FCC SAR Compliance Test Report

Product Name:	LTE USB Stick
Model:	MS2372h-517
Report No.:	SYBH(Z-SAR)020082017-2
FCC ID:	QISMS2372H-517

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	Wei Huanbin	Bao Fengkai
DATE	2017-10-13	2017-10-13

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.

2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03

3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.

4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.

5. The test report is invalid if there is any evidence of erasure and/or falsification.

6. The test report is only valid for the test samples.

7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

Copyright © Huawei Technologies Co., Ltd

Table of Contents

1 General Information 6
1.1 Statement of Compliance 6
1.2 RF exposure limits 7
1.3 EUT Description 8
1.3.1 General Description 10
1.4 Test specification(s) 11
1.5 Testing laboratory 11
1.6 Applicant and Manufacturer 11
1.7 Application details 11
1.8 Ambient Condition 11
2 SAR Measurement System 12
2.1 SAR Measurement Set-up 12
2.2 Test environment 13
2.3 Data Acquisition Electronics description 13
2.4 Probe description 14
2.5 Phantom description 15
2.6 Device holder description 16
2.7 Test Equipment List 17
3 SAR Measurement Procedure 18
3.1 Scanning procedure 18
3.2 Spatial Peak SAR Evaluation 19
3.3 Data Storage and Evaluation 20
4 System Verification Procedure 22
4.1 Tissue Verification 22
4.2 System Check 24
4.3 System check Procedure 25
5 SAR measurement variability and uncertainty 26
5.1 SAR measurement variability 26
5.2 SAR measurement uncertainty 26
6 SAR Test Configuration 27
6.1 Test Positions Configuration 27
6.2 3G SAR Test Reduction Procedure 27
6.3 GSM Test Configuration 27
6.4 UMTS Test Configuration 28
6.5 LTE Test Configuration 34
7 SAR Measurement Results 36
7.1 Conducted power measurements 36
7.1.1 Conducted power measurements of GSM850 37
7.1.2 Conducted power measurements of GSM1900 38
7.1.3 Conducted power measurements of UMTS Band II 39
7.1.4 Conducted power measurements of UMTS Band IV 40
7.1.5 Conducted power measurements of UMTS Band V 41
7.1.6 Conducted power measurements of LTE Band II 42
7.1.7 Conducted power measurements of LTE Band IV 44
7.1.8 Conducted power measurements of LTE Band V 46
7.1.9 Conducted power measurements of LTE Band VII 47
7.1.10 Conducted power measurements of LTE Band XII 49
7.2 SAR measurement Results 50
7.2.1 SAR measurement Result of GSM850 51
7.2.2 SAR measurement Result of GSM1900 51
7.2.3 SAR measurement Result of UMTS Band II 51
7.2.4 SAR measurement Result of UMTS Band IV 52
7.2.5 SAR measurement Result of UMTS Band V 52
7.2.6 SAR measurement Result of LTE Band II 52
7.2.7 SAR measurement Result of LTE Band IV 53
7.2.8 SAR measurement Result of LTE Band V 53
7.2.9 SAR measurement Result of LTE Band VII 54
7.2.10 SAR measurement Result of LTE Band XII 54
Appendix A. System Check Plots 55

Copyright © Huawei Technologies Co., Ltd

Appendix B. SAR Measurement Plots.....55
Appendix C. Calibration Certificate 55
Appendix D. Photo documentation.....55

Copyright © Huawei Technologies Co., Ltd

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2017-10-13	Bao Fengkai

Copyright © Huawei Technologies Co., Ltd

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for MS2372h-517 are as below Table 1.

Band	Max 1g Reported SAR(W/kg)
	Body(5mm)
GSM850	0.99
GSM1900	0.73
UMTS Band II	0.66
UMTS Band IV	1.01
UMTS Band V	1.13
LTE Band II	0.70
LTE Band IV	1.02
LTE Band V	**1.18**
LTE Band VII	0.68
LTE Band XII	1.08

Table 1:Summary of test result

Note:

The device is in compliance with Specific Absorption Rate（SAR）for general population/uncontraolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

Copyright © Huawei Technologies Co., Ltd

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	**1.60 W/kg**	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

Copyright © Huawei Technologies Co., Ltd

1.3 EUT Description

Device Information:			
Product Name:	LTE USB Stick		
Model:	MS2372h-517		
FCC ID :	QISMS2372H-517		
SN. :	DW4N8K179J019347		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	CL1MS2372HM VER.B		
Software Version :	21.328.01.07.00		
Antenna Type :	Internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/IV/V, LTE Band II/IV/V/VII/XII		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XII	699-716	729-746
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(UMTS Band II)		
	3, tested with power control “all 1”(UMTS Band IV)		
	3, tested with power control “all 1”(UMTS Band V)		
	3, tested with power control all Max.(LTE Band II)		
	3, tested with power control all Max.(LTE Band IV)		
	3, tested with power control all Max.(LTE Band V)		
	3, tested with power control all Max.(LTE Band VII)		
	3, tested with power control all Max.(LTE Band XII)		

Copyright © Huawei Technologies Co., Ltd

Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1513(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	23035-23095-23155(LTE Band XII BW=5MHz)
	23060-23095-23130(LTE Band XII BW=10MHz)

Table 3:Device information and operating configuration

Copyright © Huawei Technologies Co., Ltd

1.3.1 General Description

MS2372h-517 implement such functions as RF signal receiving/ transmitting, LTE/WCDMA protocol processing, data service etc,Externally it provides USB interface (to connect to the notebook etc.), Externally it provides USIM card interface. MS2372h-517 which supports: 4G bands: LTE B2/ B4/ B5/B7/B12; 3G bands:WCDMA B1/B2/ B4/ B5; 2G bands:GSM850/1900.

The location of the antennas inside the device is shown as below picture:

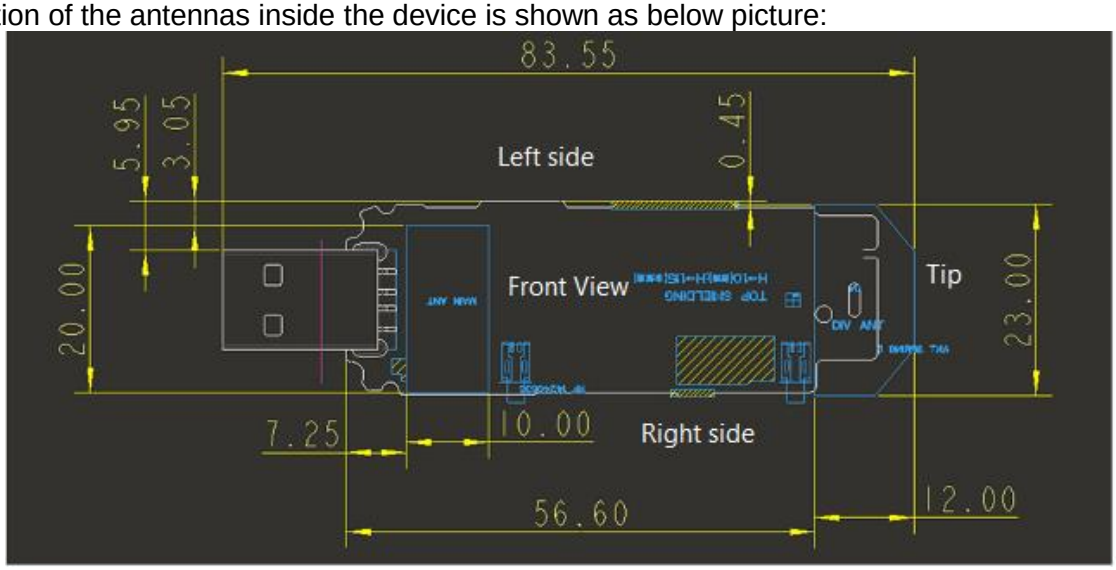

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Tip Side
Main antenna	Body 5mm	Yes	Yes	Yes	Yes	No

Table 4:Sides for SAR testing

Note:

1) This device is a simple USB dongle. Per KDB 447498D02, only the USB orientations in the table above. need to be tested(Refer to section 6.1 for details).

2) DIV Antenna does not have the transmitter function. The device only has one main Tx ant and does not support Simultaneous Transmission Possibilities. So simultaneous transmission SAR evaluation is not required for this devcie.

Copyright © Huawei Technologies Co., Ltd

1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03
KDB941225 D05	SAR for LTE Devices v02r05
KDB447498 D01	General RF Exposure Guidance v06
KDB447498 D02	SAR Procedures for Dongle Xmtr v02r01
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01 & 2174.02 & 2174.03

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details

Start Date of test	2017-09-15
End Date of test	2017-10-10

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

Copyright © Huawei Technologies Co., Ltd

2 SAR Measurement System

2.1 SAR Measurement Set-up

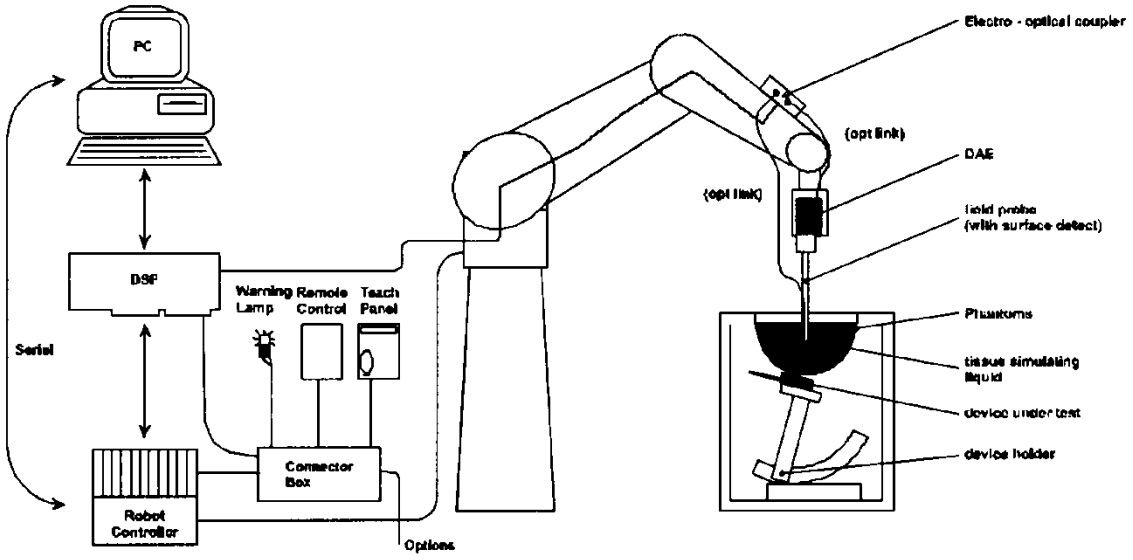

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

Copyright © Huawei Technologies Co., Ltd

2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions:
5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.
Picture 1 of the photo documentation shows a complete view of the test environment.
The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

Copyright © Huawei Technologies Co., Ltd

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (±2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB(noise:typically<1µW/g)	
Dimensions	Overall length: 337 mm (Tip:20 mm) Tip diameter:2.5 mm (Body:12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g.,very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

Copyright © Huawei Technologies Co., Ltd

2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.		

The following figure shows the definition of reference point:

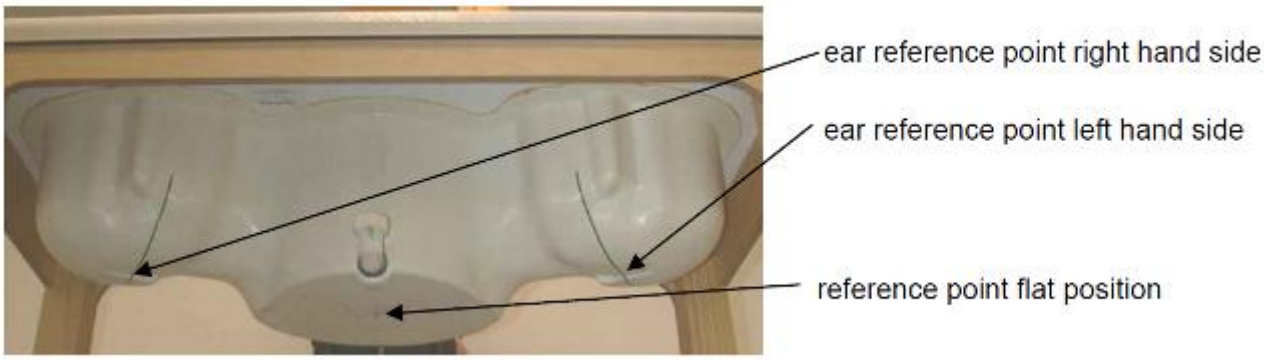

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity 2≤εr≤5 at ≤3 GHz,3≤ εr≤4 at >3 GHz and and a loss tangent ⩽0.05.

Copyright © Huawei Technologies Co., Ltd

2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent σ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.
The device holder permits the device to be positioned with a tolerance of ±1° in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.
Therefore those devices are normally only tested at the flat part of the SAM.

Copyright © Huawei Technologies Co., Ltd

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.
Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	3820	2017-06-27	One year
☒	SPEAG	750 MHz Dipole	D750V3	1078	2017-06-20	Three years
☒	SPEAG	835 MHz Dipole	D835V2	4d126	2015-07-23	Three years
☐	SPEAG	900 MHz Dipole	D900V2	1d192	2016-02-02	Three years
☒	SPEAG	1750 MHz Dipole	D1750V2	1145	2016-02-02	Three years
☒	SPEAG	1900 MHz Dipole	D1900V2	5d091	2015-09-21	Three years
☐	SPEAG	2000 MHz Dipole	D2000V2	1036	2016-11-23	Three years
☐	SPEAG	2450 MHz Dipole	D2450V2	978	2016-02-08	Three years
☒	SPEAG	2600 MHz Dipole	D2600V2	1119	2016-02-03	Three years
☒	SPEAG	Data acquisition electronics	DAE4	905	2017-06-20	One year
☒	SPEAG	Flat Phantom	Triple Flat Phantom 5.1C	1176/1	NCR	NCR
☒	SPEAG	Software	DASY 5	N/A	NCR	NCR
☒	R & S	Universal Radio Communication Tester	CMU 200	111379	2016-12-29	One year
☒	R & S	WideBand Radio Communication Tester	CMW 500	126855	2017-05-15	One year
☒	Agilent	Network Analyser	E5071C	MY46213349	2016-12-30	One year
☒	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
☒	Agilent	Signal Generator	N5181A	MY50145341	2016-11-14	One year
☒	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
☒	AR	Directional Coupler	DC7144AM1	0423264	2017-04-12	One year
☒	SHX	Directional Coupler	DDTO-4-20	07122401	2017-08-07	One year
☐	MINI-CIRCUITS	Amplifier	ZVE-8G+	N523101139	NCR	One year
☐	Agilent	Dual Directional Coupler	772D	MY52180173	2017-01-03	One year
☒	Agilent	Power Meter	E4417A	MY54100027	2017-04-10	One year
☒	Agilent	Power Meter Sensor	E9321A	MY54130007	2017-04-10	One year
☒	Agilent	Power Meter Sensor	E9321A	MY54130001	2017-04-10	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;
b) System check with specific dipole is within 10% of calibrated value;
c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

Copyright © Huawei Technologies Co., Ltd

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.

- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension(⩽2GHz)，12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
  Results of this coarse scan are shown in Appendix B.

- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom}, Δy_{zoom}⩽ 2GHz - ⩽8mm, 2-4GHz - ⩽5 mm and 4-6 GHz-⩽4mm; Δz_{zoom} ⩽3GHz - ⩽5 mm, 3-4 GHz- ⩽4mm and 4-6GHz-⩽2mm where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.)are shown in table form form in chapter 7.2.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

Copyright © Huawei Technologies Co., Ltd

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution (Δx_{area}, Δy_{area})	Maximun Zoom Scan spatial resolution (Δx_{Zoom}, Δy_{Zoom})	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)$*	$\Delta z_{Zoom}(n>1)$*	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.

- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.

- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

Copyright © Huawei Technologies Co., Ltd

3.3 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i$, a_{i0}, a_{i1}, a_{i2}
	- Conversion factor	$ConvF_i$
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V_i	= compensated signal of channel i	(i = x, y, z)
	U_i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	dcp_i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be

Copyright © Huawei Technologies Co., Ltd

evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)^2] for E-field Probes
ConvF = sensitivity enhancement in solution
a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
E_i = electric field strength of channel i in V/m
H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_Y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
E_{tot} = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in g/cm^3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.The power flow density is calculated assuming the excitation field to be a free space field.

$P_{pwe} = E_{tot}^2 / 3770$ or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2
E_{tot} = total electric field strength in V/m
H_{tot} = total magnetic field strength in A/m

Copyright © Huawei Technologies Co., Ltd

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectic parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within ± 5% of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	**Body Tissue**					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 5: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16MΩ+ resistivity
HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

☒**Simulating Body Liquid (MBBL600-6000MHz),Manufactured by SPEAG:**

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Copyright © Huawei Technologies Co., Ltd

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		Permit-tivity	Conduc-tivity [S/m]	Permit-tivity	Conduc-tivity [S/m]	$\Delta\varepsilon_r$	$\Delta\sigma$		
750MHz Body	705	55.70	0.96	54.86	0.961	-1.51%	0.09%	22.0°C	2017/09/21
	710	55.70	0.96	54.82	0.965	-1.58%	0.49%		
	750	55.50	0.96	54.76	0.979	-1.33%	1.93%		
835MHz Body	825	55.20	0.97	53.38	1.004	-3.30%	3.51%	21.9°C	2017/09/16
	835	55.20	0.97	53.36	1.008	-3.33%	3.92%		
	850	55.20	0.99	53.35	1.015	-3.35%	2.53%		
835MHz Body	825	55.20	0.97	53.58	0.995	-2.93%	2.60%	22.2°C	2017/09/18
	835	55.20	0.97	53.56	0.999	-2.97%	3.00%		
	850	55.20	0.99	53.55	1.005	-2.99%	1.52%		
835MHz Body	825	55.20	0.97	54.52	1.009	-1.23%	4.02%	22.0°C	2017/09/20
	835	55.20	0.97	54.50	1.013	-1.27%	4.43%		
	850	55.20	0.99	54.45	1.019	-1.36%	2.93%		
835MHz Body	825	55.20	0.97	56.70	0.999	2.72%	2.96%	22.4°C	2017/10/10
	835	55.20	0.97	56.55	1.001	2.45%	3.20%		
	850	55.20	0.99	56.50	1.001	2.36%	1.11%		
1750MHz Body	1710	53.50	1.46	53.30	1.445	-0.37%	-1.03%	22.5°C	2017/09/20
	1730	53.50	1.48	53.29	1.452	-0.39%	-1.89%		
	1750	53.40	1.49	53.30	1.465	-0.19%	-1.68%		
	1800	53.30	1.52	53.31	1.512	0.02%	-0.53%		
1900MHz Body	1850	53.30	1.52	52.72	1.455	-1.09%	-4.28%	22.2°C	2017/09/15
	1880	53.30	1.52	52.66	1.476	-1.20%	-2.89%		
	1900	53.30	1.52	52.62	1.488	-1.28%	-2.11%		
	1910	53.30	1.52	52.60	1.494	-1.31%	-1.71%		
1900MHz Body	1850	53.30	1.52	52.82	1.466	-0.90%	-3.55%	22.0°C	2017/09/19
	1880	53.30	1.52	52.76	1.486	-1.01%	-2.24%		
	1900	53.30	1.52	52.72	1.499	-1.09%	-1.38%		
	1910	53.30	1.52	52.70	1.505	-1.13%	-0.99%		
2600MHz Body	2510	52.62	2.03	53.83	2.119	2.30%	4.38%	22.4°C	2017/10/10
	2535	52.59	2.07	53.76	2.144	2.22%	3.57%		
	2560	52.57	2.09	53.62	2.166	2.00%	3.64%		
	2600	52.50	2.16	53.63	2.211	2.15%	2.36%		

Table 6:Measured Tissue Parameter

Note: 1）The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2）KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3）The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

Copyright © Huawei Technologies Co., Ltd

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	Δ1-g	Δ10-g		
750MHz Body	8.67	5.71	9.00	6.08	3.81%	6.48%	22.0°C	2017/09/21
835MHz Body	9.41	6.16	8.52	5.56	-9.46%	-9.74%	21.9°C	2017/09/16
835MHz Body	9.41	6.16	9.56	6.24	1.59%	1.30%	22.2°C	2017/09/18
835MHz Body	9.41	6.16	9.72	6.36	3.29%	3.25%	22.0°C	2017/09/20
835MHz Body	9.41	6.16	9.92	6.60	5.42%	7.14%	22.4°C	2017/10/10
1750MHz Body	36.50	19.40	34.88	18.76	-4.44%	-3.30%	22.5°C	2017/09/20
1900MHz Body	39.90	21.00	40.40	20.84	1.25%	-0.76%	22.2°C	2017/09/15
1900MHz Body	39.90	21.00	37.92	19.56	-4.96%	-6.86%	22.0°C	2017/09/19
2600MHz Body	51.60	23.00	53.60	24.60	3.88%	6.96%	22.4°C	2017/10/10

Table 7:System Check Results

Copyright © Huawei Technologies Co., Ltd

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 3GHz) or 100mW(3-6GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).
System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

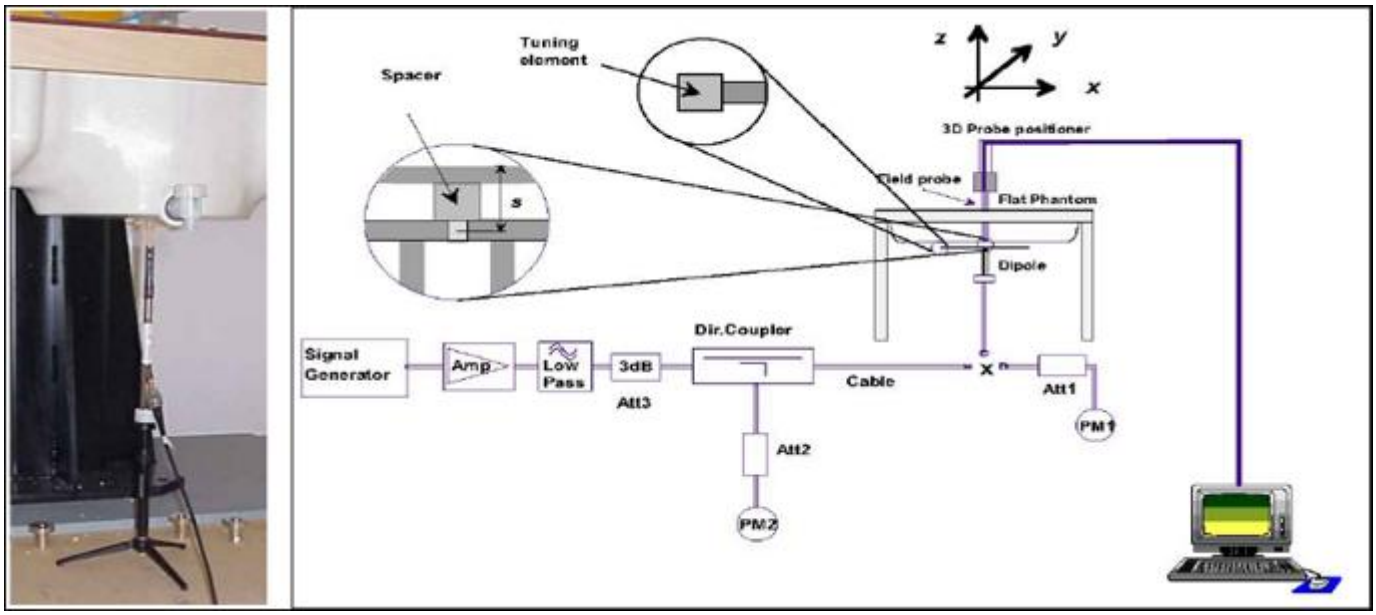

Copyright © Huawei Technologies Co., Ltd

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
2) When the original highest measured SAR is ⩾ 0.80 W/kg, repeat that measurement once.
3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ⩾ 1.45 W/kg (~ 10% from the 1-g SAR limit).
4) Perform a third repeated measurement only if the original, first or second repeated measurement is ⩾ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04,when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

Copyright © Huawei Technologies Co., Ltd

6 SAR Test Configuration

6.1 Test Positions Configuration

Per FCC KDB 447498D02， for USB dongle transmitters with internal antennas， test all USB orientations(see figure below) with a device-to-phantom separation distance of 5 mm or less. These test orientations are intended for the exposure conditions found in typical laptop/notebook/netbook or tablet computers with either horizontal or vertical USB connector configurations at various locations in the keyboard section of the computer.

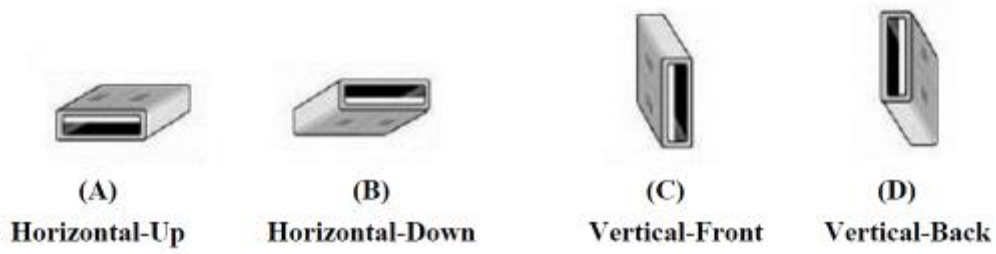

Figure : USB Connector Orientations Implemented on Laptop Computers

6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01v03, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

Copyright © Huawei Technologies Co., Ltd

6.4 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are requied in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements’’ procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK, ΔNACK, ΔCQI = 8. The variation of the β_c /β_d ratio causes a power reduction at sub-tests 2 - 4.

Copyright © Huawei Technologies Co., Ltd

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\triangle$ACK, $\triangle$NACK and $\triangle$CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for β_c/β_d= 12/15, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Table 8: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 9:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Copyright © Huawei Technologies Co., Ltd

Table 10:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}(1)	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM(2) (dB)	MPR (dB)	AG(4) Index	E-TFCI
1	11/15(3)	15/15(3)	64	11/15(3)	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15(4)	15/15(4)	64	15/15(4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 11:Subtests for UMTS Release 6 HSUPA

Copyright © Huawei Technologies Co., Ltd

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Speading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).						

Table 12:HSUPA UE category

5) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.
The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH _Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Copyright © Huawei Technologies Co., Ltd

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 13: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

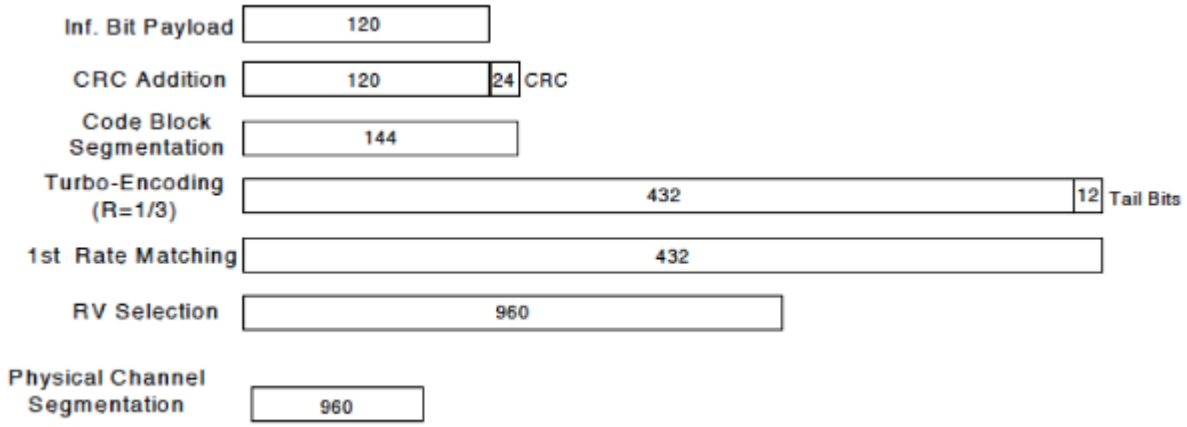

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to β_c = 11/15 and β_d = 15/15

Up commands are set continuously to set the UE to Max power.

Note:

Copyright © Huawei Technologies Co., Ltd

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band .
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn’t support carrier aggregation for it just can operate in Release 8.

Copyright © Huawei Technologies Co., Ltd

6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing.Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS_01”on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

Copyright © Huawei Technologies Co., Ltd

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

Copyright © Huawei Technologies Co., Ltd

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots.For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

Copyright © Huawei Technologies Co., Ltd

7.1.1 Conducted power measurements of GSM850

GSM850		Tune-up	Burst-Averaged output Power (dBm)			Division Factors	Tune-up	Frame-Averaged output Power (dBm)		
		Max.	128CH	190CH	251CH		Max.	128CH	190CH	251CH
GPRS/ EDGE (GMSK)	1 Tx Slot	33.0	32.10	32.00	31.90	-9.19	23.81	22.91	22.81	22.71
	2 Tx Slots	**31.0**	**29.70**	**29.80**	**29.50**	**-6.13**	**24.87**	**23.57**	**23.67**	**23.37**
	3 Tx Slots	29.0	27.50	27.50	27.30	-4.42	24.58	23.08	23.08	22.88
	4 Tx Slots	27.0	26.40	26.10	25.90	-3.18	23.82	23.22	22.92	22.72
EDGE (8PSK)	1 Tx Slot	27.5	26.20	26.20	26.00	-9.19	18.31	17.01	17.01	16.81
	2 Tx Slots	25.5	24.10	24.20	23.90	-6.13	19.37	17.97	18.07	17.77
	3 Tx Slots	23.5	22.00	22.10	21.90	-4.42	19.08	17.58	17.68	17.48
	4 Tx Slots	21.5	20.00	20.10	19.80	-3.18	18.32	16.82	16.92	16.62

Table 14:Conducted power measurement results of GSM850

Note:

1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timesolts.

3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Copyright © Huawei Technologies Co., Ltd

7.1.2 Conducted power measurements of GSM1900

GSM1900		Tune-up	Burst-Averaged output Power (dBm)			Division Factors	Tune-up	Frame-Averaged output Power (dBm)		
		Max.	512CH	661CH	810CH		Max.	512CH	661CH	810CH
GPRS/ EDGE (GMSK)	1 Tx Slot	30.0	29.30	29.20	29.40	-9.19	20.81	20.11	20.01	20.21
	2 Tx Slots	**28.0**	**26.90**	**27.00**	**27.20**	**-6.13**	**21.87**	**20.77**	**20.87**	**21.07**
	3 Tx Slots	26.0	25.10	24.90	25.00	-4.42	21.58	20.68	20.48	20.58
	4 Tx Slots	24.0	23.80	23.80	23.90	-3.18	20.82	20.62	20.62	20.72
EDGE (8PSK)	1 Tx Slot	26.5	25.30	25.20	25.30	-9.19	17.31	16.11	16.01	16.11
	2 Tx Slots	24.5	23.40	23.20	23.30	-6.13	18.37	17.27	17.07	17.17
	3 Tx Slots	22.5	21.30	21.20	21.20	-4.42	18.08	16.88	16.78	16.78
	4 Tx Slots	20.5	19.40	19.20	19.30	-3.18	17.32	16.22	16.02	16.12

Table 15: Conducted power measurement results of GSM1900

Note:

1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timesolts.

3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Copyright © Huawei Technologies Co., Ltd

7.1.3 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.5	**22.96**	**22.96**	**22.99**
HSDPA	Subtest 1	23.5	23.15	23.15	23.31
	Subtest 2	23.5	22.92	22.89	23.18
	Subtest 3	23.0	22.35	22.33	22.65
	Subtest 4	23.0	22.22	22.30	22.63
HSUPA	Subtest 1	22.5	21.80	22.09	22.15
	Subtest 2	21.0	19.69	19.72	20.29
	Subtest 3	21.5	20.48	19.86	19.84
	Subtest 4	21.0	19.02	19.01	19.34
	Subtest 5	22.5	22.49	22.14	22.19
DC-HSDPA	Subtest 1	23.5	23.16	23.16	23.32
	Subtest 2	23.5	22.93	22.90	23.19
	Subtest 3	23.0	22.36	22.34	22.66
	Subtest 4	23.0	22.23	22.31	22.64

Table 16: Conducted power measurement results of UMTS Band II

Note: 1) The conducted power of UMTS Band II is measured with RMS detector.
2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.4 Conducted power measurements of UMTS Band IV

UMTS Band IV		Tune-up	Average Power (dBm)		
		Max.	1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.5	**23.03**	**22.96**	**22.89**
HSDPA	Subtest 1	23.5	22.92	22.69	23.03
	Subtest 2	23.5	22.60	22.48	22.76
	Subtest 3	23.0	22.03	21.91	22.22
	Subtest 4	23.0	22.01	21.89	22.04
HSUPA	Subtest 1	22.5	21.71	22.13	22.03
	Subtest 2	21.0	19.68	19.01	19.15
	Subtest 3	21.5	20.15	19.51	19.71
	Subtest 4	21.0	19.09	19.01	19.30
	Subtest 5	22.5	22.37	22.11	21.69
DC-HSDPA	Subtest 1	23.5	22.93	22.70	23.04
	Subtest 2	23.5	22.61	22.49	22.77
	Subtest 3	23.0	22.04	21.92	22.23
	Subtest 4	23.0	22.02	21.90	22.05

Table 17: Conducted power measurement results of UMTS Band IV

Note: 1) The conducted power of UMTS Band IV is measured with RMS detector.
2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.5 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4183CH	4233CH
WCDMA	12.2kbps RMC	23.5	**23.02**	**23.05**	**23.06**
HSDPA	Subtest 1	23.5	23.01	23.08	23.06
	Subtest 2	23.5	22.97	22.99	23.25
	Subtest 3	23.0	22.28	22.32	22.58
	Subtest 4	23.0	22.27	22.37	22.56
HSUPA	Subtest 1	22.5	21.94	22.14	22.03
	Subtest 2	21.0	19.74	19.93	19.99
	Subtest 3	21.5	21.07	21.11	20.66
	Subtest 4	21.0	19.45	19.57	19.39
	Subtest 5	22.5	22.22	21.64	21.63
DC-HSDPA	Subtest 1	23.5	23.02	23.09	23.07
	Subtest 2	23.5	22.98	23.00	23.26
	Subtest 3	23.0	22.29	22.33	22.59
	Subtest 4	23.0	22.28	22.38	22.57

Table 18: Conducted power measurement results of UMTS Band V

Note: 1) The conducted power of UMTS Band V is measured with RMS detector.
2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.6 Conducted power measurements of LTE Band II

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.5	21.68	21.83	22.36
		1	13	23.5	22.48	22.29	22.46
		1	24	23.5	22.21	21.58	21.52
		12	0	22.5	21.29	21.17	21.67
		12	6	22.5	21.63	21.24	21.54
		12	13	22.5	21.56	21.03	21.09
		25	0	22.5	21.38	21.00	21.25
	16QAM	1	0	22.5	21.43	21.23	22.14
		1	13	22.5	22.25	21.76	21.92
		1	24	22.5	21.81	21.01	20.89
		12	0	21.5	20.83	20.41	20.99
		12	6	21.5	21.18	20.50	20.81
		12	13	21.5	21.15	20.26	20.29
		25	0	21.5	20.96	20.61	20.47
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18650CH	18900CH	19150CH
10MHz	QPSK	1	0	23.5	21.82	22.06	22.56
		1	25	23.5	22.82	22.39	23.12
		1	49	23.5	22.37	21.58	21.56
		25	0	22.5	21.07	21.08	21.95
		25	13	22.5	21.65	21.08	21.84
		25	25	22.5	21.70	20.78	21.18
		50	0	22.5	21.39	20.83	21.37
	16QAM	1	0	22.5	21.34	21.52	22.49
		1	25	22.5	22.24	21.82	22.37
		1	49	22.5	21.80	20.71	20.78
		25	0	21.5	20.49	20.23	21.24
		25	13	21.5	20.97	20.21	21.09
		25	25	21.5	20.97	19.93	20.38
		50	0	21.5	20.62	20.00	20.61

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.5	21.74	22.33	22.43
		1	38	23.5	22.76	22.09	23.17
		1	74	23.5	22.45	21.65	21.60
		36	0	22.5	21.16	20.91	21.96
		36	18	22.5	21.62	20.91	22.08
		36	39	22.5	21.63	20.55	21.36
		75	0	22.5	21.34	20.69	21.41
	16QAM	1	0	22.5	21.53	21.95	22.21
		1	38	22.5	22.28	21.64	22.49
		1	74	22.5	21.96	20.93	20.71
		36	0	21.5	20.51	20.19	21.31
		36	18	21.5	20.99	20.15	21.39
		36	39	21.5	21.02	19.79	20.61
		75	0	21.5	20.73	20.00	20.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.5	22.49	22.17	22.40
		1	50	23.5	**23.21**	**22.58**	**22.98**
		1	99	23.5	22.08	22.29	21.66
		50	0	22.5	21.68	21.40	21.59
		50	25	22.5	**21.99**	21.76	21.73
		50	50	22.5	21.98	21.06	21.55
		100	0	22.5	21.78	21.15	21.71
	16QAM	1	0	22.5	21.60	22.16	22.06
		1	50	22.5	22.13	21.33	22.49
		1	99	22.5	22.49	21.64	21.37
		50	0	21.5	20.47	20.22	20.84
		50	25	21.5	20.78	19.76	20.89
		50	50	21.5	20.86	19.88	20.51
		100	0	21.5	20.57	19.93	20.63

Table 19: Conducted power measurement results of LTE Band II

Copyright © Huawei Technologies Co., Ltd

7.1.7 Conducted power measurements of LTE Band IV

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 19975CH	Channel 20175CH	Channel 20375CH
5MHz	QPSK	1	0	23.5	22.74	22.03	21.86
		1	13	23.5	23.45	22.71	21.99
		1	24	23.5	22.87	22.28	21.62
		12	0	22.5	21.84	21.05	20.65
		12	6	22.5	22.13	21.28	20.70
		12	13	22.5	21.92	21.20	20.60
		25	0	22.5	21.79	21.15	20.73
	16QAM	1	0	22.5	21.25	20.71	21.14
		1	13	22.5	22.37	21.42	21.35
		1	24	22.5	21.76	21.28	20.52
		12	0	21.5	20.82	20.30	19.93
		12	6	21.5	21.11	20.53	19.99
		12	13	21.5	20.90	20.43	19.78
		25	0	21.5	20.73	20.27	20.11
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20000CH	Channel 20175CH	Channel 20350CH
10MHz	QPSK	1	0	23.5	22.65	21.88	22.02
		1	25	23.5	23.45	22.50	21.88
		1	49	23.5	22.49	22.10	21.55
		25	0	22.5	21.76	20.72	20.58
		25	13	22.5	21.83	20.87	20.84
		25	25	22.5	21.51	20.88	20.50
		50	0	22.5	21.59	20.79	20.56
	16QAM	1	0	22.5	21.28	21.29	21.50
		1	25	22.5	22.11	21.86	21.61
		1	49	22.5	21.05	21.43	20.55
		25	0	21.5	20.83	20.13	20.11
		25	13	21.5	20.89	20.23	20.06
		25	25	21.5	20.60	20.21	19.78
		50	0	21.5	20.81	20.14	19.96

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.5	23.32	22.55	22.78
		1	38	23.5	23.33	22.83	22.69
		1	74	23.5	22.14	22.55	21.52
		36	0	22.5	21.90	21.20	21.42
		36	18	22.5	21.96	21.53	21.20
		36	39	22.5	21.34	21.58	20.70
		75	0	22.5	21.76	21.38	21.10
	16QAM	1	0	22.5	22.25	21.11	21.66
		1	38	22.5	22.13	21.39	21.42
		1	74	22.5	21.00	21.07	20.52
		36	0	21.5	20.96	20.01	20.58
		36	18	21.5	20.89	20.28	20.36
		36	39	21.5	20.29	20.38	19.80
		75	0	21.5	20.74	20.18	20.27
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.5	**23.29**	22.38	22.61
		1	50	23.5	22.53	22.36	22.60
		1	99	23.5	22.37	22.87	21.62
		50	0	22.5	**21.50**	20.83	**21.60**
		50	25	22.5	21.14	20.93	20.88
		50	50	22.5	20.98	**21.25**	20.52
		100	0	22.5	21.05	21.09	**21.22**
	16QAM	1	0	22.5	22.12	21.44	21.64
		1	50	22.5	21.58	21.30	21.78
		1	99	22.5	21.42	21.73	20.52
		50	0	21.5	20.44	19.86	20.18
		50	25	21.5	19.99	19.92	20.02
		50	50	21.5	19.88	20.26	19.64
		100	0	21.5	20.14	20.11	19.87

Table 20: Conducted power measurement results of LTE Band IV

Copyright © Huawei Technologies Co., Ltd

7.1.8 Conducted power measurements of LTE Band V

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20425CH	Channel 20525CH	Channel 20625CH
5MHz	QPSK	1	0	24.0	22.50	22.35	22.30
		1	13	24.0	23.26	23.42	23.05
		1	24	24.0	22.47	22.56	22.08
		12	0	23.0	21.74	21.97	21.85
		12	6	23.0	21.97	22.26	22.12
		12	13	23.0	21.69	22.00	21.83
		25	0	23.0	22.09	21.96	21.82
	16QAM	1	0	23.0	22.05	22.00	21.98
		1	13	23.0	22.66	22.80	22.38
		1	24	23.0	21.92	21.96	21.52
		12	0	22.0	21.94	21.95	21.81
		12	6	22.0	21.98	21.99	21.94
		12	13	22.0	21.97	21.95	21.75
		25	0	22.0	21.98	21.96	21.71
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20450	Channel 20525	Channel 20600
10MHz	QPSK	1	0	24.0	22.12	22.88	22.13
		1	25	24.0	**23.53**	**23.25**	**23.29**
		1	49	24.0	22.83	22.54	22.38
		25	0	23.0	21.87	22.00	21.92
		25	13	23.0	**22.07**	**22.11**	**22.12**
		25	25	23.0	21.95	21.92	21.66
		50	0	23.0	21.95	**22.01**	21.81
	16QAM	1	0	23.0	22.30	22.17	22.45
		1	25	23.0	22.74	22.72	22.71
		1	49	23.0	22.16	21.93	21.87
		25	0	22.0	21.94	21.97	21.98
		25	13	22.0	21.99	21.98	21.93
		25	25	22.0	21.95	21.94	21.72
		50	0	22.0	21.95	22.00	21.88

Table 21: Conducted power measurement results of LTE Band V

Copyright © Huawei Technologies Co., Ltd

7.1.9 Conducted power measurements of LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	23.5	22.13	22.18	22.38
		1	13	23.5	22.60	23.06	22.79
		1	24	23.5	21.90	22.38	21.60
		12	0	22.5	21.88	22.12	22.18
		12	6	22.5	22.09	22.37	22.27
		12	13	22.5	22.01	22.28	21.80
		25	0	22.5	22.04	22.22	21.97
	16QAM	1	0	22.5	20.88	21.30	21.91
		1	13	22.5	21.63	22.41	22.08
		1	24	22.5	20.95	21.70	20.76
		12	0	21.5	19.99	20.70	20.62
		12	6	21.5	20.26	20.98	20.66
		12	13	21.5	20.16	20.90	20.13
		25	0	21.5	20.05	20.79	20.32
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	23.5	21.94	21.93	22.08
		1	25	23.5	22.48	22.93	22.95
		1	49	23.5	21.52	21.93	21.56
		25	0	22.5	21.61	21.67	21.89
		25	13	22.5	21.91	22.06	22.09
		25	25	22.5	21.44	21.83	21.59
		50	0	22.5	21.30	22.00	21.72
	16QAM	1	0	22.5	21.31	20.99	21.57
		1	25	22.5	21.93	22.17	22.36
		1	49	22.5	20.65	21.38	20.52
		25	0	21.5	19.90	20.37	20.50
		25	13	21.5	20.30	20.77	20.65
		25	25	21.5	19.88	20.50	20.12
		50	0	21.5	19.76	20.52	20.29

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	23.5	22.37	22.39	21.98
		1	38	23.5	22.38	22.99	22.86
		1	74	23.5	21.52	21.87	21.62
		36	0	22.5	21.86	21.99	21.81
		36	18	22.5	21.96	22.27	22.30
		36	39	22.5	21.50	22.04	21.94
		75	0	22.5	21.57	21.92	21.99
	16QAM	1	0	22.5	21.48	21.51	21.38
		1	38	22.5	21.94	22.29	22.47
		1	74	22.5	20.53	20.97	20.77
		36	0	21.5	20.21	20.44	20.66
		36	18	21.5	20.27	20.75	20.98
		36	39	21.5	19.86	20.50	20.56
		75	0	21.5	20.08	20.40	20.66
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	23.5	22.44	22.29	21.86
		1	50	23.5	22.26	**23.10**	23.07
		1	99	23.5	21.93	22.38	22.25
		50	0	22.5	**21.90**	22.22	21.80
		50	25	22.5	21.77	**22.45**	**22.42**
		50	50	22.5	21.35	22.31	22.37
		100	0	22.5	21.60	22.16	22.00
	16QAM	1	0	22.5	22.05	21.73	21.36
		1	50	22.5	21.92	22.40	22.35
		1	99	22.5	21.22	21.80	21.74
		50	0	21.5	20.57	20.93	20.64
		50	25	21.5	20.44	21.15	21.17
		50	50	21.5	20.02	20.93	21.12
		100	0	21.5	20.28	20.79	20.92

Table 22: Conducted power measurement results of LTE Band VII

Copyright © Huawei Technologies Co., Ltd

7.1.10 Conducted power measurements of LTE Band XII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23035CH	23095CH	23155CH
5MHz	QPSK	1	0	24.5	22.52	22.59	22.68
		1	13	24.5	23.27	22.92	23.12
		1	24	24.5	22.65	22.50	22.59
		12	0	23.5	22.09	21.50	21.95
		12	6	23.5	22.33	21.82	22.45
		12	13	23.5	22.04	21.63	22.03
		25	0	23.5	22.05	21.67	22.15
	16QAM	1	0	23.5	21.58	21.71	21.98
		1	13	23.5	22.59	22.42	22.59
		1	24	23.5	21.72	21.67	21.52
		12	0	22.5	21.12	20.66	20.90
		12	6	22.5	21.47	20.95	21.00
		12	13	22.5	21.21	20.76	20.65
		25	0	22.5	21.10	20.77	20.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	23060CH	23095CH	23130CH
10MHz	QPSK	1	0	24.5	23.06	22.98	22.58
		1	25	24.5	23.35	23.08	**23.91**
		1	49	24.5	22.84	23.14	22.91
		25	0	23.5	**22.03**	21.86	22.08
		25	13	23.5	21.98	22.15	**22.31**
		25	25	23.5	21.68	**22.24**	22.17
		50	0	23.5	21.82	22.05	**22.10**
	16QAM	1	0	23.5	22.11	22.16	21.95
		1	25	23.5	22.34	22.41	22.75
		1	49	23.5	21.90	22.44	21.90
		25	0	22.5	21.19	21.06	20.85
		25	13	22.5	21.21	21.31	21.11
		25	25	22.5	20.87	21.07	20.96
		50	0	22.5	21.02	21.17	20.88

Table 23: Conducted power measurement results of LTE Band XII

Copyright © Huawei Technologies Co., Ltd

7.2 SAR measurement Results

General Notes:

1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

● ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.

● ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.

● ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.

3) Per KDB865664 D01,for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/Kg; if the deviation among the repeated measurement is ≤20%, and the measured SAR <1.45W/Kg, only one repeated measurement is required.

4) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix B for details).

GSM Notes:

1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

UMTS Notes:

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05.The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator.SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames(maximum TTI)

Copyright © Huawei Technologies Co., Ltd

7.2.1 SAR measurement Result of GSM850

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	190/836.6	GPRS 2TS	**0.752**	0.430	0.10	29.80	31.00	**0.991**	Yes
Front Side	5mm	128/824.2	GPRS 2TS	0.491	0.295	0.15	29.70	31.00	0.662	/
Front Side	5mm	251/848.8	GPRS 2TS	0.642	0.384	0.17	29.50	31.00	0.907	/
Back Side	5mm	190/836.6	GPRS 2TS	0.689	0.410	-0.05	29.80	31.00	0.908	/
Back Side	5mm	128/824.2	GPRS 2TS	0.550	0.332	0.07	29.70	31.00	0.742	/
Back Side	5mm	251/848.8	GPRS 2TS	0.560	0.338	0.07	29.50	31.00	0.791	/
Left Side	5mm	190/836.6	GPRS 2TS	0.183	0.122	0.10	29.80	31.00	0.241	/
Right Side	5mm	190/836.6	GPRS 2TS	0.466	0.273	-0.18	29.80	31.00	0.614	/

Table 24: Body SAR test results of GSM850

7.2.2 SAR measurement Result of GSM1900

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	661/1880	GPRS 2TS	0.522	0.302	-0.04	27.00	28.00	0.657	/
Back Side	5mm	661/1880	GPRS 2TS	0.370	0.217	-0.08	27.00	28.00	0.466	/
Left Side	5mm	661/1880	GPRS 2TS	0.098	0.053	-0.16	27.00	28.00	0.123	/
Right Side	5mm	661/1880	GPRS 2TS	0.441	0.234	-0.16	27.00	28.00	0.555	/
Front Side	5mm	512/1850.2	GPRS 2TS	**0.568**	0.326	-0.10	26.90	28.00	**0.732**	Yes
Front Side	5mm	810/1909.8	GPRS 2TS	0.485	0.280	-0.01	27.20	28.00	0.583	/

Table 25: Body SAR test results of GSM1900

7.2.3 SAR measurement Result of UMTS Band II

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	9400/1880	RMC	0.544	0.278	-0.03	22.96	23.50	0.616	/
Back Side	5mm	9400/1880	RMC	0.575	0.312	0.03	22.96	23.50	0.651	/
Left Side	5mm	9400/1880	RMC	0.175	0.097	-0.11	22.96	23.50	0.198	/
Right Side	5mm	9400/1880	RMC	**0.579**	0.320	-0.13	22.96	23.50	**0.656**	Yes
Right Side	5mm	9262/1852.4	RMC	0.456	0.249	-0.05	22.96	23.50	0.516	/
Right Side	5mm	9538/1907.6	RMC	0.465	0.254	-0.06	22.99	23.50	0.523	/

Table 26: Body SAR test results of UMTS Band II

Copyright © Huawei Technologies Co., Ltd

7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	1413/1732.6	RMC	0.684	0.374	0.04	22.96	23.50	0.775	/
Back Side	5mm	1413/1732.6	RMC	0.762	0.394	-0.02	22.96	23.50	0.863	/
Back Side	5mm	1312/1712.4	RMC	0.729	0.379	0.05	23.03	23.50	0.812	/
Back Side	5mm	1513/1752.6	RMC	**0.875**	0.450	0.04	22.89	23.50	**1.007**	Yes
Left Side	5mm	1413/1732.6	RMC	0.082	0.047	0.19	22.96	23.50	0.093	/
Right Side	5mm	1413/1732.6	RMC	0.343	0.187	-0.09	22.96	23.50	0.388	/
Back Side repeated	5mm	1513/1752.6	RMC	0.873	0.448	0.08	22.89	23.50	1.005	/

Table 27: Body SAR test results of UMTS Band IV

7.2.5 SAR measurement Result of UMTS Band V

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	4182/836.4	RMC	0.817	0.493	0.17	23.05	23.50	0.906	/
Front Side	5mm	4132/826.4	RMC	0.781	0.470	0.05	23.02	23.50	0.872	/
Front Side	5mm	4233/846.6	RMC	0.849	0.507	0.10	23.06	23.50	0.940	/
Back Side	5mm	4182/836.4	RMC	0.838	0.484	0.17	23.05	23.50	0.929	/
Back Side	5mm	4132/826.4	RMC	0.854	0.483	0.16	23.02	23.50	0.954	/
Back Side	5mm	4233/846.6	RMC	**1.020**	0.581	0.12	23.06	23.50	**1.129**	Yes
Left Side	5mm	4182/836.4	RMC	0.175	0.115	0.12	23.05	23.50	0.194	/
Right Side	5mm	4182/836.4	RMC	0.598	0.350	0.02	23.05	23.50	0.663	/
Back Side repeated	5mm	4233/846.6	RMC	1.020	0.580	0.17	23.06	23.50	1.129	/

Table 28: Body SAR test results of UMTS Band V

7.2.6 SAR measurement Result of LTE Band II

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	18700/1860	20M QPSK 1RB#50	**0.655**	0.318	0.11	23.21	23.50	**0.700**	Yes
Back Side	5mm	18700/1860	20M QPSK 1RB#50	0.632	0.327	0.02	23.21	23.50	0.676	/
Left Side	5mm	18700/1860	20M QPSK 1RB#50	0.122	0.067	0.03	23.21	23.50	0.130	/
Right Side	5mm	18700/1860	20M QPSK 1RB#50	0.511	0.277	-0.20	23.21	23.50	0.546	/
Front Side	5mm	18700/1860	20M QPSK 50%RB#25	0.574	0.311	-0.11	21.99	22.50	0.646	/
Back Side	5mm	18700/1860	20M QPSK 50%RB#25	0.605	0.312	0.13	21.99	22.50	0.680	/
Left Side	5mm	18700/1860	20M QPSK 50%RB#25	0.138	0.075	-0.20	21.99	22.50	0.155	/
Right Side	5mm	18700/1860	20M QPSK 50%RB#25	0.572	0.315	0.14	21.99	22.50	0.643	/
Front Side	5mm	18900/1880	20M QPSK 1RB#50	0.440	0.244	-0.03	22.58	23.50	0.544	/
Front Side	5mm	19100/1900	20M QPSK 1RB#50	0.453	0.230	0.02	22.98	23.50	0.511	/

Table 29: Body SAR test results of LTE Band II

Copyright © Huawei Technologies Co., Ltd

7.2.7 SAR measurement Result of LTE Band IV

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	20050/1720	20M QPSK 1RB#0	0.690	0.373	0.02	23.29	23.50	0.724	/
Back Side	5mm	20050/1720	20M QPSK 1RB#0	0.704	0.372	0.19	23.29	23.50	0.739	/
Left Side	5mm	20050/1720	20M QPSK 1RB#0	0.104	0.060	0.00	23.29	23.50	0.109	/
Right Side	5mm	20050/1720	20M QPSK 1RB#0	0.537	0.287	-0.17	23.29	23.50	0.564	/
Front Side	5mm	20300/1745	20M QPSK 50%RB#0	0.753	0.411	0.13	21.60	22.50	0.926	/
Front Side	5mm	20050/1720	20M QPSK 50%RB#0	0.564	0.312	0.01	21.50	22.50	0.710	/
Front Side	5mm	20175/1732.5	20M QPSK 50%RB#50	0.600	0.335	-0.02	21.25	22.50	0.800	/
Front Side	5mm	20300/1745	20M QPSK 100%RB#0	0.611	0.341	-0.04	21.22	22.50	0.820	/
Back Side	5mm	20300/1745	20M QPSK 50%RB#0	**0.775**	0.405	0.02	21.60	22.50	**0.953**	Yes
Back Side	5mm	20050/1720	20M QPSK 50%RB#0	0.735	0.387	0.19	21.50	22.50	0.925	/
Back Side	5mm	20175/1732.5	20M QPSK 50%RB#50	0.624	0.328	0.16	21.25	22.50	0.832	/
Back Side	5mm	20300/1745	20M QPSK 100%RB#0	0.662	0.384	0.04	21.22	22.50	0.889	/
Left Side	5mm	20300/1745	20M QPSK 50%RB#0	0.102	0.057	0.16	21.60	22.50	0.125	/
Right Side	5mm	20300/1745	20M QPSK 50%RB#0	0.481	0.255	0.16	21.60	22.50	0.592	/

Table 30: Body SAR test results of LTE Band IV

7.2.8 SAR measurement Result of LTE Band V

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	20450/829	10M QPSK 1RB#25	0.903	0.541	0.11	23.53	24.00	1.006	/
Front Side	5mm	20525/836.5	10M QPSK 1RB#25	0.919	0.550	0.08	23.25	24.00	1.092	/
Front Side	5mm	20600/844	10M QPSK 1RB#25	0.852	0.515	0.05	23.29	24.00	1.003	/
Back Side	5mm	20450/829	10M QPSK 1RB#25	0.960	0.563	0.06	23.53	24.00	1.070	/
Back Side	5mm	20525/836.5	10M QPSK 1RB#25	0.985	0.569	0.19	23.25	24.00	1.171	/
Back Side	5mm	20600/844	10M QPSK 1RB#25	**1.000**	0.587	-0.16	23.29	24.00	**1.178**	Yes
Left Side	5mm	20450/829	10M QPSK 1RB#25	0.233	0.152	0.11	23.53	24.00	0.260	/
Right Side	5mm	20450/829	10M QPSK 1RB#25	0.646	0.385	0.08	23.53	24.00	0.720	/
Front Side	5mm	20600/844	10M QPSK 50%RB#13	0.784	0.472	0.09	22.12	23.00	0.960	/
Front Side	5mm	20525/836.5	10M QPSK 50%RB#13	0.710	0.431	0.03	22.11	23.00	0.871	/
Front Side	5mm	20450/829	10M QPSK 50%RB#13	0.707	0.430	0.13	22.07	23.00	0.876	/
Front Side	5mm	20525/836.5	10M QPSK 100%RB#0	0.698	0.424	0.07	22.01	23.00	0.877	/
Back Side	5mm	20600/844	10M QPSK 50%RB#13	0.913	0.528	-0.07	22.12	23.00	1.118	/
Back Side	5mm	20525/836.5	10M QPSK 50%RB#13	0.867	0.504	0.14	22.11	23.00	1.064	/
Back Side	5mm	20450/829	10M QPSK 50%RB#13	0.867	0.507	0.16	22.07	23.00	1.074	/
Back Side	5mm	20525/836.5	10M QPSK 100%RB#0	0.850	0.497	0.15	22.01	23.00	1.068	/
Left Side	5mm	20600/844	10M QPSK 50%RB#13	0.215	0.140	0.20	22.12	23.00	0.263	/
Right Side	5mm	20600/844	10M QPSK 50%RB#13	0.610	0.360	-0.11	22.12	23.00	0.747	/
Back Side repeated	5mm	20600/844	10M QPSK 1RB#25	0.970	0.564	0.08	23.29	24.00	1.142	/

Table 31: Body SAR test results of LTE Band V

Copyright © Huawei Technologies Co., Ltd

7.2.9 SAR measurement Result of LTE Band VII

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	21100/2535	20M QPSK 1RB#50	0.386	0.183	-0.15	23.10	23.50	0.423	/
Back Side	5mm	21100/2535	20M QPSK 1RB#50	0.609	0.323	-0.20	23.10	23.50	0.668	/
Left Side	5mm	21100/2535	20M QPSK 1RB#50	0.143	0.070	-0.02	23.10	23.50	0.157	/
Right Side	5mm	21100/2535	20M QPSK 1RB#50	0.507	0.247	0.18	23.10	23.50	0.556	/
Front Side	5mm	21100/2535	20M QPSK 50%RB#25	0.445	0.239	0.17	22.45	22.50	0.450	/
Back Side	5mm	21100/2535	20M QPSK 50%RB#25	**0.667**	0.350	0.09	22.45	22.50	**0.675**	Yes
Left Side	5mm	21100/2535	20M QPSK 50%RB#25	0.145	0.071	-0.16	22.45	22.50	0.147	/
Right Side	5mm	21100/2535	20M QPSK 50%RB#25	0.510	0.247	-0.14	22.45	22.50	0.516	/
Back Side	5mm	20850/2510	20M QPSK 50%RB#0	0.547	0.286	0.09	21.90	22.50	0.628	/
Back Side	5mm	21350/2560	20M QPSK 50%RB#25	0.494	0.260	-0.05	22.42	22.50	0.503	/

Table 32: Body SAR test results of LTE Band VII

7.2.10 SAR measurement Result of LTE Band XII

Test Position of Body	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front Side	5mm	23130/711	10M QPSK 1RB#25	0.600	0.354	0.15	23.91	24.50	0.687	/
Back Side	5mm	23130/711	10M QPSK 1RB#25	0.696	0.400	-0.07	23.91	24.50	0.797	/
Left Side	5mm	23130/711	10M QPSK 1RB#25	0.145	0.096	-0.14	23.91	24.50	0.166	/
Right Side	5mm	23130/711	10M QPSK 1RB#25	0.460	0.283	-0.08	23.91	24.50	0.527	/
Front Side	5mm	23130/711	10M QPSK 50%RB#13	0.663	0.389	0.05	22.31	23.50	0.872	/
Front Side	5mm	23060/704	10M QPSK 50%RB#0	0.660	0.387	0.05	22.03	23.50	0.926	/
Front Side	5mm	23095/707.5	10M QPSK 50%RB#25	0.661	0.388	0.05	22.24	23.50	0.883	/
Front Side	5mm	23130/711	10M QPSK 100%RB#0	0.557	0.340	0.13	22.10	23.50	0.769	/
Back Side	5mm	23130/711	10M QPSK 50%RB#13	0.687	0.386	0.11	22.31	23.50	0.904	/
Back Side	5mm	23060/704	10M QPSK 50%RB#0	0.550	0.318	0.12	22.03	23.50	0.772	/
Back Side	5mm	23095/707.5	10M QPSK 50%RB#25	**0.804**	0.461	0.14	22.24	23.50	**1.075**	Yes
Left Side	5mm	23130/711	10M QPSK 50%RB#13	0.130	0.086	-0.15	22.31	23.50	0.171	/
Right Side	5mm	23130/711	10M QPSK 50%RB#13	0.434	0.266	0.03	22.31	23.50	0.571	/
Back Side	5mm	23130/711	10M QPSK 100%RB#0	0.646	0.369	0.01	22.10	23.50	0.892	/
Back Side repeated	5mm	23095/707.5	10M QPSK 50%RB#25	0.795	0.456	0.06	22.24	23.50	1.063	/

Table 33: Body SAR test results of LTE Band XII

Copyright © Huawei Technologies Co., Ltd

Appendix A. System Check Plots
(Pls See Appendix No.: SYBH(Z-SAR)020082017-2A, total: 10 pages)

Appendix B. SAR Measurement Plots
(Pls See Appendix No.: SYBH(Z-SAR)020082017-2B, total: 11 pages)

Appendix C. Calibration Certificate
(Pls See Appendix No.: SYBH(Z-SAR)020082017-2C, total: 88 pages)

Appendix D. Photo documentation
(Pls See Appendix No.: SYBH(Z-SAR)020082017-2D, total: 4 pages)

End

Copyright © Huawei Technologies Co., Ltd