FCC SAR Compliance Test Report

Product Name: Mobile WiFi

Model: HWD37

Report No.: SYBH(Z-SAR)20180903005001-2

FCC ID: QISRUCOLA

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	Wei Huanbin	He Rengiang
DATE	2018-10-23	2018-10-23

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.

2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03

3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.

4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.

5. The test report is invalid if there is any evidence of erasure and/or falsification.

6. The test report is only valid for the test samples.

7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory

Copyright © Huawei Technologies Co., Ltd

Table of Contents

1 General Information 6
1.1 Statement of Compliance 6
1.2 RF exposure limits 7
1.3 EUT Description 8
1.3.1 General Description 9
1.4 Test specification(s) 10
1.5 Testing laboratory 10
1.6 Applicant and Manufacturer 10
1.7 Application details 10
1.8 Ambient Condition 10
2 SAR Measurement System 11
2.1 SAR Measurement Set-up 11
2.2 Test environment 12
2.3 Data Acquisition Electronics description 12
2.4 Probe description 13
2.5 Phantom description 14
2.6 Device holder description 15
2.7 Test Equipment List 16
3 SAR Measurement Procedure 17
3.1 Scanning procedure 17
3.2 Spatial Peak SAR Evaluation 18
3.3 Data Storage and Evaluation 19
4 System Verification Procedure 21
4.1 Tissue Verification 21
4.2 System Check 23
4.3 System check Procedure 24
5 SAR measurement variability and uncertainty 25
5.1 SAR measurement variability 25
5.2 SAR measurement uncertainty 25
6 SAR Test Configuration 26
6.1 Test Positions Configuration 26
6.2 3G SAR Test Reduction Procedure 26
6.3 UMTS Test Configuration 26
6.4 LTE Test Configuration 32
6.5 WiFi Test Configuration 34
6.5.1 Initial Test Position Procedure 34
6.5.2 Initial Test Configuration Procedure 34
6.5.3 Sub Test Configuration Procedure 34
6.5.4 WiFi 2.4G SAR Test Procedures 35
6.5.5 OFDM Transmission Mode SAR Test Channel Selection Requirements 36
6.5.6 MIMO SAR Considerations 36
6.6 Power reduction specification 37
6.6.1 Power Reduction of WiFi Antenna 37
6.6.1 Power reduction of Main(3G/4G) antenna 37
6.6.2 Capacitive proximity sensor power reduction test configurations 38
7 SAR Measurement Results 45
7.1 Conducted power measurements 45
7.1.1 Conducted power measurements of UMTS Band II 45
7.1.2 Conducted power measurements of UMTS Band V 47
7.1.3 Conducted power measurements of LTE Band 5 48
7.1.4 Conducted power measurements of LTE Band 17 50
7.1.5 Conducted power measurements of WiFi 2.4G 52
7.1.6 Conducted power measurements of BT 57
7.2 SAR measurement Results 58
7.2.1 SAR measurement Result of UMTS Band II 60
7.2.2 SAR measurement Result of UMTS Band V 61
7.2.3 SAR measurement Result of LTE Band 5 62
7.2.4 SAR measurement Result of LTE Band 17 63
7.2.5 SAR measurement Result of WiFi 2.4G 64

Copyright © Huawei Technologies Co., Ltd

7.3 Multiple Transmitter Evaluation 65
7.3.1 Stand-alone SAR test exclusion 66
7.3.2 Simultaneous Transmission Possibilities 67
7.3.3 SAR Summation Scenario 67
7.3.4 Simultaneous Transmission Conclusion 68
Appendix A. System Check Plots 69
Appendix B. SAR Measurement Plots 69
Appendix C. Calibration Certificate 69
Appendix D. Photo documentation 69

Copyright © Huawei Technologies Co., Ltd

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2018-10-23	He Renqiang

Copyright © Huawei Technologies Co., Ltd

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HWD37 are as below Table 1.

Band	Reported 1-g SAR(W/kg)
	Body
UMTS Band II	**0.95**
UMTS Band V	0.74
LTE Band 5	0.68
LTE Band 17	0.71
WiFi 2.4G	0.17
BT	/
The highest reported SAR for body and simultaneous transmission exposure conditions are 0.95W/kg and 1.13 W/kg respectively per KDB690783 D01.	

Table 1:Summary of test result

Note:
1) Per FCC KDB 447498D01v06, Stand-alone SAR is not required for BT.
2) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
3) The device is in compliance with Specific Absorption Rate（SAR）for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

Copyright © Huawei Technologies Co., Ltd

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	**1.60 W/kg**	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation

.

Copyright © Huawei Technologies Co., Ltd

1.3 EUT Description

Device Information:			
Product Name:	Mobile WiFi		
Model:	HWD37		
FCC ID :	QISRUCOLA		
SN:	1#: HVLDW18811000095 2#: HVLDW18811000063 3#: HVLDW18811000061 4#: HVLDW18811000100 5#: HVLDW18813000004		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment/general population		
Hardware Version :	CL2KD20M VER. B		
Software Version :	8.0.1.31(H25SP2C824)		
Antenna Type :	Internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	UMTS Band II/V, LTE Band 5/17, WiFi 2.4G(Tested), BT(Untested)		
Test Modulation	UMTS(QPSK), LTE(QPSK/16QAM/64QAM), WiFi(DSSS/OFDM), BT(GFSK)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	UMTS Band II	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	LTE Band 5	824-849	869-894
	LTE Band 17	704-716	734-746
	BT	2400-2483.5	2400-2483.5
	WiFi 2.4G	2400-2472	2400-2472
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	3, tested with power control “all 1”(UMTS Band II)		
	3, tested with power control “all 1”(UMTS Band V)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 17)		
Test Channels (low-mid-high):	9262-9400-9538(UMTS Band II)		
	4132-4182-4233(UMTS Band V)		
	20425-20525-20625(LTE Band 5 BW=5MHz)		
	20450-20525-20600(LTE Band 5 BW=10MHz)		
	23755-23790-23825(LTE Band 17 BW=5MHz)		
	23780-23790-23800(LTE Band 17 BW=10MHz)		
	802.11b/g/n 20M:1-2-3-6-10-11 (WiFi 2.4G) 802.11n 40M:3-4-5-6-7-8-9		
	BT: 0-19-39		

Table 3:Device information and operating configuration

Copyright © Huawei Technologies Co., Ltd

1.3.1 General Description

HWD37, which supports LTE B5/B17 and DC-HSDPA/HSDPA/HSUPA/UMTS B2/B5, is subscriber equipment in the LTE/UMTS system. HWD37 implements such functions as RF signal receiving/transmitting, LTE/UMTS protocol processing and data service, etc. It can act as a Wi-Fi hotspot for user accessing to internet. Externally it provides USB interface (to connect to the notebook etc), USIM card interface. The WiFi is 2X2 and the frequency is 2.4GHz. HWD37 also supports BLE.

Battery information:

Name	Manufacturer/trademark	Description
Li-Polymer Battery	HuaweiTechnologies Co., Ltd. (Manufacturer: SCUD)	Model:HB494590EBC-B Rechargeable Battery, Li-Polymer Battery HB494590EBC-B, 3.8V, 3000mAh, Single Cell, Max 4.9*45*90mm, Terminal Dedicated

Copyright © Huawei Technologies Co., Ltd

1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03
KDB616217 D04	SAR for laptop and tablets v01r02

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	NO.2 New City Avenue Songshan Lake Sci. & Tech. Industry Park, Dongguan, Guangdong, P.R.C
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT # 2174.01 & 2174.02 & 2174.03

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details

Start Date of test	2018-09-20
End Date of test	2018-09-27

1.8 Ambient Condition

Ambient temperature	18°C – 25°C
Relative Humidity	30% – 70%

Copyright © Huawei Technologies Co., Ltd

2 SAR Measurement System

2.1 SAR Measurement Set-up

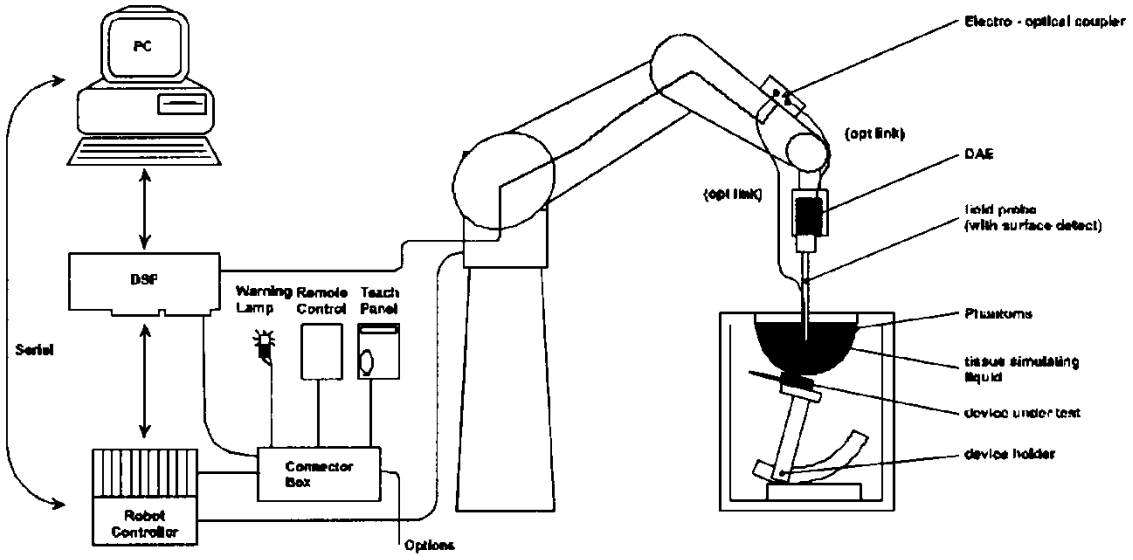

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

Copyright © Huawei Technologies Co., Ltd

2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions:
5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.
Picture 1 of the photo documentation shows a complete view of the test environment.
The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

Copyright © Huawei Technologies Co., Ltd

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (±2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB(noise:typically<1µW/g)	
Dimensions	Overall length: 337 mm (Tip:20 mm) Tip diameter:2.5 mm (Body:12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g.,very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

Copyright © Huawei Technologies Co., Ltd

2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	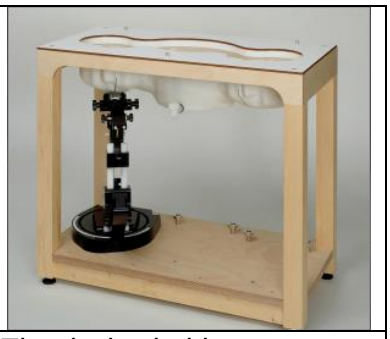
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.		

The following figure shows the definition of reference point:

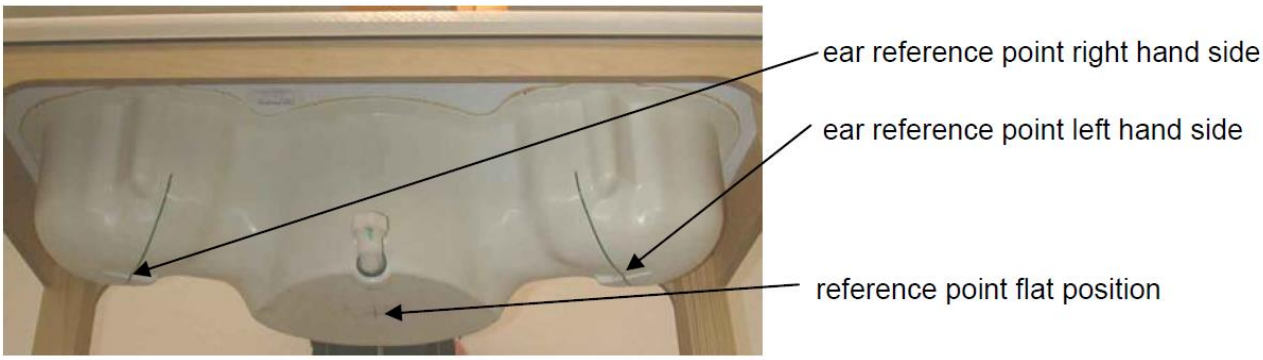

ELI4 Phantom

Shell Thickness	2mm±0.2mm	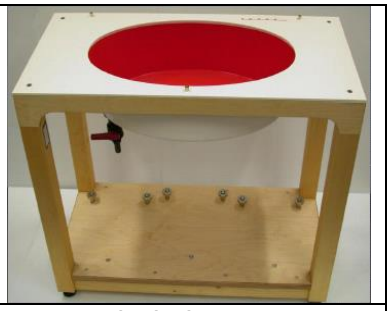
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity 2≤εr≤5 at ≤3 GHz,3≤ εr≤4 at >3 GHz and and a loss tangent ⩽0.05.

Copyright © Huawei Technologies Co., Ltd

Modular Triple Flat Phantom

Shell Thickness (bottom plate)	2mm±0.2mm	
Filling Volume (Module)	approx. 8.1 liters (filling height: 155 mm)	
Dimensions	Length: 292 mm Width: 178 mm Height: 178 mm Useable area: 280 × 175 mm	
Measurement Areas	Flat phantom	
The Modular Flat Phantom consists of three identical modules that can be installed and removed separately without emptying the liquid. It is used for compliance testing of small wireless devices in body-worn configurations according to IEC 62209-2, etc.		

2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent σ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.
The device holder permits the device to be positioned with a tolerance of ±1° in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.
Therefore those devices are normally only tested at the flat part of the SAM.

Copyright © Huawei Technologies Co., Ltd

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.
Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration*)	Valid period
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	7505	2018-06-12	One year
☒	SPEAG	750 MHz Dipole	D750V3	1132	2017-12-18	Three years
☒	SPEAG	835 MHz Dipole	D835V2	4d126	2018-07-24	Three years
☒	SPEAG	1900 MHz Dipole	D1900V2	5d142	2018-06-12	Three years
☒	SPEAG	2450 MHz Dipole	D2450V2	978	2016-02-08	Three years
☒	SPEAG	Data acquisition electronics	DAE4	1235	2017-11-16	One year
☒	SPEAG	Twin Phantom	SAM6	1892	NCR	NCR
☒	R & S	WideBand Radio Communication Tester	CMW 500	116265	2018-03-05	One year
☒	Agilent	Network Analyser	E5071C	MY46629448	2018-03-15	One year
☒	Agilent	Signal Generator	N5181A	MY50145341	2017-12-08	One year
☒	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
☒	AR	Directional Coupler	DC7144M1	0423264	2018-04-28	One year
☒	SHX	Dual Directional Coupler	DDTO-4-20	17121801	2018-01-02	One year
☒	Agilent	Power Meter	E4417A	MY54100027	2018-03-24	One year
☒	Agilent	Power Meter Sensor	E9321A	MY44420359	2018-01-02	One year
☒	Agilent	Power Meter Sensor	E9321A	MY54130007	2018-03-24	One year

Note:
1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
a) There is no physical damage on the dipole;
b) System check with specific dipole is within 10% of calibrated value;
c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

Copyright © Huawei Technologies Co., Ltd

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.

- For power drift measurement, DASY software supports that the reference position can be either the selected section's grid reference point or a user point. If the E-field of power reference measurement in the default grid reference point is very small, the test lab may set the reference position to the user point near the hotspot location to avoid large measurement uncertainty.

- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension(⩽2GHz),12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
  Results of this coarse scan are shown in Appendix B.

- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom}, Δy_{zoom}⩽ 2GHz - ⩽8mm, 2-4GHz - ⩽5 mm and 4-6 GHz-⩽4mm; Δz_{zoom} ⩽3GHz - ⩽5 mm, 3-4 GHz- ⩽4mm and 4-6GHz-⩽2mm where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.)are shown in table form form in chapter 7.2.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

Copyright © Huawei Technologies Co., Ltd

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution (Δx_{area}, Δy_{area})	Maximun Zoom Scan spatial resolution (Δx_{Zoom}, Δy_{Zoom})	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)$*	$\Delta z_{Zoom}(n>1)$*	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.

- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.

- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

Copyright © Huawei Technologies Co., Ltd

3.3 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i$, a_{i0}, a_{i1}, a_{i2}
	- Conversion factor	$ConvF_i$
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V_i	= compensated signal of channel i	(i = x, y, z)
	U_i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	dcp_i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be

Copyright © Huawei Technologies Co., Ltd

evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)^2] for E-field Probes
ConvF = sensitivity enhancement in solution
a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
E_i = electric field strength of channel i in V/m
H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_Y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
E_{tot} = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in g/cm^3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.The power flow density is calculated assuming the excitation field to be a free space field.

$P_{pwe} = E_{tot}^2 / 3770$ or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2
E_{tot} = total electric field strength in V/m
H_{tot} = total magnetic field strength in A/m

Copyright © Huawei Technologies Co., Ltd

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectic parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within ± 5% of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16MΩ+ resistivity
HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

☒**Simulating Body Liquid (MBBL600-6000MHz),Manufactured by SPEAG:**

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Copyright © Huawei Technologies Co., Ltd

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		Permit-tivity	Conduc-tivity [S/m]	Permit-tivity	Conduc-tivity [S/m]	$\Delta\varepsilon_r$	$\Delta\sigma$		
750MHz Body	705	55.70	0.96	54.90	0.964	-1.44%	0.42%	21.5°C	2018-9-26
	710	55.70	0.96	54.87	0.966	-1.49%	0.63%		
	750	55.50	0.96	54.64	0.982	-1.55%	2.29%		
835MHz Body	825	55.20	0.97	54.41	1.006	-1.43%	3.71%	21.5°C	2018-9-25
	835	55.20	0.97	54.37	1.010	-1.50%	4.12%		
	850	55.20	0.99	54.31	1.016	-1.61%	2.63%		
1900MHz Body	1850	53.30	1.52	52.72	1.546	-1.09%	1.71%	21.5°C	2018-9-27
	1880	53.30	1.52	52.65	1.568	-1.22%	3.16%		
	1900	53.30	1.52	52.61	1.583	-1.29%	4.14%		
	1910	53.30	1.52	52.59	1.590	-1.33%	4.61%		
2450MHz Body	2410	52.80	1.91	53.58	1.972	1.48%	3.25%	22.0°C	2018-9-20
	2435	52.70	1.94	53.54	1.996	1.59%	2.89%		
	2450	52.70	1.95	53.52	2.010	1.56%	3.08%		
	2460	52.70	1.96	53.50	2.019	1.52%	3.01%		

Table 5: Measured Tissue Parameter

Note: 1）The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2）KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3）The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

Copyright © Huawei Technologies Co., Ltd

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	Δ1-g	Δ10-g	
750MHz Body	8.74	5.75	8.12	5.60	-7.09%	-2.61%	2018-9-26
835MHz Body	9.65	6.32	10.00	6.84	3.63%	8.23%	2018-9-25
1900MHz Body	40.20	21.30	40.40	22.08	0.50%	3.66%	2018-9-27
2450MHz Body	52.10	24.70	48.80	23.68	-6.33%	-4.13%	2018-9-20

Table 6: System Check Results

Copyright © Huawei Technologies Co., Ltd

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SAM. It is fed with a power of 250 mW(below 3GHz) or 100mW(3-6GHz). To adjust this power, a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).
System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

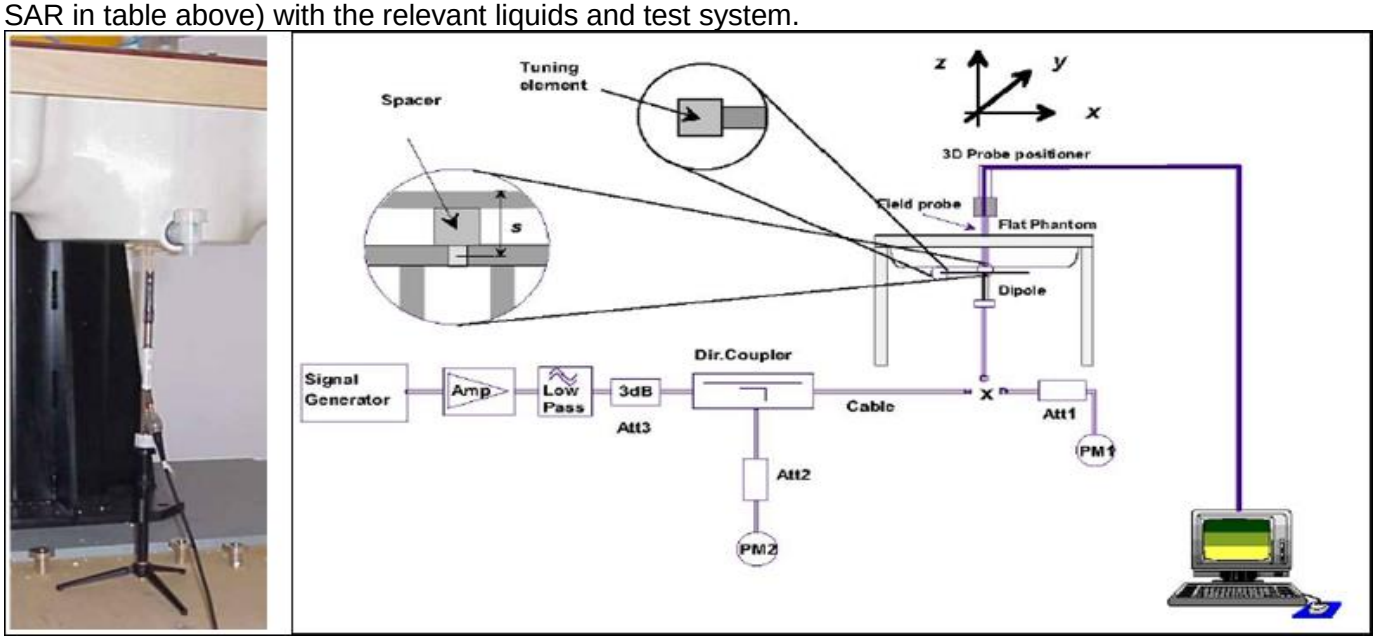

Copyright © Huawei Technologies Co., Ltd

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
2) When the original highest measured SAR is ⩾ 0.80 W/kg, repeat that measurement once.
3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ⩾ 1.45 W/kg (~ 10% from the 1-g SAR limit).
4) Perform a third repeated measurement only if the original, first or second repeated measurement is ⩾ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz,when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

Copyright © Huawei Technologies Co., Ltd

6 SAR Test Configuration

6.1 Test Positions Configuration

The Wi-Fi and WWAN transmitters used for hotspot mode are usually built-in within the device, such as battery-operated personal wireless routers and wireless handsets.
Per FCC KDB 941225D06, The Body SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is > 9 cm x 5 cm, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.3 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are requied in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

Body SAR Measurements

Copyright © Huawei Technologies Co., Ltd

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK, ΔNACK, ΔCQI = 8. The variation of the β_c /β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test	β_c	β_d	β_d (SF)	β_c /β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: △ACK, △NACK and △CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to β_c = 11/15 and β_d = 15/15

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI’s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits

Copyright © Huawei Technologies Co., Ltd

Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Copyright © Huawei Technologies Co., Ltd

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}(1)	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM(2) (dB)	MPR (dB)	AG(4) Index	E-TFCI
1	11/15(3)	15/15(3)	64	11/15(3)	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15(4)	15/15(4)	64	15/15(4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 10:Subtests for UMTS Release 6 HSUPA

Copyright © Huawei Technologies Co., Ltd

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Speading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).						

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH _Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Copyright © Huawei Technologies Co., Ltd

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12:settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

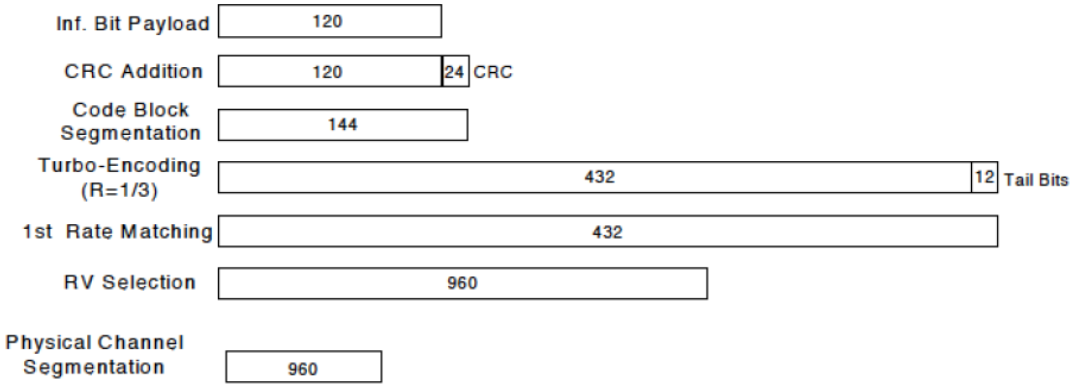

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to β_c = 11/15 and β_d = 15/15

Up commands are set continuously to set the UE to Max power.

Note:

1.The Dual Carriers transmission only applies to HSDPA physical channels

2.The Dual Carriers belong to the same Node and are on adjacent carriers.

3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation

4.The Dual Carriers operate in the same frequency band .

5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.

6.The device doesn't support carrier aggregation for it just can operate in Release 8.

Copyright © Huawei Technologies Co., Ltd

6.4 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing.Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	**Channel bandwidth / Transmission bandwidth (N_{RB})**						**MPR (dB)**
	1.4 MHz	**3.0 MHz**	**5 MHz**	**10 MHz**	**15 MHz**	**20 MHz**	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS_01”on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

Copyright © Huawei Technologies Co., Ltd

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

Copyright © Huawei Technologies Co., Ltd

6.5 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01v02 are applied. (Refer to KDB 248227D01 for more details)

6.5.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet , procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated(peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

6.5.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

6.5.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

Copyright © Huawei Technologies Co., Ltd

6.5.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Copyright © Huawei Technologies Co., Ltd

6.5.5 OFDM Transmission Mode SAR Test Channel Selection Requirements

For 2.4 GHz, When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth,lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations, the lower order 802.11 mode is used for SAR measurement. When the maximum output power are the same for multiple test channel, either according to the default or additional power measurement requirement, SAR is measured using the channel closest to the middle of the frequency band or aggregted band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.5.6 MIMO SAR Considerations

Per KDB 248227D01v02, simultaneous transmission provisions in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1-g SAR single transmission SAR measurement is <1.6W/kg, no additional SAR measurements for MIMO are required. Alternatively,SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

Copyright © Huawei Technologies Co., Ltd

6.6 Power reduction specification

This device uses some single step independent power reduction through static table look-up for SAR compliance.

1) This device uses the mobile country code (MCC) to indicate whether the users in CE countries, FCC countries or Japan. The selection among CE countries, FCC countries and Japan power levels is based on the country code detection mechanism. It can determine the countries where users are and set the relevant power level accordingly.

Antenna	MCC OF CE COUNTRY (CE standard)	MCC OF FCC COUNTRY (FCC standard)	MCC OF Japan
WiFi 2.4G Ant	Power Level A1	Power Level B1	Power Level C1
3G/4G Main Ant	Power Level A2	Power Level B2	Power Level C2

2) This device uses a proximity sensor that shares the same metallic electrode as the main transmitting antenna to facilitate triggering in typical user interactivity with the device.

6.6.1 Power Reduction of WiFi Antenna

The following tables summarize the key power reduction information of WiFi antenna. The detailed full power and reduced conducted power measurement results are provided in section 6 of this report:

Table: Example of SAR power reduction using country code detection

Mode	Frequency bands	Country code of Japan	Country code of CE	Country code of FCC	Country code of no network
SISO	802.11b	0	4.0	0	4.5
	802.11g	0	0	0	6.0
	802.11n 20M	0	0	0	5.0
	802.11n 40M	0	0	1.5	7.5
MIMO	802.11g	0	0	0	6.0
	802.11n 20M	0	0	0	5.5
	802.11n 40M	0	0	0	6.0

Note: Standalone FCC SAR of WiFi 2.4G is evaluated at power level Ab1; (FCC mobile country code).

6.6.1 Power reduction of Main(3G/4G) antenna

Copyright © Huawei Technologies Co., Ltd

6.6.2 Capacitive proximity sensor power reduction test configurations

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body/hotspot exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance.

The following tables summerize the key power reduction information for proximity sensor. The test procedures in KDB 616217 should be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

Band	Sensor Trigger Distance	Power reduction (dB)
UMTS Band II	Front side: 18mm Back side: 19mm Right side: 22mm	4.0
UMTS Band V	Front side: 18mm Back side: 19mm Right side: 22mm	1.0
LTE Band 5	Front side: 18mm Back side: 19mm Right side: 22mm	1.5
LTE Band 17	Front side: 18mm Back side: 19mm Right side: 22mm	1.0

Copyright © Huawei Technologies Co., Ltd

1) Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the front side, back side and right side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

the proximity sensor triggering distance measurement method are as below:

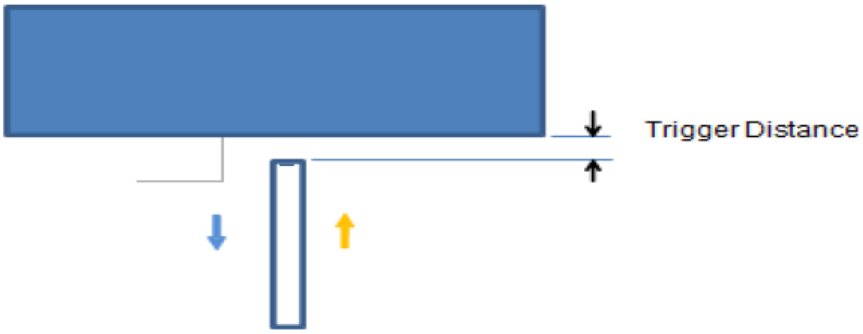

Picture: Proximity sensor triggering distances assessment (Right side)

Picture: Proximity sensor triggering distances assessment (Front/Back side)

Copyright © Huawei Technologies Co., Ltd

Table: Summary of Trigger Distances

Band	Trigger distance-Front Side		Trigger distance-Back Side		Trigger distance-Right Side	
	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom
UMTS Band II	18mm	18mm	19mm	19mm	22mm	22mm
UMTS Band V	18mm	18mm	19mm	19mm	22mm	22mm
LTE Band 5	18mm	18mm	19mm	19mm	22mm	22mm
LTE Band 17	18mm	18mm	19mm	19mm	22mm	22mm

The detailed conducted power measurement data to determine the triggering distances is as below:

The DUT(Front side) is moved towards the flat phantom:

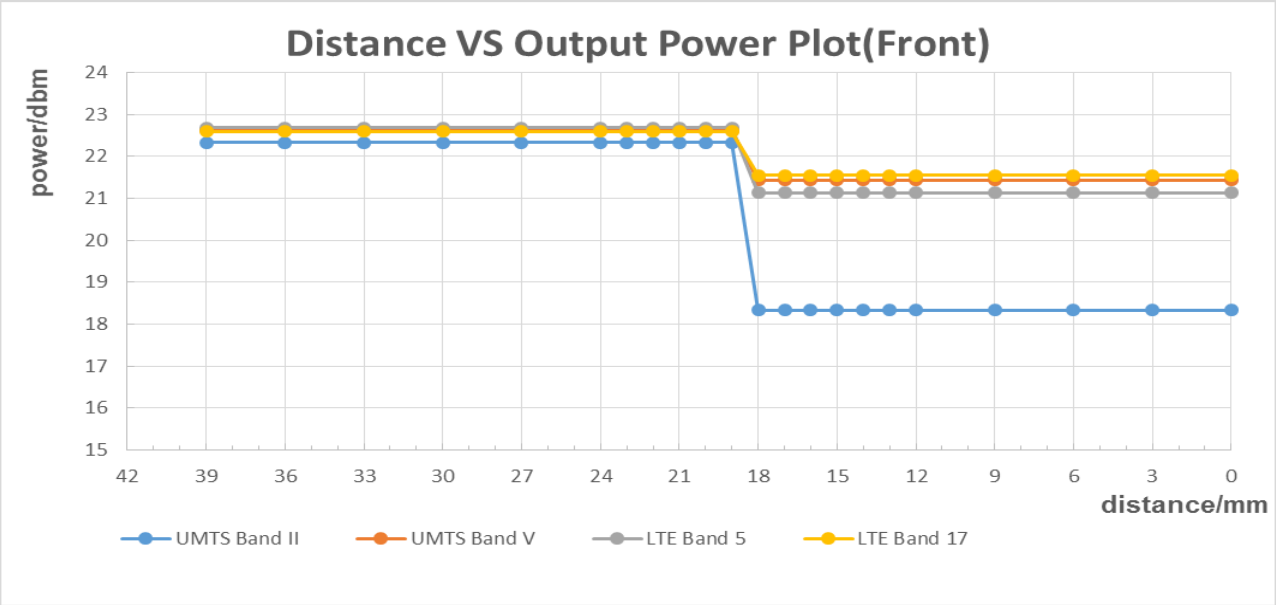

Copyright © Huawei Technologies Co., Ltd

The DUT(Back side) is moved towards the flat phantom:

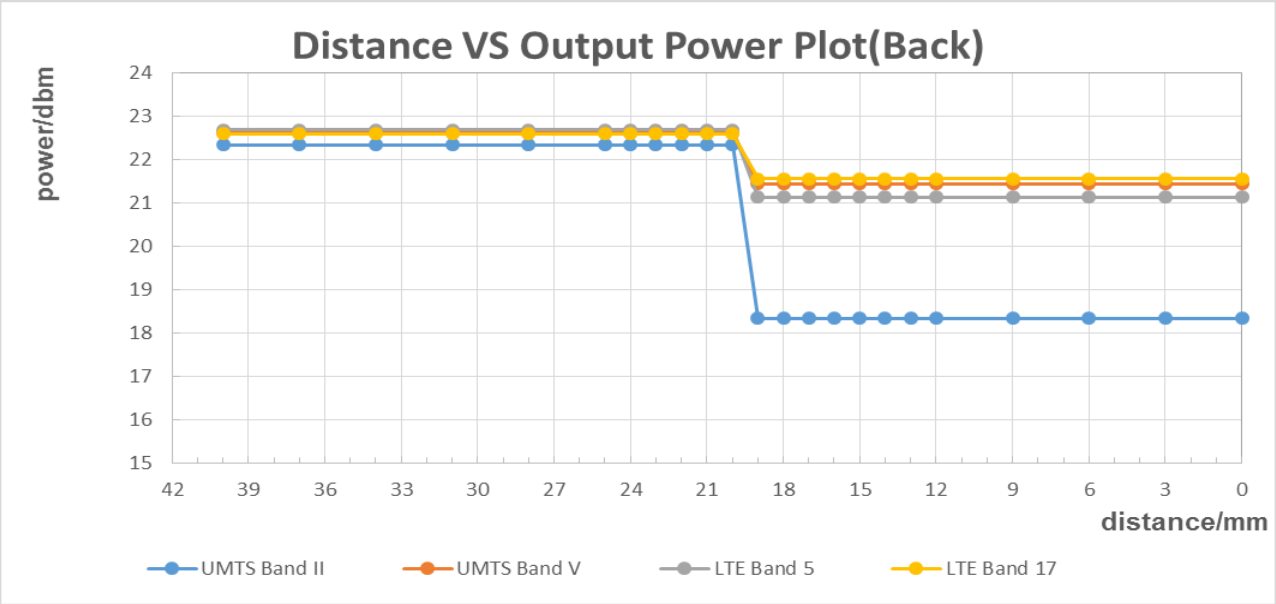

The DUT(Right side) is moved towards the flat phantom:

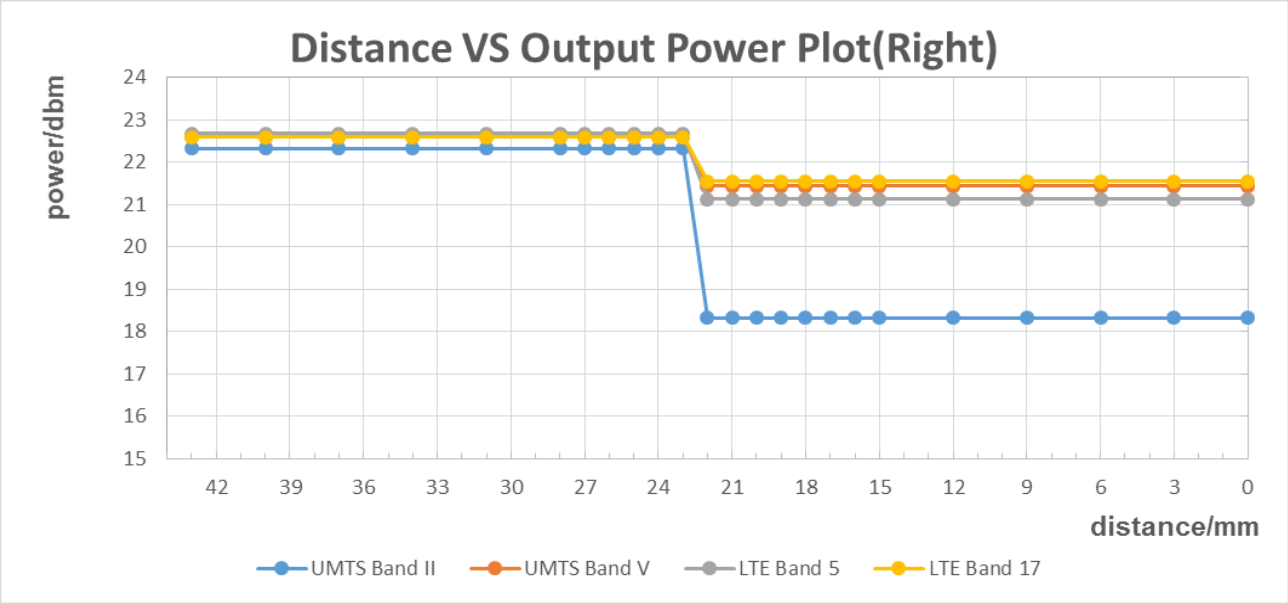

Copyright © Huawei Technologies Co., Ltd

The DUT(Front side) is moved away from the flat phantom:

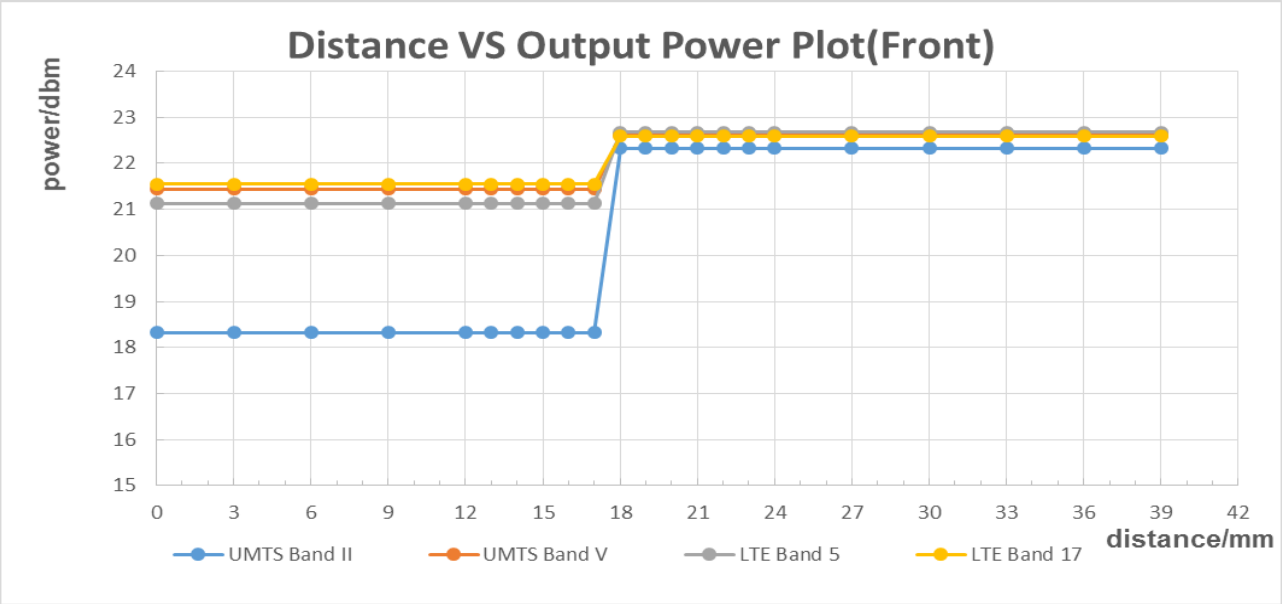

The DUT(Back side) is moved away from the flat phantom:

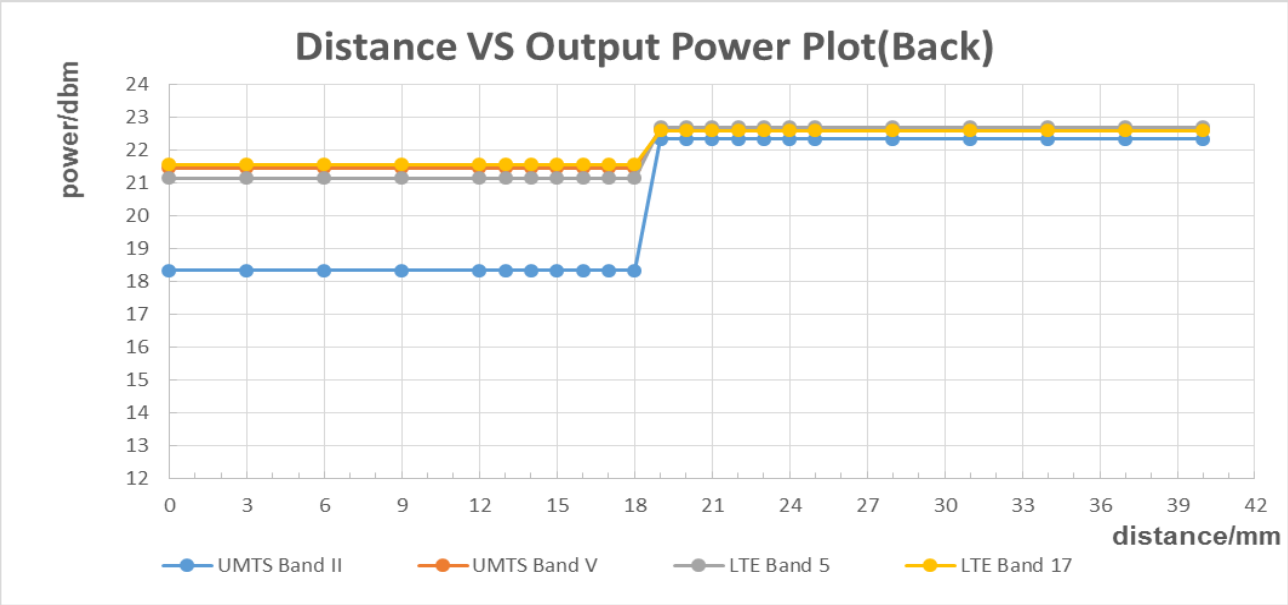

Copyright © Huawei Technologies Co., Ltd

The DUT(Right side) is moved away from the flat phantom:

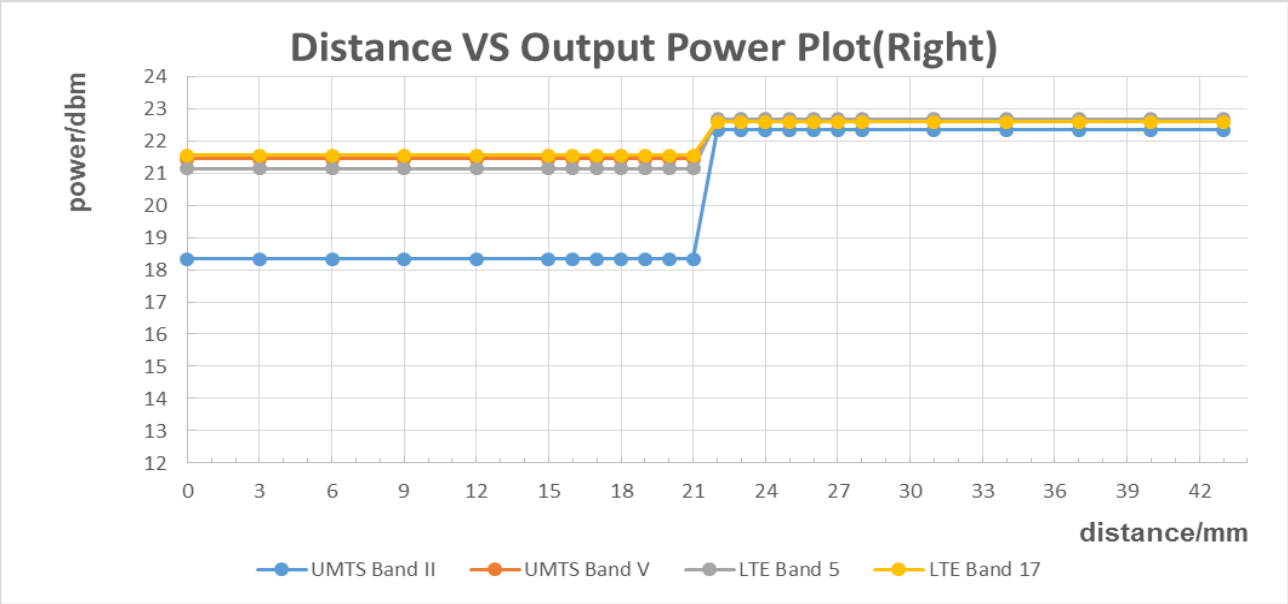

Conclusion: It can be ensured that the proximity sensor can be valid triggered.

2) Procedures for determining antenna and proximity sensor coverage

There is no spatial offset between the Main antenna and the proximity sensor element, so procedures for determining the proximity sensor coverage does not need to be assessed per KDB616217.

Copyright © Huawei Technologies Co., Ltd

3) Procedures for determining device tilt angle influences to proximity sensor triggering

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Right side parallel to the base of the flat phantom for each band.

The EUT was rotated about Right side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

The proximity sensor triggering tilt angle measurement method are as below:

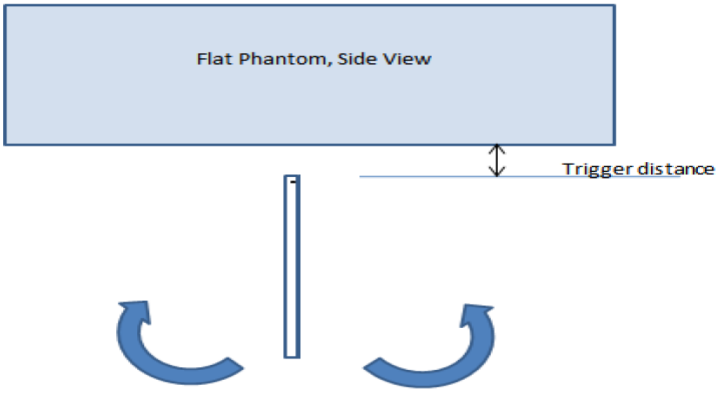

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering(Right side)

Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status										
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
UMTS Band II	22mm	on	on	on	on	on	on	on	on	on	on	on
UMTS Band V	22mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 5	22mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 17	22mm	on	on	on	on	on	on	on	on	on	on	on

Conclusion: It can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition

Copyright © Huawei Technologies Co., Ltd

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMW500 was used.
SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

7.1.1 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.70	**22.40**	**22.33**	**22.32**
HSDPA	Subtest 1	23.20	21.95	21.88	21.88
	Subtest 2	23.20	22.13	22.04	22.06
	Subtest 3	22.20	21.55	21.49	21.48
	Subtest 4	22.20	21.58	21.52	21.52
HSUPA	Subtest 1	21.20	20.38	20.18	20.39
	Subtest 2	19.20	17.57	17.36	17.74
	Subtest 3	20.20	18.67	19.11	18.96
	Subtest 4	20.20	17.82	18.23	18.01
	Subtest 5	23.20	22.59	22.32	22.29
DC-HSDPA	Subtest 1	23.20	21.95	21.88	21.88
	Subtest 2	23.20	22.13	22.04	22.06
	Subtest 3	22.20	21.55	21.49	21.48
	Subtest 4	22.20	21.58	21.52	21.52

Table 13: Conducted power measurement results of UMTS Band II (Full Power)

Copyright © Huawei Technologies Co., Ltd

UMTS Band II		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	19.70	18.43	**18.33**	18.34
HSDPA	Subtest 1	19.20	17.87	17.80	17.82
	Subtest 2	19.20	17.93	17.83	17.82
	Subtest 3	18.20	17.45	17.34	17.37
	Subtest 4	18.20	17.45	17.35	17.36
HSUPA	Subtest 1	17.20	16.31	16.34	16.32
	Subtest 2	15.20	14.48	13.99	14.06
	Subtest 3	16.20	15.58	14.72	14.64
	Subtest 4	16.20	14.38	14.25	14.17
	Subtest 5	19.70	18.40	18.44	18.35
DC-HSDPA	Subtest 1	19.20	17.87	17.80	17.82
	Subtest 2	19.20	17.93	17.83	17.82
	Subtest 3	18.20	17.45	17.34	17.37
	Subtest 4	18.20	17.45	17.35	17.36

Table 14: Conducted power measurement results of UMTS Band II (Sensor on)

Note:

1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).

2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.2 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.70	22.61	**22.62**	22.48
HSDPA	Subtest 1	23.20	22.05	21.88	21.89
	Subtest 2	23.20	22.07	21.88	21.86
	Subtest 3	22.20	21.98	21.83	21.79
	Subtest 4	22.20	21.97	21.81	21.78
HSUPA	Subtest 1	22.20	21.51	21.24	21.52
	Subtest 2	19.70	19.10	19.11	19.04
	Subtest 3	21.20	19.80	19.78	19.62
	Subtest 4	20.20	18.52	18.45	18.38
	Subtest 5	23.20	22.75	22.59	22.57
DC-HSDPA	Subtest 1	23.20	22.05	21.88	21.89
	Subtest 2	23.20	22.07	21.88	21.86
	Subtest 3	22.20	21.98	21.83	21.79
	Subtest 4	22.20	21.97	21.81	21.78

Table 15: Conducted power measurement results of UMTS Band V (Full Power)

UMTS Band V		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.70	21.64	**21.44**	21.47
HSDPA	Subtest 1	22.20	21.07	20.88	20.87
	Subtest 2	22.20	21.08	20.91	20.87
	Subtest 3	21.20	20.96	20.79	20.80
	Subtest 4	21.20	20.95	20.76	20.79
HSUPA	Subtest 1	21.70	20.53	20.24	20.40
	Subtest 2	19.20	18.38	18.08	18.15
	Subtest 3	19.70	19.06	18.87	18.65
	Subtest 4	19.20	17.39	17.99	17.56
	Subtest 5	22.20	21.78	21.61	21.60
DC-HSDPA	Subtest 1	22.20	21.07	20.88	20.87
	Subtest 2	22.20	21.08	20.91	20.87
	Subtest 3	21.20	20.96	20.79	20.80
	Subtest 4	21.20	20.95	20.76	20.79

Table 16: Conducted power measurement results of UMTS Band V (Sensor on)

Note:

1) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).

2) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.3 Conducted power measurements of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20425CH	Channel 20525CH	Channel 20625CH
5MHz	QPSK	1	0	23.70	22.60	22.55	22.38
		1	13	23.70	22.74	22.53	22.45
		1	24	23.70	22.63	22.49	22.24
		12	0	22.70	21.67	21.50	21.36
		12	6	22.70	21.74	21.54	21.42
		12	13	22.70	21.65	21.51	21.32
		25	0	22.70	21.73	21.50	21.42
	16QAM	1	0	22.70	21.62	21.52	21.41
		1	13	22.70	21.74	21.55	21.42
		1	24	22.70	21.66	21.49	21.31
		12	0	21.70	20.62	20.50	20.26
		12	6	21.70	20.69	20.45	20.35
		12	13	21.70	20.61	20.42	20.19
		25	0	21.70	20.68	20.54	20.29
	64QAM	1	0	21.70	20.77	20.78	20.61
		1	13	21.70	20.82	20.69	20.56
		1	24	21.70	20.83	20.58	20.36
		12	0	20.70	19.75	19.62	19.58
		12	6	20.70	19.82	19.69	19.54
		12	13	20.70	19.79	19.60	19.44
		25	0	20.70	19.76	19.60	19.45
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20450CH	Channel 20525CH	Channel 20600CH
10MHz	QPSK	1	0	23.70	22.55	22.57	22.48
		1	25	23.70	**22.83**	22.68	22.64
		1	49	23.70	22.52	22.53	22.30
		25	0	22.70	21.67	21.57	21.50
		25	13	22.70	**21.71**	21.58	21.48
		25	25	22.70	21.69	21.50	21.37
		50	0	22.70	21.68	21.60	21.40
	16QAM	1	0	22.70	21.71	21.59	21.47
		1	25	22.70	21.94	21.69	21.63
		1	49	22.70	21.72	21.58	21.30
		25	0	21.70	20.62	20.57	20.40
		25	13	21.70	20.67	20.59	20.41
		25	25	21.70	20.66	20.43	20.33
		50	0	21.70	20.58	20.48	20.32
	64QAM	1	0	21.70	20.69	20.57	20.67
		1	25	21.70	20.90	20.58	20.68
		1	49	21.70	20.61	20.52	20.45
		25	0	20.70	19.67	19.57	19.58
		25	13	20.70	19.75	19.58	19.55
		25	25	20.70	19.66	19.52	19.43
		50	0	20.70	19.68	19.57	19.49

Table 17: Conducted power measurement results of LTE Band 5 (Full power)

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20425CH	Channel 20525CH	Channel 20625CH
5MHz	QPSK	1	0	22.20	21.11	21.03	20.90
		1	13	22.20	21.24	21.06	20.93
		1	24	22.20	21.15	20.96	20.81
		12	0	22.20	21.14	21.04	20.88
		12	6	22.20	21.20	21.08	20.95
		12	13	22.20	21.21	20.99	20.83
		25	0	22.20	21.22	21.04	20.85
	16QAM	1	0	22.20	21.13	20.92	20.95
		1	13	22.20	21.30	20.94	20.96
		1	24	22.20	21.25	20.82	20.79
		12	0	21.70	20.60	20.50	20.36
		12	6	21.70	20.70	20.56	20.37
		12	13	21.70	20.68	20.48	20.26
		25	0	21.70	20.64	20.46	20.30
	64QAM	1	0	21.70	20.85	20.77	20.61
		1	13	21.70	20.93	20.81	20.71
		1	24	21.70	20.91	20.66	20.51
		12	0	20.70	19.80	19.71	19.58
		12	6	20.70	19.83	19.66	19.61
		12	13	20.70	19.73	19.67	19.51
		25	0	20.70	19.81	19.68	19.54
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 20450CH	Channel 20525CH	Channel 20600CH
10MHz	QPSK	1	0	22.20	21.10	21.01	20.95
		1	25	22.20	**21.46**	21.13	21.06
		1	49	22.20	21.08	20.90	20.72
		25	0	22.20	21.15	21.06	20.92
		25	13	22.20	**21.20**	21.08	20.93
		25	25	22.20	21.17	20.97	20.90
		50	0	22.20	21.16	21.04	20.91
	16QAM	1	0	22.20	21.08	21.19	21.11
		1	25	22.20	21.45	21.39	21.28
		1	49	22.20	21.05	21.11	20.89
		25	0	21.70	20.61	20.52	20.40
		25	13	21.70	20.62	20.51	20.40
		25	25	21.70	20.60	20.44	20.30
		50	0	21.70	20.60	20.47	20.36
	64QAM	1	0	21.70	20.65	20.82	20.61
		1	25	21.70	20.95	20.90	20.71
		1	49	21.70	20.61	20.59	20.42
		25	0	20.70	19.80	19.68	19.58
		25	13	20.70	19.84	19.68	19.55
		25	25	20.70	19.62	19.61	19.44
		50	0	20.70	19.79	19.67	19.54

Table 18: Conducted power measurement results of LTE Band 5 (Sensor on)

Copyright © Huawei Technologies Co., Ltd

7.1.4 Conducted power measurements of LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 23755CH	Channel 23790CH	Channel 23825CH
5MHz	QPSK	1	0	23.70	22.19	22.28	22.48
		1	13	23.70	22.42	22.49	22.61
		1	24	23.70	22.39	22.46	22.55
		12	0	22.70	21.38	21.39	21.60
		12	6	22.70	21.46	21.42	21.58
		12	13	22.70	21.34	21.53	21.60
		25	0	22.70	21.45	21.51	21.63
	16QAM	1	0	22.70	21.27	21.31	21.25
		1	13	22.70	21.55	21.44	21.45
		1	24	22.70	21.51	21.51	21.42
		12	0	21.70	20.33	20.32	20.52
		12	6	21.70	20.42	20.54	20.61
		12	13	21.70	20.35	20.55	20.58
		25	0	21.70	20.37	20.34	20.58
	64QAM	1	0	21.70	20.50	20.61	20.77
		1	13	21.70	20.68	20.71	20.83
		1	24	21.70	20.55	20.72	20.80
		12	0	20.70	19.51	19.62	19.81
		12	6	20.70	19.63	19.66	19.78
		12	13	20.70	19.54	19.72	19.79
		25	0	20.70	19.60	19.62	19.71
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 23780CH	Channel 23790CH	Channel 23800CH
10MHz	QPSK	1	0	23.70	22.17	22.15	22.29
		1	25	23.70	22.51	22.59	**22.71**
		1	49	23.70	22.47	22.49	22.59
		25	0	22.70	21.35	21.33	21.38
		25	13	22.70	21.46	21.43	21.53
		25	25	22.70	21.45	21.46	**21.55**
		50	0	22.70	21.39	21.39	21.38
	16QAM	1	0	22.70	21.30	21.24	21.36
		1	25	22.70	21.77	21.66	21.81
		1	49	22.70	21.66	21.63	21.58
		25	0	21.70	20.30	20.30	20.37
		25	13	21.70	20.39	20.39	20.52
		25	25	21.70	20.42	20.44	20.54
		50	0	21.70	20.33	20.33	20.31
	64QAM	1	0	21.70	20.45	20.51	20.63
		1	25	21.70	20.84	20.89	20.94
		1	49	21.70	20.73	20.90	20.71
		25	0	20.70	19.54	19.58	19.55
		25	13	20.70	19.65	19.63	19.69
		25	25	20.70	19.66	19.67	19.71
		50	0	20.70	19.61	19.58	19.55

Table 19: Conducted power measurement results of LTE Band 17 (Full Power)

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 23755CH	Channel 23790CH	Channel 23825CH
5MHz	QPSK	1	0	22.70	21.16	21.32	21.43
		1	13	22.70	21.34	21.48	21.56
		1	24	22.70	21.29	21.46	21.44
		12	0	22.70	21.31	21.33	21.48
		12	6	22.70	21.39	21.50	21.55
		12	13	22.70	21.29	21.46	21.54
		25	0	22.70	21.39	21.35	21.58
	16QAM	1	0	22.70	21.04	21.34	21.57
		1	13	22.70	21.26	21.48	21.74
		1	24	22.70	21.20	21.53	21.67
		12	0	21.70	20.35	20.27	20.50
		12	6	21.70	20.42	20.31	20.57
		12	13	21.70	20.35	20.44	20.58
		25	0	21.70	20.35	20.28	20.54
	64QAM	1	0	21.70	20.64	20.68	20.80
		1	13	21.70	20.74	20.76	20.93
		1	24	21.70	20.67	20.75	20.88
		12	0	20.70	19.56	19.68	19.87
		12	6	20.70	19.66	19.65	19.82
		12	13	20.70	19.61	19.68	19.78
		25	0	20.70	19.58	19.67	19.78
Bandwidth	Modulation	RB size	RB offset	Tune-up Max.	Channel 23780CH	Channel 23790CH	Channel 23800CH
10MHz	QPSK	1	0	22.70	21.17	21.09	21.22
		1	25	22.70	21.63	21.55	**21.73**
		1	49	22.70	21.51	21.44	21.47
		25	0	22.70	21.34	21.34	21.39
		25	13	22.70	21.45	21.44	**21.53**
		25	25	22.70	21.47	21.49	21.53
		50	0	22.70	21.41	21.41	21.40
	16QAM	1	0	22.70	21.11	21.29	21.44
		1	25	22.70	21.55	21.66	21.91
		1	49	22.70	21.47	21.61	21.72
		25	0	21.70	20.28	20.29	20.36
		25	13	21.70	20.32	20.39	20.46
		25	25	21.70	20.45	20.46	20.49
		50	0	21.70	20.35	20.33	20.32
	64QAM	1	0	21.70	20.54	20.58	20.69
		1	25	21.70	20.95	20.94	21.01
		1	49	21.70	20.77	20.75	20.82
		25	0	20.70	19.55	19.62	19.68
		25	13	20.70	19.69	19.66	19.71
		25	25	20.70	19.66	19.70	19.73
		50	0	20.70	19.67	19.58	19.63

Table 20: Conducted power measurement results of LTE Band 17 (Sensor on)

Copyright © Huawei Technologies Co., Ltd

7.1.5 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Mode	Ant	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	Ant1	1	2412	1Mbps	16.50	15.27	No
		2	2417		17.50	**16.43**	Yes
		6	2437		17.50	16.10	No
		10	2457		17.50	15.69	No
		11	2462		16.50	14.54	No
	Ant2	1	2412	1Mbps	16.50	15.47	No
		2	2417		17.50	16.83	No
		6	2437		17.50	**17.06**	Yes
		10	2457		17.50	16.68	No
		11	2462		16.50	15.11	No
802.11g	Ant1	1	2412	6Mbps	8.50	7.45	No
		2	2417		12.50	11.52	No
		3	2422		14.50	13.49	No
		6	2437		14.50	12.86	No
		10	2457		14.50	12.83	No
		11	2462		10.00	8.07	No
	Ant2	1	2412	6Mbps	8.50	7.75	No
		2	2417		12.50	12.17	No
		3	2422		14.50	13.36	No
		6	2437		14.50	12.77	No
		10	2457		14.50	12.69	No
		11	2462		10.00	8.86	No
802.11n SISO 20M	Ant1	1	2412	MCS0	8.00	6.93	No
		2	2417		12.50	12.24	No
		3	2422		13.50	12.29	No
		6	2437		13.50	12.84	No
		10	2457		13.50	12.63	No
		11	2462		9.00	7.21	No
	Ant2	1	2412	MCS0	8.00	7.15	No
		2	2417		12.50	11.44	No
		3	2422		13.50	12.50	No
		6	2437		13.50	12.78	No
		10	2457		13.50	12.83	No
		11	2462		9.00	7.35	No

Copyright © Huawei Technologies Co., Ltd

802.11n SISO 40M	Ant1	3	2422	MCS0	5.50	4.96	No
		4	2427		7.00	5.59	No
		5	2432		8.50	7.07	No
		6	2437		8.50	7.14	No
		7	2442		12.00	10.01	No
		8	2447		9.00	7.09	No
		9	2452		7.50	7.09	No
	Ant2	3	2422	MCS0	5.50	5.40	No
		4	2427		7.00	6.73	No
		5	2432		8.50	8.40	No
		6	2437		8.50	7.94	No
		7	2442		12.00	10.72	No
		8	2447		9.00	8.05	No
		9	2452		7.50	7.02	No
802.11g CDD	Sum	1	2412	6Mbps	11.50	10.61	No
		2	2417		15.50	14.65	No
		3	2422		17.50	**16.47**	Yes
		6	2437		17.50	16.10	No
		10	2457		17.50	15.79	No
		11	2462		13.00	12.02	No
802.11n MIMO 20M	Sum	1	2412	MCS8	11.00	10.55	No
		2	2417		15.50	14.49	No
		3	2422		16.50	15.38	No
		6	2437		16.50	15.44	No
		10	2457		16.50	15.32	No
		11	2462		12.00	10.65	No
802.11n MIMO 40M	Sum	3	2422	MCS8	8.50	7.92	No
		4	2427		10.00	9.57	No
		5	2432		11.50	10.41	No
		6	2437		11.50	10.38	No
		7	2442		15.00	13.84	No
		8	2447		12.00	10.89	No
		9	2452		10.50	9.46	No

Table 21: Conducted power measurement results of WiFi 2.4G (MCC of FCC countries)

Copyright © Huawei Technologies Co., Ltd

Mode	Ant	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	Ant1	1	2412	1Mbps	13.50	11.86	No
		6	2437		13.50	11.33	No
		11	2462		13.50	11.34	No
	Ant2	1	2412	1Mbps	13.50	12.80	No
		6	2437		13.50	12.25	No
		11	2462		13.50	12.68	No
802.11g	Ant1	1	2412	6Mbps	14.50	13.96	Yes
		6	2437		14.50	13.10	Yes
		11	2462		14.50	12.80	Yes
	Ant2	1	2412	6Mbps	14.50	13.16	Yes
		6	2437		14.50	12.86	Yes
		11	2462		14.50	12.94	Yes
802.11n SISO 20M	Ant1	1	2412	MCS0	13.50	12.47	No
		6	2437		13.50	12.12	No
		11	2462		13.50	12.09	No
	Ant2	1	2412	MCS0	13.50	12.42	No
		6	2437		13.50	11.91	No
		11	2462		13.50	12.04	No
802.11n SISO 40M	Ant1	3	2422	MCS0	13.50	11.41	No
		6	2437		13.50	11.81	No
		9	2452		13.50	12.03	No
	Ant2	3	2422	MCS0	13.50	11.59	No
		6	2437		13.50	12.07	No
		9	2452		13.50	11.48	No
802.11g CDD	Sum	1	2412	6Mbps	17.50	16.03	Yes
		6	2437		17.50	15.62	Yes
		11	2462		17.50	15.55	Yes
802.11n MIMO 20M	Sum	1	2412	MCS8	16.50	15.34	No
		6	2437		16.50	15.10	No
		11	2462		16.50	15.09	No
802.11n MIMO 40M	Sum	3	2422	MCS8	16.50	14.51	No
		6	2437		16.50	14.79	No
		9	2452		16.50	14.59	No

Table 22: Conducted power measurement results of WiFi 2.4G (MCC of CE countries)

Note: The Average conducted power of WiFi is measured with RMS detector.

Copyright © Huawei Technologies Co., Ltd

Mode	Ant	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	Ant1	1	2412	1Mbps	17.50	16.27	No
		6	2437		17.50	16.70	No
		11	2462		17.50	16.48	No
	Ant2	1	2412	1Mbps	17.50	16.68	No
		6	2437		17.50	16.79	No
		11	2462		17.50	16.53	No
802.11g	Ant1	1	2412	6Mbps	14.50	13.89	No
		6	2437		14.50	12.35	No
		11	2462		14.50	12.89	No
	Ant2	1	2412	6Mbps	14.50	13.06	No
		6	2437		14.50	12.69	No
		11	2462		14.50	12.73	No
802.11n SISO 20M	Ant1	1	2412	MCS0	13.50	12.50	No
		6	2437		13.50	12.09	No
		11	2462		13.50	11.89	No
	Ant2	1	2412	MCS0	13.50	12.73	No
		6	2437		13.50	11.72	No
		11	2462		13.50	11.83	No
802.11n SISO 40M	Ant1	3	2422	MCS0	13.50	11.50	No
		6	2437		13.50	11.79	No
		9	2452		13.50	12.10	No
	Ant2	3	2422	MCS0	13.50	11.70	No
		6	2437		13.50	11.80	No
		9	2452		13.50	11.53	No
802.11g CDD	Sum	1	2412	6Mbps	17.50	15.89	No
		6	2437		17.50	15.63	No
		11	2462		17.50	15.63	No
802.11n MIMO 20M	Sum	1	2412	MCS8	16.50	15.31	No
		6	2437		16.50	15.18	No
		11	2462		16.50	15.10	No
802.11n MIMO 40M	Sum	3	2422	MCS8	16.50	14.58	No
		6	2437		16.50	14.63	No
		9	2452		16.50	14.56	No

Table 23: Conducted power measurement results of WiFi 2.4G (MCC of Japan countries)

Copyright © Huawei Technologies Co., Ltd

Mode	Ant	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	Ant1	1	2412	1Mbps	13.50	11.96	No
		6	2437		13.50	11.25	No
		11	2462		13.50	11.36	No
	Ant2	1	2412	1Mbps	13.50	12.75	No
		6	2437		13.50	12.30	No
		11	2462		13.50	12.83	No
802.11g	Ant1	1	2412	6Mbps	8.50	8.10	No
		6	2437		8.50	7.67	No
		11	2462		8.50	7.83	No
	Ant2	1	2412	6Mbps	8.50	7.72	No
		6	2437		8.50	7.01	No
		11	2462		8.50	6.54	No
802.11n SISO 20M	Ant1	1	2412	MCS0	8.00	6.87	No
		6	2437		8.00	6.33	No
		11	2462		8.00	7.02	No
	Ant2	1	2412	MCS0	8.00	7.09	No
		6	2437		8.00	6.14	No
		11	2462		8.00	6.01	No
802.11n SISO 40M	Ant1	3	2422	MCS0	6.00	5.12	No
		6	2437		6.00	4.35	No
		9	2452		6.00	4.40	No
	Ant2	3	2422	MCS0	6.00	5.20	No
		6	2437		6.00	4.56	No
		9	2452		6.00	4.45	No
802.11g CDD	Sum	1	2412	6Mbps	11.50	11.12	No
		6	2437		11.50	10.62	No
		11	2462		11.50	10.42	No
802.11n MIMO 20M	Sum	1	2412	MCS8	11.00	10.22	No
		6	2437		11.00	9.51	No
		11	2462		11.00	9.62	No
802.11n MIMO 40M	Sum	3	2422	MCS8	9.00	8.42	No
		6	2437		9.00	7.80	No
		9	2452		9.00	7.72	No

Table 24: Conducted power measurement results of WiFi 2.4G (MCC of other condition and no network)

Copyright © Huawei Technologies Co., Ltd

7.1.6 Conducted power measurements of BT

The output power of BT antenna is as the following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BT 4.0	4.00	-0.66	0.37	-0.08

Table 25: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

Copyright © Huawei Technologies Co., Ltd

7.2 SAR measurement Results

General Notes:

1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

● ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.

● ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.

● ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.

3) Per KDB865664 D01,for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg; if the deviation among the repeated measurement is ≤20%, and the measured SAR <1.45W/kg, only one repeated measurement is required.

4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤1.2 W/kg, no additional SAR evaluations using a headset are required.

6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

UMTS Notes:

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices.The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator.SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames(maximum TTI)

3) According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR is tested using a fixed periodic duty factor according to the highest transmission duty factor (63.33%) implemented for the device and supported by the defined 3GPP LTE TDD configurations.

Copyright © Huawei Technologies Co., Ltd

WiFi Notes:

Per KDB248227D01:

1) When reported SAR for the initial test position is ≤ 0.4W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested..

2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations

4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

Copyright © Huawei Technologies Co., Ltd

7.2.1 SAR measurement Result of UMTS Band II

Test Position of Body	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	9400/1880	RMC	0.455	0.274	-0.15	18.33	19.70	0.624	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.551	0.347	0.13	18.33	19.70	0.755	Battery 1#	/
Right Side	10mm	9400/1880	RMC	0.091	0.053	0.10	18.33	19.70	0.124	Battery 1#	/
Top Side	10mm	9400/1880	RMC	0.357	0.206	-0.03	22.33	23.70	0.489	Battery 1#	/
Bottom Side	10mm	9400/1880	RMC	0.212	0.121	-0.01	22.33	23.70	0.291	Battery 1#	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Front Side	17mm	9400/1880	RMC	0.625	0.426	-0.05	22.33	23.70	0.857	Battery 1#	/
Front Side	17mm	9262/1852.4	RMC	0.641	0.432	-0.13	22.40	23.70	0.865	Battery 1#	/
Front Side	17mm	9538/1907.6	RMC	0.585	0.349	-0.16	22.32	23.70	0.804	Battery 1#	/
Back Side	18mm	9400/1880	RMC	**0.694**	0.456	-0.19	22.33	23.70	**0.951**	Battery 1#	Yes
Back Side	18mm	9262/1852.4	RMC	0.693	0.454	-0.17	22.40	23.70	0.935	Battery 1#	/
Back Side	18mm	9538/1907.6	RMC	0.672	0.445	-0.18	22.32	23.70	0.923	Battery 1#	/
Right Side	21mm	9400/1880	RMC	0.111	0.074	0.00	22.33	23.70	0.152	Battery 1#	/

Table 26: Body SAR test results of UMTS Band II

Copyright © Huawei Technologies Co., Ltd

7.2.2 SAR measurement Result of UMTS Band V

Test Position of Body	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	4182/836.4	RMC	0.515	0.351	0.01	21.44	22.70	0.688	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	**0.553**	0.413	0.15	21.44	22.70	**0.739**	Battery 1#	Yes
Right Side	10mm	4182/836.4	RMC	0.092	0.053	-0.10	21.44	22.70	0.123	Battery 1#	/
Top Side	10mm	4182/836.4	RMC	0.362	0.263	0.12	22.62	23.70	0.464	Battery 1#	/
Bottom Side	10mm	4182/836.4	RMC	0.330	0.241	-12.00	22.62	23.70	0.423	Battery 1#	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Front Side	17mm	4182/836.4	RMC	0.443	0.336	-0.14	22.62	23.70	0.568	Battery 1#	/
Back Side	18mm	4182/836.4	RMC	0.467	0.355	-0.11	22.62	23.70	0.599	Battery 1#	/
Right Side	21mm	4182/836.4	RMC	0.028	0.019	-0.19	22.62	23.70	0.035	Battery 1#	/

Table 27: Body SAR test results of UMTS Band V

Copyright © Huawei Technologies Co., Ltd

7.2.3 SAR measurement Result of LTE Band 5

Test Position of Body	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20450/829	10M QPSK 1RB#25	0.440	0.304	0.13	21.46	22.20	0.522	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.476	0.357	0.14	21.46	22.20	0.564	Battery 1#	/
Right Side	10mm	20450/829	10M QPSK 1RB#25	0.078	0.045	-0.07	21.46	22.20	0.093	Battery 1#	/
Top Side	10mm	20450/829	10M QPSK 1RB#25	0.347	0.234	0.12	22.83	23.70	0.424	Battery 1#	/
Bottom Side	10mm	20450/829	10M QPSK 1RB#25	0.318	0.217	0.00	22.83	23.70	0.389	Battery 1#	/
Front Side	10mm	20450/829	10M QPSK 50%RB#13	0.489	0.334	-0.11	21.20	22.20	0.616	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 50%RB#13	**0.543**	0.396	-0.17	21.20	22.20	**0.684**	Battery 1#	Yes
Right Side	10mm	20450/829	10M QPSK 50%RB#13	0.070	0.486	-0.07	21.20	22.20	0.088	Battery 1#	/
Top Side	10mm	20450/829	10M QPSK 50%RB#13	0.272	0.184	0.00	21.71	22.70	0.342	Battery 1#	/
Bottom Side	10mm	20450/829	10M QPSK 50%RB#13	0.233	0.159	0.00	21.71	22.70	0.293	Battery 1#	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Front Side	17mm	20450/829	10M QPSK 1RB#25	0.414	0.321	-0.07	22.83	23.70	0.506	Battery 1#	/
Back Side	18mm	20450/829	10M QPSK 1RB#25	0.358	0.276	-0.01	22.83	23.70	0.437	Battery 1#	/
Right Side	21mm	20450/829	10M QPSK 1RB#25	0.030	0.021	-0.12	22.83	23.70	0.036	Battery 1#	/
Front Side	17mm	20450/829	10M QPSK 50%RB#13	0.316	0.245	-0.14	21.71	22.70	0.397	Battery 1#	/
Back Side	18mm	20450/829	10M QPSK 50%RB#13	0.276	0.212	-0.13	21.71	22.70	0.347	Battery 1#	/
Right Side	21mm	20450/829	10M QPSK 50%RB#13	0.023	0.016	-0.18	21.71	22.70	0.029	Battery 1#	/

Table 28: Body SAR test results of LTE Band 5

Copyright © Huawei Technologies Co., Ltd

7.2.4 SAR measurement Result of LTE Band 17

Test Position of Body	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	23800/711	10M QPSK 1RB#25	**0.562**	0.419	-0.03	21.73	22.70	0.703	Battery 1#	Yes
Back Side	10mm	23800/711	10M QPSK 1RB#25	0.547	0.401	-0.15	21.73	22.70	0.684	Battery 1#	/
Right Side	10mm	23800/711	10M QPSK 1RB#25	0.065	0.039	-0.09	21.73	22.70	0.081	Battery 1#	/
Top Side	10mm	23800/711	10M QPSK 1RB#25	0.274	0.200	-0.11	22.71	23.70	0.344	Battery 1#	/
Bottom Side	10mm	23800/711	10M QPSK 1RB#25	0.220	0.164	-0.06	22.71	23.70	0.276	Battery 1#	/
Front Side	10mm	23800/711	10M QPSK 50%RB#13	0.545	0.377	0.02	21.53	22.70	**0.714**	Battery 1#	/
Back Side	10mm	23800/711	10M QPSK 50%RB#13	0.533	0.366	-0.11	21.53	22.70	0.698	Battery 1#	/
Right Side	10mm	23800/711	10M QPSK 50%RB#13	0.063	0.038	-0.15	21.53	22.70	0.083	Battery 1#	/
Top Side	10mm	23800/711	10M QPSK 50%RB#25	0.220	0.161	-0.08	21.55	22.70	0.287	Battery 1#	/
Bottom Side	10mm	23800/711	10M QPSK 50%RB#25	0.174	0.130	-0.10	21.55	22.70	0.227	Battery 1#	/
Additional SAR test at a conservative distance(triggering distance minus 1mm)											
Front Side	17mm	23800/711	10M QPSK 1RB#25	0.515	0.400	-0.09	22.71	23.70	0.647	Battery 1#	/
Back Side	18mm	23800/711	10M QPSK 1RB#25	0.510	0.393	-0.09	22.71	23.70	0.641	Battery 1#	/
Right Side	21mm	23800/711	10M QPSK 1RB#25	0.019	0.014	-0.12	22.71	23.70	0.024	Battery 1#	/
Front Side	17mm	23800/711	10M QPSK 50%RB#25	0.396	0.307	-0.03	21.55	22.70	0.516	Battery 1#	/
Back Side	18mm	23800/711	10M QPSK 50%RB#25	0.393	0.303	-0.16	21.55	22.70	0.512	Battery 1#	/
Right Side	21mm	23800/711	10M QPSK 50%RB#25	0.015	0.010	-0.10	21.55	22.70	0.019	Battery 1#	/

Table 29: Body SAR test results of LTE Band 17

Copyright © Huawei Technologies Co., Ltd

7.2.5 SAR measurement Result of WiFi 2.4G

Test Position of Body	Dist.	Test Channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty cycle	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
ANT1														
Front Side	10mm	2/2417	802.11 b	0.106	/	/	-0.01	99%	/	16.43	17.50	/	Battery 1#	/
Back Side	10mm	2/2417	802.11 b	0.105	/	0.069	-0.18	99%	/	16.43	17.50	/	Battery 1#	/
Top Side	10mm	2/2417	802.11 b	0.139	0.119	0.063	-0.06	99%	0.120	16.43	17.50	0.154	Battery 1#	/
ANT2														
Front Side	10mm	6/2437	802.11 b	0.076	/	/	0.06	99%	/	17.06	17.50	/	Battery 1#	/
Back Side	10mm	6/2437	802.11 b	0.101	0.110	0.061	0.11	99%	0.111	17.06	17.50	0.123	Battery 1#	/
Bottom Side	10mm	6/2437	802.11 b	0.084	/	/	-0.16	99%	/	17.06	17.50	/	Battery 1#	/
CDD														
Front Side	10mm	3/2422	802.11g	0.088	/	/	-0.13	99%	/	16.47	17.50	/	Battery 1#	/
Back Side	10mm	3/2422	802.11g	0.147	**0.136**	0.079	-0.07	99%	0.137	16.47	17.50	**0.174**	Battery 1#	Yes
Top Side	10mm	3/2422	802.11g	0.063	/	/	-0.14	99%	/	16.47	17.50	/	Battery 1#	/
Bottom Side	10mm	3/2422	802.11g	0.064	/	/	-0.09	99%	/	16.47	17.50	/	Battery 1#	/

Table 30: Body SAR test results of WiFi 2.4G

WiFi 2.4G	Tune-upLimit (dBm)	Tune-up Limit (mW)	Hightest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b SISO	17.50	56.23	0.154	/	Yes
802.11g SISO	14.50	28.18	/	0.078	No
802.11n 20M SISO	13.50	22.39	/	0.062	No
802.11n 40M SISO	12.00	15.85	/	0.044	No

WiFi 2.4G	Tune-upLimit (dBm)	Tune-up Limit (mW)	Hightest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11g CDD	17.50	56.23	0.174	/	Yes
802.11n 20M MIMO	16.50	44.67	/	0.138	No
802.11n 40M MIMO	15.00	31.62	/	0.098	No

Note: Per KDB248227D01,

1) For Body SAR test of WiFi 2.4G SISO, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.
2) For Body SAR test of WiFi 2.4G CDD/MIMO, SAR is measured for 2.4 GHz 802.11g CDD using the initial test position procedure. The highest reported SAR for 802.11g CDD is adjusted by the ratio of OFDM 802.11n MIMO to 802.11g CDD specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11n MIMO is not required.

Copyright © Huawei Technologies Co., Ltd

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside device is shown as below picture:

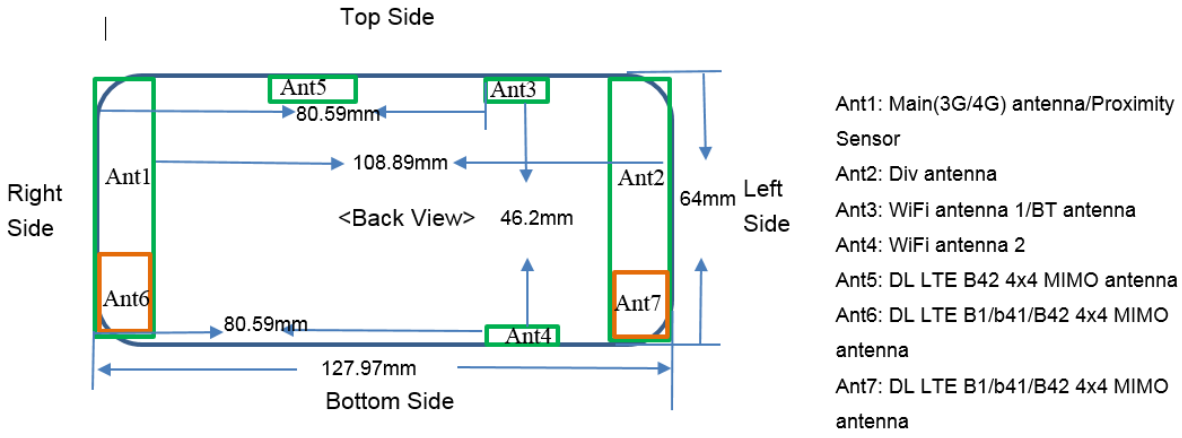

Note:

1) Div antenna is used to improve the acceptance of performance of the main antenna. It does not have the transmitter function.

2) WiFi 1 and WIFI 2 antenna support WIFI 2*2 MIMO.

3) DL LTE B42 4x4 MIMO antenna does not support transmitter function

4) DL LTE B1/B41/B42 4x4 MIMO antenna does not support transmitter function

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Body	Yes	Yes	No	Yes	Yes	Yes
WiFi Antenna 1/BT Antenna	Body	Yes	Yes	No	No	Yes	No
WiFi Antenna 2	Body	Yes	Yes	No	No	No	Yes
WiFi MIMO/CDD	Body	Yes	Yes	No	No	Yes	Yes

Table 31: Sides for Body testing

Note:

1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Body SAR if the antenna-to-edge distance is greater than 2.5cm;

Copyright © Huawei Technologies Co., Ltd

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body	4.00	2.51	10	2.480	0.40	3.00	Yes

Table 32: Standalone SAR test exclusion for BT

Note:

1)* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] •

[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm,where x = 7.5 for 1-g SAR and x = 18.75 for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/kg)*
BT	Body	4.00	2.51	10	2.480	7.50	0.053

Table 33: Estimated SAR calculation for BT

Note:

1) * - maximum possible output power declared by manufacturer

Copyright © Huawei Technologies Co., Ltd

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	UMTS/LTE DATA + WiFi 2.4G SISO ANT1	Yes
2	UMTS/LTE DATA + WiFi 2.4G SISO ANT2	Yes
3	UMTS/LTE DATA + WiFi 2.4G MIMO	Yes
4	UMTS/LTE DATA + BT	Yes

Table 34: Simultaneous Transmission Possibilities

Note:

1) WiFi and Bluetooth can't transmit simultaneously.

2) The device does not support DTM function.

7.3.3 SAR Summation Scenario

Test Position		Main antenna SARMax				WiFi/BT antenna SARMax		ΣSAR
		UMTS II	UMTS V	LTE B5	LTE B17	WiFi 2.4G	BT	
Body	Front Side	0.865	0.688	0.616	0.714	0.174	0.053	1.039
	Back Side	0.951	0.739	0.684	0.698	0.174	0.053	**1.125**
	Left Side	/	/	/	/	/	/	/
	Right Side	0.152	0.123	0.093	0.083	/	/	0.152
	Top Side	0.489	0.464	0.424	0.344	0.174	0.053	0.663
	Bottom Side	0.291	0.423	0.389	0.276	0.174	0.053	0.597

Table 35: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT antenna.

Copyright © Huawei Technologies Co., Ltd

7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.

Copyright © Huawei Technologies Co., Ltd

Appendix A. System Check Plots
(Please See Appendix No.: SYBH(Z-SAR)20180903005001-2A, total: 8 pages)

Appendix B. SAR Measurement Plots
(Please See Appendix No.: SYBH(Z-SAR)20180903005001-2B, total: 6 pages)

Appendix C. Calibration Certificate
(Please See Appendix No.: SYBH(Z-SAR)20180903005001-2C, total: 79 pages)

Appendix D. Photo documentation
(Please See Appendix No.: SYBH(Z-SAR)20180903005001-2D, total: 5 pages)

End

Copyright © Huawei Technologies Co., Ltd