

WPT Plots

- Verification Plots
- WPT Test Plots

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.22

Scan info

Center location:
x: -35.06 mm, y: -70.30 mm, z: 38.78 mm

Dimensions:
x: 389.0 mm, y: 476.0 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/22 11:33:15

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 129.18 A/m
x: 91.50 A/m, y: 72.51 A/m, z: 55.28 A/m

Maximum H-field location relative to DUT:
x: 69.67 mm, y: 128.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 106.92 V/m
x: 6.25 V/m, y: 654.15 mV/m, z: 106.74 V/m

Maximum E-field location relative to DUT:
x: 95.33 mm, y: -117.33 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
65.59 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

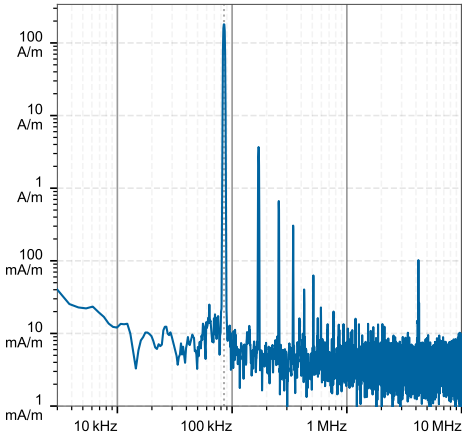

H-field magnitude [RMS] at lowest plane

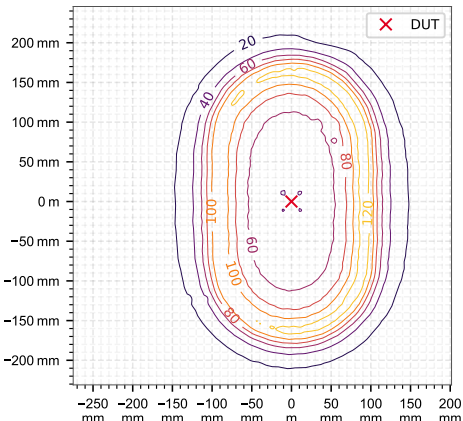

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 85.00 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	203	107	3.49	3.52	3.53	2.47	7.21	5.45	182	1%	74%	44%
2.00	185	99.1	3.30	3.33	3.34	2.34	6.49	4.97	184	1%	74%	47%

Compliance evaluation (Field values at the peak frequency) (f=85.00 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]		BR [RMS]		RL [RMS]		BR [RMS]		ERL [RMS]		DRL [RMS]		MPE [RMS]		BR [RMS]		RL [RMS]		BR [RMS]	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	203	107	3.50	5.45	203	107	2.47	5.45	203	107	3.53	5.45	203	107	N/A	7.21	203	107	3.53	7.21
2.00	185	99.1	3.30	4.97	185	99.1	2.34	4.97	185	99.1	3.34	4.97	185	99.1	N/A	6.49	185	99.1	3.33	6.49

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL		BR		RL		BR		ERL		DRL		MPE		BR		RL		BR	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	9.67	N/A	5.07	N/A	0.31	N/A	40.6	4.84	14.6	N/A	1.25	N/A	0.69	N/A	0.20	N/A	2.26	2.28	N/A	N/A
2.00	8.81	N/A	4.7	N/A	0.29	N/A	37.0	4.48	13.8	N/A	1.14	N/A	0.64	N/A	0.19	N/A	2.06	2.12	N/A	N/A

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.22

Scan info

Center location:
x: -37.27 mm, y: -70.28 mm, z: 38.55 mm

Dimensions:
x: 388.0 mm, y: 476.0 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/23 11:09:19

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 132.63 A/m
x: 124.41 A/m, y: 8.40 A/m, z: 45.20 A/m

Maximum H-field location relative to DUT:
x: 91.67 mm, y: 69.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 119.53 V/m
x: 310.61 mV/m, y: 1.38 V/m, z: 119.52 V/m

Maximum E-field location relative to DUT:
x: 102.67 mm, y: -80.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
69.57 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

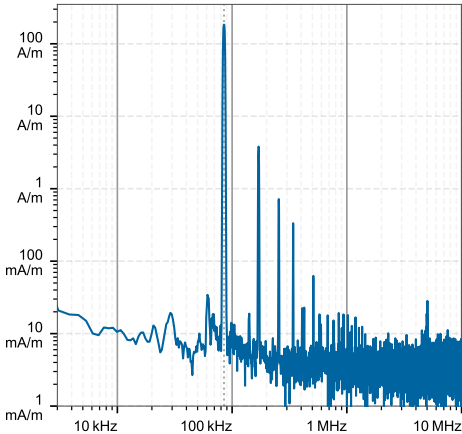

H-field magnitude [RMS] at lowest plane

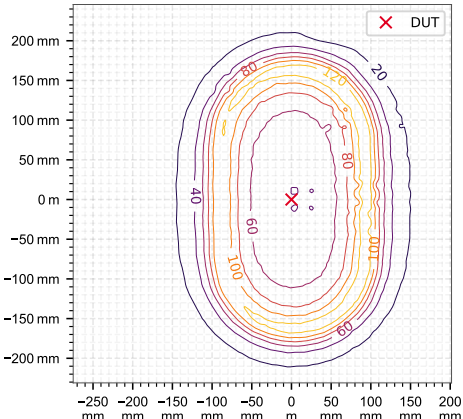

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 85.00 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	206	120	3.56	3.59	3.60	2.52	7.49	5.66	182	1%	67%	45%
2.00	188	110	3.37	3.39	3.40	2.38	6.73	5.17	184	1%	67%	48%

Compliance evaluation (Field values at the peak frequency) (f=85.00 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]		BR [RMS]		RL [RMS]		BR [RMS]		ERL [RMS]		DRL [RMS]		MPE [RMS]		BR [RMS]		RL [RMS]		BR [RMS]	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	206	120	3.56	5.66	206	120	2.52	5.66	206	120	3.60	5.66	206	120	N/A	7.49	206	120	3.59	7.49
2.00	188	110	3.37	5.17	188	110	2.38	5.17	188	110	3.41	5.17	188	110	N/A	6.73	188	110	3.40	6.73

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL		BR		RL		BR		ERL		DRL		MPE		BR		RL		BR	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	9.81	N/A	6.72	N/A	0.31	N/A	41.2	6.41	14.9	N/A	1.26	N/A	0.91	N/A	0.20	N/A	2.29	2.96	N/A	N/A
2.00	8.95	N/A	6.21	N/A	0.29	N/A	37.6	5.92	14.1	N/A	1.15	N/A	0.84	N/A	0.19	N/A	2.09	2.74	N/A	N/A

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.22

Scan info

Center location:
x: -16.32 mm, y: 43.04 mm, z: 53.37 mm

Dimensions:
x: 168.3 mm, y: 169.0 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/22 16:20:36

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 32.88 A/m
x: 2.29 A/m, y: 2.19 A/m, z: 32.73 A/m

Maximum H-field location relative to DUT:
x: 25.67 mm, y: -18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 128.09 V/m
x: 2.85 V/m, y: 1.39 V/m, z: 128.05 V/m

Maximum E-field location relative to DUT:
x: -44.00 mm, y: -44.00 mm, z: 0.00 m


Distance to -20.0 dB boundary:
69.57 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

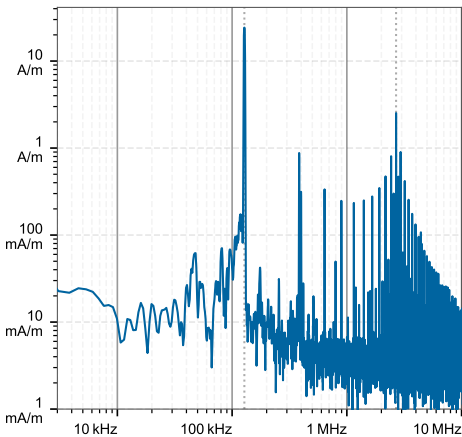

H-field magnitude [RMS] at lowest plane

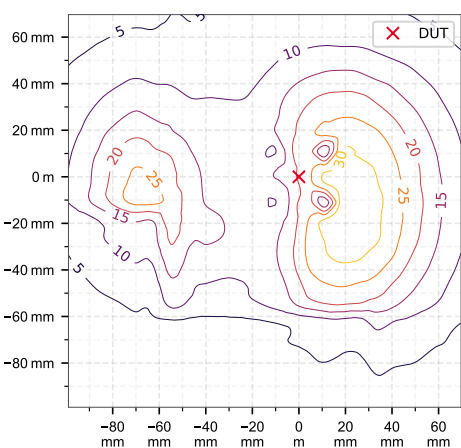

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.87 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	52.1	128	0.634	0.639	0.639	0.456	0.240	0.180	86.4	11%	33%	100%

Compliance evaluation (Field values at the peak frequency) (f=127.87 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	ERL [RMS]	DRL [RMS]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]
0.00	52.1	128	0.639	0.180	52.1	128	0.459	0.180	52.1	128	0.644	0.180	52.1	128	N/A	0.257	52.1	128	0.643	0.257

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	PH _{inc}	PE _{inc}	RL	BR	PH _{inc}	PE _{inc}	ERL	DRL	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	RL	BR	PH _{inc}	PE _{inc}
0.00	2.85	6.11	3.68	0.22	0.04	<0.01	138.4	4.05	2.08	<0.01	10.37	0.82	0.50	0.11	0.03	<0.01	133.0	0.76	N/A	<0.01

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.36

Scan info

Center location:
x: -26.97 mm, y: 14.93 mm, z: 40.08 mm

Dimensions:
x: 168.7 mm, y: 168.7 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/22 12:39:24

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 33.12 A/m
x: 5.16 A/m, y: 9.98 A/m, z: 31.16 A/m

Maximum H-field location relative to DUT:
x: 33.00 mm, y: 33.00 mm, z: 45.17 mm


Maximum E-field [RMS]:
MAGNITUDE: 160.49 V/m
x: 82.15 V/m, y: 4.82 V/m, z: 137.78 V/m

Maximum E-field location relative to DUT:
x: 44.00 mm, y: 44.00 mm, z: 14.67 mm


Distance to -20.0 dB boundary:
29.33 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

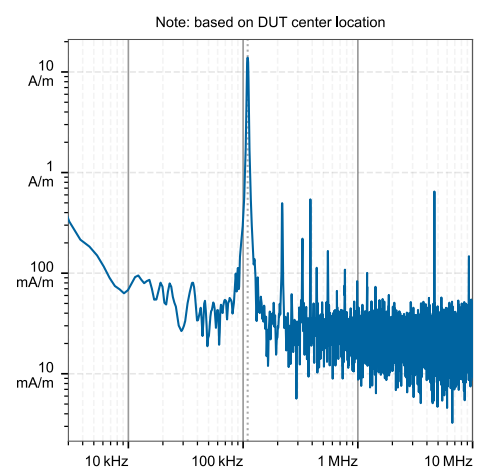

H-field magnitude [RMS] at lowest plane

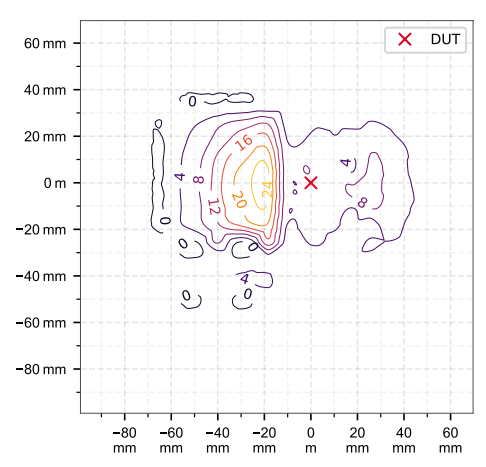

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 108.90 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	44.2	1.55	0.130	0.134	0.132	0.084	0.007	0.003	44.2	257%	107%	41%

Compliance evaluation (Field values at the peak frequency) (f=108.90 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]		BR [RMS]		RL [RMS]		BR [RMS]		ERL [RMS]		DRL [RMS]		MPE [RMS]		BR [RMS]		RL [RMS]		BR [RMS]	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	44.2	1.55	0.130	0.003	44.2	1.55	0.084	0.003	44.2	1.55	0.132	0.003	44.2	1.55	N/A	0.007	44.2	1.55	0.134	0.007

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL		BR		RL		BR		ERL		DRL		MPE		BR		RL		BR	
	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR
0.00	2.11	0.98	1.54	42.9	<0.01	<0.01	18.84	2.3	0.40	<0.01	10.27	0.13	0.21	4.29	<0.01	<0.01	127.1	0.38	N/A	<0.01

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.22

Scan info

Center location:
x: -21.51 mm, y: 69.91 mm, z: 110.10 mm

Dimensions:
x: 80.7 mm, y: 124.7 mm, z: 36.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/22 13:34:03

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 33.97 A/m
x: 9.12 A/m, y: 10.97 A/m, z: 30.83 A/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: -3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 15.53 V/m
x: 5.02 V/m, y: 2.20 V/m, z: 14.53 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 7.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
55.85 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

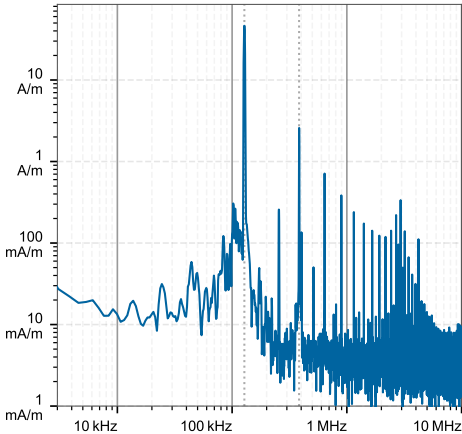

H-field magnitude [RMS] at lowest plane

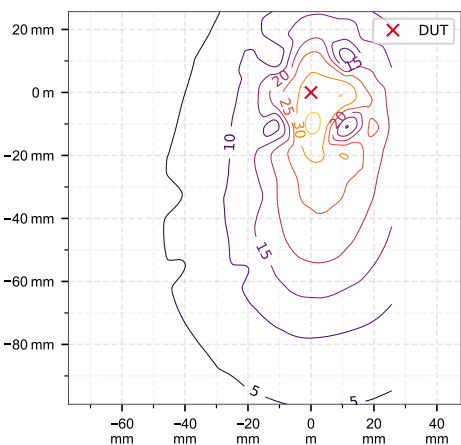

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.87 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	66.0	15.5	0.554	0.569	0.570	0.355	0.128	0.066	49.0	9%	40%	100%

Compliance evaluation (Field values at the peak frequency) (f=127.87 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	ERL [RMS]	DRL [RMS]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]
0.00	66.0	15.5	0.555	0.066	66.0	15.5	0.356	0.066	66.0	15.5	0.571	0.066	66.0	15.5	N/A	0.128	66.0	15.5	0.569	0.128

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	PH _{inc}	PE _{inc}	RL	BR	PH _{inc}	PE _{inc}	ERL	DRL	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	RL	BR	PH _{inc}	PE _{inc}
0.00	3.31	1.77	0.69	0.10	0.03	<0.01	13.5	0.96	1.47	<0.01	10.43	0.24	0.09	0.02	0.02	<0.01	140.6	0.16	N/A	<0.01

DASY8 Module WPT Measurement Report

Device under test

Info:
not set

Serial number:
not set

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000265, 2026/05/05

Software version:
2.0.61, backend: 2.2.22

Scan info

Center location:
x: -16.43 mm, y: 43.13 mm, z: 53.26 mm

Dimensions:
x: 168.2 mm, y: 168.9 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/06/22 14:23:29

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 32.20 A/m
x: 3.64 A/m, y: 390.94 mA/m, z: 31.99 A/m

Maximum H-field location relative to DUT:
x: 25.67 mm, y: -11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 107.69 V/m
x: 3.08 V/m, y: 2.26 V/m, z: 107.63 V/m

Maximum E-field location relative to DUT:
x: -44.00 mm, y: -44.00 mm, z: 0.00 m


Distance to -20.0 dB boundary:
92.76 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

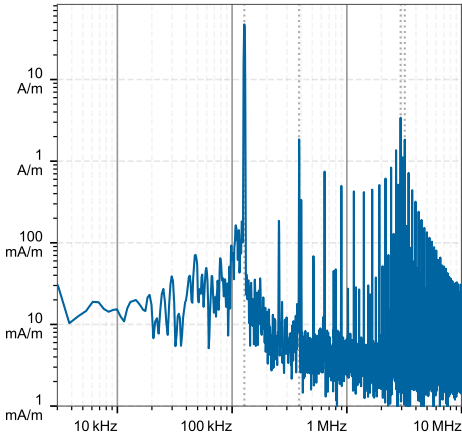

H-field magnitude [RMS] at lowest plane

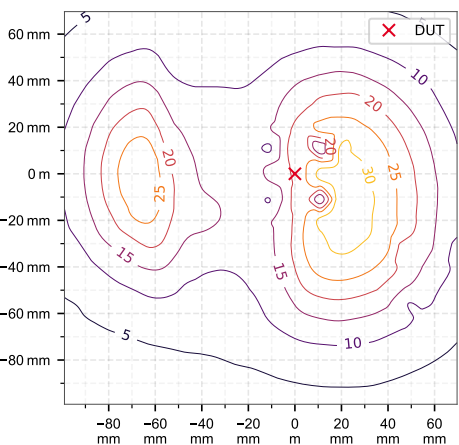

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.87 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	52.4	108	0.646	0.653	0.653	0.455	0.253	0.174	90.7	11%	41%	100%

Compliance evaluation (Field values at the peak frequency) (f=127.87 kHz, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	ERL [RMS]	DRL [RMS]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]
0.00	52.4	108	0.65	0.174	52.4	108	0.458	0.174	52.4	108	0.657	0.174	52.4	108	N/A	0.253	52.4	108	0.657	0.253

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	PH _{inc}	PE _{inc}	RL	BR	PH _{inc}	PE _{inc}	ERL	DRL	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	RL	BR	PH _{inc}	PE _{inc}
0.00	3.7	30.7	3.6	0.31	0.06	<0.01	183.05	0.1	2.67	<0.01	10.48	4.14	0.49	0.11	0.04	<0.01	138.5	0.88	N/A	<0.01