



ELEMENT SUWON
13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
Gyeonggi-do, 16954 South Korea
Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

MEASUREMENT REPORT

FCC Part 15C Wireless Power Transfer

Applicant Name:

BH EVS CO., LTD.
35, Magokjungang 8-ro 3-gil,
Gangseo-gu, Seoul,
07793 Republic of Korea

Date of Testing:

10/28/2025 - 1/21/2026

Test Report Issue Date:

2/6/2026

Test Site/Location:

Element Lab., Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1K2510300010-04.2A6WX

FCC ID:

2A6WXWCSKD12A

APPLICANT:

BH EVS CO., LTD.

Application Type:

Certification

Model:

WCSKD12A

EUT Type:

Wireless Charger

Frequency Range:

128kHz, 360kHz

FCC Rule Part:

Part 15 Subpart C

FCC Classification:

Part 15 Low Power Transmitter Below 1705kHz (DCD)

Test Procedure(s):

ANSI C63.10-2020 + Cor.1:2023 + C63.10a:2024 +
Errata to C63.10a:2024, ANSI C63.30-2021

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger		Page 1 of 39

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TEST	5
3.1	Evaluation Procedure.....	5
3.2	Radiated Emissions	5
3.3	Environmental Conditions	5
4.0	Antenna Requirements	6
5.0	MEASUREMENT UNCERTAINTY	7
6.0	TEST EQUIPMENT CALIBRATION DATA.....	8
7.0	TEST DATA	9
7.1	Summary	9
7.2	Occupied Bandwidth Measurement.....	10
7.3	Radiated Spurious Emission Measurements, Out-of-Band.....	13
8.0	CONCLUSION	39

FCC: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger		Page 2 of 39

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4:2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 3 of 39

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **BH EVS Wireless Charger FCC ID: 2A6WXWCSKD12A**. The test data contained in this report pertains only to the emissions generated by the IC of the EUT that receive or transmit DC power signal through magnetic induction (MI) or magnetic resonance (MR) wirelessly.

2.2 Device Capabilities

This device contains the following capabilities:

NFC, WPT

2.3 Test Configuration

The operating frequency of 128 kHz produces a maximum power of 15 W, and the operating frequency of 360 kHz produces a maximum power of 25 W.

The EUT can operate in four conditions. Condition 1 operates at 220kHz (Ping signal - is used for detection and not considered an intentional radiated signal however data for this operational condition is also included.) and Condition 2 operates 128kHz and Condition 3 and 4 operates at 360kHz. Condition 3 and 4 are differentiated by the form factor of the load.

The RSE testing was performed under the following conditions. The 360 kHz case was identified and documented as the worst-case scenario among Conditions 3 and 4.

	First Pad	Second Pad
#1	Ping	Ping
#2	128kHz	Ping
#3	360kHz	Ping
#4	128kHz	128kHz
#5	360kHz	360kHz
#6	128kHz	360kHz

The EUT was tested in accordance with the guidance of ANSI C63.10-2020. See Sections 3.2 of this test report for a description of the radiated emissions test setup.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 4 of 39

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 5 of 39

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the EUT are **permanently attached**.
- This unit was tested while powered by an DC power source.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 6 of 39

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Radiated Disturbance (<1GHz)	4.10

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 7 of 39

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
COM-Power	AL-130R	Active Loop Antenna	10/10/2024	Biennial	10/09/2026	10160045
ESPEC	SH-242	Temperature and Humidity Chamber	9/17/2025	Annual	9/17/2026	93011064
Rohde & Schwarz	ESW	EMI Test Receiver	9/15/2025	Annual	9/14/2026	103550
Rohde & Schwarz	FSW	SIGNAL & SPECTRUM ANALYZER	9/15/2025	Annual	9/14/2026	103295
Agilent	N9030A	PXA Signal Analyzer	5/23/2025	Annual	5/22/2026	MY49432391

Table 6-1. Annual Test Equipment Calibration Schedule

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 8 of 39

7.0 TEST DATA

7.1 Summary

Company Name: BH EVS CO., LTD.
 FCC: 2A6WXWCSKD12A
 FCC Classification: Part 15 Low Power Transmitter Below 1705kHz (DCD)
 Frequency Range: 128kHz, 360kHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	NA	Conducted	Pass	Section 7.2
15.209	Out-of-Band Emissions	Emissions must meet the radiated limits detailed in 15.209	Radiated	PASS	Section 7.3

Table 7-1. Summary of Test Results

Note:

This unit was tested while transferring maximum power wirelessly to a similar unit.

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 9 of 39

7.2 Occupied Bandwidth Measurement

RSS-Gen (6.6)

Test Overview and Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.

Test Settings

1. Spectrum analyzer frequency is set to the nominal EUT channel center frequency.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. Using the 99% power bandwidth function of the instrument and report the measured bandwidth.

Mode	Frequency	Occupied Bandwidth
Condition 1	220.00kHz	109.71kHz
Condition 2	128.00kHz	2.361kHz
Condition 3	360.36kHz	7.329kHz
Condition 4	360.36kHz	6.208kHz

Table 7-2. Occupied Bandwidth Measurement

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 10 of 39



Plot 7-1. Occupied Bandwidth Measurement – Condition 1



Plot 7-2. Occupied Bandwidth Measurement – Condition 2

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 11 of 39



Plot 7-3. Occupied Bandwidth Measurement – Condition 3



Plot 7-4. Occupied Bandwidth Measurement – Condition 4

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 12 of 39

7.3 Radiated Spurious Emission Measurements, Out-of-Band

Test Overview and Limit

The EUT was tested from 9kHz up to the 30MHz. All measurements up to 30MHz were recorded with a spectrum analyzer employing a quasi-peak detector.

All out-of-band emissions must not exceed the limits shown in Table 7-3 per Part 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-3. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2020 – Section 6.5.4

Test Settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz
3. VBW $\geq 3 \times$ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 13 of 39

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

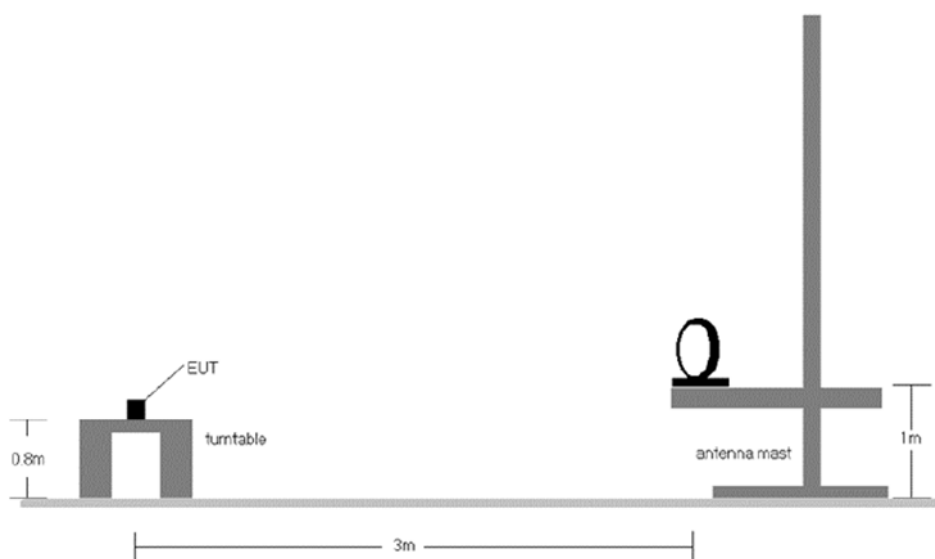


Figure 7-1. Radiated Test Setup

Test Notes:

1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 30MHz.
2. A loop antenna was used to investigate emissions below 30MHz.
3. Below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
4. The spectrum is investigated from 9kHz up to 30MHz per §15.33. The worst-case emissions are reported.
5. No spurious emissions levels were found to be greater than the level of the fundamental.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculation


- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}] - \text{Distance Correction Factor} [\text{dB}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 14 of 39


Radiated Spurious Emission Measurements, Out-of-Band

\$15.209


#1

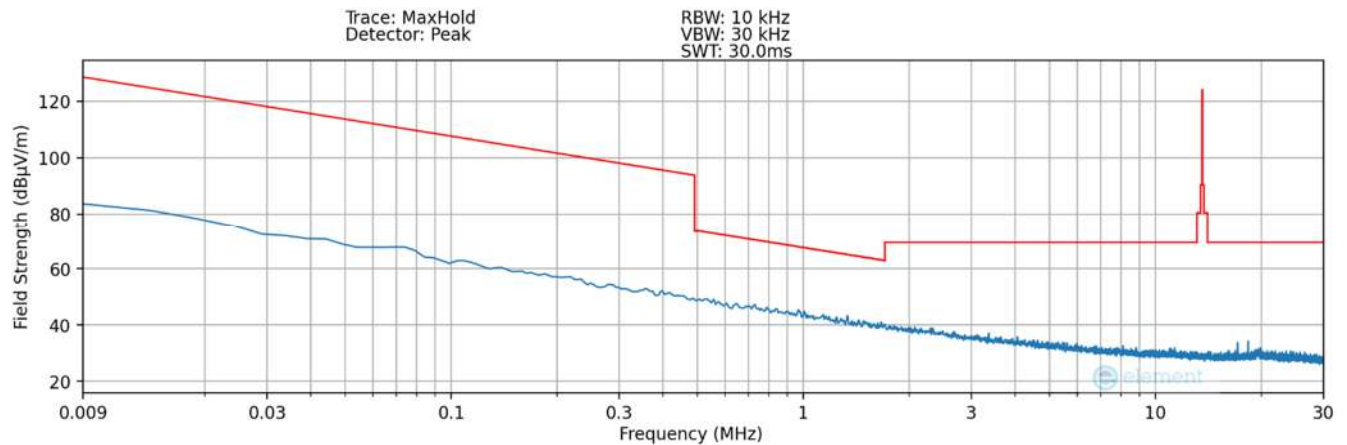

Plot 7-5. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #1) – DCB LED

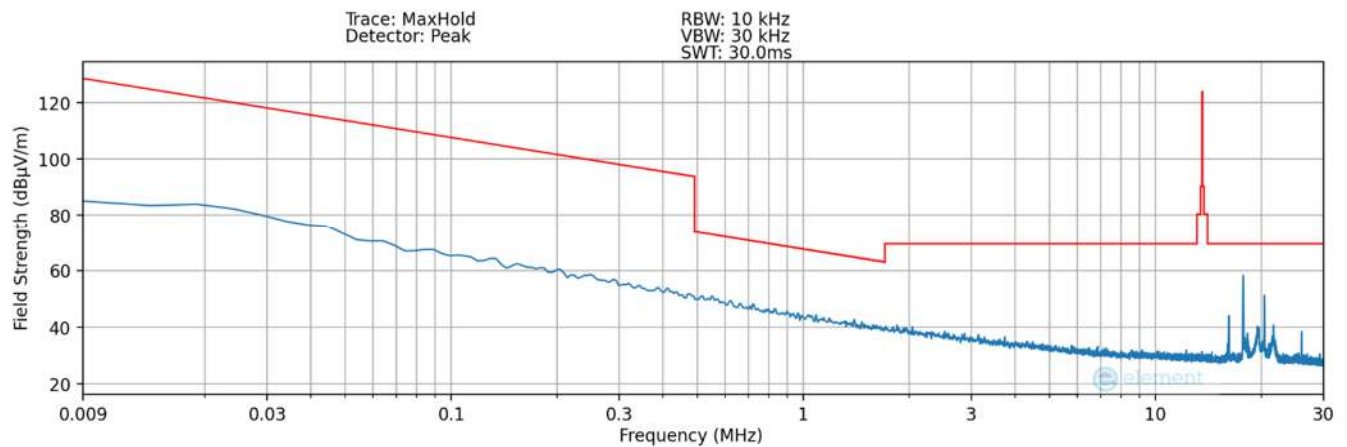

Plot 7-6. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #1) – DCB LED

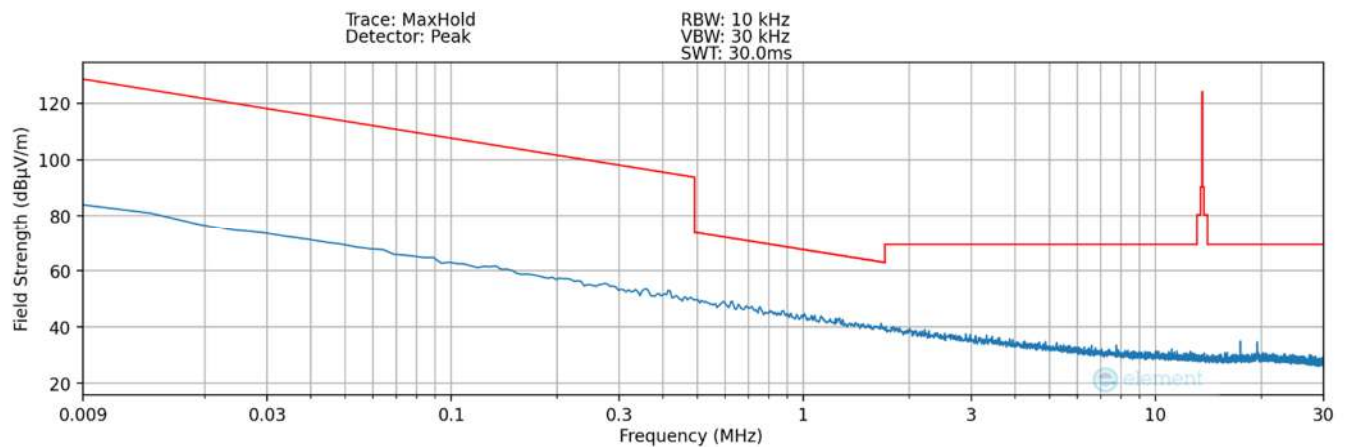

Plot 7-7. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #1) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 15 of 39




Tx Frequency 220.00kHz + 220.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.220	Y	100	168	-60.44	13.45	60.01	100.76	-40.75
0.440	Y	-	-	-66.06	13.42	54.36	94.74	-40.38
0.660	Y	-	-	-68.59	13.42	51.83	91.21	-39.38
0.880	Y	-	-	-73.94	13.42	46.48	88.71	-42.23
1.100	Y	-	-	-74.51	13.45	45.94	86.78	-40.84
1.320	Y	-	-	-76.40	13.50	44.10	85.19	-41.09

Table 7-4. Radiated Measurements (#1) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 16 of 39

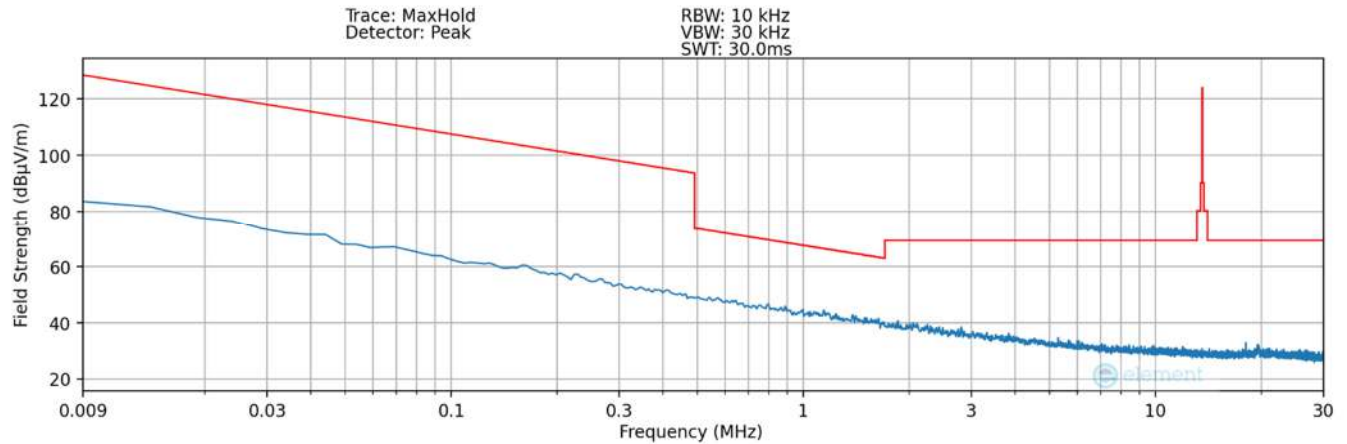

Plot 7-8. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #1) – DCB

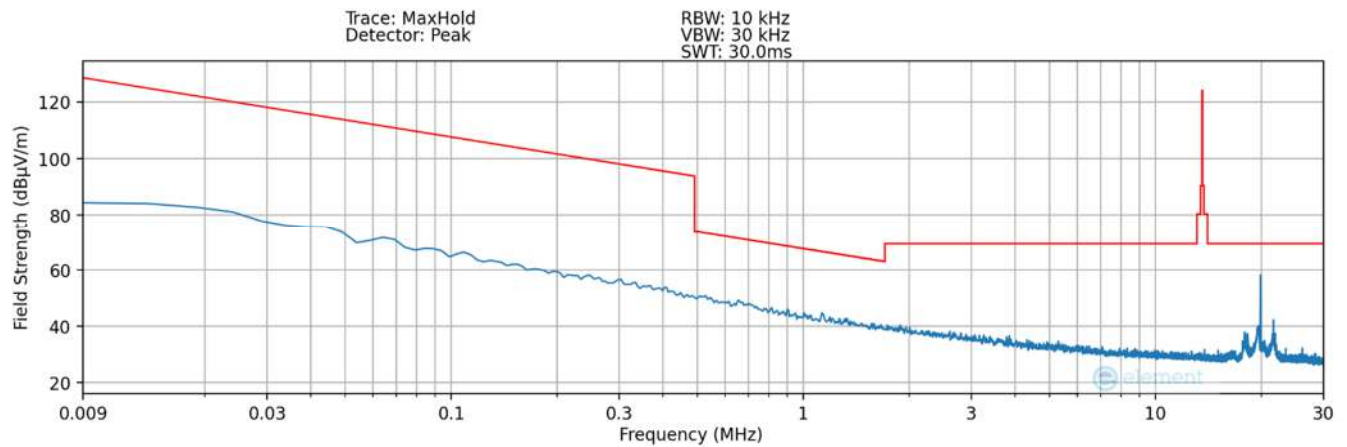

Plot 7-9. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #1) – DCB

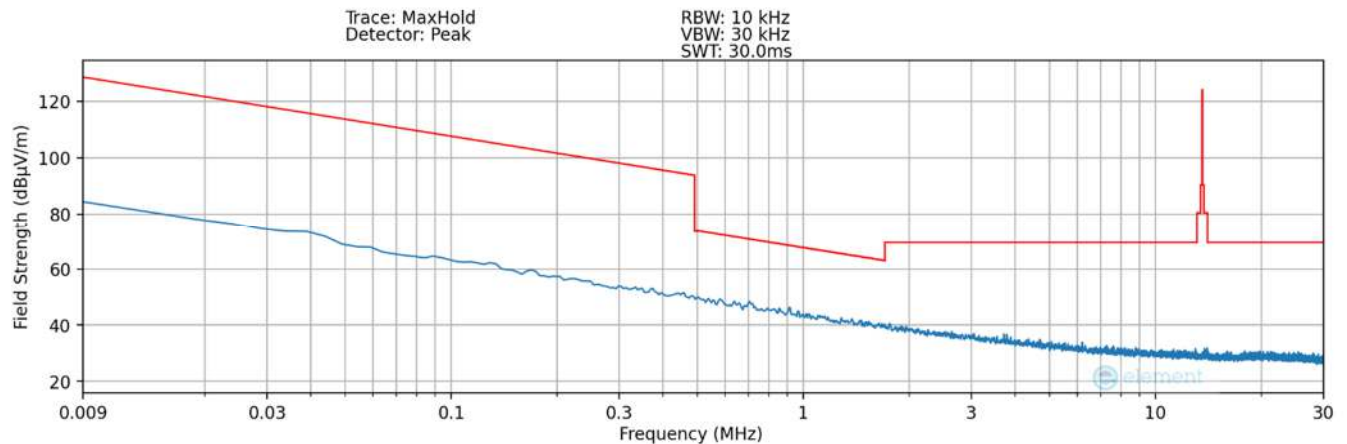

Plot 7-10. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #1) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 17 of 39

Tx Frequency 220.00kHz + 220.00kHz


Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.220	Y	100	185	-60.05	13.45	60.40	100.76	-40.36
0.440	Y	-	-	-66.02	13.42	54.40	94.74	-40.34
0.660	Y	-	-	-68.08	13.42	52.34	91.21	-38.87
0.880	Y	-	-	-74.29	13.42	46.13	88.71	-42.58
1.100	Y	-	-	-74.03	13.45	46.42	86.78	-40.36
1.320	Y	-	-	-75.06	13.50	45.44	85.19	-39.75


Table 7-5. Radiated Measurements (#1) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 18 of 39


#2

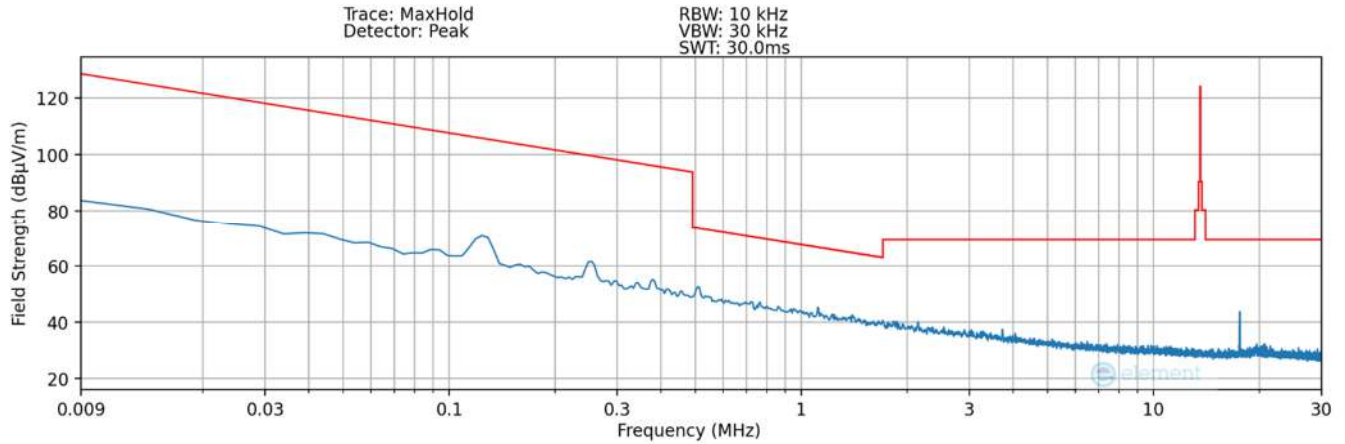

Plot 7-11. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #2) – DCB LED

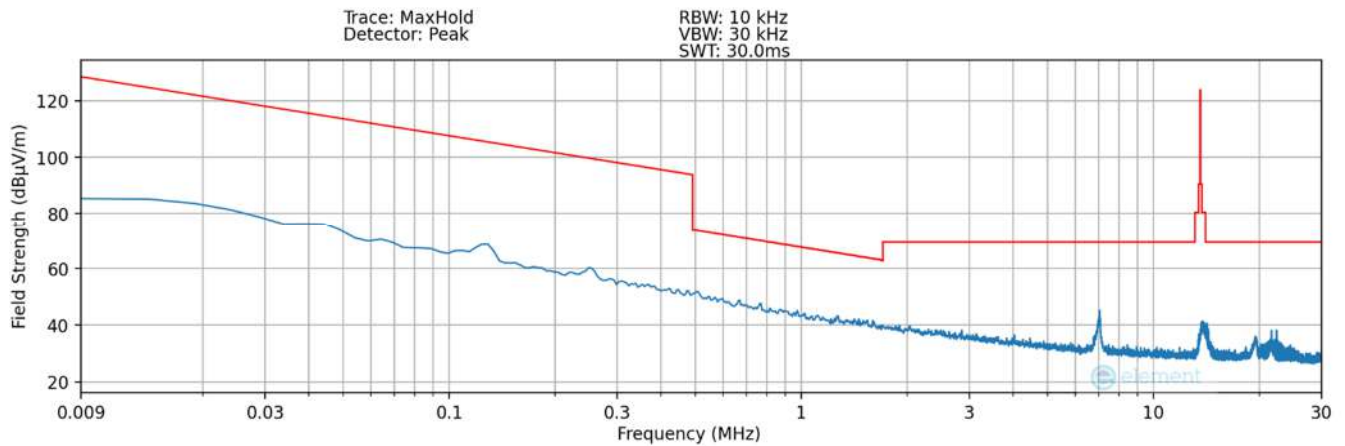

Plot 7-12. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #2) – DCB LED

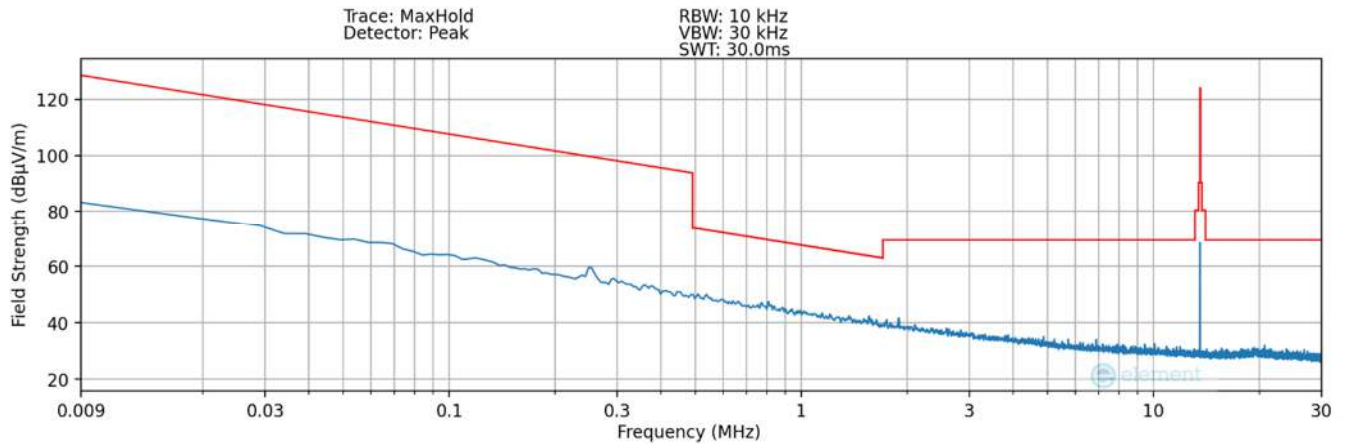

Plot 7-13. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #2) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 19 of 39


Tx Frequency 128.00kHz + 220.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.312	Y	-	-	-63.48	13.42	56.94	97.72	-40.78
0.384	Y	-	-	-65.62	13.42	54.80	95.92	-41.12
0.476	Y	-	-	-67.33	13.42	53.09	94.05	-40.96
0.512	Y	-	-	-67.48	13.42	52.94	93.42	-40.48
0.568	Y	-	-	-67.63	13.42	52.79	92.52	-39.73
0.660	Y	-	-	-68.29	13.42	52.13	91.21	-39.08

Table 7-6. Radiated Measurements (#2) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 20 of 39

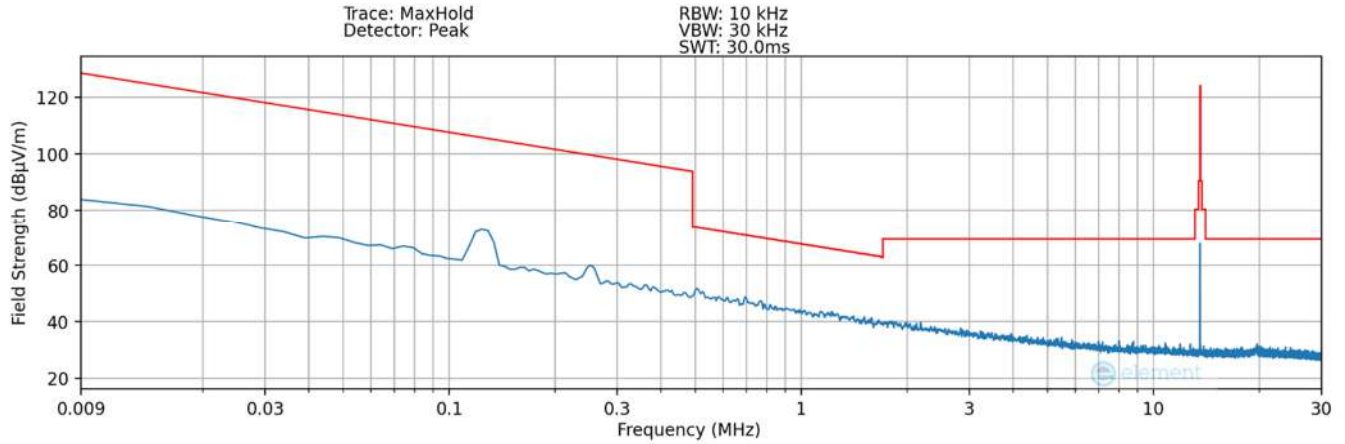

Plot 7-14. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #2) – DCB

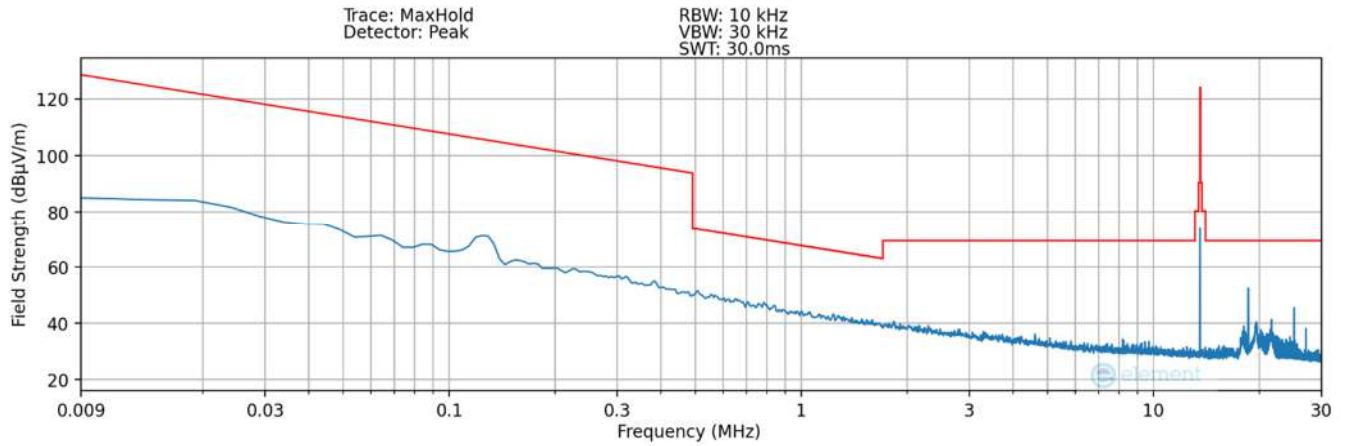

Plot 7-15. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #2) – DCB

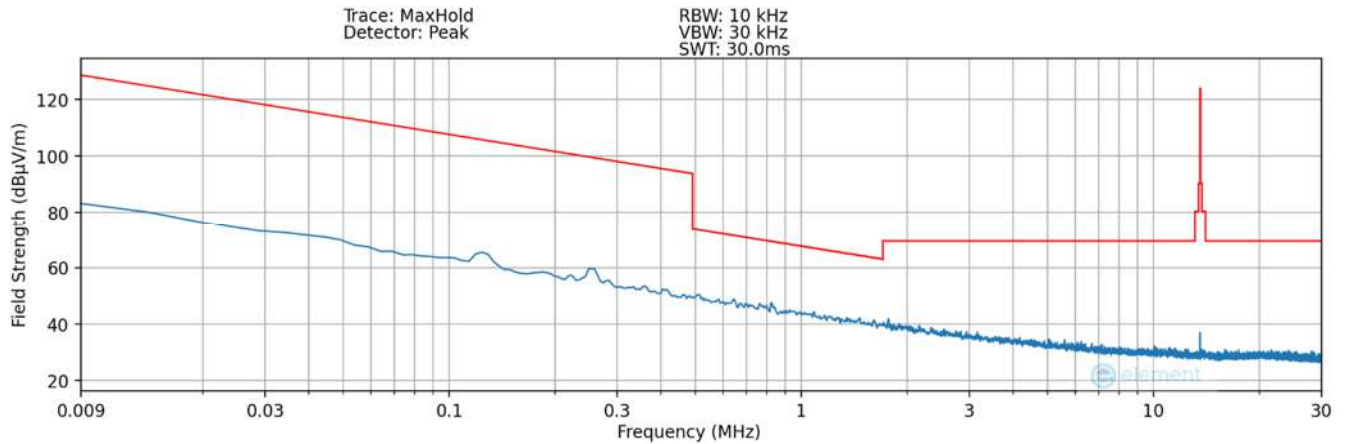

Plot 7-16. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #2) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 21 of 39

Tx Frequency 128.00kHz + 220.00kHz


Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.312	Y	-	-	-63.51	13.42	56.91	97.72	-40.81
0.384	Y	-	-	-65.24	13.42	55.18	95.92	-40.74
0.476	Y	-	-	-68.08	13.42	52.34	94.05	-41.71
0.512	Y	-	-	-69.05	13.42	51.37	93.42	-42.05
0.568	Y	-	-	-69.82	13.42	50.60	92.52	-41.92
0.660	Y	-	-	-70.83	13.42	49.59	91.21	-41.62


Table 7-7. Radiated Measurements (#2) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 22 of 39


#3

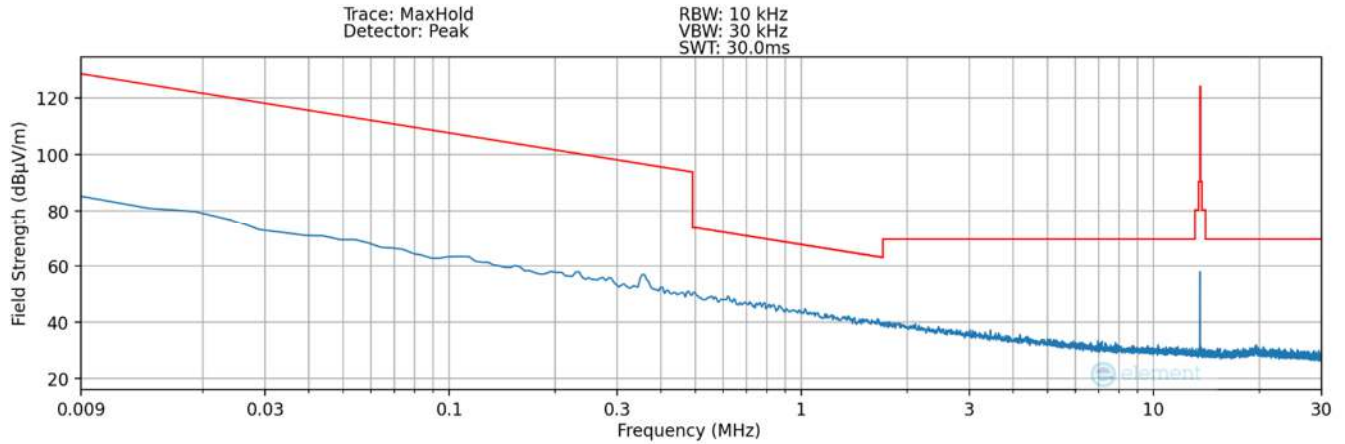

Plot 7-17. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #3) – DCB LED

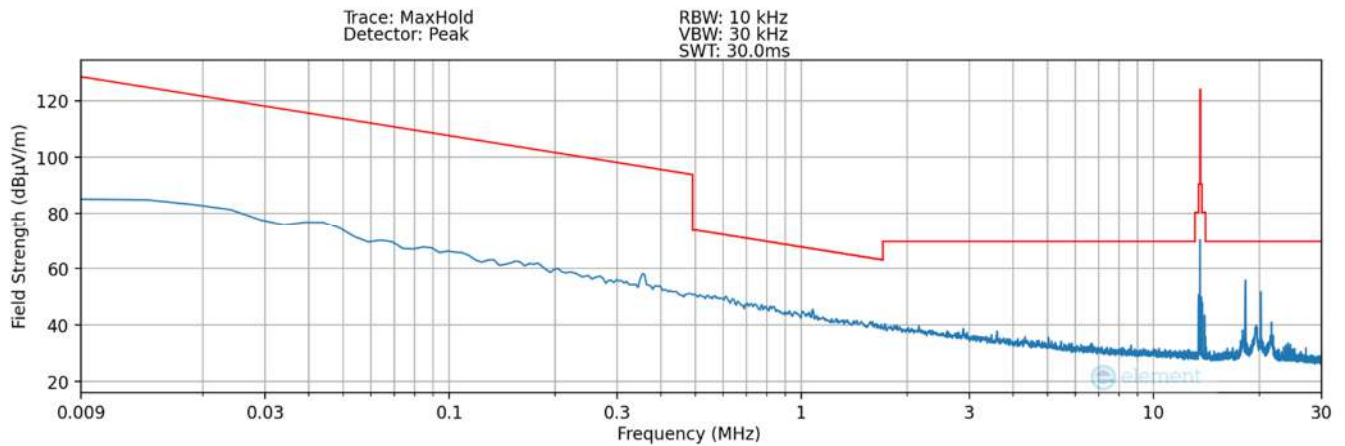

Plot 7-18. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #3) – DCB LED

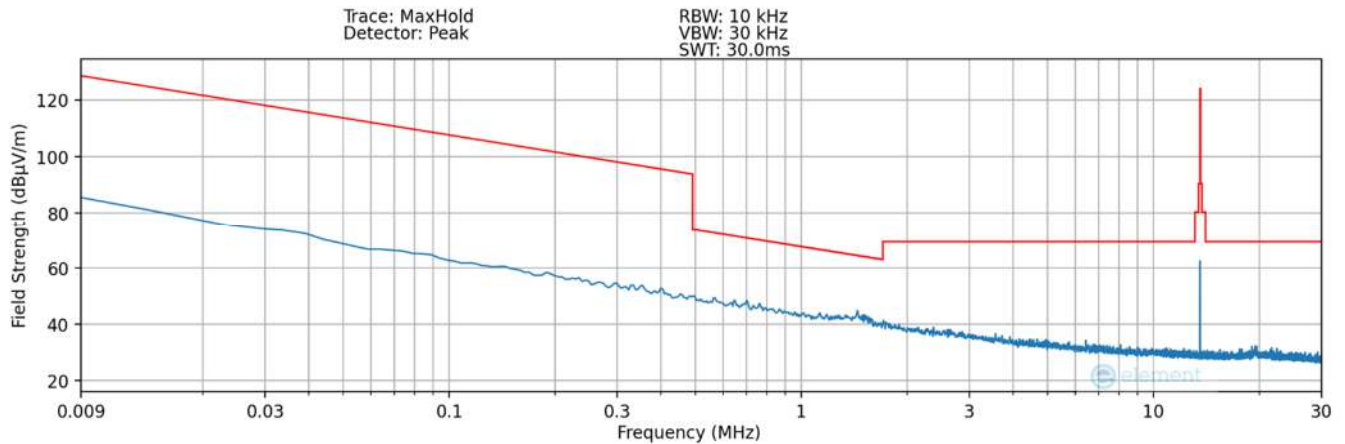

Plot 7-19. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #3) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 23 of 39


Tx Frequency 360.00kHz + 220.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.500	Y	-	-	-67.80	13.42	52.62	93.62	-41.00
0.580	Y	-	-	-68.23	13.42	52.19	92.34	-40.15
0.660	Y	-	-	-68.49	13.42	51.93	91.21	-39.28
0.800	Y	-	-	-71.89	13.42	48.53	89.54	-41.01
0.940	Y	-	-	-73.55	13.42	46.87	88.14	-41.27
1.080	Y	-	-	-74.86	13.44	45.58	86.94	-41.36

Table 7-8. Radiated Measurements (#3) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 24 of 39

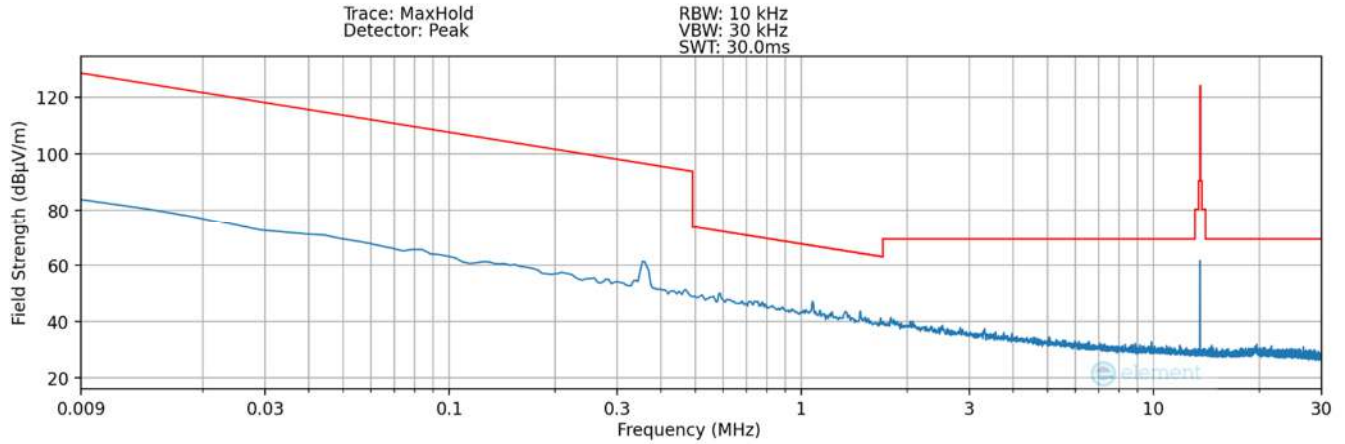

Plot 7-20. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #3) – DCB

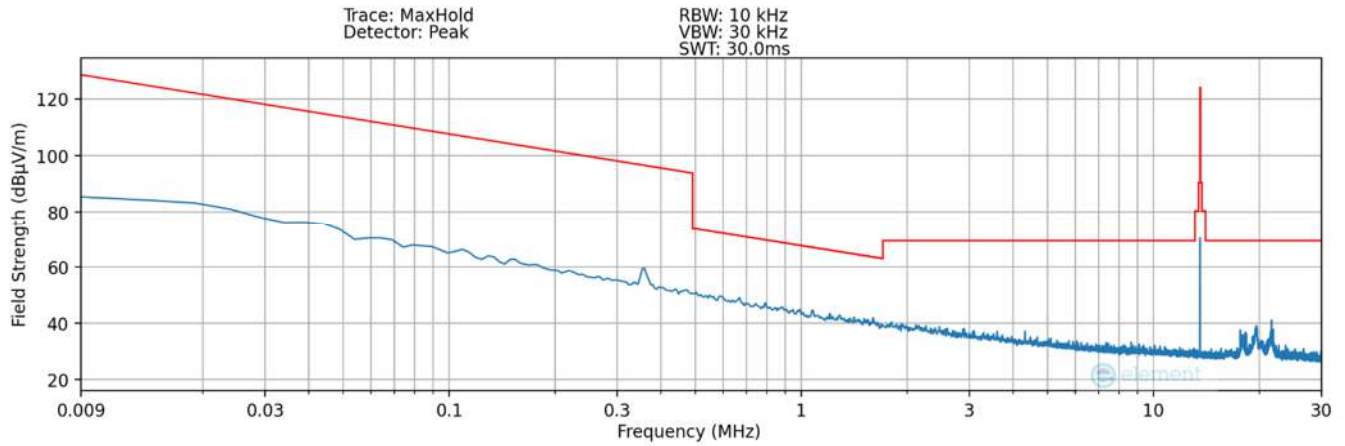

Plot 7-21. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #3) – DCB

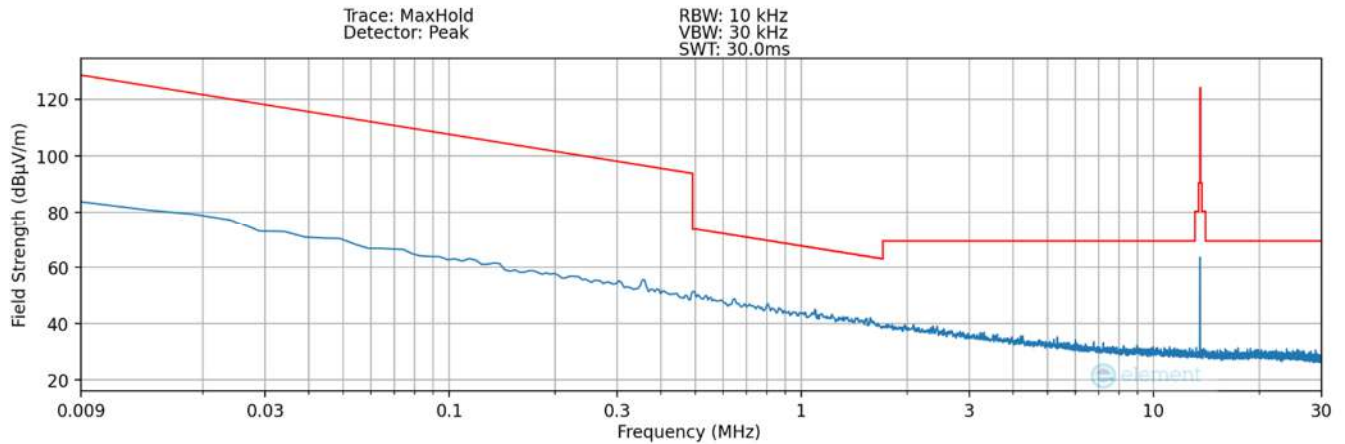

Plot 7-22. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #3) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 25 of 39

Tx Frequency 360.00kHz + 220.00kHz


Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.500	Y	-	-	-67.12	13.42	53.30	107.26	-53.96
0.580	Y	-	-	-67.98	13.42	52.44	92.34	-39.90
0.660	Y	-	-	-68.53	13.42	51.89	94.27	-42.38
0.800	Y	-	-	-73.12	13.42	47.30	103.97	-56.67
0.940	Y	-	-	-74.90	13.42	45.52	101.24	-55.72
1.080	Y	-	-	-75.12	13.44	45.32	95.39	-50.07


Table 7-9. Radiated Measurements (#3) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 26 of 39


#4

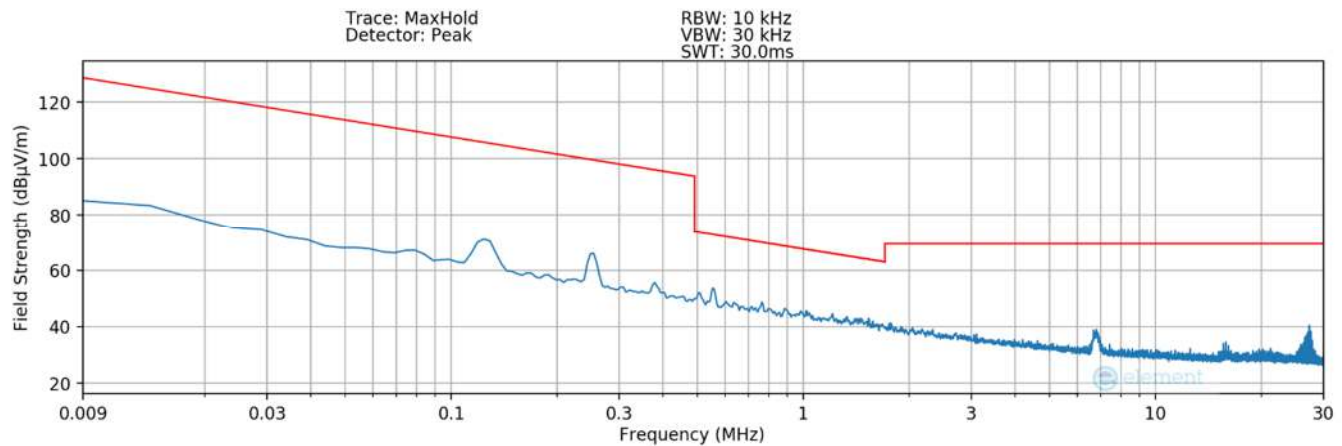

Plot 7-23. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #4) – DCB LED

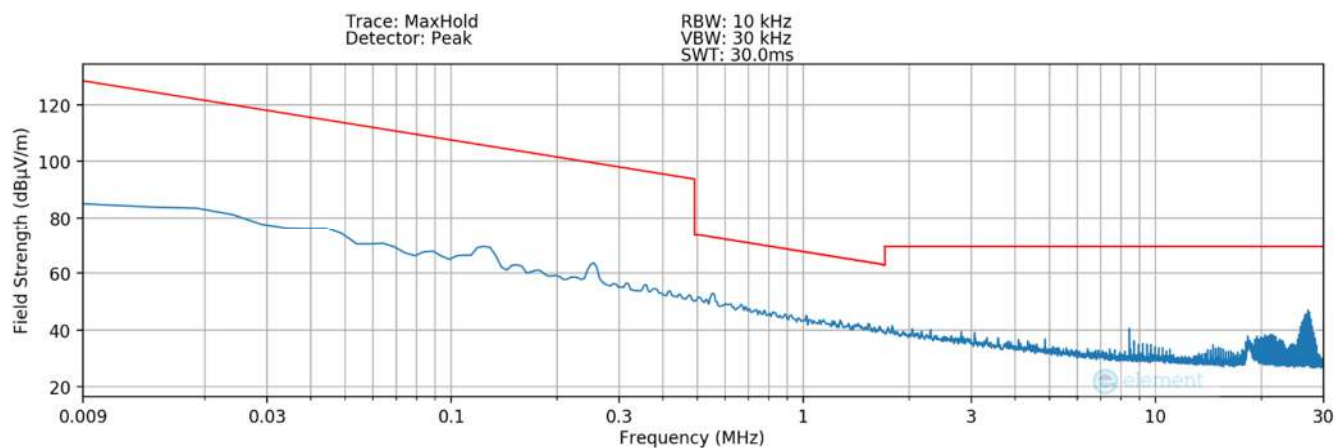

Plot 7-24. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #4) – DCB LED

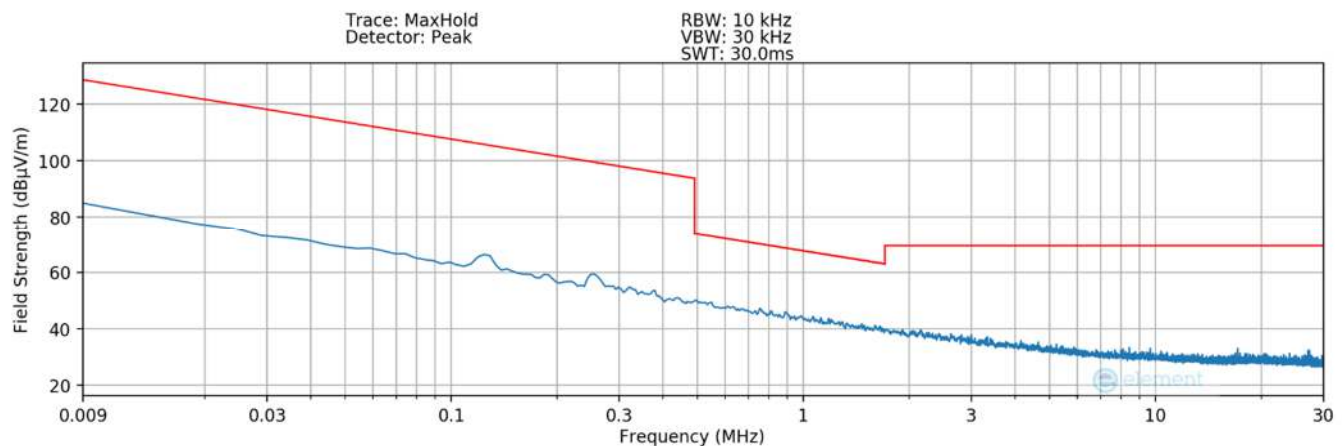

Plot 7-25. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #4) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 27 of 39


Tx Frequency 128.00kHz + 128.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.128	Y	100	270	-52.80	13.50	67.70	105.46	-37.76
0.256	Y	100	329	-66.70	13.43	53.73	99.44	-45.71
0.384	Y	100	-	-73.30	13.42	47.12	95.92	-48.80
0.512	Y	100	331	-75.50	13.42	44.92	73.42	-28.50
0.640	Y	100	-	-79.30	13.42	41.12	71.48	-30.36
0.768	Y	100	-	-81.30	13.42	39.12	69.90	-30.78

Table 7-10. Radiated Measurements (#4) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 28 of 39

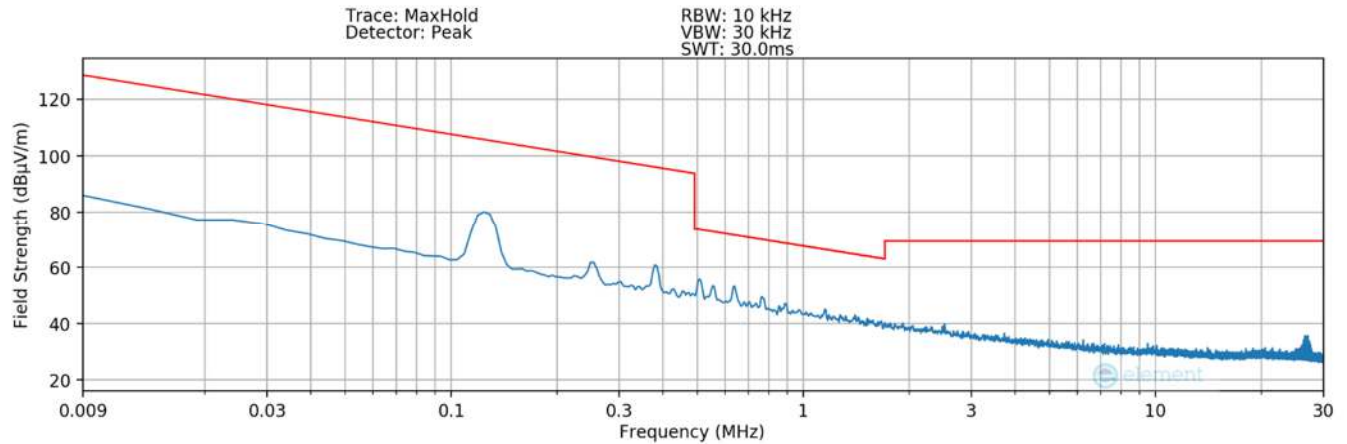

Plot 7-26. Radiated Spurious Plot 9kHz – 30MHz (Pol. X- #4) – DCB

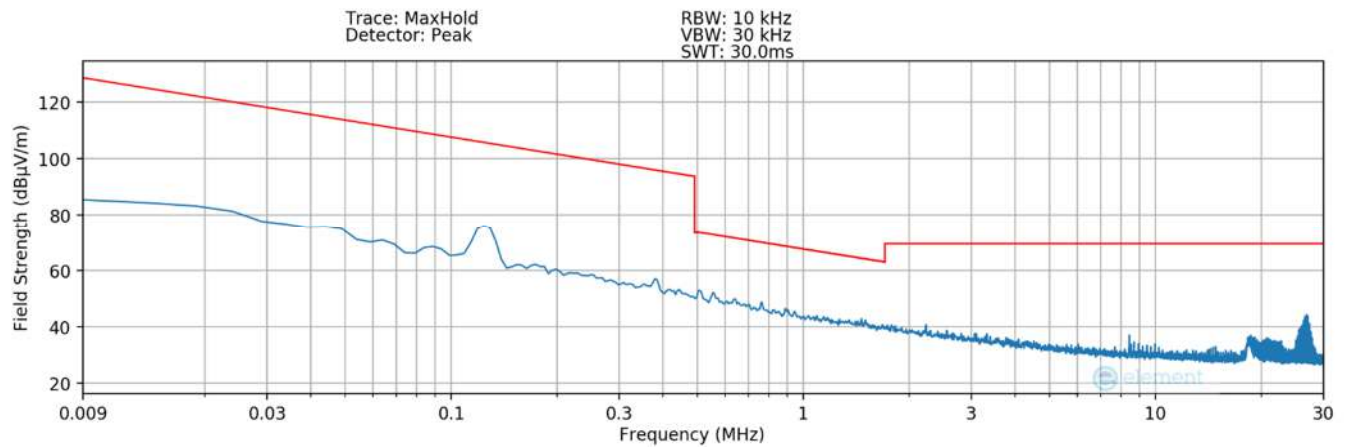

Plot 7-27. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y- #4) – DCB

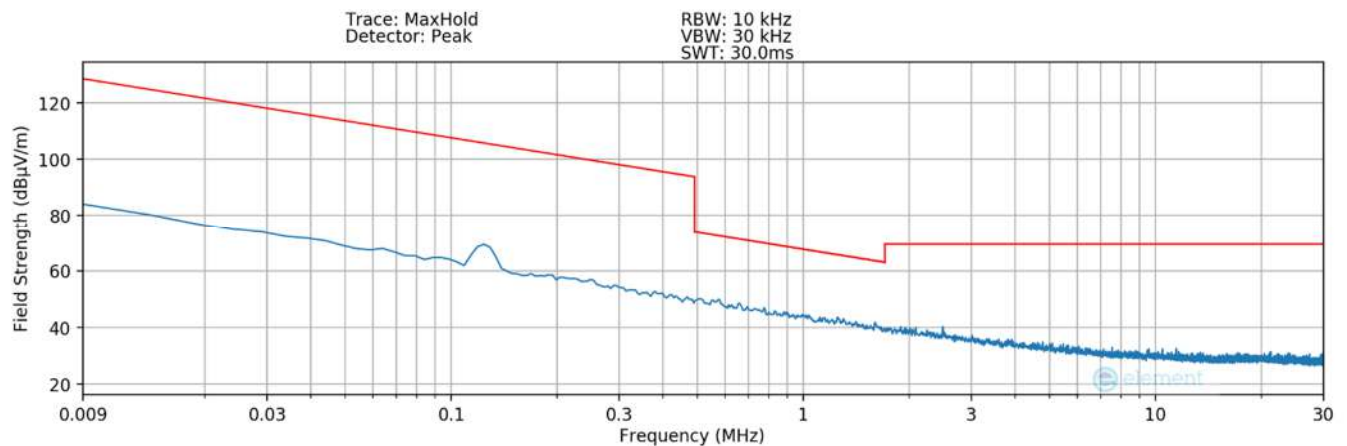

Plot 7-28. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z - #4) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 29 of 39

Tx Frequency 128.00kHz + 128.00kHz


Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.128	Y	100	270	-44.50	13.42	75.92	105.46	-29.54
0.256	Y	100	264	-65.30	13.42	55.12	99.44	-44.32
0.384	Y	100	258	-65.60	13.44	54.84	95.92	-41.08
0.512	Y	100	285	-72.20	13.53	48.33	73.42	-25.09
0.640	Y	-	-	-78.30	13.60	42.30	71.48	-29.18
0.768	Y	-	-	-78.60	13.67	42.07	69.90	-27.83


Table 7-11. Radiated Measurements (#4) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 30 of 39


#5

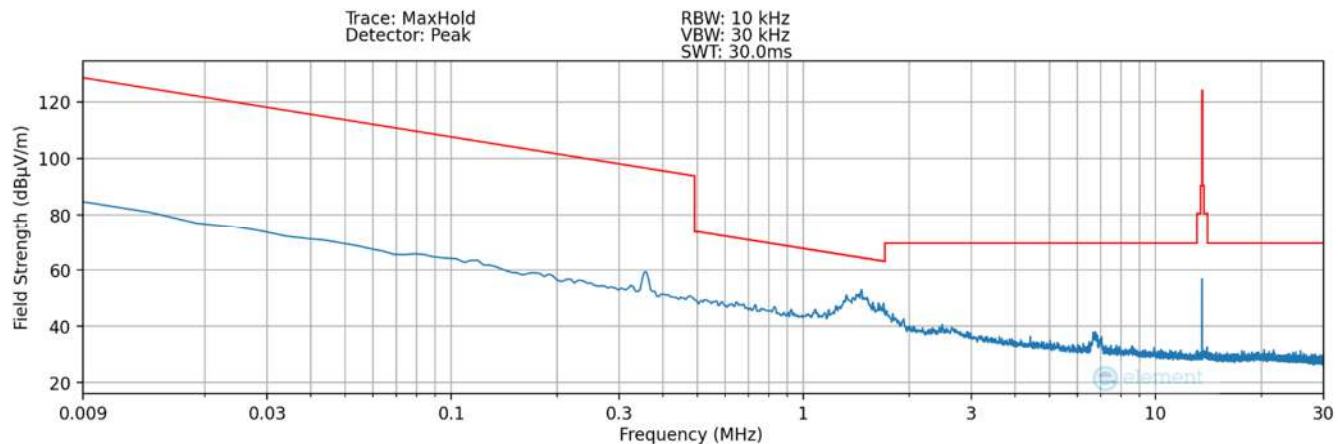

Plot 7-29. Radiated Spurious Plot 9kHz – 30MHz (Pol. X- #5) – DCB LED

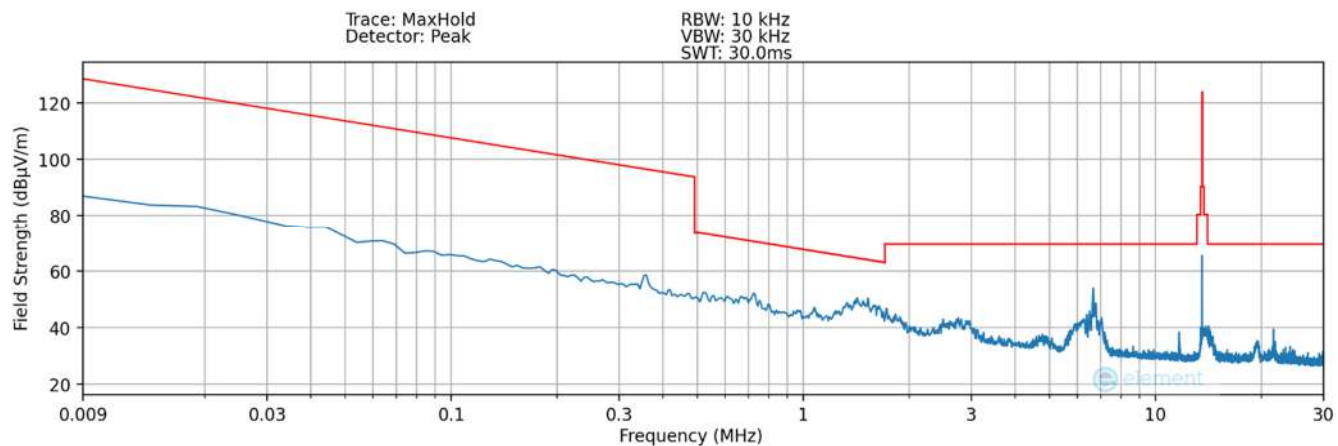

Plot 7-30. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y- #5) – DCB LED

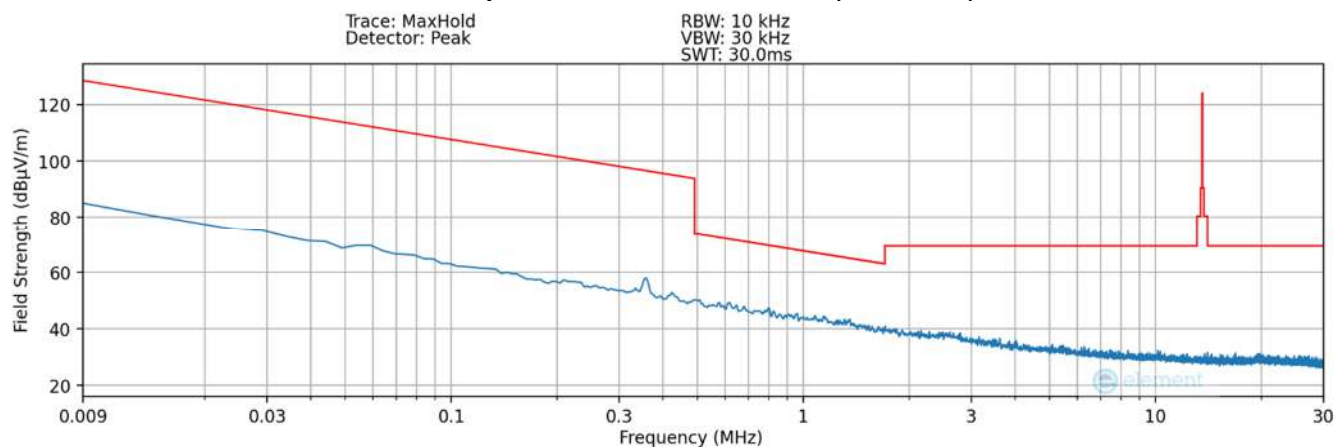

Plot 7-31. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z - #5) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 31 of 39


Tx Frequency 360.00kHz + 360.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.360	Y	100	333	-61.36	13.42	59.06	96.48	-37.42
0.720	Y	-	-	-68.32	13.42	52.10	70.46	-18.36
1.080	Y	100	318	-71.66	13.44	48.78	66.94	-18.16
1.440	Y	-	-	-75.44	13.53	45.09	64.44	-19.35
1.800	Y	-	-	-74.32	13.60	46.28	69.54	-23.26
2.160	Y	-	-	-78.42	13.67	42.25	69.54	-27.29

Table 7-12. Radiated Measurements (#5) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 32 of 39

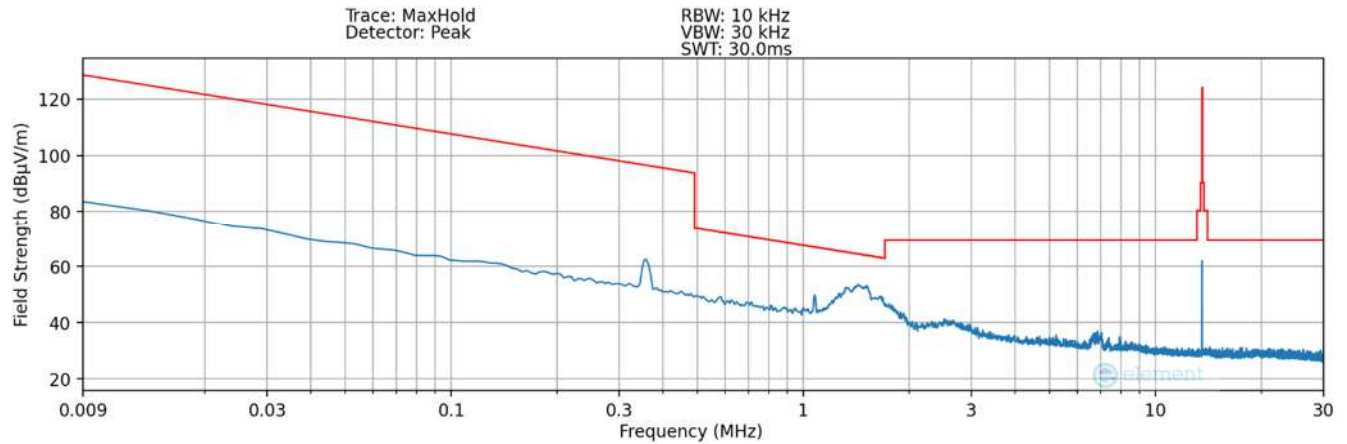

Plot 7-32. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #5) – DCB

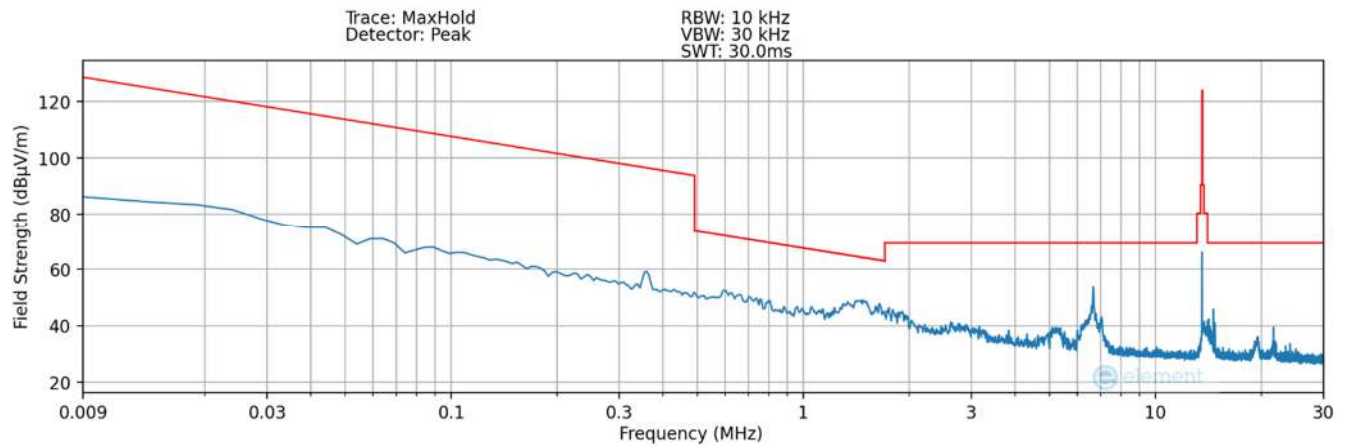

Plot 7-33. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #5) – DCB

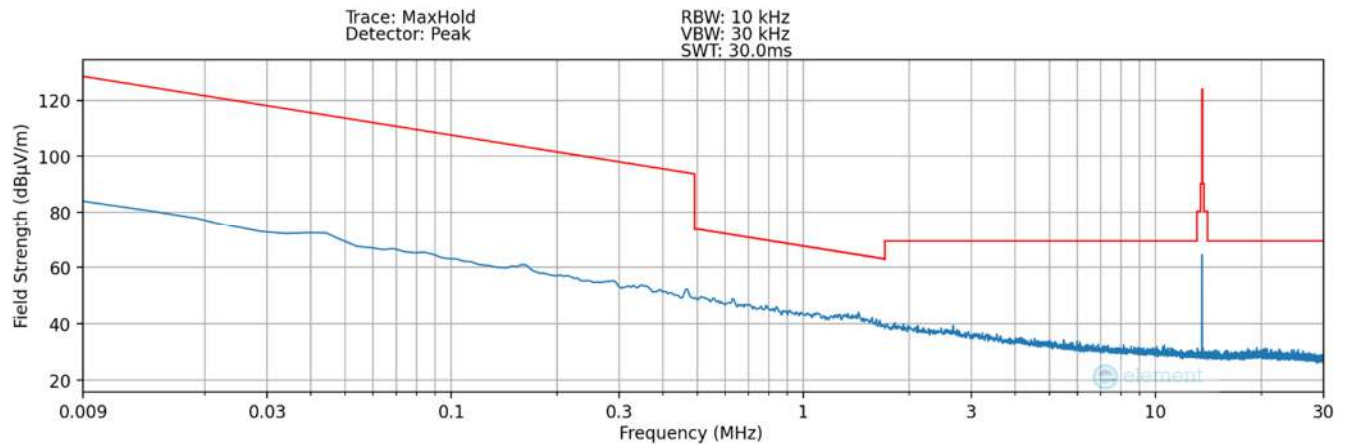

Plot 7-34. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #5) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 33 of 39

Tx Frequency 360.00kHz + 360.00kHz


Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.360	Y	100	360	-59.31	13.44	61.13	96.48	-35.35
0.720	Y	-	-	-68.22	13.52	52.30	70.46	-18.16
1.080	Y	100	345	-72.44	13.42	47.98	66.94	-18.96
1.440	Y	-	-	-75.18	13.48	45.30	64.44	-19.14
1.800	Y	-	-	-74.25	13.45	46.20	69.54	-23.34
2.160	Y	-	-	-77.91	13.42	42.51	69.54	-27.03


Table 7-13. Radiated Measurements (#5) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 34 of 39


#6

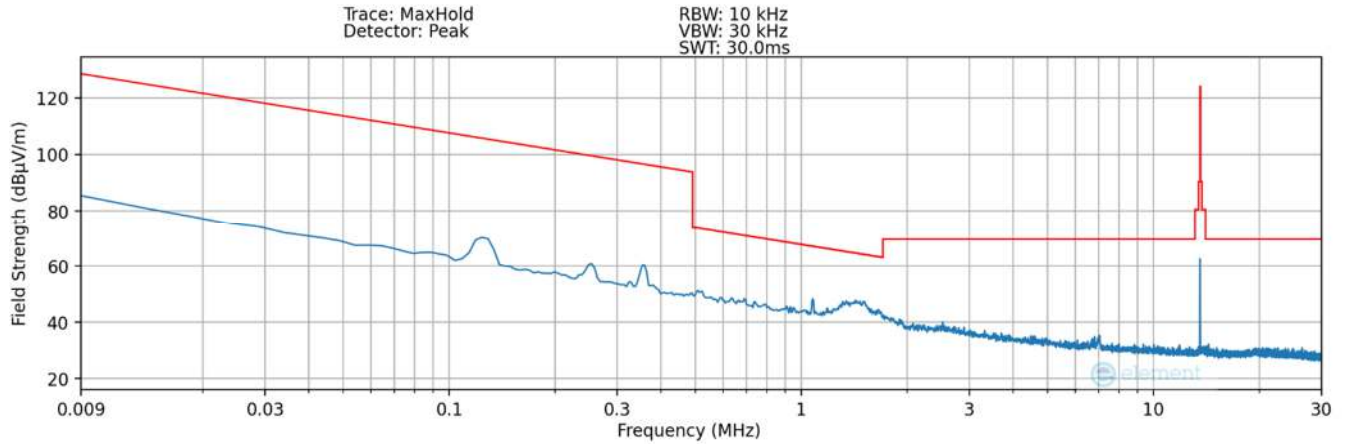

Plot 7-35. Radiated Spurious Plot 9kHz – 30MHz (Pol. X- #6) – DCB LED

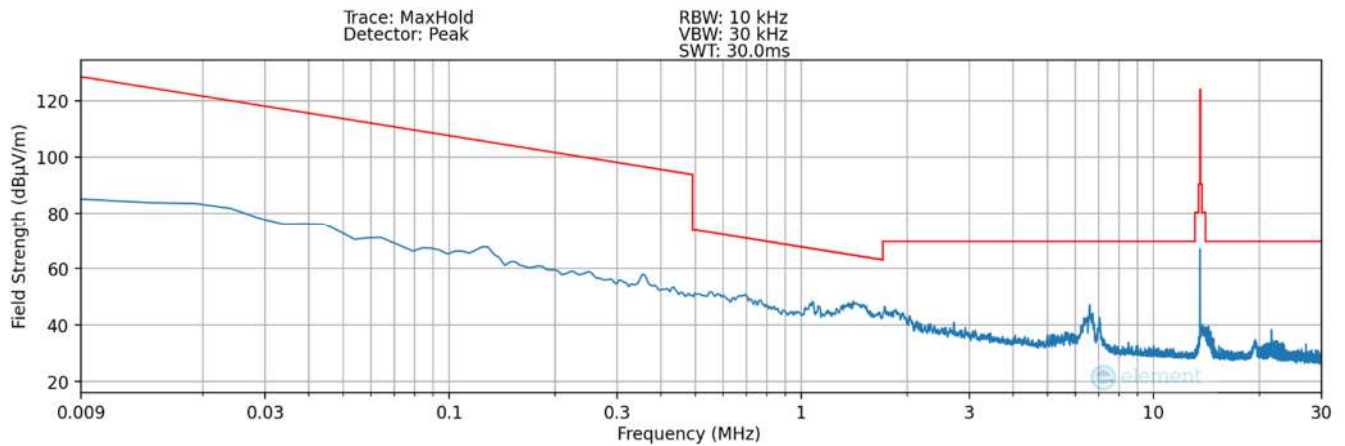

Plot 7-36. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y- #6) – DCB LED

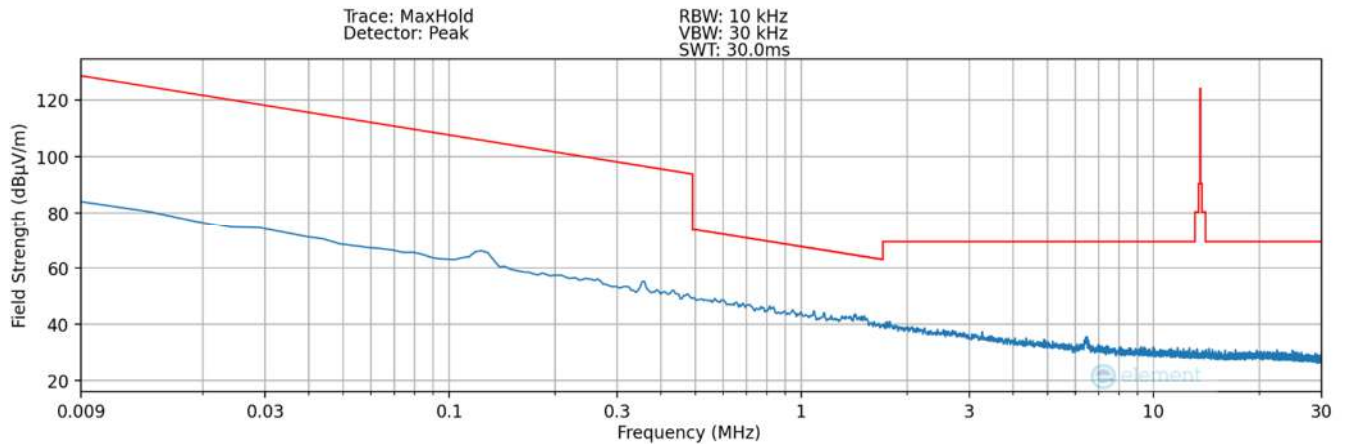

Plot 7-37. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z- #6) – DCB LED

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 35 of 39


Tx Frequency 128.00kHz + 360.00kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.232	Y	-	-	-61.99	13.44	58.45	100.29	-41.84
0.104	Y	-	-	-53.65	13.52	66.87	107.26	-40.39
0.464	Y	-	-	-66.71	13.42	53.71	94.27	-40.56
0.152	Y	-	-	-57.73	13.48	62.75	103.97	-41.22
0.208	Y	-	-	-60.31	13.45	60.14	101.24	-41.10
0.408	Y	-	-	-65.08	13.42	55.34	95.39	-40.05

Table 7-14. Radiated Measurements (#6) – DCB LED


FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 36 of 39

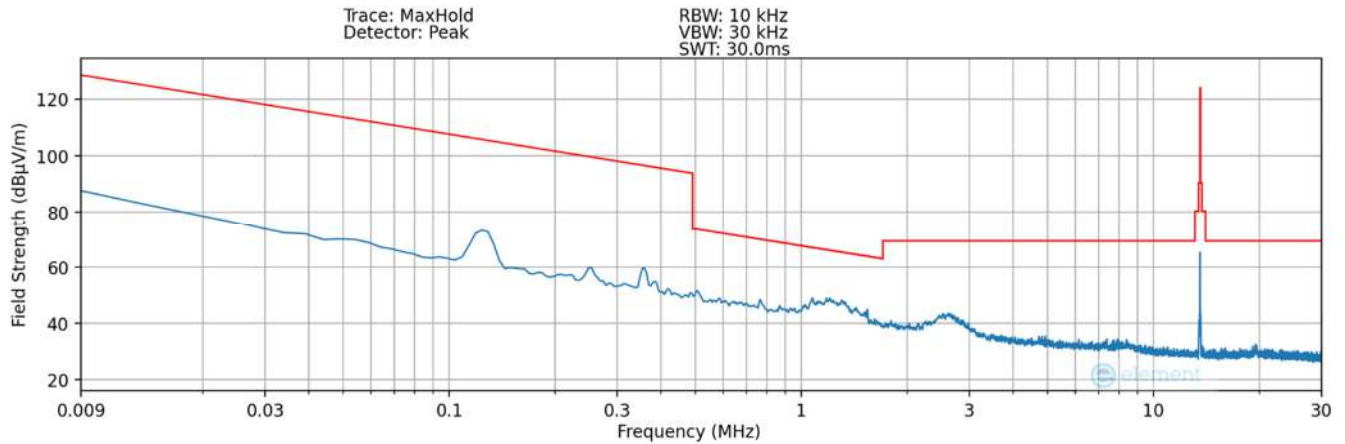

Plot 7-38. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – #6) – DCB

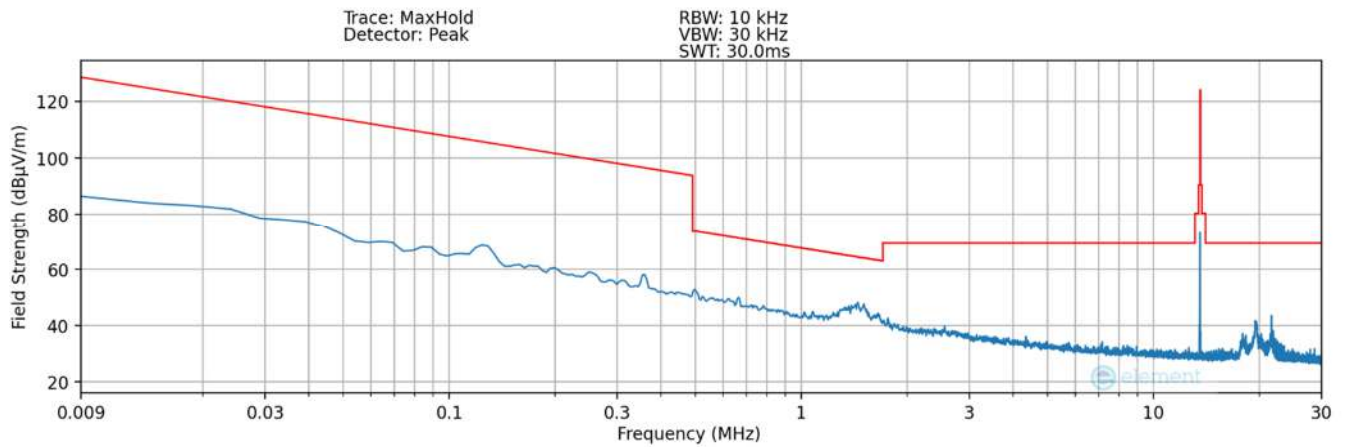

Plot 7-39. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – #6) – DCB

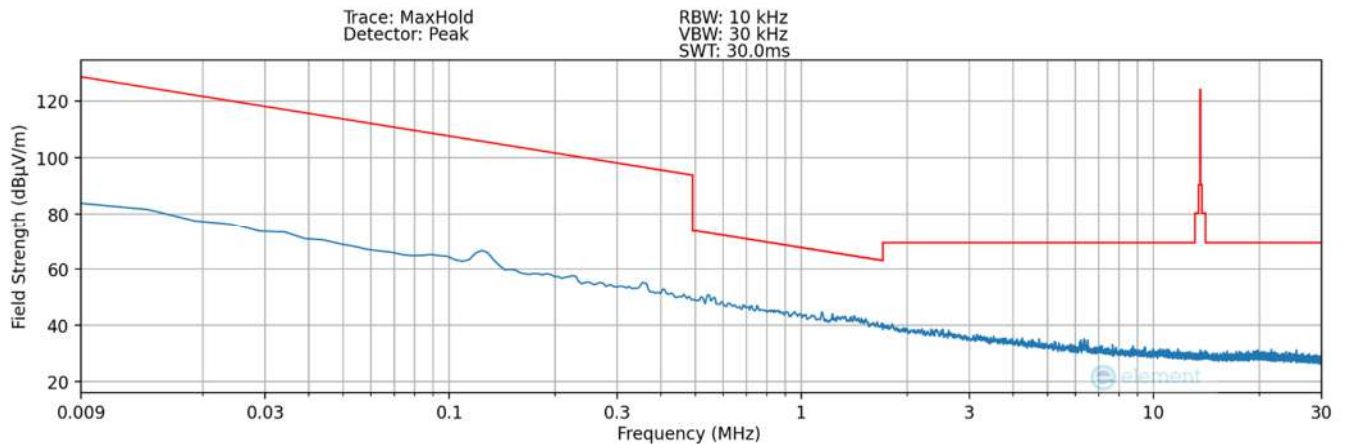

Plot 7-40. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – #6) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 37 of 39

Tx Frequency 128.00kHz + 360.00kHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.232	Y	-	-	-61.90	13.44	58.54	100.29	-41.75
0.104	Y	-	-	-53.41	13.52	67.11	107.26	-40.15
0.464	Y	-	-	-66.01	13.42	54.41	94.27	-39.86
0.152	Y	-	-	-57.54	13.48	62.94	103.97	-41.03
0.208	Y	-	-	-59.29	13.45	61.16	101.24	-40.08
0.408	Y	-	-	-65.44	13.42	54.98	95.39	-40.41

Table 7-15. Radiated Measurements (#6) – DCB

FCC: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger	Page 38 of 39

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **BH EVS Wireless Charger FCC ID: 2A6WXWCSKD12A** has been verified to comply with the requirements specified in Part 15 (§15.207 and §15.209) of the FCC Rules.

FCC: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-02.2A6WX	Test Dates: 10/28/2025 - 1/21/2026	EUT Type: Wireless Charger		Page 39 of 39