

TEST REPORT

No.: 16-1-0050601T41a

According to:
FCC Regulations
 Part 22, Part 24, Part 27

ISED-Regulations
 RSS-132 Issue 3, RSS-133 Issue 6,
 RSS-139 Issue 2, RSS-Gen Issue 4

peiker acoustic GmbH & Co. KG

GSM/ WCDMA/ LTE Telematics US Module
 V1231-0

FCC-ID: QWY-V1231-0
 ISED ID: 6588A-V12310
 PMN: V1231-0
 HVIN: V1231-0

Laboratory Accreditation and Listings		
 Deutsche Akkreditierungsstelle D-PL-12047-01-01 Accredited EMC-Test Laboratory	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-20013, C-20009, T-20006, G-20013
 	 ctia Authorized TM Test Lab Lab Code: 20011130-00	 FEDERAL COMMUNICATIONS COMMISSION USA MRA US-EU 0003
accredited according to DIN EN ISO/IEC 17025		
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com		
Laboratory Accreditation and Listings		

Table of contents

1. SUMMARY OF TEST RESULTS	3
1.1. Tests overview of US CFR Title 47 Part 22/24/27 and Canada ISSED (RSS) Standards	3
1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards	4
1.3. Attestation:	5
2. ADMINISTRATIVE DATA	6
2.1. Identification of the testing laboratory	6
2.2. Test location	6
2.3. Organizational items	6
2.4. Applicant's details	6
2.5. Manufacturer's details	6
3. EQUIPMENT UNDER TEST (EUT)	7
3.1. TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT	7
3.2. EUT: Type, S/N etc. and short descriptions used in this test report	8
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	8
3.4. EUT set-ups	8
3.5. EUT operating modes	9
3.6. Configuration of cables used for testing	9
4. DESCRIPTION OF TEST SYSTEM SET-UP'S	10
4.1. Test system set-up for conducted measurements on antenna port	10
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz	12
4.3. Test system set-up for radiated spurious emission measurements	13
5. MEASUREMENTS	14
5.1. RF-Parameter - RF Peak power output conducted and PAPR-Value	14
5.2. RF-Parameter - Occupied bandwidth and emission bandwidth	16
5.3. RF-Parameter - Conducted out of Band RF emissions and Band Edge	18
5.4. RF-Parameter - Frequency stability on temperature and voltage variations	21
5.5. General Limit - Radiated field strength emissions below 30 MHz	31
5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge	33
5.7. Measurement uncertainties	37
6. ABBREVIATIONS USED IN THIS REPORT	38
7. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES	38
8. INSTRUMENTS AND ANCILLARY	39
9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)	42

Table of annex

	Total pages
Annex 1: Test result diagrams (separate document) CETECOM_TR16-1-0050601T41a-A1	95
Annex 2: External photographs of EUT (separate document) CETECOM_TR16_1_0050601T43a-A2	6
Annex 3: Internal photographs of EUT (separate document)	--
Annex 4: Test set-up photographs (separate document) CETECOM_TR16_1_0050601T43a-A4	5

The listed attachments are an integral part of this report.

1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. This test report shows results for W-CDMA technologies only. Other implemented wireless technologies were not considered within this test report.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H, Part 24, Subpart E (Broadband PCS) of the FCC CFR Title 47 Rules, Edition 4th November 2016 and Canada RSS-132 Issue 3, RSS-133 Issue 6 and RSS-Gen Issue 4 standards.

1.1. Tests overview of US CFR Title 47 Part 22/24/27 and Canada ISED (RSS) Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines Emissions Conducted (0,15 - 30 MHz)	AC-Power lines (conducted)	§15.207	RSS-Gen, Issue 4: Chapter 8.8	§15.207 limits IC: Table 3	--	--	Remark 1.)
2	General field strength emissions (9 kHz - 30 MHz)	Enclosure + Inter-connecting cables (radiated)	§15.209(a)	RSS-Gen, Issue 4: Chapter 8.9, Table 5+6	2400/F(kHz) μV/m 24000/F(kHz) μV/m 30 μV/m	--	1+2+3	passed
7	RF-Power (ERP/EIRP)		§2.1046	RSS-132, Issue 3: Chapter 5.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	--	--	Passed (calculated)
			§22.913(a)(2)	RSS-133, Issue 6 Chapter 4.1/6.4 SRSP-510: 5.1.2	< 2 Watt (EIRP)			
			§24.232(c)	RSS-139: Issue 3 Chapter 6.5 SRSP-513: 5.1.2	< 1 Watt (EIRP)			
8	Spurious emissions		§2.1053(a) §2.1057	RSS-132: Chapter 5.5(i)(ii) RSS-133: Chapter 6.5.1(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	2	1+2+3	passed
9	Band-Edge compliance	§22.917(a)(b) §24.238(a)(b)	RSS-139: Issue 3 Chapter 6.6 (i)(ii)	2		1+2+3	passed	

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
30	RF Power	Antenna terminal (conducted)	§2.1046	RSS-132: Chapter 5.4 SRSP-503: 5.1.3 RSS-133: Chapter 4.1/6.4 SRSP-510: 5.1.2 RSS-139, Issue 3: Chapter 6.5	< 7 Watt (ERP) < 2 Watt (EIRP) < 1 Watt (EIRP)	1	1+2+3	passed
34	26dB Emission bandwidth		§2.202 §2.1049(h) §22.917(a) §24.238(a) §27.53(h)	RSS-Gen., Issue 4: Chapter 6.6	99% Power	1	1+2+3	passed
35	99% Occupied bandwidth					1	1+2+3	passed
36	Spurious emissions		§2.1051 §2.1057	RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii) RSS-139, Issue 3 Chapt. 6.6 (i) (ii)	Required attenuation below P(dBW): 43+10log(P) dBc	1	1+2+3	passed
37	Band-Edge compliance		§22.917(a)(b) §24.238(a)(b) §27.53(h)			1	1+2+3	passed
38	Frequency stability		§2.1055(a)(2) §22.355	RSS-132, Issue 3: Chapter 5.3	FCC/ISED: < ±2.5ppm	3	1+2+3	passed Remark 3.)
			table C-1 §24.235	RSS-133, Issue 6: Chapter 6.3	FCC/ISED: fundamental emissions stay within the authorized bands ISED: < ±2.5ppm			
			§27.54	RSS-139, Issue 3: Chapter 6.4	FCC/ISED: fundamental emissions stay within the authorized bands			

Remarks: 1.) not applicable since car environment
2.) calculated with declared antenna gain
3.) Tests only performed across extreme voltage rang for information: limited approval
OEM integrators should consult grant and applicants recommendations on power supply design rules.

1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines conducted Emissions	AC-Power lines	§15.107 §15.207	RSS-Gen, Issue 8: Chapter 8.8	FCC §15.107 class B limits §15.207 limits RSS-Gen: Table 3	--	--	Not applicable 1.)
3	Receiver radiated emissions	Cabinet + Interconnecting cables	§15.109 §15.33 §15.35	RSS-Gen, Issue 4	FCC 15.109 class B limits RSS-Gen: Chapter 5.3+Chapter 7.1.2	--	--	Passed Remark 2

Remark:
1.) EUT intended for car environment only
2.) See separate test report CETECOM_TR16-1-0050601T43a for measurements according Part 15, Subpart B.

1.3. Attestation:

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

Digital unterschrieben von Rachid
Acharkaoui
DN: cn=Rachid Acharkaoui,
o=CETECOM GmbH, ou=RC&EMC,
email=rachid.acharkaoui@cetecom.
com, c=DE
Datum: 2017.09.13 08:57:09 +02'00'

.....
Dipl.-Ing. Rachid Acharkaoui
Responsible for test section

Digitally signed
by Martin Nunier
Date: 2017.09.12
15:55:11 +02'00'

.....
M. Nunier
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Rachid Acharkaoui
Deputy:	Dipl.-Ing. Niels Jeß

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

2.3. Organizational items

Responsible for test report and project leader:	M. Nunier
Receipt of EUT:	2017-01-18
Date(s) of test:	2017-01-20 to 2017-07-14
Date of report:	2017-08-24

Version of template:	13.02

2.4. Applicant's details

Applicant's name:	peiker acoustic GmbH & Co. KG
Address:	Max-Planck-Straße 28-32 61381 Friedrichsdorf/ts Germany
Contact person:	Philippe Seguret

2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

3. Equipment under test (EUT)

3.1. TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT

TX-frequency range	☒ FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990 MHz (Downlink) ☒ FDD Band 4: 1712.4–1752.6 MHz (Uplink), 2110-2155 MHz (Downlink) ☒ FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894 MHz (Downlink)		
Type of modulation	☒ FDD-Mode Release99: QPSK ☒ FDD Mode Release 5+6: 16QAM additional		
Number of channels	☒ FDD Band 2: UARFCN range 9262 – 9400 – 9538 ☒ FDD Band 4: UARFCN range 1312 – 1450 – 1513 ☒ FDD Band 5: UARFCN range 4132 – 4183 – 4233		
UMTS-HSPA connectivity	☒ Uplink speed: 5.76 Mb/s (category 6) ☐ Uplink speed:		
Emission designator(s)	4M18F9W		
Antenna Type	☐ External - dedicated, no RF- connector ☒ External, separate RF-connector: normal usage		
Antenna Gain Tx (main)	☐ Not applicable ☒ from data sheet “BMW_Multibandantenna_Max Gain Tel GNSS_en” 699MHz – 716MHz: 8.3dBi 824MHz – 849MHz: 7.8dBi 1710MHz – 1755MHz: 7.3dBi 1850MHz – 1910MHz: 8.9dBi 2500MHz – 2570MHz: 6.8dBi ☐ No information from customer		
Path Losses	☒ from data sheet “TEL1_NAD_to_TEL1_TRUNK_table” W-CDMA FDDV: 2.96dB W-CDMA FDDII: 5.55dB W-CDMA FDDIV: 5.10dB		
MAX PEAK Output Power[dBm]: Conducted	FDD-Mode 2 FDD-Mode 4 FDD-Mode 5	26.0 (PK) / 22.6 (AV) 26.9 (PK) / 23.0 (AV) 27.4 (PK) / 23.4 (AV)	
PEAK EIRP [dBm]: Radiated	FDD-Mode 2 FDD-Mode 4 FDD-Mode 5	(Peak Output Power + Antenna Gain – Path losses) 26.0dBm + 8.9dBi – 5.55dB = 29.35dBm 26.9dBm + 7.3dBi – 5.10dB = 29.10dBm 27.4dBm + 7.8dBi – 2.96dB = 32.24dBm	
PEAK ERP [dBm]: Radiated	FDD-Mode 2 FDD-Mode 4 FDD-Mode 5	(PEAK EIRP – 2.15) 29.35dBm – 2.15 = 27.20dBm 29.10dBm – 2.15= 26.95dBm 32.24dBm – 2.15= 30.09dBm	
Installed option	☒ GSM 900 and GSM 1800 Bands (not usable in USA/Canada) ☒ W-CDMA Band I and Band VIII (not usable in USA/Canada) ☒ W-LAN (not tested within this test report) ☒ GPS (not tested within this test report)		
Power supply	☒ DC power only: 12 Volt V _{NOM} (car environment)		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamics microphones, etc.?	☐ yes ☒ no		
EUT sample type	☐ Production	☒ Pre-Production	☐ Engineering
FCC label attached	☐ yes	☒ no	

3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	GSM/ WCDMA/ LTE Telematics US Module	V1231-0	004402580040446	V1231-0_Ver.1	MPSS.TH.2.0.2-00256
EUT B	Kathrein Cellular/GNSS antenna	Model No: 9396828-02	50110256	--	--
EUT C	Kathrein Cellular antenna	Model No: 9396827-02	50110255	--	--
EUT D	GSM/WCDMA/LTE Telematics US Module	V1231-0	004402580040248	V1231-0_Ver.1	MPSS.TH.2.0.2.c4-00018

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	Loudspeaker	KL3 / 4-Ohm	-	-	-
AE 2	Microphone	ME 39	-	-	-
AE 3	DC cable	--	--	--	--
AE 4	Dell Laptop Computer	DELL Latitude D610	EMC#3	Pentium IV Centrino	Windows XP Professional

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE 3	RF-Conducted Measurement set-up
set. 2	EUT A + EUT 2 + EUT 3+ AE 1 + AE 2 + AE 3	RF-radiated measurement set-up
set. 3	EUT D + AE3	Frequency stability measurement set-up

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.5. EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
op. 1	FDD-Band 2 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 2	FDD-Band 4 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 3	FDD-Band 5 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.

*) EUT operating mode no. is used to simplify the test report.

3.6. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	Cable 2	Microphone line	--	--	--
Cable 3	Cable 4	Speaker line	--	--	--
Cable 5	Cable 6	GPS antenna cable	--	--	--
Cable 7	Cable 8	Antenna cable TRX	--	--	--
Cable 9	Cable 10	Antenna cable DRX	--	--	--

4. Description of test system set-up's


4.1. Test system set-up for conducted measurements on antenna port

Cellular Conducted RF-Setup 1 (Cel-1 Set-up)

Tests Specification: Conducted spurious emissions, Emission Bandwidth

General Description: The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) before it is 0° divided by a power divider (3). One of the RF-signal path is connected to the test unit communication tester (4), other RF-path is connected to the spectrum – analyzer (5) for specific RF-measurements. The specific attenuation losses for both signal paths/branches are determined prior to the measurement within a set-up calibration. These are then taken into account by correcting the measurement readings on the spectrum-analyzer.

Schematic:

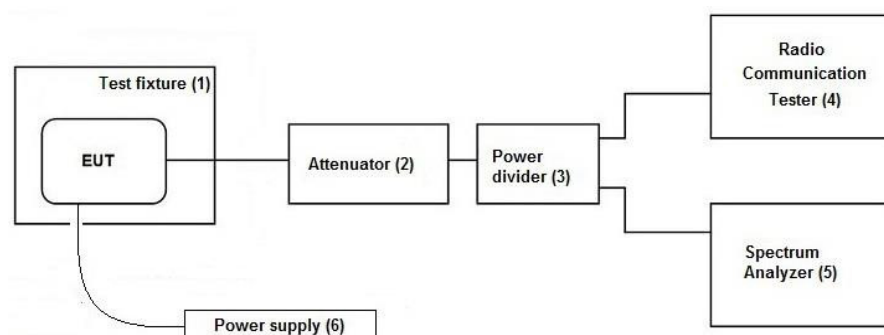


Used Equipment:	Passive Elements	Test Equipment	Remark:
	☒ 10 dB Attenuator (#530)	☒ CMU200 Communication Test-Unit for GSM/W-CDMA	See List of equipment under each test case and chapter 8 for calibration info
	☒ Low loss RF-cables	☒ DC-Power Supply	
	☒ 6 dB resistive power divider/coupler (#529)	☒ Spectrum-Analyser	
Testing method:	ANSI C63.10:2013, KDB 971168 D01 v02r02		
Measurement uncertainty:	See chapter Measurement Uncertainties (Cel-1)		

Cellular Conducted RF-Setup 2 (Cel-2 Set-up)

Tests Specification: Conducted Carrier power, Frequency Error

Schematic: Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5)

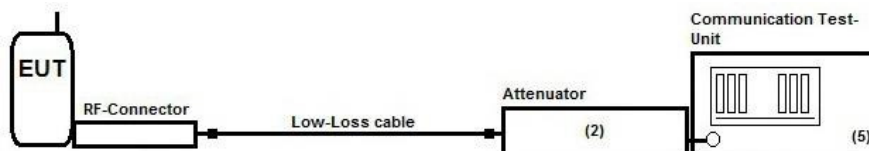

Testing method: ANSI C63.10:2013, KDB 971168 D01 v02r02

Used Equipment	Passive Elements	Test Equipment	Remark:
	☒ 20 dB Attenuator (#613)	☒ CMU200 Communication Test-Unit for GSM/W-CDMA	See List of equipment under each test case and chapter 8 for calibration info
	☒ Low loss RF-cables	☒ DC-Power Supply	

Measurement uncertainty See chapter Measurement Uncertainties (Cel-2)


4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

Specification: ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1 , ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

General Description: Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

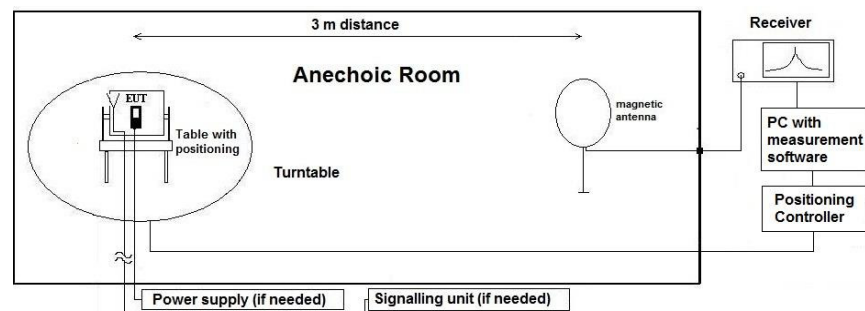

Testing method:

Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Distance correction:

Reference for applied correction (extrapolating) factors due to reduced measurement distance:

ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

4.3. Test system set-up for radiated spurious emission measurements


Specification:

ANSI C63.4-2014 chapter 8.3, ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4, ANSI C63.26-2015, Chapter 4.6.3.3

General Description:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

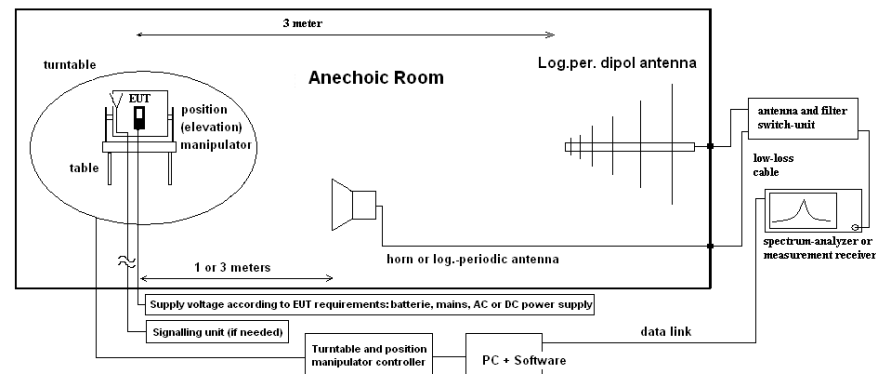

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C(E)RP} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{C(E)RP}$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

$E_{C(E)RP}$ = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

5. Measurements

5.1. RF-Parameter - RF Peak power output conducted and PAPR-Value

5.1.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2			
test site	☐ 347 Radio.lab. 1	☒ Radio.lab. 2			
spectr. analys.	☐ 584 FSU	☐ 489 ESU 40	☐ 264 FSEK	☐ 620 ESU 26	
signaling	☐ 392 MT8820A	☐ 436 CMU	☐ 547 CMU	☐ 460 CMU	
otherwise	☐ 400 FTC40x15E	☐ 401 FTC40x15E	☐ 110 USB LWL	☐ 482 Filter Matrix	☐ 378 RadiSense
DC power	☒ 611 E3636A	☐ 463 HP3245A	☐ 459 EA 2032-50	☐ 268 EA- 3050	☐ 494 AG6632A
otherwise	☐ 331 HC 4055	☐ 248 6 dB Att.	☐ 529 Power div.	☐ - cable OTA20	☐ 498 NGPE 40
line voltage	☐ 230 V 50 Hz via public mains	☐ 060 110 V/ 60 Hz via PAS 5000			

5.1.2. Requirements and limits

FCC	☒ §2.1046 ☒ §22.913(a)(2) ☒ § 24.232(c) ☒ § 27.50(d)(4)
ISED	☒ RSS-132, Issue 3: 5.4 + SRSP 503:5.1.3 ☒ RSS-133, Issue 6: 4.1/6.4 + SRSP-510:5.1.2 ☒ RSS-139, Issue 3: 6.5
ANSI	C62.26-2015
KDB	971168 D01 v02r02, October 2014
Limits	Maximum Power Output of the wireless device should be determined while measured radiated E(I)RP
	☒ Limit FDD Band 5: 7 Watt ERP (38.4 dBm)
	☒ Limit FDD Band 2: 2 Watt EIRP (33.0 dBm)
	☒ Limit FDD Band 4: 1 Watt EIRP (30.0 dBm)
	PAPR ≤ 13dB

5.1.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port" ANRITSU	
Measurement method	The measurements were performed with the integrated power measurement function of the „radio communication tester CMU200 from Rohde&Schwarz company. In this way spectrum-analyzers instrument limitations can be avoided or minimized. Instead, CMU manufacturers declared measurement error can be considered for this measurement. The attenuation (insertion loss) at the RF Inputs/Outputs of CMU were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector) Peak and Average Values have been recorded for each channel on test set-up Cel-1. The Peak-to - Average-Power Ratio is determined by devices integrated CCDF capability with corresponding settings. (see annex 1 plots)	
EUT settings	A call was established on highest power transmit conditions in GMSK and RMC99 mode. UE is set TX mode, highest transmit power conditions, DTX, MPR or other power saving techniques have been disabled The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.	

5.1.4. Measurement Results

FDD Band 2								
EUT	Set-up 1, Op. Mode 1							
Test case	Power value [dBm]						Limit [dBm]	Result
	UARFCN no. 9262		UARFCN no. 9400		UARFCN no. 9538			
	PK	AV	PK	AV	PK	AV		
Release 99 12.2kbps RMC	26.0	22.5	26.0	22.6	25.1	21.8	33	Passed
Peak-to-Average power ratio on 0.1% probability [dB]	3.56		3.59		3.50		13	Passed

Remark:

- 1.) values within applicant's declared power range (tune-up range)

FDD Band 4								
EUT	Set-up 1, Op. Mode 2							
Test case	Power value [dBm]						Limit [dBm]	Result
	UARFCN no. 1312		UARFCN no. 1450		UARFCN no. 1513			
	PK	AV	PK	AV	PK	AV		
Release 99 12.2kbps RMC	26.5	23.0	26.6	22.7	26.9	22.9	30	Passed
Peak-to-Average power ratio on 0.1% probability [dB]	2.99		3.11		3.07		13	Passed

Remark:

- 1.) values within applicant's declared power range (tune-up range)

FDD Band 5								
EUT	Set-up 1, Op. Mode 3							
Test case	Power value [dBm]						Limit [dBm]	Result
	UARFCN no. 4132		UARFCN no. 4185		UARFCN no. 4233			
	PK	AV	PK	AV	PK	AV		
Release 99 12.2kbps RMC	26.9	23.1	27.2	23.4	27.4	23.2	38.4	Passed
Peak-to Average ratio [dB]	3.23		3.45		3.48		13	Passed

Remark:

- 1.) values within applicant's declared power range (tune-up range)

5.2. RF-Parameter - Occupied bandwidth and emission bandwidth

5.2.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test site	☐ 347 Radio.lab. 1	☒ Radio.lab. 2			
spectr. analys.	☐ 584 FSU	☐ 489 ESU	☐ 264 FSEK	☒ 620 ESU26	
attenuator	☒ 530 10 dB	☐	☐		
signaling	☐ 392 MT8820A	☐ 436 CMU	☒ 547 CMU		
DC Power	☒ 611 E3636A	☐ 087 EA3013	☒ 354 NGPE 40	☐ 086 LNG50-10	
otherwise	☒ 529 6dB divider	☒ 530 10dB			
line voltage	☐ 230 V 50 Hz via public mains	☐ 060 120 V/ 60 Hz via PAS 5000			

5.2.2. Requirements and Limits

FCC	CFR47, §2.202(a), §2.1049(h) ☒ FDD-Band 5: §22.917(b) ☒ FDD-Band 2: §24.238(b) ☒ FDD-Band 4: §27.53(h)(3)	„the occupied bandwidth is the frequency bandwidth, such that, below it lower and above it upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated”
ISED	☒ RSS-Gen, Issue 4: §6.6	
ANSI	C63.26-2015	
KDB	971168 D01 v02r02, Chapter 4	

5.2.3. Test condition and test set-up

Climatic conditions		Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up		Please see chapter “Test system set-up for conducted measurements at antenna port”	
Spectrum Analyzer Settings	Parameter	Occupied bandwidth:	Emission bandwidth
	Scan Mode Span RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 6 MHz 50 kHz 300 kHz Coupled (Auto) Repetitive, max-hold Peak	Spectrum analyser mode 6 MHz 50 kHz 300 kHz Coupled (Auto) Repetitive, max-hold Peak
Measurement method		The used spectrum analyzer FSE or ESU from Rohde & Schwarz contains an integrated function to calculate the occupied bandwidth automatically. From left and right display margin, the upper and lower frequency points where the accumulated power becomes 0.5% of the total power, are calculated. Subtracting the previous determined two frequency points, yields the occupied bandwidth.	Bandwidth defined between 2 markers with are 26dBc compared to highest In-Band Peak Emission.
EUT settings		A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.	

5.2.4. Results

Operating band	Channel no.		Occupied 99% bandwidth [MHz]	26 dBc Emission bandwidth [MHz]
	Range	No.		
Set-up 1, Op-Mode 1				
FDD Band 2	Channel Low (1852.4 MHz)	9262	4.1466	4.6875
	Channel Middle (1880.0 MHz)	9400	4.1586	4.6995
	Channel High (1907.6 MHz)	9538	4.1466	4.7115
Set-up 1, Op-Mode 2				
FDD Band 4	Channel Low (1712.4 MHz)	1313	4.1346	4.7115
	Channel Middle (1740.0 MHz)	1450	4.1225	4.6995
	Channel High (1752.6 MHz)	1513	4.1346	4.7115
Set-up 1, Op-Mode 3				
FDD Band 5	Channel Low (826.4 MHz)	4132	4.1346	4.7115
	Channel Middle (836.6 MHz)	4185	4.1346	4.6875
	Channel High (846.6 MHz)	4233	4.1346	4.6875

Remarks: see diagrams in separate annex 1

5.3. RF-Parameter - Conducted out of Band RF emissions and Band Edge

5.3.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2	☐ Please see Chapter. 2.2.3
test site	☐ 347 Radio.lab. 1 ☒ Radio.lab. 2		
spectr. analys.	☐ 584 FSU ☐ 120 FSEM ☐ 264 FSEK ☒ 489 ESU		
signaling	☐ 017 CMD 65 ☐ 323 CMD 55 ☐ 340 CMD 55		
signaling	☐ 392 MT8820A ☐ 436 CMU ☒ 670 CMU		
power supply	☒ 611 E3636A ☐ 457 EA 3013A ☐ 459 EA 2032-50 ☐ 268 EA- 3050 ☐ 494 AG6632A ☐ 498 NGPE 40		
otherwise	☒ 529 6dB divider ☒ 530 10dB Att. ☐ 431 Near field		
line voltage	☐ 230 V 50 Hz via public mains ☐ 060 120 V/ 60 Hz via PAS 5000		

5.3.2. Requirements and limits

FCC	§2.1051 §2.1057 ☒ §22.917(a)(b) ☒ §24.238(a)(b) ☒ §27.53(h)
IC	☒ RSS-132, Issue 3: 5.5(i)(ii) ☒ RSS-133, Issue 6: 6.5.1(i)(ii) ☒ RSS-139, Issue 3: 6.6 (i)(ii)
ANSI	C63.26-2015
Limit	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“

5.3.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C) Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for conducted measurements on antenna port”
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)
Spectrum-Analyzer settings	See below tables
Mobile phone settings	A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.

Spectrum-Analyzer settings for FDD Band 2

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- ^{1.)}	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	19500	1	-- ^{1.)}	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	1849	1850	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1849	1850	0.05	-- ^{1.)}	30	35	MaxH-AV
Sweep 4a (Band-Edge)	1910	1911	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 4b (Band-Edge)	1910	1911	0.05	-- ^{1.)}	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

Spectrum-Analyzer Settings FDD Band 4

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- ^{1.)}	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	18000	1	-- ^{1.)}	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	1709	1710	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1709	1710	0.05	-- ^{1.)}	30	35	MaxH-AV
Sweep 4a (Band-Edge)	1755	1756	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 4b (Band-Edge)	1755	1756	0.05	-- ^{1.)}	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

Spectrum-Analyzer Settings FDD Band 5

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	0.150	0.0001	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 2)	0.150	1	0.009	-- ^{1.)}	10	25	MaxH-PK
Sweep 1 (subrange 3)	1	30	0.1	-- ^{1.)}	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	9000	1	-- ^{1.)}	>60	35	MaxH-PK
Sweep 3a (Band-Edge)	823	824	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 3b (Band-Edge)	823	824	0.05	-- ^{1.)}	30	35	MaxH-AV
Sweep 4a (Band-Edge)	850	851	0.05	-- ^{1.)}	30	35	MaxH-PK
Sweep 4b (Band-Edge)	850	851	0.05	-- ^{1.)}	30	35	MaxH-AV

Remark: 1.) EMI 6dB receiver mode used

5.3.4. Results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 4.

5.3.4.1. FDD Band 2: Op. Mode 1, Set-up 1

Dia- gram no.	Carrier Channel		Frequency range	OP- mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.60	Low	9262	9kHz to 30MHz	1	--	☒	☐	☐	passed
36.61	Low		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
37.60	Low		1849 – 1850 MHz		Band Edge Compliance	☒	☐	☐	passed
36.62	Middle	9400	9kHz to 30MHz		--	☒	☐	☐	passed
36.63	Middle		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
36.64	High		9kHz to 30MHz		--	☒	☐	☐	passed
36.65	High	9538	30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
37.61	High		1910 – 1911 MHz		Band-Edge compliance	☒	☐	☐	passed

Remark: --

5.3.4.2. FDD Band 4: Op. Mode 2 Set-up 1

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.70	Low	1312	9kHz to 30MHz	2	--	☒	☐	☐	passed
36.71	Low		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
37.70	Low		1709 -1710 MHz		Band Edge Compliance	☒	☐	☐	passed
36.72	Middle	1450	9kHz to 30MHz		--	☒	☐	☐	passed
36.73	Middle		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
36.74	High	1513	9kHz to 30MHz		--	☒	☐	☐	passed
36.75	High		30 MHz to 19.5MHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
37.71	High		1755 - 1756 MHz		Band-Edge compliance	☒	☐	☐	passed

Remark: --

5.3.4.3. FDD Band 5: Op. Mode 3, Set-up 1

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.40	Low	4132	9kHz to 30MHz	3	--	☒	☐	☐	passed
36.41	Low		30 MHz to 9GHz		Carrier visible on diagram, not relevant for results	☒	☐	☐	passed
37.40	Low		823 – 824 MHz		Band Edge Compliance	☒	☐	☐	passed
36.42	Middle	4185	9kHz to 30MHz		--	☒	☐	☐	passed
36.43	Middle		30 MHz to 9GHz		Carrier visible on diagram,	☒	☐	☐	passed
36.44	High	4233	9kHz to 30MHz		--	☒	☐	☐	passed
36.45	High		30 MHz to 9GHz		Carrier visible on diagram,	☒	☐	☐	passed
37.41	High		849 – 850 MHz		Band-Edge compliance	☒	☐	☐	passed

Remark: --

5.4. RF-Parameter - Frequency stability on temperature and voltage variations

5.4.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2	☐ Please see Chapter. 2.2.3
test site	☒ 347 Radio.lab.1 ☐ Radio.lab.2		☐
spectr. analys.	☐ 584 FSU ☐ 489 ESU 40	☐ 264 FSEK ☐ 620 ESU 26	☐
signaling	☐ 392 MT8820A ☐ 436 CMU	☒ 547 CMU	
DC power	☐ 456 EA 3013A ☐ 457 EA 3013A	☐ 459 EA 2032-50 ☐ 268 EA- 3050	☐ 494 AG6632A ☐ 498 NGPE 40
otherwise	☒ 529 6dB divider ☒ 530 10dB Att.	☐ 431 Near field ☒ 341 Fluke 112	
Climatic test chamber	☒ 331 HC 4055 ☒ 331 VT 4002	☒ 627 OPUS 1	
line voltage	☐ 230 V 50 Hz via public mains	☐ 060 110 V/ 60 Hz via PAS 5000	

5.4.2. Requirements and limits

FCC	§2.1055(a)(1) ☒ FDD Band 5: §22.355, Table C-1 ☒ FDD Band 2: §24.235 ☒ FDD Band 4: §27.54
ISED	☒ FDD Band 5: RSS-132, Issue 3: 5.3 ☒ FDD Band 2: RSS-133, Issue 6: 6.3 ☒ FDD Band 4: RSS-139, Issue 3: 6.4
ANSI	C63.26-2015, chapter 5.6
Limit	<i>"The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block"</i>

5.4.3. Test condition and test set-up

Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port" In order to maintain the voltage constant over the time period of the tests, a dummy battery was connected to a laboratory power supply. The power supply voltage was controlled on the input of the power supply terminals of the EUT.
Measurement method	The RF Channel spacing is 200 kHz according W-CDMA-Spec, with a guard band. The aim of the EUT is to function under all extreme conditions within authorized sub-bands in regard to temperature and voltage variations. The frequency deviation was recorded with base station's build in capability. (CMU) As the standard requires that the fundamental emissions stays within the authorized band, a limit of 0.1ppm is considered low enough to ensure this.
Mobile phone settings	A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance. Tests have been done in Rel99, 12.2 kbps RMC operating mode.

5.4.4. Measurement Results:

5.4.4.1. Frequency shift of carrier against a voltage range at constant nominal temperature of 20° Celsius

Tests only performed across extreme voltage range for information: limited approval

OEM integrators should consult grant and applicants recommendations on power supply design rules.

- 1.) determine the carrier frequency for the lowest and highest channel at room temperature and nominal voltage [20°C]
- 2.) The voltage was reduced in 0.1 Volt steps to the lower end point, where the mobile phone stops working. (this shall be specified by the manufacturer) Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self-heating effects.
- 3.) The voltage was increased in 0.1 Volt steps to the upper declared voltage of the battery. Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self-heating effects.

5.4.4.2. FDD Band 2

FDD Band 2 - Channel 9400

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,880E+09	-7,9	-0,004	passed
4,00		-6,93	-0,004	
4,10		-7,29	-0,004	

FDD Band 2 - Channel 9262

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,852E+09	-5,22	-0,003	passed
4,00		-5,26	-0,003	
4,10		-4,81	-0,003	

FDD Band 2 - Channel 9538

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,9076E+09	-4,79	-0,003	passed
4,00		-4,06	-0,002	
4,10		-4,56	-0,002	

5.4.4.3. FDD Band 4

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,7124E+09	2,85	0,002	passed
4,00		3,86	0,002	
4,10		2,91	0,002	

FDD Band 4 - Channel 1450

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,7400E+09	-3,02	-0,002	passed
4,00		-3,37	-0,002	
4,10		4,03	0,002	

FDD Band 4 - Channel 1513

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 0.1ppm
		[Hz]	[ppm]	
3,91	1,7526E+09	-3,11	-0,002	passed
4,00		-3,72	-0,002	
4,10		-4,21	-0,002	

5.4.4.4. FDD Band 5

FDD Band V - Channel 4183

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 2.5ppm
		[Hz]	[ppm]	
3,91	8,366E+08	3,22	0,004	passed
4,00		3,88	0,005	
4,10		3,02	0,004	

FDD Band V - Channel 4132

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 2.5ppm
		[Hz]	[ppm]	
3,91	8,264E+08	3,13	0,004	passed
4,00		-3,45	-0,004	
4,10		-3,08	-0,004	

FDD Band V - Channel 4233

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict Limit= +/- 2.5ppm
		[Hz]	[ppm]	
3,91	8,466E+08	3,78	0,004	passed
4,00		3,43	0,004	
4,10		2,96	0,003	

5.4.4.5. Frequency shift of carrier against temperature at constant power supply voltage

- 1.) determine the carrier frequency for the lowest, middle and highest channel at room temperature and nominal voltage [20°C]
- 2.) expose the mobile station to -30°C, wait sufficient time to have constant temperature.
- 3.) Perform the carrier frequencies measurements in 10°C increments from -40°C to +80°C. For about half hour at the specified temperature the mobile was powered-off. After powering-on, the measurements were made within 2 minute for the channel lower channel, in order to prevent self-warming of the mobile.


5.4.4.6. FDD Band 2

Nominal Frequencies

1,8524E+09 1,8800E+09 1,9076E+09

Temperature	Maximum frequency error						Verdict
	Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538	
	[Hz]			[ppm]			
							Limit=±0.1ppm
-40	25,80	-16,63	-25,71	0,014	-0,009	-0,013	PASS
-30	10,44	5,20	-7,80	0,006	0,003	-0,004	
-20	-6,21	-3,39	7,42	-0,003	-0,002	0,004	
-10	-11,60	11,03	14,48	-0,006	0,006	0,008	
0	-18,88	-10,89	14,76	-0,010	-0,006	0,008	
10	-12,36	9,46	16,37	-0,007	0,005	0,009	
20	-6,81	3,75	5,55	-0,004	0,002	0,003	
30	4,64	-4,43	-7,37	0,003	-0,002	-0,004	
40	-5,96	-4,30	-10,16	-0,003	-0,002	-0,005	
50	12,13	-6,03	-16,78	0,007	-0,003	-0,009	
60	11,12	-3,97	-13,29	0,006	-0,002	-0,007	
70	10,94	4,75	-12,86	0,006	0,003	-0,007	
80	15,41	6,85	-8,88	0,008	0,004	-0,005	

MAX	25,80	11,03	16,37
MIN	-18,88	-16,63	-25,71

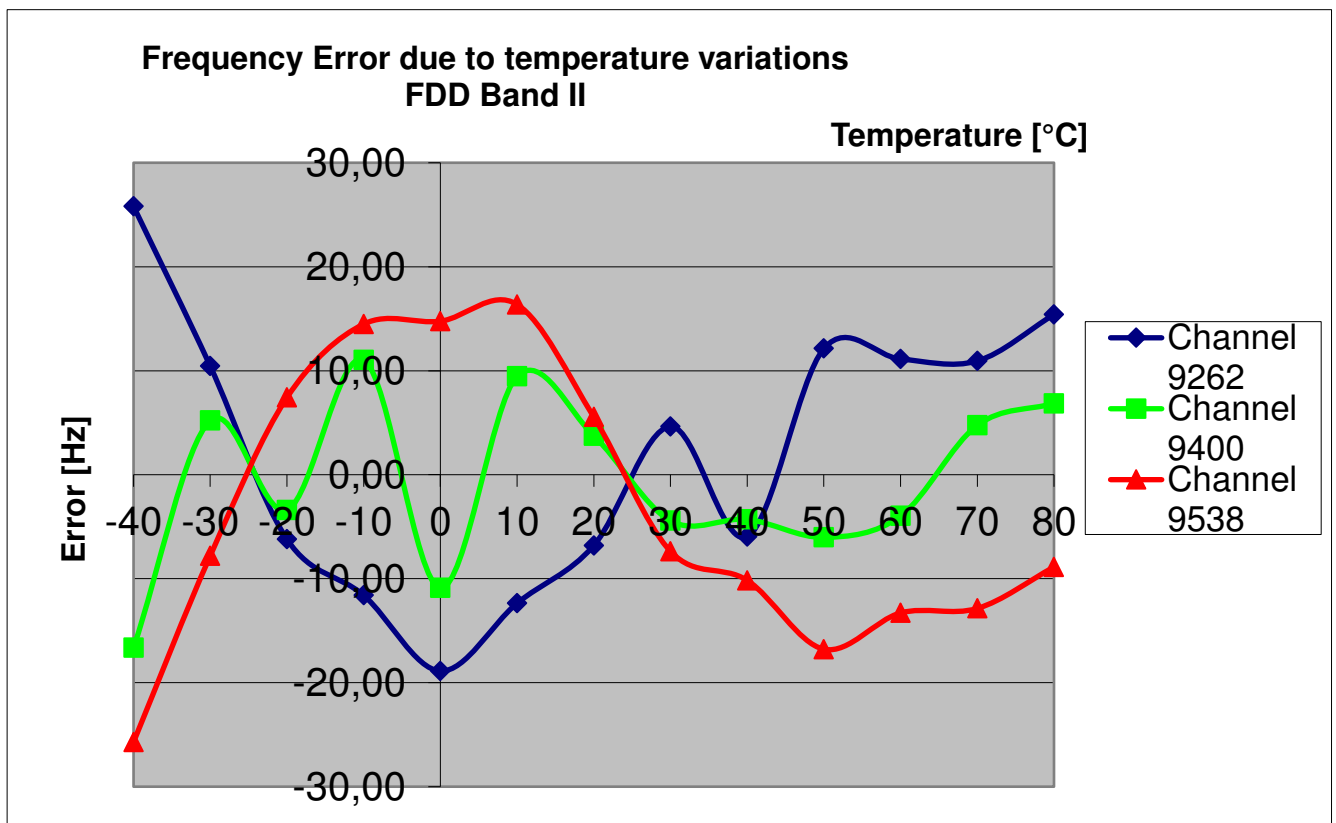

5.4.4.6.1. W-CDMA Band 2: Canada requirement regarding emission/occupied bandwidth

Measurement Method:

With results of chapter 5.4.4.1/5.4.4.5 (frequency error) and of chapter 5.2. (occupied bandwidth) a calculation should show that the occupied/emissions bandwidth remains within the authorized band. Negative frequency error shifts the carrier (T1) more closer to the left band-edge (1850MHz), positive frequency error shifts the carrier (T2 points) more closer to the right band-edge (1910MHz). Following table shows the results calculated with above presumptions:

LOW-Band EDGE:

from
occupied
bandwidth
diagrams
point (T1)

Modulation -Scheme	FL [MHz]	Low Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
-----------------------	-----------------	-------------------------------	---	--	--	---------

FDD2	1850,332692	1850	0,33269200	-0,00001888	0,332673120	pass
------	-------------	------	------------	-------------	-------------	------

High-Band EDGE:

from occupied
bandwidth
diagrams point
(T2)

Modulation -Scheme	FH [MHz]	High Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
-----------------------	-----------------	----------------------------	---	--	--	---------

FDD2	1909,679327000	1910	0,320673000	0,00001637	0,32065663	pass
------	----------------	------	-------------	------------	------------	------


5.4.4.7. FDD Band 4

Nominal Frequencies

8,2640E+08 8,3660E+08 8,4660E+08

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 1312	Channel 1450	Channel 1513	Channel 1312	Channel 1450	Channel 1513	
	[Hz]			[ppm]			
-40	41,99	-18,45	-41,06	0,051	-0,022	-0,048	PASS
-30	11,78	-6,48	-10,73	0,014	-0,008	-0,013	
-20	-14,68	9,98	15,98	-0,018	0,012	0,019	
-10	-20,81	12,68	24,41	-0,025	0,015	0,029	
0	-21,19	11,95	26,14	-0,026	0,014	0,031	
10	-15,37	10,82	18,39	-0,019	0,013	0,022	
20	-5,91	6,13	7,02	-0,007	0,007	0,008	
30	14,57	-6,03	-11,28	0,018	-0,007	-0,013	
40	30,30	-10,18	-23,51	0,037	-0,012	-0,028	
50	31,89	-18,55	-36,15	0,039	-0,022	-0,043	
60	35,40	-14,57	-34,67	0,043	-0,017	-0,041	
70	28,05	-12,77	-26,15	0,034	-0,015	-0,031	
80	10,25	-6,20	33,72	0,012	-0,007	0,040	

MAX	41,99	12,68	33,72
MIN	-21,19	-18,55	-41,06

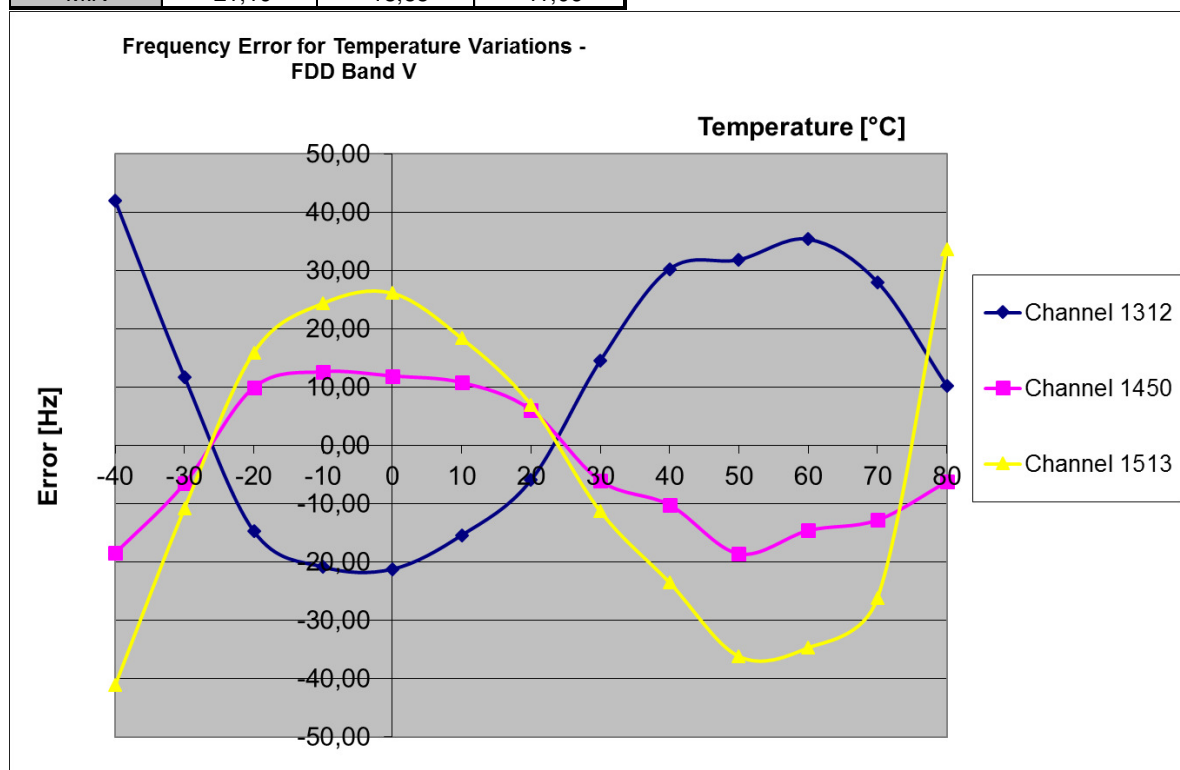

5.4.4.7.1. W-CDMA Band 4: Canada requirement regarding emission/occupied bandwidth

Measurement Method:

With results of chapter 5.4.4.2/5.4.4.6 (frequency error) and of chapter 5.2. (occupied bandwidth) a calculation should show that the occupied/emissions bandwidth remains within the authorized band. Negative frequency error shifts the carrier (T1) more closer to the left band-edge (1850MHz), positive frequency error shifts the carrier (T2 points) more closer to the right band-edge (1910MHz). Following table shows the results calculated with above presumptions:

LOW-Band EDGE:

from occupied
bandwidth
diagrams point
(T1)

Modulation -Scheme	FL [MHz]	Low Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
FDD4	1710,332692000	1710	0,33269200	-0,00002119	0,332670810	pass

High-Band EDGE:

from occupied
bandwidth
diagrams point
(T2)

Modulation -Scheme	FH [MHz]	High Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
FDD4	1754,667308000	1755	0,332692000	0,00003372	0,3326582800	pass


5.4.4.8. FDD Band 5

Nominal Frequencies

8,2640E+08 8,3660E+08 8,4660E+08

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233	
	[Hz]			[ppm]			
-40	6,62	-3,74	-9,02	0,008	-0,004	-0,011	PASS
-30	4,61	-2,98	-4,41	0,006	-0,004	-0,005	
-20	-6,2	-3,51	4,68	-0,008	-0,004	0,006	
-10	-5,54	-3,68	6,39	-0,007	-0,004	0,008	
0	-6,23	-4,04	5,89	-0,008	-0,005	0,007	
10	-5,2	-2,96	5,16	-0,006	-0,004	0,006	
20	-3,42	-3,13	3,48	-0,004	-0,004	0,004	
30	4,44	3,77	-5,37	0,005	0,005	-0,006	
40	5,69	-3,71	-5,51	0,007	-0,004	-0,007	
50	6,33	-2,76	-7,16	0,008	-0,003	-0,008	
60	6,82	-2,9	-6,77	0,008	-0,003	-0,008	
70	5,26	-3,51	-6,77	0,006	-0,004	-0,008	
80	3,46	-3,4	-3,6	0,004	-0,004	-0,004	

MAX	6,82	3,77	6,39
MIN	-6,23	-4,04	-9,02

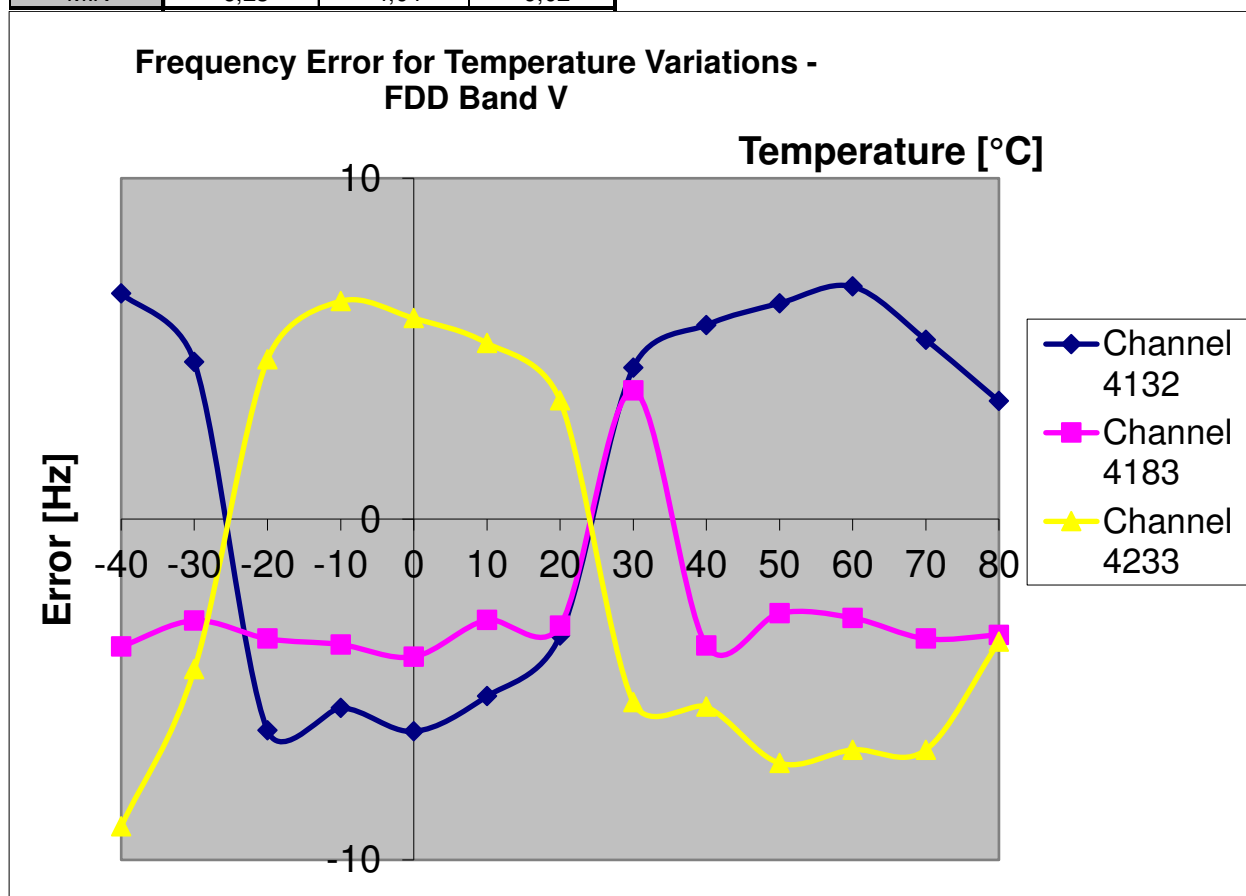

5.4.4.8.1. W-CDMA Band 5: Canada requirement regarding emission/occupied bandwidth

Measurement Method:

With results of chapter 5.4.4.6.1/5.4.4.7 (frequency error) and of chapter 5.2. (occupied bandwidth) a calculation should show that the occupied/emissions bandwidth remains within the authorized band. Negative frequency error shifts the carrier (T1) more closer to the left band-edge (824MHz), positive frequency error shifts the carrier (T2 points) more closer to the right band-edge (849MHz). Following table shows the results calculated with above presumptions:

LOW-Band EDGE:

from occupied
bandwidth
diagrams point
(T1)

Modulation -Scheme	FL [MHz]	Low Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
FDD5	824,332692308	824	0,33269231	-0,00000623	0,332686078	pass

High-Band EDGE:

from occupied
bandwidth
diagrams point
(T2)

Modulation -Scheme	FH [MHz]	High Band-Edge [MHz]	Margin to band-Edge except Frequency Error [MHz]	Frequency of Worst-Case Deviation during climatic tests [MHz]	Margin to Low-Band- Edge including climatic conditions [MHz]	Verdict
FDD5	848,667307692	849	0,332692308	0,00000639	0,3326859180	pass

5.5. General Limit - Radiated field strength emissions below 30 MHz

5.5.1. Test location and equipment

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2	☐ Please see Chapter. 2.2.3
test site	☒ 441 EMI SAR	☐ 487 SAR NSA	☐ 347 Radio.lab.
receiver	☐ 377 ESCS30	☒ 001 ESS	☐
spectr. analys.	☐ 584 FSU	☐ 120 FSEM	☐ 264 FSEK
antenna	☐ 574 BTA-L	☐ 133 EMCO3115	☐ 302 BBHA9170
signaling	☐ 392 MT8820A	☐ 371 CBT32	☐ 547 CMU
otherwise	☐ 400 FTC40x15E	☐ 401 FTC40x15E	☐ 110 USB LWL
DC power	☐ 456 EA 3013A	☐ 457 EA 3013A	☐ 459 EA 2032-50
line voltage	☐ 230 V 50 Hz via public mains	☒ 060 120 V 60 Hz via PAS 5000	☐ 289 CBL 6141

5.5.2. Requirements

FCC	Part 15, Subpart C, §15.205 & §15.209			
IC	RSS-Gen: Issue 4: §8.9 Table 5			
ANSI	C63.10-2013			
Frequency [MHz]	Field strength limit [μV/m]		Distance [m]	Remarks
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3 m
0.490 – 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used due to measurement distance of 3 m
1.705 – 30	30	29.5	30	Correction factor used due to measurement distance of 3 m

5.5.3. Test condition and test set-up

Signal link to test system (if used):	☒ air link	☐ cable connection	☐ none
EUT-grounding	☒ none	☐ with power supply	☐ additional connection
Equipment set up	☒ table top	☐ floor standing	
Climatic conditions	Temperature: (22±3°C) Rel. humidity: (40±20)%		
EMI-Receiver or Analyzer Settings	Scan data	☒ 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz	
	Scan-Mode	☒ 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz	
	Detector Mode: Sweep-Time	☐ other: Peak (pre-measurement) and Quasi-PK/Average (final if applicable) Repetitive-Scan, max-hold Coupled – calibrated display if continuous signal otherwise adapted to EUT's individual transmission duty-cycle	
General measurement procedures		Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz"	

5.5.4. Measurement Results

The results are presented below in summary form only. For more information please consult the diagrams included in annex 1.

The EUT is put on operation on middle channel only. If critical peaks are found (Margin <10 dB) the lowest and highest channels will be performed too. For more information please see the diagrams.

Table of measurement results:

Diagram No.	Carrier Channel		Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
2.20	Low	9262	9 kHz-30 MHz		1		☒	☐	☐	passed
2.40	Low	1312	9 kHz-30 MHz		2		☒	☐	☐	passed
2.50	Low	4132	9 kHz-30 MHz		3		☒	☐	☐	passed
2.21	Middle	9400	9 kHz-30 MHz		1		☒	☐	☐	passed
2.41	Middle	1450	9 kHz-30 MHz		2		☒	☐	☐	passed
2.51	Middle	4183	9 kHz-30 MHz		3		☒	☐	☐	passed
2.22	High	9538	9 kHz-30 MHz		1		☒	☐	☐	passed
2.42	High	1513	9 kHz-30 MHz		2		☒	☐	☐	passed
2.52	High	4233	9 kHz-30 MHz		3		☒	☐	☐	passed

5.5.5. Correction factors due to reduced meas. distance (f< 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (d _{meas} < D _{near-field})	2'te Condition (Limit distance bigger d _{near-field})	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,65		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	596,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47		fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
MHz	7,00E+05	428,57	68,21	30	fulfilled	not fulfilled	-40,00
	8,00E+05	375,00	59,68		fulfilled	not fulfilled	-40,00
	9,00E+05	333,33	53,05		fulfilled	not fulfilled	-40,00
	1,00	300,00	47,75		fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,98		fulfilled	fulfilled	-22,45
	13,56	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,81		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
	21,00	14,29	2,27		not fulfilled	fulfilled	-20,00
	23,00	13,04	2,08		not fulfilled	fulfilled	-20,00
	25,00	12,00	1,91		not fulfilled	fulfilled	-20,00
	27,00	11,11	1,77		not fulfilled	fulfilled	-20,00
	29,00	10,34	1,65		not fulfilled	fulfilled	-20,00
	30,00	10,00	1,59		not fulfilled	fulfilled	-20,00

5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge

5.6.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2	☐ Please see Chapter. 2.2.3
test site	☐ 441 EMI SAR	☐ 487 SAR NSA	☒ 443 FAR
receiver	☐ 377 ESCS30	☐ 001 ESS	☐ 489 ESU 40
spectr. analys.	☐ 584 FSU	☐ 120 FSEM	☒ 264 FSEK
antenna	☒ 439 HL 562	☒ 549 HL 025	☐ 302 BBHA9170
signaling	☐ 017 CMD 65	☐ 323 CMD 55	☐ 340 CMD 55
signaling	☐ 392 MT8820A	☒ 546 CMU	☐ 547 CMU
power supply	☒ 611 E3636A	☐ 457 EA 3013A	☐ 459 EA 2032-50
otherwise	☐ 529 6dB divider	☐ 530 6dB Att.	☐ 110 USB LWL
line voltage	☐ 230 V 50 Hz via public mains	☐ 060 120 V/ 60 Hz via PAS 5000	☐ 268 EA- 3050
			☐ 494 AG6632A
			☐ 498 NGPE 40

5.6.2. Requirements and limits

FCC	General: §2.1053(a) , §2.1057(a) ☒ FDD Band 5: Part 22: §22.917(a)(b) ☒ FDD Band 2: Part 24: §24.238(a)(b) ☒ FDD Band 4: Part 27: §27.53(h)
IC	☒ FDD Band 5: RSS-132, Issue 3: 5.5(i)(ii) ☒ FDD Band 2: RSS-133, Issue 6: 6.5.1(i)(ii) ☒ FDD Band 4: RSS-139, Issue 3: 6.6 (i)(ii)
Limit	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limits for all power levels of the Mobile Phone: -13dBm

5.6.3. Test condition and test set-up

link to test system (if used):	☒ air link	☐ cable connection	☐
EUT-grounding	☒ none	☐ with power supply	☐ additional connection
Equipment set up	☒ table top	☐ floor standing	
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%	
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied for critical measurements. According chapter 4.2		
EUT settings	A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.		

Spectrum-Analyzer settings for FDD band 2

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	1	60	10	MaxH-PK
Sweep 2a (Band-Edge)	1849	1850	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1849	1850			30	35	MaxH-AV
Sweep 3a (Band-Edge)	1910	1911			30	35	MaxH-PK
Sweep 3b (Band-Edge)	1910	1911			30	35	MaxH-AV

Spectrum-analyzer settings for FDD Band 4

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	1709	1710	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1709	1710			30	35	MaxH-AV
Sweep 3a (Band-Edge)	1755	1756			30	35	MaxH-PK
Sweep 3b (Band-Edge)	1755	1756			30	35	MaxH-AV

Spectrum-analyzer settings for FDD Band 5

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	12000	1	1	160	10	MaxH-PK
Sweep 2a (Band-Edge)	823	824	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	823	824			30	35	MaxH-AV
Sweep 3a (Band-Edge)	850	851			30	35	MaxH-PK
Sweep 3b (Band-Edge)	850	851			30	35	MaxH-AV

5.6.4. Results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 4.

5.6.4.1. FDD Band 2: Op. Mode 1, Set-up 2

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.20a 8.20b	Low	9262	30 MHz to 19.5 GHz	1	Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.20a 9.20b	Low		1849 – 1850 MHz		Band Edge Compliance a – laying b - standing	☒	☐	☐	passed
8.21a 8.21b	Middle	9400	30 MHz to 19.5 GHz		Carrier visible on diagram. - > Not relevant for results a – laying b - standing	☒	☐	☐	passed
8.22a 8.22b	High	9538	30 MHz to 19.5 GHz		Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.21a 9.21b	High		1910 – 1911 MHz		Band-Edge compliance: a – laying b - standing	☒	☒	☐	passed

Remark: --

5.6.4.2. FDD Band 4: Op. Mode 2, Set-up 2

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.40a 8.40b	Low	1312	30 MHz to 20 GHz	2	Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.40a 9.40b	Low		1709 - 1710 MHz		Band Edge Compliance a – laying b - standing	☒	☐	☐	passed
8.41a 8.41b	Middle	1450	30 MHz to 18 GHz		Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
8.42a 8.42b	High	1513	30 MHz to 18 GHz		Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.41a 9.41b	High		1755 – 1756 MHz		Band-Edge compliance a – laying b - standing	☒	☐	☐	passed

Remark: --

5.6.4.3. FDD Band 5: Op. Mode 3, Set-up 2

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.50a 8.50b	Low	4132	30 MHz to 9 GHz	3	Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.50a 9.50b	Low		823 – 824 MHz		Band Edge Compliance a – laying b - standing	☒	☐	☐	passed
8.51a 8.51b	Middle	4183	30 MHz to 9 GHz		Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
8.52a 8.52b	High	4233	30 MHz to 9 GHz		Carrier visible on diagram. Not relevant for results a – laying b - standing	☒	☐	☐	passed
9.51a 9.51b	High		849 – 850 MHz		Band-Edge compliance a – laying b - standing	☒	☐	☐	passed

Remark: a mathematical correction of used RBW=30kHz for measurements to required 1% RBW of EBW was used

5.7. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB							-
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dB 5.1 dB							E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-							-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB							Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--		
		12.75 - 26.5GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable	
		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79	--		
Power density	-	1 – 2.8GHz	1.40 dB							--
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			1.0 dB							Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
	-		See above: 0.70 dB							Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm							-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB							Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB							
		1 GHz - 20 GHz	3.17 dB							

Table: measurement uncertainties, valid for conducted/radiated measurements

6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R- 4452 G- 20013 C- 20009 T- 20006	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

8. Instruments and Ancillary

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

8.0.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr. 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
607	Signal Generator	SMR 20	832033/011	V1.25
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
670	Univ. Radio Communication Tester	CMU 200	106833	µP1 =V8.50, Firmware = V.20
689	Vector Signal Generator	SMU200	100970	02.20.360.142
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

8.0.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	16.05.2018
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	15.05.2018
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	17.05.2018
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	15.05.2019
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	30.05.2019
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.07.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	15.05.2019
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.06.2017
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	30.05.2019
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36 M	1c	10.03.2020
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	36 M	-	10.03.2020
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	30.05.2018
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2018
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2018
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	30.05.2019
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	30.05.2018
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	30.05.2018
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2017
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2017
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	17.05.2018
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	14.03.2020
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	20.03.2020
331	Climatic Test Chamber -40/+180 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.10.2018
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	30.05.2018
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	17.05.2019
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	30.05.2018
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	24.05.2019
371	Bluetooth Tester	CBT32	100153	R&S	36 M	-	30.05.2019
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	12 M	-	17.05.2018
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	15.05.2018
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	31.12.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	18.05.2018
405	Thermo-/Hygrometer	OPUS 10 THI	126.0604.0003.3.3.3.2	LUFFT Mess u. Regeltechnik	24 M	-	30.03.2019
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	24.05.2018
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	10.03.2020
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	31.12.2017

Test Report 16-1-0050601T41a, Page 41 of 42

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	31.12.2017
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	31.12.2017
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	31.12.2017
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	16.06.2018
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2018
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.04.2018
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2018
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	16.05.2019
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.07.2017
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.03.2019
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	18.05.2019
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	31.12.2017
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	18.05.2019
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.03.2018
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	05.07.2018
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2018
550	System CTC S-VSWR Verification SAR-EMI	System EMI Field SAR S-VSWR	-	ETS Lindgren/CETECOM	24 M	-	30.03.2019
552	high pass filter 2,8-18GHz	WHKX 2,8/18G-10SS	4	Wainwright	12 M	1c	31.12.2017
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	31.12.2017
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	08.08.2019
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2019
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.04.2017
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	pre-m	-	
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	17.05.2019
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	15.05.2019
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2018
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	16.05.2018
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.03.2019
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	KogitLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	12 M	-	24.05.2018
644	Amplifier	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2018
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	17.05.2018
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	29.03.2019
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	17.05.2018
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	

Test Report 16-1-0050601T41a, Page 42 of 42

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	12 M	-	16.05.2018
691	OSP120 Base Unit	OSP120	101183	Rohde & Schwarz	12 M	-	22.05.2018
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	29.05.2020
693	TS8997	CTC-Radio Lab 1_TS8997	-	Rohde&Schwarz	12 M	5	31.12.2017
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	
701	CMW500 wide. Radio Comm.	CMW500	158150	Rohde & Schwarz	12 M	-	31.12.2017
703	INNCO Antennen Mast	MA 4010-KT080-XPET-ZSS3	MA4170-KT100-XPET-	INNCO	pre-m	-	
704	INNCON Controller	CO 3000-4port	CO3000/933/3841051 6/L	INNCO Systems GmBh	pre-m	-	
711	Harmonic Mixer 90 GHz - 140GHz	RPG FS-Z140	101004	RPG	12 M	-	22.02.2018
712	Harmonic Mixer 75 GHz - 110GHz	FS-Z110	101468	Rohde & Schwarz	12 M	-	22.02.2018
713	Harmonic Mixer, 50 GHz - 75GHz	FS-Z75	101022	Rohde & Schwarz	12 M	-	22.05.2018
714	Signal Analyzer 67GHz	FSW67	104023	Rohde & Schwarz	24 M	-	03.03.2019
715	Harmonic Mixer, 140 GHz - 220GHz	FS-Z220	101009	RPG Radiometer Physics	12 M	-	03.08.2018
716	Harmonic Mixer 220 GHz to 325 GHz	FS-Z325	101005	RPG Radiometer Physics	12 M	-	13.02.2018
747	Spectrum Analyzer	FSU 26	200152	Rohde & Schwarz	12 M	-	18.05.2018
748	Pickett-Potter Horn Antenna	FH-PP 4060	010001	Radiometer Physics	-	-	
749	Pickett-potter Horn Antenna	FH-PP 60-90	010003	Radiometer Physics	-	-	
750	Pickett-Potter Horn Antenna	FH-PP 140-220	010011	Radiometer Physics	-	-	

8.0.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No. 443)
	1d	System CTC-SAR-EMI (Ref.-No. 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No. 420)
	1 g	System CTC-FAR-EMS (Ref.-No. 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

9. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2017-08-24
--	--	--