

B


A

B

A


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. MATERIAL: POLYESTER LABEL WITH PERMANENT ACRYLIC ADHESIVE
 - 2. LABEL CHARACTER TO BE ARIAL BOLD 8PT, COLOR: WHITE ON BLACK BACKGROUND

REVISION HISTORY (ALL SHEETS AT SAME REVISION)			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	5/8/2023	BTZ
B	ADDED "A" SUFFIX TO FCC & ISED ID	11/27/2024	JC

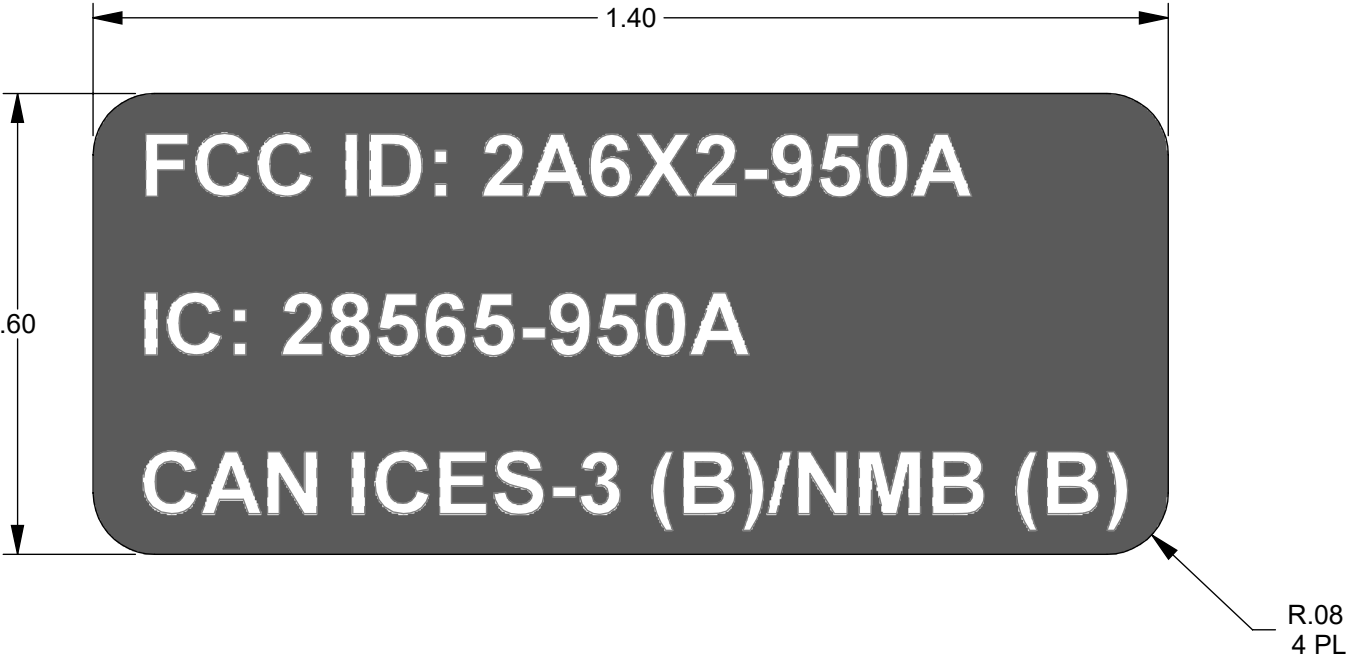

This document contains information within the purview of the Export Administration Regulations (EAR), 15 CFR §730 et seq., and is export-controlled. Violations of these regulations are punishable by fine, imprisonment, or both.

© 2024 TrellisWare Technologies, Inc. Proprietary Information

PROPRIETARY NOTICE THESE DRAWINGS, LISTS OR SPECIFICATIONS ARE THE CONFIDENTIAL INFORMATION AND/OR TRADE SECRETS OF TRELLISWARE TECHNOLOGIES, INC. AND ISSUED IN STRICT CONFIDENCE. EXCEPT AS AUTHORIZED BY TRELLISWARE TECHNOLOGIES IN WRITING, THESE DRAWINGS, LISTS OR SPECIFICATIONS SHALL NOT BE REPRODUCED, RETRANSMITTED, USED FOR THE DESIGN, MANUFACTURE OR SALE OF EQUIPMENT OR USED FOR ANY OTHER PURPOSE OTHER THAN EVALUATION. THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND APPLY AFTER FINISH OR PLATING. TOLERANCES ARE:				CONTRACT NO. *		TrellisWare TECHNOLOGIES 10641 SCRIPPS SUMMIT COURT, STE. 100 SAN DIEGO, CA 92131																
	<table><thead><tr><th></th><th><u>.X</u></th><th><u>XX</u></th><th><u>XXX</u></th><th><u>ANGULAR</u></th></tr></thead><tbody><tr><td>SHEET METAL:</td><td>± .1</td><td>± .03</td><td>±.010</td><td>± .5°</td></tr><tr><td>MACHINING:</td><td>± .1</td><td>± .02</td><td>±.005</td><td>± .5°</td></tr></tbody></table>					<u>.X</u>					<u>XX</u>	<u>XXX</u>	<u>ANGULAR</u>	SHEET METAL:	± .1	± .03	±.010	± .5°	MACHINING:	± .1	± .02	±.005	± .5°
		<u>.X</u>	<u>XX</u>	<u>XXX</u>	<u>ANGULAR</u>																		
	SHEET METAL:	± .1	± .03	±.010	± .5°																		
	MACHINING:	± .1	± .02	±.005	± .5°																		
	<table><thead><tr><th></th><th>HOLE DIAMETER</th></tr></thead><tbody><tr><td><u>.000-.250</u></td><td><u>.251-.500</u></td><td><u>.501-1.000</u></td></tr><tr><td>+ .004</td><td>+ .006</td><td>+ .010</td></tr><tr><td>- .001</td><td>- .001</td><td>- .001</td></tr></tbody></table>					HOLE DIAMETER	<u>.000-.250</u>	<u>.251-.500</u>	<u>.501-1.000</u>	+ .004	+ .006	+ .010	- .001	- .001	- .001	DRAWN							
						HOLE DIAMETER																	
	<u>.000-.250</u>	<u>.251-.500</u>	<u>.501-1.000</u>																				
	+ .004	+ .006	+ .010																				
	- .001	- .001	- .001																				
MAX SURFACE ROUGHNESS 125 ON ALL MACHINED SURFACES				DESIGNED																			
				CHECKED																			
FINISH:				B. ZANDER		05/08/2023																	
				B. ZANDER		05/08/2023																	
CAD GENERATED DRAWING: SOLIDWORKS				SCALE: 4:1		WT:		LBS		SHEET 1 OF 1													