



AFC DUT TEST HARNESS REPORT

FCC ID : QXO-AP5022

Equipment : Access Point

Brand Name : Extreme Networks

Model Name : AP5022FX

Applicant : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina United States 27560

Manufacturer : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina United States 27560

Standard : 47 CFR FCC Part 15.407

The product was received on May 16, 2026, and testing was started from Aug. 06, 2026 and completed on Aug. 06, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in AFC Device (AFC DUT) Compliance Test Plan Version 1.7 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

1	General Description	6
1.1	Product Feature of Equipment Under Test	6
1.2	Antenna Information	7
1.3	Table for EUT Support Function	17
1.4	Table for Radio Function	17
1.5	Accessories	17
1.6	Table for Permissive Change	17
1.7	Support Equipment	18
1.8	Applicable Standards	19
1.9	Testing Location	19
2	Measurement Environment	20
2.1	AFCD General Capabilities Declaration	20
2.2	Test Configuration	21
3	Protocol Test Results	24
3.1	Successful Registration and Spectrum Access Request	24
3.2	Unsuccessful Spectrum Access Request	26
3.3	Successful Spectrum Access Update	27
3.4	Unsuccessful Spectrum Access Update	29
3.5	Unsuccessful Server Validation	31
4	Test Equipment and Calibration Data	32
5	Measurement Uncertainty	33

Appendix A. Tools Report

Appendix B. DUT Spectrum Inquiry Request/Response Logs

Appendix C. RF Measurement Plots

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_7 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Case Name	Result (PASS/FAIL)	Remark
AFC capability - Inquired Frequency				
Test Group: Inquired Frequency - Always				
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_160MHz_10614_1	N/A	-
-	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1	N/A	-
-	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1	N/A	-
-	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_320MHz_10713_1	N/A	-
AFC capability - Inquired Channel				
Test Group: Inquired Channel - Always				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_20MHz_10618_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_40MHz_10619_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_80MHz_10620_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_160MHz_10621_1	PASS	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1	PASS	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Channel_10623_1	PASS	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Channel_10624_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_320MHz_10714_1	PASS	-
AFC capability - Inquired Frequency & Channel				
Test Group: Inquired Frequency and Channel - Always				
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1	N/A	-
-	3.2.4	CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1	N/A	-
-	3.3.4	CT_AFC_SP_AP_AFCDSAU33_FrequencyChannel_10630_1	N/A	-
-	3.4.4	CT_AFC_SP_AP_AFCDUAU34_FrequencyChannel_10631_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_320MHz_10715_1	N/A	-
AFC capability - Server Validation – Mandatory				
Test Group: Server Validation - Always				
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1	PASS	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Sharon Jiang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature of Equipment Under Test	
Power Type	From power adapter or PoE
EUT Type	☒ Standard Power Access Point with Proxy ☐ Standard Power Access Point without Proxy ☐ Fixed Client with Proxy ☐ Fixed Client without Proxy
Bandwidth (MHz)	For Radio 1: 20 / 40 / 80 / 160 For Radio 3: 20 / 40 / 80 / 160 / 320 For Scanning Radio 4: 20 / 40 / 80 / 160 / 320
Condition of EUT	☒ Indoor ☐ Outdoor
Professional Installation	☒ Yes ☐ No
DUT Firmware version	10.19.1.0-1125D
DUT Software version	N/A
DUT Hardware version	N/A
Proxy Firmware version	VE6120K Small 10.20.01.0105P
Proxy Software version	N/A
Proxy Hardware version	N/A

Note: The above information was declared by manufacturer.



1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Support	Radio	Remark
1	1/2/3/4	Extreme Networks	AI-TP05360	MIMO-Directional Panel	SMA ST. Plug	2.4G & 5G Low & 6G High + 5G Full & 5G High + 6G Full & 6G Low	Radio 1+Radio 2 +Radio 3	External Ant.
2	1/2/3/4	Extreme Networks	AI-TQ08055	Sector	RP- SMA	2.4G & 5G Low & 6G High + 5G Full & 5G High + 6G Full & 6G Low	Radio 1+Radio 2 +Radio 3	External Ant.
3	1/2/3/4	Extreme Networks	AIO-HQ17020	MIMO-Directional Panel	SMA Female	5G Low & 6G High + 5G Full & 5G High + 6G Full & 6G Low	Radio 1+Radio 2 +Radio 3	External Ant.
4	1/2/3/4	Extreme Networks	AIO-DQ15021-RPS MA	MIMO-Directional Panel	Reverse SMA	2.4G & 5G Low + 5G Full & 5G High	Radio 1+Radio 2	External Ant.
5	1	WNC	95XPAM15.G84	PIFA	I-Pex	6G Full & 6G Low	Radio 3	Internal Ant.
6	2	WNC	95XPAM15.G85	PIFA	I-Pex	6G Full & 6G Low	Radio 3	Internal Ant.
7	3	WNC	95XPAM15.G87	Alford loop	I-Pex	6G Full & 6G Low	Radio 3	Internal Ant.
8	4	WNC	95XPAM15.G88	Alford loop	I-Pex	6G Full & 6G Low	Radio 3	Internal Ant.
9	1	WNC	95XPAM15.G56	PIFA	I-Pex	Scan 2.4G & 5G & 6G	Radio 4	Internal Ant.
10	2	WNC	95XPAM15.G57	PIFA	I-Pex	Scan 2.4G & 5G & 6G	Radio 4	Internal Ant.
11	1	WNC	95XPAM15.G53	PIFA	I-Pex	BT+802.15.4	Radio 5	Internal Ant.
12	2	WNC	95XPAM15.G54	PIFA	I-Pex	BT+802.15.4	Radio 5	Internal Ant.
13	3	WNC	95XPAM15.GAM	Alford loop	I-Pex	BT+802.15.4	Radio 5	Internal Ant.
14	4	Extreme Networks	AI-TS06360	Dipole	RP-SMA	BT+802.15.4	Radio 5	External Ant.
15	1	WNC	95XPAM15.G81	PIFA	I-Pex	UWB	Radio 6	Internal Ant.
16	2	WNC	95XPAM15.G82	Alford loop	I-Pex	UWB	Radio 6	Internal Ant.
17	3	WNC	95XPAM15.G82	Alford loop	I-Pex	UWB	Radio 6	Internal Ant.
18	4	WNC	95XPAM15.G82	Alford loop	I-Pex	UWB	Radio 6	Internal Ant.
19	1/2/3/4	Extreme Networks	AIO-HM25007	Spherical lens	N Male	5G Full & 6G Full	Radio 2+Radio 3	External Ant.



Ant.	POL	Port	Antenna peak gain (dBi)											
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	802.15.4	UWB
Ant 1 Radio 1 2.4G 5G Low 6G High	-	1	4.4	4.4	4.4	-	-	-	-	4.7	2.8	-	-	-
	-	2	4.4	4.4	4.4	-	-	-	-	4.7	2.8	-	-	-
	-	3	4.4	4.4	4.4	-	-	-	-	4.7	2.8	-	-	-
	-	4	4.4	4.4	4.4	-	-	-	-	4.7	2.8	-	-	-
	-	5	4.4	4.4	4.4	-	-	-	-	4.7	2.8	-	-	-
Ant 1 Radio 2 5G Full 5G High	-	1	-	4.4	4.4	5.2	5	-	-	-	-	-	-	-
	-	2	-	4.4	4.4	5.2	5	-	-	-	-	-	-	-
	-	3	-	4.4	4.4	5.2	5	-	-	-	-	-	-	-
	-	4	-	4.4	4.4	5.2	5	-	-	-	-	-	-	-
	-	5	-	4.4	4.4	5.2	5	-	-	-	-	-	-	-
Ant 1 Radio 3 6G Full 6G Low	-	1	-	-	-	-	-	4.7	4.7	4.7	2.8	-	-	-
	-	2	-	-	-	-	-	4.7	4.7	4.7	2.8	-	-	-
	-	3	-	-	-	-	-	4.7	4.7	4.7	2.8	-	-	-
	-	4	-	-	-	-	-	4.7	4.7	4.7	2.8	-	-	-
	-	5	-	-	-	-	-	4.7	4.7	4.7	2.8	-	-	-
Ant 2 Radio 1 2.4G 5G Low 6G High	V-POL	1	7	6	6	-	-	-	-	6	6	-	-	-
	H-POL	2	7	6	6	-	-	-	-	6	6	-	-	-
	V-POL	3	7	6	6	-	-	-	-	6	6	-	-	-
	H-POL	4	7	6	6	-	-	-	-	6	6	-	-	-
Ant 2 Radio 2 5G Full 5G High	V-POL	1	-	6	6	6	6	-	-	-	-	-	-	-
	H-POL	2	-	6	6	6	6	-	-	-	-	-	-	-
	V-POL	3	-	6	6	6	6	-	-	-	-	-	-	-
	H-POL	4	-	6	6	6	6	-	-	-	-	-	-	-
Ant 2 Radio 3 6G Full 6G Low	V-POL	1	-	-	-	-	-	6	6	6	6	-	-	-
	H-POL	2	-	-	-	-	-	6	6	6	6	-	-	-
	V-POL	3	-	-	-	-	-	6	6	6	6	-	-	-
	H-POL	4	-	-	-	-	-	6	6	6	6	-	-	-
Ant 3 Radio 1 5G Low 6G High	-45 POL	1	-	17	17	-	-	-	-	17	17	-	-	-
	+45 POL	2	-	17	17	-	-	-	-	17	17	-	-	-
	+45 POL	3	-	17	17	-	-	-	-	17	17	-	-	-
	-45 POL	4	-	17	17	-	-	-	-	17	17	-	-	-
Ant 3 Radio 2 5G Full 5G High	-45 POL	1	-	17	17	17	17	-	-	-	-	-	-	-
	+45 POL	2	-	17	17	17	17	-	-	-	-	-	-	-
	+45 POL	3	-	17	17	17	17	-	-	-	-	-	-	-
	-45 POL	4	-	17	17	17	17	-	-	-	-	-	-	-
Ant 3 Radio 3 6G Full 6G Low	-45 POL	1	-	-	-	-	-	17	17	17	17	-	-	-
	+45 POL	2	-	-	-	-	-	17	17	17	17	-	-	-
	+45 POL	3	-	-	-	-	-	17	17	17	17	-	-	-
	-45 POL	4	-	-	-	-	-	17	17	17	17	-	-	-



Ant.	POL	Port	Antenna peak gain (dBi)											
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	802.15.4	UWB
Ant 4 Radio 1 2.4G 5G Low	V-POL	1	11.1	15	15	-	-	-	-	-	-	-	-	-
	H-POL	2	11.1	15	15	-	-	-	-	-	-	-	-	-
	V-POL	3	11.1	15	15	-	-	-	-	-	-	-	-	-
	H-POL	4	11.1	15	15	-	-	-	-	-	-	-	-	-
Ant 4 Radio 2 5G Full 5G High	V-POL	1	-	15	15	15	15	-	-	-	-	-	-	-
	H-POL	2	-	15	15	15	15	-	-	-	-	-	-	-
	V-POL	3	-	15	15	15	15	-	-	-	-	-	-	-
	H-POL	4	-	15	15	15	15	-	-	-	-	-	-	-
Ant 5	-	1	-	-	-	-	-	5.8	4.39	4.54	5.28	-	-	-
Ant 6	-	2	-	-	-	-	-	4.31	5.13	4.62	4.43	-	-	-
Ant 7	-	3	-	-	-	-	-	5.41	5.06	3.5	4.6	-	-	-
Ant 8	-	4	-	-	-	-	-	4.15	3.89	2.42	3.55	-	-	-
Ant 9	-	1	2.42	4.11	4.34	5.46	3.49	3.46	4.88	5.13	4.76	-	-	-
Ant 10	-	2	2.86	3.32	3.52	3.7	4.34	5.68	4.13	4.75	4.59	-	-	-
Ant 11	-	1	-	-	-	-	-	-	-	-	-	3.6	3.6	-
Ant 12	-	2	-	-	-	-	-	-	-	-	-	5.7	5.7	-
Ant 13	-	3	-	-	-	-	-	-	-	-	-	2.7	2.7	-
Ant 14	-	4	-	-	-	-	-	-	-	-	-	3.04	3.04	-
Ant 15	-	1	-	-	-	-	-	-	-	-	-	-	-	4.7
Ant 16	-	2	-	-	-	-	-	-	-	-	-	-	-	5.4
Ant 17	-	3	-	-	-	-	-	-	-	-	-	-	-	4.8
Ant 18	-	4	-	-	-	-	-	-	-	-	-	-	-	4.4
Ant 19 Radio 2 5G Full	+ 45 POL	1	-	22.3	22.3	22.3	22.3	-	-	-	-	-	-	-
	- 45 POL	2	-	22.3	22.3	22.3	22.3	-	-	-	-	-	-	-
	+ 45 POL	3	-	22.3	22.3	22.3	22.3	-	-	-	-	-	-	-
	- 45 POL	4	-	22.3	22.3	22.3	22.3	-	-	-	-	-	-	-
Ant 19 Radio 3 6G Full	+ 45 POL	1	-	-	-	-	-	22.3	22.3	22.3	22.3	-	-	-
	- 45 POL	2	-	-	-	-	-	22.3	22.3	22.3	22.3	-	-	-
	+ 45 POL	3	-	-	-	-	-	22.3	22.3	22.3	22.3	-	-	-
	- 45 POL	4	-	-	-	-	-	22.3	22.3	22.3	22.3	-	-	-



Ant.	POL	Port	Antenna cable loss (dB)																	
			Main PCB to External Antenna Connector Loss					Radio 1: Main PCB to External Antenna Connector Loss Radio 3: Main PCB to Switch Board Loss				Radio 3: Switch Board to External Antenna Connector Loss				Antenna 3 Cable Loss		Main PCB to External Antenna Connector Loss		UWB
								UNII-5	UNII-6	UNII-7	UNII-8	UNII-5	UNII-6	UNII-7	UNII-8	5G Ant.	6G Ant.	BT	802.15.4	UWB
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3													
Ant 1 Radio 1 2.4G 5G Low 6G High	-	1	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	-	2	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	-	3	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	-	4	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	-	5	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
Ant 1 Radio 2 5G Full 5G High	-	1	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	2	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	3	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	4	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	5	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
Ant 1 Radio 3 6G Full 6G Low	-	1	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	-	2	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	-	3	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	-	4	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	-	5	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
Ant 2 Radio 1 2.4G 5G Low 6G High	V-POL	1	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	H-POL	2	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	V-POL	3	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
	H-POL	4	1.38	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	-	-	-	-	-
Ant 2 Radio 2 5G Full 5G High	V-POL	1	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	H-POL	2	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	V-POL	3	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
	H-POL	4	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	-
Ant 2 Radio 3 6G Full 6G Low	V-POL	1	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	H-POL	2	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	V-POL	3	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
	H-POL	4	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	-	-	-	-
Ant 3 Radio 1 5G Low 6G High	-45 POL	1	-	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	0.75	0.84	-	-	-
	+45 POL	2	-	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	0.75	0.84	-	-	-
	+45 POL	3	-	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	0.75	0.84	-	-	-
	-45 POL	4	-	1.86	1.86	-	-	-	-	2.18	2.18	-	-	-	-	0.75	0.84	-	-	-
Ant 3 Radio 2 5G Full 5G High	-45 POL	1	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	0.75	-	-	-	-
	+45 POL	2	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	0.75	-	-	-	-
	+45 POL	3	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	0.75	-	-	-	-
	-45 POL	4	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	0.75	-	-	-	-
Ant 3 Radio 3 6G Full 6G Low	-45 POL	1	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	0.84	-	-	-
	+45 POL	2	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	0.84	-	-	-
	+45 POL	3	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	0.84	-	-	-
	-45 POL	4	-	-	-	-	-	2.73	2.73	2.73	2.73	1.86	1.86	1.86	1.86	-	0.84	-	-	-



Ant.	POL	Port	Antenna cable loss (dB)																	
			Main PCB to External Antenna Connector Loss					Radio 1: Main PCB to External Antenna Connector Loss Radio 3: Main PCB to Switch Board Loss				Radio 3: Switch Board to External Antenna Connector Loss				Antenna 3 Cable Loss		Main PCB to External Antenna Connector Loss		UWB
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	UNII-5	UNII-6	UNII-7	UNII-8	5G Ant.	6G Ant.	BT	802.15.4	UWB
Ant 4	V-POL	1	1.38	1.86	1.86	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Radio 1 2.4G	H-POL	2	1.38	1.86	1.86	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	V-POL	3	1.38	1.86	1.86	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5G Low	H-POL	4	1.38	1.86	1.86	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 4	V-POL	1	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	
Radio 2 5G Full	H-POL	2	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	
	V-POL	3	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	
5G High	H-POL	4	-	2.25	2.25	2.25	2.25	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 5	-	1	-	-	-	-	-	2.73	2.73	2.73	2.73	-	-	-	-	-	-	-	-	
Ant 6	-	2	-	-	-	-	-	2.73	2.73	2.73	2.73	-	-	-	-	-	-	-	-	
Ant 7	-	3	-	-	-	-	-	2.73	2.73	2.73	2.73	-	-	-	-	-	-	-	-	
Ant 8	-	4	-	-	-	-	-	2.73	2.73	2.73	2.73	-	-	-	-	-	-	-	-	
Ant 9	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 10	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 11	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 12	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 13	-	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 14	-	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.09	1.09	-	
Ant 15	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 16	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 17	-	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Ant 18	-	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

Ant.	POL	Port	Antenna cable loss (dB)																			
			Radio 3: Main PCB to Switch Board Loss				Radio 2 and Radio 3: Switch Board to External Antenna Connector Loss								Diplexer Board							
			UNII-5	UNII-6	UNII-7	UNII-8	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8
Ant 19 Radio 2 5G Full	+ 45 POL	1	-	-	-	-	2.48	2.48	2.48	2.48	-	-	-	-	3.7	3.3	2.9	3.3	-	-	-	-
	- 45 POL	2	-	-	-	-	2.48	2.48	2.48	2.48	-	-	-	-	3.7	3.3	2.9	3.3	-	-	-	-
	+ 45 POL	3	-	-	-	-	2.48	2.48	2.48	2.48	-	-	-	-	3.7	3.3	2.9	3.3	-	-	-	-
	- 45 POL	4	-	-	-	-	2.48	2.48	2.48	2.48	-	-	-	-	3.7	3.3	2.9	3.3	-	-	-	-
Ant 19 Radio 3 6G Full	+ 45 POL	1	2.73	2.73	2.73	2.73	-	-	-	-	2.28	2.28	2.28	2.28	-	-	-	-	4	3.7	3.6	3.4
	- 45 POL	2	2.73	2.73	2.73	2.73	-	-	-	-	2.28	2.28	2.28	2.28	-	-	-	-	4	3.7	3.6	3.4
	+ 45 POL	3	2.73	2.73	2.73	2.73	-	-	-	-	2.28	2.28	2.28	2.28	-	-	-	-	4	3.7	3.6	3.4
	- 45 POL	4	2.73	2.73	2.73	2.73	-	-	-	-	2.28	2.28	2.28	2.28	-	-	-	-	4	3.7	3.6	3.4



Ant.	POL	Port	Antenna Net Gain (dB)											
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	802.15.4	UWB
Ant 1 Radio 1 2.4G 5G Low 6G High	-	1	3.02	2.54	2.54	-	-	-	-	2.52	0.62	-	-	-
	-	2	3.02	2.54	2.54	-	-	-	-	2.52	0.62	-	-	-
	-	3	3.02	2.54	2.54	-	-	-	-	2.52	0.62	-	-	-
	-	4	3.02	2.54	2.54	-	-	-	-	2.52	0.62	-	-	-
	-	5	3.02	2.54	2.54	-	-	-	-	2.52	0.62	-	-	-
Ant 1 Radio 2 5G Full 5G High	-	1	-	2.15	2.15	2.95	2.75	-	-	-	-	-	-	-
	-	2	-	2.15	2.15	2.95	2.75	-	-	-	-	-	-	-
	-	3	-	2.15	2.15	2.95	2.75	-	-	-	-	-	-	-
	-	4	-	2.15	2.15	2.95	2.75	-	-	-	-	-	-	-
	-	5	-	2.15	2.15	2.95	2.75	-	-	-	-	-	-	-
Ant 1 Radio 3 6G Full 6G Low	-	1	-	-	-	-	-	0.11	0.11	0.11	-1.79	-	-	-
	-	2	-	-	-	-	-	0.11	0.11	0.11	-1.79	-	-	-
	-	3	-	-	-	-	-	0.11	0.11	0.11	-1.79	-	-	-
	-	4	-	-	-	-	-	0.11	0.11	0.11	-1.79	-	-	-
	-	5	-	-	-	-	-	0.11	0.11	0.11	-1.79	-	-	-
Ant 2 Radio 1 2.4G 5G Low 6G High	V-POL	1	5.62	4.14	4.14	-	-	-	-	3.82	3.82	-	-	-
	H-POL	2	5.62	4.14	4.14	-	-	-	-	3.82	3.82	-	-	-
	V-POL	3	5.62	4.14	4.14	-	-	-	-	3.82	3.82	-	-	-
	H-POL	4	5.62	4.14	4.14	-	-	-	-	3.82	3.82	-	-	-
	V-POL	1	-	3.75	3.75	3.75	3.75	-	-	-	-	-	-	-
Ant 2 Radio 2 5G Full 5G High	H-POL	2	-	3.75	3.75	3.75	3.75	-	-	-	-	-	-	-
	V-POL	3	-	3.75	3.75	3.75	3.75	-	-	-	-	-	-	-
	H-POL	4	-	3.75	3.75	3.75	3.75	-	-	-	-	-	-	-
	V-POL	1	-	-	-	-	-	1.41	1.41	1.41	1.41	-	-	-
	H-POL	2	-	-	-	-	-	1.41	1.41	1.41	1.41	-	-	-
Ant 2 Radio 3 6G Full 6G Low	V-POL	3	-	-	-	-	-	1.41	1.41	1.41	1.41	-	-	-
	H-POL	4	-	-	-	-	-	1.41	1.41	1.41	1.41	-	-	-
	- 45 POL	1	-	14.39	14.39	-	-	-	-	13.98	13.98	-	-	-
	+ 45 POL	2	-	14.39	14.39	-	-	-	-	13.98	13.98	-	-	-
	+ 45 POL	3	-	14.39	14.39	-	-	-	-	13.98	13.98	-	-	-
Ant 3 Radio 1 5G Low 6G High	- 45 POL	4	-	14.39	14.39	-	-	-	-	13.98	13.98	-	-	-
	- 45 POL	1	-	14	14	14	14	-	-	-	-	-	-	-
	+ 45 POL	2	-	14	14	14	14	-	-	-	-	-	-	-
	+ 45 POL	3	-	14	14	14	14	-	-	-	-	-	-	-
	- 45 POL	4	-	14	14	14	14	-	-	-	-	-	-	-
Ant 3 Radio 2 5G Full 5G High	- 45 POL	1	-	-	-	-	-	11.57	11.57	11.57	11.57	-	-	-
	+ 45 POL	2	-	-	-	-	-	11.57	11.57	11.57	11.57	-	-	-
	+ 45 POL	3	-	-	-	-	-	11.57	11.57	11.57	11.57	-	-	-
	- 45 POL	4	-	-	-	-	-	11.57	11.57	11.57	11.57	-	-	-
	- 45 POL	1	-	-	-	-	-	11.57	11.57	11.57	11.57	-	-	-



Ant.	POL	Port	Antenna Net Gain (dB)											
			2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	802.15.4	UWB
Ant 4 Radio 1 2.4G 5G Low	V-POL	1	9.72	13.14	13.14	-	-	-	-	-	-	-	-	-
	H-POL	2	9.72	13.14	13.14	-	-	-	-	-	-	-	-	-
	V-POL	3	9.72	13.14	13.14	-	-	-	-	-	-	-	-	-
	H-POL	4	9.72	13.14	13.14	-	-	-	-	-	-	-	-	-
Ant 4 Radio 2 5G Full 5G High	V-POL	1	-	12.75	12.75	12.75	12.75	-	-	-	-	-	-	-
	H-POL	2	-	12.75	12.75	12.75	12.75	-	-	-	-	-	-	-
	V-POL	3	-	12.75	12.75	12.75	12.75	-	-	-	-	-	-	-
	H-POL	4	-	12.75	12.75	12.75	12.75	-	-	-	-	-	-	-
Ant 5	-	1	-	-	-	-	-	3.07	1.66	1.81	2.55	-	-	-
Ant 6	-	2	-	-	-	-	-	1.58	2.4	1.89	1.7	-	-	-
Ant 7	-	3	-	-	-	-	-	2.68	2.33	0.77	1.87	-	-	-
Ant 8	-	4	-	-	-	-	-	1.42	1.16	-0.31	0.82	-	-	-
Ant 9	-	1	2.42	4.11	4.34	5.46	3.49	3.46	4.88	5.13	4.76	-	-	-
Ant 10	-	2	2.86	3.32	3.52	3.7	4.34	5.68	4.13	4.75	4.59	-	-	-
Ant 11	-	1	-	-	-	-	-	-	-	-	-	3.6	3.6	-
Ant 12	-	2	-	-	-	-	-	-	-	-	-	5.7	5.7	-
Ant 13	-	3	-	-	-	-	-	-	-	-	-	2.7	2.7	-
Ant 14	-	4	-	-	-	-	-	-	-	-	-	1.95	1.95	-
Ant 15	-	1	-	-	-	-	-	-	-	-	-	-	-	4.7
Ant 16	-	2	-	-	-	-	-	-	-	-	-	-	-	5.4
Ant 17	-	3	-	-	-	-	-	-	-	-	-	-	-	4.8
Ant 18	-	4	-	-	-	-	-	-	-	-	-	-	-	4.4
Ant 19 Radio 2 5G Full	+ 45 POL	1	-	16.12	16.52	16.92	16.52	-	-	-	-	-	-	-
	- 45 POL	2	-	16.12	16.52	16.92	16.52	-	-	-	-	-	-	-
	+ 45 POL	3	-	16.12	16.52	16.92	16.52	-	-	-	-	-	-	-
	- 45 POL	4	-	16.12	16.52	16.92	16.52	-	-	-	-	-	-	-
Ant 19 Radio 3 6G Full	+ 45 POL	1	-	-	-	-	-	13.29	13.59	13.69	13.89	-	-	-
	- 45 POL	2	-	-	-	-	-	13.29	13.59	13.69	13.89	-	-	-
	+ 45 POL	3	-	-	-	-	-	13.29	13.59	13.69	13.89	-	-	-
	- 45 POL	4	-	-	-	-	-	13.29	13.59	13.69	13.89	-	-	-



Ant.	Items	Composite Gain (dBi) for 4TX								
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8
Ant 5~8 Radio 3 6G Full 6G Low	DG [1SS]	-	-	-	-	-	6.11	5.89	4.62	5.39
	DG [4SS]	-	-	-	-	-	5.8	5.13	4.62	5.28

Ant.	Items	Composite Gain (dBi) for 2TX								
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8
Ant 5~8 Radio 3 6G Full 6G Low	DG [1SS]	-	-	-	-	-	6.33	6.5	5.7	5.91
	DG [2SS]	-	-	-	-	-	5.8	5.13	4.62	5.28
Ant 9~10 Radio 4 Scan	DG [1SS]	4.23	5.88	6.57	7.04	5.34	5.85	4.88	5.32	4.76
	DG [2SS]	2.86	4.11	4.34	5.46	4.34	5.68	4.88	5.13	4.76

Note 1: The EUT has nineteen antennas.

Note 2: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

Note 3: BT= Bluetooth.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (1TX/4RX) (Radio 1)

Ant. 1 or Ant. 2 or Ant.4 could transmit/receive.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/4RX) (Radio 1)

Ant. 1 or Ant. 2 or Ant.4 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX) (Radio 1)

Ant. 1 or Ant. 2 or Ant.4 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Scan Radio)

Ant. 9~10 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (1TX/4RX) (Radio 1_Low and)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 could transmit/receive.

For IEEE 802.11 a/n/ac/ax/be mode (2TX/4RX) (Radio 1_Low and)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) (Radio 1_Low and)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (1TX/4RX) (Radio 2)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 or Ant.19 could transmit/receive.

For IEEE 802.11 a/n/ac/ax/be mode (2TX/4RX) (Radio 2)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 or Ant.19 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) (Radio 2)

Ant. 1 or Ant. 2 or Ant.3 or Ant.4 or Ant.19 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Scan Radio)

Ant. 9~10 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode (1TX/4RX) (Radio 1_High Band)



Ant. 1 or Ant. 2 or Ant.3 could transmit/receive.

For IEEE 802.11 ax/be mode (2TX/4RX) (Radio 1_High Band)

Ant. 1 or Ant. 2 or Ant.3 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) (Radio 1_High Band)

Ant. 1 or Ant. 2 or Ant.3 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (1TX/4RX) (Radio 3_Low Band)

Ant. 1 or Ant. 2 or Ant.3 could transmit/receive.

Ant. 5 could transmit/receive.

For IEEE 802.11 ax/be mode (2TX/4RX) (Radio 3_Low Band)

Ant. 1 or Ant. 2 or Ant.3 could transmit/receive simultaneously.

Ant. 5~6 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) (Radio 3_Low Band)

Ant. 1 or Ant. 2 or Ant.3 could transmit/receive simultaneously.

Ant. 5~8 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (1TX/4RX) (Radio 3)

Ant. 1 or Ant. 2 or Ant.3 or Ant.19 could transmit/receive.

Ant. 5 could transmit/receive.

For IEEE 802.11 ax/be mode (2TX/4RX) (Radio 3)

Ant. 1 or Ant. 2 or Ant.3 or Ant.19 could transmit/receive simultaneously.

Ant. 5~6 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) (Radio 3)

Ant. 1 or Ant. 2 or Ant.3 or Ant.19 could transmit/receive simultaneously.

Ant. 5~8 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Scan Radio)

Ant. 9~10 could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 11 or Ant.12 or Ant 13 or Ant 14 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 2 and it was recorded in this test report.

For 802.15.4 function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 11 or Ant.12 or Ant 13 or Ant 14 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 2 and it was recorded in this test report.

For UWB function(2TX/4RX):

Ant. 15 and Ant 17 could transmit. Ant. 15~18 could receive.

Note 4: Directional gain information (Ant 1~4, 19)

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.3 Table for EUT Support Function

Function
AP
Bridge
Mesh

Note: The above information was declared by manufacturer.

1.4 Table for Radio Function

Radio (R)	WLAN 2.4GHz	5GHz	Scanning radio (WLAN 2.4GHz / 5GHz / 6GHz)	6GHz	Bluetooth / IEEE802.15.4	UWB
R1	V (AP, Bridge, Mesh)	V (AP for UNII 1~2A, Bridge, Mesh for UNII 1)	-	V (AP for 6GHz UNII 7~8/6SD External ant.)	-	-
R2	-	V (AP for UNII 1~3 or UNII 2C~3 / Bridge, Mesh for UNII 3)	-	-	-	-
R3	-	-	-	V (AP for 6GHz UNII 5~8 or UNII 5/6ID Internal ant.&6SD External ant.)	-	-
R4	-	-	V (AP, for 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8/6ID Internal ant.&6SD Internal ant.)	-	-	-
R5	-	-	-	-	V	-
R6	-	-	-	-	-	V

1.5 Accessories

Bracket*1

1.6 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: F35O0964-01

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add external Ant.19 for Radio 2 and Radio 3 (Standard Power Access Point mode only).	AFC DUT TEST HARNESS
2. External Ant. 2 for the Standard Power Access Point mode has been enabled in Radio 1 and Radio 3.	After evaluation, this does not affect this report.
3. Remove model name AP5022, AP5022S6D.	



1.7 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	WLAN module	QCA	QCNCM865	N/A
D	PoE	Microsemi	PD-9501-10GC	N/A
E	Proxy	DELL	OptiPlex	N/A



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ AFC Device (AFC DUT) Compliance Test Plan Version 1.7
- ♦ FCC KDB 987594 D05 v01r01

1.9 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Caster Chang	23.8-24.1 / 53-57	Aug. 06, 2026



2 Measurement Environment


Measurement Environment Information	
AFC DUT Test Harness version	2.0.65.184

2.1 AFCD General Capabilities Declaration

Item	Question	Vendor Response
1	AFC DUT Type	Standalone AP with Proxy
2	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Frequency Range field?	No
3	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Channels fields?	Yes
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's default inquiry type?	-
5	Does the AFC DUT need to be supplied with BSS configuration parameters?	No
6	Does the AFC DUT manufacturer attest to AFC DUT compliance with rules for LPI operation?	No
7	Does the AFC DUT need to be supplied with mandatory registration information to formulate an Available Spectrum Inquiry Request	No
8	If the Answer to Item 7 is "Yes". What is the geographic Supported by the AFC DUT?	N/A
9	Does the AFC DUT supports 160 MHz channel width operation?	Yes
10	Which method does AFC DUT acting as a Fixed Client uses for sending an Available Spectrum Inquiry Request?	No
11	Does the AFC DUT supports 320 MHz channel width operation?	Yes


Note: The above information was declared by manufacturer.

2.2 Test Configuration

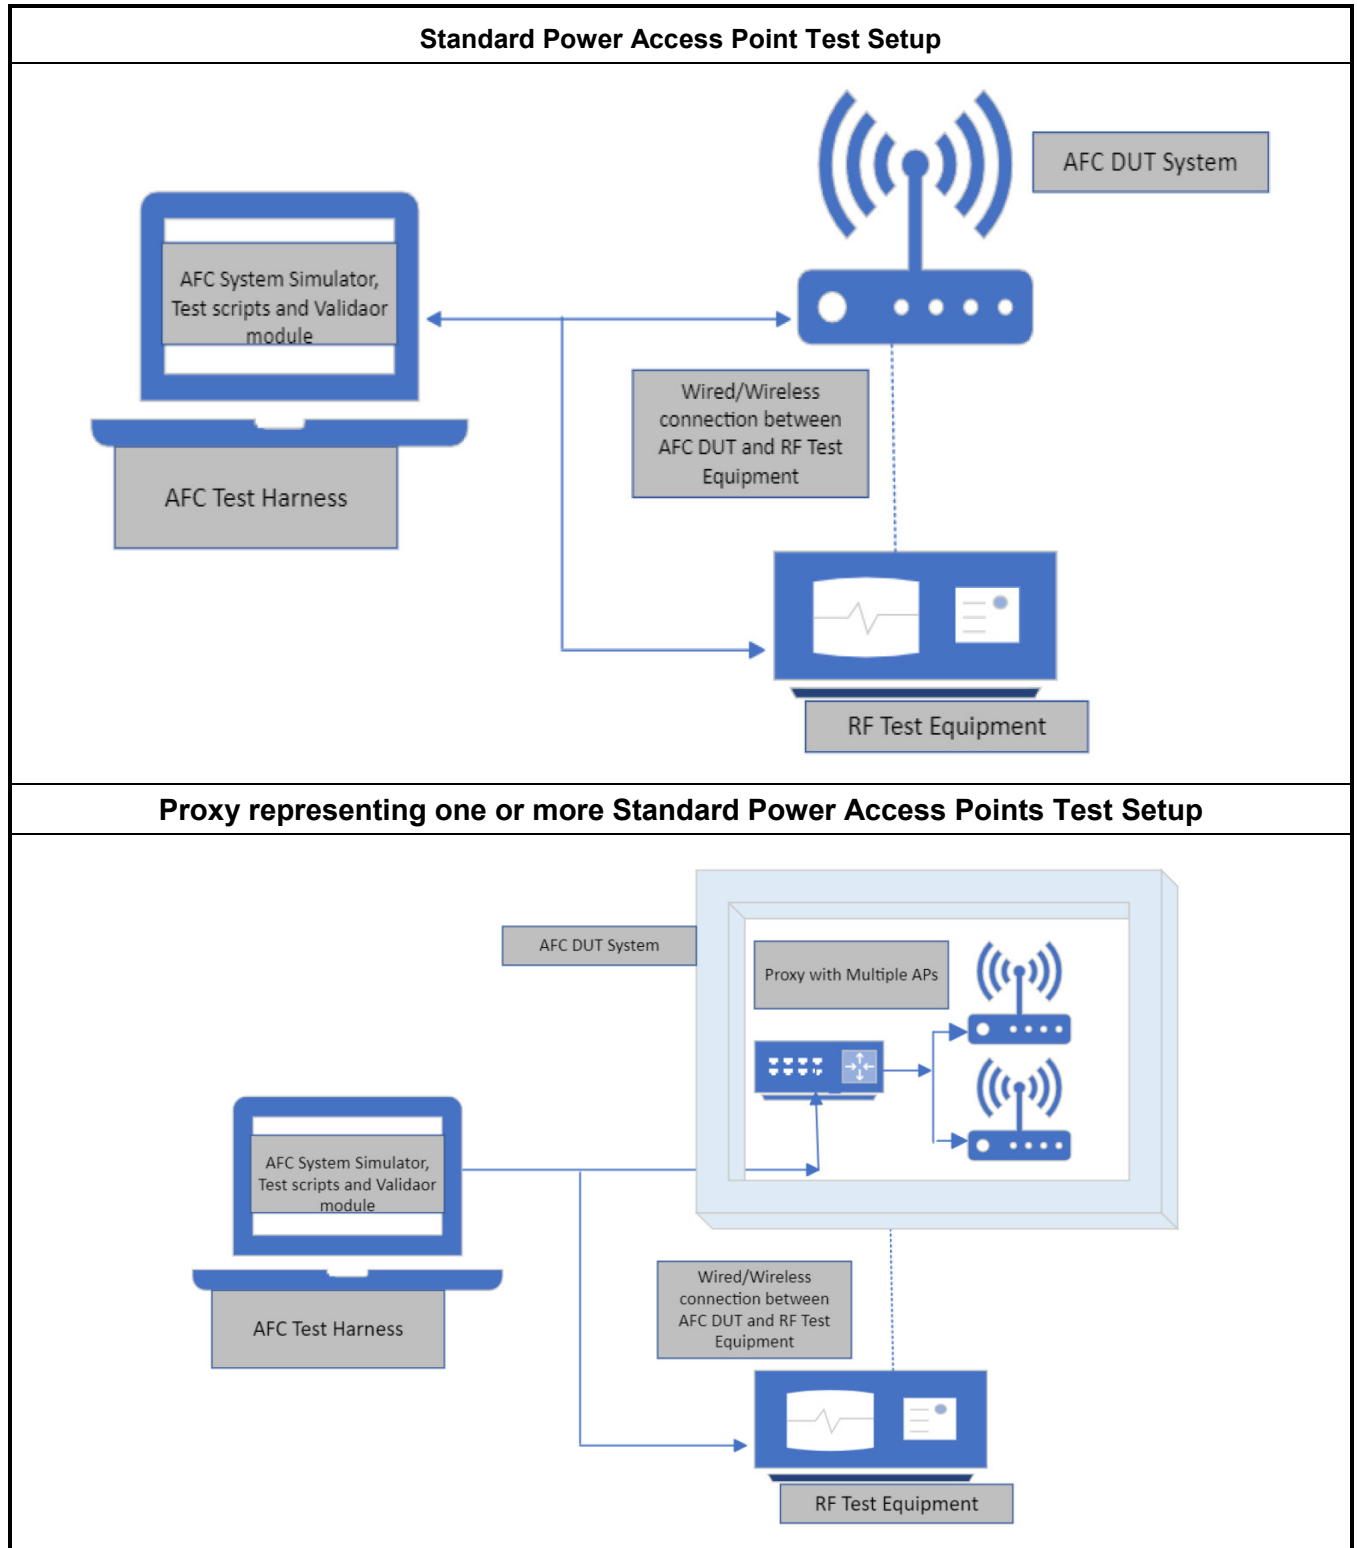



Fixed Client Device Test Setup

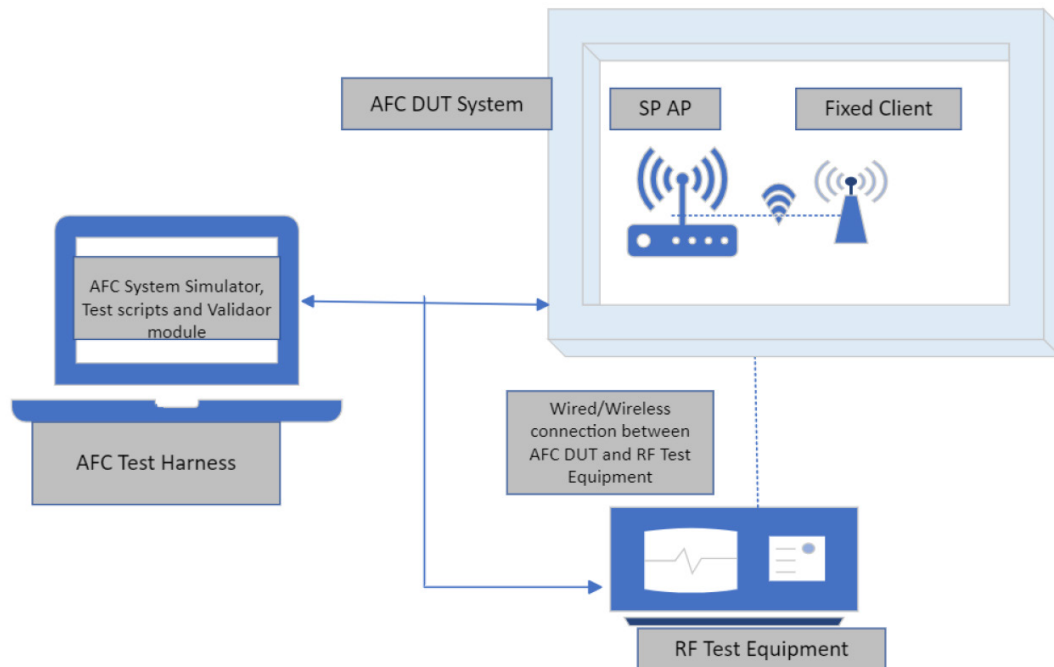



3 Protocol Test Results

3.1 Successful Registration and Spectrum Access Request

3.1.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates the presence of mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
9	AFC DUT Test Harness validates the presence of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5.
11	Wait for 5 minutes (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the latest Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency



	ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods
21	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
22	AFC DUT Test Harness validates the presence of mandatory registration information
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 17.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

3.1.2 Test Result

Refer as Appendix A~C

3.2 Unsuccessful Spectrum Access Request

3.2.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 7
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
6	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment monitors the output of the AFC DUT to confirm the following: • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test
8	The AFC DUT set to Initial Pre-test State.
9	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
11	AFC DUT Test Harness validates mandatory registration information.
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor
13	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

3.2.2 Test Result

Refer as Appendix A~C



3.3 Successful Spectrum Access Update

3.3.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the preceding steps, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
7	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the following and STOP the test • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 9
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5. • During the 60 seconds wait time: ▪ For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits ▪ For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band
11	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test



13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel and STOP the test. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 21
22	AFC DUT Test Harness evaluates validity of mandatory registration information
23	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from step 17. During the 60 seconds wait time, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

3.3.2 Test Result

Refer as Appendix A~C



3.4 Unsuccessful Spectrum Access Update

3.4.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the DUT with AFC System URL and server root certificate. Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields.
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies
7	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds • If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the DUT to verify the following and STOP the test: ▪ For SP only operation, AFC DUT does not transmit in the band, ▪ For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. • If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 8
9	AFC DUT Test Harness evaluates validity of mandatory registration information.
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
11	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment monitors the output of the AFC DUT to confirm that: For SP only operation, AFC DUT does not transmit in the band. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 9 declaration), configure the DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information



17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel., If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 22 else STOP the test
22	AFC DUT Test Harness evaluates validity of mandatory registration information.
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

3.4.2 Test Result

Refer as Appendix A~C



3.5 Unsuccessful Server Validation

3.5.1 Test Procedure

Step	Description
1	The AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT Test Harness with TLS configuration that is the same as the default configuration defined in Section 2.3.1 except for the following: - Run 1: A different server certificate (and private key) with SAN domain name entry "badafc.com" (i.e. that does not match AFC system URL's domain name); signed by the same root certificate as per Section 2.3.1 - Run 2: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1, but the certificate is signed by a different root certificate - Run 3: A different server certificate (and private key) with SAN domain name entry "wfatestorg.org" only (i.e. SAN domain name only matches suffix of AFC server's hostname); signed by the same root certificate as per Section 2.3.1 - Run 4: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1 signed by the same root certificate as per Section 2.3.1, but the server certificate is revoked as indicated in stapled OCSP response - Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is disabled and CRL/OCSP servers are not available - Run 6: Same configuration as per Section 2.3.1, except stapled OCSP response has expired and CRL/OCSP servers are not available - Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher suite "eNULL" (no encryption) is enabled - Run 8: N/A (same configuration as per Section 2.3.1) Configure the AFC DUT with the AFC System URL and the following root certificate: - Runs 1-7: Root certificate as per Section 2.3.1 - Run 8: No root certificate Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum Inquiry Request is sent to it.
3	Steps 1 and 2 are repeated for each of the remaining Runs

3.5.2 Test Result

Refer as Appendix A



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Signal Analyzer	R&S	FSV3044	101320	9kHz ~ 44GHz	Aug. 07, 2025	Aug. 06, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	Titan	2 Way	DV-8G -10	2GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	MTJ	2 Way	DF01-DV03	1GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	MTJ	2 Way	DF01-DV02	1GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission	3.8 dB	Confidence levels of 95%

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP with Proxy
DUT Vendor Name	Extreme Networks
DUT Product Model	AP5022FX

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1 (Unsuccessful server validation)	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Channel_320MHz_10714_1 (Successful registration and spectrum access request)	PASS

15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(9) (i)	CT_AFC_SP_AP_AFCDUAU34_Channel_10624_1 (Unsuccessful spectrum access update)	PASS
15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(9) (i)	CT_AFC_SP_AP_AFCDUAU33_Channel_10623_1 (Successful spectrum access update)	PASS
15.407(k)(1), 15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(8) (iii)	CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1 (Unsuccessful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(8) (iii), 15.407(l) (ii), 15.407(k) (8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Channel_160MHz_10621_1 (Successful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(8) (iii), 15.407(l) (ii), 15.407(k) (8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Channel_80MHz_10620_1 (Successful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(8) (iii), 15.407(l) (ii), 15.407(k) (8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Channel_40MHz_10619_1 (Successful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8) (i), 15.407(k) (8)(ii), 15.407(k)(8) (iii), 15.407(l) (ii), 15.407(k) (8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Channel_20MHz_10618_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
-------------------	-------------	-------	-------------------

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS
--------------------------------------	---	-------	------

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1
(Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1
(Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1
(Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1 (Unsuccessful

server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_Channel_320MHz_10714_1 (Successful registration and spectrum access request)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (32.2 dBm EIRP) on channel center frequency index 31	true	PASS

	bandwidth 320.		
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (23.7 dBm EIRP) on channel center frequency index 63 bandwidth 320.	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDU34_Channel_10624_1 (Unsuccessful spectrum access update)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS

AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (36.0 dBm EIRP) on channel 5 bandwidth 20.	true	PASS
AFC_DUT_SP_OPERATION_NO_REQ	AFC DUT transmit with standard power in the band in no Spectrum Inquiry Request case	false	PASS

TestCaseName: CT_AFC_SP_AP_AFCDSAU33_Channel_10623_1 (Successful spectrum access update)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION_1	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS