

## RF Test Report

Applicant : Control4  
Product Type : 802.11ac 4x4 Wave 2 Access Point  
Trade Name : pakedge  
Model Number : WA-4200, WA-4200-1, WA-4200-C, WA-4200-C-1  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013  
Received Date : May 30, 2019  
Test Period : Aug. 07 ~ Nov. 14, 2019  
Issued Date : Nov. 21, 2019

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Test Firm MRA designation number: TW0010

#### **Note:**

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



### **Revision History**

| Rev. | Issued Date   | Revisions                                                                                      | Revised By  |
|------|---------------|------------------------------------------------------------------------------------------------|-------------|
| 00   | Oct. 01, 2019 | Initial Issue                                                                                  | Tobey Cheng |
| 01   | Nov. 21, 2019 | 1.Removed EUT modify description.<br>2.Retest conducted and radiated emission<br>(above 1GHz). | Nina Lin    |
|      |               |                                                                                                |             |
|      |               |                                                                                                |             |

## Verification of Compliance

Issued Date: Nov. 21, 2019

Applicant : Control4

Product Type : 802.11ac 4x4 Wave 2 Access Point

Trade Name : pakedge

Model Number : WA-4200, WA-4200-1, WA-4200-C, WA-4200-C-1

FCC ID : R33WA4200

EUT Rated Voltage : DC 12 V, 2 A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By  
(Manager)

: Fly Lu  
(Fly Lu)

Reviewed By

(Testing Engineer)

: Ken Yang  
(Ken Yang)

## TABLE OF CONTENTS

|          |                                                   |           |
|----------|---------------------------------------------------|-----------|
| <b>1</b> | <b>General Information .....</b>                  | <b>5</b>  |
| 1.1.     | Summary of Test Result.....                       | 5         |
| 1.2.     | Measurement Uncertainty.....                      | 6         |
| <b>2</b> | <b>EUT Description .....</b>                      | <b>7</b>  |
| <b>3</b> | <b>Test Methodology .....</b>                     | <b>9</b>  |
| 3.1.     | Mode of Operation.....                            | 9         |
| 3.2.     | EUT Test Step.....                                | 14        |
| 3.3.     | Configuration of Test System Details .....        | 15        |
| 3.4.     | Test Instruments .....                            | 17        |
| 3.5.     | Test Site Environment.....                        | 18        |
| <b>4</b> | <b>Measurement Procedure .....</b>                | <b>19</b> |
| 4.1.     | AC Power Line Conducted Emission Measurement..... | 19        |
| 4.2.     | Radiated Emission Measurement .....               | 21        |
| 4.3.     | Maximum Conducted Output Power Measurement.....   | 25        |
| 4.4.     | 6 dB RF Bandwidth Measurement .....               | 26        |
| 4.5.     | Maximum Power Spectral Density Measurement.....   | 27        |
| 4.6.     | Out of Band Conducted Emissions Measurement ..... | 28        |
| 4.7.     | Antenna Measurement .....                         | 29        |
| <b>5</b> | <b>Test Results.....</b>                          | <b>31</b> |
|          | Annex A. Conducted Emission .....                 | 31        |
|          | Annex B. Conducted Test Results .....             | 33        |
|          | Annex C. Radiated Emission Measurement .....      | 162       |



## 1 General Information

### 1.1. Summary of Test Result

| Standard     | Item                                    | Result | Remark |
|--------------|-----------------------------------------|--------|--------|
| 15.207       | AC Power Conducted Emission             | PASS   | -----  |
| 15.247(d)    | Transmitter Radiated Emissions          | PASS   | -----  |
| 15.247(b)(3) | Max. Output Power                       | PASS   | -----  |
| 15.247(a)(2) | 6 dB RF Bandwidth                       | PASS   | -----  |
| 15.247(e)    | Maximum Power Spectral Density          | PASS   | -----  |
| 15.247(d)    | Out of Band Conducted Spurious Emission | PASS   | -----  |
| 15.203       | Antenna Requirement                     | PASS   | -----  |

| Standard                                      | Description                                                                                                                                                                              |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CFR47, Part 15, Subpart C                     | Intentional Radiators                                                                                                                                                                    |
| ANSI C63. 10: 2013                            | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                                           |
| KDB 558074 D01 15.247<br>Meas Guidance v05r02 | GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES |
| KDB 662911 D01 v02r01                         | Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)                                                                                |

## 1.2. Measurement Uncertainty

| Test Item              | Frequency Range       | Uncertainty (dB) |
|------------------------|-----------------------|------------------|
| Conducted Emission     | 150 kHz ~ 30 MHz      | 2.8              |
| Radiated Emission      | 9 kHz ~ 30 MHz        | 1.7              |
|                        | 30 MHz ~ 1000 MHz     | 5.7              |
|                        | 1000 MHz ~ 18000 MHz  | 5.6              |
|                        | 18000 MHz ~ 26500 MHz | 4.9              |
|                        | 26500 MHz ~ 40000 MHz | 4.8              |
| Conducted Output Power | +0.27 dB / -0.28 dB   |                  |
| RF Bandwidth           | 4.96 %                |                  |
| Power Spectral Density | +0.71 dB / -0.77 dB   |                  |

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.



## 2 EUT Description

|                                        |                                                                        |                     |                    |                             |
|----------------------------------------|------------------------------------------------------------------------|---------------------|--------------------|-----------------------------|
| Applicant                              | Control4<br>11734 S. Election Road, Draper, Utah, 84020, United States |                     |                    |                             |
| Manufacturer                           | Control4<br>11734 S. Election Road, Draper, Utah, 84020, United States |                     |                    |                             |
| Product Type                           | 802.11ac 4x4 Wave 2 Access Point                                       |                     |                    |                             |
| Trade Name                             | pakedge                                                                |                     |                    |                             |
| Model Number                           | WA-4200, WA-4200-1, WA-4200-C, WA-4200-C-1                             |                     |                    |                             |
| Difference description of model number | Difference is due to selling region.                                   |                     |                    |                             |
| FCC ID                                 | R33WA4200                                                              |                     |                    |                             |
| Operate Freq. Band                     | Frequency Range (MHz)                                                  | Modulation          | Channel Bandwidth  | Data Rate 400 / 800 GI (ns) |
| IEEE 802.11b                           | 2412 ~ 2462                                                            | DSSS                | 20 MHz             | Up to 11 Mbps               |
| IEEE 802.11g                           | 2412 ~ 2462                                                            | OFDM                | 20 MHz             | Up to 54 Mbps               |
| IEEE 802.11n 2.4 GHz 20 MHz            | 2412 ~ 2462                                                            | OFDM (64QAM/256QAM) | 20 MHz             | Up to 346.8 Mbps            |
| IEEE 802.11n 2.4 GHz 40 MHz            | 2422 ~ 2452                                                            | OFDM (64QAM/256QAM) | 40 MHz             | Up to 800 Mbps              |
| Antenna information                    | ANT                                                                    | Model Number        | Type               | Max. Gain (dBi)             |
|                                        | ANT-0                                                                  | 5718A0346300        | Metal PIFA Antenna | 2.86                        |
|                                        | ANT-1                                                                  | 5718A0347300        | Metal PIFA Antenna | 3.12                        |
|                                        | ANT-2                                                                  | 5718A0348300        | Metal PIFA Antenna | 3.14                        |
|                                        | ANT-3                                                                  | 5718A0349300        | Metal PIFA Antenna | 3.29                        |
| Antenna Delivery                       | See section 3.1                                                        |                     |                    |                             |
| Operate Temp. Range                    | 0 ~ +50 °C                                                             |                     |                    |                             |



| Frequency Band                       | Max. RF Output Power (W) |
|--------------------------------------|--------------------------|
| IEEE 802.11b                         | 0.227                    |
| IEEE 802.11g                         | 0.155                    |
| IEEE 802.11n 2.4 GHz 20 MHz (64QAM)  | 0.139                    |
| IEEE 802.11n 2.4 GHz 40 MHz (64QAM)  | 0.164                    |
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 0.142                    |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 0.167                    |

Beamforming on

| Frequency Band                       | Max. RF Output Power (W) |
|--------------------------------------|--------------------------|
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 0.030                    |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 0.035                    |

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode                                                       |
|-----------------------------------------------------------------|
| Mode 1: Transmit mode                                           |
| Mode 2: IEEE 802.11b Continuous TX mode                         |
| Mode 3: IEEE 802.11g Continuous TX mode                         |
| Mode 4: IEEE 802.11n 2.4 GHz 20 MHz (64QAM) Continuous TX mode  |
| Mode 5: IEEE 802.11n 2.4 GHz 40 MHz (64QAM) Continuous TX mode  |
| Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode |
| Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode |

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

Note: Investigation has been done on all the possible configurations for searching the worst cases (256QAM covers 64QAM). The table is a list of the test modes show in this test report.

| Test Mode | ANT-0 | ANT-1 | ANT-2 | ANT-3 | ANT-0+1+2+3 |
|-----------|-------|-------|-------|-------|-------------|
| Mode 2    | V     | V     | V     | V     | V           |
| Mode 3    | V     | V     | V     | V     | V           |
| Mode 4    | V     | V     | V     | V     | V           |
| Mode 5    | V     | V     | V     | V     | V           |
| Mode 6    | V     | V     | V     | V     | V           |
| Mode 7    | V     | V     | V     | V     | V           |

| Test Mode | Antenna Delivery          | Data Rate (Mbps) | Test Channel |
|-----------|---------------------------|------------------|--------------|
| Mode 2    | 4TX (CDD)                 | 1                | 1, 6, 11     |
| Mode 3    | 4TX (CDD)                 | 6                | 1, 6, 11     |
| Mode 4    | 4TX (STBC)                | 26               | 1, 6, 11     |
| Mode 5    | 4TX (STBC)                | 54               | 3, 6, 9      |
| Mode 6    | 4TX (STBC/Beamforming on) | 26               | 1, 6, 11     |
| Mode 7    | 4TX (STBC/Beamforming on) | 54               | 3, 6, 9      |



**Duty cycle**

| Test Mode | Frequency (MHz) | on time (ms) | on+off time (ms) | Duty cycle | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|-----------|-----------------|--------------|------------------|------------|------------------|-----------------------|
| Mode 2    | 2412.0          | 10.000       | 10.000           | 1.000      | 0.000            | 0.010                 |
| Mode 3    | 2412.0          | 2.080        | 2.130            | 0.977      | 0.103            | 0.481                 |
| Mode 6    | 2412.0          | 5.040        | 5.085            | 0.991      | 0.039            | 0.010                 |
| Mode 7    | 2422.0          | 2.460        | 2.510            | 0.980      | 0.087            | 0.010                 |

**Beamforming on**

| Test Mode | Frequency (MHz) | on time (ms) | on+off time (ms) | Duty cycle | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|-----------|-----------------|--------------|------------------|------------|------------------|-----------------------|
| Mode 6    | 2412.0          | 5.040        | 5.085            | 0.991      | 0.039            | 0.010                 |
| Mode 7    | 2422.0          | 2.460        | 2.510            | 0.980      | 0.087            | 0.010                 |




## Duty Cycle Graphs

### Mode 2: IEEE 802.11b Continuous TX mode




### Mode 3: IEEE 802.11g Continuous TX mode

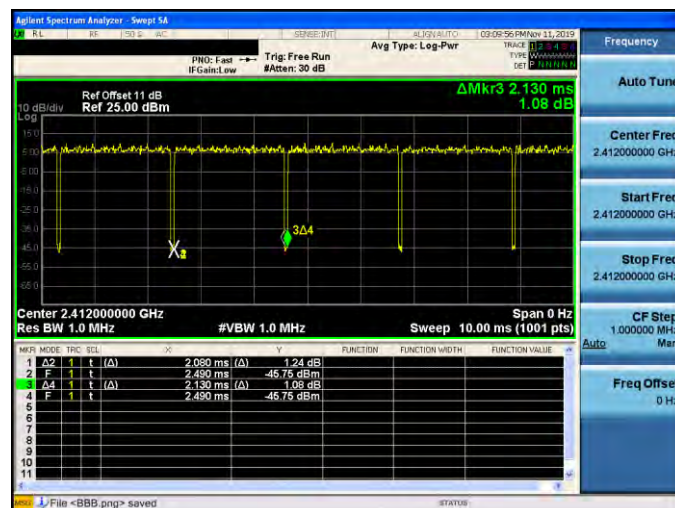




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode

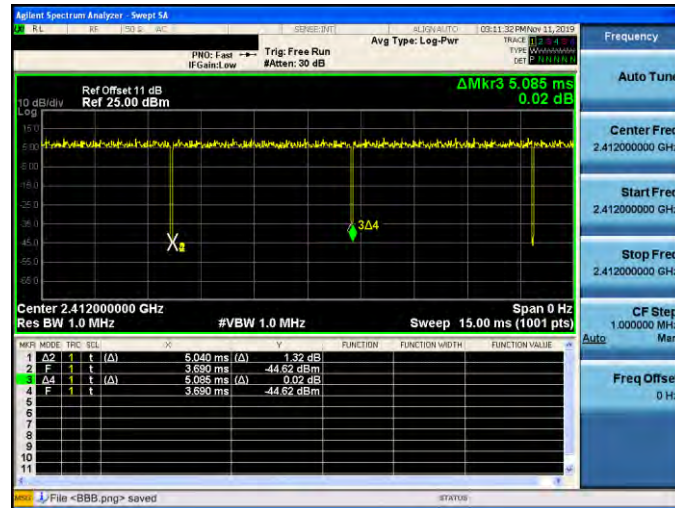


Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode

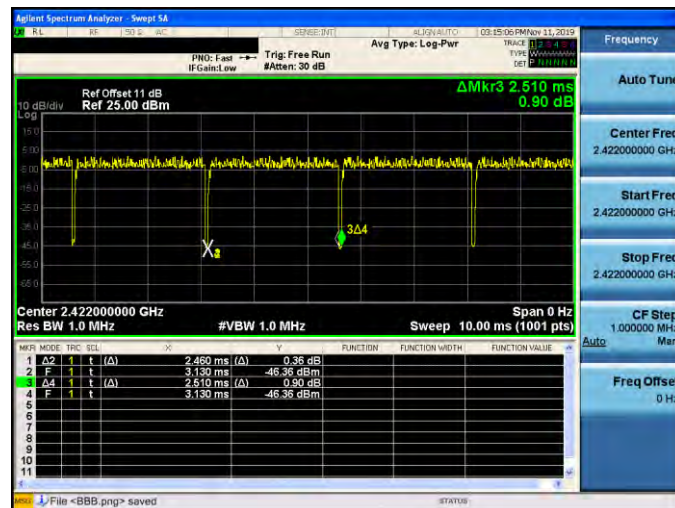


Beamforming on

Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode

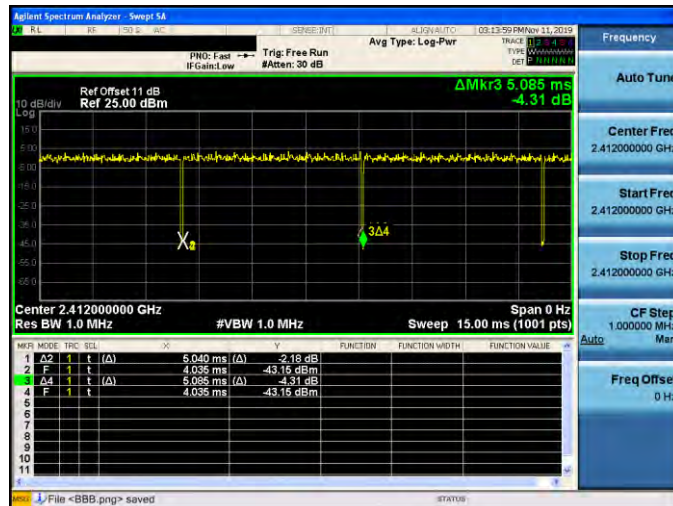

Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode

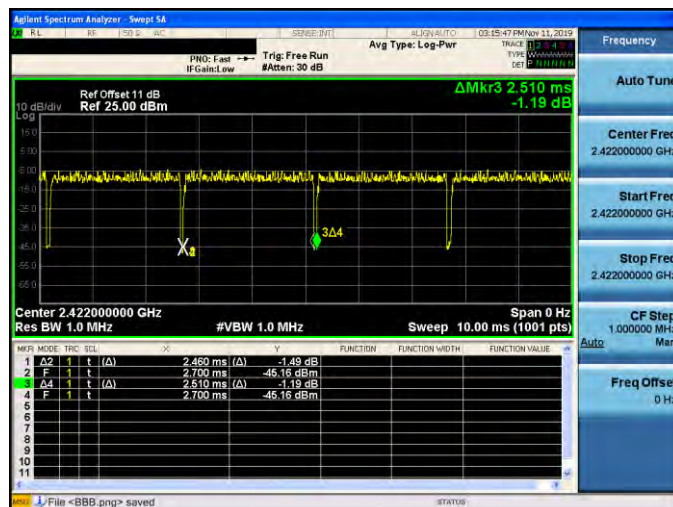


### 3.2. EUT Test Step

|    |                                                                |
|----|----------------------------------------------------------------|
| 1. | Setup the EUT shown on “Configuration of Test System Details”. |
| 2. | Turn on the power of all equipment.                            |
| 3. | Turn on TX function                                            |
| 4. | EUT run test program.                                          |


| Measurement Software |                    |          |         |
|----------------------|--------------------|----------|---------|
| No.                  | Description        | Software | Version |
| 1                    | Conducted Emission | EZ EMC   | 1.1.4.3 |
| 2                    | Radiated Emission  | EZ EMC   | 1.1.4.4 |

### 3.3. Configuration of Test System Details

Conducted Emissions

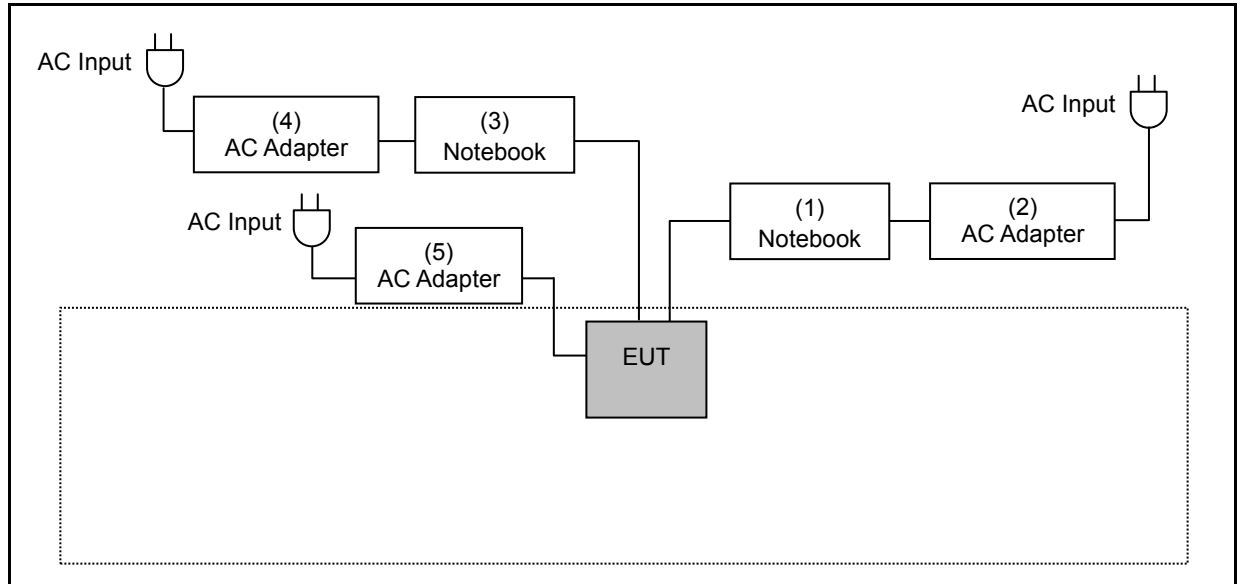

Radiated Emission

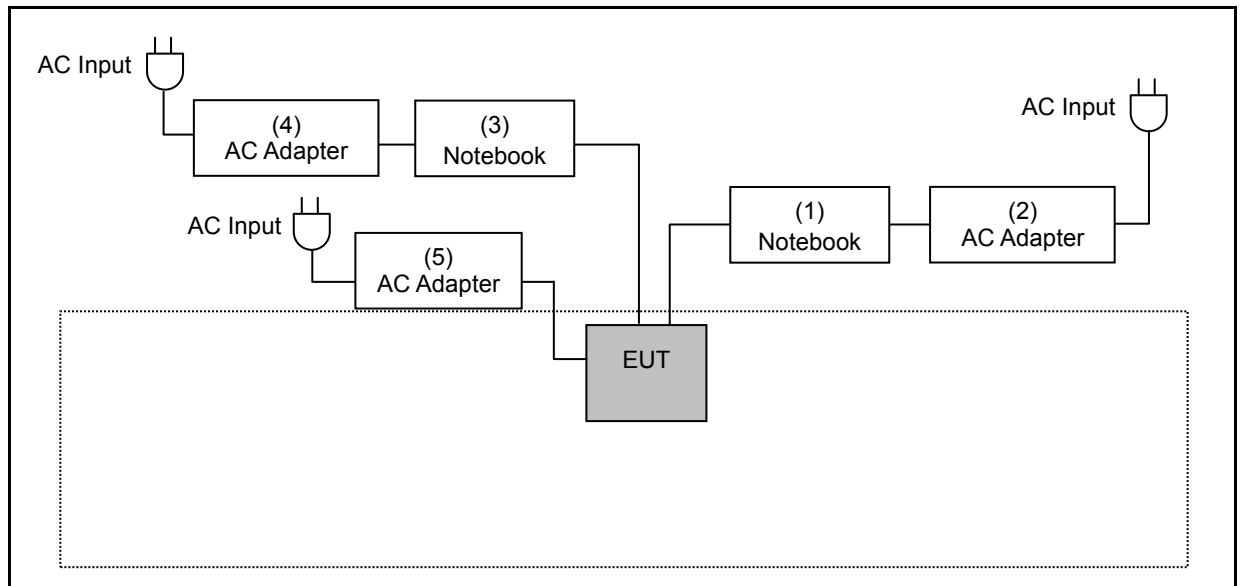

| Devices Description |            |              |                  |               |                                                       |
|---------------------|------------|--------------|------------------|---------------|-------------------------------------------------------|
|                     | Product    | Manufacturer | Model Number     | Serial Number | Remark                                                |
| (1)                 | Notebook   | HP           | PROBOOK 4421s    | CNF1182X1G    | ---                                                   |
| (2)                 | AC Adapter | HP           | Series PPP012H-S | ---           | Non-Shielded, 1.7 m                                   |
| (3)                 | Notebook   | DELL         | LATITUDE E5440   | BRTQXY1       | ---                                                   |
| (4)                 | AC Adapter | DELL         | HA65NM130        | ---           | Non-Shielded, 0.8 m                                   |
| (5)                 | AC Adapter | APD          | WB-24J12R        | ---           | I/P: 100-240 VAC, 50-60 Hz, 0.7 A<br>O/P: 12 VDC, 2 A |
| (6)                 | AC Adapter | APD          | WB-24J12FU       | ---           | I/P: 100-240 VAC, 50-60 Hz, 0.7 A<br>O/P: 12 VDC, 2 A |

Note : The device used two models of adapter, adapter number: WB-24J12R is worst case to perform testing.



### 3.4. Test Instruments

For Conducted Emission

Test Period: Aug. 07, 2019

| Equipment     | Manufacturer | Model Number   | Serial Number | Cal. Date  | Cal. Period |
|---------------|--------------|----------------|---------------|------------|-------------|
| Test Receiver | R&S          | ESCI           | 100367        | 05/23/2019 | 1 year      |
| LISN          | R&S          | ENV216         | 101040        | 04/03/2019 | 1 year      |
| LISN          | R&S          | ENV216         | 101041        | 03/28/2019 | 1 year      |
| RF Cable      | Woken        | 00100D1380194M | TE-02-03      | 05/23/2019 | 1 year      |

For Radiated Emissions

Test Period: Nov. 07 ~ Nov. 08, 2019

| Equipment                           | Manufacturer                   | Model Number           | Serial Number | Cal. Date  | Cal. Period |
|-------------------------------------|--------------------------------|------------------------|---------------|------------|-------------|
| Spectrum Analyzer<br>(10 Hz~44 GHz) | Keysight                       | N9010A                 | MY52221312    | 01/14/2019 | 1 year      |
| Pre Amplifier<br>(1~26.5 GHz)       | Agilent                        | 8449B                  | 3008A02237    | 10/18/2019 | 1 year      |
| Pre Amplifier<br>(100 kHz~1.3 GHz)  | Agilent                        | 8447D                  | 2944A11119    | 01/14/2019 | 1 year      |
| Broadband Antenna                   | Schwarzbeck                    | VULB9168               | 416           | 10/23/2019 | 1 year      |
| Horn Antenna<br>(1~18 GHz)          | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA9120D              | 9120D-550     | 08/22/2019 | 1 year      |
| Horn Antenna<br>(18~40 GHz)         | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA9170               | 9170-320      | 08/14/2019 | 1 year      |
| Loop Antenna                        | COM-POWER<br>CORPORATION       | AL-130                 | 121014        | 03/29/2019 | 1 year      |
| RF Cable                            | EMCI                           | EMC104-N-N-6000        | TE01-1        | 02/20/2019 | 1 year      |
| Microwave Cable                     | EMCI                           | EMC104-SM-SM-1<br>3000 | 170814        | 10/29/2019 | 1 year      |
| Microwave Cable                     | EMCI                           | EMC102-KM-KM-1<br>4000 | 151001        | 02/20/2019 | 1 year      |

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Nov. 11 ~ Nov. 14, 2019

| Equipment                             | Manufacturer | Model Number | Serial Number | Cal. Date  | Cal. Period |
|---------------------------------------|--------------|--------------|---------------|------------|-------------|
| Spectrum Analyzer<br>(20 Hz~26.5 GHz) | Agilent      | N9020A       | US47520902    | 09/18/2019 | 1 year      |
| Power Sensor                          | Anritsu      | MA2411B      | 1126022       | 09/03/2019 | 1 year      |
| Power Meter                           | Anritsu      | ML2495A      | 1135009       | 09/03/2019 | 1 year      |

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

| Items                      | Required (IEC 60068-1) | Actual |
|----------------------------|------------------------|--------|
| Temperature (°C)           | 15-35                  | 26     |
| Humidity (%RH)             | 25-75                  | 60     |
| Barometric pressure (mbar) | 860-1060               | 990    |


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

#### ■ Limit

| Frequency (MHz) | Quasi-peak | Average  |
|-----------------|------------|----------|
| 0.15 - 0.5      | 66 to 56   | 56 to 46 |
| 0.50 - 5.0      | 56         | 46       |
| 5.0 - 30.0      | 60         | 50       |

#### ■ Test Setup

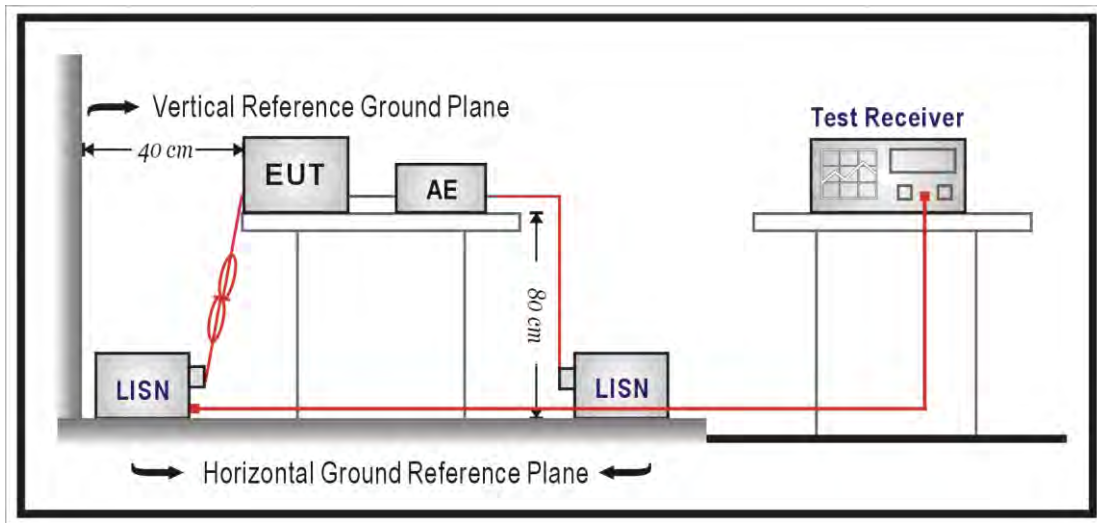

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ at meter) | Measurement Distance (meters) |
|-----------------|--------------------------------------------|-------------------------------|
| 0.009 – 0.490   | $2400 / F$ (kHz)                           | 300                           |
| 0.490 – 1.705   | $24000 / F$ (kHz)                          | 30                            |
| 1.705 – 30.0    | 30                                         | 30                            |
| 30 - 88         | 100**                                      | 3                             |
| 88-216          | 150**                                      | 3                             |
| 216-960         | 200**                                      | 3                             |
| Above 960       | 500                                        | 3                             |


\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ■ Setup


9 kHz ~ 30 MHz

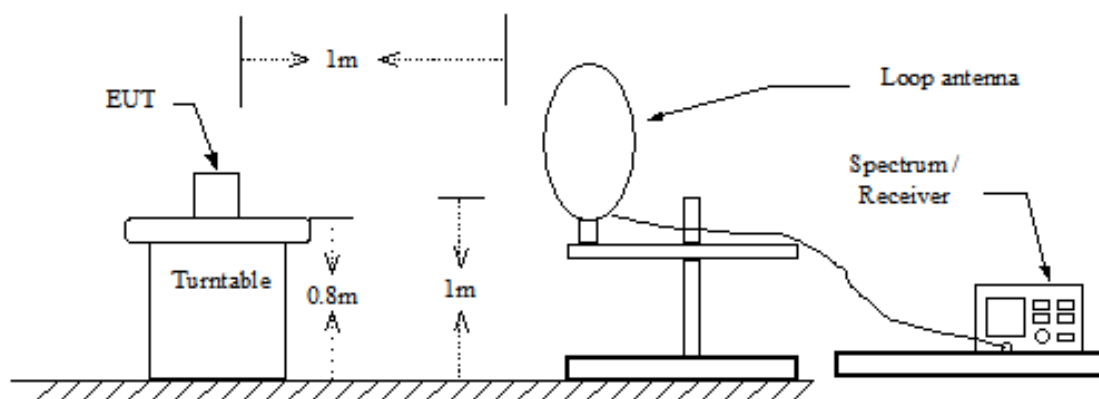

Below 1 GHz

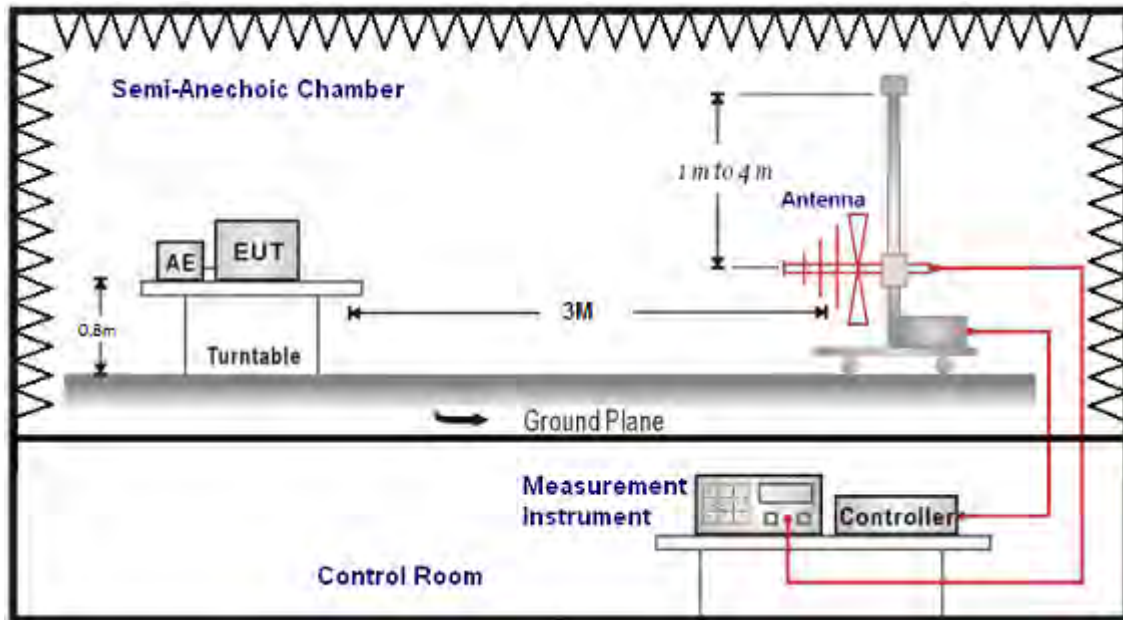

Above 1 GHz

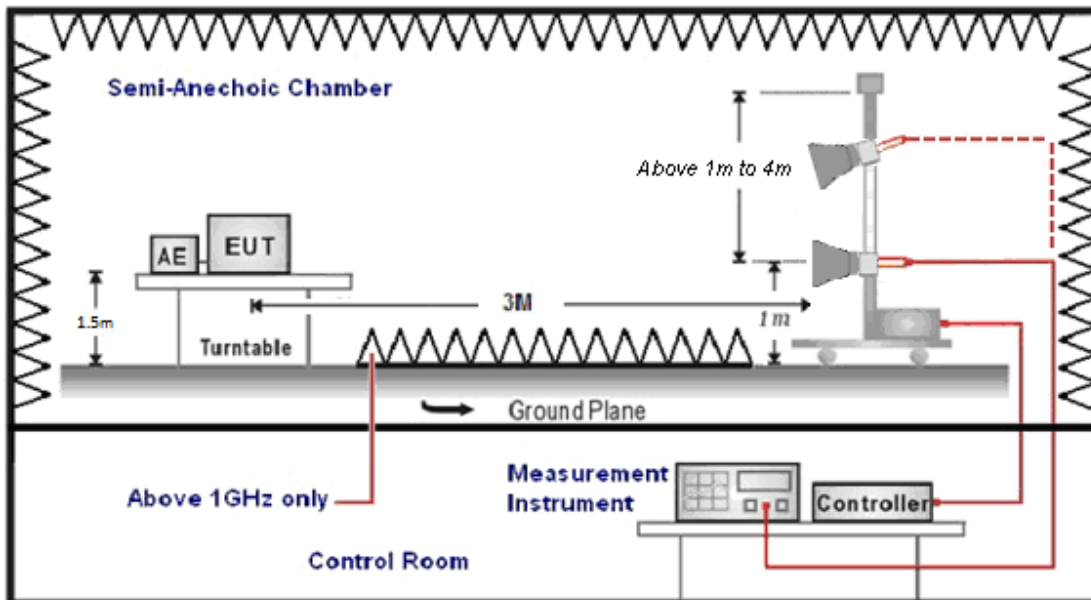

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle  $>0.98$  /  $1/T$  for average measurements when Duty cycle  $<0.98$ . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

### 4.3. Maximum Conducted Output Power Measurement

#### ■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IEEE 802.11b / IEEE 802.11g / IEEE 802.11n 2.4 GHz 20 MHz (64QAM) / IEEE 802.11n 2.4 GHz 40 MHz (64QAM) / IEEE 802.11n 2.4 GHz 20 MHz (256QAM) / IEEE 802.11n 2.4 GHz 40 MHz (256QAM)

\* Directional =  $G_{ANT}$  : 3.11 dBi > 6 dBi


Beamforming on :

IEEE 802.11n 2.4 GHz 20 MHz (256QAM) / IEEE 802.11n 2.4 GHz 40 MHz (256QAM)

\* Directional Gain =  $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$  = 9.12 dBi > 6 dBi

\* Power Limit = 30 - 3.12 = 26.88 dBm

#### ■ Test Setup

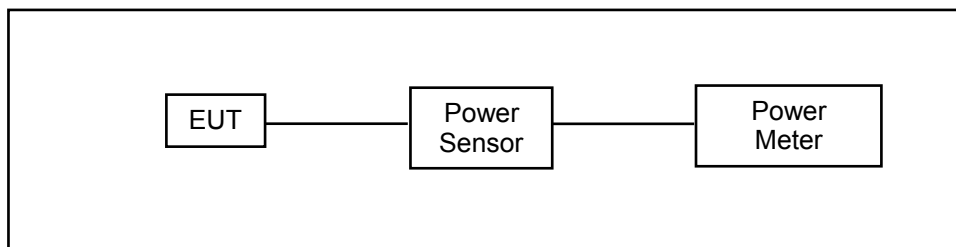

#### ■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

#### 4.4. 6 dB RF Bandwidth Measurement

##### ■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

##### ■ Test Setup

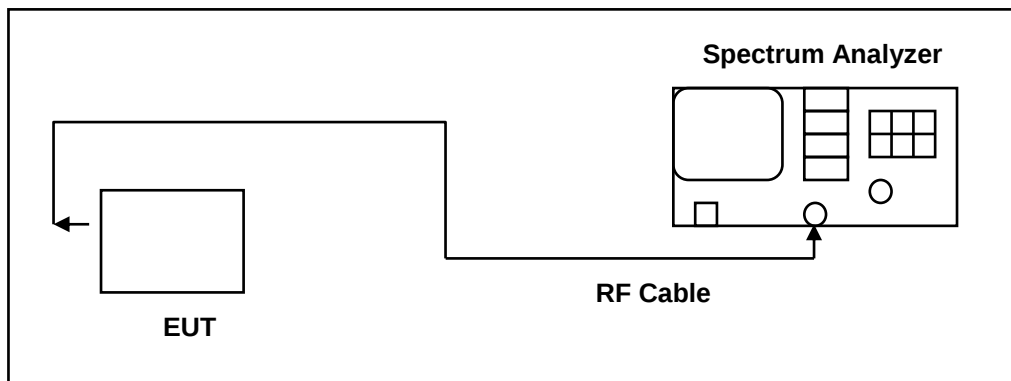

##### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

## 4.5. Maximum Power Spectral Density Measurement

### ■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

IEEE 802.11b / IEEE 802.11g

\* Directional Gain =  $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 9.12 \text{ dBi} > 6 \text{ dBi}$

\* Conducted Power Spectral Density Limit =  $8 - 3.12 = 4.88 \text{ dBm/MHz}$

IEEE 802.11n 2.4 GHz 20 MHz (256QAM) / IEEE 802.11n 2.4 GHz 40 MHz (256QAM)

\* Directional Gain =  $10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 3.11 \text{ dBi} < 6 \text{ dBi}$

\* Conducted Power Spectral Density Limit = 8 dBm/MHz


Beamforming on :

IEEE 802.11n 2.4 GHz 20 MHz (256QAM) / IEEE 802.11n 2.4 GHz 40 MHz (256QAM)

\* Directional Gain =  $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 9.12 \text{ dBi} > 6 \text{ dBi}$

\* Conducted Power Spectral Density Limit =  $8 - 3.12 = 4.88 \text{ dBm/MHz}$

### ■ Test Setup

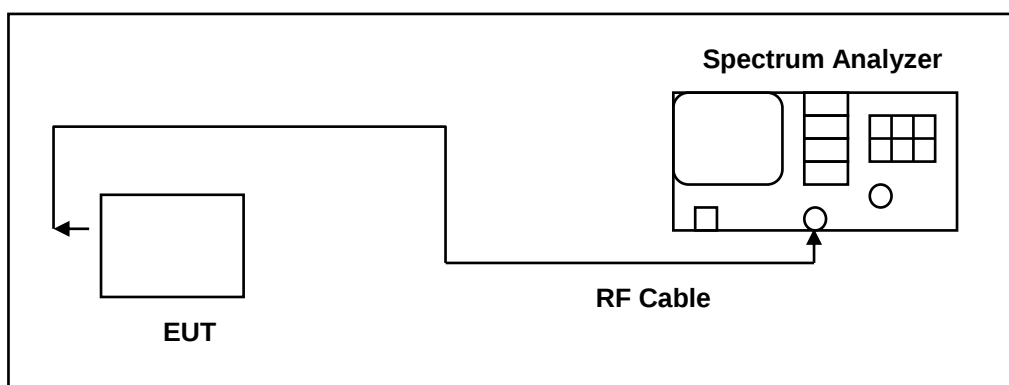

### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 4.6. Out of Band Conducted Emissions Measurement

### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### ■ Test Setup

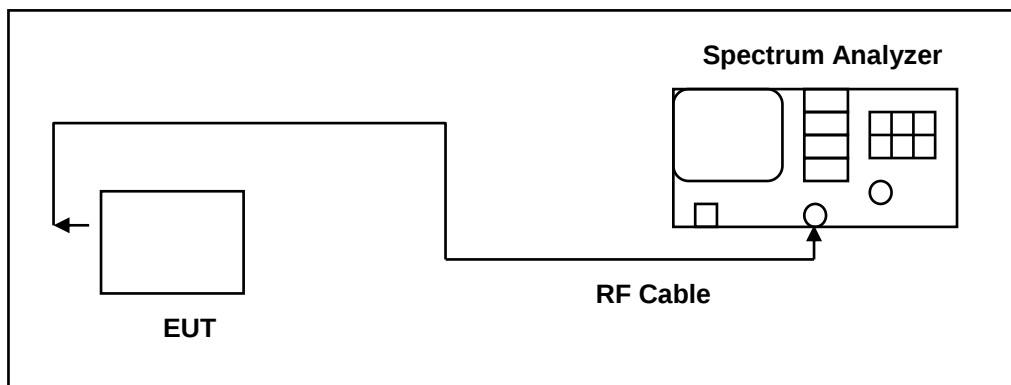

### ■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

## 4.7. Antenna Measurement

### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ■ Antenna Description

See section 2 – antenna information.

### ■ Directional Gain Calculated

For Maximum Conducted Output Power

| Operate Freq. Band                   | Directional Gain (dBi) |
|--------------------------------------|------------------------|
| IEEE 802.11b                         | 3.11                   |
| IEEE 802.11g                         | 3.11                   |
| IEEE 802.11n 2.4 GHz 20 MHz (64QAM)  | 3.11                   |
| IEEE 802.11n 2.4 GHz 40 MHz (64QAM)  | 3.11                   |
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 3.11                   |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 3.11                   |

|                |
|----------------|
| Beamforming on |
|----------------|

| Operate Freq. Band                   | Directional Gain (dBi) |
|--------------------------------------|------------------------|
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 9.12                   |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 9.12                   |



**For Maximum Power Density**

| Operate Freq. Band                   | Directional Gain<br>(dBi) |
|--------------------------------------|---------------------------|
| IEEE 802.11b                         | 9.12                      |
| IEEE 802.11g                         | 9.12                      |
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 3.11                      |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 3.11                      |


Beamforming on

| Operate Freq. Band                   | Directional Gain<br>(dBi) |
|--------------------------------------|---------------------------|
| IEEE 802.11n 2.4 GHz 20 MHz (256QAM) | 9.12                      |
| IEEE 802.11n 2.4 GHz 40 MHz (256QAM) | 9.12                      |

## 5 Test Results

### Annex A. Conducted Emission


|              |                    |                      |                |
|--------------|--------------------|----------------------|----------------|
| Standard:    | FCC Part 15.247    | Line:                | L1             |
| Test item:   | Conducted Emission | Power:               | AC 120 V/60 Hz |
| Mode:        | Mode 1             | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH  |
| Description: |                    |                      |                |

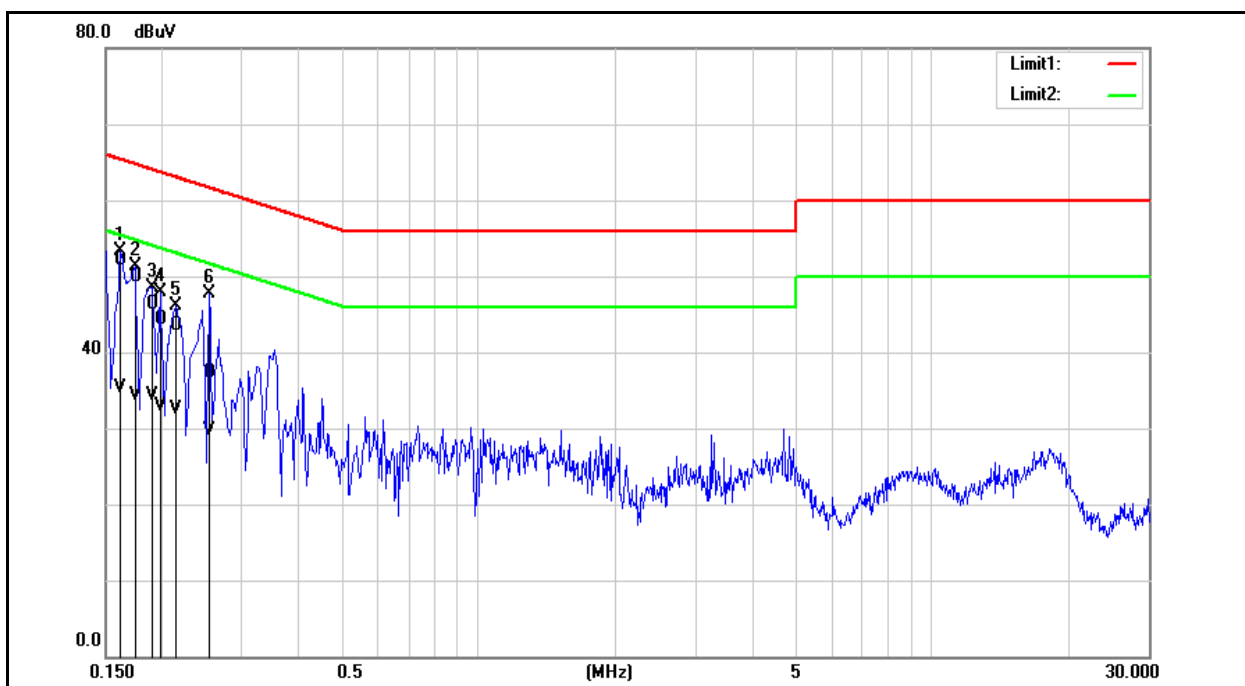

| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.1620          | 42.47             | 25.75              | 9.65                   | 52.12            | 35.40             | 65.36           | 55.36            | -13.24         | -19.96          | Pass   |
| 2   | 0.1740          | 40.27             | 24.61              | 9.65                   | 49.92            | 34.26             | 64.77           | 54.77            | -14.85         | -20.51          | Pass   |
| 3   | 0.1900          | 36.65             | 24.68              | 9.64                   | 46.29            | 34.32             | 64.04           | 54.04            | -17.75         | -19.72          | Pass   |
| 4   | 0.1980          | 34.76             | 23.25              | 9.64                   | 44.40            | 32.89             | 63.69           | 53.69            | -19.29         | -20.80          | Pass   |
| 5   | 0.2140          | 33.82             | 22.80              | 9.64                   | 43.46            | 32.44             | 63.05           | 53.05            | -19.59         | -20.61          | Pass   |
| 6   | 0.2540          | 27.73             | 20.08              | 9.64                   | 37.37            | 29.72             | 61.63           | 51.63            | -24.26         | -21.91          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

|              |                    |                      |                |
|--------------|--------------------|----------------------|----------------|
| Standard:    | FCC Part 15.247    | Line:                | N              |
| Test item:   | Conducted Emission | Power:               | AC 120 V/60 Hz |
| Mode:        | Mode 1             | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH  |
| Description: |                    |                      |                |

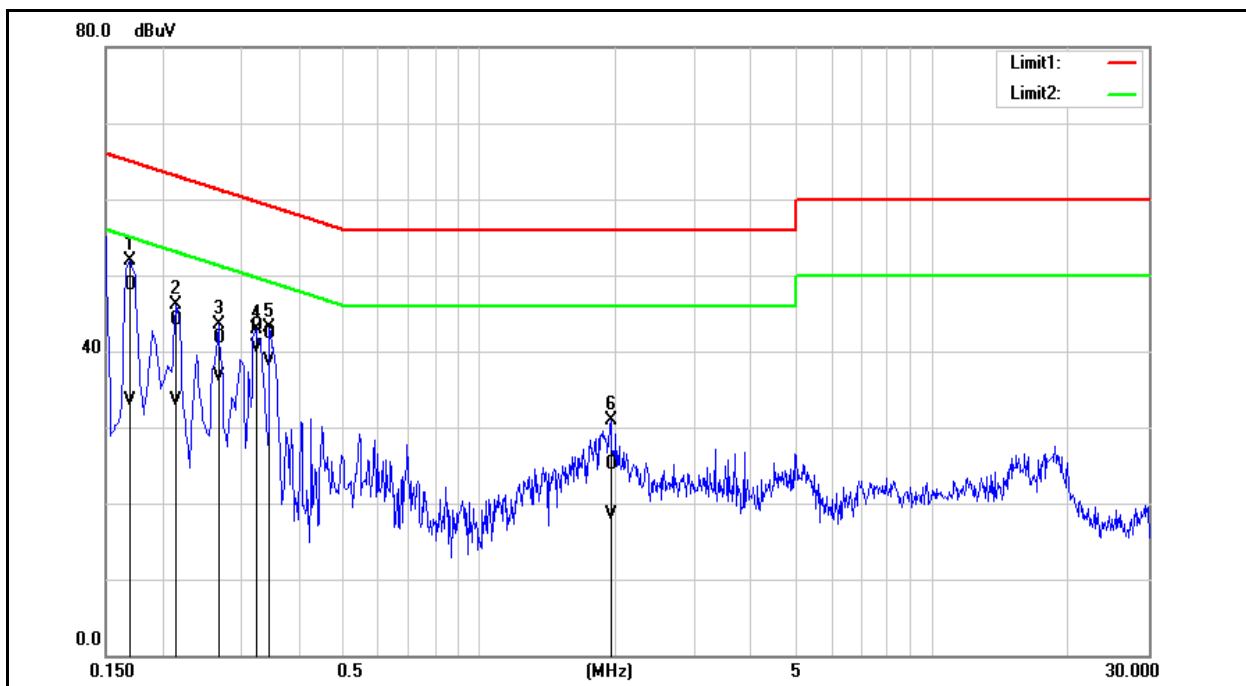

| No. | Frequency<br>(MHz) | QP<br>reading<br>(dBuV) | AVG<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QP<br>result<br>(dBuV) | AVG<br>result<br>(dBuV) | QP<br>limit<br>(dBuV) | AVG<br>limit<br>(dBuV) | QP<br>margin<br>(dB) | AVG<br>margin<br>(dB) | Remark |
|-----|--------------------|-------------------------|--------------------------|------------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|--------|
| 1   | 0.1700             | 38.95                   | 23.84                    | 9.68                         | 48.63                  | 33.52                   | 64.96                 | 54.96                  | -16.33               | -21.44                | Pass   |
| 2   | 0.2140             | 34.41                   | 23.88                    | 9.67                         | 44.08                  | 33.55                   | 63.05                 | 53.05                  | -18.97               | -19.50                | Pass   |
| 3   | 0.2660             | 32.07                   | 27.09                    | 9.67                         | 41.74                  | 36.76                   | 61.24                 | 51.24                  | -19.50               | -14.48                | Pass   |
| 4   | 0.3220             | 33.67                   | 30.77                    | 9.68                         | 43.35                  | 40.45                   | 59.66                 | 49.66                  | -16.31               | -9.21                 | Pass   |
| 5   | 0.3460             | 32.56                   | 29.07                    | 9.68                         | 42.24                  | 38.75                   | 59.06                 | 49.06                  | -16.82               | -10.31                | Pass   |
| 6   | 1.9500             | 15.35                   | 8.75                     | 9.75                         | 25.10                  | 18.50                   | 56.00                 | 46.00                  | -30.90               | -27.50                | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## Annex B. Conducted Test Results

### Maximum Conducted Output Power Measurement

| ANT-0     |                 |           |                      |       |       |
|-----------|-----------------|-----------|----------------------|-------|-------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |       |
|           |                 |           | Measurement Results  |       | Limit |
|           |                 |           | dBm                  | W     | dBm   |
| Mode 2    | 2412            | 1 M       | 17.01                | 0.050 | ≤ 30  |
|           | 2437            |           | 16.95                | 0.050 | ≤ 30  |
|           | 2462            |           | 17.21                | 0.053 | ≤ 30  |
| Mode 3    | 2412            | 6 M       | 15.45                | 0.035 | ≤ 30  |
|           | 2437            |           | 15.37                | 0.034 | ≤ 30  |
|           | 2462            |           | 15.05                | 0.032 | ≤ 30  |
| Mode 4    | 2412            | 26 M      | 15.02                | 0.032 | ≤ 30  |
|           | 2437            |           | 14.95                | 0.031 | ≤ 30  |
|           | 2462            |           | 13.44                | 0.022 | ≤ 30  |
| Mode 5    | 2422            | 54 M      | 13.24                | 0.021 | ≤ 30  |
|           | 2437            |           | 15.67                | 0.037 | ≤ 30  |
|           | 2452            |           | 12.83                | 0.019 | ≤ 30  |
| Mode 6    | 2412            | 26 M      | 15.11                | 0.032 | ≤ 30  |
|           | 2437            |           | 15.06                | 0.032 | ≤ 30  |
|           | 2462            |           | 13.57                | 0.023 | ≤ 30  |
| Mode 7    | 2422            | 54 M      | 13.32                | 0.021 | ≤ 30  |
|           | 2437            |           | 15.73                | 0.037 | ≤ 30  |
|           | 2452            |           | 12.98                | 0.020 | ≤ 30  |

Note: The relevant measured result has the offset with cable loss already.

| ANT-1     |                 |           |                      |       |       |
|-----------|-----------------|-----------|----------------------|-------|-------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |       |
|           |                 |           | Measurement Results  |       | Limit |
|           |                 |           | dBm                  | W     | dBm   |
| Mode 2    | 2412            | 1 M       | 17.56                | 0.057 | ≤ 30  |
|           | 2437            |           | 17.11                | 0.051 | ≤ 30  |
|           | 2462            |           | 17.76                | 0.060 | ≤ 30  |
| Mode 3    | 2412            | 6 M       | 15.62                | 0.036 | ≤ 30  |
|           | 2437            |           | 15.56                | 0.036 | ≤ 30  |
|           | 2462            |           | 15.46                | 0.035 | ≤ 30  |
| Mode 4    | 2412            | 26 M      | 15.11                | 0.032 | ≤ 30  |
|           | 2437            |           | 15.09                | 0.032 | ≤ 30  |
|           | 2462            |           | 13.03                | 0.020 | ≤ 30  |
| Mode 5    | 2422            | 54 M      | 13.47                | 0.022 | ≤ 30  |
|           | 2437            |           | 15.83                | 0.038 | ≤ 30  |
|           | 2452            |           | 13.03                | 0.020 | ≤ 30  |
| Mode 6    | 2412            | 26 M      | 15.21                | 0.033 | ≤ 30  |
|           | 2437            |           | 15.18                | 0.033 | ≤ 30  |
|           | 2462            |           | 14.12                | 0.026 | ≤ 30  |
| Mode 7    | 2422            | 54 M      | 13.58                | 0.023 | ≤ 30  |
|           | 2437            |           | 15.92                | 0.039 | ≤ 30  |
|           | 2452            |           | 13.14                | 0.021 | ≤ 30  |

Note: The relevant measured result has the offset with cable loss already.

| ANT-2     |                 |           |                      |       |       |
|-----------|-----------------|-----------|----------------------|-------|-------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |       |
|           |                 |           | Measurement Results  |       | Limit |
|           |                 |           | dBm                  | W     | dBm   |
| Mode 2    | 2412            | 1 M       | 18.06                | 0.064 | ≤ 30  |
|           | 2437            |           | 17.95                | 0.062 | ≤ 30  |
|           | 2462            |           | 17.62                | 0.058 | ≤ 30  |
| Mode 3    | 2412            | 6 M       | 16.47                | 0.044 | ≤ 30  |
|           | 2437            |           | 16.26                | 0.042 | ≤ 30  |
|           | 2462            |           | 15.85                | 0.038 | ≤ 30  |
| Mode 4    | 2412            | 26 M      | 15.98                | 0.040 | ≤ 30  |
|           | 2437            |           | 15.74                | 0.037 | ≤ 30  |
|           | 2462            |           | 14.25                | 0.027 | ≤ 30  |
| Mode 5    | 2422            | 54 M      | 14.37                | 0.027 | ≤ 30  |
|           | 2437            |           | 16.88                | 0.049 | ≤ 30  |
|           | 2452            |           | 13.71                | 0.023 | ≤ 30  |
| Mode 6    | 2412            | 26 M      | 16.09                | 0.041 | ≤ 30  |
|           | 2437            |           | 15.89                | 0.039 | ≤ 30  |
|           | 2462            |           | 14.35                | 0.027 | ≤ 30  |
| Mode 7    | 2422            | 54 M      | 14.43                | 0.028 | ≤ 30  |
|           | 2437            |           | 16.94                | 0.049 | ≤ 30  |
|           | 2452            |           | 13.78                | 0.024 | ≤ 30  |

Note: The relevant measured result has the offset with cable loss already.

| ANT-3     |                 |           |                      |       |       |
|-----------|-----------------|-----------|----------------------|-------|-------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |       |
|           |                 |           | Measurement Results  |       | Limit |
|           |                 |           | dBm                  | W     | dBm   |
| Mode 2    | 2412            | 1 M       | 17.16                | 0.052 | ≤ 30  |
|           | 2437            |           | 17.18                | 0.052 | ≤ 30  |
|           | 2462            |           | 17.52                | 0.056 | ≤ 30  |
| Mode 3    | 2412            | 6 M       | 15.93                | 0.039 | ≤ 30  |
|           | 2437            |           | 15.85                | 0.038 | ≤ 30  |
|           | 2462            |           | 15.73                | 0.037 | ≤ 30  |
| Mode 4    | 2412            | 26 M      | 15.44                | 0.035 | ≤ 30  |
|           | 2437            |           | 15.43                | 0.035 | ≤ 30  |
|           | 2462            |           | 14.22                | 0.026 | ≤ 30  |
| Mode 5    | 2422            | 54 M      | 13.53                | 0.023 | ≤ 30  |
|           | 2437            |           | 16.05                | 0.040 | ≤ 30  |
|           | 2452            |           | 13.31                | 0.021 | ≤ 30  |
| Mode 6    | 2412            | 26 M      | 15.51                | 0.036 | ≤ 30  |
|           | 2437            |           | 15.54                | 0.036 | ≤ 30  |
|           | 2462            |           | 14.35                | 0.027 | ≤ 30  |
| Mode 7    | 2422            | 54 M      | 13.66                | 0.023 | ≤ 30  |
|           | 2437            |           | 16.14                | 0.041 | ≤ 30  |
|           | 2452            |           | 13.43                | 0.022 | ≤ 30  |

Note: The relevant measured result has the offset with cable loss already.

| ANT-0+1+2+3 |                 |           |                      |              |       |
|-------------|-----------------|-----------|----------------------|--------------|-------|
| Test Mode   | Frequency (MHz) | Data Rate | Average Output Power |              |       |
|             |                 |           | Measurement Results  |              | Limit |
|             |                 |           | dBm                  | W            | dBm   |
| Mode 2      | 2412            | 1 M       | 23.49                | 0.223        | ≤ 30  |
|             | 2437            |           | 23.34                | 0.216        | ≤ 30  |
|             | 2462            |           | <b>23.55</b>         | <b>0.227</b> | ≤ 30  |
| Mode 3      | 2412            | 6 M       | <b>21.91</b>         | <b>0.155</b> | ≤ 30  |
|             | 2437            |           | 21.79                | 0.151        | ≤ 30  |
|             | 2462            |           | 21.55                | 0.143        | ≤ 30  |
| Mode 4      | 2412            | 26 M      | <b>21.42</b>         | <b>0.139</b> | ≤ 30  |
|             | 2437            |           | 21.33                | 0.136        | ≤ 30  |
|             | 2462            |           | 19.79                | 0.095        | ≤ 30  |
| Mode 5      | 2422            | 54 M      | 19.69                | 0.093        | ≤ 30  |
|             | 2437            |           | <b>22.15</b>         | <b>0.164</b> | ≤ 30  |
|             | 2452            |           | 19.25                | 0.084        | ≤ 30  |
| Mode 6      | 2412            | 26 M      | <b>21.52</b>         | <b>0.142</b> | ≤ 30  |
|             | 2437            |           | 21.45                | 0.140        | ≤ 30  |
|             | 2462            |           | 20.13                | 0.103        | ≤ 30  |
| Mode 7      | 2422            | 54 M      | 19.79                | 0.095        | ≤ 30  |
|             | 2437            |           | <b>22.23</b>         | <b>0.167</b> | ≤ 30  |
|             | 2452            |           | 19.36                | 0.086        | ≤ 30  |

Note: The relevant measured result has the offset with cable loss already.

Beamforming on

| ANT-0     |                 |           |                      |       |         |
|-----------|-----------------|-----------|----------------------|-------|---------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |         |
|           |                 |           | Measurement Results  |       | Limit   |
|           |                 |           | dBm                  | W     | dBm     |
| Mode 6    | 2412            | 26 M      | 8.34                 | 0.007 | ≤ 26.87 |
|           | 2437            |           | 8.37                 | 0.007 | ≤ 26.87 |
|           | 2462            |           | 6.88                 | 0.005 | ≤ 26.87 |
| Mode 7    | 2422            | 54 M      | 6.34                 | 0.004 | ≤ 26.87 |
|           | 2437            |           | 9.03                 | 0.008 | ≤ 26.87 |
|           | 2452            |           | 6.13                 | 0.004 | ≤ 26.87 |

| ANT-1     |                 |           |                      |       |         |
|-----------|-----------------|-----------|----------------------|-------|---------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |         |
|           |                 |           | Measurement Results  |       | Limit   |
|           |                 |           | dBm                  | W     | dBm     |
| Mode 6    | 2412            | 26 M      | 8.62                 | 0.007 | ≤ 26.87 |
|           | 2437            |           | 8.67                 | 0.007 | ≤ 26.87 |
|           | 2462            |           | 7.39                 | 0.005 | ≤ 26.87 |
| Mode 7    | 2422            | 54 M      | 6.85                 | 0.005 | ≤ 26.87 |
|           | 2437            |           | 9.26                 | 0.008 | ≤ 26.87 |
|           | 2452            |           | 6.42                 | 0.004 | ≤ 26.87 |

| ANT-2     |                 |           |                      |       |         |
|-----------|-----------------|-----------|----------------------|-------|---------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |         |
|           |                 |           | Measurement Results  |       | Limit   |
|           |                 |           | dBm                  | W     | dBm     |
| Mode 6    | 2412            | 26 M      | 9.34                 | 0.009 | ≤ 26.87 |
|           | 2437            |           | 9.15                 | 0.008 | ≤ 26.87 |
|           | 2462            |           | 7.87                 | 0.006 | ≤ 26.87 |
| Mode 7    | 2422            | 54 M      | 7.62                 | 0.006 | ≤ 26.87 |
|           | 2437            |           | 10.13                | 0.010 | ≤ 26.87 |
|           | 2452            |           | 7.11                 | 0.005 | ≤ 26.87 |

Note: The relevant measured result has the offset with cable loss already.

| ANT-3     |                 |           |                      |       |         |
|-----------|-----------------|-----------|----------------------|-------|---------|
| Test Mode | Frequency (MHz) | Data Rate | Average Output Power |       |         |
|           |                 |           | Measurement Results  |       | Limit   |
|           |                 |           | dBm                  | W     | dBm     |
| Mode 6    | 2412            | 26 M      | 8.78                 | 0.008 | ≤ 26.87 |
|           | 2437            |           | 8.67                 | 0.007 | ≤ 26.87 |
|           | 2462            |           | 7.53                 | 0.006 | ≤ 26.87 |
| Mode 7    | 2422            | 54 M      | 6.92                 | 0.005 | ≤ 26.87 |
|           | 2437            |           | 9.30                 | 0.009 | ≤ 26.87 |
|           | 2452            |           | 6.61                 | 0.005 | ≤ 26.87 |

| ANT-0+1+2+3 |                 |           |                      |              |         |
|-------------|-----------------|-----------|----------------------|--------------|---------|
| Test Mode   | Frequency (MHz) | Data Rate | Average Output Power |              |         |
|             |                 |           | Measurement Results  |              | Limit   |
|             |                 |           | dBm                  | W            | dBm     |
| Mode 6      | 2412            | 26 M      | <b>14.81</b>         | <b>0.030</b> | ≤ 26.87 |
|             | 2437            |           | 14.74                | 0.030        | ≤ 26.87 |
|             | 2462            |           | 13.45                | 0.022        | ≤ 26.87 |
| Mode 7      | 2422            | 54 M      | 12.98                | 0.020        | ≤ 26.87 |
|             | 2437            |           | <b>15.47</b>         | <b>0.035</b> | ≤ 26.87 |
|             | 2452            |           | 12.60                | 0.018        | ≤ 26.87 |

Note: The relevant measured result has the offset with cable loss already.

### 6 dB RF Bandwidth Measurement

| Test Mode | Frequency (MHz) | Measurement (kHz) |       |       |       | Limit (kHz) |
|-----------|-----------------|-------------------|-------|-------|-------|-------------|
|           |                 | ANT-0             | ANT-1 | ANT-2 | ANT-3 |             |
| Mode 2    | 2412            | 8103              | 8098  | 8098  | 8101  | ≥ 500       |
|           | 2437            | 8105              | 8099  | 8100  | 8100  | ≥ 500       |
|           | 2462            | 8100              | 8080  | 8095  | 8100  | ≥ 500       |
| Mode 3    | 2412            | 16300             | 15680 | 16270 | 16320 | ≥ 500       |
|           | 2437            | 16290             | 15700 | 16300 | 16060 | ≥ 500       |
|           | 2462            | 16300             | 15880 | 16330 | 16310 | ≥ 500       |
| Mode 6    | 2412            | 17320             | 15470 | 15970 | 17160 | ≥ 500       |
|           | 2437            | 16840             | 15740 | 16840 | 16570 | ≥ 500       |
|           | 2462            | 16960             | 15480 | 16350 | 16340 | ≥ 500       |
| Mode 7    | 2422            | 35040             | 33900 | 35120 | 35130 | ≥ 500       |
|           | 2437            | 35070             | 35070 | 35090 | 35110 | ≥ 500       |
|           | 2452            | 35140             | 35140 | 35140 | 35120 | ≥ 500       |


Beamforming on

| Test Mode | Frequency (MHz) | Measurement (kHz) |       |       |       | Limit (kHz) |
|-----------|-----------------|-------------------|-------|-------|-------|-------------|
|           |                 | ANT-0             | ANT-1 | ANT-2 | ANT-3 |             |
| Mode 6    | 2412            | 16690             | 17590 | 16590 | 16940 | ≥ 500       |
|           | 2437            | 17290             | 16310 | 16940 | 16570 | ≥ 500       |
|           | 2462            | 16930             | 16320 | 16940 | 17570 | ≥ 500       |
| Mode 7    | 2422            | 35110             | 35150 | 35120 | 35150 | ≥ 500       |
|           | 2437            | 35140             | 35140 | 35130 | 35110 | ≥ 500       |
|           | 2452            | 35140             | 35140 | 35140 | 35040 | ≥ 500       |


## ■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz

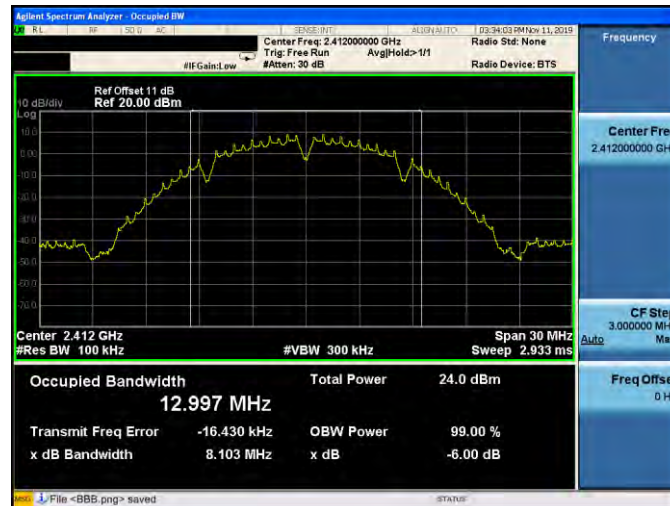

2437 MHz

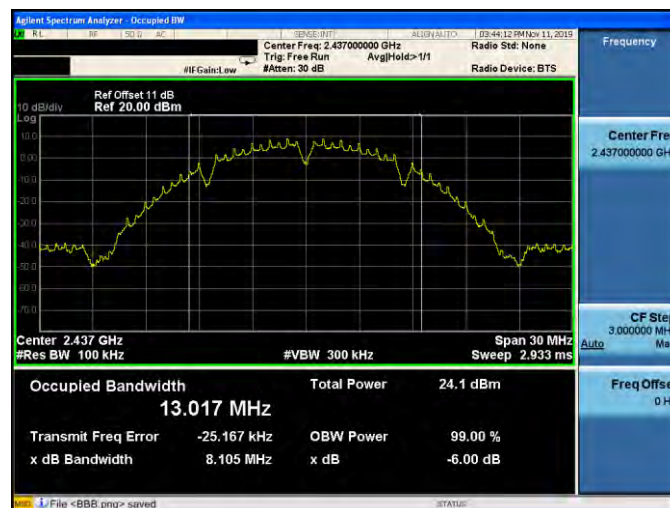


2462 MHz






Mode 3: IEEE 802.11g Continuous TX mode\_ANT-0


2412 MHz

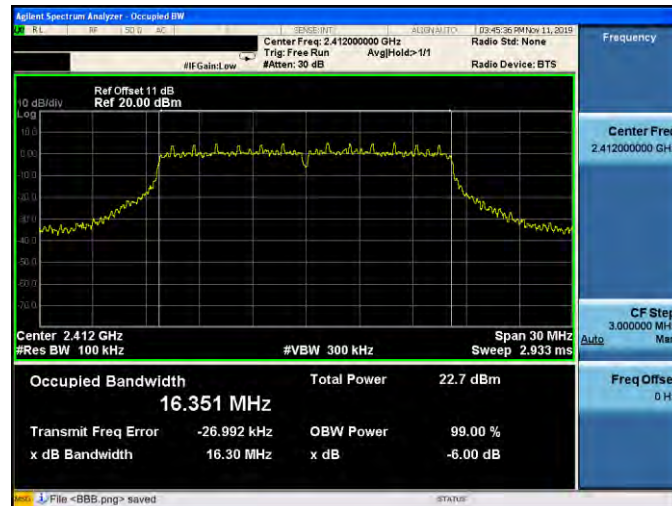

2437 MHz

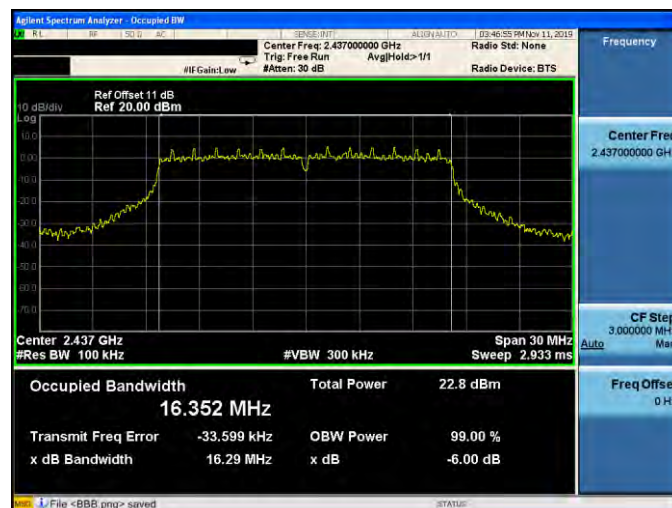


2462 MHz

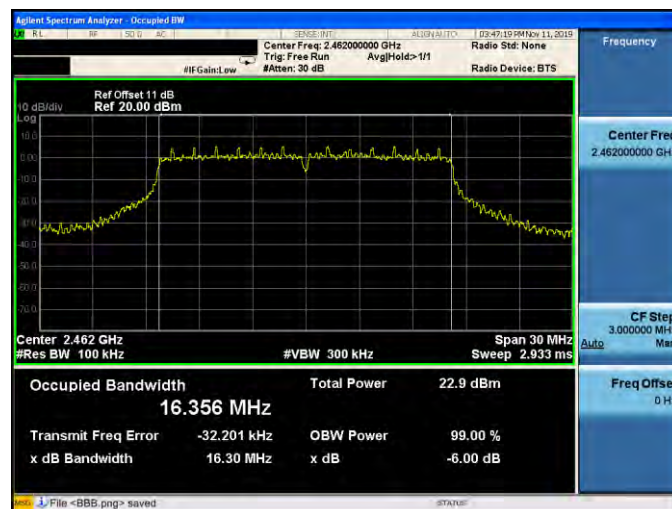




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-0


2412 MHz

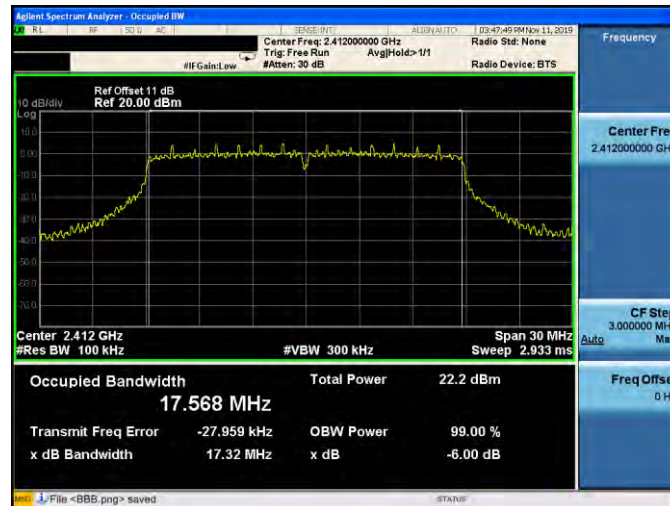

2437 MHz

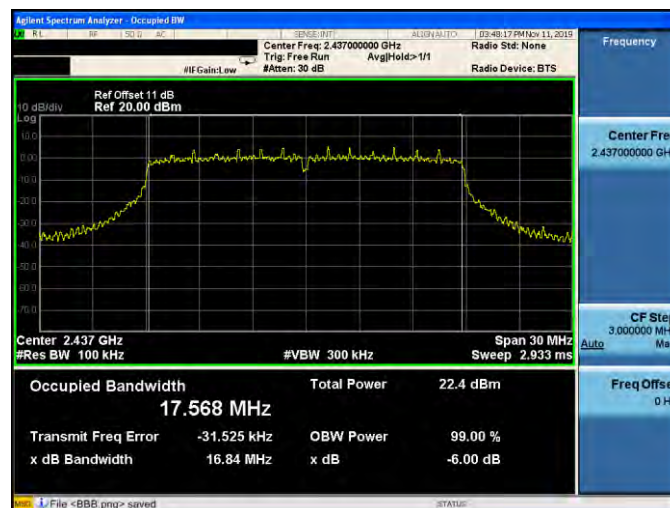


2462 MHz

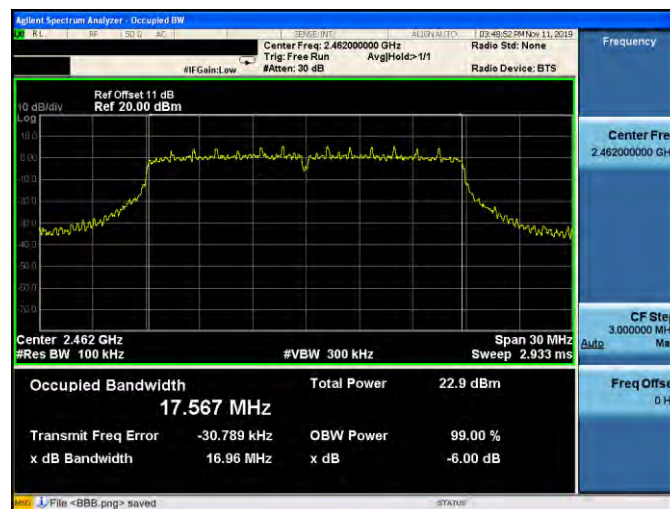




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-0


2422 MHz

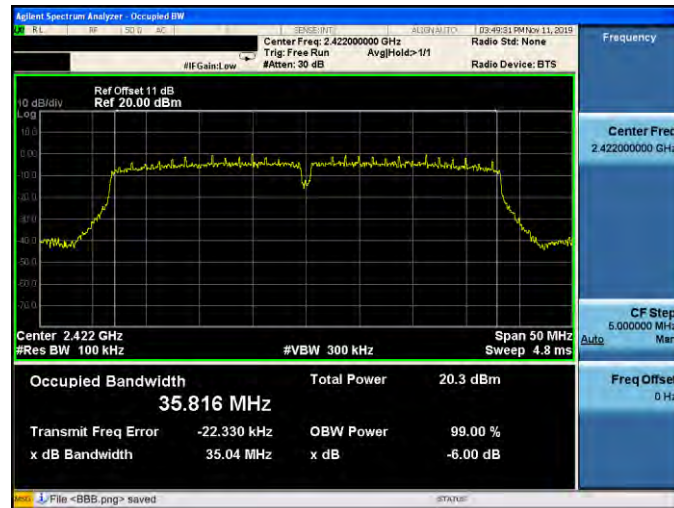

2437 MHz

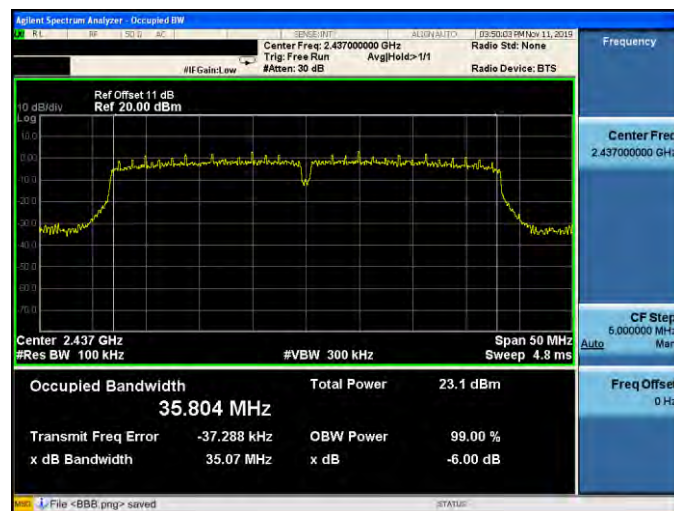

2452 MHz

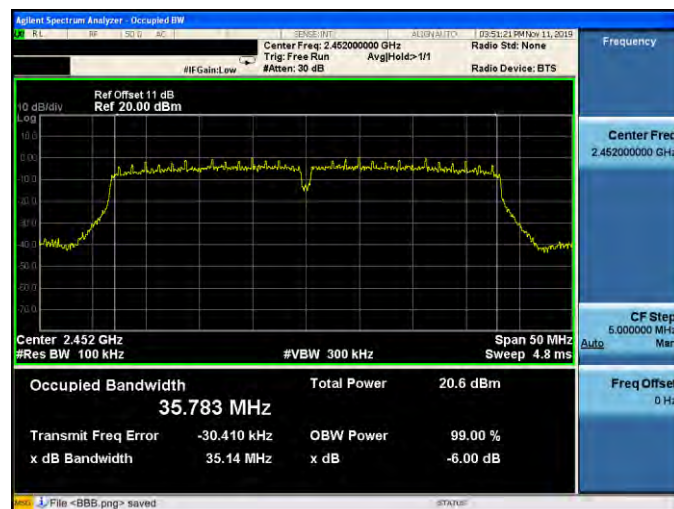



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1


2412 MHz



2437 MHz




2462 MHz

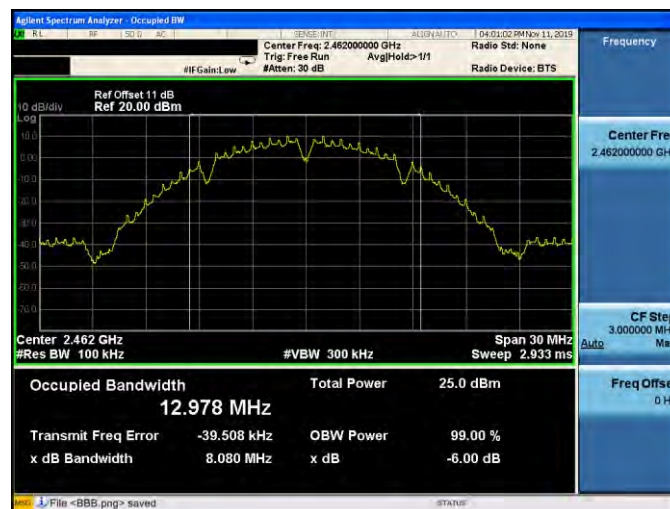


Mode 3: IEEE 802.11g Continuous TX mode\_ANT-1

2412 MHz

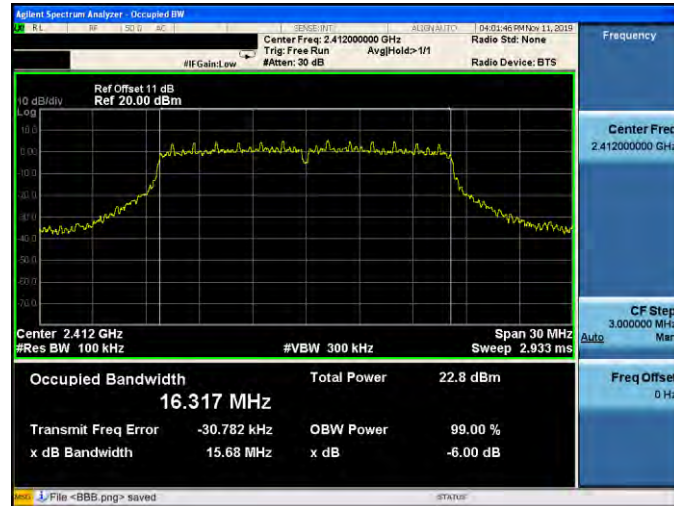

2437 MHz

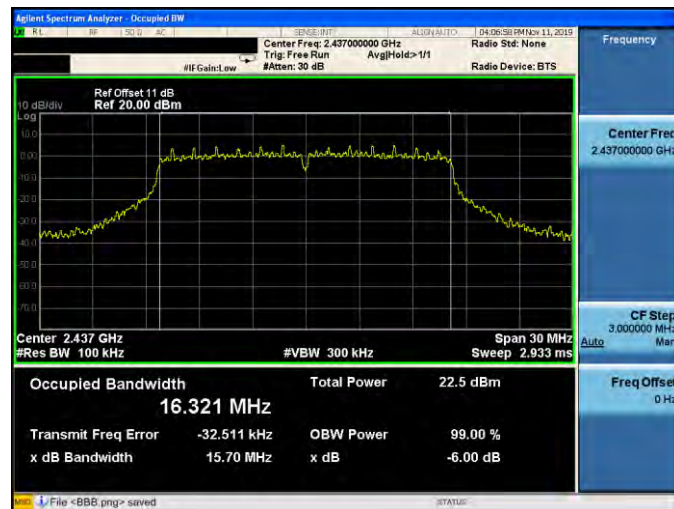


2462 MHz






Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-1


2412 MHz

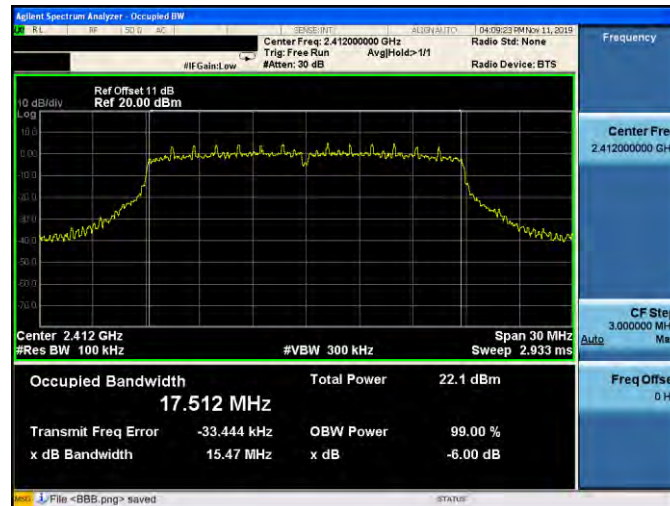

2437 MHz

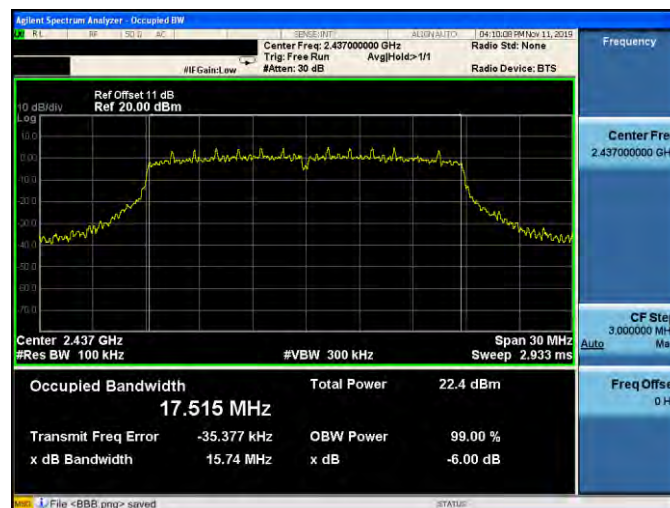


2462 MHz

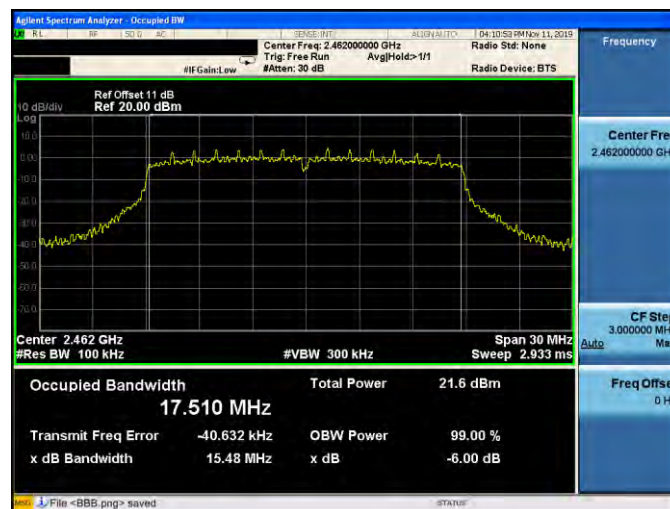



Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-1


2422 MHz

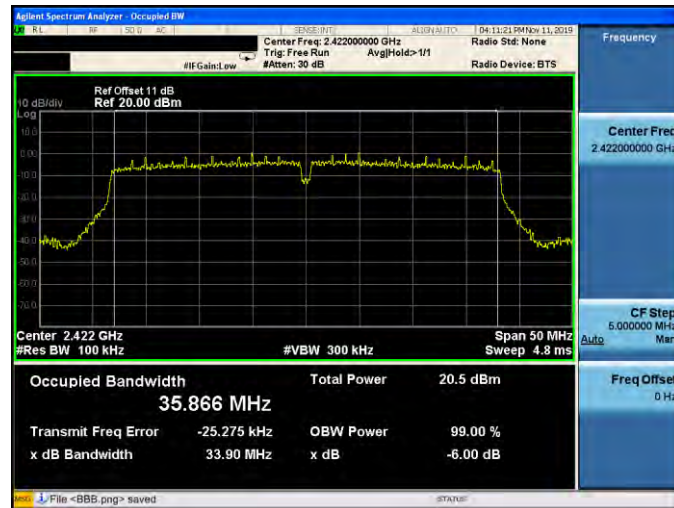

2437 MHz



2452 MHz

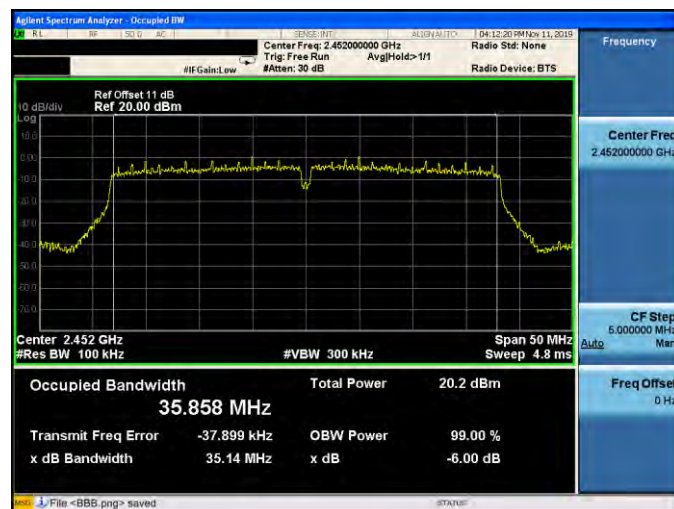



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2


2412 MHz



2437 MHz




2462 MHz

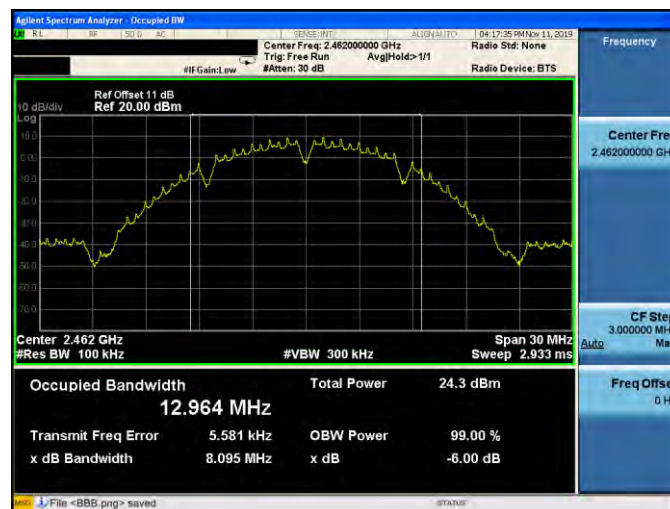



Mode 3: IEEE 802.11g Continuous TX mode\_ANT-2


2412 MHz

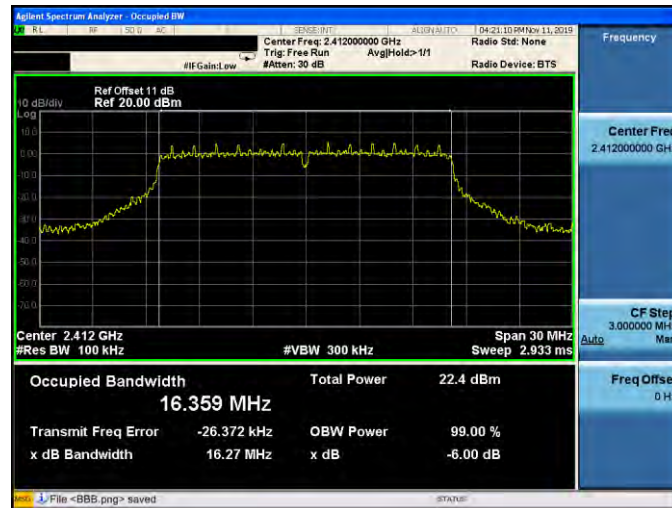

2437 MHz




2462 MHz

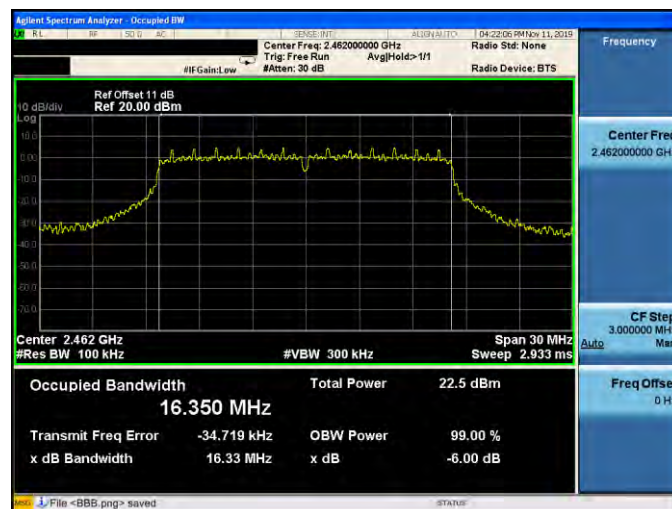


Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-2


2412 MHz

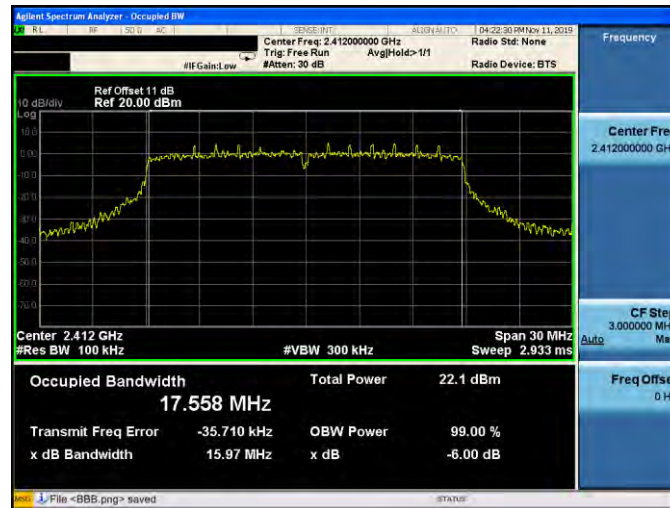

2437 MHz

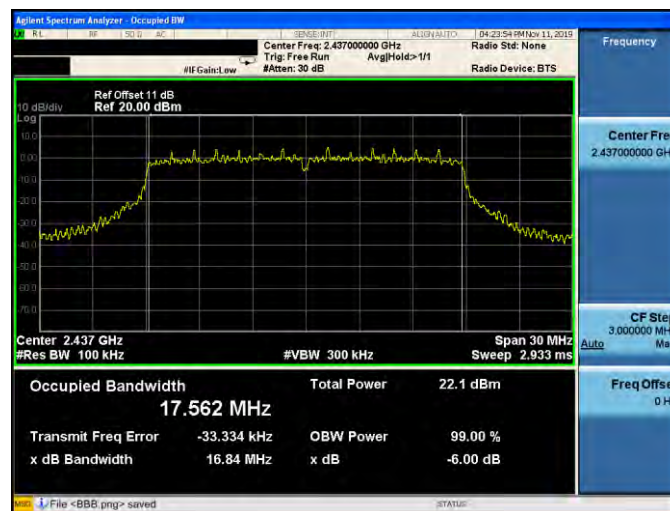


2462 MHz

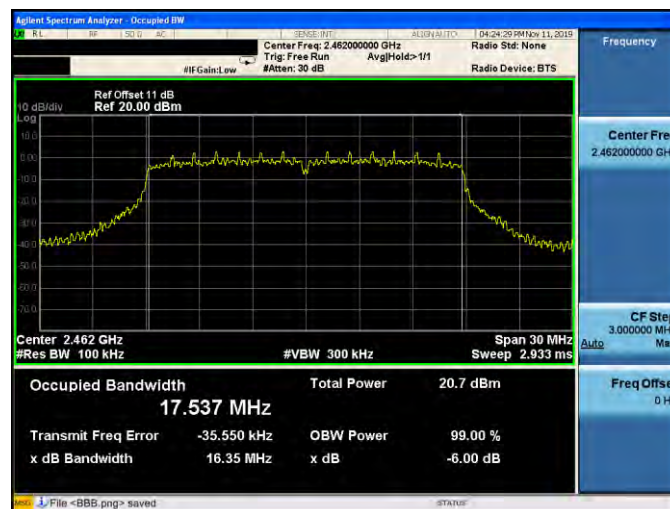




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-2


2422 MHz

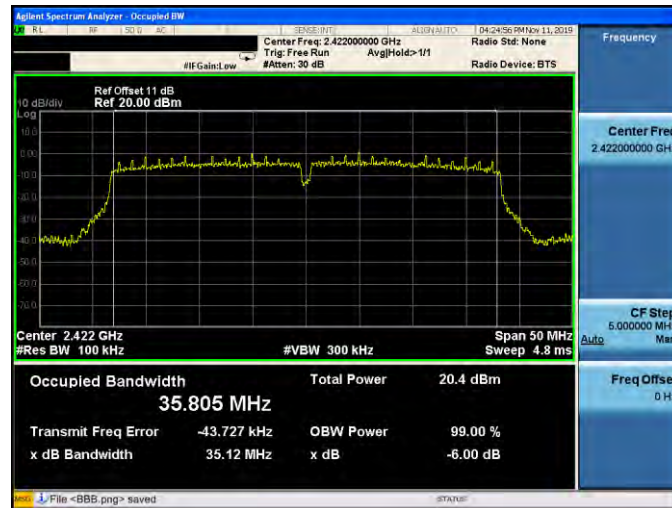

2437 MHz

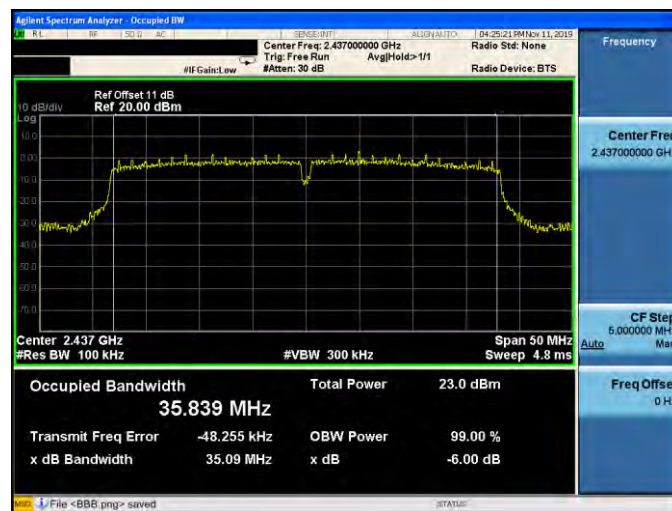

2452 MHz

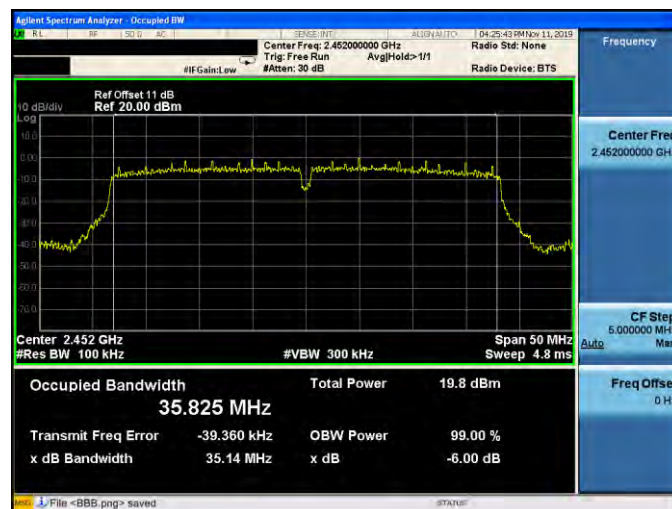



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz




2462 MHz






Mode 3: IEEE 802.11g Continuous TX mode\_ANT-3

2412 MHz

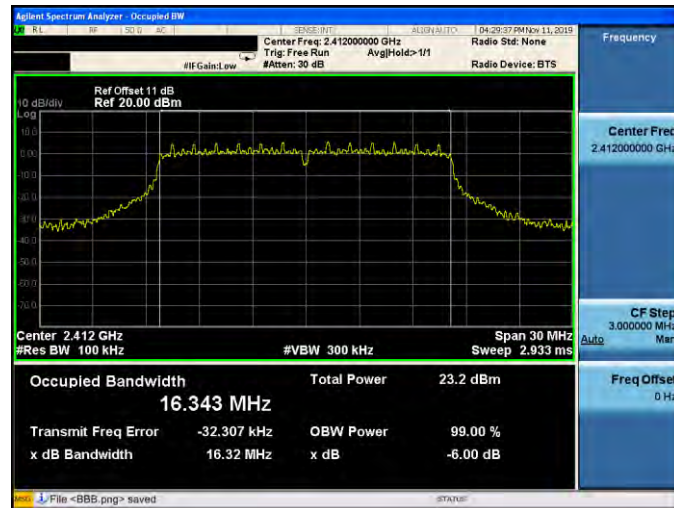

2437 MHz

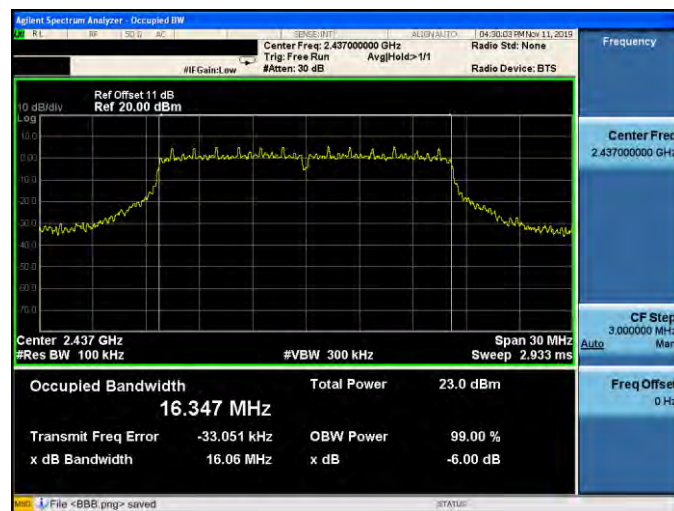


2462 MHz






Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-3


2412 MHz

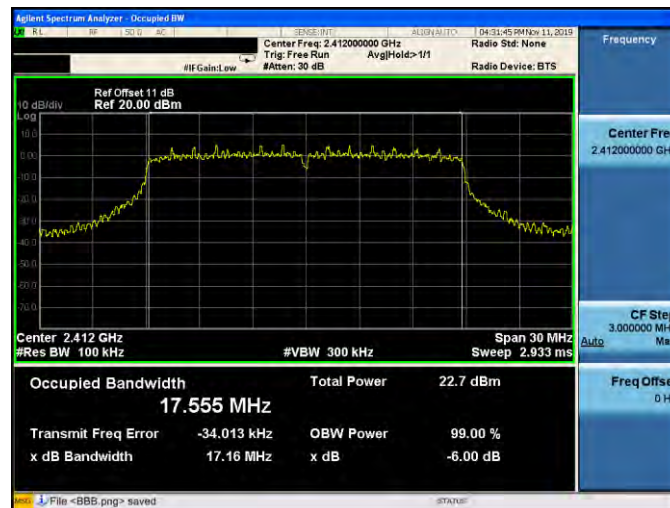

2437 MHz

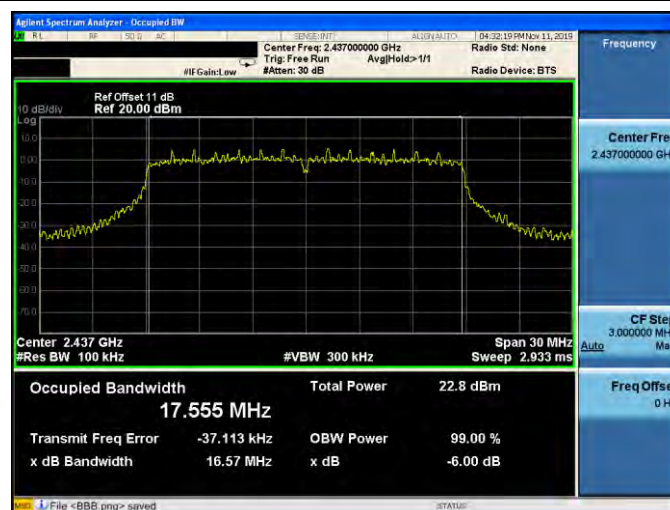


2462 MHz

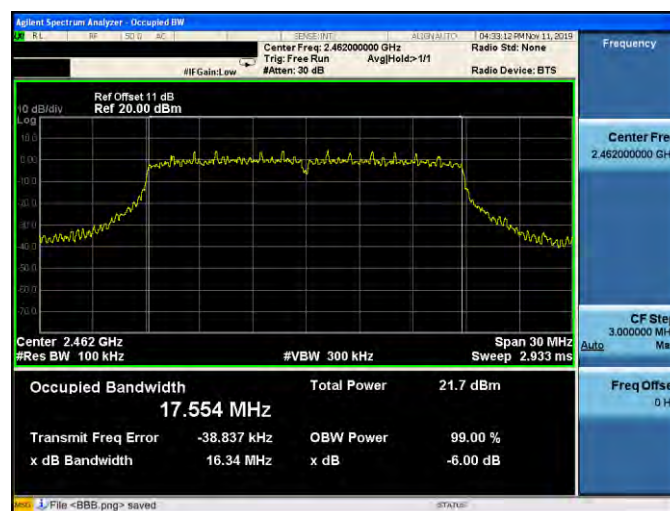




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-3


2422 MHz

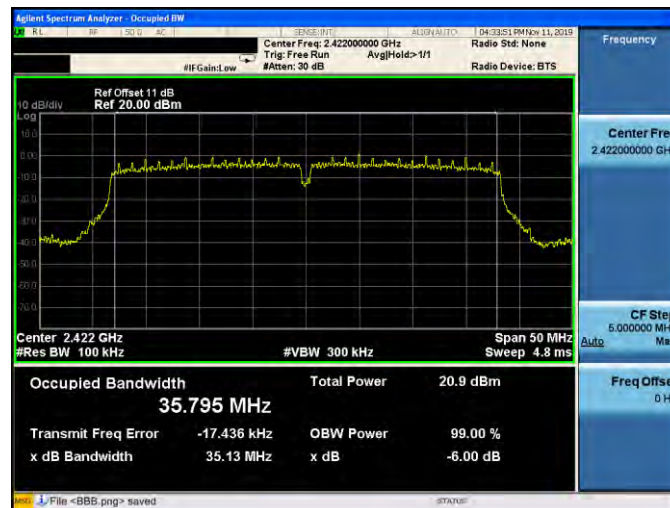

2437 MHz

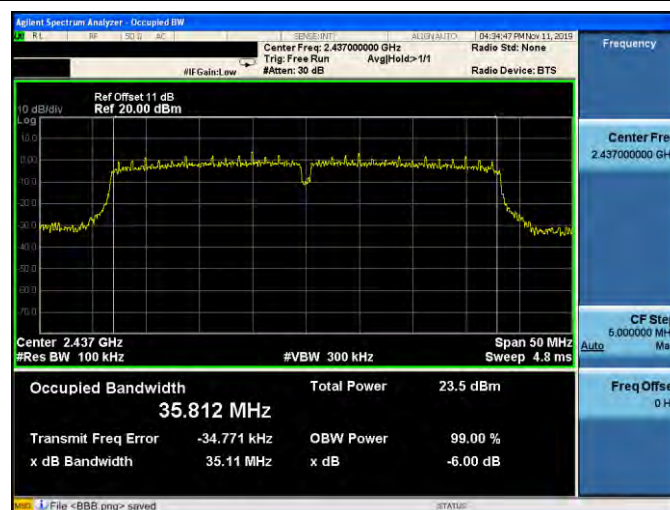

2452 MHz

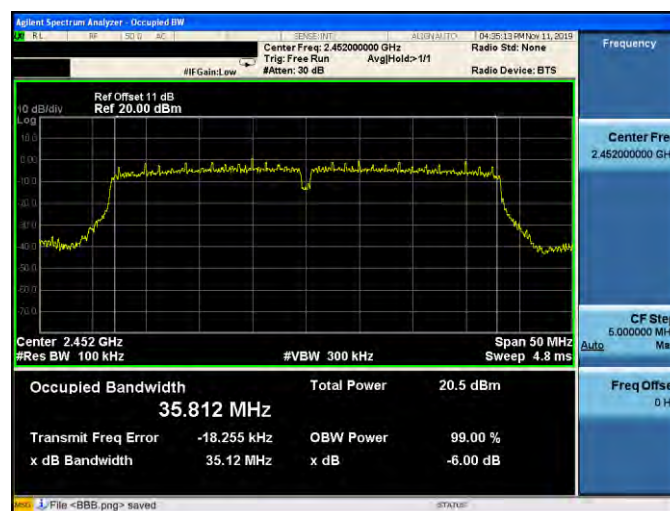





Beamforming on

Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-0


2412 MHz

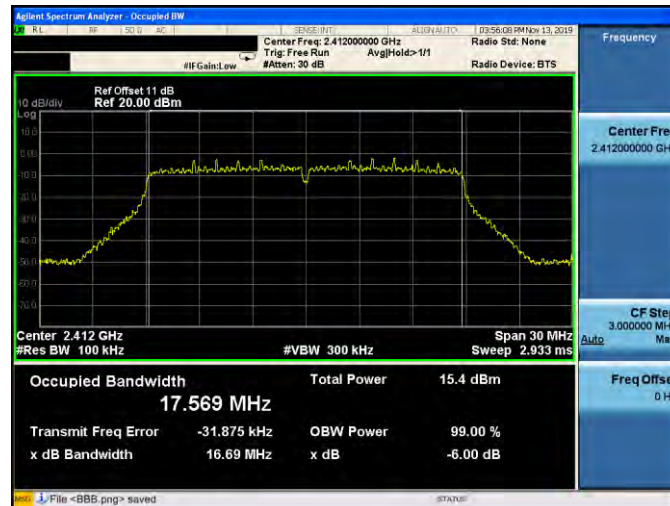

2437 MHz

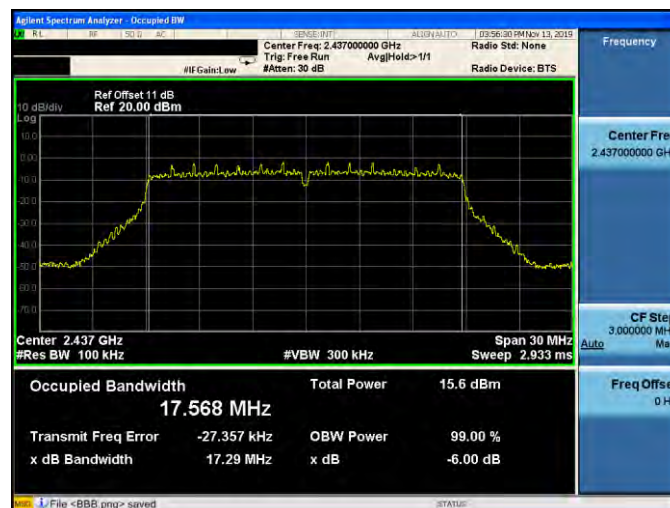


2462 MHz

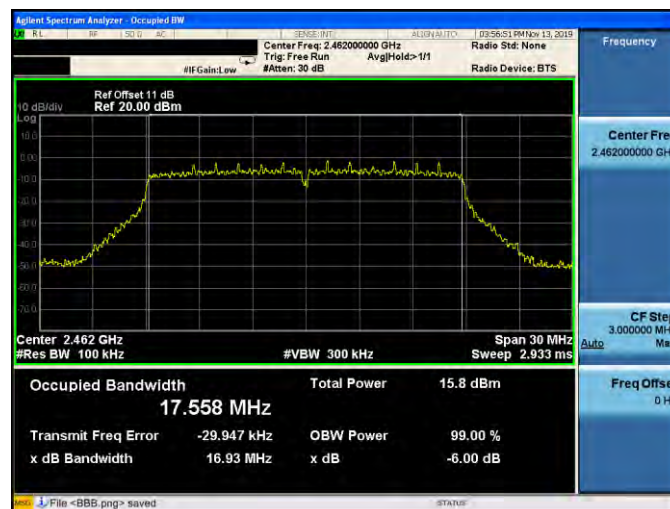




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-0


2422 MHz

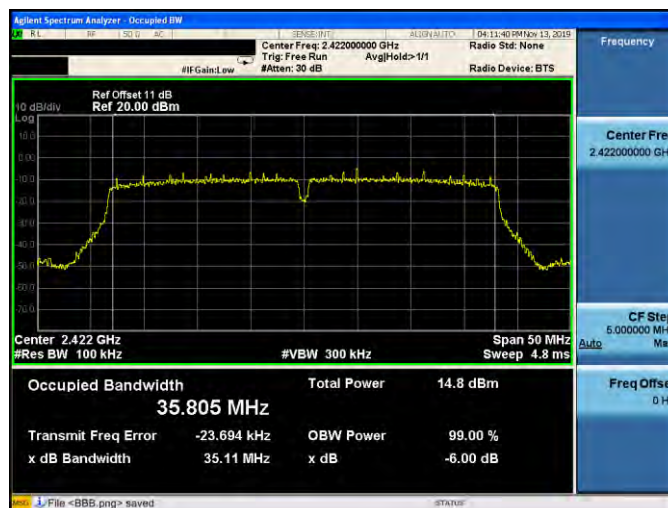

2437 MHz

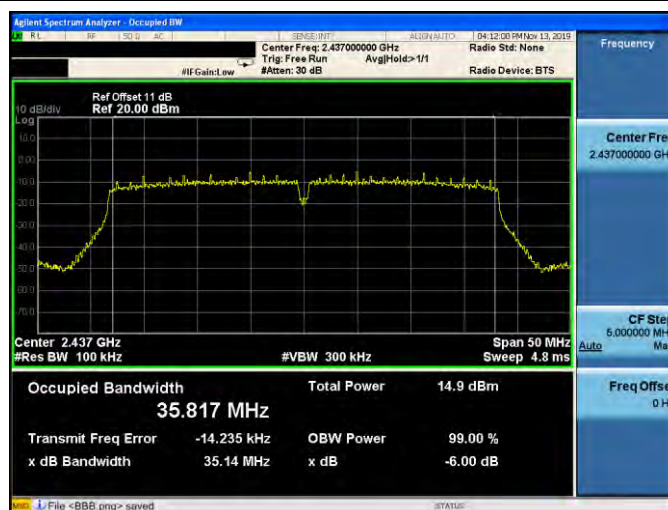


2452 MHz

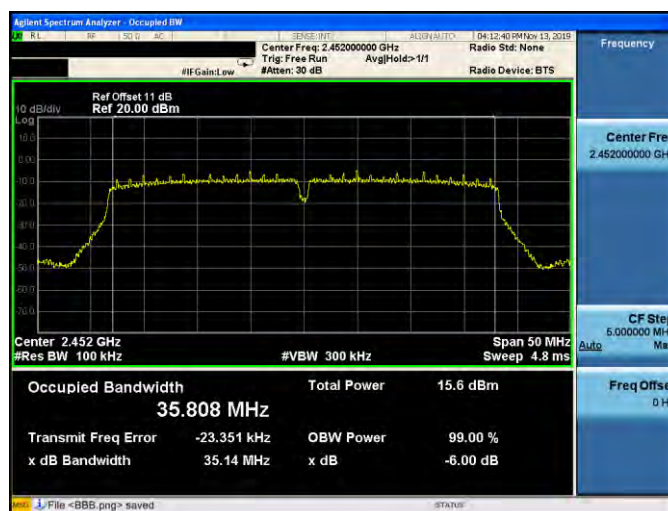




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-1


2412 MHz

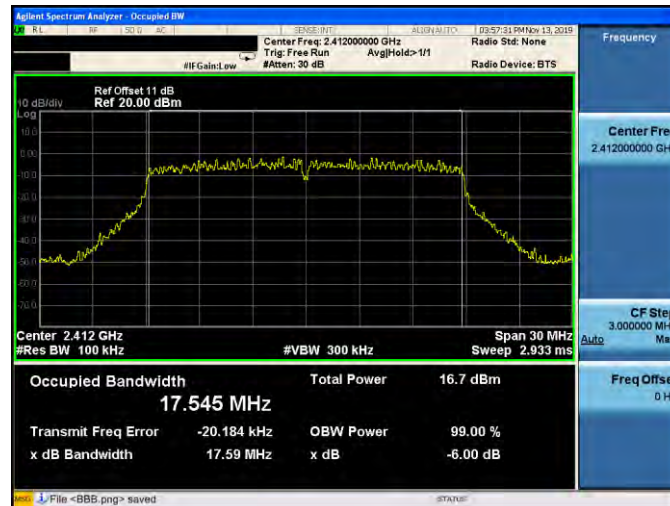

2437 MHz

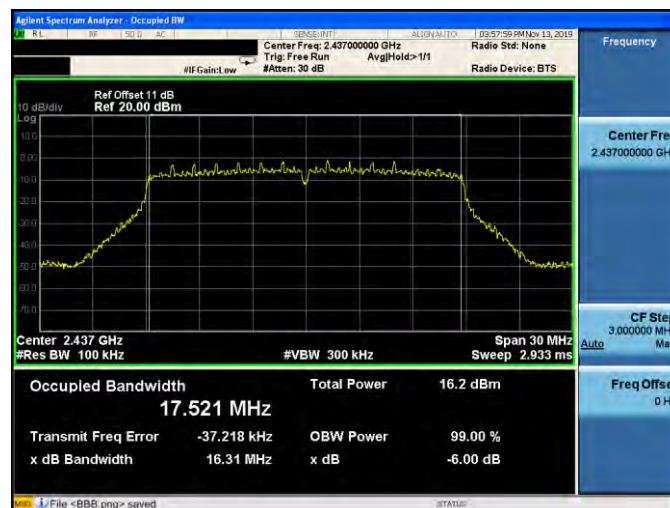


2462 MHz

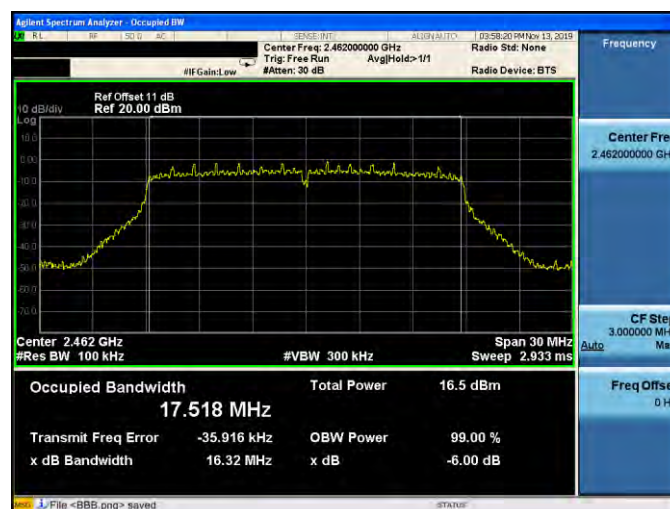




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-1


2422 MHz

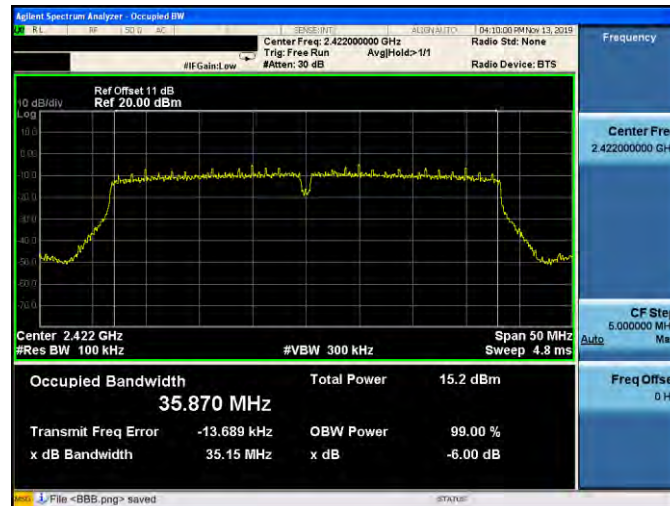

2437 MHz

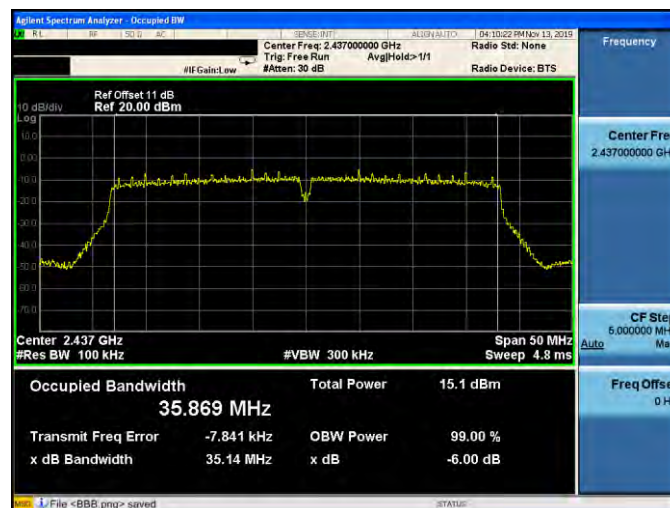


2452 MHz

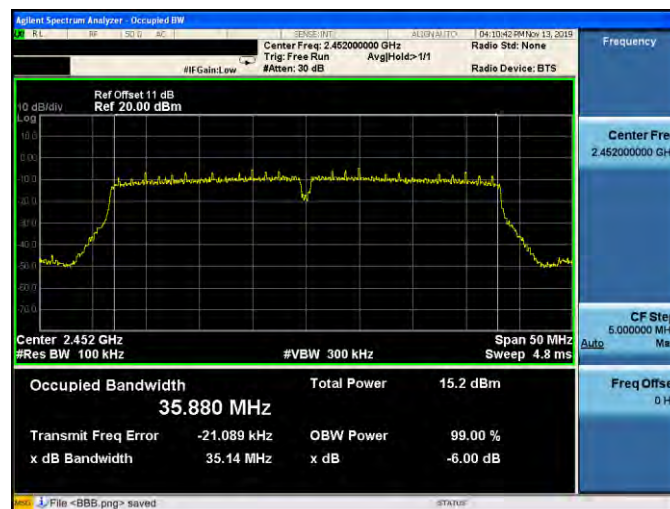




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-2

2412 MHz

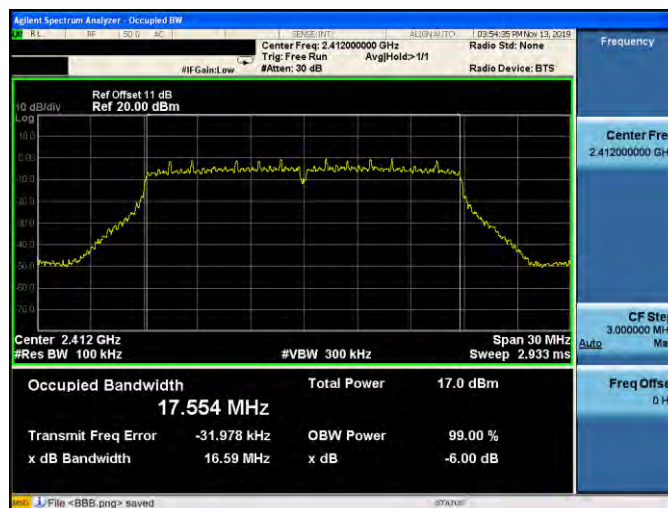

2437 MHz

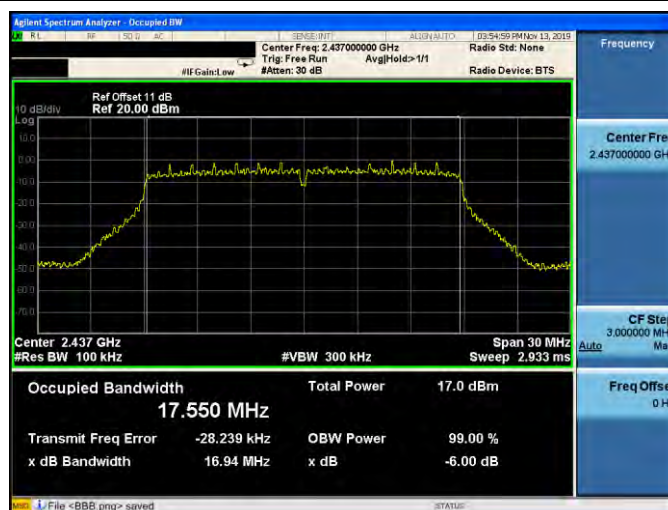


2462 MHz






Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-2


2422 MHz

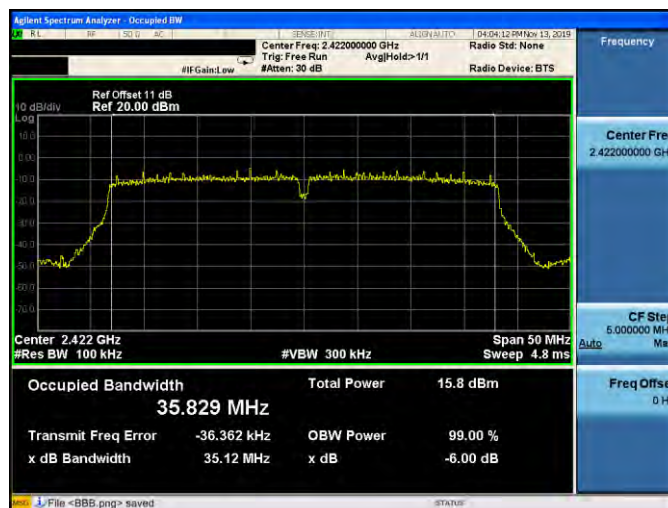

2437 MHz

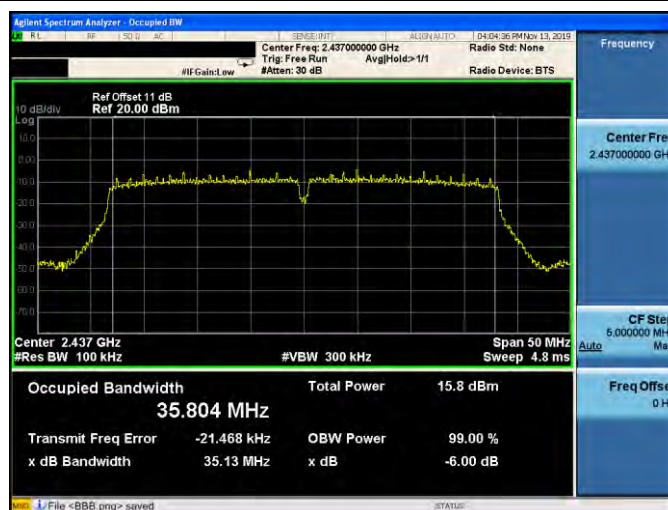


2452 MHz

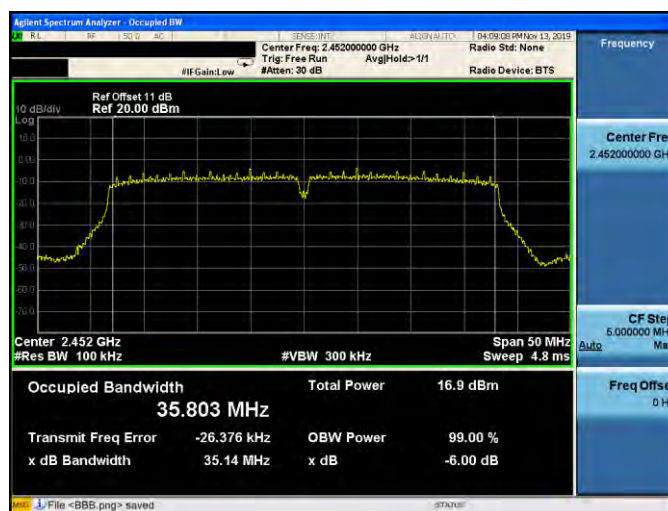


Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-3


2412 MHz

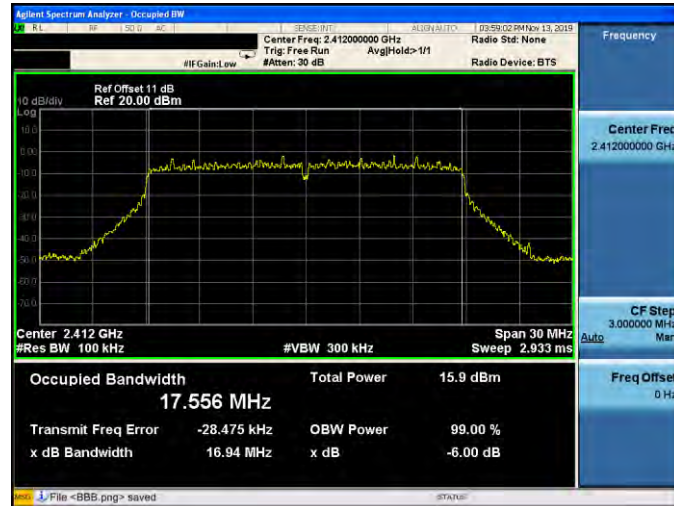

2437 MHz

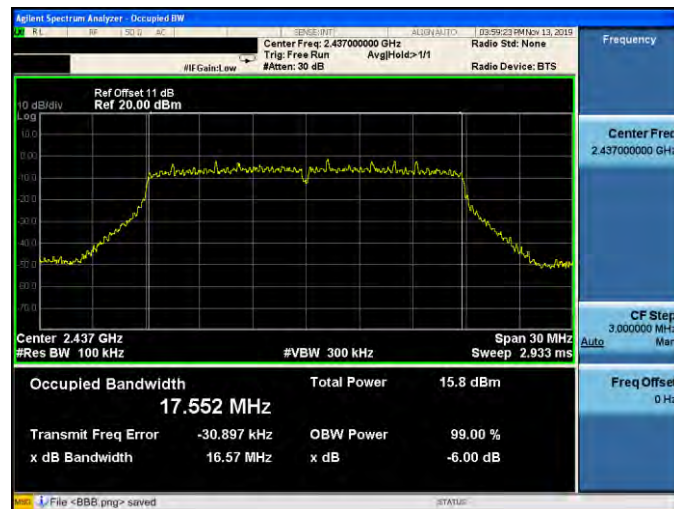


2462 MHz

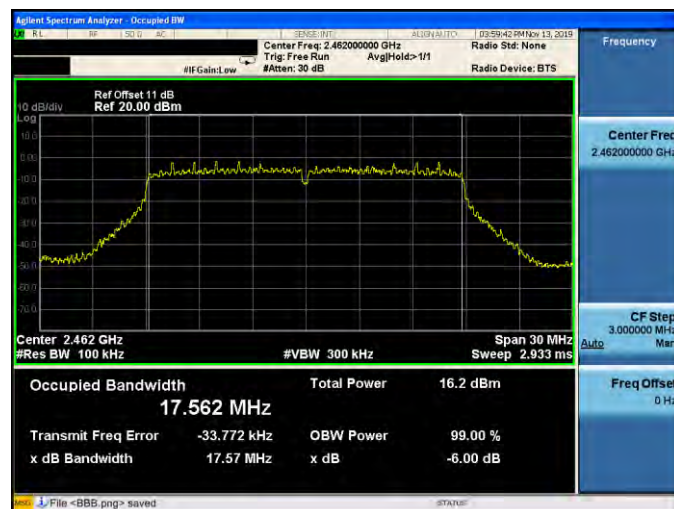




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-3


2422 MHz

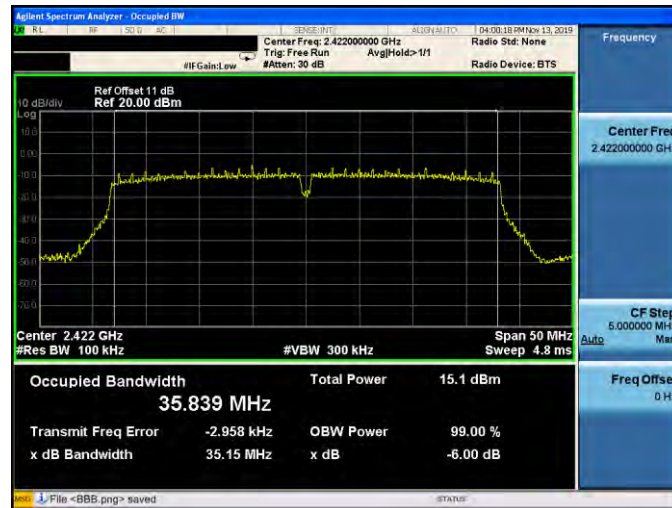

2437 MHz

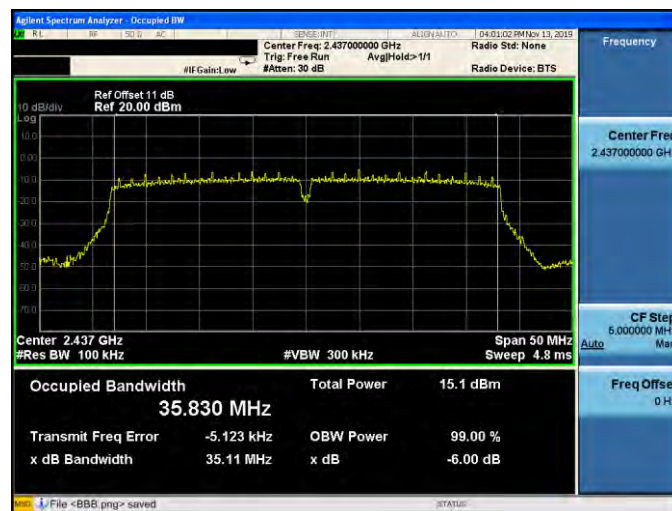

2452 MHz

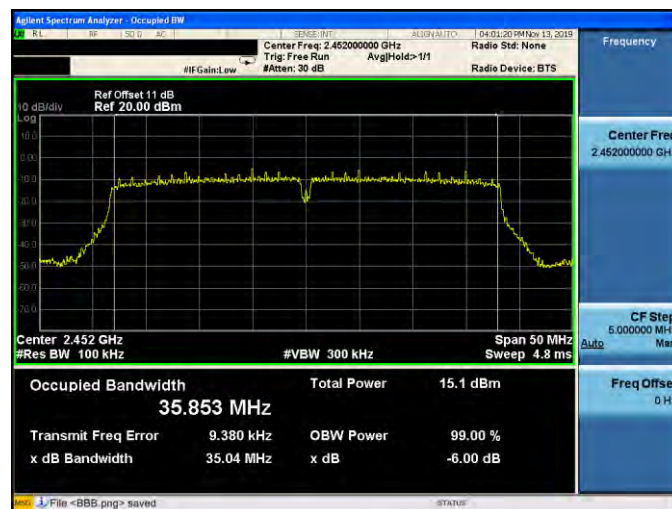

### Maximum Power Spectral Density Measurement

| Test Mode | Frequency (MHz) | Measurement (dBm/3 kHz) |         |         |         |             | Limit (dBm/ 3 kHz) |
|-----------|-----------------|-------------------------|---------|---------|---------|-------------|--------------------|
|           |                 | ANT-0                   | ANT-1   | ANT-2   | ANT-3   | ANT-0+1+2+3 |                    |
| Mode 2    | 2412            | -5.013                  | -4.726  | -4.307  | -4.948  | 1.281       | ≤ 4.88             |
|           | 2437            | -5.065                  | -5.099  | -4.586  | -5.035  | 1.079       | ≤ 4.88             |
|           | 2462            | -5.053                  | -4.505  | -4.797  | -4.793  | 1.238       | ≤ 4.88             |
| Mode 3    | 2412            | -9.820                  | -9.772  | -8.823  | -9.373  | -3.408      | ≤ 4.88             |
|           | 2437            | -10.235                 | -9.951  | -8.992  | -9.505  | -3.624      | ≤ 4.88             |
|           | 2462            | -10.377                 | -10.091 | -9.114  | -9.671  | -3.766      | ≤ 4.88             |
| Mode 6    | 2412            | -9.988                  | -9.862  | -8.999  | -9.301  | -3.498      | ≤ 8                |
|           | 2437            | -9.986                  | -10.174 | -9.050  | -9.598  | -3.660      | ≤ 8                |
|           | 2462            | -11.576                 | -11.316 | -10.916 | -11.126 | -5.206      | ≤ 8                |
| Mode 7    | 2422            | -15.128                 | -15.028 | -14.080 | -14.887 | -8.740      | ≤ 8                |
|           | 2437            | -12.414                 | -12.238 | -11.132 | -12.186 | -5.941      | ≤ 8                |
|           | 2452            | -15.706                 | -15.302 | -14.874 | -15.251 | -9.253      | ≤ 8                |

Beamforming on

| Test Mode | Frequency (MHz) | Measurement (dBm/3 kHz) |         |         |         |             | Limit (dBm/ 3 kHz) |
|-----------|-----------------|-------------------------|---------|---------|---------|-------------|--------------------|
|           |                 | ANT-0                   | ANT-1   | ANT-2   | ANT-3   | ANT-0+1+2+3 |                    |
| Mode 6    | 2412            | -16.798                 | -16.882 | -15.999 | -16.284 | -10.455     | ≤ 4.88             |
|           | 2437            | -16.981                 | -17.291 | -15.714 | -16.571 | -10.577     | ≤ 4.88             |
|           | 2462            | -18.302                 | -17.613 | -17.568 | -17.646 | -11.751     | ≤ 4.88             |
| Mode 7    | 2422            | -21.579                 | -21.460 | -20.799 | -21.200 | -15.228     | ≤ 4.88             |
|           | 2437            | -19.242                 | -18.705 | -17.846 | -18.838 | -12.607     | ≤ 4.88             |
|           | 2452            | -22.162                 | -21.542 | -21.300 | -21.711 | -15.647     | ≤ 4.88             |



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz



2437 MHz




2462 MHz





Mode 3: IEEE 802.11g Continuous TX mode\_ANT-0


2412 MHz

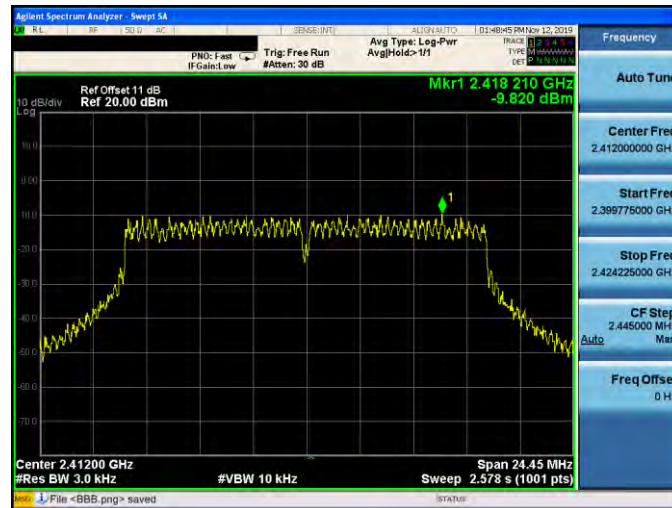

2437 MHz




2462 MHz

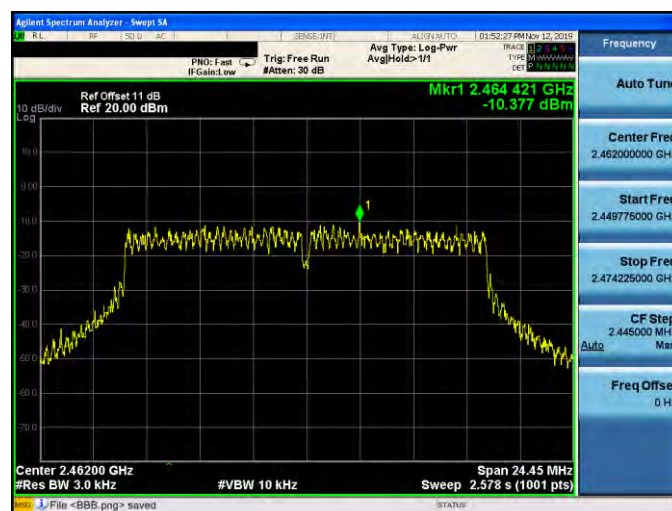




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-0


2412 MHz

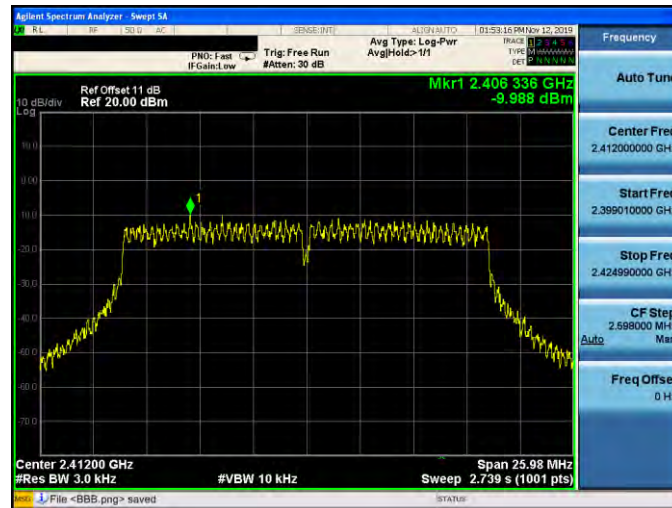

2437 MHz

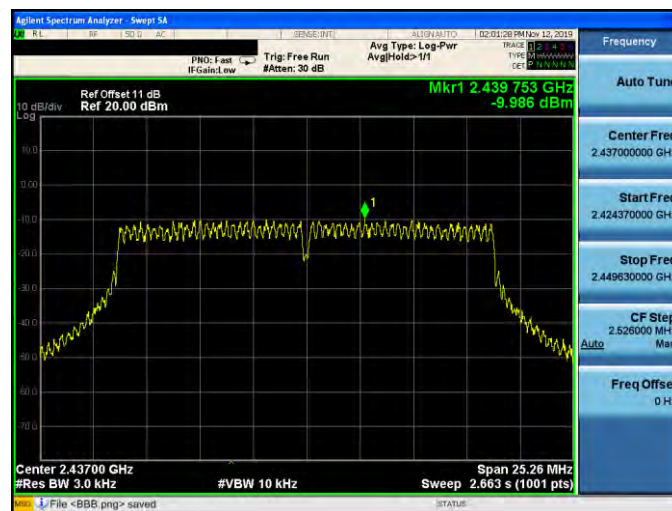


2462 MHz

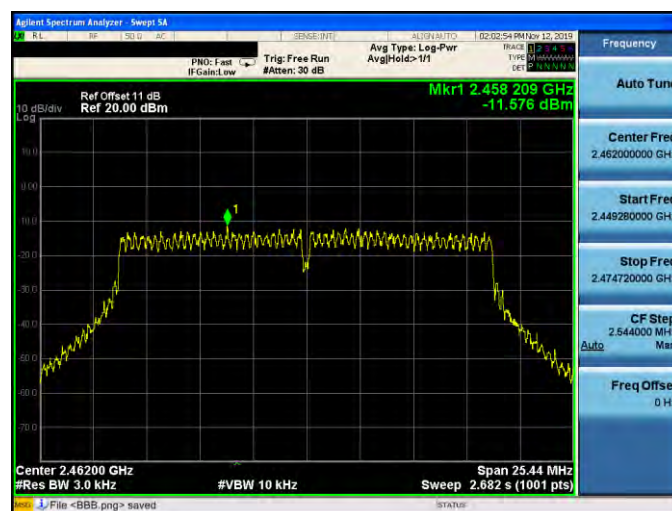




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-0


2422 MHz

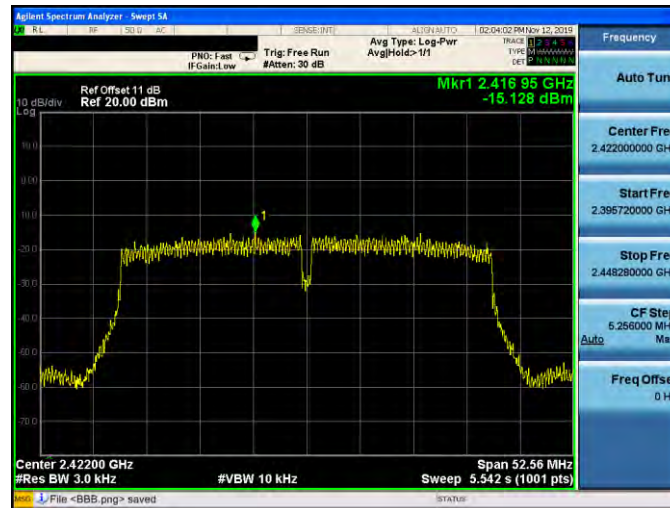

2437 MHz

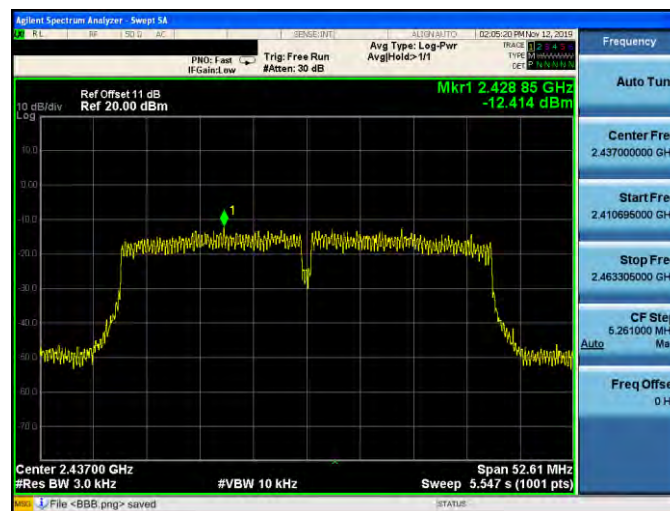

2452 MHz

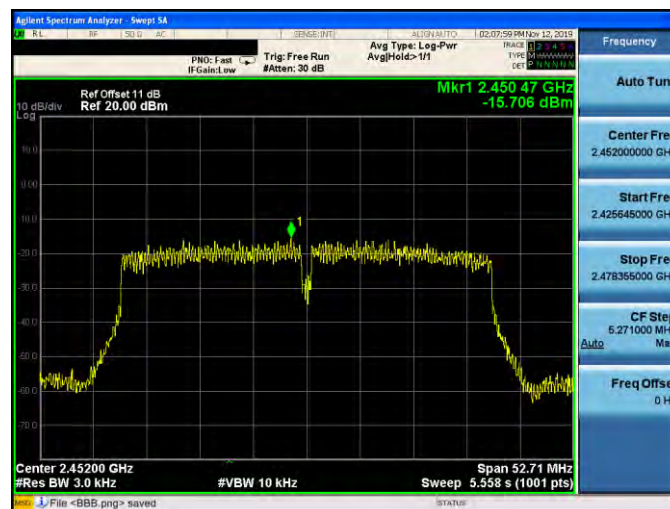



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz



2437 MHz




2462 MHz





Mode 3: IEEE 802.11g Continuous TX mode\_ANT-1


2412 MHz

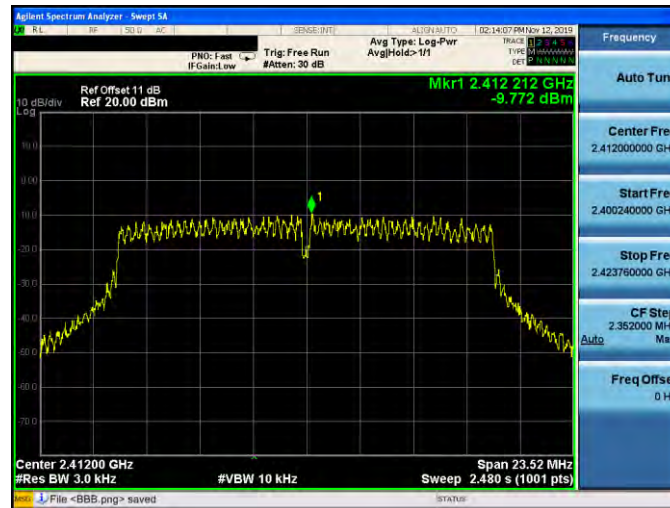

2437 MHz



2462 MHz

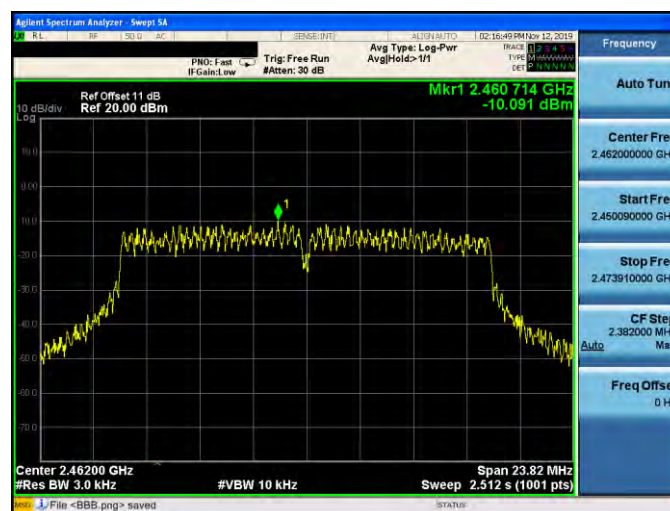

Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-1


2412 MHz



2437 MHz




2462 MHz

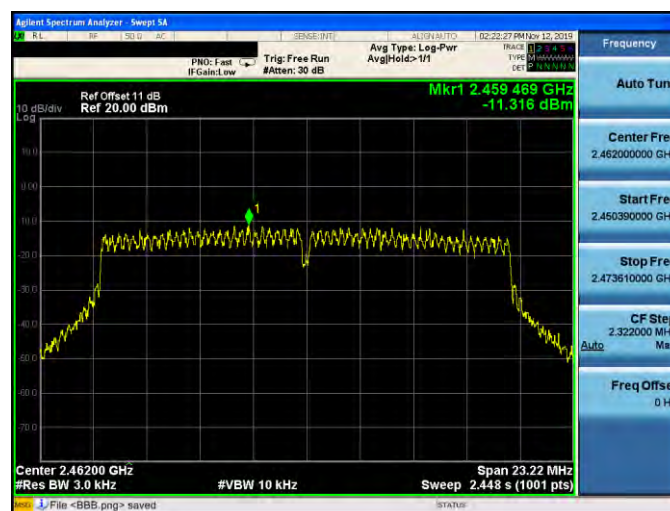




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-1


2422 MHz

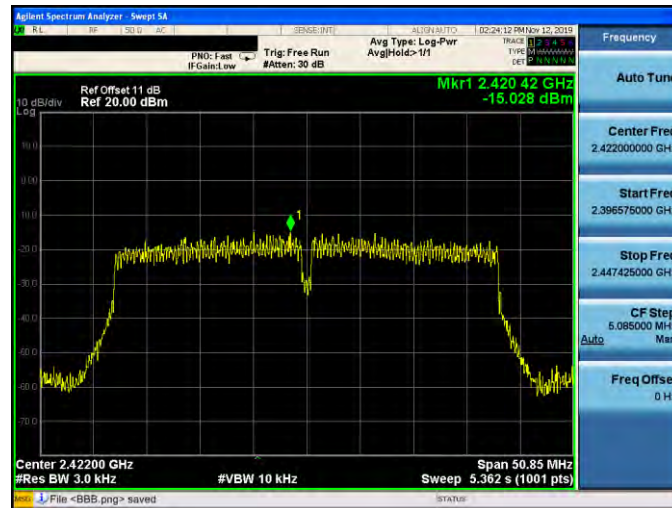

2437 MHz

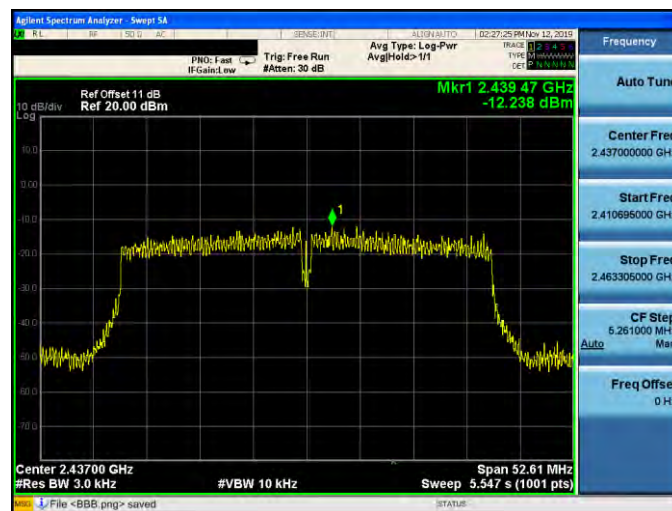

2452 MHz

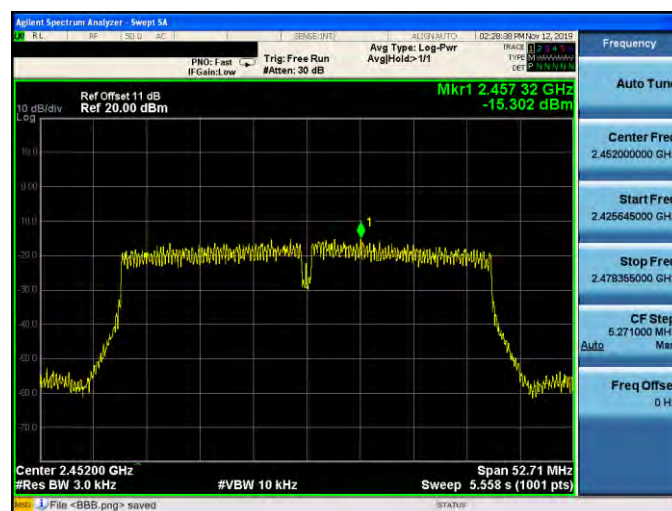



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

2412 MHz



2437 MHz




2462 MHz






Mode 3: IEEE 802.11g Continuous TX mode\_ANT-2


2412 MHz

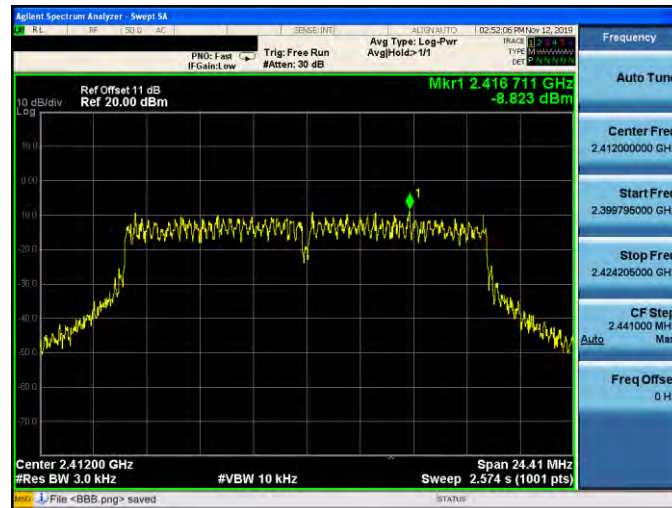

2437 MHz

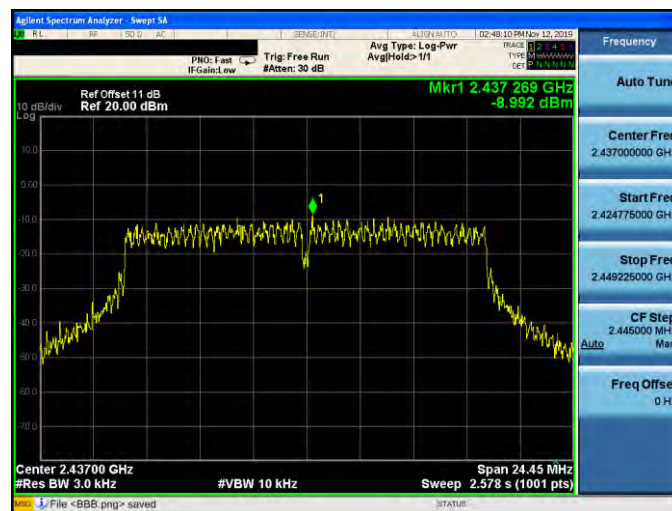

2462 MHz

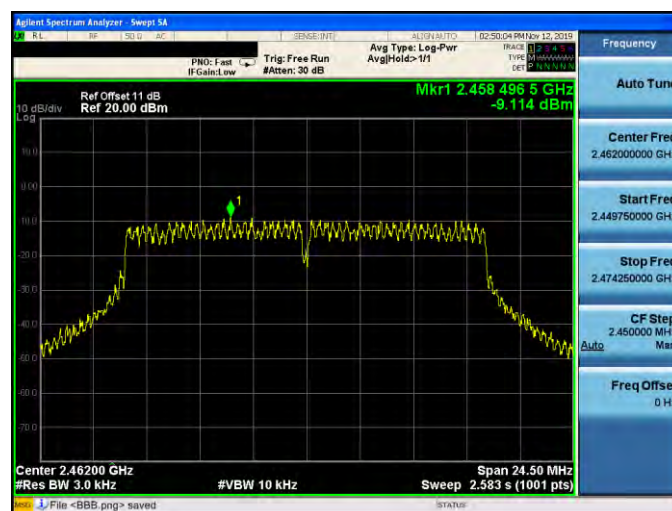




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-2


2412 MHz



2437 MHz

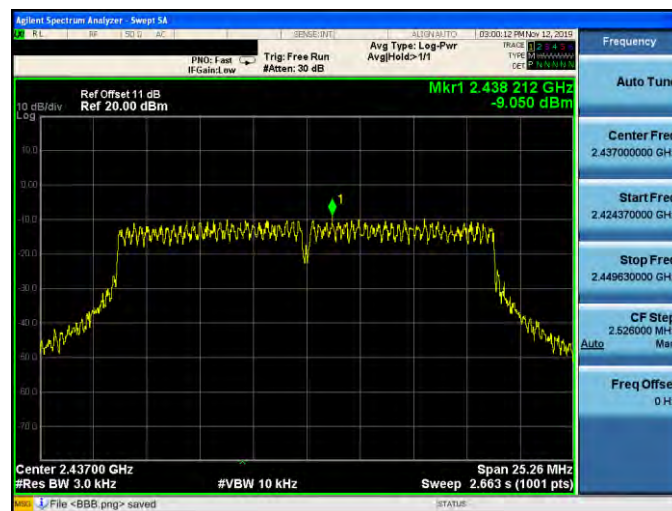


2462 MHz

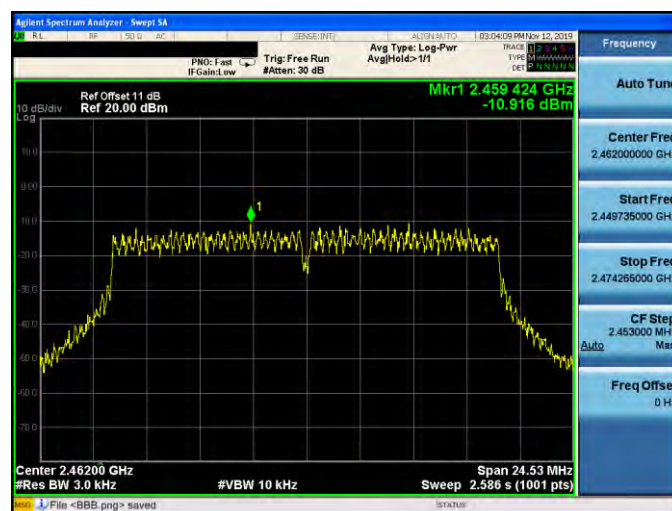




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-2


2422 MHz

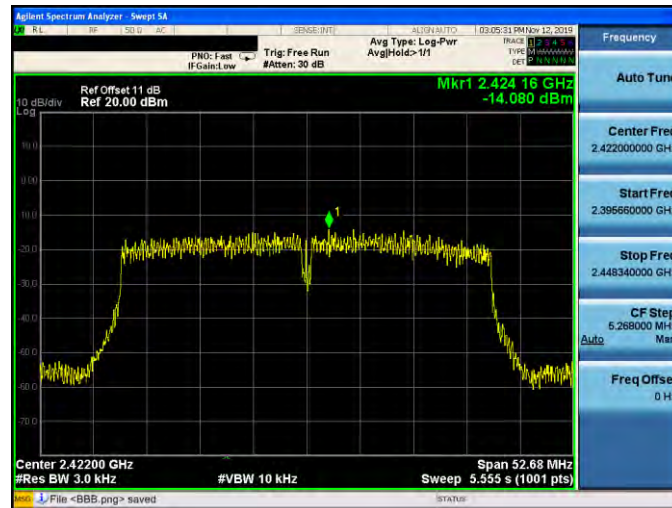

2437 MHz

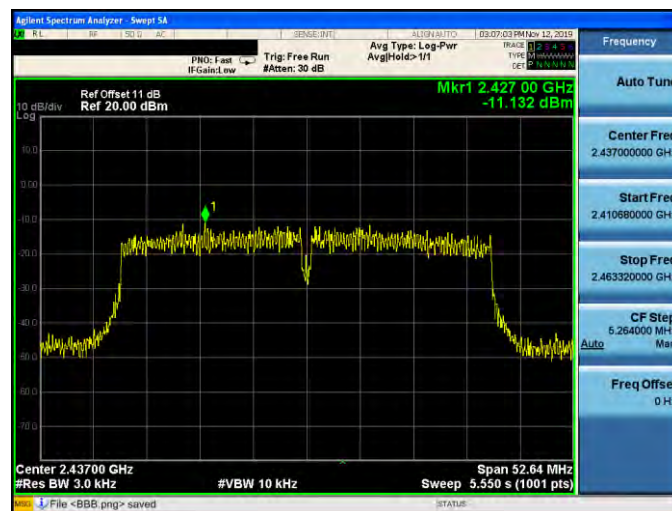

2452 MHz

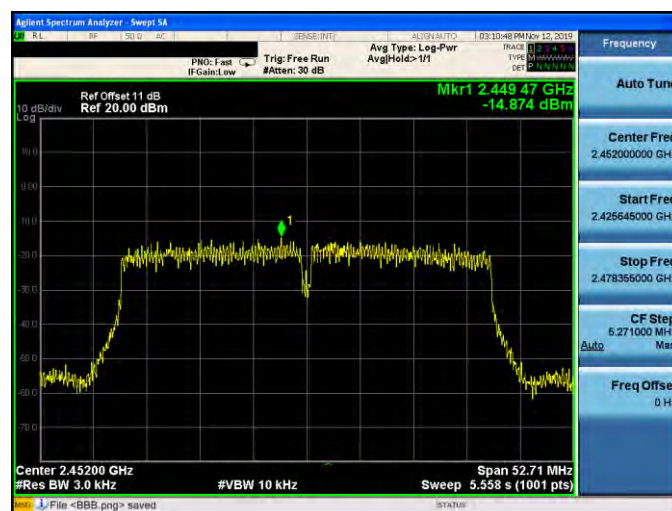



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz




2462 MHz






Mode 3: IEEE 802.11g Continuous TX mode\_ANT-3


2412 MHz

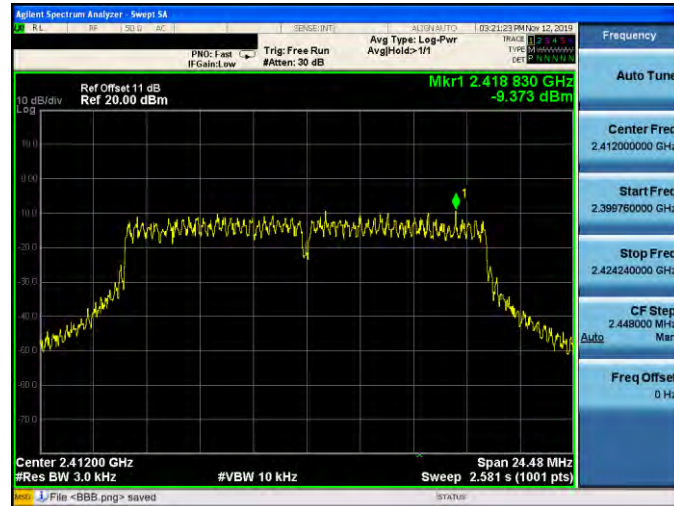

2437 MHz

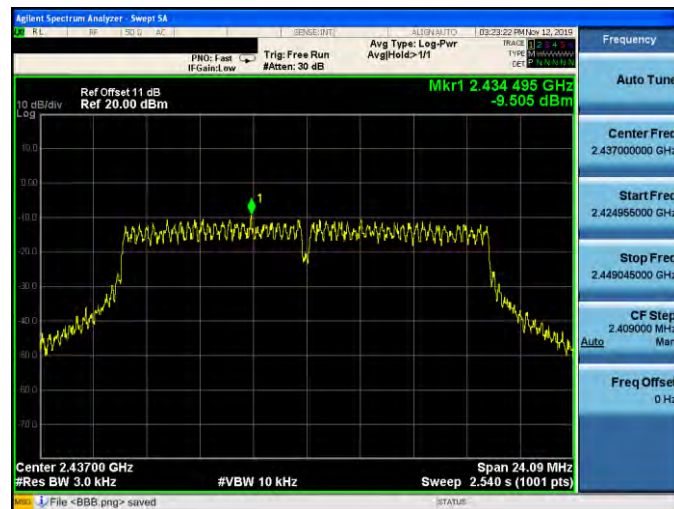

2462 MHz

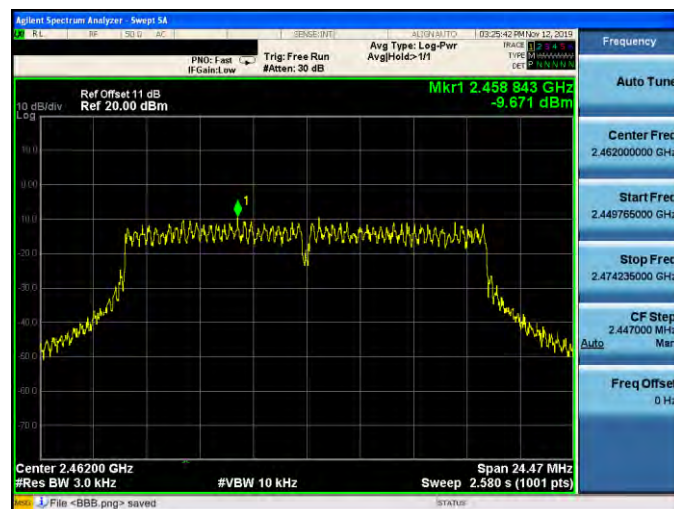




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-3


2412 MHz



2437 MHz

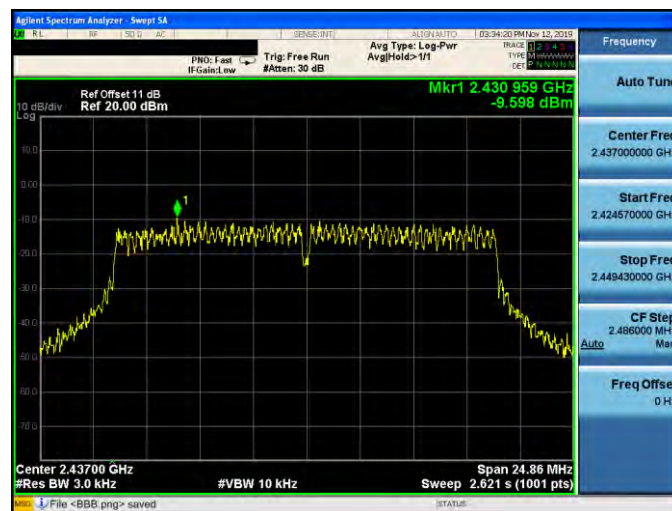


2462 MHz

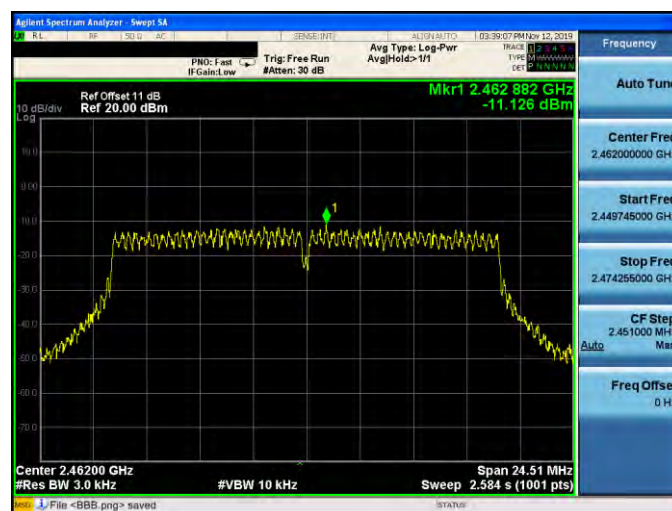




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-3


2422 MHz

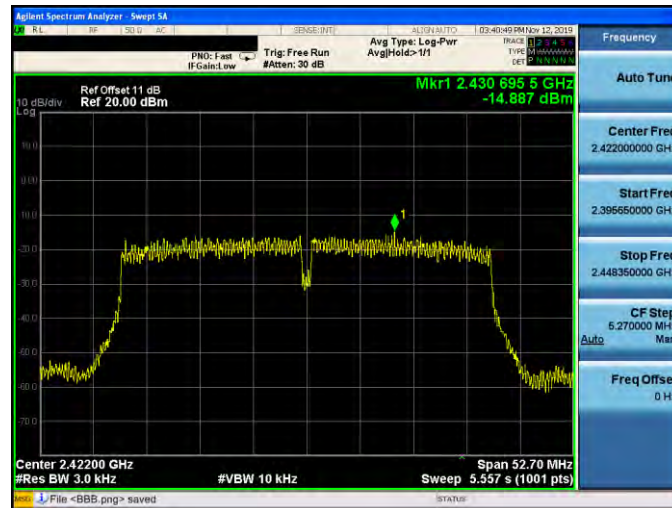

2437 MHz

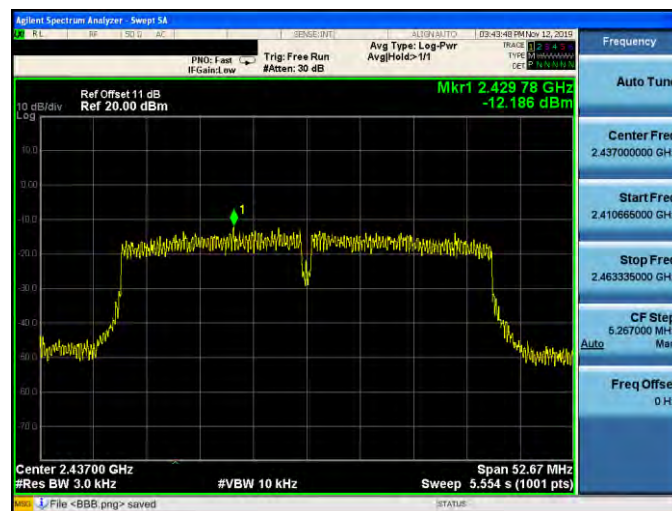


2452 MHz

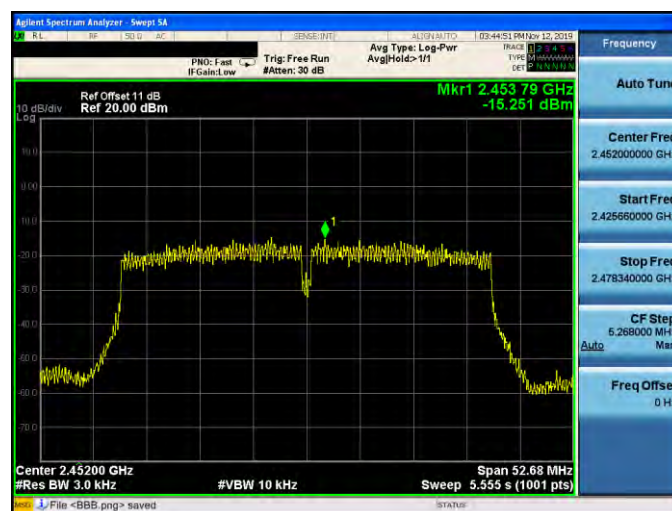


Beamforming on

Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-0


2412 MHz

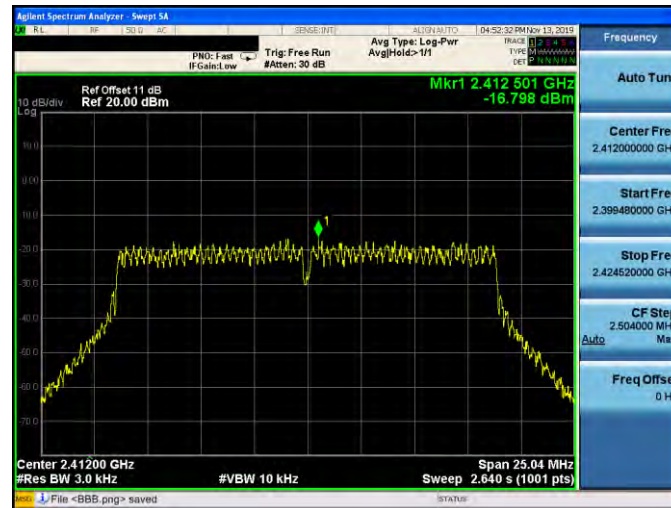

2437 MHz

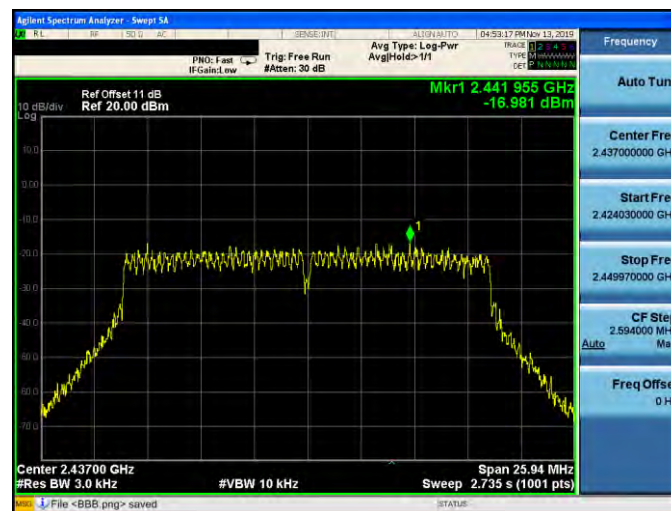


2462 MHz

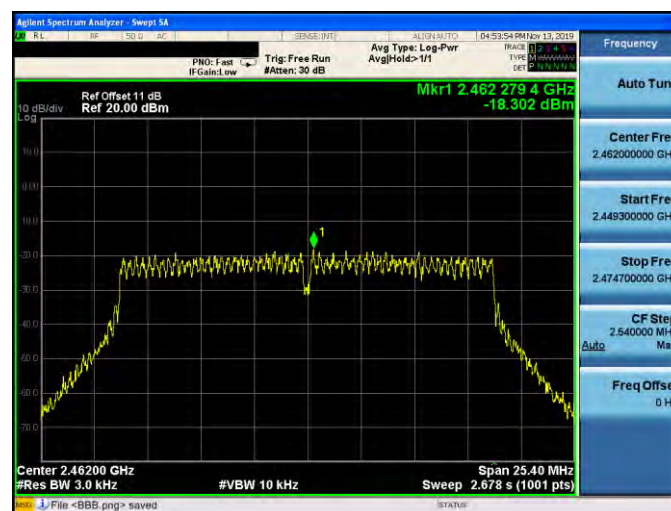




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-0


2422 MHz

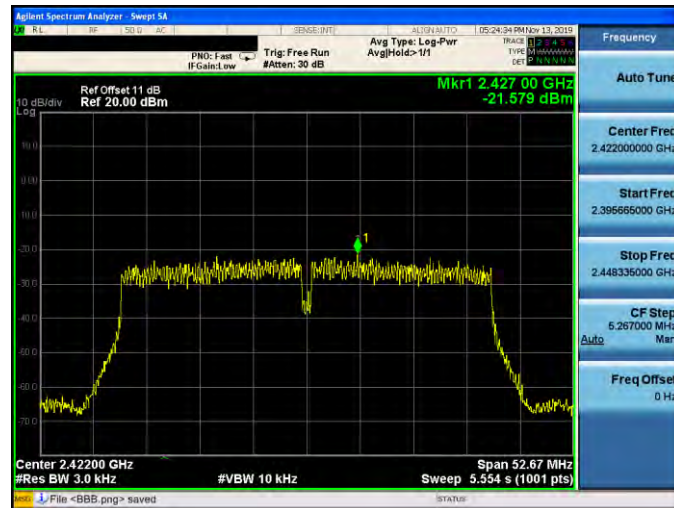

2437 MHz

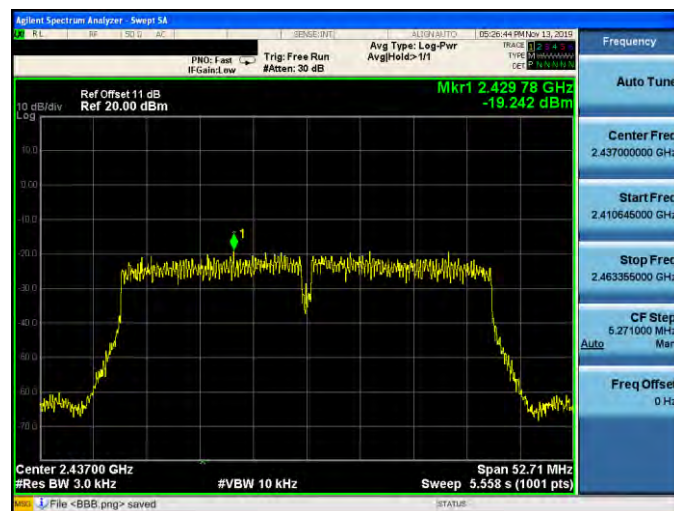


2452 MHz

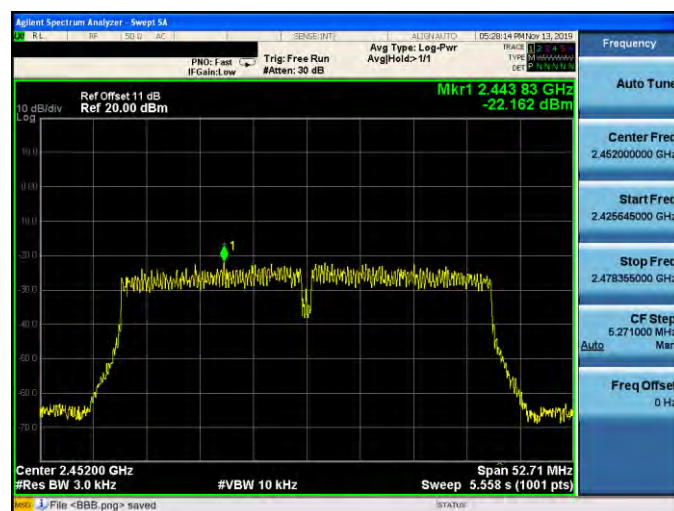




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-1


2412 MHz

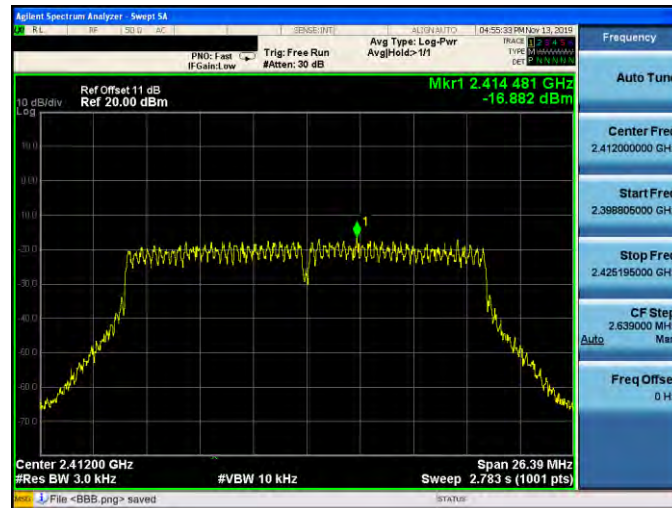

2437 MHz

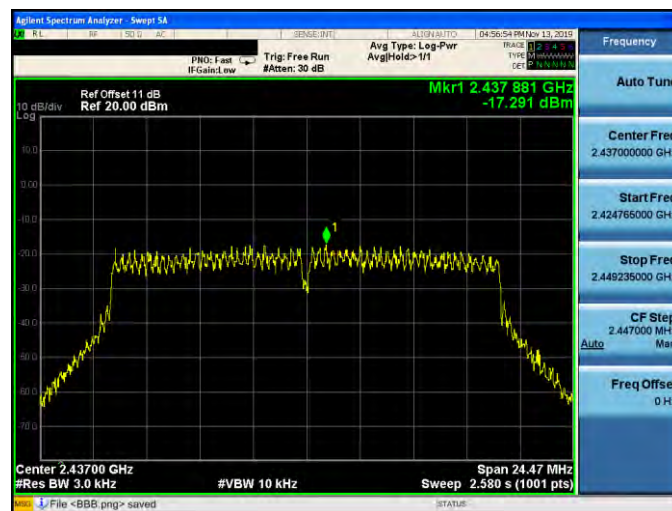


2462 MHz

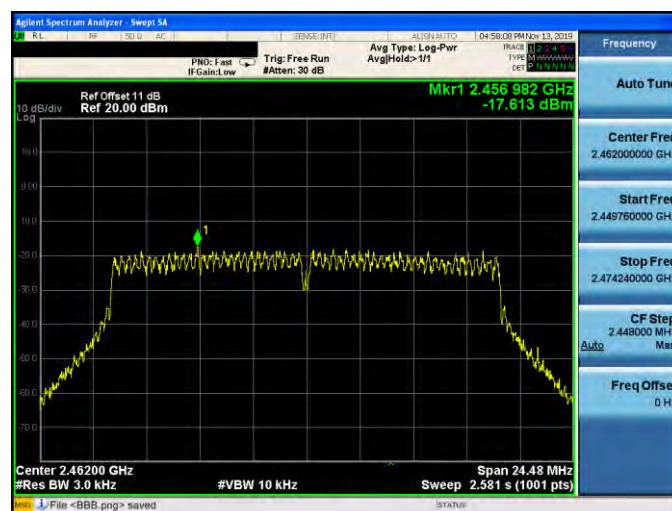




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-1


2422 MHz

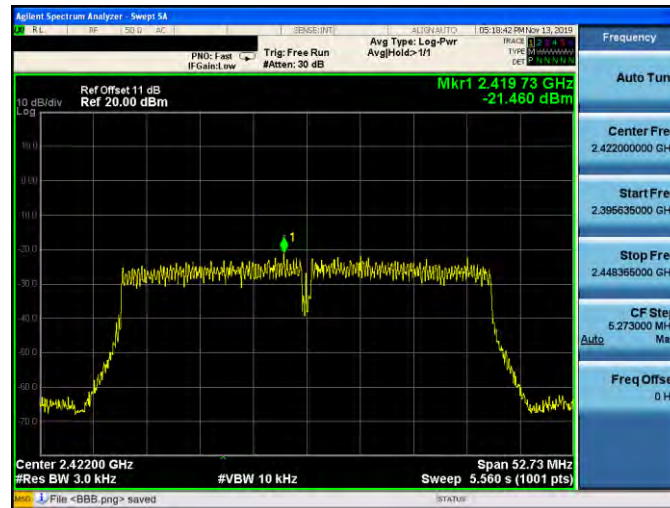

2437 MHz

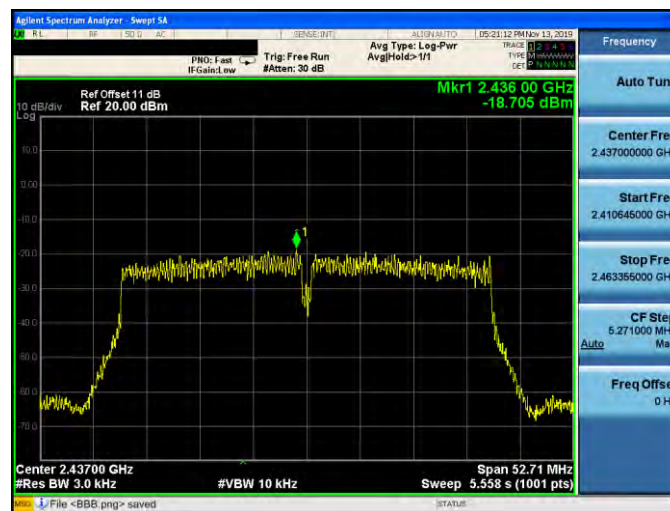


2452 MHz

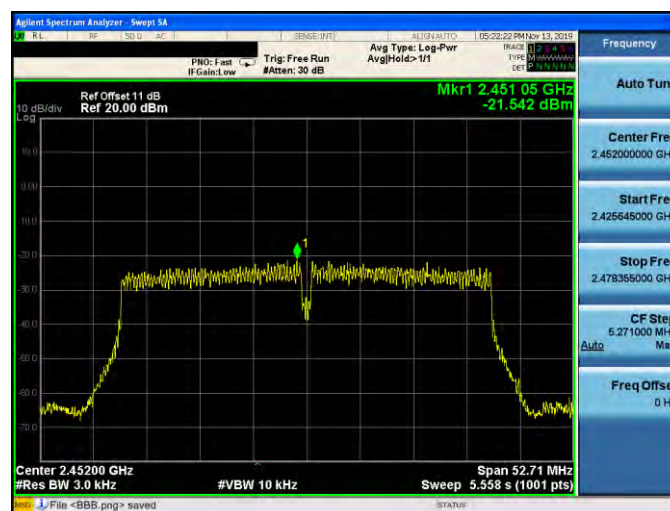




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-2


2412 MHz

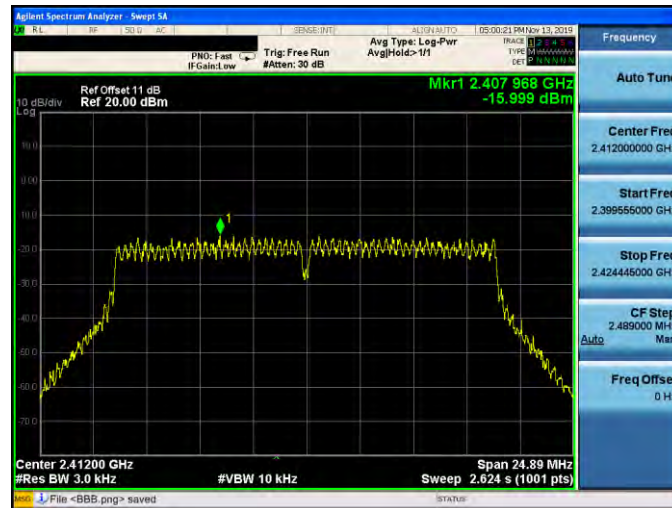

2437 MHz

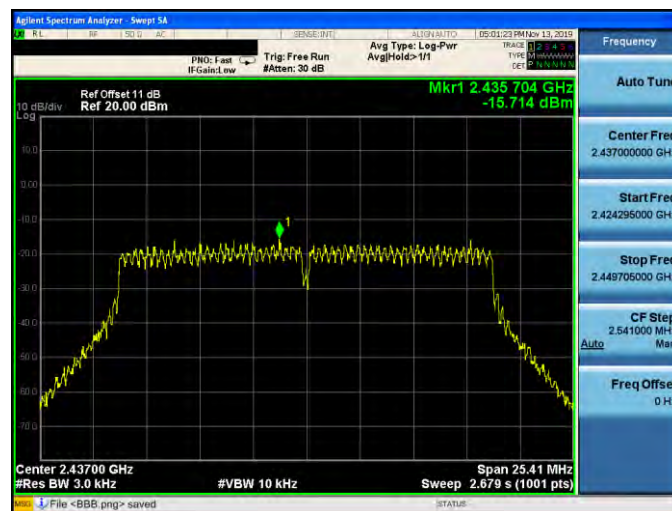


2462 MHz

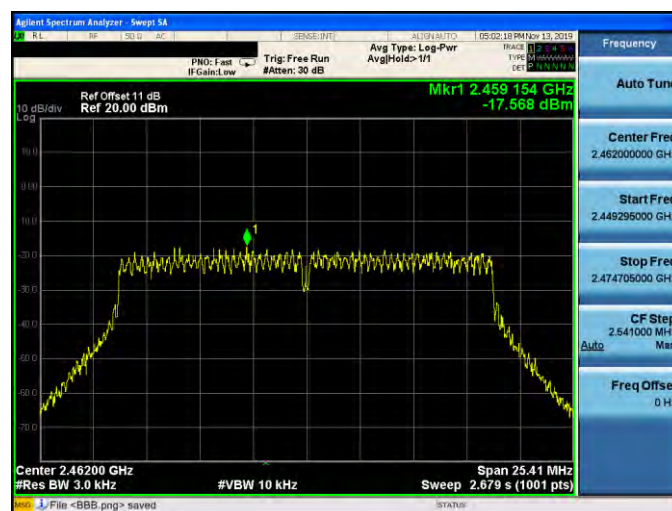




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-2


2422 MHz

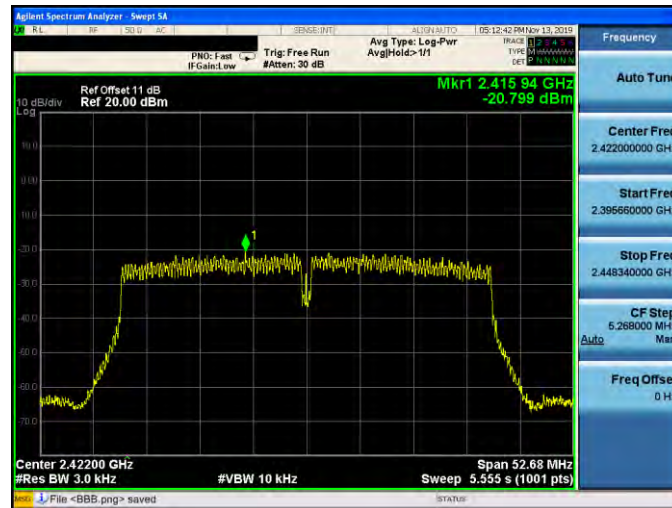

2437 MHz

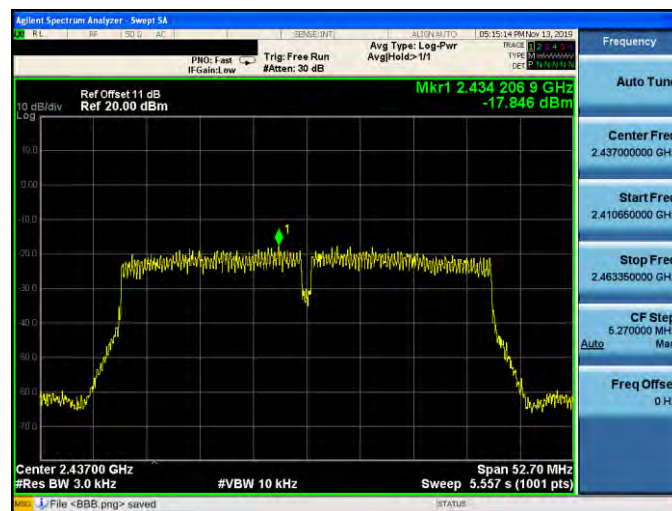


2452 MHz

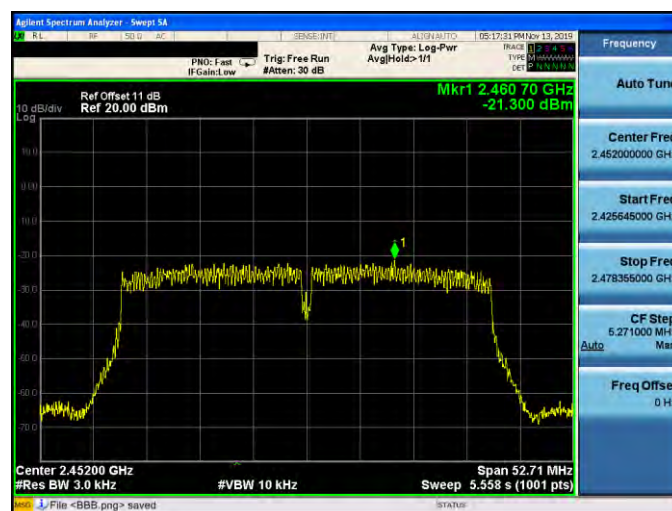




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode\_ANT-3


2412 MHz

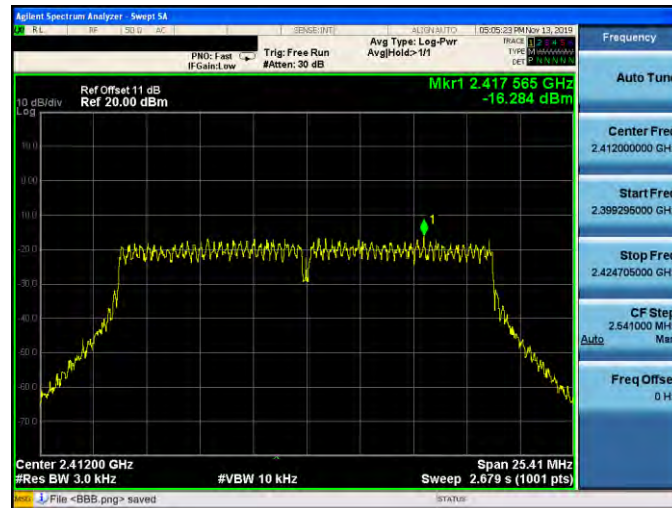

2437 MHz

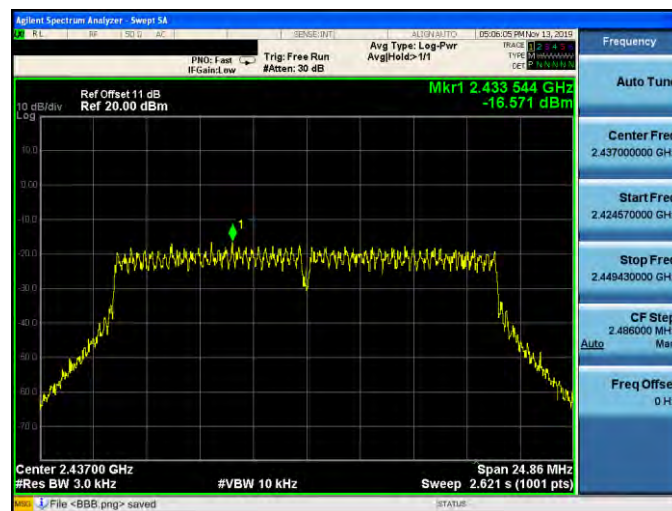


2462 MHz

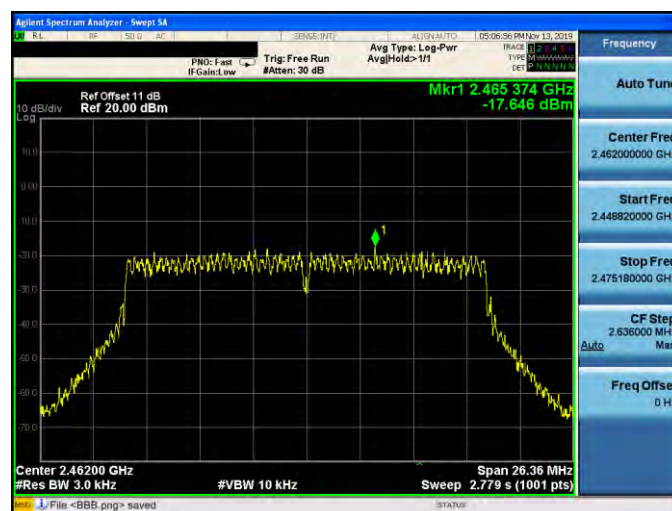




Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode\_ANT-3

2422 MHz

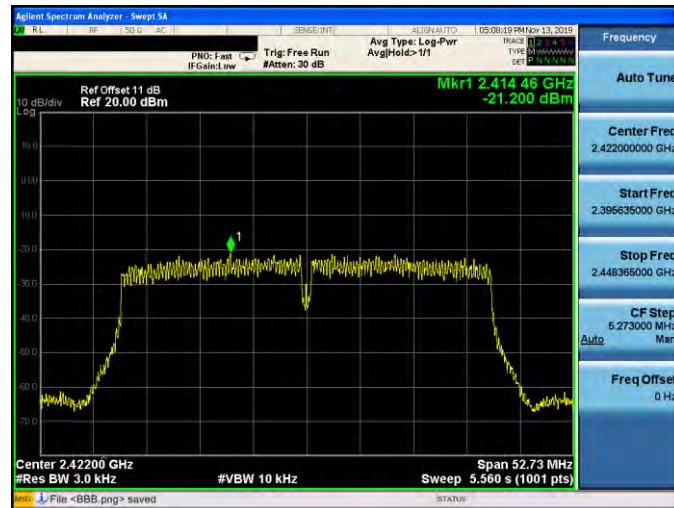

2437 MHz

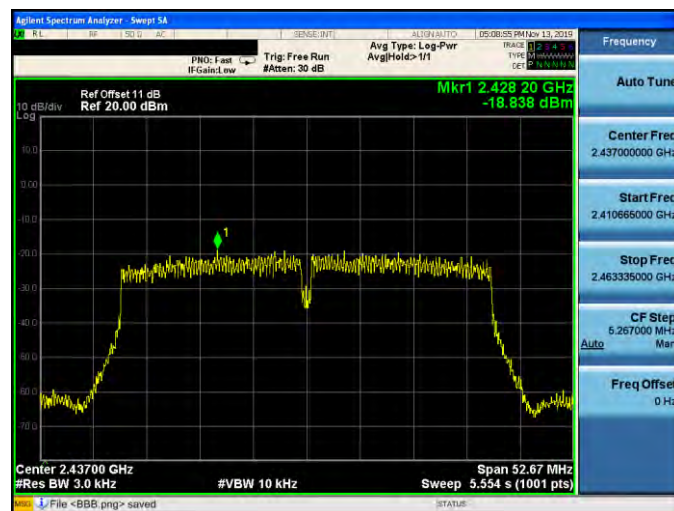

2452 MHz

