



Test Report

Report No. : MTi260407024-0109E4
Date of Issue : 2026-05-21
Applicant : DOYAN LLC
Product : ORB
Model(s) : GA-MHG, GA-MHG-2, GA-MHW-2, GA-MHB-2,
GA-MHR-2
FCC ID : 2A6YW-GA-MHG

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of test modes	5
1.4	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures	10
5.4	Information of test equipment	11
5.5	Test results	12
	Photographs of the Test Setup	16
	Photographs of the EUT	17

Test Result Certification		
Applicant	DOYAN LLC	
Applicant Address	656 Dark Star Ave, Columbus, OH 43230, United States	
Manufacturer	Dongguan Mumingmao Intelligent Technology Co., Ltd	
Manufacturer Address	4/F, B8, Jindi Zhihui Gang Industry Park, No.95 Jiaoping Road, Tangxia Town, Dongguan City, Guangdong Province, China	
Factory	Dongguan Mumingmao Intelligent Technology Co., Ltd	
Factory Address	4/F, B8, Jindi Zhihui Gang Industry Park, No.95 Jiaoping Road, Tangxia Town, Dongguan City, Guangdong Province, China	
Product description		
Product name	ORB	
Trademark	NYTSTND	
Model name	GA-MHG	
Series Model(s)	GA-MHG-2, GA-MHW-2, GA-MHB-2, GA-MHR-2	
Standards	47 CFR PART 1, § 1.1310 part2.1091	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2026-05-18 to 2026-05-20	
Test Result	Pass	
Prepared by:	James Qin	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

1 General Description

1.1 Description of the EUT

Product name:	ORB
Model name:	GA-MHG
Series Model(s):	GA-MHG-2, GA-MHW-2, GA-MHB-2, GA-MHR-2
Model difference:	All the models are the same circuit and module, except the model name and color.
Electrical rating:	Input: 9V=3A/ 12V=3A/ 15V=3A Wireless Charging: 5W/ 7.5W/ 10W/ 15W/ 25W(Max) Apple Watch: 2.5W(Max) Earbuds: 3W(Max) Speaker: 10W(4Ω)
Accessories:	Cable: Type-c to Type-c cable: 100cm
Hardware version:	X16-V3.0
Software version:	XH_X16_V2.1
Test sample(s) number:	MTi250928006-01-R002
RF specification	
Operating frequency range:	Coil1(Phone): 115-205kHz(5W/ 7.5W/ 10W/ 15W EPP), 360kHz(15W MPP/ 25W MPP) Coil2(Earphone/ Watch): 115-205kHz(Earphone), 300-340kHz(Watch)
Modulation type:	ASK
Antenna(s) type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

1.3 Description of test modes

No.	Emission test modes
Mode1	Wireless Output Phone(5W)+Watch Output(2.5W)
Mode2	Wireless Output Phone(7.5W)+Watch Output(2.5W)
Mode3	Wireless Output Phone(10W)+Watch Output(2.5W)
Mode4	Wireless Output Phone(15W EPP)+Watch Output(2.5W)
Mode5	Wireless Output Phone(15W MPP)+Watch Output(2.5W)
Mode6	Wireless Output Phone(25W MPP)+Watch Output(2.5W)
Mode7	Wireless Output Phone(5W)+Earphone Output(3W)
Mode8	Wireless Output Phone(7.5W)+Earphone Output(3W)
Mode9	Wireless Output Phone(10W)+Earphone Output(3W)
Mode10	Wireless Output Phone(15W EPP)+Earphone Output(3W)
Mode11	Wireless Output Phone(15W MPP)+Earphone Output(3W)
Mode12	Wireless Output Phone(25W MPP)+Earphone Output(3W)
Mode13	Wireless Output Phone(5W)
Mode14	Wireless Output Phone(7.5W)
Mode15	Wireless Output Phone(10W)
Mode16	Wireless Output Phone(15W EPP)
Mode17	Wireless Output Phone(15W MPP)
Mode18	Wireless Output Phone(25W MPP)
Mode19	Wireless Output Earphone (3W)
Mode20	Wireless Output Watch(2.5W)
Mode21	Stand by

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	iPhone 16 Pro Max	/	Apple
Mobile phone	iPhone 12	/	Apple
PHONE	FIND X3	M2LQK7WHH0	OPPO
watch	watch S7	M0JVGQG1VP	Apple
Earphone Case	Earphone	MJHFCQP1QM	Apple
HUAWEI QUICK CHARGE	HW-200325CP1	FL8606P8500764	HUAWEI
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations**3.1 Test laboratory**

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+E3D	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

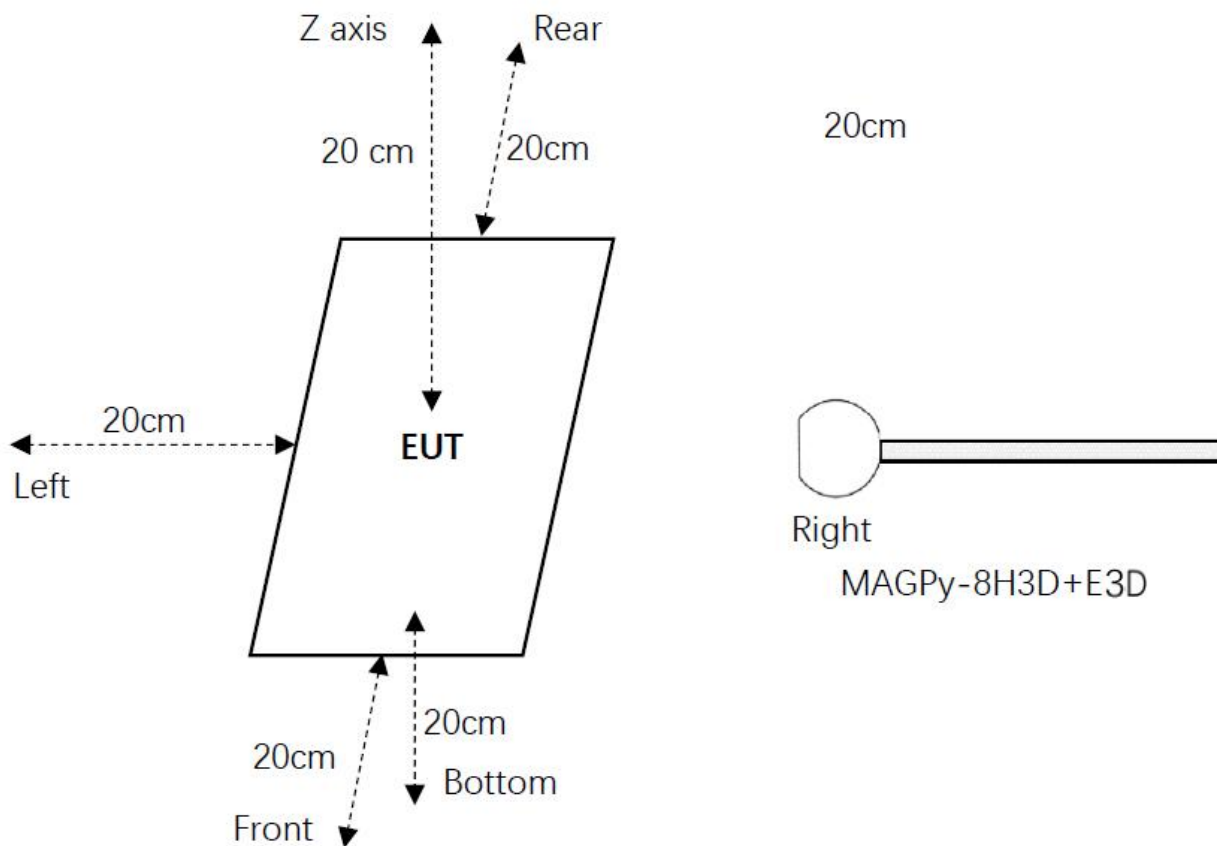
f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup



5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+E3D V2	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

5.5 Test results

Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	4.22	614	0.69%	0.06	1.63	3.68%
Left	3.93			0.05		
Right	3.27			0.03		
Front	2.44			0.03		
Rear	1.78			0.02		
Bottom	2.12			0.03		

Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	4.26	614	0.69%	0.08	1.63	4.91%
Left	3.85			0.03		
Right	3.11			0.02		
Front	2.39			0.05		
Rear	1.85			0.03		
Bottom	2.13			0.01		

Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	4.15	614	0.68%	0.05	1.63	3.07%
Left	3.68			0.03		
Right	3.11			0.03		
Front	2.32			0.05		
Rear	1.69			0.03		
Bottom	2.06			0.02		

TEST REPORT

Report No.: MTi260407024-0109E4

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.34	614	0.22%	0.01	1.63	0.61%
Left	0.89			0.009		
Right	0.76			0.008		
Front	0.54			0.008		
Rear	0.47			0.009		
Bottom	0.56			0.008		

Test condition 2: Mode 6 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.36	614	0.22%	0.009	1.63	0.55%
Left	0.86			0.007		
Right	0.71			0.008		
Front	0.51			0.007		
Rear	0.43			0.008		
Bottom	0.39			0.007		

Test condition 3: Mode 6 operating mode with client device (99 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.26	614	0.21%	0.02	1.63	1.23%
Left	0.78			0.01		
Right	0.75			0.008		
Front	0.41			0.009		
Rear	0.45			0.007		
Bottom	0.46			0.008		

TEST REPORT

Report No.: MTi260407024-0109E4

Test condition 1: Mode 10 operating mode with client device (1 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	5.69	614	0.93%	0.07	1.63	4.29%
Left	3.56			0.05		
Right	3.51			0.06		
Front	2.59			0.06		
Rear	1.65			0.03		
Bottom	2.23			0.03		

Test condition 2: Mode 10 operating mode with client device (50 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	5.79	614	0.94%	0.08	1.63	4.91%
Left	3.68			0.06		
Right	2.56			0.05		
Front	2.39			0.03		
Rear	1.77			0.05		
Bottom	2.25			0.03		

Test condition 3: Mode 10 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	5.41	614	0.88%	0.07	1.63	4.09%
Left	3.39			0.05		
Right	3.34			0.06		
Front	2.46			0.06		
Rear	1.57			0.03		
Bottom	2.12			0.03		

TEST REPORT

Report No.: MTi260407024-0109E4

Test condition 1: Mode 12 operating mode with client device (1 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	3.66	614	0.60%	0.05	1.63	3.07%
Left	2.16			0.03		
Right	2.08			0.02		
Front	1.62			0.01		
Rear	0.96			0.02		
Bottom	1.36			0.03		

Test condition 2: Mode 12 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	3.88	614	0.63%	0.06	1.63	3.68%
Left	2.23			0.03		
Right	2.05			0.02		
Front	1.56			0.03		
Rear	1.12			0.02		
Bottom	1.33			0.01		

Test condition 3: Mode 12 operating mode with client device (99 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	3.21	614	0.52%	0.04	1.63	2.45%
Left	2.03			0.02		
Right	1.86			0.03		
Front	1.36			0.02		
Rear	0.88			0.03		
Bottom	1.05			0.02		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****