

承认书

客户名称: 深圳市瀚彩微电子有限公司Shenzhen Hancal Microelectronics Co., Ltd.

客户料号: 01.011.0375

我司型号: A11-G33.3*8*1.0-7.5UH-12MM

送样日期: 2025 年 10 月 18 日

供应方: 东莞捷瑞思科技有限公司 Dongguan Jierestech Technology Co., Ltd.

绘制	审 核	批 准
王 莉 芝	邓 祥 桂	陆 如 圣

客户承认:

合 格	不 合 格	承 认
备 注		

东莞捷瑞思科技有限公司Dongguan Jierestech Technology Co., Ltd.


Tel: _____

Fax: 86+13632701380

地址: 东莞市大岭山镇朗湖路 96 号 (金雄达科技园 L 栋 3 楼) No. 96, Langhu Road, Dalingshan Town, Dongguan City (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

客户名称	客户料号	我司型号	版 本	日 期
瀚 彩	01.011.0375	G33.3*8*1.0-7.5UH-12MM	A0	2025.10.18

一、平面结构图Planar structure diagram: 单位Organization:MM

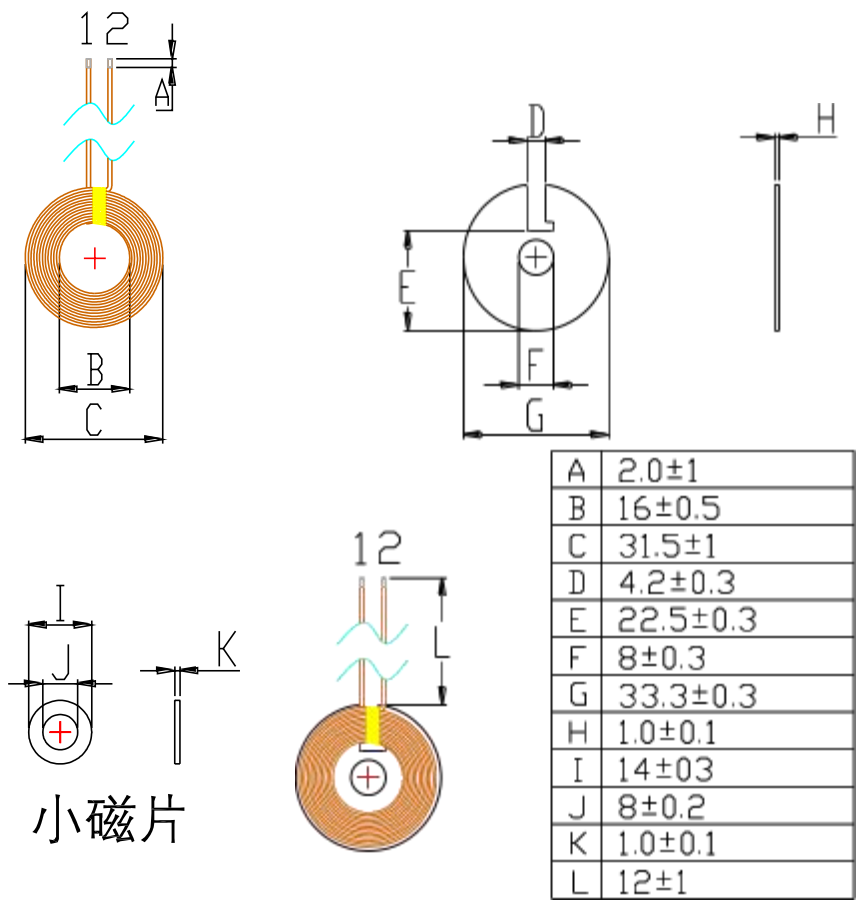

二、产品参数Product parameters:

脚 位 Foot position	线 径 Path	圈 数 Circle Number	备 注 Note
1 - 2	0.08*24*2P	12T	热风线

三、技术要求Technical requirements:

1. 固定好线头线尾，防止线松断线等现象

Fix the ends of the wires securely to prevent any loosening or breakage of the wires.

2. 按客户要求把过长的线头剪，镀上锡，镀锡深度统一为 2±1MM

According to the customer's requirements, cut the excessively long wire ends, apply tin plating, and ensure that the tin plating depth is uniformly 2±1MM.

3. 在磁片上点上适当的白胶，贴上线圈，过程中要保证产品表面干净整洁



Apply the appropriate white glue on the magnetic sheet and attach the coil. During the process, ensure that the surface of the product remains clean and tidy.

4. 所用硬磁片为带圆孔, 无破损

The hard magnetic sheet used has circular holes and is free from any damage.

四、电性参数Electrical parameters:

1.电感值, Q 值Inductance value, Q value:

PIN 1 — 2 = 7.5uH ±0.3UH

Q 值 ≥ 45

以上电感与 Q 值以铨华 1062A 仪器, 以 100KHZ/1.0Vrms 为标准或等同仪器。

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100KHZ/1.0Vrms or an equivalent instrument.

五、材料清单Material List:

序号	名称Name	材质Material	供应商Supplier	备 注Note
1	热风线 Hot air line	0.08*24*2P		
2	磁 片Disk	G33.3*8*1.0 Hard substrate		Small magnetic disk14*8*1.0
3	锡Tin	高温环保High-temperature environmental protection		
4	白 胶 White glue	BY882		
5	双 面 胶 Double-sided adhesive tape	Diameter 32MM		无孔 Without holes
6	磁 铁 Magnet	7.65*2.0*3200GS		配磁铁 With magnets
7	高温胶布 High-temperature adhesive tape	3MM		
