

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

E016

客 戶 料 號:
CUST P/N:

泛 亞 料 號:
FINE P/N:

產 品 型 號:
DESC:

FYE01612024041901S

日 期:
DATE:

2024/04/19

版 本:
Version:

A.1

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
尹 艺 Yin yi	兰明慧 Lan minghui	蔡纪雨 Cai jiyu	

东莞市泛亚电子有限公司

Dongguan FANYA Electronics Co., LTD

地址：东莞市石碣镇刘屋科技东路 194 号

Address: No. 194, Science and Technology East Road, Liuwu Town, Shijie District, Dongguan City

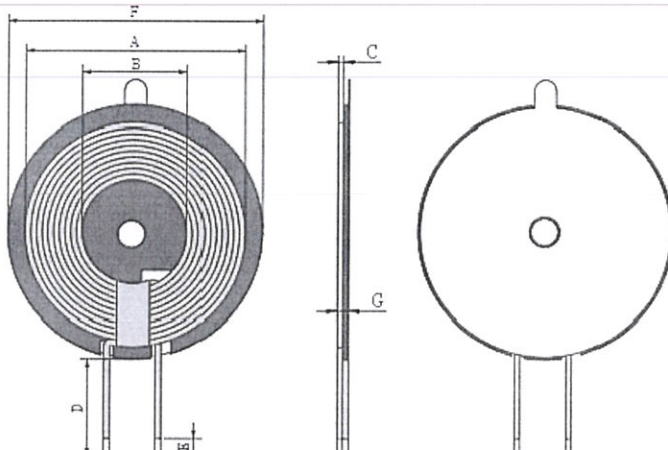
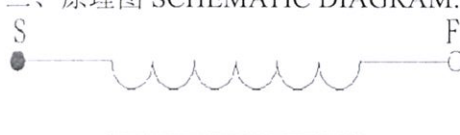
TEL: 0769-22490287 / 22452492

FAX: 0769-22499451

E-mail: fineelec@163.com



SPECIFICATION

產品型號: DESC		FYE01612024041901S		版本 Rev: A.1	客戶 CUST: 泛亚料号 Fine P/N: 客户料号 CUST P/N:	E016
一、尺寸 DIMENSION:(mm)					A	41±1.5
					B	20.5±0.5
					C	1.05±0.2
					D	20±2
					E	3±2
					F	43.5±0.5
					G	2.6 MAX(不含离型纸)
					二、原理图 SCHEMATIC DIAGRAM:	
					1. 线圈交叉出线;线圈出线位置贴 8mm 宽高温胶;	
Note: 1. Crossed coil output; the position of the coil output is covered with 8mm-wide high-temperature adhesive; 2. The coil is reversely attached to the hard magnetic sheet. The size of the hard magnetic sheet is 43.5*5.3*1.0mm. The holes are opened in the L-shaped double groove; 3. The back of the magnetic sheet is covered with 42*6*0.08mm. The hole is equipped with a detachable position and ordinary double-sided adhesive.					2. 线圈反贴硬磁片,硬磁片尺寸 $\phi 43.5*5.3*1.0\text{mm}$,开孔开 L 双槽;	
					3. 磁片背面贴 $\phi 42*6*0.08\text{mm}$ 开孔带手撕位普通双面背胶。	
					三、绕线参数 Winding Specification:	
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	
1	S	F	丝包线 0.078*105P	10Ts	CCW	
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65+20%						
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	6.3uH ±10%	100KHz/1.0V	TH2810	
2	DCR	S-F	60mΩ max	25℃	TH2810	
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE		
Yin yi 尹艺 2024/05/17				Cai jiyu 蔡纪雨 2024/05/17		