


**Appendix B. Test Result and Data (30MHz ~ 1GHz)**

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

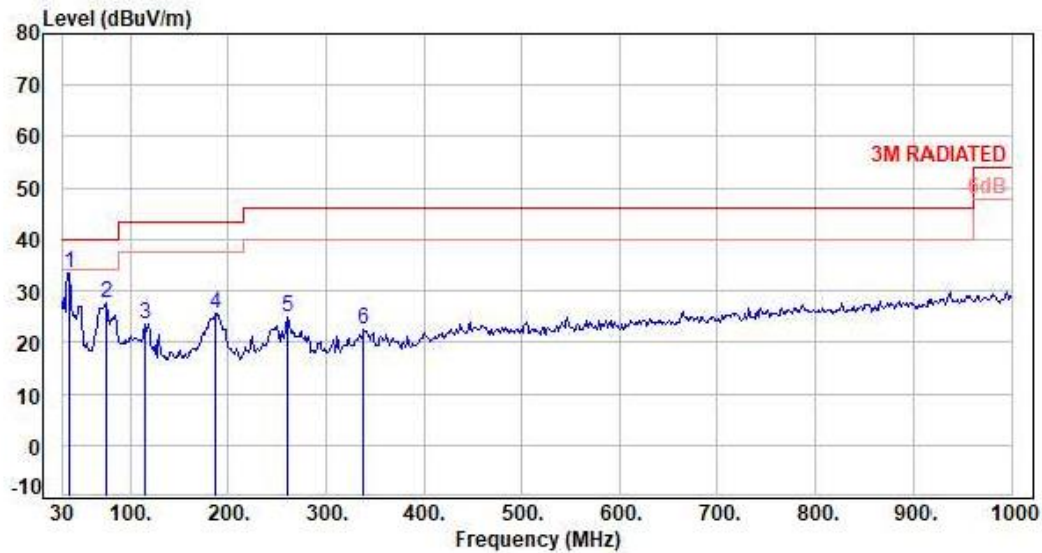

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	36.79	-11.04	44.57	33.53	40.00	-6.47	Peak	400	360	P
2	74.62	-13.89	41.66	27.77	40.00	-12.23	Peak	400	360	P
3	115.36	-13.80	37.28	23.48	43.50	-20.02	Peak	400	360	P
4	187.14	-12.44	38.13	25.69	43.50	-17.81	Peak	400	360	P
5	260.86	-11.41	36.46	25.05	46.00	-20.95	Peak	400	360	P
6	338.46	-8.87	31.39	22.52	46.00	-23.48	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

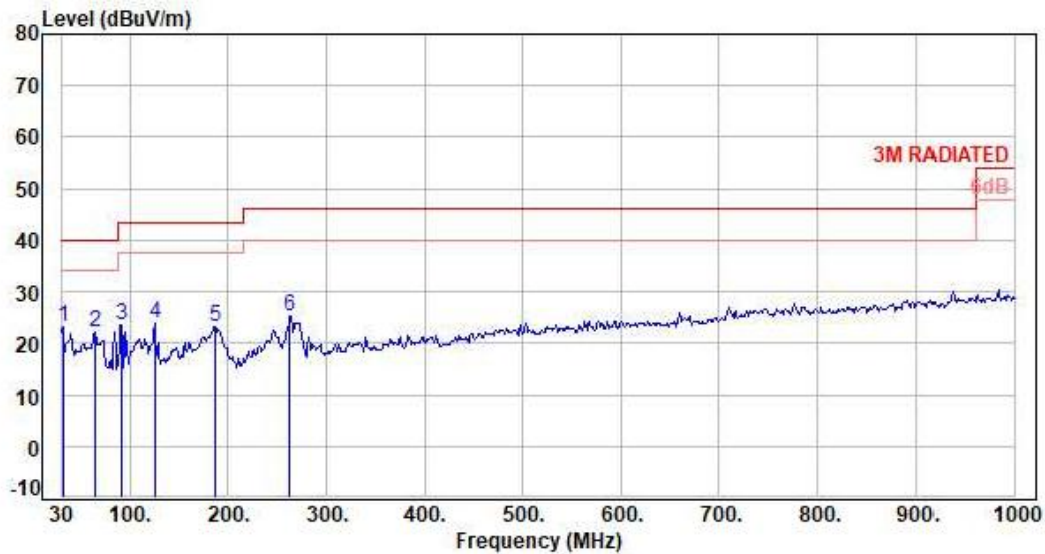

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	31.94	-11.05	34.14	23.09	40.00	-16.91	Peak	400	0	P
2	64.92	-11.12	33.13	22.01	40.00	-17.99	Peak	400	0	P
3	92.08	-16.64	40.15	23.51	43.50	-19.99	Peak	400	0	P
4	125.06	-13.00	36.77	23.77	43.50	-19.73	Peak	400	0	P
5	187.14	-12.44	35.66	23.22	43.50	-20.28	Peak	400	0	P
6	262.80	-11.32	36.53	25.21	46.00	-20.79	Peak	400	0	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor