

SR800 Magnetic Power Bank Manual

- A. Power On / Off
B. LED Battery Indicator
C. USB-C: Input / Output
D. Wireless charging area
E. Stand



Specification

- Product Name: Rechargeable Li-Polymer Magneric Power Bank
- Model Name: SR800 Magnetic
- Battery Capacity: 3.87V / 19.35Wh
- Rate Capacity: 5V / 3300mAh, 9V / 1600mAh
- Input: USB-C: DC 5V / 3A, 9V / 2A,
- Output: USB-C: DC 5V/3A, 9V/2.22A, Max 20W
Wireless: 5W/7.5W/10W/15W
- Max Output: USB-C + Wireless output: DC 5V/3A,15w
- Quick Charge: Qualcomm® Quick Charge™ 3.0 Technology / USB PD 3.0
- Charging time: 2.5-3.5 hours(when using a compatible DC 5V 3.0A adapter)
- Dimensions: 106.7 * 72.7* 22.6 mm/ 4.2 * 2.86 * 0.88 inch
- Weight: 145g / 5.11oz
- Temperature: Operating temp: 5°C ~ 35°C Storage temp: -5°C ~ 45°C
- Storage Humidity: 10% ~ 60% RH

Power Display

Press the Power On/Off to display the power status.

Indicator	Battery Status	Wireless Charging Status
Light on	Power On Indicator – Charge Level ■○○○ 5%~25% ■●○○ 25%~50% ■●●○ 50%~75% ■●●● 75%~100%	Wireless charging activated
	1. Power bank is charging 2. Low battery warning ■○○○ 1%~5%	
Flashing		If a foreign object is detected between power bank and device, the indicator will flash and wireless charging will not start.
Dim light	If the LED indicator lights are dim after pressing the power key, please charge the Power Bank immediately. ○○○○	Wireless charging off

“This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada’s licence-exempt RSS(s). Operation is subject to the following two conditions:
1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.”

1. “L’ émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d’ Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L’ exploitation est autorisée aux deux conditions suivantes:
1. L’ appareil ne doit pas produire de brouillage ;
2. L’ appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d’ en compromettre le fonctionnement.”


IC RF Exposure statement

Radiation Exposure Statement:
This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 10cm between the radiator & your body.

Déclaration d'exposition aux radiations:
Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 10cm de distance entre la source de rayonnement et votre corps.


Operation

Charge Your Mobile Device
(This product supports no pass-through charging)

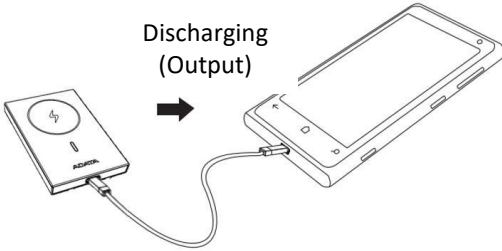

Plug the USB cable into the Power Bank and press the power button to charge your device. 3 devices can be charged simultaneously either with cables or wirelessly.

Charge The Power Bank
Use the USB-C port to charge the Power Bank from a computer or a compatible charging device.



The LED indicator blinks while the Power Bank charges.

Cautions



1. Use the USB-C cable to charge the Power Bank.
2. Do not leave this product in an enclosed vehicle. Extreme heat and sunlight may damage the power bank.
3. Do not expose the product to high temperatures or humid environments.
4. Do not insert metal or foreign objects into the product, so as to avoid short-circuits and damage.
5. Do not disassemble, damage, jolt, or burn the product. Do not subject it to heavy weight.
6. Do not arbitrarily discard this product; recycle used batteries in accordance with local laws.
7. If not used long-term, charge the device once every three months in order to maintain the battery lifespan.
8. If the Power Bank is out of power (after pressing the power key and the LED indicator remains dim),to avoid of battery damage, immediately charge the Power Bank.
9. Output current will vary depending on the input charge.
10. Stop using the power bank if it has reached the end of its lifespan or exhibits swelling.
11. 1Using ADATA brand or safety-certified data transfer cables and charging stations is recommended to ensure charging safety.
12. Do not overcharge this product.
13. Do not submerge this product or allow water into its internal workings to prevent the risk of short circuits.



Recycle old batteries properly

Warranty

Please note that ADATA is not responsible for providing repair or replacement if damage is caused by the following:
(1) Damage caused by natural calamity or any inappropriate usage.
(2) Product has been repaired or taken apart by unauthorized technicians.
(3) The warranty label is altered, damaged or missing.
(4) Product serial number does not conform to our original system or the label has been damaged.
(5) Products purchased from unauthorized agents. This limited warranty covers only repairs or replacements of ADATA products. ADATA is not liable for any loss of data or any cost incurred from determining the source of system problems, removing, servicing or installing ADATA products.

For more information, visit the ADATA website <http://www.adata.com>

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the users is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

For Wireless Charging:During the operation of device a distance of 10 cm surrounding thedevice and 10 cm above the top surface of the device must berespected.au cours de l’opération de l’appareil sur une distance de10 cm autour de l’appareil et de 10 cm au - dessus de la surfacesupérieure de l’appareil doit être respecté.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.