

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

WIFI2.4G- Horizontal-TX


Test result

Project Number: Certification

Test Time: 2026-03-26_20.14.16

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

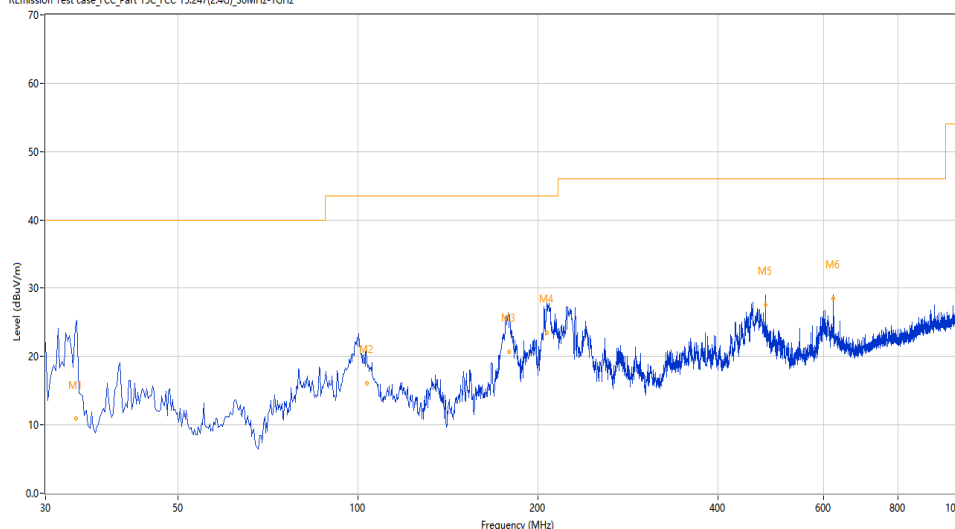

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.781	27.47	-26.95	40.0	12.53	Peak	65.70	213	Horizontal	Pass
1*	33.781	10.90	-26.95	40.0	29.10	QP	65.70	213	Horizontal	Pass
2	103.368	20.28	-24.97	43.5	23.22	Peak	232.80	155	Horizontal	Pass
2*	103.368	16.12	-24.97	43.5	27.38	QP	232.80	155	Horizontal	Pass
3	178.541	25.47	-27.06	43.5	18.03	Peak	0.00	101	Horizontal	Pass
3*	178.541	20.71	-27.06	43.5	22.79	QP	0.00	101	Horizontal	Pass
4	207.014	28.28	-24.88	43.5	15.22	Peak	296.40	150	Horizontal	Pass
4*	207.014	23.47	-24.88	43.5	20.03	QP	296.40	150	Horizontal	Pass
5	480.008	31.53	-17.71	46.0	14.47	Peak	279.70	106	Horizontal	Pass
5*	480.008	27.51	-17.71	46.0	18.49	QP	279.70	106	Horizontal	Pass
6	624.011	31.07	-13.25	46.0	14.93	Peak	309.80	197	Horizontal	Pass
6*	624.011	28.48	-13.25	46.0	17.52	QP	309.80	197	Horizontal	Pass

WIFI2.4G-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_20.03.50

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

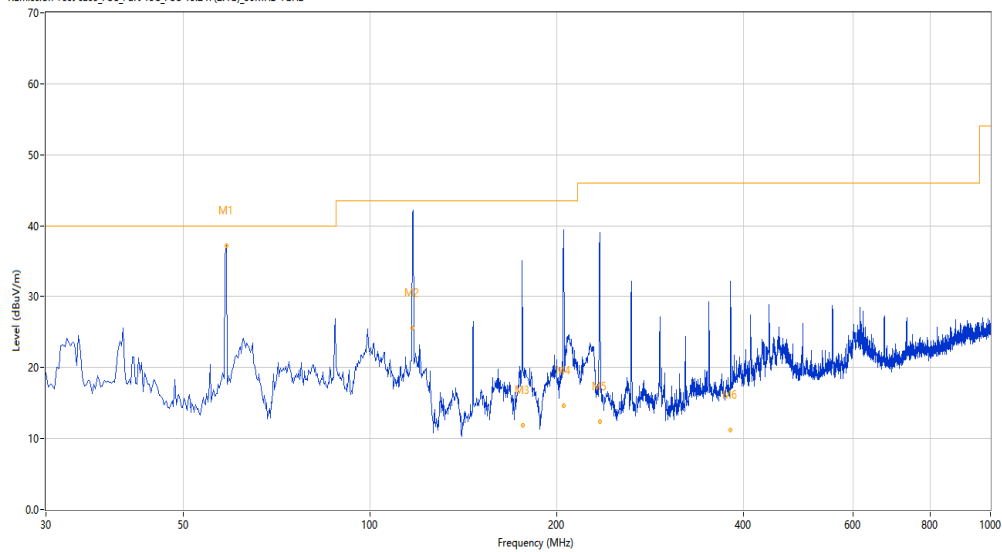

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.611	38.32	-24.63	40.0	1.68	Peak	9.60	101	Vertical	Pass
1*	58.611	37.16	-24.63	40.0	2.84	QP	9.60	101	Vertical	Pass
2	117.124	26.83	-26.43	43.5	16.67	Peak	177.30	299	Vertical	Pass
2*	117.124	25.58	-26.43	43.5	17.92	QP	177.30	299	Vertical	Pass
3	176.049	17.28	-27.20	43.5	26.22	Peak	103.50	101	Vertical	Pass
3*	176.049	11.91	-27.20	43.5	31.59	QP	103.50	101	Vertical	Pass
4	205.093	21.72	-24.79	43.5	21.78	Peak	189.40	101	Vertical	Pass
4*	205.093	14.66	-24.79	43.5	28.84	QP	189.40	101	Vertical	Pass
5	234.626	18.63	-23.52	46.0	27.37	Peak	0.00	172	Vertical	Pass
5*	234.626	12.41	-23.52	46.0	33.59	QP	0.00	172	Vertical	Pass
6	381.157	17.34	-19.79	46.0	28.66	Peak	255.40	298	Vertical	Pass
6*	381.157	11.26	-19.79	46.0	34.74	QP	255.40	298	Vertical	Pass

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-27_19.00.50

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

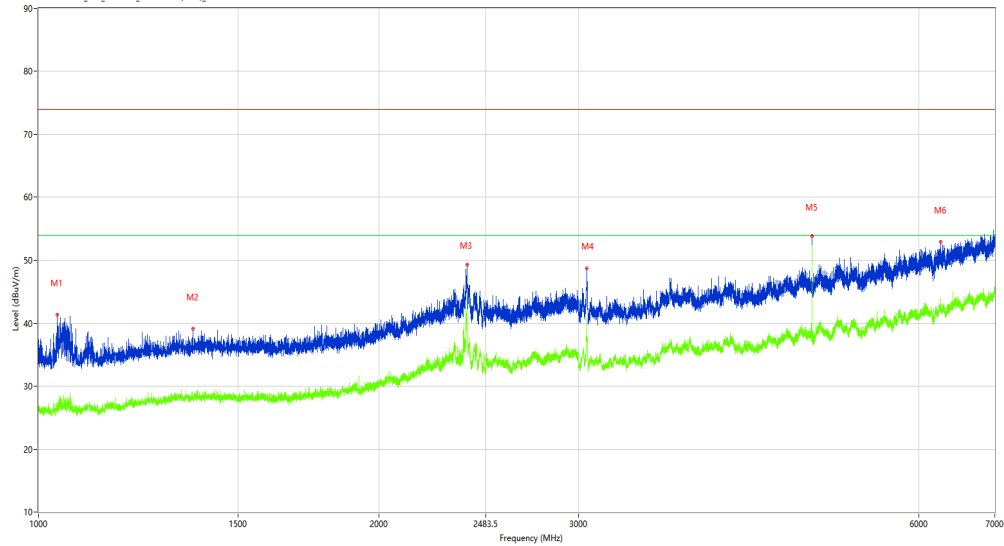

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1038.750	41.39	-14.96	74.0	32.61	Peak	156.40	100	Horizontal	Pass
1**	1038.750	25.81	-14.96	54.0	28.19	AV	156.40	100	Horizontal	Pass
2	1369.000	39.14	-13.44	74.0	34.86	Peak	310.50	100	Horizontal	Pass
2**	1369.000	27.62	-13.44	54.0	26.38	AV	310.50	100	Horizontal	Pass
3	2391.500	49.33	-5.51	74.0	24.67	Peak	156.40	100	Horizontal	Pass
3**	2391.500	42.32	-5.51	54.0	11.68	AV	156.40	100	Horizontal	Pass
4	3050.000	47.93	-4.72	74.0	26.07	Peak	0.00	100	Horizontal	Pass
4**	3050.000	40.44	-4.72	54.0	13.56	AV	0.00	100	Horizontal	Pass
5	4824.000	53.86	-1.50	74.0	20.14	Peak	139.40	100	Horizontal	Pass
5**	4824.000	52.38	-1.50	54.0	1.62	AV	139.40	100	Horizontal	Pass
6	6269.500	52.88	2.40	74.0	21.12	Peak	0.00	100	Horizontal	Pass
6**	6269.500	42.71	2.40	54.0	11.29	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_19.04.45

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ


CAMERA SMART PET FEEDER

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

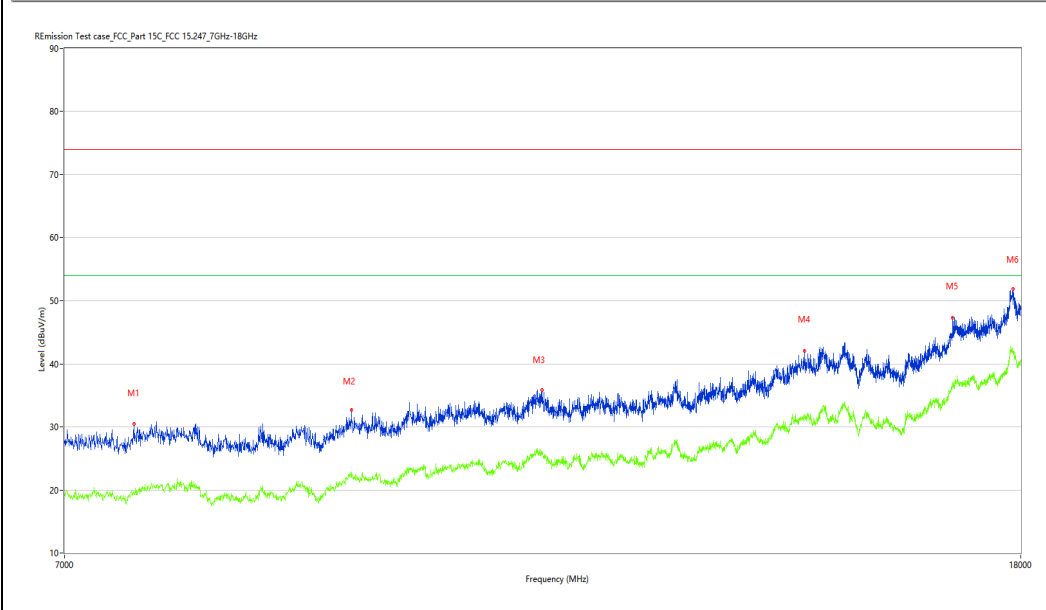

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7495.000	30.50	-0.05	74.0	43.50	Peak	158.80	100	Horizontal	Pass
1**	7495.000	19.37	-0.05	54.0	34.63	AV	158.80	100	Horizontal	Pass
2	9293.500	32.67	1.30	74.0	41.33	Peak	170.50	100	Horizontal	Pass
2**	9293.500	22.07	1.30	54.0	31.93	AV	170.50	100	Horizontal	Pass
3	11215.750	35.85	4.18	74.0	38.15	Peak	216.80	100	Horizontal	Pass
3**	11215.750	25.79	4.18	54.0	28.21	AV	216.80	100	Horizontal	Pass
4	14540.500	41.99	9.61	74.0	32.01	Peak	360.00	100	Horizontal	Pass
4**	14540.500	32.03	9.61	54.0	21.97	AV	360.00	100	Horizontal	Pass
5	16828.500	47.28	13.84	74.0	26.72	Peak	170.50	100	Horizontal	Pass
5**	16828.500	37.04	13.84	54.0	16.96	AV	170.50	100	Horizontal	Pass
6	17862.500	51.86	18.46	74.0	22.14	Peak	360.00	100	Horizontal	Pass
6**	17862.500	41.97	18.46	54.0	12.03	AV	360.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_20.59.08

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

Remission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

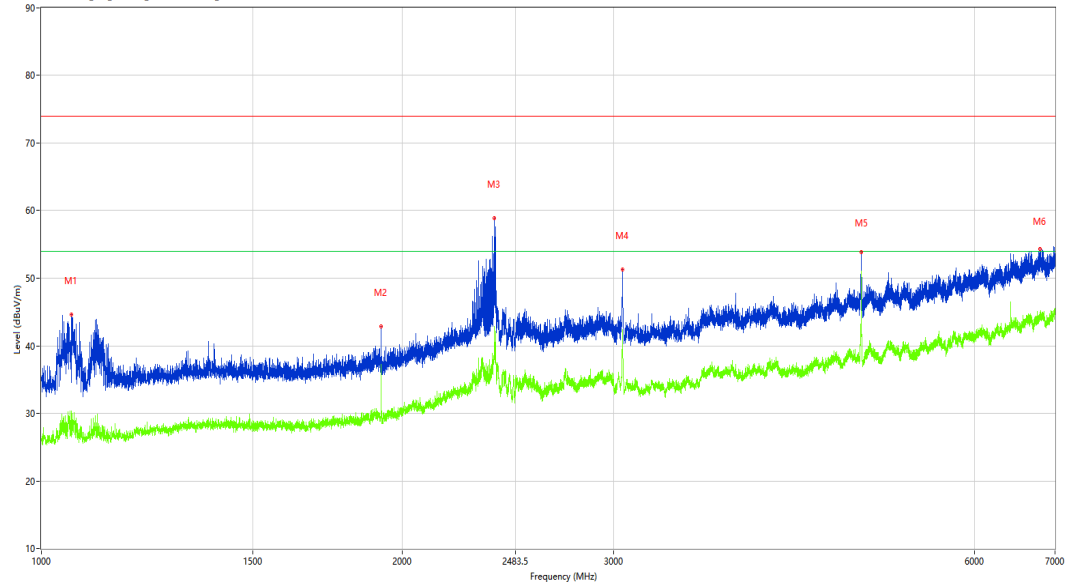

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1059.750	44.56	-14.91	74.0	29.44	Peak	125.10	100	Vertical	Pass
1**	1059.750	30.37	-14.91	54.0	23.63	AV	125.10	100	Vertical	Pass
2	1920.000	42.90	-12.27	74.0	31.10	Peak	125.10	100	Vertical	Pass
2**	1920.000	37.25	-12.27	54.0	16.75	AV	125.10	100	Vertical	Pass
3	2385.250	58.89	-7.69	74.0	15.11	Peak	330.10	100	Vertical	Pass
3**	2385.250	42.89	-7.69	54.0	11.11	AV	330.10	100	Vertical	Pass
4	3050.000	51.25	-4.72	74.0	22.75	Peak	360.00	100	Vertical	Pass
4**	3050.000	42.38	-4.72	54.0	11.62	AV	360.00	100	Vertical	Pass
5	4824.000	53.83	-1.50	74.0	20.17	Peak	280.40	100	Vertical	Pass
5**	4824.000	51.09	-1.50	54.0	2.91	AV	280.40	100	Vertical	Pass
6	6799.500	54.28	4.19	74.0	19.72	Peak	207.50	100	Vertical	Pass
6**	6799.500	44.57	4.19	54.0	9.43	AV	207.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.25.56

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

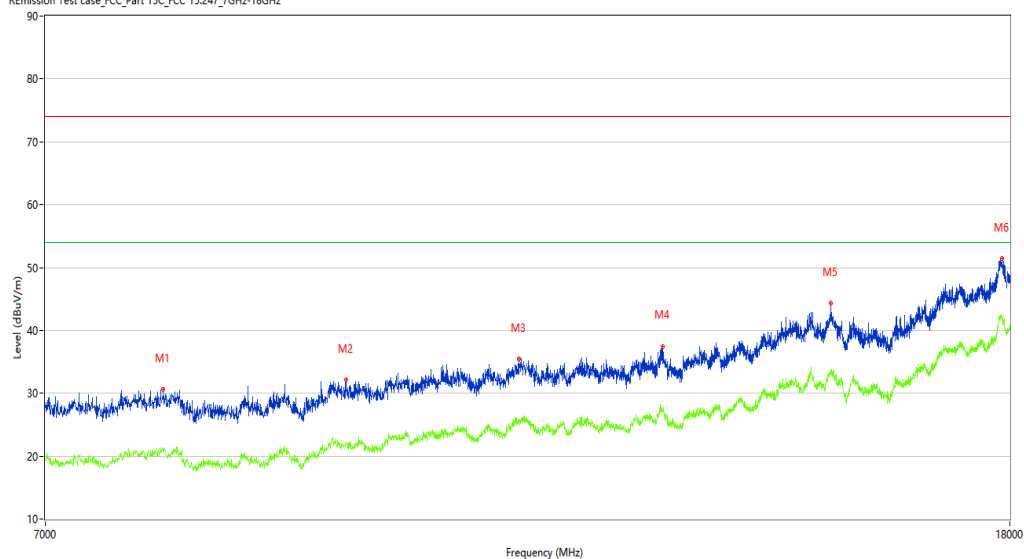

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7858.000	30.64	1.05	74.0	43.36	Peak	39.30	100	Vertical	Pass
1**	7858.000	21.01	1.05	54.0	32.99	AV	39.30	100	Vertical	Pass
2	9395.250	32.16	1.82	74.0	41.84	Peak	139.30	100	Vertical	Pass
2**	9395.250	22.04	1.82	54.0	31.96	AV	139.30	100	Vertical	Pass
3	11127.750	35.42	4.00	74.0	38.58	Peak	87.20	100	Vertical	Pass
3**	11127.750	25.72	4.00	54.0	28.28	AV	87.20	100	Vertical	Pass
4	12807.999	37.45	5.69	74.0	36.55	Peak	39.30	100	Vertical	Pass
4**	12807.999	27.38	5.69	54.0	26.62	AV	39.30	100	Vertical	Pass
5	15109.750	44.28	10.02	74.0	29.72	Peak	305.20	100	Vertical	Pass
5**	15109.750	33.83	10.02	54.0	20.17	AV	305.20	100	Vertical	Pass
6	17865.251	51.39	18.36	74.0	22.61	Peak	353.30	100	Vertical	Pass
6**	17865.251	41.60	18.36	54.0	12.40	AV	353.30	100	Vertical	Pass

WIFI2.4G-B-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-27_20.18.53

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

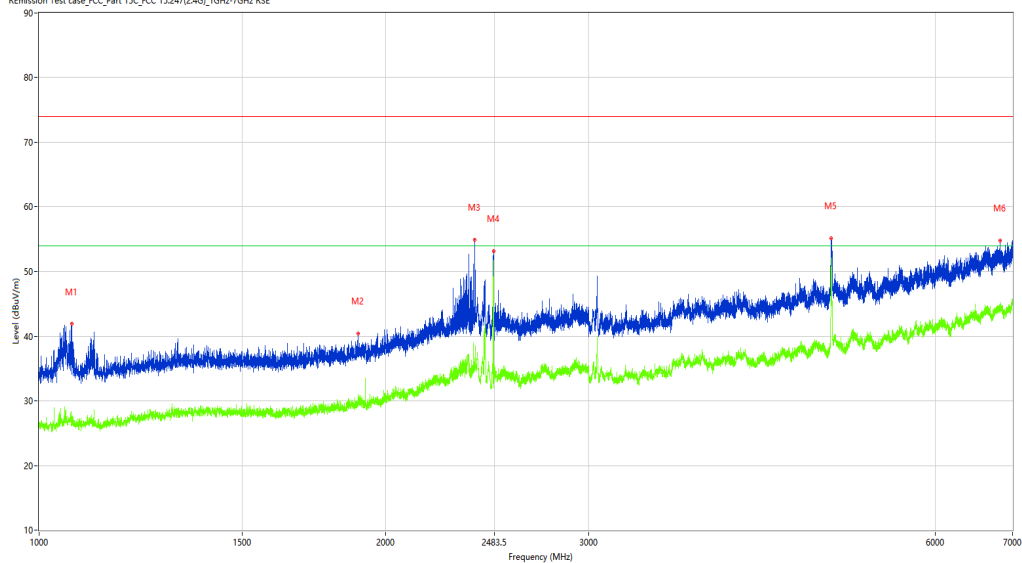

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1068.250	41.88	-14.92	74.0	32.12	Peak	59.60	100	Horizontal	Pass
1**	1068.250	27.63	-14.92	54.0	26.37	AV	59.60	100	Horizontal	Pass
2	1892.500	40.43	-12.19	74.0	33.57	Peak	0.00	100	Horizontal	Pass
2**	1892.500	29.43	-12.19	54.0	24.57	AV	0.00	100	Horizontal	Pass
3	2388.250	54.97	-7.20	74.0	19.03	Peak	130.30	100	Horizontal	Pass
3**	2388.250	36.05	-7.20	54.0	17.95	AV	130.30	100	Horizontal	Pass
4	2479.750	53.18	-7.01	74.0	20.82	Peak	38.30	100	Horizontal	Pass
4**	2479.750	50.59	-7.01	54.0	3.41	AV	38.30	100	Horizontal	Pass
5	4873.500	55.11	-0.64	74.0	18.89	Peak	125.70	100	Horizontal	Pass
5**	4873.500	49.44	-0.64	54.0	4.56	AV	125.70	100	Horizontal	Pass
6	6831.000	54.74	4.22	74.0	19.26	Peak	225.70	100	Horizontal	Pass
6**	6831.000	43.88	4.22	54.0	10.12	AV	225.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_19.09.39

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

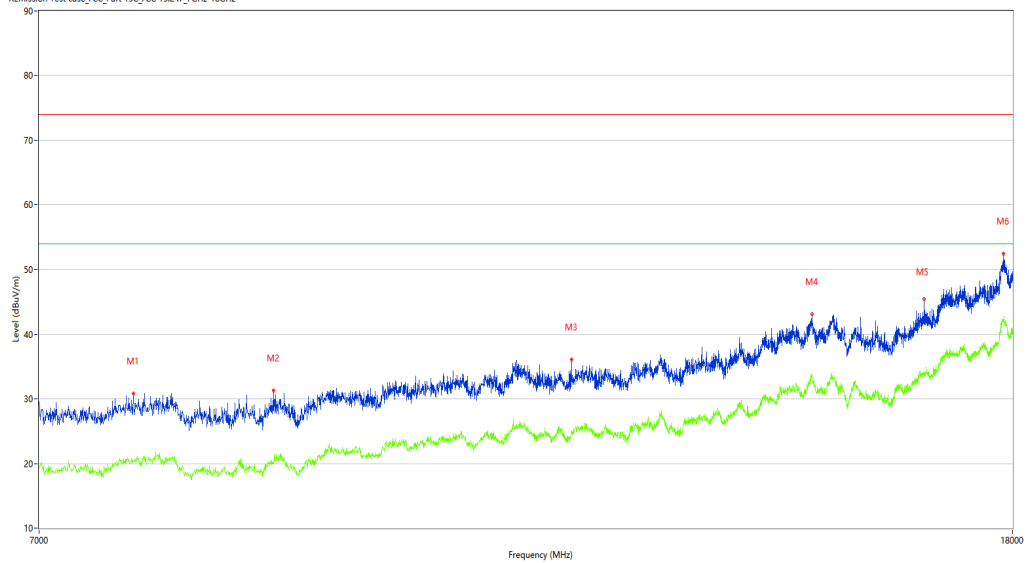

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7671.000	30.81	0.64	74.0	43.19	Peak	341.40	100	Horizontal	Pass
1**	7671.000	20.20	0.64	54.0	33.80	AV	341.40	100	Horizontal	Pass
2	8787.500	31.29	-0.14	74.0	42.71	Peak	0.00	100	Horizontal	Pass
2**	8787.500	20.01	-0.14	54.0	33.99	AV	0.00	100	Horizontal	Pass
3	11735.500	36.06	4.59	74.0	37.94	Peak	137.90	100	Horizontal	Pass
3**	11735.500	25.07	4.59	54.0	28.93	AV	137.90	100	Horizontal	Pass
4	14818.250	43.09	11.76	74.0	30.91	Peak	0.00	100	Horizontal	Pass
4**	14818.250	33.30	11.76	54.0	20.70	AV	0.00	100	Horizontal	Pass
5	16523.250	45.45	11.11	74.0	28.55	Peak	137.90	100	Horizontal	Pass
5**	16523.250	33.42	11.11	54.0	20.58	AV	137.90	100	Horizontal	Pass
6	17843.249	52.51	18.49	74.0	21.49	Peak	39.90	100	Horizontal	Pass
6**	17843.249	41.96	18.49	54.0	12.04	AV	39.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_20.50.34

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

Remission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

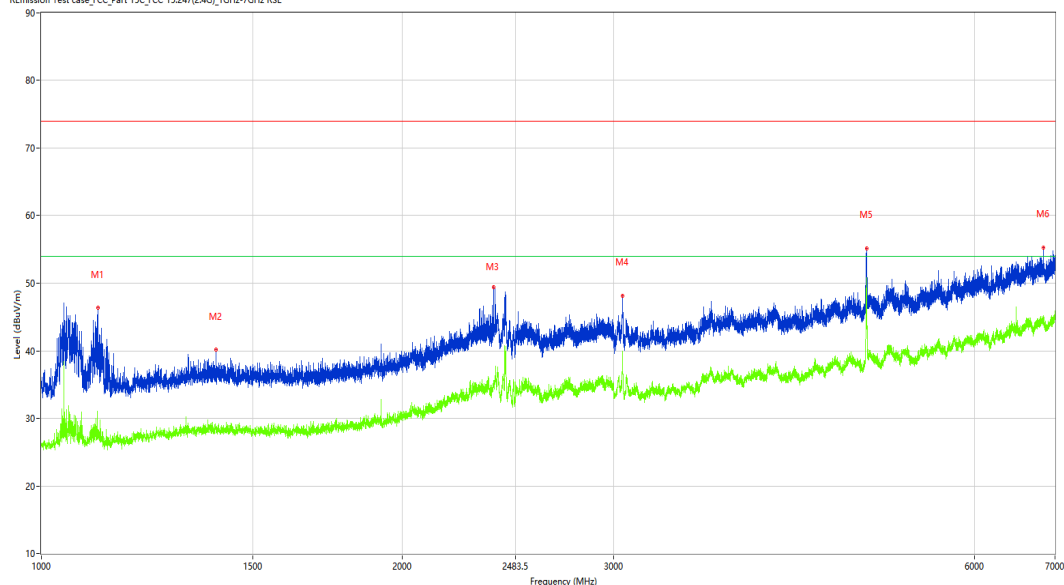

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.750	46.33	-15.07	74.0	27.67	Peak	196.20	100	Vertical	Pass
1**	1114.750	26.89	-15.07	54.0	27.11	AV	196.20	100	Vertical	Pass
2	1397.750	40.17	-13.41	74.0	33.83	Peak	54.10	100	Vertical	Pass
2**	1397.750	28.41	-13.41	54.0	25.59	AV	54.10	100	Vertical	Pass
3	2381.750	49.36	-7.89	74.0	24.64	Peak	360.00	100	Vertical	Pass
3**	2381.750	34.58	-7.89	54.0	19.42	AV	360.00	100	Vertical	Pass
4	3050.000	48.14	-4.72	74.0	25.86	Peak	212.10	100	Vertical	Pass
4**	3050.000	39.47	-4.72	54.0	14.53	AV	212.10	100	Vertical	Pass
5	4874.000	55.12	-0.63	74.0	18.88	Peak	10.70	100	Vertical	Pass
5**	4874.000	50.81	-0.63	54.0	3.19	AV	10.70	100	Vertical	Pass
6	6842.500	55.28	4.17	74.0	18.72	Peak	198.90	100	Vertical	Pass
6**	6842.500	44.46	4.17	54.0	9.54	AV	198.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:31.22

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

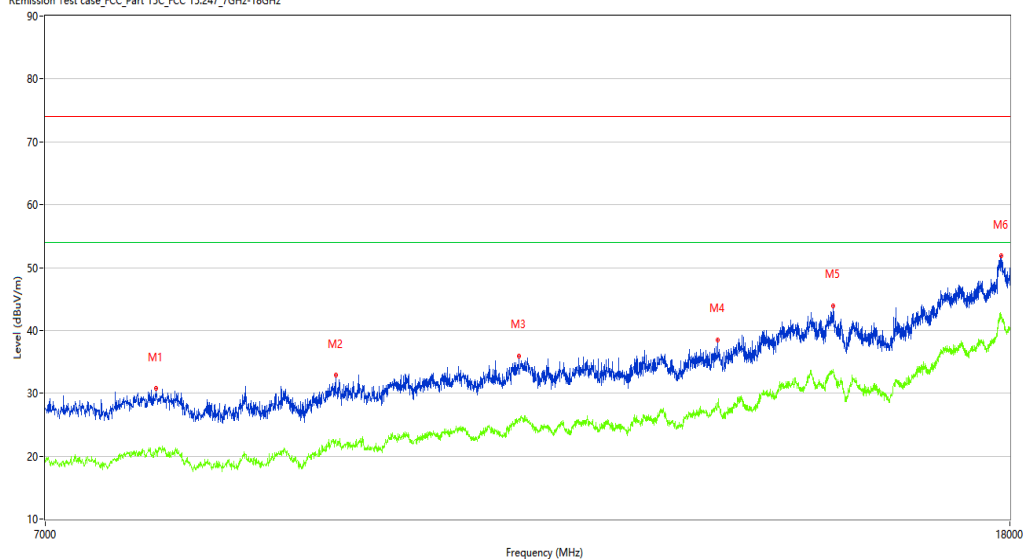

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7800.250	30.82	0.74	74.0	43.18	Peak	112.90	100	Vertical	Pass
1**	7800.250	20.96	0.74	54.0	33.04	AV	112.90	100	Vertical	Pass
2	9301.750	32.92	1.61	74.0	41.08	Peak	112.90	100	Vertical	Pass
2**	9301.750	22.72	1.61	54.0	31.28	AV	112.90	100	Vertical	Pass
3	11130.500	35.98	4.05	74.0	38.02	Peak	360.00	100	Vertical	Pass
3**	11130.500	25.99	4.05	54.0	28.01	AV	360.00	100	Vertical	Pass
4	13523.000	38.55	7.50	74.0	35.45	Peak	265.40	100	Vertical	Pass
4**	13523.000	28.40	7.50	54.0	25.60	AV	265.40	100	Vertical	Pass
5	15137.250	43.95	9.34	74.0	30.05	Peak	360.00	100	Vertical	Pass
5**	15137.250	33.75	9.34	54.0	20.25	AV	360.00	100	Vertical	Pass
6	17846.000	51.83	18.76	74.0	22.17	Peak	5.70	100	Vertical	Pass
6**	17846.000	42.33	18.76	54.0	11.67	AV	5.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_20.02.19

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ


CAMERA SMART PET FEEDER

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

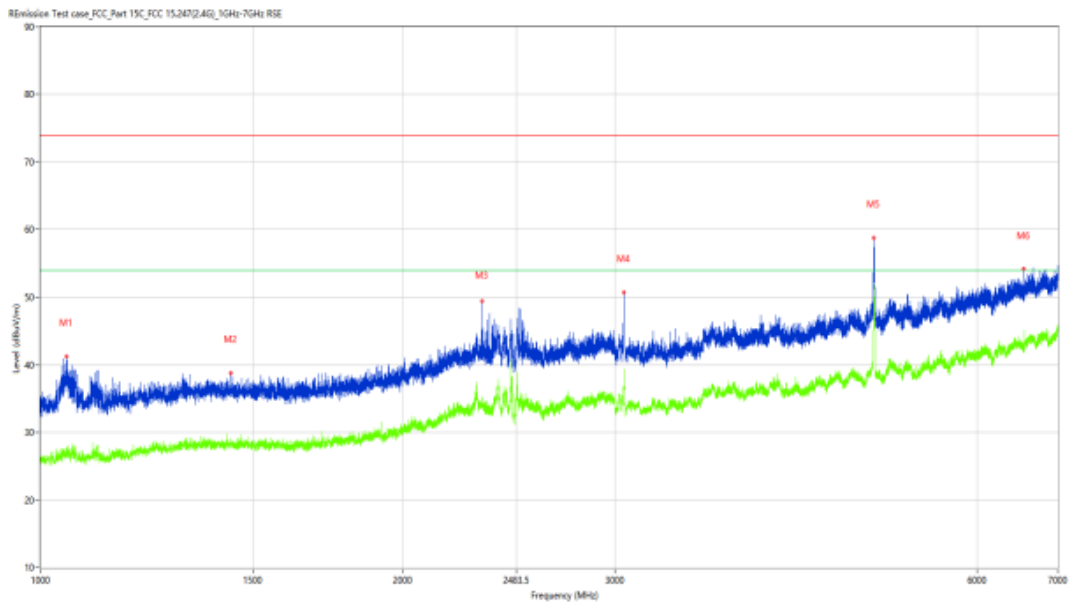

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1050.500	41.24	-14.81	74.0	32.76	Peak	151.10	100	Horizontal	Pass
1**	1050.500	26.27	-14.81	54.0	27.73	AV	151.10	100	Horizontal	Pass
2	1438.750	38.73	-13.52	74.0	35.27	Peak	48.90	100	Horizontal	Pass
2**	1438.750	28.73	-13.52	54.0	25.27	AV	48.90	100	Horizontal	Pass
3	2325.750	49.46	-8.72	74.0	24.54	Peak	151.10	100	Horizontal	Pass
3**	2325.750	34.20	-8.72	54.0	19.80	AV	151.10	100	Horizontal	Pass
4	3050.000	50.68	-4.72	74.0	23.32	Peak	234.60	100	Horizontal	Pass
4**	3050.000	39.40	-4.72	54.0	14.60	AV	234.60	100	Horizontal	Pass
5	4924.000	58.81	-0.07	74.0	15.19	Peak	66.30	100	Horizontal	Pass
5**	4924.000	51.83	-0.07	54.0	2.17	AV	66.30	100	Horizontal	Pass
6	6556.500	54.17	2.97	74.0	19.83	Peak	159.20	100	Horizontal	Pass
6**	6556.500	42.51	2.97	54.0	11.49	AV	159.20	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:53:30

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

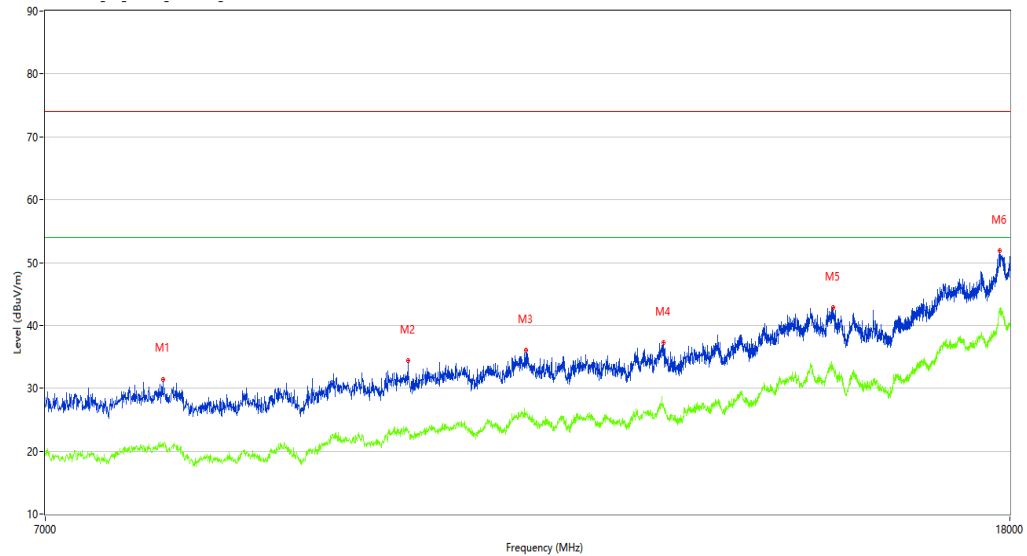

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7855.250	31.46	1.03	74.0	42.54	Peak	154.20	100	Horizontal	Pass
1**	7855.250	21.25	1.03	54.0	32.75	AV	154.20	100	Horizontal	Pass
2	9983.750	34.38	3.21	74.0	39.62	Peak	45.80	100	Horizontal	Pass
2**	9983.750	22.84	3.21	54.0	31.16	AV	45.80	100	Horizontal	Pass
3	11204.750	36.04	4.04	74.0	37.96	Peak	360.00	100	Horizontal	Pass
3**	11204.750	26.03	4.04	54.0	27.97	AV	360.00	100	Horizontal	Pass
4	12819.000	37.31	5.63	74.0	36.69	Peak	162.50	100	Horizontal	Pass
4**	12819.000	27.47	5.63	54.0	26.53	AV	162.50	100	Horizontal	Pass
5	15142.750	42.86	9.15	74.0	31.14	Peak	271.90	100	Horizontal	Pass
5**	15142.750	33.51	9.15	54.0	20.49	AV	271.90	100	Horizontal	Pass
6	17826.750	51.93	18.38	74.0	22.07	Peak	218.10	100	Horizontal	Pass
6**	17826.750	42.21	18.38	54.0	11.79	AV	218.10	100	Horizontal	Pass

WIFI2.4G-B-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 26-03-27_20.35.56 .

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

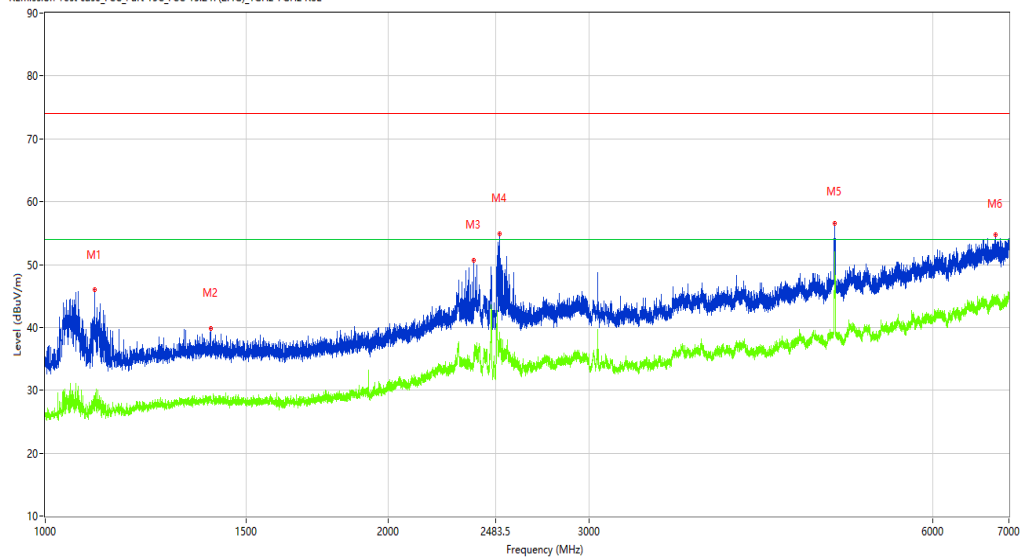

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.500	45.95	-15.03	74.0	28.05	Peak	196.70	100	Vertical	Pass
1**	1104.500	28.89	-15.03	54.0	25.11	AV	196.70	100	Vertical	Pass
2	1397.750	39.85	-13.41	74.0	34.15	Peak	121.00	100	Vertical	Pass
2**	1397.750	28.99	-13.41	54.0	25.01	AV	121.00	100	Vertical	Pass
3	2376.750	50.67	-8.17	74.0	23.33	Peak	196.70	100	Vertical	Pass
3**	2376.750	34.16	-8.17	54.0	19.84	AV	196.70	100	Vertical	Pass
4	2504.750	54.83	-7.30	74.0	19.17	Peak	44.50	100	Vertical	Pass
4**	2504.750	38.06	-7.30	54.0	15.94	AV	44.50	100	Vertical	Pass
5	4924.500	56.62	-0.07	74.0	17.38	Peak	46.60	100	Vertical	Pass
5**	4924.500	46.63	-0.07	54.0	7.37	AV	46.60	100	Vertical	Pass
6	6815.500	54.71	4.29	74.0	19.29	Peak	0.00	100	Vertical	Pass
6**	6815.500	44.26	4.29	54.0	9.74	AV	0.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:37:43

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

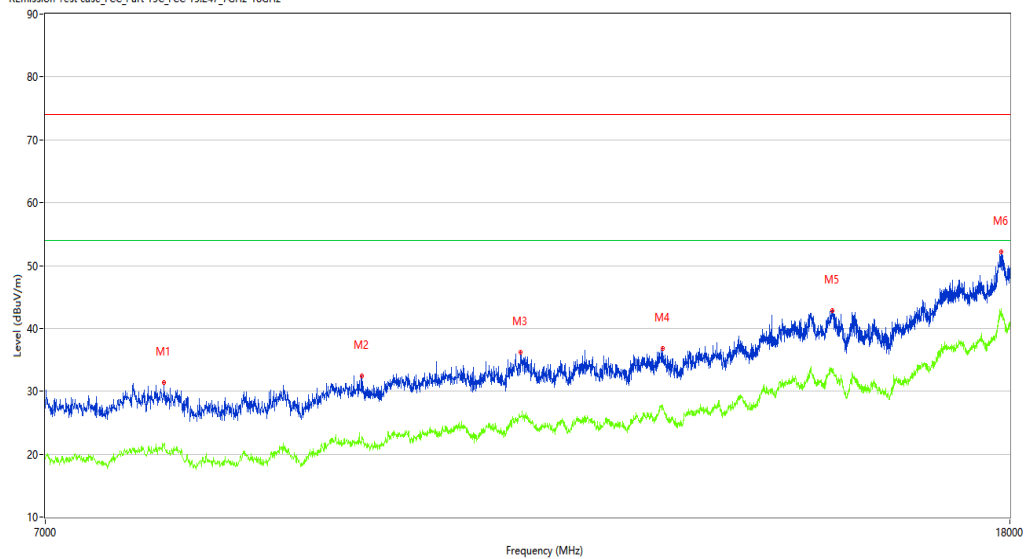

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7863.500	31.34	1.12	74.0	42.66	Peak	44.50	100	Vertical	Pass
1**	7863.500	21.55	1.12	54.0	32.45	AV	44.50	100	Vertical	Pass
2	9543.750	32.46	2.68	74.0	41.54	Peak	143.60	100	Vertical	Pass
2**	9543.750	21.90	2.68	54.0	32.10	AV	143.60	100	Vertical	Pass
3	11149.750	36.15	3.72	74.0	37.85	Peak	91.70	100	Vertical	Pass
3**	11149.750	26.02	3.72	54.0	27.98	AV	91.70	100	Vertical	Pass
4	12813.500	36.75	5.55	74.0	37.25	Peak	91.70	100	Vertical	Pass
4**	12813.500	26.97	5.55	54.0	27.03	AV	91.70	100	Vertical	Pass
5	15123.500	42.89	9.65	74.0	31.11	Peak	0.00	100	Vertical	Pass
5**	15123.500	33.24	9.65	54.0	20.76	AV	0.00	100	Vertical	Pass
6	17846.000	52.21	18.76	74.0	21.79	Peak	195.50	100	Vertical	Pass
6**	17846.000	43.12	18.76	54.0	10.88	AV	195.50	100	Vertical	Pass

WIFI2.4G-G-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-27_19.51.58

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

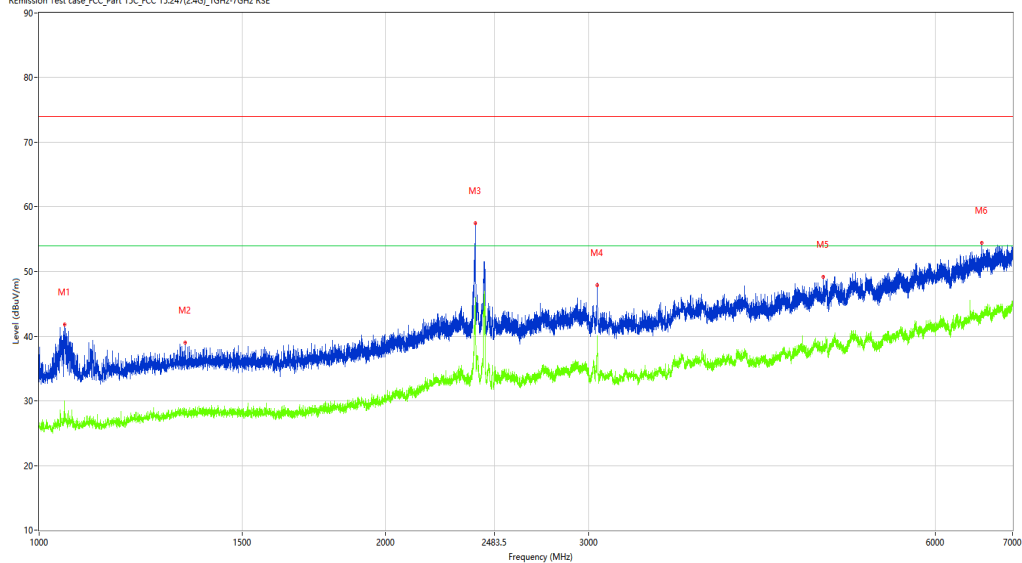

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.000	41.83	-14.88	74.0	32.17	Peak	122.10	100	Horizontal	Pass
1**	1053.000	27.17	-14.88	54.0	26.83	AV	122.10	100	Horizontal	Pass
2	1338.750	38.97	-13.59	74.0	35.03	Peak	59.40	100	Horizontal	Pass
2**	1338.750	28.02	-13.59	54.0	25.98	AV	59.40	100	Horizontal	Pass
3	2391.000	57.52	-6.29	74.0	16.48	Peak	141.60	100	Horizontal	Pass
3**	2391.000	45.11	-6.29	54.0	8.89	AV	141.60	100	Horizontal	Pass
4	3050.000	45.61	-4.72	74.0	28.39	Peak	0.00	100	Horizontal	Pass
4**	3050.000	38.88	-4.72	54.0	15.12	AV	0.00	100	Horizontal	Pass
5	4793.000	49.13	-1.49	74.0	24.87	Peak	312.40	100	Horizontal	Pass
5**	4793.000	38.47	-1.49	54.0	15.53	AV	312.40	100	Horizontal	Pass
6	6581.500	54.47	3.11	74.0	19.53	Peak	45.60	100	Horizontal	Pass
6**	6581.500	43.99	3.11	54.0	10.01	AV	45.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_19.42.52

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R&Emission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

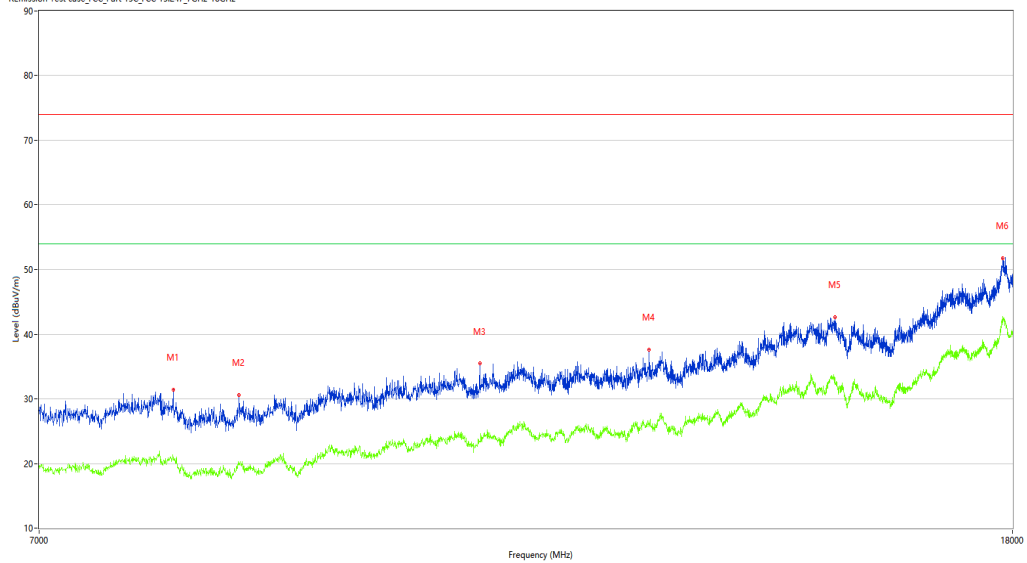

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7973.500	31.39	0.91	74.0	42.61	Peak	360.00	100	Horizontal	Pass
1**	7973.500	20.57	0.91	54.0	33.43	AV	360.00	100	Horizontal	Pass
2	8498.750	30.62	-0.48	74.0	43.38	Peak	317.30	100	Horizontal	Pass
2**	8498.750	20.09	-0.48	54.0	33.91	AV	317.30	100	Horizontal	Pass
3	10734.500	35.47	3.87	74.0	38.53	Peak	1.10	100	Horizontal	Pass
3**	10734.500	23.49	3.87	54.0	30.51	AV	1.10	100	Horizontal	Pass
4	12648.500	37.57	5.02	74.0	36.43	Peak	171.20	100	Horizontal	Pass
4**	12648.500	26.12	5.02	54.0	27.88	AV	171.20	100	Horizontal	Pass
5	15156.500	42.62	8.55	74.0	31.38	Peak	115.60	100	Horizontal	Pass
5**	15156.500	32.27	8.55	54.0	21.73	AV	115.60	100	Horizontal	Pass
6	17832.249	51.72	18.61	74.0	22.28	Peak	115.60	100	Horizontal	Pass
6**	17832.249	42.78	18.61	54.0	11.22	AV	115.60	100	Horizontal	Pass

WIFI2.4G-G-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-27_21.10.58

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R&Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

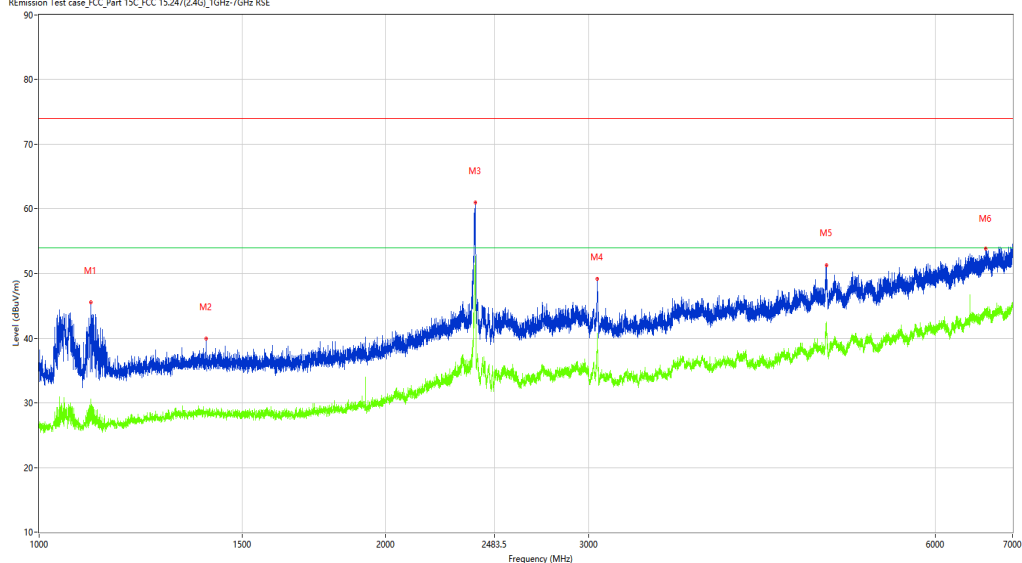

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1109.250	45.58	-15.00	74.0	28.42	Peak	76.40	100	Vertical	Pass
1**	1109.250	29.98	-15.00	54.0	24.02	AV	76.40	100	Vertical	Pass
2	1396.750	39.89	-13.36	74.0	34.11	Peak	229.00	100	Vertical	Pass
2**	1396.750	28.40	-13.36	54.0	25.60	AV	229.00	100	Vertical	Pass
3	2392.000	60.95	-4.72	74.0	13.05	Peak	139.40	100	Vertical	Pass
3**	2392.000	52.52	-4.72	54.0	1.48	AV	139.40	100	Vertical	Pass
4	3050.500	49.22	-5.39	74.0	24.78	Peak	235.10	100	Vertical	Pass
4**	3050.500	40.61	-5.39	54.0	13.39	AV	235.10	100	Vertical	Pass
5	4823.500	51.26	-1.50	74.0	22.74	Peak	63.00	100	Vertical	Pass
5**	4823.500	41.12	-1.50	54.0	12.88	AV	63.00	100	Vertical	Pass
6	6632.500	53.83	3.93	74.0	20.17	Peak	53.20	100	Vertical	Pass
6**	6632.500	43.83	3.93	54.0	10.17	AV	53.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.28.02

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

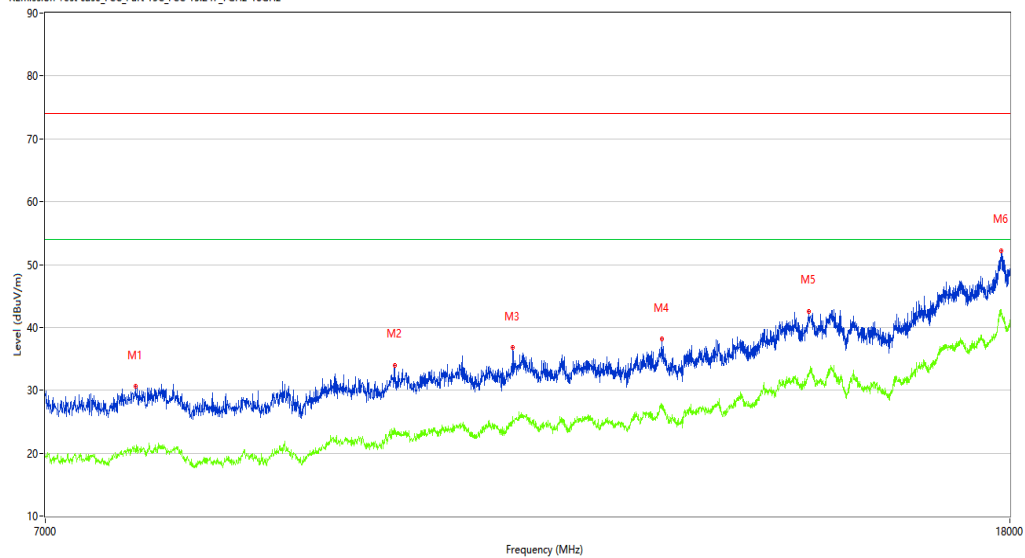

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7646.250	30.61	0.28	74.0	43.39	Peak	360.00	100	Vertical	Pass
1**	7646.250	20.75	0.28	54.0	33.25	AV	360.00	100	Vertical	Pass
2	9860.000	34.02	2.86	74.0	39.98	Peak	13.60	100	Vertical	Pass
2**	9860.000	23.86	2.86	54.0	30.14	AV	13.60	100	Vertical	Pass
3	11061.750	36.79	4.45	74.0	37.21	Peak	13.60	100	Vertical	Pass
3**	11061.750	25.84	4.45	54.0	28.16	AV	13.60	100	Vertical	Pass
4	12802.500	38.20	5.84	74.0	35.80	Peak	115.60	100	Vertical	Pass
4**	12802.500	27.72	5.84	54.0	26.28	AV	115.60	100	Vertical	Pass
5	14788.000	42.56	11.11	74.0	31.44	Peak	216.60	100	Vertical	Pass
5**	14788.000	32.76	11.11	54.0	21.24	AV	216.60	100	Vertical	Pass
6	17851.501	52.26	18.50	74.0	21.74	Peak	216.60	100	Vertical	Pass
6**	17851.501	42.80	18.50	54.0	11.20	AV	216.60	100	Vertical	Pass

WIFI2.4G-G-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.45.47

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

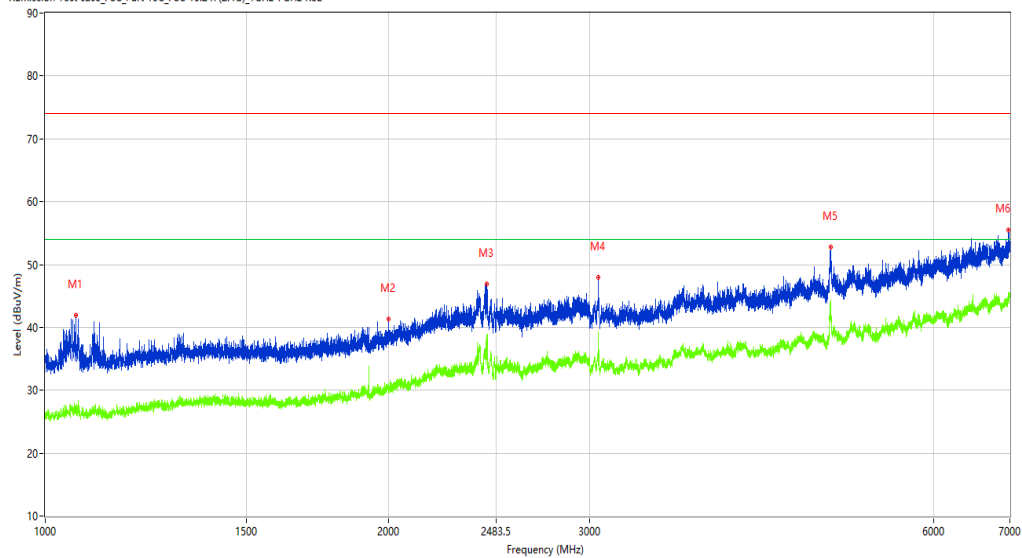

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.250	41.89	-14.91	74.0	32.11	Peak	61.80	100	Horizontal	Pass
1**	1064.250	27.20	-14.91	54.0	26.80	AV	61.80	100	Horizontal	Pass
2	1999.500	41.32	-11.66	74.0	32.68	Peak	164.00	100	Horizontal	Pass
2**	1999.500	30.96	-11.66	54.0	23.04	AV	164.00	100	Horizontal	Pass
3	2435.000	46.85	-5.86	74.0	27.15	Peak	130.60	100	Horizontal	Pass
3**	2435.000	38.46	-5.86	54.0	15.54	AV	130.60	100	Horizontal	Pass
4	3050.000	47.97	-4.72	74.0	26.03	Peak	229.70	100	Horizontal	Pass
4**	3050.000	39.26	-4.72	54.0	14.74	AV	229.70	100	Horizontal	Pass
5	4877.000	52.77	-0.57	74.0	21.23	Peak	81.50	100	Horizontal	Pass
5**	4877.000	44.41	-0.57	54.0	9.59	AV	81.50	100	Horizontal	Pass
6	6981.500	55.50	4.53	74.0	18.50	Peak	41.90	100	Horizontal	Pass
6**	6981.500	44.78	4.53	54.0	9.22	AV	41.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:50:41

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

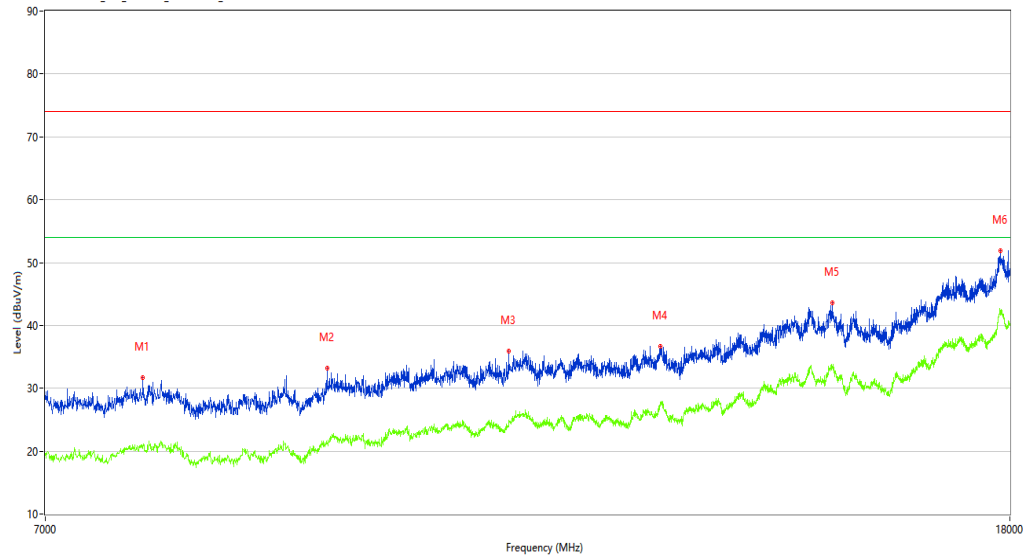

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7701.250	31.64	1.03	74.0	42.36	Peak	360.00	100	Horizontal	Pass
1**	7701.250	20.68	1.03	54.0	33.32	AV	360.00	100	Horizontal	Pass
2	9224.750	33.23	0.85	74.0	40.77	Peak	317.00	100	Horizontal	Pass
2**	9224.750	21.18	0.85	54.0	32.82	AV	317.00	100	Horizontal	Pass
3	11020.500	35.85	4.50	74.0	38.15	Peak	118.00	100	Horizontal	Pass
3**	11020.500	24.92	4.50	54.0	29.08	AV	118.00	100	Horizontal	Pass
4	12786.000	36.62	5.86	74.0	37.38	Peak	317.00	100	Horizontal	Pass
4**	12786.000	27.11	5.86	54.0	26.89	AV	317.00	100	Horizontal	Pass
5	15123.500	43.54	9.65	74.0	30.46	Peak	172.10	100	Horizontal	Pass
5**	15123.500	33.24	9.65	54.0	20.76	AV	172.10	100	Horizontal	Pass
6	17832.249	51.84	18.61	74.0	22.16	Peak	21.60	100	Horizontal	Pass
6**	17832.249	42.19	18.61	54.0	11.81	AV	21.60	100	Horizontal	Pass

WIFI2.4G-G-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-27_21.14.00

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

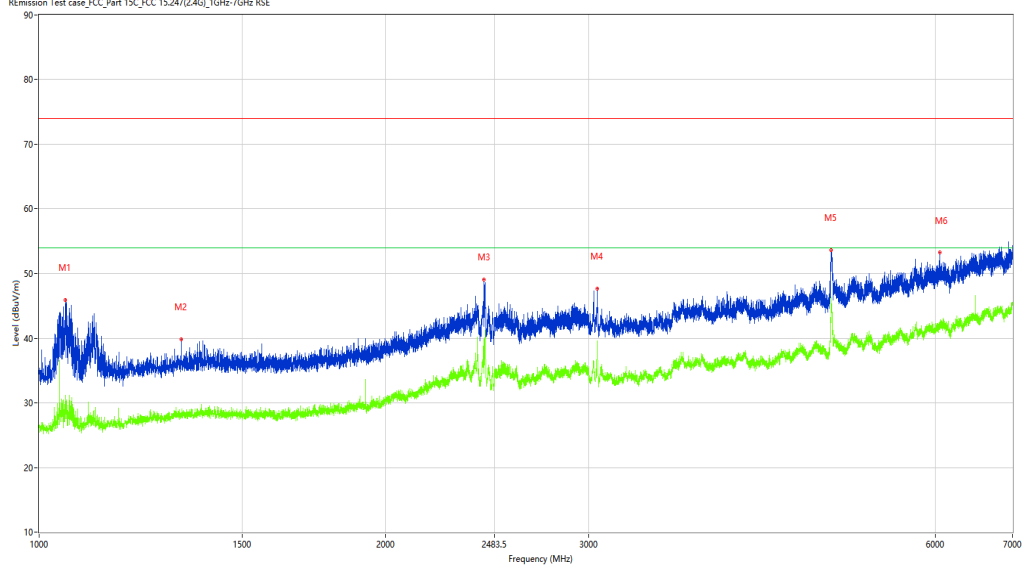

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.500	45.89	-14.88	74.0	28.11	Peak	217.60	100	Vertical	Pass
1**	1053.500	30.78	-14.88	54.0	23.22	AV	217.60	100	Vertical	Pass
2	1329.000	39.81	-13.64	74.0	34.19	Peak	44.90	100	Vertical	Pass
2**	1329.000	28.17	-13.64	54.0	25.83	AV	44.90	100	Vertical	Pass
3	2434.000	49.04	-5.84	74.0	24.96	Peak	49.80	100	Vertical	Pass
3**	2434.000	38.62	-5.84	54.0	15.38	AV	49.80	100	Vertical	Pass
4	3050.000	47.63	-4.72	74.0	26.37	Peak	129.10	100	Vertical	Pass
4**	3050.000	39.57	-4.72	54.0	14.43	AV	129.10	100	Vertical	Pass
5	4870.000	53.68	-0.71	74.0	20.32	Peak	58.70	100	Vertical	Pass
5**	4870.000	44.53	-0.71	54.0	9.47	AV	58.70	100	Vertical	Pass
6	6054.000	53.33	1.94	74.0	20.67	Peak	135.90	100	Vertical	Pass
6**	6054.000	41.60	1.94	54.0	12.40	AV	135.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:33:18

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

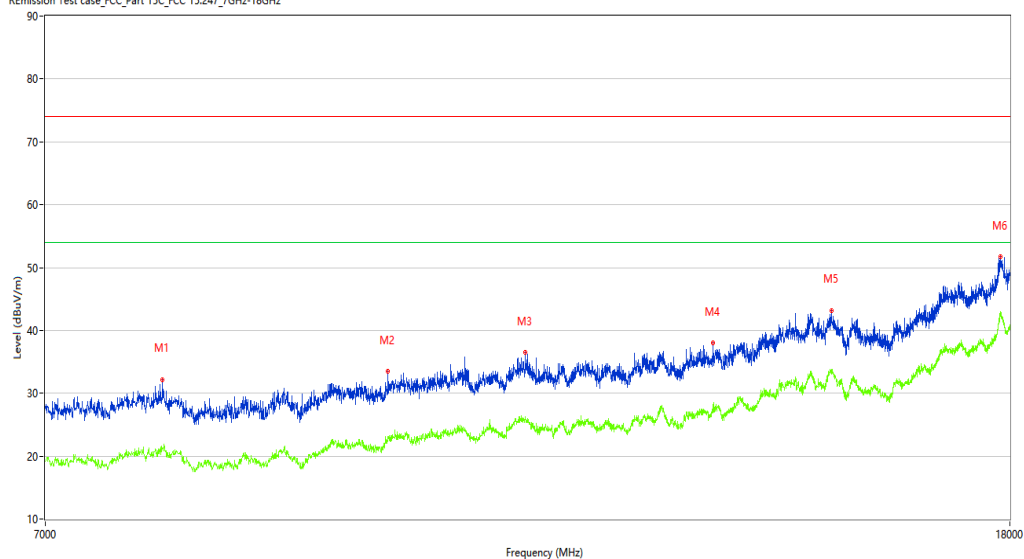

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7849.750	32.20	0.95	74.0	41.80	Peak	95.50	100	Vertical	Pass
1**	7849.750	21.36	0.95	54.0	32.64	AV	95.50	100	Vertical	Pass
2	9791.250	33.51	2.94	74.0	40.49	Peak	306.40	100	Vertical	Pass
2**	9791.250	23.09	2.94	54.0	30.91	AV	306.40	100	Vertical	Pass
3	11199.250	36.56	4.02	74.0	37.44	Peak	148.60	100	Vertical	Pass
3**	11199.250	26.29	4.02	54.0	27.71	AV	148.60	100	Vertical	Pass
4	13459.750	38.06	6.32	74.0	35.94	Peak	95.50	100	Vertical	Pass
4**	13459.750	26.97	6.32	54.0	27.03	AV	95.50	100	Vertical	Pass
5	15115.250	43.21	9.76	74.0	30.79	Peak	0.00	100	Vertical	Pass
5**	15115.250	33.35	9.76	54.0	20.65	AV	0.00	100	Vertical	Pass
6	17837.750	51.77	18.50	74.0	22.23	Peak	41.70	100	Vertical	Pass
6**	17837.750	42.34	18.50	54.0	11.66	AV	41.70	100	Vertical	Pass

WIFI2.4G-G-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.42.44

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

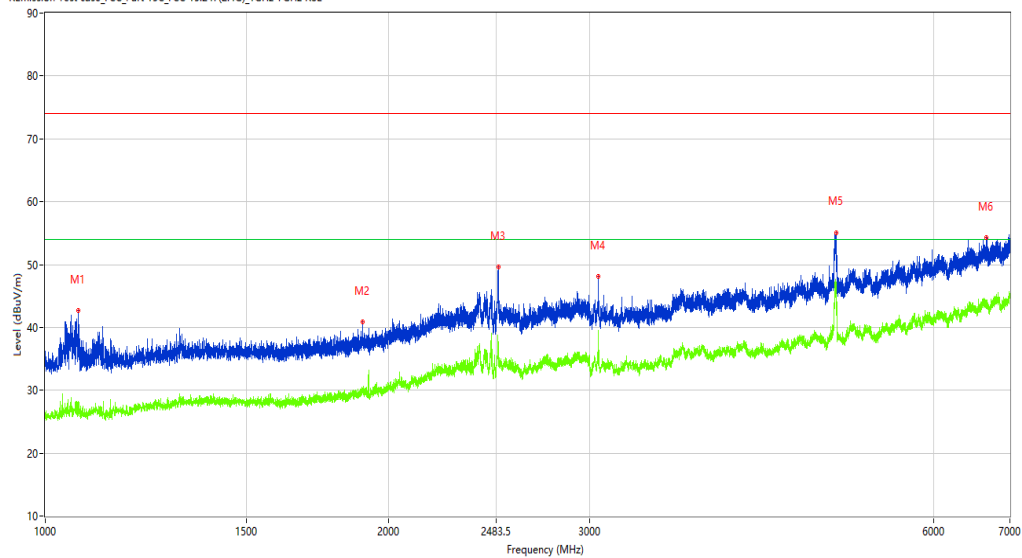

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1069.500	42.69	-14.95	74.0	31.31	Peak	68.90	100	Horizontal	Pass
1**	1069.500	28.23	-14.95	54.0	25.77	AV	68.90	100	Horizontal	Pass
2	1896.000	40.90	-12.04	74.0	33.10	Peak	292.40	100	Horizontal	Pass
2**	1896.000	29.98	-12.04	54.0	24.02	AV	292.40	100	Horizontal	Pass
3	2493.500	49.55	-7.30	74.0	24.45	Peak	136.80	100	Horizontal	Pass
3**	2493.500	37.74	-7.30	54.0	16.26	AV	136.80	100	Horizontal	Pass
4	3050.000	48.11	-4.72	74.0	25.89	Peak	360.00	100	Horizontal	Pass
4**	3050.000	39.46	-4.72	54.0	14.54	AV	360.00	100	Horizontal	Pass
5	4928.500	55.11	-0.07	74.0	18.89	Peak	192.70	100	Horizontal	Pass
5**	4928.500	46.09	-0.07	54.0	7.91	AV	192.70	100	Horizontal	Pass
6	6679.000	54.25	3.70	74.0	19.75	Peak	184.30	100	Horizontal	Pass
6**	6679.000	43.94	3.70	54.0	10.06	AV	184.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.54.45

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

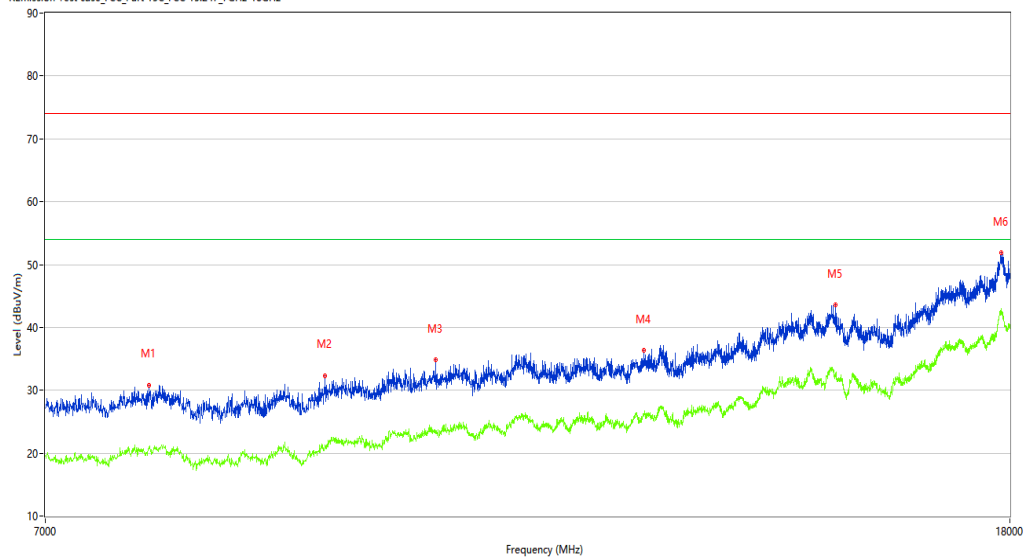

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7745.250	30.84	0.53	74.0	43.16	Peak	345.10	100	Horizontal	Pass
1**	7745.250	20.72	0.53	54.0	33.28	AV	345.10	100	Horizontal	Pass
2	9205.500	32.24	0.83	74.0	41.76	Peak	0.00	100	Horizontal	Pass
2**	9205.500	21.27	0.83	54.0	32.73	AV	0.00	100	Horizontal	Pass
3	10261.500	34.79	2.92	74.0	39.21	Peak	245.30	100	Horizontal	Pass
3**	10261.500	23.62	2.92	54.0	30.38	AV	245.30	100	Horizontal	Pass
4	12582.500	36.30	5.38	74.0	37.70	Peak	245.30	100	Horizontal	Pass
4**	12582.500	26.13	5.38	54.0	27.87	AV	245.30	100	Horizontal	Pass
5	15178.500	43.63	8.69	74.0	30.37	Peak	245.30	100	Horizontal	Pass
5**	15178.500	32.68	8.69	54.0	21.32	AV	245.30	100	Horizontal	Pass
6	17846.000	51.83	18.76	74.0	22.17	Peak	0.00	100	Horizontal	Pass
6**	17846.000	42.92	18.76	54.0	11.08	AV	0.00	100	Horizontal	Pass

WIFI2.4G-G-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.20.53

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

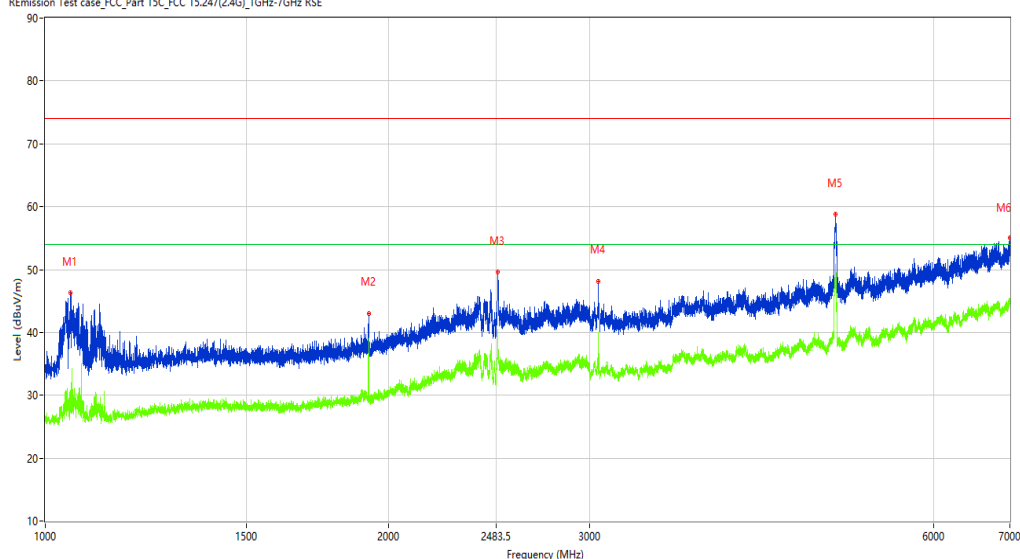

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.500	46.34	-14.82	74.0	27.66	Peak	224.00	100	Vertical	Pass
1**	1051.500	27.42	-14.82	54.0	26.58	AV	224.00	100	Vertical	Pass
2	1920.250	43.05	-12.27	74.0	30.95	Peak	69.50	100	Vertical	Pass
2**	1920.250	38.14	-12.27	54.0	15.86	AV	69.50	100	Vertical	Pass
3	2491.750	49.64	-7.27	74.0	24.36	Peak	229.90	100	Vertical	Pass
3**	2491.750	40.45	-7.27	54.0	13.55	AV	229.90	100	Vertical	Pass
4	3050.000	48.17	-4.72	74.0	25.83	Peak	298.30	100	Vertical	Pass
4**	3050.000	40.05	-4.72	54.0	13.95	AV	298.30	100	Vertical	Pass
5	4925.000	58.86	-0.07	74.0	15.14	Peak	47.20	100	Vertical	Pass
5**	4925.000	48.56	-0.07	54.0	5.44	AV	47.20	100	Vertical	Pass
6	6995.000	55.10	4.71	74.0	18.90	Peak	130.30	100	Vertical	Pass
6**	6995.000	45.39	4.71	54.0	8.61	AV	130.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.39.39

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

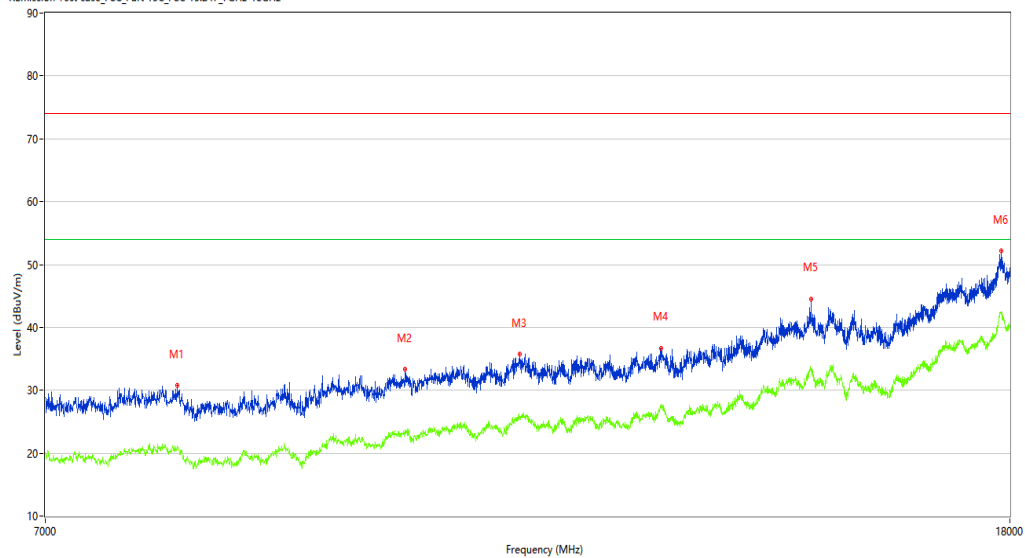

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7965.250	30.76	1.05	74.0	43.24	Peak	108.10	100	Vertical	Pass
1**	7965.250	21.00	1.05	54.0	33.00	AV	108.10	100	Vertical	Pass
2	9956.250	33.31	3.35	74.0	40.69	Peak	269.50	100	Vertical	Pass
2**	9956.250	23.75	3.35	54.0	30.25	AV	269.50	100	Vertical	Pass
3	11136.000	35.77	3.96	74.0	38.23	Peak	360.00	100	Vertical	Pass
3**	11136.000	25.75	3.96	54.0	28.25	AV	360.00	100	Vertical	Pass
4	12794.250	36.65	5.85	74.0	37.35	Peak	161.90	100	Vertical	Pass
4**	12794.250	27.16	5.85	54.0	26.84	AV	161.90	100	Vertical	Pass
5	14815.500	44.57	11.92	74.0	29.43	Peak	0.40	100	Vertical	Pass
5**	14815.500	33.47	11.92	54.0	20.53	AV	0.40	100	Vertical	Pass
6	17848.750	52.22	18.72	74.0	21.78	Peak	161.90	100	Vertical	Pass
6**	17848.750	42.43	18.72	54.0	11.57	AV	161.90	100	Vertical	Pass

WIFI2.4G-N-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.51.12

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

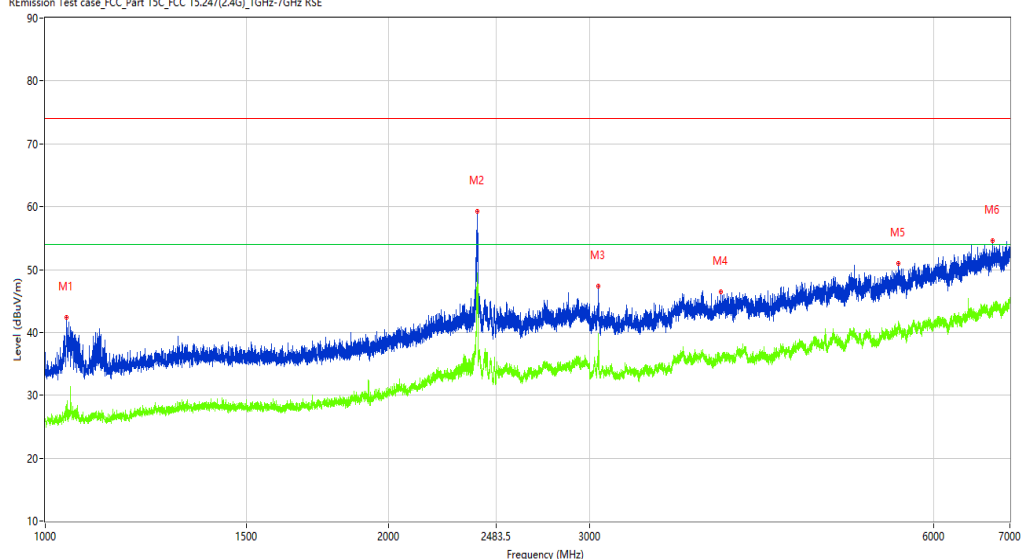

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1043.500	42.42	-14.86	74.0	31.58	Peak	55.60	100	Horizontal	Pass
1**	1043.500	28.50	-14.86	54.0	25.50	AV	55.60	100	Horizontal	Pass
2	2391.250	59.31	-5.90	74.0	14.69	Peak	131.30	100	Horizontal	Pass
2**	2391.250	48.53	-5.90	54.0	5.47	AV	131.30	100	Horizontal	Pass
3	3050.000	47.38	-4.72	74.0	26.62	Peak	215.80	100	Horizontal	Pass
3**	3050.000	39.85	-4.72	54.0	14.15	AV	215.80	100	Horizontal	Pass
4	3906.500	46.49	-2.53	74.0	27.51	Peak	308.20	100	Horizontal	Pass
4**	3906.500	35.96	-2.53	54.0	18.04	AV	308.20	100	Horizontal	Pass
5	5591.500	51.02	1.06	74.0	22.98	Peak	231.60	100	Horizontal	Pass
5**	5591.500	41.83	1.06	54.0	12.17	AV	231.60	100	Horizontal	Pass
6	6764.500	54.54	3.69	74.0	19.46	Peak	145.10	100	Horizontal	Pass
6**	6764.500	44.06	3.69	54.0	9.94	AV	145.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.48.00

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

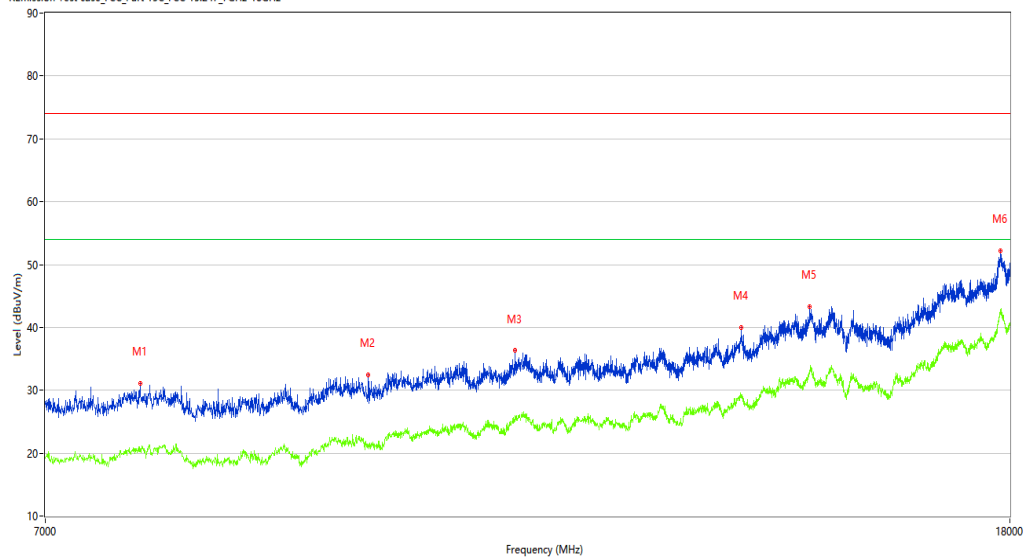

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7682.000	31.16	0.74	74.0	42.84	Peak	317.80	100	Horizontal	Pass
1**	7682.000	20.70	0.74	54.0	33.30	AV	317.80	100	Horizontal	Pass
2	9604.250	32.38	2.03	74.0	41.62	Peak	171.30	100	Horizontal	Pass
2**	9604.250	21.24	2.03	54.0	32.76	AV	171.30	100	Horizontal	Pass
3	11086.500	36.34	4.54	74.0	37.66	Peak	217.30	100	Horizontal	Pass
3**	11086.500	26.03	4.54	54.0	27.97	AV	217.30	100	Horizontal	Pass
4	13842.000	39.93	7.43	74.0	34.07	Peak	360.00	100	Horizontal	Pass
4**	13842.000	29.18	7.43	54.0	24.82	AV	360.00	100	Horizontal	Pass
5	14799.000	43.35	11.46	74.0	30.65	Peak	317.80	100	Horizontal	Pass
5**	14799.000	32.55	11.46	54.0	21.45	AV	317.80	100	Horizontal	Pass
6	17837.750	52.25	18.50	74.0	21.75	Peak	360.00	100	Horizontal	Pass
6**	17837.750	42.85	18.50	54.0	11.15	AV	360.00	100	Horizontal	Pass

WIFI2.4G-N-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_09.13.35

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

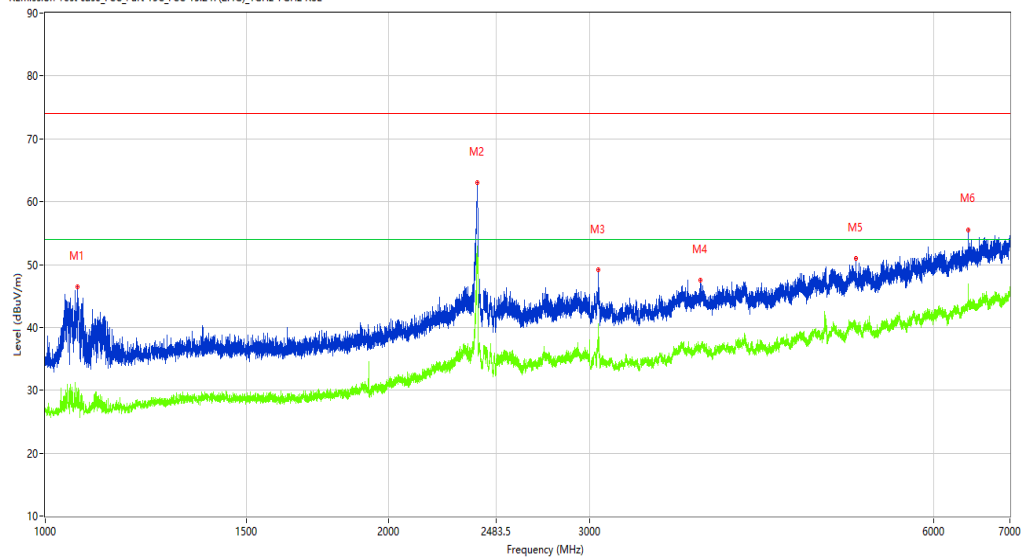

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1067.500	46.40	-14.90	74.0	27.60	Peak	152.50	100	Vertical	Pass
1**	1067.500	27.50	-14.90	54.0	26.50	AV	152.50	100	Vertical	Pass
2	2390.750	63.04	-6.37	74.0	10.96	Peak	54.60	100	Vertical	Pass
2**	2390.750	51.66	-6.37	54.0	2.34	AV	54.60	100	Vertical	Pass
3	3050.000	49.15	-4.72	74.0	24.85	Peak	56.70	100	Vertical	Pass
3**	3050.000	40.61	-4.72	54.0	13.39	AV	56.70	100	Vertical	Pass
4	3750.000	47.47	-2.48	74.0	26.53	Peak	234.60	100	Vertical	Pass
4**	3750.000	36.14	-2.48	54.0	17.86	AV	234.60	100	Vertical	Pass
5	5130.000	50.99	0.25	74.0	23.01	Peak	135.70	100	Vertical	Pass
5**	5130.000	40.38	0.25	54.0	13.62	AV	135.70	100	Vertical	Pass
6	6432.000	55.55	2.97	74.0	18.45	Peak	47.80	100	Vertical	Pass
6**	6432.000	46.94	2.97	54.0	7.06	AV	47.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.29.50

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

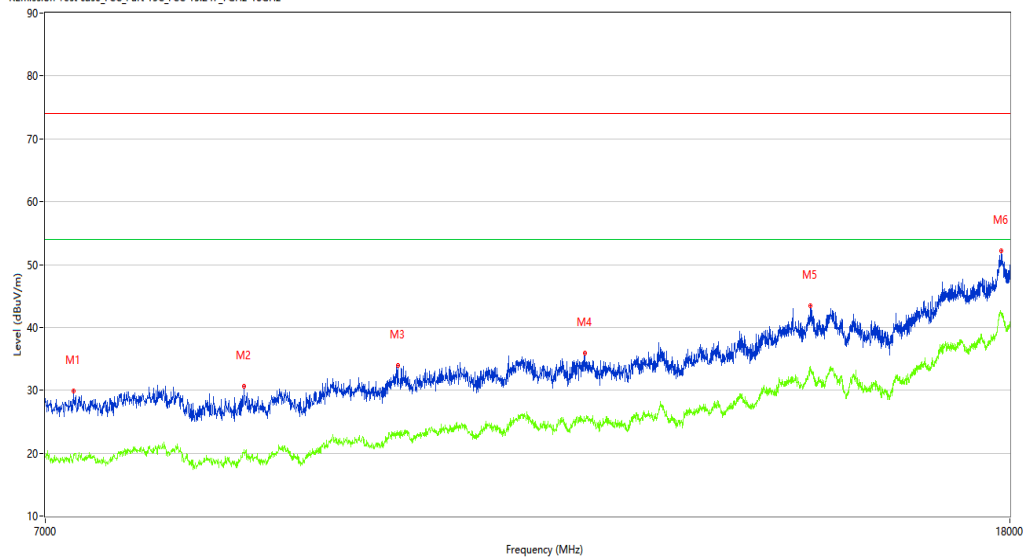

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7195.250	29.89	-0.72	74.0	44.11	Peak	246.50	100	Vertical	Pass
1**	7195.250	19.60	-0.72	54.0	34.40	AV	246.50	100	Vertical	Pass
2	8504.250	30.67	-0.43	74.0	43.33	Peak	197.70	100	Vertical	Pass
2**	8504.250	20.54	-0.43	54.0	33.46	AV	197.70	100	Vertical	Pass
3	9884.750	33.97	2.85	74.0	40.03	Peak	355.40	100	Vertical	Pass
3**	9884.750	23.10	2.85	54.0	30.90	AV	355.40	100	Vertical	Pass
4	11870.250	35.84	3.94	74.0	38.16	Peak	148.00	100	Vertical	Pass
4**	11870.250	25.02	3.94	54.0	28.98	AV	148.00	100	Vertical	Pass
5	14804.500	43.40	11.83	74.0	30.60	Peak	297.70	100	Vertical	Pass
5**	14804.500	33.85	11.83	54.0	20.15	AV	297.70	100	Vertical	Pass
6	17854.251	52.22	18.55	74.0	21.78	Peak	297.70	100	Vertical	Pass
6**	17854.251	42.43	18.55	54.0	11.57	AV	297.70	100	Vertical	Pass

WIFI2.4G-N-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.48.28

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

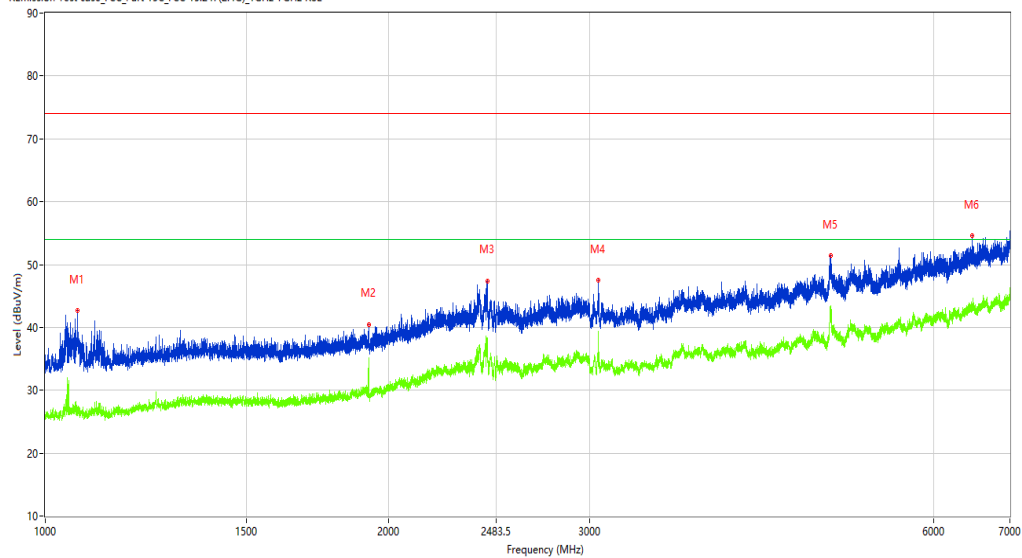

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1067.250	42.69	-14.89	74.0	31.31	Peak	63.30	100	Horizontal	Pass
1**	1067.250	26.26	-14.89	54.0	27.74	AV	63.30	100	Horizontal	Pass
2	1919.750	40.37	-12.26	74.0	33.63	Peak	72.20	100	Horizontal	Pass
2**	1919.750	34.37	-12.26	54.0	19.63	AV	72.20	100	Horizontal	Pass
3	2438.500	47.41	-5.88	74.0	26.59	Peak	124.70	100	Horizontal	Pass
3**	2438.500	37.54	-5.88	54.0	16.46	AV	124.70	100	Horizontal	Pass
4	3050.000	47.16	-4.72	74.0	26.84	Peak	194.20	100	Horizontal	Pass
4**	3050.000	39.16	-4.72	54.0	14.84	AV	194.20	100	Horizontal	Pass
5	4875.500	51.41	-0.60	74.0	22.59	Peak	194.20	100	Horizontal	Pass
5**	4875.500	42.81	-0.60	54.0	11.19	AV	194.20	100	Horizontal	Pass
6	6485.000	54.53	3.09	74.0	19.47	Peak	184.60	100	Horizontal	Pass
6**	6485.000	43.69	3.09	54.0	10.31	AV	184.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.52.03

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

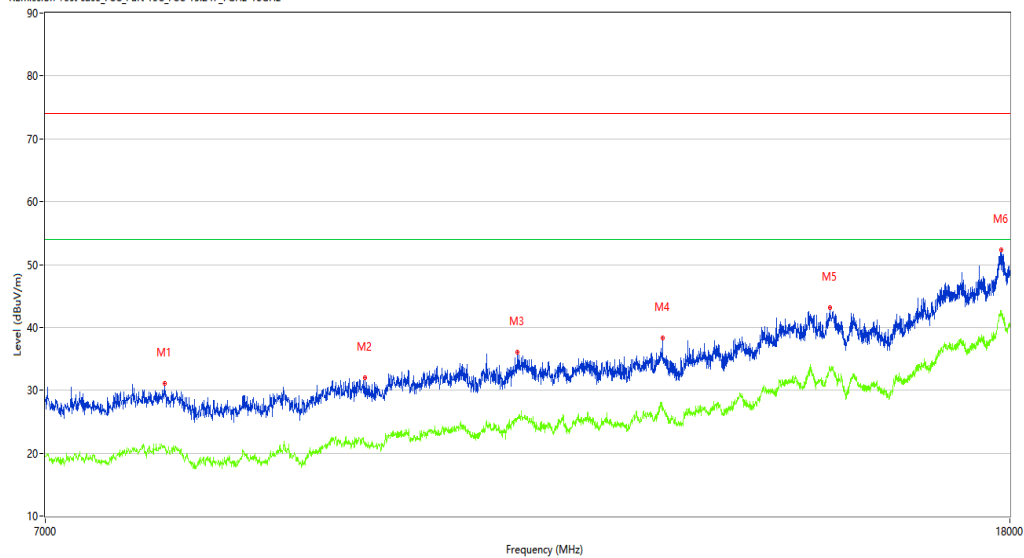

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7869.000	31.11	1.08	74.0	42.89	Peak	192.10	100	Horizontal	Pass
1**	7869.000	21.18	1.08	54.0	32.82	AV	192.10	100	Horizontal	Pass
2	9574.000	31.93	2.00	74.0	42.07	Peak	0.00	100	Horizontal	Pass
2**	9574.000	21.60	2.00	54.0	32.40	AV	0.00	100	Horizontal	Pass
3	11114.000	36.09	4.06	74.0	37.91	Peak	0.00	100	Horizontal	Pass
3**	11114.000	25.61	4.06	54.0	28.39	AV	0.00	100	Horizontal	Pass
4	12810.750	38.31	5.63	74.0	35.69	Peak	192.10	100	Horizontal	Pass
4**	12810.750	27.48	5.63	54.0	26.52	AV	192.10	100	Horizontal	Pass
5	15087.750	43.14	10.45	74.0	30.86	Peak	37.60	100	Horizontal	Pass
5**	15087.750	33.21	10.45	54.0	20.79	AV	37.60	100	Horizontal	Pass
6	17848.750	52.28	18.72	74.0	21.72	Peak	37.60	100	Horizontal	Pass
6**	17848.750	42.71	18.72	54.0	11.29	AV	37.60	100	Horizontal	Pass

WIFI2.4G-N-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_09.09.17

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

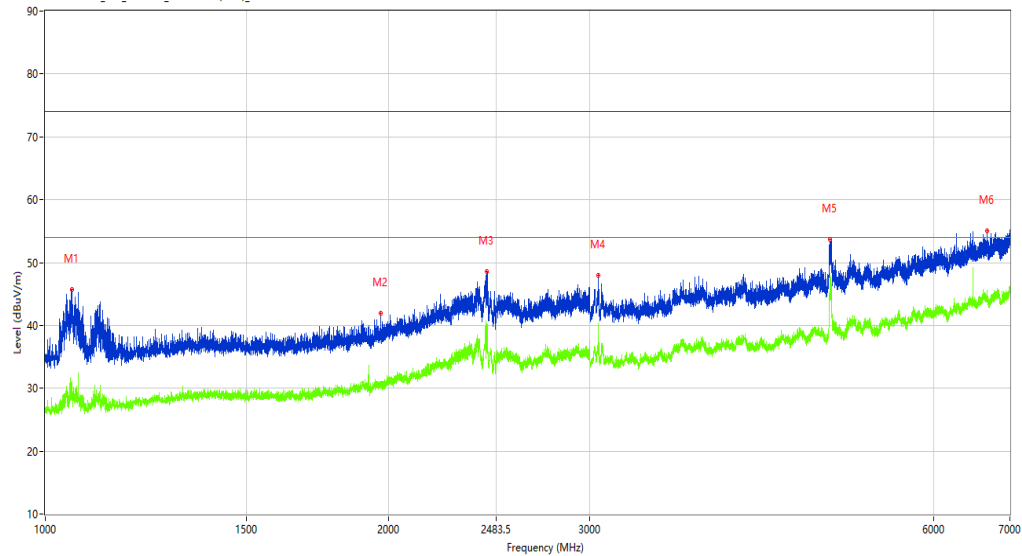

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.500	45.68	-14.86	74.0	28.32	Peak	219.30	100	Vertical	Pass
1**	1055.500	28.15	-14.86	54.0	25.85	AV	219.30	100	Vertical	Pass
2	1967.750	41.94	-11.80	74.0	32.06	Peak	326.90	100	Vertical	Pass
2**	1967.750	30.76	-11.80	54.0	23.24	AV	326.90	100	Vertical	Pass
3	2438.250	48.59	-5.88	74.0	25.41	Peak	317.70	100	Vertical	Pass
3**	2438.250	40.32	-5.88	54.0	13.68	AV	317.70	100	Vertical	Pass
4	3050.500	47.91	-5.39	74.0	26.09	Peak	250.20	100	Vertical	Pass
4**	3050.500	40.28	-5.39	54.0	13.72	AV	250.20	100	Vertical	Pass
5	4873.500	53.72	-0.64	74.0	20.28	Peak	54.50	100	Vertical	Pass
5**	4873.500	46.65	-0.64	54.0	7.35	AV	54.50	100	Vertical	Pass
6	6682.500	55.02	3.69	74.0	18.98	Peak	244.10	100	Vertical	Pass
6**	6682.500	44.39	3.69	54.0	9.61	AV	244.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.34.44

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

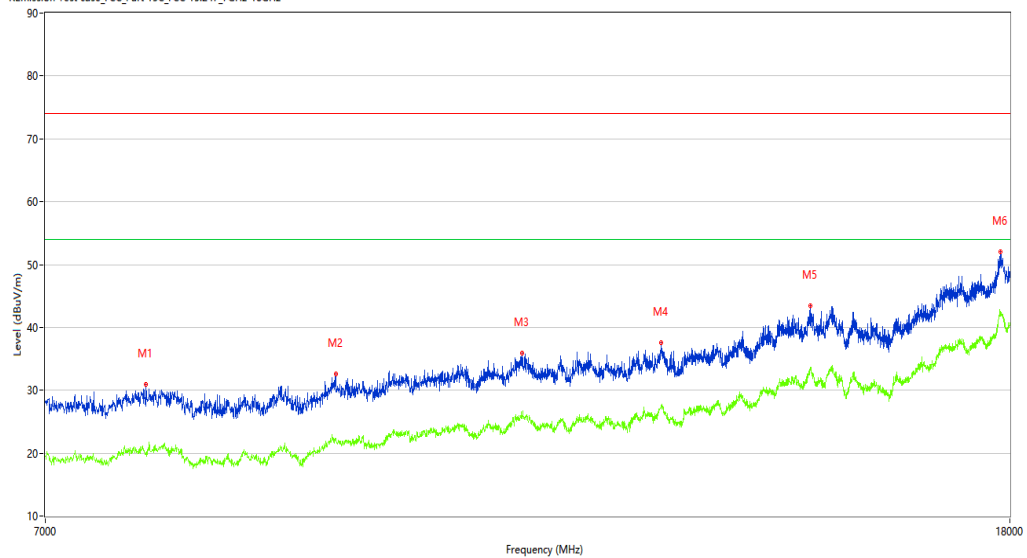

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7726.000	30.97	-0.08	74.0	43.03	Peak	360.00	100	Vertical	Pass
1**	7726.000	19.91	-0.08	54.0	34.09	AV	360.00	100	Vertical	Pass
2	9301.750	32.53	1.61	74.0	41.47	Peak	265.50	100	Vertical	Pass
2**	9301.750	22.01	1.61	54.0	31.99	AV	265.50	100	Vertical	Pass
3	11163.500	35.86	3.95	74.0	38.14	Peak	224.40	100	Vertical	Pass
3**	11163.500	25.69	3.95	54.0	28.31	AV	224.40	100	Vertical	Pass
4	12788.750	37.50	5.97	74.0	36.50	Peak	224.40	100	Vertical	Pass
4**	12788.750	27.27	5.97	54.0	26.73	AV	224.40	100	Vertical	Pass
5	14810.000	43.42	11.98	74.0	30.58	Peak	360.00	100	Vertical	Pass
5**	14810.000	33.71	11.98	54.0	20.29	AV	360.00	100	Vertical	Pass
6	17837.750	52.06	18.50	74.0	21.94	Peak	172.20	100	Vertical	Pass
6**	17837.750	41.98	18.50	54.0	12.02	AV	172.20	100	Vertical	Pass

WIFI2.4G-N-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.39.53

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

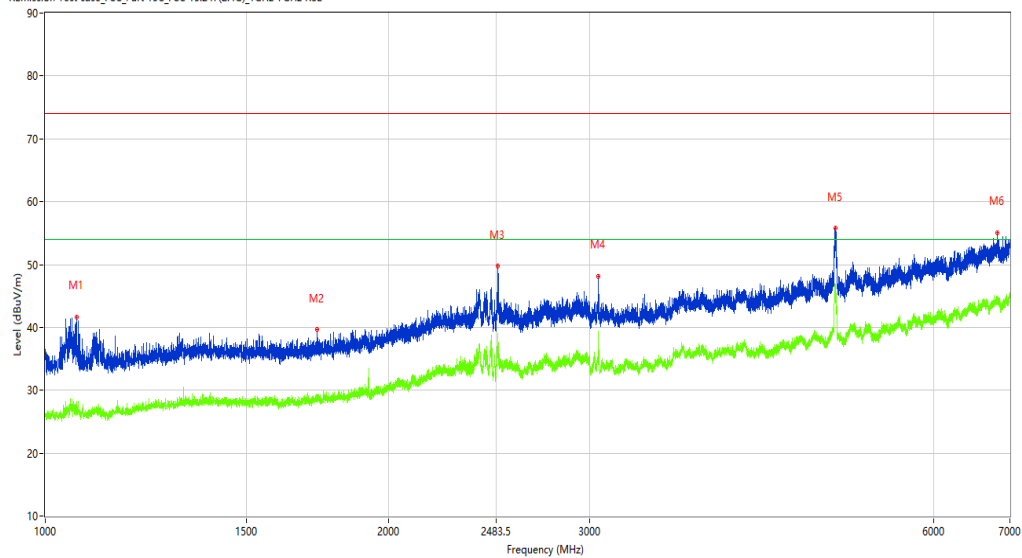

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.750	41.70	-14.91	74.0	32.30	Peak	115.40	100	Horizontal	Pass
1**	1064.750	28.18	-14.91	54.0	25.82	AV	115.40	100	Horizontal	Pass
2	1729.750	39.61	-12.95	74.0	34.39	Peak	228.10	100	Horizontal	Pass
2**	1729.750	28.40	-12.95	54.0	25.60	AV	228.10	100	Horizontal	Pass
3	2490.250	49.73	-7.22	74.0	24.27	Peak	122.20	100	Horizontal	Pass
3**	2490.250	36.14	-7.22	54.0	17.86	AV	122.20	100	Horizontal	Pass
4	3050.000	48.17	-4.72	74.0	25.83	Peak	46.90	100	Horizontal	Pass
4**	3050.000	39.36	-4.72	54.0	14.64	AV	46.90	100	Horizontal	Pass
5	4922.500	55.76	-0.08	74.0	18.24	Peak	61.70	100	Horizontal	Pass
5**	4922.500	45.01	-0.08	54.0	8.99	AV	61.70	100	Horizontal	Pass
6	6827.000	55.10	4.30	74.0	18.90	Peak	313.80	100	Horizontal	Pass
6**	6827.000	45.02	4.30	54.0	8.98	AV	313.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:56:20

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

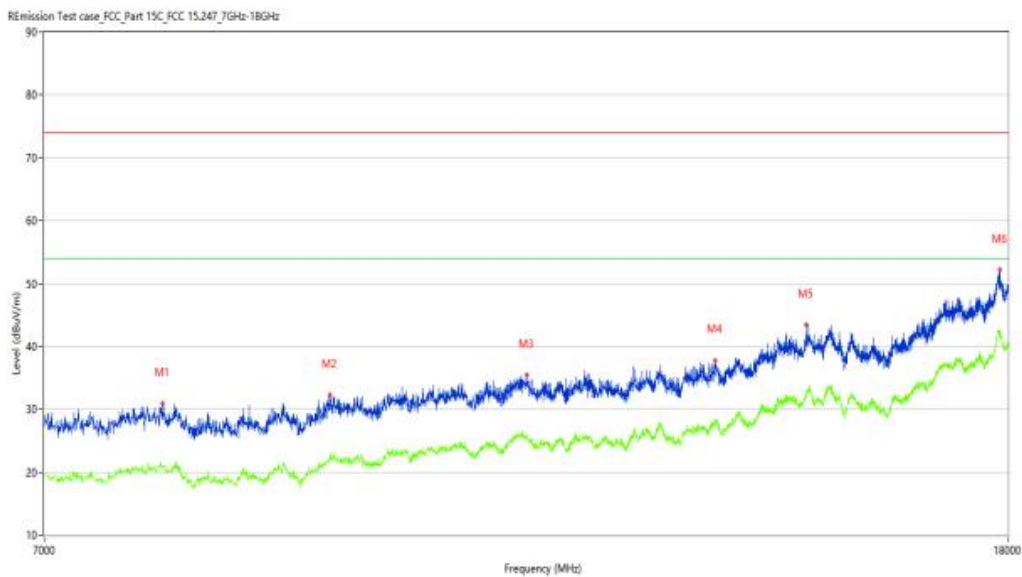

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7863.500	30.89	1.12	74.0	43.11	Peak	172.60	100	Horizontal	Pass
1**	7863.500	20.85	1.12	54.0	33.15	AV	172.60	100	Horizontal	Pass
2	9260.500	32.31	1.25	74.0	41.69	Peak	172.60	100	Horizontal	Pass
2**	9260.500	22.05	1.25	54.0	31.95	AV	172.60	100	Horizontal	Pass
3	11235.000	35.41	4.09	74.0	38.59	Peak	274.60	100	Horizontal	Pass
3**	11235.000	25.87	4.09	54.0	28.13	AV	274.60	100	Horizontal	Pass
4	13506.500	37.77	7.17	74.0	36.23	Peak	320.10	100	Horizontal	Pass
4**	13506.500	27.83	7.17	54.0	26.17	AV	320.10	100	Horizontal	Pass
5	14777.000	43.41	11.02	74.0	30.59	Peak	360.00	100	Horizontal	Pass
5**	14777.000	32.81	11.02	54.0	21.19	AV	360.00	100	Horizontal	Pass
6	17856.999	52.18	18.58	74.0	21.82	Peak	65.10	100	Horizontal	Pass
6**	17856.999	41.96	18.58	54.0	12.04	AV	65.10	100	Horizontal	Pass

WIFI2.4G-N-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_10.24.56

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

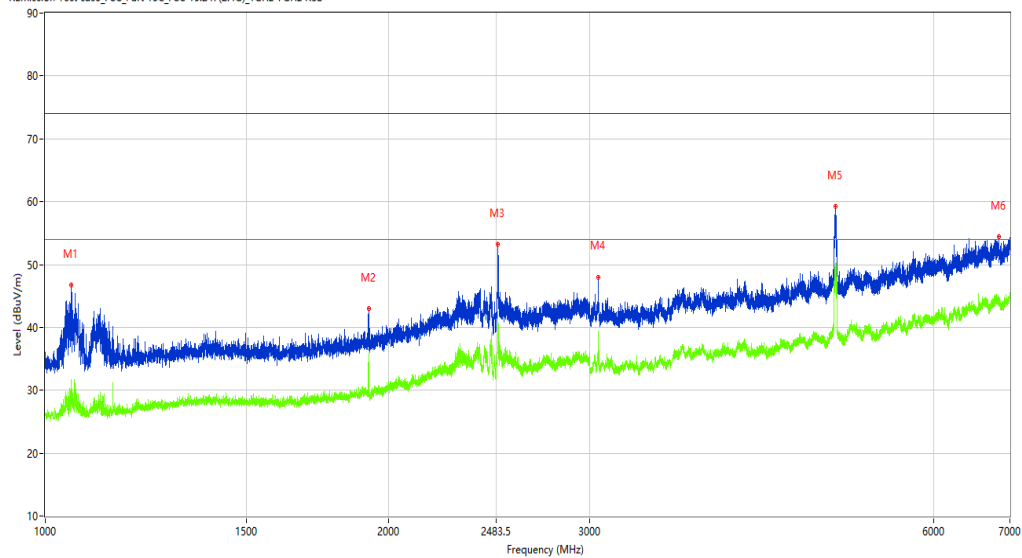

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.250	46.75	-14.88	74.0	27.25	Peak	80.30	100	Vertical	Pass
1**	1053.250	31.69	-14.88	54.0	22.31	AV	80.30	100	Vertical	Pass
2	1920.000	43.00	-12.27	74.0	31.00	Peak	71.30	100	Vertical	Pass
2**	1920.000	35.93	-12.27	54.0	18.07	AV	71.30	100	Vertical	Pass
3	2490.500	53.18	-7.23	74.0	20.82	Peak	331.70	100	Vertical	Pass
3**	2490.500	42.50	-7.23	54.0	11.50	AV	331.70	100	Vertical	Pass
4	3050.000	48.02	-4.72	74.0	25.98	Peak	318.10	100	Vertical	Pass
4**	3050.000	39.37	-4.72	54.0	14.63	AV	318.10	100	Vertical	Pass
5	4922.000	59.26	-0.08	74.0	14.74	Peak	43.20	100	Vertical	Pass
5**	4922.000	49.20	-0.08	54.0	4.80	AV	43.20	100	Vertical	Pass
6	6847.000	54.37	4.02	74.0	19.63	Peak	27.50	100	Vertical	Pass
6**	6847.000	43.75	4.02	54.0	10.25	AV	27.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.41.26

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

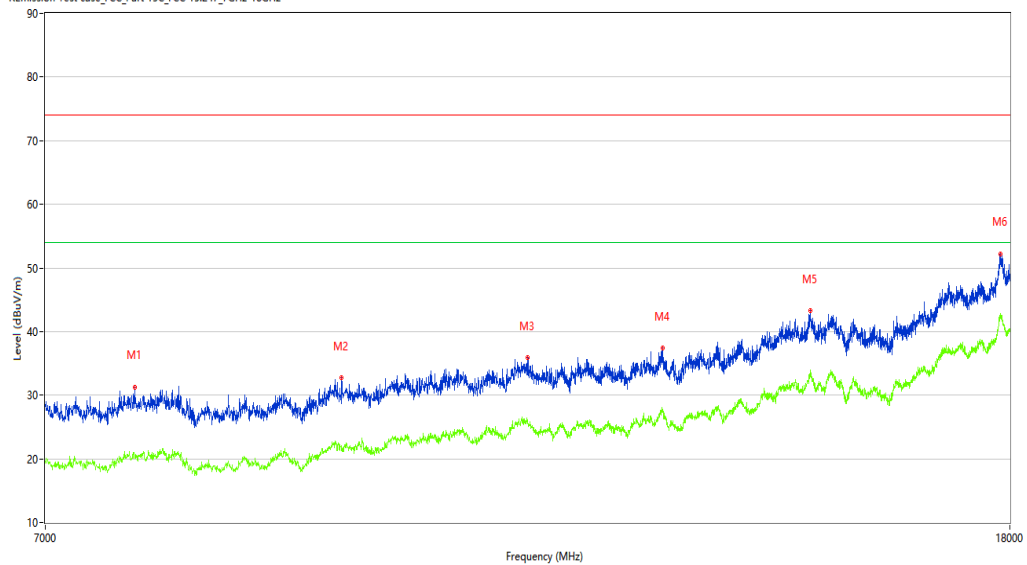

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7640.750	31.30	0.29	74.0	42.70	Peak	0.00	100	Vertical	Pass
1**	7640.750	20.49	0.29	54.0	33.51	AV	0.00	100	Vertical	Pass
2	9354.000	32.82	1.36	74.0	41.18	Peak	291.20	100	Vertical	Pass
2**	9354.000	21.62	1.36	54.0	32.38	AV	291.20	100	Vertical	Pass
3	11226.750	35.89	4.04	74.0	38.11	Peak	339.70	100	Vertical	Pass
3**	11226.750	26.13	4.04	54.0	27.87	AV	339.70	100	Vertical	Pass
4	12807.999	37.37	5.69	74.0	36.63	Peak	198.60	100	Vertical	Pass
4**	12807.999	27.75	5.69	54.0	26.25	AV	198.60	100	Vertical	Pass
5	14804.500	43.27	11.83	74.0	30.73	Peak	339.70	100	Vertical	Pass
5**	14804.500	33.96	11.83	54.0	20.04	AV	339.70	100	Vertical	Pass
6	17837.750	52.24	18.50	74.0	21.76	Peak	148.80	100	Vertical	Pass
6**	17837.750	42.09	18.50	54.0	11.91	AV	148.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-27_20.09.26

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

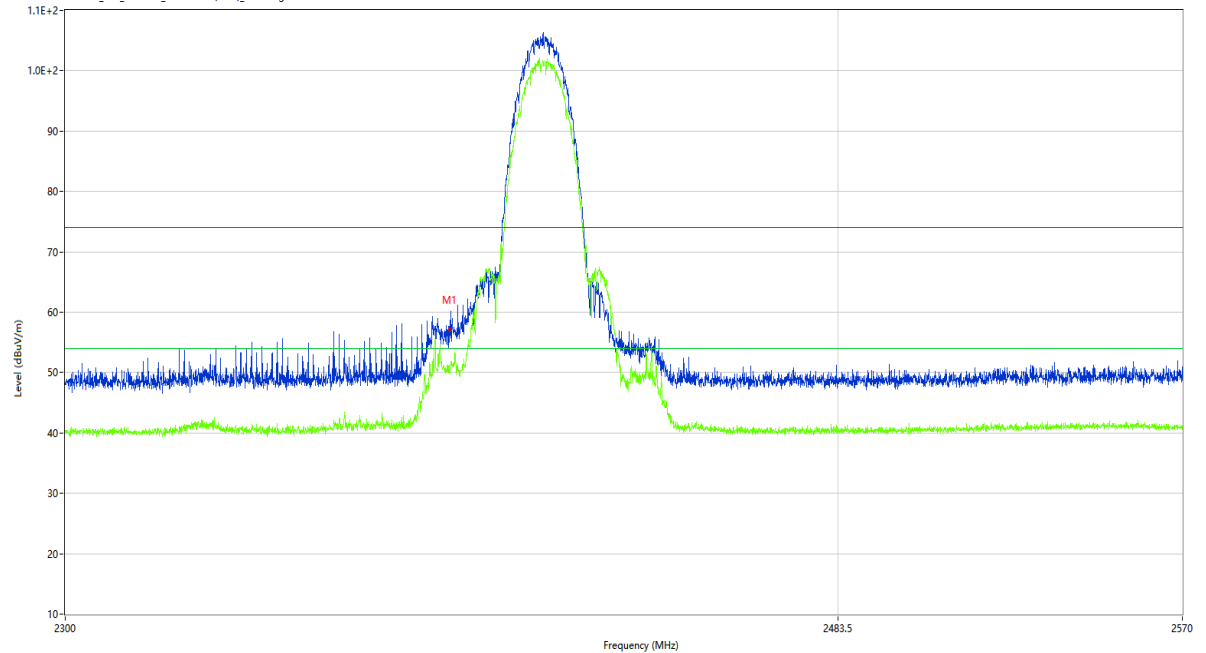

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.05	-10.58	74.0	16.95	Peak	118.10	100	H	Pass
1**	2390.000	51.66	-10.58	54.0	2.34	AV	118.10	100	H	Pass

WIFI2.4G-Bandedge -B-Low channel- Vertical -TX


Test result

Project Number: Certification

Test Time: 2026-03-27_21.02.52

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

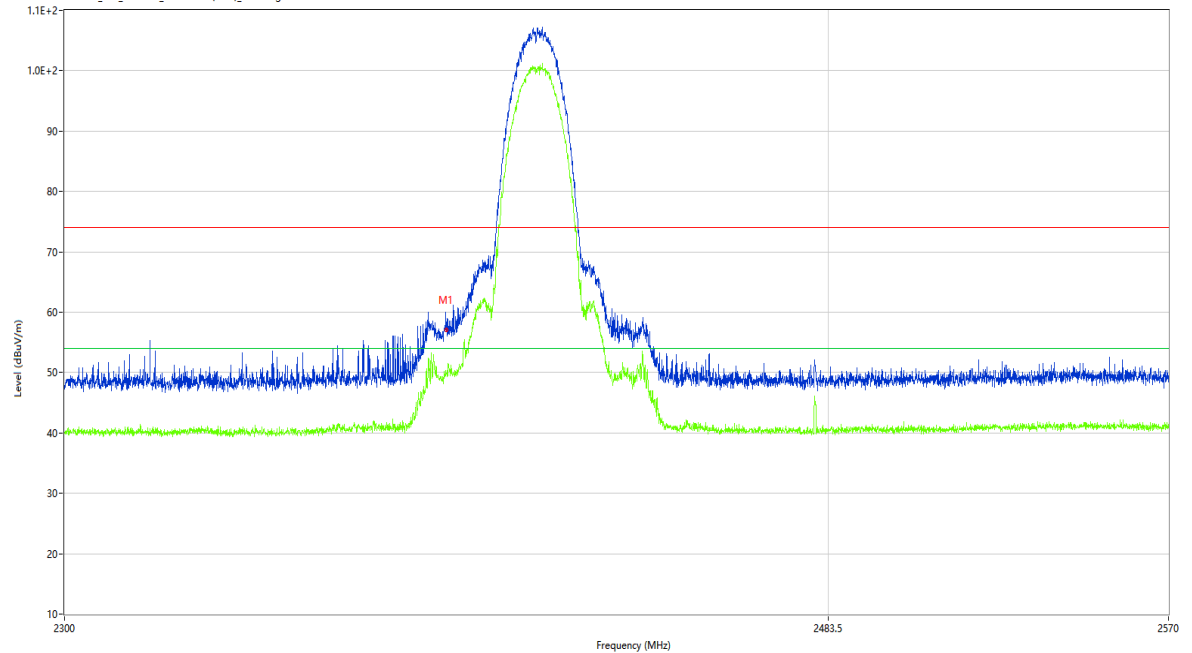

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.06	-10.58	74.0	16.94	Peak	244.60	100	V	Pass
1**	2390.000	49.82	-10.58	54.0	4.18	AV	244.60	100	V	Pass


Test result

Project Number: Certification

Test Time: 2026-03-27_20.22.36

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

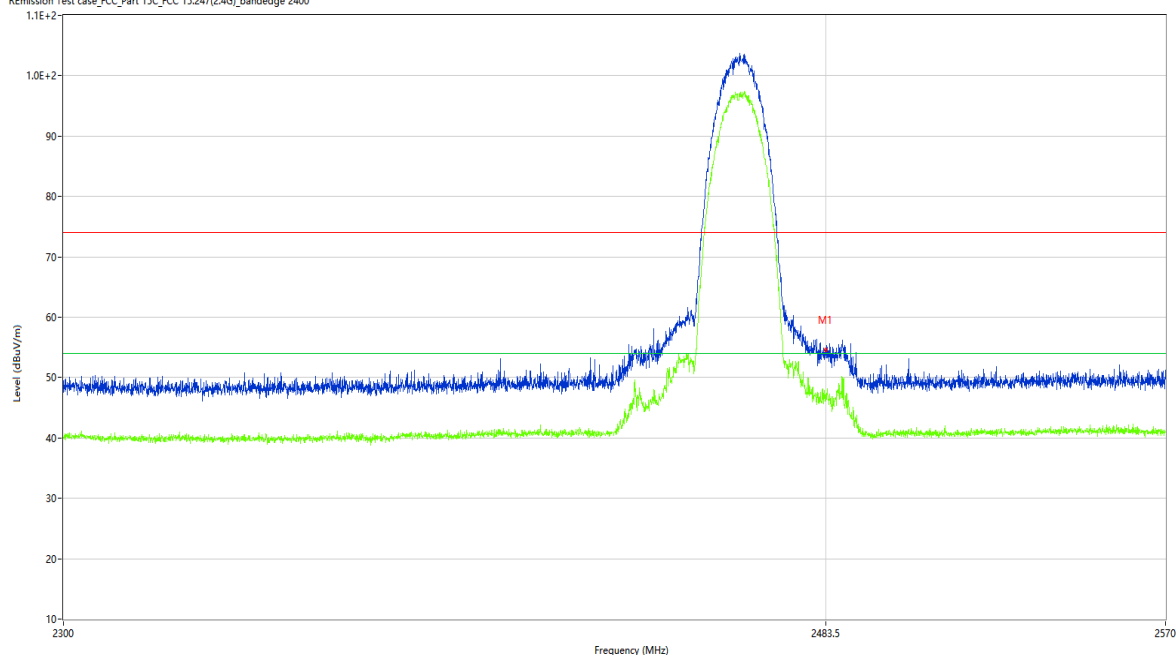

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.59	-10.56	74.0	19.41	Peak	190.32	100	H	Pass
1**	2483.500	46.53	-10.56	54.0	7.47	AV	190.32	100	H	Pass


Test result

Project Number: Certification

Test Time: 2026-03-28_09.47.05

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH	Test Engineer:	XCJ
	CAMERA SMART PET FEEDER		
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

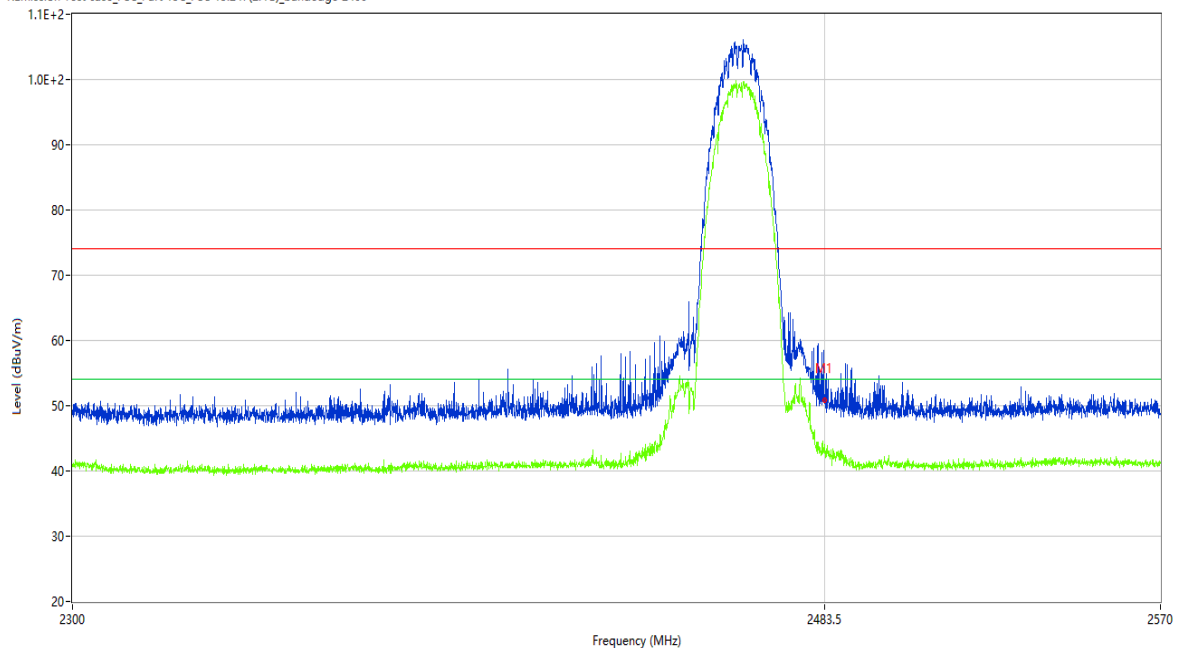

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.65	-10.56	74.0	23.35	Peak	246.94	100	V	Pass
1**	2483.500	43.47	-10.56	54.0	10.53	AV	246.94	100	V	Pass


Test result

Project Number: Certification

Test Time: 2026-03-27_19.49.47

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

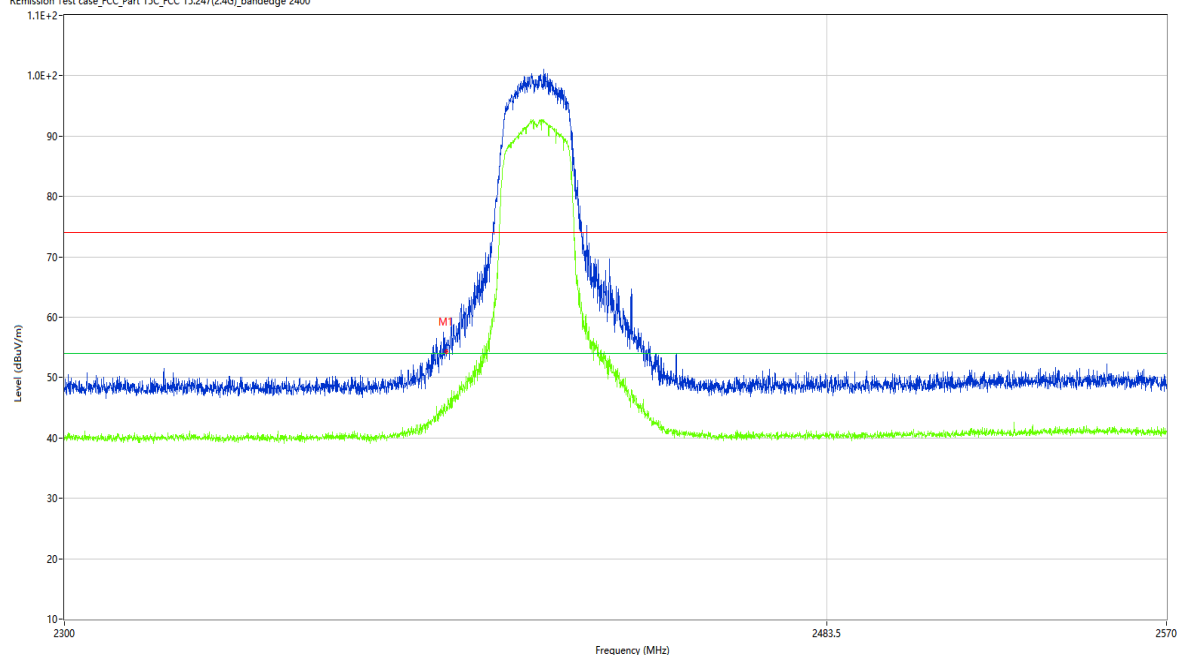

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.55	-10.58	74.0	19.45	Peak	106.23	100	H	Pass
1**	2390.000	44.11	-10.58	54.0	9.89	AV	106.23	100	H	Pass


Test result

Project Number: Certification

Test Time: 2026-03-27_21.07.26

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

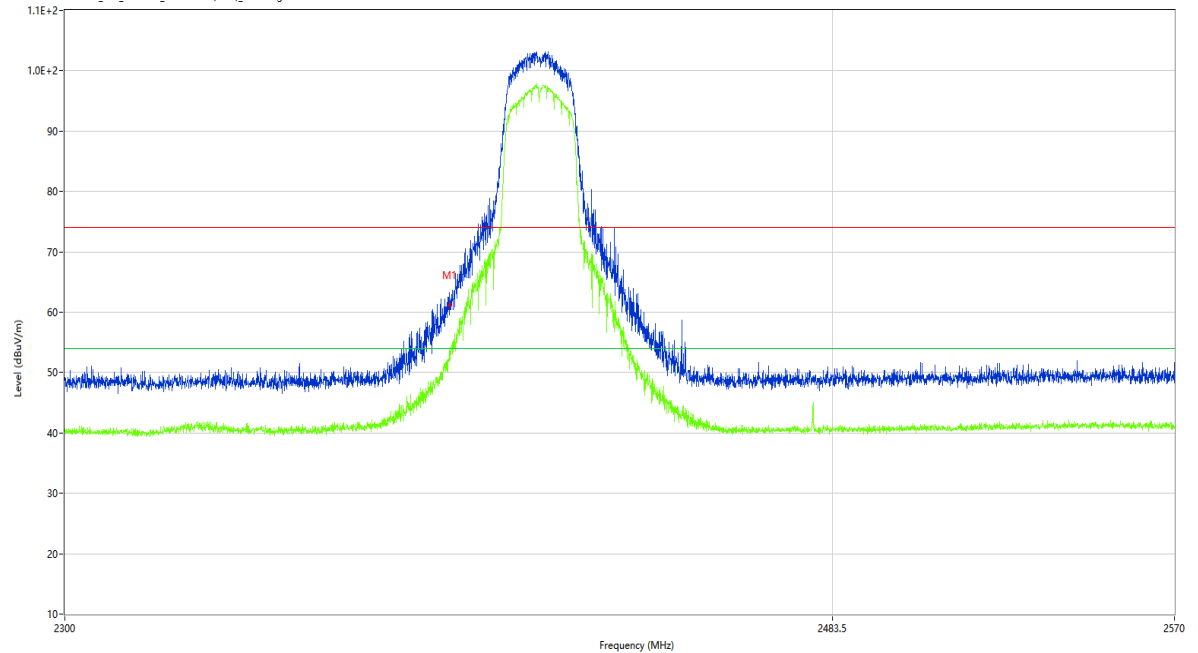

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	60.86	-10.58	74.0	13.14	Peak	85.90	100	V	Pass
1**	2390.000	52.08	-10.58	54.0	1.92	AV	85.90	100	V	Pass


Test result

Project Number: Certification

Test Time: 2026-04-02_15.00.22

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.6	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

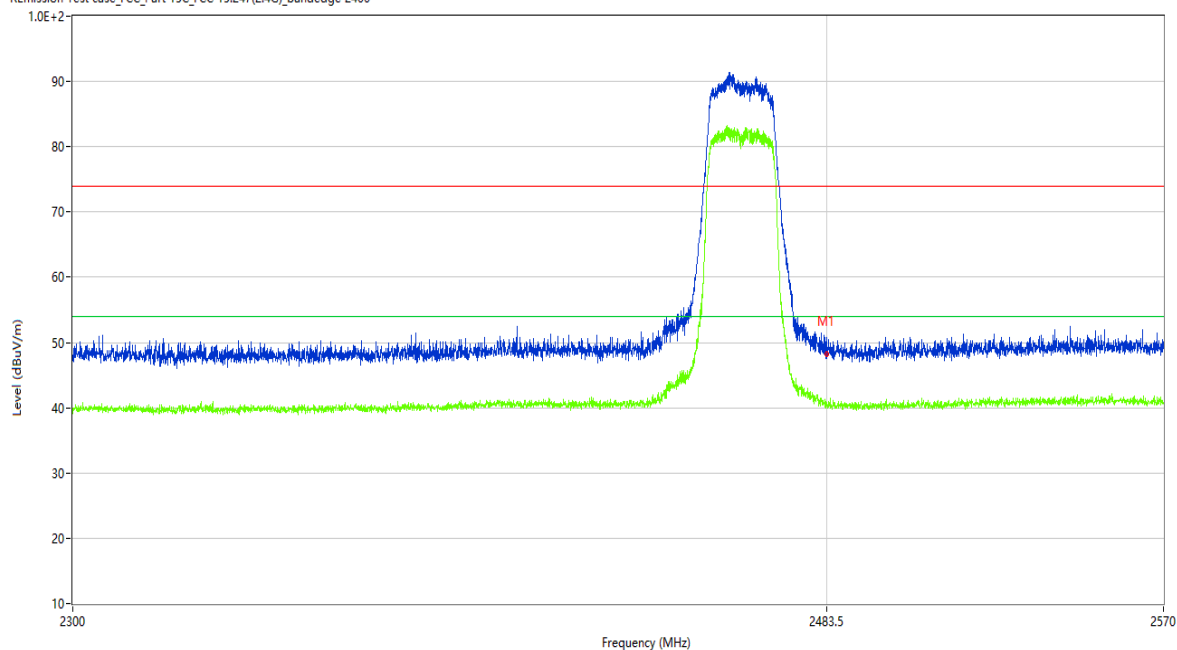

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.28	-10.56	74.0	25.72	Peak	294.36	100	H	Pass
1**	2483.500	40.35	-10.56	54.0	13.65	AV	294.36	100	H	Pass


Test result

Project Number: Certification

Test Time: 2026-03-28_09.42.37

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

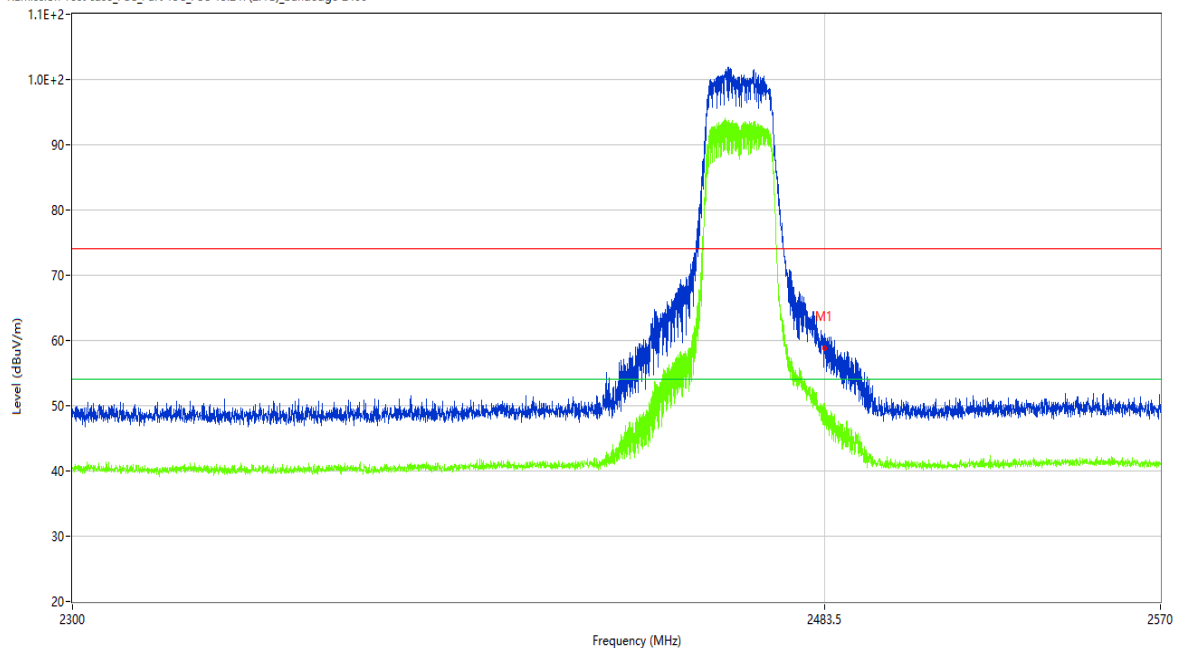


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.42	-10.56	74.0	15.58	Peak	278.70	100	V	Pass
1**	2483.500	47.08	-10.56	54.0	6.92	AV	278.70	100	V	Pass

Test result

Project Number: Certification

Test Time: 2026-04-02_14.53.45

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.3	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

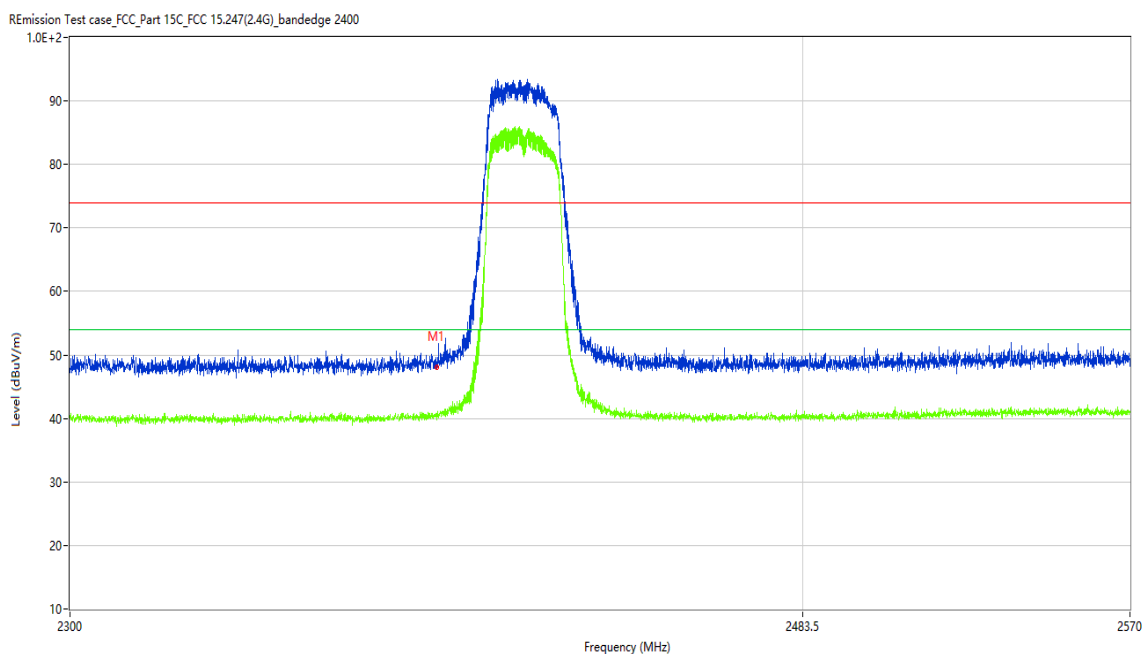

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.03	-10.58	74.0	25.97	Peak	211.02	100	H	Pass
1**	2390.000	39.88	-10.58	54.0	14.12	AV	211.02	100	H	Pass

Test result

Project Number: Certification

Test Time: 2026-03-28_09.34.25

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

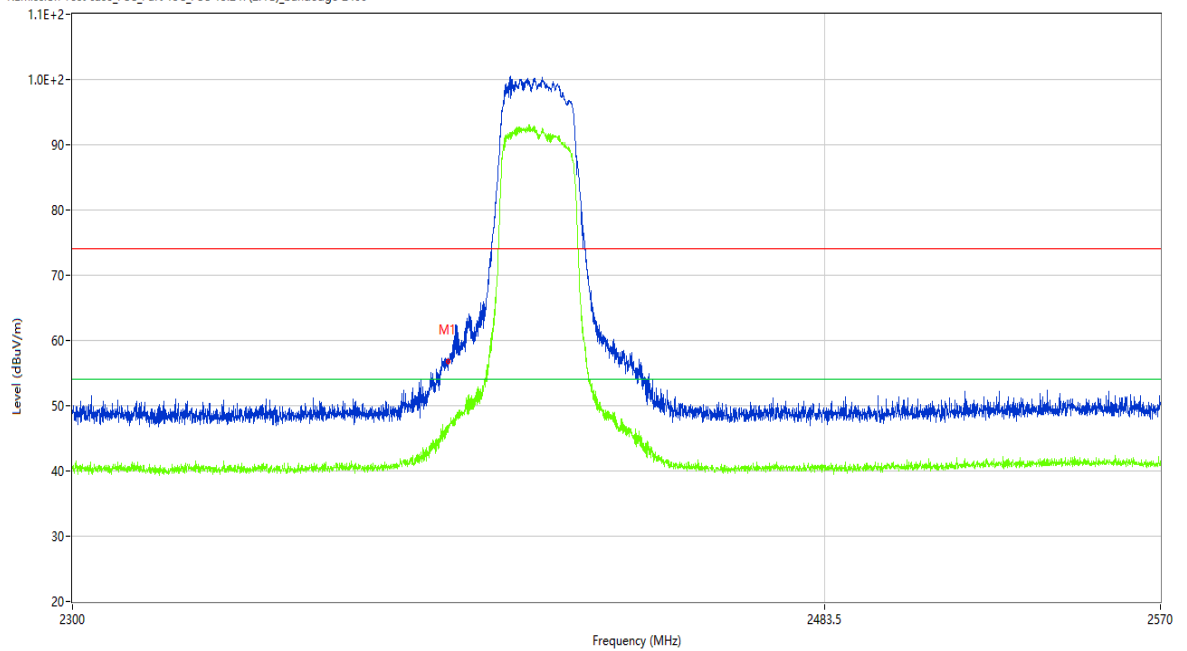

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	56.74	-10.58	74.0	17.26	Peak	182.83	100	V	Pass
1**	2390.000	47.11	-10.58	54.0	6.89	AV	182.83	100	V	Pass


Test result

Project Number: Certification

Test Time: 2026-04-02_14.57.26

EUT Name:	PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER	Test Engineer:	XCJ
Manufacturer:	PETKIT	Test Standard:	FCC
Model:	P572	Work Addition:	TX
Temp.(oC):	22.6	Load:	Full load
Hum.:	52%RH	Remark:	DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

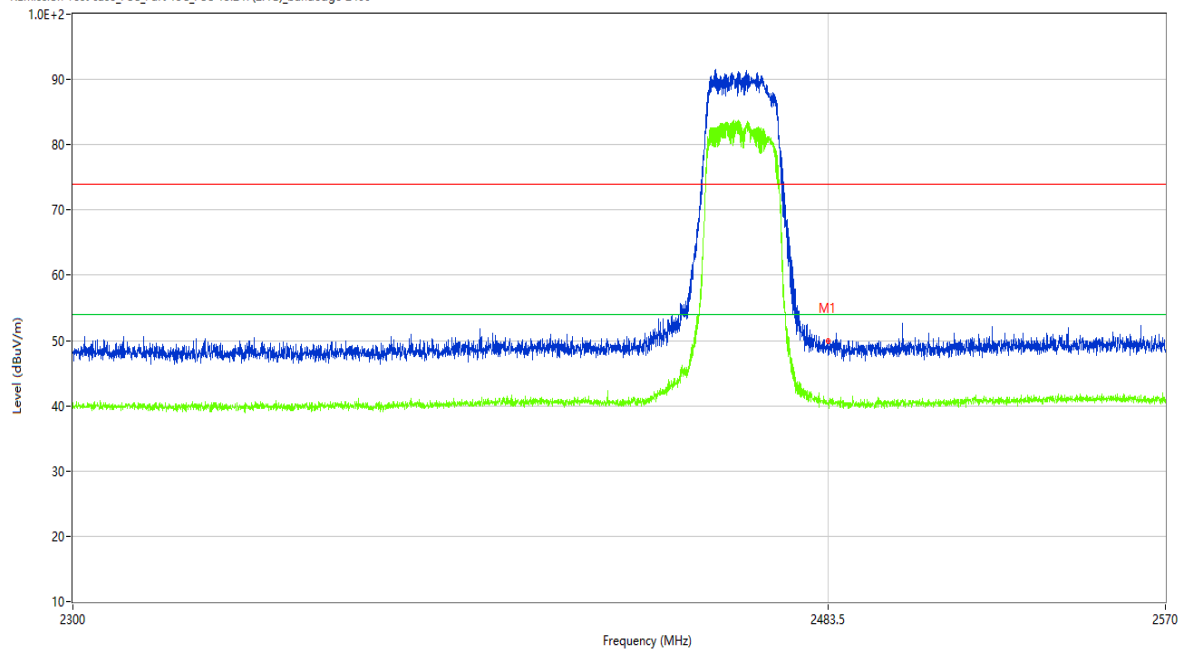

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.99	-10.56	74.0	24.01	Peak	223.23	100	H	Pass
1**	2483.500	40.48	-10.56	54.0	13.52	AV	223.23	100	H	Pass

WIFI2.4G-Bandedge -N-High channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_09.39.35

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

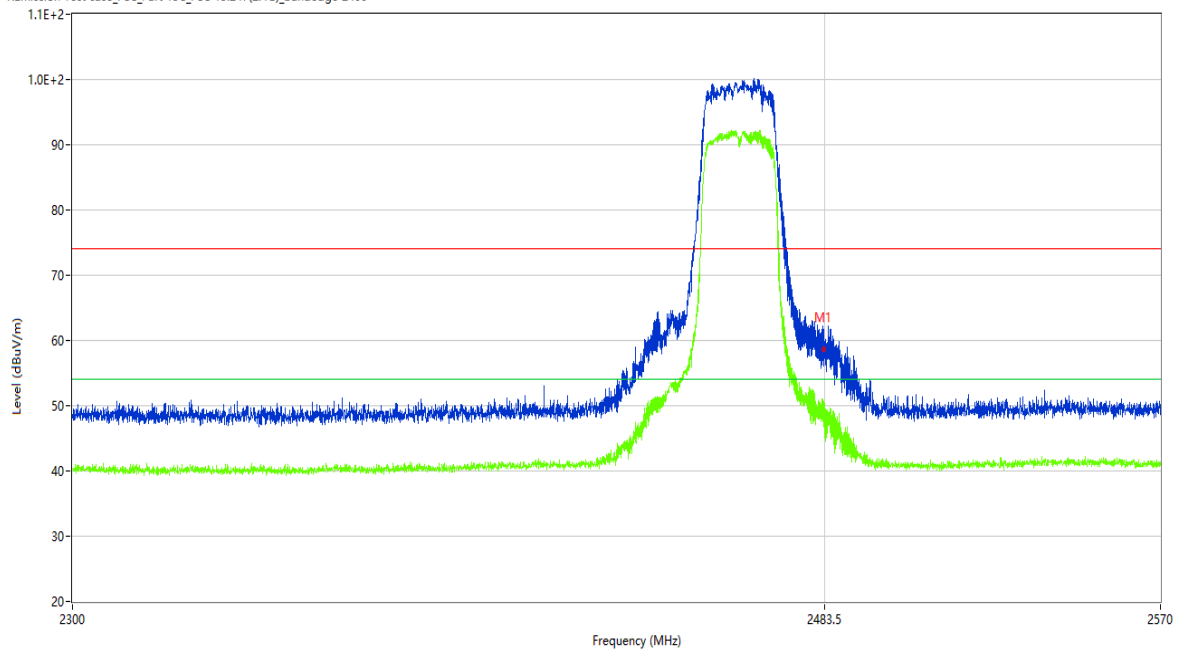

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.75	-10.56	74.0	15.25	Peak	189.12	100	V	Pass
1**	2483.500	49.45	-10.56	54.0	4.55	AV	189.12	100	V	Pass