

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

WIFI5GB1 -Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.34.46

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

Rémission Test case_FCC_Part 15E_FCC 15.407(SG)_30MHz-1GHz

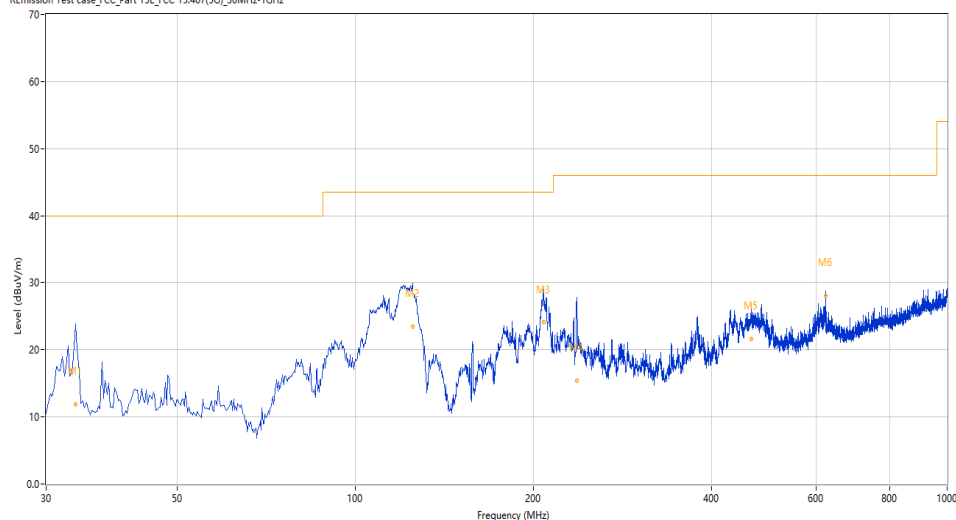

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.666	29.76	-27.02	40.0	10.24	Peak	172.20	151	Horizontal	Pass
1*	33.666	11.81	-27.02	40.0	28.19	QP	172.20	151	Horizontal	Pass
2	125.003	27.11	-27.60	43.5	16.39	Peak	83.40	188	Horizontal	Pass
2*	125.003	23.51	-27.60	43.5	19.99	QP	83.40	188	Horizontal	Pass
3	207.771	28.51	-24.92	43.5	14.99	Peak	290.80	110	Horizontal	Pass
3*	207.771	24.08	-24.92	43.5	19.42	QP	290.80	110	Horizontal	Pass
4	236.441	21.42	-23.36	46.0	24.58	Peak	63.60	101	Horizontal	Pass
4*	236.441	15.40	-23.36	46.0	30.60	QP	63.60	101	Horizontal	Pass
5	467.317	26.36	-17.98	46.0	19.64	Peak	312.40	106	Horizontal	Pass
5*	467.317	21.64	-17.98	46.0	24.36	QP	312.40	106	Horizontal	Pass
6	624.012	31.65	-13.25	46.0	14.35	Peak	77.40	100	Horizontal	Pass
6*	624.012	28.10	-13.25	46.0	17.90	QP	77.40	100	Horizontal	Pass

WIFI5GB1 - Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.25.10

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_30MHz-1GHz

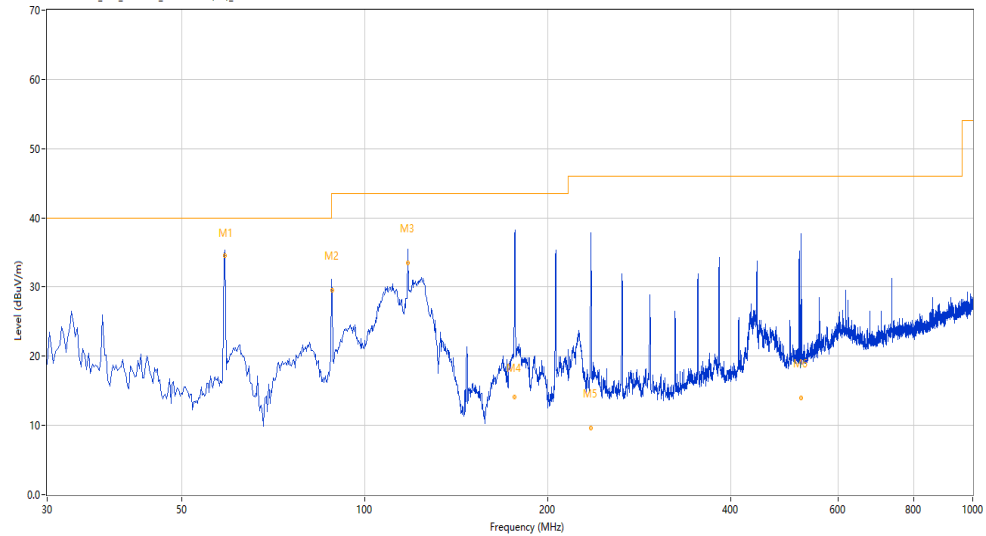

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.863	35.30	-24.68	40.0	4.70	Peak	240.00	100	Vertical	Pass
1*	58.863	34.54	-24.68	40.0	5.46	QP	240.00	100	Vertical	Pass
2	88.280	30.96	-27.81	43.5	12.54	Peak	31.80	100	Vertical	Pass
2*	88.280	29.50	-27.81	43.5	14.00	QP	31.80	100	Vertical	Pass
3	117.641	35.37	-26.47	43.5	8.13	Peak	147.40	100	Vertical	Pass
3*	117.641	33.50	-26.47	43.5	10.00	QP	147.40	100	Vertical	Pass
4	176.438	18.99	-27.18	43.5	24.51	Peak	104.30	100	Vertical	Pass
4*	176.438	14.14	-27.18	43.5	29.36	QP	104.30	100	Vertical	Pass
5	235.312	15.46	-23.45	46.0	30.54	Peak	83.90	100	Vertical	Pass
5*	235.312	9.64	-23.45	46.0	36.36	QP	83.90	100	Vertical	Pass
6	522.363	19.19	-16.18	46.0	26.81	Peak	0.30	100	Vertical	Pass
6*	522.363	13.93	-16.18	46.0	32.07	QP	0.30	100	Vertical	Pass

1G-18G

WIFI5GB1-A-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.08.57


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

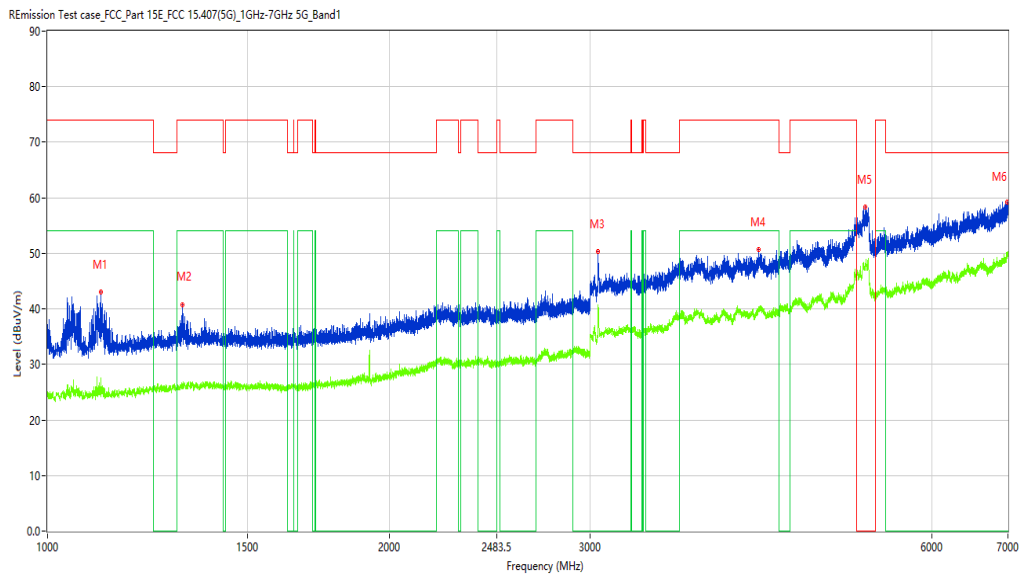

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1113.250	43.00	-16.65	74.0	31.00	Peak	189.30	100	Horizontal	Pass
1**	1113.250	27.63	-16.65	54.0	26.37	AV	189.30	100	Horizontal	Pass
2	1313.500	40.76	-15.36	74.0	33.24	Peak	189.30	100	Horizontal	Pass
2**	1313.500	26.15	-15.36	54.0	27.85	AV	189.30	100	Horizontal	Pass
3	3050.500	50.26	-3.50	68.2	17.94	Peak	323.00	100	Horizontal	Pass
3**	3050.500	40.46	-3.50	--	-40.46	AV	323.00	100	Horizontal	N/A
4	4225.000	50.68	1.51	74.0	23.32	Peak	121.60	100	Horizontal	Pass
4**	4225.000	40.02	1.51	54.0	13.98	AV	121.60	100	Horizontal	Pass
5	5243.000	58.31	8.75	--	214.69	Peak	273.00	100	Horizontal	Pass
5**	5243.000	47.89	8.75	--	-47.89	AV	273.00	100	Horizontal	N/A
6	6990.000	59.22	9.43	68.2	8.98	Peak	168.90	100	Horizontal	Pass
6**	6990.000	49.48	9.43	--	-49.48	AV	168.90	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.53.27

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

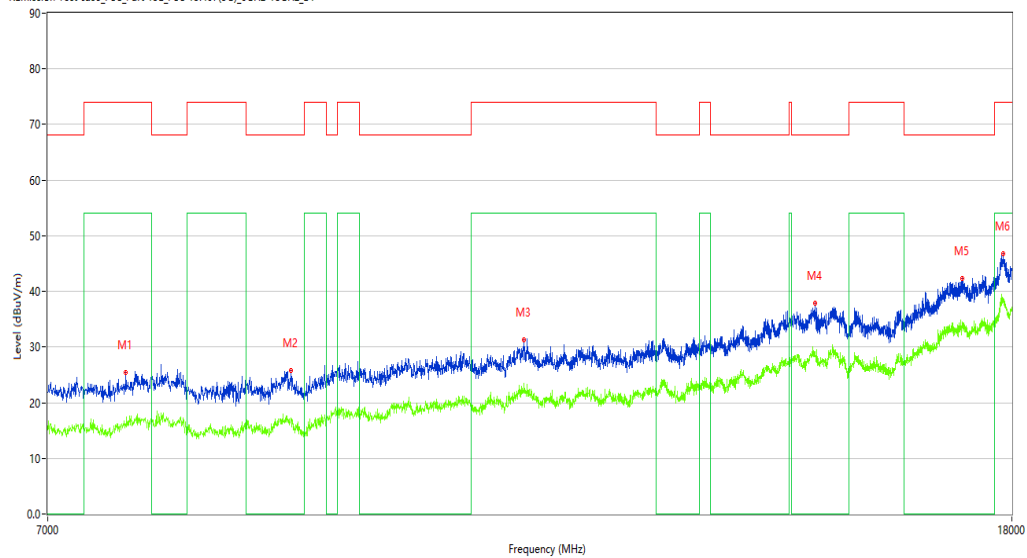

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7555.500	25.37	4.95	74.0	48.63	Peak	194.30	100	Horizontal	Pass
1**	7555.500	15.78	4.95	54.0	38.22	AV	194.30	100	Horizontal	Pass
2	8881.000	25.87	5.20	68.2	42.33	Peak	317.20	100	Horizontal	Pass
2**	8881.000	16.84	5.20	--	-16.84	AV	317.20	100	Horizontal	N/A
3	11158.000	31.29	8.93	74.0	42.71	Peak	46.10	100	Horizontal	Pass
3**	11158.000	21.80	8.93	54.0	32.20	AV	46.10	100	Horizontal	Pass
4	14848.500	37.90	16.01	68.2	30.30	Peak	46.10	100	Horizontal	Pass
4**	14848.500	29.01	16.01	--	-29.01	AV	46.10	100	Horizontal	N/A
5	17142.000	42.34	19.86	68.2	25.86	Peak	360.00	100	Horizontal	Pass
5**	17142.000	34.53	19.86	--	-34.53	AV	360.00	100	Horizontal	N/A
6	17848.750	46.82	23.72	74.0	27.18	Peak	147.70	100	Horizontal	Pass
6**	17848.750	38.04	23.72	54.0	15.96	AV	147.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-28_13.50.41

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

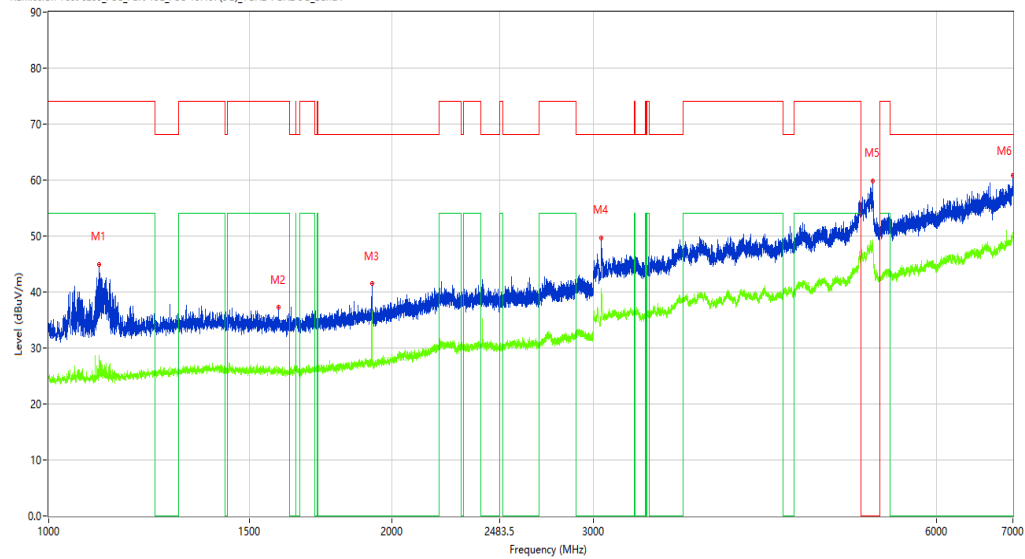

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1107.500	44.92	-16.55	74.0	29.08	Peak	89.20	100	Vertical	Pass
1**	1107.500	28.66	-16.55	54.0	25.34	AV	89.20	100	Vertical	Pass
2	1589.250	37.26	-15.64	74.0	36.74	Peak	240.20	100	Vertical	Pass
2**	1589.250	25.97	-15.64	54.0	28.03	AV	240.20	100	Vertical	Pass
3	1920.000	41.51	-14.27	68.2	26.69	Peak	134.30	100	Vertical	Pass
3**	1920.000	36.61	-14.27	—	-36.61	AV	134.30	100	Vertical	N/A
4	3051.000	49.66	-3.51	68.2	18.54	Peak	321.00	100	Vertical	Pass
4**	3051.000	40.53	-3.51	—	-40.53	AV	321.00	100	Vertical	N/A
5	5276.500	59.86	8.75	—	64.64	Peak	124.50	100	Vertical	Pass
5**	5276.500	49.31	8.75	—	-49.31	AV	124.50	100	Vertical	N/A
6	6997.500	60.91	9.70	68.2	7.29	Peak	72.30	100	Vertical	Pass
6**	6997.500	49.85	9.70	—	-49.85	AV	72.30	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.12.30

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R/Emission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

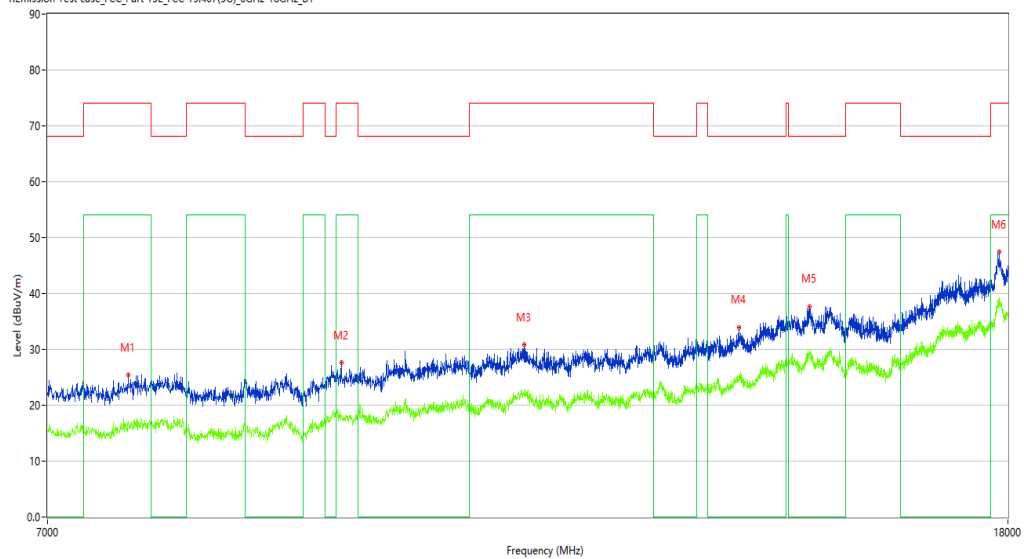

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7577.500	25.42	5.04	74.0	48.58	Peak	314.60	100	Vertical	Pass
1**	7577.500	17.07	5.04	54.0	36.93	AV	314.60	100	Vertical	Pass
2	9345.750	27.58	6.63	74.0	46.42	Peak	286.40	100	Vertical	Pass
2**	9345.750	17.98	6.63	54.0	36.02	AV	286.40	100	Vertical	Pass
3	11188.250	30.79	8.93	74.0	43.21	Peak	26.70	100	Vertical	Pass
3**	11188.250	22.86	8.93	54.0	31.14	AV	26.70	100	Vertical	Pass
4	13814.500	33.91	12.17	68.2	34.29	Peak	8.80	100	Vertical	Pass
4**	13814.500	24.96	12.17	--	-24.96	AV	8.80	100	Vertical	N/A
5	14810.000	37.69	16.98	68.2	30.51	Peak	71.50	100	Vertical	Pass
5**	14810.000	29.08	16.98	--	-29.08	AV	71.50	100	Vertical	N/A
6	17843.249	47.46	23.49	74.0	26.54	Peak	50.80	100	Vertical	Pass
6**	17843.249	39.24	23.49	54.0	14.76	AV	50.80	100	Vertical	Pass

WIFI5GB1-A-Middle channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.06.10

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

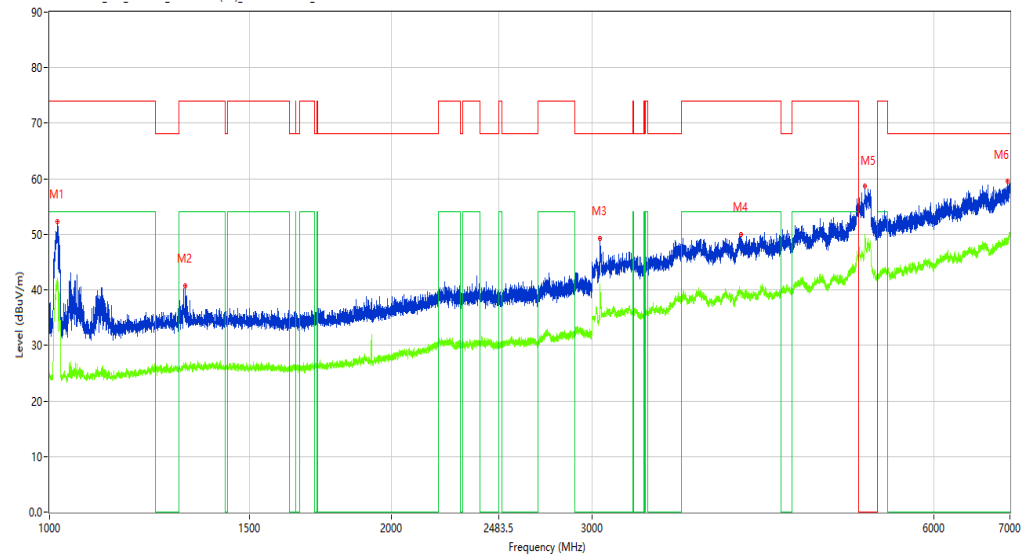

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.500	52.35	-16.27	74.0	21.65	Peak	360.00	100	Horizontal	Pass
1**	1016.500	41.50	-16.27	54.0	12.50	AV	360.00	100	Horizontal	Pass
2	1316.750	40.76	-15.36	74.0	33.24	Peak	139.90	100	Horizontal	Pass
2**	1316.750	26.95	-15.36	54.0	27.05	AV	139.90	100	Horizontal	Pass
3	3050.500	49.32	-3.50	68.2	18.88	Peak	19.40	100	Horizontal	Pass
3**	3050.500	41.06	-3.50	--	-41.06	AV	19.40	100	Horizontal	N/A
4	4062.500	49.93	1.67	74.0	24.07	Peak	69.10	100	Horizontal	Pass
4**	4062.500	38.97	1.67	54.0	15.03	AV	69.10	100	Horizontal	Pass
5	5220.000	58.78	8.27	--	-58.78	Peak	0.00	100	Horizontal	N/A
5**	5220.000	49.97	8.27	--	-49.97	AV	0.00	100	Horizontal	N/A
6	6971.000	59.51	8.92	68.2	8.69	Peak	118.20	100	Horizontal	Pass
6**	6971.000	49.19	8.92	--	-49.19	AV	118.20	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.51.40

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

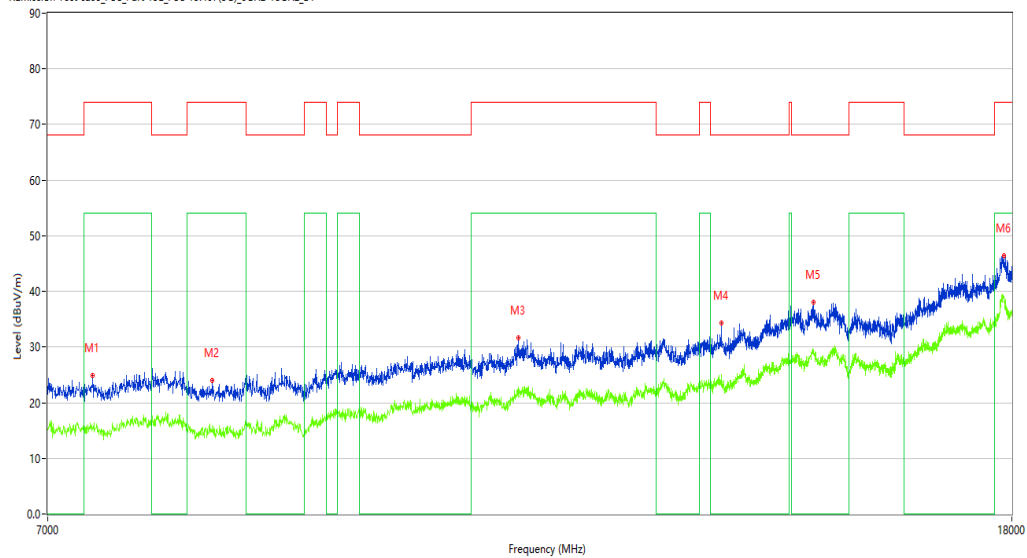

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7316.250	24.88	4.88	74.0	49.12	Peak	232.70	100	Horizontal	Pass
1**	7316.250	15.33	4.88	54.0	38.67	AV	232.70	100	Horizontal	Pass
2	8223.750	24.04	4.72	74.0	49.96	Peak	360.00	100	Horizontal	Pass
2**	8223.750	15.29	4.72	54.0	38.71	AV	360.00	100	Horizontal	Pass
3	11103.000	31.61	9.18	74.0	42.39	Peak	72.40	100	Horizontal	Pass
3**	11103.000	21.84	9.18	54.0	32.16	AV	72.40	100	Horizontal	Pass
4	13542.250	34.28	12.30	68.2	33.92	Peak	53.30	100	Horizontal	Pass
4**	13542.250	25.15	12.30	--	-25.15	AV	53.30	100	Horizontal	N/A
5	14818.250	38.00	16.76	68.2	30.20	Peak	214.80	100	Horizontal	Pass
5**	14818.250	29.17	16.76	--	-29.17	AV	214.80	100	Horizontal	N/A
6	17862.500	46.38	23.46	74.0	27.62	Peak	37.80	100	Horizontal	Pass
6**	17862.500	39.14	23.46	54.0	14.86	AV	37.80	100	Horizontal	Pass

WIFI5GB1-A-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_13.47.52

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

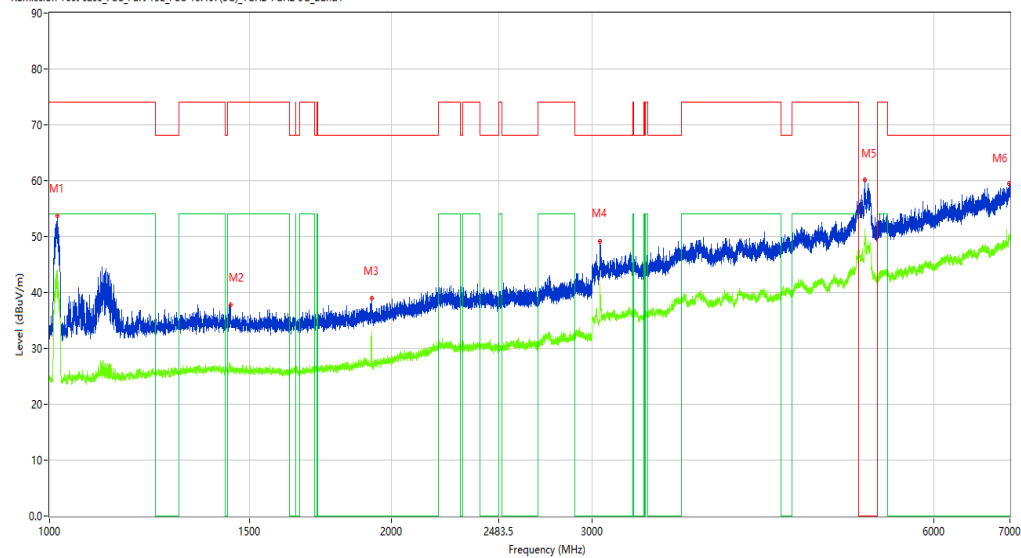

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.500	53.70	-16.27	74.0	20.30	Peak	337.80	100	Vertical	Pass
1**	1016.500	44.13	-16.27	54.0	9.87	AV	337.80	100	Vertical	Pass
2	1443.000	37.74	-15.19	74.0	36.26	Peak	240.20	100	Vertical	Pass
2**	1443.000	26.96	-15.19	54.0	27.04	AV	240.20	100	Vertical	Pass
3	1920.500	38.90	-14.28	68.2	29.30	Peak	141.80	100	Vertical	Pass
3**	1920.500	32.03	-14.28	--	-32.03	AV	141.80	100	Vertical	N/A
4	3050.000	49.21	-3.49	68.2	18.99	Peak	272.10	100	Vertical	Pass
4**	3050.000	40.30	-3.49	--	-40.30	AV	272.10	100	Vertical	N/A
5	5220.000	60.11	8.27	--	-37.61	Peak	22.50	100	Vertical	N/A
5**	5220.000	51.23	8.27	--	-51.23	AV	22.50	100	Vertical	N/A
6	6983.500	59.50	9.50	68.2	8.70	Peak	171.10	100	Vertical	Pass
6**	6983.500	49.38	9.50	--	-49.38	AV	171.10	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.14.16

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_5GHz-18GHz_B1

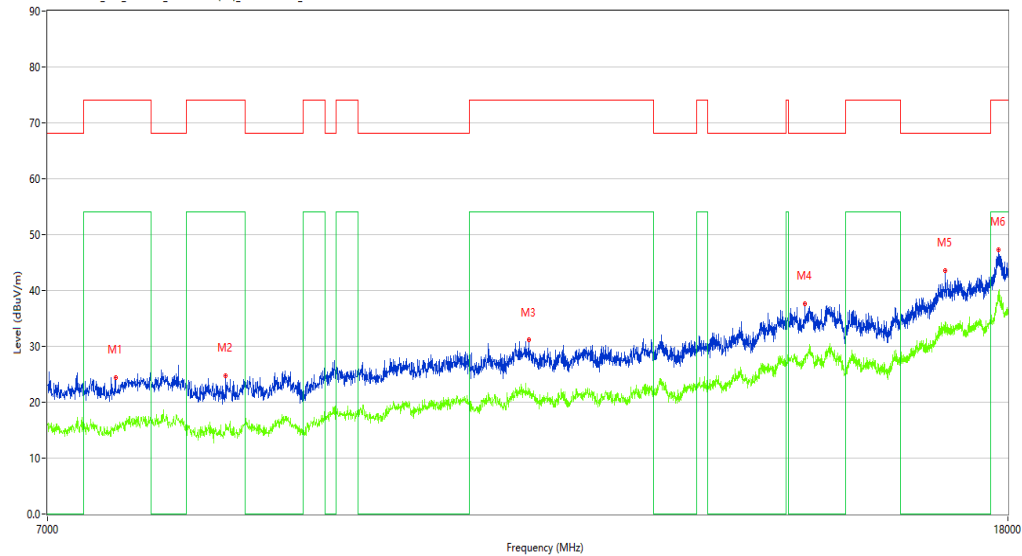

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7484.000	24.44	5.05	74.0	49.56	Peak	49.10	100	Vertical	Pass
1**	7484.000	16.06	5.05	54.0	37.94	AV	49.10	100	Vertical	Pass
2	8339.250	24.73	4.63	74.0	49.27	Peak	0.00	100	Vertical	Pass
2**	8339.250	16.17	4.63	54.0	37.83	AV	0.00	100	Vertical	Pass
3	11235.000	31.13	9.09	74.0	42.87	Peak	198.30	100	Vertical	Pass
3**	11235.000	21.70	9.09	54.0	32.30	AV	198.30	100	Vertical	Pass
4	14744.001	37.65	15.18	68.2	30.55	Peak	49.10	100	Vertical	Pass
4**	14744.001	28.26	15.18	--	-28.26	AV	49.10	100	Vertical	N/A
5	16922.000	43.61	19.41	68.2	24.59	Peak	0.00	100	Vertical	Pass
5**	16922.000	34.47	19.41	--	-34.47	AV	0.00	100	Vertical	N/A
6	17835.000	47.31	23.63	74.0	26.69	Peak	312.20	100	Vertical	Pass
6**	17835.000	38.54	23.63	54.0	15.46	AV	312.20	100	Vertical	Pass

WIFI5GB1-A-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.01.44

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

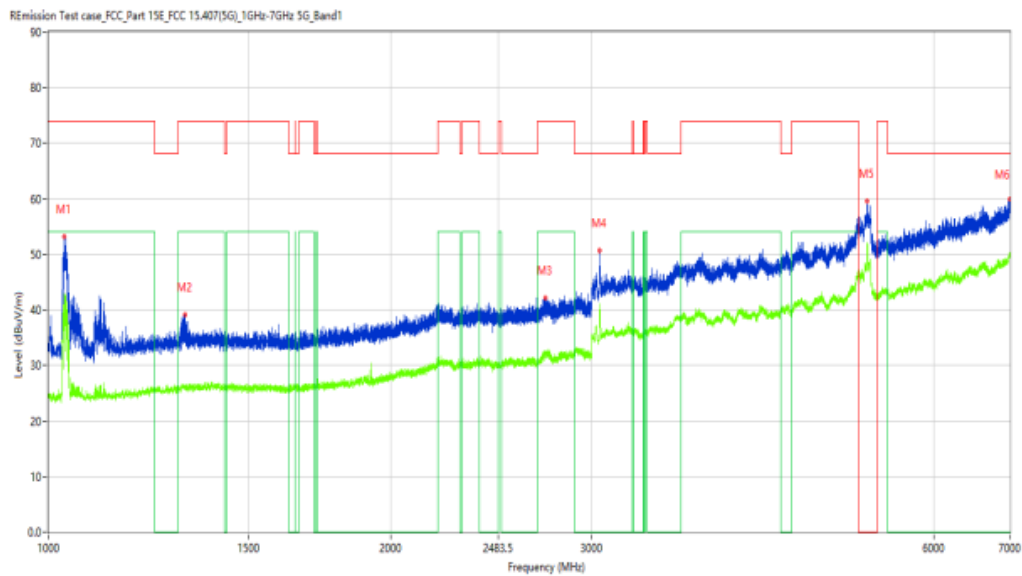

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1032.500	53.18	-16.19	74.0	20.82	Peak	0.00	100	Horizontal	Pass
1**	1032.500	42.79	-16.19	54.0	11.21	AV	0.00	100	Horizontal	Pass
2	1318.000	39.14	-15.36	74.0	34.86	Peak	137.10	100	Horizontal	Pass
2**	1318.000	26.14	-15.36	54.0	27.86	AV	137.10	100	Horizontal	Pass
3	2732.750	42.12	-8.61	74.0	31.88	Peak	240.60	100	Horizontal	Pass
3**	2732.750	32.46	-8.61	54.0	21.54	AV	240.60	100	Horizontal	Pass
4	3050.500	50.76	-3.50	68.2	17.44	Peak	276.40	100	Horizontal	Pass
4**	3050.500	41.01	-3.50	--	-41.01	AV	276.40	100	Horizontal	N/A
5	5246.500	59.60	8.54	--	-59.60	Peak	0.00	100	Horizontal	N/A
5**	5246.500	52.17	8.54	--	-52.17	AV	0.00	100	Horizontal	N/A
6	6996.500	59.87	9.67	68.2	8.33	Peak	0.00	100	Horizontal	Pass
6**	6996.500	49.90	9.67	--	-49.90	AV	0.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.48.31

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

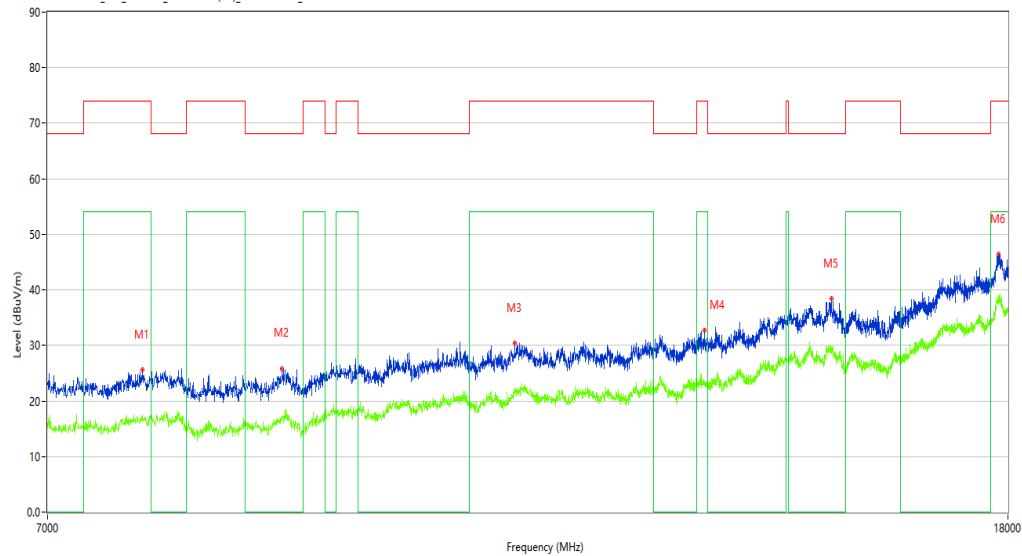

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7684.750	25.59	5.76	74.0	48.41	Peak	297.30	100	Horizontal	Pass
1**	7684.750	17.44	5.76	54.0	36.56	AV	297.30	100	Horizontal	Pass
2	8817.750	25.79	5.26	68.2	42.41	Peak	340.30	100	Horizontal	Pass
2**	8817.750	16.79	5.26	--	-16.79	AV	340.30	100	Horizontal	N/A
3	11083.750	30.35	9.45	74.0	43.65	Peak	277.60	100	Horizontal	Pass
3**	11083.750	22.12	9.45	54.0	31.88	AV	277.60	100	Horizontal	Pass
4	13360.750	32.78	11.18	74.0	41.22	Peak	104.90	100	Horizontal	Pass
4**	13360.750	22.93	11.18	54.0	31.07	AV	104.90	100	Horizontal	Pass
5	15129.000	38.37	14.36	68.2	29.83	Peak	360.00	100	Horizontal	Pass
5**	15129.000	29.66	14.36	--	-29.66	AV	360.00	100	Horizontal	N/A
6	17837.750	46.50	23.50	74.0	27.50	Peak	186.10	100	Horizontal	Pass
6**	17837.750	38.86	23.50	54.0	15.14	AV	186.10	100	Horizontal	Pass

WIFI5GB1-A-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_13.42.48

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

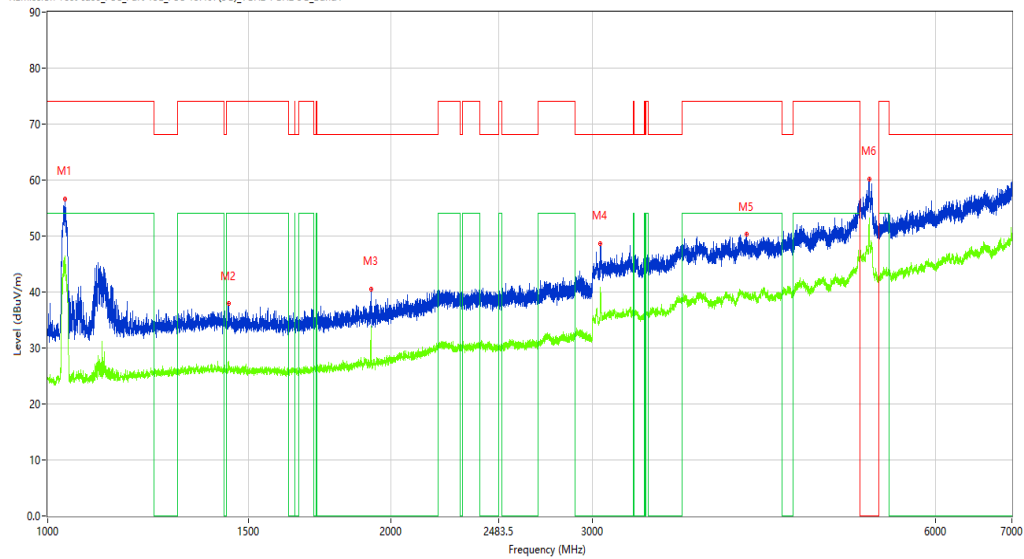

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1036.250	56.68	-16.27	74.0	17.32	Peak	343.50	100	Vertical	Pass
1**	1036.250	45.54	-16.27	54.0	8.46	AV	343.50	100	Vertical	Pass
2	1440.250	37.99	-15.22	74.0	36.01	Peak	143.10	100	Vertical	Pass
2**	1440.250	27.61	-15.22	54.0	26.39	AV	143.10	100	Vertical	Pass
3	1920.000	40.56	-14.27	68.2	27.64	Peak	89.00	100	Vertical	Pass
3**	1920.000	33.94	-14.27	--	-33.94	AV	89.00	100	Vertical	N/A
4	3051.000	48.68	-3.51	68.2	19.52	Peak	228.20	100	Vertical	Pass
4**	3051.000	40.30	-3.51	--	-40.30	AV	228.20	100	Vertical	N/A
5	4101.000	50.28	0.98	74.0	23.72	Peak	360.00	100	Vertical	Pass
5**	4101.000	39.39	0.98	54.0	14.61	AV	360.00	100	Vertical	Pass
6	5248.000	60.24	8.60	--	-36.24	Peak	24.00	100	Vertical	N/A
6**	5248.000	53.18	8.60	--	-53.18	AV	24.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.16.05

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R emission Test case_FCC_Part 15E_FCC 15.407(SG)_6GHz-18GHz_B1

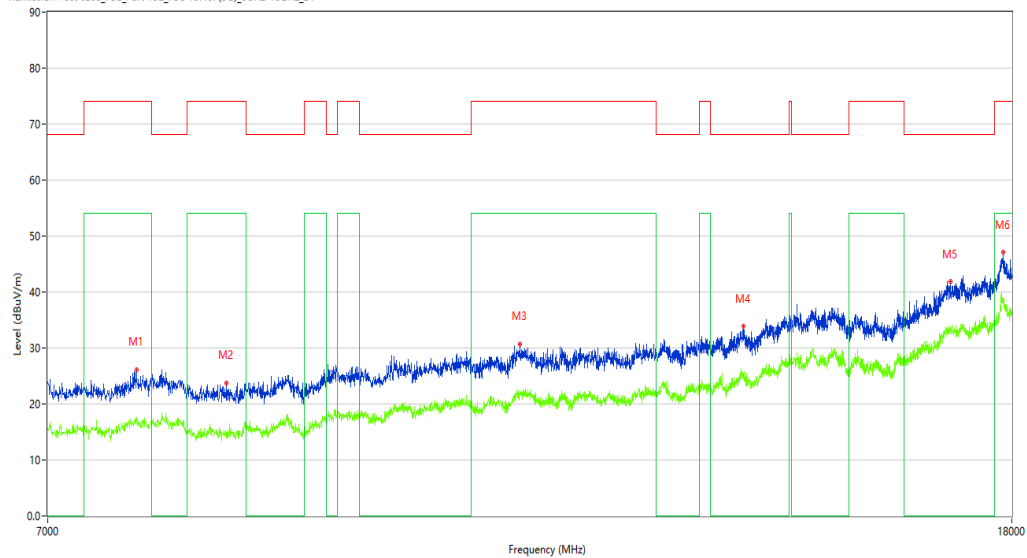

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7635.250	26.02	5.42	74.0	47.98	Peak	162.90	100	Vertical	Pass
1**	7635.250	17.63	5.42	54.0	36.37	AV	162.90	100	Vertical	Pass
2	8342.000	23.77	4.67	74.0	50.23	Peak	25.40	100	Vertical	Pass
2**	8342.000	14.72	4.67	54.0	39.28	AV	25.40	100	Vertical	Pass
3	11114.000	30.69	9.06	74.0	43.31	Peak	43.40	100	Vertical	Pass
3**	11114.000	22.19	9.06	54.0	31.81	AV	43.40	100	Vertical	Pass
4	13833.750	33.92	12.34	68.2	34.28	Peak	308.70	100	Vertical	Pass
4**	13833.750	25.38	12.34	--	-25.38	AV	308.70	100	Vertical	N/A
5	16952.250	41.80	19.52	68.2	26.40	Peak	1.40	100	Vertical	Pass
5**	16952.250	33.39	19.52	--	-33.39	AV	1.40	100	Vertical	N/A
6	17846.000	47.09	23.76	74.0	26.91	Peak	249.70	100	Vertical	Pass
6**	17846.000	38.49	23.76	54.0	15.51	AV	249.70	100	Vertical	Pass

WIFI5GB1-N20-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.16.53

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

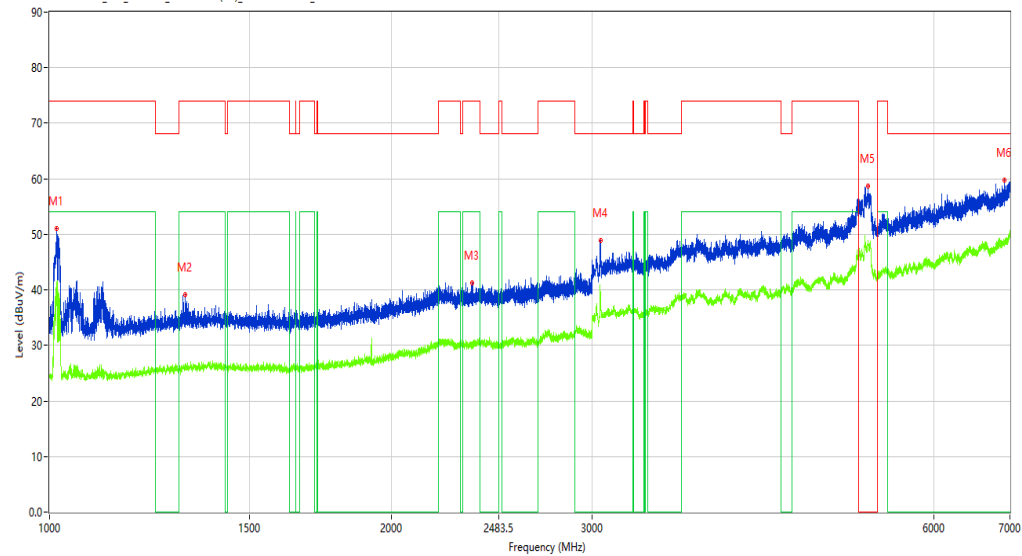

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1014.000	51.04	-16.33	74.0	22.96	Peak	0.00	100	Horizontal	Pass
1**	1014.000	39.46	-16.33	54.0	14.54	AV	0.00	100	Horizontal	Pass
2	1317.000	39.16	-15.36	74.0	34.84	Peak	140.90	100	Horizontal	Pass
2**	1317.000	26.07	-15.36	54.0	27.93	AV	140.90	100	Horizontal	Pass
3	2354.000	41.25	-10.96	74.0	32.75	Peak	344.40	100	Horizontal	Pass
3**	2354.000	30.66	-10.96	54.0	23.34	AV	344.40	100	Horizontal	Pass
4	3053.000	48.92	-3.49	68.2	19.28	Peak	328.30	100	Horizontal	Pass
4**	3053.000	39.35	-3.49	--	-39.35	AV	328.30	100	Horizontal	N/A
5	5250.000	58.69	8.79	--	17.21	Peak	75.90	100	Horizontal	Pass
5**	5250.000	48.90	8.79	--	-48.90	AV	75.90	100	Horizontal	N/A
6	6924.500	59.82	8.25	68.2	8.38	Peak	277.30	100	Horizontal	Pass
6**	6924.500	48.99	8.25	--	-48.99	AV	277.30	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.55.36

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

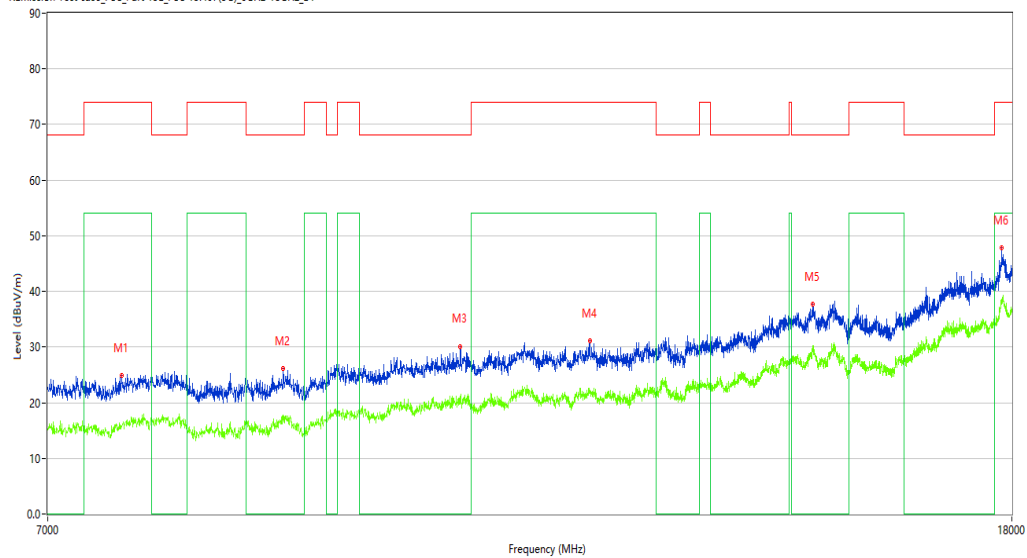

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7525.250	24.94	5.14	74.0	49.06	Peak	134.50	100	Horizontal	Pass
1**	7525.250	15.60	5.14	54.0	38.40	AV	134.50	100	Horizontal	Pass
2	8817.750	26.06	5.26	68.2	42.14	Peak	251.80	100	Horizontal	Pass
2**	8817.750	17.46	5.26	--	-17.46	AV	251.80	100	Horizontal	N/A
3	10487.000	30.12	8.66	68.2	38.08	Peak	14.30	100	Horizontal	Pass
3**	10487.000	20.95	8.66	--	-20.95	AV	14.30	100	Horizontal	N/A
4	11908.750	31.12	9.42	74.0	42.88	Peak	111.30	100	Horizontal	Pass
4**	11908.750	22.24	9.42	54.0	31.76	AV	111.30	100	Horizontal	Pass
5	14804.500	37.70	16.83	68.2	30.50	Peak	251.80	100	Horizontal	Pass
5**	14804.500	30.18	16.83	--	-30.18	AV	251.80	100	Horizontal	N/A
6	17818.499	47.80	23.29	74.0	26.20	Peak	233.60	100	Horizontal	Pass
6**	17818.499	37.86	23.29	54.0	16.14	AV	233.60	100	Horizontal	Pass

WIFI5GB1-N20-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.00.39

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

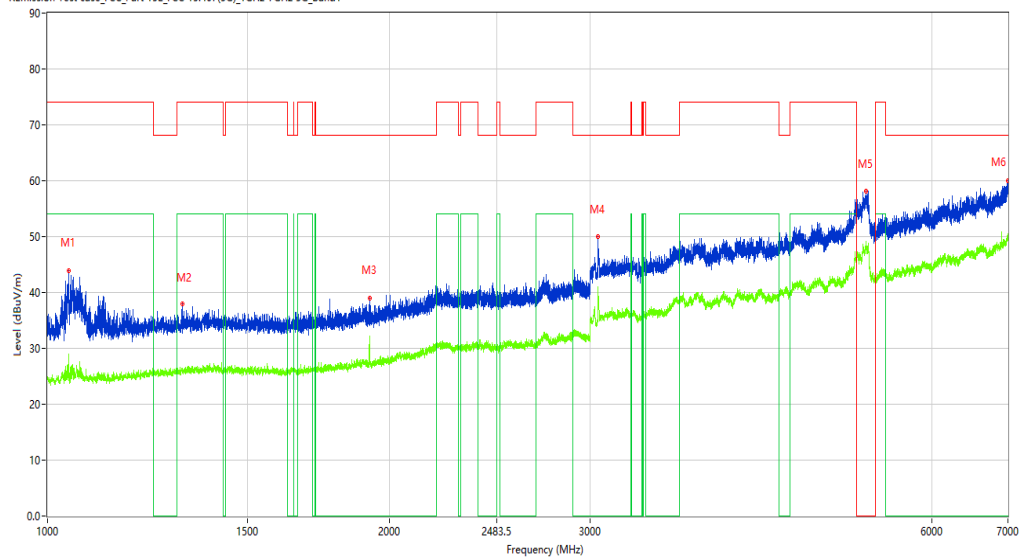

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1043.750	43.93	-16.40	74.0	30.07	Peak	218.80	100	Vertical	Pass
1**	1043.750	28.94	-16.40	54.0	25.06	AV	218.80	100	Vertical	Pass
2	1314.250	38.02	-15.36	74.0	35.98	Peak	74.80	100	Vertical	Pass
2**	1314.250	25.85	-15.36	54.0	28.15	AV	74.80	100	Vertical	Pass
3	1919.750	38.92	-14.27	68.2	29.28	Peak	122.10	100	Vertical	Pass
3**	1919.750	32.19	-14.27	--	-32.19	AV	122.10	100	Vertical	N/A
4	3050.500	49.98	-3.50	68.2	18.22	Peak	344.20	100	Vertical	Pass
4**	3050.500	41.08	-3.50	--	-41.08	AV	344.20	100	Vertical	N/A
5	5255.000	58.19	8.94	--	33.11	Peak	91.30	100	Vertical	Pass
5**	5255.000	48.53	8.94	--	-48.53	AV	91.30	100	Vertical	N/A
6	6997.000	60.06	9.69	68.2	8.14	Peak	91.30	100	Vertical	Pass
6**	6997.000	49.88	9.69	--	-49.88	AV	91.30	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.18.16

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

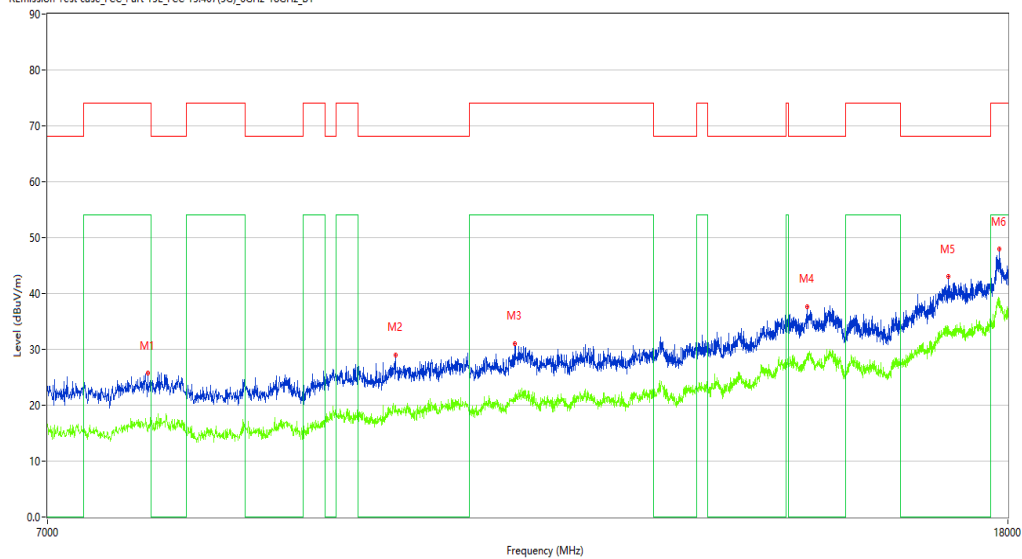

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7726.000	25.78	4.92	74.0	48.22	Peak	296.20	100	Vertical	Pass
1**	7726.000	16.16	4.92	54.0	37.84	AV	296.20	100	Vertical	Pass
2	9854.500	28.96	7.73	68.2	39.24	Peak	136.20	100	Vertical	Pass
2**	9854.500	19.92	7.73	--	-19.92	AV	136.20	100	Vertical	N/A
3	11083.750	31.08	9.45	74.0	42.92	Peak	206.30	100	Vertical	Pass
3**	11083.750	21.85	9.45	54.0	32.15	AV	206.30	100	Vertical	Pass
4	14774.250	37.67	16.03	68.2	30.53	Peak	79.70	100	Vertical	Pass
4**	14774.250	29.12	16.03	--	-29.12	AV	79.70	100	Vertical	N/A
5	16979.750	42.98	19.69	68.2	25.22	Peak	253.60	100	Vertical	Pass
5**	16979.750	34.04	19.69	--	-34.04	AV	253.60	100	Vertical	N/A
6	17846.000	47.95	23.76	74.0	26.05	Peak	360.00	100	Vertical	Pass
6**	17846.000	39.19	23.76	54.0	14.81	AV	360.00	100	Vertical	Pass

WIFI5GB1-N20-Middle channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.14.17

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

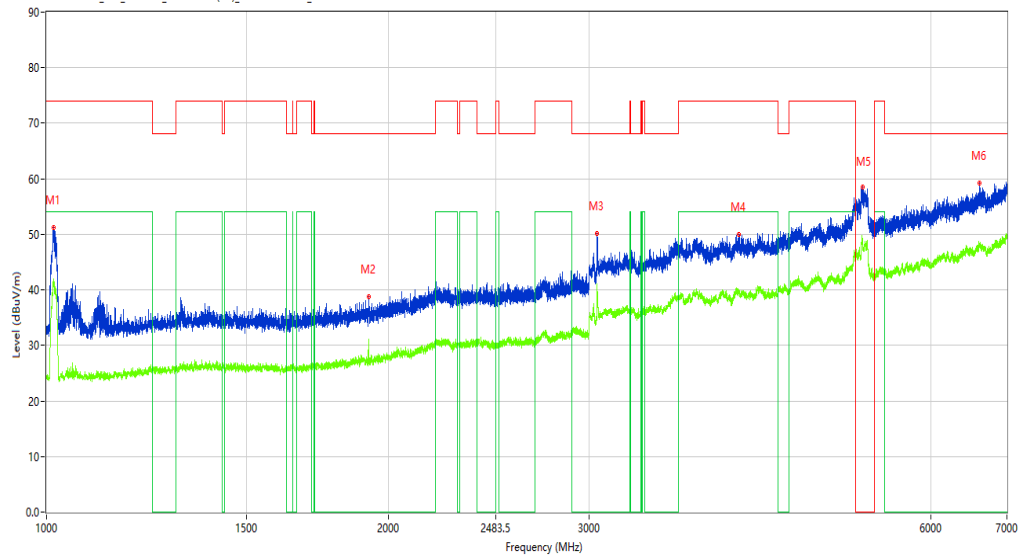

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1014.250	51.17	-16.32	74.0	22.83	Peak	358.30	100	Horizontal	Pass
1**	1014.250	41.37	-16.32	54.0	12.63	AV	358.30	100	Horizontal	Pass
2	1920.250	38.84	-14.28	68.2	29.36	Peak	0.00	100	Horizontal	Pass
2**	1920.250	31.03	-14.28	--	-31.03	AV	0.00	100	Horizontal	N/A
3	3050.500	50.15	-3.50	68.2	18.05	Peak	27.10	100	Horizontal	Pass
3**	3050.500	41.06	-3.50	--	-41.06	AV	27.10	100	Horizontal	N/A
4	4066.500	49.90	1.79	74.0	24.10	Peak	27.10	100	Horizontal	Pass
4**	4066.500	39.26	1.79	54.0	14.74	AV	27.10	100	Horizontal	Pass
5	5222.000	58.46	8.36	--	301.54	Peak	360.00	100	Horizontal	Pass
5**	5222.000	49.30	8.36	--	-49.30	AV	360.00	100	Horizontal	N/A
6	6619.000	59.31	8.11	68.2	8.89	Peak	360.00	100	Horizontal	Pass
6**	6619.000	48.10	8.11	--	-48.10	AV	360.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14:57:28

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

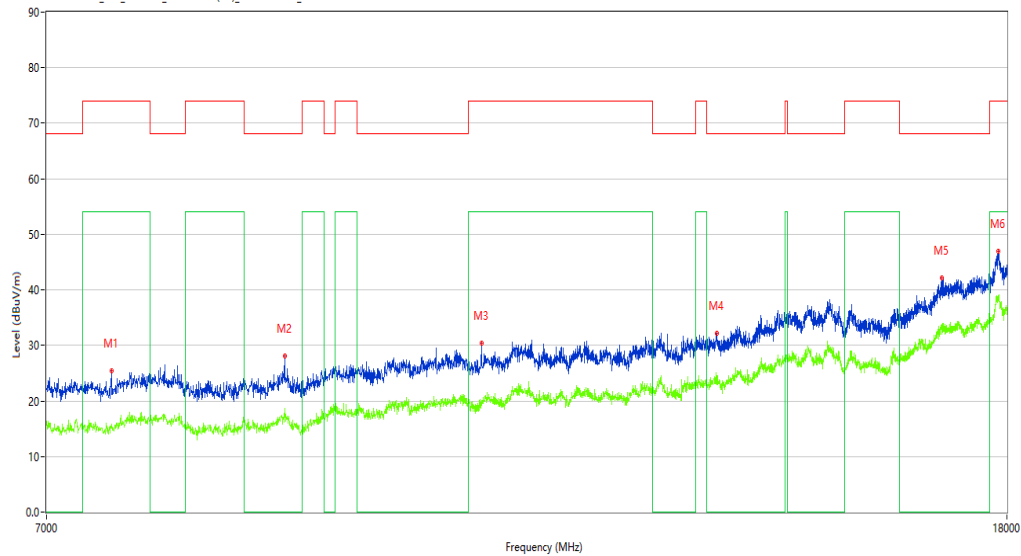

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7462.000	25.35	5.06	74.0	48.65	Peak	0.00	100	Horizontal	Pass
1**	7462.000	15.86	5.06	54.0	38.14	AV	0.00	100	Horizontal	Pass
2	8848.000	28.02	5.29	68.2	40.18	Peak	360.00	100	Horizontal	Pass
2**	8848.000	18.76	5.29	--	-18.76	AV	360.00	100	Horizontal	N/A
3	10734.500	30.49	8.87	74.0	43.51	Peak	293.10	100	Horizontal	Pass
3**	10734.500	20.15	8.87	54.0	33.85	AV	293.10	100	Horizontal	Pass
4	13531.250	32.24	12.62	68.2	35.96	Peak	0.00	100	Horizontal	Pass
4**	13531.250	24.49	12.62	--	-24.49	AV	0.00	100	Horizontal	N/A
5	16889.000	42.16	19.16	68.2	26.04	Peak	312.60	100	Horizontal	Pass
5**	16889.000	33.64	19.16	--	-33.64	AV	312.60	100	Horizontal	N/A
6	17854.251	46.91	23.55	74.0	27.09	Peak	72.00	100	Horizontal	Pass
6**	17854.251	38.05	23.55	54.0	15.95	AV	72.00	100	Horizontal	Pass

WIFI5GB1-N20-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_13.57.03

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

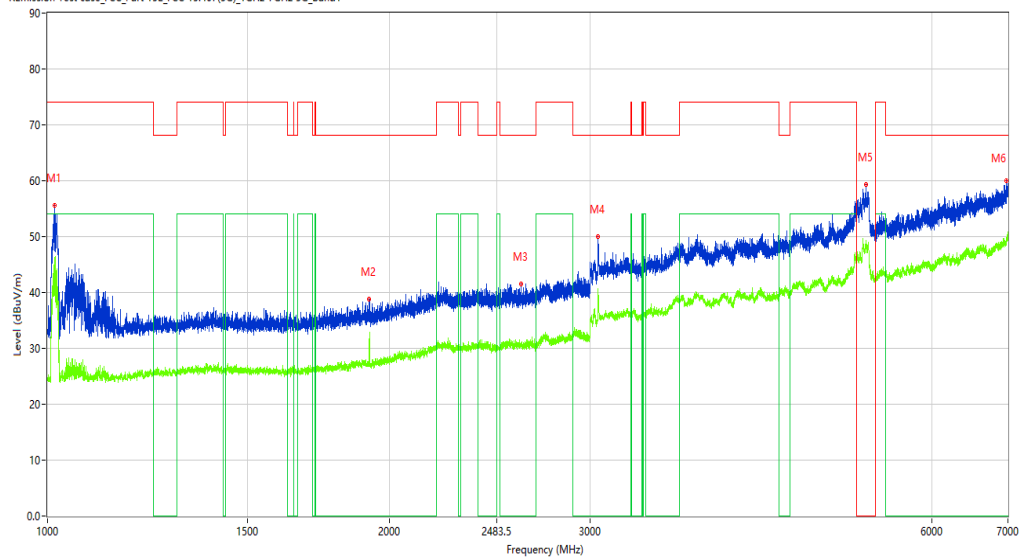

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1013.750	55.53	-16.33	74.0	18.47	Peak	63.70	100	Vertical	Pass
1**	1013.750	44.02	-16.33	54.0	9.98	AV	63.70	100	Vertical	Pass
2	1919.500	38.79	-14.26	68.2	29.41	Peak	160.40	100	Vertical	Pass
2**	1919.500	31.58	-14.26	--	-31.58	AV	160.40	100	Vertical	N/A
3	2610.000	41.56	-9.54	68.2	26.64	Peak	116.30	100	Vertical	Pass
3**	2610.000	30.98	-9.54	--	-30.98	AV	116.30	100	Vertical	N/A
4	3050.500	49.93	-3.50	68.2	18.27	Peak	237.00	100	Vertical	Pass
4**	3050.500	40.72	-3.50	--	-40.72	AV	237.00	100	Vertical	N/A
5	5254.000	59.30	8.94	--	76.10	Peak	135.40	100	Vertical	Pass
5**	5254.000	48.37	8.94	--	-48.37	AV	135.40	100	Vertical	N/A
6	6982.000	59.99	9.39	68.2	8.21	Peak	336.70	100	Vertical	Pass
6**	6982.000	49.34	9.39	--	-49.34	AV	336.70	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.20.00

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

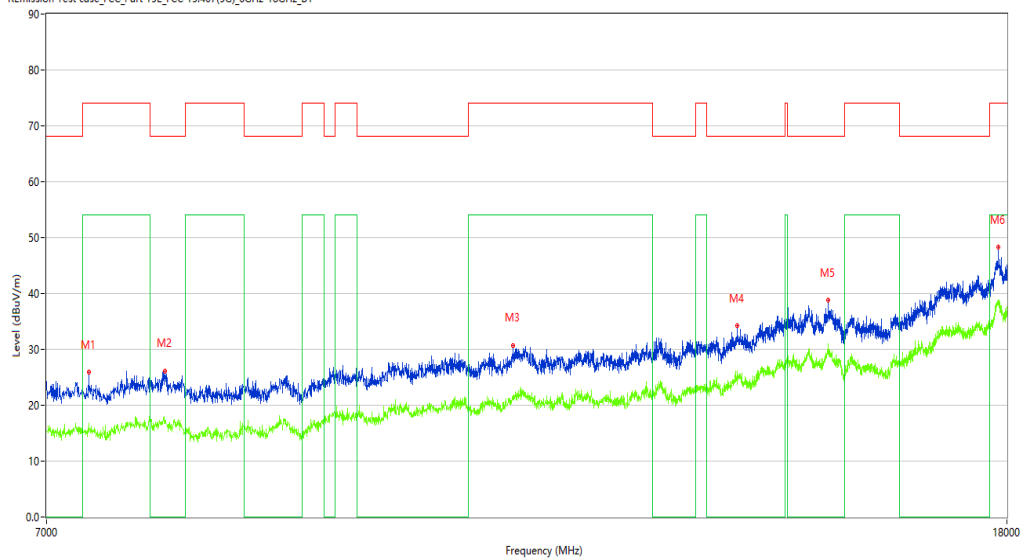

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7297.000	25.88	4.55	74.0	48.12	Peak	269.20	100	Vertical	Pass
1**	7297.000	16.85	4.55	54.0	37.15	AV	269.20	100	Vertical	Pass
2	7866.250	26.18	6.19	68.2	42.02	Peak	22.40	100	Vertical	Pass
2**	7866.250	17.33	6.19	--	-17.33	AV	22.40	100	Vertical	N/A
3	11078.250	30.76	9.26	74.0	43.24	Peak	229.90	100	Vertical	Pass
3**	11078.250	21.67	9.26	54.0	32.33	AV	229.90	100	Vertical	Pass
4	13809.000	34.32	12.28	68.2	33.88	Peak	22.40	100	Vertical	Pass
4**	13809.000	25.53	12.28	--	-25.53	AV	22.40	100	Vertical	N/A
5	15101.500	38.78	15.19	68.2	29.42	Peak	108.50	100	Vertical	Pass
5**	15101.500	30.94	15.19	--	-30.94	AV	108.50	100	Vertical	N/A
6	17846.000	48.26	23.76	74.0	25.74	Peak	108.50	100	Vertical	Pass
6**	17846.000	38.54	23.76	54.0	15.46	AV	108.50	100	Vertical	Pass

WIFI5GB1-N20-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.11.32

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

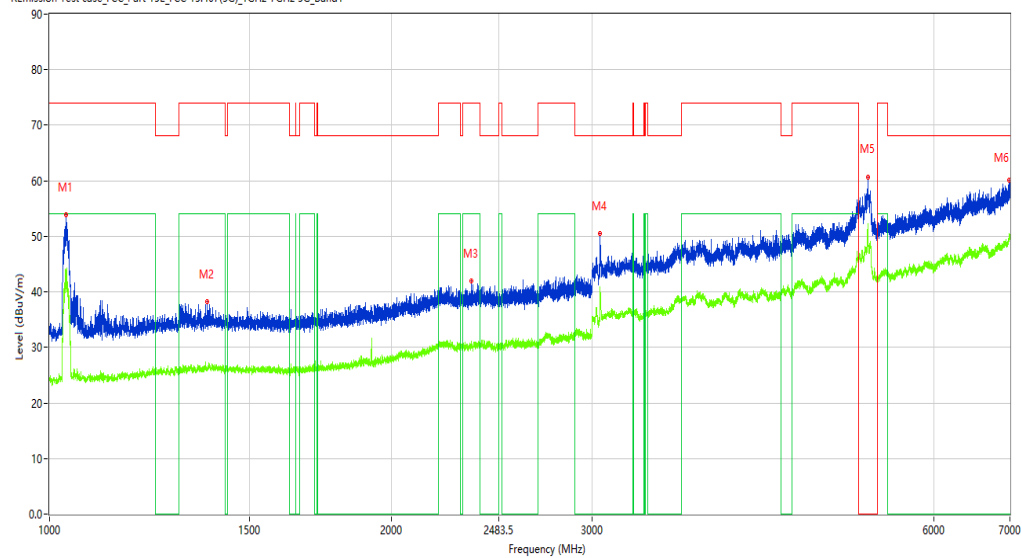

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1034.000	53.92	-16.21	74.0	20.08	Peak	355.90	100	Horizontal	Pass
1**	1034.000	40.74	-16.21	54.0	13.26	AV	355.90	100	Horizontal	Pass
2	1376.250	38.17	-15.07	74.0	35.83	Peak	211.00	100	Horizontal	Pass
2**	1376.250	26.13	-15.07	54.0	27.87	AV	211.00	100	Horizontal	Pass
3	2349.500	42.03	-11.08	74.0	31.97	Peak	355.90	100	Horizontal	Pass
3**	2349.500	31.13	-11.08	54.0	22.87	AV	355.90	100	Horizontal	Pass
4	3050.000	50.46	-3.49	68.2	17.74	Peak	219.50	100	Horizontal	Pass
4**	3050.000	40.69	-3.49	--	-40.69	AV	219.50	100	Horizontal	N/A
5	5248.500	60.74	8.65	--	299.26	Peak	360.00	100	Horizontal	Pass
5**	5248.500	52.34	8.65	--	-52.34	AV	360.00	100	Horizontal	N/A
6	6985.500	60.13	9.48	68.2	8.07	Peak	219.50	100	Horizontal	Pass
6**	6985.500	49.72	9.48	--	-49.72	AV	219.50	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.59.30

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

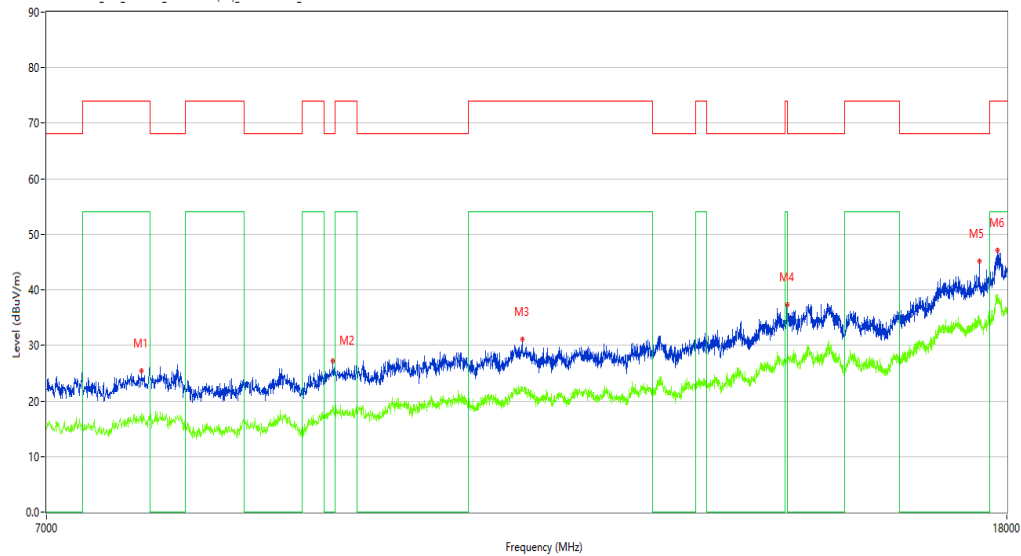

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7682.000	25.48	5.74	74.0	48.52	Peak	236.70	100	Horizontal	Pass
1**	7682.000	17.87	5.74	54.0	36.13	AV	236.70	100	Horizontal	Pass
2	9274.250	27.14	6.72	68.2	41.06	Peak	236.70	100	Horizontal	Pass
2**	9274.250	18.26	6.72	--	-18.26	AV	236.70	100	Horizontal	N/A
3	11174.500	31.09	8.93	74.0	42.91	Peak	236.70	100	Horizontal	Pass
3**	11174.500	22.51	8.93	54.0	31.49	AV	236.70	100	Horizontal	Pass
4	14502.000	37.43	14.52	68.2	30.77	Peak	20.50	100	Horizontal	Pass
4**	14502.000	28.52	14.52	--	-28.52	AV	20.50	100	Horizontal	N/A
5	17518.750	45.15	21.09	68.2	23.05	Peak	326.30	100	Horizontal	Pass
5**	17518.750	34.79	21.09	--	-34.79	AV	326.30	100	Horizontal	N/A
6	17832.249	47.19	23.61	74.0	26.81	Peak	281.80	100	Horizontal	Pass
6**	17832.249	39.12	23.61	54.0	14.88	AV	281.80	100	Horizontal	Pass

WIFI5GB1-N20-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_13.53.50

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band1

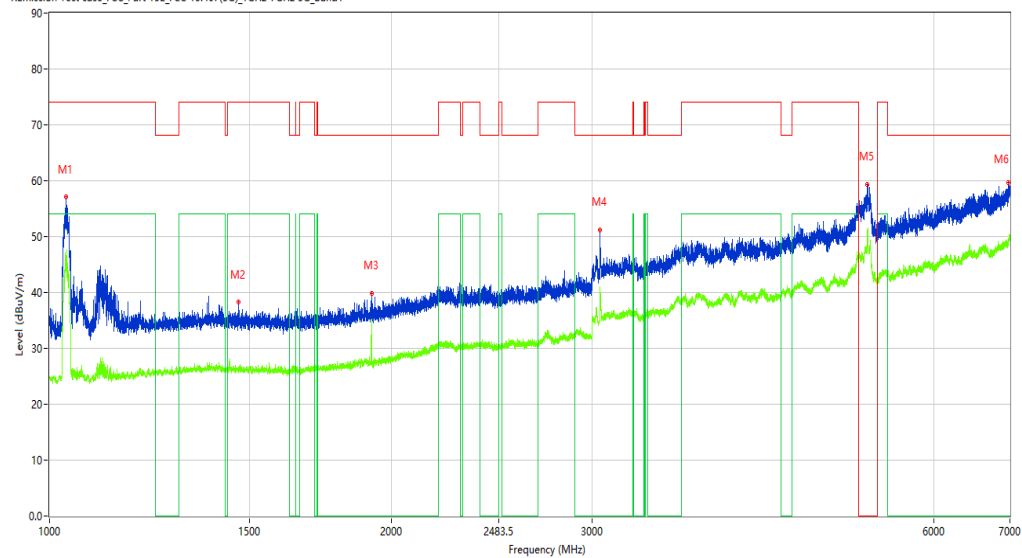

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1034.000	57.05	-16.21	74.0	16.95	Peak	342.90	100	Vertical	Pass
1**	1034.000	45.58	-16.21	54.0	8.42	AV	342.90	100	Vertical	Pass
2	1467.000	38.23	-15.45	74.0	35.77	Peak	244.00	100	Vertical	Pass
2**	1467.000	26.02	-15.45	54.0	27.98	AV	244.00	100	Vertical	Pass
3	1920.000	39.86	-14.27	68.2	28.34	Peak	112.70	100	Vertical	Pass
3**	1920.000	35.17	-14.27	--	-35.17	AV	112.70	100	Vertical	N/A
4	3051.000	51.26	-3.51	68.2	16.94	Peak	137.00	100	Vertical	Pass
4**	3051.000	40.07	-3.51	--	-40.07	AV	137.00	100	Vertical	N/A
5	5246.500	59.36	8.54	--	278.34	Peak	337.70	100	Vertical	Pass
5**	5246.500	51.25	8.54	--	-51.25	AV	337.70	100	Vertical	N/A
6	6980.000	59.65	9.25	68.2	8.55	Peak	283.00	100	Vertical	Pass
6**	6980.000	49.29	9.25	--	-49.29	AV	283.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-03-28_14.21.29

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B1

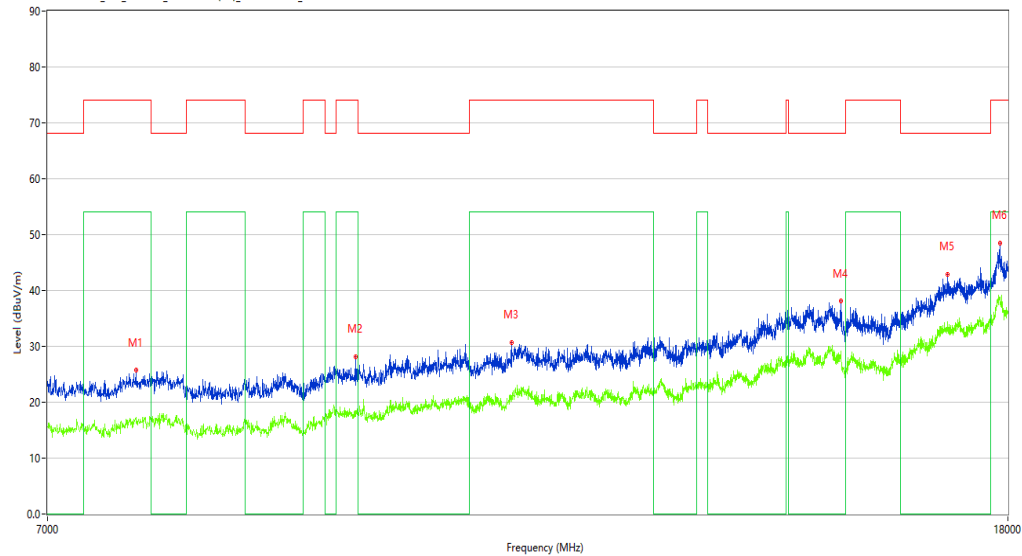

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7635.250	25.72	5.42	74.0	48.28	Peak	336.60	100	Vertical	Pass
1**	7635.250	17.29	5.42	54.0	36.71	AV	336.60	100	Vertical	Pass
2	9480.500	28.10	7.06	74.0	45.90	Peak	360.00	100	Vertical	Pass
2**	9480.500	18.53	7.06	54.0	35.47	AV	360.00	100	Vertical	Pass
3	11045.250	30.70	9.13	74.0	43.30	Peak	356.50	100	Vertical	Pass
3**	11045.250	21.26	9.13	54.0	32.74	AV	356.50	100	Vertical	Pass
4	15269.250	38.07	15.52	68.2	30.13	Peak	47.30	100	Vertical	Pass
4**	15269.250	29.10	15.52	--	-29.10	AV	47.30	100	Vertical	N/A
5	16968.750	42.87	19.74	68.2	25.33	Peak	360.00	100	Vertical	Pass
5**	16968.750	34.40	19.74	--	-34.40	AV	360.00	100	Vertical	N/A
6	17856.999	48.55	23.58	74.0	25.45	Peak	197.00	100	Vertical	Pass
6**	17856.999	38.76	23.58	54.0	15.24	AV	197.00	100	Vertical	Pass

WIFI5GB4-A-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.09.24

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1069.750	41.92	-16.41	74.0	32.08	Peak	183.50	100	Horizontal	Pass
1**	1069.750	24.21	-16.41	54.0	29.79	AV	183.50	100	Horizontal	Pass
2	1541.750	40.82	-15.35	74.0	33.18	Peak	0.00	100	Horizontal	Pass
2**	1541.750	28.62	-15.35	54.0	25.38	AV	0.00	100	Horizontal	Pass
3	2073.250	39.92	-12.24	68.2	28.28	Peak	183.50	100	Horizontal	Pass
3**	2073.250	28.66	-12.24	--	-28.66	AV	183.50	100	Horizontal	N/A
4	3050.000	48.51	-4.72	68.2	19.69	Peak	176.30	100	Horizontal	Pass
4**	3050.000	39.69	-4.72	--	-39.69	AV	176.30	100	Horizontal	N/A
5	4504.500	48.13	-1.32	74.0	25.87	Peak	225.70	100	Horizontal	Pass
5**	4504.500	37.10	-1.32	54.0	16.90	AV	225.70	100	Horizontal	Pass
6	5742.000	99.62	1.20	--	260.38	Peak	360.00	100	Horizontal	Pass
6**	5742.000	90.44	1.20	--	-90.44	AV	360.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.13.59

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

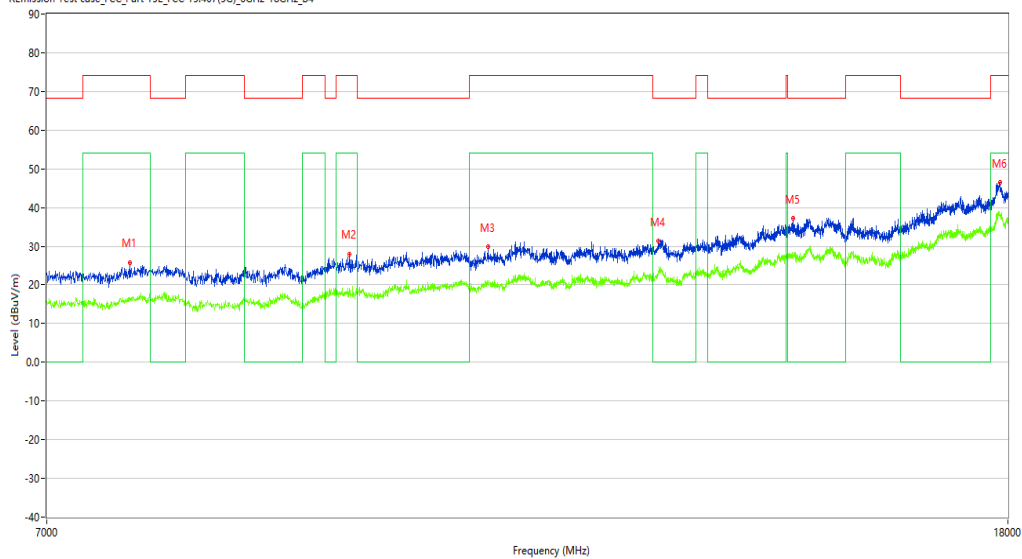

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7596.750	25.78	5.09	74.0	48.22	Peak	261.20	100	Horizontal	Pass
1**	7596.750	16.70	5.09	54.0	37.30	AV	261.20	100	Horizontal	Pass
2	9425.500	28.04	6.78	74.0	45.96	Peak	30.00	100	Horizontal	Pass
2**	9425.500	19.07	6.78	54.0	34.93	AV	30.00	100	Horizontal	Pass
3	10800.500	29.83	9.23	74.0	44.17	Peak	135.90	100	Horizontal	Pass
3**	10800.500	20.54	9.23	54.0	33.46	AV	135.90	100	Horizontal	Pass
4	12769.500	31.25	10.52	68.2	36.95	Peak	154.10	100	Horizontal	Pass
4**	12769.500	22.57	10.52	--	-22.57	AV	154.10	100	Horizontal	N/A
5	14579.000	37.15	14.97	68.2	31.05	Peak	180.00	100	Horizontal	Pass
5**	14579.000	27.73	14.97	--	-27.73	AV	180.00	100	Horizontal	N/A
6	17856.999	46.38	23.58	74.0	27.62	Peak	242.70	100	Horizontal	Pass
6**	17856.999	38.13	23.58	54.0	15.87	AV	242.70	100	Horizontal	Pass

WIFI5GB4-A-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.46.11


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

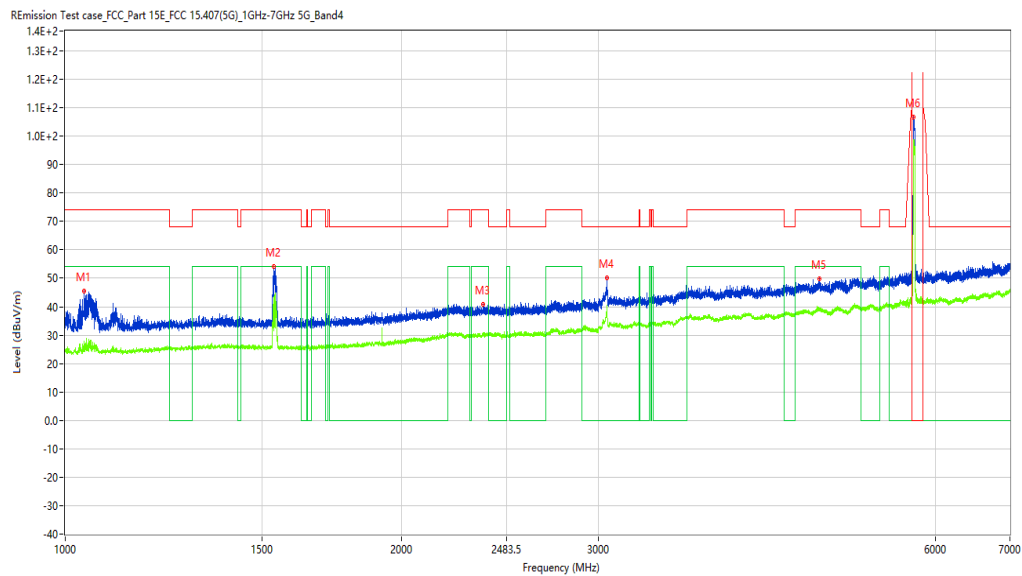

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1039.750	45.35	-16.41	74.0	28.65	Peak	193.70	100	Vertical	Pass
1**	1039.750	27.89	-16.41	54.0	26.11	AV	193.70	100	Vertical	Pass
2	1537.250	54.05	-15.35	74.0	19.95	Peak	0.00	100	Vertical	Pass
2**	1537.250	43.36	-15.35	54.0	10.64	AV	0.00	100	Vertical	Pass
3	2366.500	40.92	-10.76	74.0	33.08	Peak	346.50	100	Vertical	Pass
3**	2366.500	30.33	-10.76	54.0	23.67	AV	346.50	100	Vertical	Pass
4	3050.000	50.14	-4.72	68.2	18.06	Peak	268.70	100	Vertical	Pass
4**	3050.000	40.52	-4.72	--	-40.52	AV	268.70	100	Vertical	N/A
5	4731.000	49.91	-0.43	74.0	24.09	Peak	73.80	100	Vertical	Pass
5**	4731.000	39.13	-0.43	54.0	14.87	AV	73.80	100	Vertical	Pass
6	5742.500	106.80	1.21	--	253.20	Peak	360.00	100	Vertical	Pass
6**	5742.500	98.33	1.21	--	-98.33	AV	360.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.20.55

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

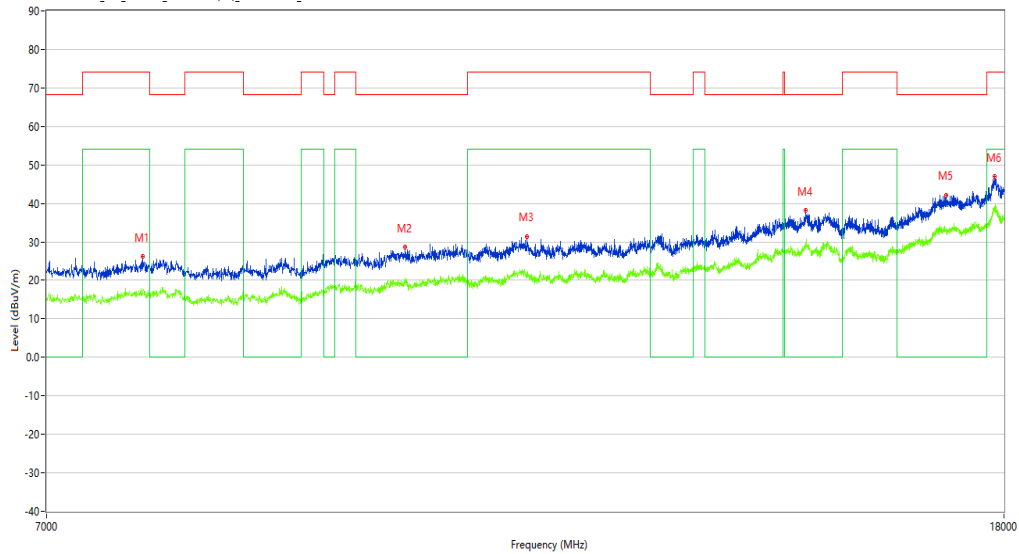

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7693.000	26.16	5.90	74.0	47.84	Peak	92.80	100	Vertical	Pass
1**	7693.000	17.08	5.90	54.0	36.92	AV	92.80	100	Vertical	Pass
2	9970.000	28.61	8.49	68.2	39.59	Peak	107.90	100	Vertical	Pass
2**	9970.000	19.42	8.49	--	-19.42	AV	107.90	100	Vertical	N/A
3	11246.000	31.47	9.33	74.0	42.53	Peak	268.80	100	Vertical	Pass
3**	11246.000	22.07	9.33	54.0	31.93	AV	268.80	100	Vertical	Pass
4	14801.750	38.12	16.54	68.2	30.08	Peak	231.50	100	Vertical	Pass
4**	14801.750	29.02	16.54	--	-29.02	AV	231.50	100	Vertical	N/A
5	16996.250	42.21	19.78	68.2	25.99	Peak	24.80	100	Vertical	Pass
5**	16996.250	33.66	19.78	--	-33.66	AV	24.80	100	Vertical	N/A
6	17835.000	46.94	23.63	74.0	27.06	Peak	231.50	100	Vertical	Pass
6**	17835.000	39.17	23.63	54.0	14.83	AV	231.50	100	Vertical	Pass

WIFI5GB4-A-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.05.21

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.000	43.22	-16.41	74.0	30.78	Peak	144.50	100	Horizontal	Pass
1**	1064.000	27.40	-16.41	54.0	26.60	AV	144.50	100	Horizontal	Pass
2	1577.750	38.26	-15.48	74.0	35.74	Peak	0.00	100	Horizontal	Pass
2**	1577.750	28.99	-15.48	54.0	25.01	AV	0.00	100	Horizontal	Pass
3	2242.000	41.87	-10.84	74.0	32.13	Peak	335.00	100	Horizontal	Pass
3**	2242.000	30.40	-10.84	54.0	23.60	AV	335.00	100	Horizontal	Pass
4	3050.500	49.65	-5.39	68.2	18.55	Peak	273.60	100	Horizontal	Pass
4**	3050.500	39.52	-5.39	--	-39.52	AV	273.60	100	Horizontal	N/A
5	4906.500	51.18	-0.04	74.0	22.82	Peak	0.00	100	Horizontal	Pass
5**	4906.500	39.65	-0.04	54.0	14.35	AV	0.00	100	Horizontal	Pass
6	5782.000	99.98	1.79	--	-99.98	Peak	0.00	100	Horizontal	N/A
6**	5782.000	90.54	1.79	--	-90.54	AV	0.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.16.46

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

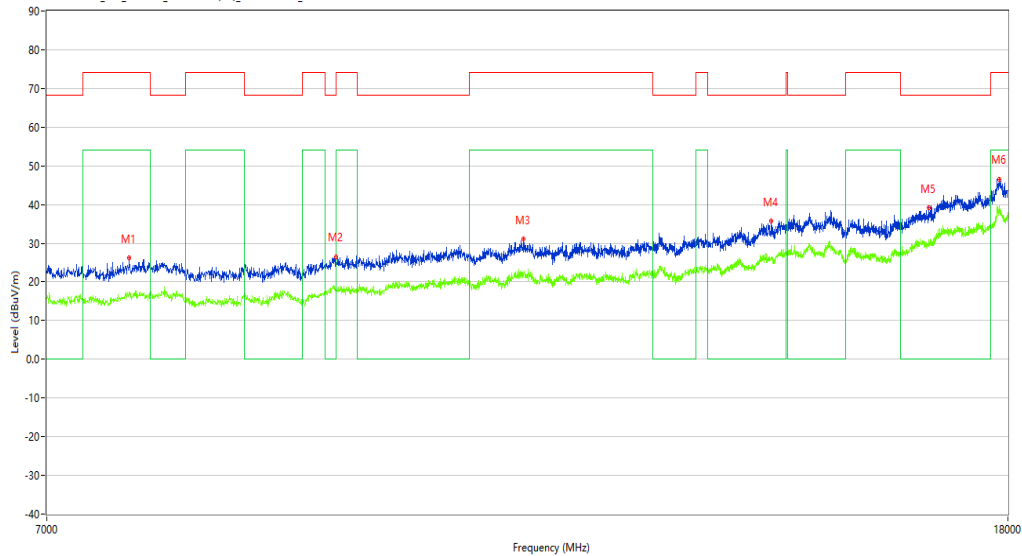

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7591.250	26.16	4.98	74.0	47.84	Peak	319.10	100	Horizontal	Pass
1**	7591.250	16.85	4.98	54.0	37.15	AV	319.10	100	Horizontal	Pass
2	9299.000	26.57	6.64	68.2	41.63	Peak	360.00	100	Horizontal	Pass
2**	9299.000	18.75	6.64	--	-18.75	AV	360.00	100	Horizontal	N/A
3	11185.500	31.00	8.85	74.0	43.00	Peak	319.10	100	Horizontal	Pass
3**	11185.500	22.15	8.85	54.0	31.85	AV	319.10	100	Horizontal	Pass
4	14268.250	35.69	13.92	68.2	32.51	Peak	136.80	100	Horizontal	Pass
4**	14268.250	26.35	13.92	--	-26.35	AV	136.80	100	Horizontal	N/A
5	16658.000	39.17	17.27	68.2	29.03	Peak	94.80	100	Horizontal	Pass
5**	16658.000	30.28	17.27	--	-30.28	AV	94.80	100	Horizontal	N/A
6	17848.750	46.52	23.72	74.0	27.48	Peak	73.50	100	Horizontal	Pass
6**	17848.750	38.68	23.72	54.0	15.32	AV	73.50	100	Horizontal	Pass

WIFI5GB4-A-Middle channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.51.36


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

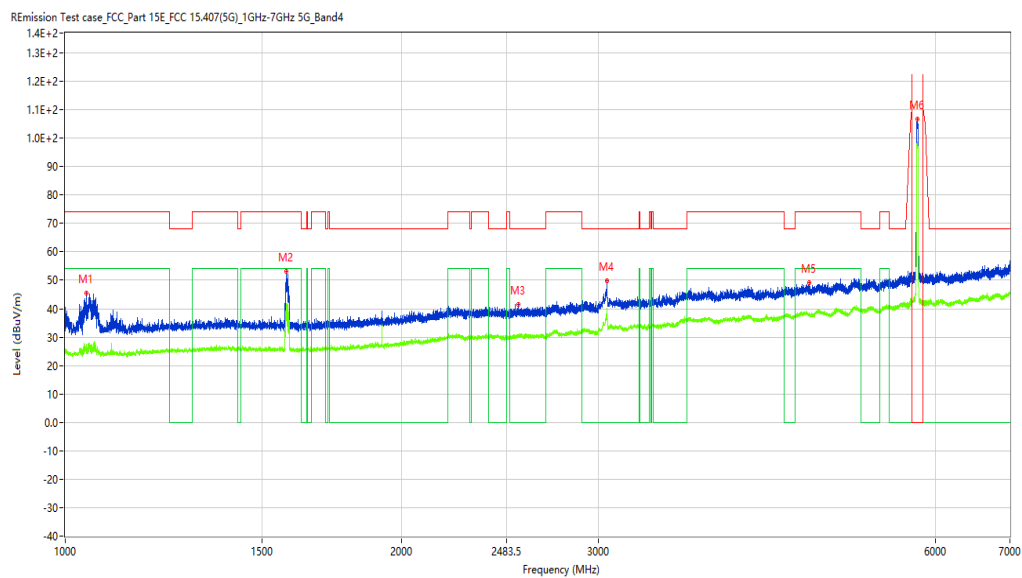

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1044.000	45.36	-16.40	74.0	28.64	Peak	198.30	100	Vertical	Pass
1**	1044.000	27.48	-16.40	54.0	26.52	AV	198.30	100	Vertical	Pass
2	1577.500	53.08	-15.48	74.0	20.92	Peak	0.00	100	Vertical	Pass
2**	1577.500	41.89	-15.48	54.0	12.11	AV	0.00	100	Vertical	Pass
3	2544.750	41.63	-9.94	68.2	26.57	Peak	349.60	100	Vertical	Pass
3**	2544.750	30.21	-9.94	--	-30.21	AV	349.60	100	Vertical	N/A
4	3050.500	49.73	-5.39	68.2	18.47	Peak	167.30	100	Vertical	Pass
4**	3050.500	39.45	-5.39	--	-39.45	AV	167.30	100	Vertical	N/A
5	4627.000	49.16	-1.34	74.0	24.84	Peak	277.30	100	Vertical	Pass
5**	4627.000	38.48	-1.34	54.0	15.52	AV	277.30	100	Vertical	Pass
6	5782.500	106.84	1.79	--	224.16	Peak	331.00	100	Vertical	Pass
6**	5782.500	98.02	1.79	--	-98.02	AV	331.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.22.29

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

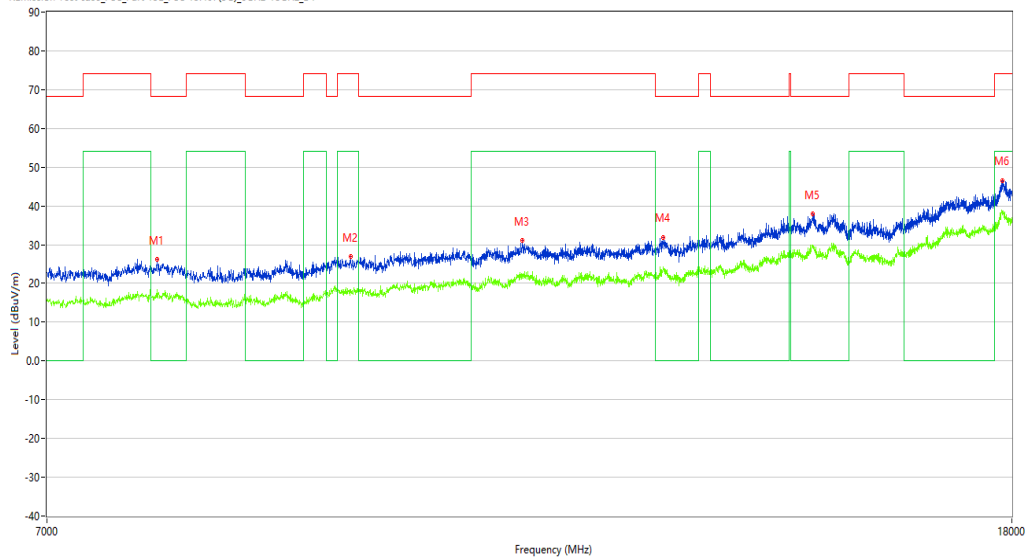

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7794.750	26.21	5.65	68.2	41.99	Peak	106.80	100	Vertical	Pass
1**	7794.750	18.32	5.65	--	-18.32	AV	106.80	100	Vertical	N/A
2	9422.750	26.83	6.76	74.0	47.17	Peak	360.00	100	Vertical	Pass
2**	9422.750	17.73	6.76	54.0	36.27	AV	360.00	100	Vertical	Pass
3	11147.000	30.99	8.78	74.0	43.01	Peak	45.40	100	Vertical	Pass
3**	11147.000	22.38	8.78	54.0	31.62	AV	45.40	100	Vertical	Pass
4	12797.000	31.96	10.88	68.2	36.24	Peak	359.40	100	Vertical	Pass
4**	12797.000	23.50	10.88	--	-23.50	AV	359.40	100	Vertical	N/A
5	14815.500	37.94	16.92	68.2	30.26	Peak	127.70	100	Vertical	Pass
5**	14815.500	29.23	16.92	--	-29.23	AV	127.70	100	Vertical	N/A
6	17832.249	46.57	23.61	74.0	27.43	Peak	252.80	100	Vertical	Pass
6**	17832.249	38.75	23.61	54.0	15.25	AV	252.80	100	Vertical	Pass

WIFI5GB4-A-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.02.10

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

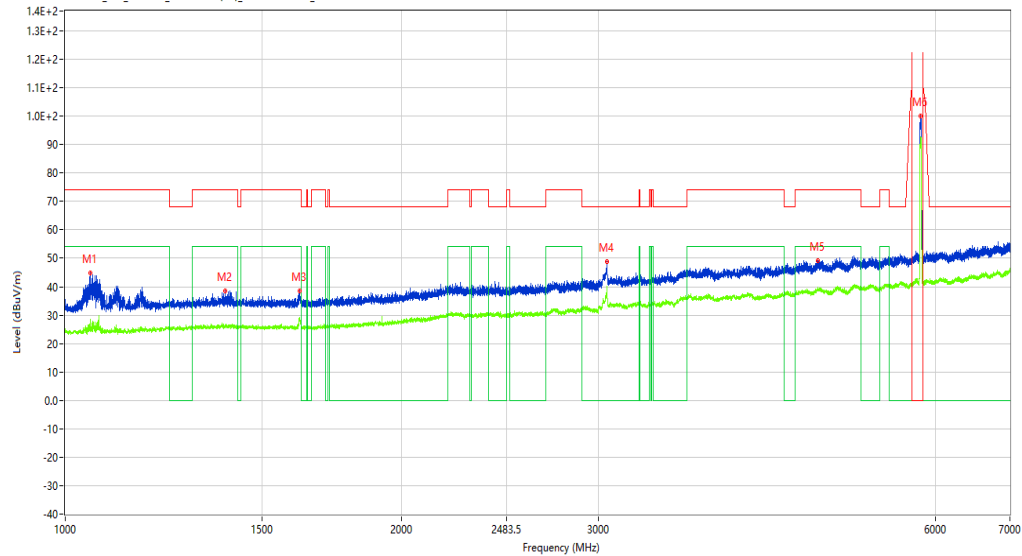

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.750	44.95	-16.64	74.0	29.05	Peak	133.20	100	Horizontal	Pass
1**	1052.750	28.66	-16.64	54.0	25.34	AV	133.20	100	Horizontal	Pass
2	1389.750	38.57	-15.03	74.0	35.43	Peak	188.40	100	Horizontal	Pass
2**	1389.750	26.52	-15.03	54.0	27.48	AV	188.40	100	Horizontal	Pass
3	1620.000	38.43	-15.71	74.0	35.57	Peak	0.00	100	Horizontal	Pass
3**	1620.000	28.69	-15.71	54.0	25.31	AV	0.00	100	Horizontal	Pass
4	3050.000	48.93	-4.72	68.2	19.27	Peak	118.90	100	Horizontal	Pass
4**	3050.000	40.18	-4.72	--	-40.18	AV	118.90	100	Horizontal	N/A
5	4710.000	49.28	-0.60	74.0	24.72	Peak	127.50	100	Horizontal	Pass
5**	4710.000	39.24	-0.60	54.0	14.76	AV	127.50	100	Horizontal	Pass
6	5822.500	100.14	1.37	--	-100.14	Peak	0.00	100	Horizontal	N/A
6**	5822.500	92.27	1.37	--	-92.27	AV	0.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.18.07

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

R Emission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

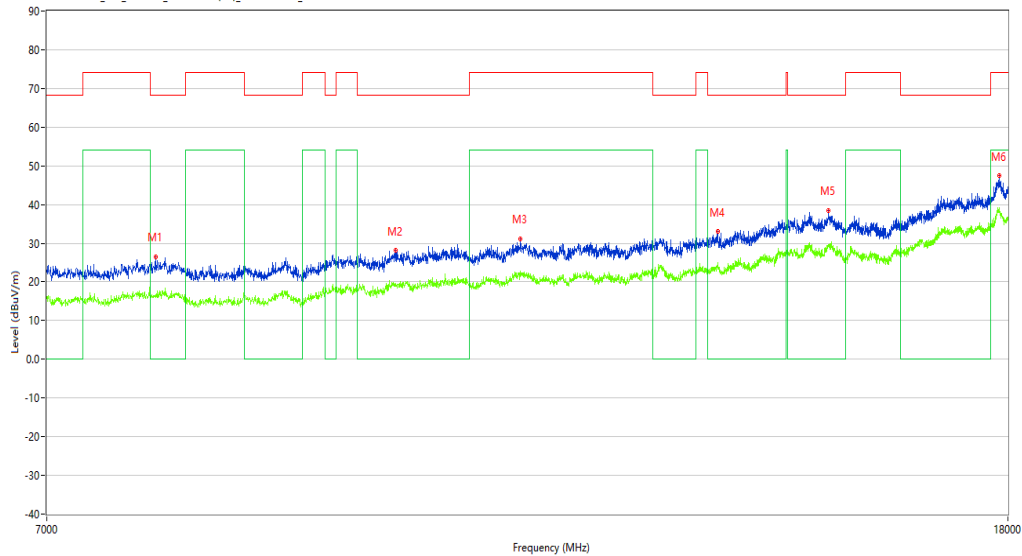

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7789.250	26.52	5.60	68.2	41.68	Peak	299.60	100	Horizontal	Pass
1**	7789.250	16.68	5.60	--	-16.68	AV	299.60	100	Horizontal	N/A
2	9865.500	28.09	7.80	68.2	40.11	Peak	299.60	100	Horizontal	Pass
2**	9865.500	19.61	7.80	--	-19.61	AV	299.60	100	Horizontal	N/A
3	11149.750	31.17	8.72	74.0	42.83	Peak	182.30	100	Horizontal	Pass
3**	11149.750	22.71	8.72	54.0	31.29	AV	182.30	100	Horizontal	Pass
4	13534.000	33.06	12.43	68.2	35.14	Peak	150.50	100	Horizontal	Pass
4**	13534.000	24.92	12.43	--	-24.92	AV	150.50	100	Horizontal	N/A
5	15087.750	38.48	15.45	68.2	29.72	Peak	205.10	100	Horizontal	Pass
5**	15087.750	29.56	15.45	--	-29.56	AV	205.10	100	Horizontal	N/A
6	17851.501	47.42	23.50	74.0	26.58	Peak	182.30	100	Horizontal	Pass
6**	17851.501	39.11	23.50	54.0	14.89	AV	182.30	100	Horizontal	Pass

WIFI5GB4-A-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.56.01

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

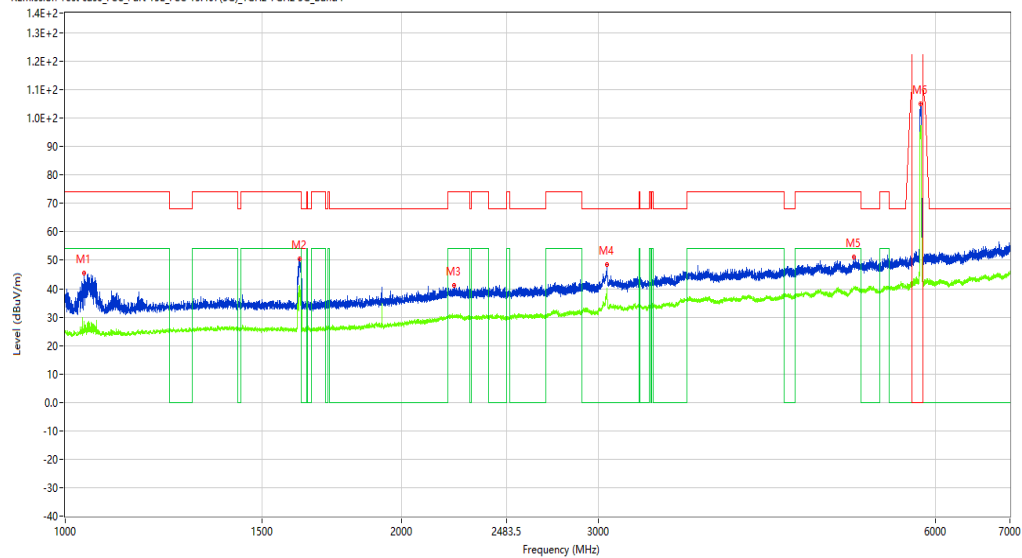

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1040.250	45.43	-16.41	74.0	28.57	Peak	194.30	100	Vertical	Pass
1**	1040.250	28.39	-16.41	54.0	25.61	AV	194.30	100	Vertical	Pass
2	1621.750	50.61	-15.74	74.0	23.39	Peak	0.00	100	Vertical	Pass
2**	1621.750	41.12	-15.74	54.0	12.88	AV	0.00	100	Vertical	Pass
3	2227.000	41.07	-10.80	74.0	32.93	Peak	95.50	100	Vertical	Pass
3**	2227.000	30.30	-10.80	54.0	23.70	AV	95.50	100	Vertical	Pass
4	3050.000	48.43	-4.72	68.2	19.77	Peak	327.70	100	Vertical	Pass
4**	3050.000	40.10	-4.72	--	-40.10	AV	327.70	100	Vertical	N/A
5	5075.500	51.15	0.68	74.0	22.85	Peak	21.80	100	Vertical	Pass
5**	5075.500	40.44	0.68	54.0	13.56	AV	21.80	100	Vertical	Pass
6	5822.000	104.97	1.37	--	255.03	Peak	360.00	100	Vertical	Pass
6**	5822.000	97.29	1.37	--	-97.29	AV	360.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.25.13

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

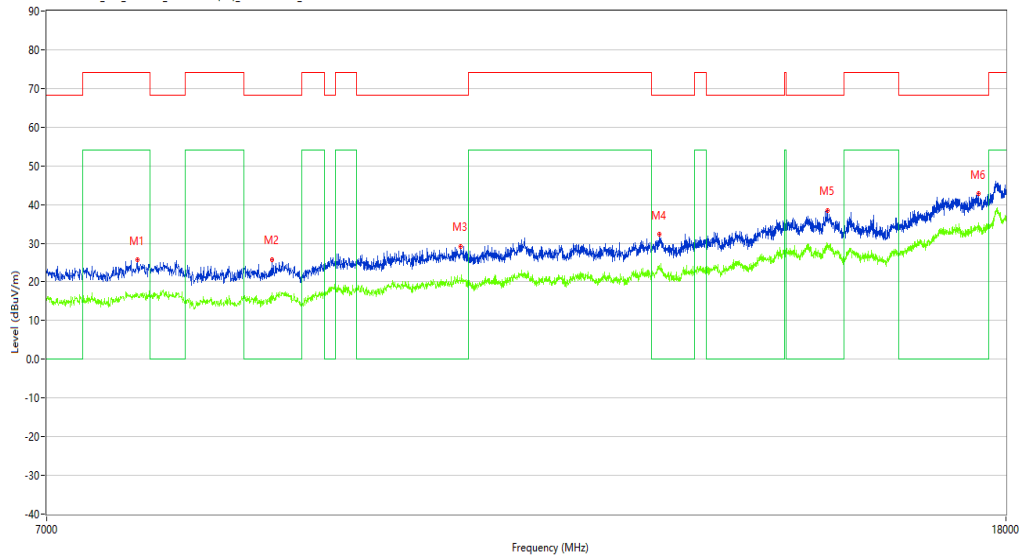

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7651.750	25.73	5.35	74.0	48.27	Peak	136.00	100	Vertical	Pass
1**	7651.750	17.01	5.35	54.0	36.99	AV	136.00	100	Vertical	Pass
2	8740.750	25.78	5.15	68.2	42.42	Peak	186.40	100	Vertical	Pass
2**	8740.750	17.22	5.15	--	-17.22	AV	186.40	100	Vertical	N/A
3	10522.750	29.25	8.72	68.2	38.95	Peak	221.60	100	Vertical	Pass
3**	10522.750	19.65	8.72	--	-19.65	AV	221.60	100	Vertical	N/A
4	12799.750	32.26	10.87	68.2	35.94	Peak	1.80	100	Vertical	Pass
4**	12799.750	24.24	10.87	--	-24.24	AV	1.80	100	Vertical	N/A
5	15096.001	38.49	15.41	68.2	29.71	Peak	360.00	100	Vertical	Pass
5**	15096.001	29.07	15.41	--	-29.07	AV	360.00	100	Vertical	N/A
6	17518.750	42.76	21.09	68.2	25.44	Peak	203.70	100	Vertical	Pass
6**	17518.750	35.34	21.09	--	-35.34	AV	203.70	100	Vertical	N/A

WIFI5GB4-N20-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.29.18

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

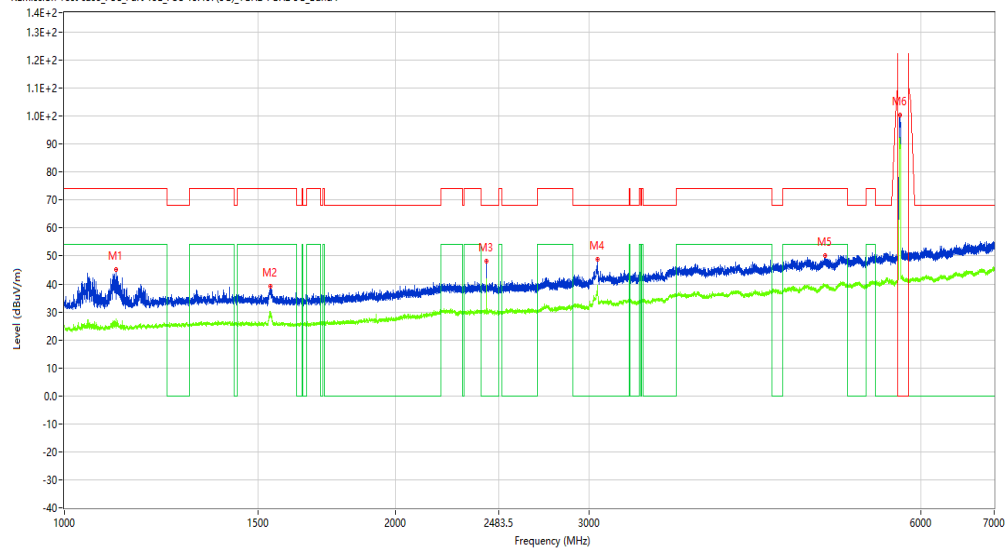

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1115.000	45.02	-16.69	74.0	28.98	Peak	93.30	100	Horizontal	Pass
1**	1115.000	27.70	-16.69	54.0	26.30	AV	93.30	100	Horizontal	Pass
2	1539.500	39.30	-15.35	74.0	34.70	Peak	0.00	100	Horizontal	Pass
2**	1539.500	28.70	-15.35	54.0	25.30	AV	0.00	100	Horizontal	Pass
3	2419.250	48.11	-10.18	68.2	20.09	Peak	196.70	100	Horizontal	Pass
3**	2419.250	41.91	-10.18	--	-41.91	AV	196.70	100	Horizontal	N/A
4	3050.000	48.71	-4.72	68.2	19.49	Peak	325.20	100	Horizontal	Pass
4**	3050.000	39.67	-4.72	--	-39.67	AV	325.20	100	Horizontal	N/A
5	4918.000	50.07	-0.10	74.0	23.93	Peak	177.50	100	Horizontal	Pass
5**	4918.000	39.04	-0.10	54.0	14.96	AV	177.50	100	Horizontal	Pass
6	5748.500	100.32	1.31	--	-100.32	Peak	0.00	100	Horizontal	N/A
6**	5748.500	91.70	1.31	--	-91.70	AV	0.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.41.46

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

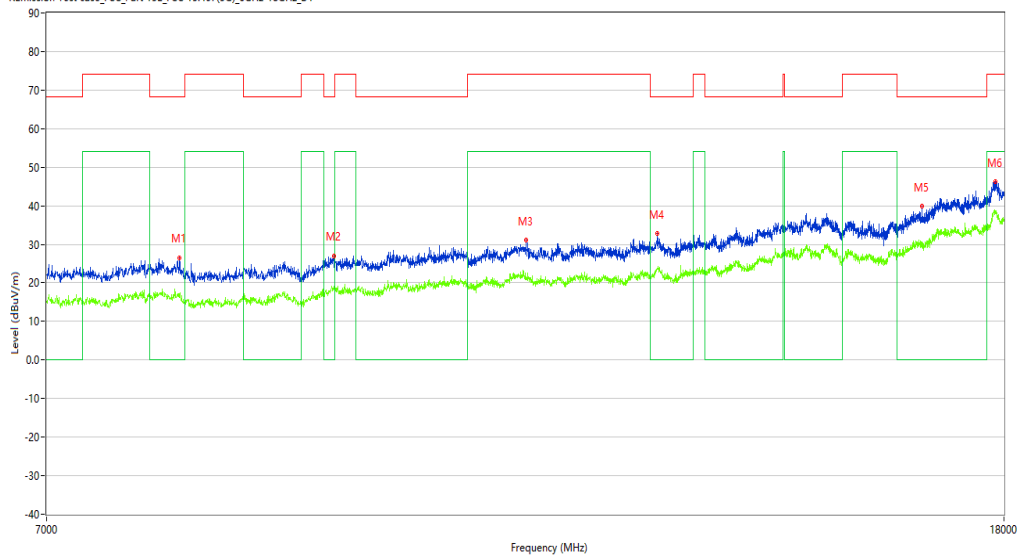

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7981.750	26.53	5.99	68.2	41.67	Peak	232.70	100	Horizontal	Pass
1**	7981.750	17.20	5.99	--	-17.20	AV	232.70	100	Horizontal	N/A
2	9290.750	27.02	6.33	68.2	41.18	Peak	232.70	100	Horizontal	Pass
2**	9290.750	18.60	6.33	--	-18.60	AV	232.70	100	Horizontal	N/A
3	11229.500	31.02	8.92	74.0	42.98	Peak	194.40	100	Horizontal	Pass
3**	11229.500	21.66	8.92	54.0	32.34	AV	194.40	100	Horizontal	Pass
4	12788.750	32.74	10.97	68.2	35.46	Peak	169.40	100	Horizontal	Pass
4**	12788.750	23.60	10.97	--	-23.60	AV	169.40	100	Horizontal	N/A
5	16603.000	39.83	17.06	68.2	28.37	Peak	82.30	100	Horizontal	Pass
5**	16603.000	29.96	17.06	--	-29.96	AV	82.30	100	Horizontal	N/A
6	17843.249	46.14	23.49	74.0	27.86	Peak	82.30	100	Horizontal	Pass
6**	17843.249	38.31	23.49	54.0	15.69	AV	82.30	100	Horizontal	Pass

WIFI5GB4-N20-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.34.06

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

Emission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

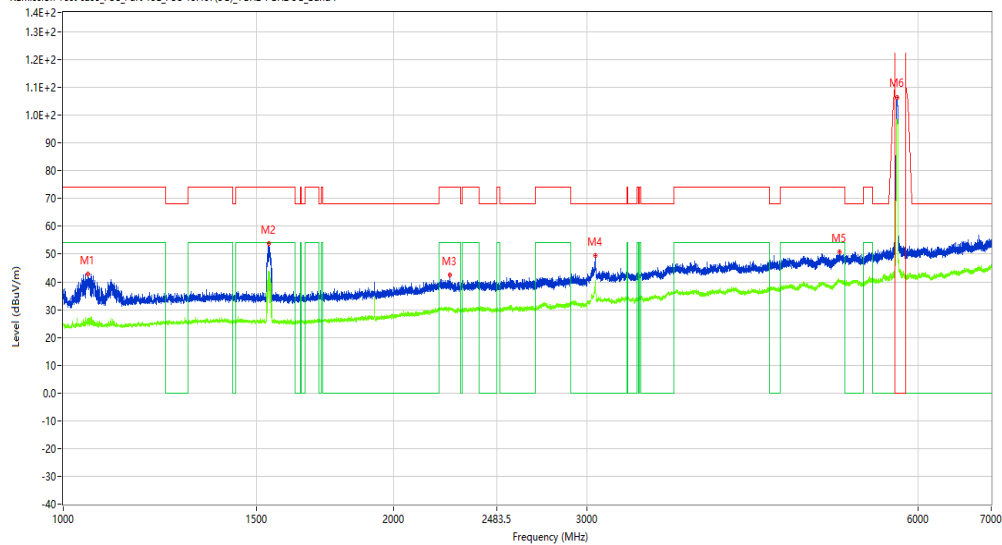

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.750	42.95	-16.64	74.0	31.05	Peak	88.40	100	Vertical	Pass
1**	1052.750	26.87	-16.64	54.0	27.13	AV	88.40	100	Vertical	Pass
2	1539.250	53.85	-15.35	74.0	20.15	Peak	0.00	100	Vertical	Pass
2**	1539.250	41.09	-15.35	54.0	12.91	AV	0.00	100	Vertical	Pass
3	2249.000	42.38	-10.66	74.0	31.62	Peak	36.20	100	Vertical	Pass
3**	2249.000	30.76	-10.66	54.0	23.24	AV	36.20	100	Vertical	Pass
4	3050.000	49.42	-4.72	68.2	18.78	Peak	73.40	100	Vertical	Pass
4**	3050.000	40.40	-4.72	--	-40.40	AV	73.40	100	Vertical	N/A
5	5089.000	50.96	0.84	74.0	23.04	Peak	175.40	100	Vertical	Pass
5**	5089.000	40.27	0.84	54.0	13.73	AV	175.40	100	Vertical	Pass
6	5748.500	106.55	1.31	--	253.45	Peak	360.00	100	Vertical	Pass
6**	5748.500	97.87	1.31	--	-97.87	AV	360.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.27.30

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

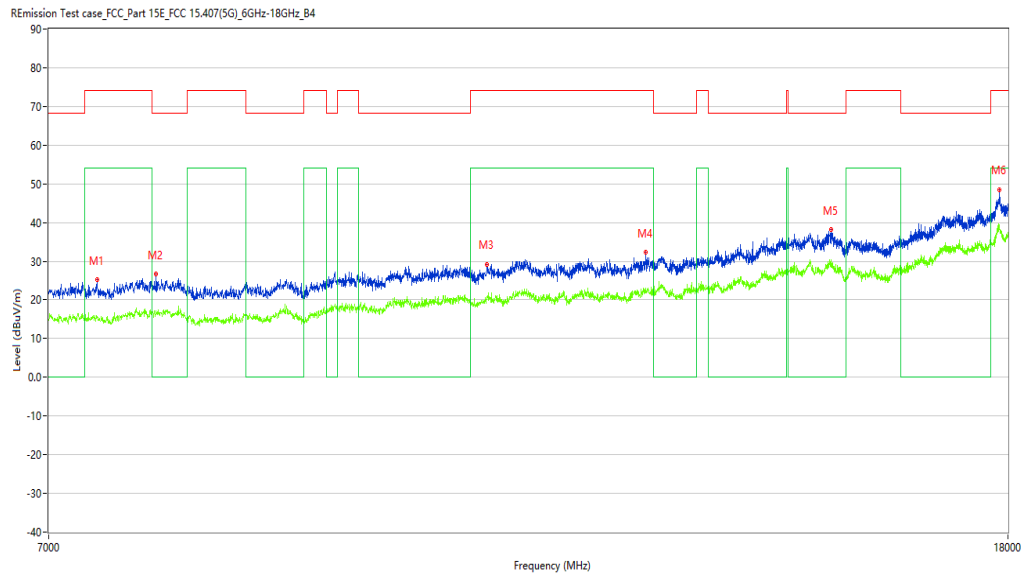

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7341.000	25.20	5.38	74.0	48.80	Peak	0.00	100	Vertical	Pass
1**	7341.000	15.53	5.38	54.0	38.47	AV	0.00	100	Vertical	Pass
2	7781.000	26.68	5.11	68.2	41.52	Peak	110.90	100	Vertical	Pass
2**	7781.000	17.29	5.11	--	-17.29	AV	110.90	100	Vertical	N/A
3	10778.500	29.17	9.42	74.0	44.83	Peak	336.10	100	Vertical	Pass
3**	10778.500	20.22	9.42	54.0	33.78	AV	336.10	100	Vertical	Pass
4	12604.500	32.28	10.09	74.0	41.72	Peak	244.00	100	Vertical	Pass
4**	12604.500	23.03	10.09	54.0	30.97	AV	244.00	100	Vertical	Pass
5	15123.500	38.10	14.65	68.2	30.10	Peak	42.00	100	Vertical	Pass
5**	15123.500	29.51	14.65	--	-29.51	AV	42.00	100	Vertical	N/A
6	17848.750	48.52	23.72	74.0	25.48	Peak	91.80	100	Vertical	Pass
6**	17848.750	38.47	23.72	54.0	15.53	AV	91.80	100	Vertical	Pass

WIFI5GB4-N20-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.25.10


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

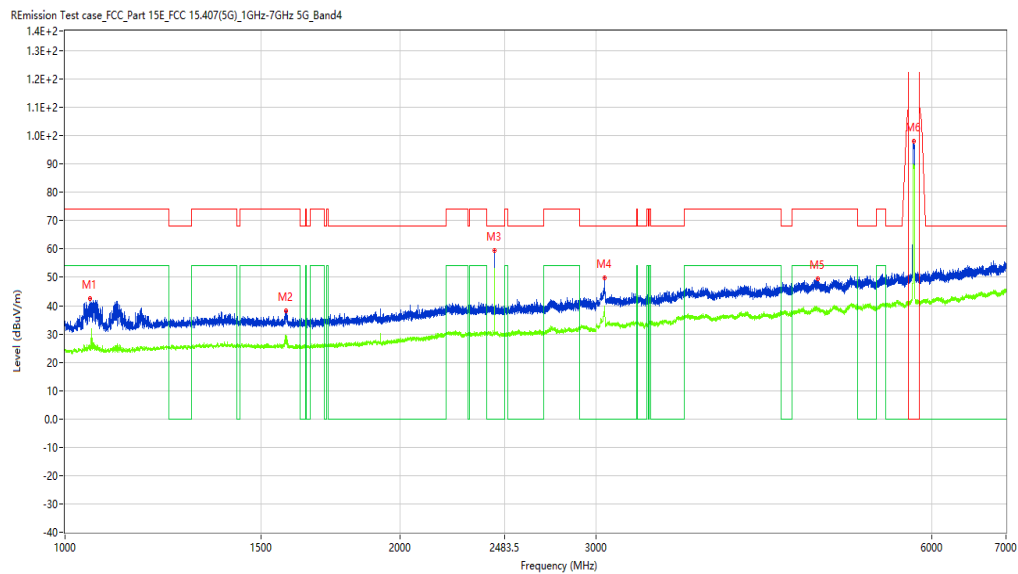

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.000	42.40	-16.64	74.0	31.60	Peak	136.20	100	Horizontal	Pass
1**	1053.000	25.89	-16.64	54.0	28.11	AV	136.20	100	Horizontal	Pass
2	1579.250	38.18	-15.54	74.0	35.82	Peak	0.00	100	Horizontal	Pass
2**	1579.250	29.16	-15.54	54.0	24.84	AV	0.00	100	Horizontal	Pass
3	2429.250	59.40	-10.24	68.2	8.80	Peak	293.10	100	Horizontal	Pass
3**	2429.250	52.99	-10.24	--	-52.99	AV	293.10	100	Horizontal	N/A
4	3051.000	49.81	-6.06	68.2	18.39	Peak	106.80	100	Horizontal	Pass
4**	3051.000	38.52	-6.06	--	-38.52	AV	106.80	100	Horizontal	N/A
5	4744.500	49.43	-0.49	74.0	24.57	Peak	106.80	100	Horizontal	Pass
5**	4744.500	38.98	-0.49	54.0	15.02	AV	106.80	100	Horizontal	Pass
6	5790.000	97.94	1.68	--	224.46	Peak	322.40	100	Horizontal	Pass
6**	5790.000	89.83	1.68	--	-89.83	AV	322.40	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.37.30

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX

Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_5GHz-18GHz_B4



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8001.000	25.85	6.17	68.2	42.35	Peak	359.30	100	Horizontal	Pass
1**	8001.000	16.92	6.17	--	-16.92	AV	359.30	100	Horizontal	N/A
2	9332.000	27.59	6.60	74.0	46.41	Peak	258.60	100	Horizontal	Pass
2**	9332.000	18.55	6.60	54.0	35.45	AV	258.60	100	Horizontal	Pass
3	11138.750	31.61	8.88	74.0	42.39	Peak	111.20	100	Horizontal	Pass
3**	11138.750	24.73	8.88	54.0	29.27	AV	111.20	100	Horizontal	Pass
4	13809.000	32.99	12.28	68.2	35.21	Peak	132.60	100	Horizontal	Pass
4**	13809.000	25.00	12.28	--	-25.00	AV	132.60	100	Horizontal	N/A
5	14779.750	38.53	15.97	68.2	29.67	Peak	157.60	100	Horizontal	Pass
5**	14779.750	28.85	15.97	--	-28.85	AV	157.60	100	Horizontal	N/A
6	17846.000	46.51	23.76	74.0	27.49	Peak	42.90	100	Horizontal	Pass
6**	17846.000	38.85	23.76	54.0	15.15	AV	42.90	100	Horizontal	Pass

WIFI5GB4-N20-Middle channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.38.40


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

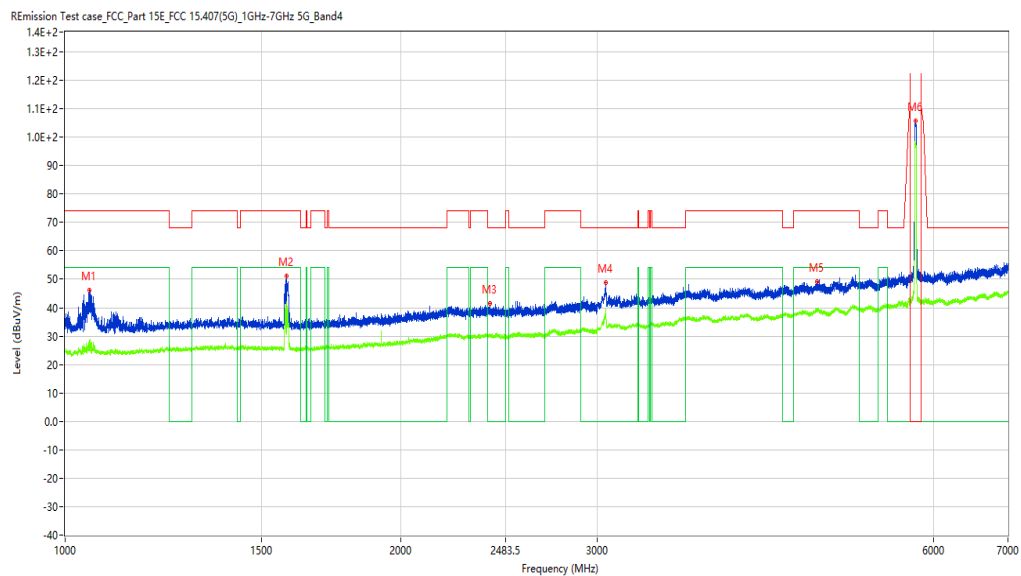

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.250	46.28	-16.63	74.0	27.72	Peak	193.10	100	Vertical	Pass
1**	1051.250	28.64	-16.63	54.0	25.36	AV	193.10	100	Vertical	Pass
2	1579.500	51.16	-15.55	74.0	22.84	Peak	0.00	100	Vertical	Pass
2**	1579.500	41.42	-15.55	54.0	12.58	AV	0.00	100	Vertical	Pass
3	2402.750	41.41	-10.13	68.2	26.79	Peak	95.50	100	Vertical	Pass
3**	2402.750	30.71	-10.13	--	-30.71	AV	95.50	100	Vertical	N/A
4	3050.000	48.97	-4.72	68.2	19.23	Peak	223.00	100	Vertical	Pass
4**	3050.000	39.75	-4.72	--	-39.75	AV	223.00	100	Vertical	N/A
5	4722.500	49.08	-0.54	74.0	24.92	Peak	127.80	100	Vertical	Pass
5**	4722.500	39.54	-0.54	54.0	14.46	AV	127.80	100	Vertical	Pass
6	5789.000	105.58	1.68	--	254.42	Peak	360.00	100	Vertical	Pass
6**	5789.000	97.08	1.68	--	-97.08	AV	360.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.29.41

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_5GHz-18GHz_B4

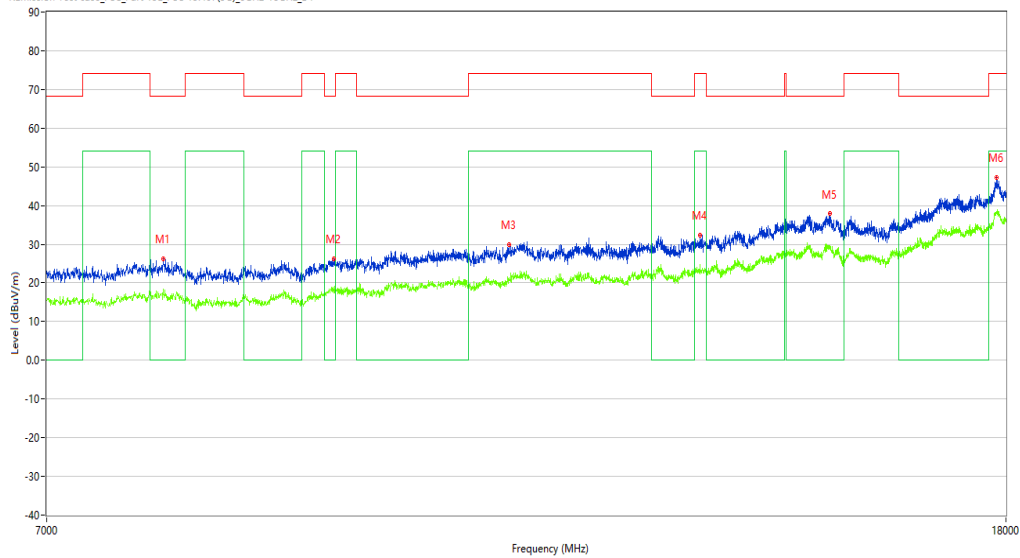

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7849.750	26.26	5.95	68.2	41.94	Peak	175.00	100	Vertical	Pass
1**	7849.750	18.35	5.95	--	-18.35	AV	175.00	100	Vertical	N/A
2	9285.250	26.27	6.34	68.2	41.93	Peak	0.30	100	Vertical	Pass
2**	9285.250	18.31	6.34	--	-18.31	AV	0.30	100	Vertical	N/A
3	11034.250	29.94	9.36	74.0	44.06	Peak	196.60	100	Vertical	Pass
3**	11034.250	21.18	9.36	54.0	32.82	AV	196.60	100	Vertical	Pass
4	13314.000	32.42	11.03	74.0	41.58	Peak	360.00	100	Vertical	Pass
4**	13314.000	24.84	11.03	54.0	29.16	AV	360.00	100	Vertical	Pass
5	15137.250	37.93	14.34	68.2	30.27	Peak	360.00	100	Vertical	Pass
5**	15137.250	29.48	14.34	--	-29.48	AV	360.00	100	Vertical	N/A
6	17832.249	47.29	23.61	74.0	26.71	Peak	312.10	100	Vertical	Pass
6**	17832.249	38.33	23.61	54.0	15.67	AV	312.10	100	Vertical	Pass

WIFI5GB4-N20-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_14.16.28

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

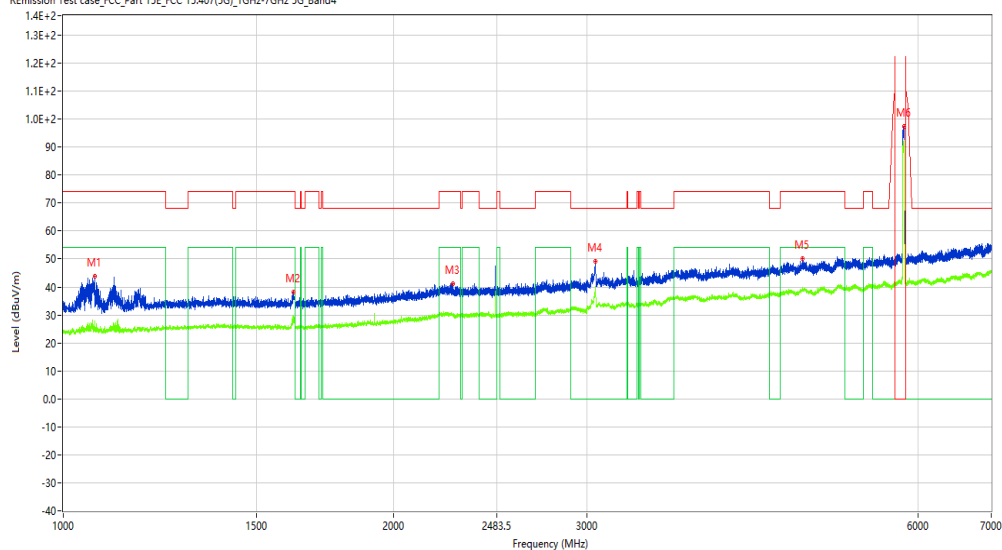

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1068.750	43.86	-16.39	74.0	30.14	Peak	96.40	100	Horizontal	Pass
1**	1068.750	27.76	-16.39	54.0	26.24	AV	96.40	100	Horizontal	Pass
2	1620.500	38.19	-15.72	74.0	35.81	Peak	295.20	100	Horizontal	Pass
2**	1620.500	29.74	-15.72	54.0	24.26	AV	295.20	100	Horizontal	Pass
3	2263.500	41.28	-10.56	74.0	32.72	Peak	96.40	100	Horizontal	Pass
3**	2263.500	30.18	-10.56	54.0	23.82	AV	96.40	100	Horizontal	Pass
4	3051.000	49.12	-6.06	68.2	19.08	Peak	271.40	100	Horizontal	Pass
4**	3051.000	38.92	-6.06	--	-38.92	AV	271.40	100	Horizontal	N/A
5	4711.500	50.23	-0.54	74.0	23.77	Peak	21.90	100	Horizontal	Pass
5**	4711.500	39.15	-0.54	54.0	14.85	AV	21.90	100	Horizontal	Pass
6	5830.000	97.55	0.96	--	262.45	Peak	360.00	100	Horizontal	Pass
6**	5830.000	90.09	0.96	--	-90.09	AV	360.00	100	Horizontal	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.35.48

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX

Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7957.000	25.80	5.90	68.2	42.40	Peak	248.20	100	Horizontal	Pass
1**	7957.000	17.36	5.90	--	-17.36	AV	248.20	100	Horizontal	N/A
2	9241.250	27.06	6.21	68.2	41.14	Peak	222.50	100	Horizontal	Pass
2**	9241.250	17.76	6.21	--	-17.76	AV	222.50	100	Horizontal	N/A
3	10753.750	29.42	9.04	74.0	44.58	Peak	112.90	100	Horizontal	Pass
3**	10753.750	20.15	9.04	54.0	33.85	AV	112.90	100	Horizontal	Pass
4	11881.250	31.04	8.90	74.0	42.96	Peak	315.20	100	Horizontal	Pass
4**	11881.250	21.08	8.90	54.0	32.92	AV	315.20	100	Horizontal	Pass
5	14601.000	37.53	15.43	68.2	30.67	Peak	222.50	100	Horizontal	Pass
5**	14601.000	27.52	15.43	--	-27.52	AV	222.50	100	Horizontal	N/A
6	17835.000	46.63	23.63	74.0	27.37	Peak	269.50	100	Horizontal	Pass
6**	17835.000	38.44	23.63	54.0	15.56	AV	269.50	100	Horizontal	Pass

WIFI5GB4-N20-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.42.52

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

Emission Test case_FCC_Part 15E_FCC 15.407(5G)_1GHz-7GHz 5G_Band4

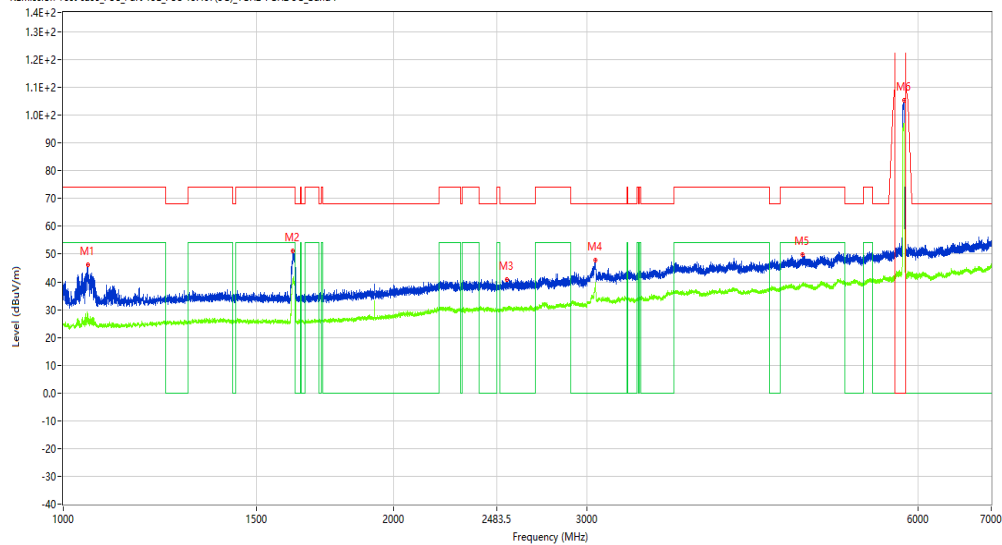

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.250	46.23	-16.63	74.0	27.77	Peak	196.40	100	Vertical	Pass
1**	1052.250	28.25	-16.63	54.0	25.75	AV	196.40	100	Vertical	Pass
2	1619.000	51.19	-15.70	74.0	22.81	Peak	43.00	100	Vertical	Pass
2**	1619.000	40.40	-15.70	54.0	13.60	AV	43.00	100	Vertical	Pass
3	2533.500	40.84	-10.09	68.2	27.36	Peak	146.70	100	Vertical	Pass
3**	2533.500	29.95	-10.09	--	-29.95	AV	146.70	100	Vertical	N/A
4	3050.500	47.84	-5.39	68.2	20.36	Peak	29.00	100	Vertical	Pass
4**	3050.500	39.44	-5.39	--	-39.44	AV	29.00	100	Vertical	N/A
5	4714.000	49.84	-0.49	74.0	24.16	Peak	275.50	100	Vertical	Pass
5**	4714.000	39.41	-0.49	54.0	14.59	AV	275.50	100	Vertical	Pass
6	5830.000	105.28	0.96	--	254.72	Peak	360.00	100	Vertical	Pass
6**	5830.000	97.14	0.96	--	-97.14	AV	360.00	100	Vertical	N/A

Test result

Project Number: Certification

Test Time: 2026-04-01_15.33.55

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)_6GHz-18GHz_B4

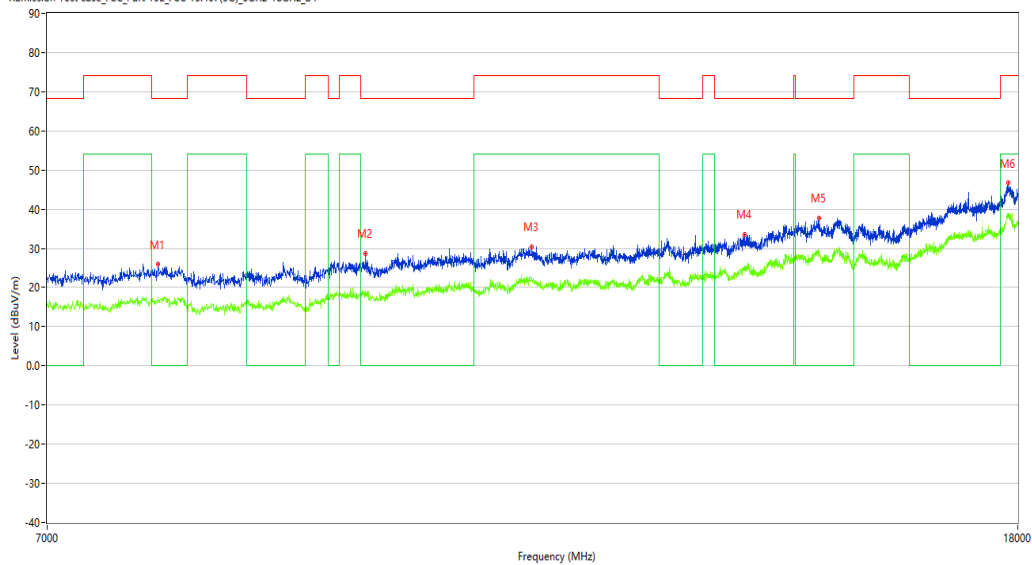

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7797.500	25.95	5.72	68.2	42.25	Peak	60.50	100	Vertical	Pass
1**	7797.500	16.91	5.72	--	-16.91	AV	60.50	100	Vertical	N/A
2	9543.750	28.68	7.68	68.2	39.52	Peak	360.00	100	Vertical	Pass
2**	9543.750	19.09	7.68	--	-19.09	AV	360.00	100	Vertical	N/A
3	11215.750	30.42	9.18	74.0	43.58	Peak	335.40	100	Vertical	Pass
3**	11215.750	21.81	9.18	54.0	32.19	AV	335.40	100	Vertical	Pass
4	13803.500	33.57	12.16	68.2	34.63	Peak	317.20	100	Vertical	Pass
4**	13803.500	24.52	12.16	--	-24.52	AV	317.20	100	Vertical	N/A
5	14832.000	37.74	16.14	68.2	30.46	Peak	360.00	100	Vertical	Pass
5**	14832.000	29.32	16.14	--	-29.32	AV	360.00	100	Vertical	N/A
6	17835.000	46.65	23.63	74.0	27.35	Peak	360.00	100	Vertical	Pass
6**	17835.000	38.83	23.63	54.0	15.17	AV	360.00	100	Vertical	Pass

WIFI5GB1-Bandedge -A-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.20.13

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G BAND 1)_bandedge

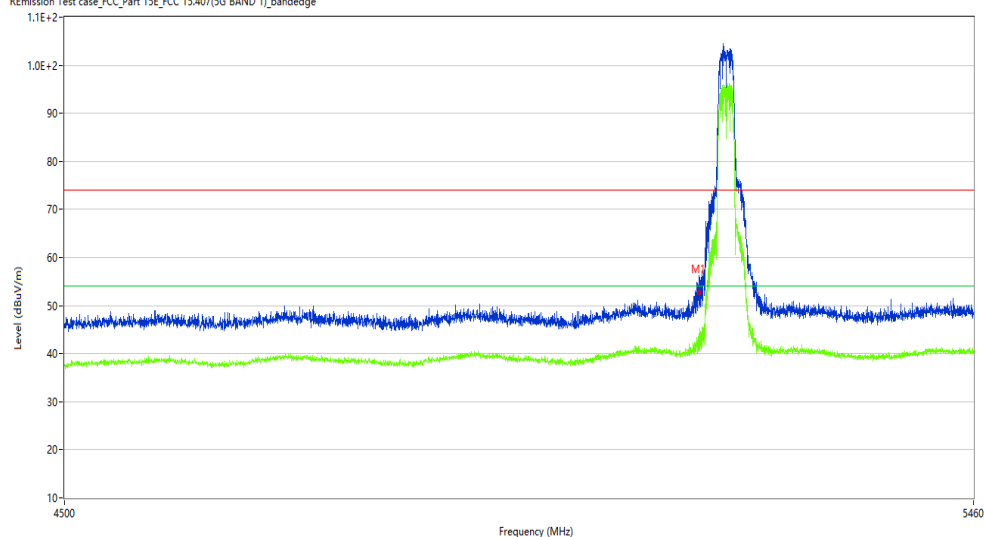

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	52.89	-0.17	74.0	21.11	Peak	0.00	100	H	Pass
1**	5150.000	43.14	-0.17	54.0	10.86	AV	0.00	100	H	Pass

WIFI5GB1-Bandedge -A-Low channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.07.13

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G BAND 1)_bandedge

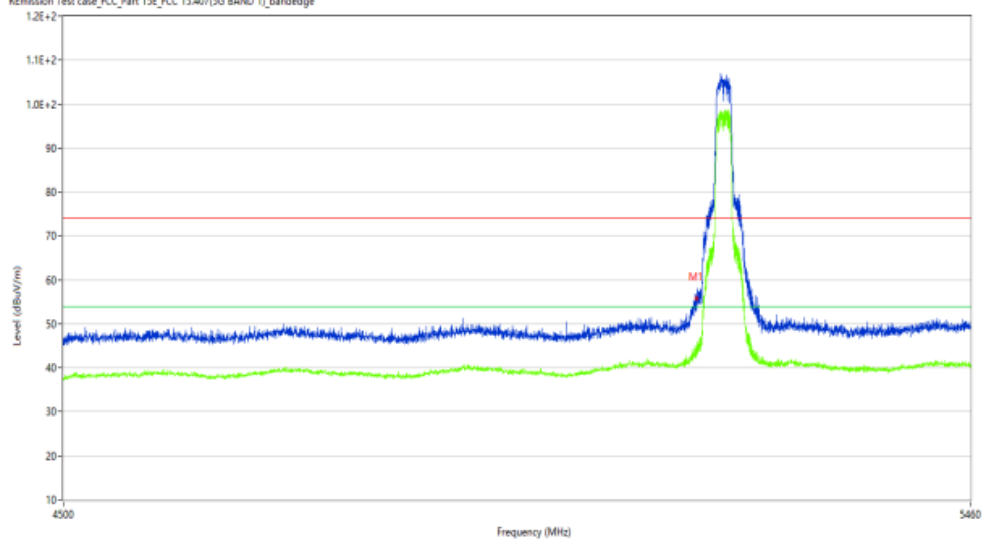

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.55	-0.17	74.0	18.45	Peak	109.95	100	V	Pass
1**	5150.000	44.90	-0.17	54.0	9.10	AV	109.95	100	V	Pass

WIFI5GB1-Bandedge -A-High channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.22.04

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT

Model: P572

Temp.(oC): 22.3

Hum.: 52%RH


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(SG BAND 1)_bandedge

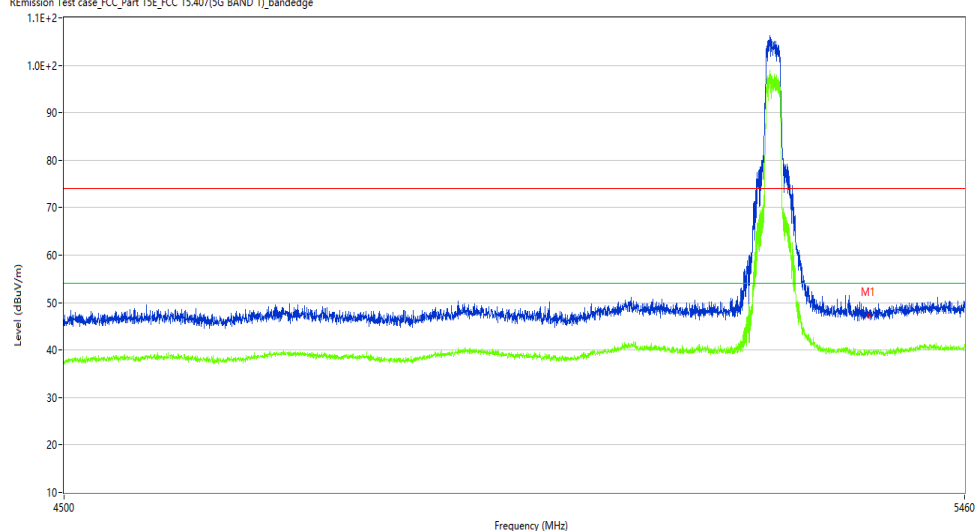

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	47.05	-1.34	74.0	26.95	Peak	217.64	100	H	Pass
1**	5350.000	39.41	-1.34	54.0	14.59	AV	217.64	100	H	Pass

WIFI5GB1-Bandedge -A-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.09.32

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G BAND 1)_bandedge

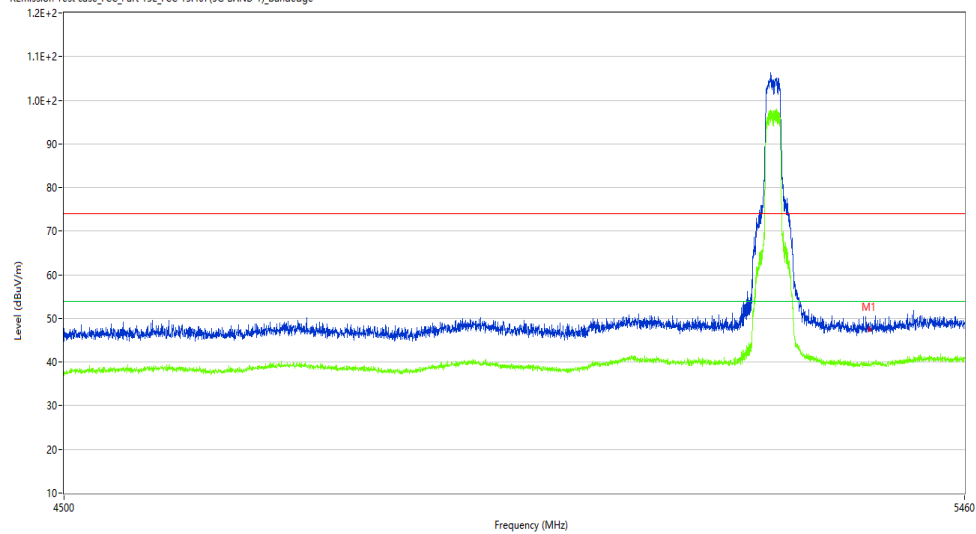

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	47.58	-1.34	74.0	26.42	Peak	262.11	100	V	Pass
1**	5350.000	39.54	-1.34	54.0	14.46	AV	262.11	100	V	Pass

WIFI5GB1-Bandedge -N20-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.23.26

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G BAND 1)_bandedge

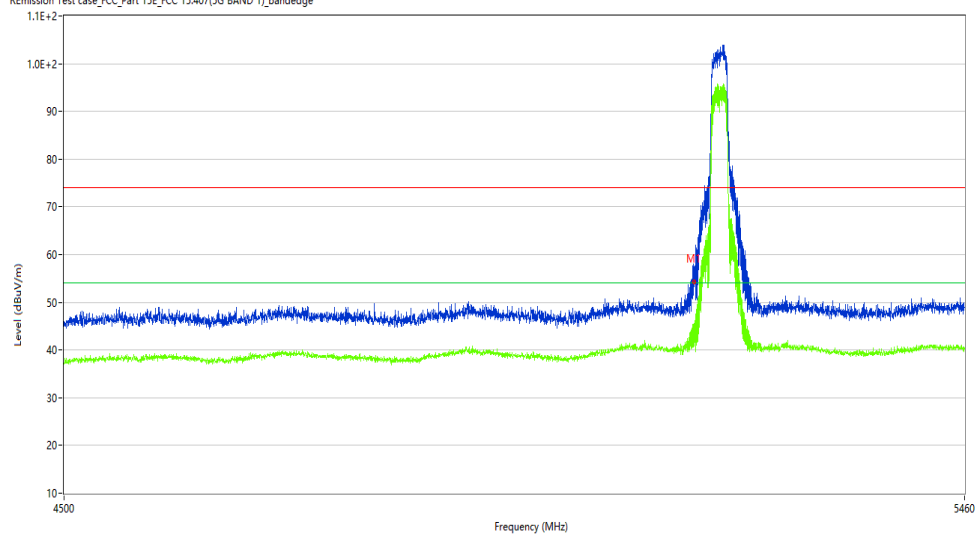

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.26	-0.17	74.0	19.74	Peak	0.00	100	H	Pass
1**	5150.000	43.20	-0.17	54.0	10.80	AV	0.00	100	H	Pass

WIFI5GB1-Bandedge -N20-Low channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.04.18

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G BAND 1)_bandedge

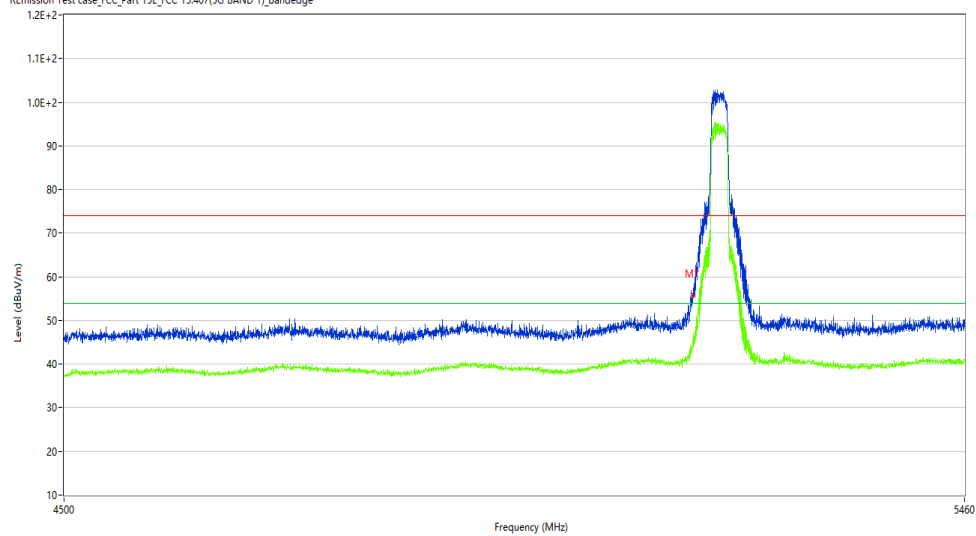

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.83	-0.17	74.0	18.17	Peak	13.10	100	V	Pass
1**	5150.000	44.40	-0.17	54.0	9.60	AV	13.10	100	V	Pass

WIFI5GB1-Bandedge -N20-High channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_15.25.05

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT

CAMERA SMART PET FEEDER

Model: P572

Test Standard: FCC

Temp.(oC): 22.3


Work Addition: TX

Hum.: 52%RH

Load: Full load

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(SG BAND 1)_bandedge

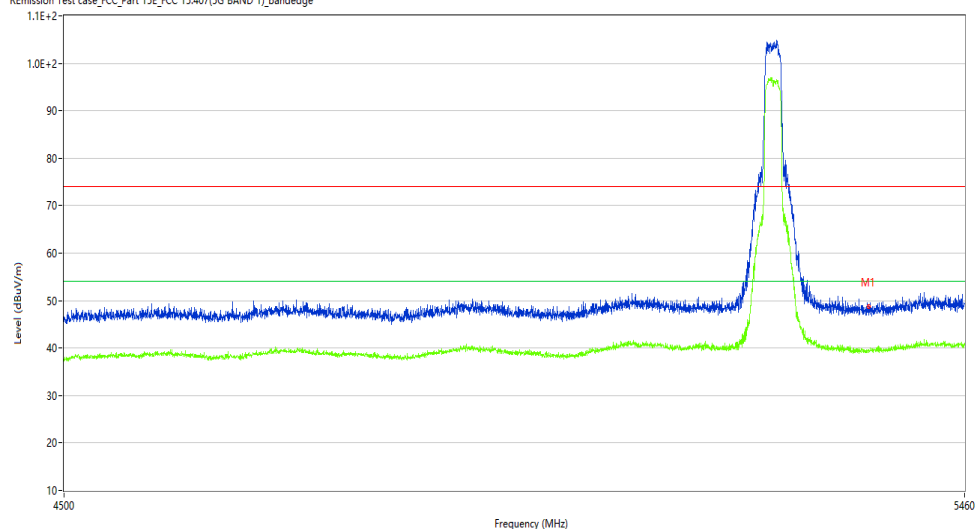

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	48.80	-1.34	74.0	25.20	Peak	190.82	100	H	Pass
1**	5350.000	39.37	-1.34	54.0	14.63	AV	190.82	100	H	Pass

WIFI5GB1-Bandedge -N20-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-28_14.05.50

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(SG BAND 1)_bandedge

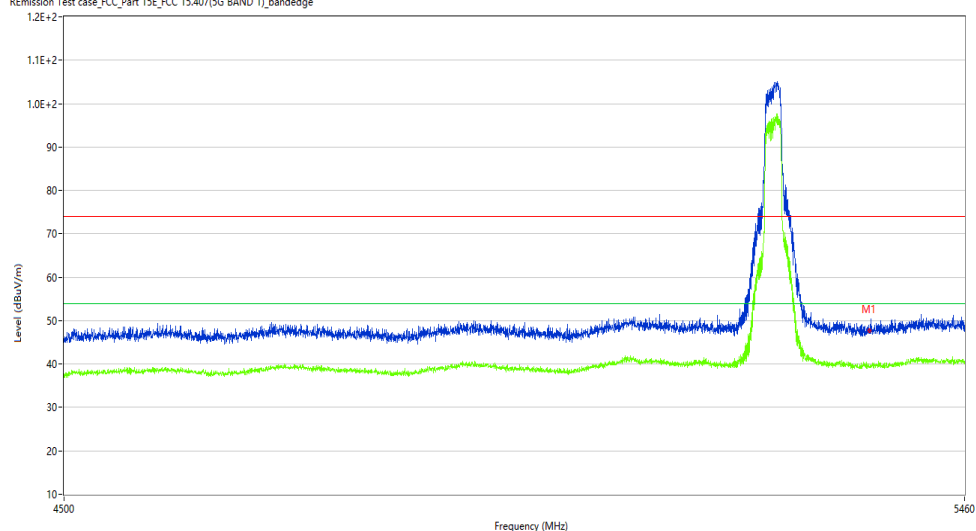

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	47.67	-1.34	74.0	26.33	Peak	124.88	100	V	Pass
1**	5350.000	39.55	-1.34	54.0	14.45	AV	124.88	100	V	Pass

WIFI5GB4-Bandedge -A-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_10.47.48

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

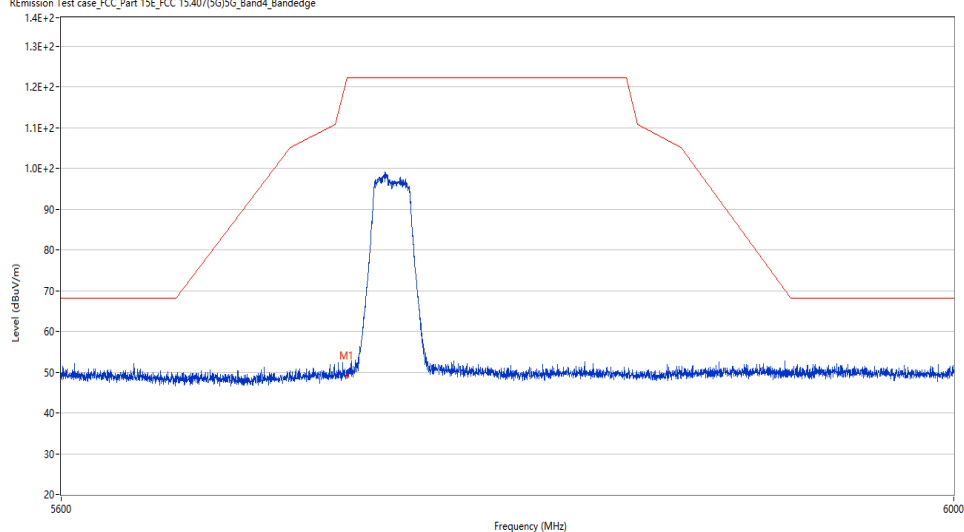

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	49.02	0.76	122.2	73.18	Peak	92.22	100	H	Pass

WIFI5GB4-Bandedge -A-Low channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.26.46

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

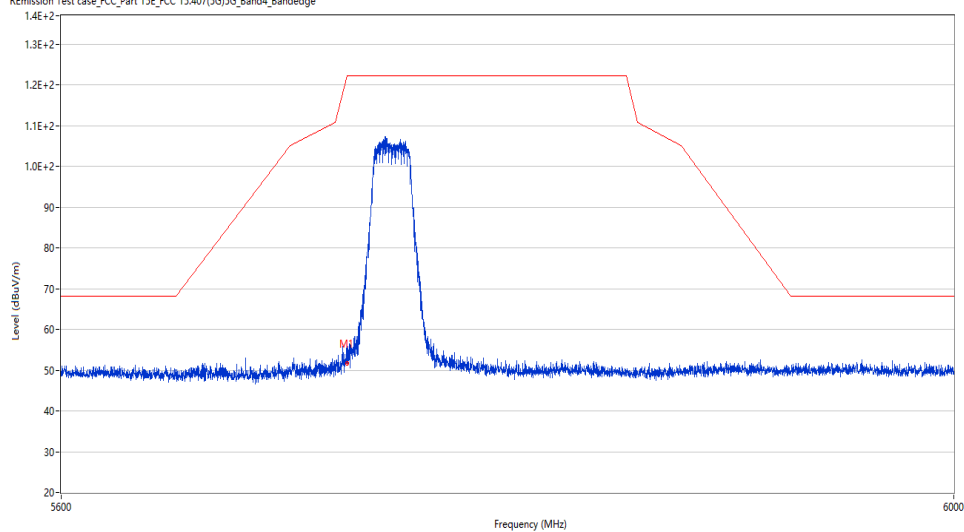

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	51.59	0.76	122.2	70.61	Peak	360.00	100	V	Pass

WIFI5GB4-Bandedge -A-High channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_10.50.04

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

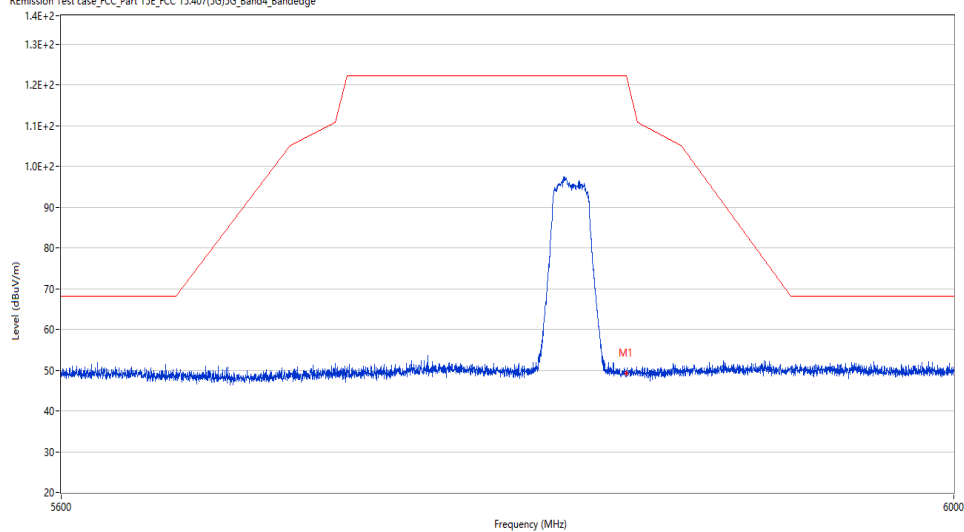

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5850.000	49.31	0.98	122.2	72.89	Peak	16.62	100	H	Pass

WIFI5GB4-Bandedge -A-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.24.38

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

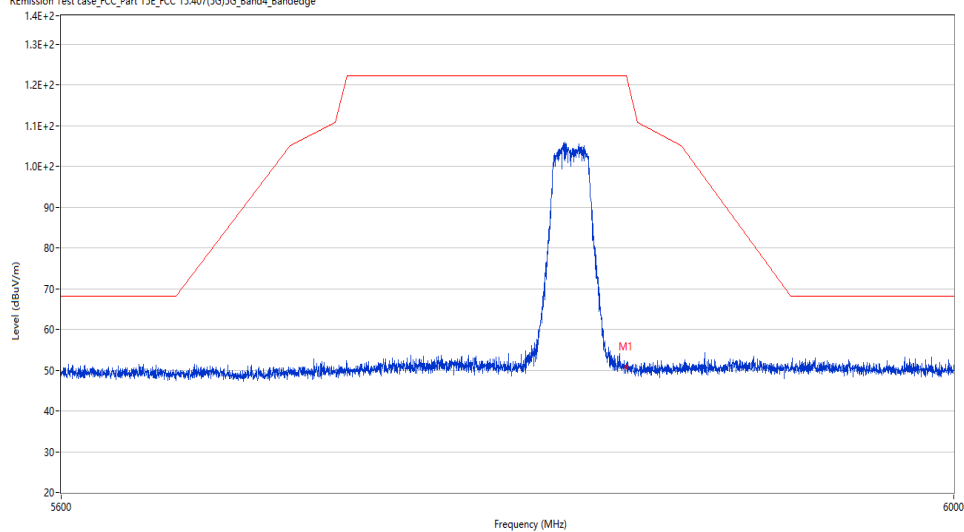

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5850.000	50.77	0.98	122.2	71.43	Peak	89.84	100	V	Pass

WIFI5GB4-Bandedge -N20-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_10.52.03

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

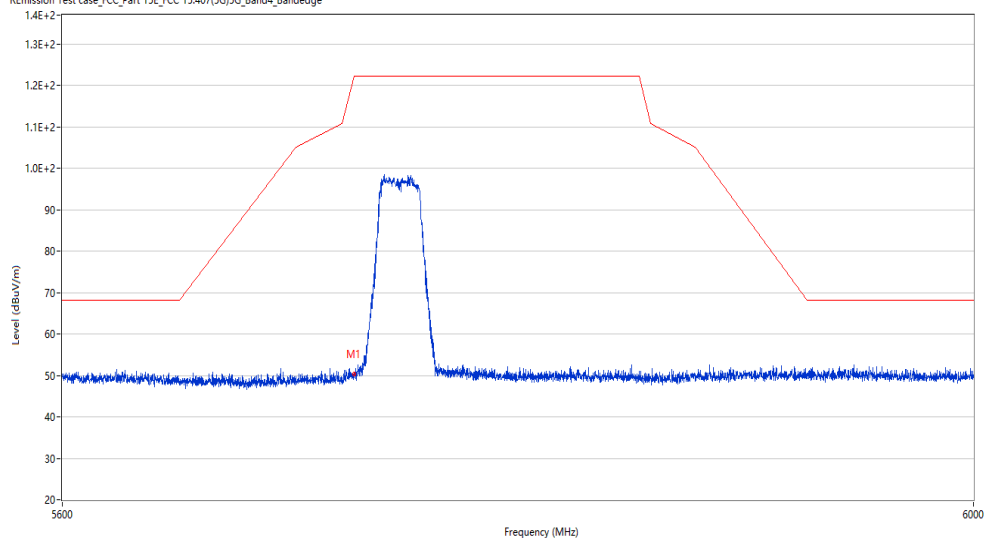

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	50.26	0.76	122.2	71.94	Peak	0.08	100	H	Pass

WIFI5GB4-Bandedge -N20-Low channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.31.41


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

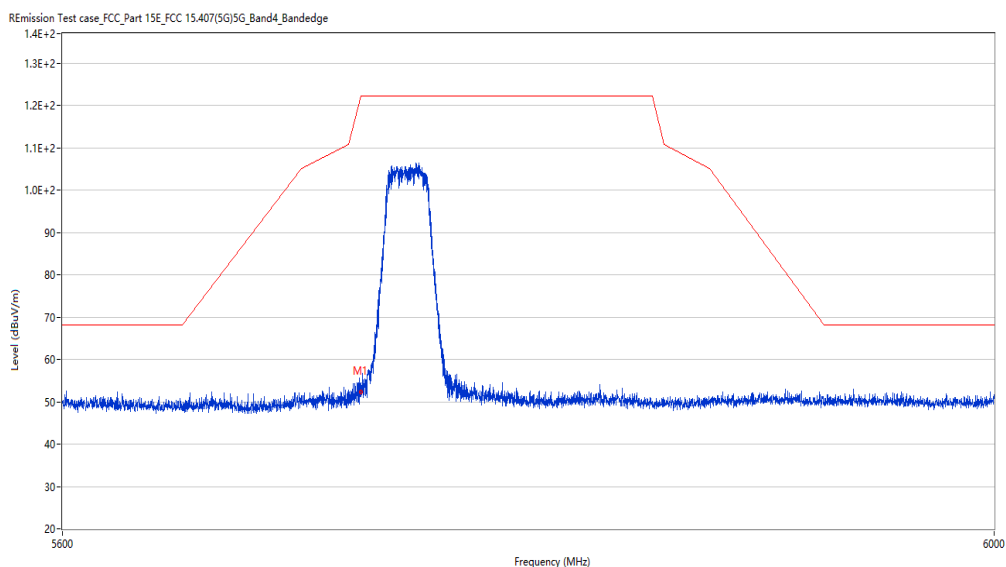

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	52.37	0.76	122.2	69.83	Peak	359.31	100	V	Pass

WIFI5GB4-Bandedge -N20-High channel- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_10.54.13

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15E_FCC 15.407(5G)5G_Band4_Bandedge

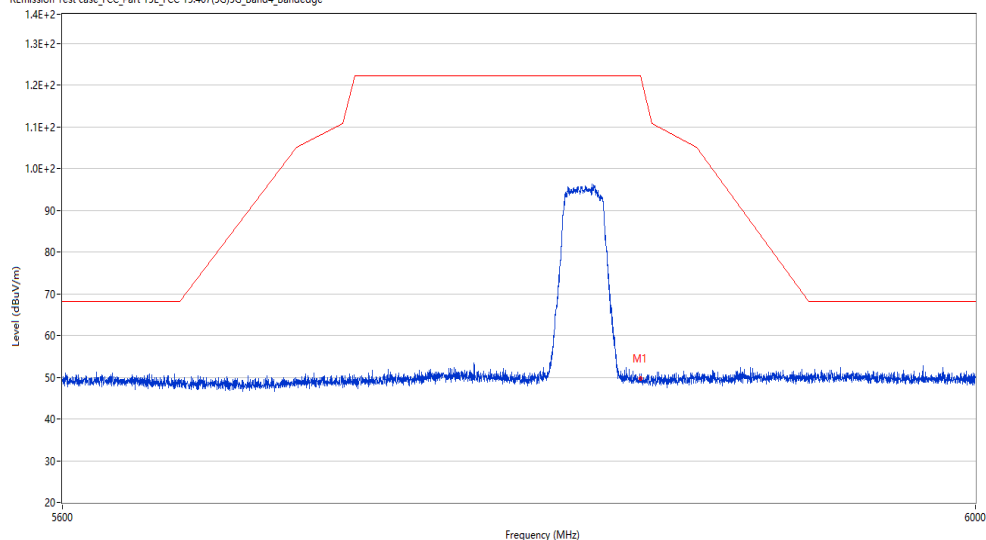

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5850.000	49.63	0.98	122.2	72.57	Peak	270.24	100	H	Pass

WIFI5GB4-Bandedge -N20-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-04-02_13.28.35


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.6 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

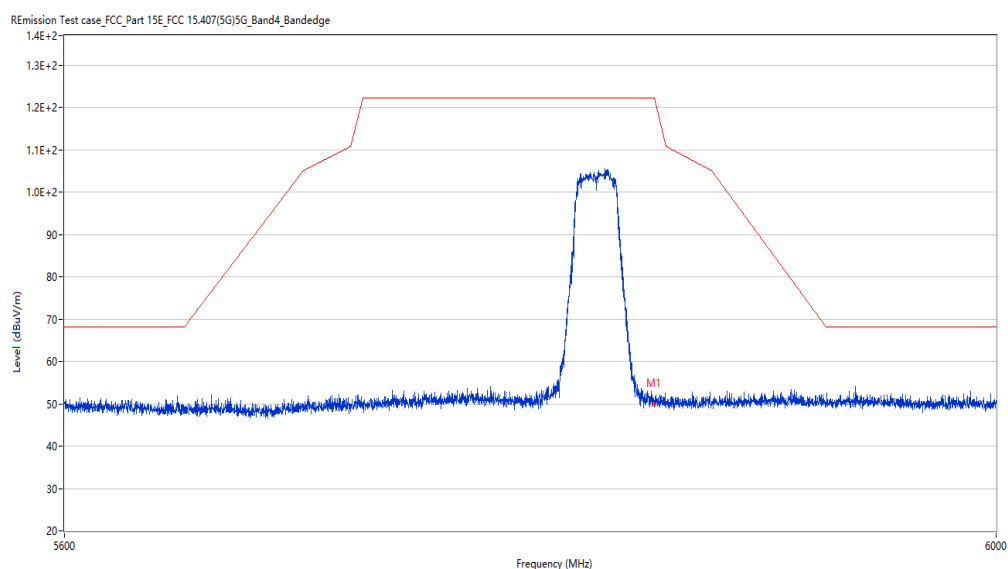

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5850.000	49.96	0.98	122.2	72.24	Peak	0.05	100	V	Pass