

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_19.09.28

EUT Name: PETKIT YUMSHARE SOLO 2 WITH Test Engineer: XCJ

CAMERA SMART PET FEEDER

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

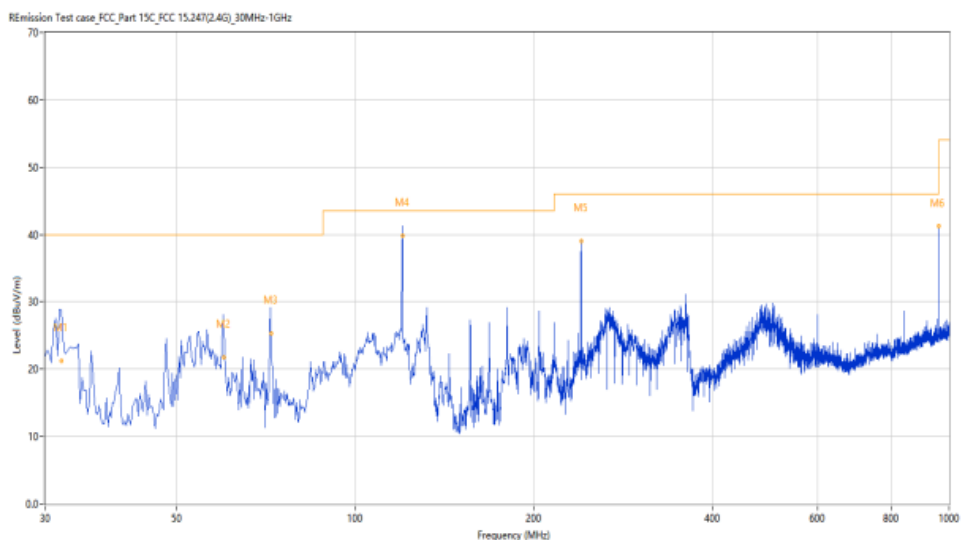

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.917	30.59	-27.59	40.0	9.41	Peak	360.00	140	Horizontal	Pass
1*	31.917	21.27	-27.59	40.0	18.73	QP	360.00	140	Horizontal	Pass
2	60.000	28.59	-24.88	40.0	11.41	Peak	354.30	178	Horizontal	Pass
2*	60.000	21.78	-24.88	40.0	18.22	QP	354.30	178	Horizontal	Pass
3	72.000	30.60	-29.00	40.0	9.40	Peak	356.40	267	Horizontal	Pass
3*	72.000	25.30	-29.00	40.0	14.70	QP	356.40	267	Horizontal	Pass
4	120.000	42.34	-26.89	43.5	1.16	Peak	45.30	204	Horizontal	Pass
4*	120.000	39.81	-26.89	43.5	3.69	QP	45.30	204	Horizontal	Pass
5	240.001	41.23	-23.07	46.0	4.77	Peak	0.30	100	Horizontal	Pass
5*	240.001	39.07	-23.07	46.0	6.93	QP	0.30	100	Horizontal	Pass
6	960.004	42.39	-7.51	46.0	3.61	Peak	318.50	136	Horizontal	Pass
6*	960.004	41.32	-7.51	46.0	4.68	QP	318.50	136	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18:58.43

EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ


Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

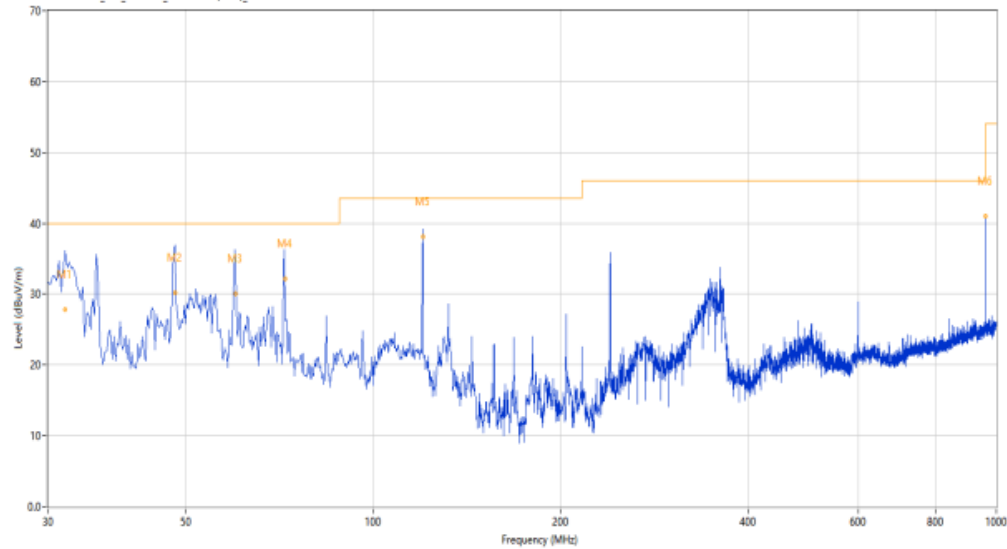

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.965	36.72	-27.55	40.0	3.28	Peak	190.60	119	Vertical	Pass
1*	31.965	27.87	-27.55	40.0	12.13	QP	190.60	119	Vertical	Pass
2	48.000	37.43	-23.69	40.0	2.57	Peak	0.00	135	Vertical	Pass
2*	48.000	30.17	-23.69	40.0	9.83	QP	0.00	135	Vertical	Pass
3	60.000	35.99	-24.88	40.0	4.01	Peak	0.00	118	Vertical	Pass
3*	60.000	30.11	-24.88	40.0	9.89	QP	0.00	118	Vertical	Pass
4	72.000	38.14	-29.00	40.0	1.86	Peak	0.00	134	Vertical	Pass
4*	72.000	32.11	-29.00	40.0	7.89	QP	0.00	134	Vertical	Pass
5	120.000	40.06	-26.89	43.5	3.44	Peak	109.90	174	Vertical	Pass
5*	120.000	38.10	-26.89	43.5	5.40	QP	109.90	174	Vertical	Pass
6	960.004	42.04	-7.51	46.0	3.96	Peak	48.40	104	Vertical	Pass
6*	960.004	41.01	-7.51	46.0	4.99	QP	48.40	104	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.24.58


EUT Name: PETKIT YUMSHARE SOLO 2 WITH CAMERA SMART PET FEEDER Test Engineer: XCJ

Manufacturer: PETKIT Test Standard: FCC

Model: P572 Work Addition: TX

Temp.(oC): 22.3 Load: Full load

Hum.: 52%RH Remark: DR-RSE01-E26030024-01#02

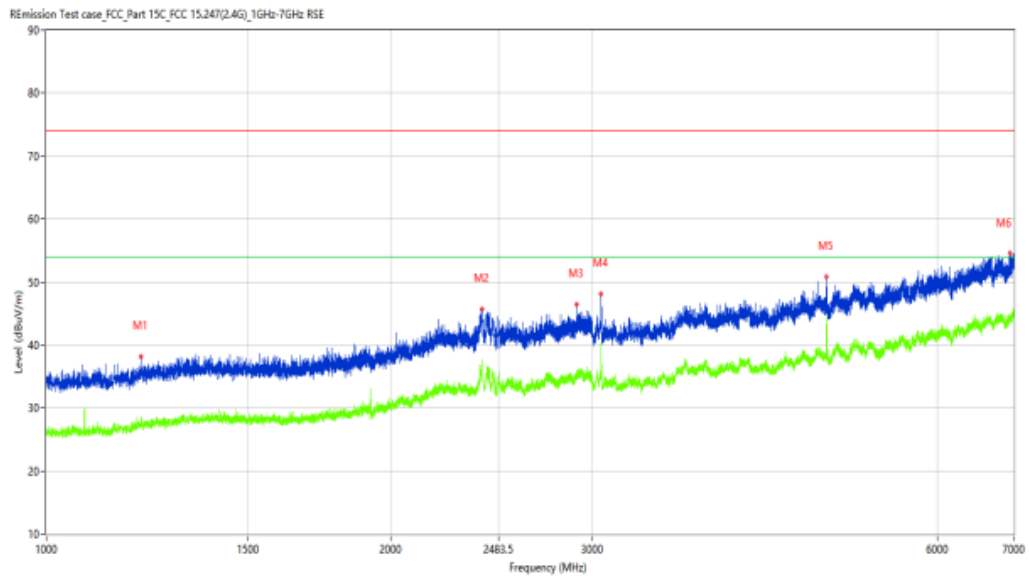

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1209.750	38.12	-14.40	74.0	35.88	Peak	216.00	100	Horizontal	Pass
1**	1209.750	27.46	-14.40	54.0	26.54	AV	216.00	100	Horizontal	Pass
2	2400.750	45.66	-4.78	74.0	28.34	Peak	131.30	100	Horizontal	Pass
2**	2400.750	37.30	-4.78	54.0	16.70	AV	131.30	100	Horizontal	Pass
3	2904.750	46.40	-4.88	74.0	27.60	Peak	318.20	100	Horizontal	Pass
3**	2904.750	34.92	-4.88	54.0	19.08	AV	318.20	100	Horizontal	Pass
4	3050.000	48.11	-4.72	74.0	25.89	Peak	360.00	100	Horizontal	Pass
4**	3050.000	39.27	-4.72	54.0	14.73	AV	360.00	100	Horizontal	Pass
5	4804.000	50.76	-1.59	74.0	23.24	Peak	360.00	100	Horizontal	Pass
5**	4804.000	43.32	-1.59	54.0	10.68	AV	360.00	100	Horizontal	Pass
6	6945.000	54.53	3.80	74.0	19.47	Peak	36.60	100	Horizontal	Pass
6**	6945.000	44.78	3.80	54.0	9.22	AV	36.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:57:38

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

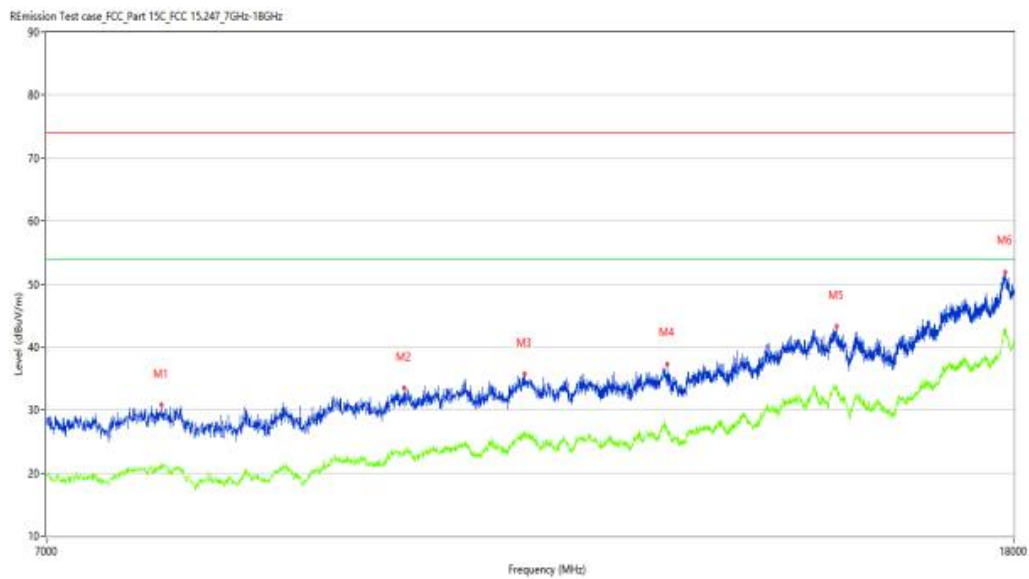

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7830.500	30.74	0.94	74.0	43.26	Peak	43.60	100	Horizontal	Pass
1**	7830.500	21.20	0.94	54.0	32.80	AV	43.60	100	Horizontal	Pass
2	9928.750	33.50	2.94	74.0	40.50	Peak	72.90	100	Horizontal	Pass
2**	9928.750	23.34	2.94	54.0	30.66	AV	72.90	100	Horizontal	Pass
3	11166.250	35.83	3.91	74.0	38.17	Peak	259.50	100	Horizontal	Pass
3**	11166.250	25.81	3.91	54.0	28.19	AV	259.50	100	Horizontal	Pass
4	12835.500	37.33	4.98	74.0	36.67	Peak	72.90	100	Horizontal	Pass
4**	12835.500	26.82	4.98	54.0	27.18	AV	72.90	100	Horizontal	Pass
5	15134.500	43.30	9.30	74.0	30.70	Peak	259.50	100	Horizontal	Pass
5**	15134.500	34.04	9.30	54.0	19.96	AV	259.50	100	Horizontal	Pass
6	17848.750	51.94	18.72	74.0	22.06	Peak	72.90	100	Horizontal	Pass
6**	17848.750	41.94	18.72	54.0	12.06	AV	72.90	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.55.11

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

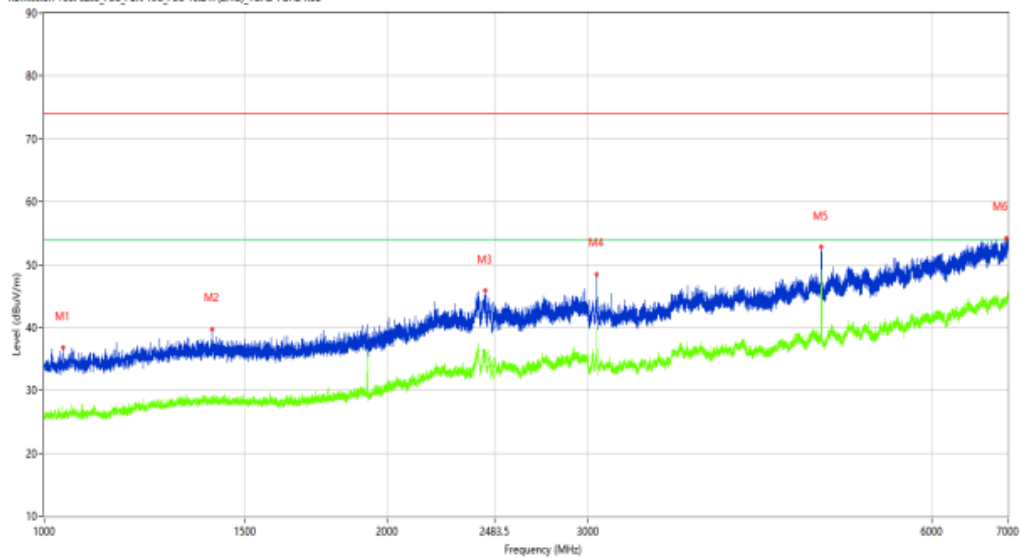

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1038.500	36.78	-14.95	74.0	37.22	Peak	0.90	100	Vertical	Pass
1**	1038.500	26.17	-14.95	54.0	27.83	AV	0.90	100	Vertical	Pass
2	1403.750	39.75	-13.28	74.0	34.25	Peak	156.00	100	Vertical	Pass
2**	1403.750	28.61	-13.28	54.0	25.39	AV	156.00	100	Vertical	Pass
3	2438.250	45.85	-5.88	74.0	28.15	Peak	235.70	100	Vertical	Pass
3**	2438.250	35.94	-5.88	54.0	18.06	AV	235.70	100	Vertical	Pass
4	3050.000	48.47	-4.72	74.0	25.53	Peak	216.70	100	Vertical	Pass
4**	3050.000	39.75	-4.72	54.0	14.25	AV	216.70	100	Vertical	Pass
5	4803.500	52.76	-1.59	74.0	21.24	Peak	0.00	100	Vertical	Pass
5**	4803.500	48.54	-1.59	54.0	5.46	AV	0.00	100	Vertical	Pass
6	6980.500	54.20	4.47	74.0	19.80	Peak	57.30	100	Vertical	Pass
6**	6980.500	44.06	4.47	54.0	9.94	AV	57.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.20.08

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

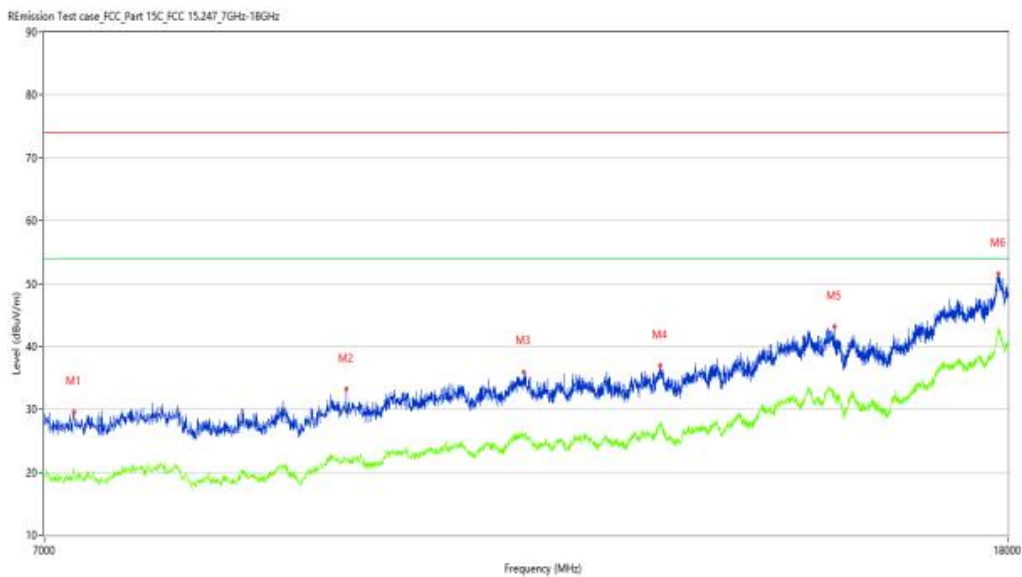

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7209.000	29.63	-0.01	74.0	44.37	Peak	360.00	100	Vertical	Pass
1**	7209.000	20.47	-0.01	54.0	33.53	AV	360.00	100	Vertical	Pass
2	9414.500	33.16	1.50	74.0	40.84	Peak	77.90	100	Vertical	Pass
2**	9414.500	21.74	1.50	54.0	32.26	AV	77.90	100	Vertical	Pass
3	11202.000	35.98	3.94	74.0	38.02	Peak	360.00	100	Vertical	Pass
3**	11202.000	25.38	3.94	54.0	28.62	AV	360.00	100	Vertical	Pass
4	12802.500	37.01	5.84	74.0	36.99	Peak	26.10	100	Vertical	Pass
4**	12802.500	27.25	5.84	54.0	26.75	AV	26.10	100	Vertical	Pass
5	15186.750	43.19	8.48	74.0	30.81	Peak	360.00	100	Vertical	Pass
5**	15186.750	32.47	8.48	54.0	21.53	AV	360.00	100	Vertical	Pass
6	17832.249	51.60	18.61	74.0	22.40	Peak	129.50	100	Vertical	Pass
6**	17832.249	42.65	18.61	54.0	11.35	AV	129.50	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.21.58

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

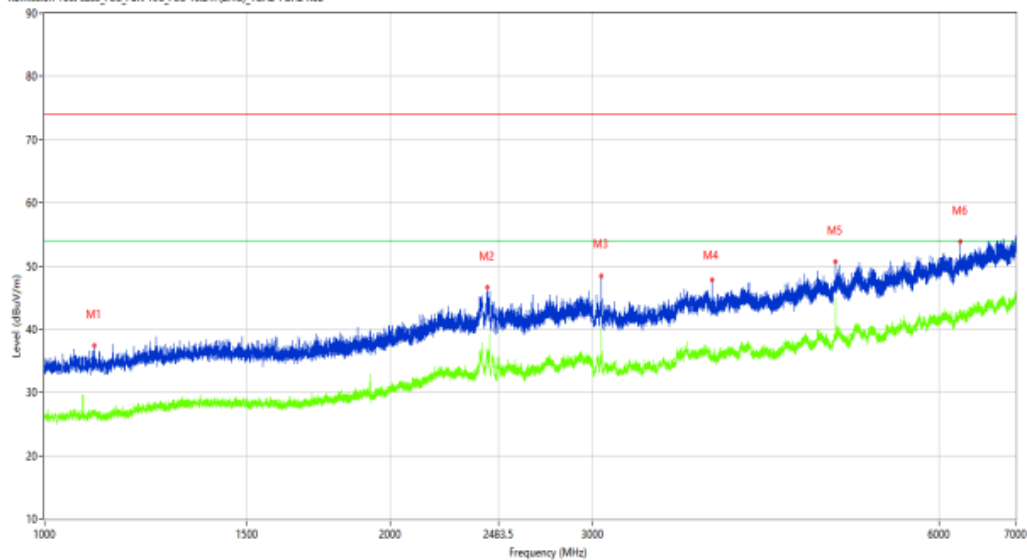

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1105.500	37.39	-15.01	74.0	36.61	Peak	235.70	100	Horizontal	Pass
1**	1105.500	27.12	-15.01	54.0	26.88	AV	235.70	100	Horizontal	Pass
2	2427.500	46.68	-5.71	74.0	27.32	Peak	55.60	100	Horizontal	Pass
2**	2427.500	36.14	-5.71	54.0	17.86	AV	55.60	100	Horizontal	Pass
3	3050.000	48.44	-4.72	74.0	25.56	Peak	135.40	100	Horizontal	Pass
3**	3050.000	40.08	-4.72	54.0	13.92	AV	135.40	100	Horizontal	Pass
4	3810.500	47.75	-3.69	74.0	26.25	Peak	120.30	100	Horizontal	Pass
4**	3810.500	35.61	-3.69	54.0	18.39	AV	120.30	100	Horizontal	Pass
5	4880.500	50.70	-0.58	74.0	23.30	Peak	229.60	100	Horizontal	Pass
5**	4880.500	44.11	-0.58	54.0	9.89	AV	229.60	100	Horizontal	Pass
6	6262.000	53.83	2.35	74.0	20.17	Peak	234.90	100	Horizontal	Pass
6**	6262.000	42.13	2.35	54.0	11.87	AV	234.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19:59:32

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

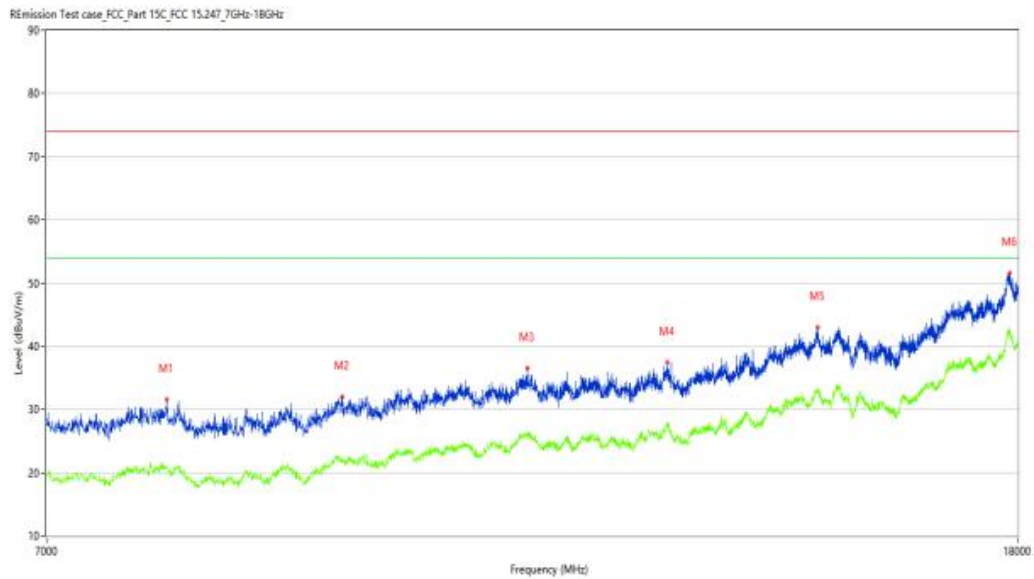

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7866.250	31.54	1.19	74.0	42.46	Peak	17.70	100	Horizontal	Pass
1**	7866.250	21.21	1.19	54.0	32.79	AV	17.70	100	Horizontal	Pass
2	9334.750	31.99	1.58	74.0	42.01	Peak	320.40	100	Horizontal	Pass
2**	9334.750	21.82	1.58	54.0	32.18	AV	320.40	100	Horizontal	Pass
3	11174.500	36.50	3.93	74.0	37.50	Peak	17.70	100	Horizontal	Pass
3**	11174.500	26.14	3.93	54.0	27.86	AV	17.70	100	Horizontal	Pass
4	12799.750	37.49	5.87	74.0	36.51	Peak	17.70	100	Horizontal	Pass
4**	12799.750	27.90	5.87	54.0	26.10	AV	17.70	100	Horizontal	Pass
5	14821.000	42.98	11.68	74.0	31.02	Peak	17.70	100	Horizontal	Pass
5**	14821.000	32.82	11.68	54.0	21.18	AV	17.70	100	Horizontal	Pass
6	17856.999	51.57	18.58	74.0	22.43	Peak	68.90	100	Horizontal	Pass
6**	17856.999	41.98	18.58	54.0	12.02	AV	68.90	100	Horizontal	Pass

BLE-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.52.39

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

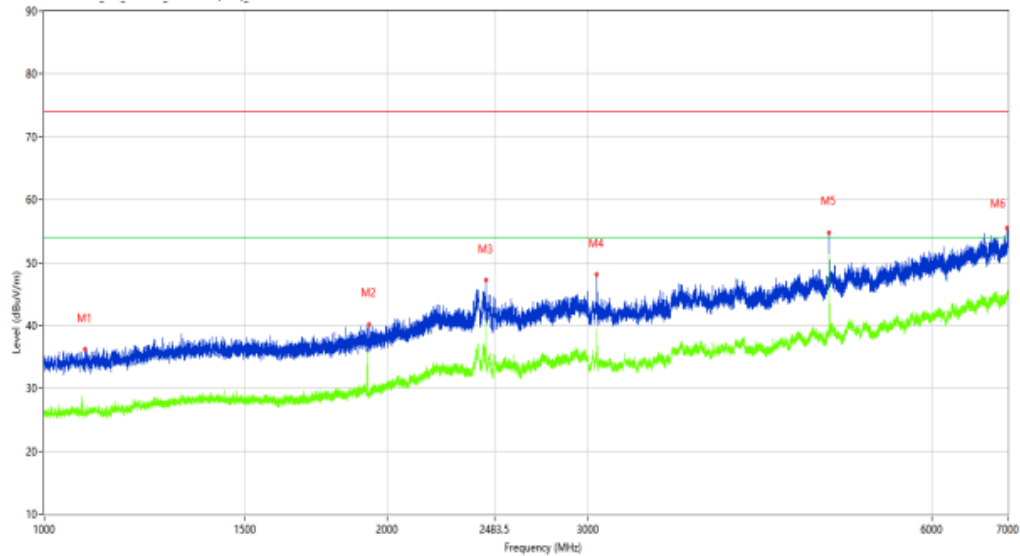

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1086.000	36.16	-14.99	74.0	37.84	Peak	217.20	100	Vertical	Pass
1**	1086.000	25.59	-14.99	54.0	28.41	AV	217.20	100	Vertical	Pass
2	1927.250	40.20	-12.21	74.0	33.80	Peak	153.90	100	Vertical	Pass
2**	1927.250	29.39	-12.21	54.0	24.61	AV	153.90	100	Vertical	Pass
3	2440.250	47.17	-5.95	74.0	26.83	Peak	0.00	100	Vertical	Pass
3**	2440.250	40.53	-5.95	54.0	13.47	AV	0.00	100	Vertical	Pass
4	3050.000	48.10	-4.72	74.0	25.90	Peak	37.70	100	Vertical	Pass
4**	3050.000	39.36	-4.72	54.0	14.64	AV	37.70	100	Vertical	Pass
5	4879.500	54.82	-0.57	74.0	19.18	Peak	0.00	100	Vertical	Pass
5**	4879.500	49.68	-0.57	54.0	4.32	AV	0.00	100	Vertical	Pass
6	6992.500	55.50	4.62	74.0	18.50	Peak	143.00	100	Vertical	Pass
6**	6992.500	44.60	4.62	54.0	9.40	AV	143.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.22.56

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7792.000	31.42	0.63	74.0	42.58	Peak	0.00	100	Vertical	Pass
1**	7792.000	21.00	0.63	54.0	33.00	AV	0.00	100	Vertical	Pass
2	9293.500	32.48	1.30	74.0	41.52	Peak	240.60	100	Vertical	Pass
2**	9293.500	22.18	1.30	54.0	31.82	AV	240.60	100	Vertical	Pass
3	10500.750	35.83	3.78	74.0	38.17	Peak	240.60	100	Vertical	Pass
3**	10500.750	24.32	3.78	54.0	29.68	AV	240.60	100	Vertical	Pass
4	12797.000	36.85	5.88	74.0	37.15	Peak	0.00	100	Vertical	Pass
4**	12797.000	27.56	5.88	54.0	26.44	AV	0.00	100	Vertical	Pass
5	14829.250	42.92	11.29	74.0	31.08	Peak	328.30	100	Vertical	Pass
5**	14829.250	32.42	11.29	54.0	21.58	AV	328.30	100	Vertical	Pass
6	17835.000	51.96	18.63	74.0	22.04	Peak	328.30	100	Vertical	Pass
6**	17835.000	42.49	18.63	54.0	11.51	AV	328.30	100	Vertical	Pass

BLE-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.19.28

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

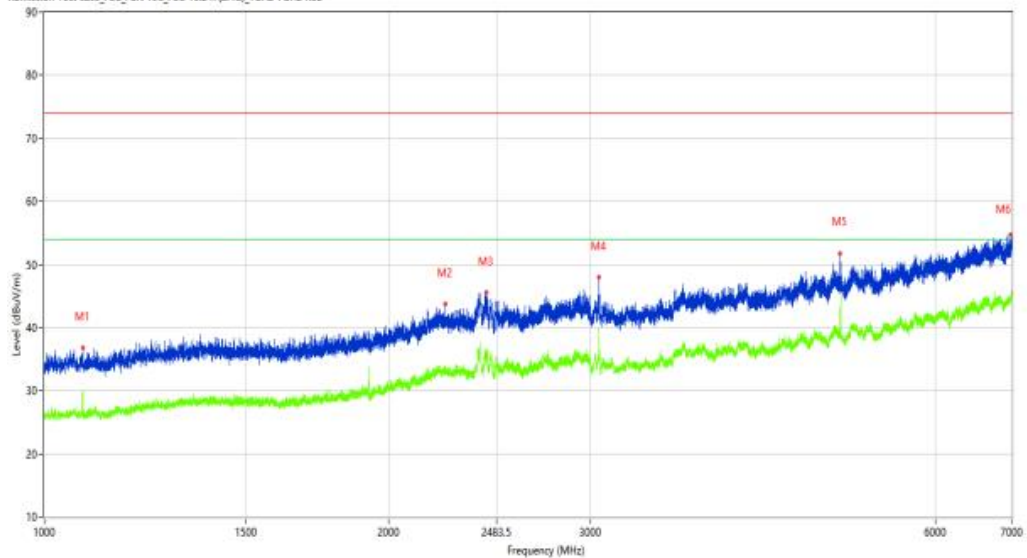

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1080.000	36.80	-15.03	74.0	37.20	Peak	38.00	100	Horizontal	Pass
1**	1080.000	29.91	-15.03	54.0	24.09	AV	38.00	100	Horizontal	Pass
2	2241.000	43.80	-8.59	74.0	30.20	Peak	66.20	100	Horizontal	Pass
2**	2241.000	33.35	-8.59	54.0	20.65	AV	66.20	100	Horizontal	Pass
3	2433.500	45.55	-5.83	74.0	28.45	Peak	216.60	100	Horizontal	Pass
3**	2433.500	35.40	-5.83	54.0	18.60	AV	216.60	100	Horizontal	Pass
4	3050.500	47.91	-5.39	74.0	26.09	Peak	142.90	100	Horizontal	Pass
4**	3050.500	38.87	-5.39	54.0	15.13	AV	142.90	100	Horizontal	Pass
5	4959.000	51.73	-0.86	74.0	22.27	Peak	342.10	100	Horizontal	Pass
5**	4959.000	42.53	-0.86	54.0	11.47	AV	342.10	100	Horizontal	Pass
6	6990.500	54.71	4.54	74.0	19.29	Peak	152.50	100	Horizontal	Pass
6**	6990.500	45.43	4.54	54.0	8.57	AV	152.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_20.00.57

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

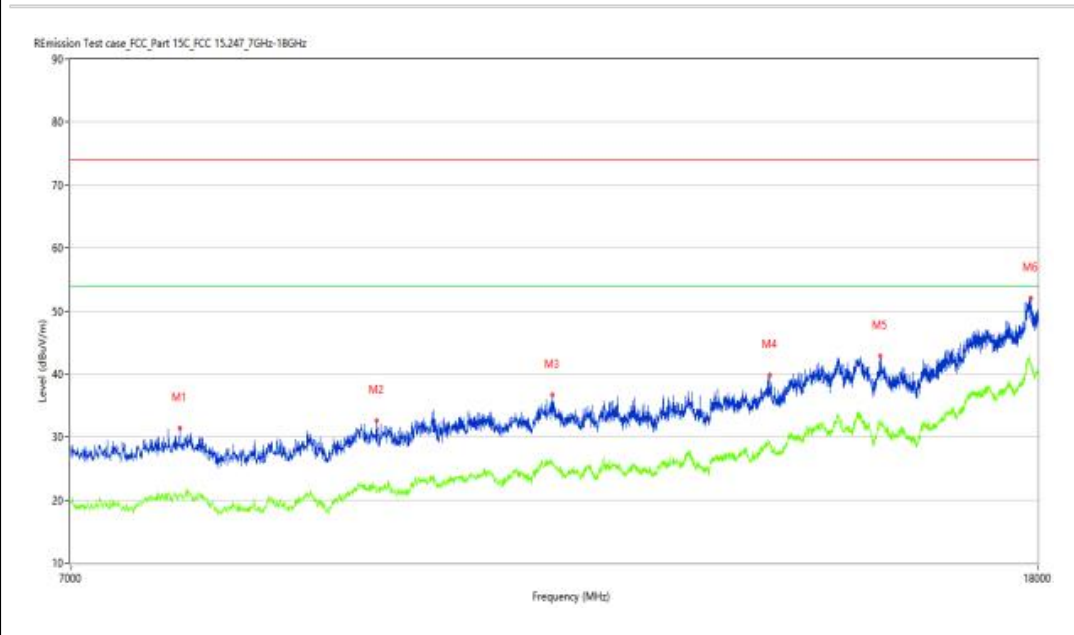

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7789.250	31.43	0.60	74.0	42.57	Peak	246.50	100	Horizontal	Pass
1**	7789.250	21.10	0.60	54.0	32.90	AV	246.50	100	Horizontal	Pass
2	9439.250	32.54	1.62	74.0	41.46	Peak	297.50	100	Horizontal	Pass
2**	9439.250	21.51	1.62	54.0	32.49	AV	297.50	100	Horizontal	Pass
3	11207.500	36.63	4.03	74.0	37.37	Peak	39.60	100	Horizontal	Pass
3**	11207.500	25.76	4.03	54.0	28.24	AV	39.60	100	Horizontal	Pass
4	13861.250	39.78	7.19	74.0	34.22	Peak	189.40	100	Horizontal	Pass
4**	13861.250	28.80	7.19	54.0	25.20	AV	189.40	100	Horizontal	Pass
5	15428.750	42.78	9.41	74.0	31.22	Peak	189.40	100	Horizontal	Pass
5**	15428.750	32.22	9.41	54.0	21.78	AV	189.40	100	Horizontal	Pass
6	17876.251	51.97	18.37	74.0	22.03	Peak	39.60	100	Horizontal	Pass
6**	17876.251	41.66	18.37	54.0	12.34	AV	39.60	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.50.06

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

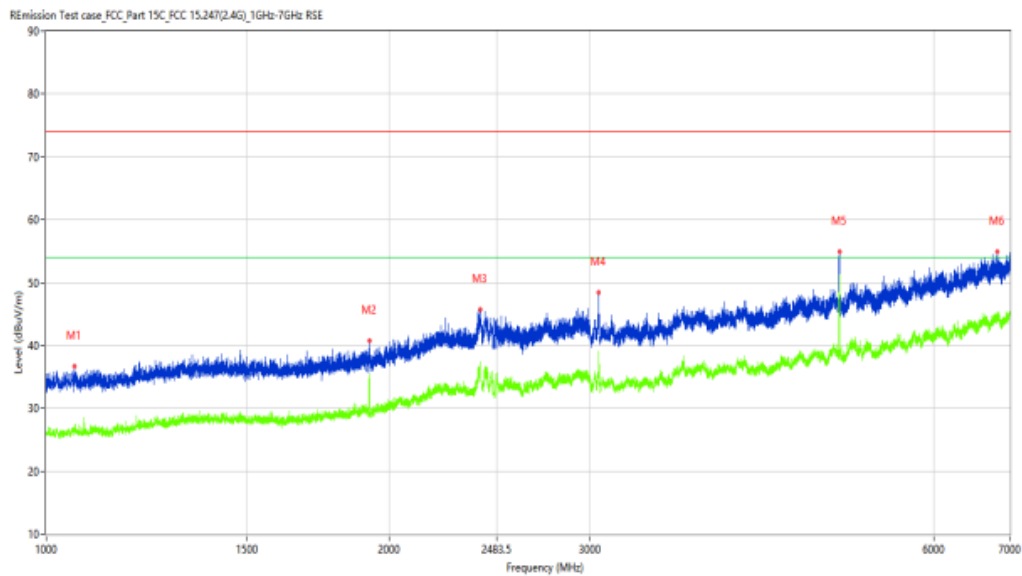

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1059.250	36.66	-14.89	74.0	37.34	Peak	165.40	100	Vertical	Pass
1**	1059.250	27.34	-14.89	54.0	26.66	AV	165.40	100	Vertical	Pass
2	1919.750	40.69	-12.26	74.0	33.31	Peak	63.10	100	Vertical	Pass
2**	1919.750	35.53	-12.26	54.0	18.47	AV	63.10	100	Vertical	Pass
3	2402.250	45.71	-4.78	74.0	28.29	Peak	141.90	100	Vertical	Pass
3**	2402.250	37.25	-4.78	54.0	16.75	AV	141.90	100	Vertical	Pass
4	3050.000	48.39	-4.72	74.0	25.61	Peak	134.90	100	Vertical	Pass
4**	3050.000	38.93	-4.72	54.0	15.07	AV	134.90	100	Vertical	Pass
5	4959.500	54.93	-0.85	74.0	19.07	Peak	309.60	100	Vertical	Pass
5**	4959.500	50.58	-0.85	54.0	3.42	AV	309.60	100	Vertical	Pass
6	6824.000	54.94	4.24	74.0	19.06	Peak	291.70	100	Vertical	Pass
6**	6824.000	44.64	4.24	54.0	9.36	AV	291.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-26_19.24.34

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

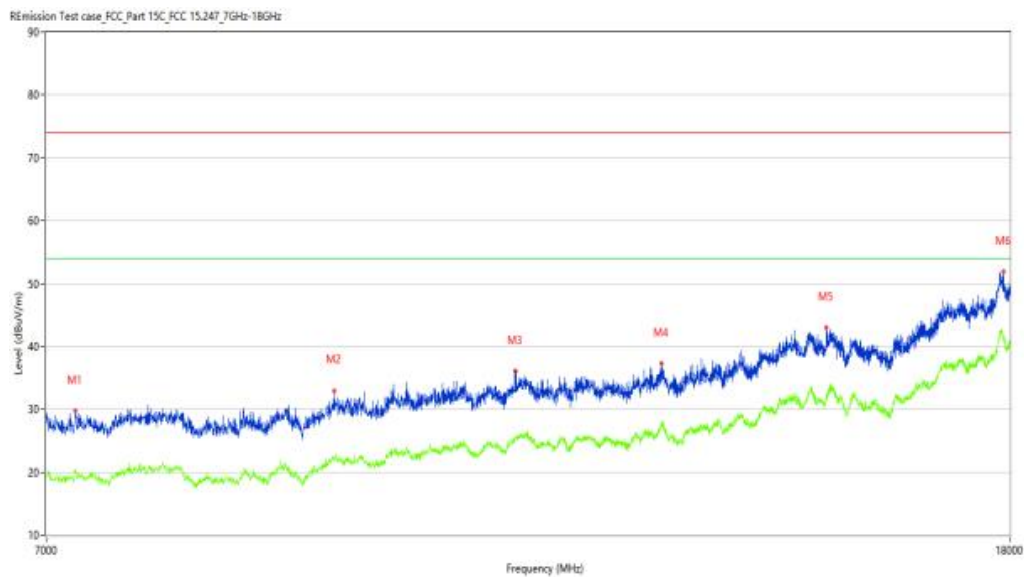

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7203.500	29.75	-0.05	74.0	44.25	Peak	173.40	100	Vertical	Pass
1**	7203.500	20.14	-0.05	54.0	33.86	AV	173.40	100	Vertical	Pass
2	9282.500	32.97	1.38	74.0	41.03	Peak	69.60	100	Vertical	Pass
2**	9282.500	22.04	1.38	54.0	31.96	AV	69.60	100	Vertical	Pass
3	11086.500	36.08	4.54	74.0	37.92	Peak	324.40	100	Vertical	Pass
3**	11086.500	25.49	4.54	54.0	28.51	AV	324.40	100	Vertical	Pass
4	12791.500	37.30	5.80	74.0	36.70	Peak	360.00	100	Vertical	Pass
4**	12791.500	27.91	5.80	54.0	26.09	AV	360.00	100	Vertical	Pass
5	15041.000	42.92	10.26	74.0	31.08	Peak	360.00	100	Vertical	Pass
5**	15041.000	32.37	10.26	54.0	21.63	AV	360.00	100	Vertical	Pass
6	17890.001	51.81	18.21	74.0	22.19	Peak	18.60	100	Vertical	Pass
6**	17890.001	41.33	18.21	54.0	12.67	AV	18.60	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.14.39

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

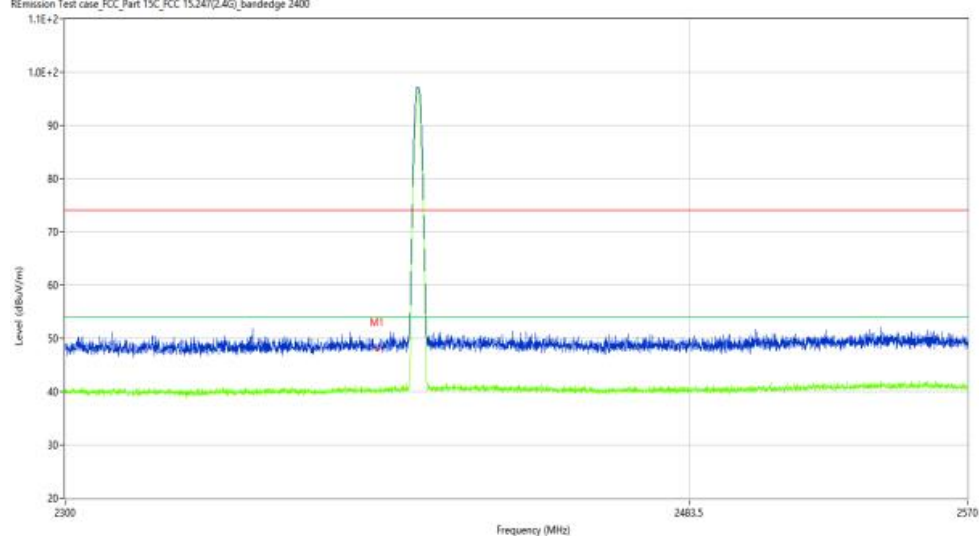

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.00	-10.58	74.0	26.00	Peak	245.43	100	H	Pass
1**	2390.000	40.31	-10.58	54.0	13.69	AV	245.43	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.45.29

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

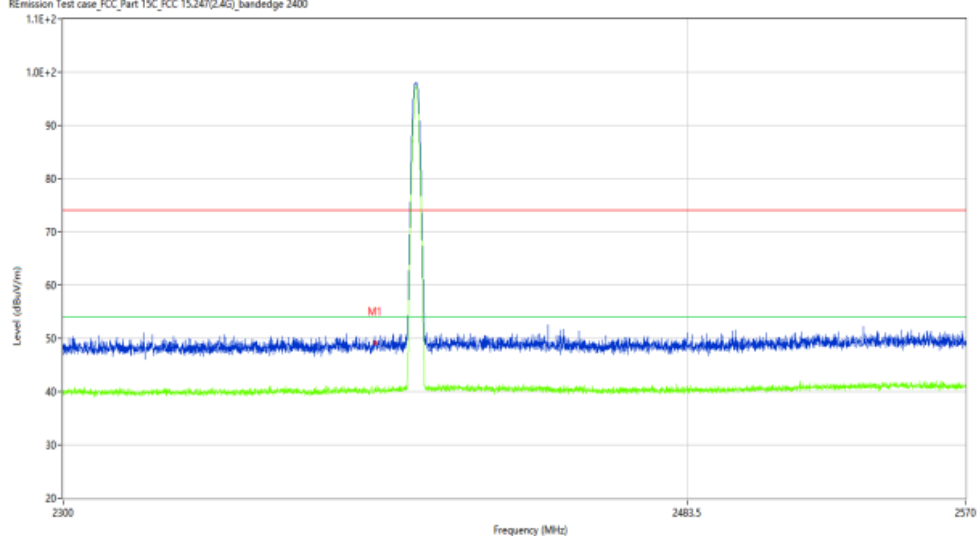

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.95	-10.58	74.0	25.05	Peak	235.03	100	V	Pass
1**	2390.000	40.54	-10.58	54.0	13.46	AV	235.03	100	V	Pass

BLE-Bandedge -High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.17.38

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

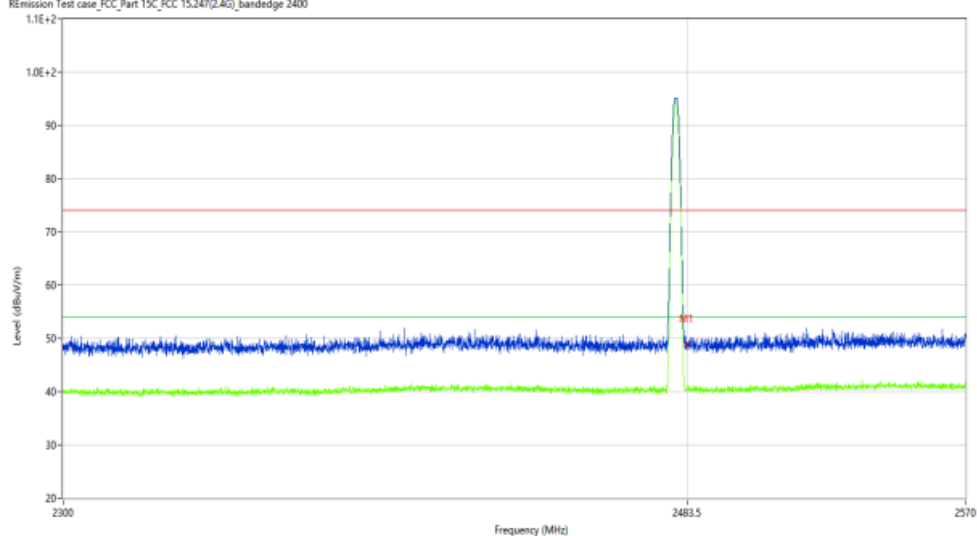

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.94	-10.56	74.0	25.06	Peak	90.58	100	H	Pass
1**	2483.500	40.53	-10.56	54.0	13.47	AV	90.58	100	H	Pass

BLE-Bandedge -High channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-26_18.47.53

EUT Name: PETKIT YUMSHARE SOLO 2 WITH
CAMERA SMART PET FEEDER

Test Engineer: XCJ

Manufacturer: PETKIT

Test Standard: FCC

Model: P572

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26030024-01#02

REmission Test case FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

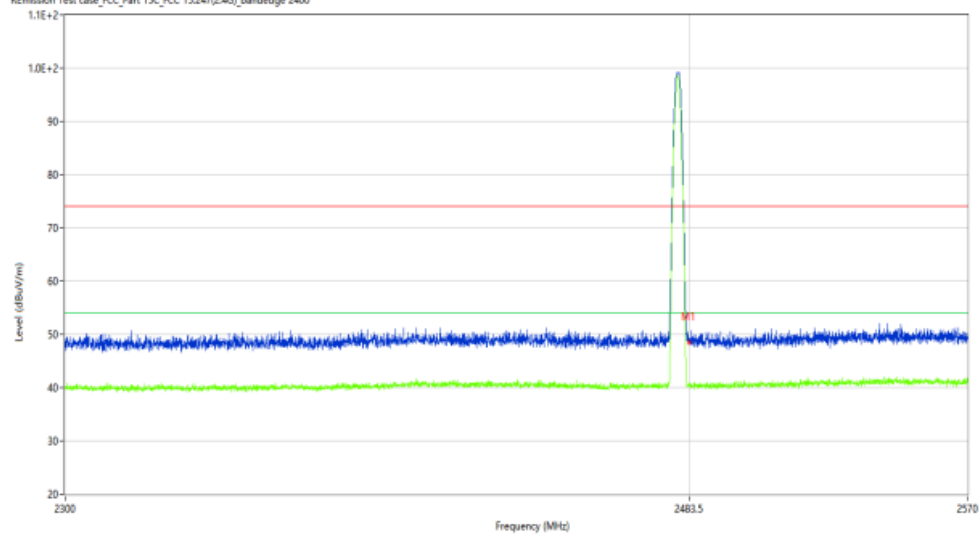

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.42	-10.56	74.0	25.58	Peak	208.43	100	V	Pass
1**	2483.500	40.55	-10.56	54.0	13.45	AV	208.43	100	V	Pass