

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-13_15.08.50

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: TX

Work Addition: TX


Temp.(oC): 23.1°C

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110009-01#04

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

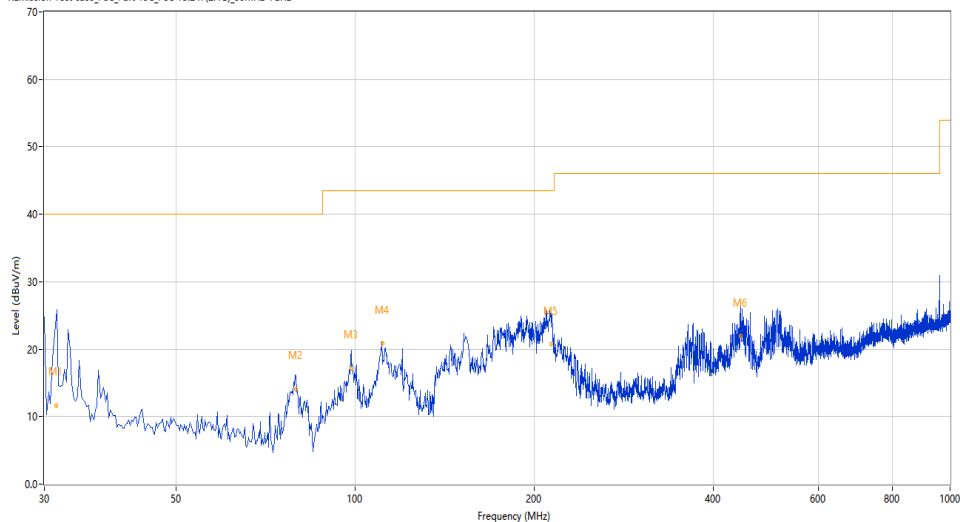

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.365	27.74	-27.63	40.0	12.26	Peak	152.40	257	Horizontal	Pass
1*	31.365	11.69	-27.63	40.0	28.31	QP	152.40	257	Horizontal	Pass
2	79.432	19.36	-30.35	40.0	20.64	Peak	28.90	222	Horizontal	Pass
2*	79.432	14.10	-30.35	40.0	25.90	QP	28.90	222	Horizontal	Pass
3	98.392	21.93	-25.49	43.5	21.57	Peak	264.70	102	Horizontal	Pass
3*	98.392	17.18	-25.49	43.5	26.32	QP	264.70	102	Horizontal	Pass
4	110.970	24.86	-25.30	43.5	18.64	Peak	264.70	280	Horizontal	Pass
4*	110.970	20.85	-25.30	43.5	22.65	QP	264.70	280	Horizontal	Pass
5	213.592	25.96	-24.81	43.5	17.54	Peak	240.90	101	Horizontal	Pass
5*	213.592	20.70	-24.81	43.5	22.80	QP	240.90	101	Horizontal	Pass
6	443.976	28.12	-18.32	46.0	17.88	Peak	149.80	102	Horizontal	Pass
6*	443.976	22.00	-18.32	46.0	24.00	QP	149.80	102	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-13_15.18.40

EUT Name: N.A

Manufacturer: N.A

Model: TX

Temp.(oC): 23.1 °C

Hum.: 45%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

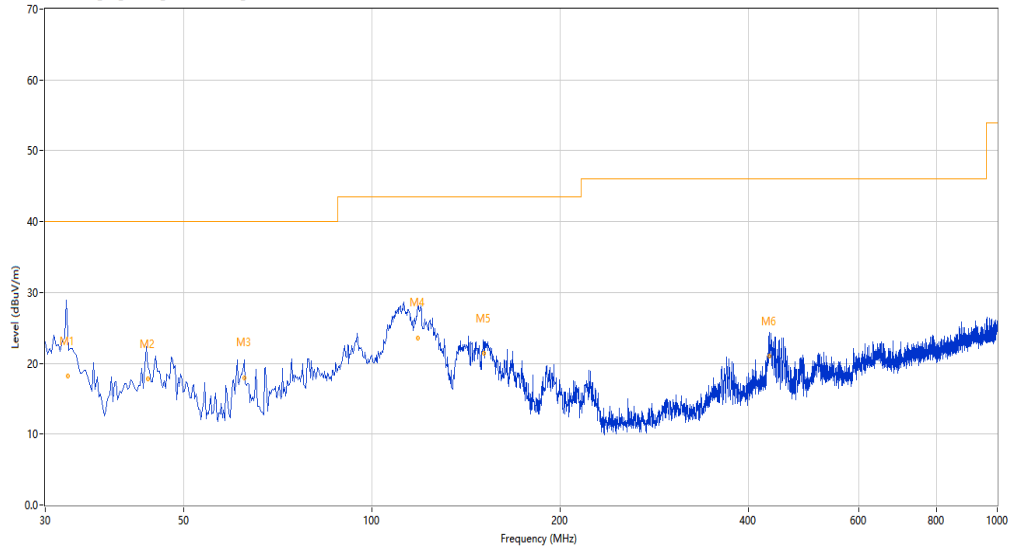

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.594	28.85	-27.41	40.0	11.15	Peak	347.80	100	Vertical	Pass
1*	32.594	18.17	-27.41	40.0	21.83	QP	347.80	100	Vertical	Pass
2	43.767	25.08	-24.12	40.0	14.92	Peak	14.40	215	Vertical	Pass
2*	43.767	17.75	-24.12	40.0	22.25	QP	14.40	215	Vertical	Pass
3	62.500	22.67	-25.57	40.0	17.33	Peak	58.30	105	Vertical	Pass
3*	62.500	17.90	-25.57	40.0	22.10	QP	58.30	105	Vertical	Pass
4	118.428	28.19	-26.64	43.5	15.31	Peak	0.60	100	Vertical	Pass
4*	118.428	23.59	-26.64	43.5	19.91	QP	0.60	100	Vertical	Pass
5	150.954	26.32	-28.38	43.5	17.18	Peak	304.20	184	Vertical	Pass
5*	150.954	21.37	-28.38	43.5	22.13	QP	304.20	184	Vertical	Pass
6	431.978	26.56	-18.19	46.0	19.44	Peak	213.10	100	Vertical	Pass
6*	431.978	20.96	-18.19	46.0	25.04	QP	213.10	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_16.43.48

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

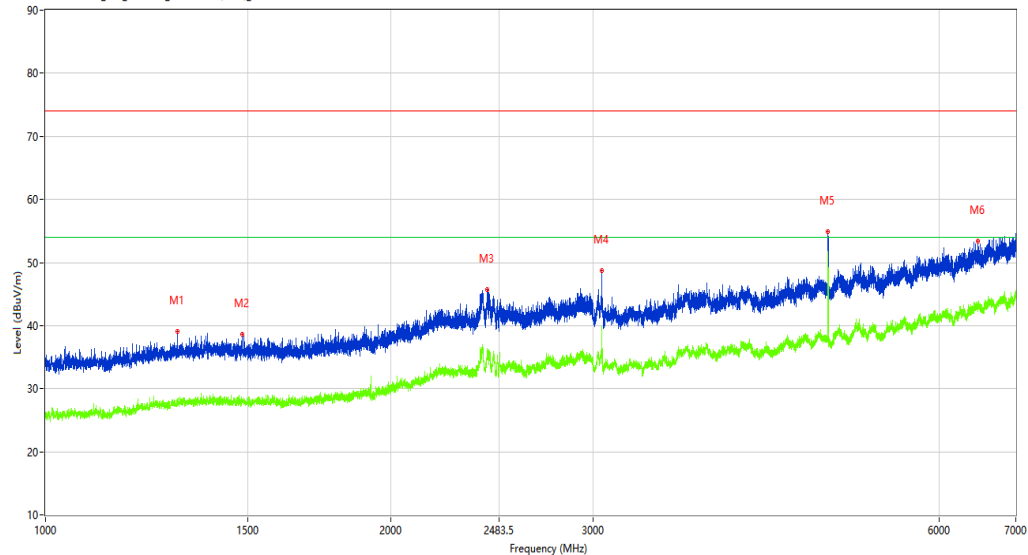

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1302.750	39.06	-13.82	74.0	34.94	Peak	358.10	100	Horizontal	Pass
1**	1302.750	27.52	-13.82	54.0	26.48	AV	358.10	100	Horizontal	Pass
2	1484.000	38.56	-13.68	74.0	35.44	Peak	359.60	100	Horizontal	Pass
2**	1484.000	27.83	-13.68	54.0	26.17	AV	359.60	100	Horizontal	Pass
3	2426.750	45.69	-5.71	74.0	28.31	Peak	288.30	100	Horizontal	Pass
3**	2426.750	36.06	-5.71	54.0	17.94	AV	288.30	100	Horizontal	Pass
4	3050.000	48.67	-4.72	74.0	25.33	Peak	360.00	100	Horizontal	Pass
4**	3050.000	39.95	-4.72	54.0	14.05	AV	360.00	100	Horizontal	Pass
5	4804.500	54.91	-1.60	74.0	19.09	Peak	168.70	100	Horizontal	Pass
5**	4804.500	51.75	-1.60	54.0	2.25	AV	168.70	100	Horizontal	Pass
6	6486.000	53.32	3.06	74.0	20.68	Peak	31.80	100	Horizontal	Pass
6**	6486.000	42.85	3.06	54.0	11.15	AV	31.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17.40.33

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

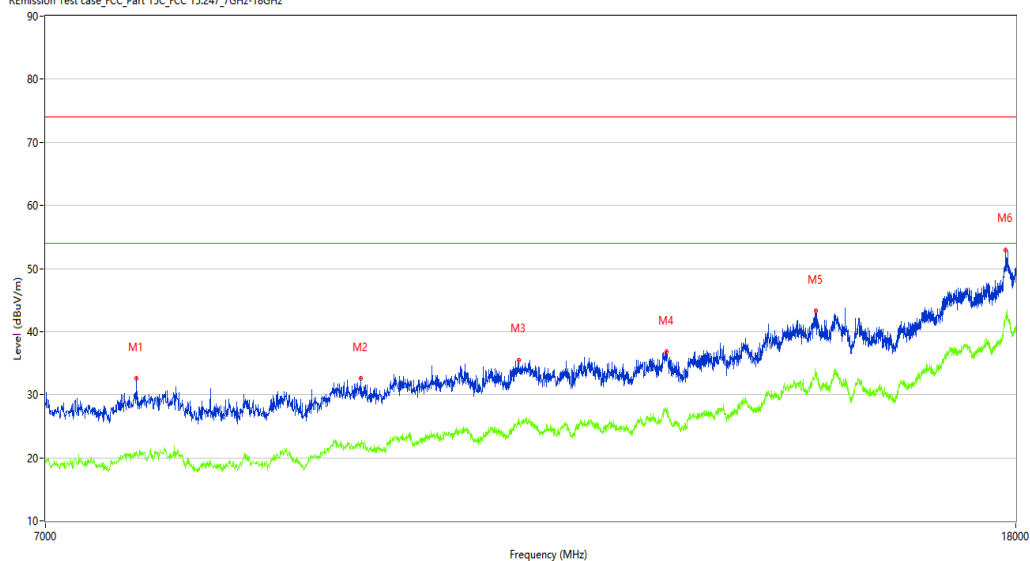

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7649.000	32.54	0.28	74.0	41.46	Peak	123.30	100	Horizontal	Pass
1**	7649.000	20.70	0.28	54.0	33.30	AV	123.30	100	Horizontal	Pass
2	9510.750	32.59	2.54	74.0	41.41	Peak	47.10	100	Horizontal	Pass
2**	9510.750	22.06	2.54	54.0	31.94	AV	47.10	100	Horizontal	Pass
3	11094.750	35.51	4.49	74.0	38.49	Peak	7.40	100	Horizontal	Pass
3**	11094.750	26.28	4.49	54.0	27.72	AV	7.40	100	Horizontal	Pass
4	12807.999	36.81	5.69	74.0	37.19	Peak	161.50	100	Horizontal	Pass
4**	12807.999	27.06	5.69	54.0	26.94	AV	161.50	100	Horizontal	Pass
5	14818.250	43.33	11.76	74.0	30.67	Peak	123.30	100	Horizontal	Pass
5**	14818.250	33.45	11.76	54.0	20.55	AV	123.30	100	Horizontal	Pass
6	17824.000	52.99	18.38	74.0	21.01	Peak	47.10	100	Horizontal	Pass
6**	17824.000	42.22	18.38	54.0	11.78	AV	47.10	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_16.35.27

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

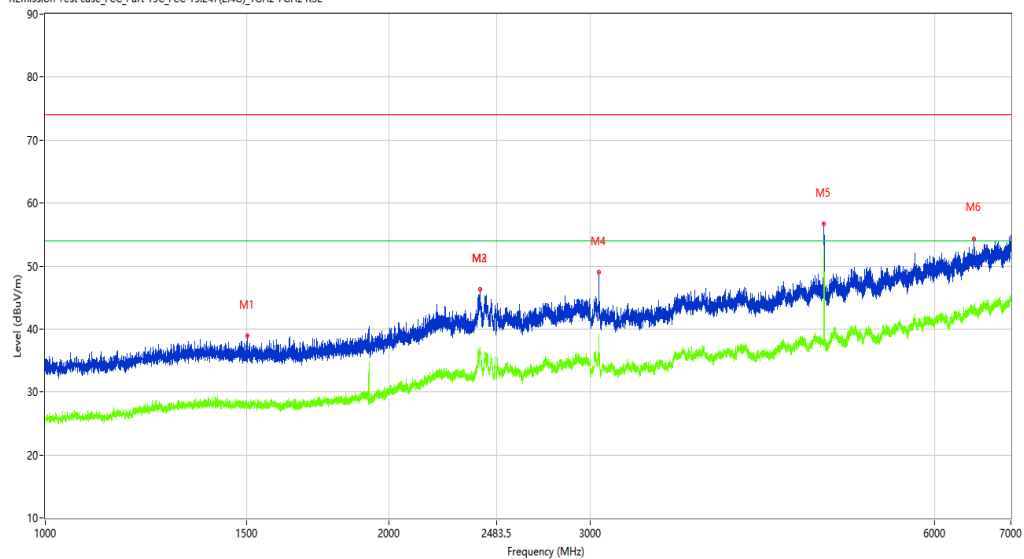

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1503.000	38.93	-13.64	74.0	35.07	Peak	41.20	100	Vertical	Pass
1**	1503.000	28.05	-13.64	54.0	25.95	AV	41.20	100	Vertical	Pass
2	2402.000	46.24	-4.78	74.0	27.76	Peak	87.90	100	Vertical	Pass
2**	2402.000	37.15	-4.78	54.0	16.85	AV	87.90	100	Vertical	Pass
3	2402.000	46.24	-4.78	74.0	27.76	Peak	87.90	100	Vertical	Pass
3**	2402.000	37.15	-4.78	54.0	16.85	AV	87.90	100	Vertical	Pass
4	3050.000	49.03	-4.72	74.0	24.97	Peak	46.60	100	Vertical	Pass
4**	3050.000	39.11	-4.72	54.0	14.89	AV	46.60	100	Vertical	Pass
5	4804.500	56.65	-1.60	74.0	17.35	Peak	267.30	100	Vertical	Pass
5**	4804.500	51.39	-1.60	54.0	2.61	AV	267.30	100	Vertical	Pass
6	6494.000	54.29	3.13	74.0	19.71	Peak	33.20	100	Vertical	Pass
6**	6494.000	43.18	3.13	54.0	10.82	AV	33.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17:34.46

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: CE

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

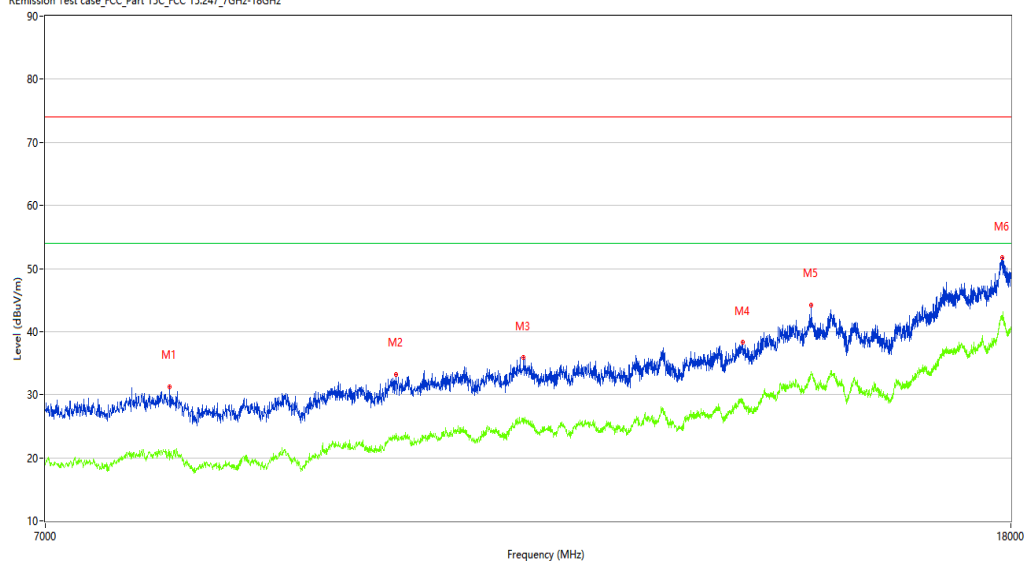

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7904.750	31.30	0.29	74.0	42.70	Peak	203.40	100	Vertical	Pass
1**	7904.750	21.01	0.29	54.0	32.99	AV	203.40	100	Vertical	Pass
2	9862.750	33.13	2.87	74.0	40.87	Peak	238.50	100	Vertical	Pass
2**	9862.750	23.83	2.87	54.0	30.17	AV	238.50	100	Vertical	Pass
3	11171.750	35.93	3.86	74.0	38.07	Peak	203.40	100	Vertical	Pass
3**	11171.750	26.25	3.86	54.0	27.75	AV	203.40	100	Vertical	Pass
4	13844.750	38.29	7.40	74.0	35.71	Peak	123.40	100	Vertical	Pass
4**	13844.750	29.16	7.40	54.0	24.84	AV	123.40	100	Vertical	Pass
5	14804.500	44.27	11.83	74.0	29.73	Peak	238.50	100	Vertical	Pass
5**	14804.500	33.67	11.83	54.0	20.33	AV	238.50	100	Vertical	Pass
6	17846.000	51.74	18.76	74.0	22.26	Peak	161.70	100	Vertical	Pass
6**	17846.000	42.48	18.76	54.0	11.52	AV	161.70	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_16.51.41

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

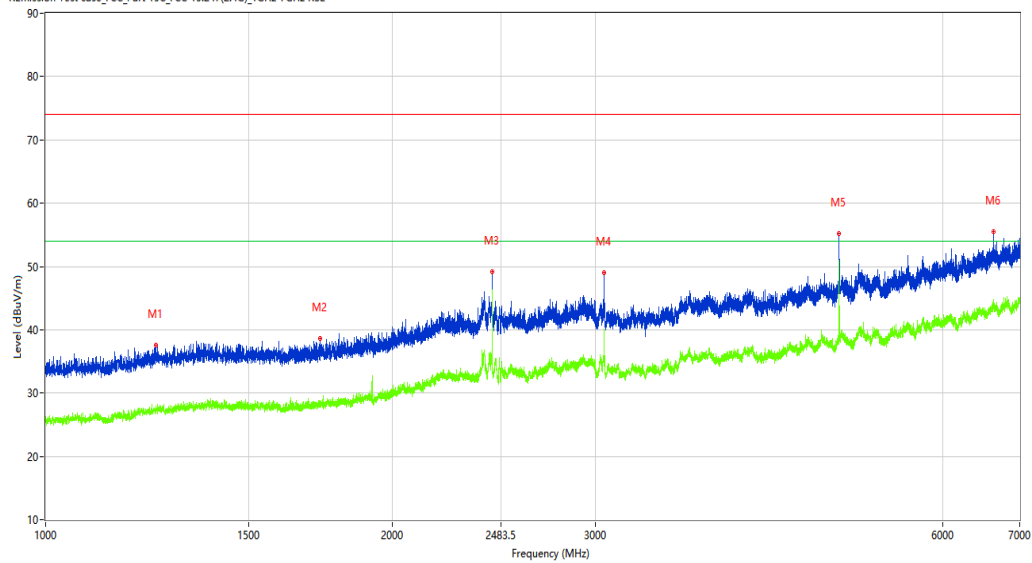

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1247.000	37.56	-13.91	74.0	36.44	Peak	180.90	100	Horizontal	Pass
1**	1247.000	27.89	-13.91	54.0	26.11	AV	180.90	100	Horizontal	Pass
2	1730.750	38.64	-12.95	74.0	35.36	Peak	293.70	100	Horizontal	Pass
2**	1730.750	28.74	-12.95	54.0	25.26	AV	293.70	100	Horizontal	Pass
3	2440.500	49.10	-5.96	74.0	24.90	Peak	55.60	100	Horizontal	Pass
3**	2440.500	44.79	-5.96	54.0	9.21	AV	55.60	100	Horizontal	Pass
4	3050.000	48.95	-4.72	74.0	25.05	Peak	116.00	100	Horizontal	Pass
4**	3050.000	40.07	-4.72	54.0	13.93	AV	116.00	100	Horizontal	Pass
5	4880.000	55.24	-0.58	74.0	18.76	Peak	127.60	100	Horizontal	Pass
5**	4880.000	50.99	-0.58	54.0	3.01	AV	127.60	100	Horizontal	Pass
6	6639.500	55.45	3.85	74.0	18.55	Peak	174.10	100	Horizontal	Pass
6**	6639.500	43.98	3.85	54.0	10.02	AV	174.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17.39.09

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

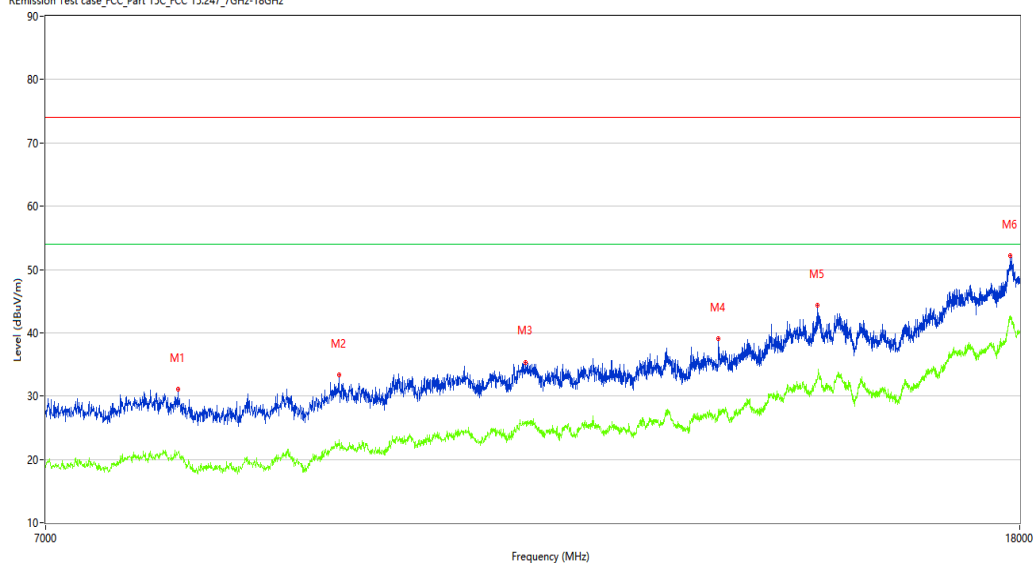

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7957.000	31.12	0.90	74.0	42.88	Peak	201.20	100	Horizontal	Pass
1**	7957.000	21.12	0.90	54.0	32.88	AV	201.20	100	Horizontal	Pass
2	9301.750	33.35	1.61	74.0	40.65	Peak	201.20	100	Horizontal	Pass
2**	9301.750	22.51	1.61	54.0	31.49	AV	201.20	100	Horizontal	Pass
3	11147.000	35.38	3.78	74.0	38.62	Peak	280.50	100	Horizontal	Pass
3**	11147.000	25.80	3.78	54.0	28.20	AV	280.50	100	Horizontal	Pass
4	13443.250	39.02	6.21	74.0	34.98	Peak	154.00	100	Horizontal	Pass
4**	13443.250	27.90	6.21	54.0	26.10	AV	154.00	100	Horizontal	Pass
5	14790.750	44.38	11.13	74.0	29.62	Peak	280.50	100	Horizontal	Pass
5**	14790.750	33.05	11.13	54.0	20.95	AV	280.50	100	Horizontal	Pass
6	17832.249	52.16	18.61	74.0	21.84	Peak	31.20	100	Horizontal	Pass
6**	17832.249	42.41	18.61	54.0	11.59	AV	31.20	100	Horizontal	Pass

BLE-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_17.25.52

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

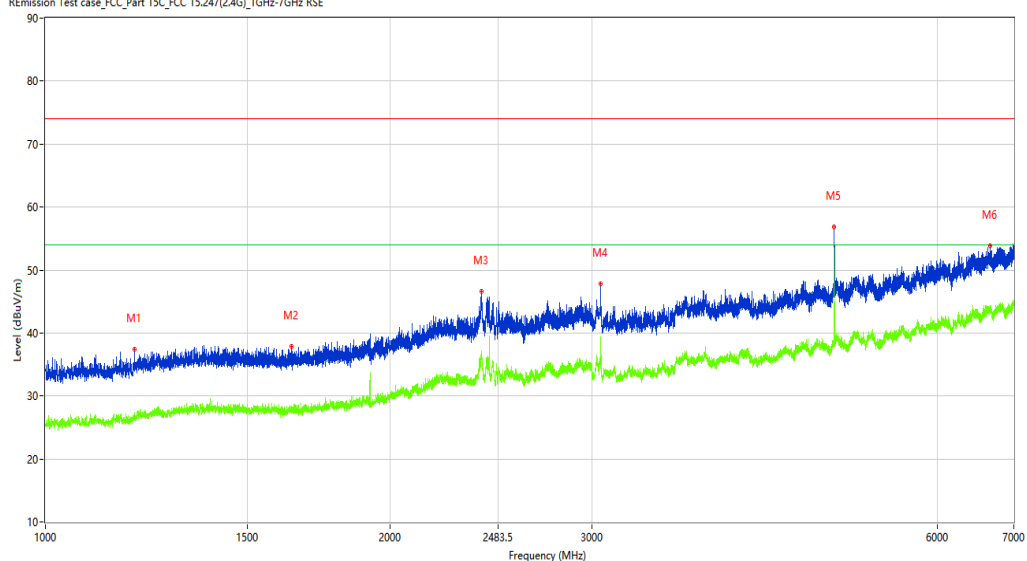

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.750	37.41	-14.46	74.0	36.59	Peak	38.20	100	Vertical	Pass
1**	1195.750	26.14	-14.46	54.0	27.86	AV	38.20	100	Vertical	Pass
2	1638.750	37.87	-13.67	74.0	36.13	Peak	248.50	100	Vertical	Pass
2**	1638.750	28.40	-13.67	54.0	25.60	AV	248.50	100	Vertical	Pass
3	2400.250	46.55	-4.78	74.0	27.45	Peak	248.50	100	Vertical	Pass
3**	2400.250	35.98	-4.78	54.0	18.02	AV	248.50	100	Vertical	Pass
4	3050.000	47.80	-4.72	74.0	26.20	Peak	95.70	100	Vertical	Pass
4**	3050.000	39.22	-4.72	54.0	14.78	AV	95.70	100	Vertical	Pass
5	4880.000	56.90	-0.58	74.0	17.10	Peak	30.80	100	Vertical	Pass
5**	4880.000	53.37	-0.58	54.0	0.63	AV	30.80	100	Vertical	Pass
6	6676.000	53.79	3.71	74.0	20.21	Peak	333.50	100	Vertical	Pass
6**	6676.000	43.72	3.71	54.0	10.28	AV	333.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17.32.00

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

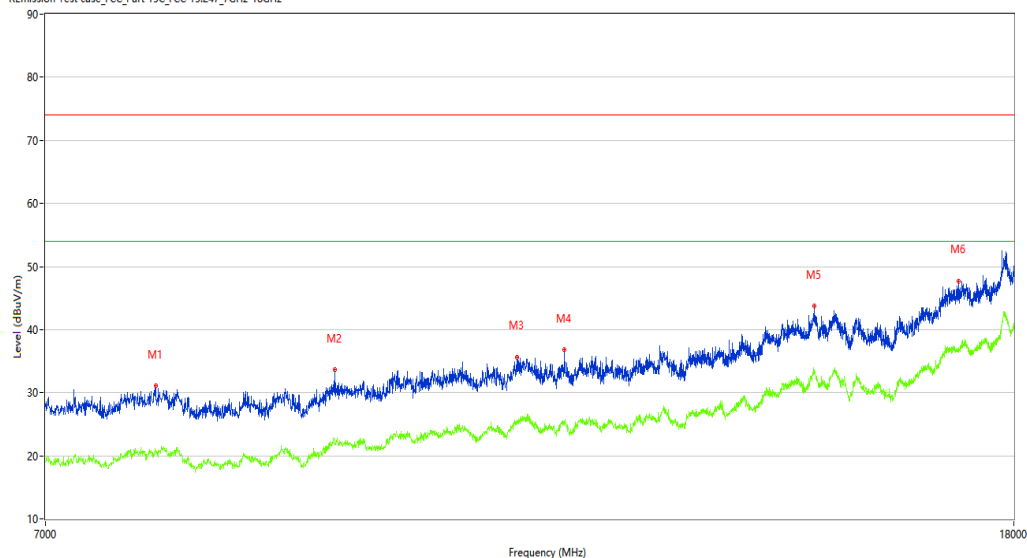

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7794.750	31.02	0.65	74.0	42.98	Peak	8.30	100	Vertical	Pass
1**	7794.750	20.23	0.65	54.0	33.77	AV	8.30	100	Vertical	Pass
2	9279.750	33.60	1.54	74.0	40.40	Peak	254.10	100	Vertical	Pass
2**	9279.750	22.67	1.54	54.0	31.33	AV	254.10	100	Vertical	Pass
3	11089.250	35.68	4.58	74.0	38.32	Peak	288.80	100	Vertical	Pass
3**	11089.250	25.67	4.58	54.0	28.33	AV	288.80	100	Vertical	Pass
4	11614.500	36.75	4.87	74.0	37.25	Peak	254.10	100	Vertical	Pass
4**	11614.500	25.38	4.87	54.0	28.62	AV	254.10	100	Vertical	Pass
5	14815.500	43.72	11.92	74.0	30.28	Peak	360.00	100	Vertical	Pass
5**	14815.500	33.36	11.92	54.0	20.64	AV	360.00	100	Vertical	Pass
6	17051.250	47.71	14.43	74.0	26.29	Peak	132.30	100	Vertical	Pass
6**	17051.250	37.00	14.43	54.0	17.00	AV	132.30	100	Vertical	Pass

BLE-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_16.57.57

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

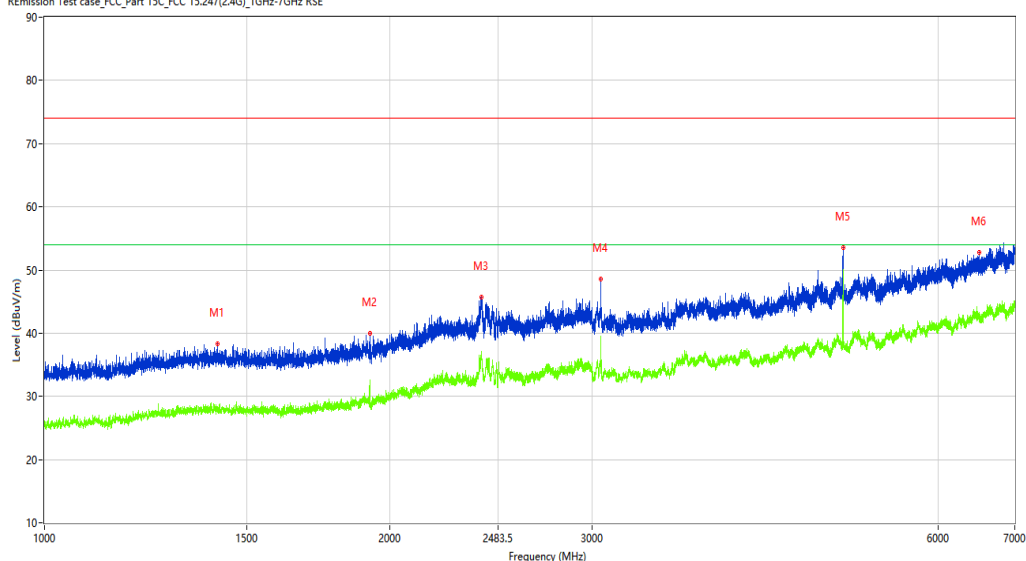

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1414.500	38.37	-13.38	74.0	35.63	Peak	319.10	100	Horizontal	Pass
1**	1414.500	27.71	-13.38	54.0	26.29	AV	319.10	100	Horizontal	Pass
2	1920.250	39.97	-12.27	74.0	34.03	Peak	247.00	100	Horizontal	Pass
2**	1920.250	31.88	-12.27	54.0	22.12	AV	247.00	100	Horizontal	Pass
3	2401.000	45.73	-4.78	74.0	28.27	Peak	164.20	100	Horizontal	Pass
3**	2401.000	37.07	-4.78	54.0	16.93	AV	164.20	100	Horizontal	Pass
4	3050.000	48.58	-4.72	74.0	25.42	Peak	311.50	100	Horizontal	Pass
4**	3050.000	39.49	-4.72	54.0	14.51	AV	311.50	100	Horizontal	Pass
5	4959.500	53.53	-0.85	74.0	20.47	Peak	172.90	100	Horizontal	Pass
5**	4959.500	48.27	-0.85	54.0	5.73	AV	172.90	100	Horizontal	Pass
6	6522.000	52.77	2.95	74.0	21.23	Peak	318.40	100	Horizontal	Pass
6**	6522.000	42.47	2.95	54.0	11.53	AV	318.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17.36.39

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

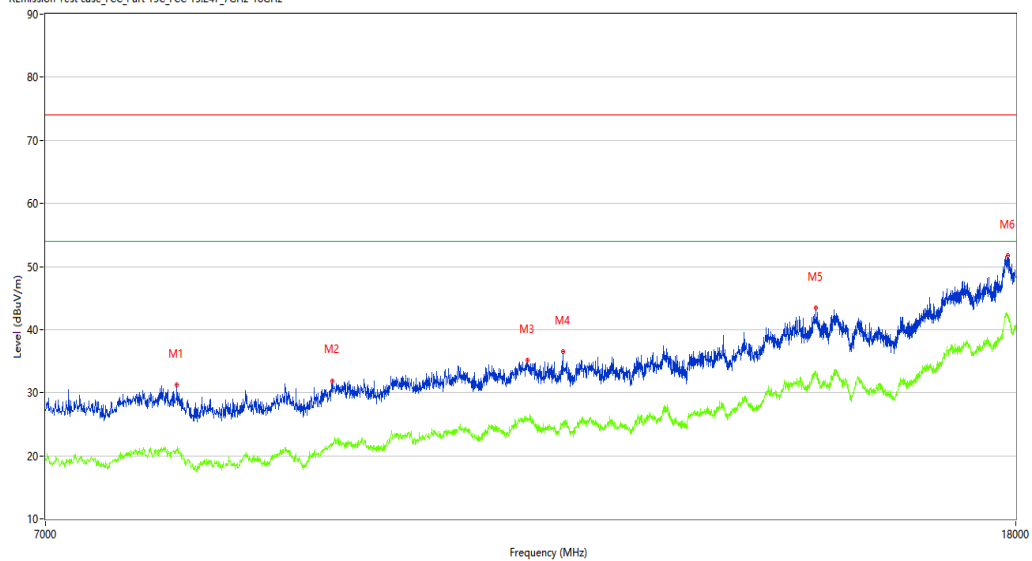

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7954.250	31.23	0.81	74.0	42.77	Peak	159.30	100	Horizontal	Pass
1**	7954.250	20.77	0.81	54.0	33.23	AV	159.30	100	Horizontal	Pass
2	9252.250	31.91	1.09	74.0	42.09	Peak	238.40	100	Horizontal	Pass
2**	9252.250	21.74	1.09	54.0	32.26	AV	238.40	100	Horizontal	Pass
3	11193.750	35.10	3.98	74.0	38.90	Peak	79.00	100	Horizontal	Pass
3**	11193.750	25.91	3.98	54.0	28.09	AV	79.00	100	Horizontal	Pass
4	11581.500	36.48	5.00	74.0	37.52	Peak	325.70	100	Horizontal	Pass
4**	11581.500	24.92	5.00	54.0	29.08	AV	325.70	100	Horizontal	Pass
5	14815.500	43.43	11.92	74.0	30.57	Peak	79.00	100	Horizontal	Pass
5**	14815.500	33.27	11.92	54.0	20.73	AV	79.00	100	Horizontal	Pass
6	17856.999	51.77	18.58	74.0	22.23	Peak	196.10	100	Horizontal	Pass
6**	17856.999	42.39	18.58	54.0	11.61	AV	196.10	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-01-19_17.07.10

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

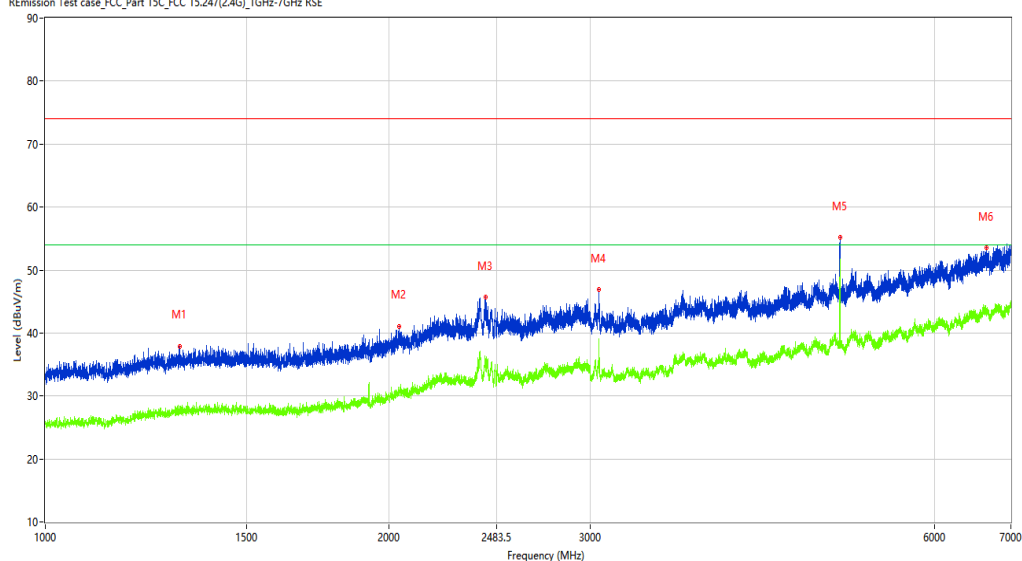

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1312.000	37.92	-13.55	74.0	36.08	Peak	113.10	100	Vertical	Pass
1**	1312.000	27.92	-13.55	54.0	26.08	AV	113.10	100	Vertical	Pass
2	2039.500	41.09	-10.85	74.0	32.91	Peak	113.10	100	Vertical	Pass
2**	2039.500	30.48	-10.85	54.0	23.52	AV	113.10	100	Vertical	Pass
3	2427.750	45.63	-5.72	74.0	28.37	Peak	311.20	100	Vertical	Pass
3**	2427.750	35.39	-5.72	54.0	18.61	AV	311.20	100	Vertical	Pass
4	3050.000	46.91	-4.72	74.0	27.09	Peak	360.00	100	Vertical	Pass
4**	3050.000	38.97	-4.72	54.0	15.03	AV	360.00	100	Vertical	Pass
5	4959.500	55.17	-0.85	74.0	18.83	Peak	37.90	100	Vertical	Pass
5**	4959.500	51.25	-0.85	54.0	2.75	AV	37.90	100	Vertical	Pass
6	6659.500	53.56	4.01	74.0	20.44	Peak	125.40	100	Vertical	Pass
6**	6659.500	43.31	4.01	54.0	10.69	AV	125.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-01-19_17:30.12

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-02#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

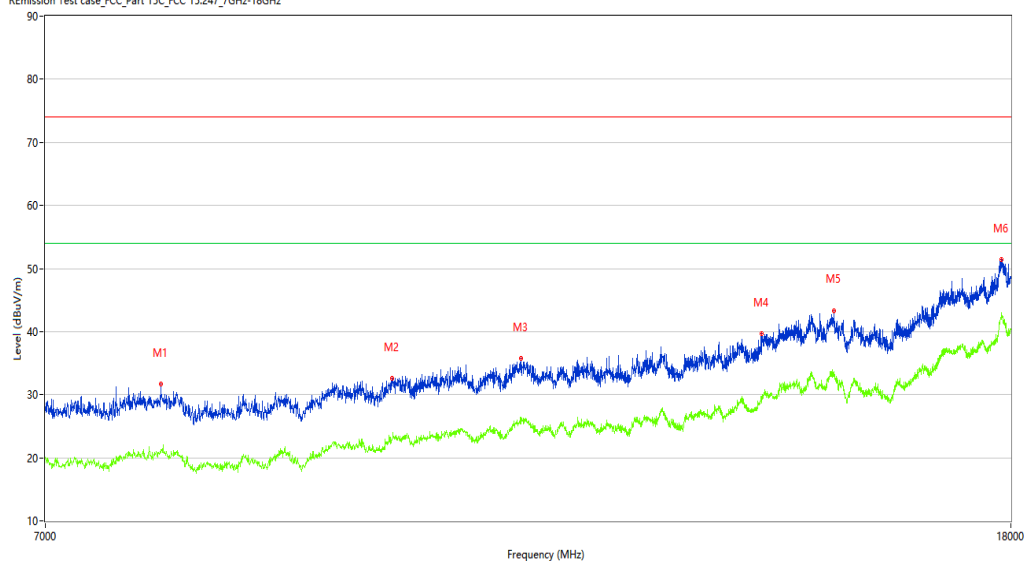

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7836.000	31.70	0.91	74.0	42.30	Peak	152.70	100	Vertical	Pass
1**	7836.000	21.23	0.91	54.0	32.77	AV	152.70	100	Vertical	Pass
2	9829.750	32.58	2.81	74.0	41.42	Peak	187.50	100	Vertical	Pass
2**	9829.750	22.89	2.81	54.0	31.11	AV	187.50	100	Vertical	Pass
3	11149.750	35.69	3.72	74.0	38.31	Peak	351.00	100	Vertical	Pass
3**	11149.750	25.87	3.72	54.0	28.13	AV	351.00	100	Vertical	Pass
4	14108.750	39.71	8.38	74.0	34.29	Peak	32.10	100	Vertical	Pass
4**	14108.750	29.42	8.38	54.0	24.58	AV	32.10	100	Vertical	Pass
5	15145.500	43.36	9.09	74.0	30.64	Peak	187.50	100	Vertical	Pass
5**	15145.500	33.48	9.09	54.0	20.52	AV	187.50	100	Vertical	Pass
6	17829.501	51.40	18.41	74.0	22.60	Peak	232.50	100	Vertical	Pass
6**	17829.501	42.01	18.41	54.0	11.99	AV	232.50	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2026-01-20_17.29.31

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

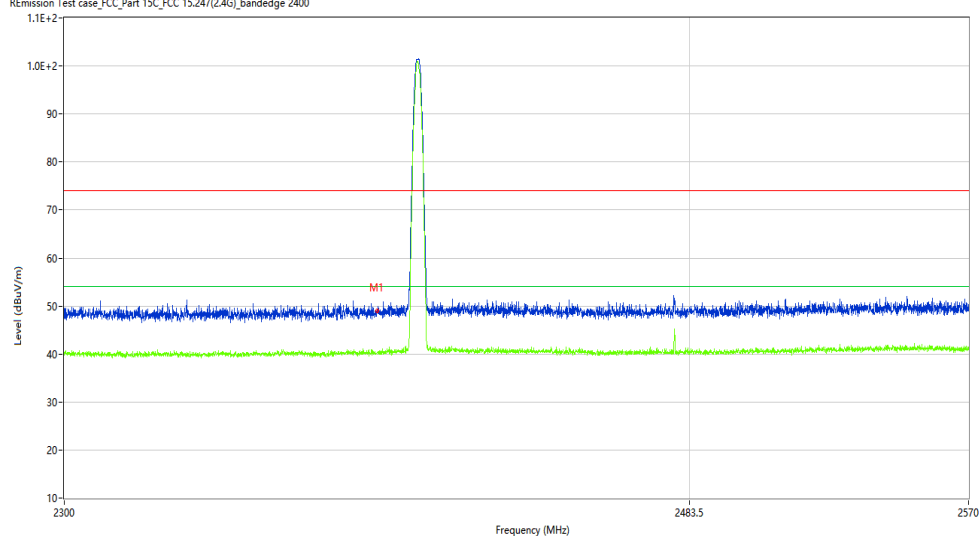

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.14	-10.58	74.0	24.86	Peak	310.13	100	H	Pass
1**	2390.000	40.30	-10.58	54.0	13.70	AV	310.13	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-01-20_17.21.30

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

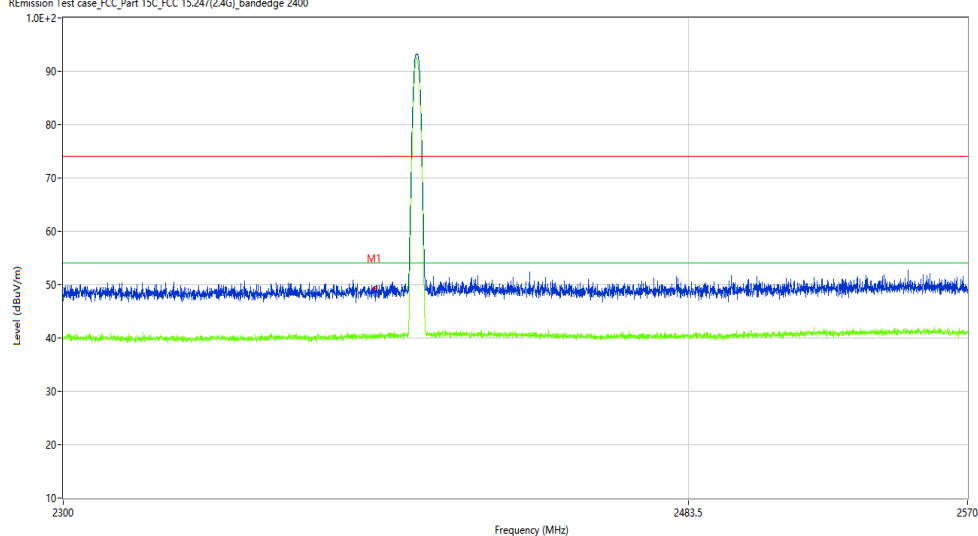

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.41	-10.58	74.0	24.59	Peak	117.24	100	V	Pass
1**	2390.000	40.53	-10.58	54.0	13.47	AV	117.24	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-01-20_17.27.55

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%


Test Engineer: SDC

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110009-01#04

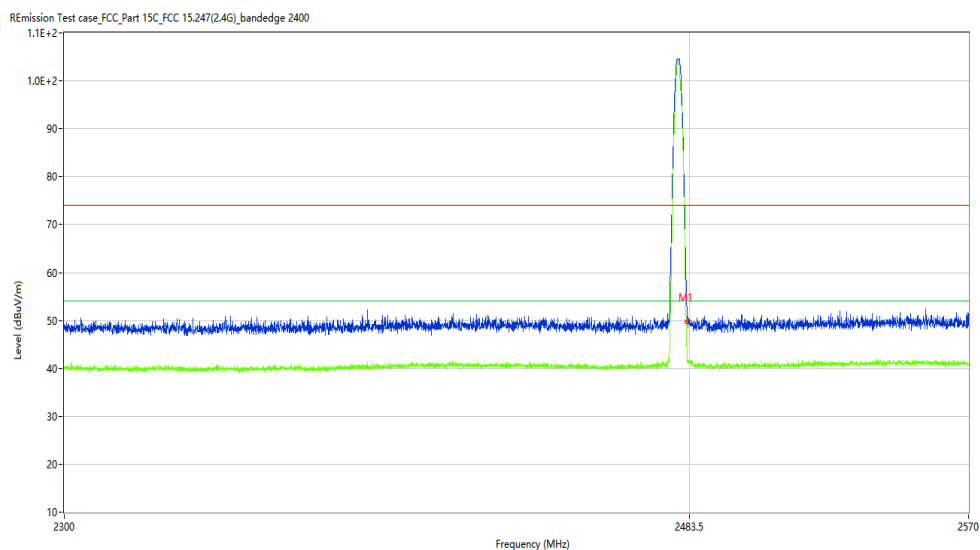

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.73	-10.56	74.0	24.27	Peak	198.41	100	H	Pass
1**	2483.500	41.43	-10.56	54.0	12.57	AV	198.41	100	H	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2026-01-20_17.24.53

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110009-01#04

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

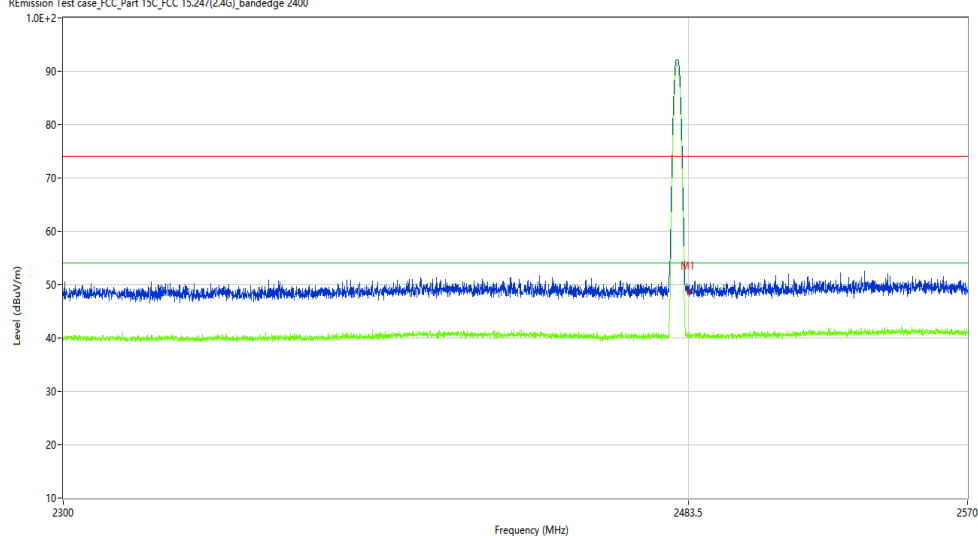

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.98	-10.56	74.0	25.02	Peak	240.49	100	V	Pass
1**	2483.500	40.60	-10.56	54.0	13.40	AV	240.49	100	V	Pass