

FCC Test Report

Product Name	Wireless image transmission module
Model No.	P301-D
FCC ID.	2A735-SIRASF1E

Applicant	Coretronic Intelligent Robotics Corporation
Address	No.11, Lixing Rd., East Dist., Hsinchu City 30078, Taiwan

Date of Receipt	May 27, 2022
Issued Date	Aug. 05, 2022
Report No.	2250839R-RFUSWL2V01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Aug. 05, 2022

Report No.: 2250839R-RFUSWL2V01-A




Product Name	Wireless image transmission module
Applicant	Coretronic Intelligent Robotics Corporation
Address	No.11, Lixing Rd., East Dist., Hsinchu City 30078, Taiwan
Manufacturer	Coretronic Intelligent Robotics Corporation
Model No.	P301-D
FCC ID.	2A735-SIRASF1E
EUT Rated Voltage	DC 5V by Test Fixture
EUT Test Voltage	DC 5V by Test Fixture
Trade Name	FLIR
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :




(Senior Project Specialist / Joanne Lin)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	6
1.3. Configuration of Tested System	6
1.4. EUT Exercise Software	6
1.5. Test Facility	7
1.6. List of Test Equipment.....	7
1.7. Uncertainty	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	11
2.3. Test Procedure	12
2.4. Test Result of Conducted Emission.....	12
3. PEAK POWER OUTPUT	14
3.1. Test Setup	14
3.2. Limit	14
3.3. Test Procedure	14
3.4. Test Result of Peak Power Output.....	15
4. RADIATED EMISSION	17
4.1. Test Setup	17
4.2. Limits.....	18
4.3. Test Procedure	19
4.4. Test Result of Radiated Emission.....	21
5. RF ANTENNA CONDUCTED TEST	25
5.1. Test Setup	25
5.2. Limits.....	25
5.3. Test Procedure	25
5.4. Test Result of RF Antenna Conducted Test.....	26
6. BAND EDGE	28
6.1. Test Setup	28
6.2. Limit	29
6.3. Test Procedure	29
6.4. Test Result of Band Edge	31
7. 6DB BANDWIDTH	35
7.1. Test Setup	35
7.2. Limits.....	35
7.3. Test Procedure	35
7.4. Test Result of 6dB Bandwidth.....	36
8. POWER DENSITY	38
8.1. Test Setup	38
8.2. Limits.....	38
8.3. Test Procedure	38
8.4. Test Result of Power Density	39
9. DUTY CYCLE	41
9.1. Test Setup	41
9.2. Test Procedure	41
9.3. Test Result of Duty Cycle.....	42

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2250839R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2250839R-RFUSWL2V01-A	V1.0	Initial issue of report.	Aug. 05, 2022

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless image transmission module
Trade Name	FLIR
Model No.	P301-D
FCC ID.	2A735-SIRASF1E
Frequency Range	5MBW & 10MBW: 2410-2470MHz
Channel Number	7CH
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	CIROCOMM	43N15C6V0W0010T	Dipole Antenna	4.0dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel: (5MBW & 10MBW)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2410 MHz	Channel 02:	2420 MHz	Channel 03:	2430 MHz	Channel 04:	2440 MHz
Channel 05:	2450 MHz	Channel 06:	2460 MHz	Channel 07:	2470 MHz		

Note:

1. The EUT is a Wireless image transmission module with built-in 2.4G and 5G transceiver, this report for 2.4G transceiver.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report
3. The spectrum plot against conducted item only shows the worst case.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
5. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

Test Mode	Mode 1: Transmit (5M-BW) Mode 2: Transmit (10M-BW)
-----------	---


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power Adapter	SPARK LIGHTING TECHNOLOGY CO., LTD	FJ-SW1203000T	N/A	N/A
2 Notebook PC	Lenovo	TP00067C	PF-0EW26J	N/A
3 Test Fixture	N/A	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A Power Cable	Non-shielded, 1.8m
B Power Cable	Non-shielded, 1.5m, with one ferrite core bonded.
C LAN Cable	Non-shielded, 0.3m
D LAN Cable	Non-shielded, 2m

1.3. Configuration of Tested System

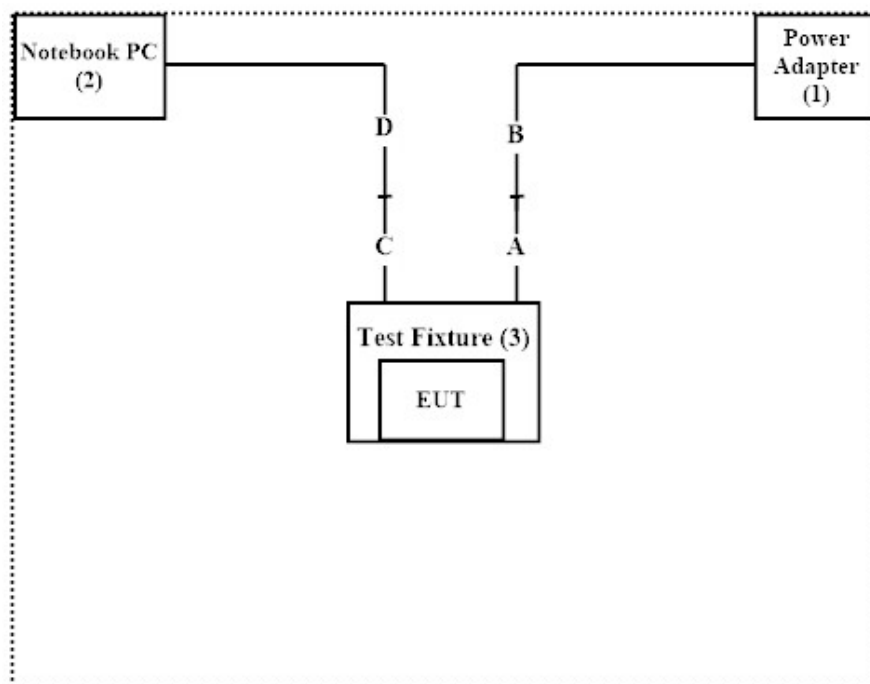

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software “ARSiriusPCTool v2.0.0-20200512” on the notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	27.0 °C
	Humidity (%RH)	10~90 %	48.7 %
Radiated Emission	Temperature (°C)	10~40 °C	21.5 °C
	Humidity (%RH)	10~90 %	54.1 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan
Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone number : +886-3-275-7255
Fax number : +866-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2022.06.23	2023.06.22
X	Two-Line V-Network	R&S	ENV216	101306	2022.05.23	2023.05.22
X	Two-Line V-Network	R&S	ENV216	101307	2022.07.04	2023.07.03
X	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022.05.24	2023.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : E3 210616 dekra V9.

For Conducted measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2021.12.27	2022.12.26
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2022.05.27	2023.05.26
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2022.05.19	2023.05.18
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2022.05.19	2023.05.18

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : RF Conducted Test Tools R3 V3.0.1.19

For Radiated measurements / HY-CB01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
	Loop Antenna	AMETEK	HLA6121	56736	2022.05.14	2023.05.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021.08.10	2022.08.09
	Horn Antenna	ETS-Lindgren	3117	00203761	2021.11.25	2022.11.24
	Horn Antenna	Com-Power	AH-840	101087	2021.06.18	2022.06.17
	Pre-Amplifier	SGH	0301	20211007-7	2021.01.20	2022.01.19
	Pre-Amplifier	EMCI	EMC051835SE	980312	2022.02.22	2023.02.21
	Pre-Amplifier	EMCI	EMC05820SE	980362	2021.08.24	2022.08.23
	Pre-Amplifier	EMCI	EMC184045SE	980369	2022.05.12	2023.05.11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G251	2021.09.16	2022.09.15
	Filter	MICRO TRONICS	BRM50716	G188	2021.09.16	2022.09.15
X	EMI Test Receiver	R&S	ESR	102792	2021.12.15	2022.12.14
	Spectrum Analyzer	R&S	FSV3044	101113	2022.01.25	2023.02.24
X	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2022.03.22	2023.03.21
	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : E3 210616 dekra V9.

For Radiated measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
	Loop Antenna	AMETEK	HLA6121	56736	2022.05.14	2023.05.13
	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2021.09.23	2022.09.22
X	Horn Antenna	ETS-Lindgren	3117	00227700	2021.11.09	2022.11.08
X	Horn Antenna	Com-Power	AH-840	101100	2021.10.04	2022.10.03
	Pre-Amplifier	EMCI	EMC001330	980302	2021.07.26	2022.07.25
	Pre-Amplifier	EMCI	EMC051835SE	980313	2021.11.24	2022.11.23
	Pre-Amplifier	EMCI	EMC05820SE	980310	2021.07.07	2022.07.06
	Pre-Amplifier	EMCI	EMC184045SE	980369	2022.05.12	2023.05.11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
X	Filter	MICRO TRONICS	BRM50702	G251	2021.09.16	2022.09.15
	Filter	MICRO TRONICS	BRM50716	G188	2021.09.16	2022.09.15
	EMI Test Receiver	R&S	ESR	102793	2021.12.15	2022.12.14
X	Spectrum Analyzer	R&S	FSV3044	101113	2022.01.25	2023.02.24
X	Coaxial Cable	SGH	SGH18	2021005-1	2022.03.18	2023.03.17
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	SGH18	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.89 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.06 dB	
Band Edge	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
6dB Bandwidth	± 1544.74 Hz	
Power Density	± 2.06 dB	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

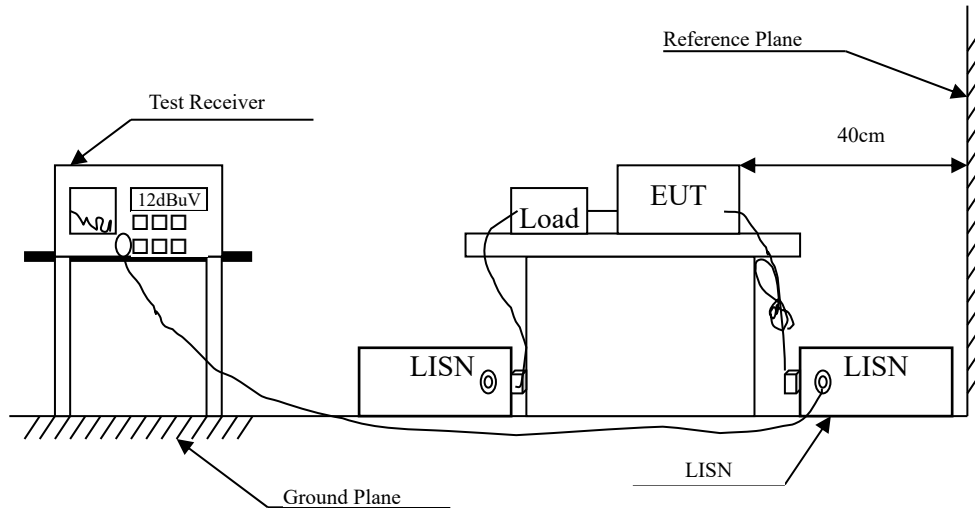

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

Mode 1: Transmit (5M-BW)

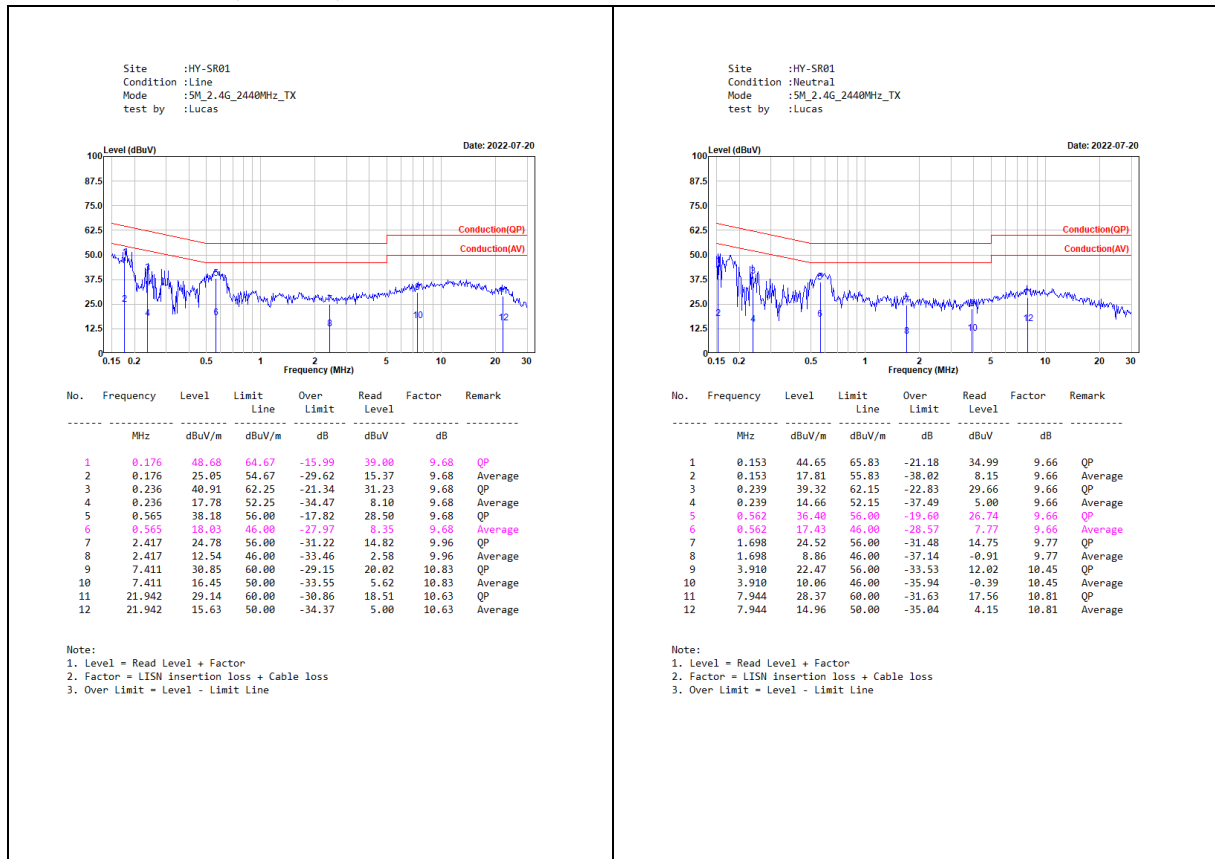


Mode 2: Transmit (10M-BW)

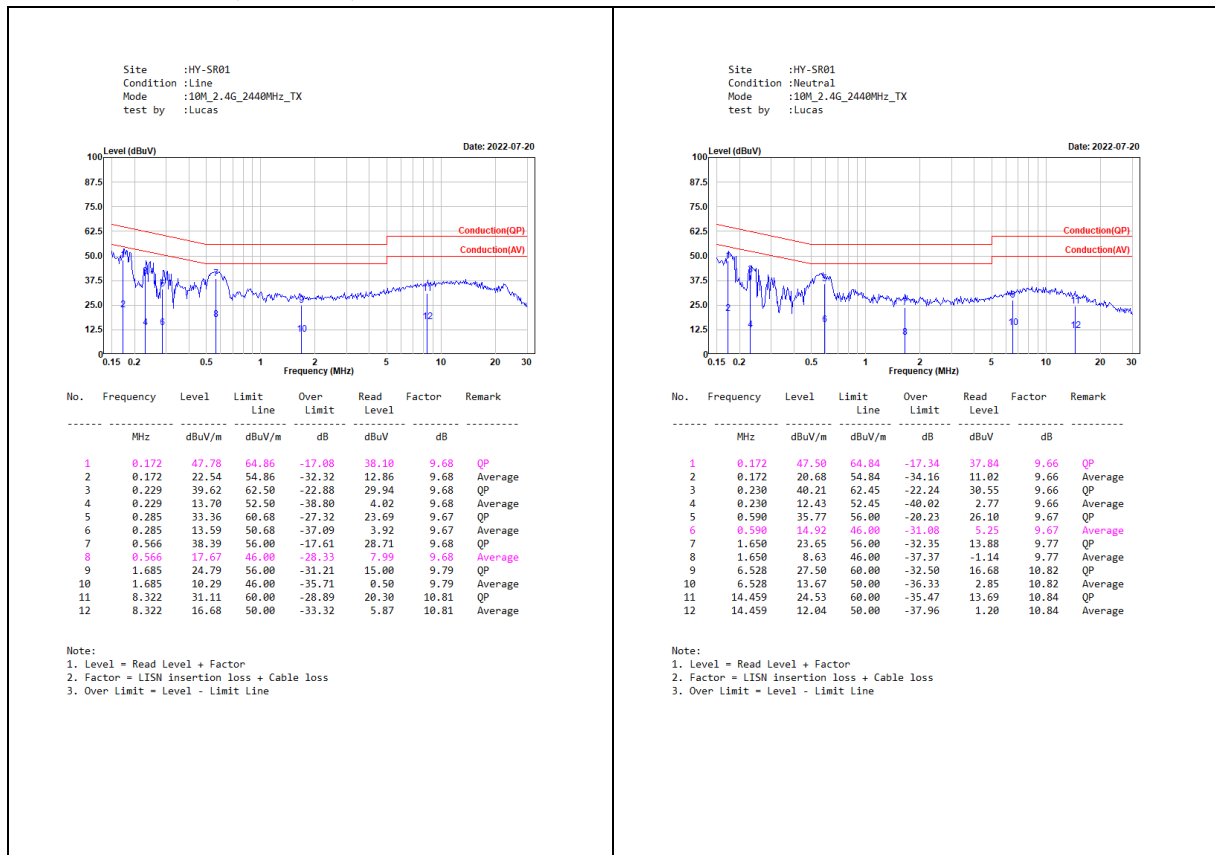

3. Peak Power Output

3.1. Test Setup

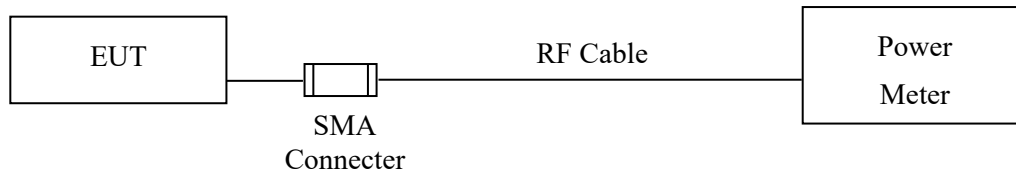

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output

Product : Wireless image transmission module
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit (5M-BW)
Test Date : 2022/07/26

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2410	25.10	25.37	28.25	30	Pass
4	2440	25.36	25.11	28.25	30	Pass
7	2470	22.69	23.00	25.86	30	Pass


Product : Wireless image transmission module
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit (10M-BW)
Test Date : 2022/07/26

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2410	22.04	22.43	25.25	30	Pass
4	2440	25.72	25.80	28.77	30	Pass
7	2470	19.89	20.16	23.04	30	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

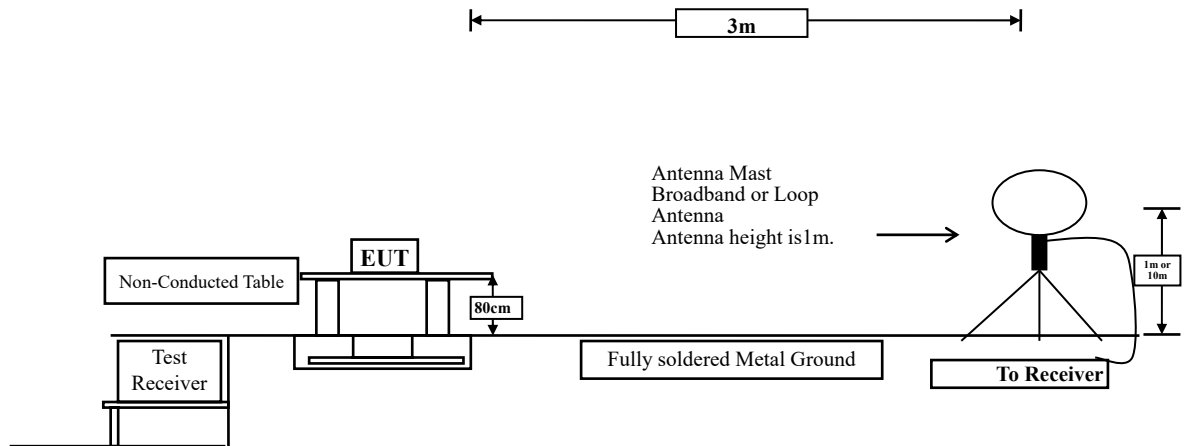

Radiated Emission Below 1GHz

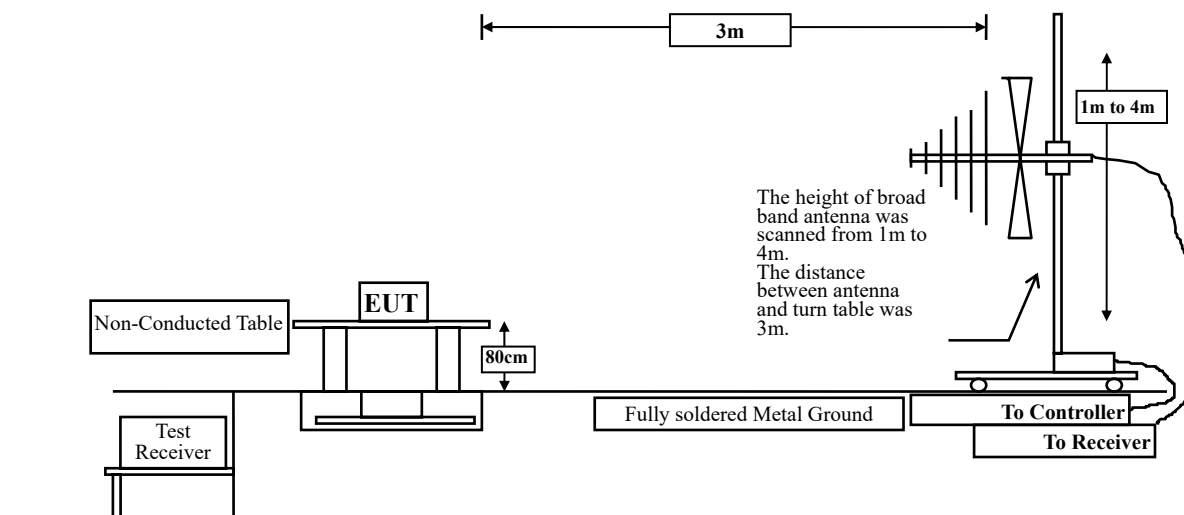

Radiated Emission Above 1GHz

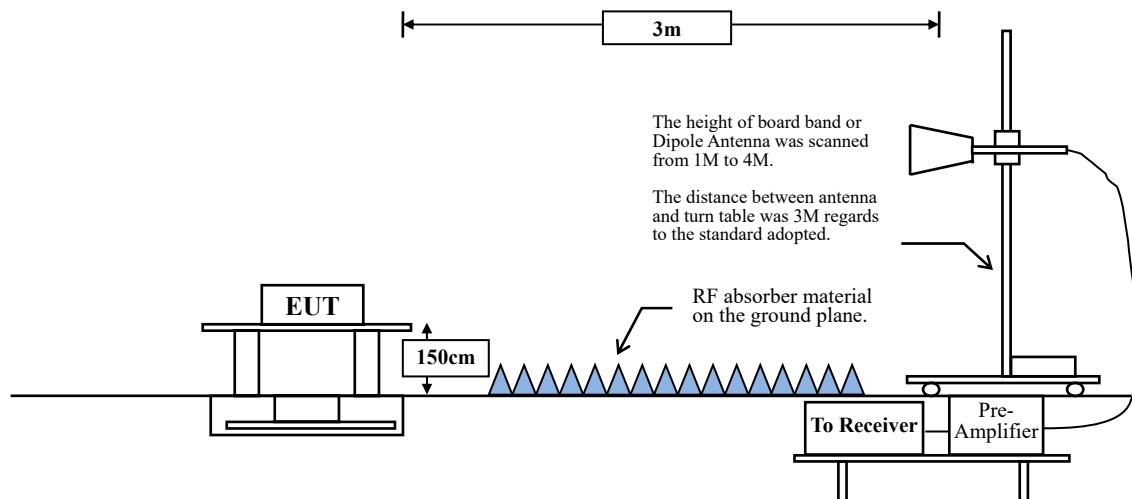

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$


(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
5M	89.74	5.3261	188	200
10M	89.74	5.3261	188	200

Note: Duty Cycle Refer to Section 9.

4.4. Test Result of Radiated Emission


Mode 1: Transmit (5M-BW)

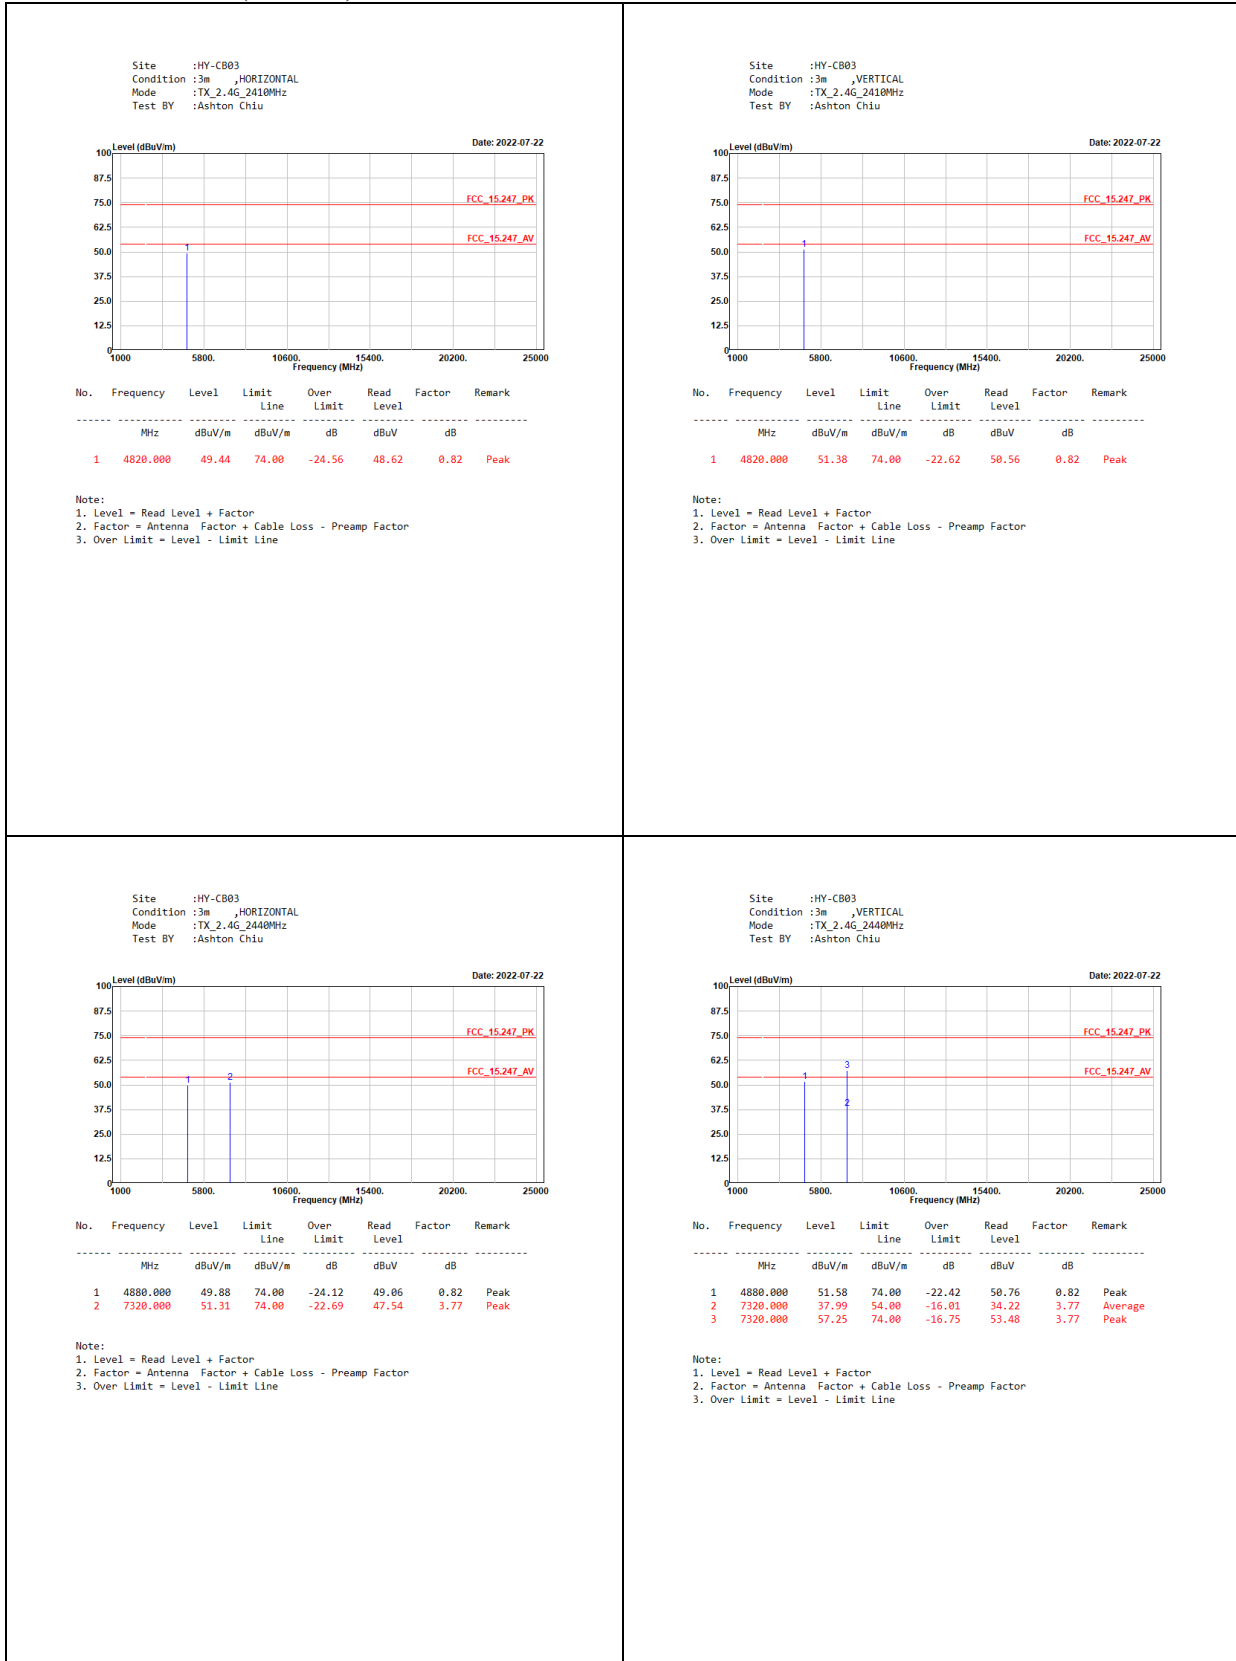



Mode 2: Transmit (10M-BW)


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

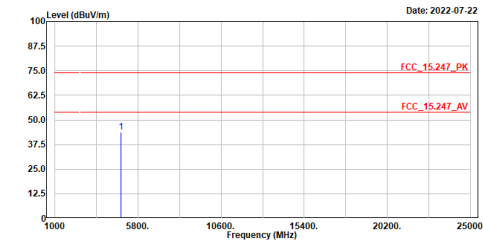

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4820.000	43.83	74.00	-30.17	43.01	0.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

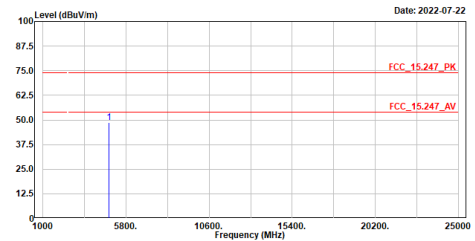

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4820.000	48.69	74.00	-25.31	47.87	0.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_2.4G_2440MHz
Test BY :Jing Chang

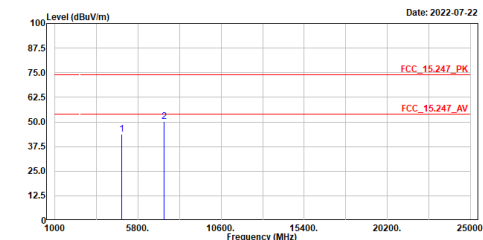

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4800.000	43.61	74.00	-30.39	42.79	0.82	Peak
2	7320.000	50.01	74.00	-23.99	46.24	3.77	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_2.4G_2440MHz
Test BY :Jing Chang

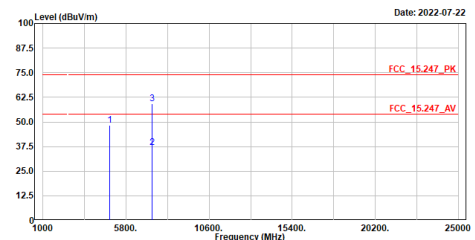


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4800.000	48.15	74.00	-25.85	47.33	0.82	Peak
2	7320.000	36.82	54.00	-17.18	33.05	3.77	Average
3	7320.000	59.08	74.00	-14.92	55.32	3.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

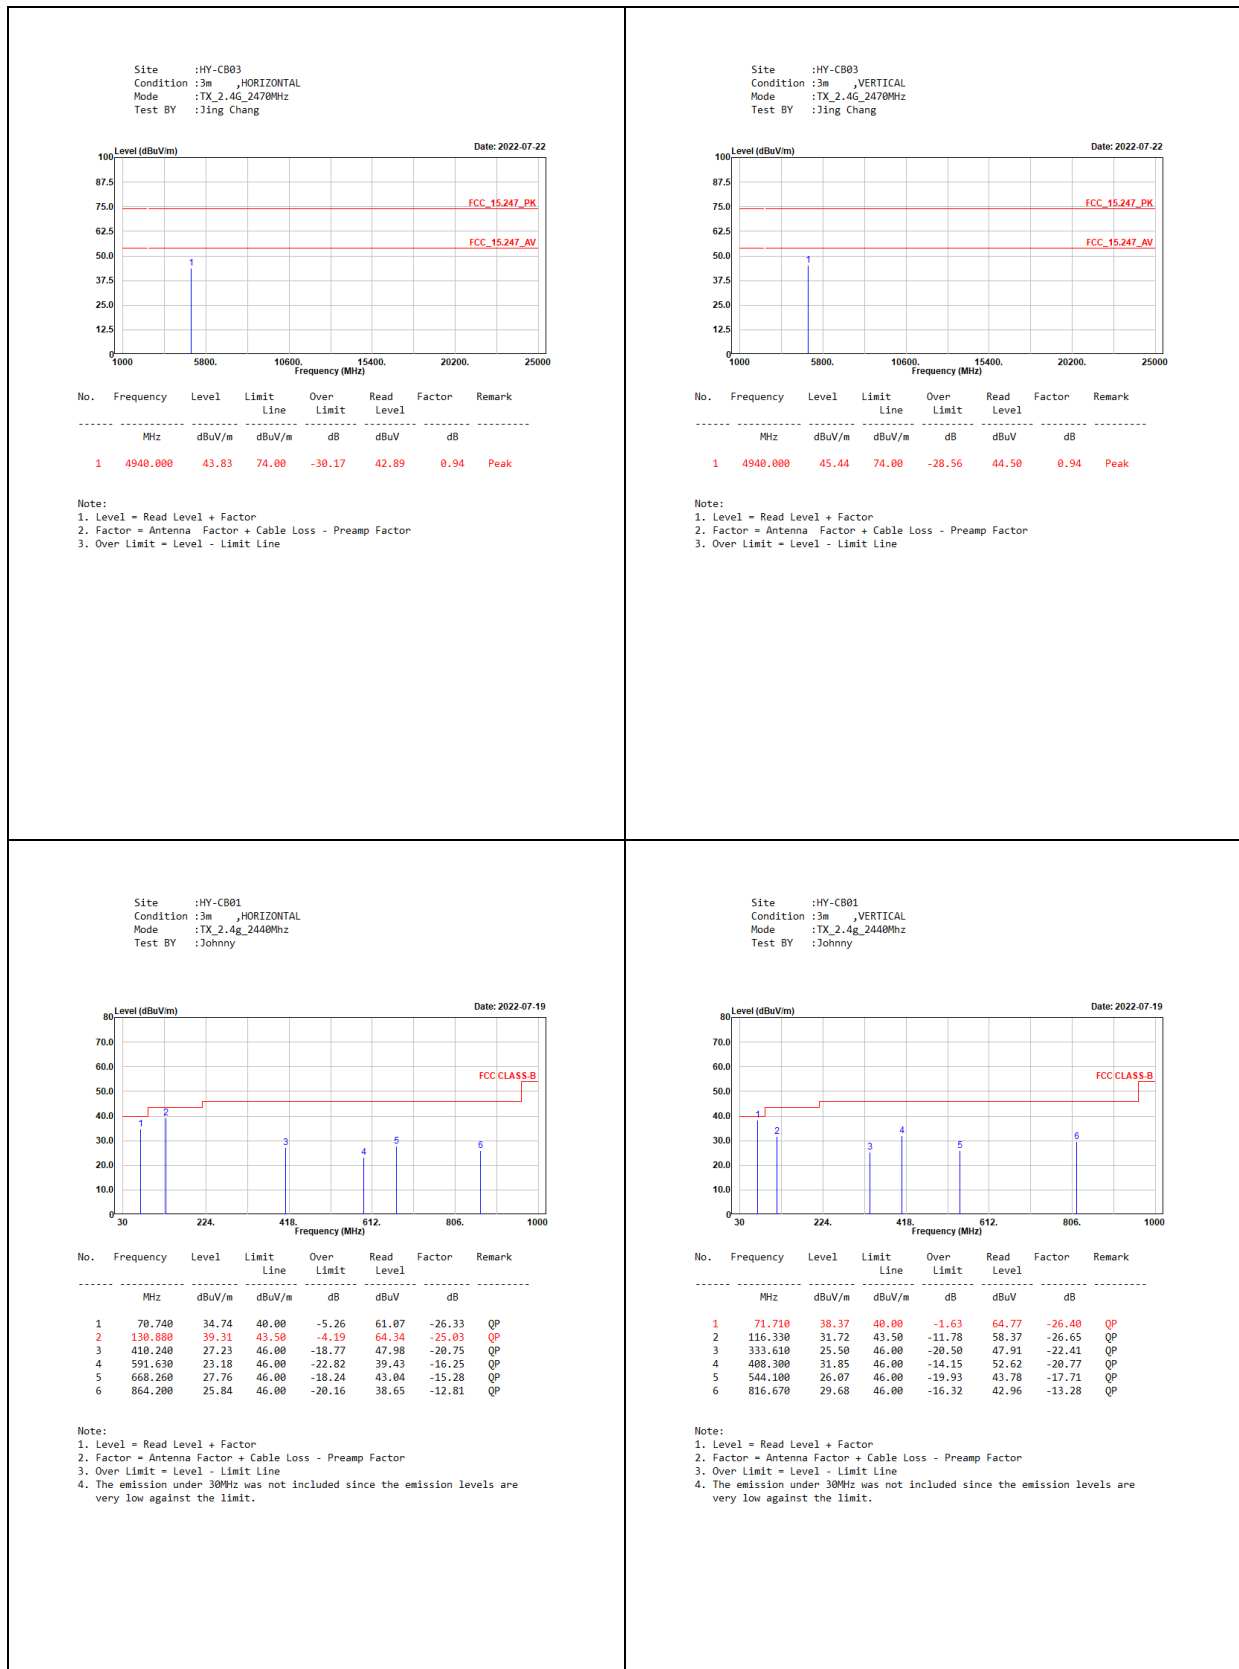

5. RF Antenna Conducted Test

5.1. Test Setup

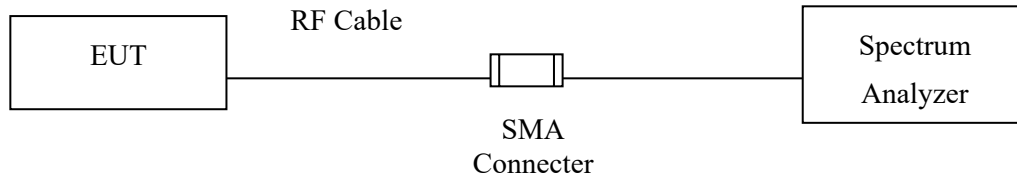

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : Wireless image transmission module
Test Item : RF Antenna Conducted Test
Test Mode : Mode 1: Transmit (5M-BW)


Figure Channel 1:

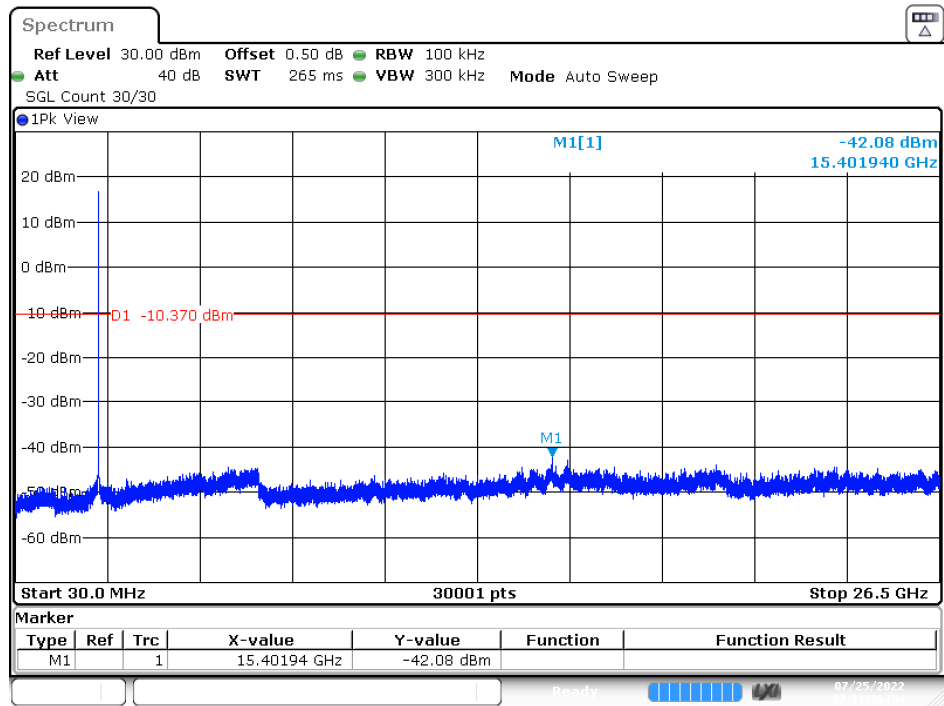

Date: 25.JUL.2022 19:11:36

Product : Wireless image transmission module
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 2: Transmit (10M-BW)

Figure Channel 4:

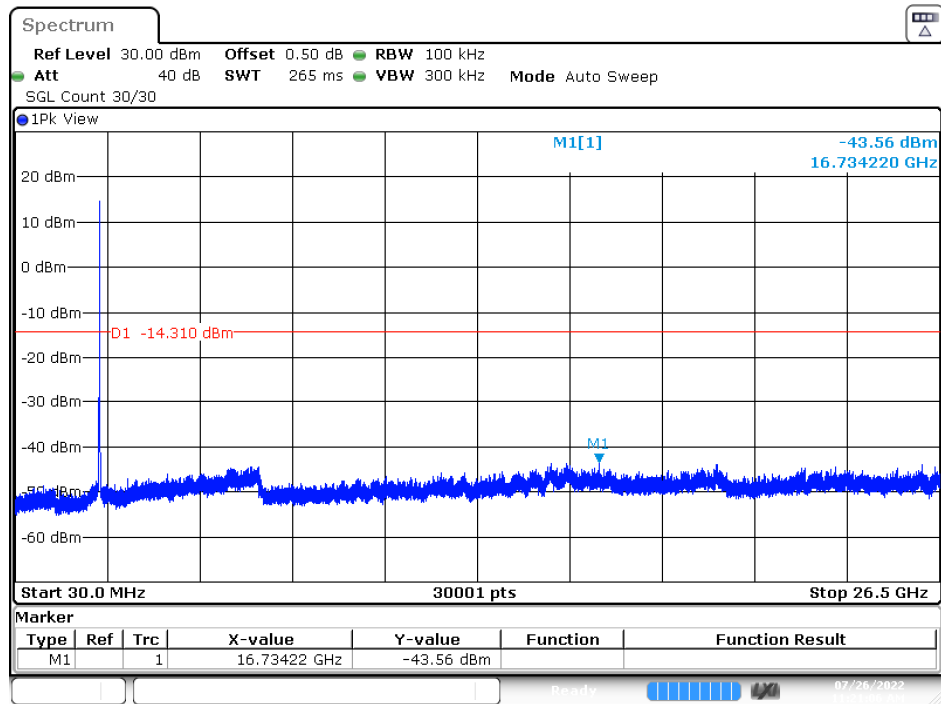


Date: 26 JUL 2022 11:21:06


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

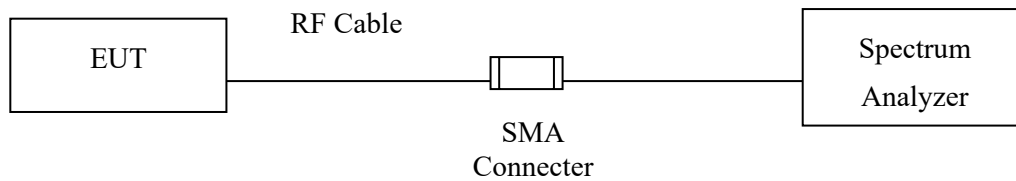

RF Radiated Measurement:

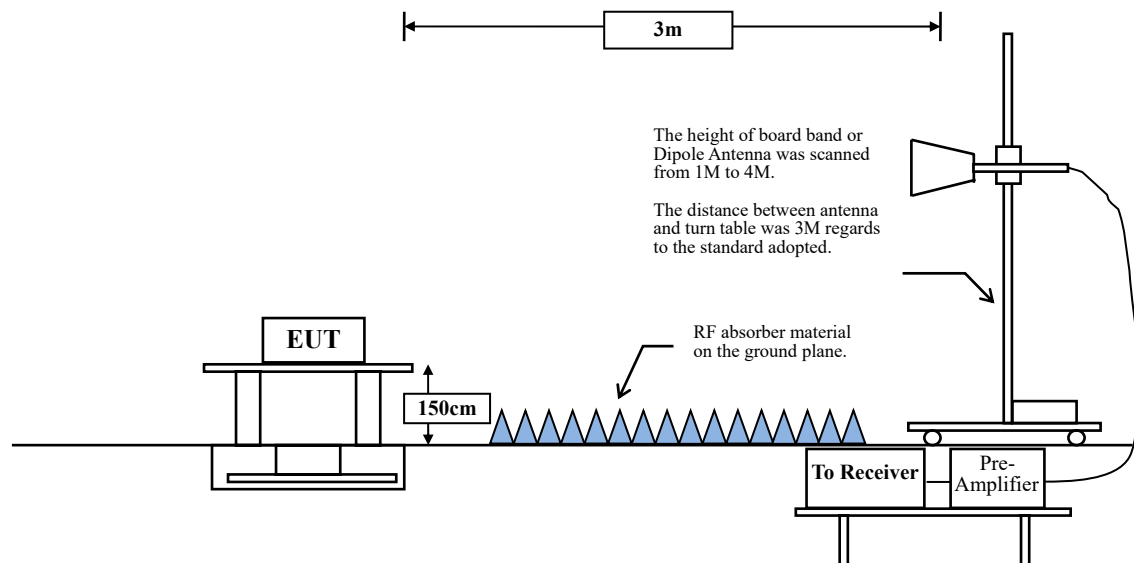

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
5M	89.74	5.3261	188	200
10M	89.74	5.3261	188	200

Note: Duty Cycle Refer to Section 9.

6.4. Test Result of Band Edge

Mode 1: Transmit (5M-BW)


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2410MHz
Test BY :Ashton Chiu

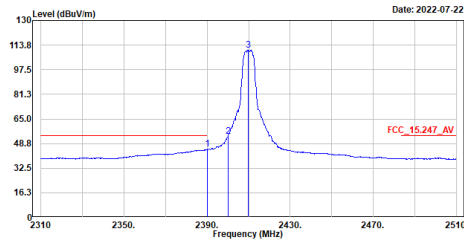

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	44.89	54.00	-9.11	33.14	11.75	Average
2	2400.000	53.51	-----	-----	41.70	11.81	Average
3	2409.000	110.33	-----	-----	98.51	11.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2410MHz
Test BY :Ashton Chiu

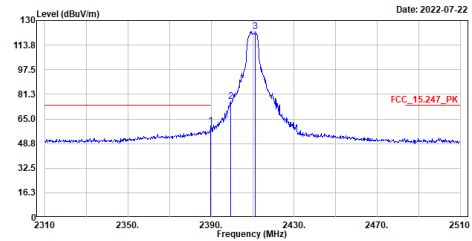

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	60.14	74.00	-13.86	48.39	11.75	Peak
2	2399.400	76.62	-----	-----	64.81	11.81	Peak
3	2411.200	122.77	-----	-----	110.95	11.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2410MHz
Test BY :Ashton Chiu

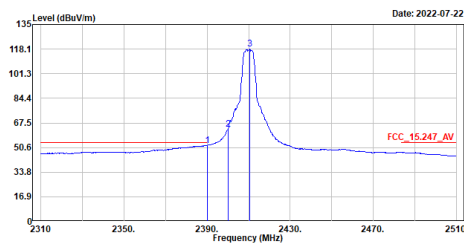

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	52.19	54.00	-1.81	40.44	11.75	Average
2	2400.000	62.98	-----	-----	51.17	11.81	Average
3	2410.400	117.95	-----	-----	106.13	11.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2410MHz
Test BY :Ashton Chiu

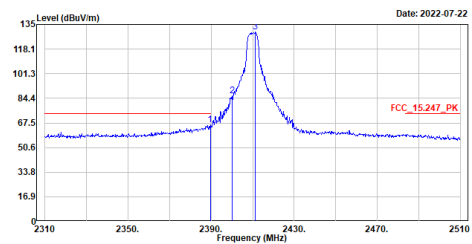

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.600	66.12	74.00	-7.88	54.37	11.75	Peak
2	2400.000	85.93	-----	-----	74.12	11.81	Peak
3	2411.400	129.66	-----	-----	117.84	11.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX 2.4G_2470MHz
Test BY :Ashton Chiu

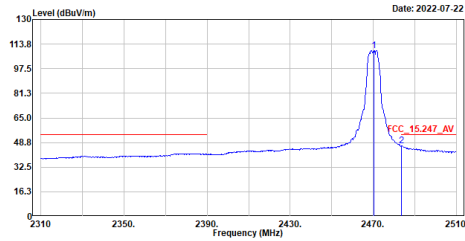

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2470.400	109.63	-----	-----	97.71	11.92	Average
2	2483.600	46.61	54.00	-7.39	34.66	11.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX 2.4G_2470MHz
Test BY :Ashton Chiu

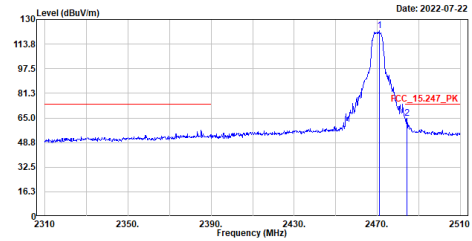

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2471.000	122.69	-----	-----	110.77	11.92	Peak
2	2484.200	64.59	74.00	-9.41	52.64	11.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX 2.4G_2470MHz
Test BY :Ashton Chiu

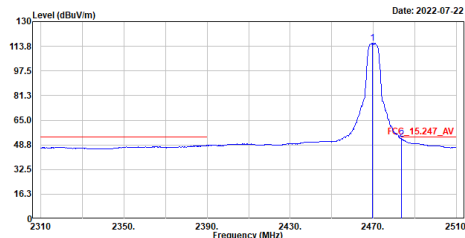

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2469.600	115.74	-----	-----	103.82	11.92	Average
2	2483.600	52.58	54.00	-1.42	40.63	11.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX 2.4G_2470MHz
Test BY :Ashton Chiu

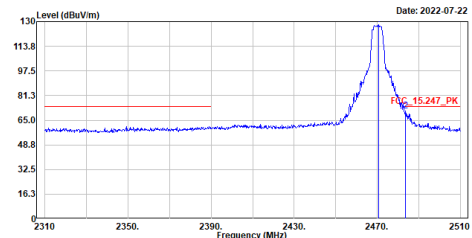


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2470.600	128.14	-----	-----	116.22	11.92	Peak
2	2483.600	71.05	74.00	-2.95	59.10	11.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Mode 2: Transmit (10M-BW)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

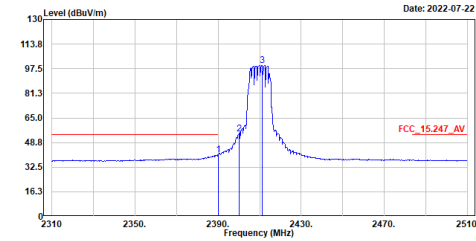


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	40.54	54.00	-13.46	28.79	11.75	Average
2	2400.000	54.40	-----	-----	42.59	11.81	Average
3	2411.000	99.61	-----	-----	87.79	11.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

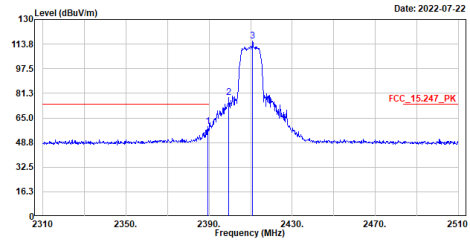


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.400	59.58	74.00	-14.42	47.83	11.75	Peak
2	2399.600	78.34	-----	-----	66.53	11.81	Peak
3	2411.000	115.53	-----	-----	103.71	11.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

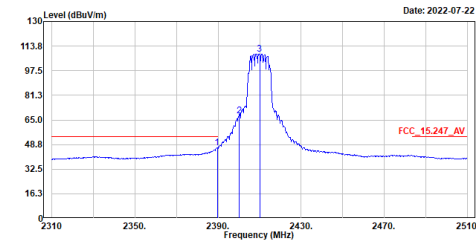


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.600	46.58	54.00	-7.42	34.83	11.75	Average
2	2400.000	67.94	-----	-----	56.13	11.81	Average
3	2410.000	108.66	-----	-----	96.84	11.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2410MHz
Test BY :Jing Chang

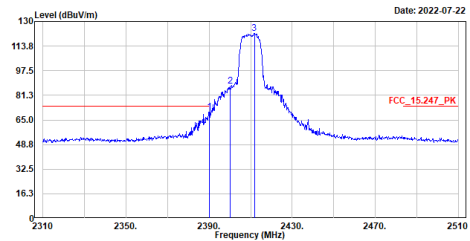


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	70.24	74.00	-3.76	58.49	11.75	Peak
2	2400.000	87.36	-----	-----	75.55	11.81	Peak
3	2411.000	121.98	-----	-----	110.16	11.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2470MHz
Test BY :Jing Chang

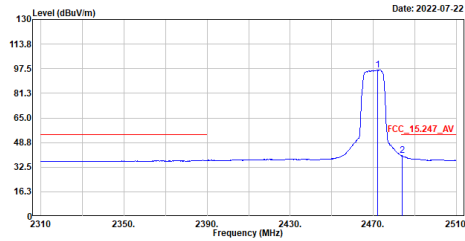

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2472.200	96.74	-----	-----	84.82	11.92	Average
2	2483.000	40.00	54.00	-14.00	28.05	11.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_2.4G_2470MHz
Test BY :Jing Chang

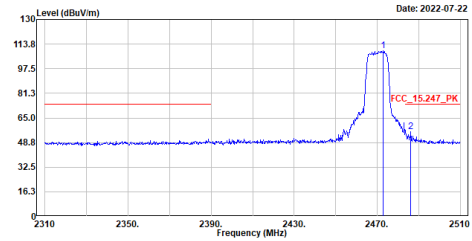

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2473.000	109.34	-----	-----	97.42	11.92	Peak
2	2486.200	56.17	74.00	-17.83	44.22	11.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2470MHz
Test BY :Jing Chang

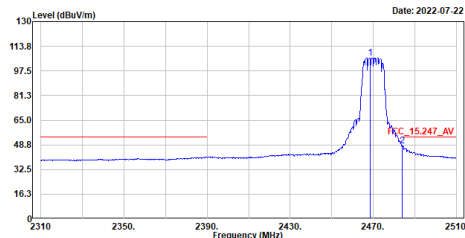

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2468.400	106.04	-----	-----	94.13	11.91	Average
2	2484.000	48.27	54.00	-5.73	36.32	11.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_2.4G_2470MHz
Test BY :Jing Chang

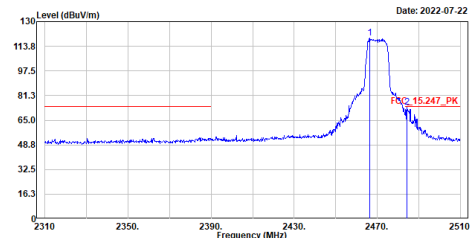


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2466.400	119.34	-----	-----	107.43	11.91	Peak
2	2484.200	73.61	74.00	-0.39	61.66	11.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

7. 6dB Bandwidth

7.1. Test Setup

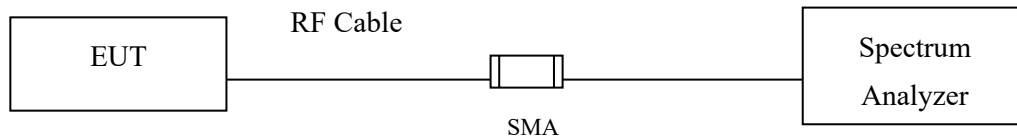

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : Wireless image transmission module
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (5M-BW)


Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2410	4796	>500	Pass
4	2440	4674	>500	Pass
7	2470	4714	>500	Pass

Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2410	4714	>500	Pass
4	2440	4796	>500	Pass
7	2470	4754	>500	Pass

Figure Channel 1 (Chain A)

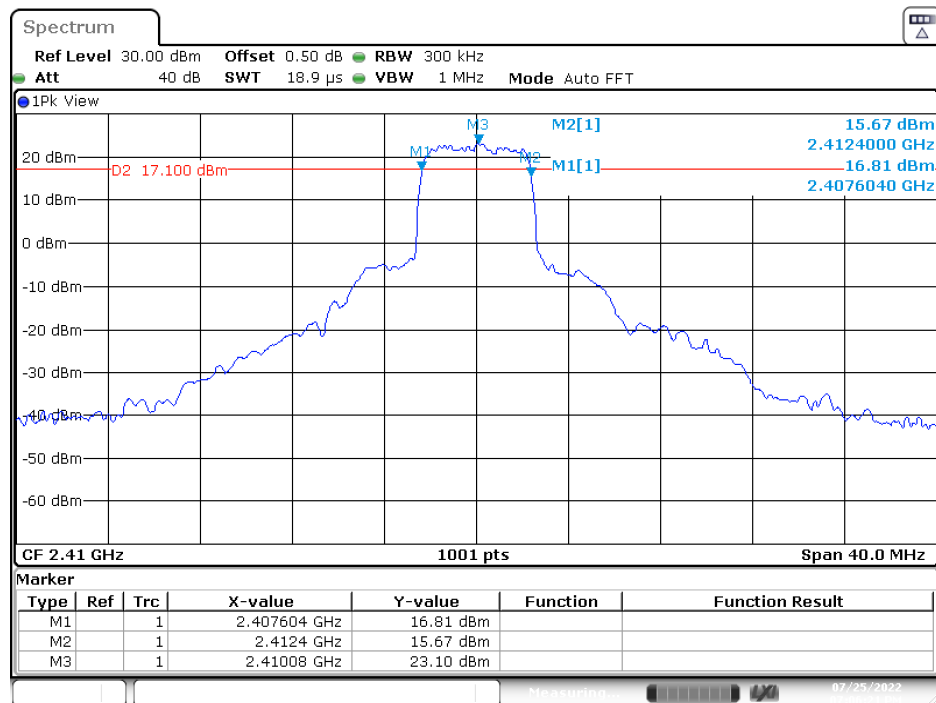

Date: 25 JUL 2022 19:06:21


Product : Wireless image transmission module
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit (10M-BW)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2410	9269	>500	Pass
4	2440	9229	>500	Pass
7	2470	9349	>500	Pass

Chain B


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2410	9309	>500	Pass
4	2440	9269	>500	Pass
7	2470	9269	>500	Pass

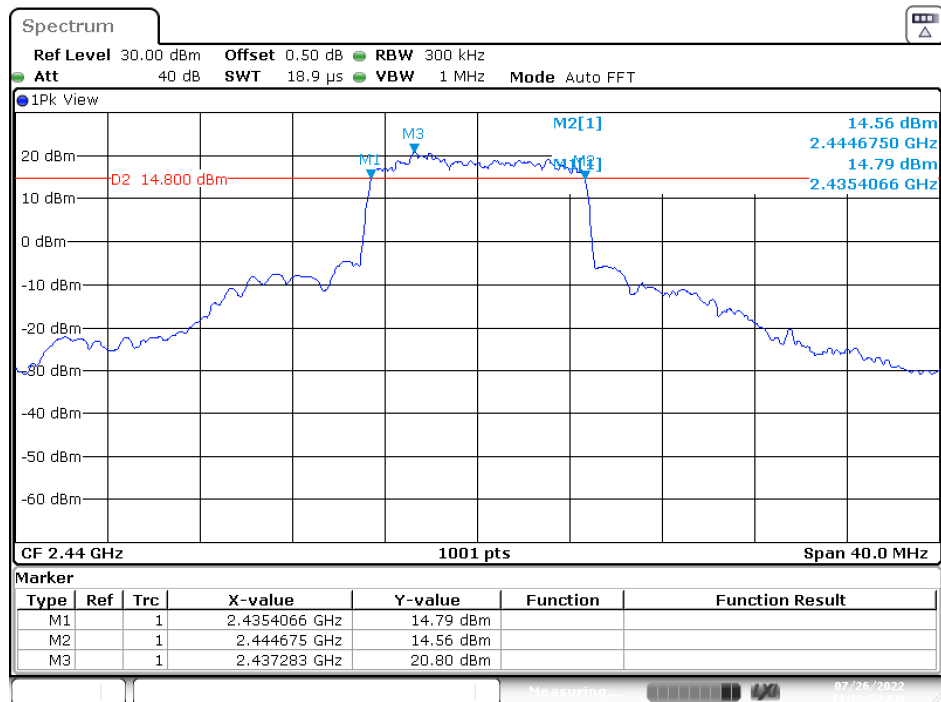Figure Channel 4 (Chain B)

Date: 26 JUL 2022 11:12:53

8. Power Density

8.1. Test Setup

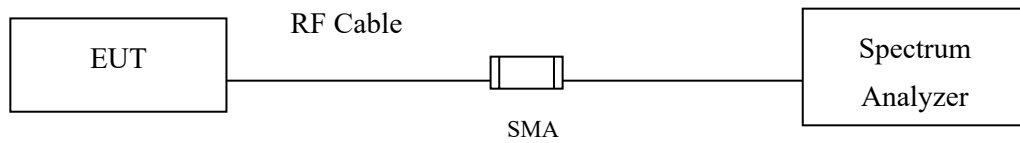

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : Wireless image transmission module
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (5M-BW)

Channel No.	Frequency (MHz)	Chain	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
1	2410	A	-1.410	1.600	$\leq 8\text{dBm}$	Pass
		B	-1.610	1.400	$\leq 8\text{dBm}$	Pass
4	2440	A	-1.720	1.290	$\leq 8\text{dBm}$	Pass
		B	-1.630	1.380	$\leq 8\text{dBm}$	Pass
7	2470	A	-3.480	-0.470	$\leq 8\text{dBm}$	Pass
		B	-3.900	-0.890	$\leq 8\text{dBm}$	Pass

Figure Channel 1 (Chain A)

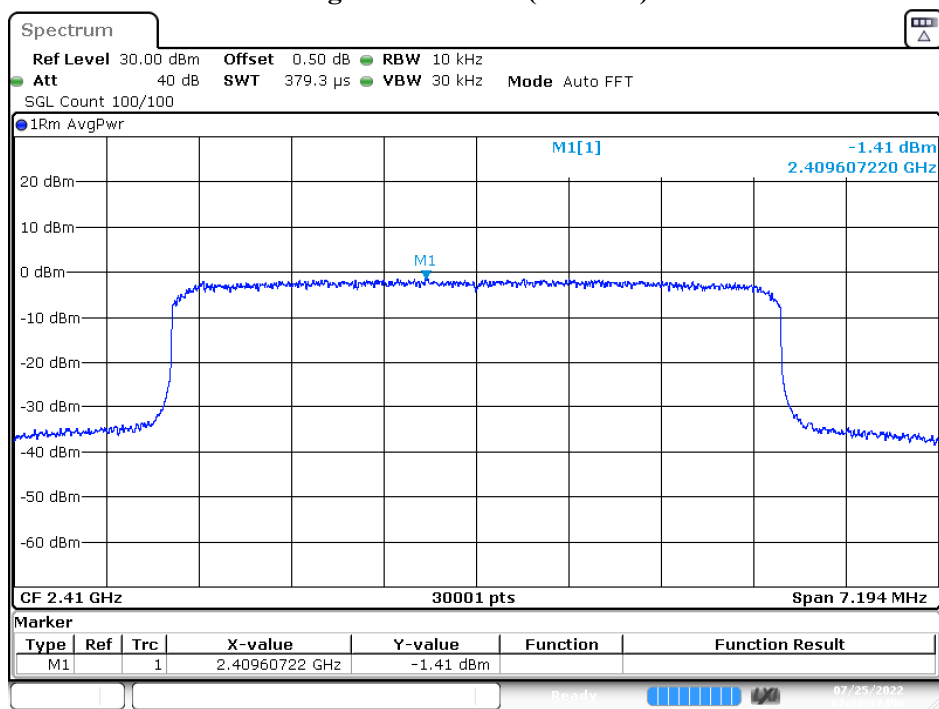


Date: 25.JUL.2022 19:32:17

Product : Wireless image transmission module
 Test Item : Power Density Data
 Test Mode : Mode 2: Transmit (10M-BW)


Channel No.	Frequency (MHz)	Chain	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
1	2410	A	-7.590	-4.580	$\leq 8\text{dBm}$	Pass
		B	-7.330	-4.320	$\leq 8\text{dBm}$	Pass
4	2440	A	-4.620	-1.610	$\leq 8\text{dBm}$	Pass
		B	-4.390	-1.380	$\leq 8\text{dBm}$	Pass
7	2470	A	-10.030	-7.020	$\leq 8\text{dBm}$	Pass
		B	-9.490	-6.480	$\leq 8\text{dBm}$	Pass

Figure Channel 4 (Chain B)

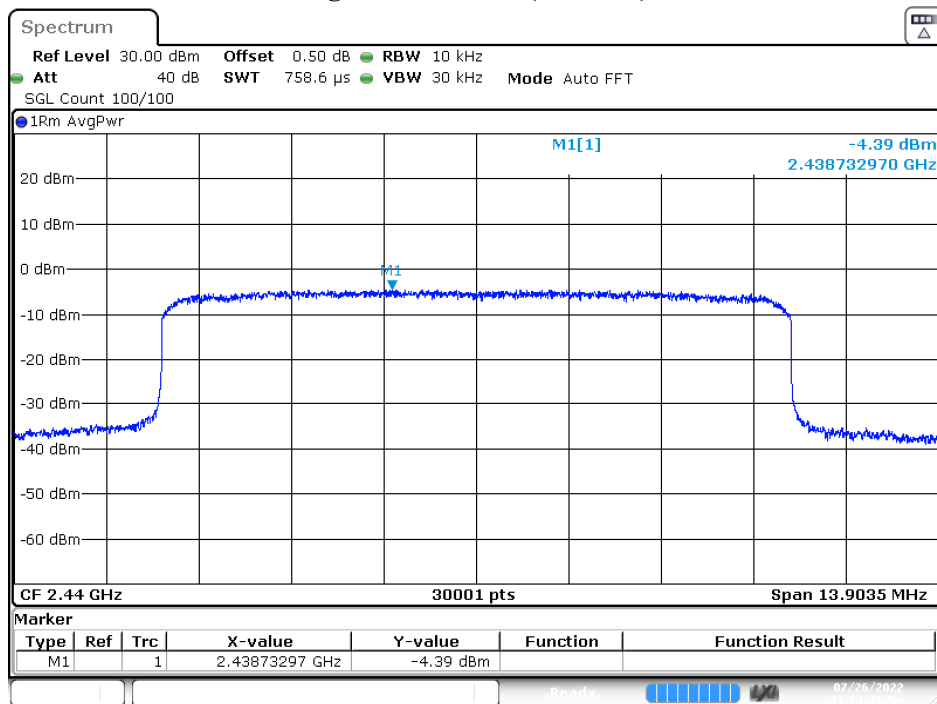

9. Duty Cycle

9.1. Test Setup

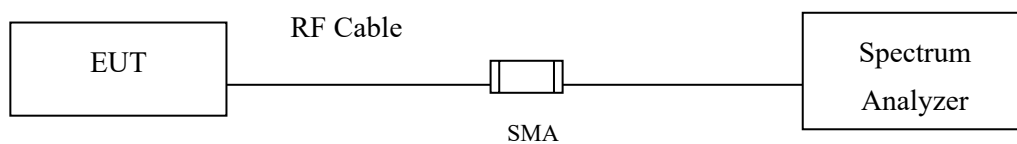

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : Wireless image transmission module
 Test Item : Duty Cycle


Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
5M	5.3261	5.9348	89.74	0.47
10M	5.3261	5.9348	89.74	0.47

5M

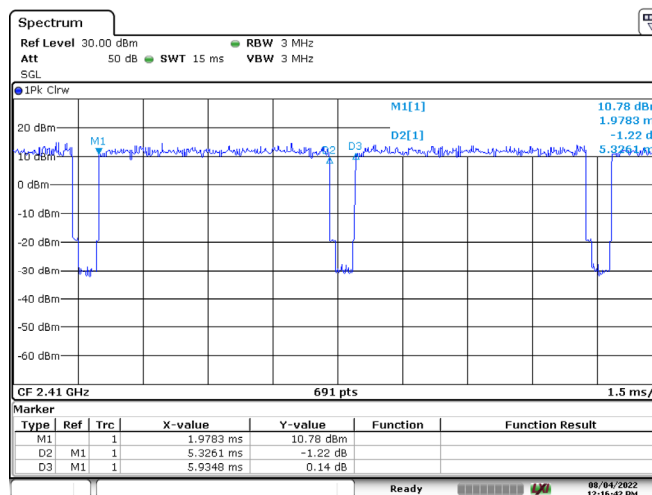

Date: 4.AUG.2022 12:16:42

10M

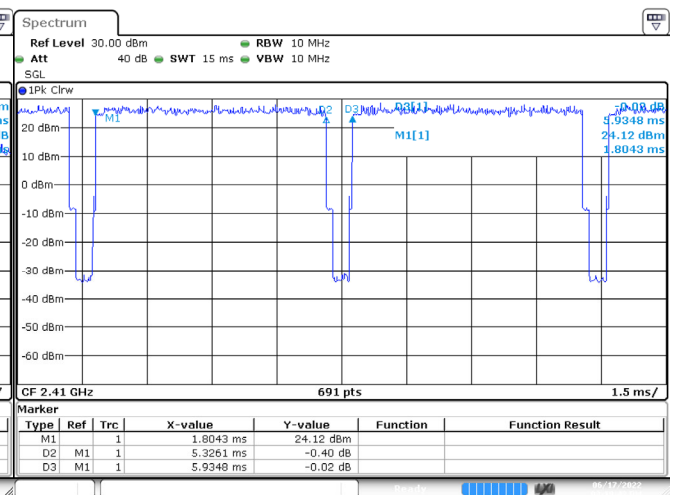

Date: 17.JUN.2022 15:19:43