



FCC RADIO TEST REPORT

FCC ID : S9GQ710US02
Equipment : LTE Access Point
Brand Name : Ruckus
Model Name : Q710US02
Applicant : Ruckus Wireless Inc.
350 W. Java Dr., Sunnyvale CA 94089 USA
Manufacturer : Ruckus Wireless Inc.
350 W. Java Dr., Sunnyvale CA 94089 USA
Standard : 47 CFR Part 2, 96

The product was received on Apr. 23, 2020 and testing was started from Apr. 28, 2020 and completed on May 08, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Ken Chen

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applied Standards	5
2 Test Configuration of Equipment Under Test	6
2.1 Test Mode.....	6
2.2 EUT Operation Test Setup	7
2.3 Measurement Results Explanation Example	7
2.4 Frequency List of Low/Middle/High Channels.....	7
3 Conducted Test Items.....	8
3.1 Measuring Instruments.....	8
3.2 Conducted Output Power	9
3.3 EIRP and Power Density	10
3.4 Occupied Bandwidth	11
4 List of Measuring Equipment.....	12
Appendix A. Test Results of Conducted Test	



History of this test report

Report No.	Version	Description	Issued Date
FG200218002	01	Initial issue of report	May 13, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Required	-
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
		Power Density	Pass	-
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
-	§2.1051 §96.41	Conducted Band Edge Measurement	Not Required	-
-	§2.1051 §96.41	Conducted Spurious Emission	Not Required	-
-	§2.1055	Frequency Stability for Temperature & Voltage	Not Required	-
-	§2.1051 §96.41	Radiated Spurious Emission	Not Required	-

Remark: This is a variant report by adding 256QAM modulation. All the test cases were performed on original report which can be referred to FCC ID: S9GQ710US02.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

LTE

Product Specification subjective to this standard	
Antenna Type	Internal BeamFlex Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No.
	TH01-CA
Test Engineer	Jordan Huang
Temperature	21~25°C
Relative Humidity	51~54%

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	48	-	-		v		v				v	v	v	v	v	v	v
EIRP Power Density	48	-	-		v		v				v			v	v	v	v
26dB and 99% Bandwidth	48	-	-		v		v				v			v	v	v	v
E.R.P / E.I.R.P	48	-	-		v		v				v			v	v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

Test Items	Band	Bandwidth (MHz)							Modulation				RB #			Test Channel		
		5+20	20+5	10+20	20+10	15+20	20+15	20+20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	48C_CA								v				v	v	v	v	v	v
EIRP Power Density	48C_CA								v				v		v	v	v	v
26dB and 99% Bandwidth	48C_CA								v				v		v	v	v	v
E.I.R.P.	48C_CA								v				v		v	v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																	

2.2 EUT Operation Test Setup

The RF test items, utility “TMCIDVtClient tool ” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.3 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0

LTE Band 48C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20M + 20M	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

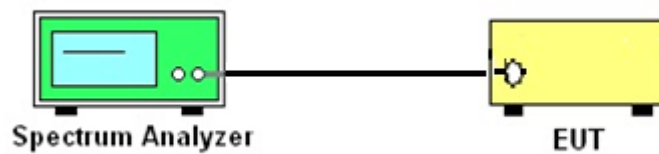

3.1.3 EIRP Power Density, Occupied Bandwidth

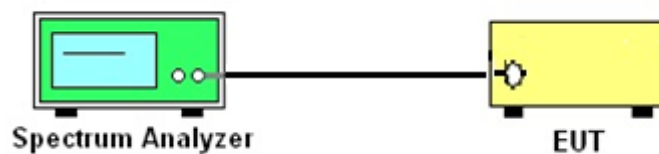

3.1.4 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

The EUT shall be set at maximum power through commands provided by manufacturer. The measured power in the radio frequency at the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. Connect the transmitter output port of EUT to the spectrum analyzer.
2. Set EUT to transmit at maximum output power.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum power at RF output terminals.

3.3 EIRP and Power Density

3.3.1 Description of the EIRP and Power Density Measurement

The EUT shall be set at maximum power through commands provided by manufacturer, and the EIRP limit shall apply to any 10 MHz portion of the bandwidth.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

EIRP and PSD limits for CBRS equipment as below tabel:

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Category A CBSD	30	20

3.3.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 Eqpt v02 Section 3.2(b)

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).
10. Determine the EIRP by adding the effective antenna gain to the adjusted power level.
11. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
Method (a): Measure and sum the spectra across the outputs.
The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	45142595	N/A	Aug. 07, 2019	Apr. 28, 2020~ May 08, 2020	Aug. 06, 2020	Conducted (TH01-CA)
Signal Analyzer	Rohde & Schwarz	FSV40	101089	10Hz~40GHz	Aug. 29, 2019	Apr. 28, 2020 ~ May 08, 2020	Aug. 28, 2020	Conducted (TH01-CA)



Appendix A. Test Results of Conducted Test



LTE Band 48

Average Power


LTE_10MHz_256QAM_2TX						
Channel	Frequency (MHz)	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Power (dBm)	Power (W)
55290	3555	2.1	21.70	21.56	24.64	0.2911
55990	3625	2.1	21.47	21.55	24.52	0.2832
56690	3695	2.1	21.67	21.89	24.79	0.3014

LTE_20MHz_256QAM_2TX						
Channel	Frequency (MHz)	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Power (dBm)	Power (W)
55340	3560	2.1	22.86	22.94	25.91	0.3900
55990	3625	2.1	22.98	22.98	25.99	0.3972
56640	3690	2.1	23.11	23.20	26.17	0.4136




LTE Band 48


Lowest Channel / 10MHz / 256QAM_Port 1

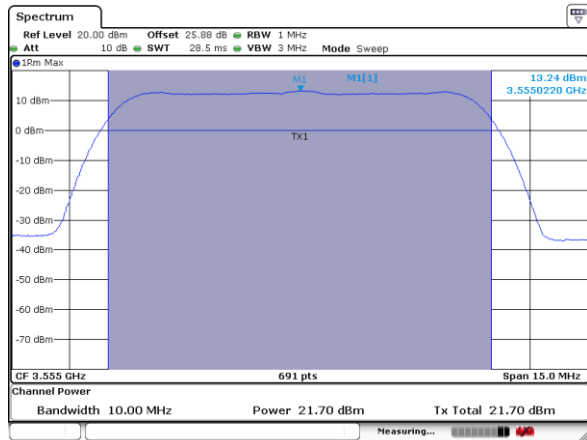


Lowest Channel / 10MHz / 256QAM_Port 2

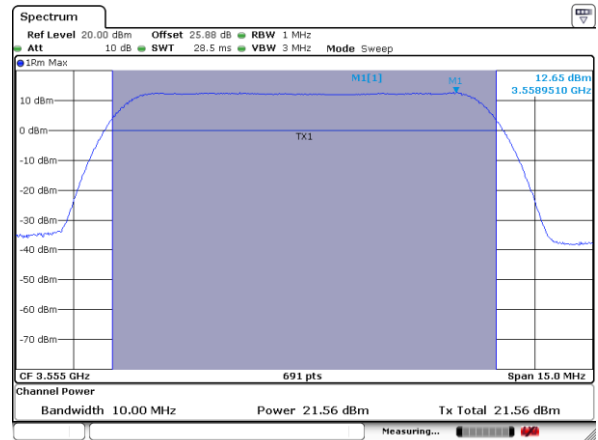


Middle Channel / 10MHz / 256QAM_Port 1

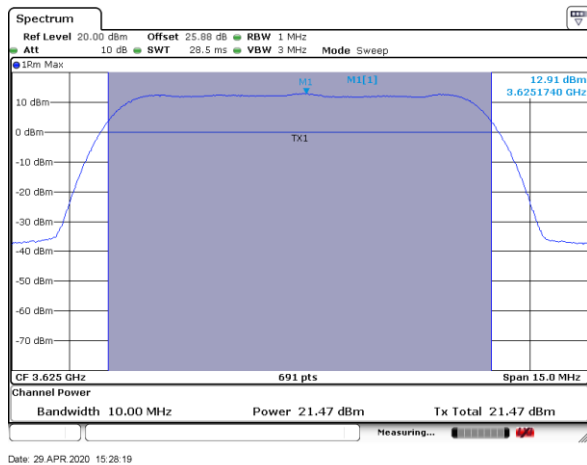


Middle Channel / 10MHz / 256QAM_Port 2

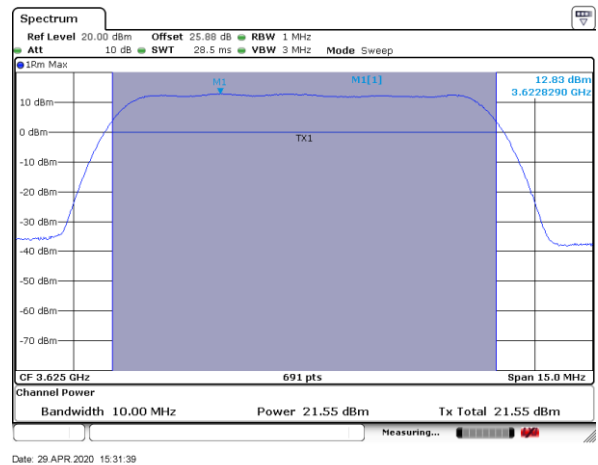

Highest Channel / 10MHz / 256QAM_Port 1

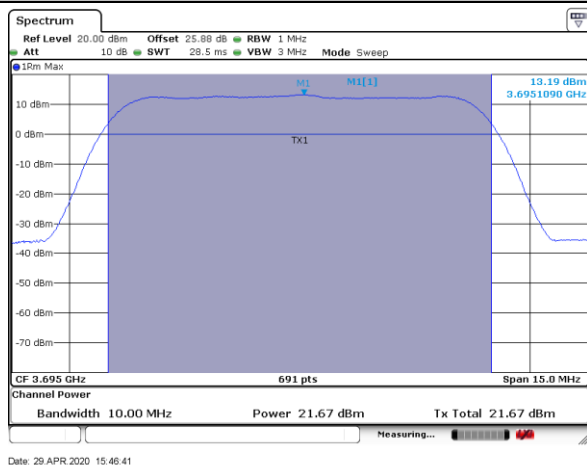


Highest Channel / 10MHz / 256QAM_Port 2

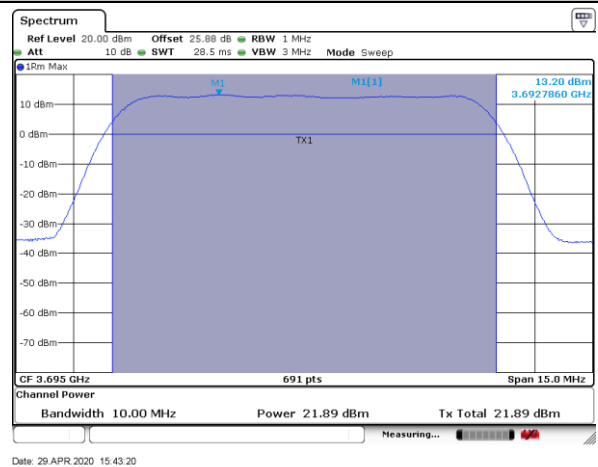




LTE Band 48


Lowest Channel / 20MHz / 256QAM_Port 1

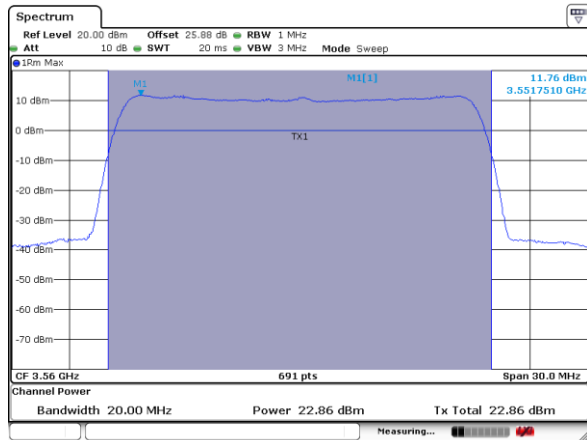


Lowest Channel / 20MHz / 256QAM_Port 2

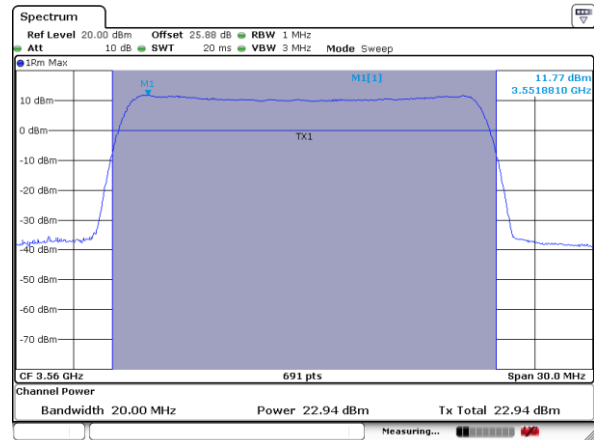


Middle Channel / 20MHz / 256QAM_Port 1

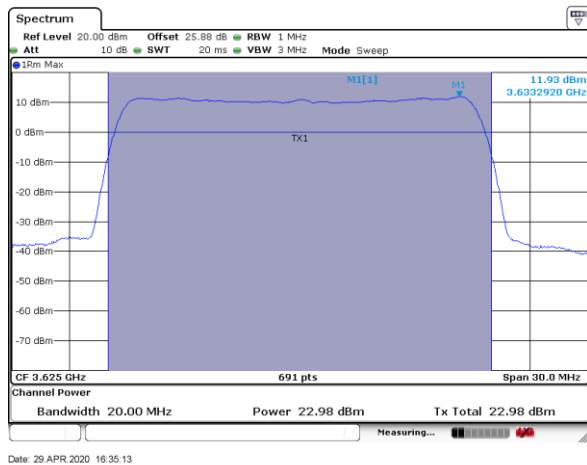


Middle Channel / 20MHz / 256QAM_Port 2

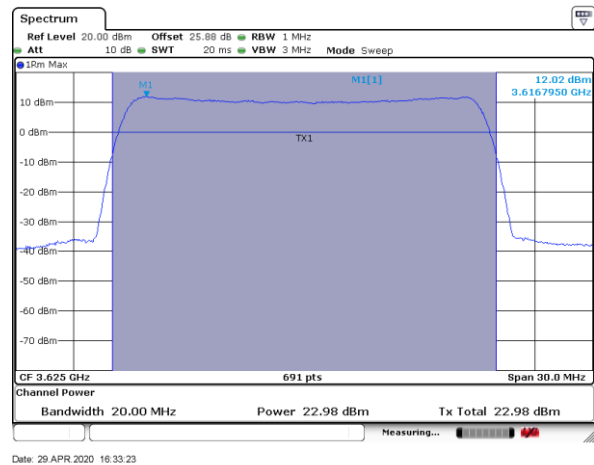

Highest Channel / 20MHz / 256QAM_Port 1

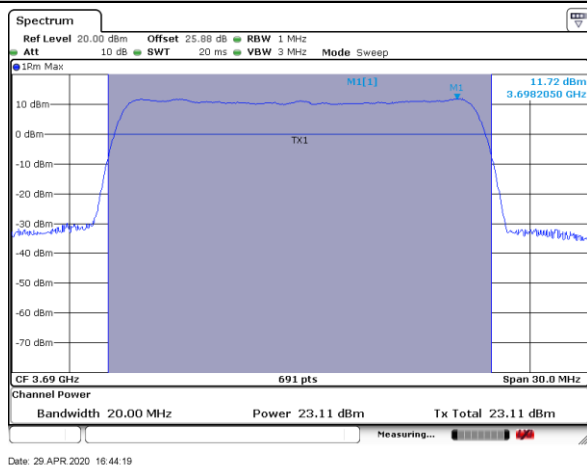

Highest Channel / 20MHz / 256QAM_Port 2

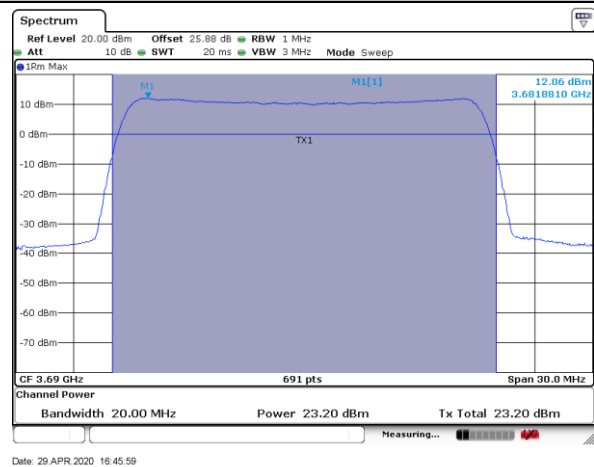


**EIRP Power Density**

LTE_10MHz_256QAM_2TX						
Channel	Frequency (MHz)	DG (dBi)	Power (dBm)	Power (W)	EIRP (dBm)	EIRP (W)
55290	3555	2.1	24.64	0.2911	26.74	0.4722
55990	3625	2.1	24.52	0.2832	26.62	0.4592
56690	3695	2.1	24.79	0.3014	26.89	0.4888

LTE_10MHz_256QAM_2TX					
Channel	Frequency (MHz)	DG (dBi)	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
55290	3555	2.1	16.13	18.23	20
55990	3625	2.1	15.92	18.02	
56690	3695	2.1	15.91	18.01	

LTE_20MHz_256QAM_2TX						
Channel	Frequency (MHz)	DG (dBi)	Power (dBm)	Power (W)	EIRP (dBm)	EIRP (W)
55340	3560	2.1	25.91	0.3900	28.01	0.6325
55990	3625	2.1	25.99	0.3972	28.09	0.6442
56640	3690	2.1	26.17	0.4136	28.27	0.6707

LTE_20MHz_256QAM_2TX					
Channel	Frequency (MHz)	DG (dBi)	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
55340	3560	2.1	14.46	16.56	20
55990	3625	2.1	14.48	16.58	
56640	3690	2.1	14.67	16.77	

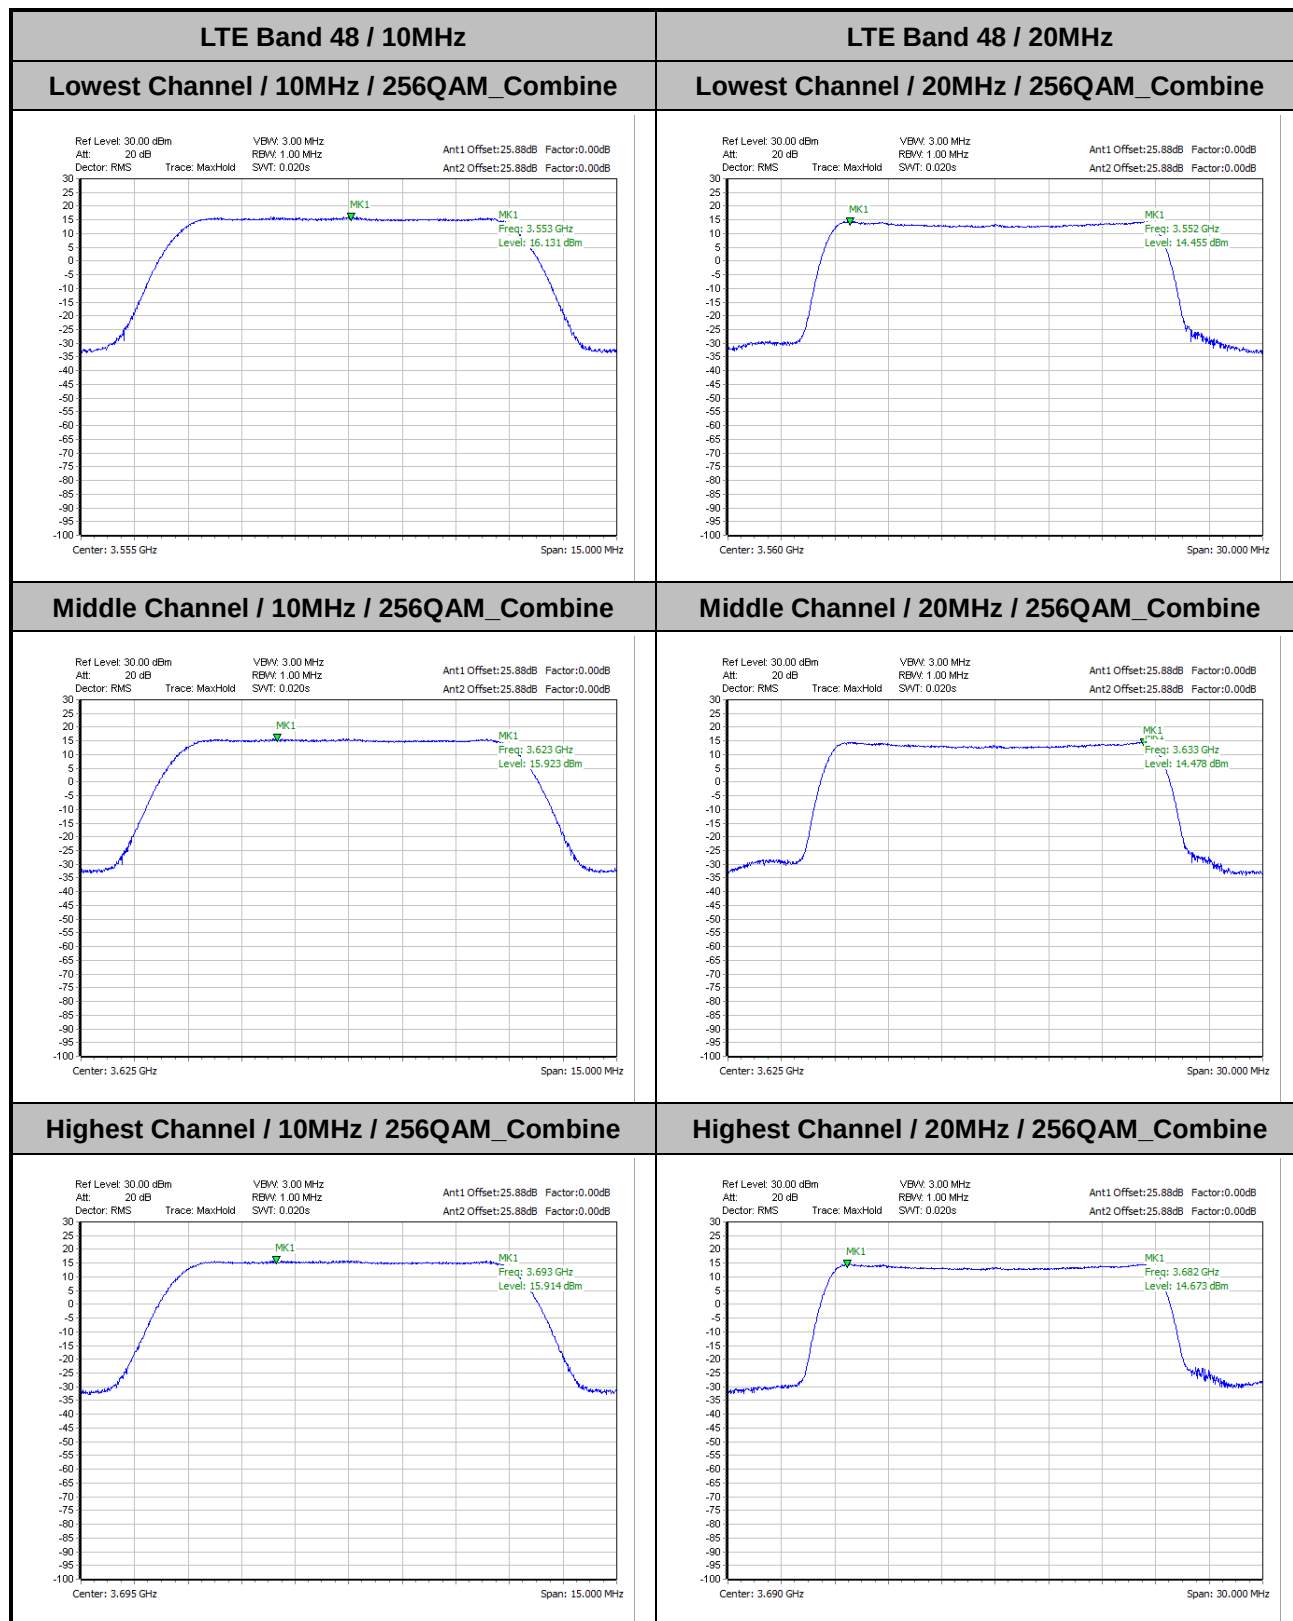


**26dB Bandwidth**

Mode	LTE Band 48 : 26dB BW(MHz)			
Mod.	256QAM			
BW	10MHz		20MHz	
Port	Port 1	Port 2	Port 1	Port 2
Lowest CH	9.69	9.71	18.74	18.78
Middle CH	9.69	9.77	18.86	19.02
Highest CH	10.09	10.09	18.82	18.86




LTE Band 48_2TX

Lowest Channel / 10MHz / 256QAM_Port 1

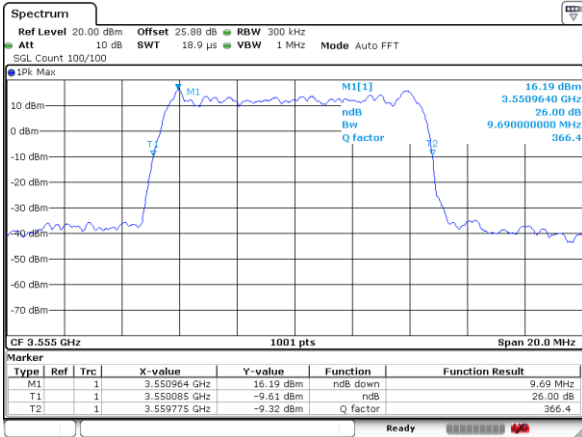


Date: 29 APR 2020 15:22:51

Lowest Channel / 10MHz / 256QAM_Port 2

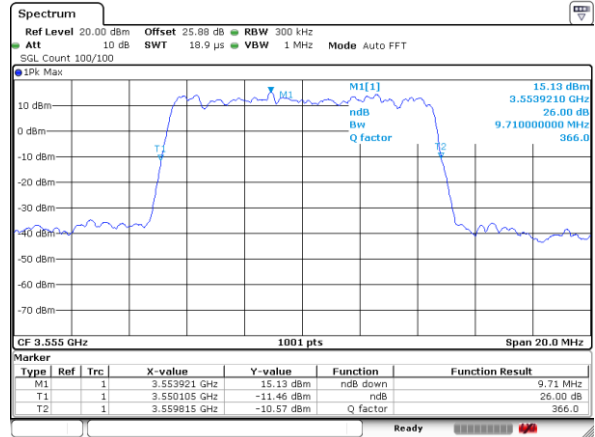


Date: 29 APR 2020 15:23:52

Middle Channel / 10MHz / 256QAM_Port 1

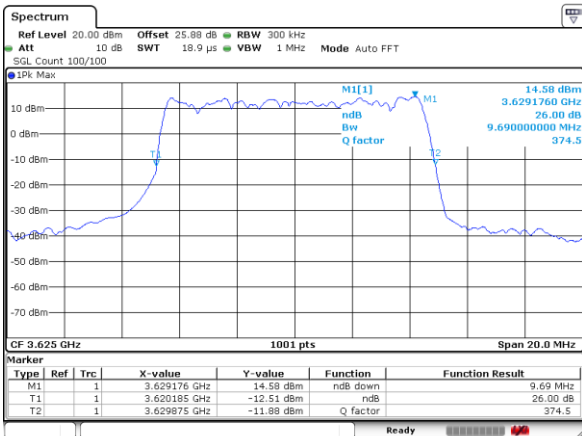


Date: 29 APR 2020 15:33:37

Middle Channel / 10MHz / 256QAM_Port 2

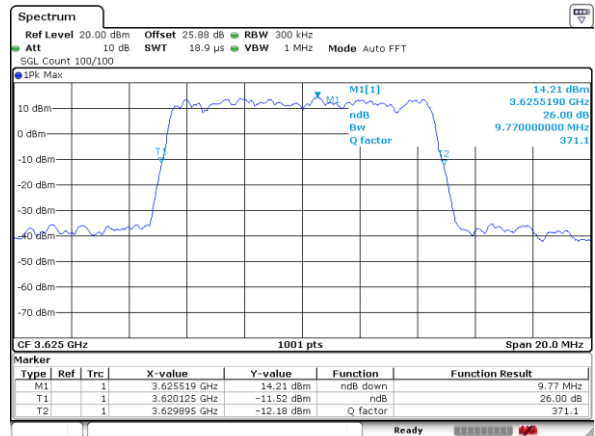


Date: 29 APR 2020 15:33:03

Highest Channel / 10MHz / 256QAM_Port 1

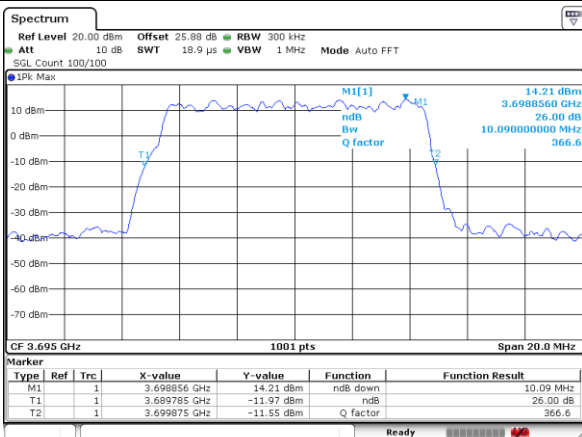

Date: 29 APR 2020 15:51:37

Highest Channel / 10MHz / 256QAM_Port 2

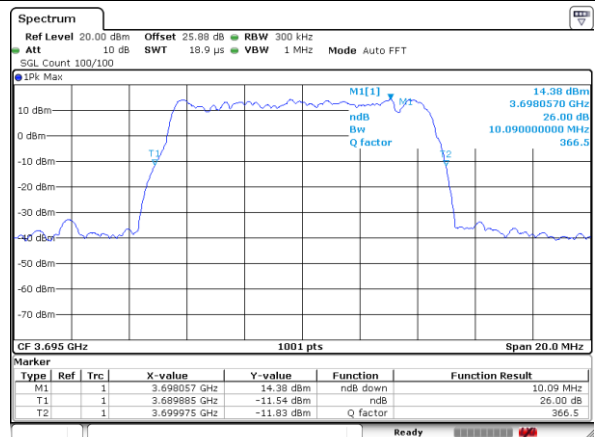


Date: 29 APR 2020 15:50:47




LTE Band 48_2TX

Lowest Channel / 20MHz / 256QAM_Port 1

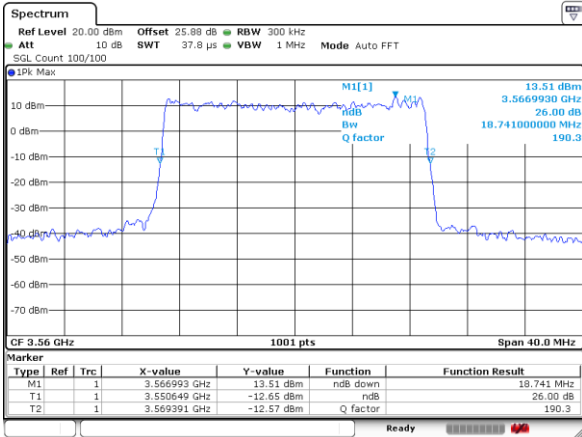


Date: 29 APR 2020 16:15:29

Lowest Channel / 20MHz / 256QAM_Port 2

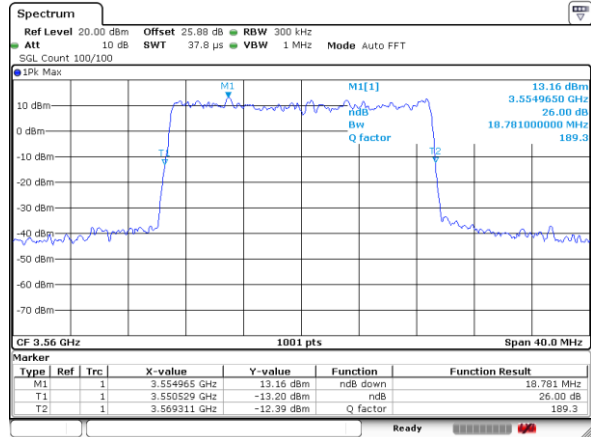


Date: 29 APR 2020 16:16:34

Middle Channel / 20MHz / 256QAM_Port 1

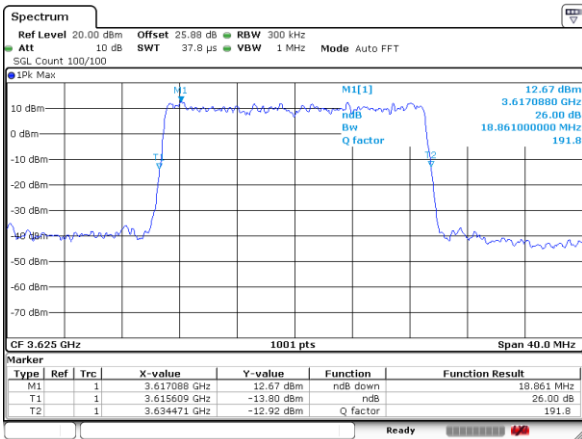


Date: 29 APR 2020 16:39:18

Middle Channel / 20MHz / 256QAM_Port 2

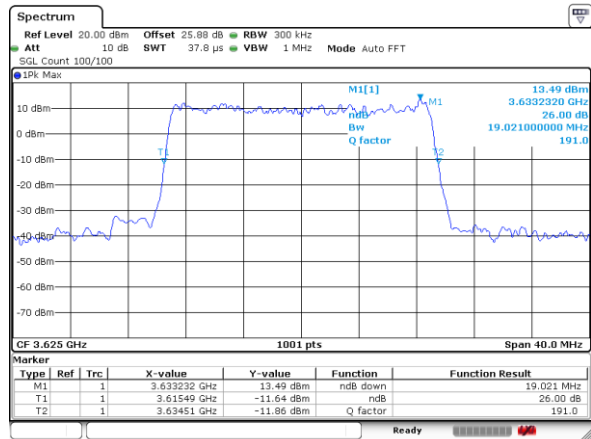


Date: 29 APR 2020 16:38:30

Highest Channel / 20MHz / 256QAM_Port 1

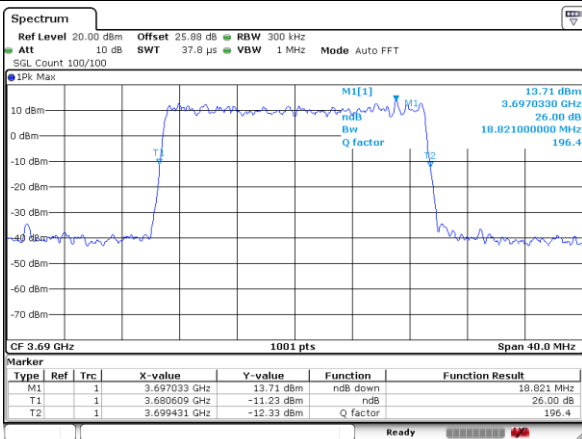

Date: 29 APR 2020 16:48:00

Highest Channel / 20MHz / 256QAM_Port 2

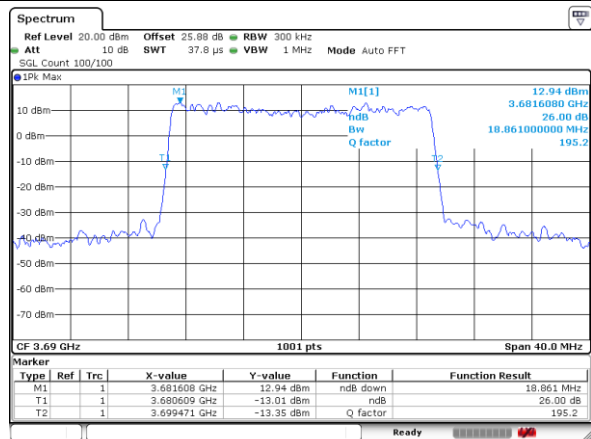

Date: 29 APR 2020 16:46:57


**Occupied Bandwidth**

Mode	LTE Band 48 : 99%OBW(MHz)			
Mod.	256QAM			
BW	10MHz		20MHz	
Port	Port 1	Port 2	Port 1	Port 2
Lowest CH	9.01	9.01	17.90	17.90
Middle CH	8.99	8.99	17.90	17.86
Highest CH	8.99	8.99	17.90	17.90




LTE Band 48_2TX

Lowest Channel / 10MHz / 256QAM_Port 1

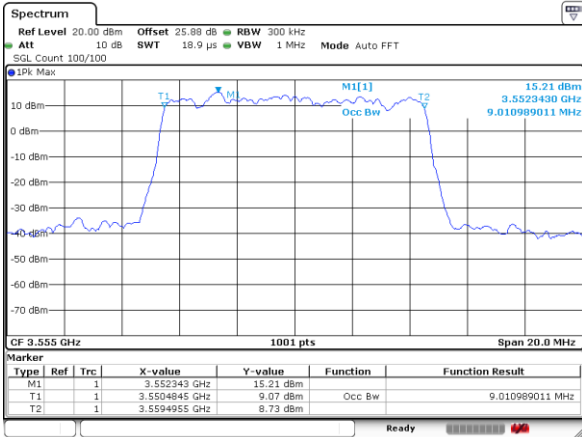


Date: 29 APR 2020 15:25:19

Lowest Channel / 10MHz / 256QAM_Port 2

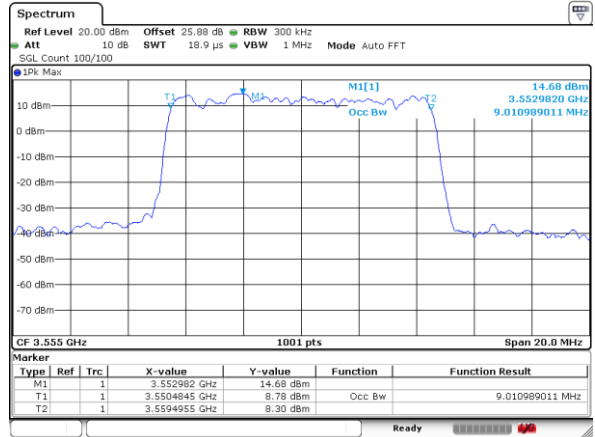


Date: 29 APR 2020 15:24:22

Middle Channel / 10MHz / 256QAM_Port 1

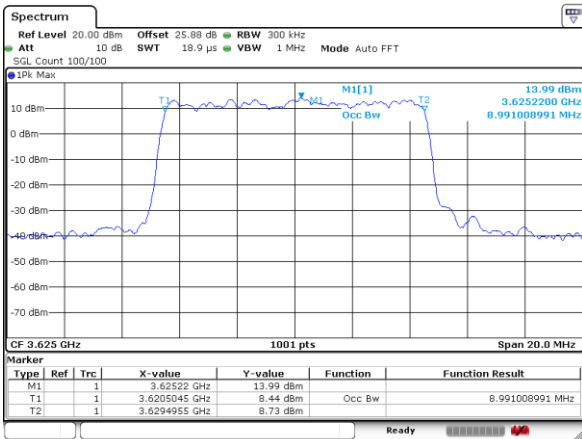


Date: 29 APR 2020 15:34:08

Middle Channel / 10MHz / 256QAM_Port 2

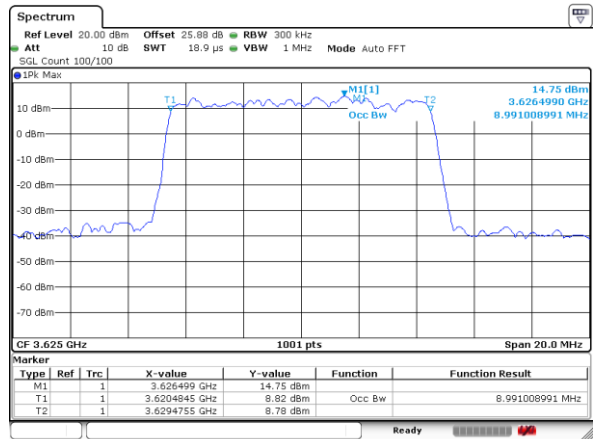


Date: 29 APR 2020 15:34:38

Highest Channel / 10MHz / 256QAM_Port 1

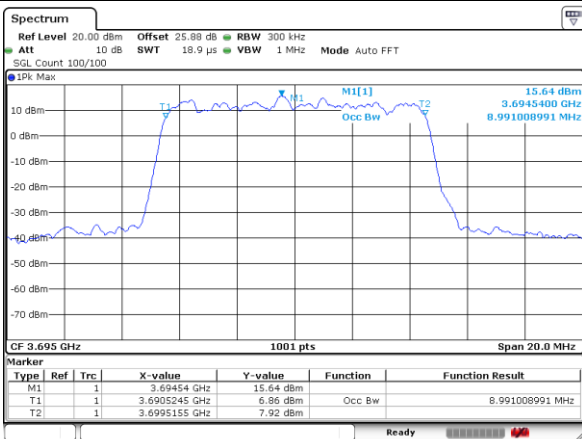

Date: 29 APR 2020 15:48:30

Highest Channel / 10MHz / 256QAM_Port 2

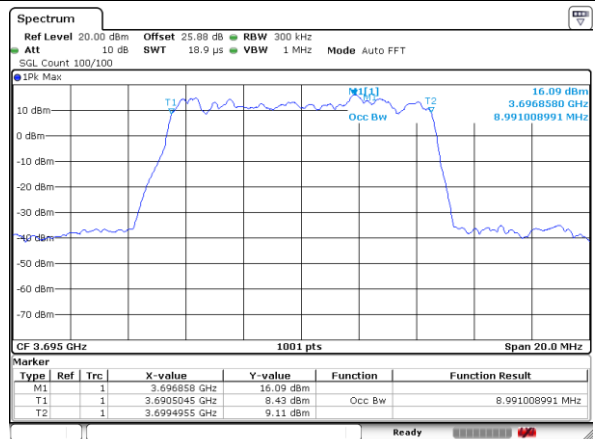


Date: 29 APR 2020 15:49:33




LTE Band 48_2TX

Lowest Channel / 20MHz / 256QAM_Port 1

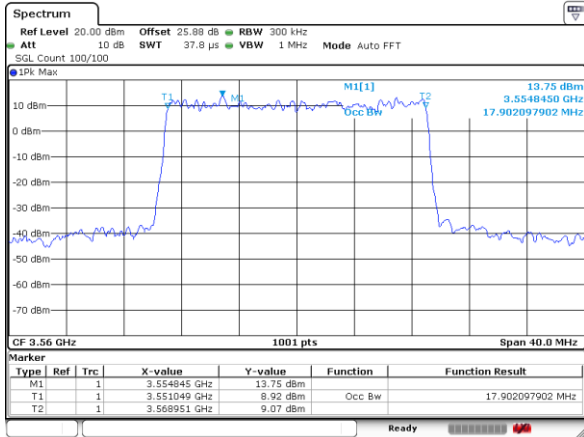


Date: 29 APR 2020 16:18:38

Lowest Channel / 20MHz / 256QAM_Port 2

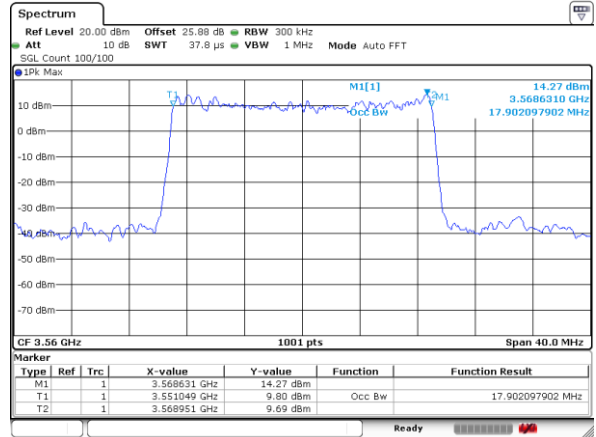


Date: 29 APR 2020 16:17:57

Middle Channel / 20MHz / 256QAM_Port 1

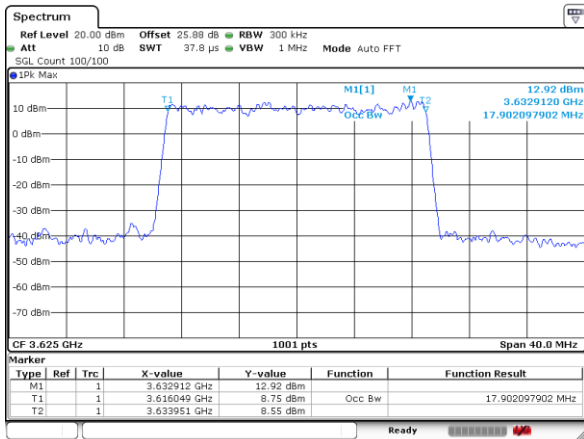


Date: 29 APR 2020 16:16:10

Middle Channel / 20MHz / 256QAM_Port 2

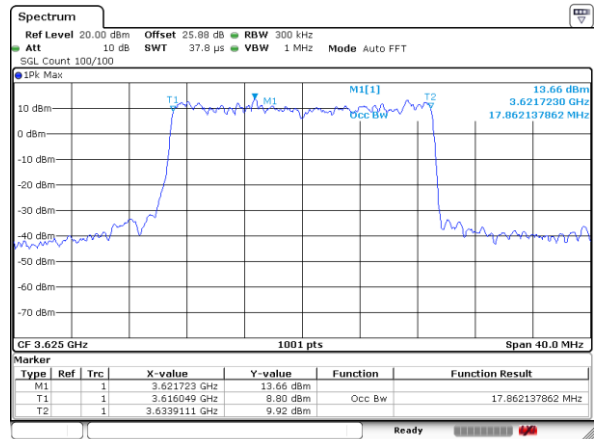


Date: 29 APR 2020 16:17:11

Highest Channel / 20MHz / 256QAM_Port 1

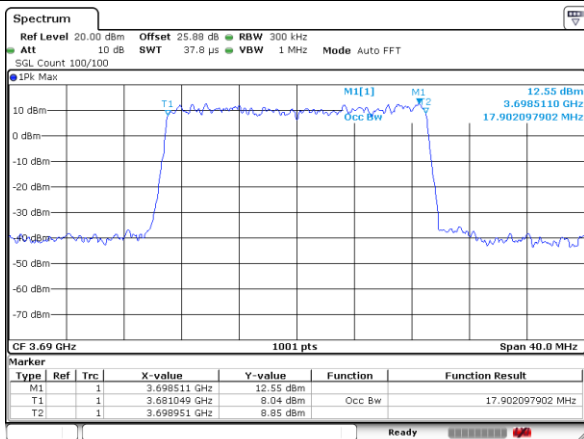

Date: 29 APR 2020 16:48:33





Highest Channel / 20MHz / 256QAM_Port 2




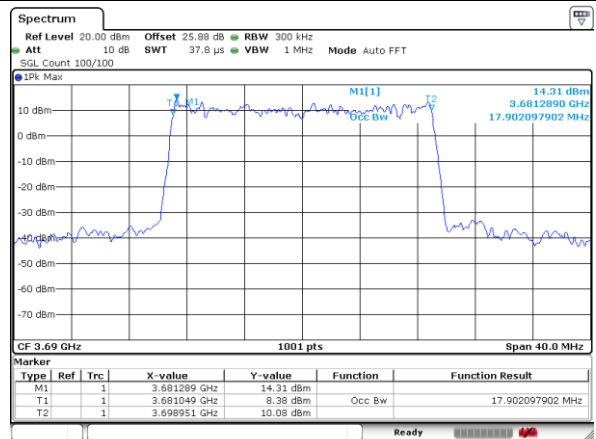



Date: 29 APR 2020 16:49:12

**LTE Band 48_CA****Average Power**


LTE_20MHz+20MHz_256QAM_4TX								
Channel	Frequency (MHz)	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Power (dBm)	Power (W)
55340 + 55540	3560 + 3580	2.25	21.30	21.48	20.84	21.30	24.40	0.2755
55890 + 56090	3615 + 3635	2.25	21.23	21.41	21.15	21.45	24.33	0.2711
56440 + 56640	3670 + 3690	2.25	21.22	21.35	21.27	21.82	24.56	0.2860
55340 + 56640	3560 + 3690	2.25	21.19	21.45	21.27	21.82	24.56	0.2860

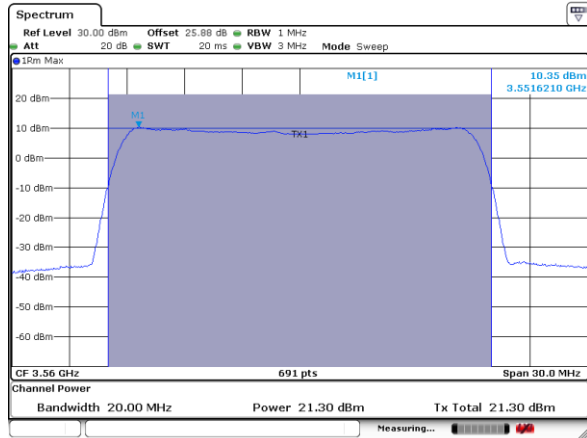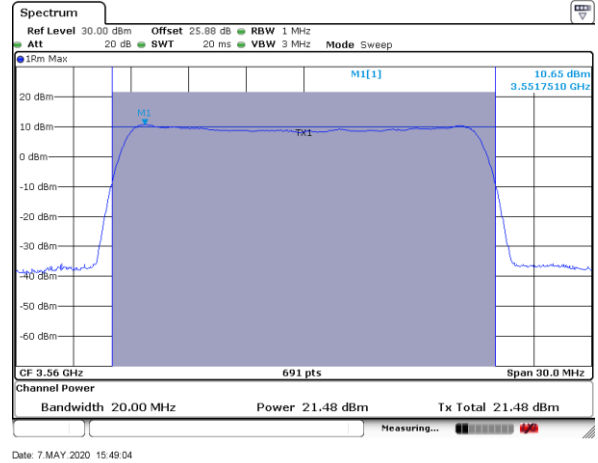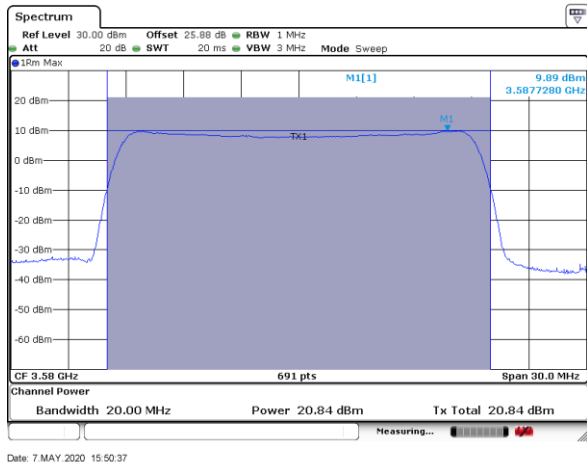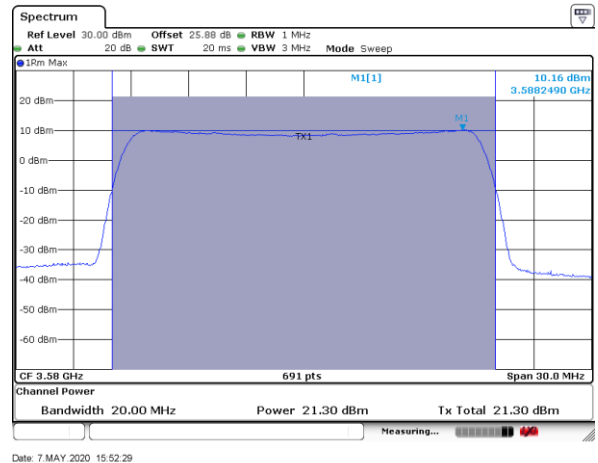LTE Band 48 CA_20MHz+20MHz
3560 MHz + 3580 MHz / 256QAM Port 1

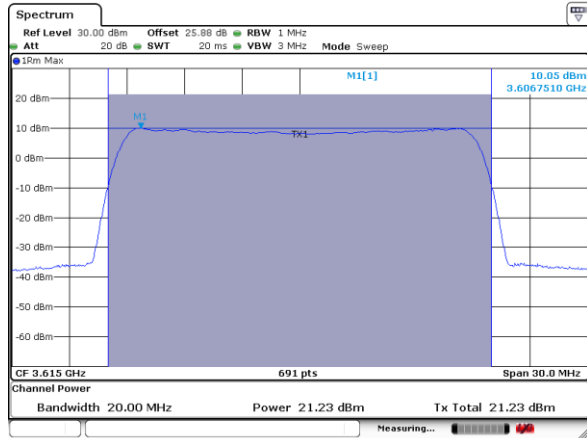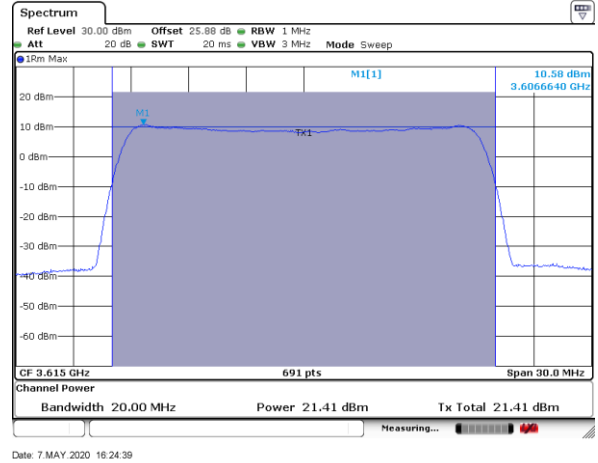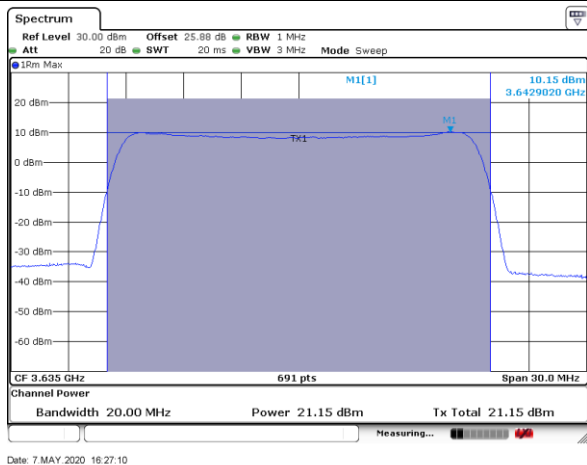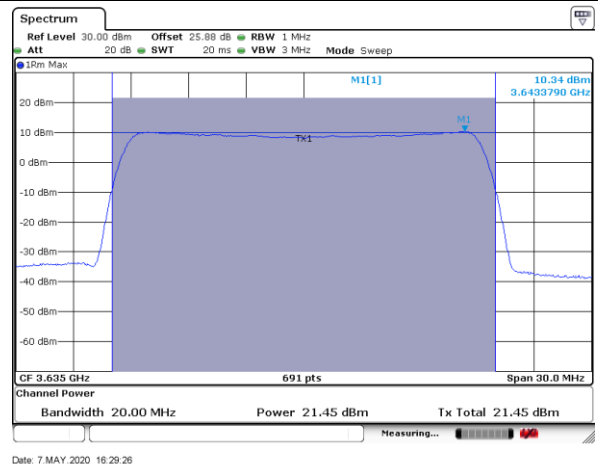3560 MHz + 3580 MHz / 256QAM Port 2

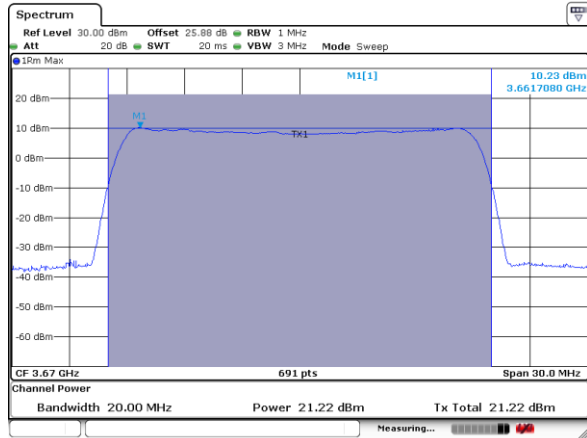3560 MHz + 3580 MHz / 256QAM Port 3

3560 MHz + 3580 MHz / 256QAM Port 4

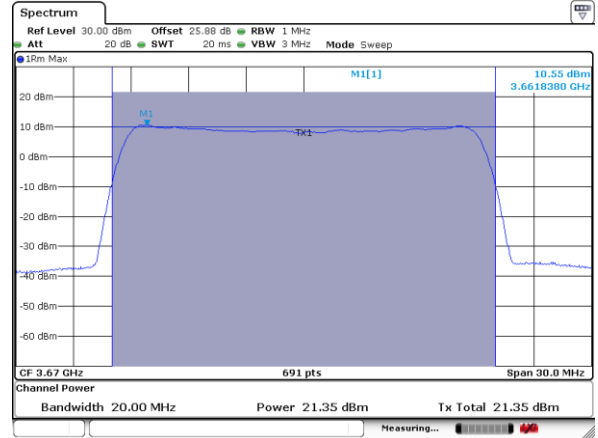
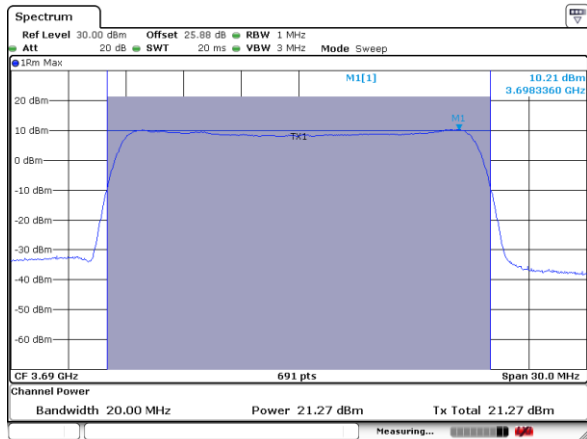
LTE Band 48 CA_20MHz+20MHz
3615 MHz + 3635 MHz / 256QAM Port 1

3615 MHz + 3635 MHz / 256QAM Port 2

3615 MHz + 3635 MHz / 256QAM Port 3

3615 MHz + 3635 MHz / 256QAM Port 4


LTE Band 48 CA_20MHz+20MHz
3670 MHz + 3690 MHz / 256QAM Port 1


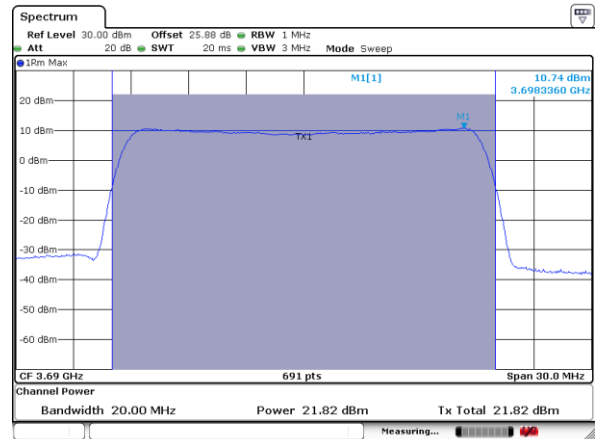
Date: 7 MAY 2020 16:34:27

3670 MHz + 3690 MHz / 256QAM Port 2


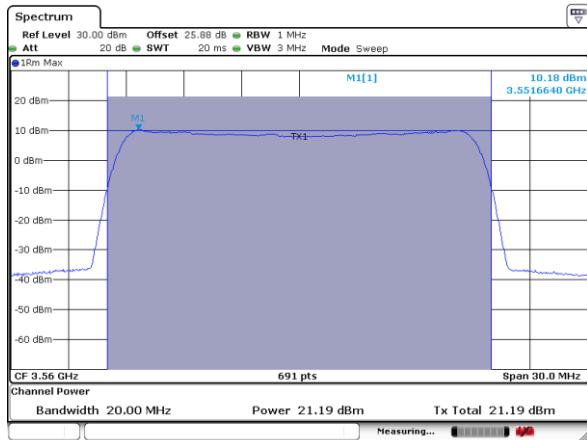
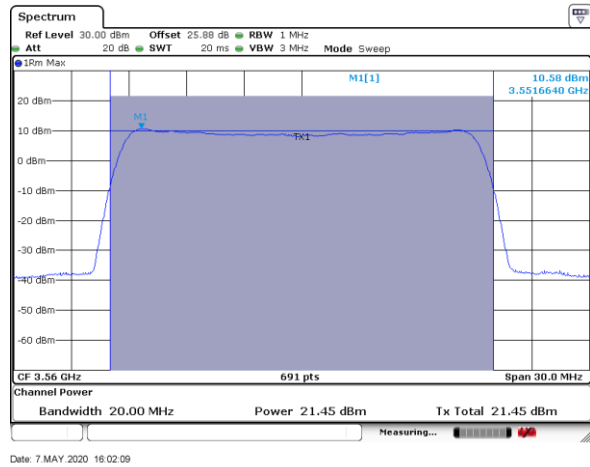
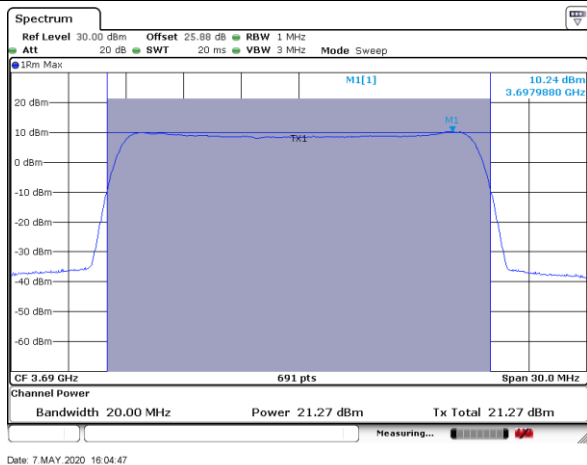
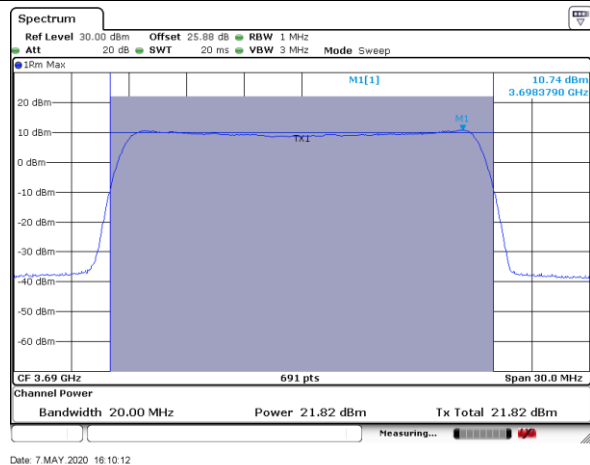
Date: 7 MAY 2020 16:36:44

3670 MHz + 3690 MHz / 256QAM Port 3


Date: 7 MAY 2020 16:38:24

3670 MHz + 3690 MHz / 256QAM Port 4


Date: 7 MAY 2020 16:39:53

LTE Band 48 CA_20MHz+20MHz
3560 MHz + 3690 MHz / 256QAM Port 1

3560 MHz + 3690 MHz / 256QAM Port 2

3560 MHz + 3690 MHz / 256QAM Port 3

3560 MHz + 3690 MHz / 256QAM Port 4


EIRP Power Density


LTE_20MHz+20MHz_256QAM_4TX						
Channel	Frequency (MHz)	DG (dBi)	Power (dBm)	Power (W)	EIRP (dBm)	EIRP (W)
55340 + 55540	3560 + 3580	2.25	24.40	0.2755	26.65	0.4625
55890 + 56090	3615 + 3635	2.25	24.33	0.2711	26.58	0.4551
56440 + 56640	3670 + 3690	2.25	24.56	0.2860	26.81	0.4802
55340 + 56640	3560 + 3690	2.25	24.56	0.2860	26.81	0.4802

LTE_20MHz+20MHz_256QAM_4TX					
Channel	Frequency (MHz)	DG (dBi)	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit
55340 + 55540	3560 + 3580	2.25	13.79	16.04	20
55890 + 56090	3615 + 3635	2.25	13.85	16.10	
56440 + 56640	3670 + 3690	2.25	14.03	16.28	
55340 + 56640	3560 + 3690	2.25	13.83	16.08	




LTE Band 48 CA_20MHz+20MHz


3560 MHz + 3580 MHz / 256QAM Combine

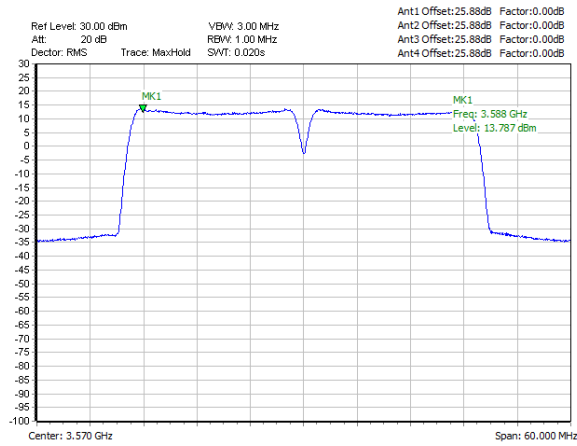


3615 MHz + 3635 MHz / 256QAM Combine

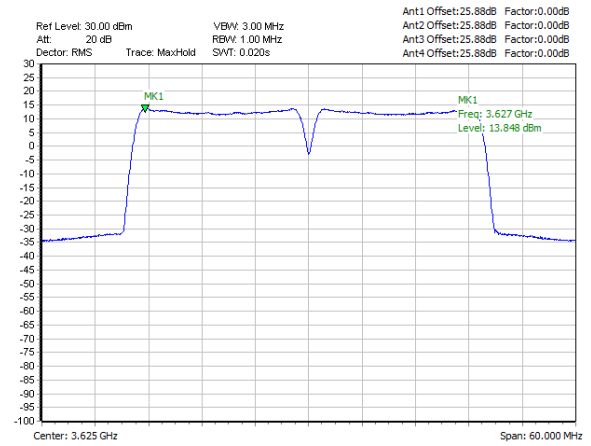

3670 MHz + 3690 MHz / 256QAM Combine

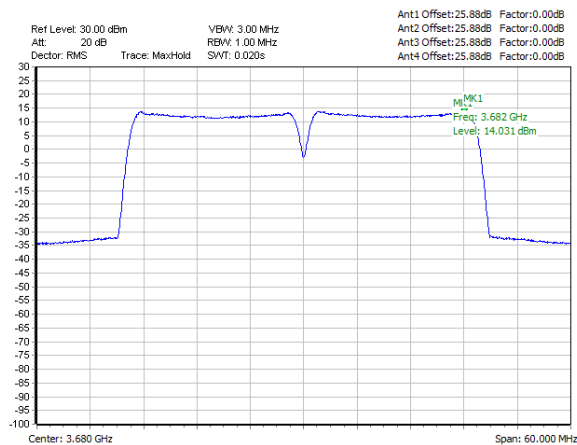

3560 MHz + 3690 MHz / 256QAM Combine

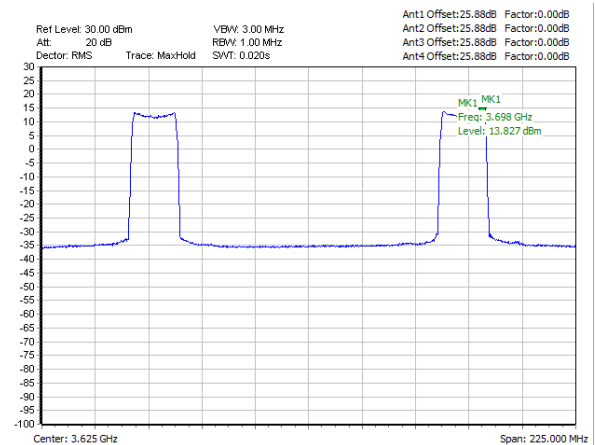


**26dB Bandwidth**

Mode		LTE Band 48 : 26dB BW(MHz)			
BW		20MHz+20MHz			
Mod.		256QAM			
Channel	Frequency (MHz)	Port 1	Port 2	Port 3	Port 4
55340 + 55540	3560 + 3580	18.74	18.74	18.74	18.78
55890 + 56090	3615 + 3635	18.70	18.70	18.74	18.74
56440 + 56640	3670 + 3690	18.78	18.74	18.74	18.74
55340 + 56640	3560 + 3690	18.74	18.74	18.74	18.74




LTE Band 48 CA_20MHz+20MHz

3560 MHz + 3580 MHz / 256QAM Port 1

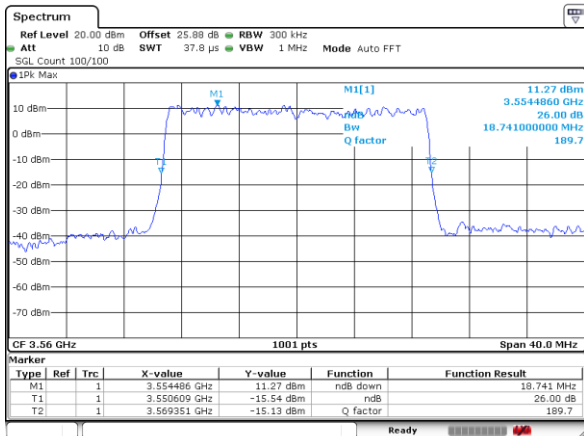


Date: 8 MAY 2020 13:27:22

3560 MHz + 3580 MHz / 256QAM Port 2

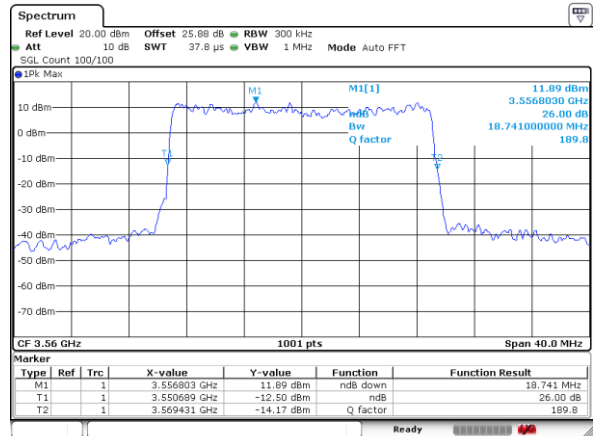


Date: 8 MAY 2020 13:27:56

3560 MHz + 3580 MHz / 256QAM Port 3

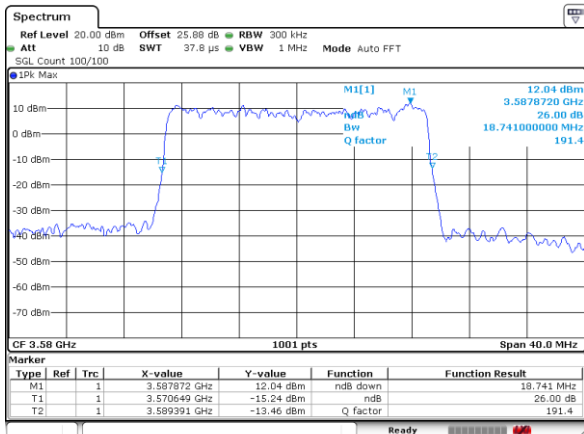

Date: 8 MAY 2020 13:28:36

3560 MHz + 3580 MHz / 256QAM Port 4

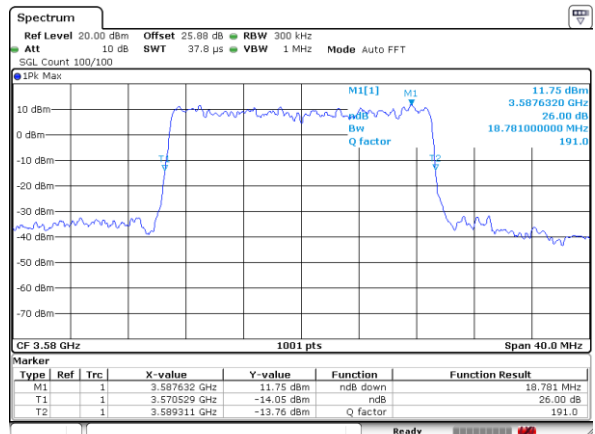


Date: 8 MAY 2020 13:29:02




LTE Band 48 CA_20MHz+20MHz

3615 MHz + 3635 MHz / 256QAM Port 1

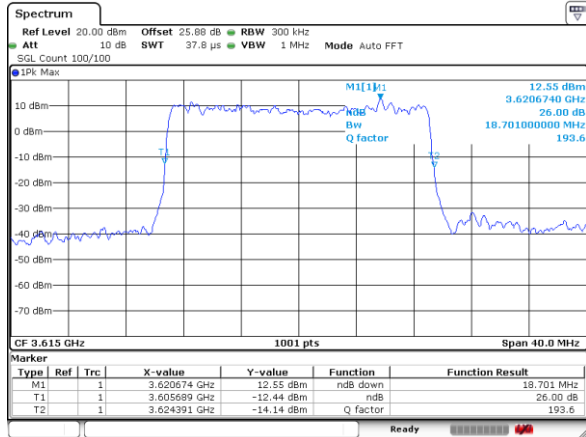


Date: 8 MAY 2020 14:29:27

3615 MHz + 3635 MHz / 256QAM Port 2

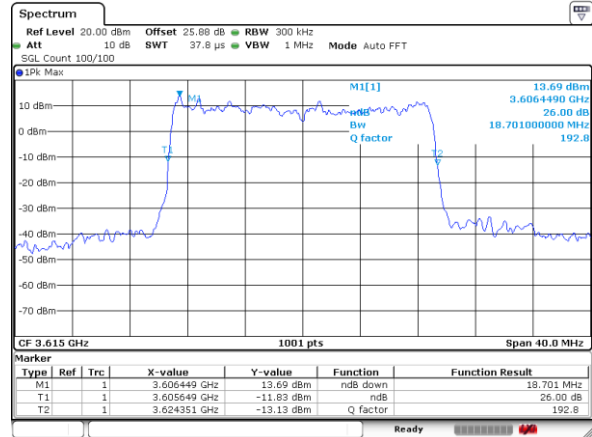


Date: 8 MAY 2020 14:30:30

3615 MHz + 3635 MHz / 256QAM Port 3

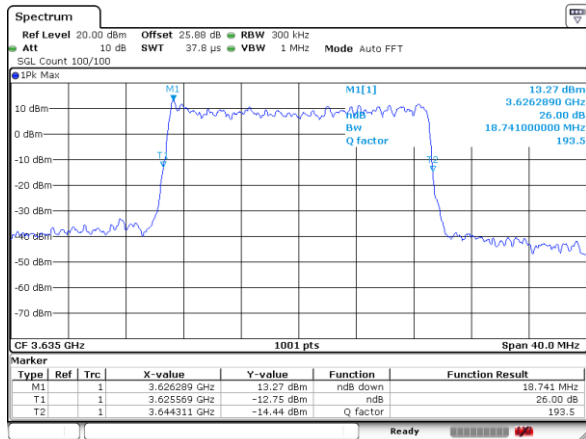

Date: 8 MAY 2020 14:30:51

3615 MHz + 3635 MHz / 256QAM Port 4

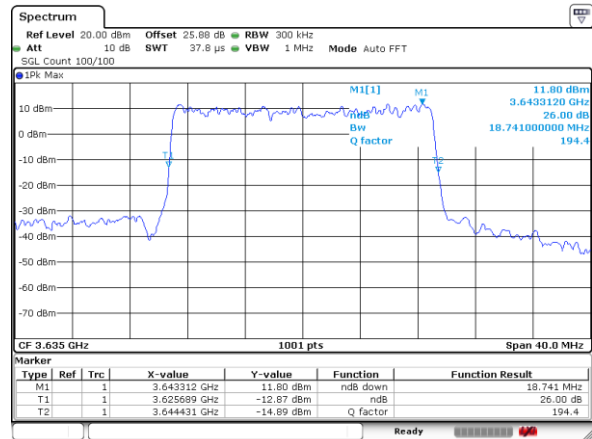


Date: 8 MAY 2020 14:31:32




LTE Band 48 CA_20MHz+20MHz

3670 MHz + 3690 MHz / 256QAM Port 1

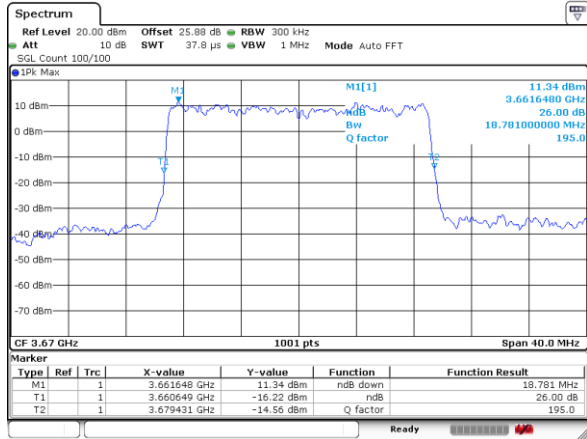


Date: 8 MAY 2020 14:43:37

3670 MHz + 3690 MHz / 256QAM Port 2

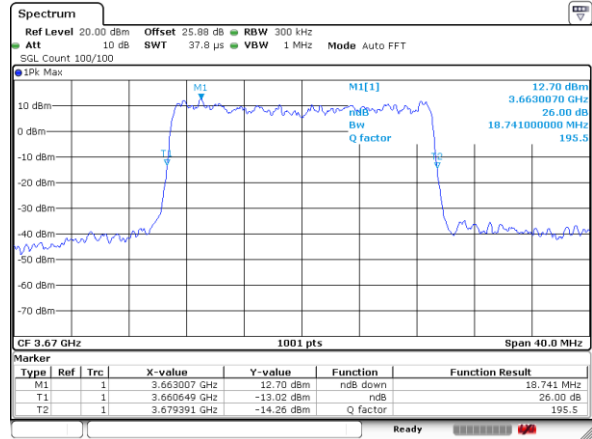


Date: 8 MAY 2020 14:43:59

3670 MHz + 3690 MHz / 256QAM Port 3

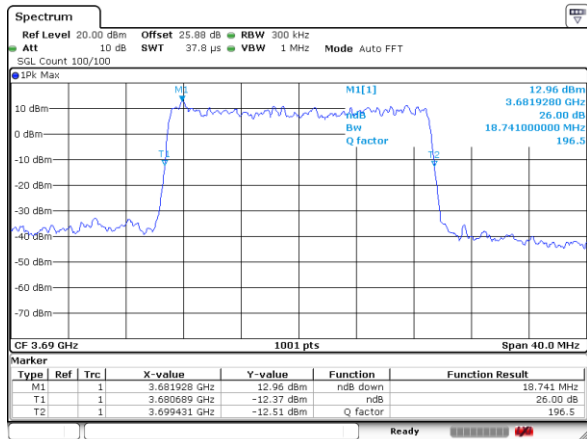

Date: 8 MAY 2020 14:44:24

3670 MHz + 3690 MHz / 256QAM Port 4

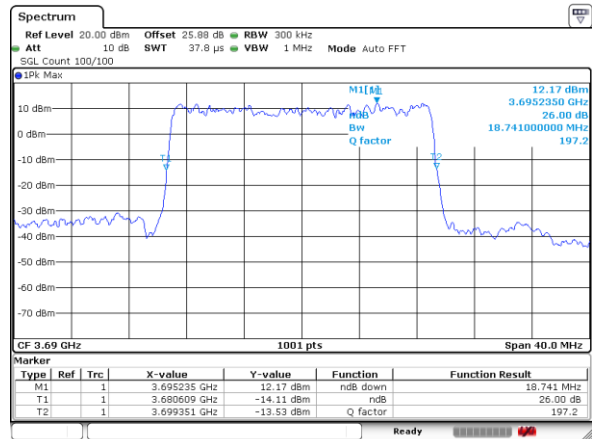


Date: 8 MAY 2020 14:44:43




LTE Band 48 CA_20MHz+20MHz

3560 MHz + 3690 MHz / 256QAM Port 1

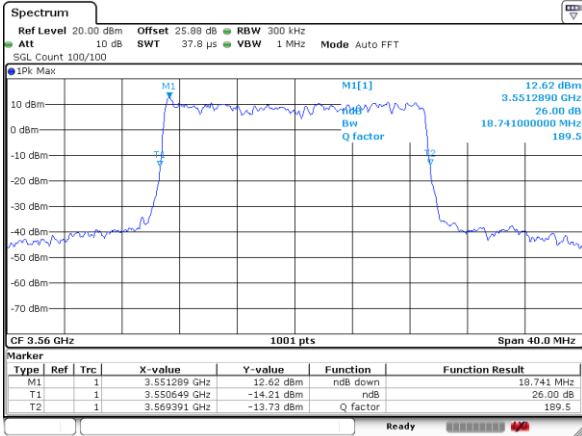


Date: 8 MAY 2020 13:52:03

3560 MHz + 3690 MHz / 256QAM Port 2

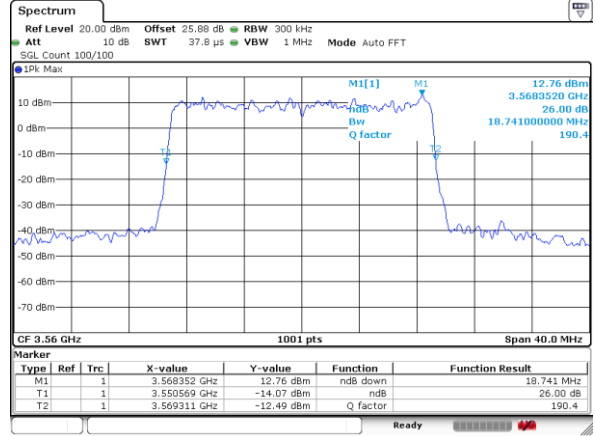


Date: 8 MAY 2020 13:52:37

3560 MHz + 3690 MHz / 256QAM Port 3

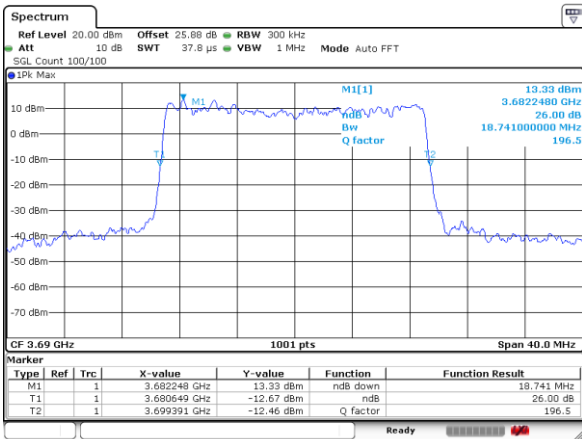

Date: 8 MAY 2020 13:53:07

3560 MHz + 3690 MHz / 256QAM Port 4

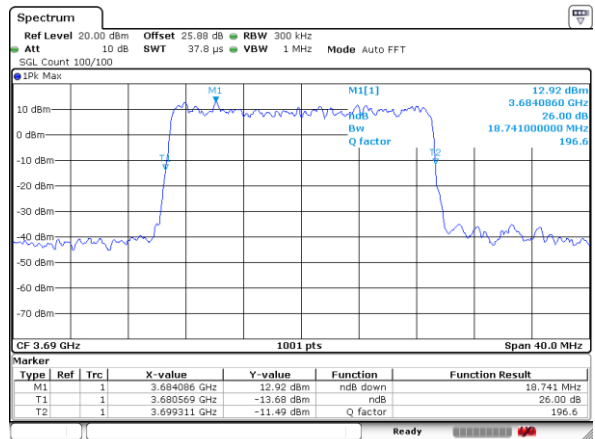

Date: 8 MAY 2020 13:53:40


**Occupied Bandwidth**

Mode		LTE Band 48 : 99%OBW(MHz)			
BW		20MHz+20MHz			
Mod.		256QAM			
Channel	Frequency (MHz)	Port 1	Port 2	Port 3	Port 4
55340 + 55540	3560 + 3580	17.90	17.90	17.90	17.90
55890 + 56090	3615 + 3635	17.90	17.90	17.90	17.90
56440 + 56640	3670 + 3690	17.90	17.90	17.90	17.90
55340 + 56640	3560 + 3690	17.90	17.90	17.90	17.90




LTE Band 48 CA_20MHz+20MHz

3560 MHz + 3580 MHz / 256QAM Port 1

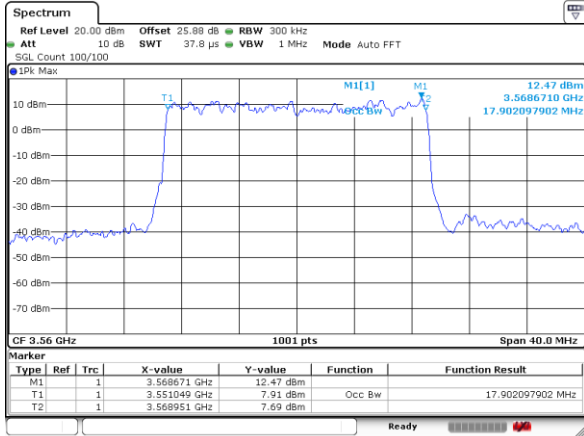


Date: 8 MAY 2020 13:29:56

3560 MHz + 3580 MHz / 256QAM Port 2

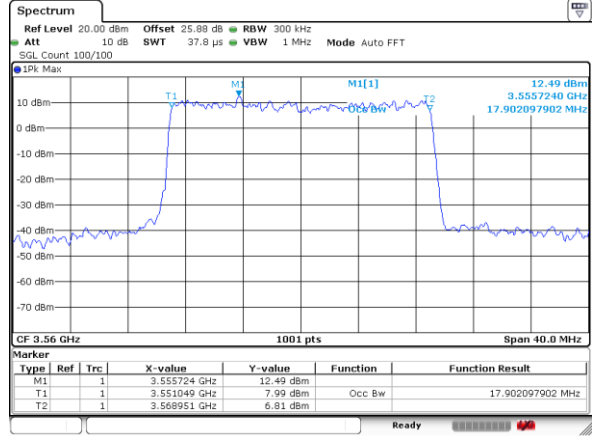


Date: 8 MAY 2020 13:31:07

3560 MHz + 3580 MHz / 256QAM Port 3

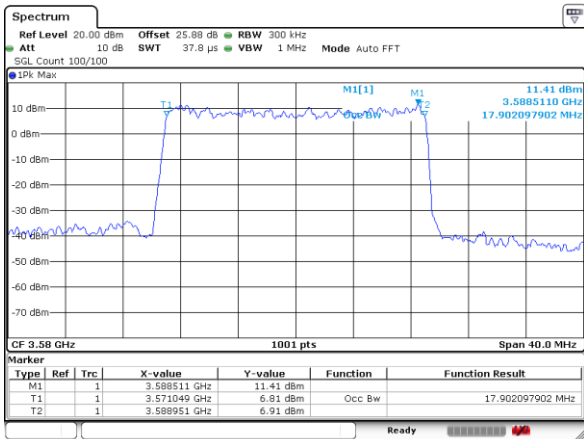

Date: 8 MAY 2020 13:32:32

3560 MHz + 3580 MHz / 256QAM Port 4

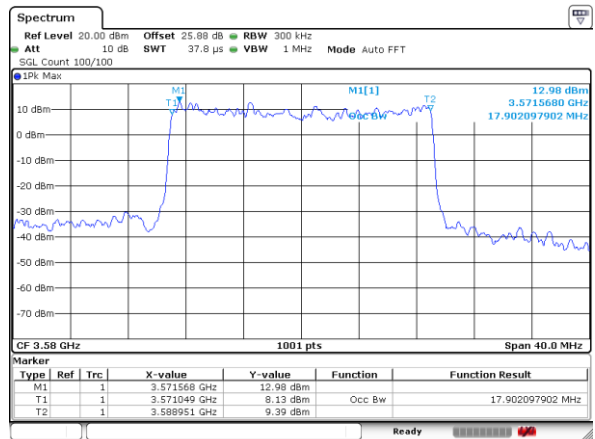


Date: 8 MAY 2020 13:32:56




LTE Band 48 CA_20MHz+20MHz

3615 MHz + 3635 MHz / 256QAM Port 1

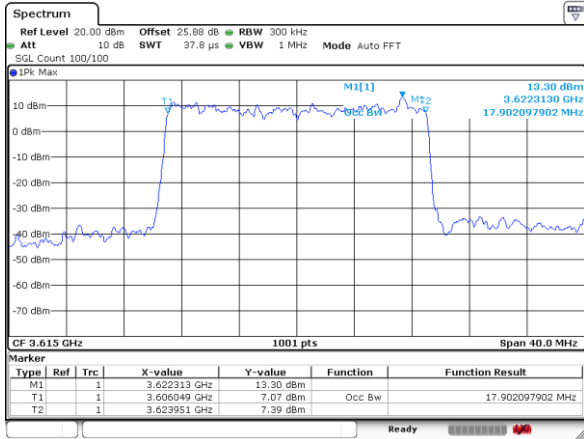


Date: 8 MAY 2020 14:32:50

3615 MHz + 3635 MHz / 256QAM Port 2

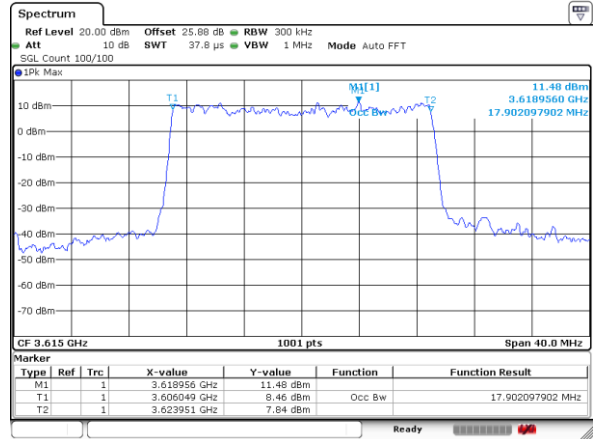


Date: 8 MAY 2020 14:33:25

3615 MHz + 3635 MHz / 256QAM Port 3

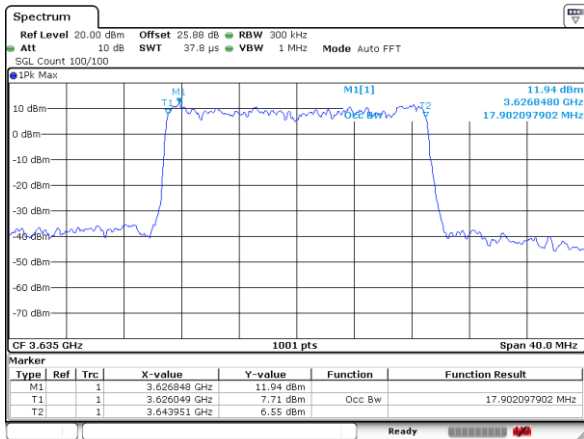

Date: 8 MAY 2020 14:34:00


3615 MHz + 3635 MHz / 256QAM Port 4

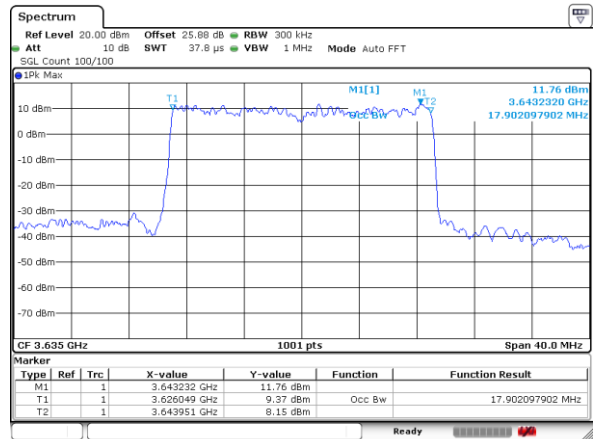

Date: 8 MAY 2020 14:34:25


LTE Band 48 CA_20MHz+20MHz

3670 MHz + 3690 MHz / 256QAM Port 1

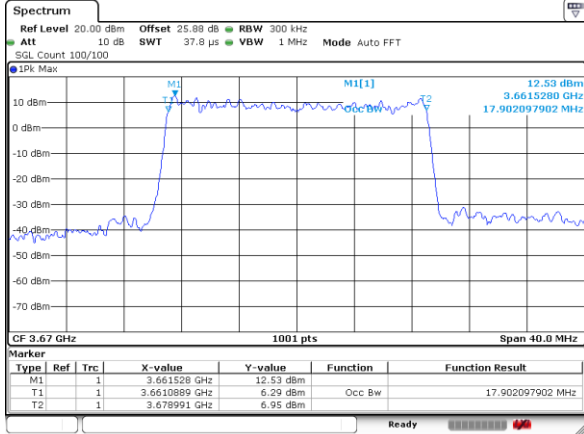


Date: 8 MAY 2020 14:45:26

3670 MHz + 3690 MHz / 256QAM Port 2

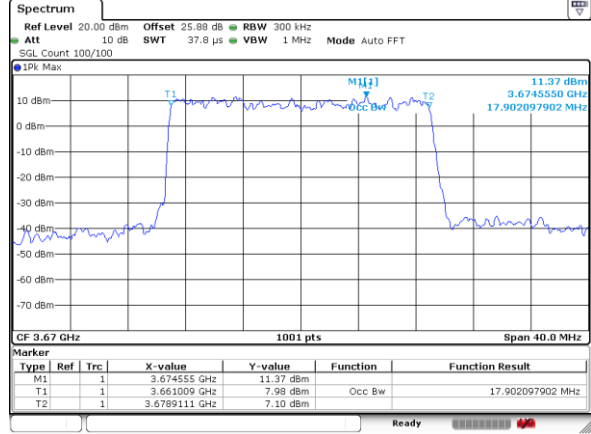


Date: 8 MAY 2020 14:45:47

3670 MHz + 3690 MHz / 256QAM Port 3

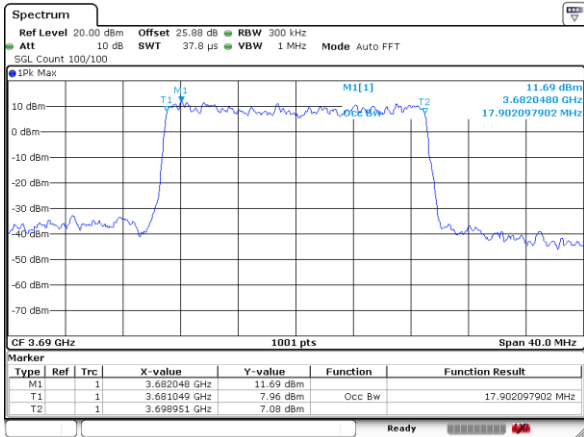

Date: 8 MAY 2020 14:46:08

3670 MHz + 3690 MHz / 256QAM Port 4

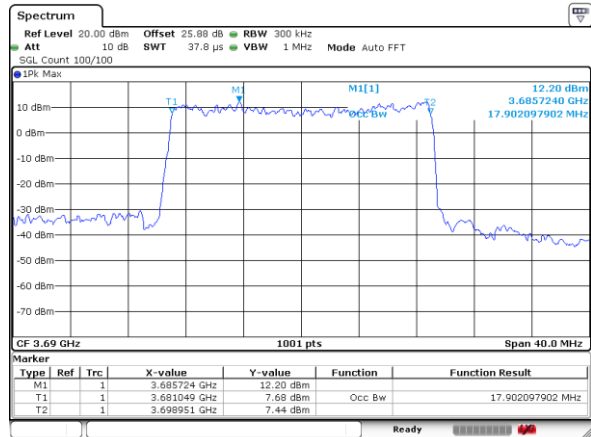


Date: 8 MAY 2020 14:46:32




LTE Band 48 CA_20MHz+20MHz

3560 MHz + 3690 MHz / 256QAM Port 1

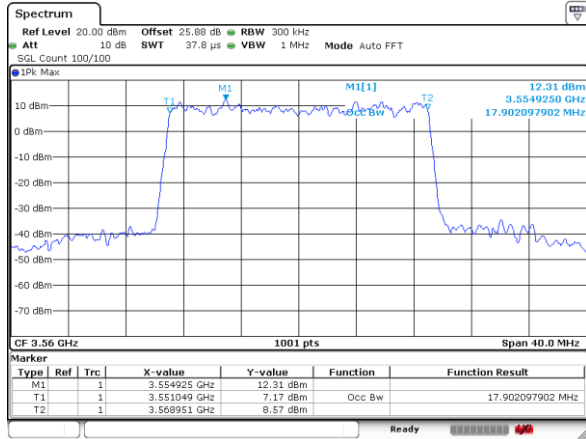


Date: 8 MAY 2020 13:54:53

3560 MHz + 3690 MHz / 256QAM Port 2

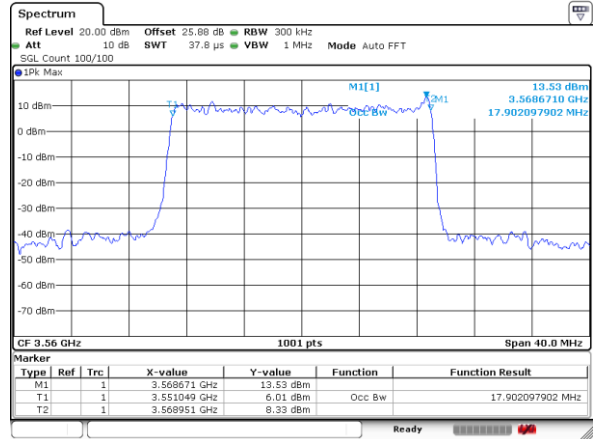


Date: 8 MAY 2020 13:55:30

3560 MHz + 3690 MHz / 256QAM Port 3

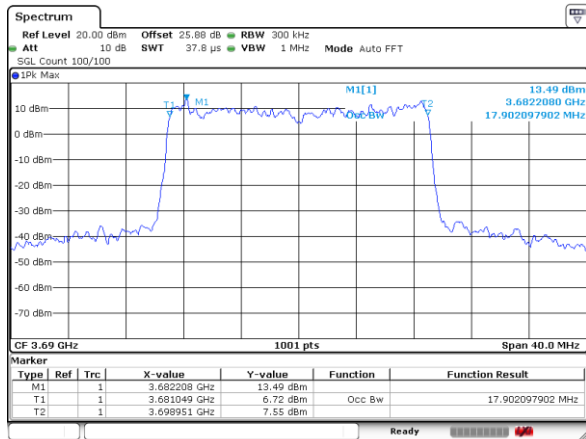

Date: 8 MAY 2020 13:54:36

3560 MHz + 3690 MHz / 256QAM Port 4

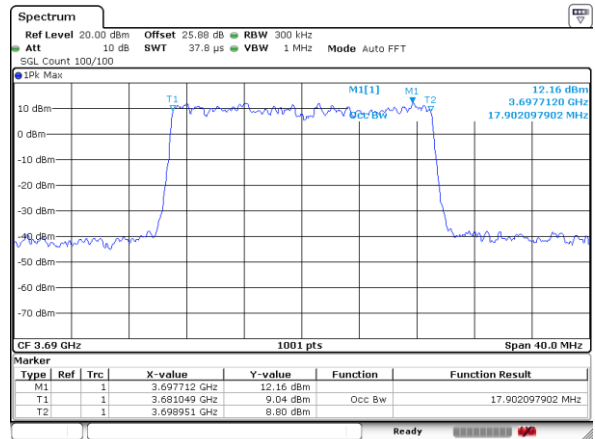

Date: 8 MAY 2020 13:54:11

—THE END—