

Garage Light Manual

Thank you for purchasing our products.(Please refer to the actual product)

Notice


- 1. The ambient temperature for normal use is -30℃ ~ 50℃. If it exceeds this range, the product life will be adversely affected;
- 2. Please check if there is any damage after unpacking. If so, please contact your merchant customer service staff for replacement. If there is a defect during transportation,do not use the damaged lamp to avoid electric shock;
- 3. Please turn off the power before installation, and then perform wiring installation;
- 4. Please connect the product according to the standard working voltage.

Features

- 1. High brightness and long service life.
- 2. The lamp can save energy by 85%.
- 3. Using high-quality constant current chip, no flicker, protect eyesight.
- 4. The installation of garage light product is simple and convenient.

Available scenarios

Warehouse lights, Garage lights, Office lights, Recreation lights, stage lights, etc.

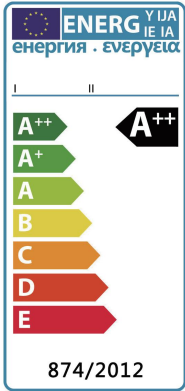


Parameter

GARAGE LIGHT	Input:85V-265V AC	CCT:6500K
LED Type:2835	Lamp Leaf: 6+1 leaf	Lamp Holder:E26/E27
Beam Angle:360°	Energy Saving:85%	Adjustable Angle:90°

Installation Instructions





Dimension Properties

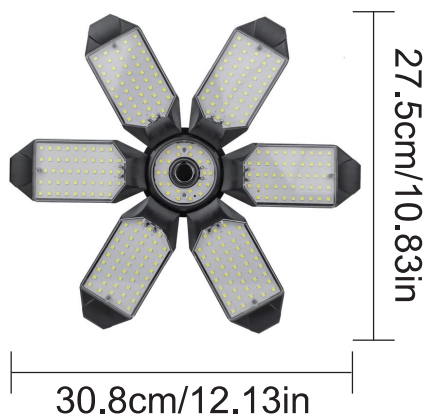

WARNING:

1. This product is for indoor use only.
2. The light source of the lamp cannot be replaced!

Structural Features

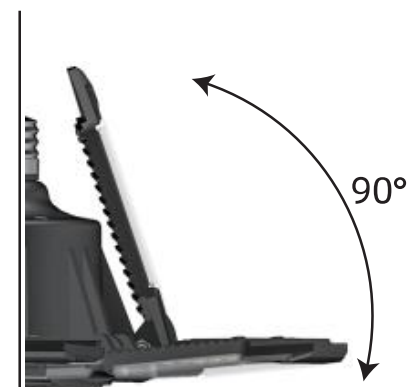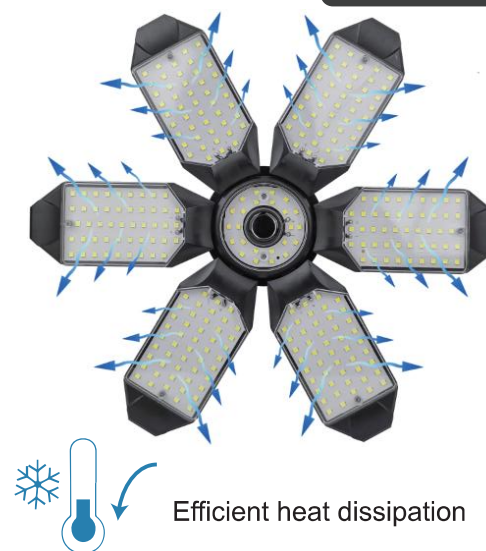

90° Foldable blade

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.