




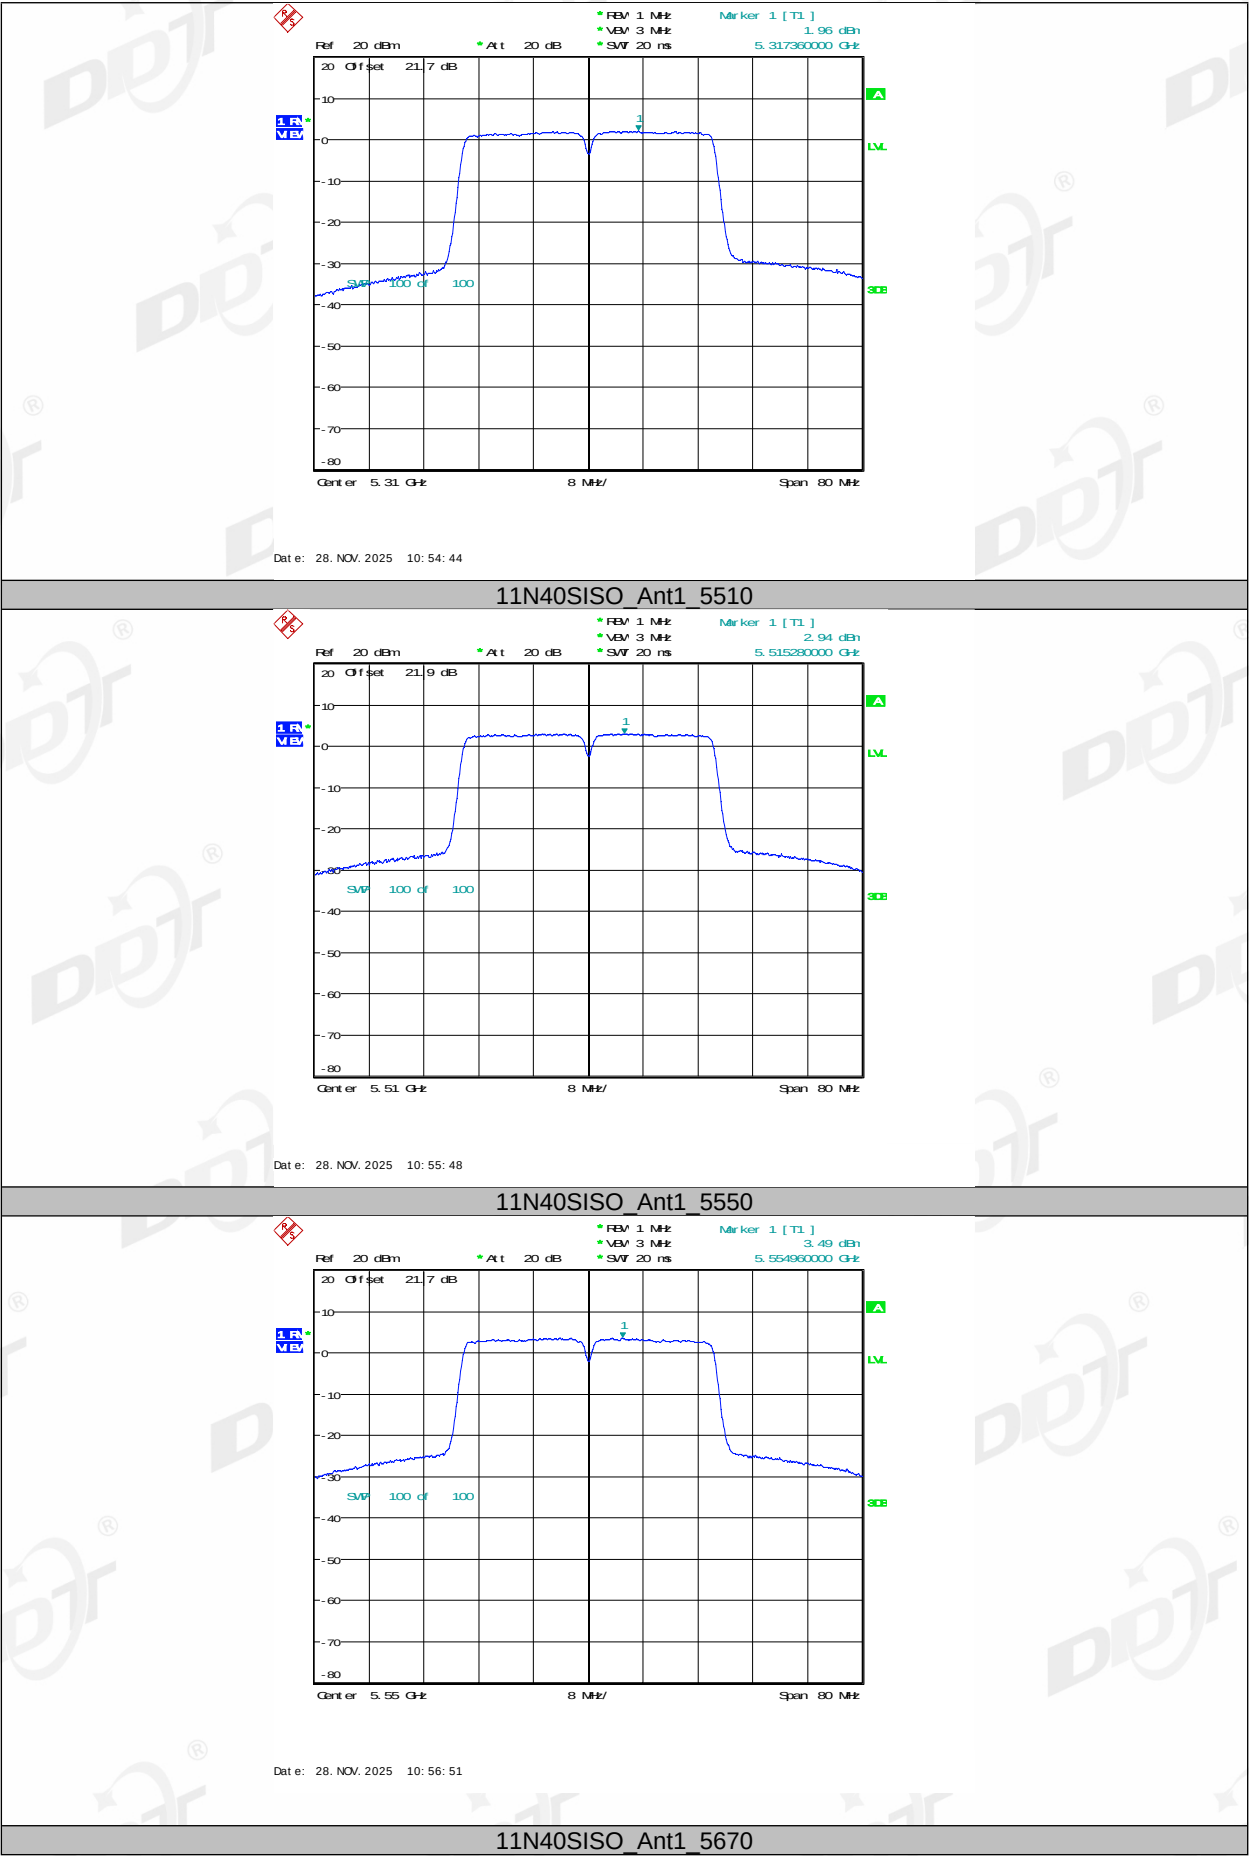


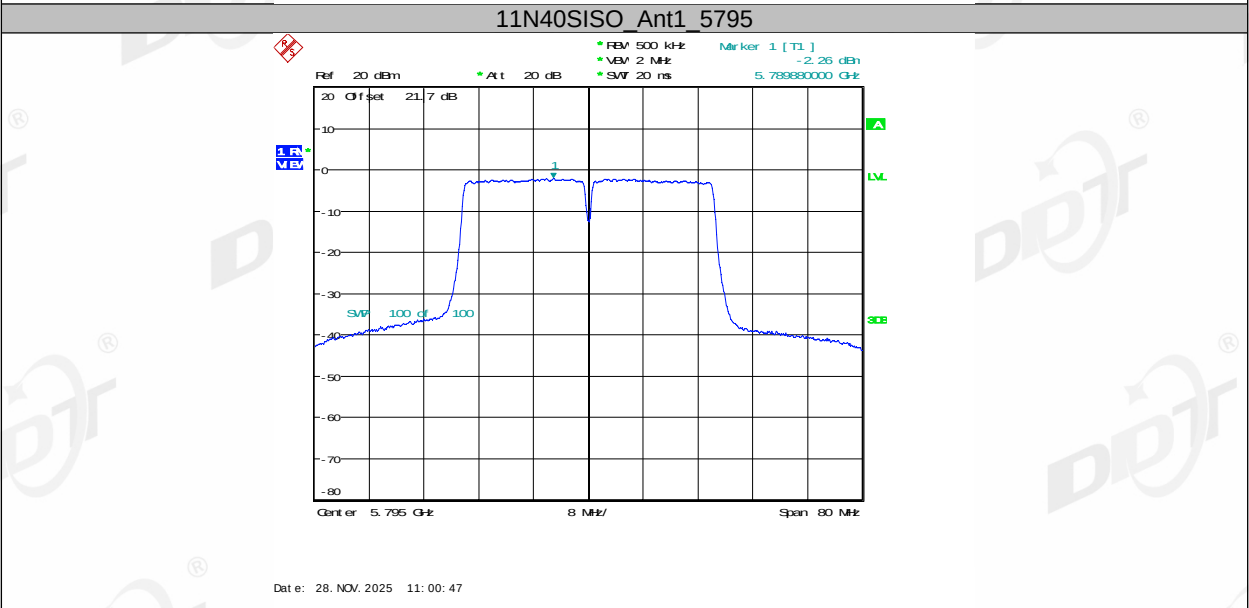

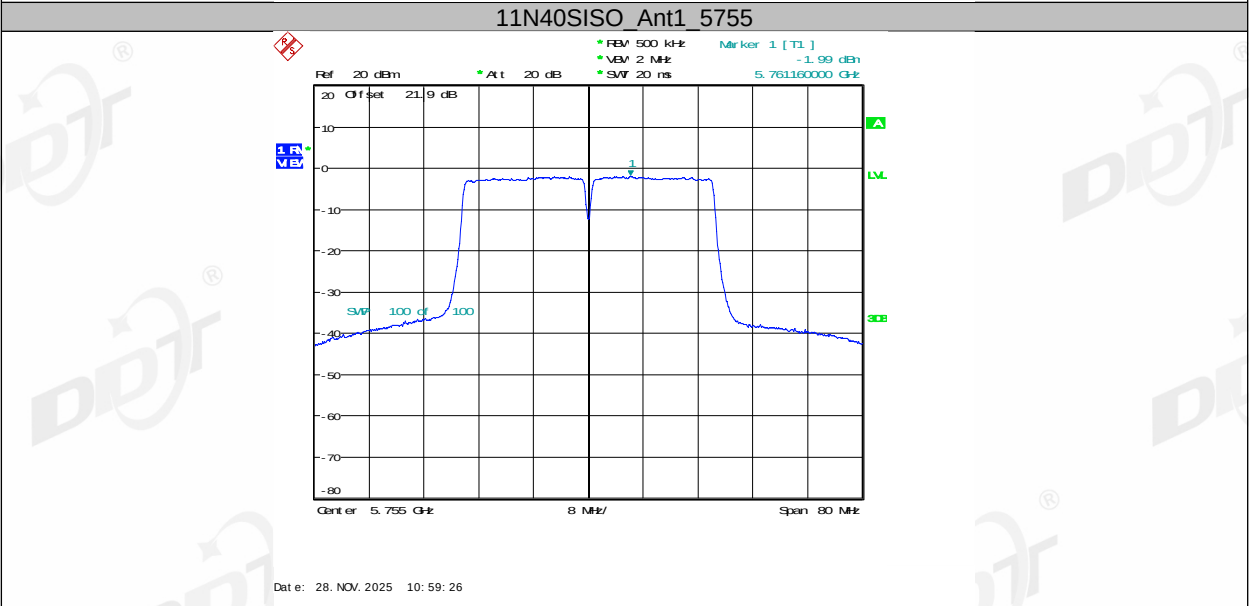


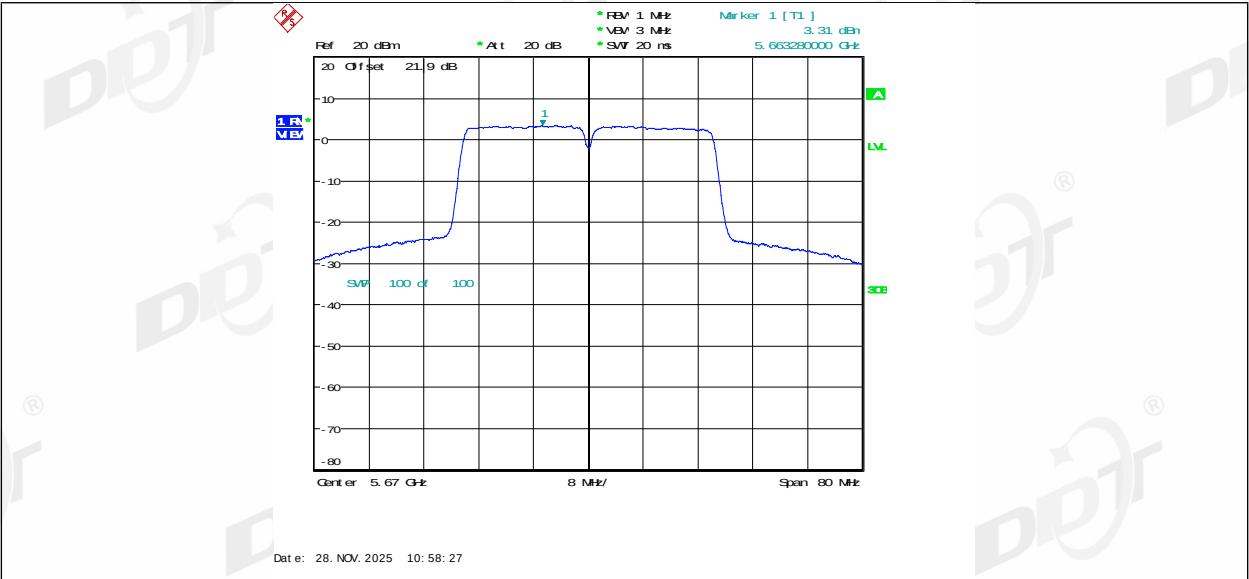

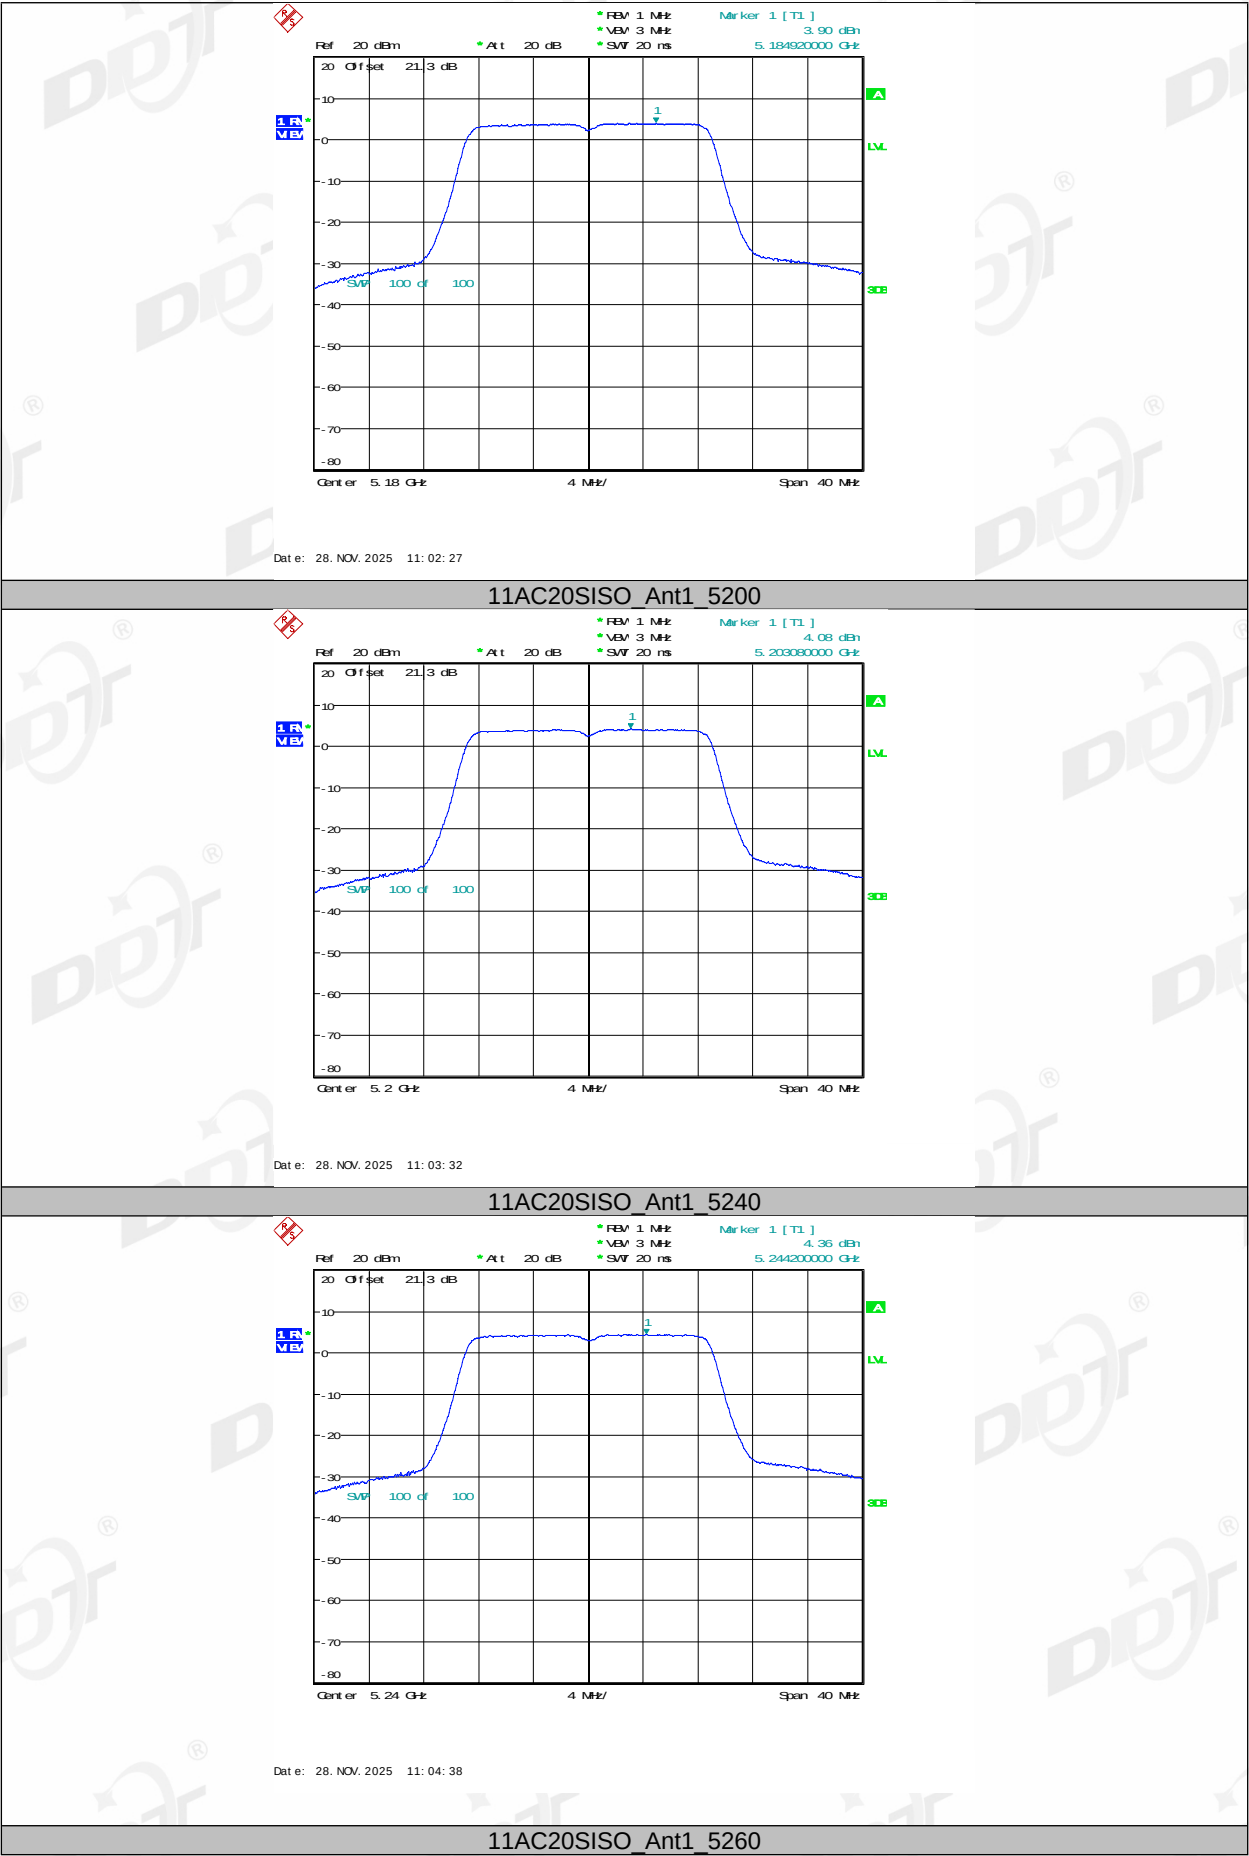


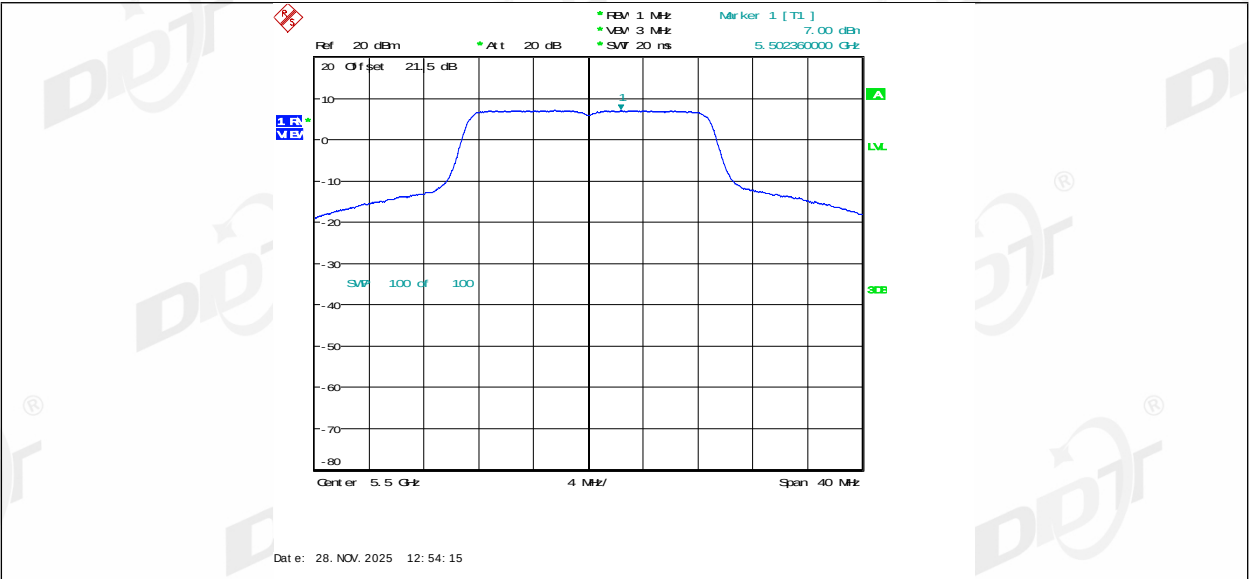


11AC20SISO_Ant1_5580

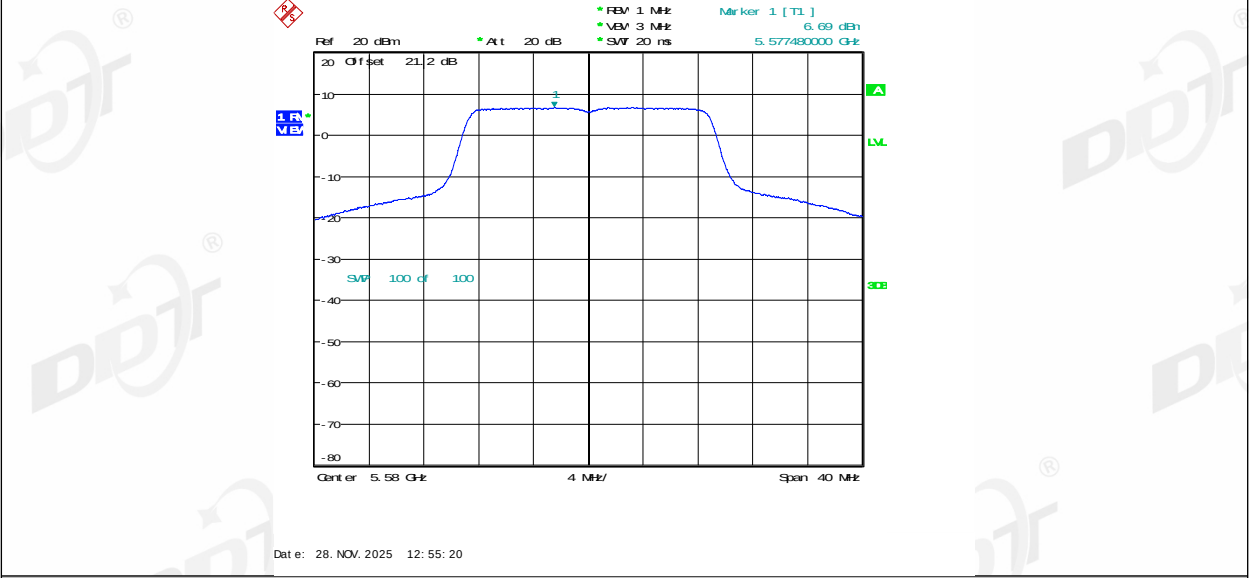


11AC20SISO_Ant1_5700

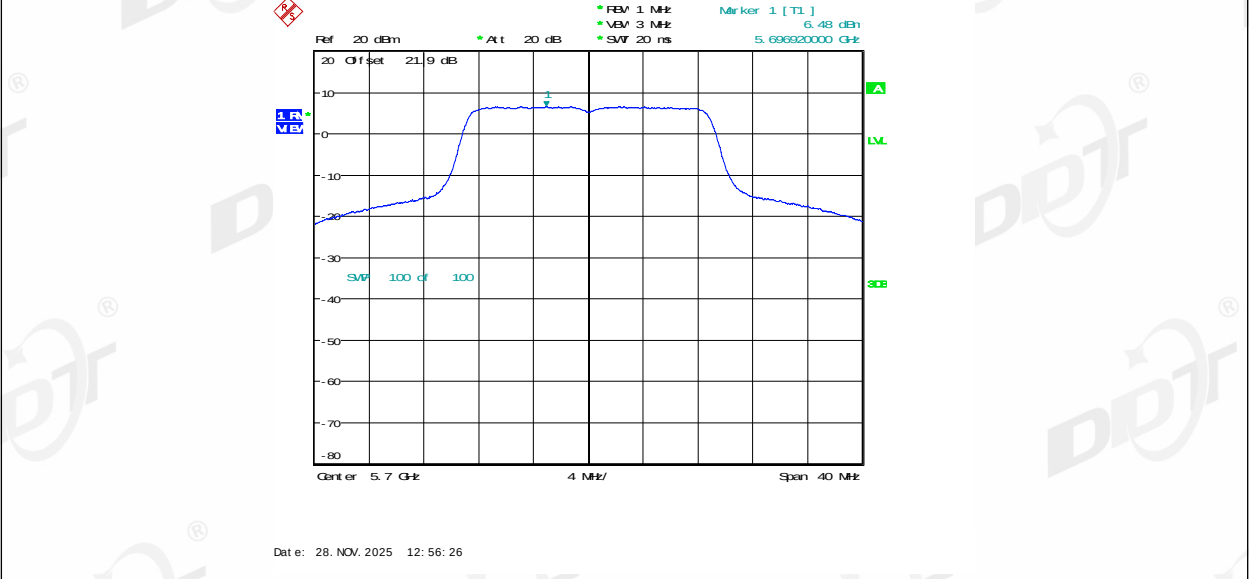


11AC20SISO_Ant1_5745

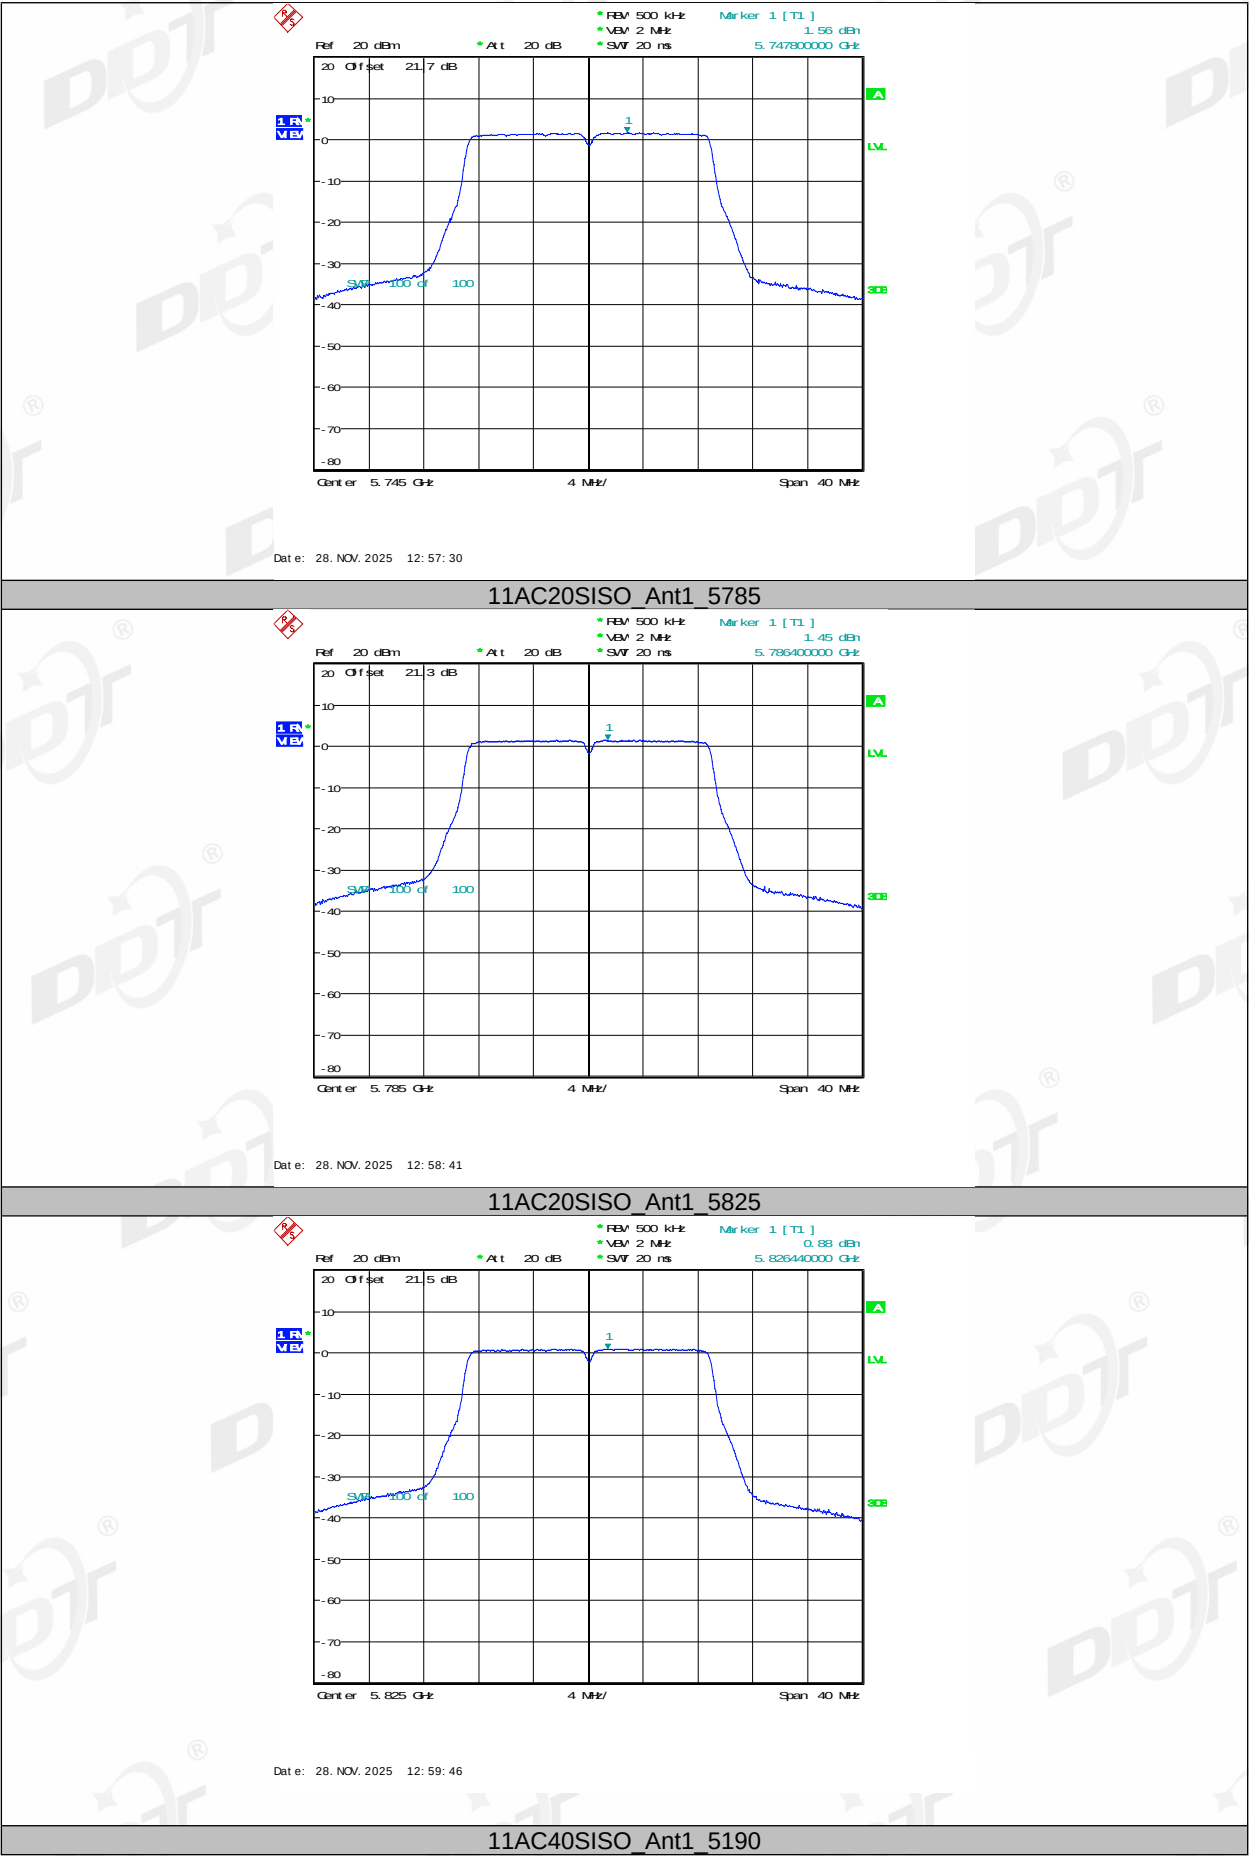


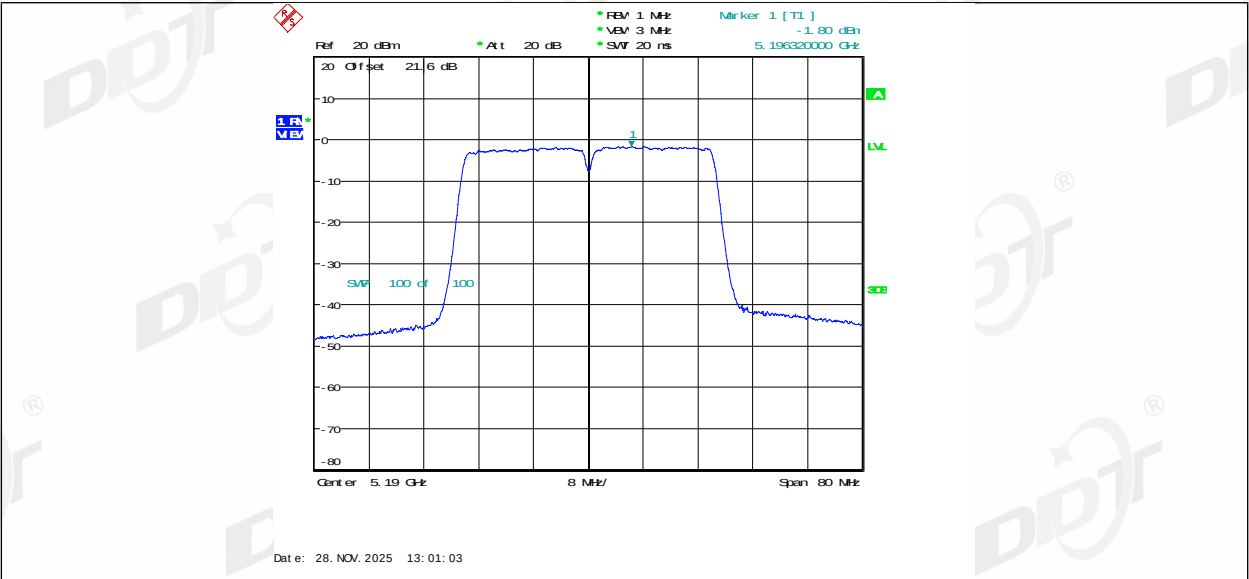


11AC40SISO_Ant1_5230

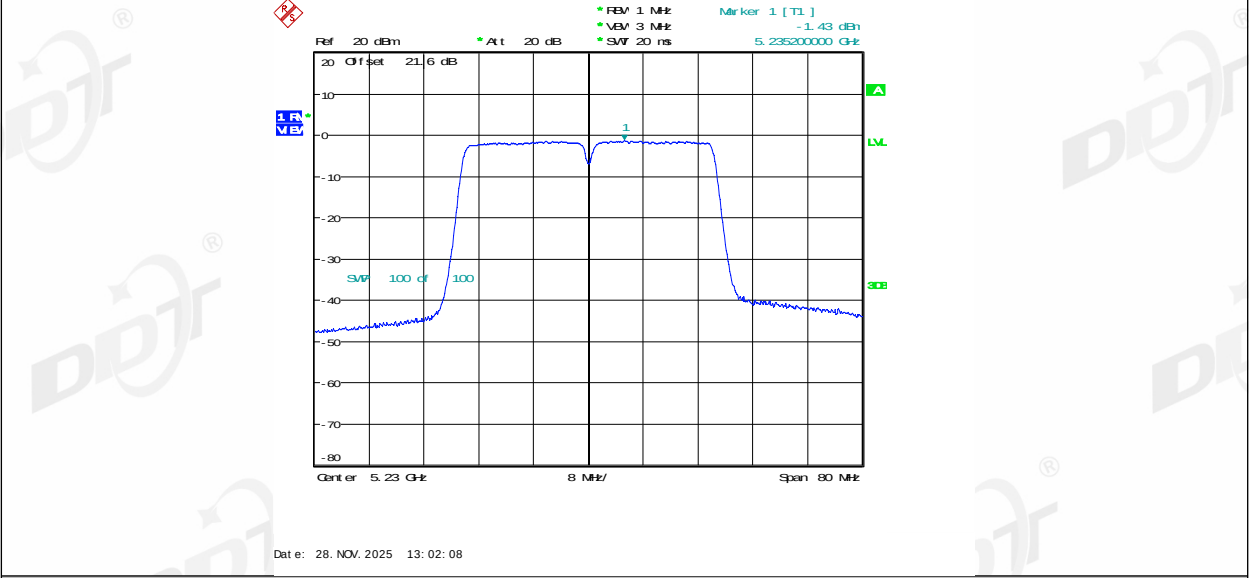



11AC40SISO_Ant1_5270

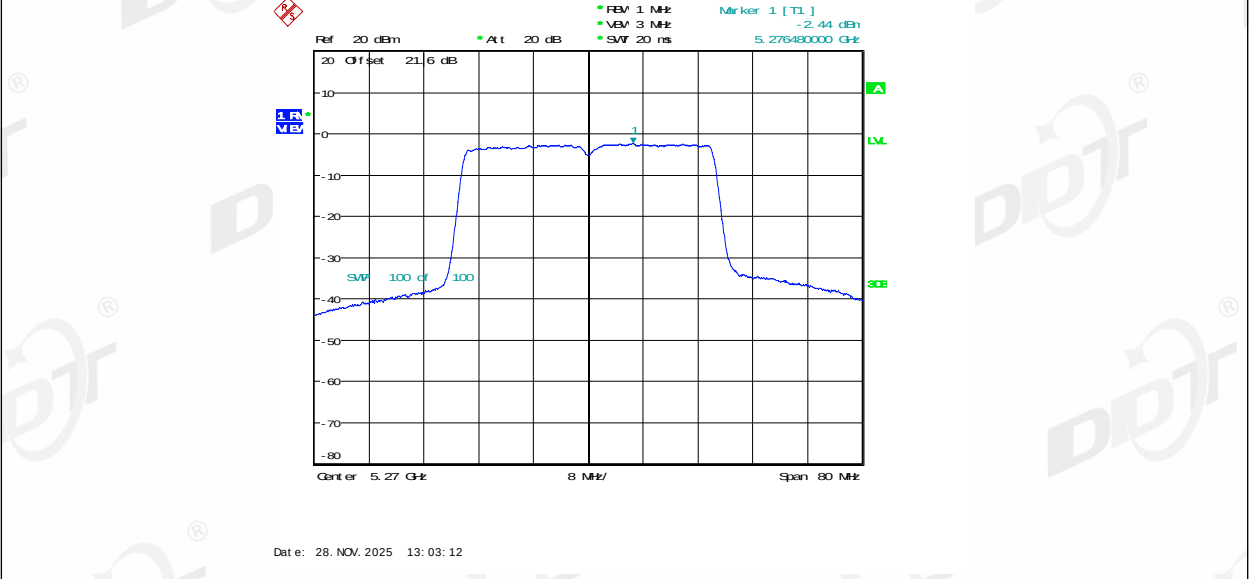




11AC40SISO_Ant1_5310

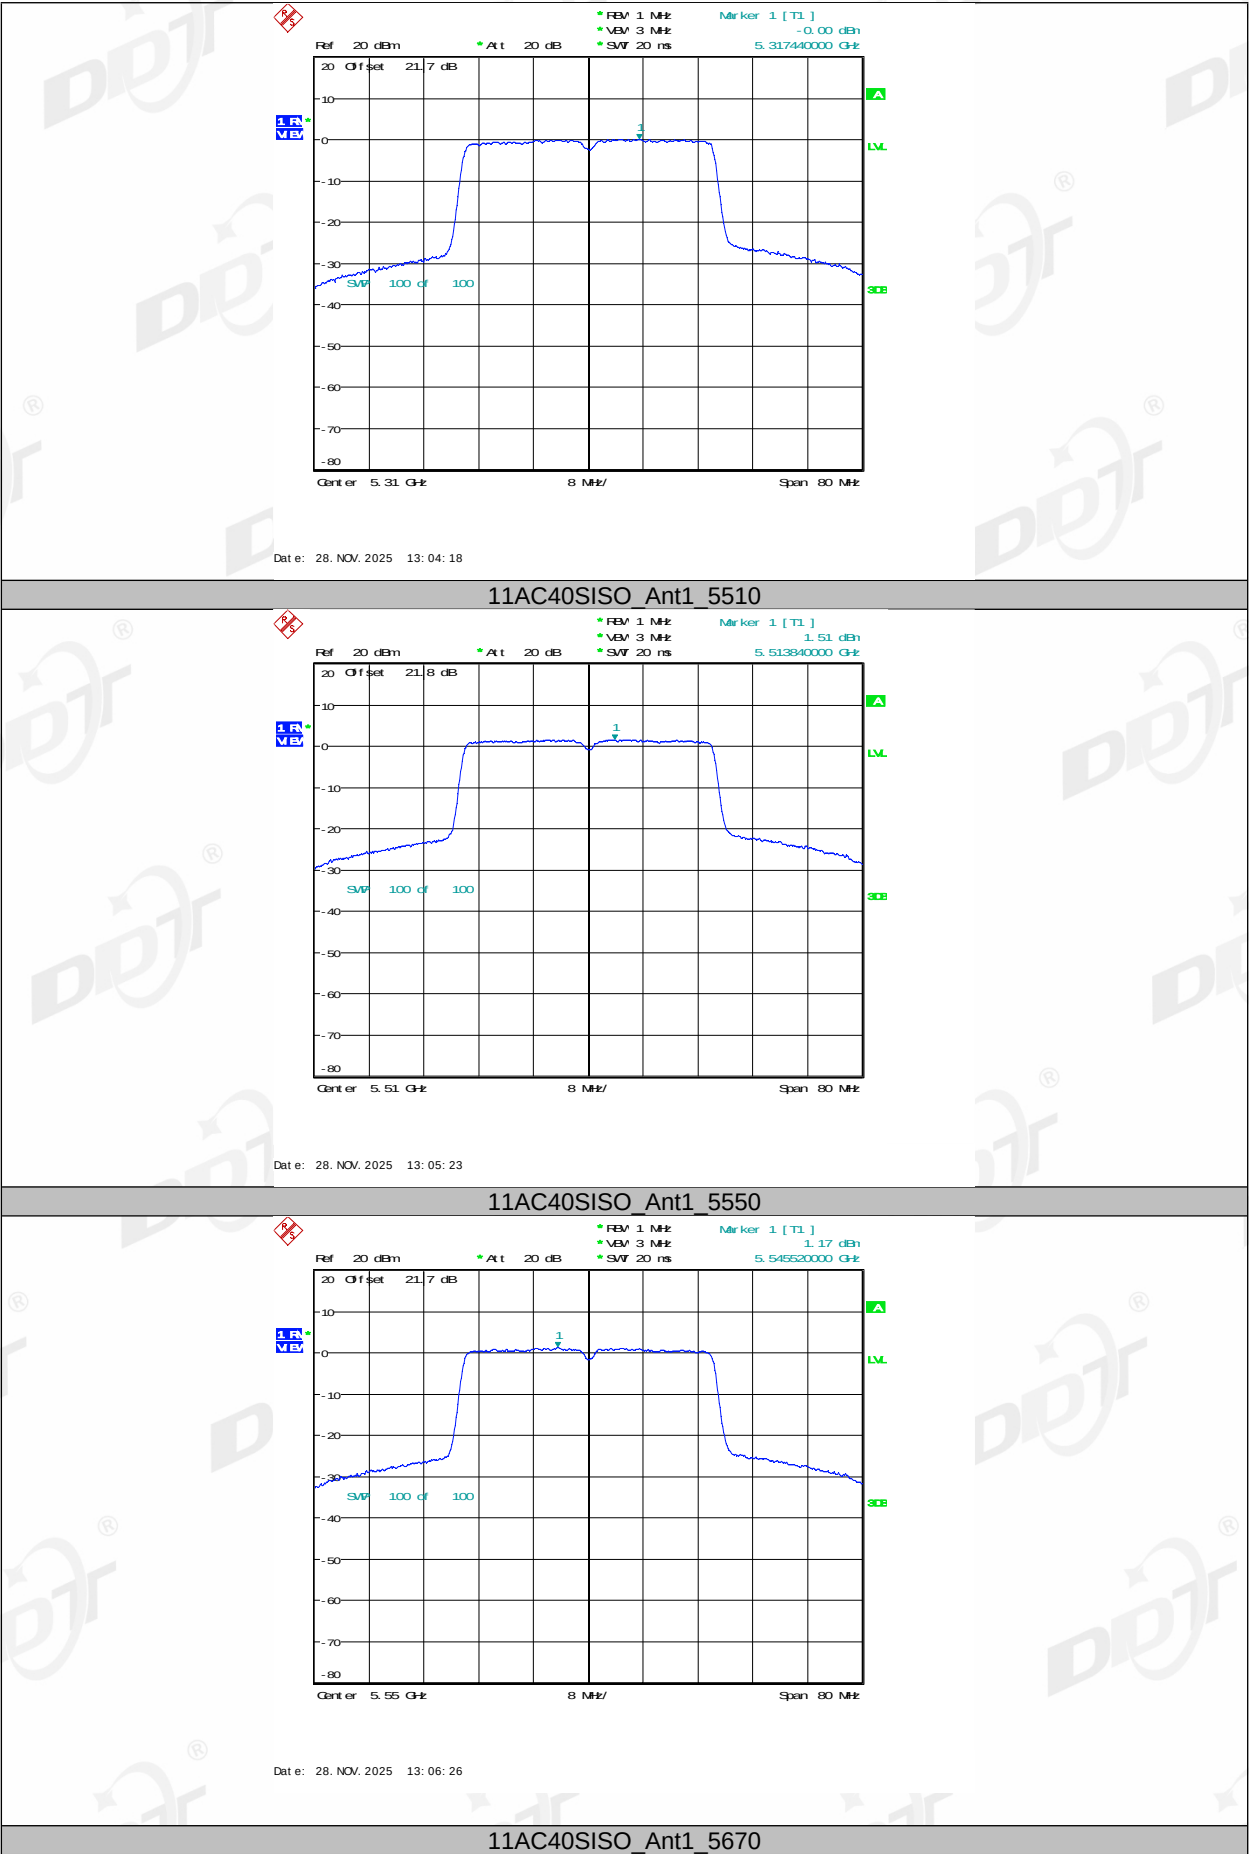

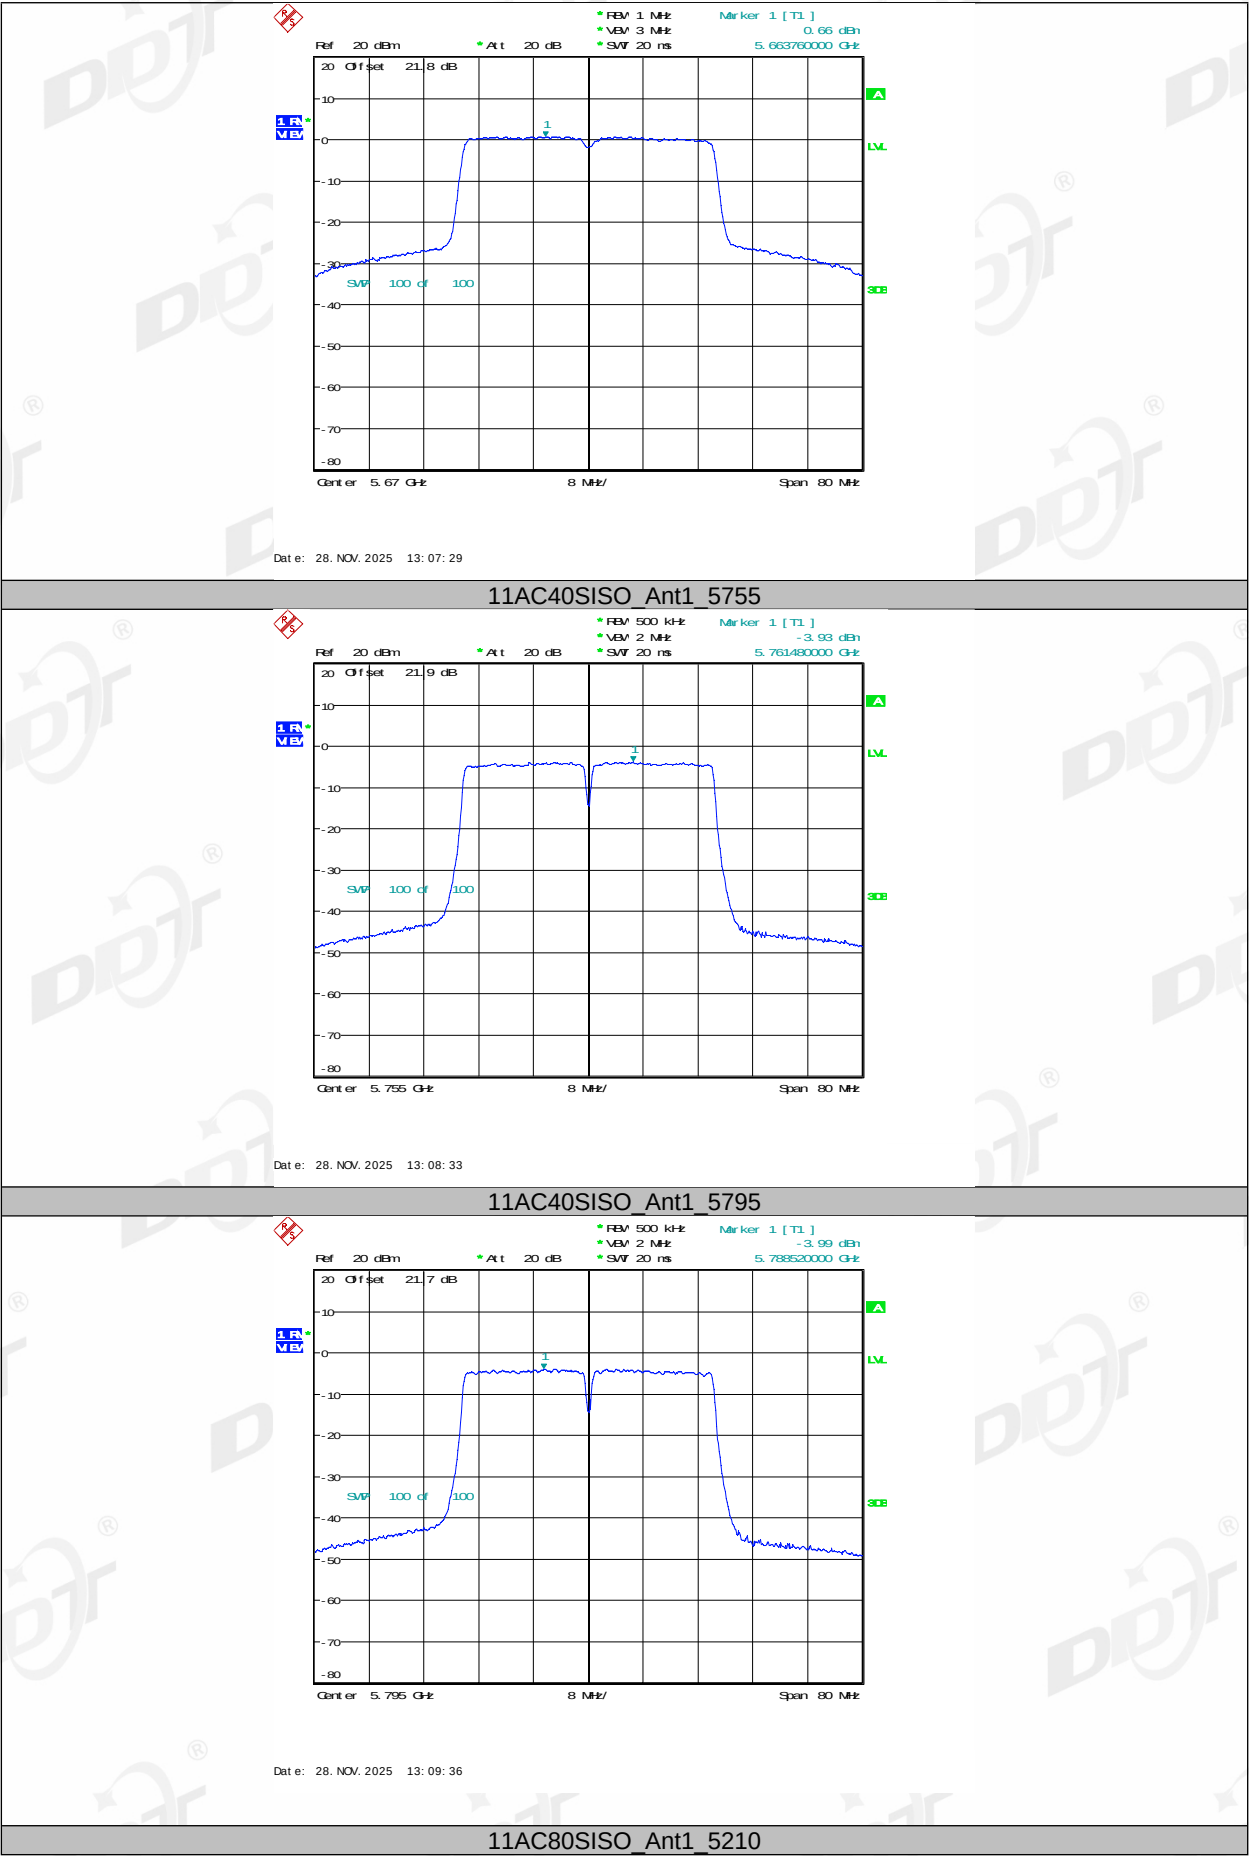

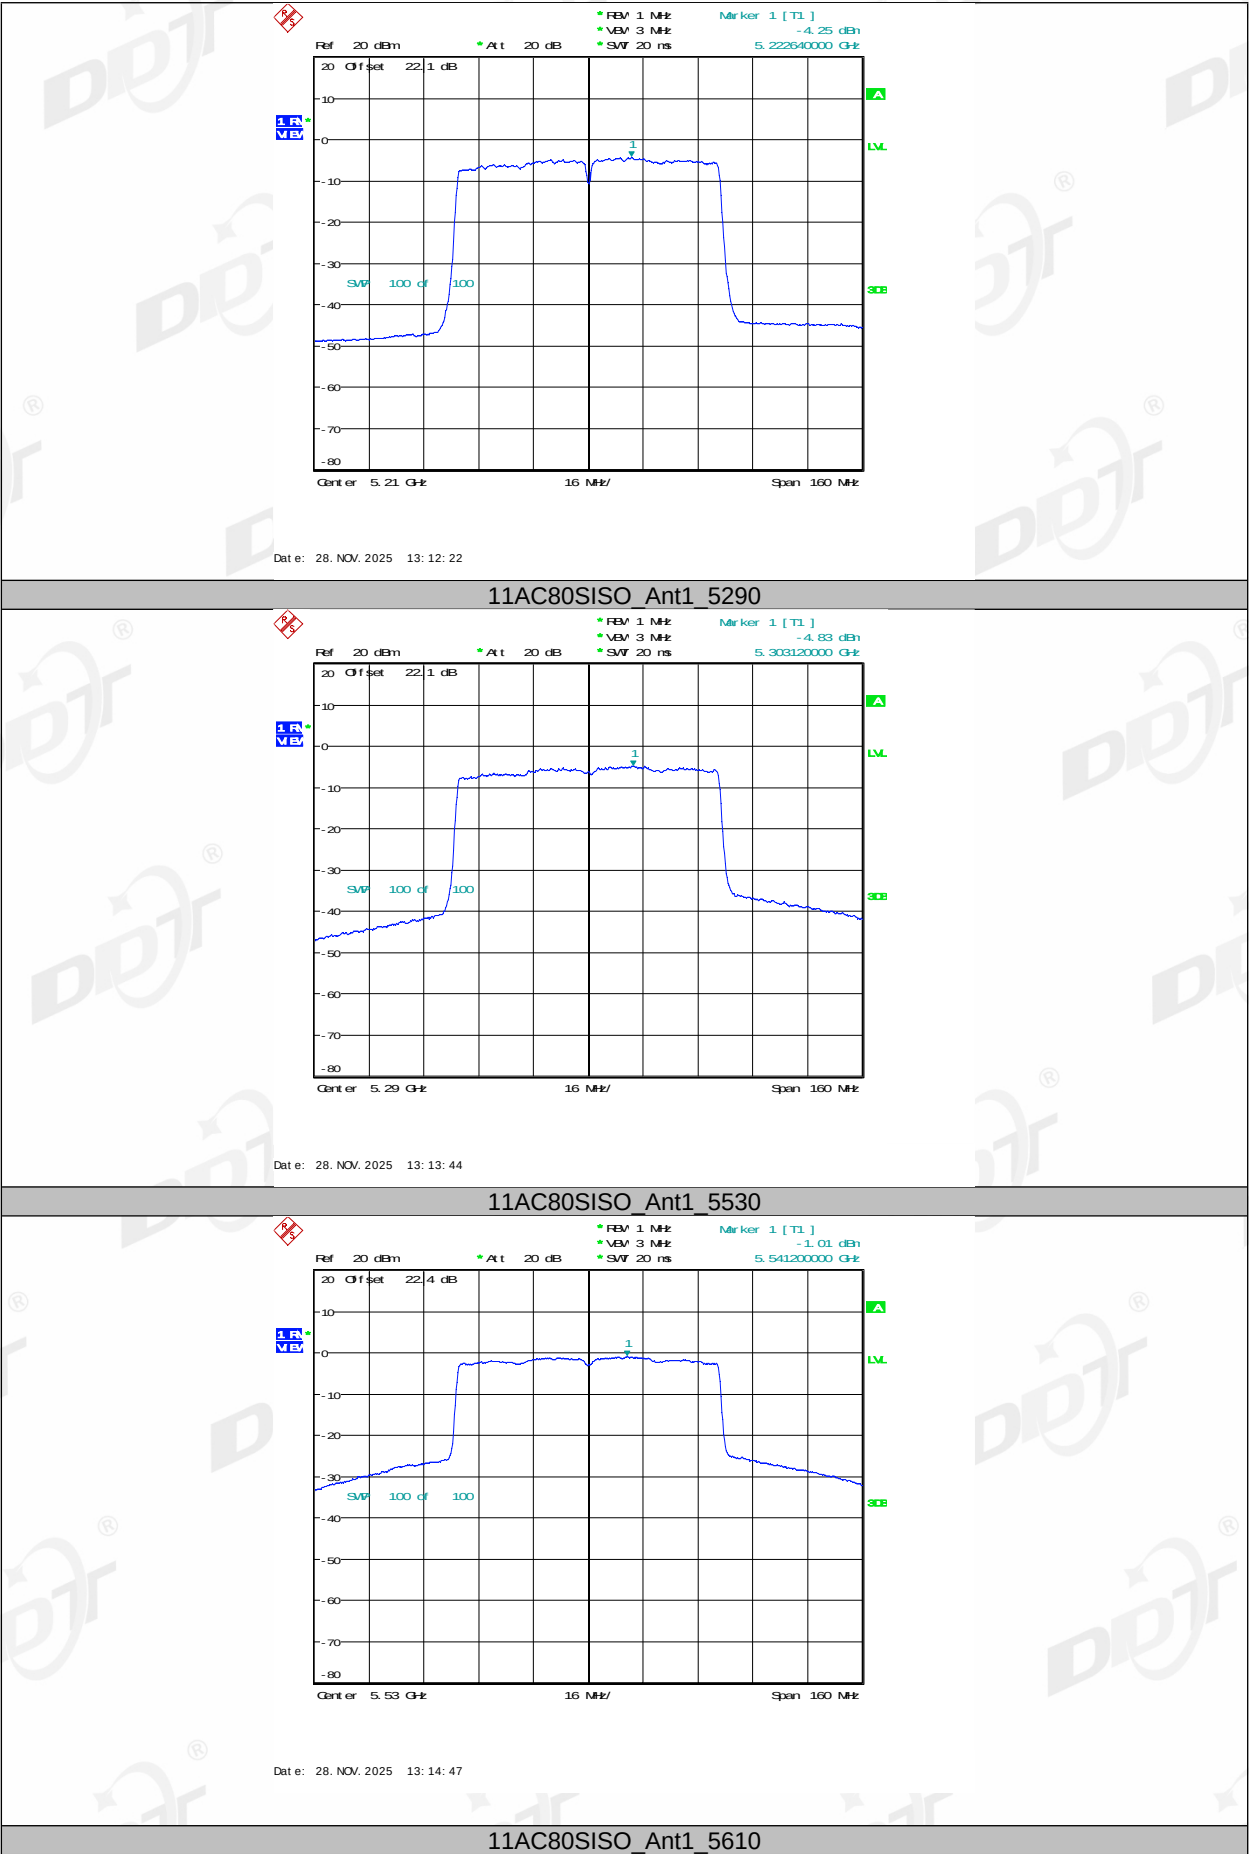





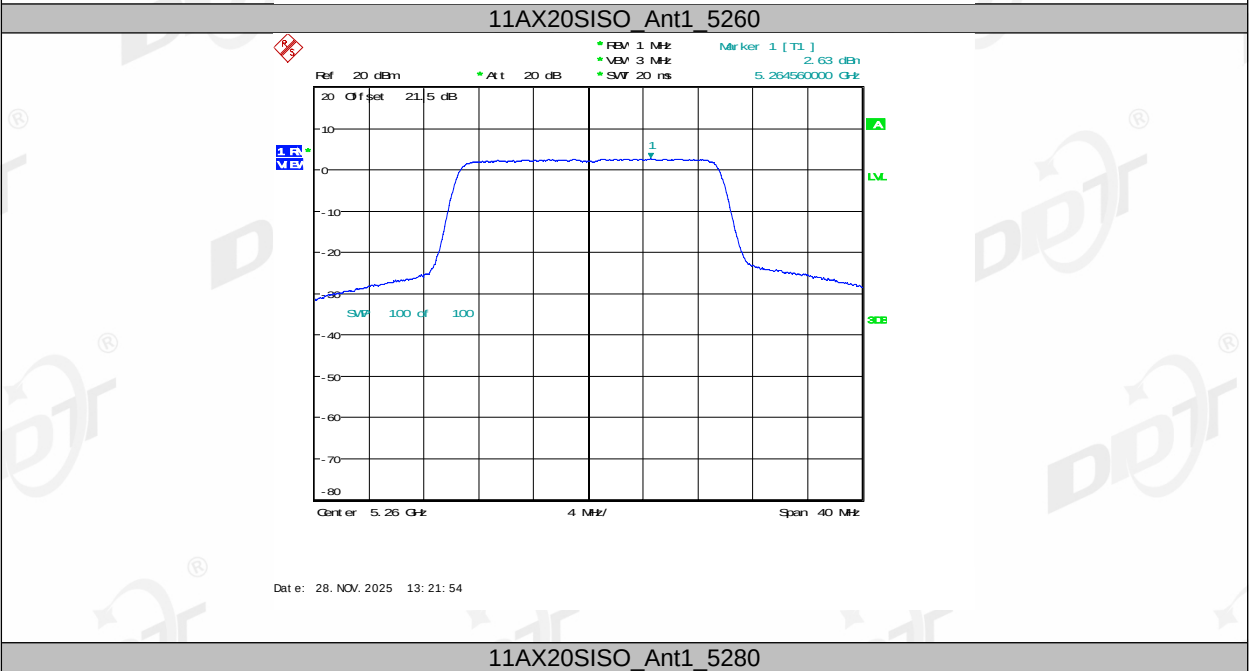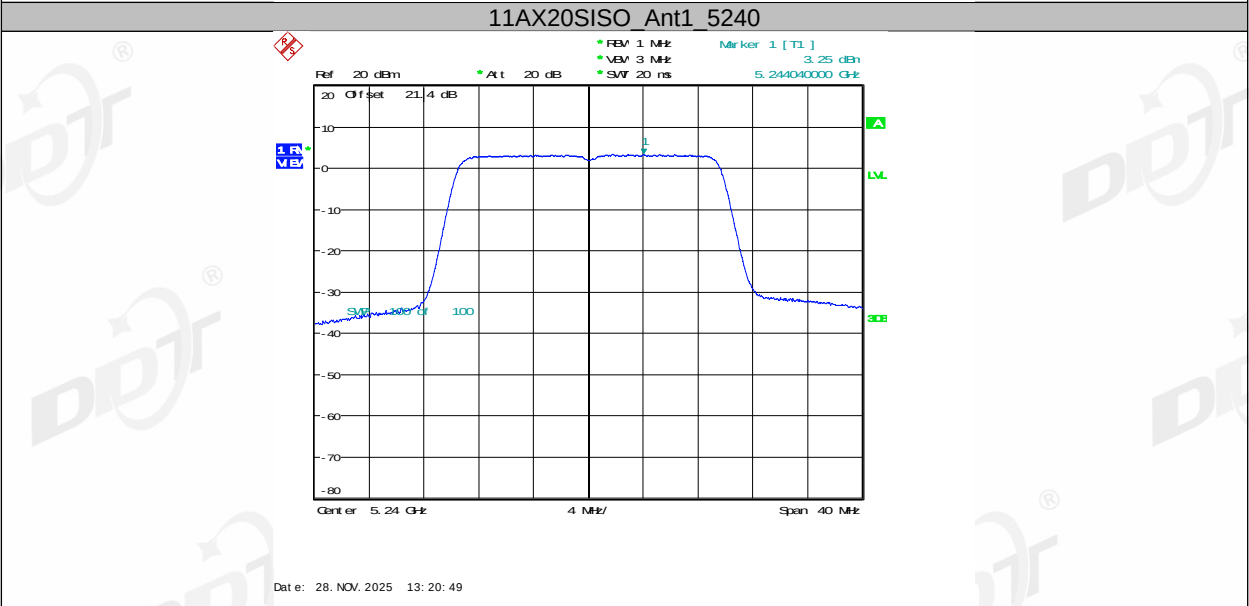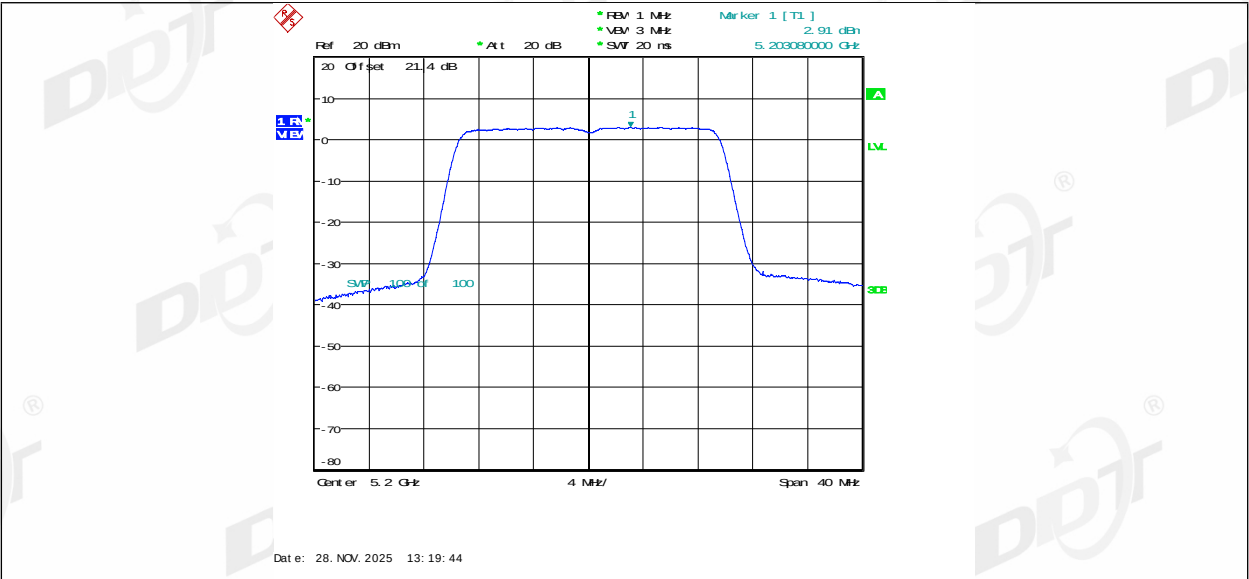












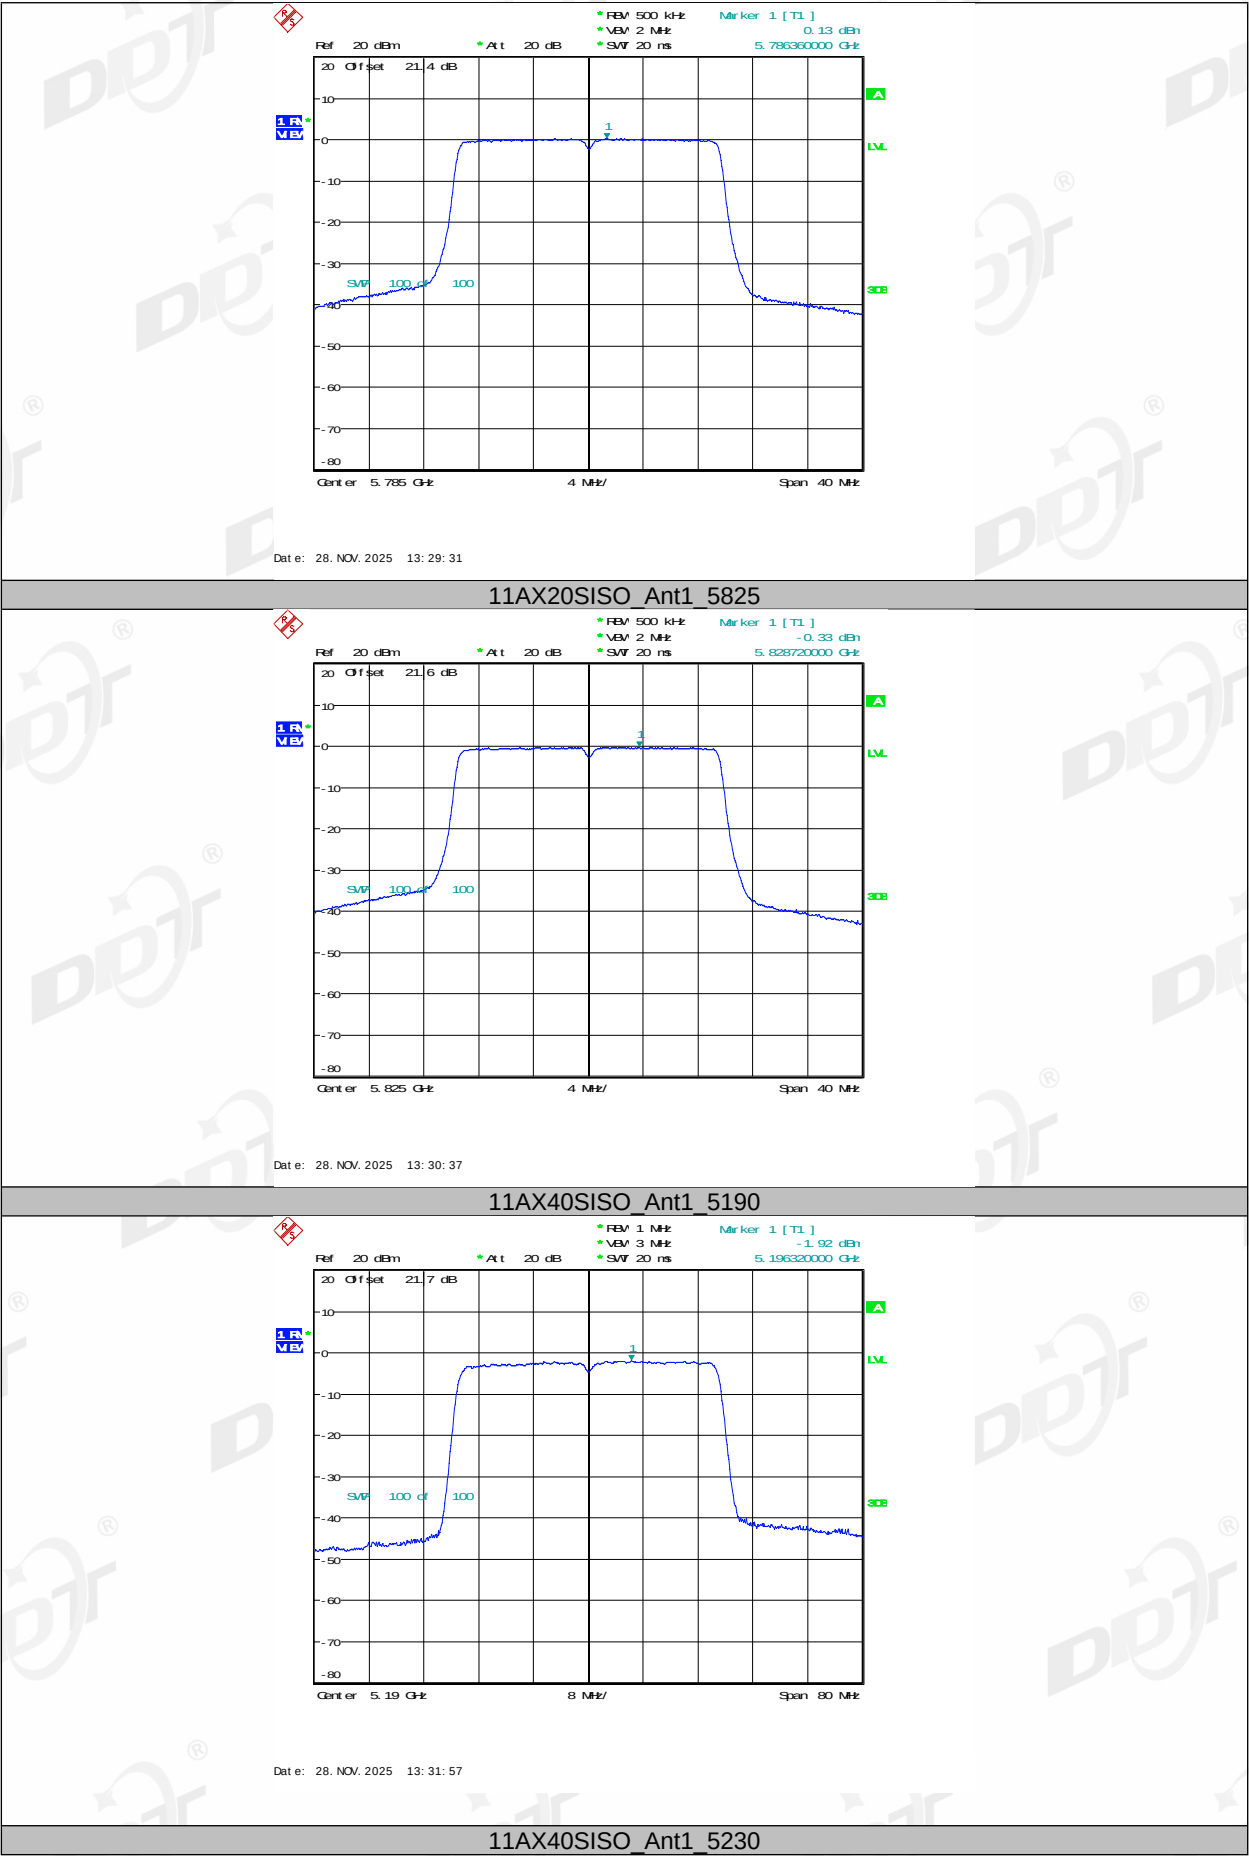


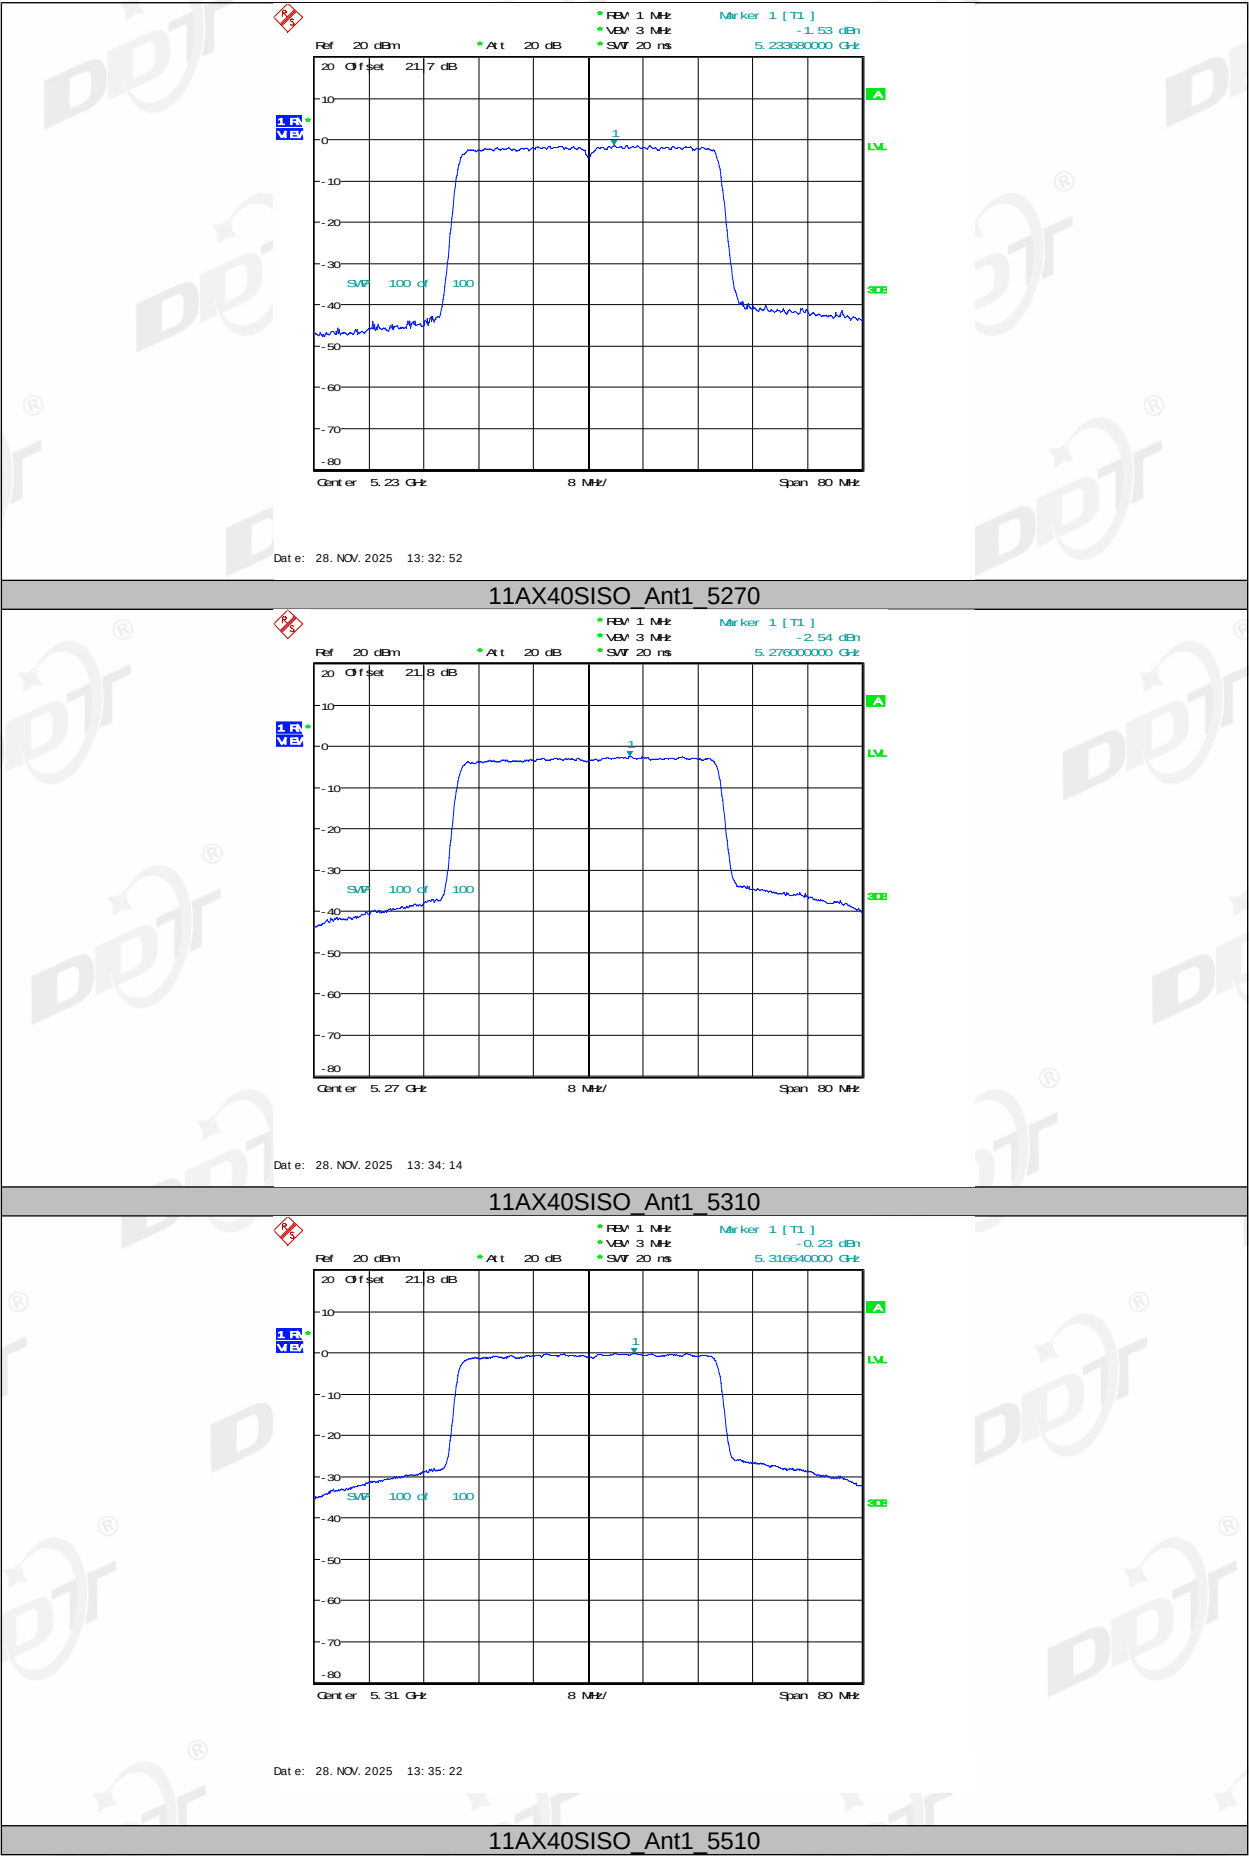

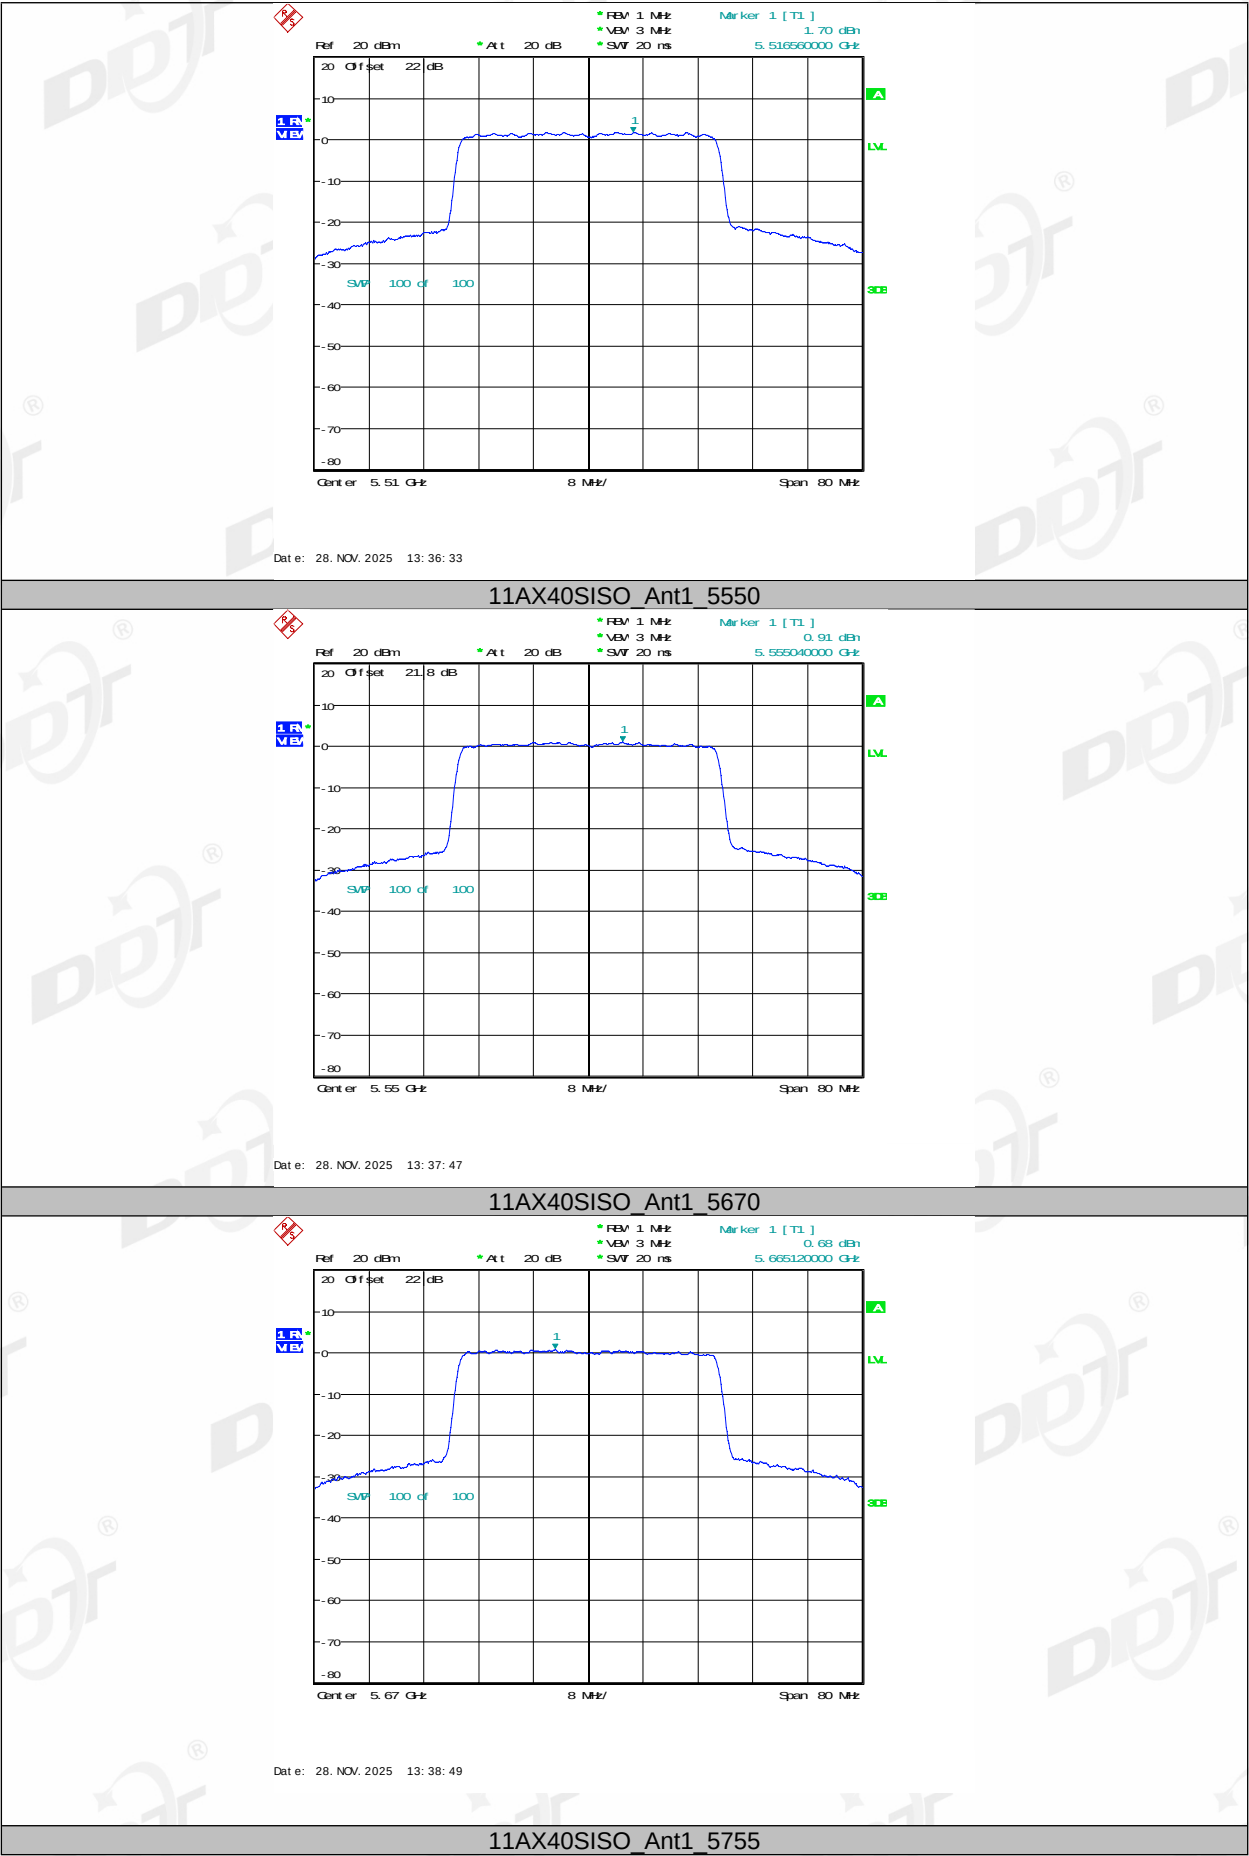


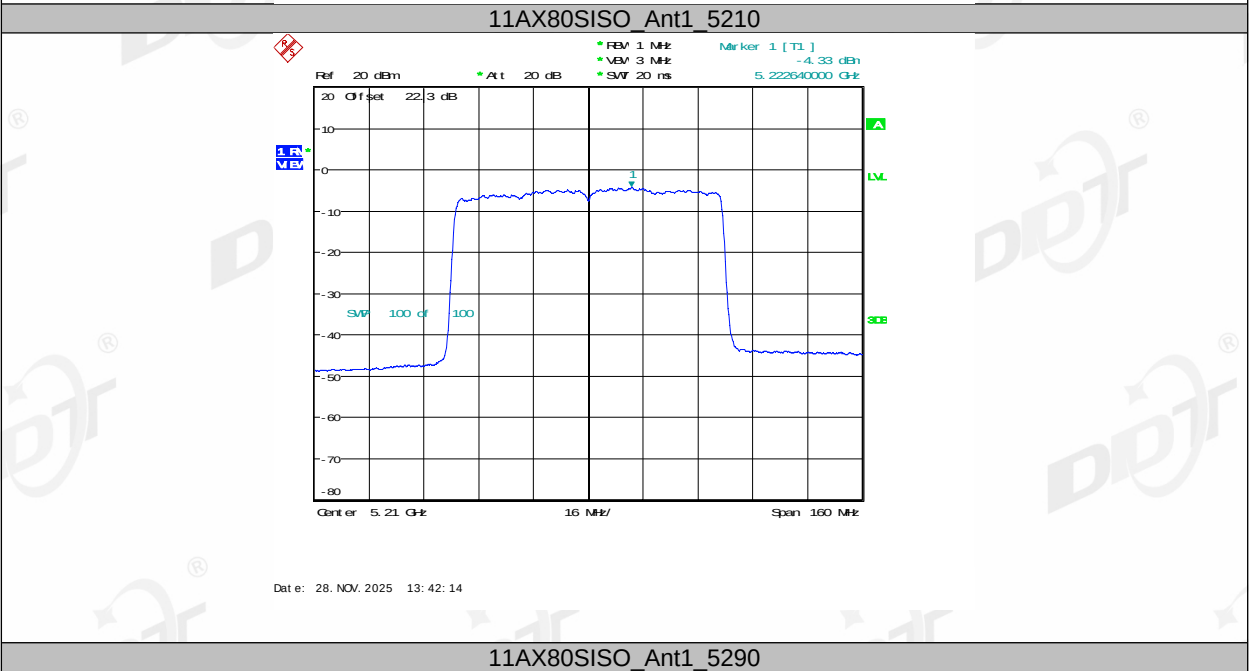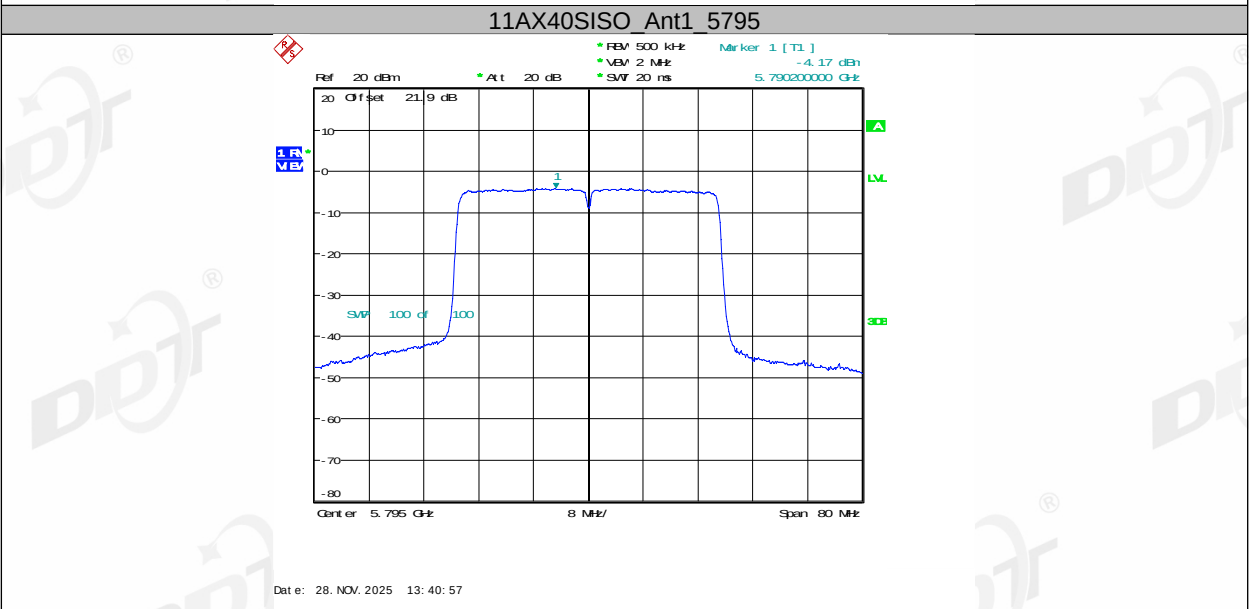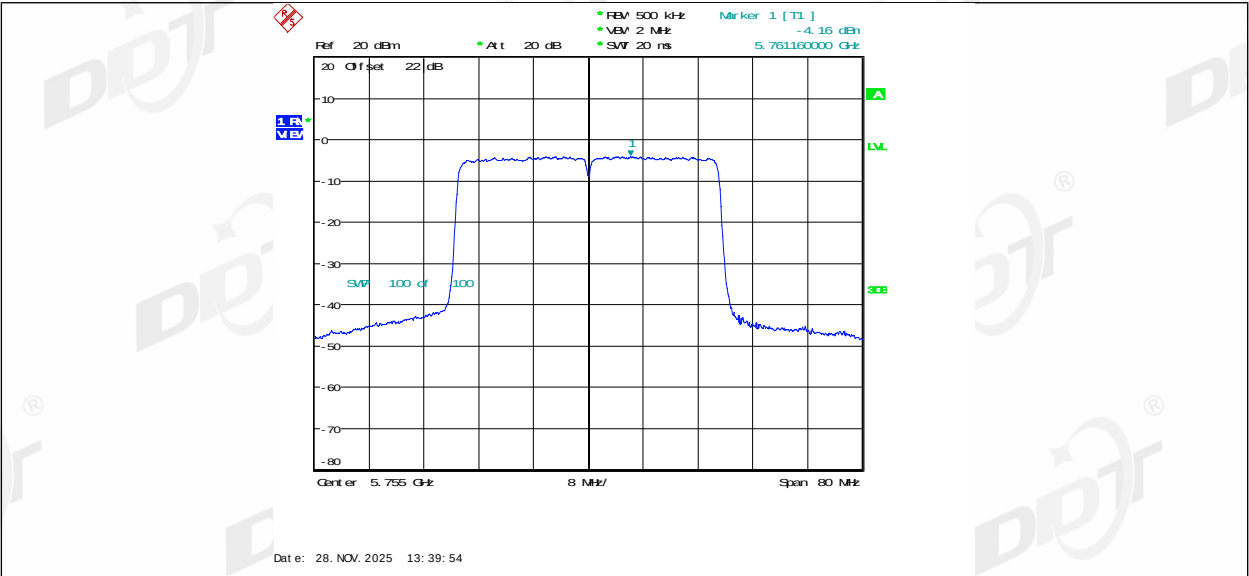


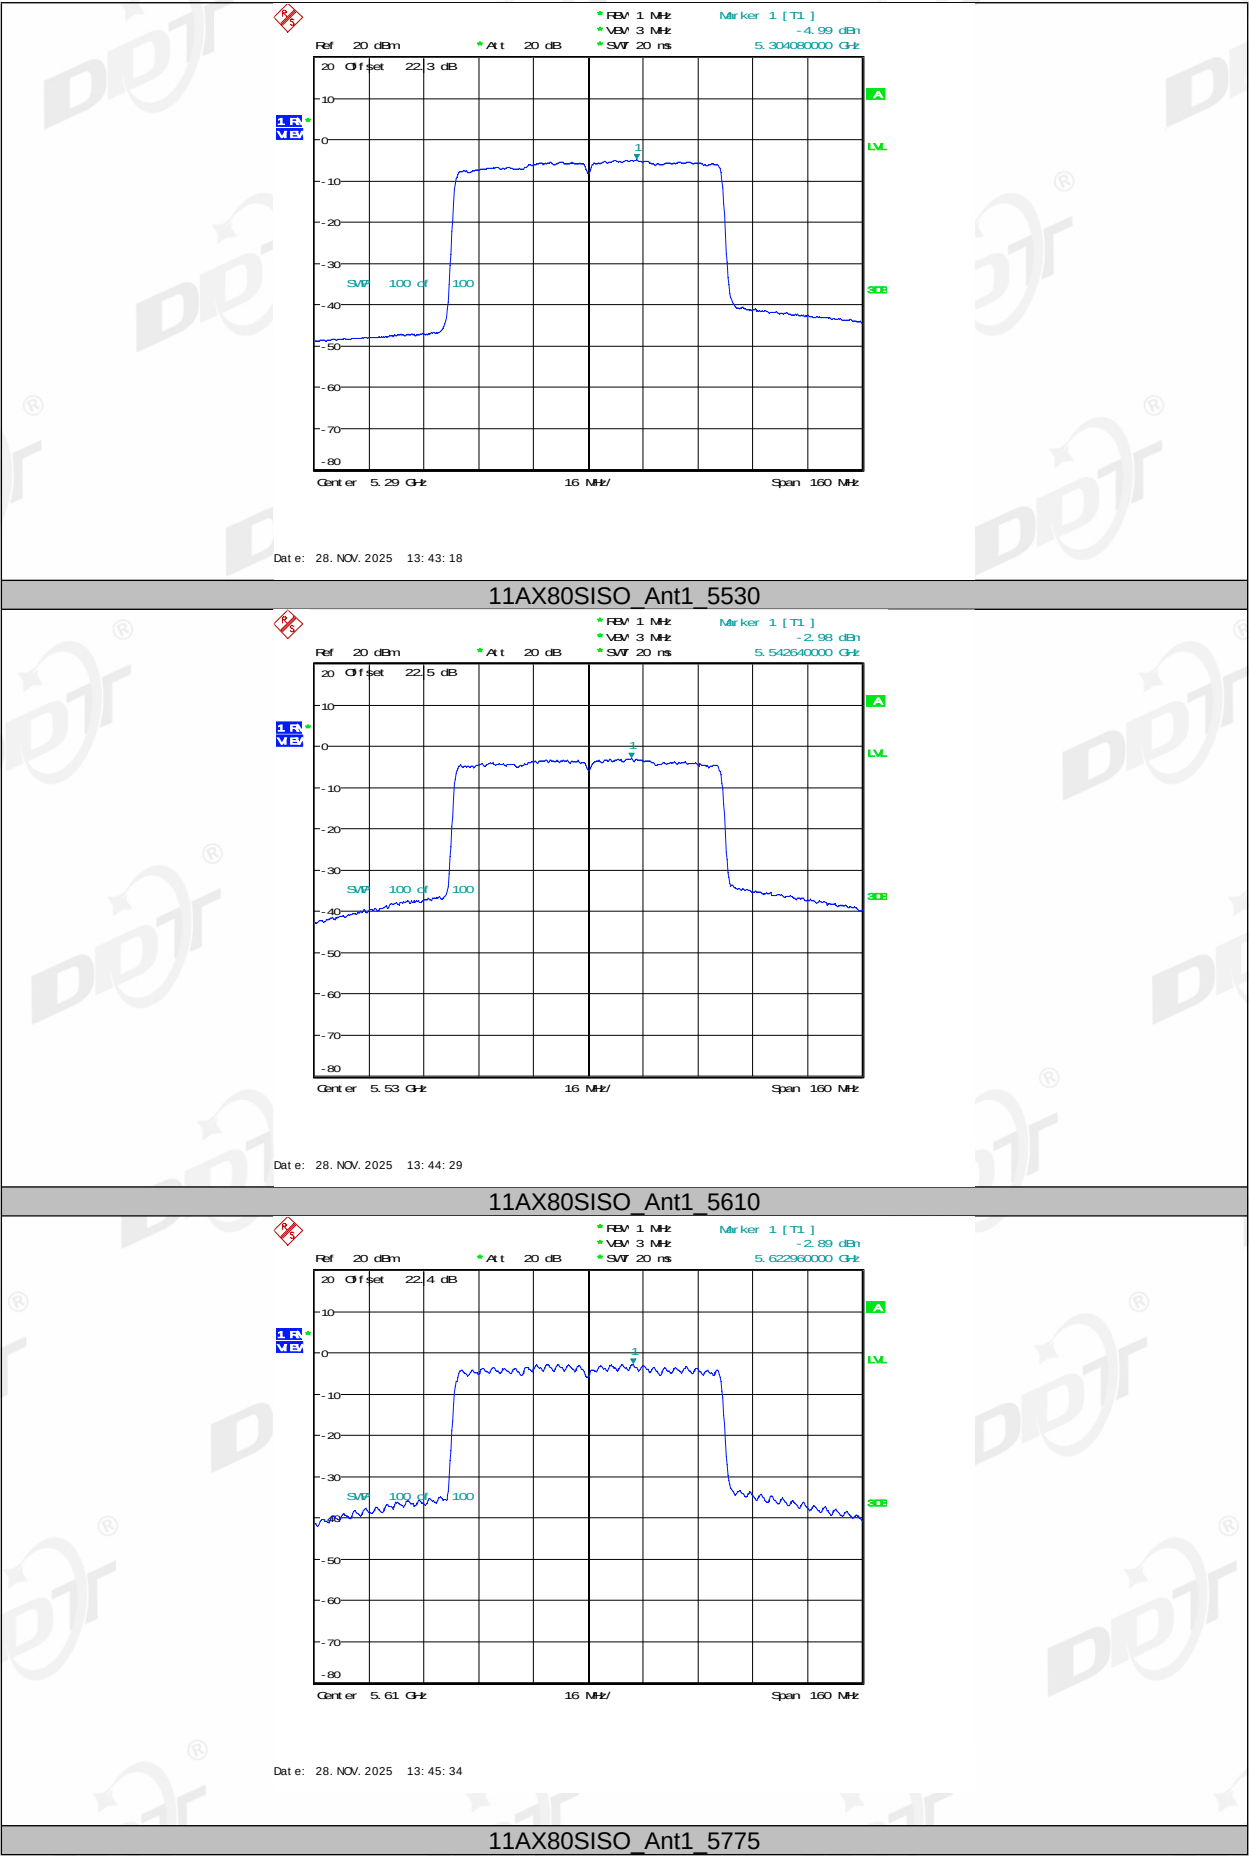

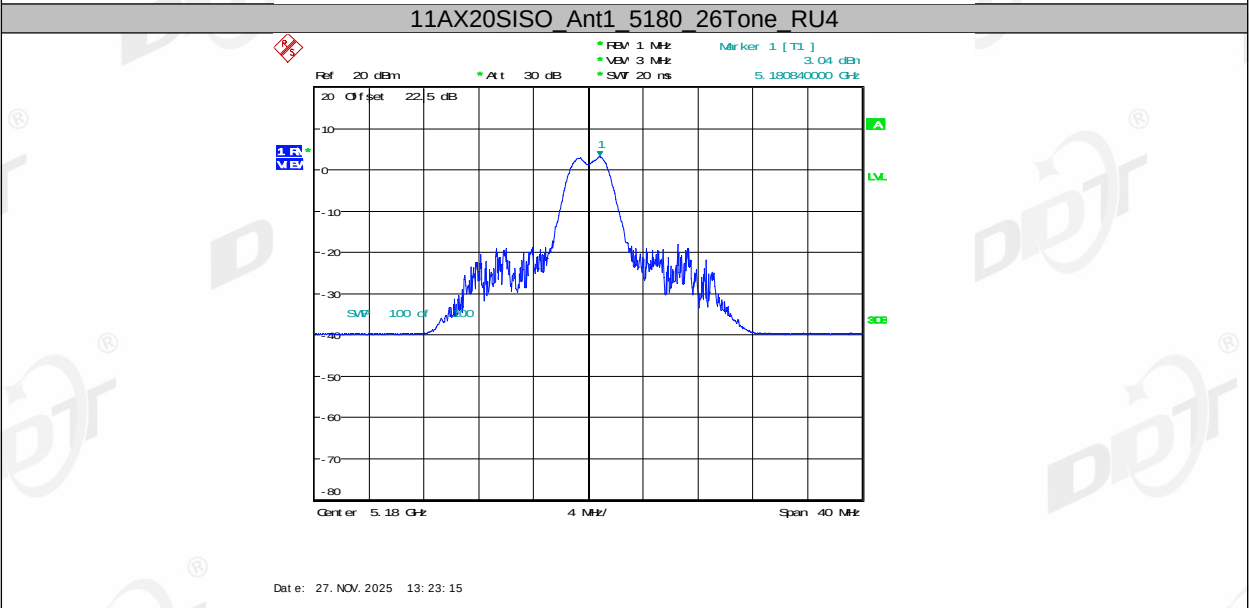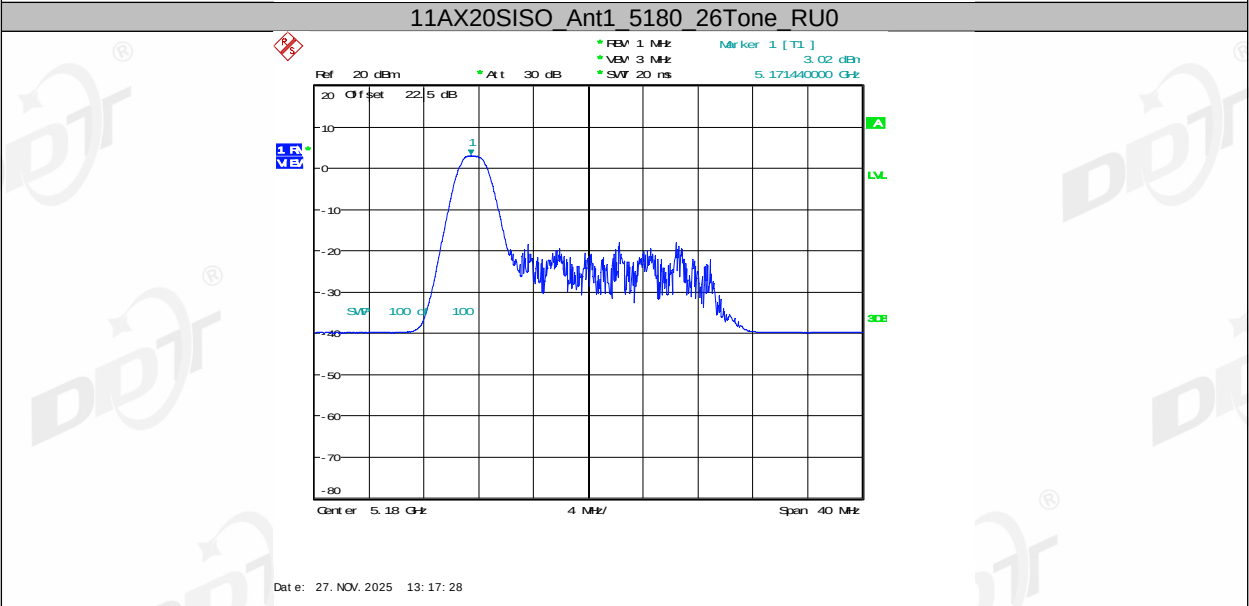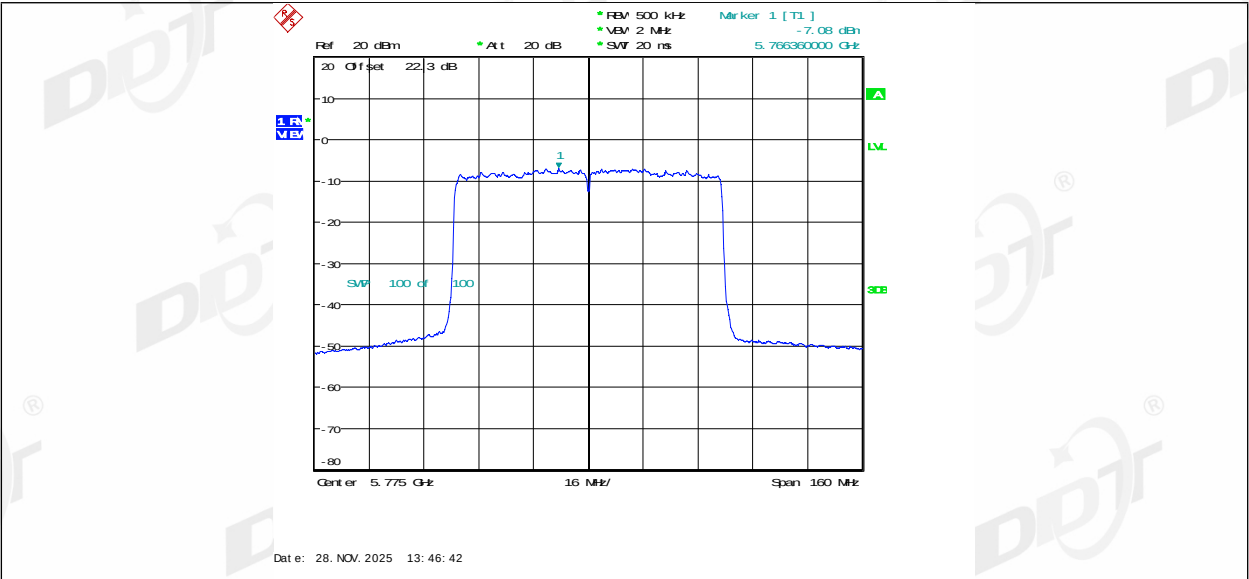


11AX20SISO Ant1 5180 26Tone RU8

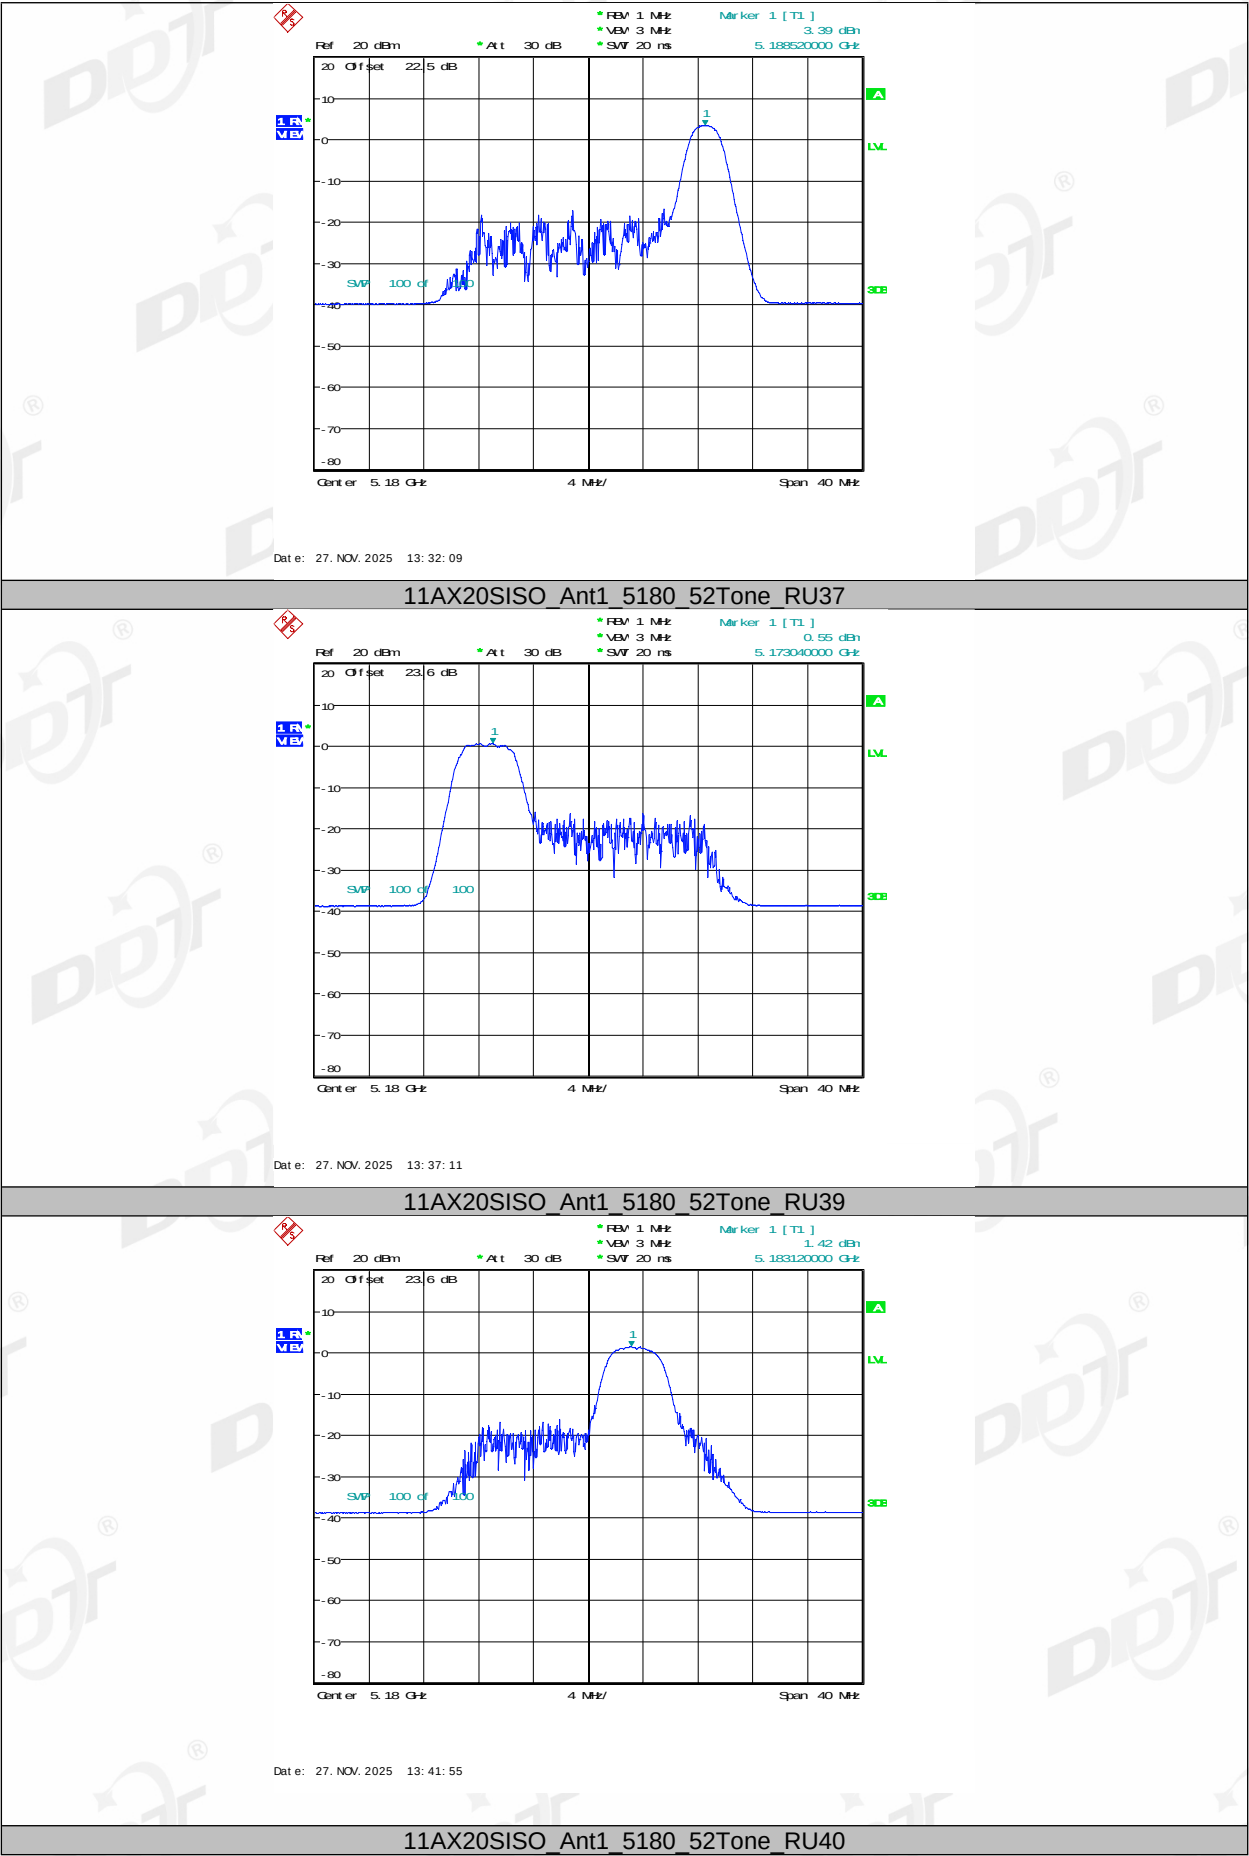


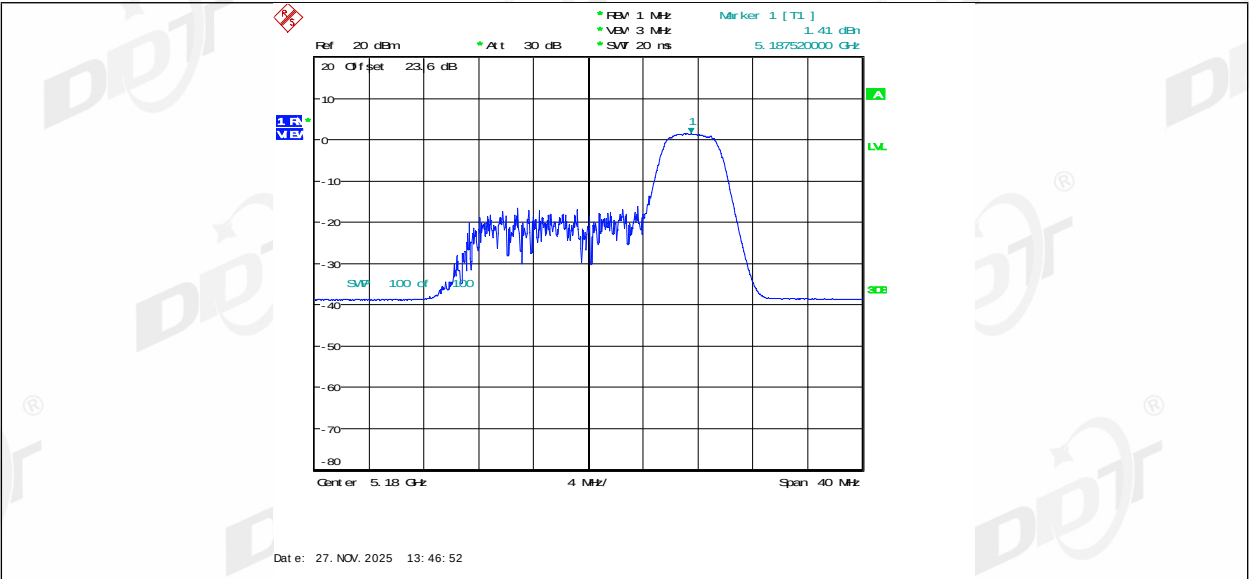


11AX20SISO_Ant1_5180_106Tone_RU53

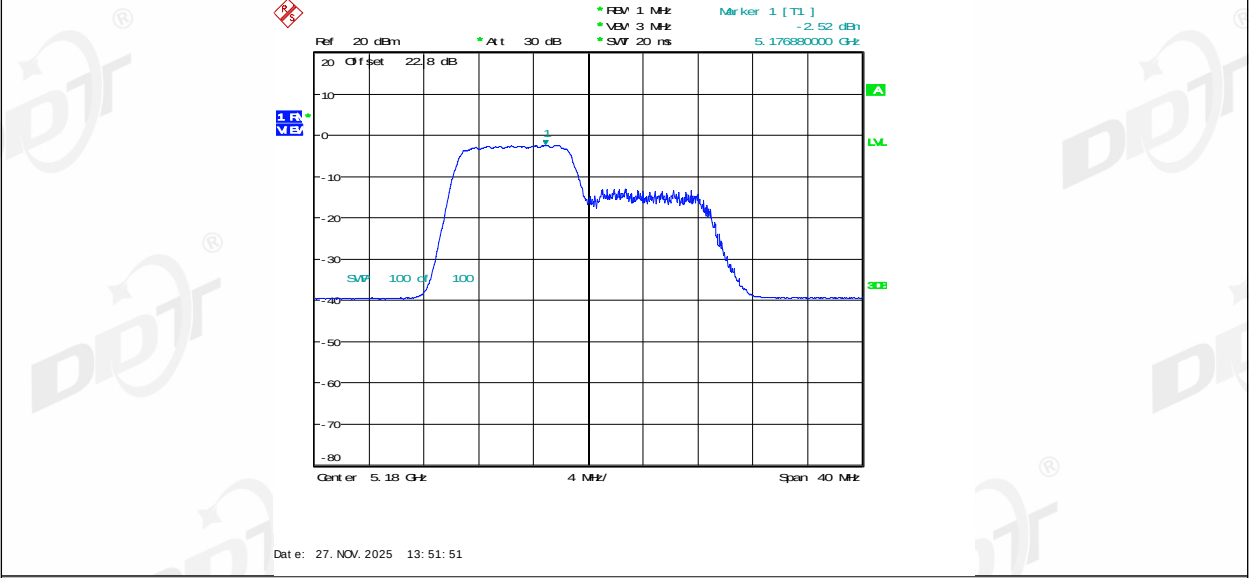



11AX20SISO_Ant1_5180_106Tone_RU54

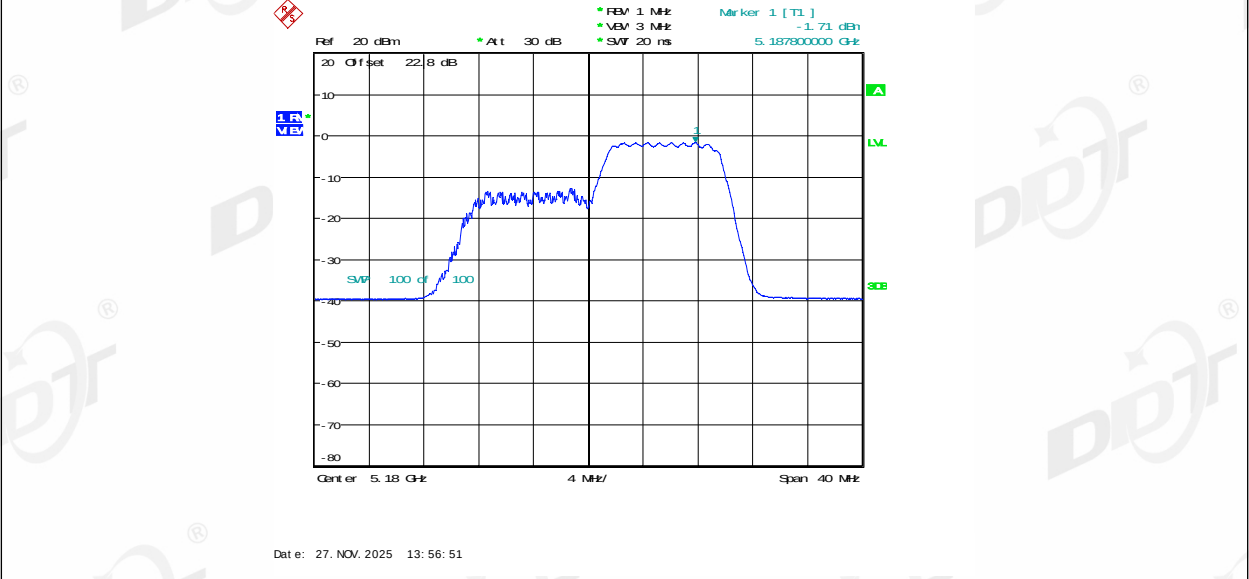


11AX20SISO_Ant1_5200_26Tone_RU0

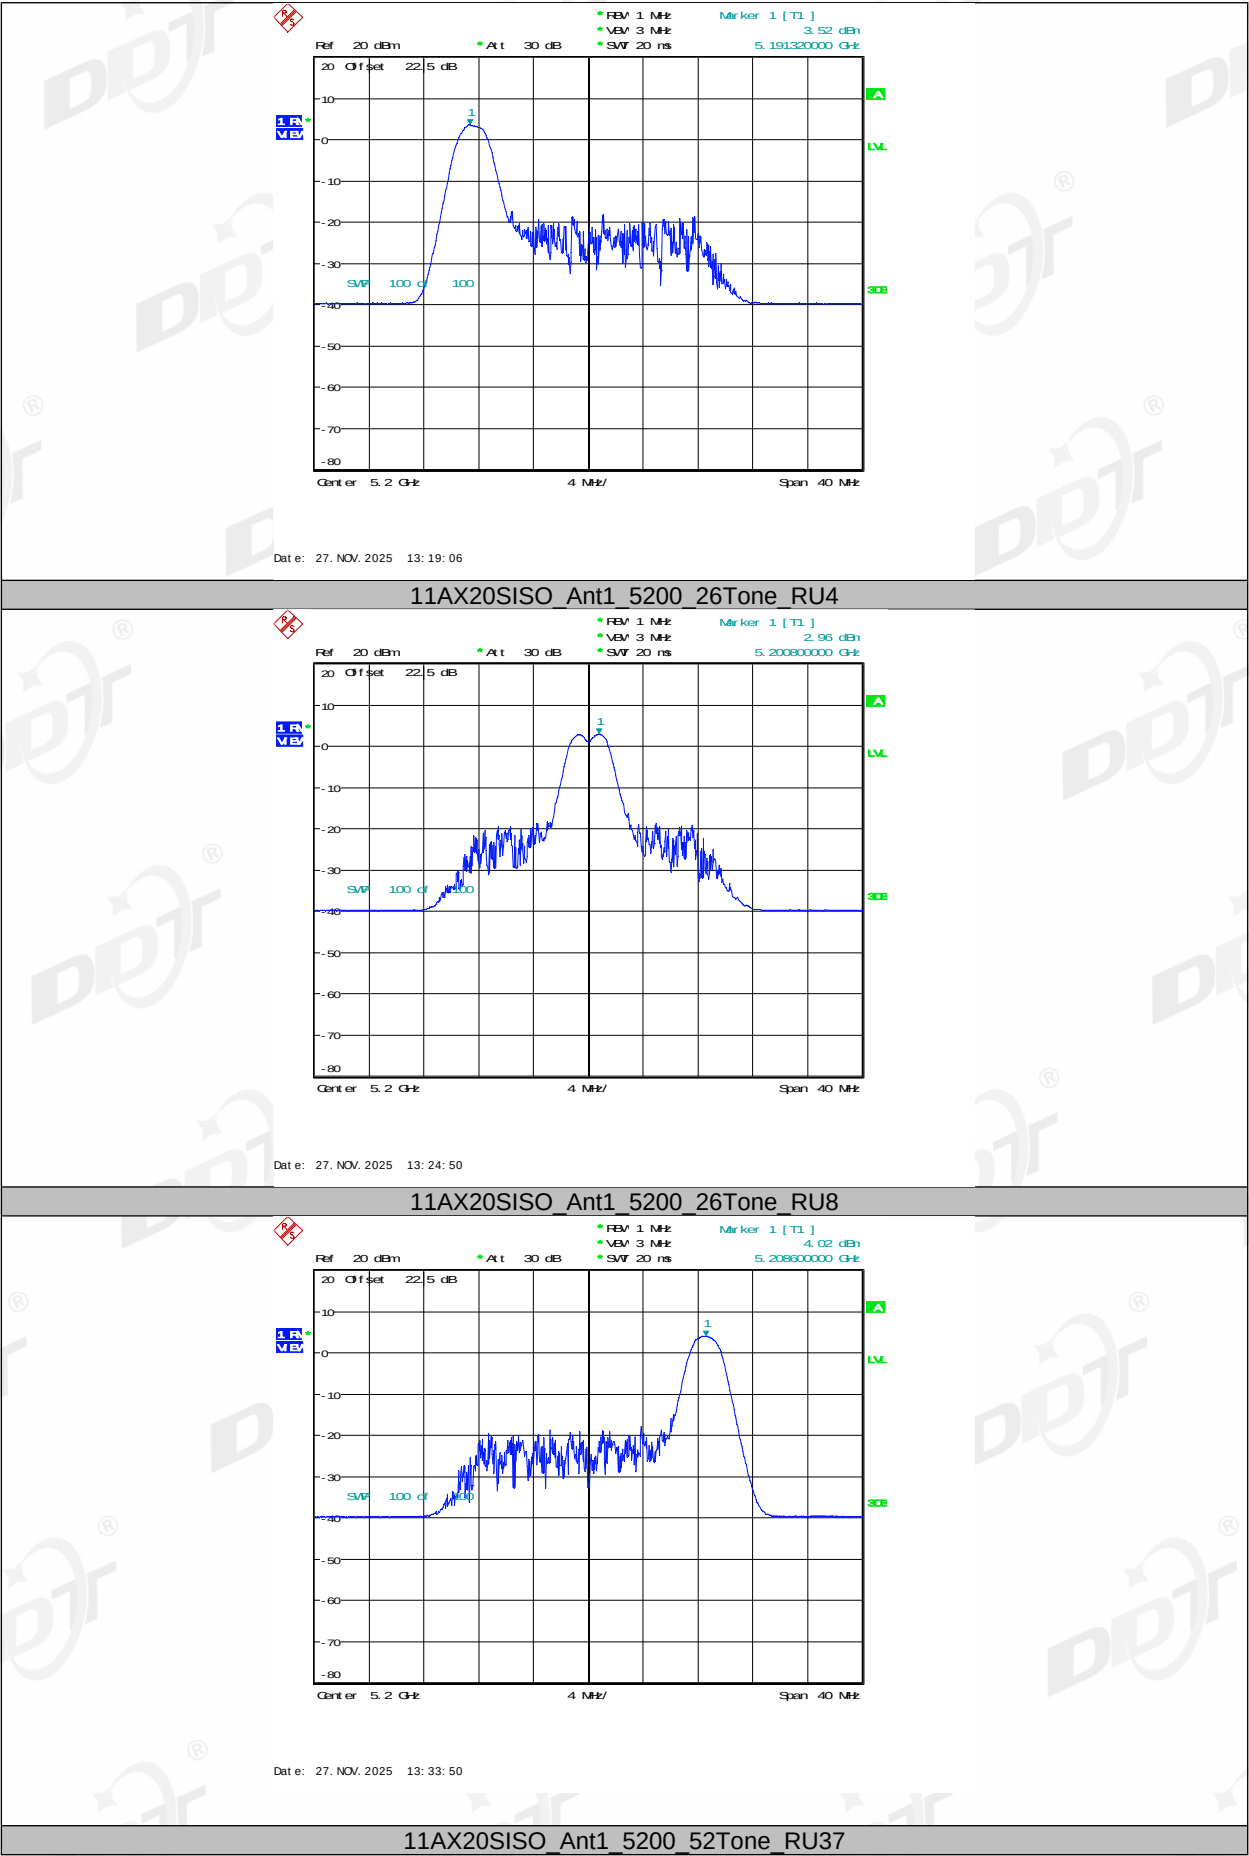

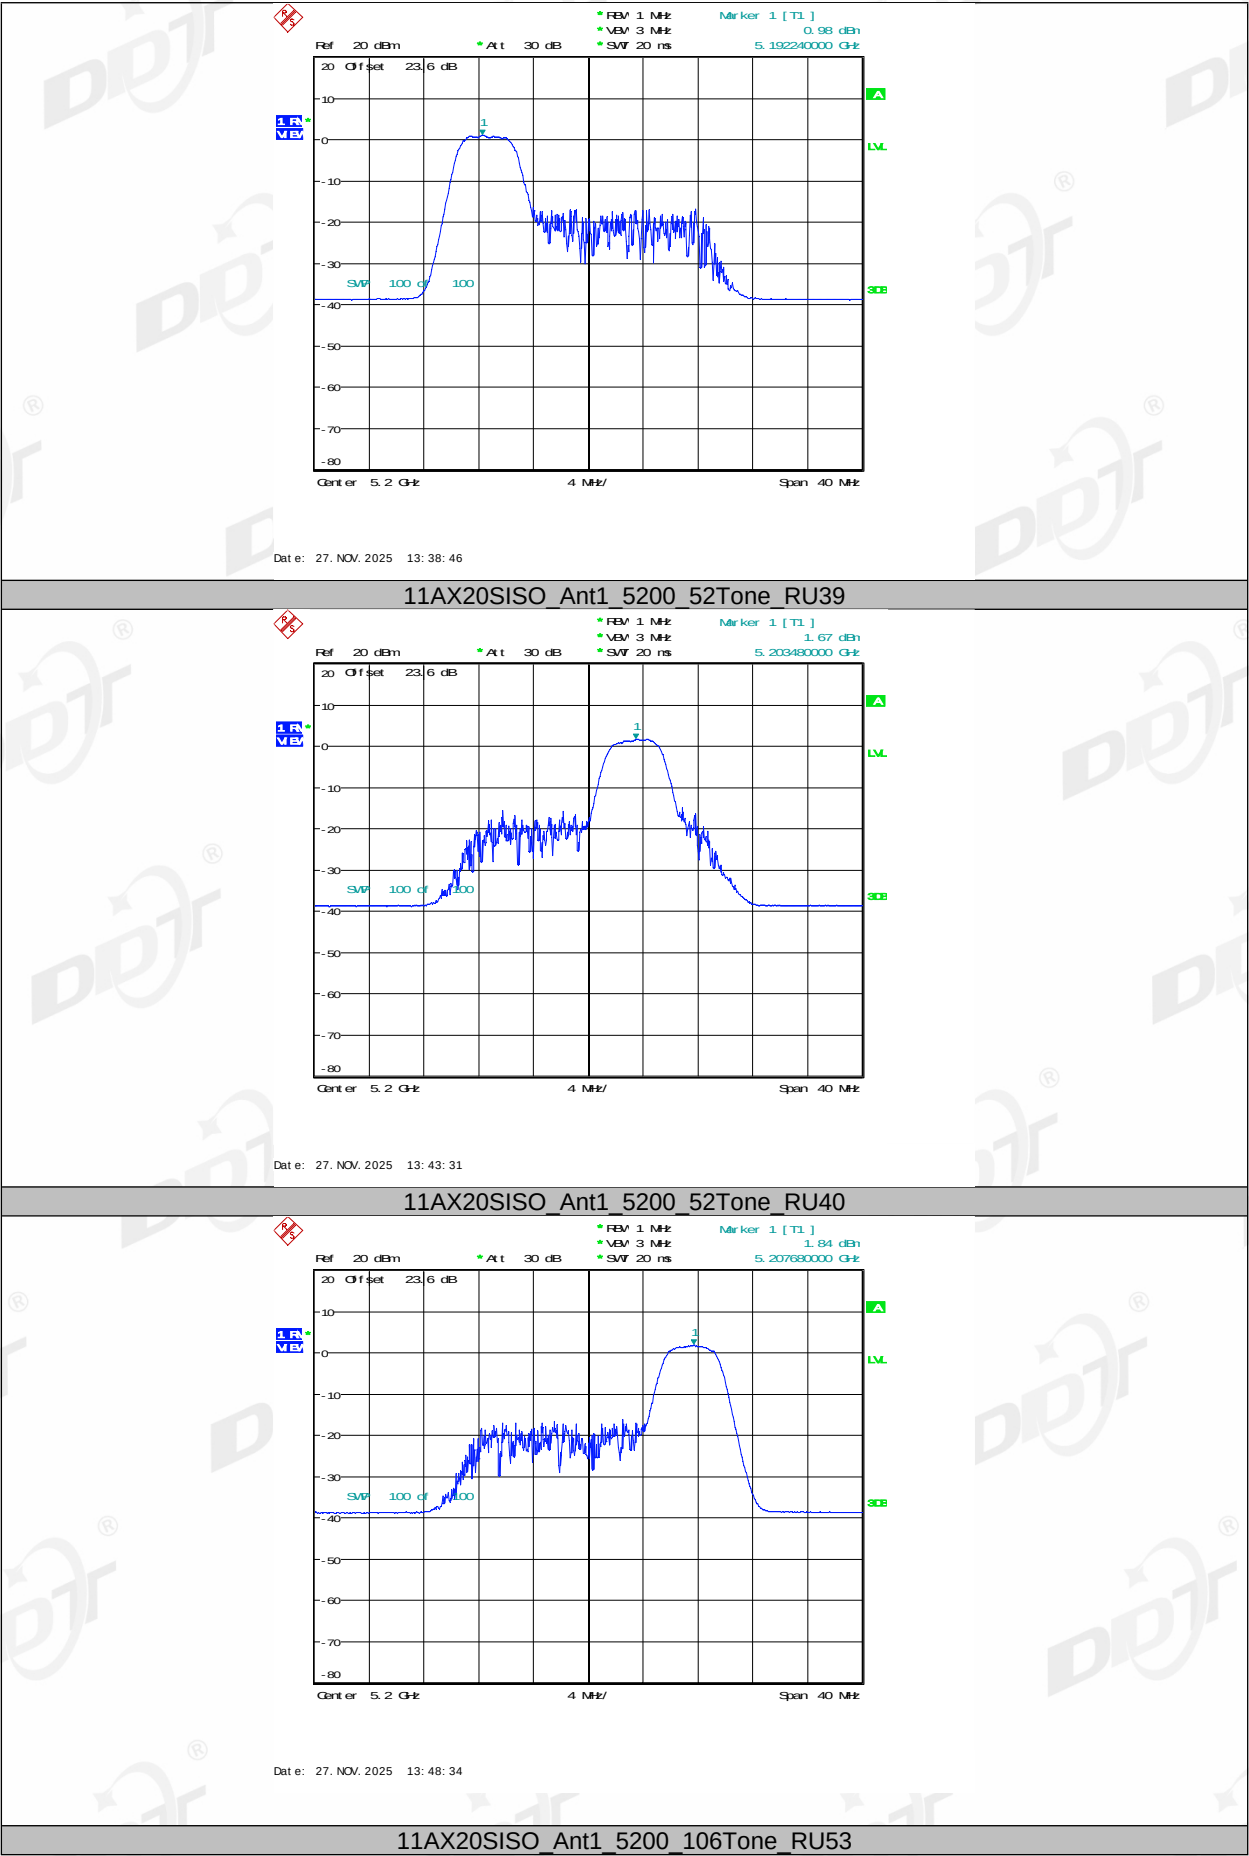


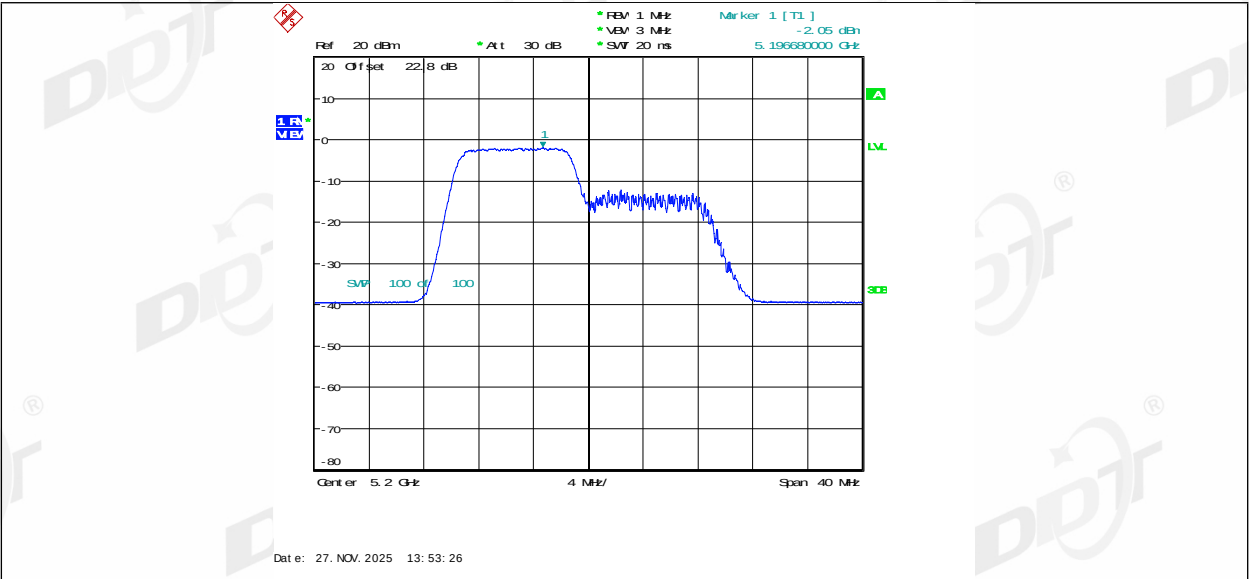

11AX20SISO_Ant1_5200_106Tone_RU54

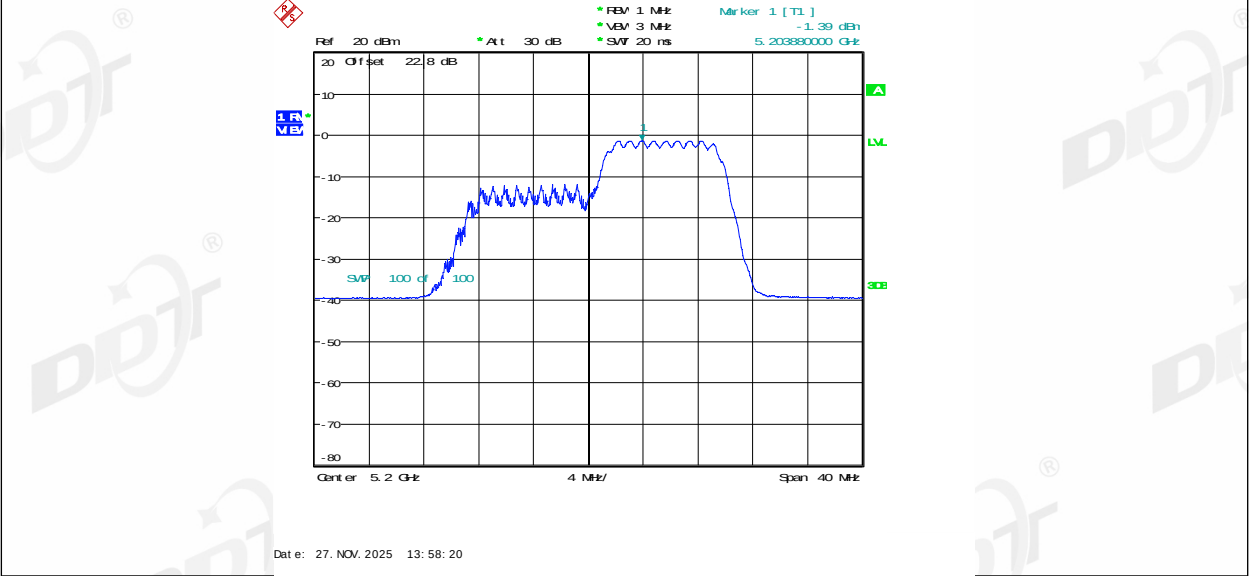


11AX20SISO_Ant1_5240_26Tone_RU0

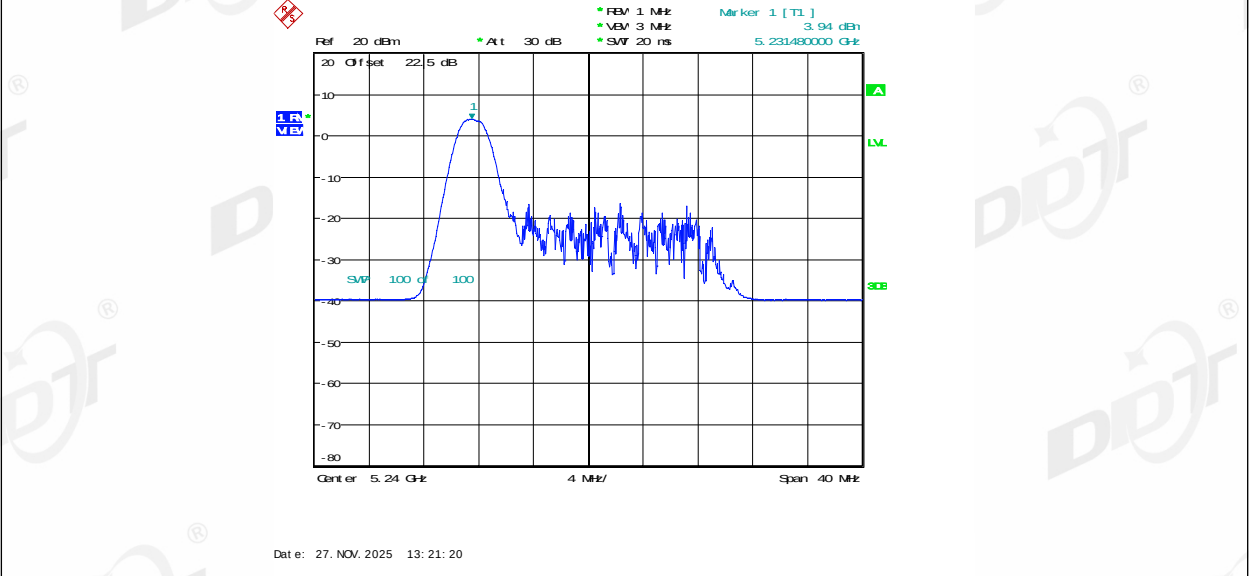


11AX20SISO_Ant1_5240_26Tone_RU4




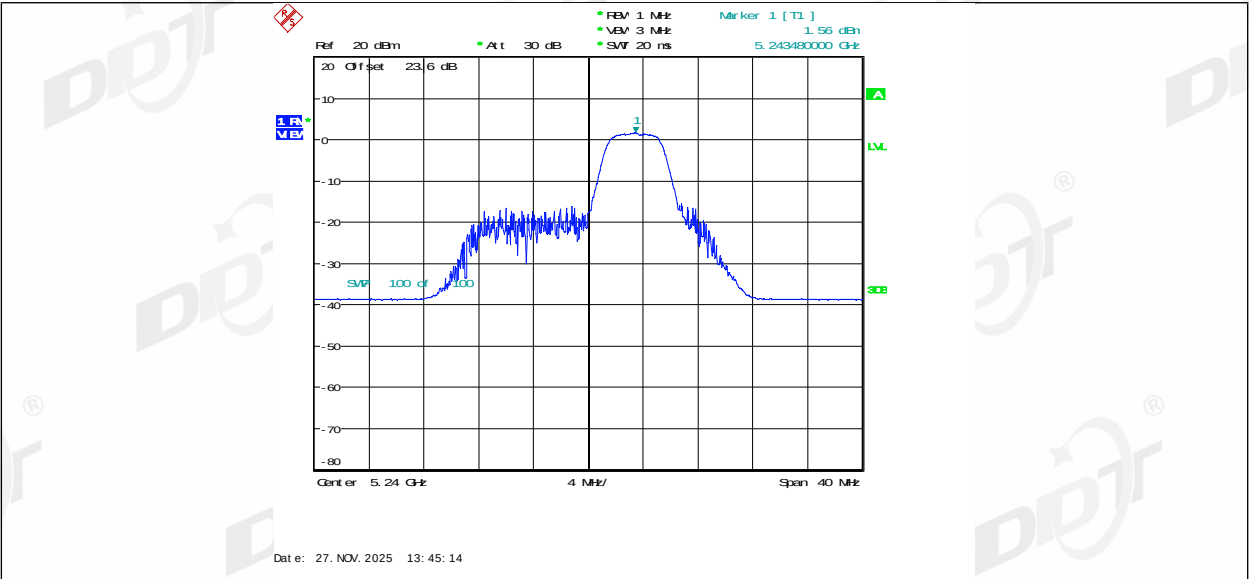


11AX20SISO_Ant1_5240_52Tone_RU40

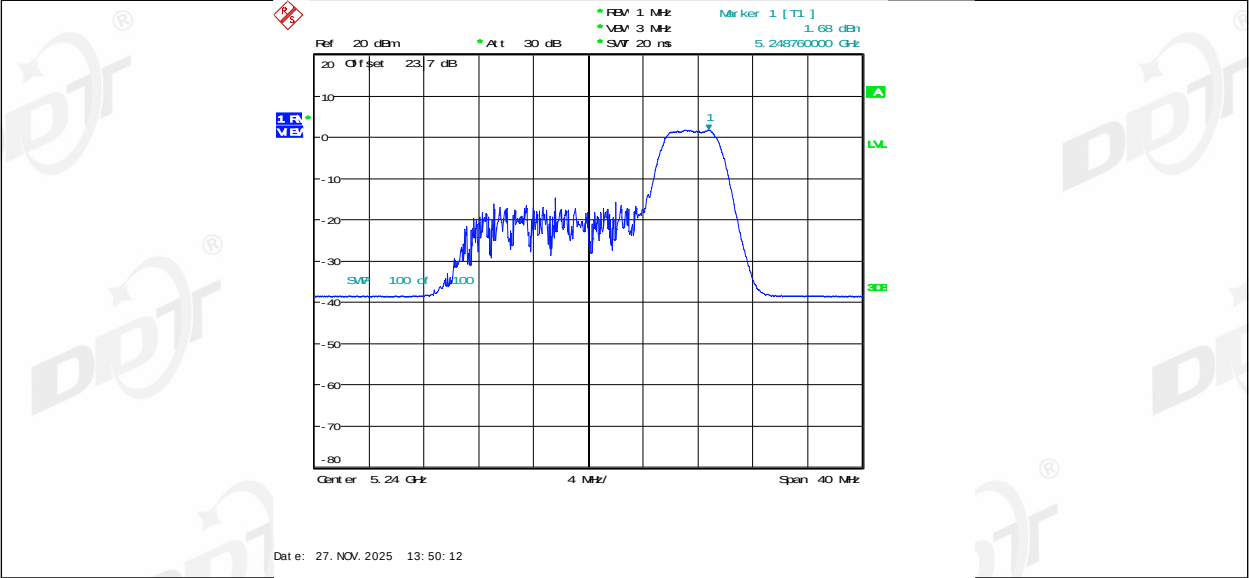


11AX20SISO_Ant1_5240_106Tone_RU53

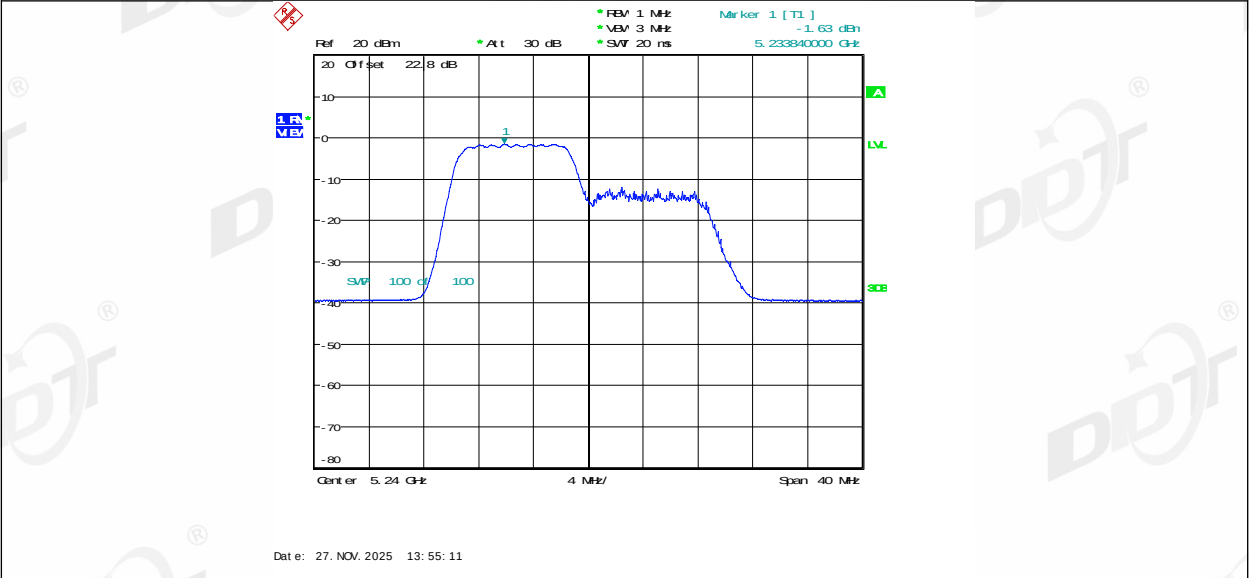


11AX20SISO_Ant1_5240_106Tone_RU54

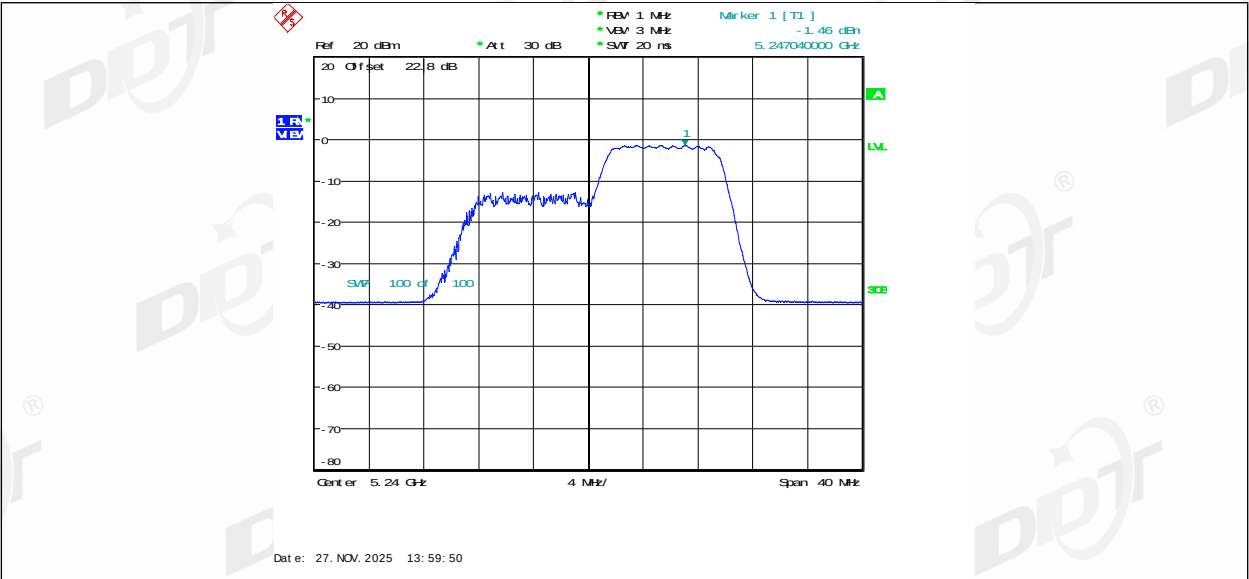


11AX20SISO_Ant1_5260_26Tone_RU0

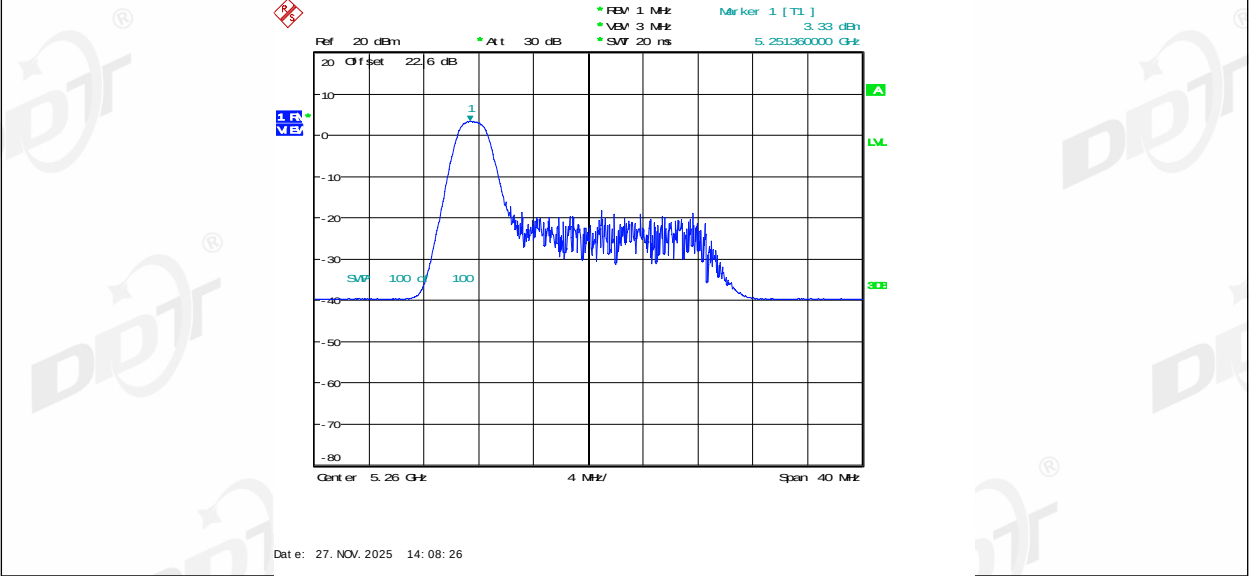


11AX20SISO_Ant1_5260_26Tone_RU4

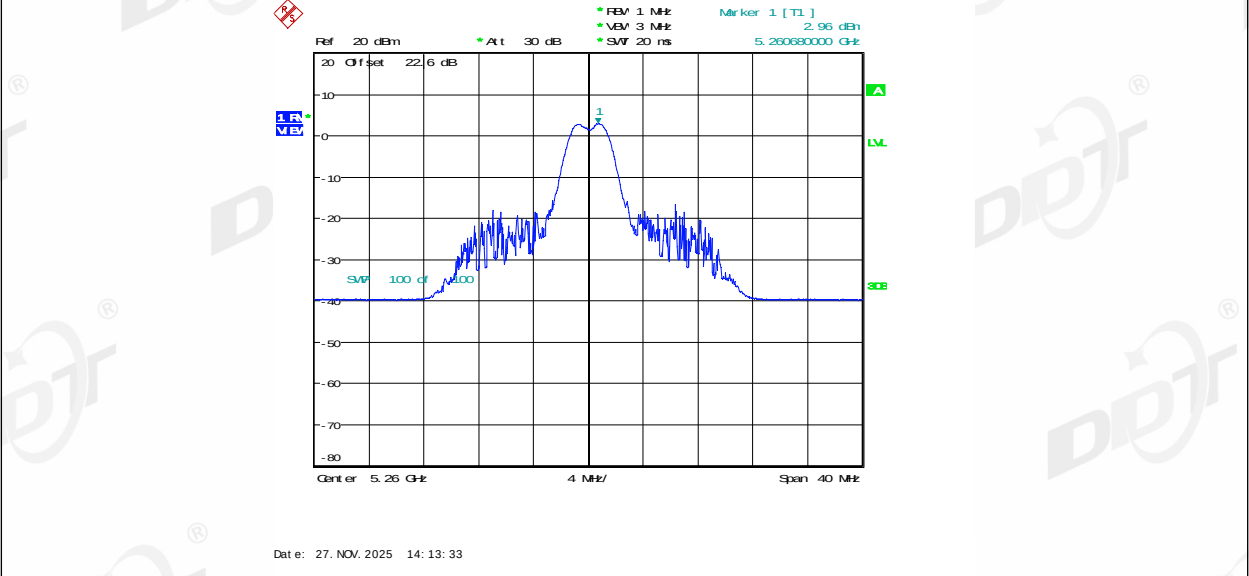


11AX20SISO_Ant1_5260_26Tone_RU8

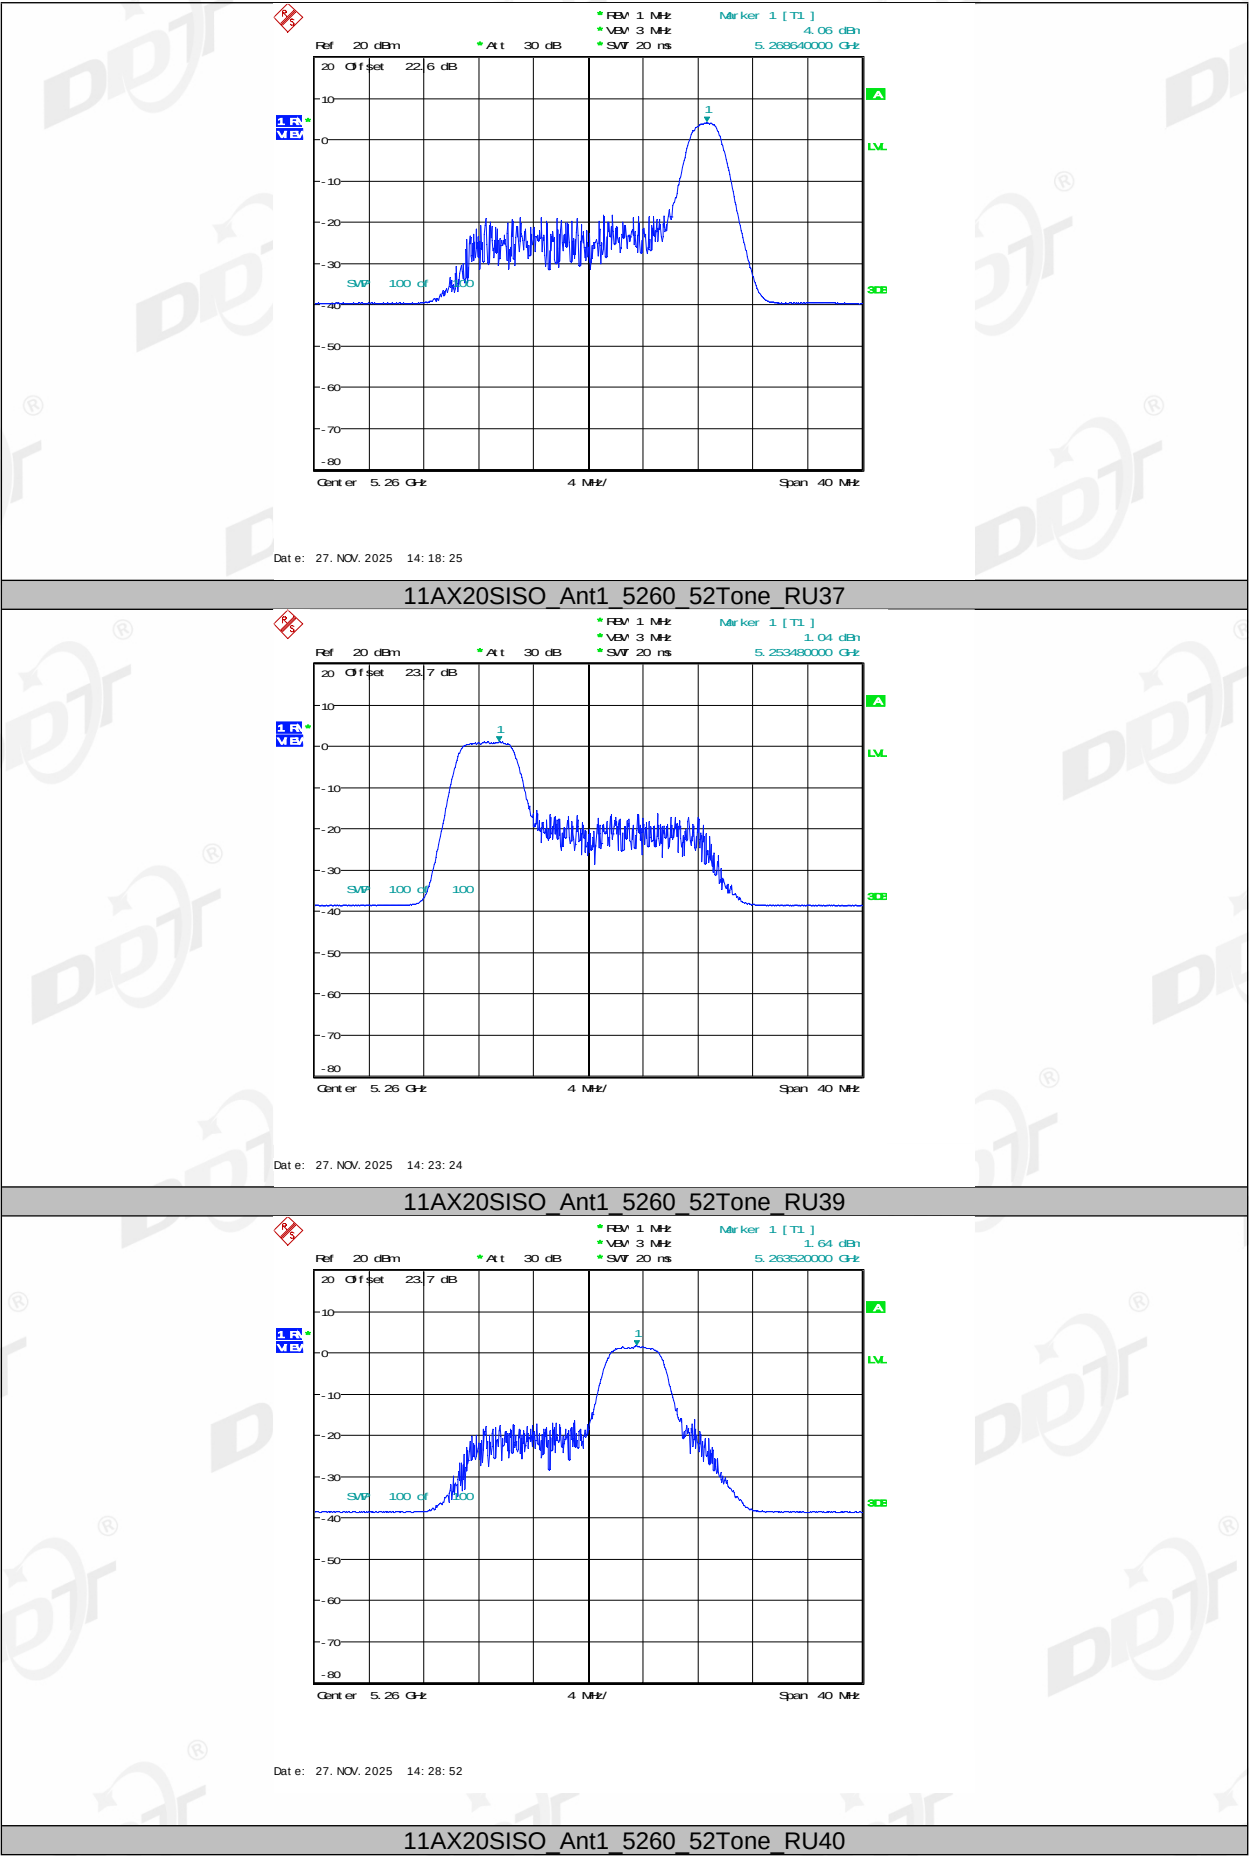


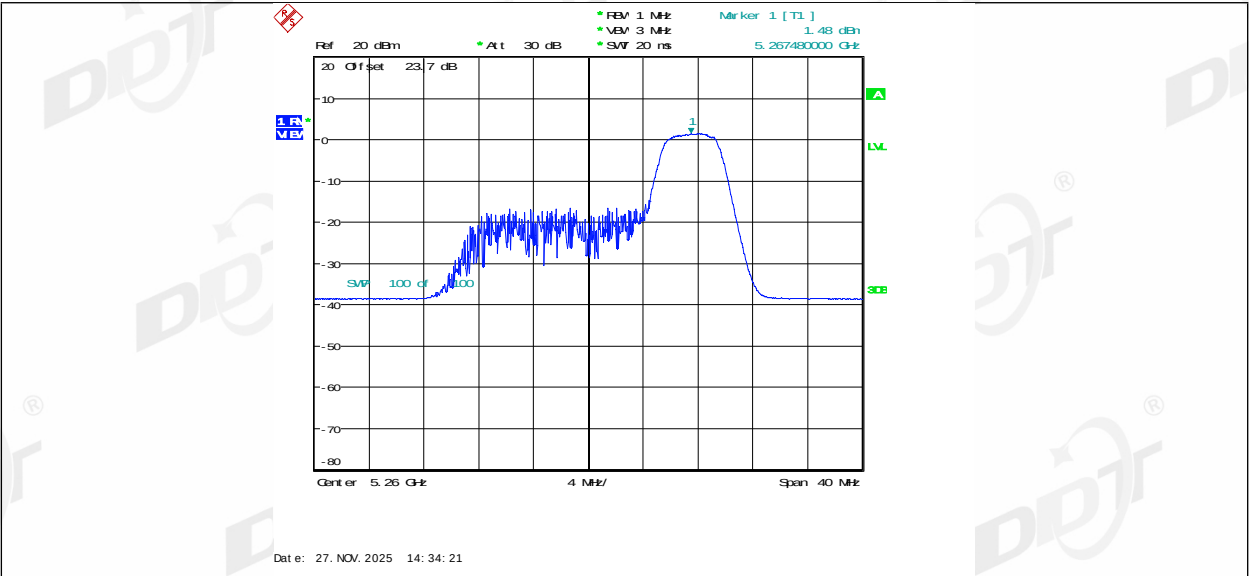


11AX20SISO_Ant1_5260_106Tone_RU53

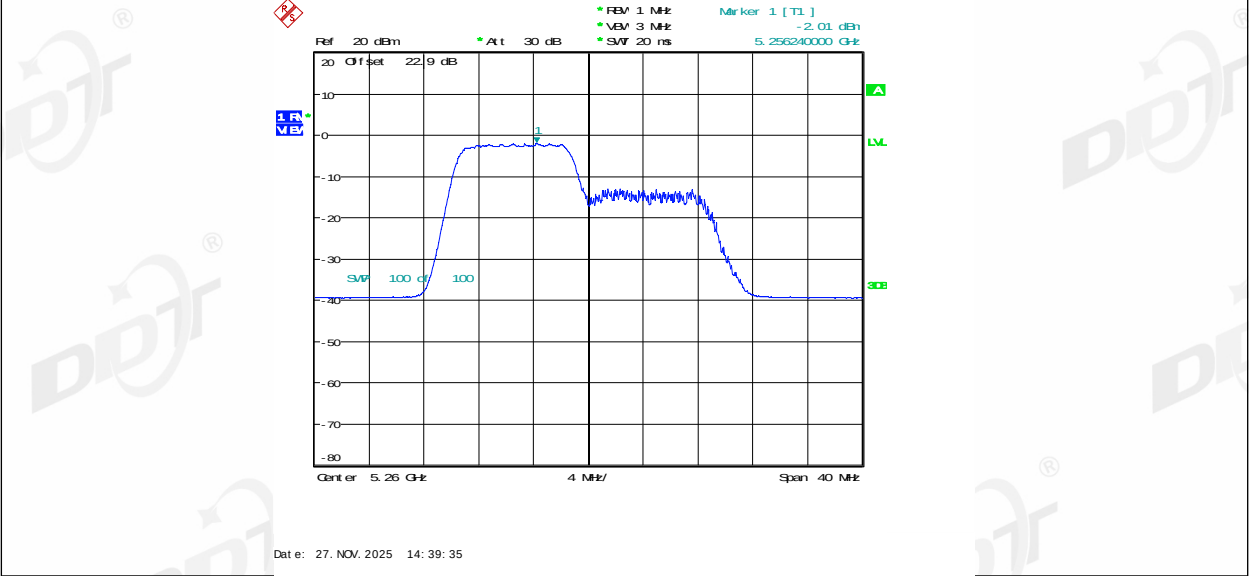


11AX20SISO_Ant1_5260_106Tone_RU54

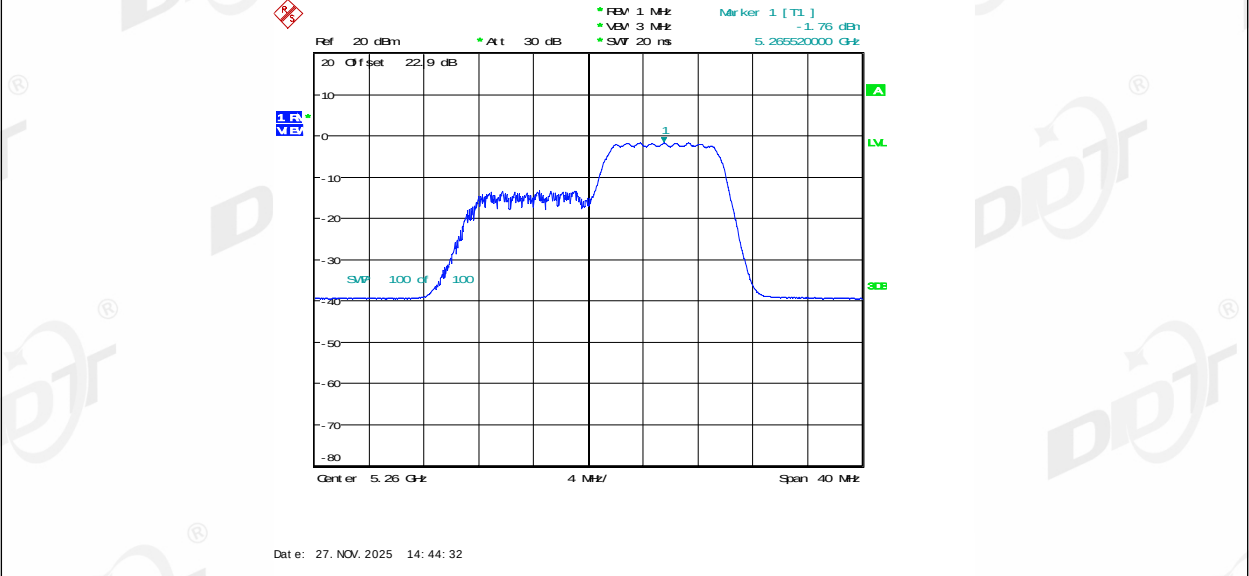


11AX20SISO_Ant1_5280_26Tone_RU0

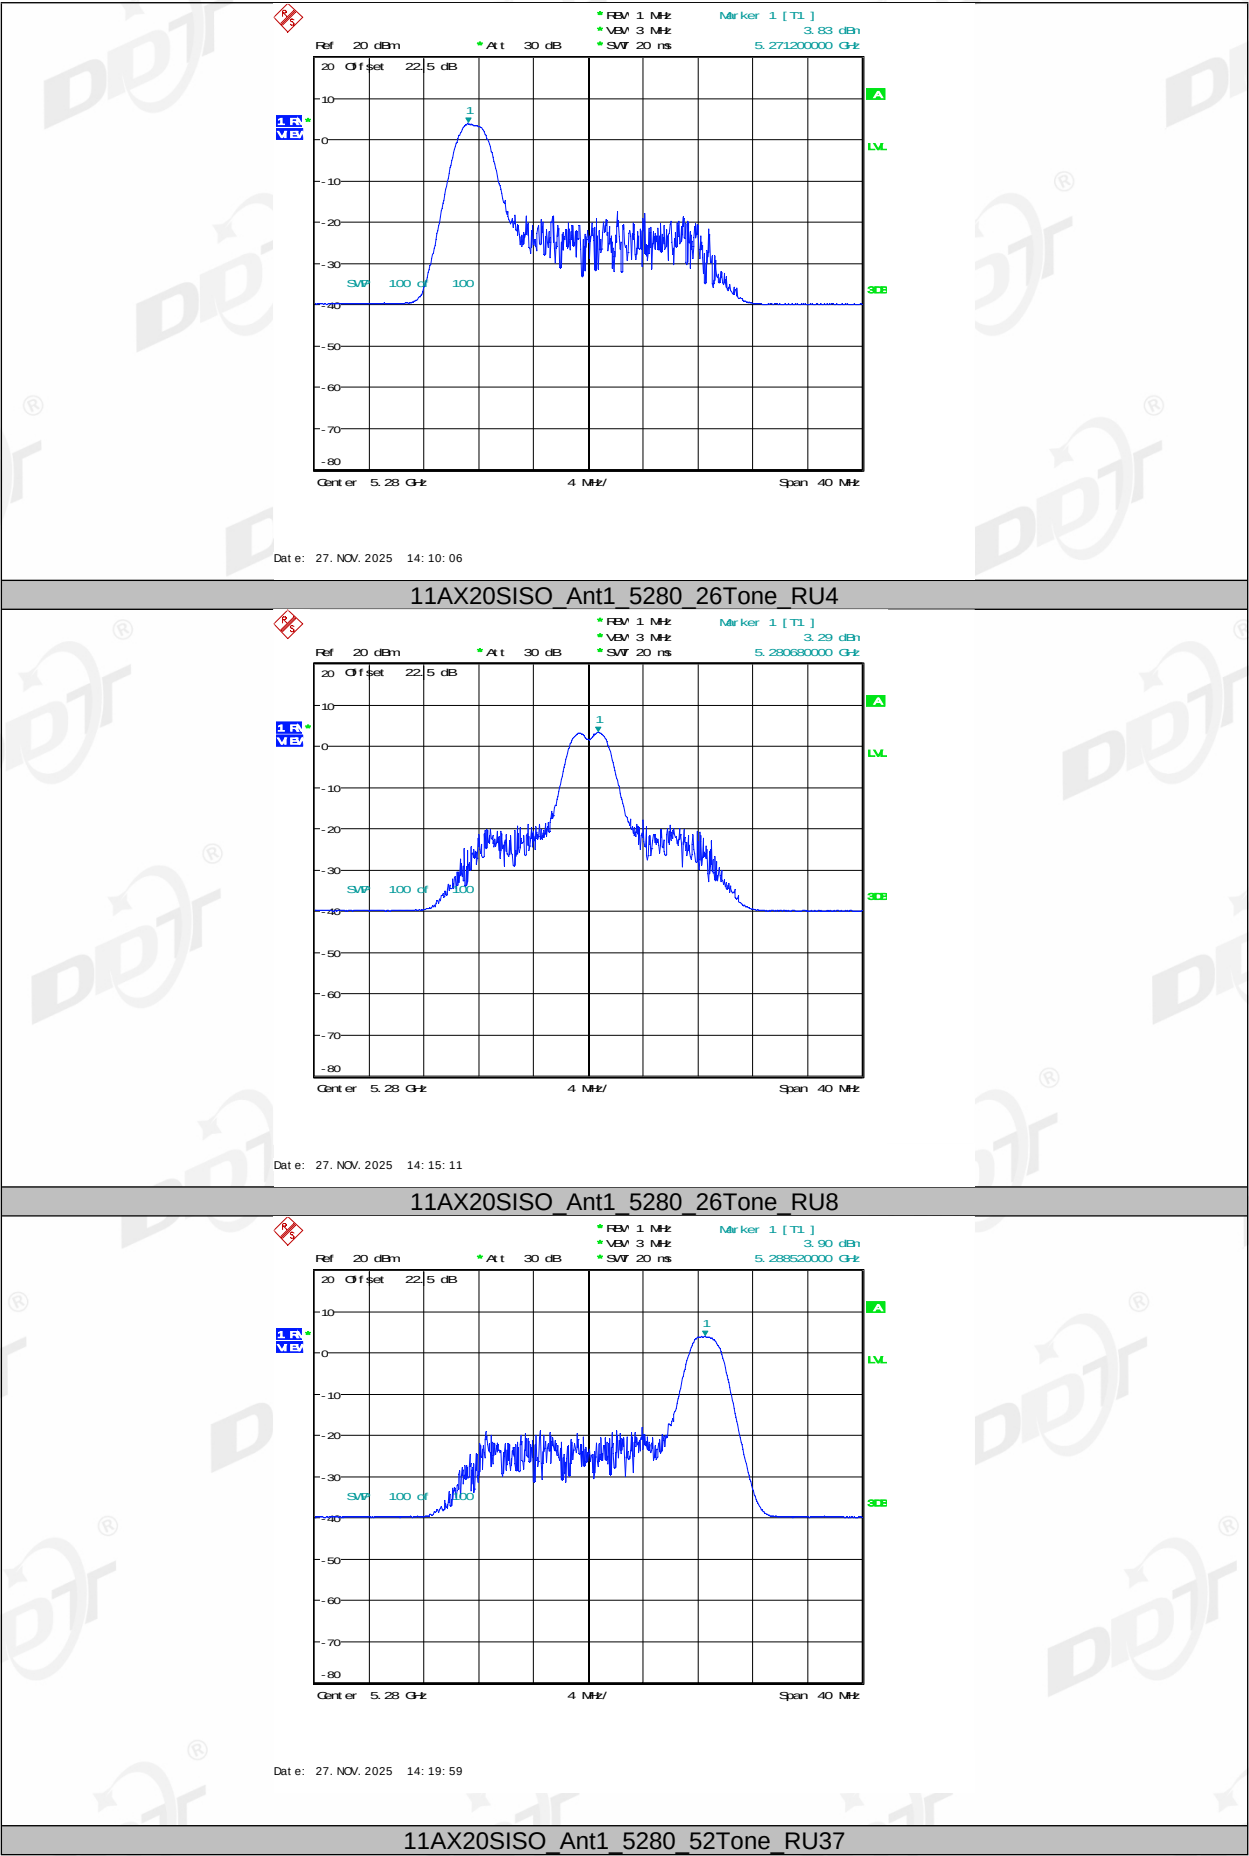

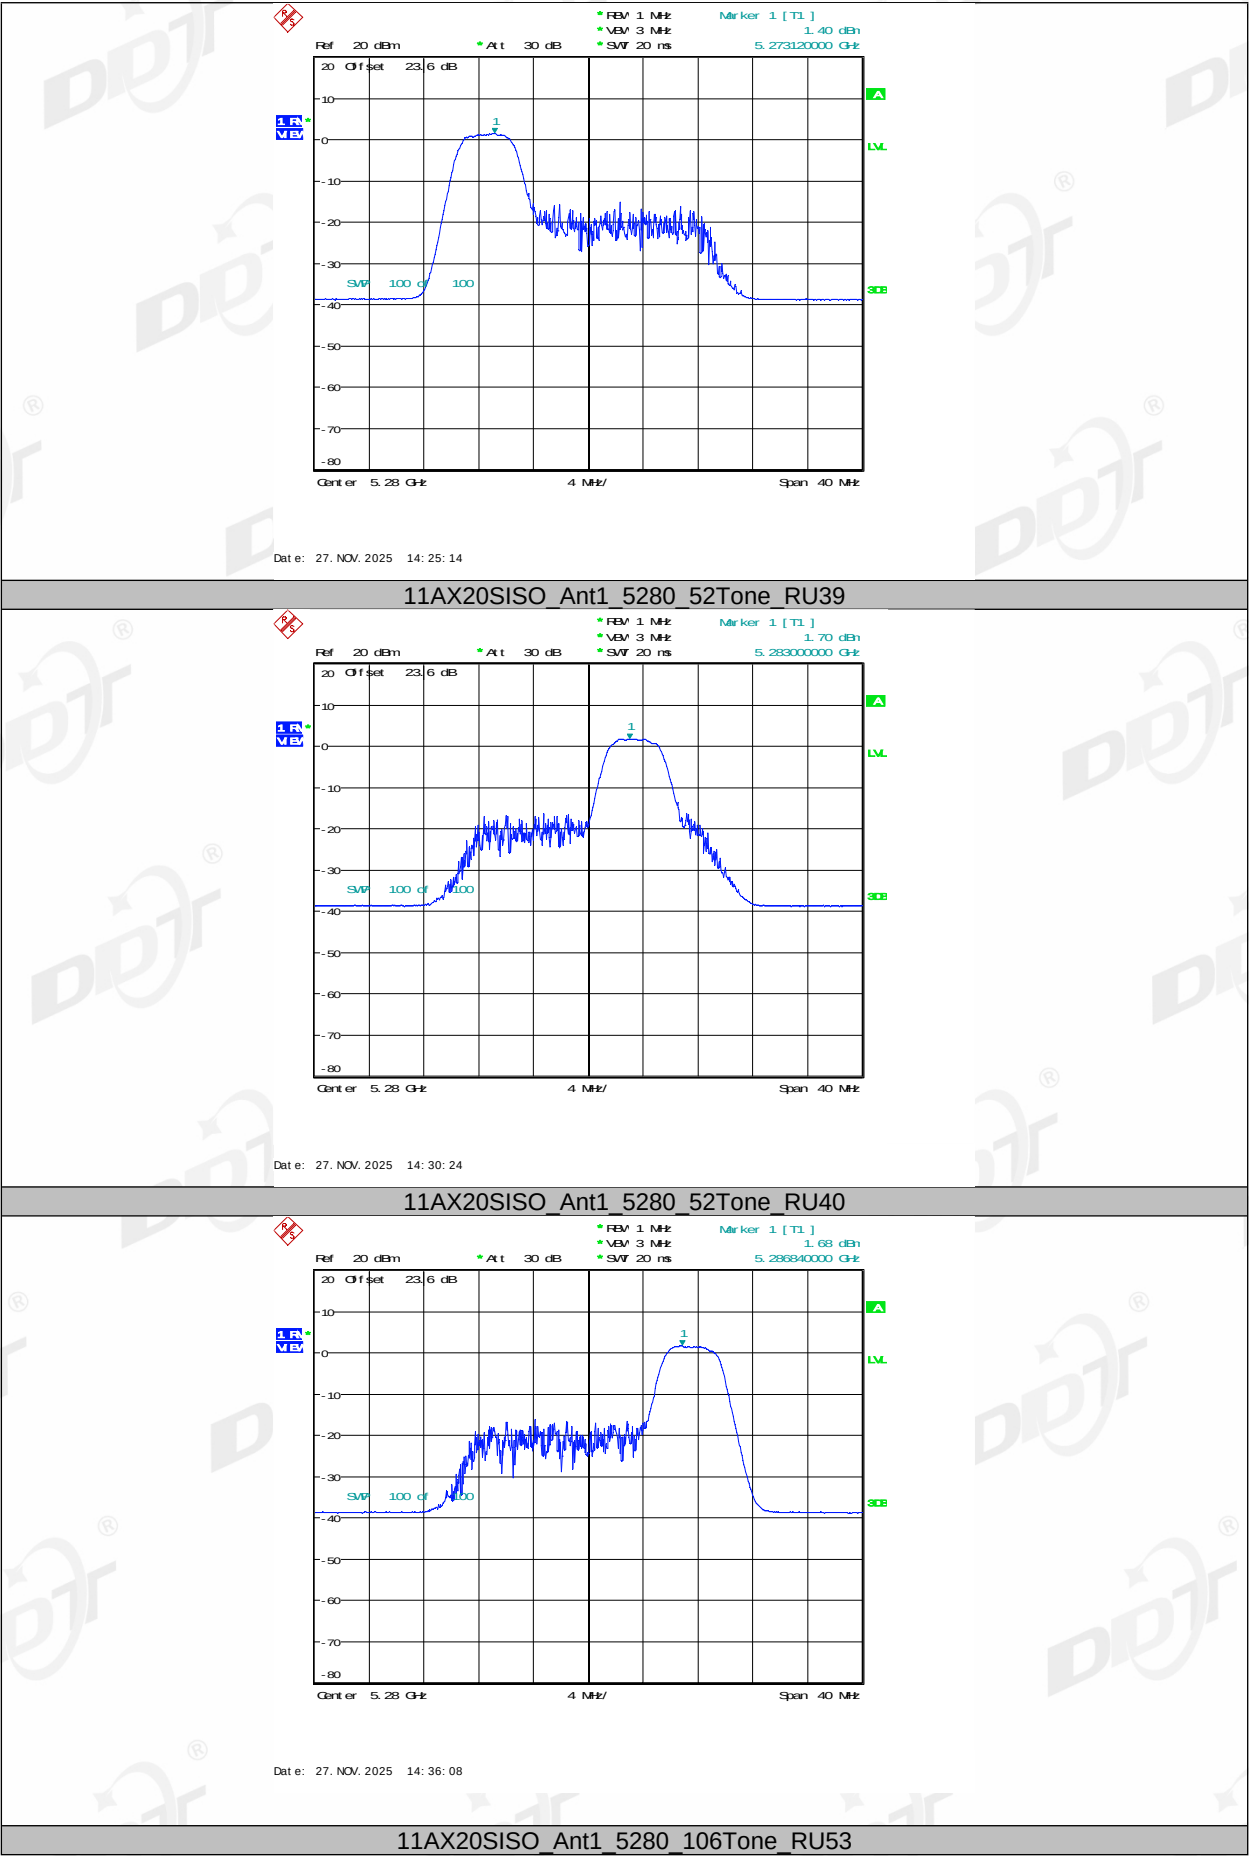







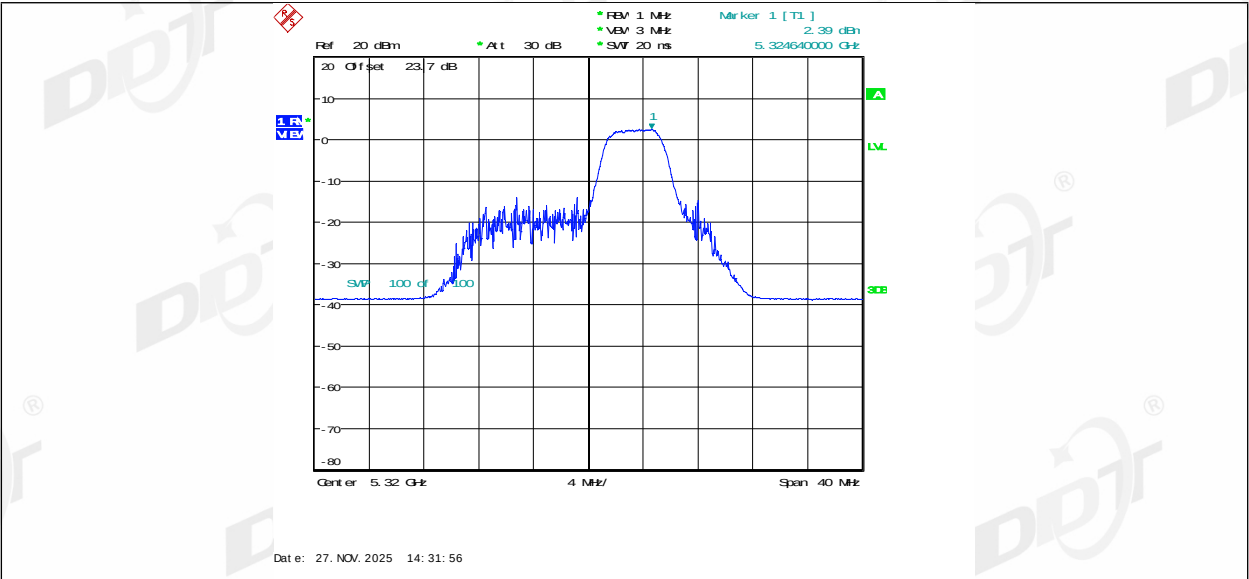


11AX20SISO_Ant1_5320_52Tone_RU40

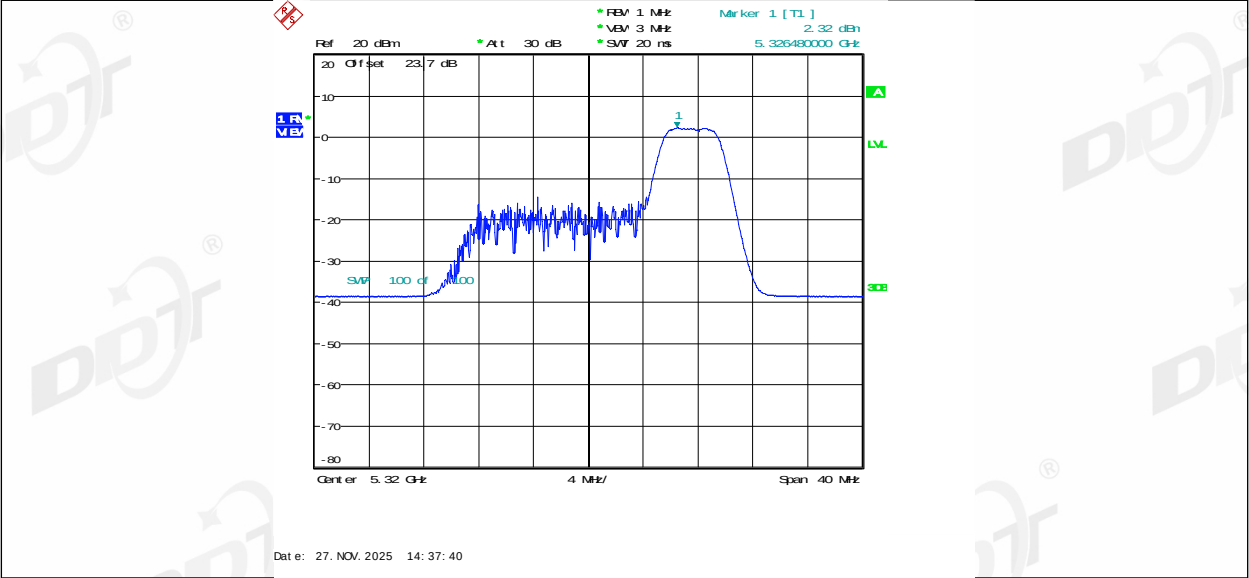



11AX20SISO_Ant1_5320_106Tone_RU53

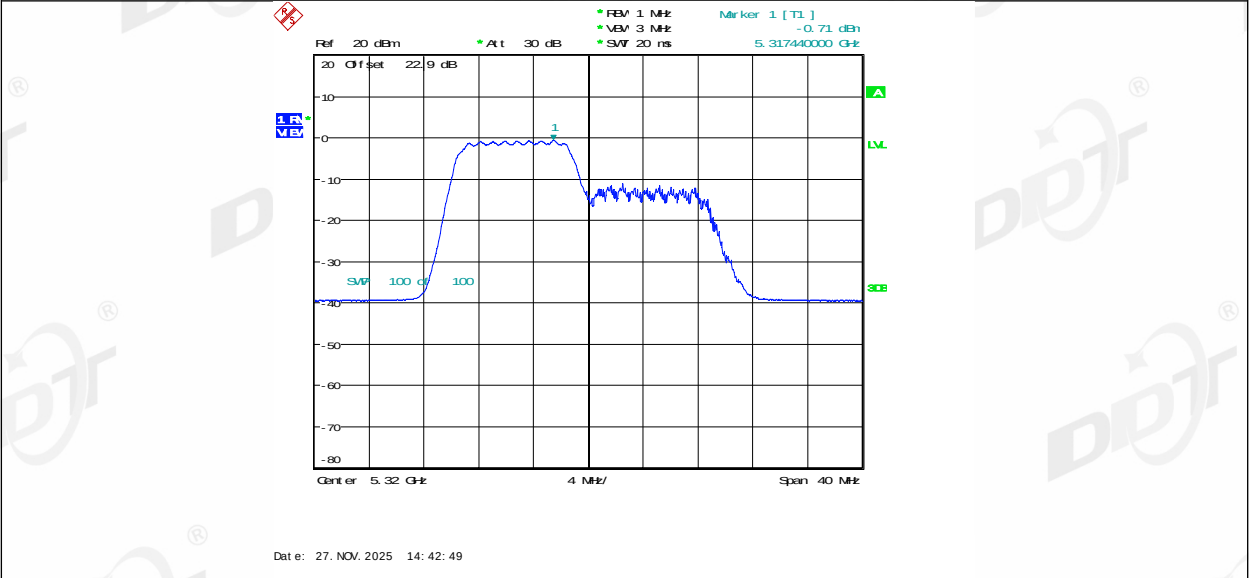


11AX20SISO_Ant1_5320_106Tone_RU54

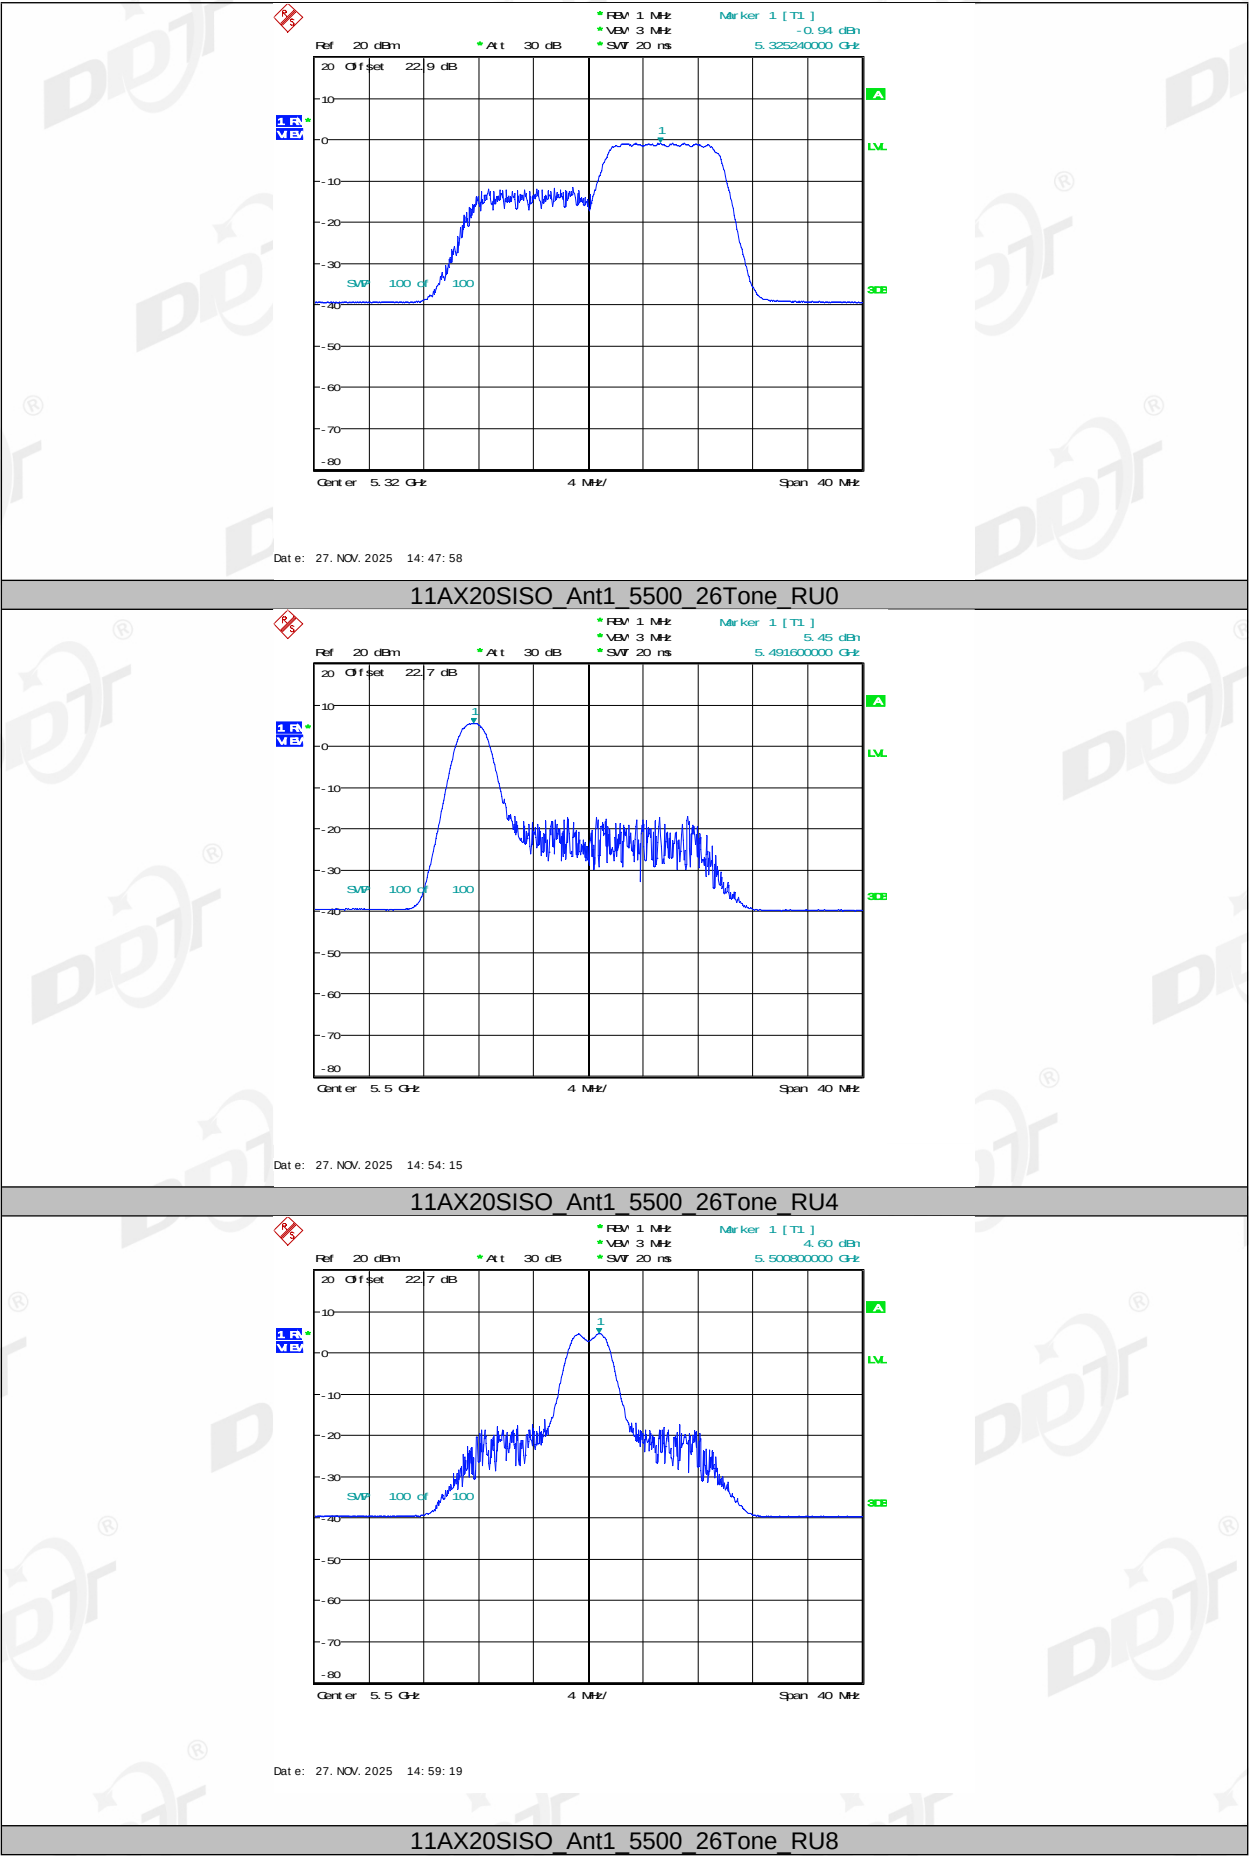

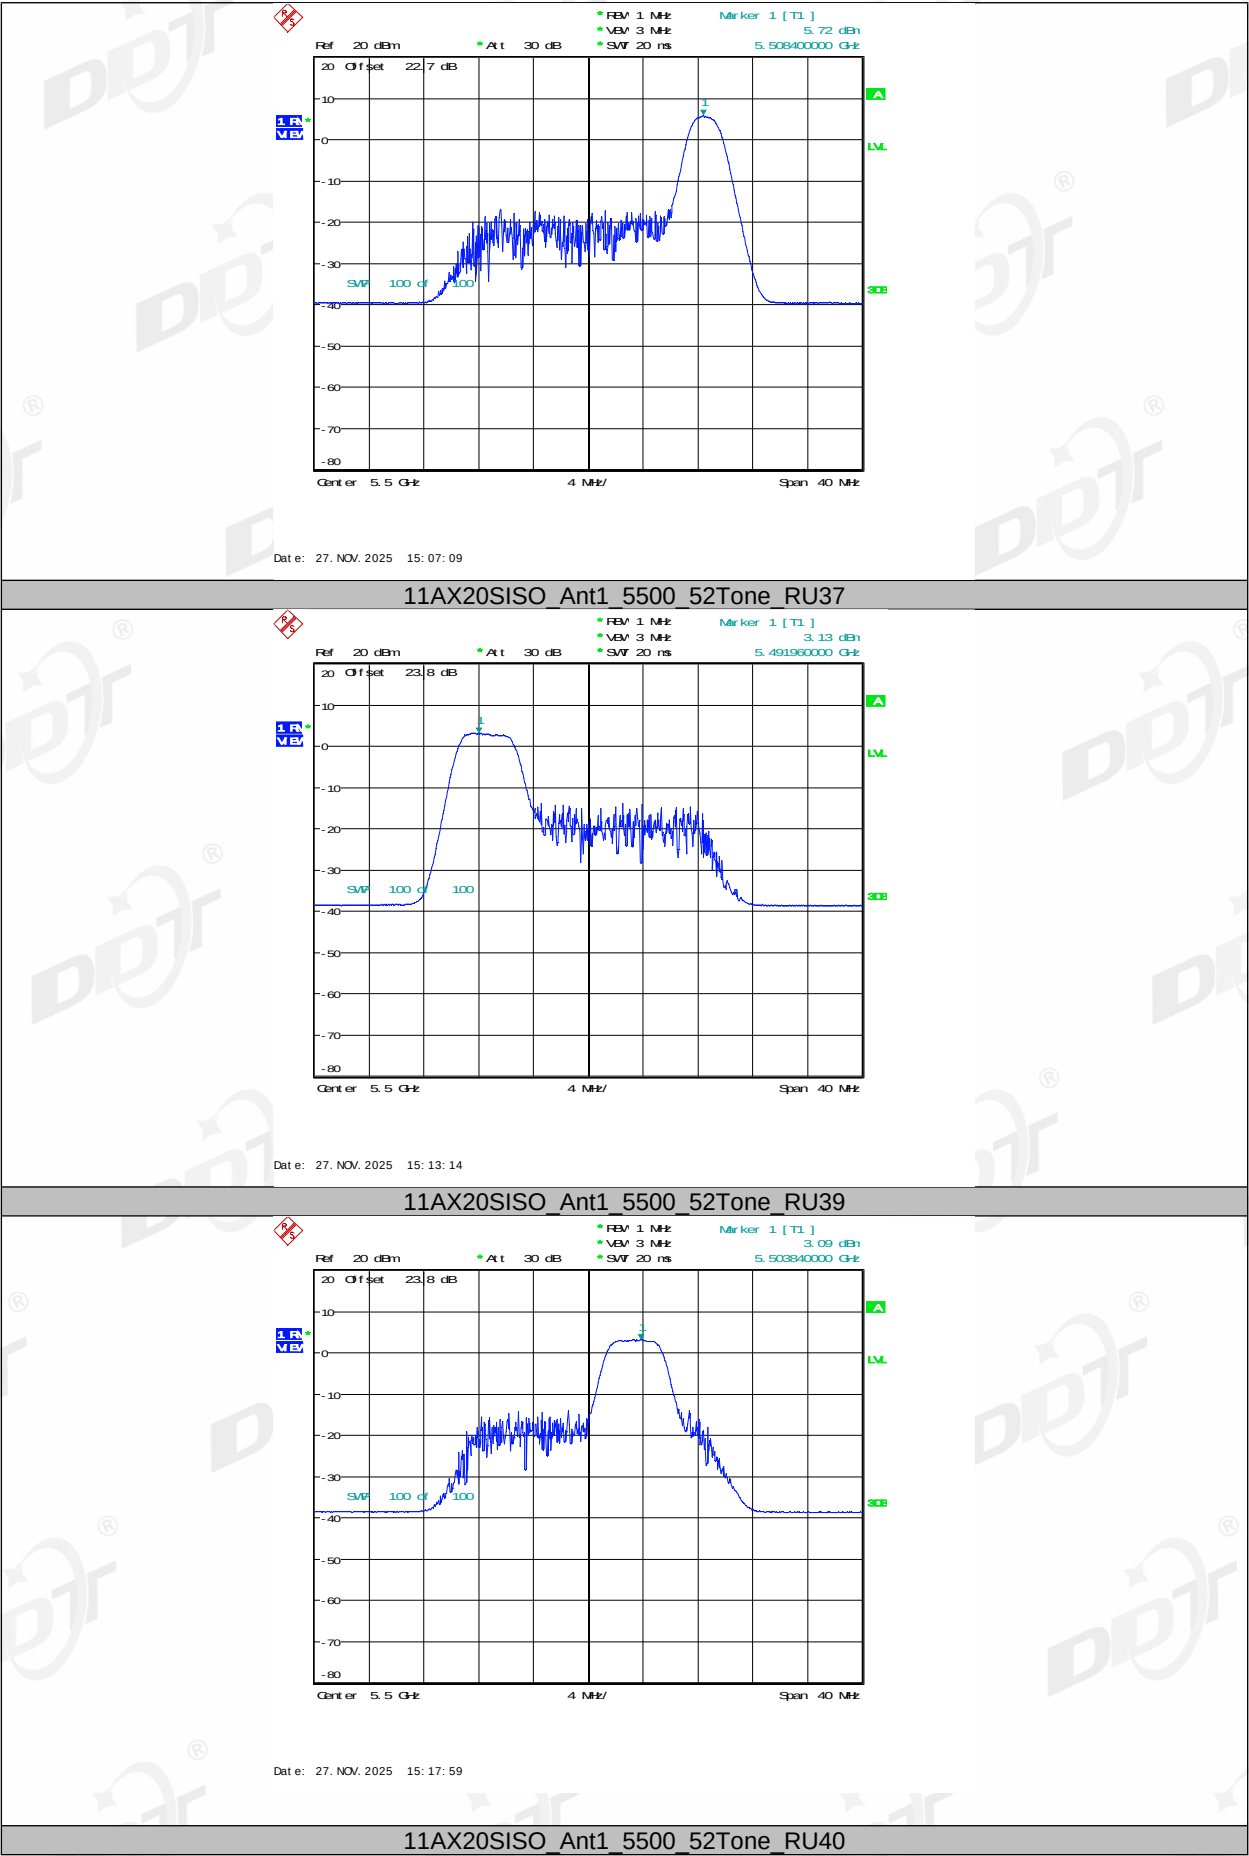


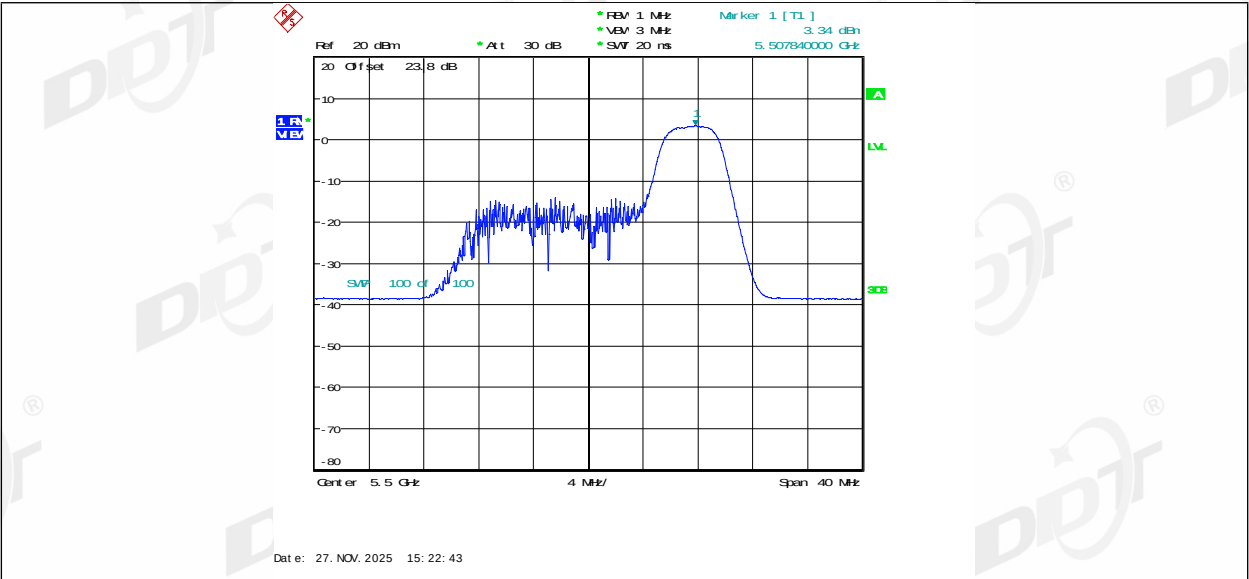


11AX20SISO_Ant1_5500_106Tone_RU53

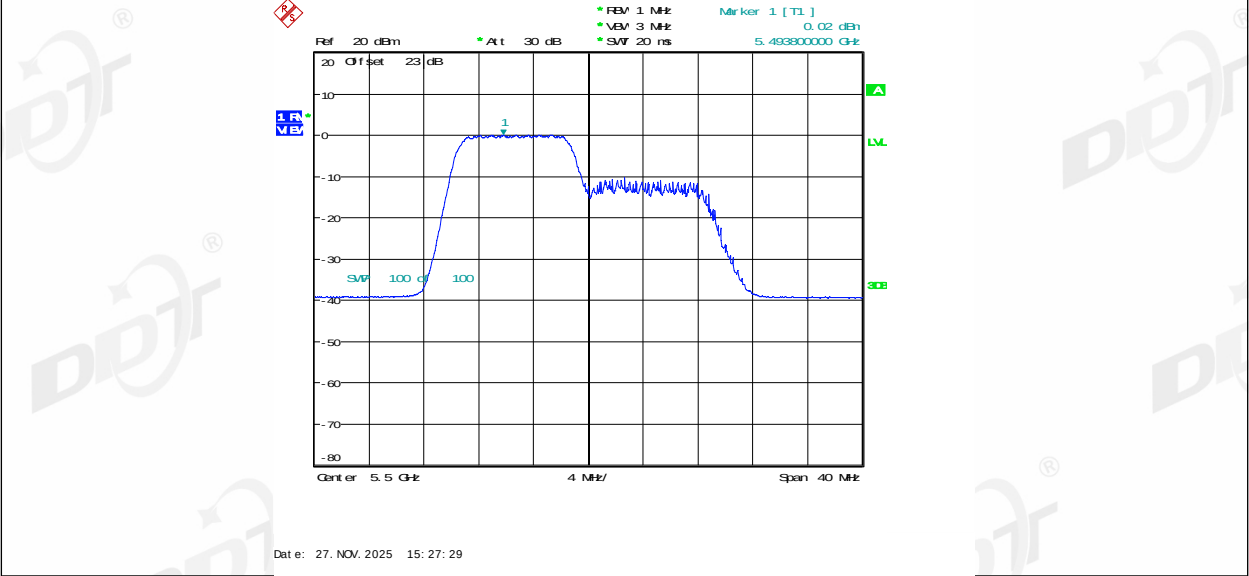

11AX20SISO_Ant1_5500_106Tone_RU54

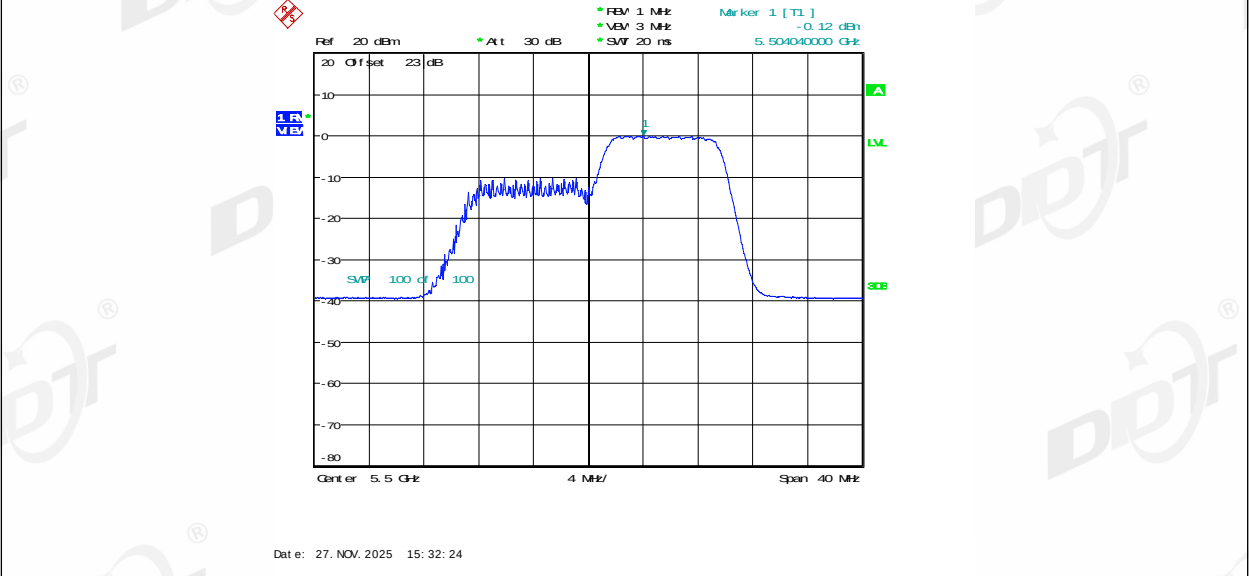


11AX20SISO_Ant1_5580_26Tone_RU0

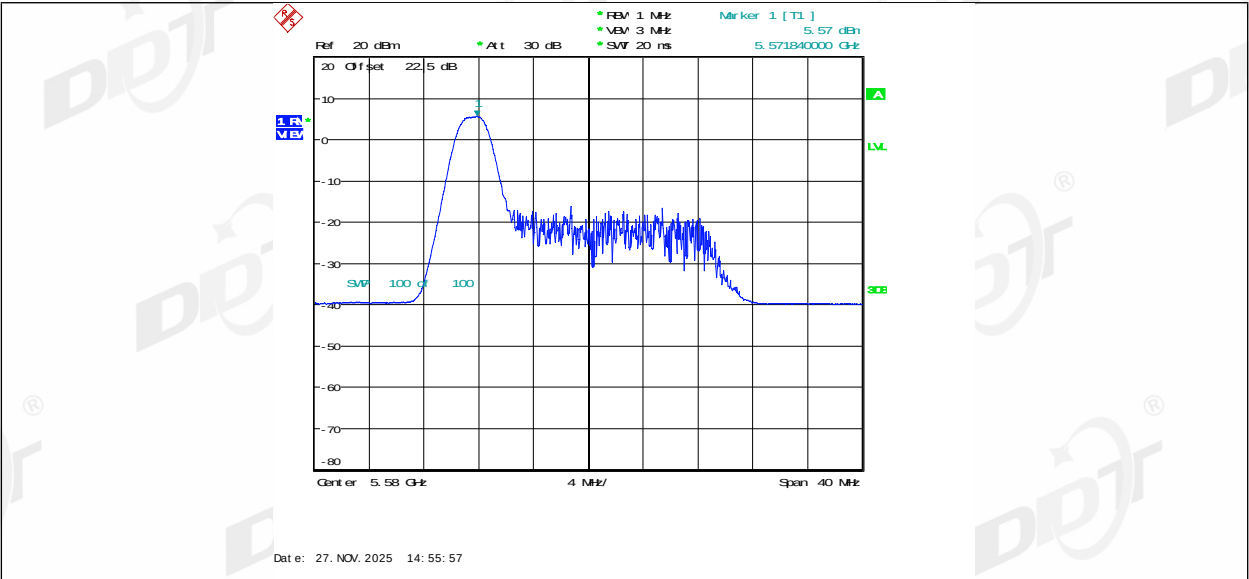


11AX20SISO_Ant1_5580_26Tone_RU4




11AX20SISO_Ant1_5580_26Tone_RU8

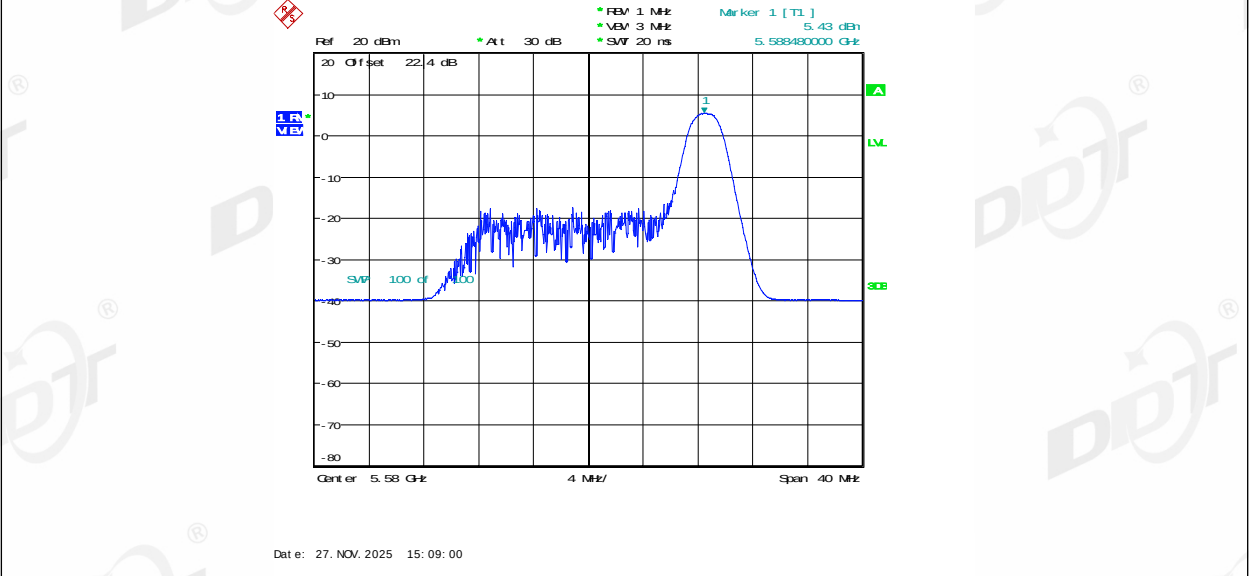


11AX20SISO_Ant1_5580_52Tone_RU37

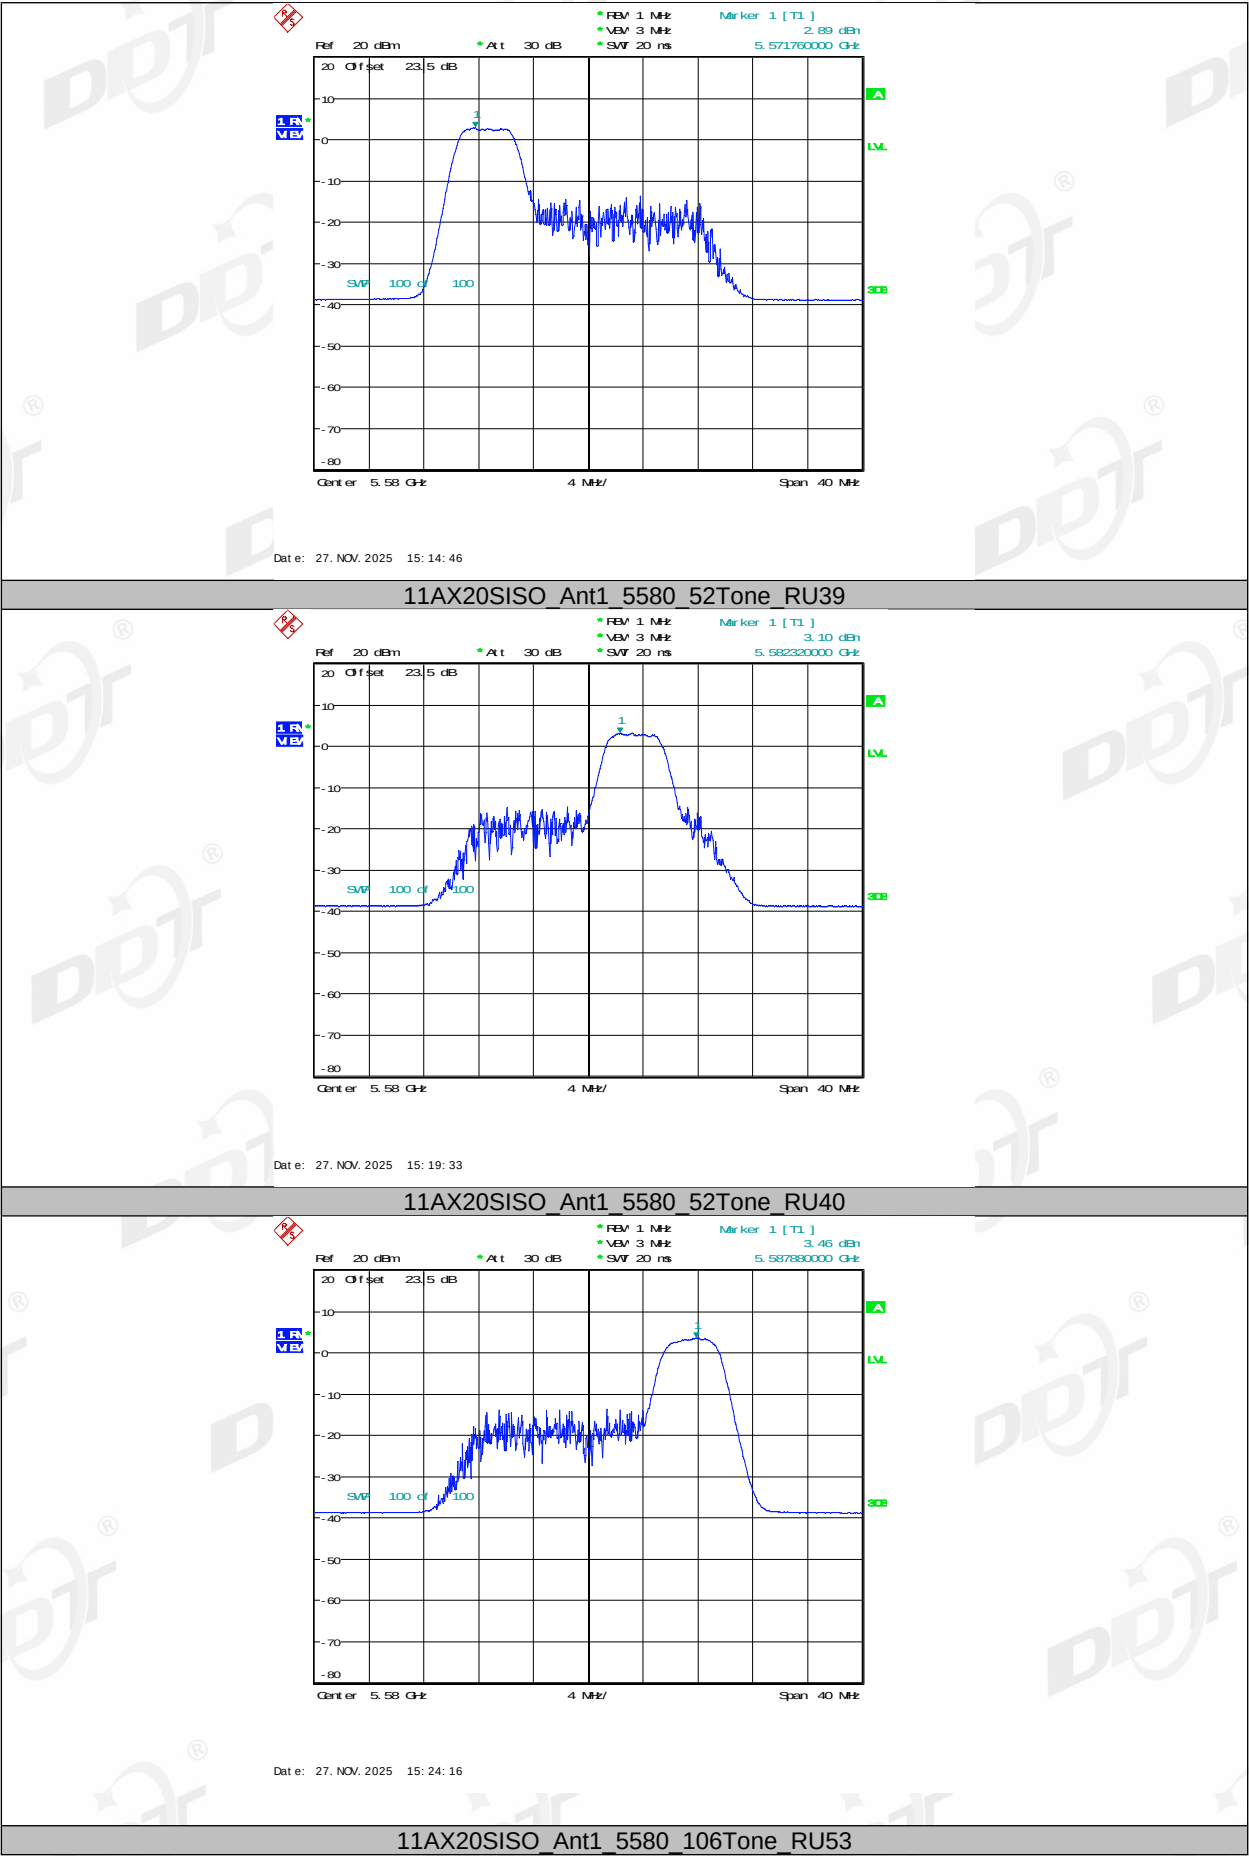

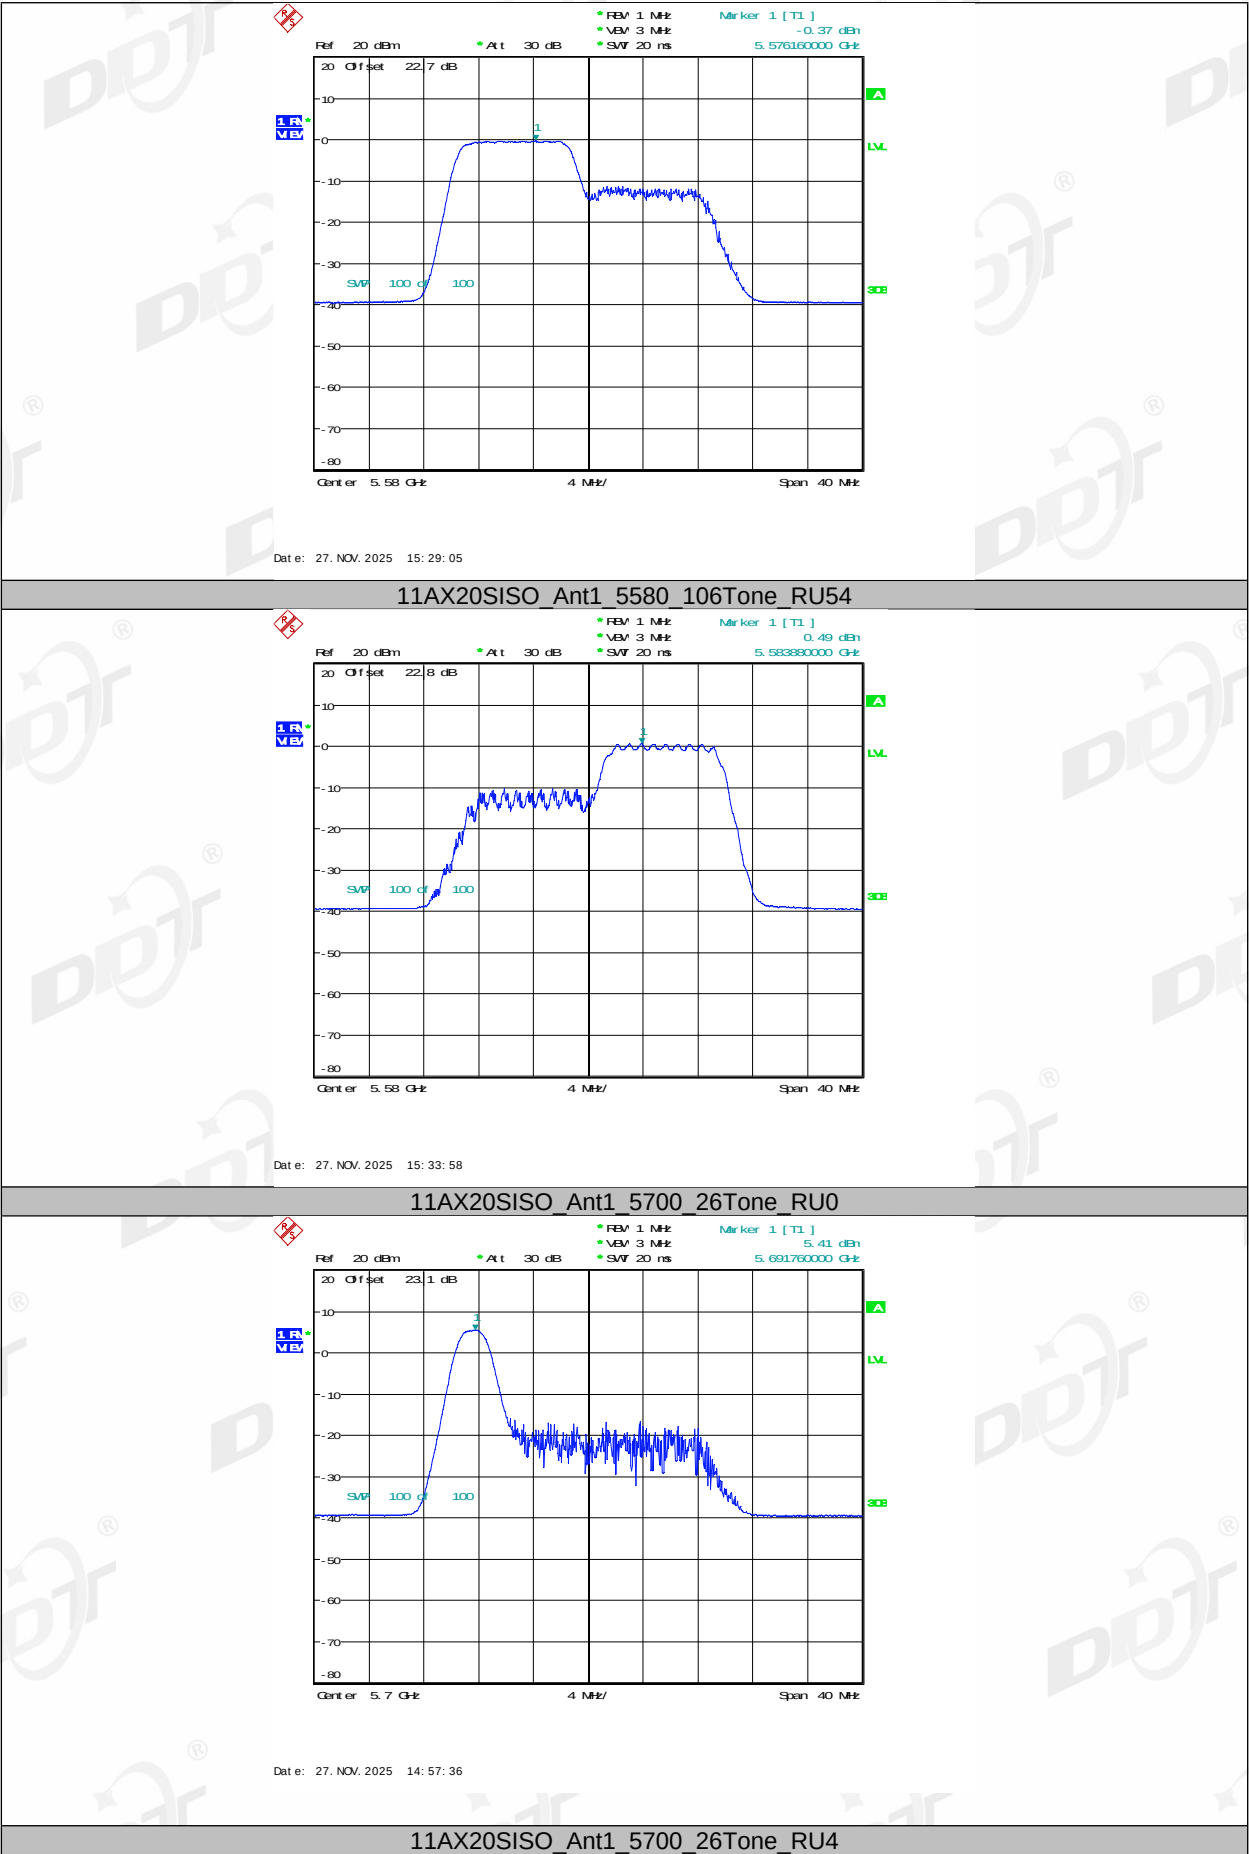






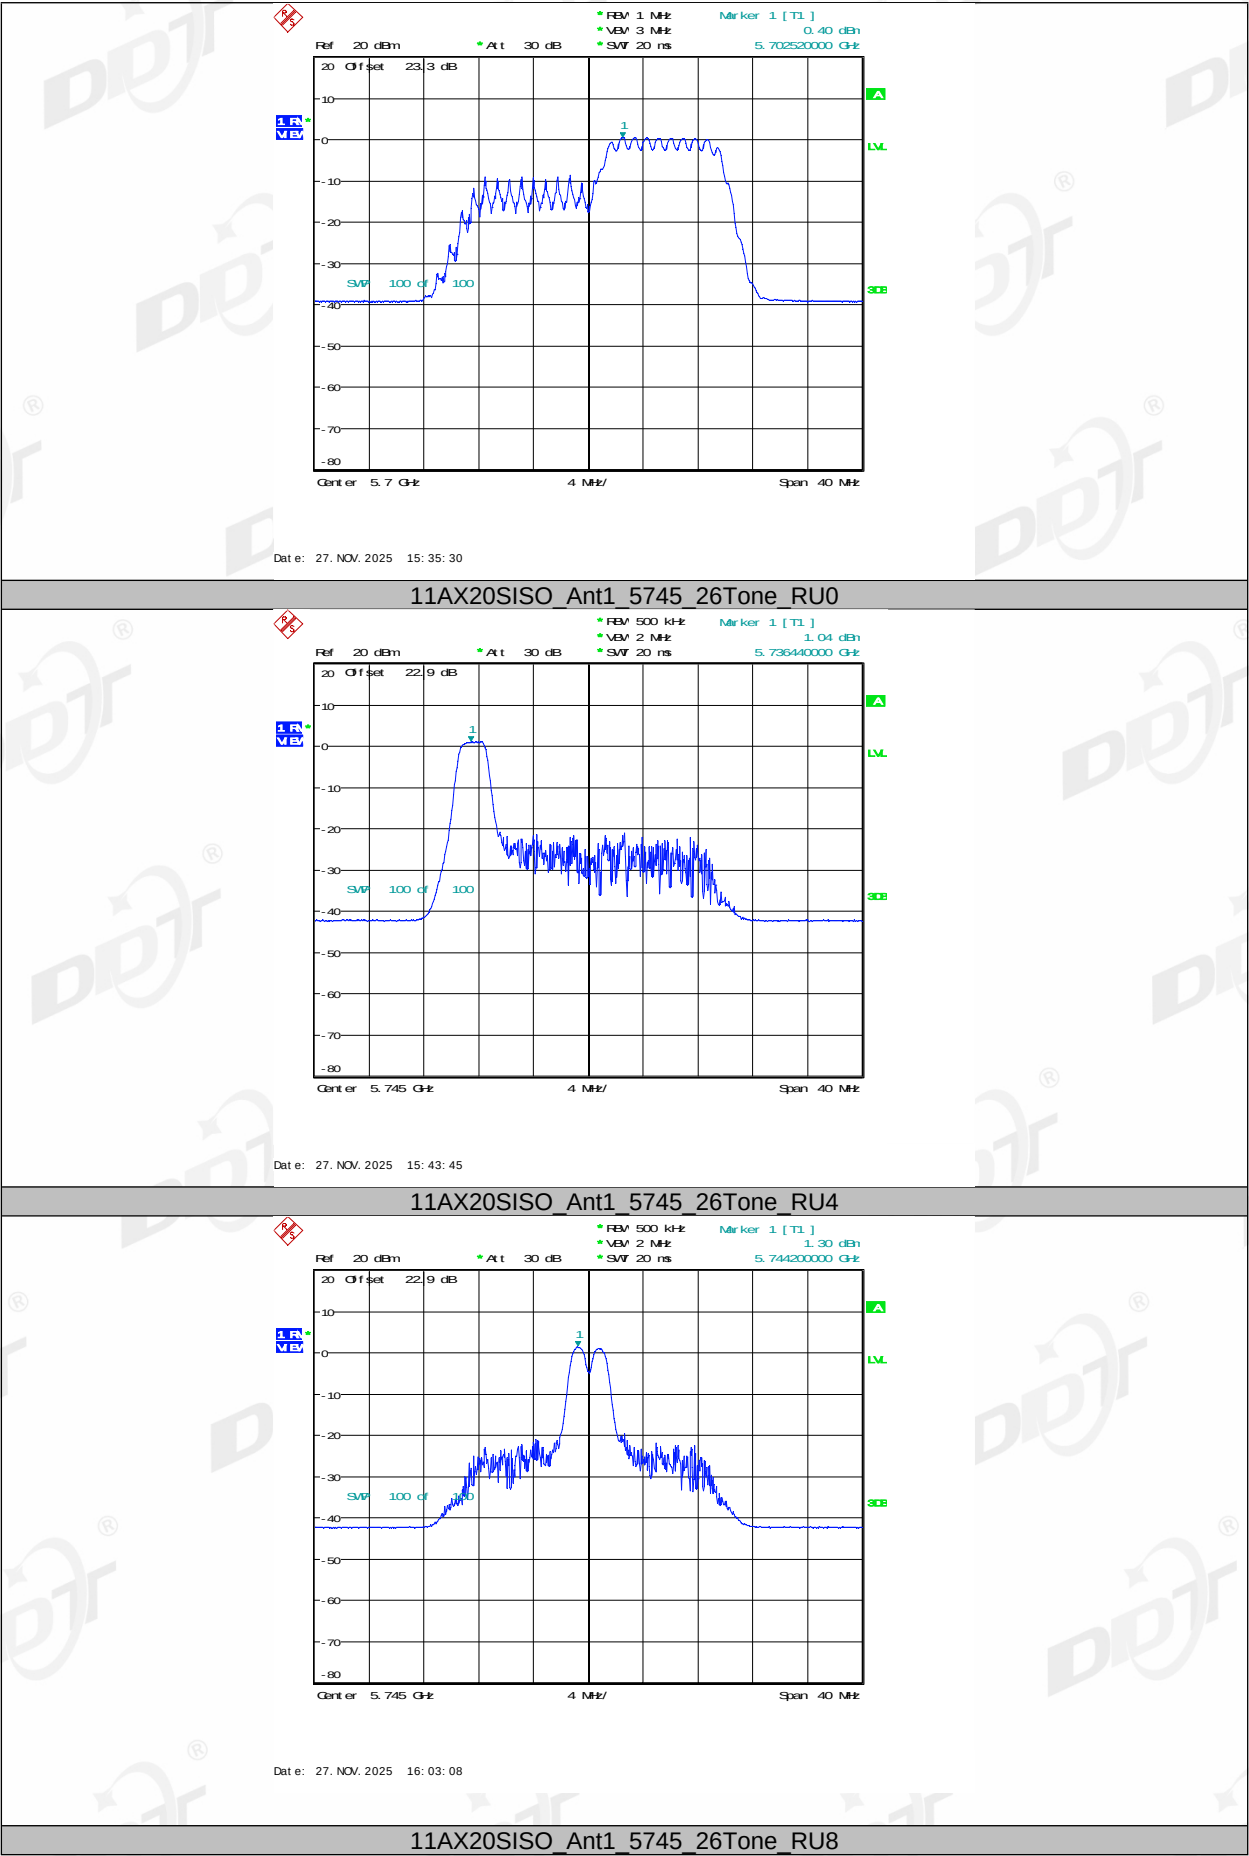







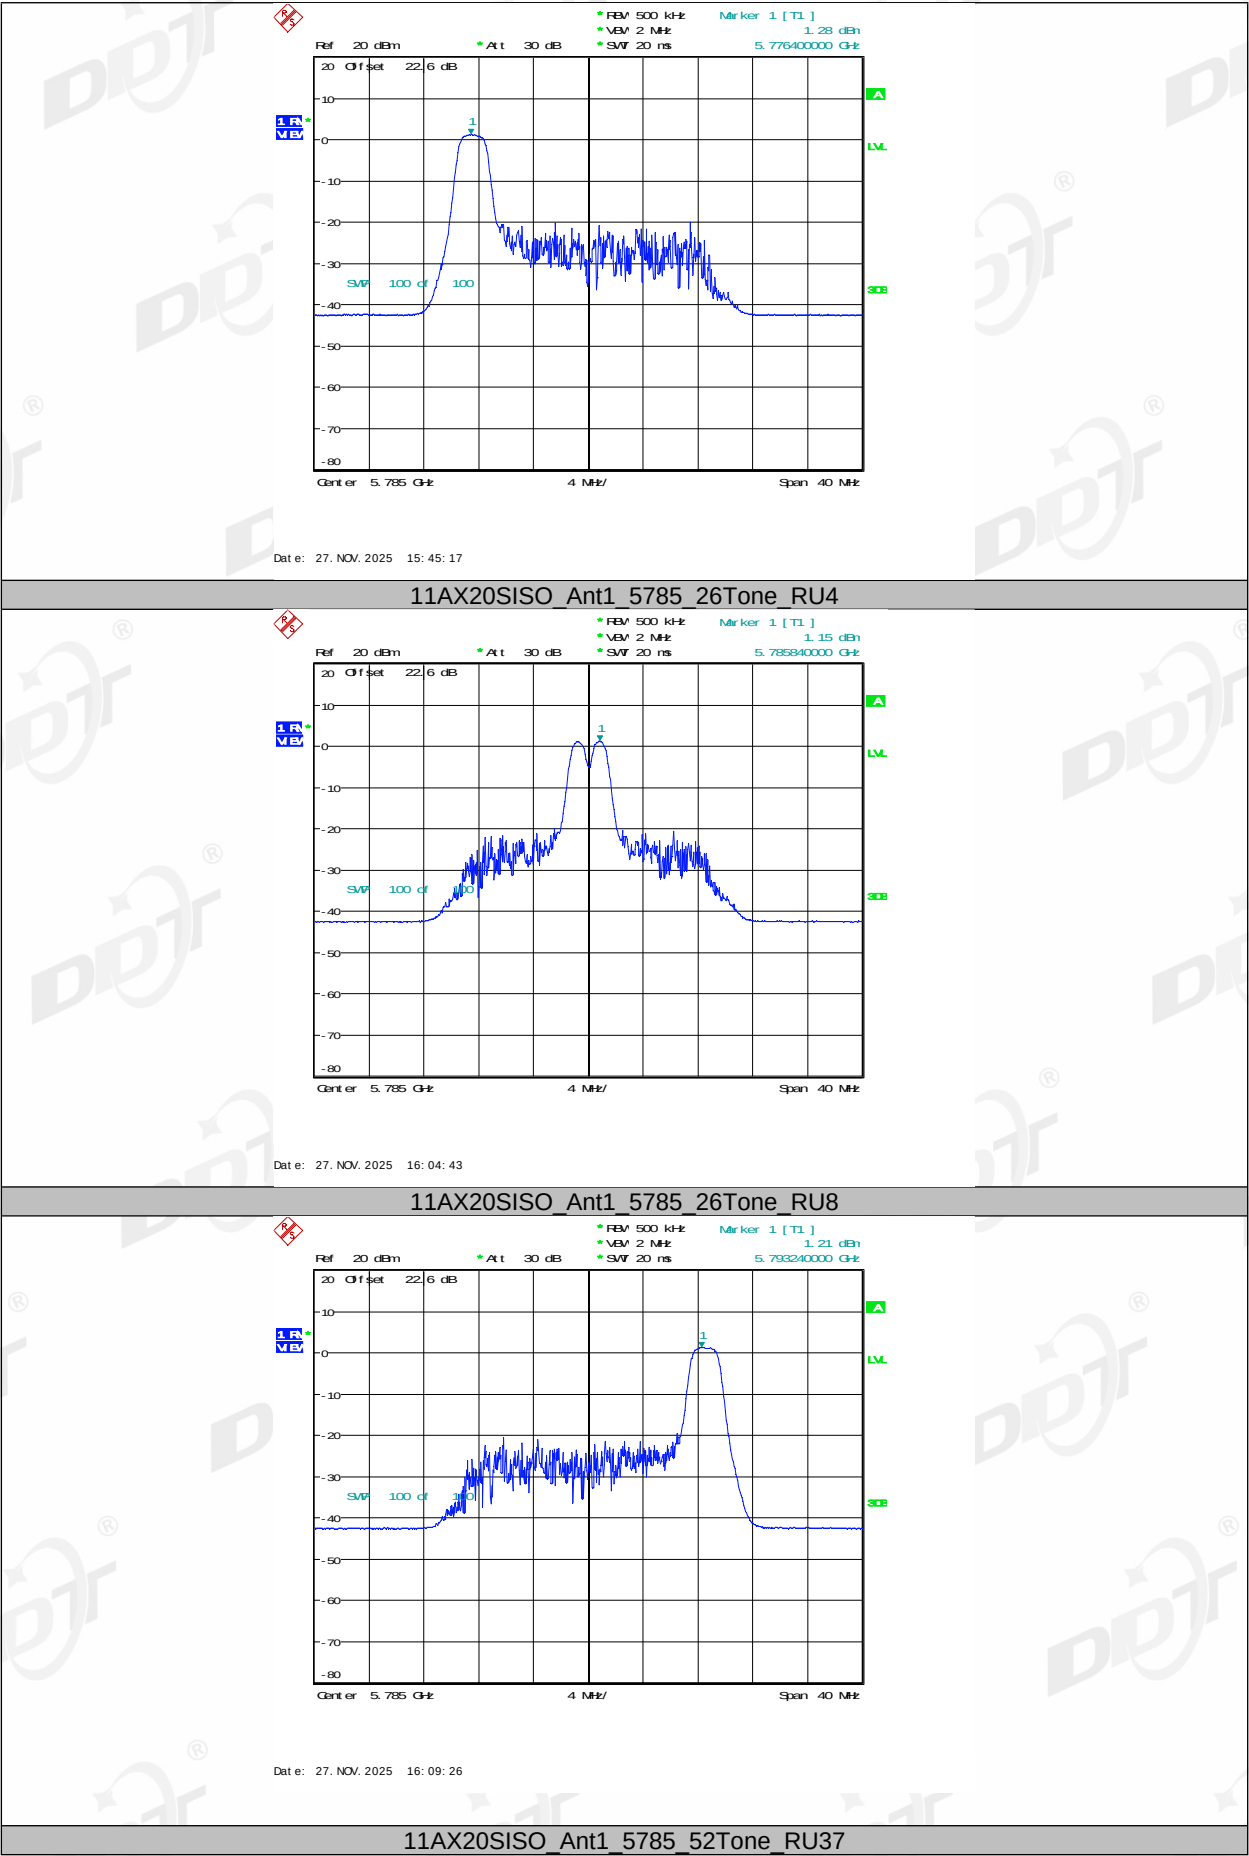




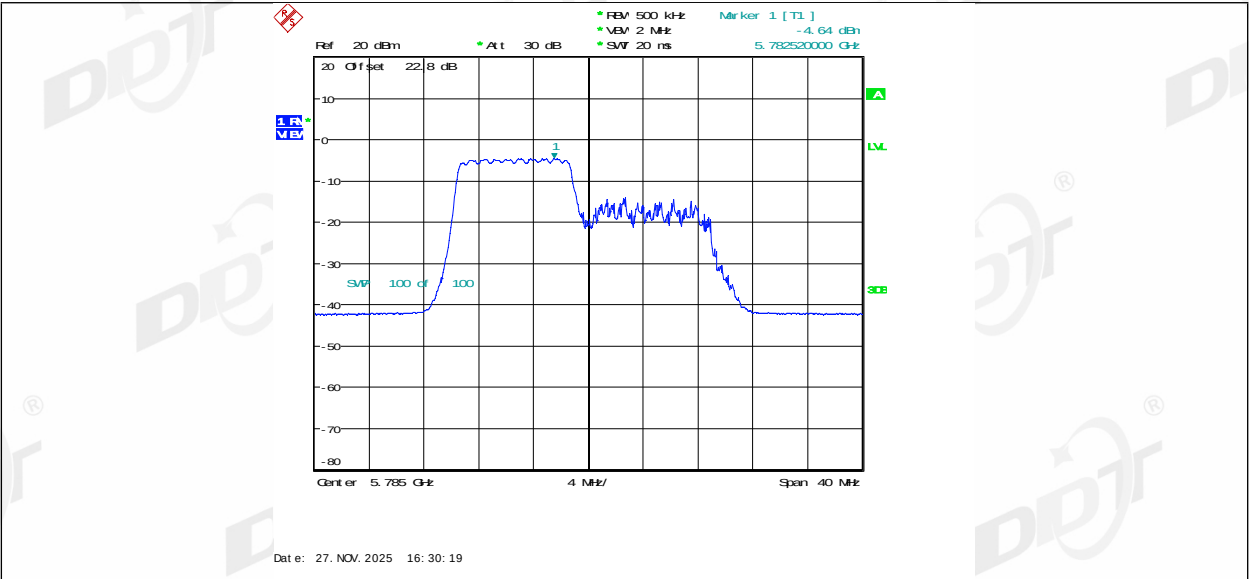


11AX20SISO_Ant1_5785_106Tone_RU54

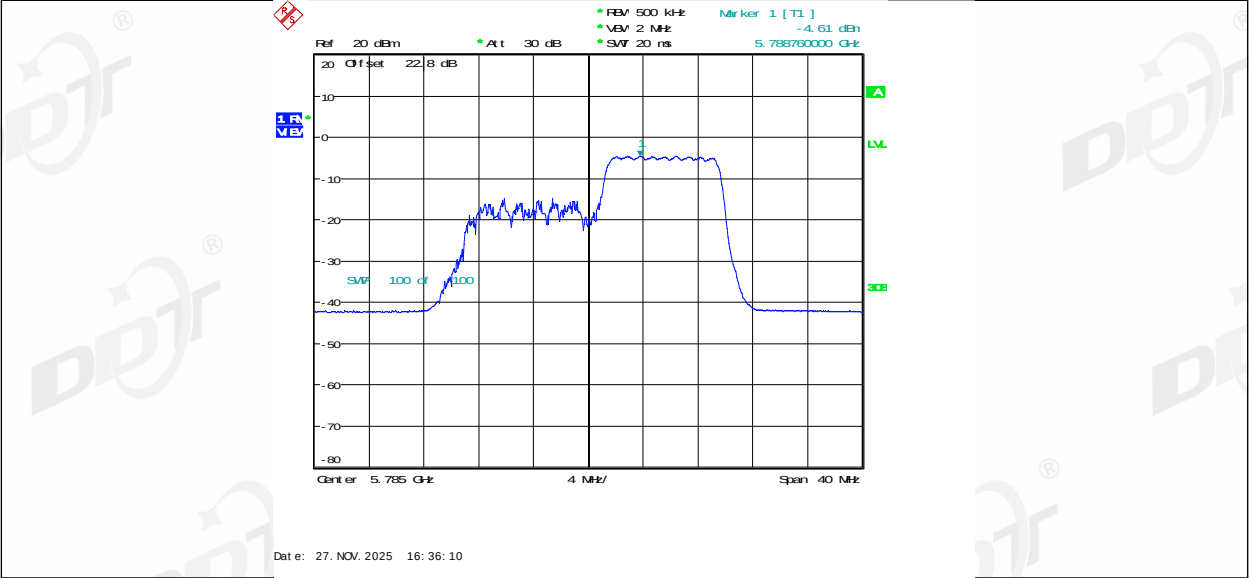


11AX20SISO_Ant1_5825_26Tone_RU0

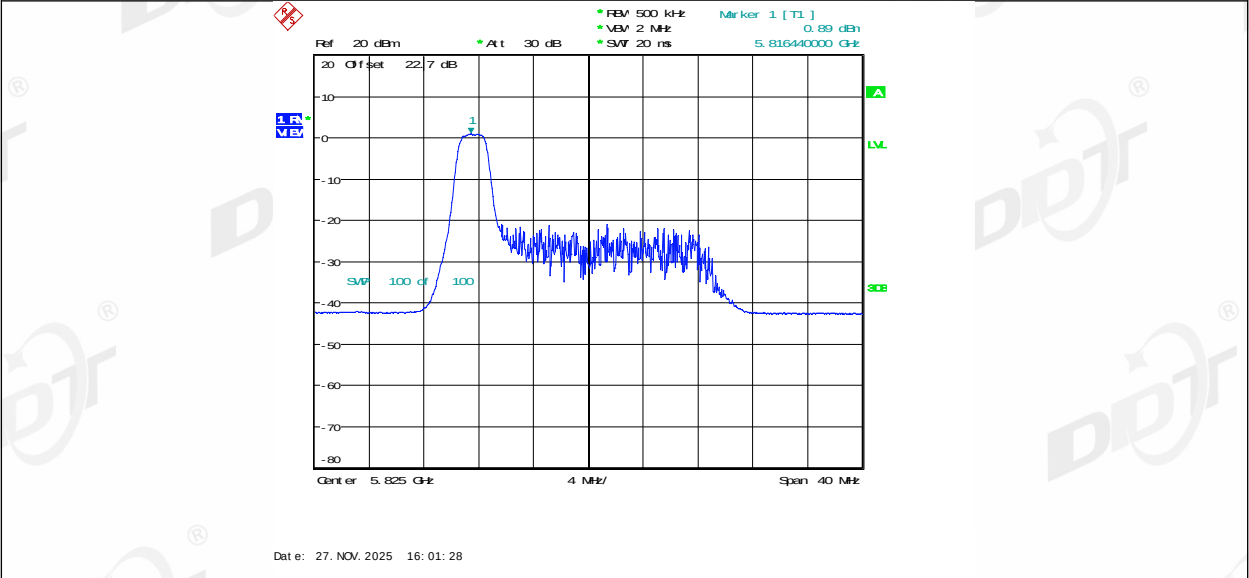


11AX20SISO_Ant1_5825_26Tone_RU4

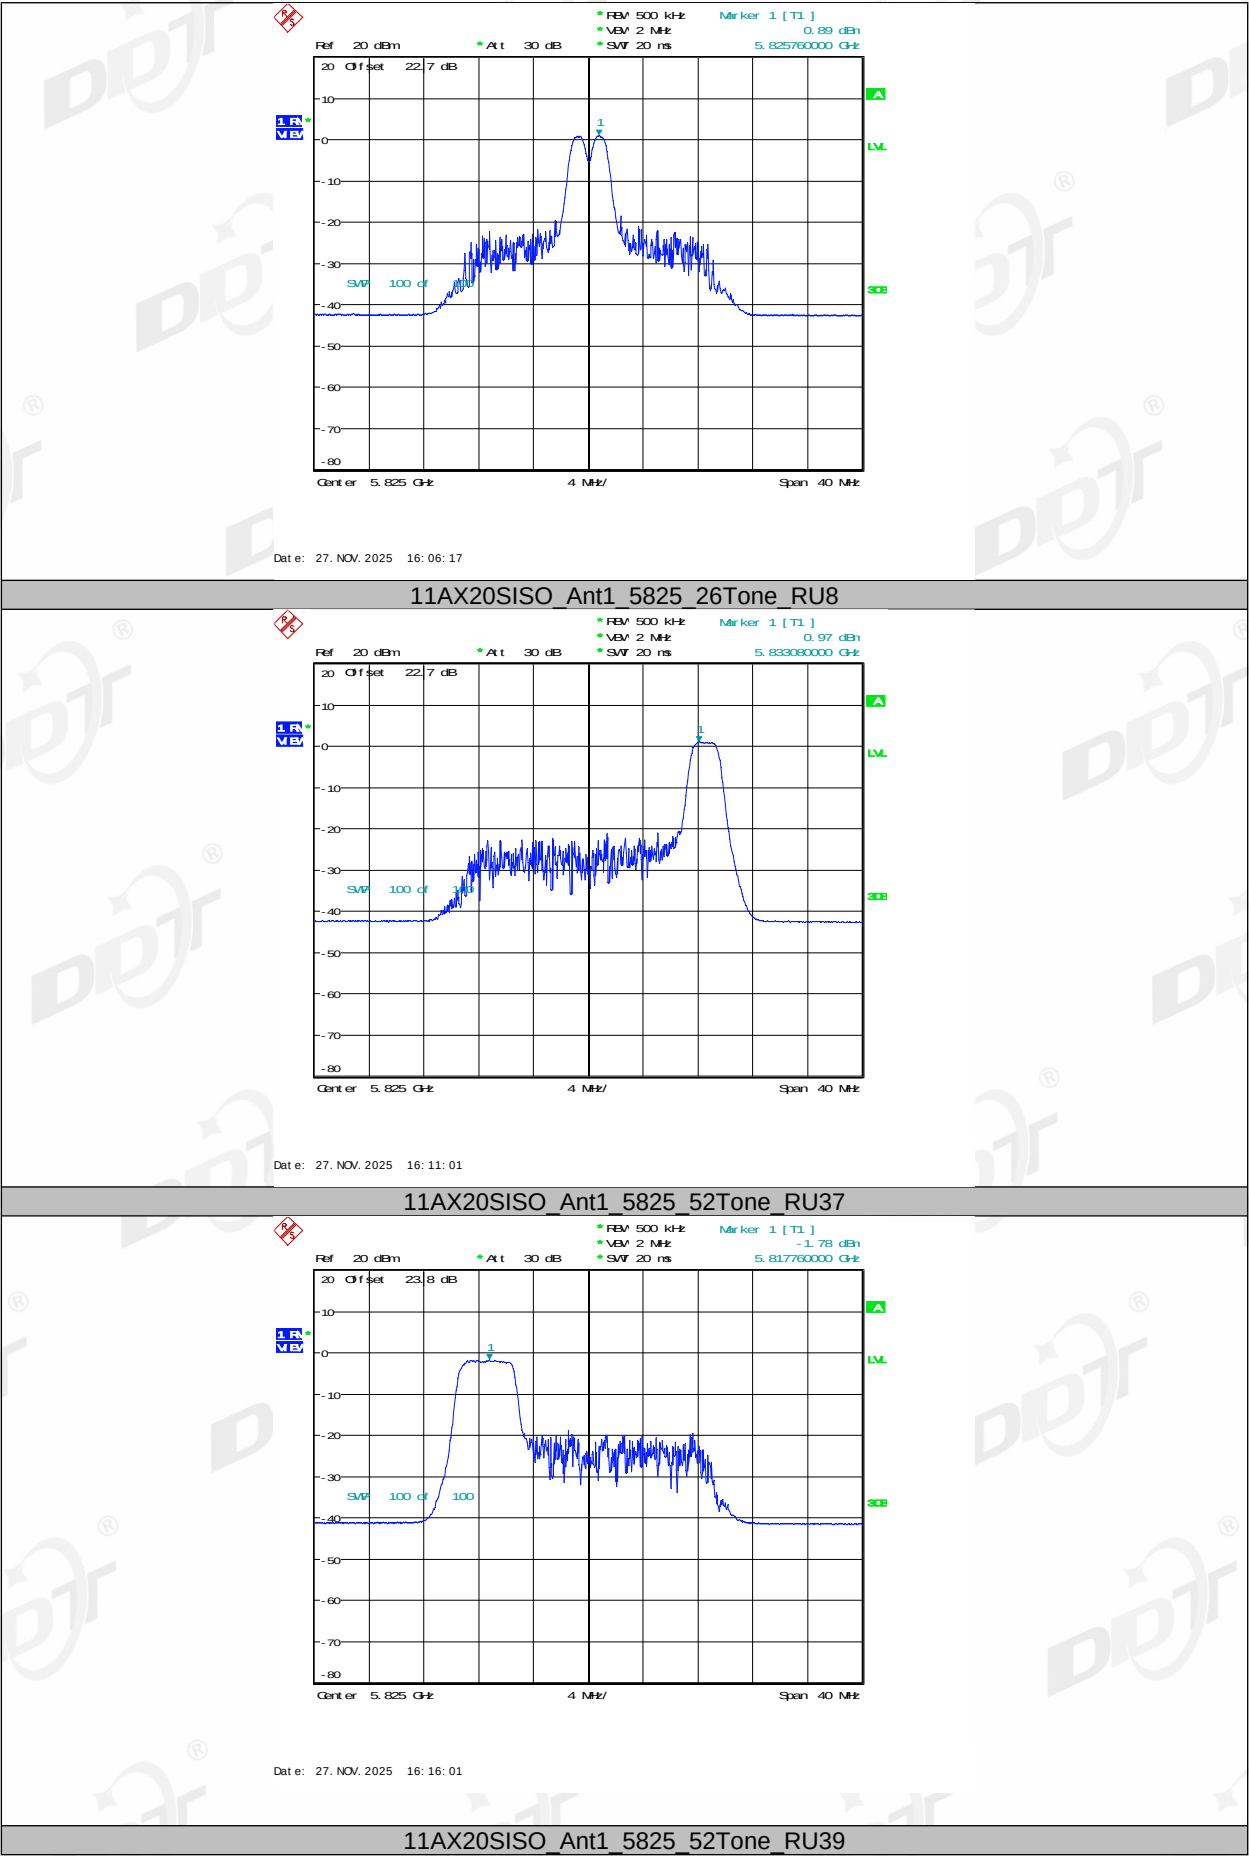


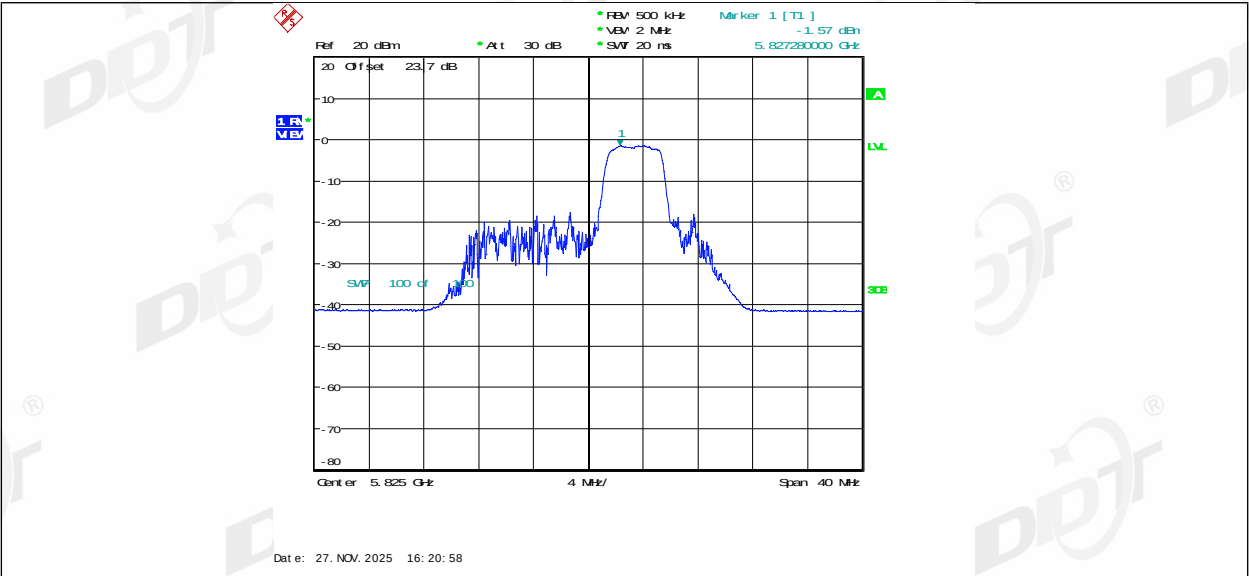




11AX20SISO_Ant1_5825_52Tone_RU40

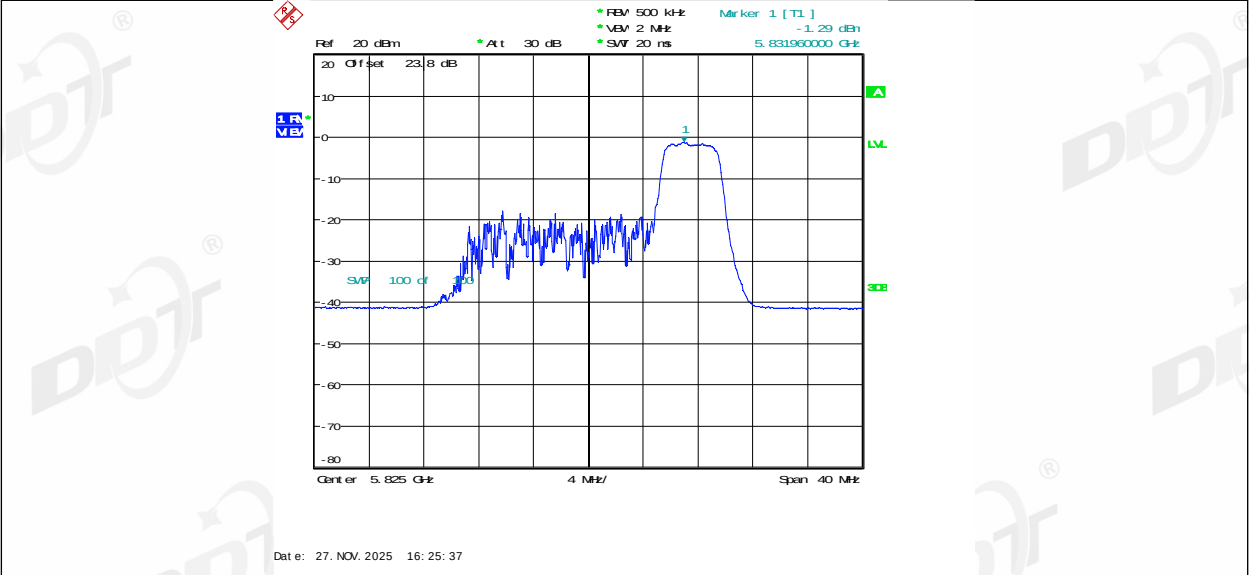


11AX20SISO_Ant1_5825_106Tone_RU53

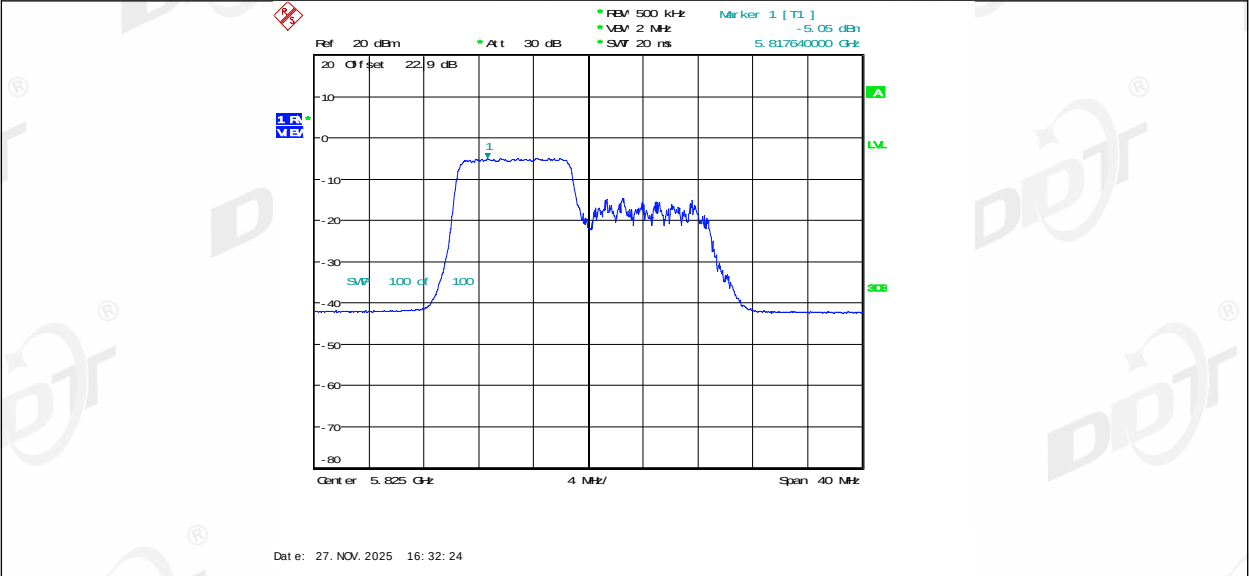



11AX20SISO_Ant1_5825_106Tone_RU54

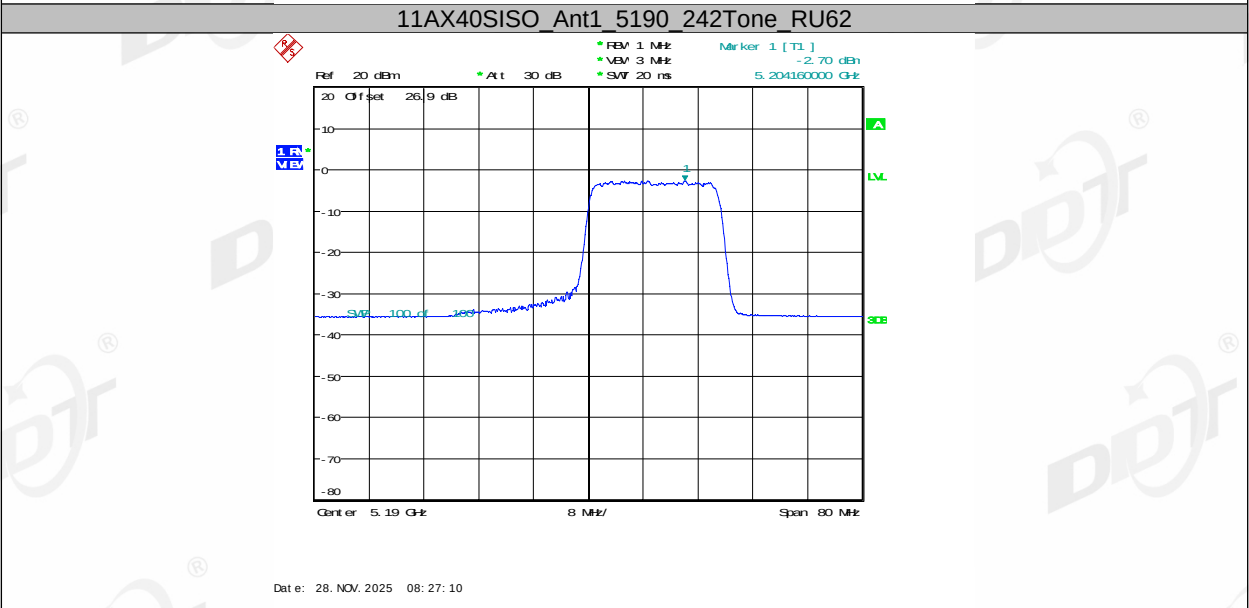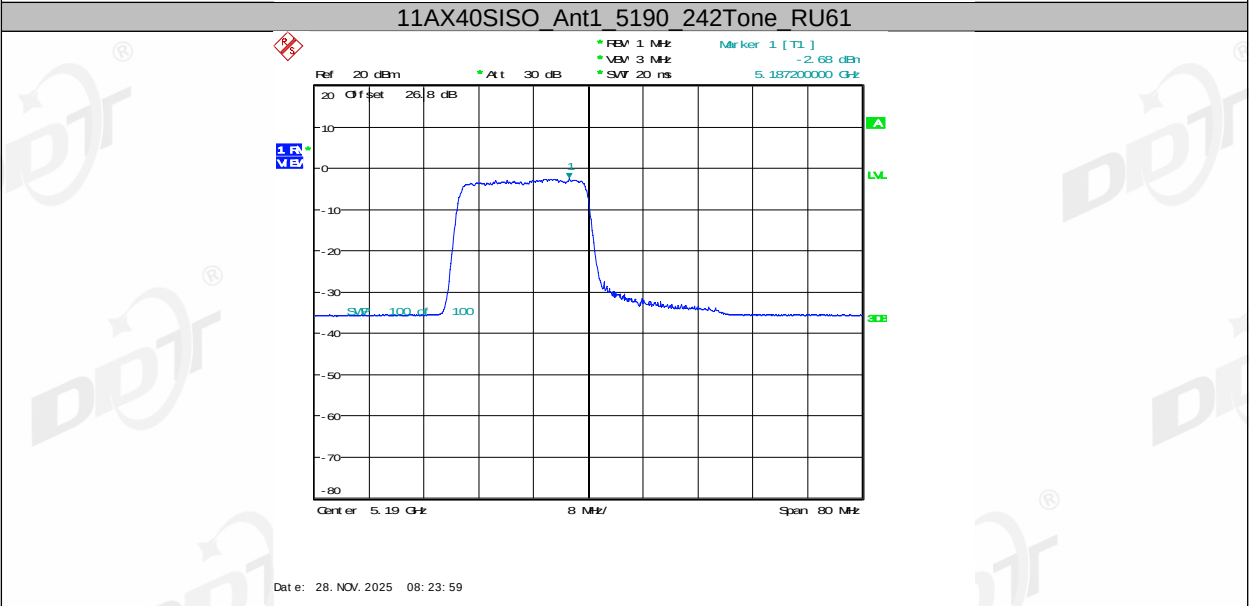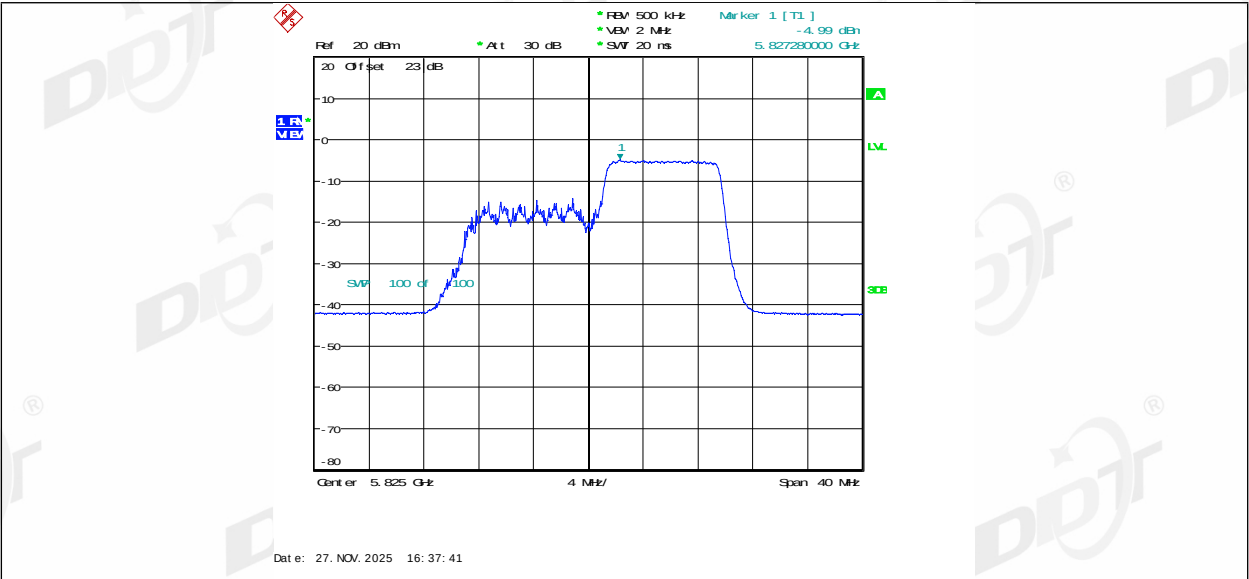


11AX40SISO_Ant1_5230_242Tone_RU61

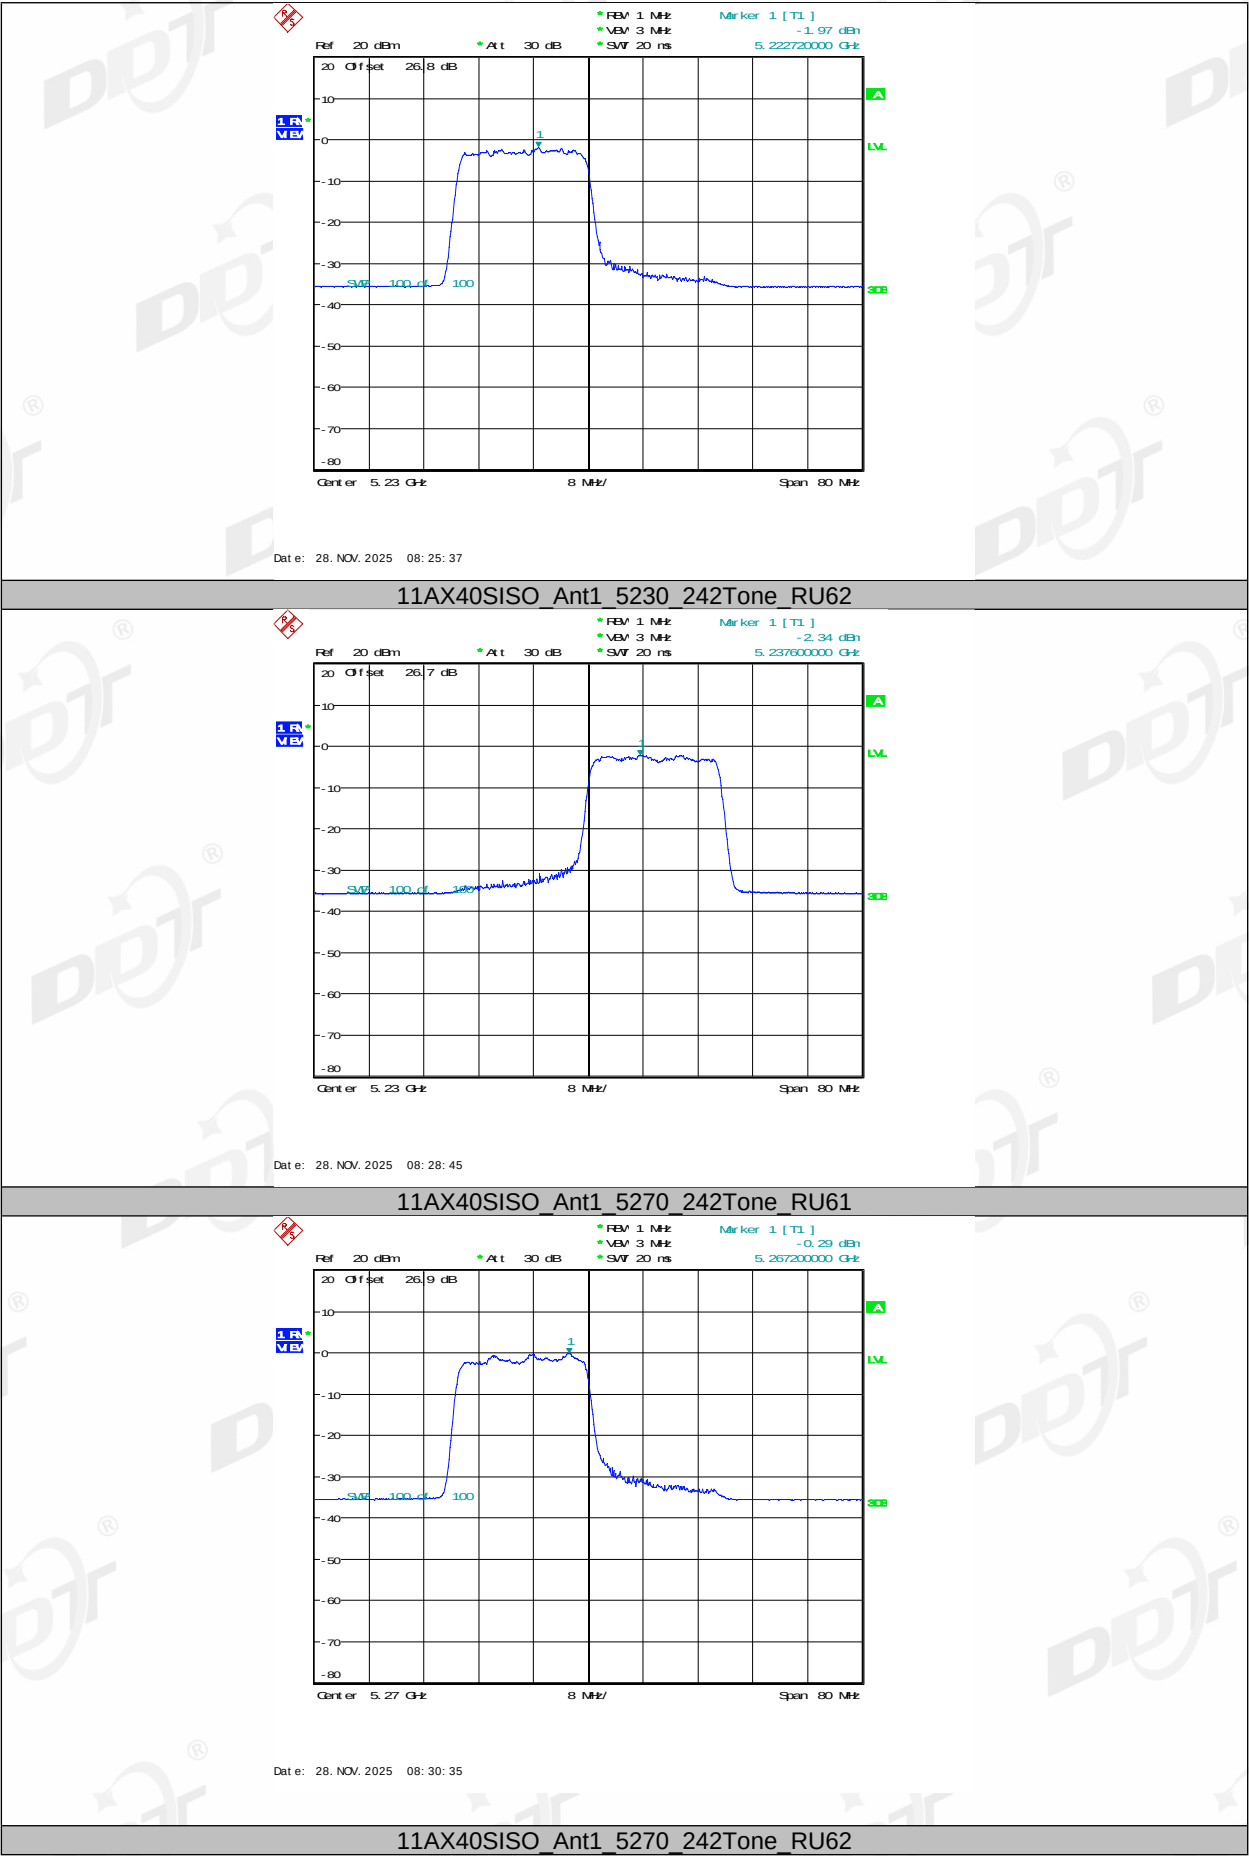

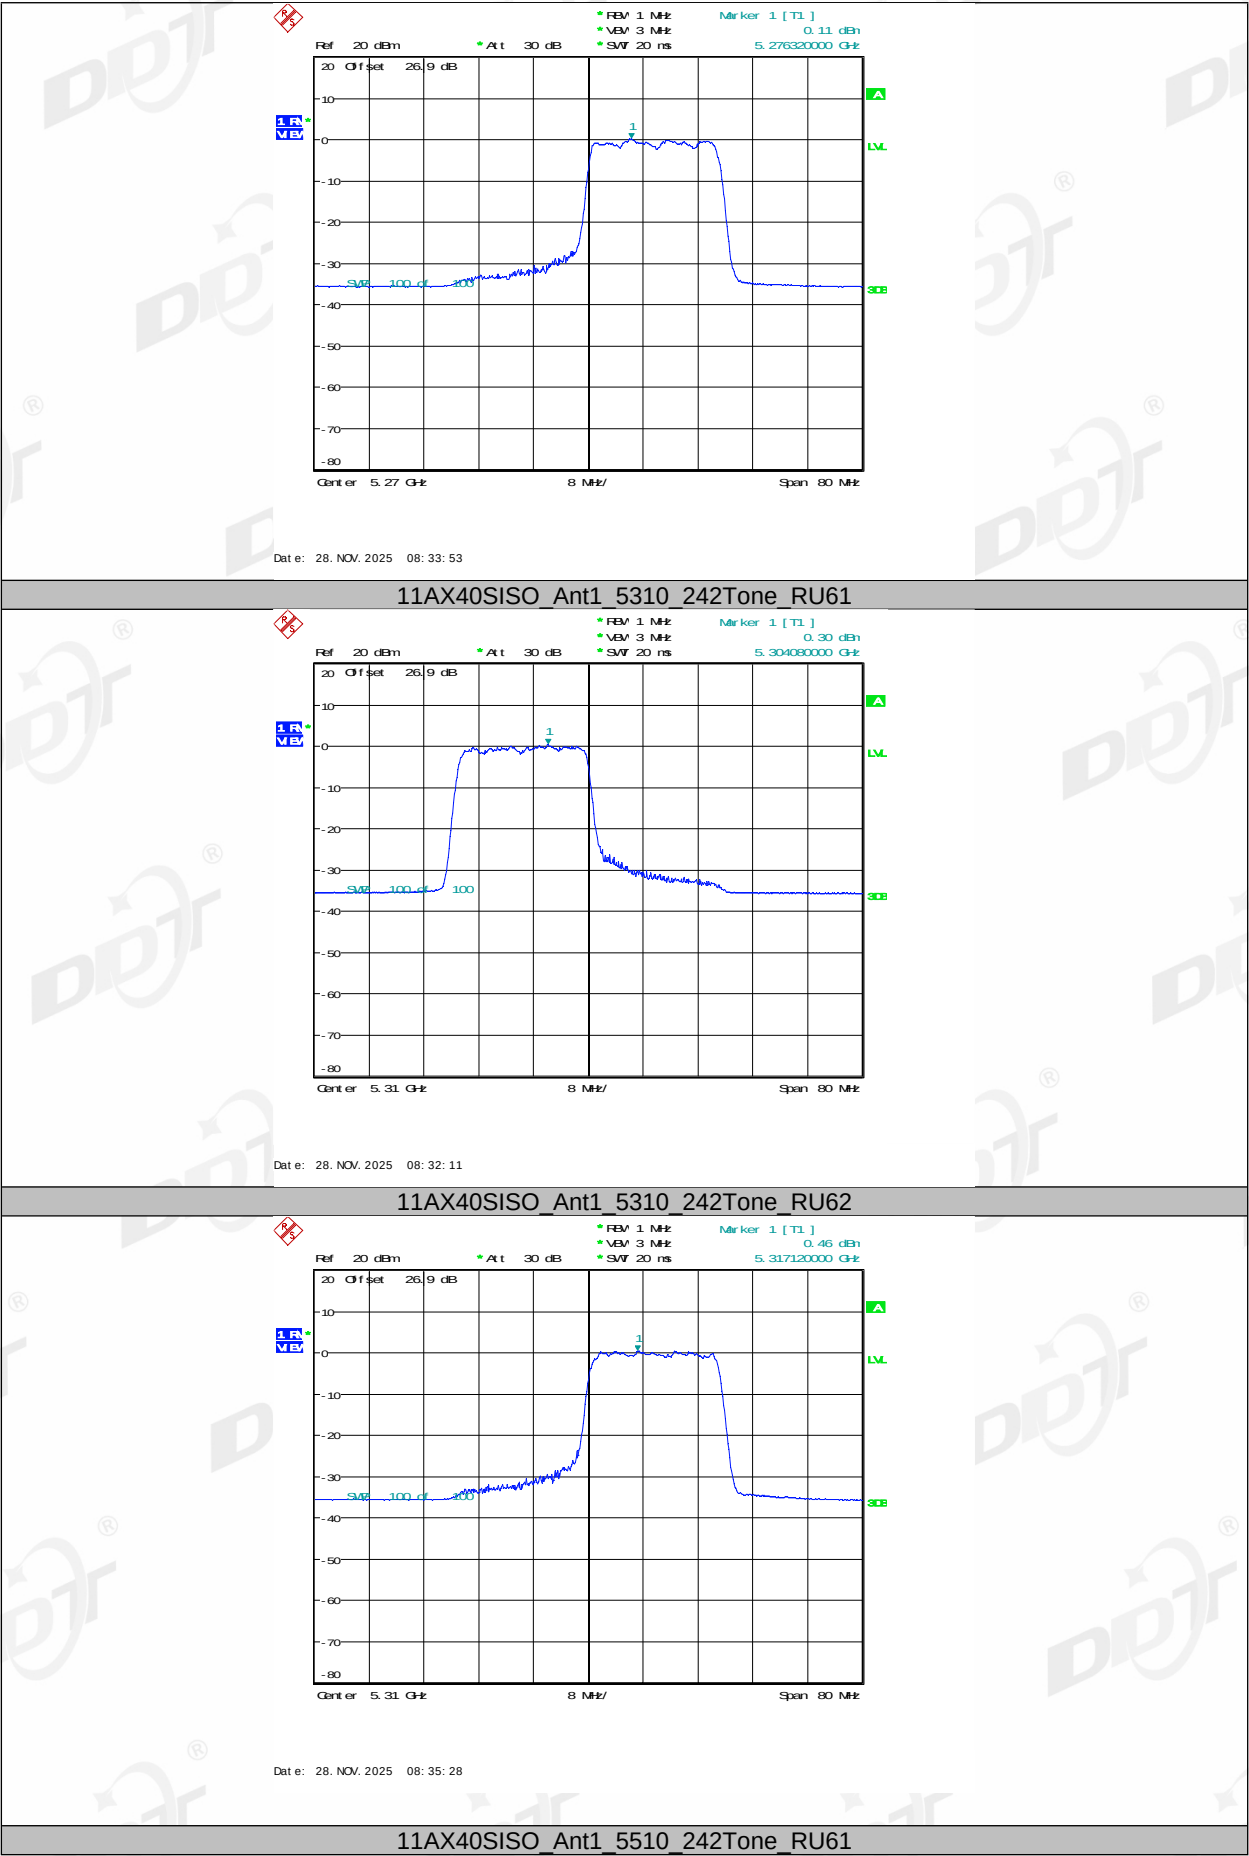


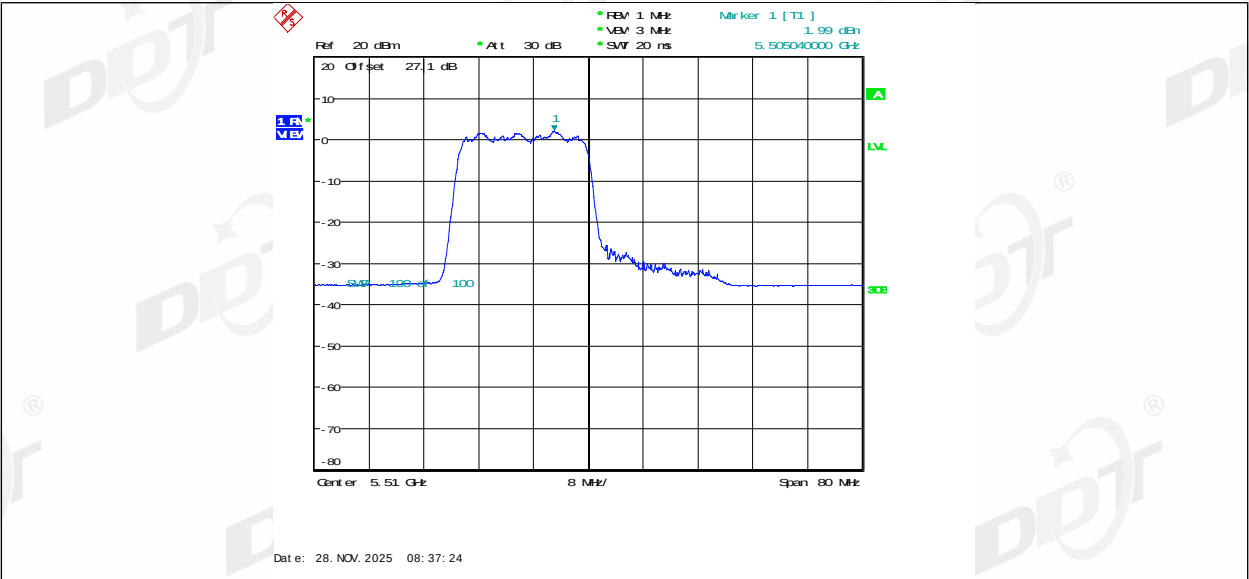


11AX40SISO_Ant1_5510_242Tone_RU62

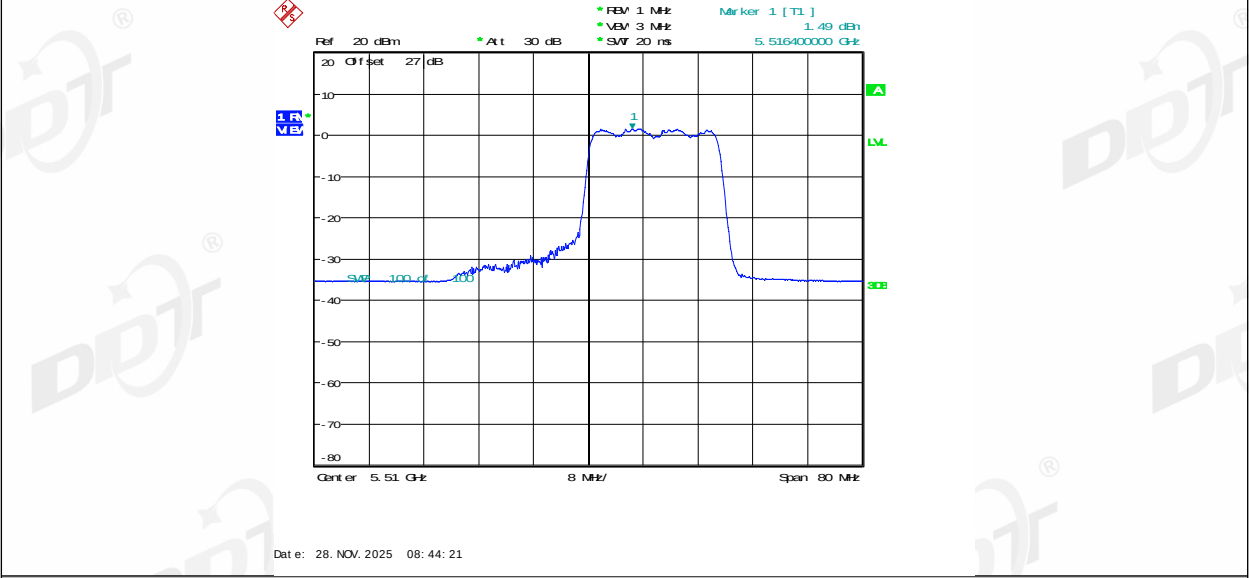


11AX40SISO_Ant1_5550_242Tone_RU61

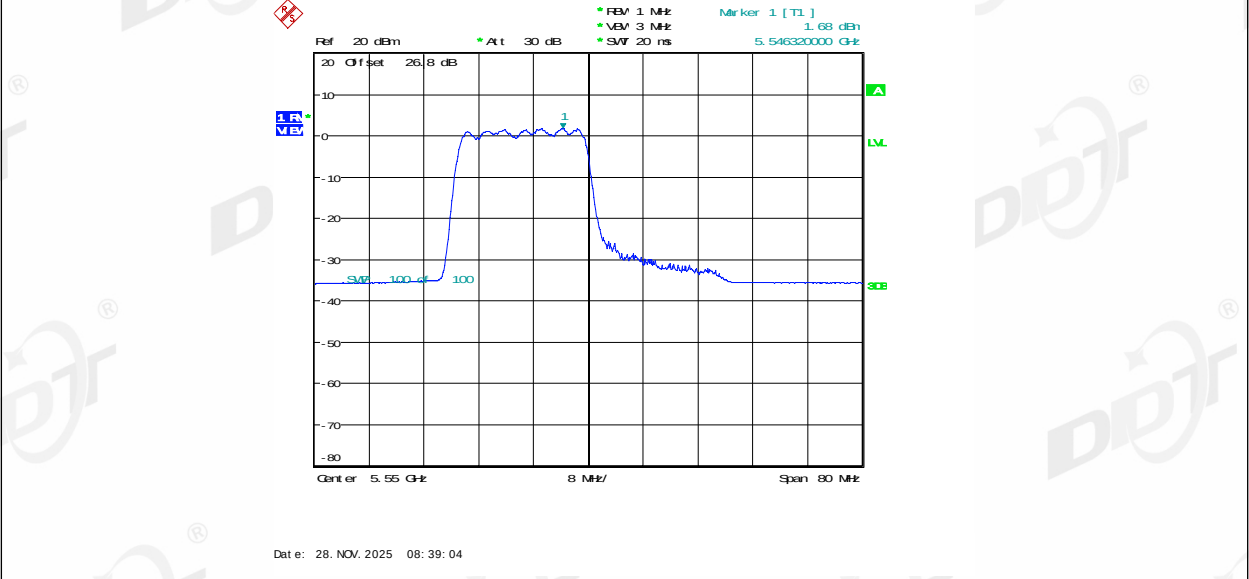


11AX40SISO_Ant1_5550_242Tone_RU62

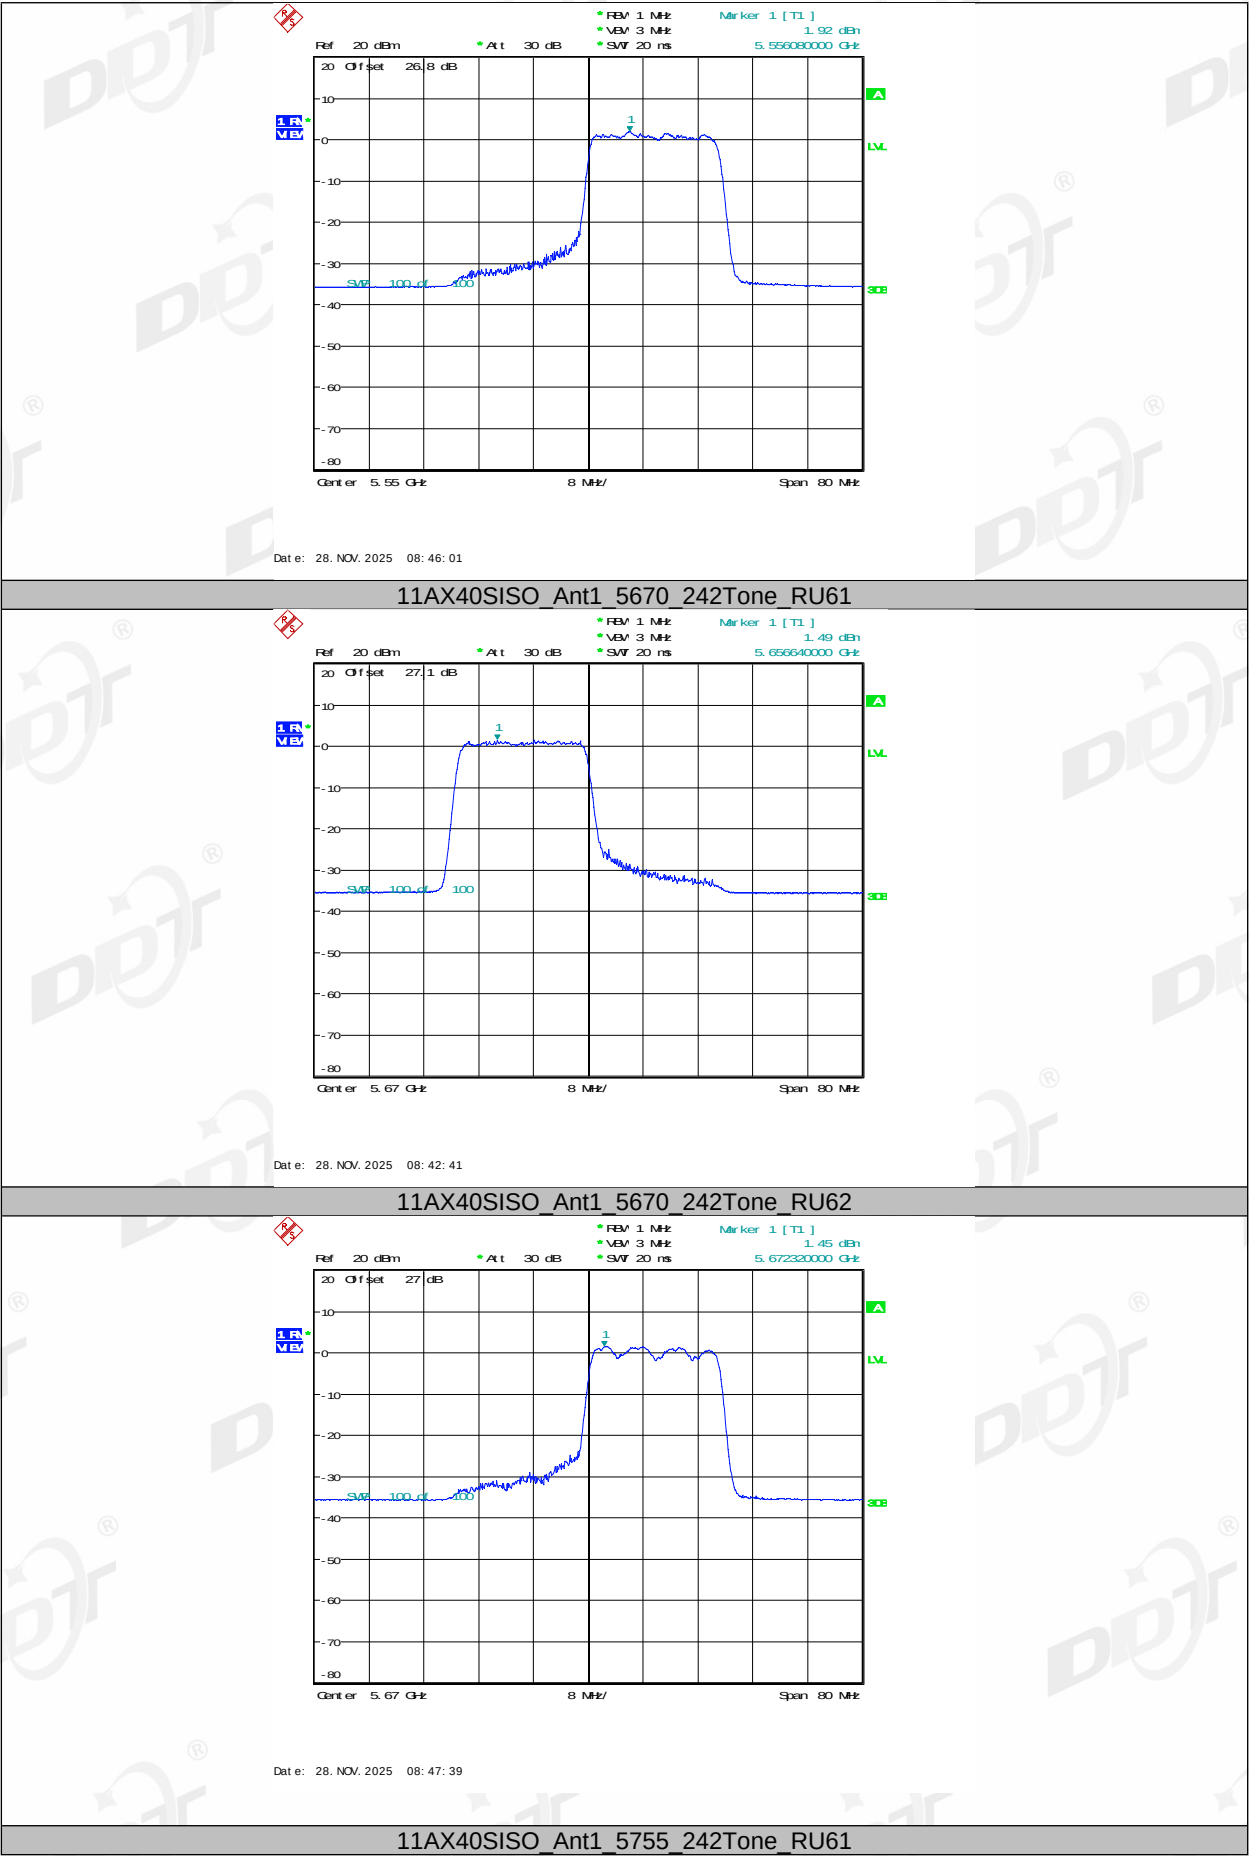




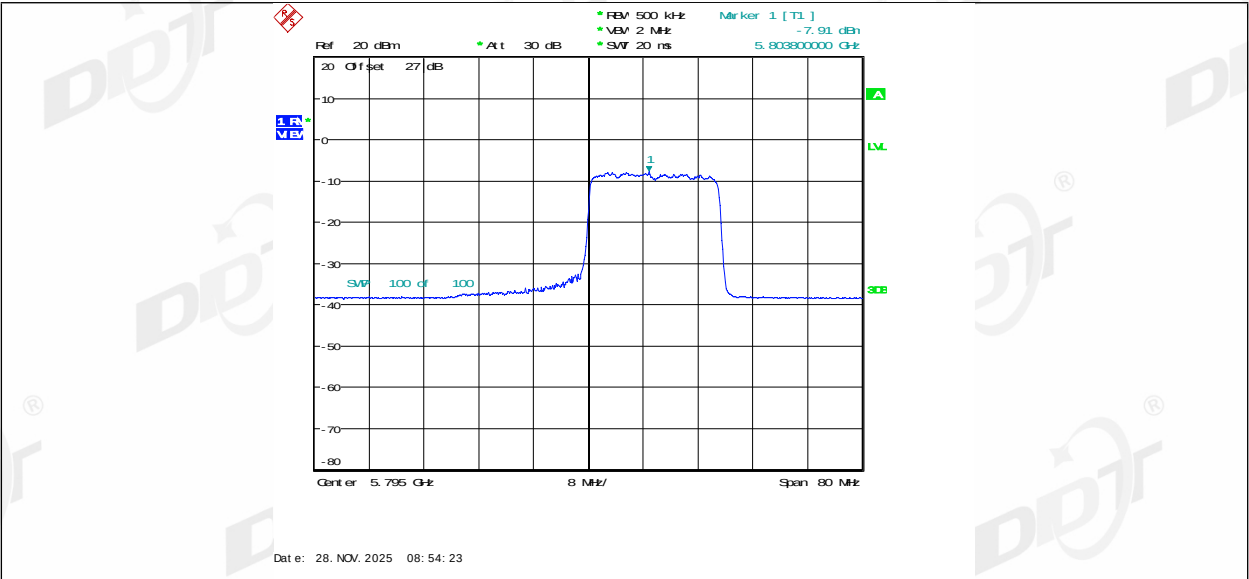


11AX80SISO_Ant1_5210_484Tone_RU65

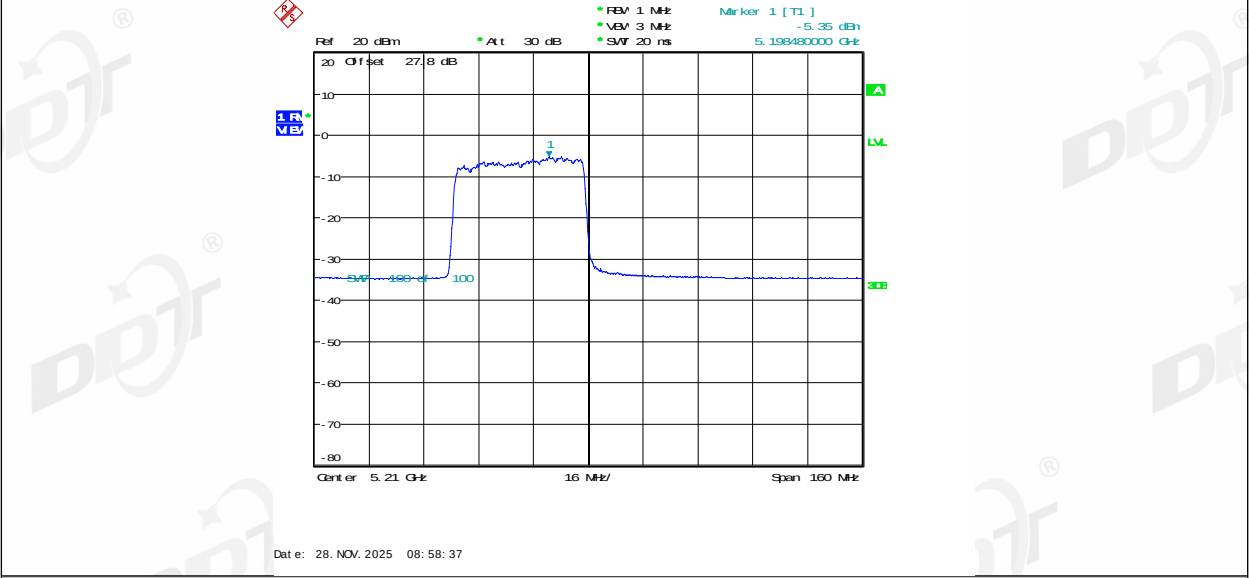


11AX80SISO_Ant1_5210_484Tone_RU66

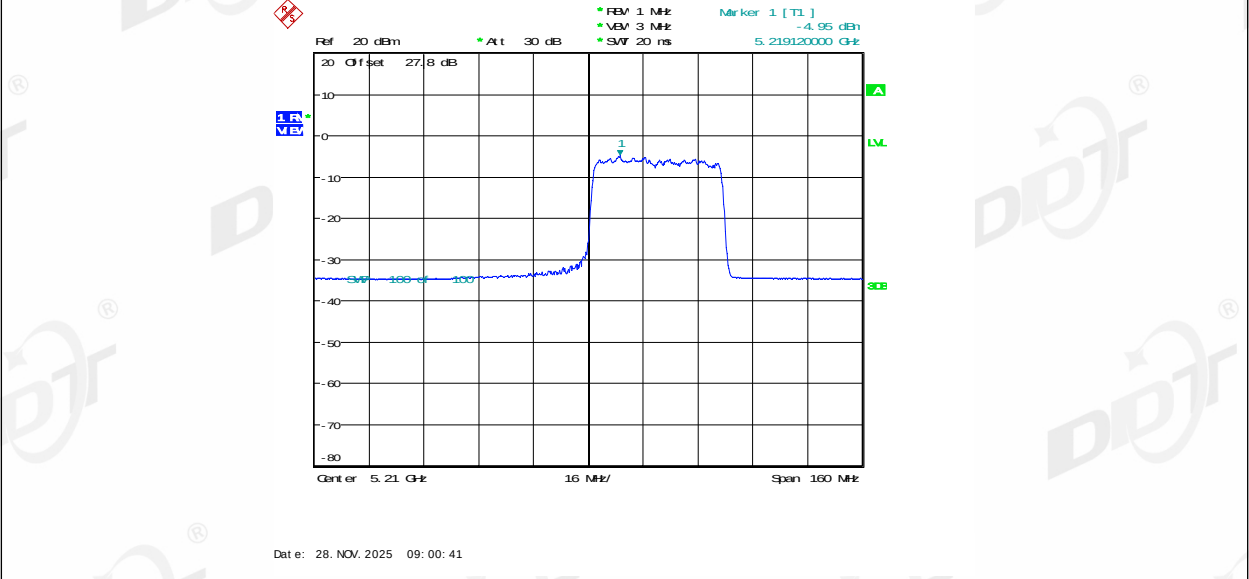


11AX80SISO_Ant1_5290_484Tone_RU65

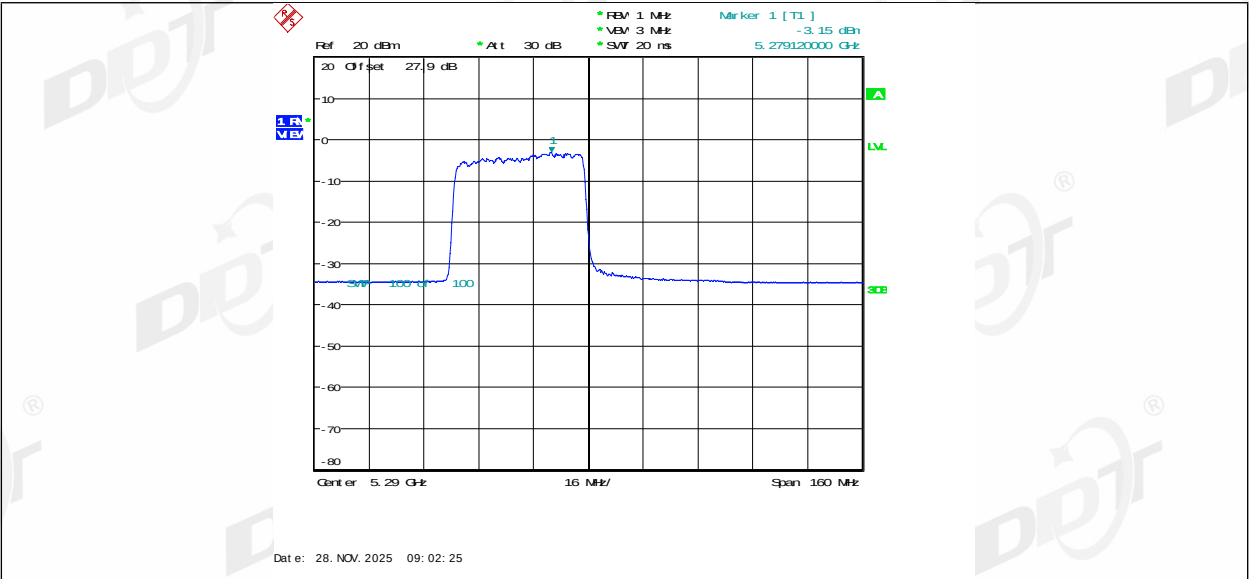


11AX80SISO_Ant1_5290_484Tone_RU66

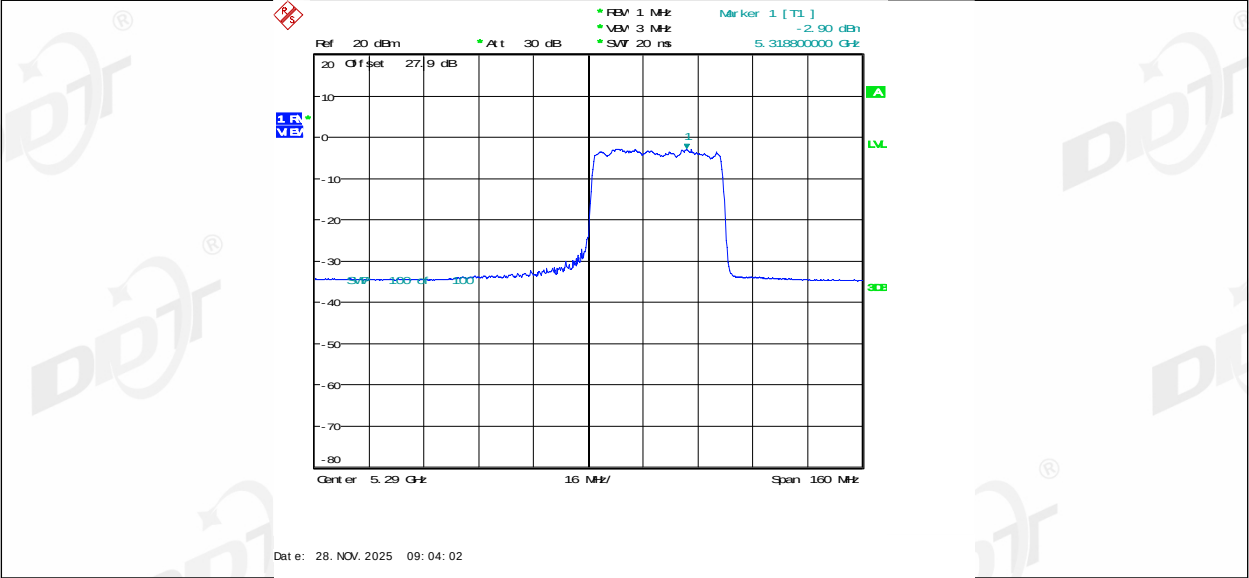


11AX80SISO_Ant1_5530_484Tone_RU65

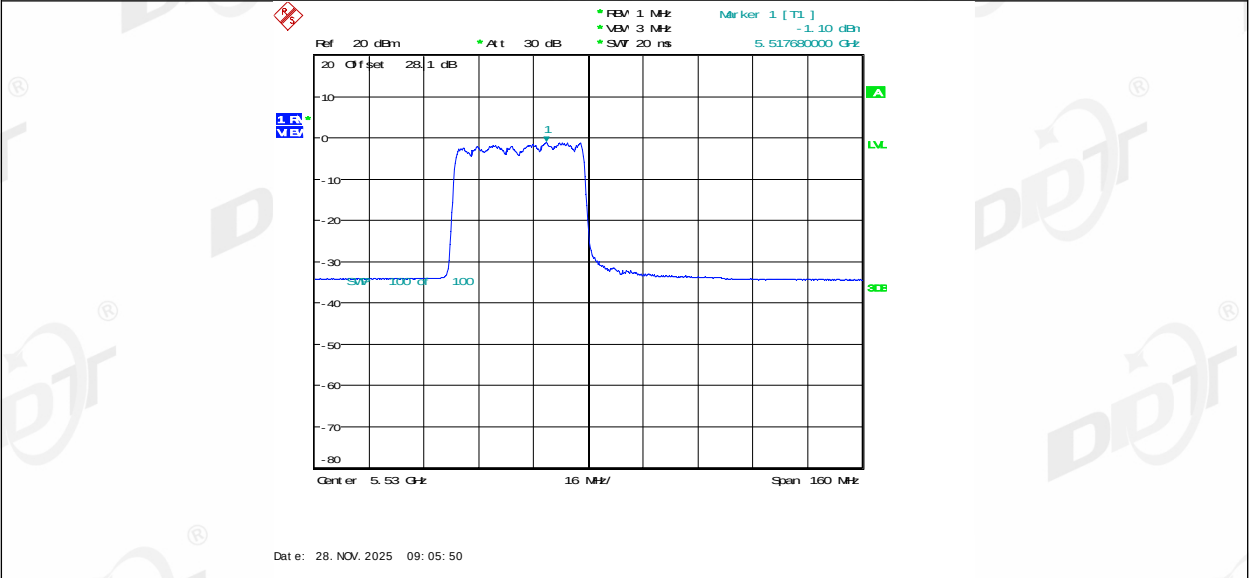


11AX80SISO_Ant1_5530_484Tone_RU66

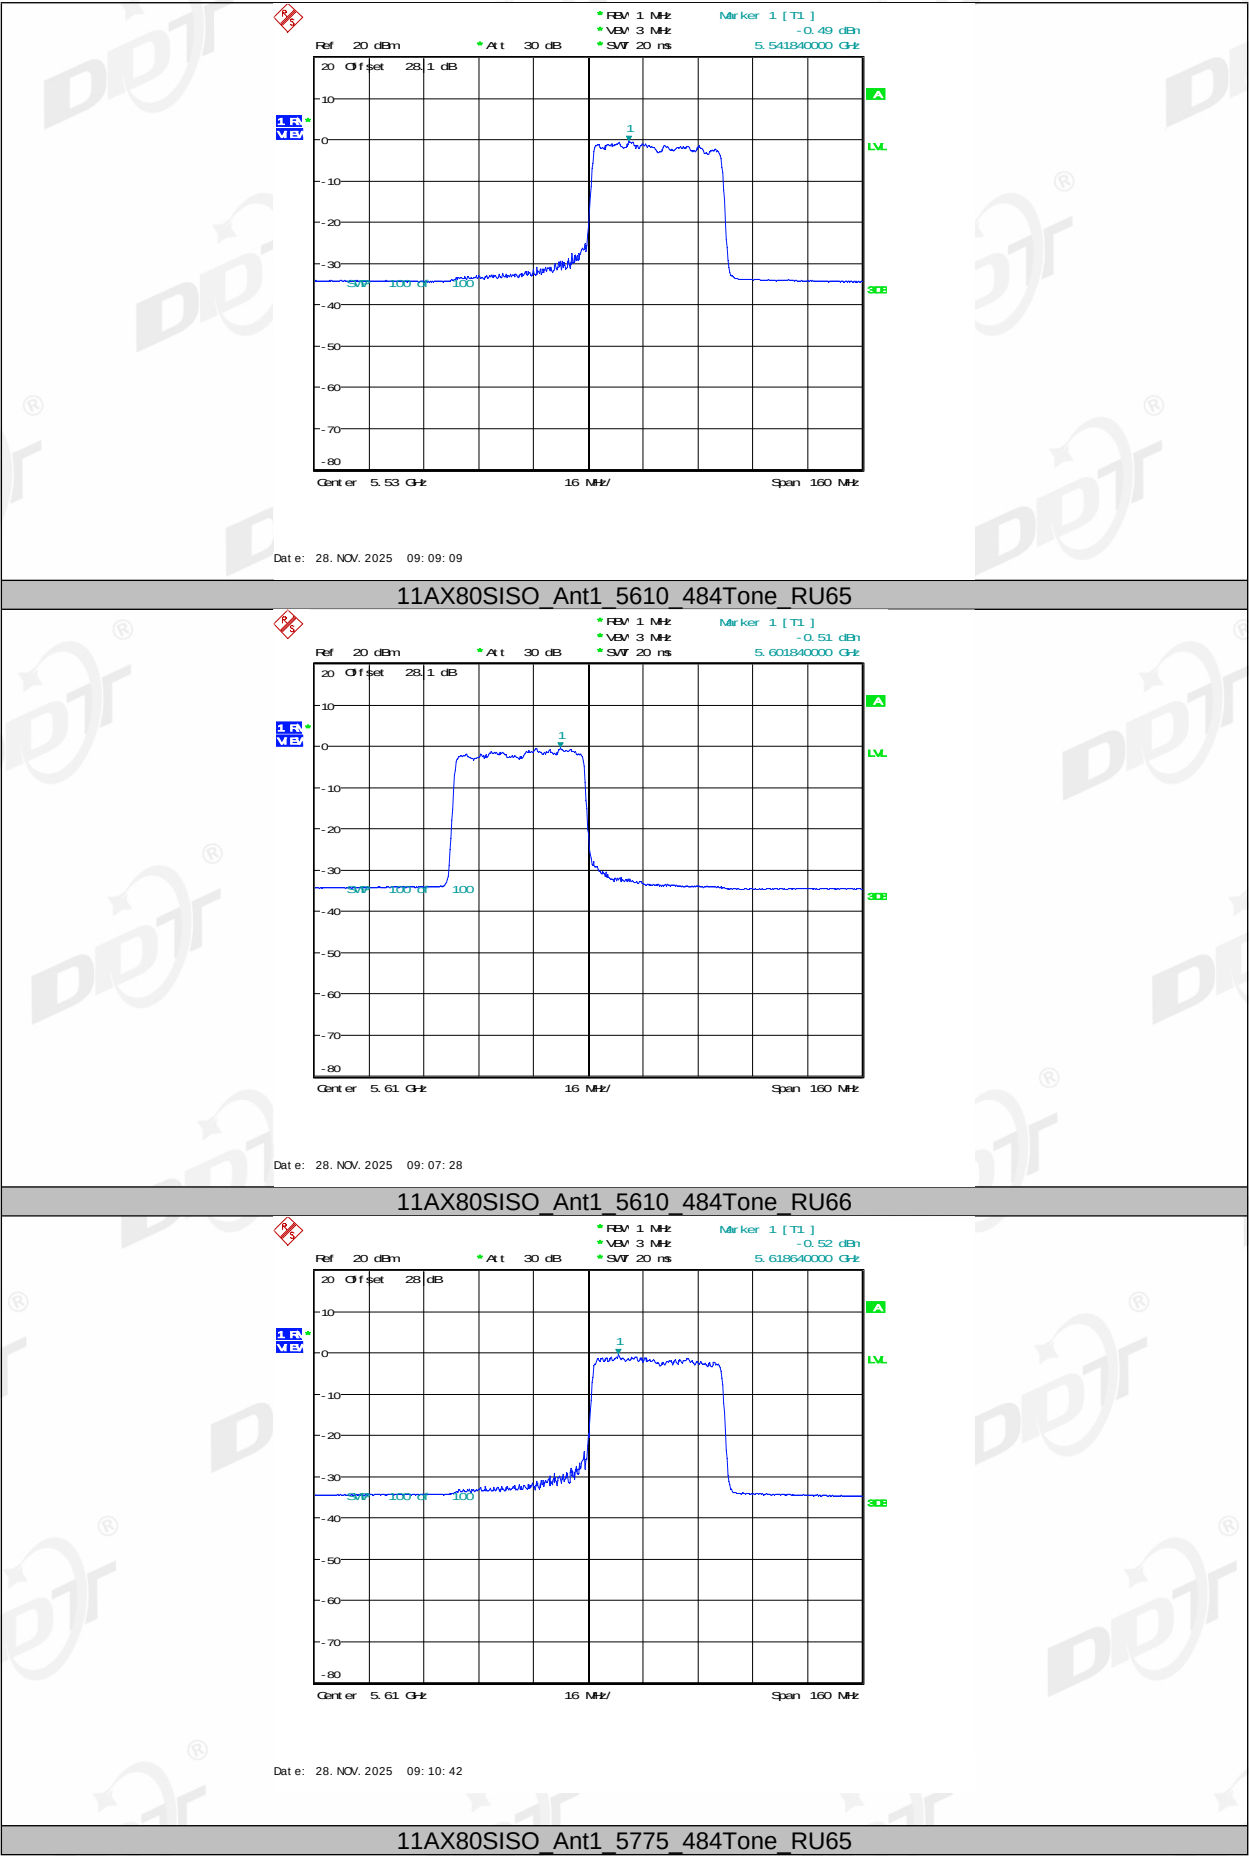


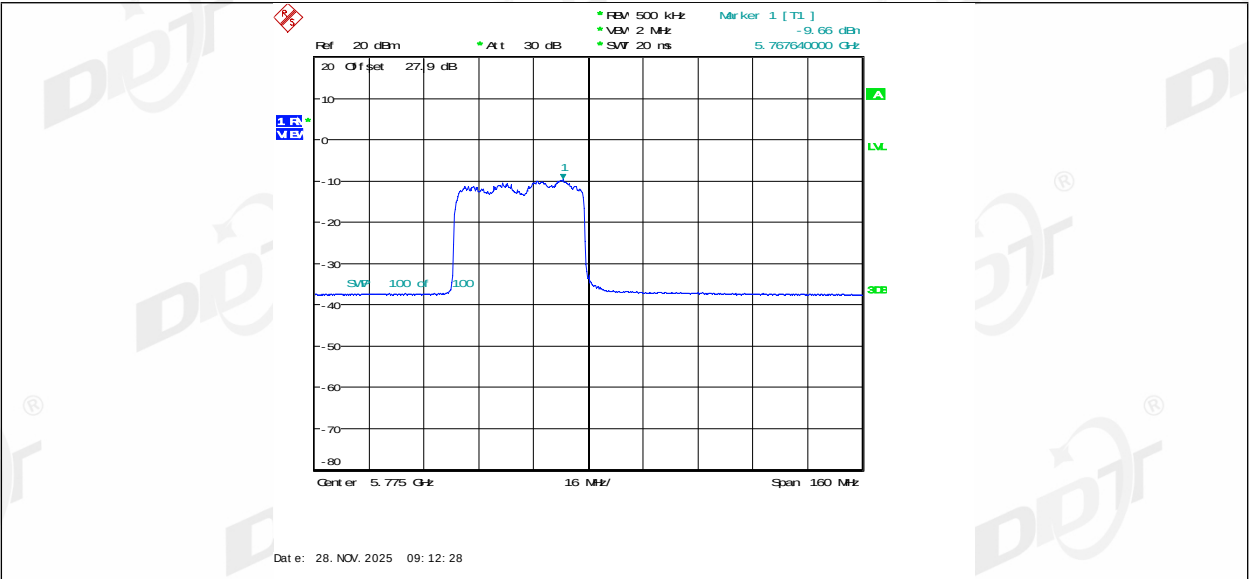




11AX80SISO_Ant1_5775_484Tone_RU66

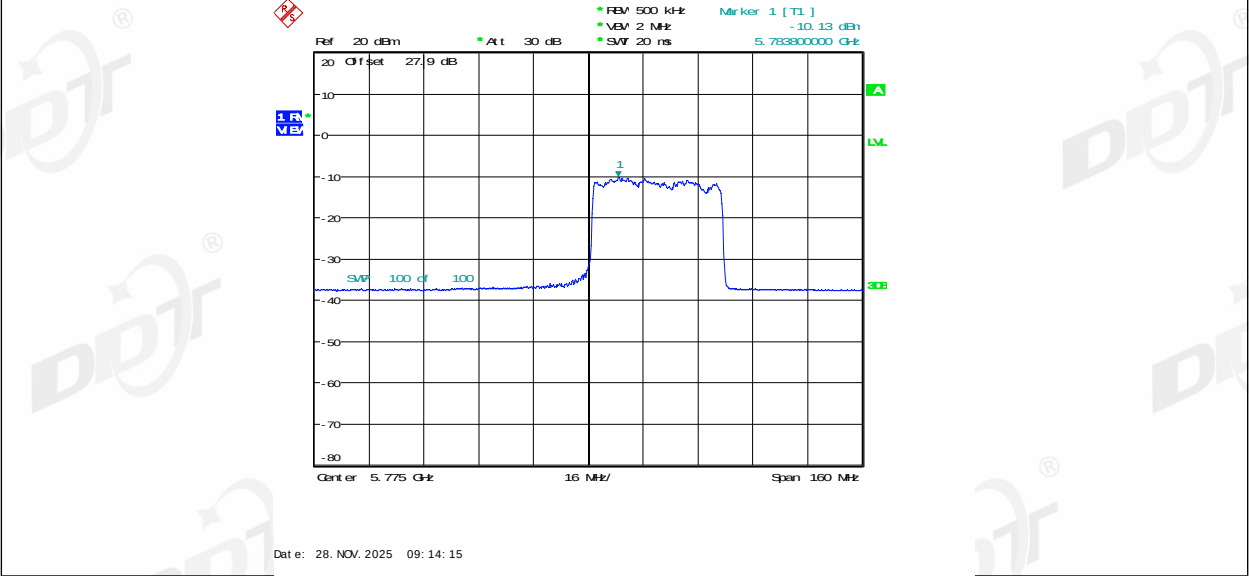


11A_Ant1_5720_UNII-2C

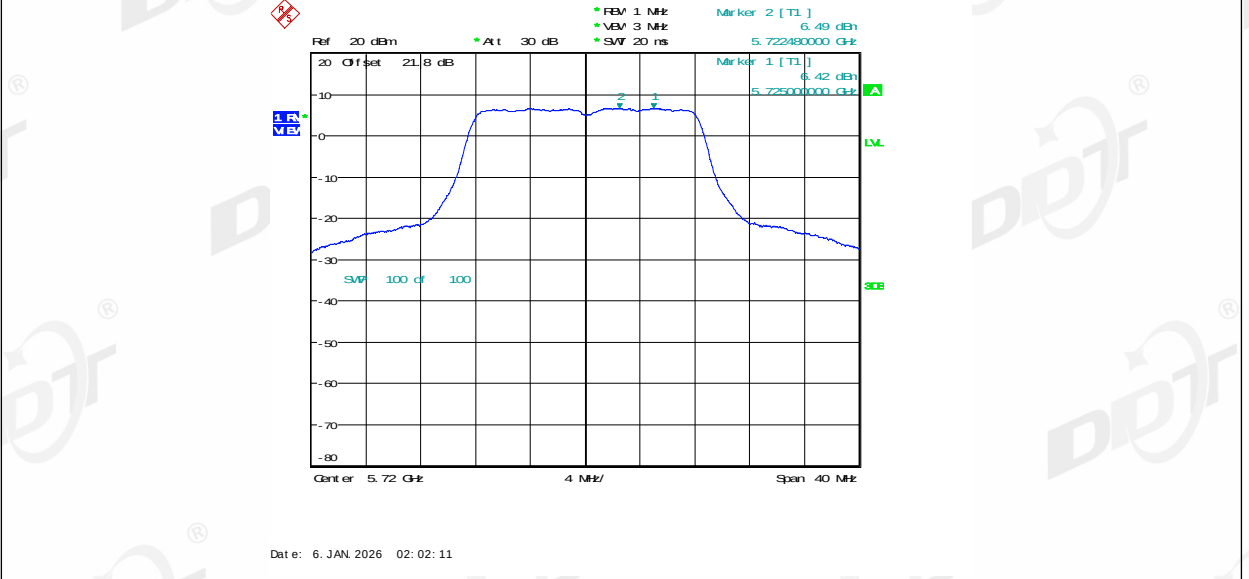


11A_Ant1_5720_UNII-3

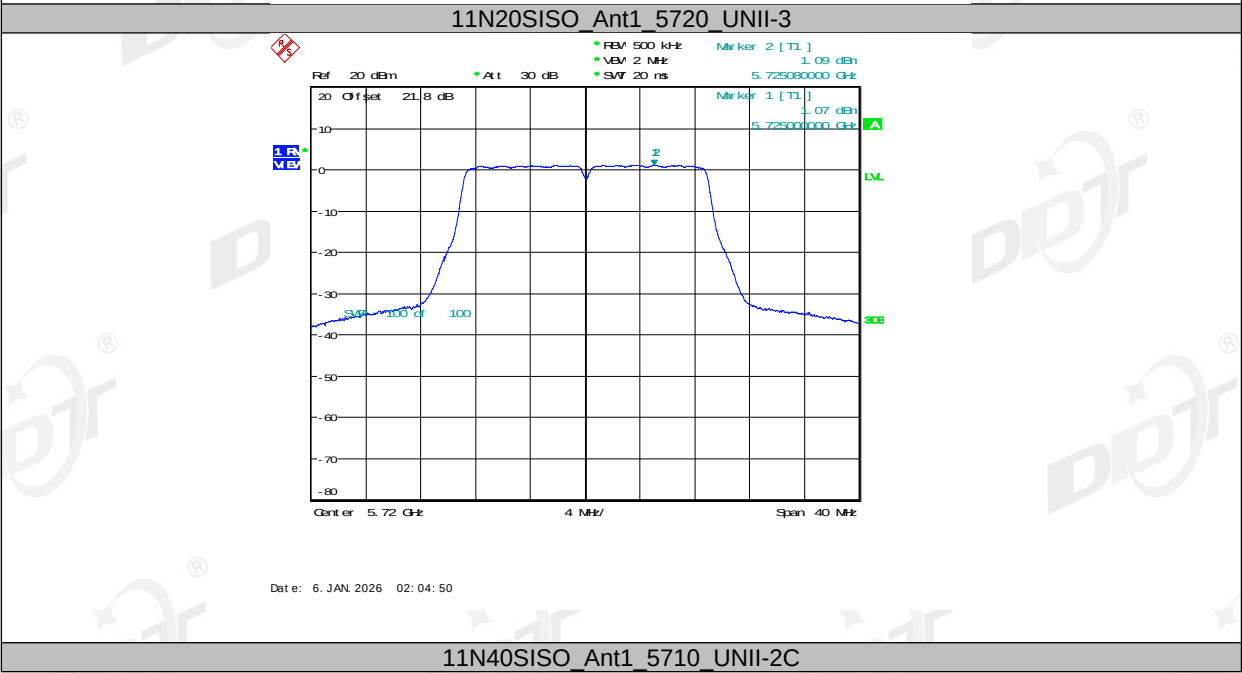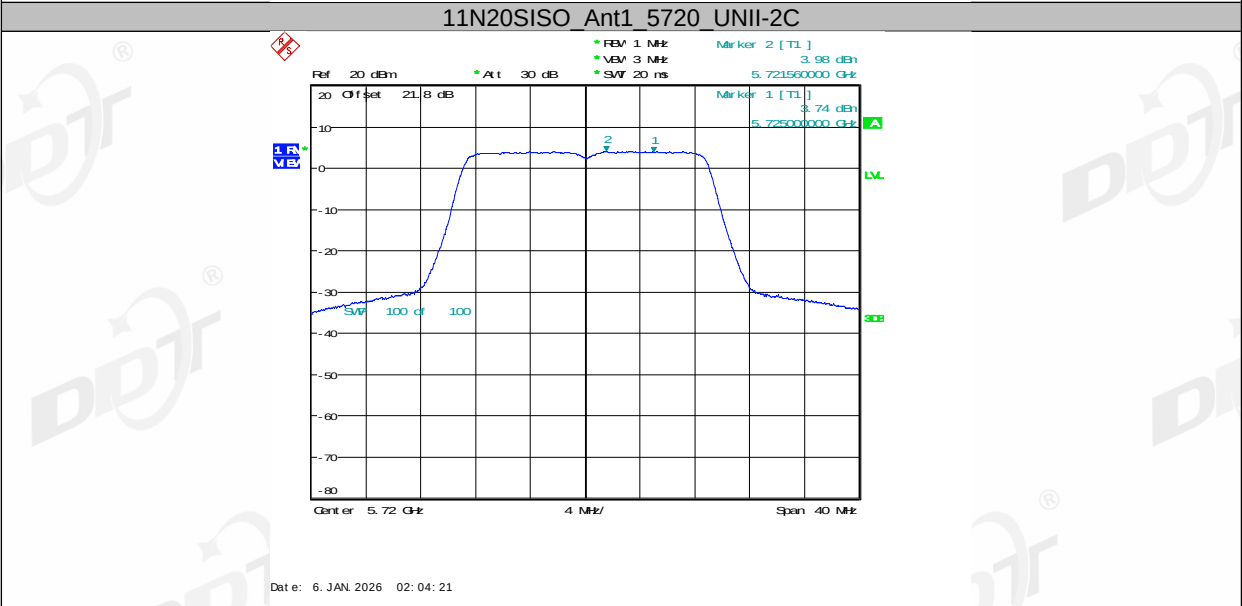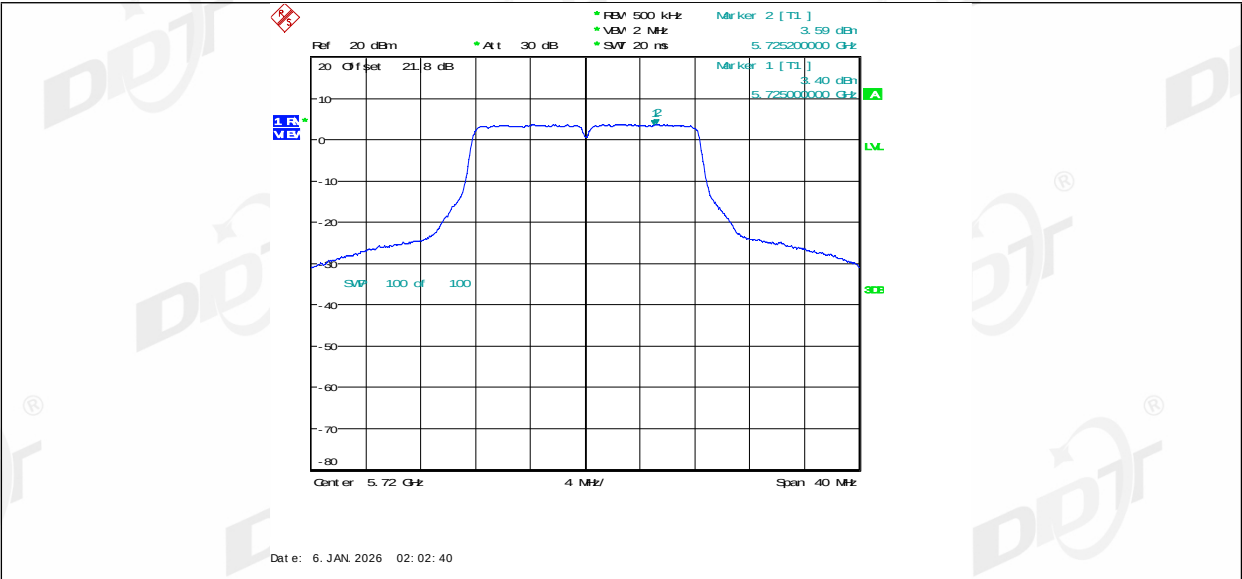


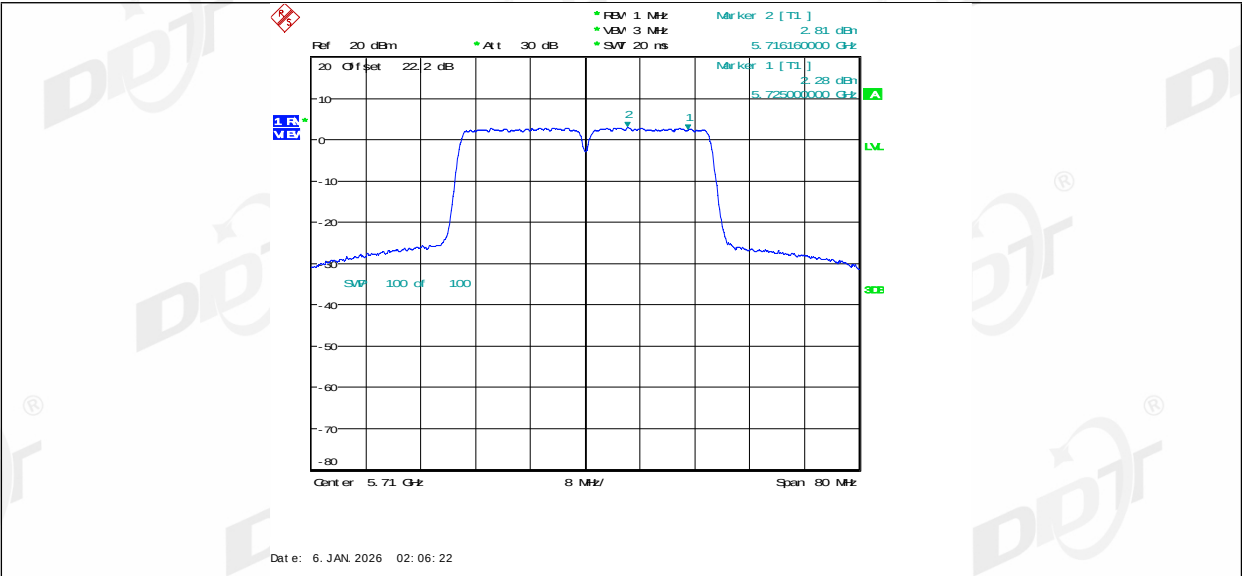


11N40SISO Ant1 5710 UNII-3

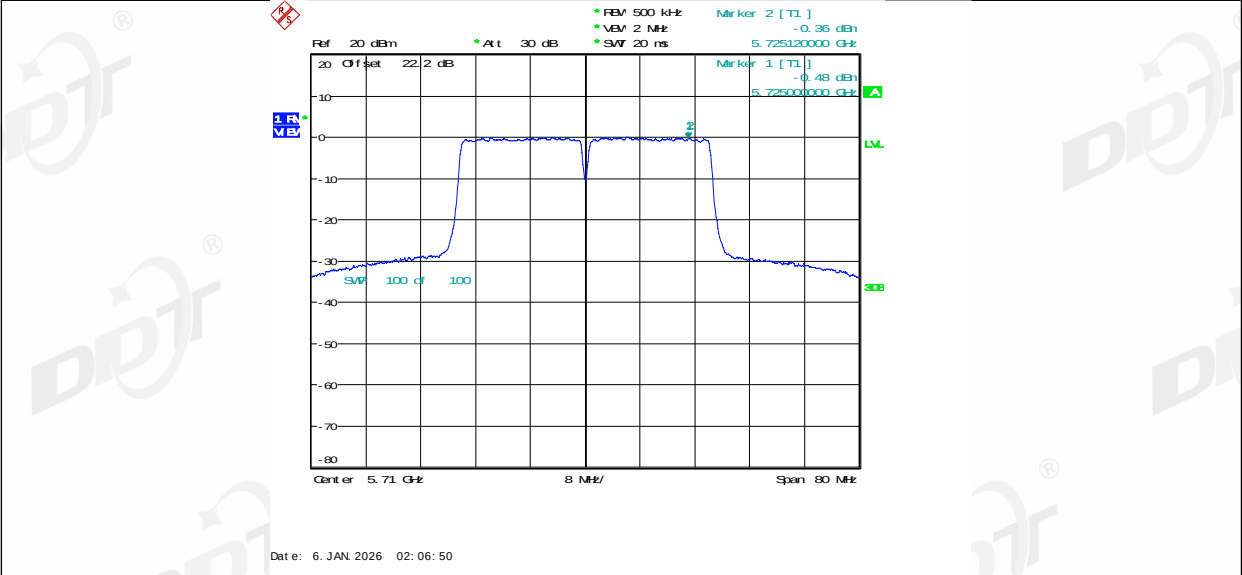


11AC20SISO Ant1 5720 UNII-2C

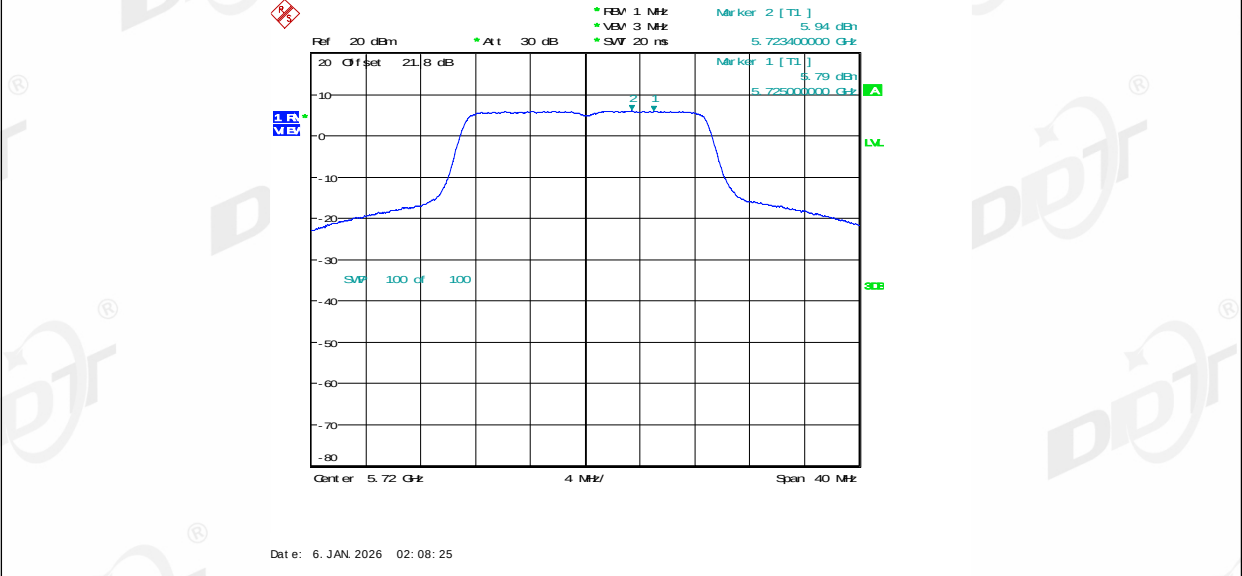


11AC20SISO Ant1 5720 UNII-3

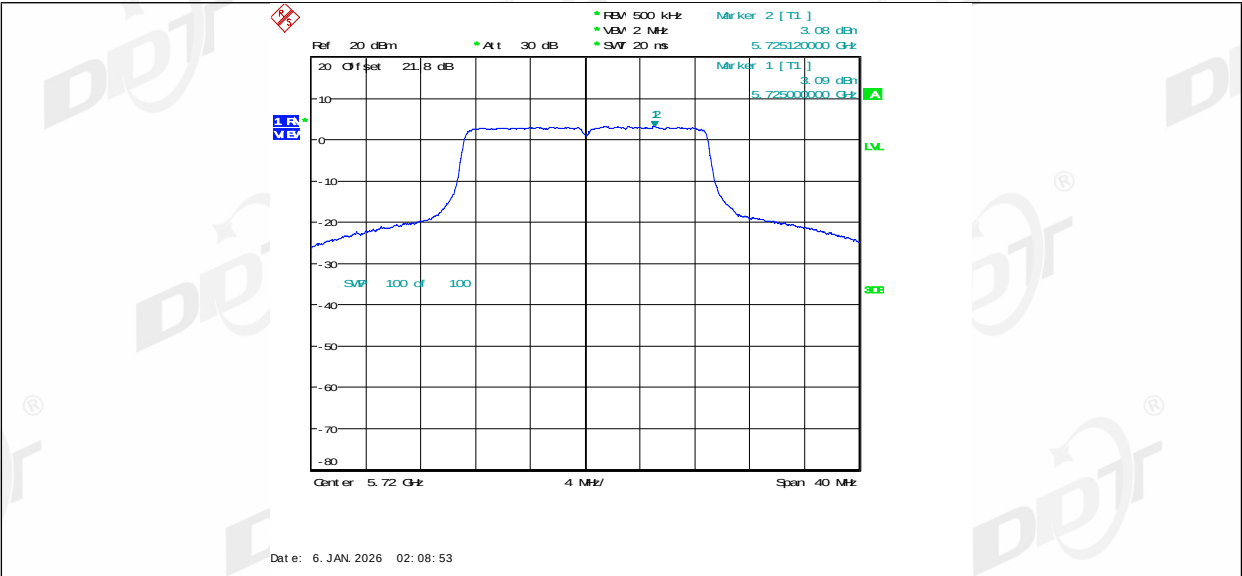




11AC40SISO Ant1 5710 UNII-2C

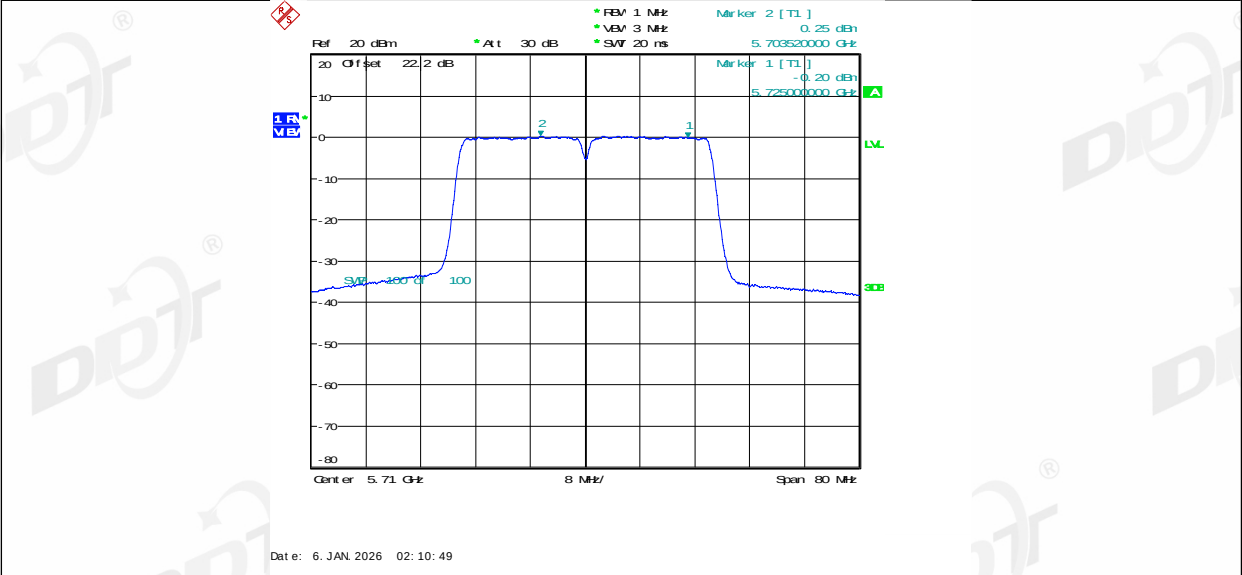


11AC40SISO Ant1 5710 UNII-3

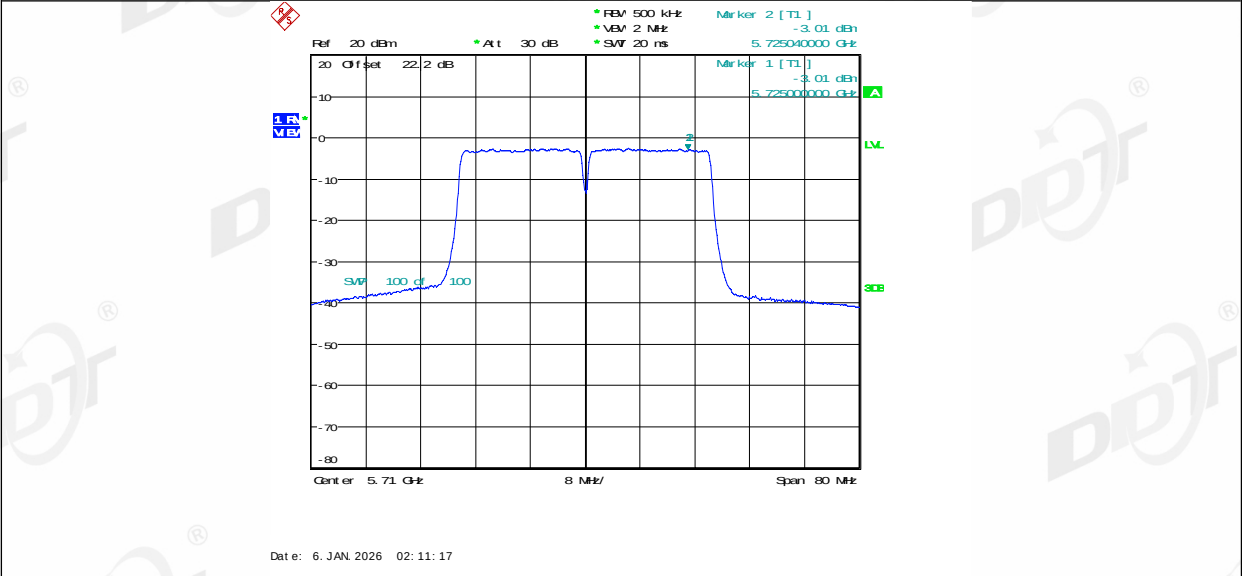


11AC80SISO Ant1 5690 UNII-2C

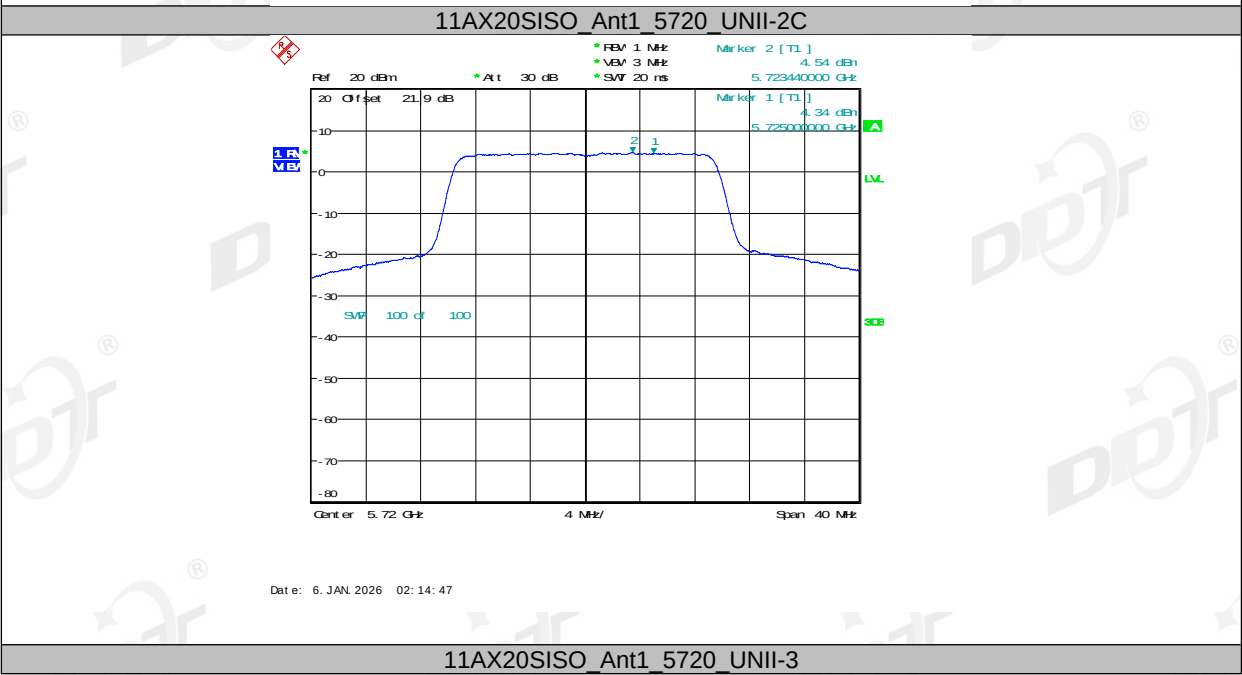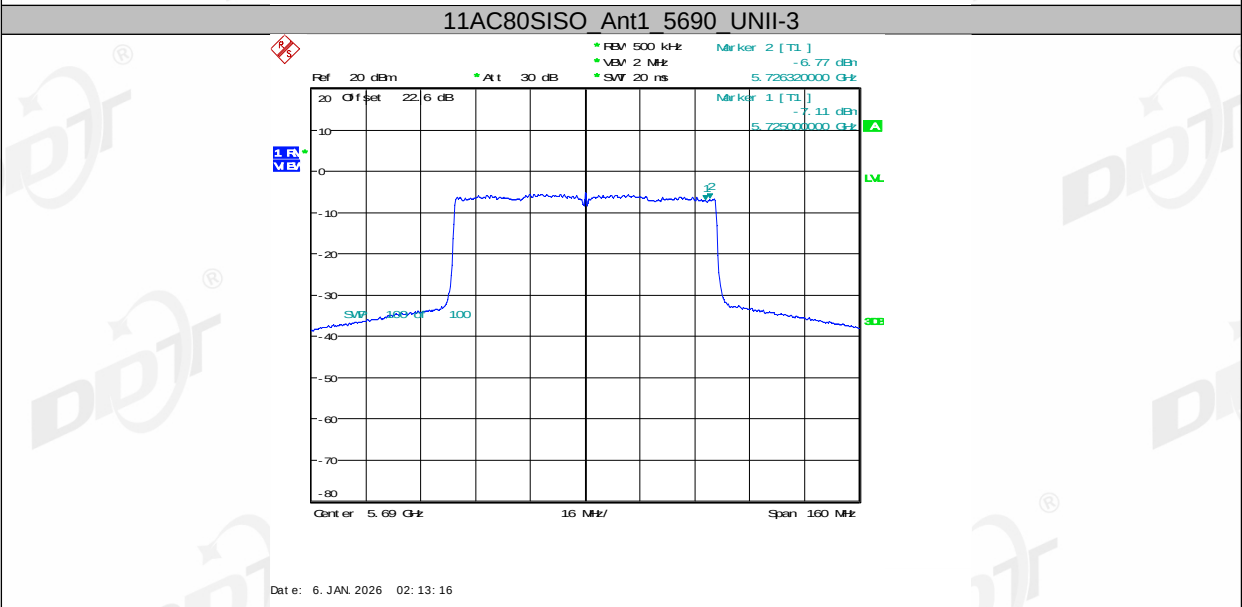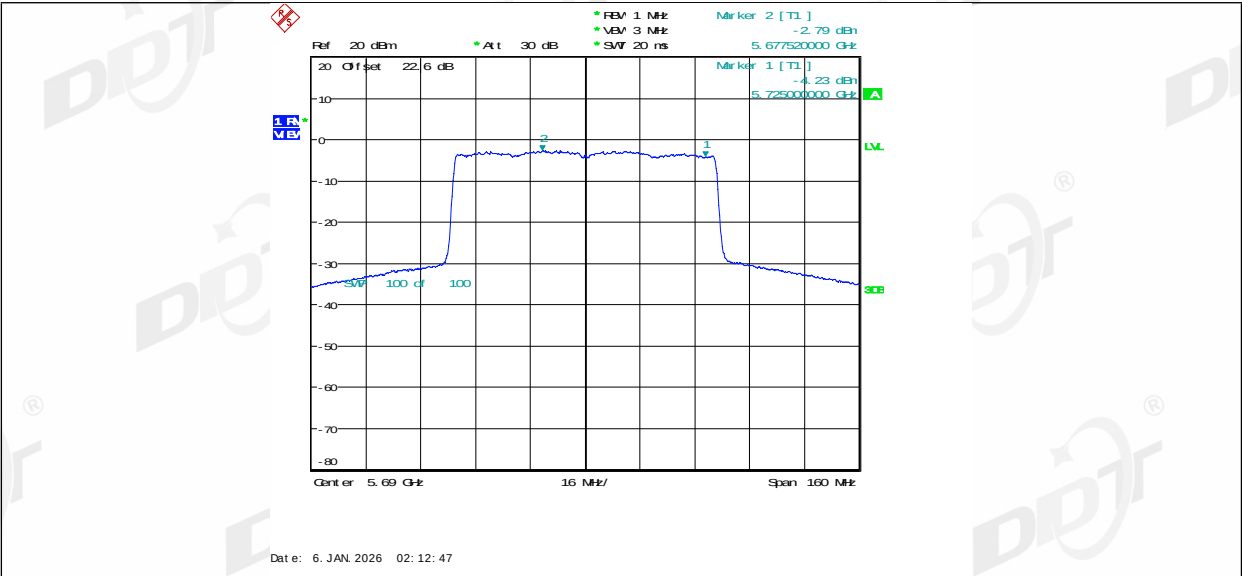


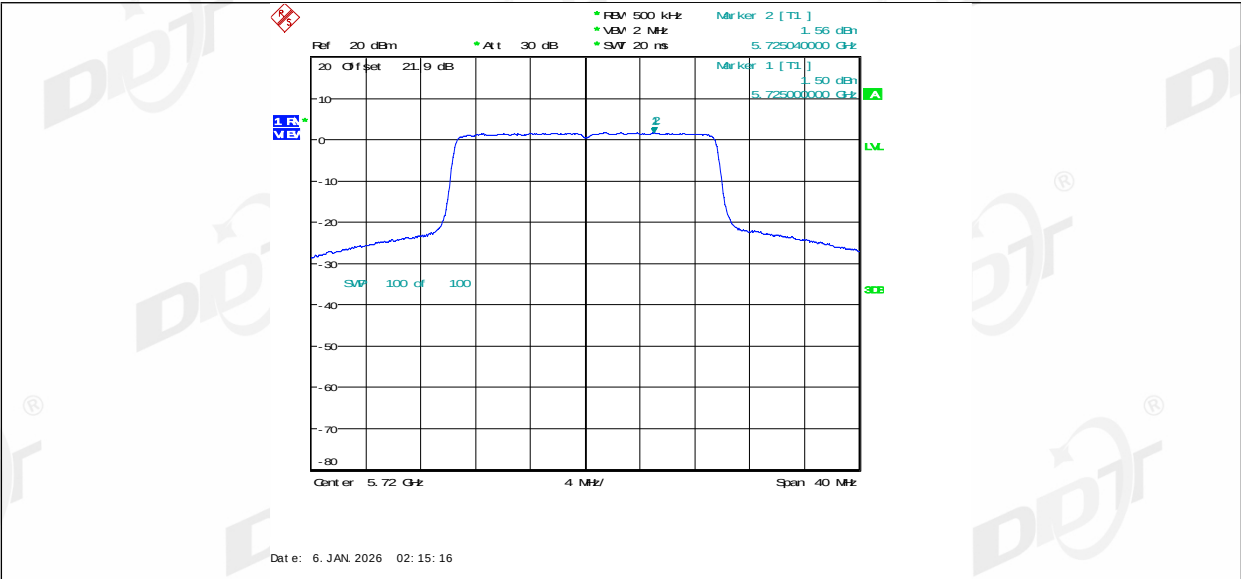




11AX40SISO_Ant1_5710_UNII-2C

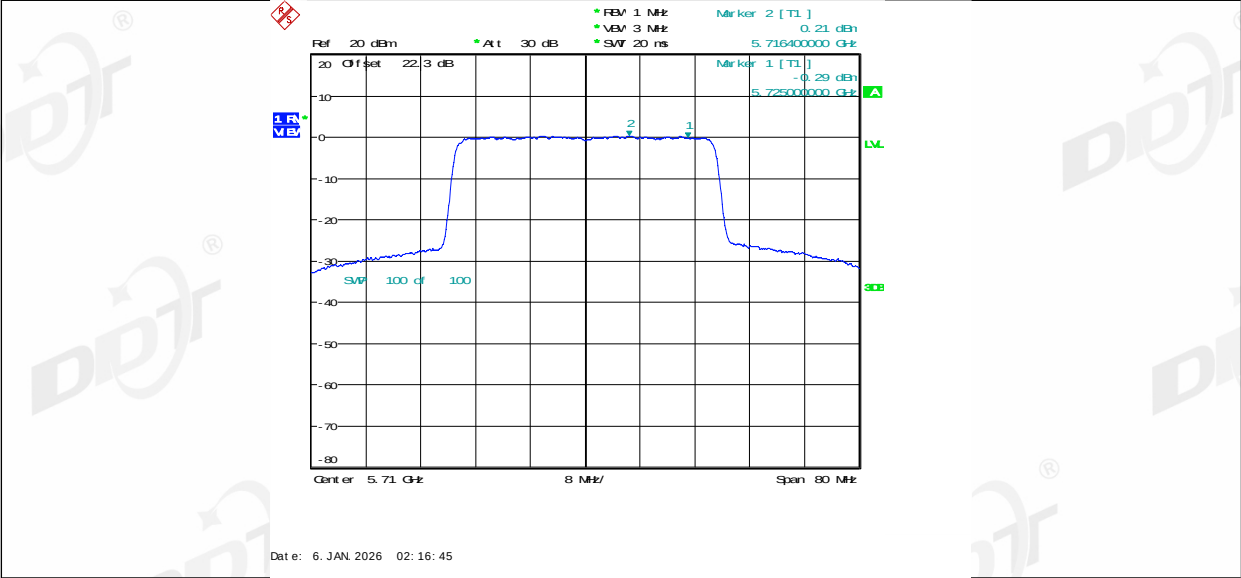


11AX40SISO_Ant1_5710_UNII-3

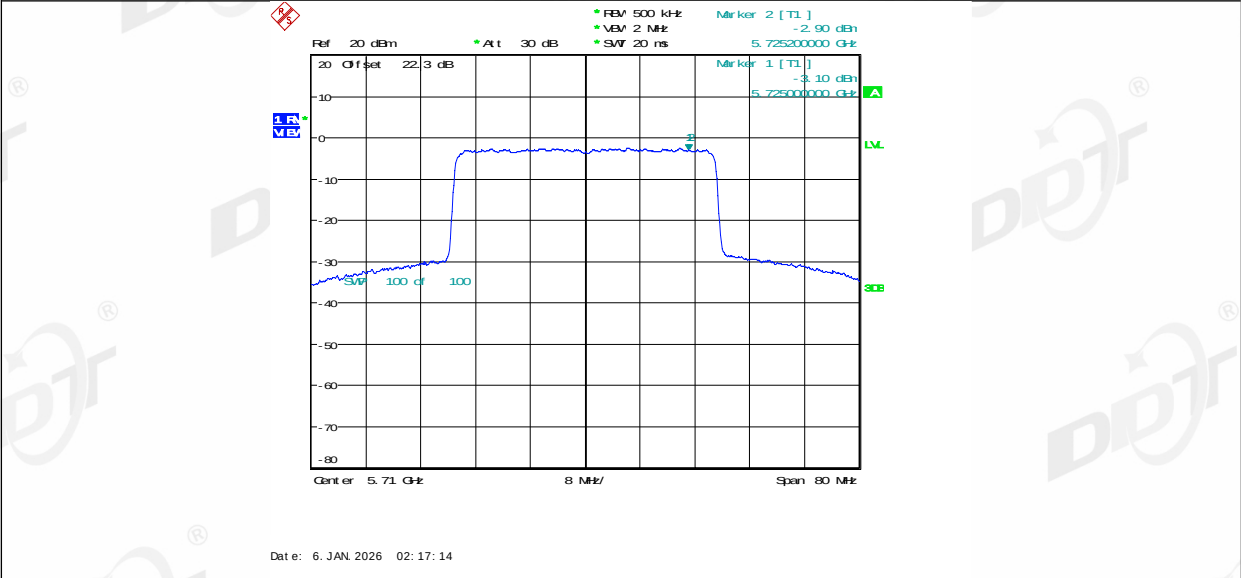



11AX80SISO_Ant1_5690_UNII-2C

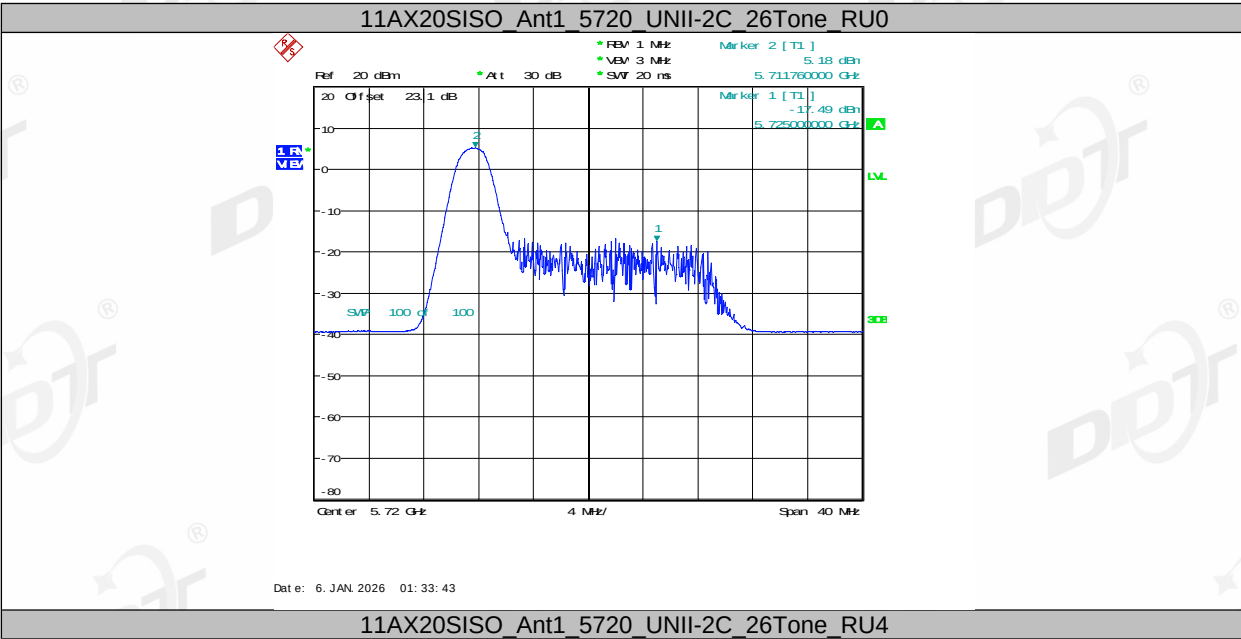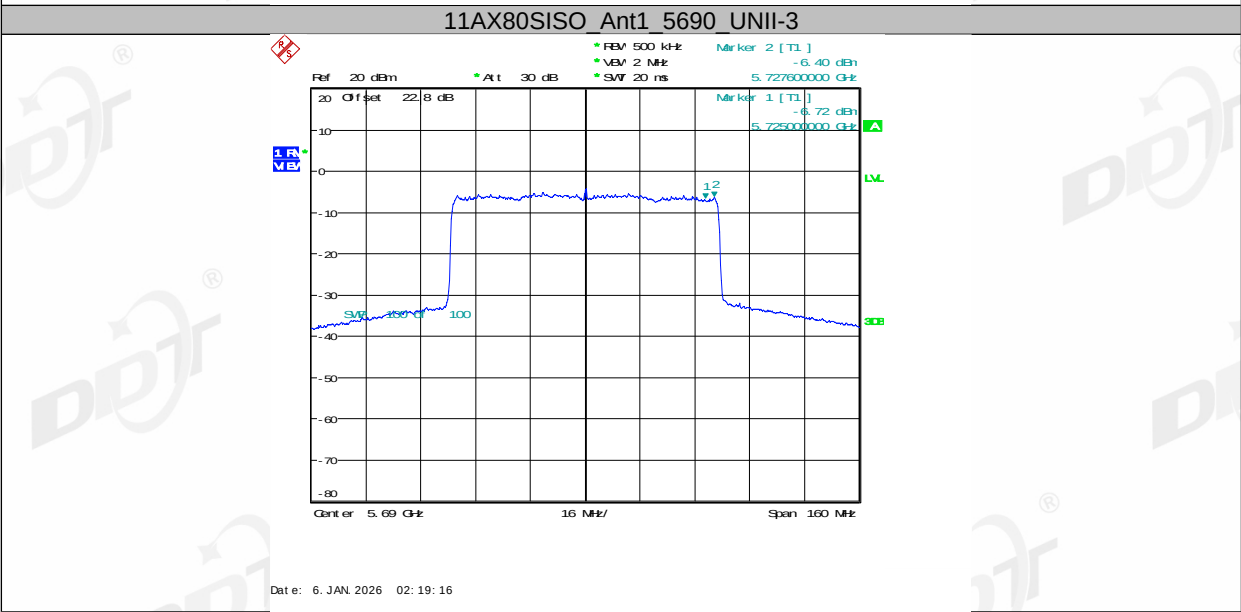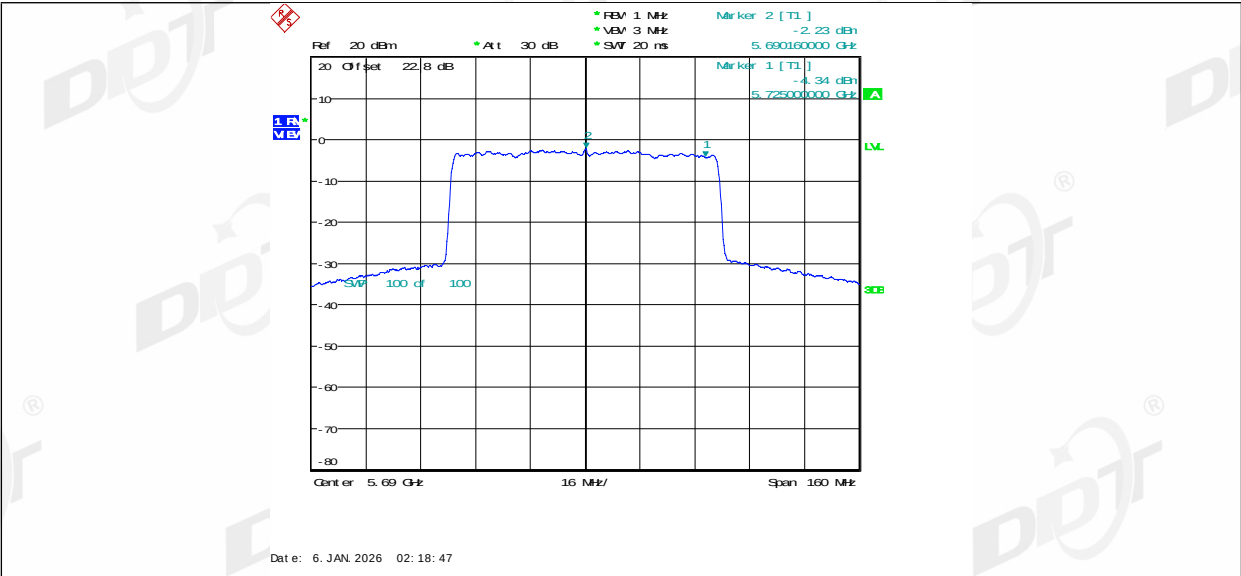




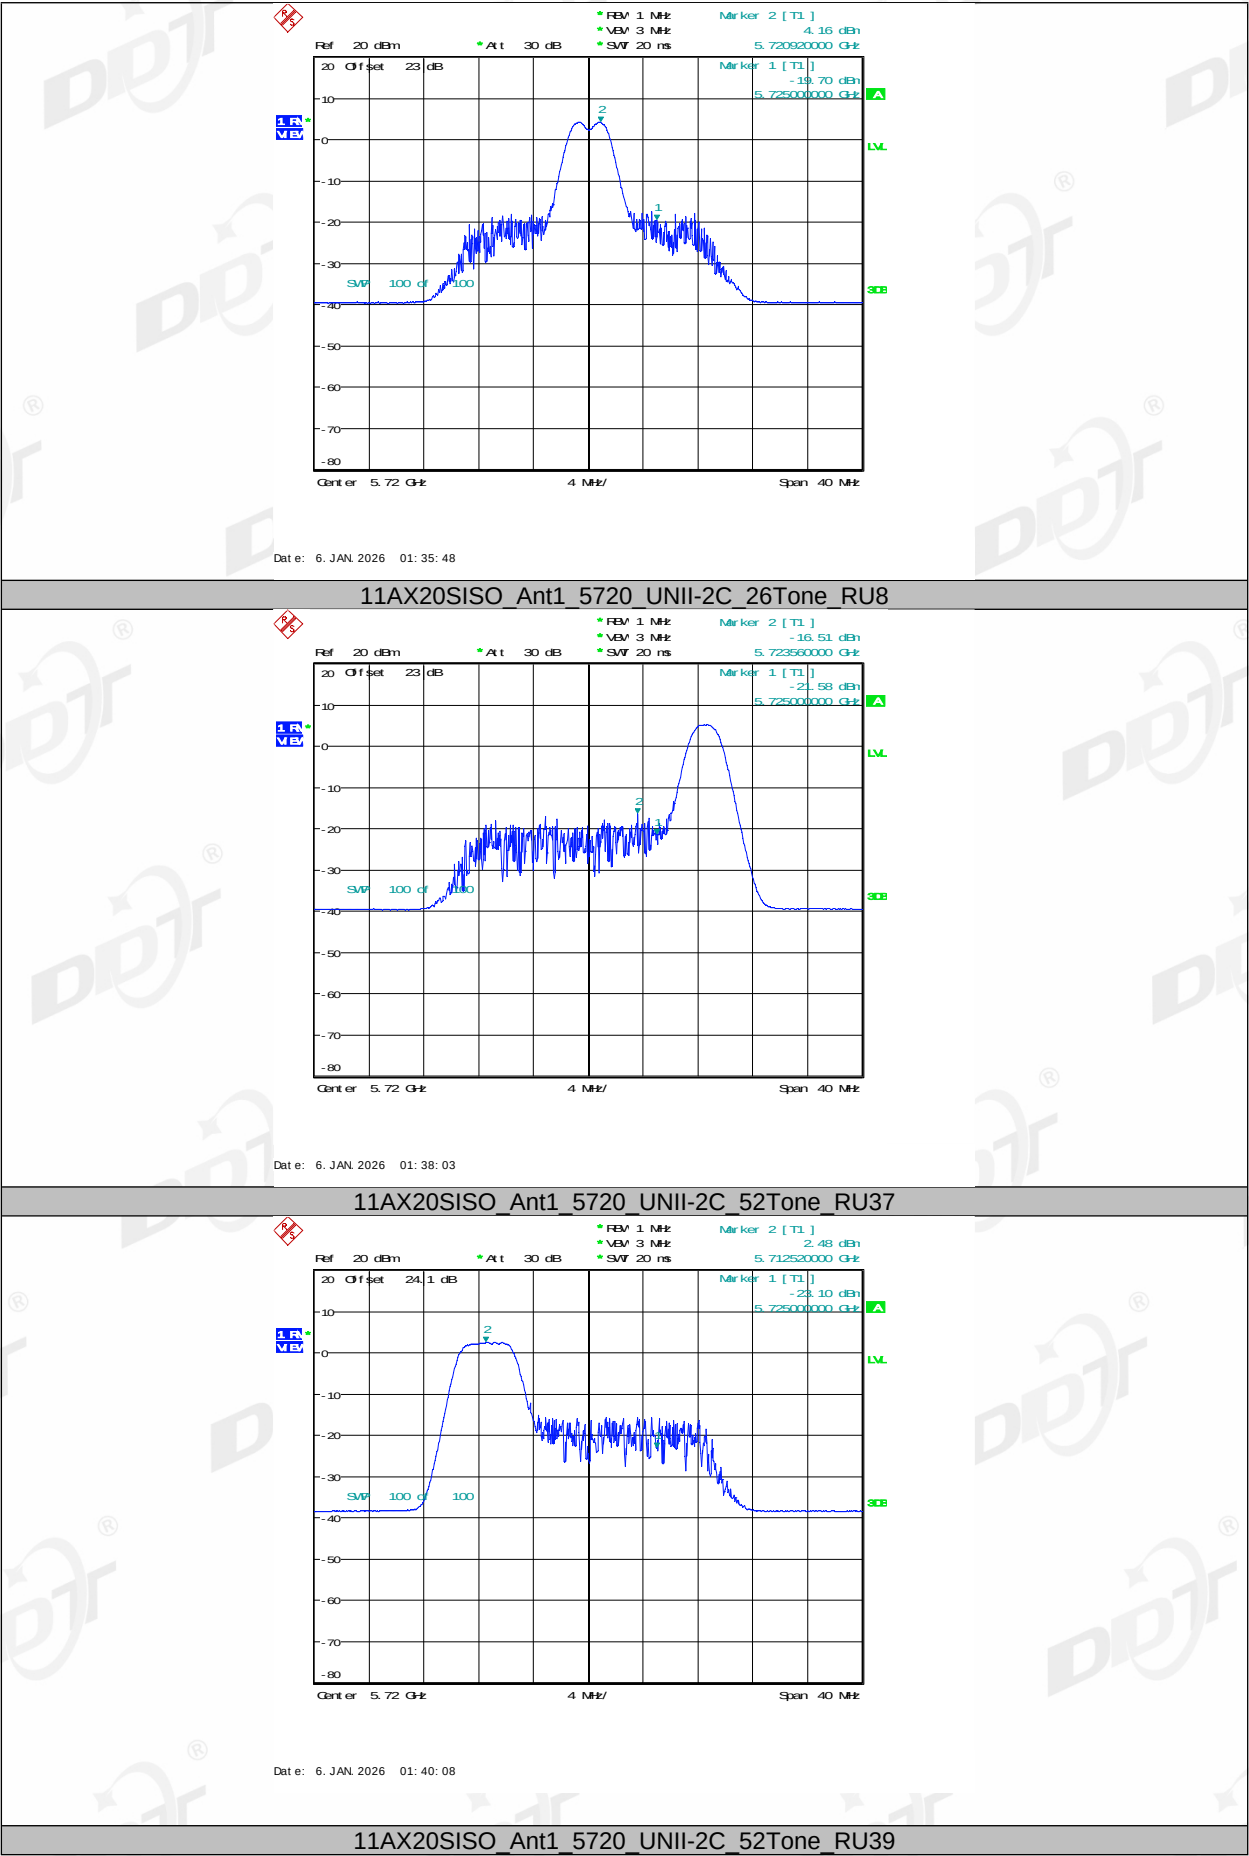




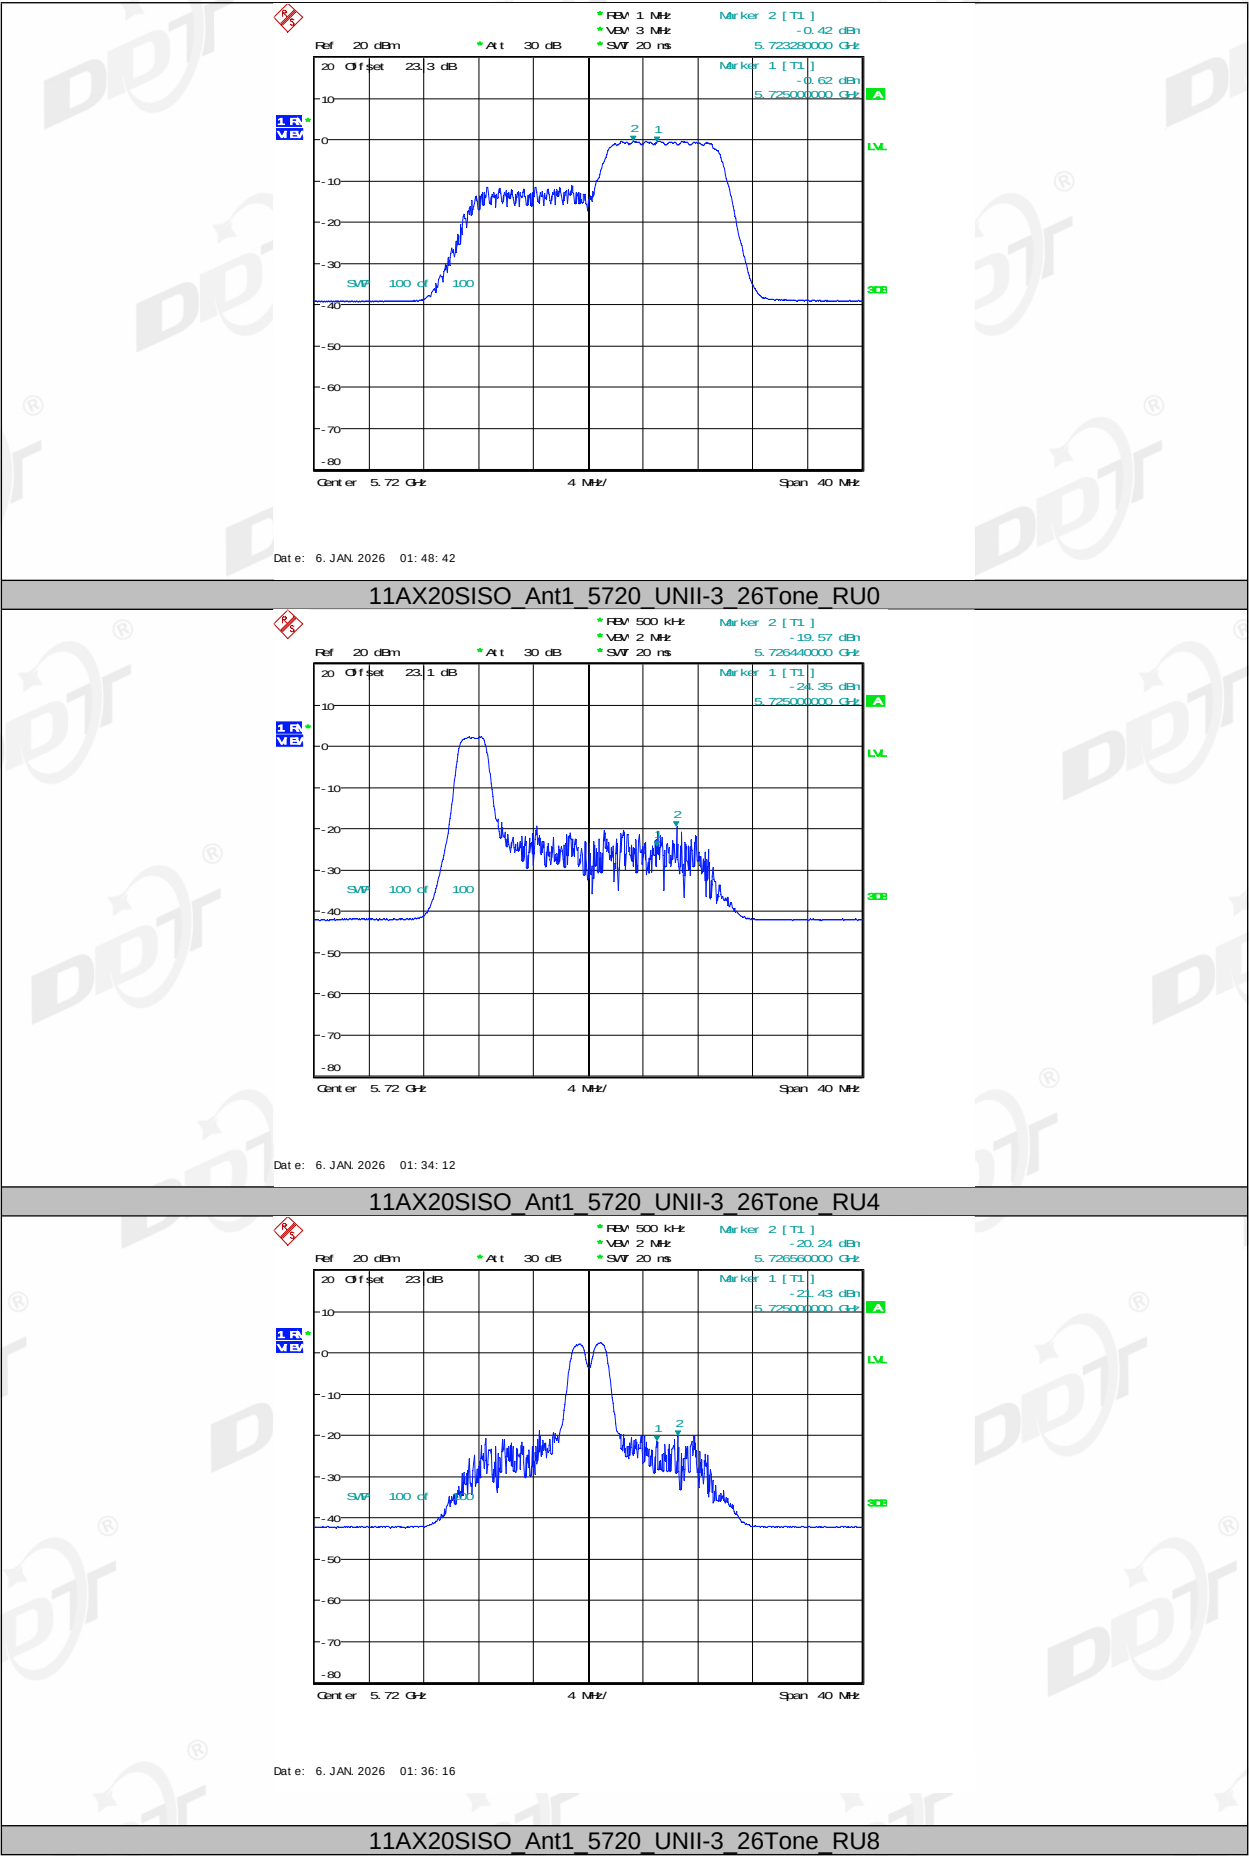

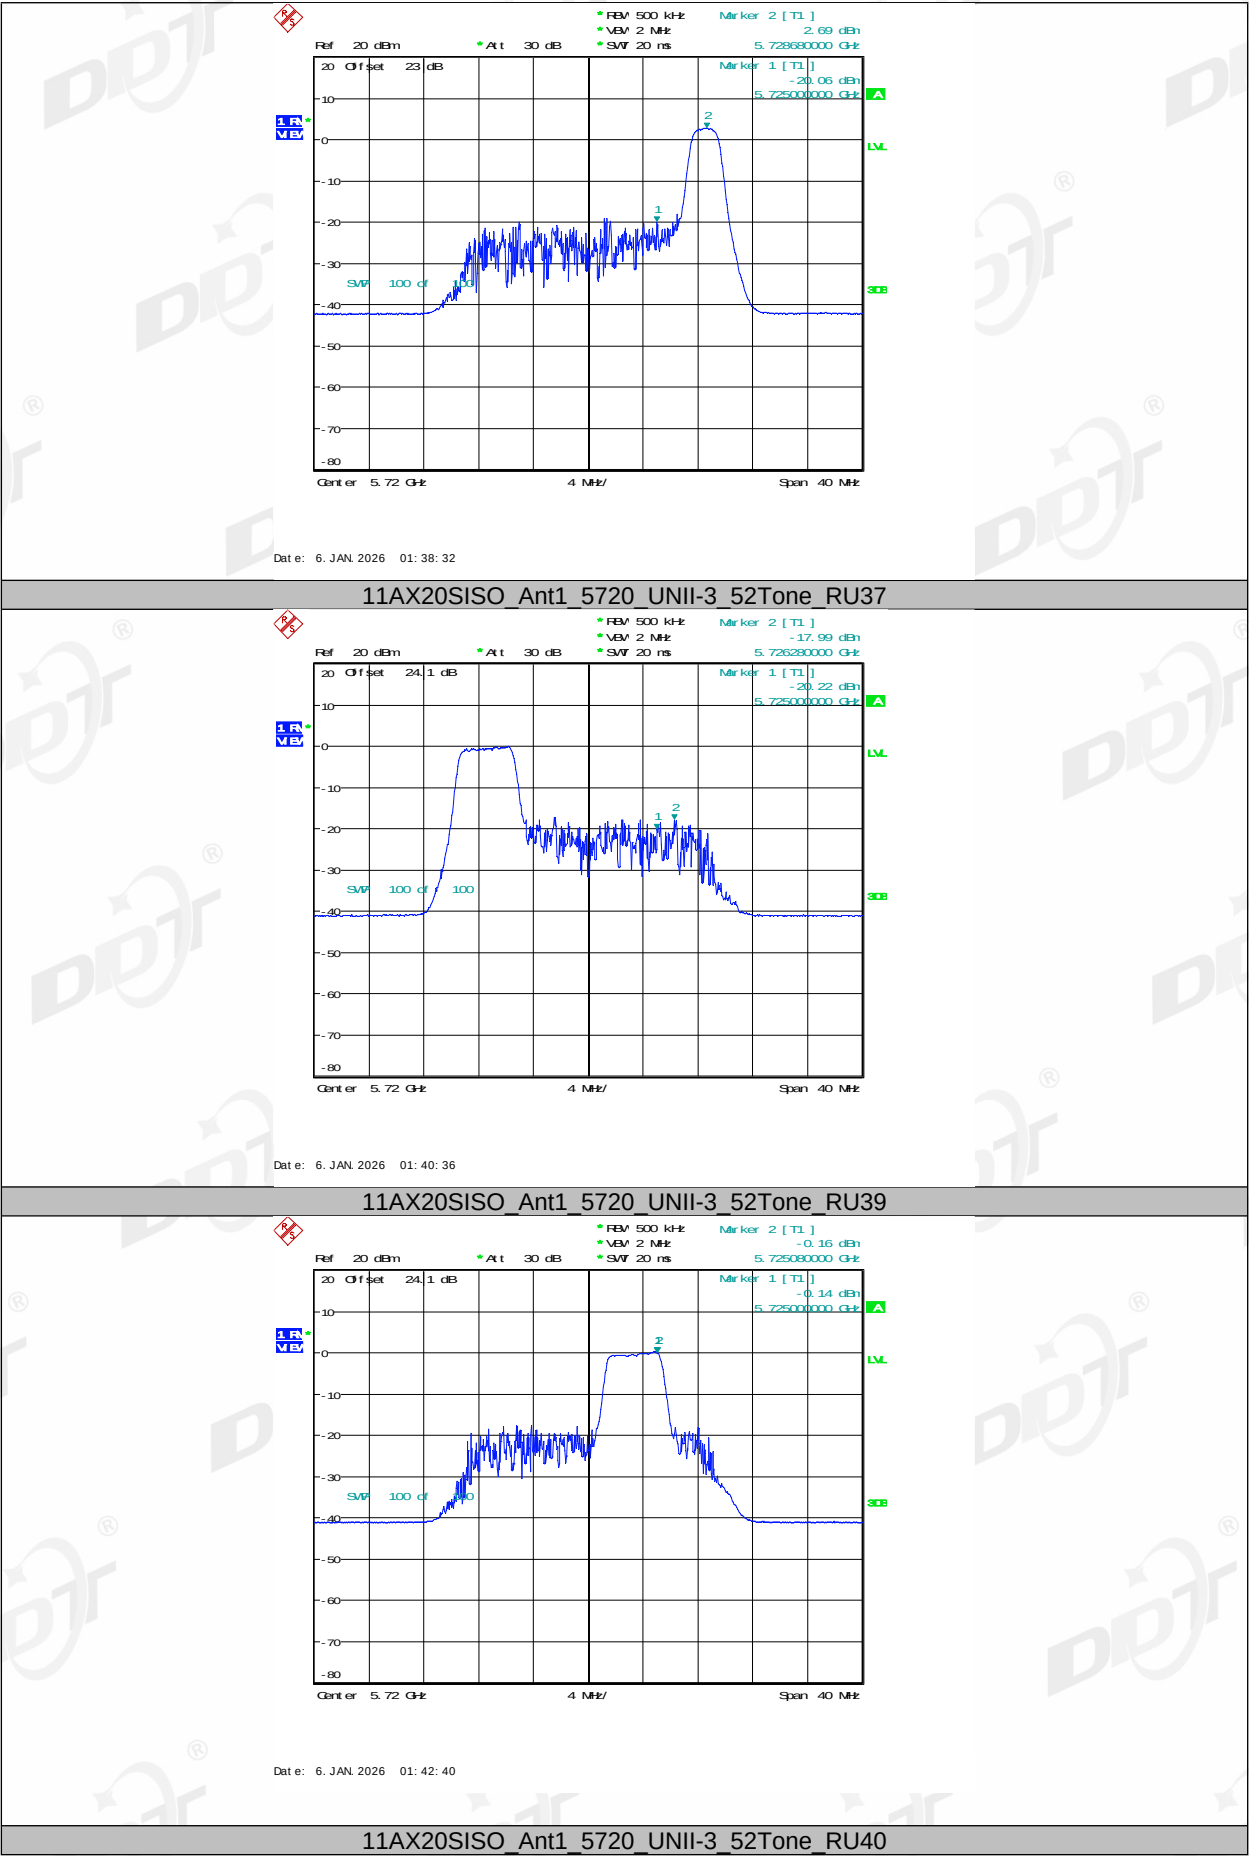


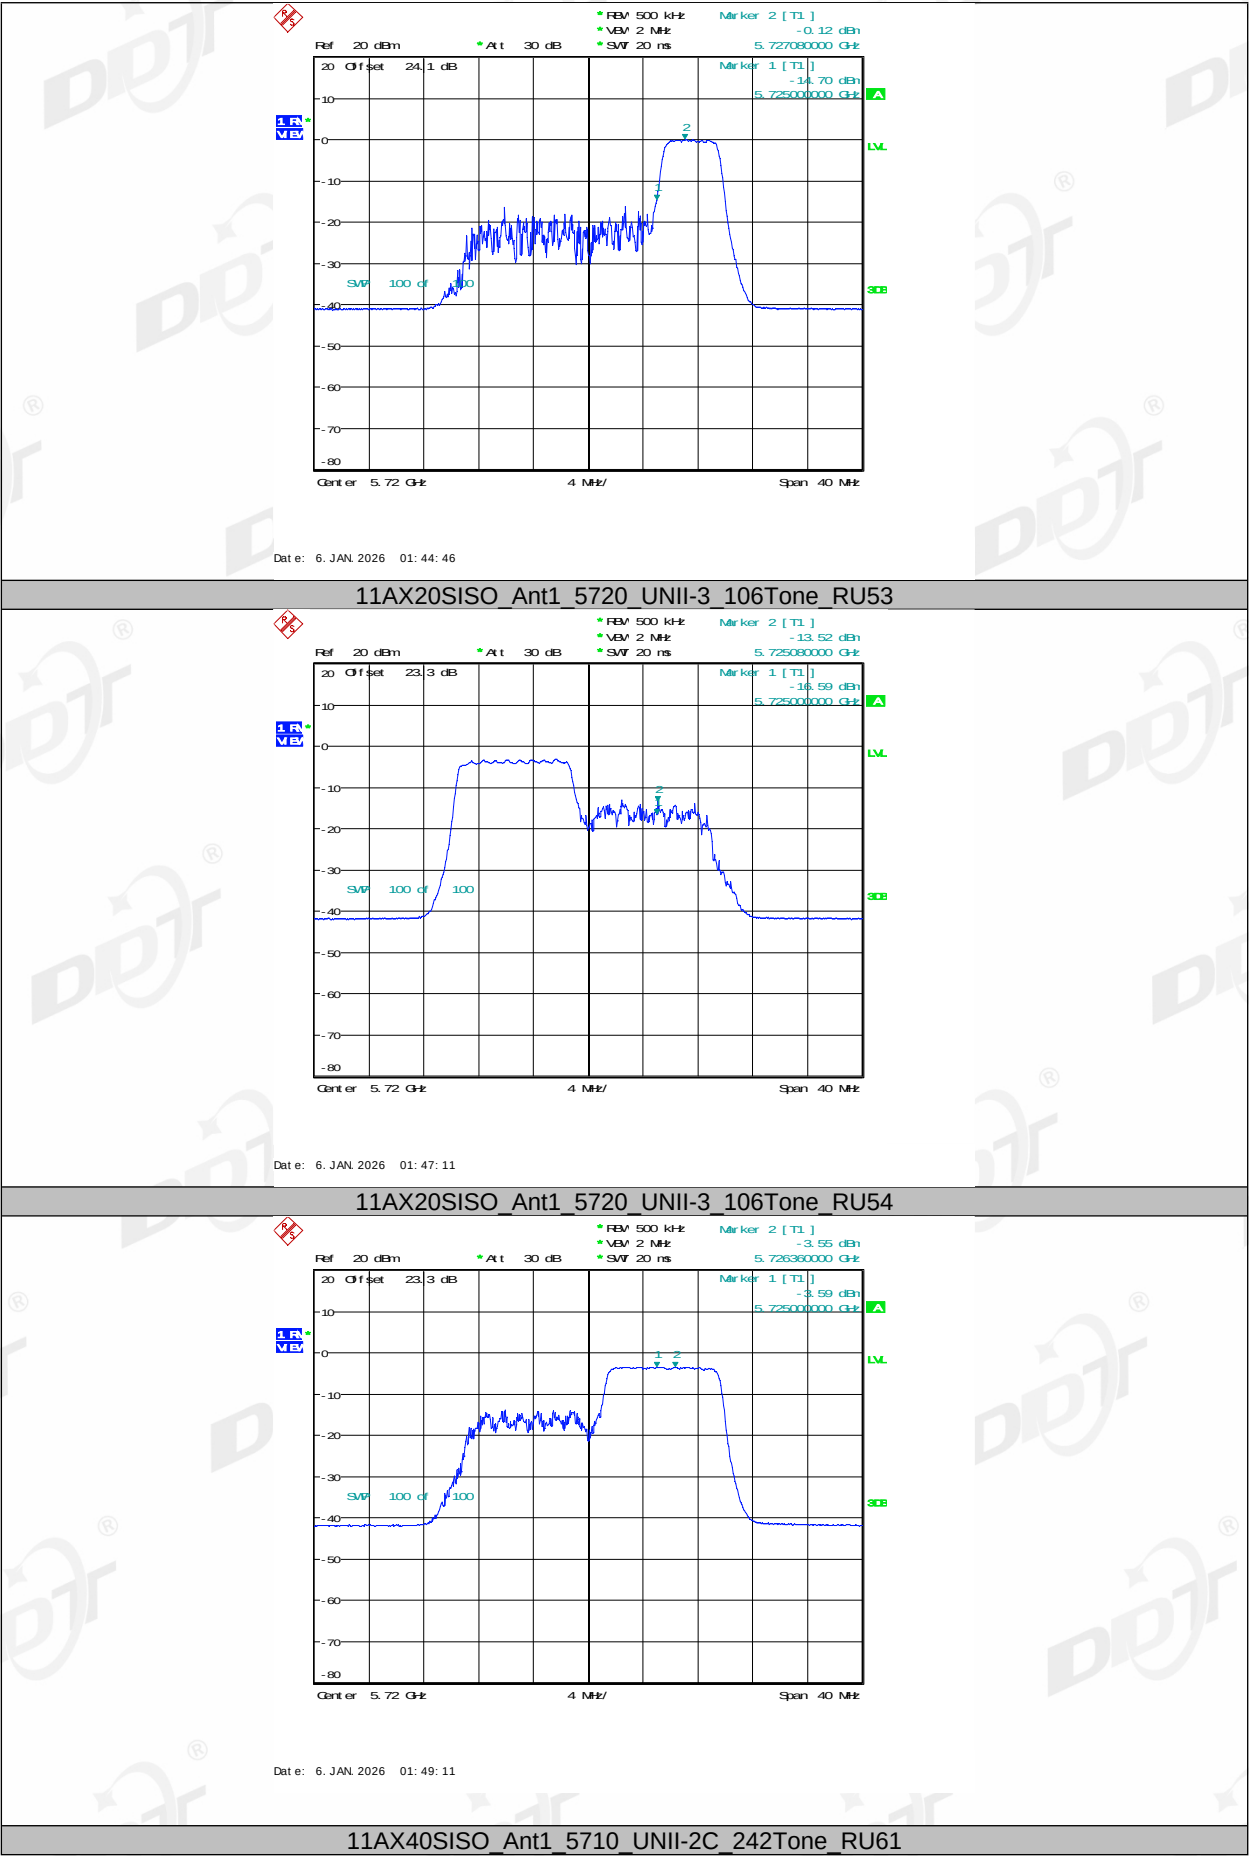

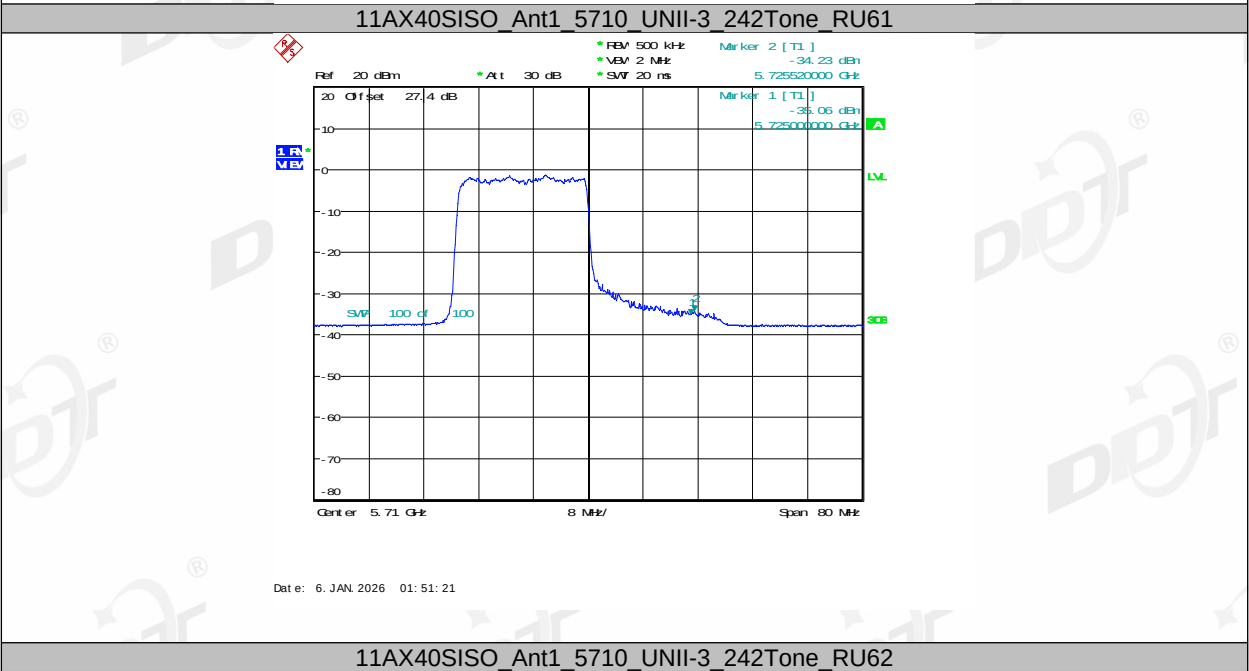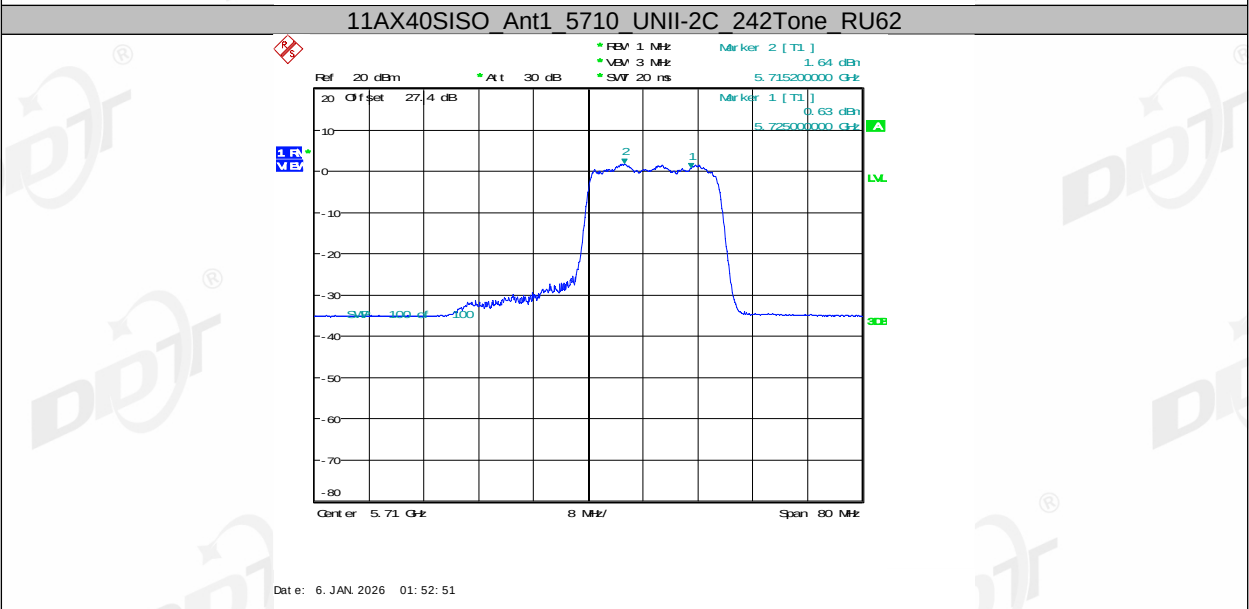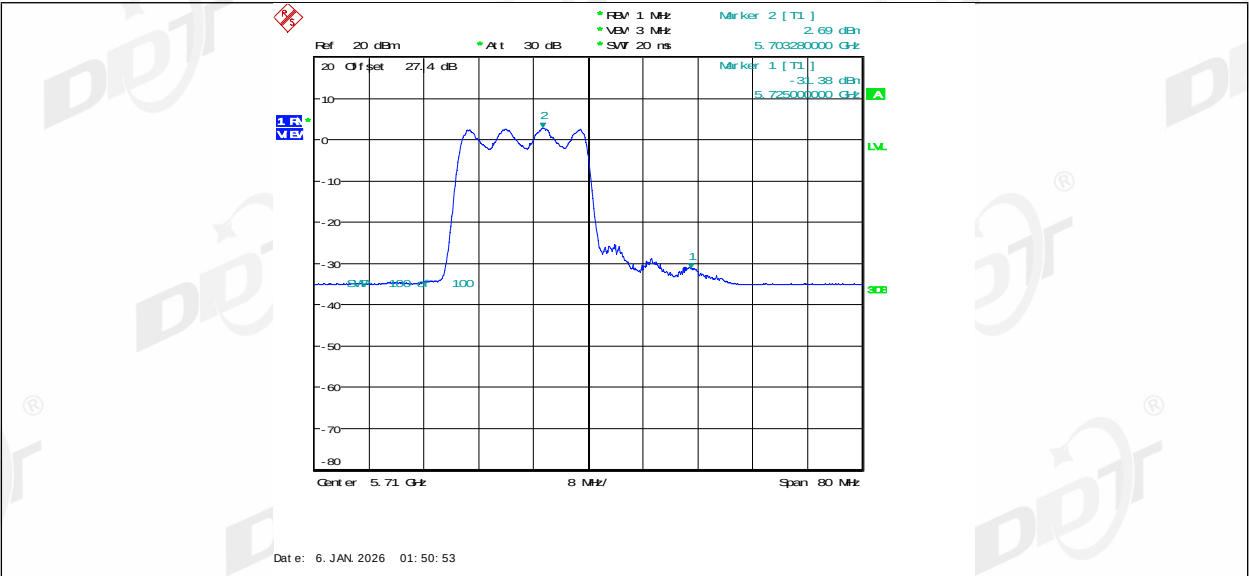





11AX80SISO Ant1 5690 UNII-2C 484Tone RU65

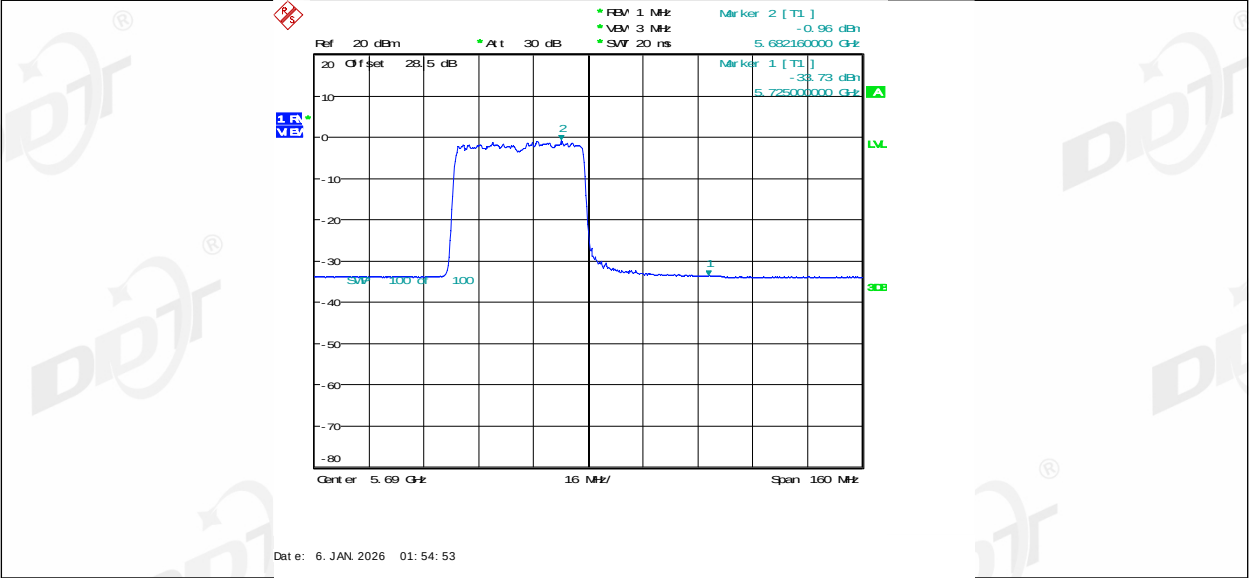

11AX80SISO Ant1 5690 UNII-2C 484Tone RU66

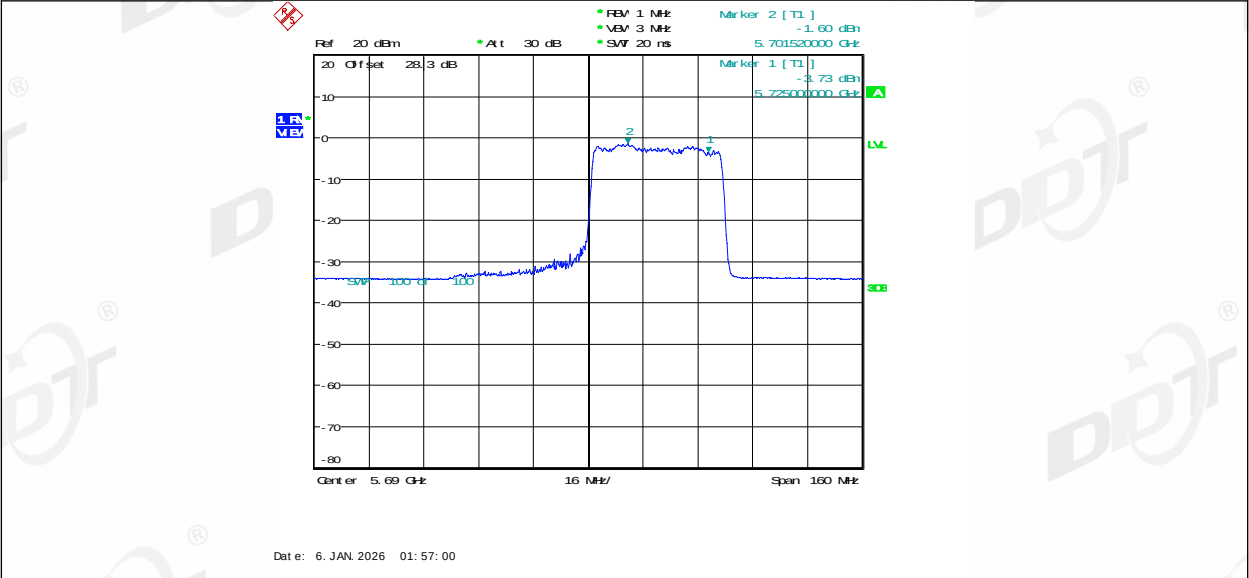

11AX80SISO Ant1 5690 UNII-3 484Tone RU65

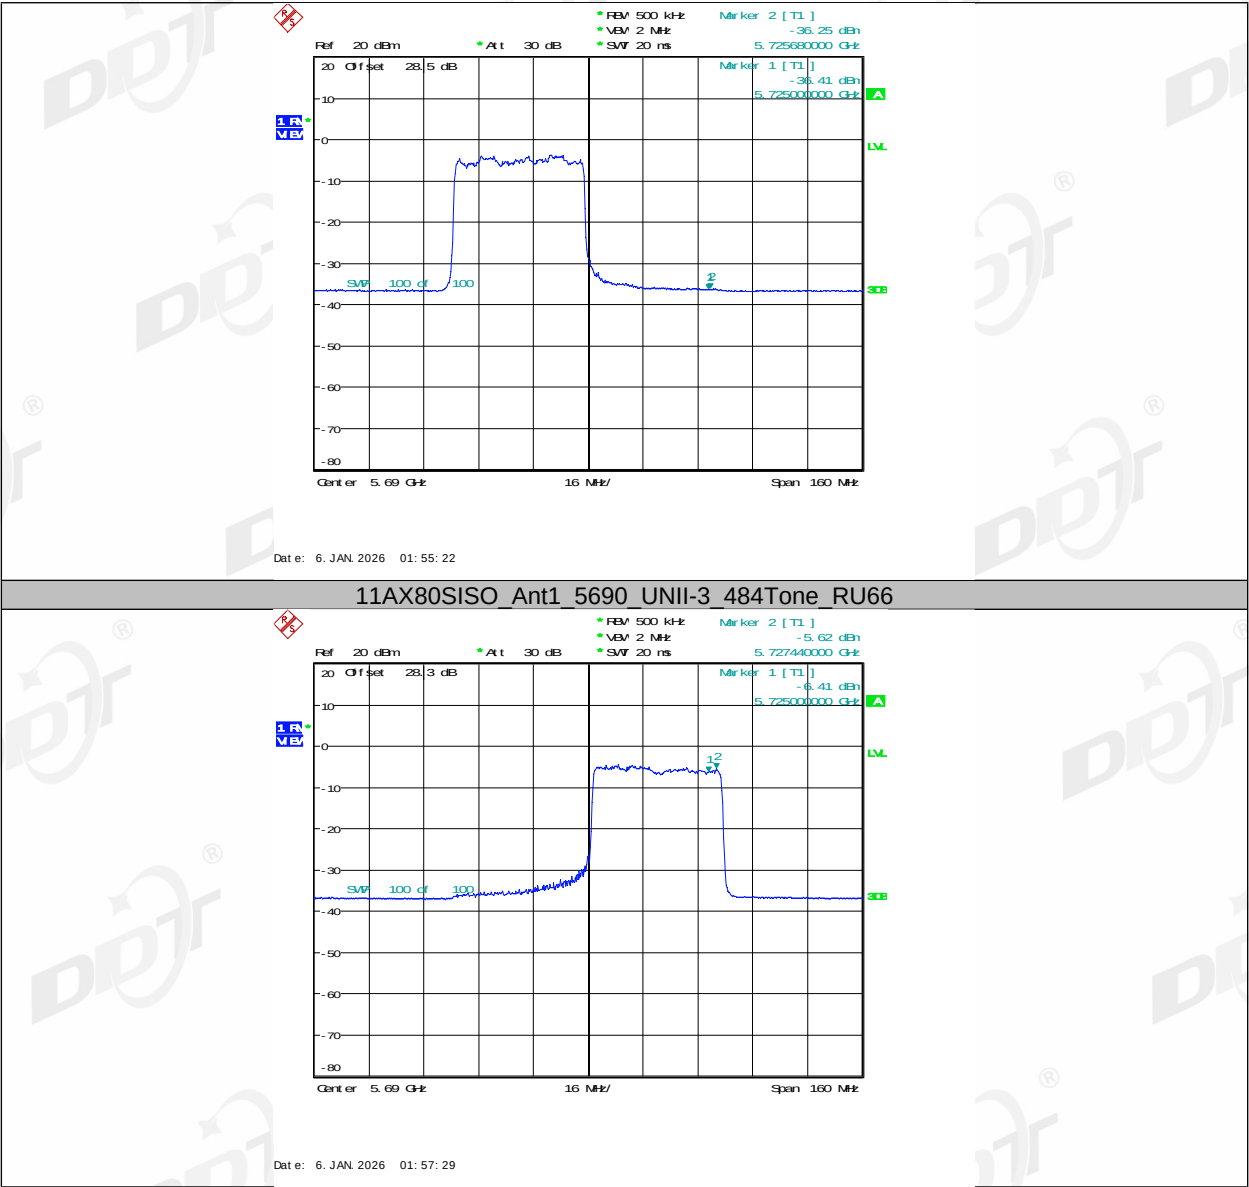

10. Frequency Stability Measurement

10.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


10.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

10.3. Test procedures

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

10.4. Test setup

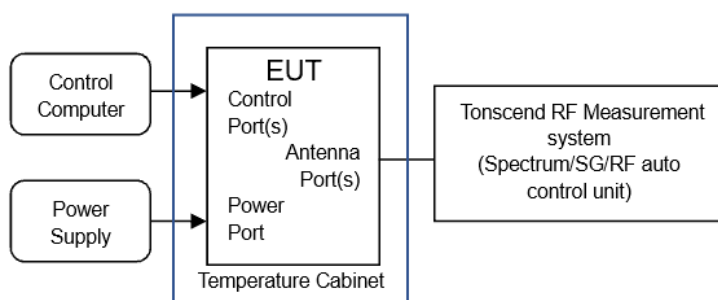

10.5. Test result

Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 1# RF Measurement System 4#
Ambient Condition:	24.4℃,47.3%RH-23.6℃,43.8%RH	Test Date:	2025.10.25-2026.01.07
Test Power Supply:	DC 12V	Sample Number:	S25060926-001

Voltage								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (℃)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	NT	40000.00	7.722008	20	PASS
			LV	NT	40000.00	7.722008	20	PASS
			HV	NT	40000.00	7.722008	20	PASS
		5200	NV	NT	40000.00	7.692308	20	PASS
			LV	NT	40000.00	7.692308	20	PASS
			HV	NT	40000.00	7.692308	20	PASS
		5240	NV	NT	40000.00	7.633588	20	PASS
			LV	NT	40000.00	7.633588	20	PASS
			HV	NT	20000.00	3.816794	20	PASS
		5260	NV	NT	40000.00	7.604563	20	PASS
			LV	NT	40000.00	7.604563	20	PASS
			HV	NT	20000.00	3.802281	20	PASS
		5280	NV	NT	40000.00	7.575758	20	PASS
			LV	NT	40000.00	7.575758	20	PASS
			HV	NT	40000.00	7.575758	20	PASS
		5320	NV	NT	40000.00	7.518797	20	PASS
			LV	NT	40000.00	7.518797	20	PASS
			HV	NT	40000.00	7.518797	20	PASS
		5500	NV	NT	40000.00	7.272727	20	PASS
			LV	NT	40000.00	7.272727	20	PASS
			HV	NT	40000.00	7.272727	20	PASS
		5580	NV	NT	40000.00	7.168459	20	PASS
			LV	NT	40000.00	7.168459	20	PASS
			HV	NT	40000.00	7.168459	20	PASS
		5700	NV	NT	40000.00	7.017544	20	PASS
			LV	NT	40000.00	7.017544	20	PASS

		5720	HV	NT	40000.00	7.017544	20	PASS
			NV	NT	40000.00	6.993007	20	PASS
			LV	NT	40000.00	6.993007	20	PASS
			HV	NT	40000.00	6.993007	20	PASS
		5745	NV	NT	40000.00	6.962576	20	PASS
			LV	NT	40000.00	6.962576	20	PASS
			HV	NT	40000.00	6.962576	20	PASS
		5785	NV	NT	40000.00	6.914434	20	PASS
			LV	NT	40000.00	6.914434	20	PASS
			HV	NT	40000.00	6.914434	20	PASS
		5825	NV	NT	40000.00	6.866953	20	PASS
			LV	NT	40000.00	6.866953	20	PASS
			HV	NT	40000.00	6.866953	20	PASS

Temperature								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-30	40000.00	7.722008	20	PASS
			NV	-20	40000.00	7.722008	20	PASS
			NV	-10	40000.00	7.722008	20	PASS
			NV	0	40000.00	7.722008	20	PASS
			NV	10	40000.00	7.722008	20	PASS
			NV	20	40000.00	7.722008	20	PASS
			NV	30	40000.00	7.722008	20	PASS
			NV	40	40000.00	7.722008	20	PASS
			NV	50	40000.00	7.722008	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	60000.00	10.489510	20	PASS
		5200	NV	-30	40000.00	7.692308	20	PASS
			NV	-20	40000.00	7.692308	20	PASS
			NV	-10	40000.00	7.692308	20	PASS
			NV	0	40000.00	7.692308	20	PASS
			NV	10	40000.00	7.692308	20	PASS
			NV	20	40000.00	7.692308	20	PASS

			NV	30	40000.00	7.692308	20	PASS
			NV	40	20000.00	3.846154	20	PASS
			NV	50	40000.00	7.692308	20	PASS
			NV	60	60000.00	10.489510	20	PASS
			NV	70	60000.00	10.489510	20	PASS
		5240	NV	-30	20000.00	3.816794	20	PASS
			NV	-20	40000.00	7.633588	20	PASS
			NV	-10	20000.00	3.816794	20	PASS
			NV	0	20000.00	3.816794	20	PASS
			NV	10	40000.00	7.633588	20	PASS
			NV	20	20000.00	3.816794	20	PASS
			NV	30	40000.00	7.633588	20	PASS
			NV	40	40000.00	7.633588	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	40000.00	6.993007	20	PASS
		5260	NV	-30	20000.00	3.802281	20	PASS
			NV	-20	40000.00	7.604563	20	PASS
			NV	-10	40000.00	7.604563	20	PASS
			NV	0	40000.00	7.604563	20	PASS
			NV	10	40000.00	7.604563	20	PASS
			NV	20	40000.00	7.604563	20	PASS
			NV	30	40000.00	7.604563	20	PASS
			NV	40	20000.00	3.802281	20	PASS
			NV	50	40000.00	7.604563	20	PASS
			NV	60	60000.00	10.489510	20	PASS
			NV	70	60000.00	10.489510	20	PASS
		5280	NV	-30	40000.00	7.575758	20	PASS
			NV	-20	40000.00	7.575758	20	PASS
			NV	-10	40000.00	7.575758	20	PASS
			NV	0	40000.00	7.575758	20	PASS
			NV	10	20000.00	3.787879	20	PASS

			NV	20	40000.00	7.575758	20	PASS
			NV	30	40000.00	7.575758	20	PASS
			NV	40	40000.00	7.575758	20	PASS
			NV	50	40000.00	7.575758	20	PASS
			NV	60	20000.00	3.496503	20	PASS
			NV	70	40000.00	6.993007	20	PASS
		5320	NV	-30	40000.00	7.518797	20	PASS
			NV	-20	40000.00	7.518797	20	PASS
			NV	-10	40000.00	7.518797	20	PASS
			NV	0	40000.00	7.518797	20	PASS
			NV	10	40000.00	7.518797	20	PASS
			NV	20	40000.00	7.518797	20	PASS
			NV	30	20000.00	3.759398	20	PASS
			NV	40	40000.00	7.518797	20	PASS
			NV	50	40000.00	7.518797	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	20000.00	3.496503	20	PASS
		5500	NV	-30	40000.00	7.272727	20	PASS
			NV	-20	40000.00	7.272727	20	PASS
			NV	-10	20000.00	3.636364	20	PASS
			NV	0	40000.00	7.272727	20	PASS
			NV	10	20000.00	3.636364	20	PASS
			NV	20	20000.00	3.636364	20	PASS
			NV	30	40000.00	7.272727	20	PASS
			NV	40	40000.00	7.272727	20	PASS
			NV	50	20000.00	3.636364	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	20000.00	3.496503	20	PASS
		5580	NV	-30	40000.00	7.168459	20	PASS
			NV	-20	40000.00	7.168459	20	PASS
			NV	-10	40000.00	7.168459	20	PASS
			NV	0	40000.00	7.168459	20	PASS

			NV	10	20000.00	3.584229	20	PASS
			NV	20	40000.00	7.168459	20	PASS
			NV	30	40000.00	7.168459	20	PASS
			NV	40	40000.00	7.168459	20	PASS
			NV	50	40000.00	7.168459	20	PASS
			NV	60	60000.00	10.489510	20	PASS
			NV	70	20000.00	3.496503	20	PASS
		5700	NV	-30	40000.00	7.017544	20	PASS
			NV	-20	40000.00	7.017544	20	PASS
			NV	-10	40000.00	7.017544	20	PASS
			NV	0	40000.00	7.017544	20	PASS
			NV	10	40000.00	7.017544	20	PASS
			NV	20	40000.00	7.017544	20	PASS
			NV	30	40000.00	7.017544	20	PASS
			NV	40	40000.00	7.017544	20	PASS
			NV	50	40000.00	7.017544	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	60000.00	10.489510	20	PASS
		5720	NV	-30	40000.00	6.993007	20	PASS
			NV	-20	40000.00	6.993007	20	PASS
			NV	-10	40000.00	6.993007	20	PASS
			NV	0	40000.00	6.993007	20	PASS
			NV	10	40000.00	6.993007	20	PASS
			NV	20	40000.00	6.993007	20	PASS
			NV	30	40000.00	6.993007	20	PASS
			NV	40	40000.00	6.993007	20	PASS
			NV	50	40000.00	6.993007	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	40000.00	6.993007	20	PASS
		5745	NV	-30	40000.00	6.962576	20	PASS
			NV	-20	40000.00	6.962576	20	PASS
			NV	-10	40000.00	6.962576	20	PASS

			NV	0	40000.00	6.962576	20	PASS
			NV	10	40000.00	6.962576	20	PASS
			NV	20	40000.00	6.962576	20	PASS
			NV	30	40000.00	6.962576	20	PASS
			NV	40	40000.00	6.962576	20	PASS
			NV	50	40000.00	6.962576	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	40000.00	6.993007	20	PASS
		5785	NV	-30	40000.00	6.914434	20	PASS
			NV	-20	40000.00	6.914434	20	PASS
			NV	-10	40000.00	6.914434	20	PASS
			NV	0	40000.00	6.914434	20	PASS
			NV	10	40000.00	6.914434	20	PASS
			NV	20	40000.00	6.914434	20	PASS
			NV	30	40000.00	6.914434	20	PASS
			NV	40	40000.00	6.914434	20	PASS
			NV	50	40000.00	6.914434	20	PASS
			NV	60	20000.00	3.496503	20	PASS
			NV	70	40000.00	6.993007	20	PASS
		5825	NV	-30	40000.00	6.866953	20	PASS
			NV	-20	40000.00	6.866953	20	PASS
			NV	-10	40000.00	6.866953	20	PASS
			NV	0	40000.00	6.866953	20	PASS
			NV	10	40000.00	6.866953	20	PASS
			NV	20	40000.00	6.866953	20	PASS
			NV	30	40000.00	6.866953	20	PASS
			NV	40	40000.00	6.866953	20	PASS
			NV	50	40000.00	6.866953	20	PASS
			NV	60	40000.00	6.993007	20	PASS
			NV	70	40000.00	6.993007	20	PASS

11. Dynamic Frequency Selection

11.1. Applicability of DFS requirements

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

11.2. Limit

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

11.3. Parameters of radar test waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{\left(\frac{1}{360} \right)^*} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4

11.4. Calibration of radar waveform


Radar Waveform Calibration Procedure:

- (1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- (2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- (3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and

video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.

- (4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was - 62dBm + 0dBi +1dB = -61dBm. Capture the spectrum analyzer plots on short pulse radar waveform.


Conducted Calibration Setup:

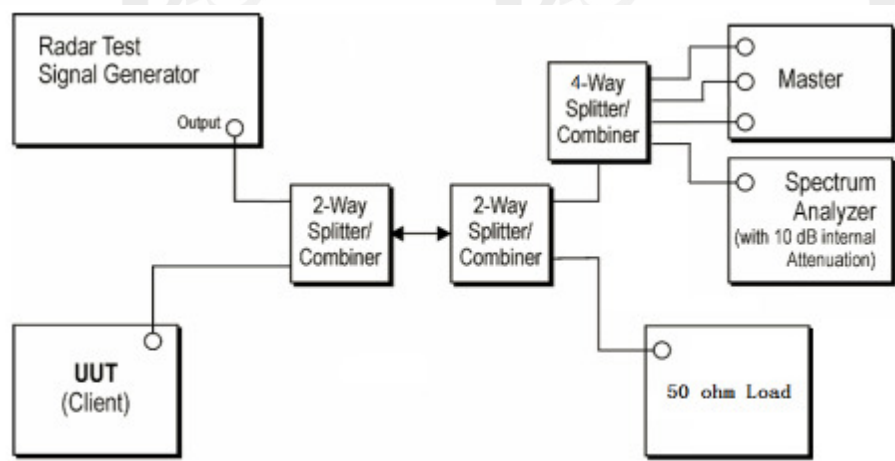

- Note: 1. Use the software "Web" to set the frequency channel.
2. EUT is not support TPC and not with Radar detection.

Radar Waveform Calibration Result:

Test Mode	Frequency [MHz]	Radar Type	Result	Limit [dbm]	Verdict
11A	5260	Type0	-58.49	-58.44	PASS
11AC80SISO	5530	Type0	-58.54	-58.44	PASS

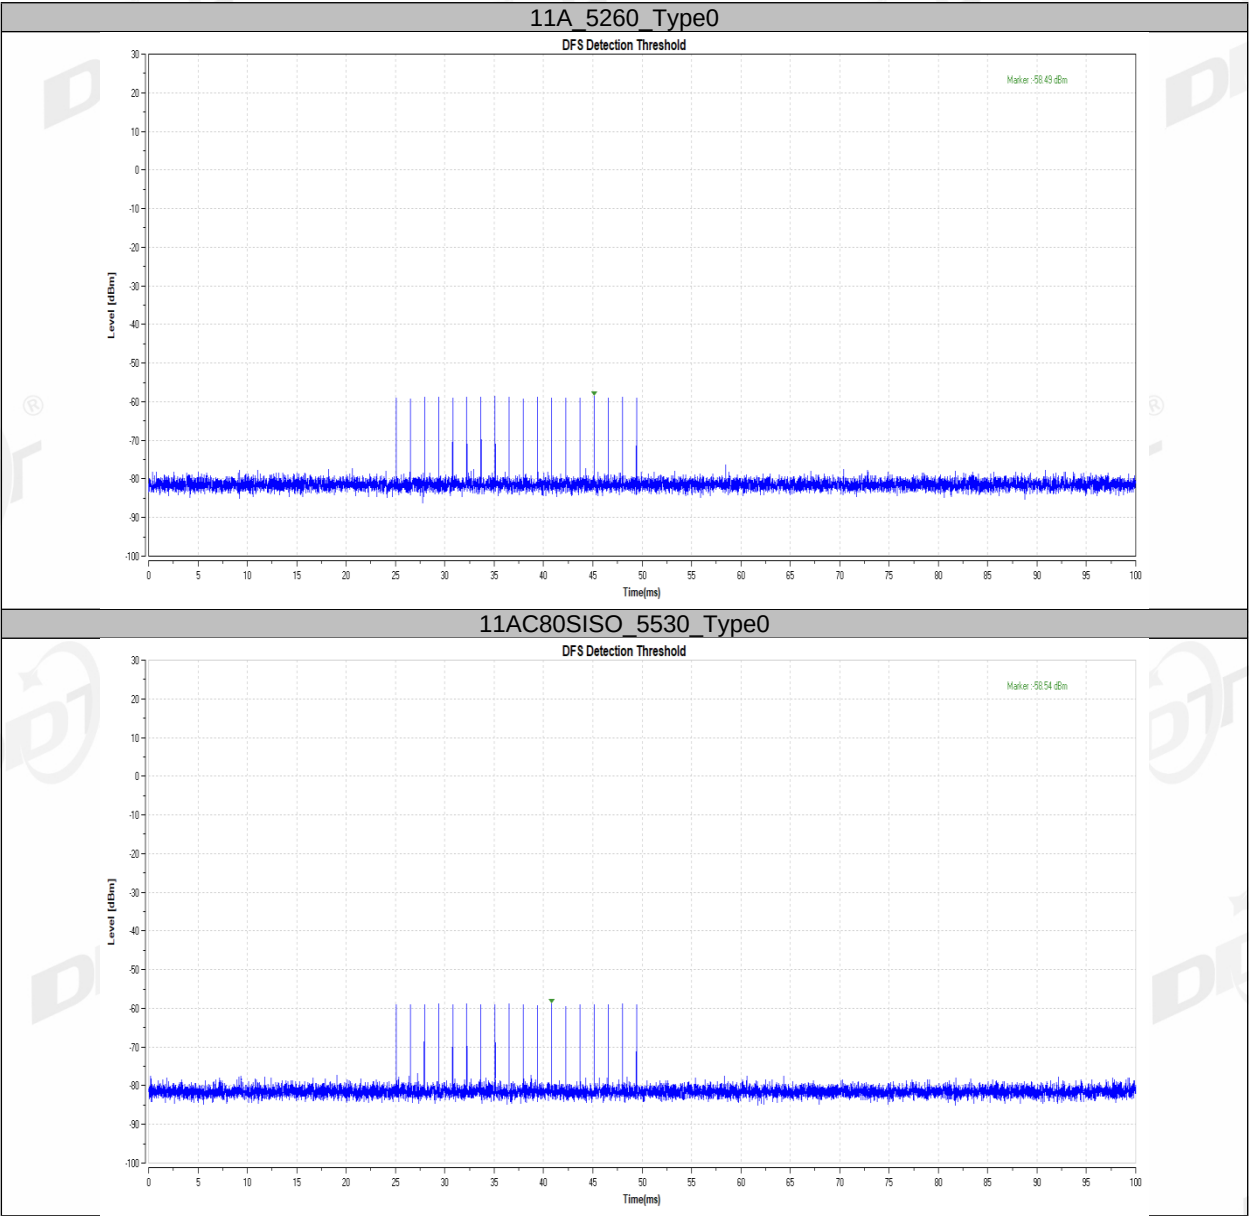


11.5. Channel closing transmission time, channel move time and non-occupancy period

Block diagram of test setup Test Procedure:

- (1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- (2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- (3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- (4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Test Software in order to properly load the network for the entire period of the test.
- (5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- (7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the
- (8) spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- (9) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

11.6. Test setup

Setup for Client with injection at the Master

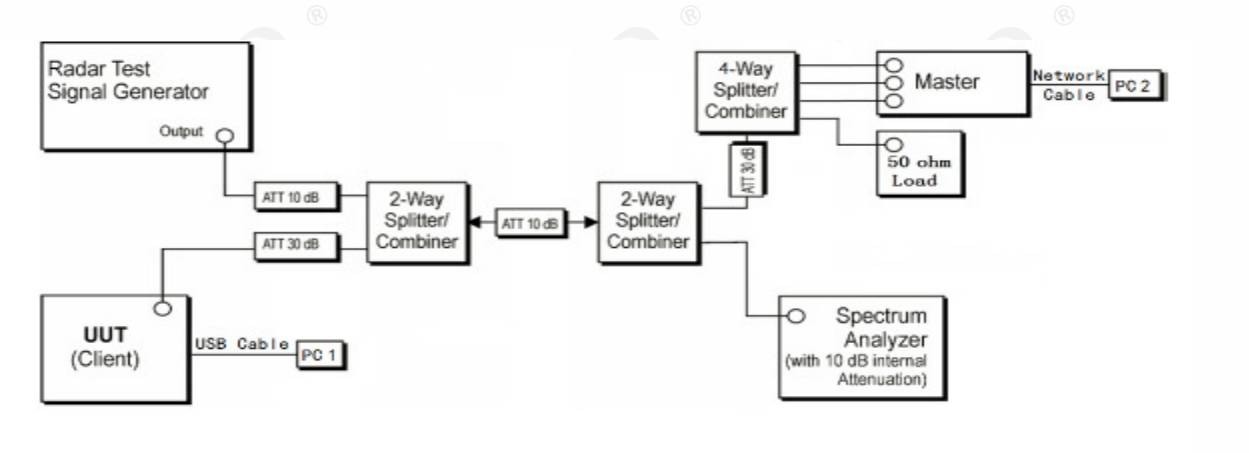

11.7. Test result


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.4℃,47.3%RH	Test Date:	2025.10.25
Test Power Supply:	DC 12V	Sample Number:	S25060926-001


Test Mode	Frequency [MHz]	CCTT [ms]	Limit [ms]	CMT [ms]	Limit [ms]	Verdict
11A	5260	200+10.4	200+60	773.2	10000	PASS
11AC80SISO	5530	200+0	200+60	38.7	10000	PASS

Non-Occupancy Period

Test Mode	Frequency [MHz]	Result	Limit [s]	Verdict
11A	5260	see test graph	≥1800	PASS
11AC80	5610	see test graph	≥1800	PASS

Test plots as follows:

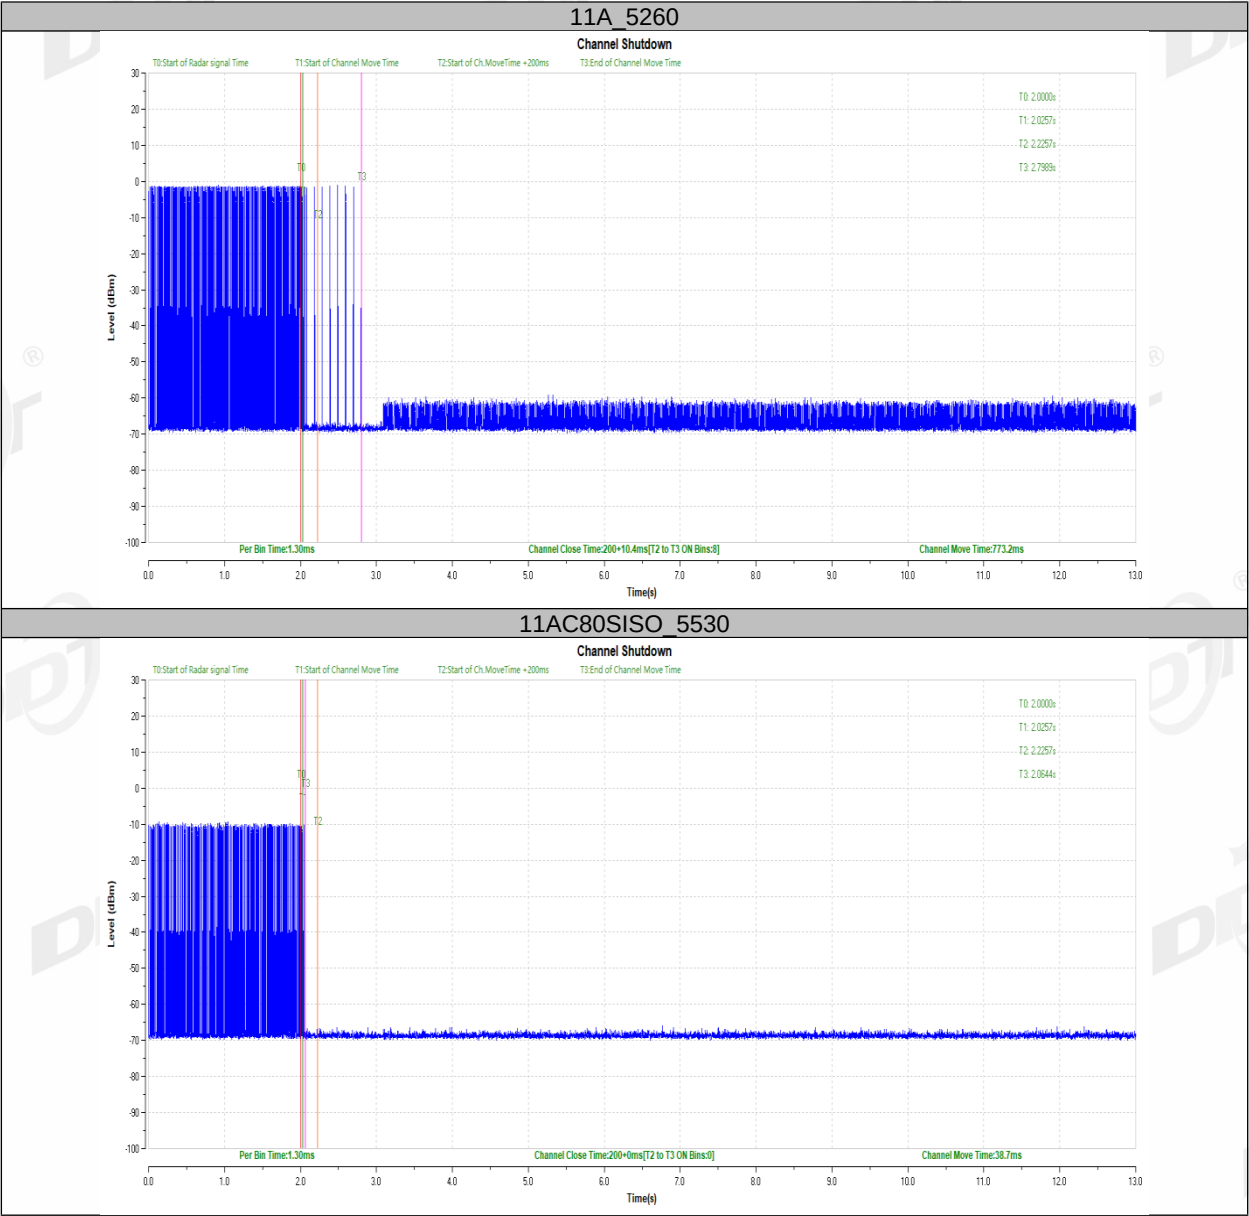

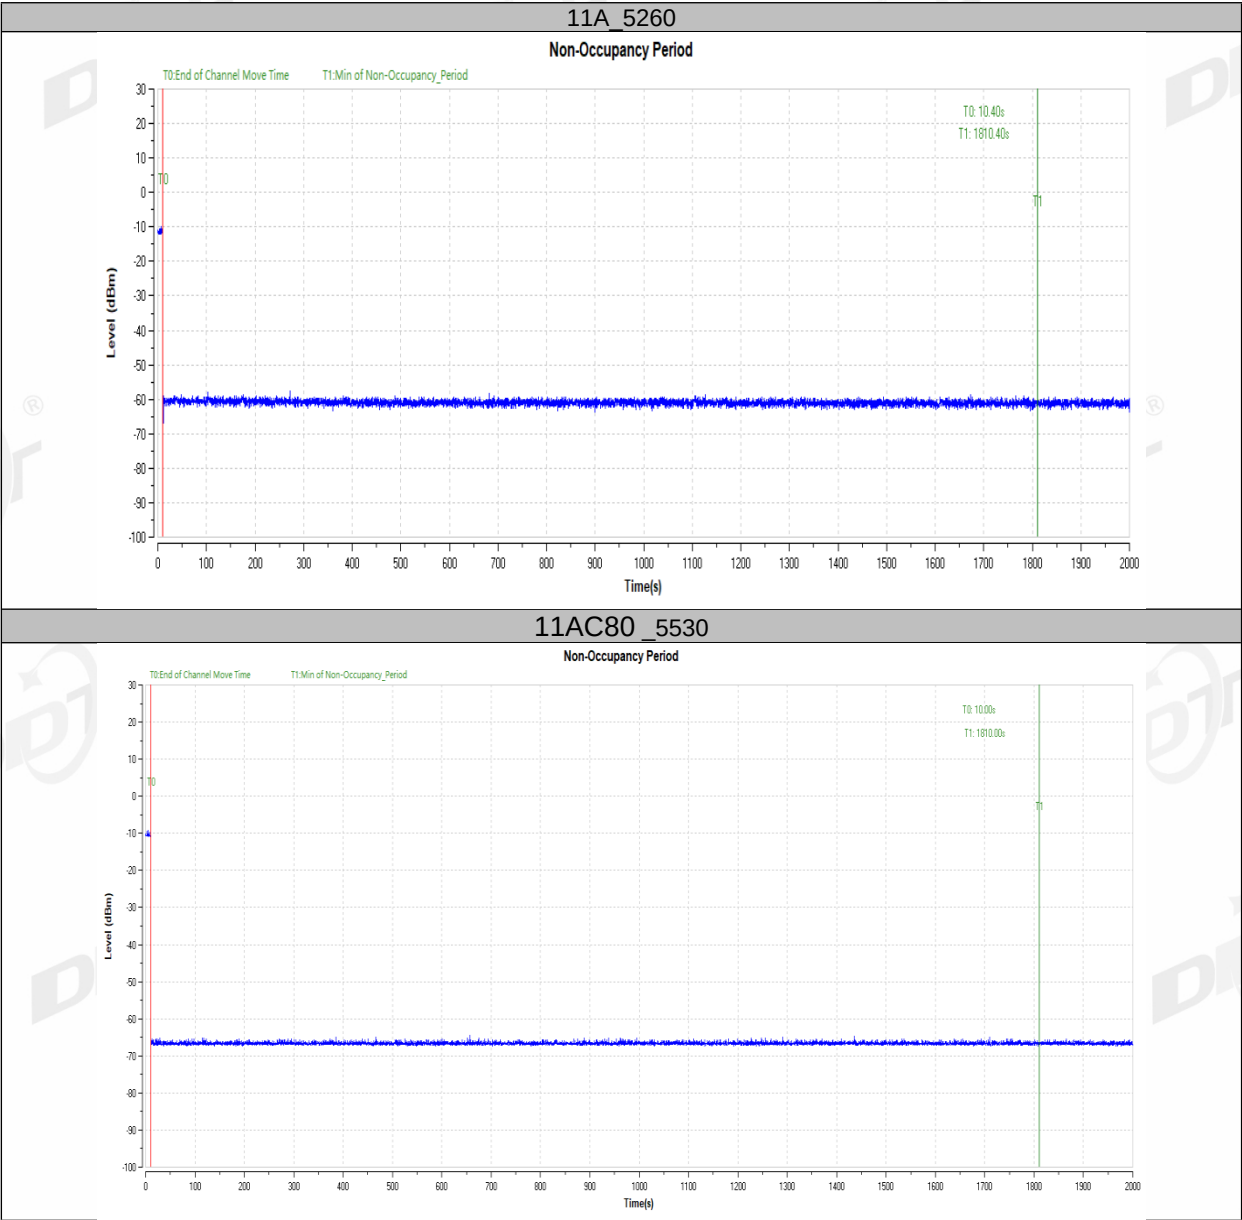

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


13. Radiated Emission

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

13.2. Block diagram of test setup

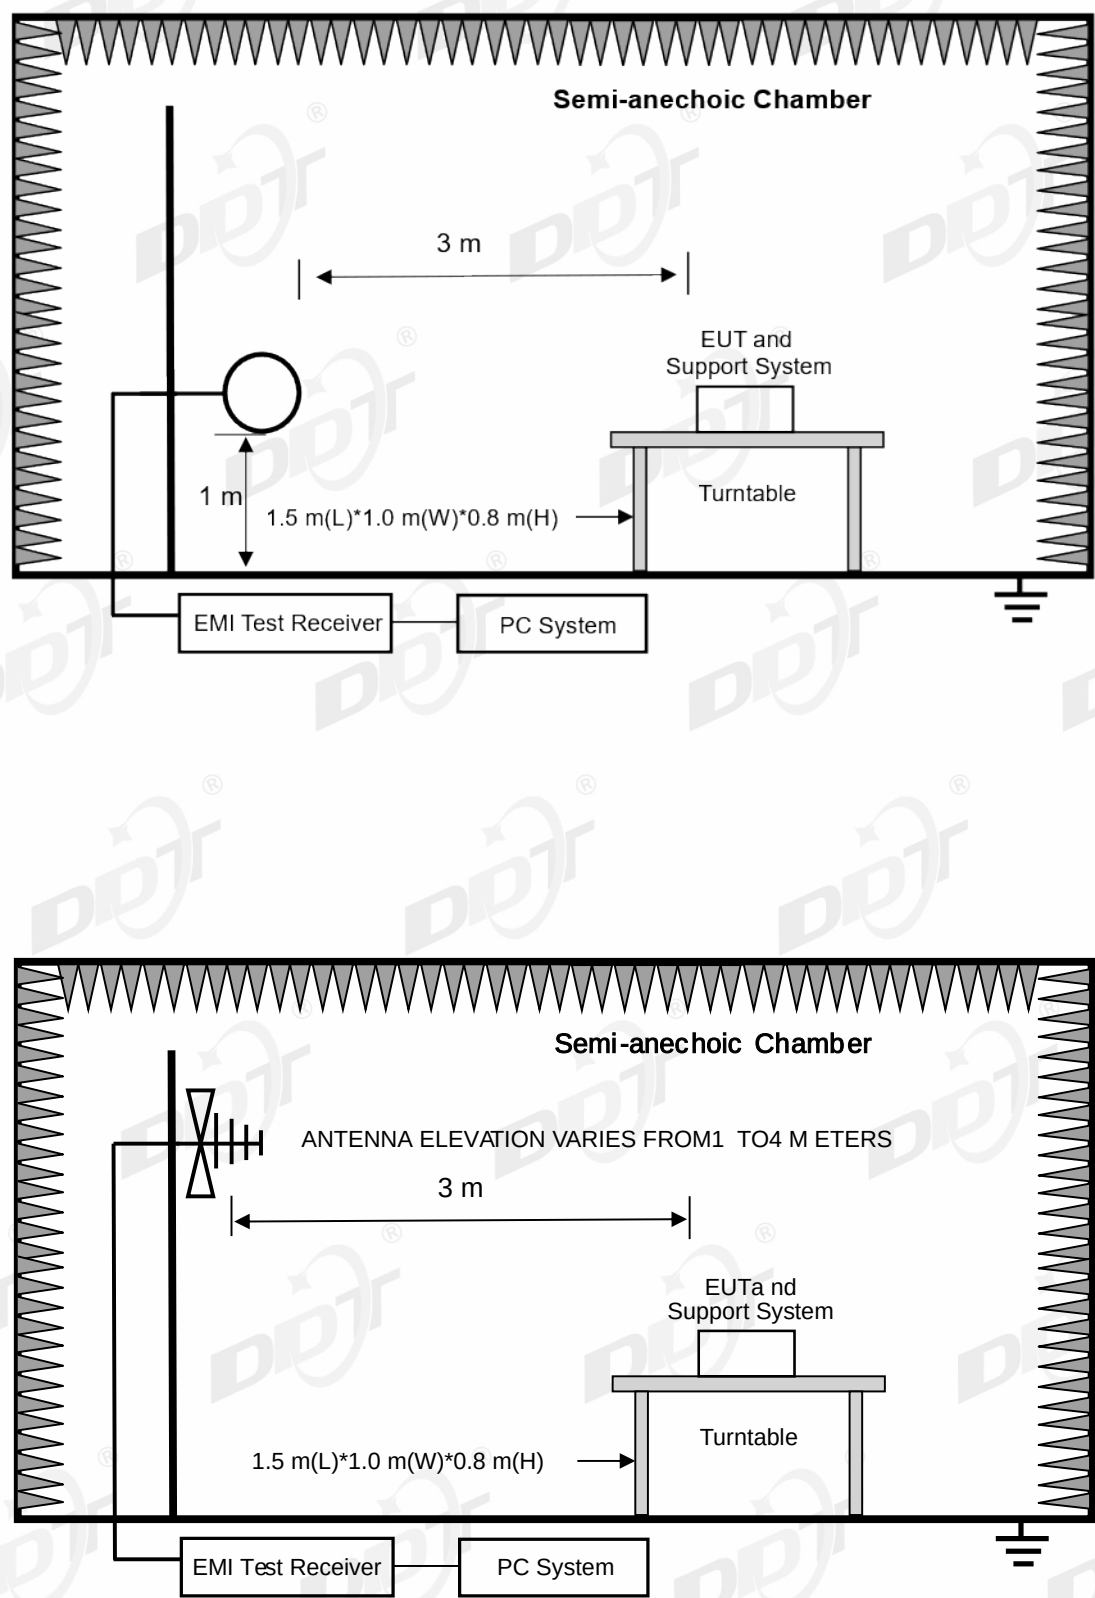

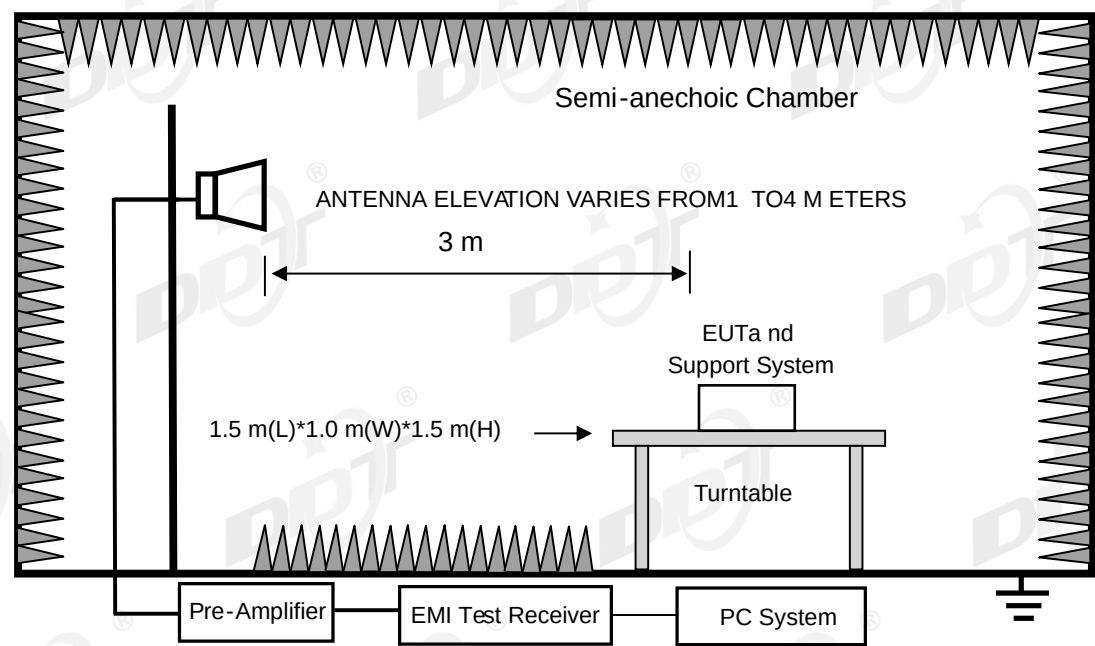

13.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description
Laptop	Lenovo	00425-00000-00002-AA135	NA

13.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 40 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

PCB B:

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-29

Tested By:

Nan Zhong

EUT:

In-vehicle Multimedia Host

Model Number:

MTD421-B2

Test Mode:

TX 5G 11AX20 5745 Mode

Power Supply:

DC 12V

Condition:

Temp:22.2°C;Humi:56.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25060926-1E\FCC BELOW1G\9

Memo:

Sample Number:S25060926-001

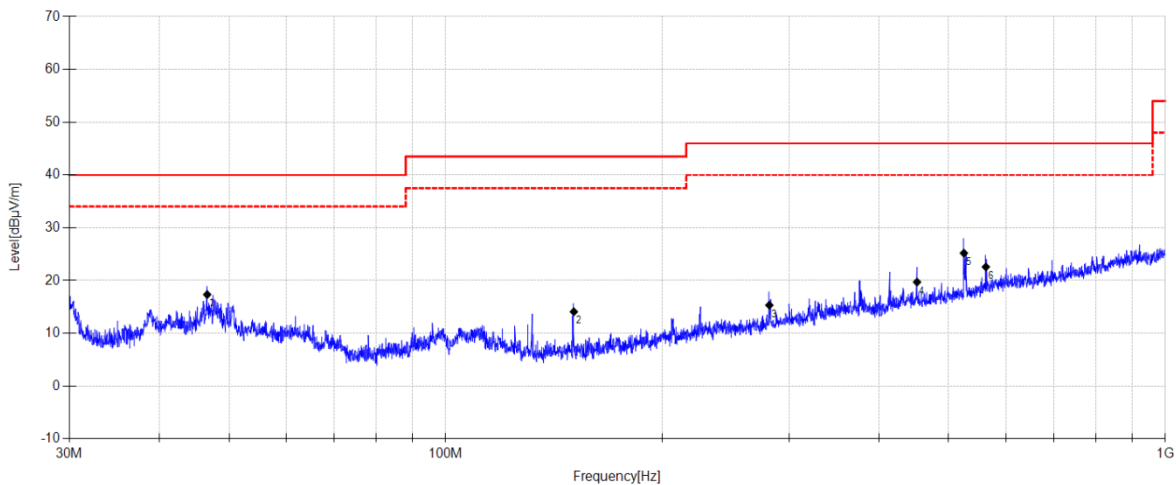

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.630	32.42	13.25	3.96	17.33	40.00	22.67	QP	Horizontal
2	150.700	33.27	8.57	4.59	14.08	43.50	29.42	QP	Horizontal
3	281.671	29.41	13.10	5.21	15.32	46.00	30.68	QP	Horizontal
4	451.840	30.27	16.10	5.88	19.70	46.00	26.30	QP	Horizontal
5	524.990	34.71	17.00	6.13	25.18	46.00	20.82	QP	Horizontal
6	563.122	31.03	18.03	6.27	22.57	46.00	23.43	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-29

Tested By:

Nan Zhong

EUT:

In-vehicle Multimedia Host

Model Number:

MTD421-B2

Test Mode:

TX 5G 11AX20 5745 Mode

Power Supply:

DC 12V

Condition:

Temp:22.2°C;Humi:56.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25060926-1E\FCC BELOW1G\10

Memo:

Sample Number:S25060926-001

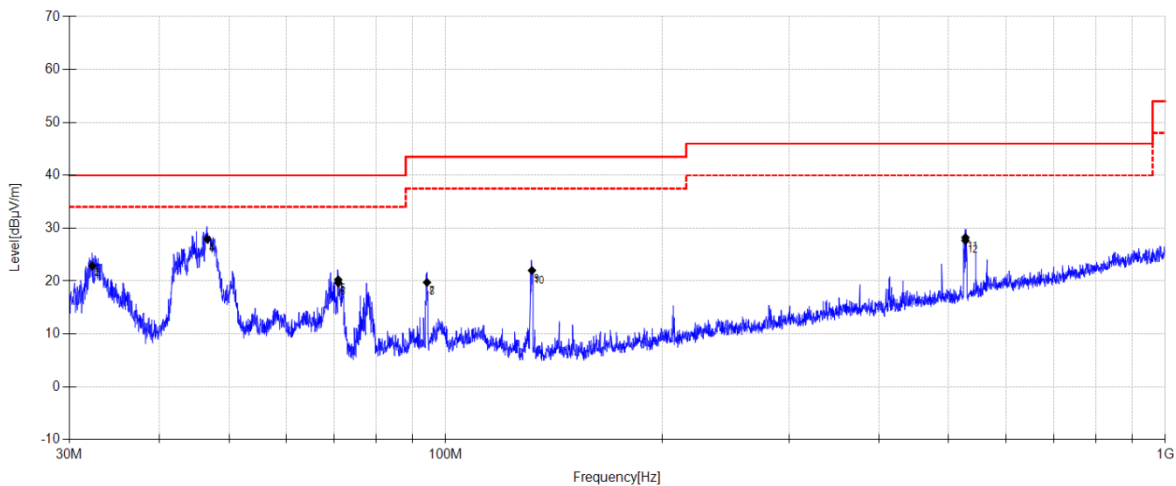

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.292	40.44	10.90	3.81	22.85	40.00	17.15	QP	Vertical
2	32.292	40.73	10.90	3.81	23.14	40.00	16.86	QP	Vertical
3	46.662	42.99	13.26	3.96	27.91	40.00	12.09	QP	Vertical
4	46.662	42.95	13.26	3.96	27.87	40.00	12.13	QP	Vertical
5	70.919	38.75	9.61	4.17	20.23	40.00	19.77	QP	Vertical
6	70.919	38.17	9.61	4.17	19.65	40.00	20.35	QP	Vertical
7	94.208	37.48	10.28	4.27	19.73	43.50	23.77	QP	Vertical
8	94.208	37.44	10.28	4.27	19.69	43.50	23.81	QP	Vertical
9	131.811	41.15	8.70	4.48	22.00	43.50	21.50	QP	Vertical
10	131.811	40.95	8.70	4.48	21.80	43.50	21.70	QP	Vertical
11	527.573	37.49	17.26	6.14	28.22	46.00	17.78	QP	Vertical
12	527.573	36.92	17.26	6.14	27.65	46.00	18.35	QP	Vertical

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.