


Product specification

Quick Reference Date

Antenna type	PCB antenna
Frequenc Range	433.94MHz
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)
Peak EIRP(dBm)	1.2
Directivity (dBi)	1 (all direction antenna)
Efficiency (dB)	60.2 %
Gain (dBi)	1.9 (Avg Gain XY-plane)
Maximum Power (dBm)	1.7 (XY-plane)
Minimum Power (dBm)	-4(XY-plane)
Avg. Power (dBm)	-0.5(XY-plane)
Input Impendence(ohm)	50
Polarization Type	Vertical & Horizontal
V. S .W. R	< 1.4
Manufacturer	Zhongshan Taozuo Electrical Technology Co., Ltd
Address	3 /F, Building 4, No. 22, Fuqing 4th Road, Henglan Town, Zhongshan City, Guangdong, China

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

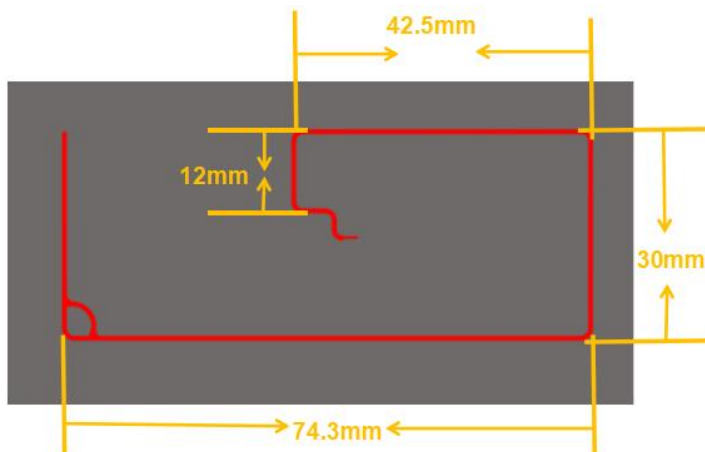


Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.9	-3.6	1.1	-3.0	60.2 %


Return Loss

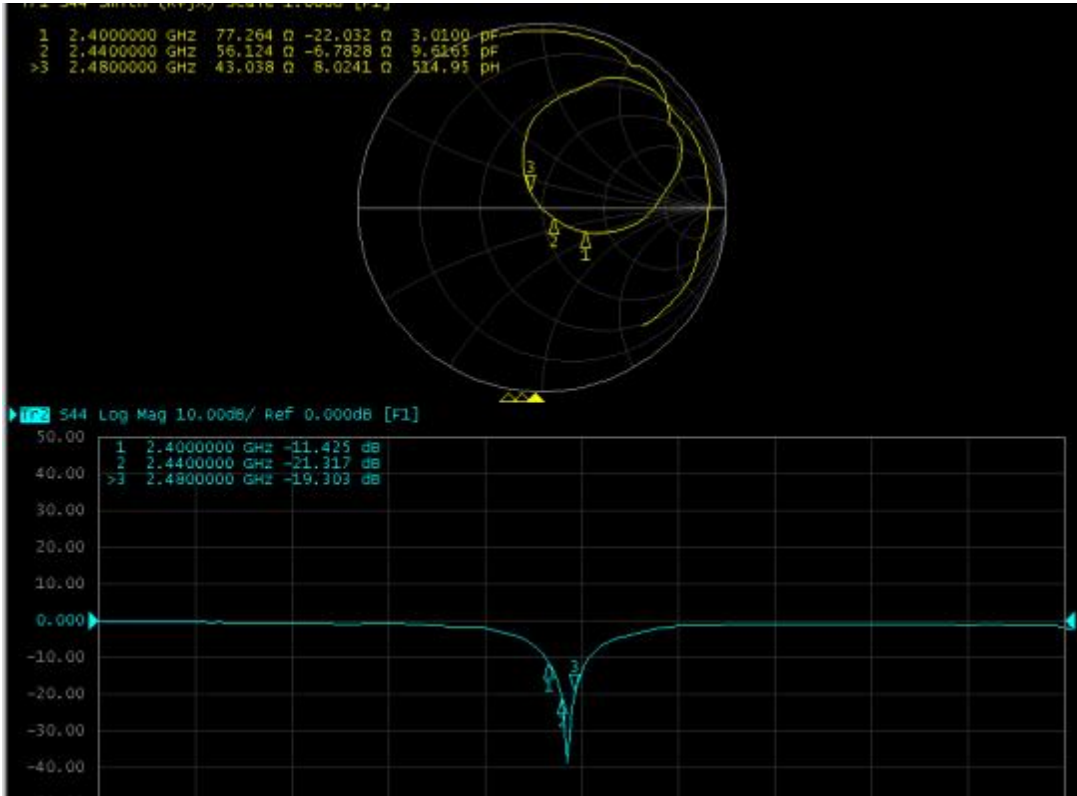


The Environment of Antenna Radiation Pattern

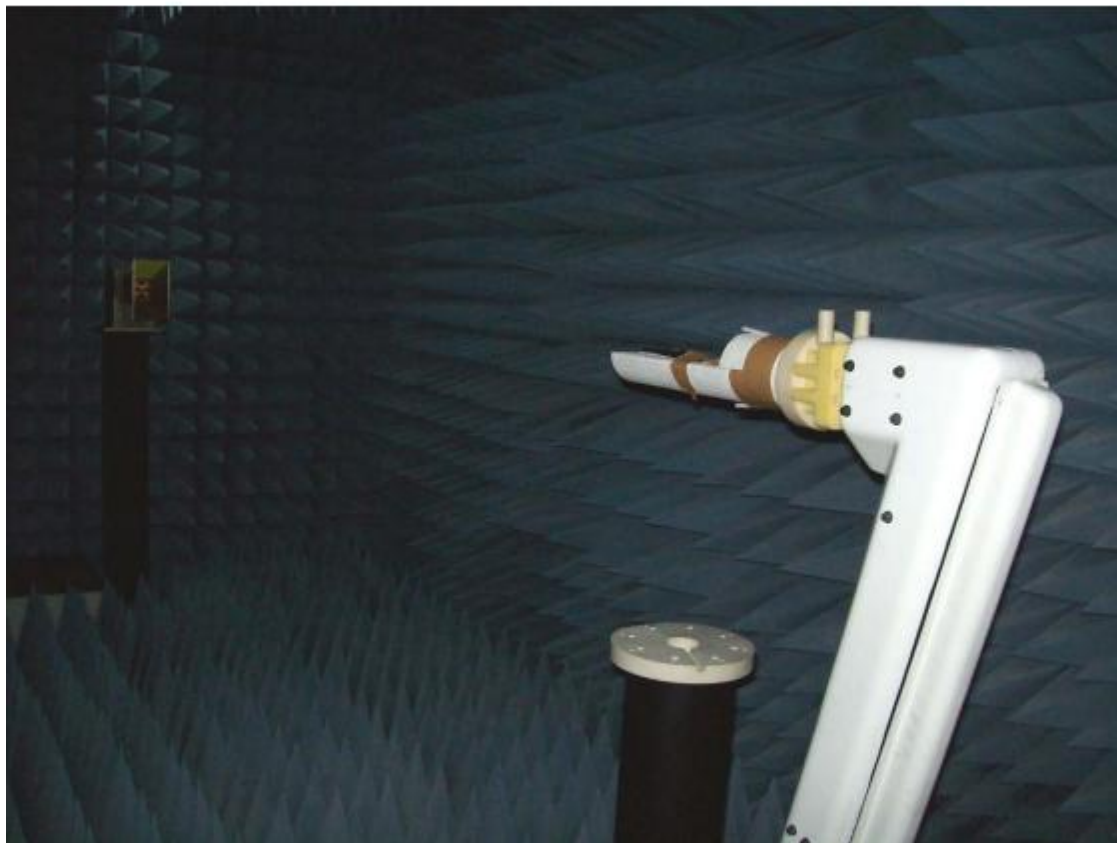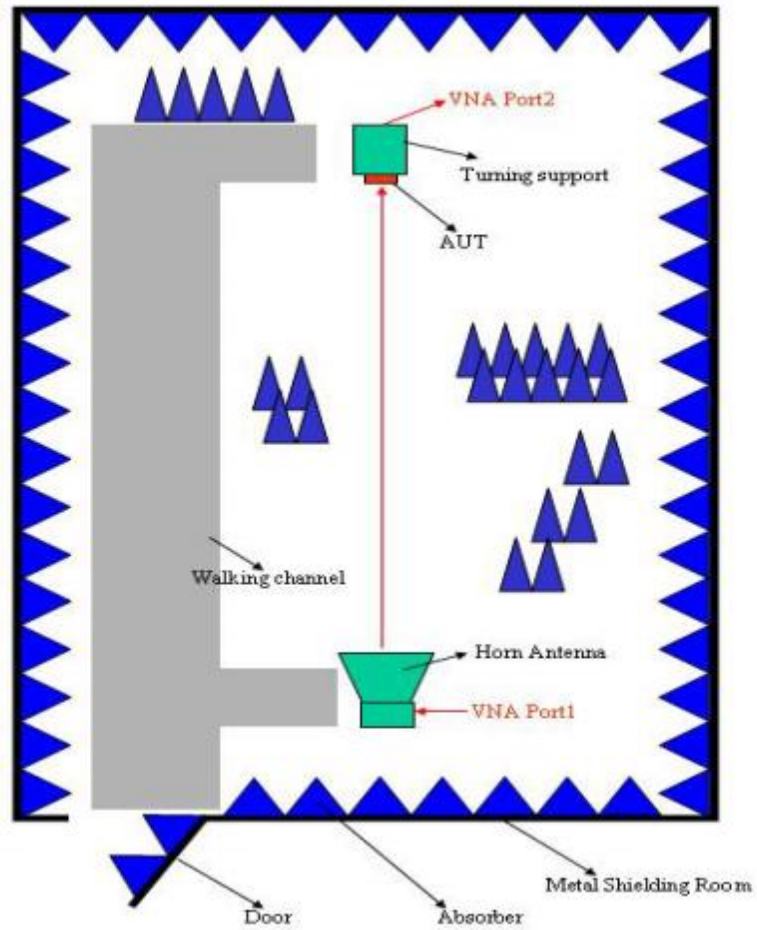


3D radiation pattern diagram

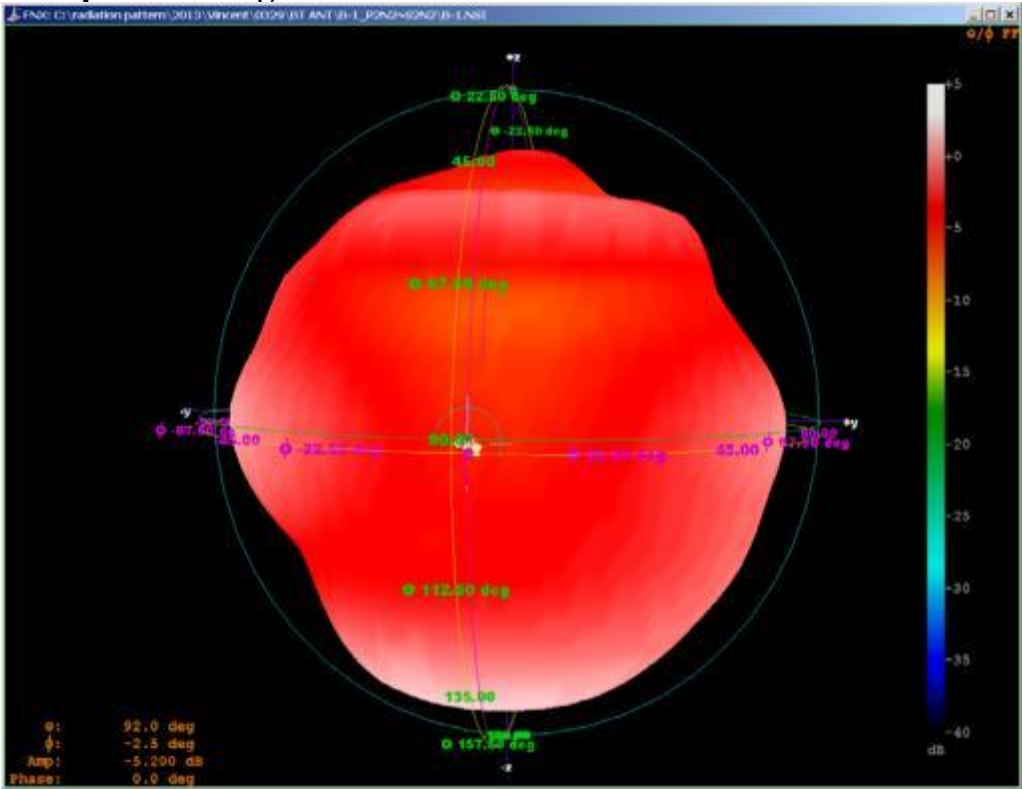

XY-plane

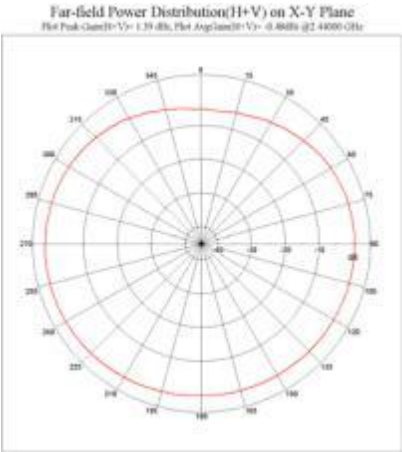

XZ-plane

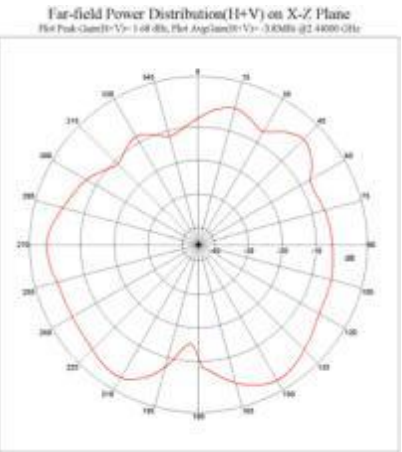

YZ-plane

