



RF MEASUREMENT REPORT

FCC ID: SFKWF196

Applicant: CIG Shanghai Co., Ltd.

Product: Tri-band 4x4 Wi-Fi 6E Wireless AP

Model No.: WF-196, API7340

Brand Name: CIG, Actiontec

FCC Classification: 15E 6GHz Low Power Indoor Access Point (6ID)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Test Date: 2022-08-05 ~ 2022-08-22

Reviewed By:



Kevin Guo

Approved By:



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2207RSU033-U5	Rev. 01	Initial Report	2022-09-02	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Antenna Details	9
2. Test Configuration	11
2.1. Test Mode	11
2.2. Test System Connection Diagram	11
2.3. Test Software	12
2.4. Applied Standards	12
2.5. Test Environment Condition	12
3. Antenna Requirements	13
4. Measuring Instrument	14
5. Decision Rules and Measurement Uncertainty	15
5.1. Decision Rules	15
5.2. Measurement Uncertainty	15
6. Test Result	16
6.1. Summary	16
6.2. 26dB & 99% Bandwidth Measurement	17
6.2.1. Test Limit	17
6.2.2. Test Procedure	17
6.2.3. Test Setting	17
6.2.4. Test Setup	18
6.2.5. Test Result	18
6.3. Output Power Measurement	19
6.3.1. Test Limit	19
6.3.2. Test Procedure	19
6.3.3. Test Setting	19
6.3.4. Test Setup	19
6.3.5. Test Result	19
6.4. Power Spectral Density Measurement	20
6.4.1. Test Limit	20
6.4.2. Test Procedure	20

6.4.3.	Test Setting	20
6.4.4.	Test Setup.....	20
6.4.5.	Test Result.....	21
6.5.	In-Band Emission Measurement	22
6.5.1.	Test Limit	22
6.5.2.	Test Procedure	22
6.5.3.	Test Setting	22
6.5.4.	Test Setup.....	23
6.5.5.	Test Result.....	23
6.6.	Frequency Stability Measurement.....	24
6.6.1.	Test Limit	24
6.6.2.	Test Procedure	24
6.6.3.	Test Setup.....	24
6.6.4.	Test Result.....	25
6.7.	Contention Based Protocol Measurement	26
6.7.1.	Test Limit	26
6.7.2.	Test Procedure	26
6.7.3.	Test Setting	26
6.7.4.	Test Setup.....	27
6.7.5.	Test Result.....	27
6.8.	Radiated Spurious Emission Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Procedure	28
6.8.3.	Test Setting	29
6.8.4.	Test Setup.....	30
6.8.5.	Test Result.....	31
6.9.	Radiated Restricted Band Edge Measurement.....	32
6.9.1.	Test Limit	32
6.9.2.	Test Procedure	33
6.9.3.	Test Setting	33
6.9.4.	Test Setup.....	34
6.9.5.	Test Result.....	34
6.10.	AC Conducted Emissions Measurement.....	35
6.10.1.	Test Limit	35
6.10.2.	Test Setup.....	35
6.10.3.	Test Result.....	35
Appendix A – Test Result.....		36
A.1	Duty Cycle Test Result	36
A.2	26dB & 99% Bandwidth Test Result	37

A.3	Output Power Test Result	48
A.4	Power Spectral Density Test Result.....	50
A.5	In-Band Emission Measurement	88
A.6	Frequency Stability Test Result	152
A.7	Contention Based Protocol Test Result.....	153
A.8	Radiated Spurious Emission Test Result	161
A.9	Radiated Restricted Band Edge Test Result	206
A.10	AC Conducted Emissions Test Result.....	238
Appendix B – Test Setup Photograph		240
Appendix C – EUT Photograph		241

1. General Information

1.1. Applicant

CIG Shanghai Co., Ltd.

5F, Building 8, NO.2388 CHENGHANG ROAD, MINHANG DISTRTCT, SHANGHAI

1.2. Manufacturer

CIG Shanghai Co., Ltd.

5F, Building 8, NO.2388 CHENGHANG ROAD, MINHANG DISTRICT, SHANGHAI

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166 VCCI:
	CNAS: L10551 ISED: CN0001 ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
	CNAS: L10551 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261
	ISED: TW3261

1.4. Product Information

Product Name	Tri-band 4x4 Wi-Fi 6E Wireless AP
Model No.	WF-196, API7340
EUT Identification No.	20220719Sample#05 (Conducted) 20220719Sample#08 (Radiated)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	V5.0 (BLE only)
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: - The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. - Different models correspond to different brands, and the others are exactly the same.	

1.5. Radio Specification under Test

Frequency Range	For 802.11ax-HE20: 5955 ~ 7095MHz For 802.11ax-HE40: 5965 ~ 7085MHz For 802.11ax-HE80: 5985 ~ 7025MHz For 802.11ax-HE160: 6025 ~ 6985MHz
Type of Modulation	802.11ax: OFDMA
Data Rate	802.11ax: up to 4804Mbps

1.6. Working Frequencies

802.11ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	5955 MHz	05	5975 MHz	09	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
07	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency (MHz)	TX Path	Antenna Gain (dBi)				Directional Gain (dBi)	
			Ant 0	Ant 1	Ant 2	Ant 3	Correlated	Uncorrelated
Wi-Fi Antenna								
PIFA	2412 ~ 2462	4	4.1	3.2	4.4	3.7	8.3	2.3
	5150 ~ 5850	4	4.4	4.2	3.7	4.1	9.0	3.0
	5925 ~ 7125	4	6.6	6.2	3.3	6.1	8.8	3.1
Bluetooth Antenna								
PIFA	2402 ~ 2480	1	4.2				--	

Remark:

- The antenna gain and directional gain refer to manufacturer's antenna specification.
- The device supports CDD Mode and STBC mode, details refer to the table as below.
- CDD signals are correlated, the directional gain as follows,
For power measurements: Array Gain = 0 dB for $N_{ANT} \leq 4$, the directional gain = max antenna gain + array gain
For power spectral density (PSD) measurements: the max directional gain (each angle) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
- STBC signals are uncorrelated, the directional gain as follows,
the max directional gain (each angle) = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$

Test Mode	T _x Paths	CDD Mode	STBC Mode
Wi-Fi 2.4G			
802.11b/g	4	√	X
802.11n/ax	4	X	√
Wi-Fi 5G			
802.11a	4	√	X
802.11n/ac/ax	4	X	√
Wi-Fi 5G			
802.11ax	4	X	√
Remark: “√” means “Support”, “X” means “Not support”.			

2.


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11ax-HE20 (MCS11) _ Nss=4 (STBC Mode)
Mode 2: Transmit by 802.11ax-HE40 (MCS11) _ Nss=4 (STBC Mode)
Mode 3: Transmit by 802.11ax-HE80 (MCS11) _ Nss=4 (STBC Mode)
Mode 4: Transmit by 802.11 ax-HE160 (MCS0) _ Nss=4 (STBC Mode)
emark:
1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
2. EUT supports one configuration only in 802.11ax full RU mode.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

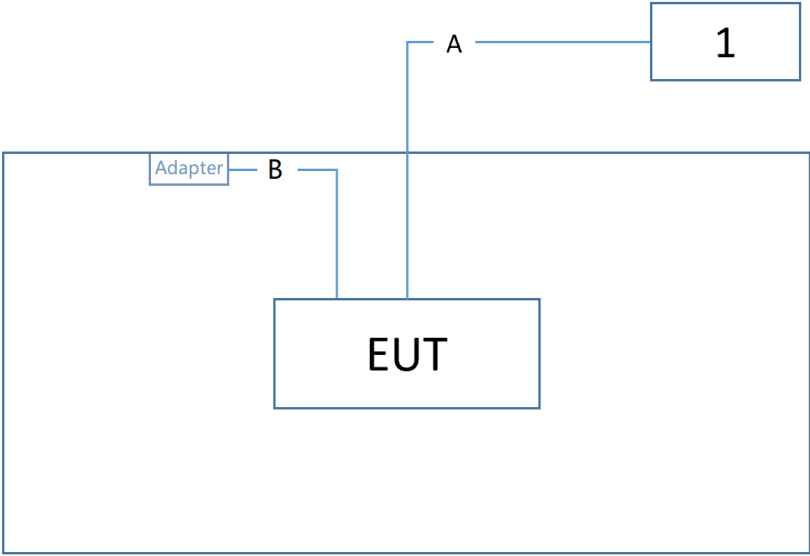Connection Diagram – Radiated Emission testing & AC Conducted Emissions			
			
No.	Cable Type	Cable Spec.	Length
A	LAN Cable	Non-Shielded	>10 m
B	LAN Cable	Non-Shielded	1.2m
No.	Product	Manufacturer	Model No.
1	Adapter	Shenzhen Honor Electronic Co., Ltd	ADT-38FKJ-PCU00F
2	Notebook	Lenovo	E431

Note: Adapter is provided by manufacturer for test only, it will not be sold with product.

2.3. Test Software

The test utility software used during testing was “QRCT”, and the version was 4.0.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v01
- FCC KDB 987594 D04v01
- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.407(a)(9) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
USB Power Sensor	Keysight	U2021XA	MRTSUE06581	1 year	2023-07-13	NS-TR2
Thermohygrometer	DELI	NO.8813	MRTSUE06783	1 year	2023-04-14	NS-TR2
Temperature Chamber	OUKE	OK-TH-100C	MRTSUE06899	1 year	2023-07-13	NS-TR2
Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2023-04-13	NS-TR2
Signal Analyzer	Keysight	N9020A	MRTSUE10065	1 year	2023-01-11	NS-TR2
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2023-04-06	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5
Frequency extender for EXG or MXG	Keysight	N5182BX07	MRTSUE06984	1 year	2023-03-03	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06451	1 year	2023-07-08	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06993	1 year	2022-09-10	WZ-SR5
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022-12-29	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2022-09-16	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2022-11-12	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2023-06-21	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2023-04-21	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2023-06-06	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022-12-29	WZ-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11039	1 year	2022-11-11	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022-12-01	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023-01-13	WZ-AC1
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2023-06-04	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	N/A	N/A	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2023-06-06	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2022-10-13	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022-11-01	WZ-SR2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
BenchVue Power Meter	2021	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(a)(5), (a)(6)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P)		Pass
15.407(a)(5), (a)(6)	Peak Power Spectral Density (E.I.R.P)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(g)	Frequency Stability		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(8), (9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode, and then choose the maximum power output for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

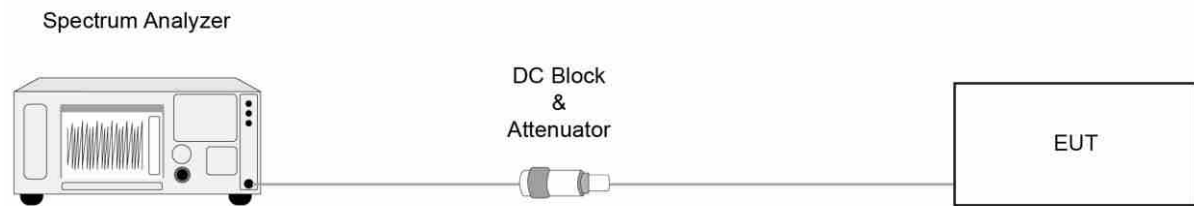

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

6.3.2. Test Procedure

KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup



6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

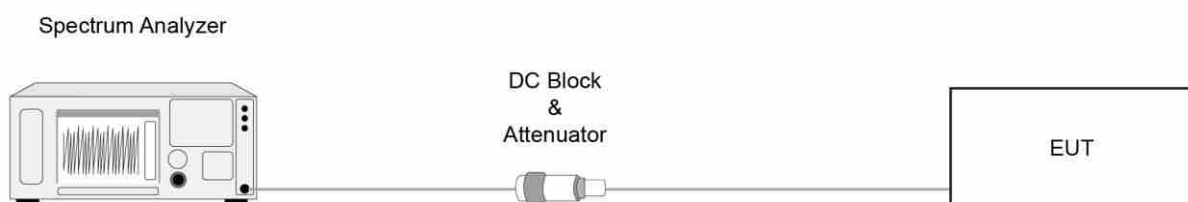

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02v01r01- Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

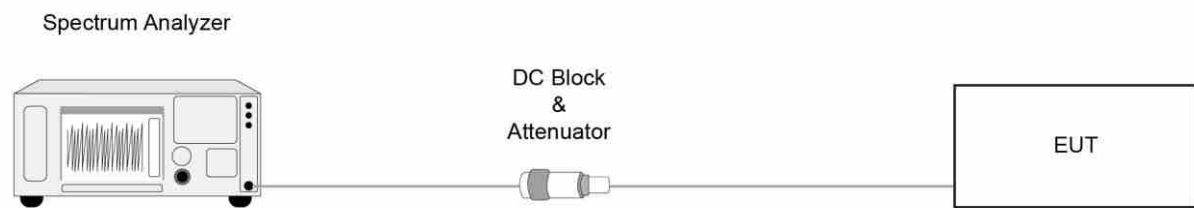

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

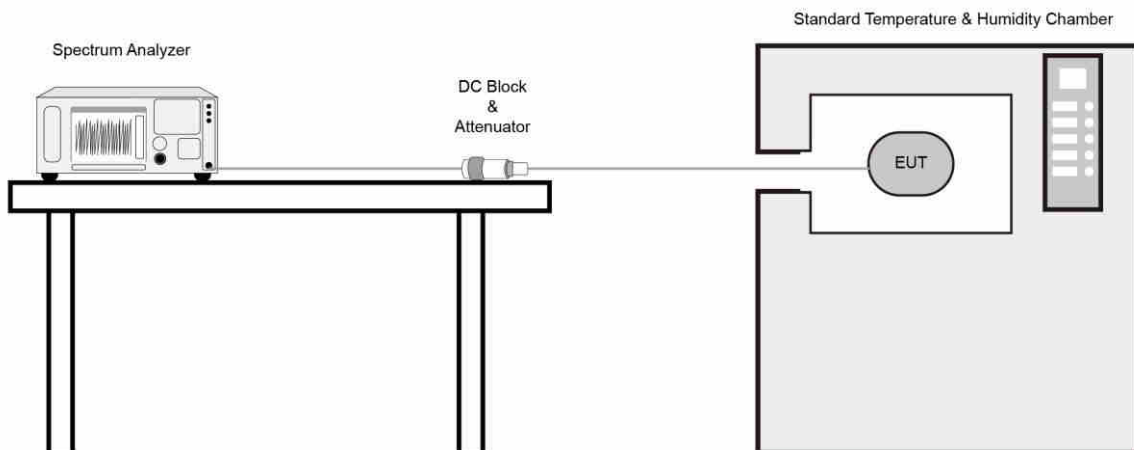

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure


KDB 987594 D02v01- Section I

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be

repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

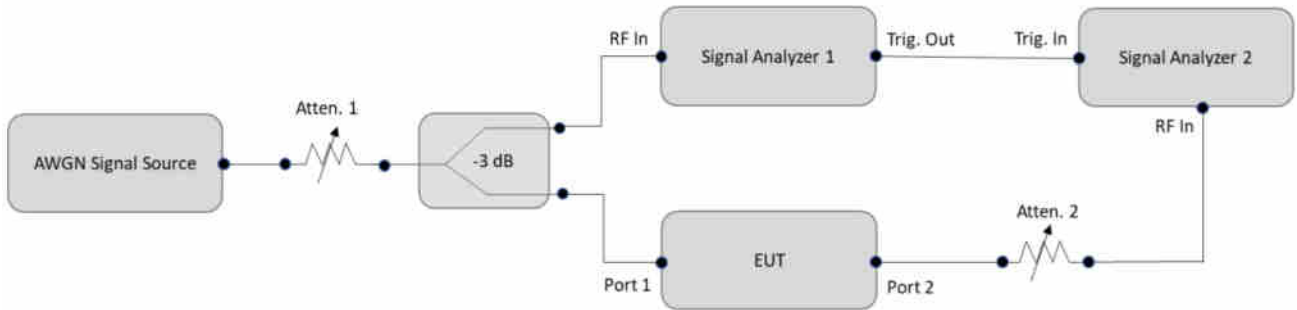

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold


7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

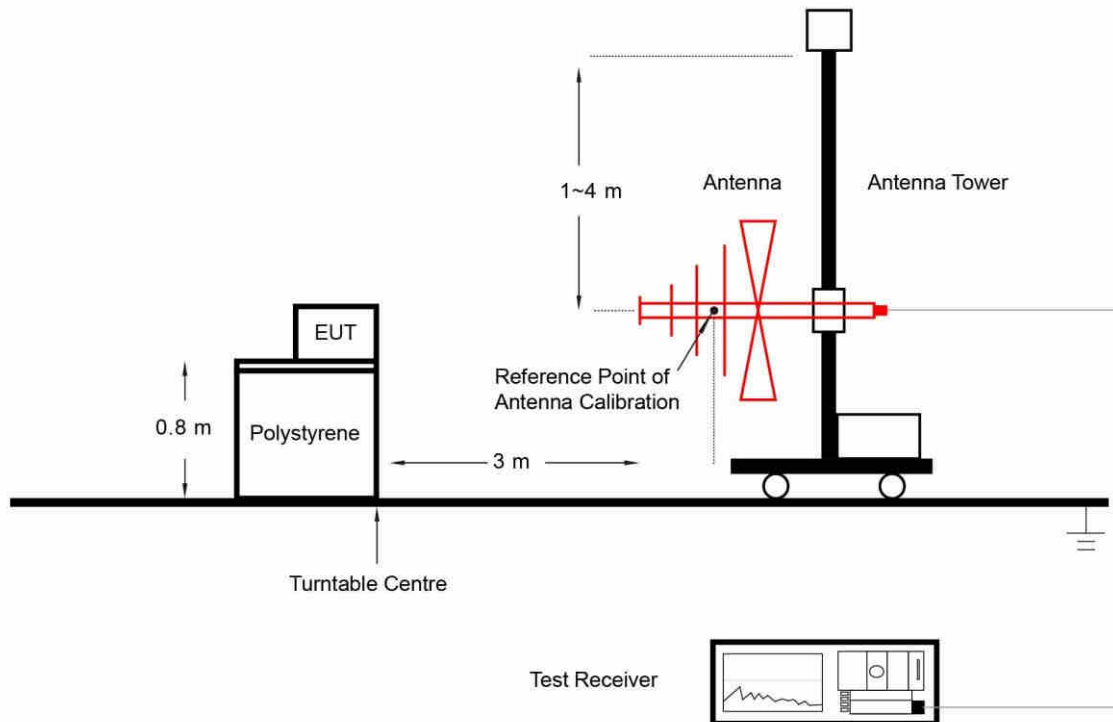

Above 1GHz Test Setup:

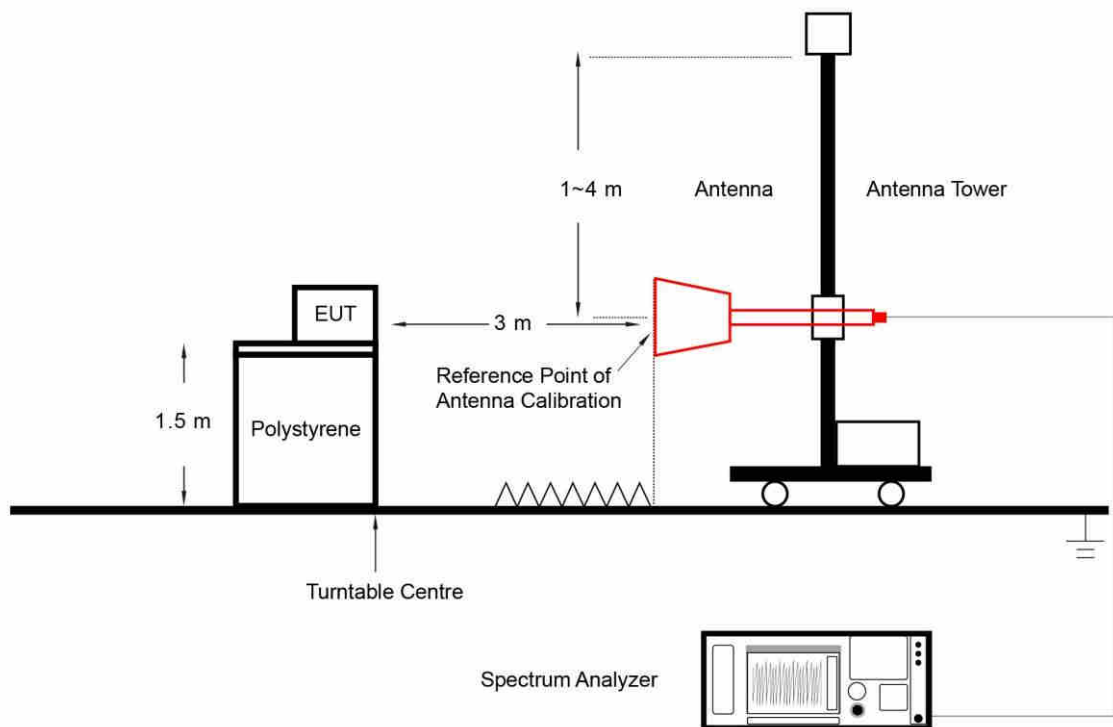

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

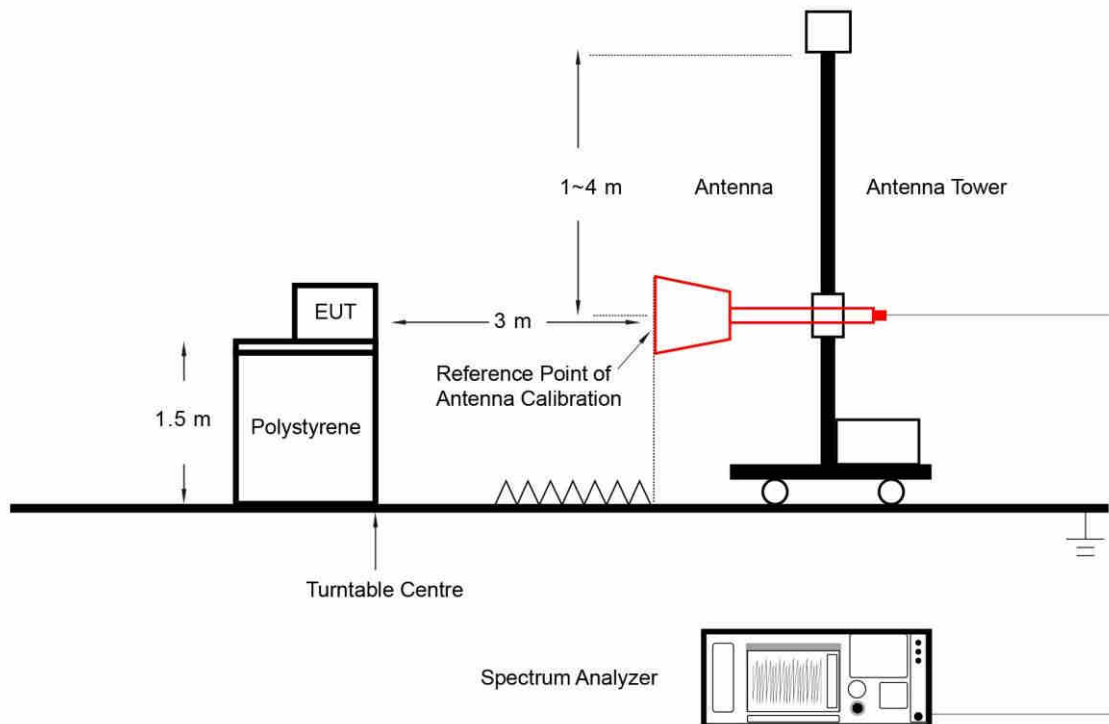

6.9.5. Test Result

Refer to Appendix A.9.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

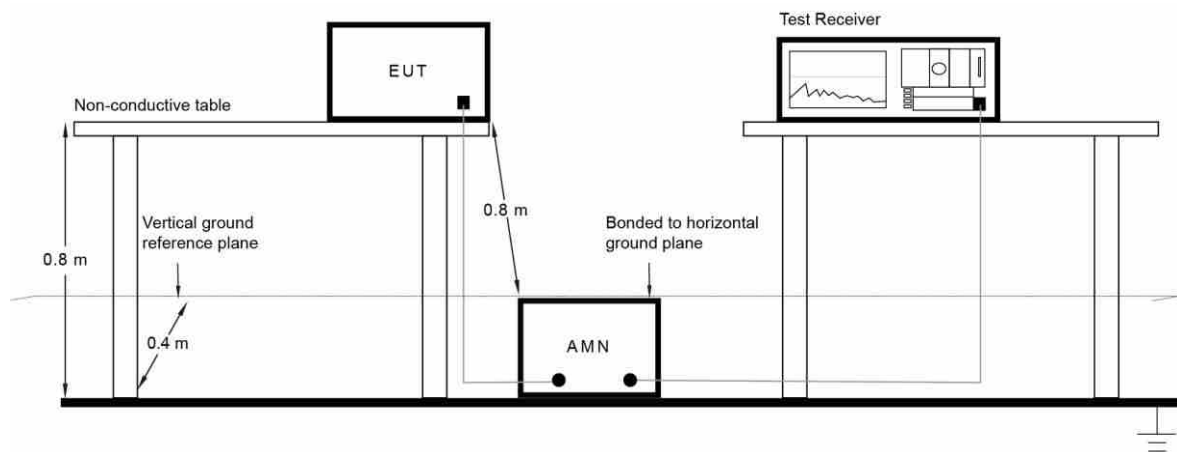

6.10.3. Test Result


Refer to Appendix A.10.


Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Mode	Duty Cycle
802.11ax-HE20	85.55%
802.11ax-HE40	93.77%
802.11ax-HE80	92.56%
802.11ax-HE160	93.32%


Duty Cycle (T = Transmission Duration)	
802.11ax-HE20 (T = 5.415ms)	802.11ax-HE40 (T = 5.415ms)

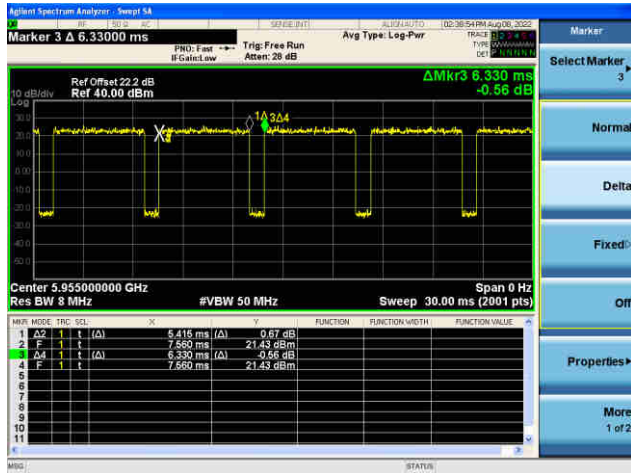

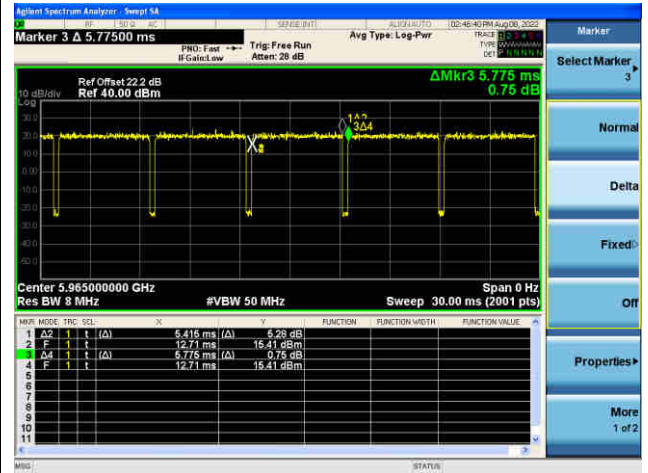

802.11ax-HE80 (T = 5.415ms)	802.11ax-HE160 (T = 5.445ms)
-----------------------------	------------------------------

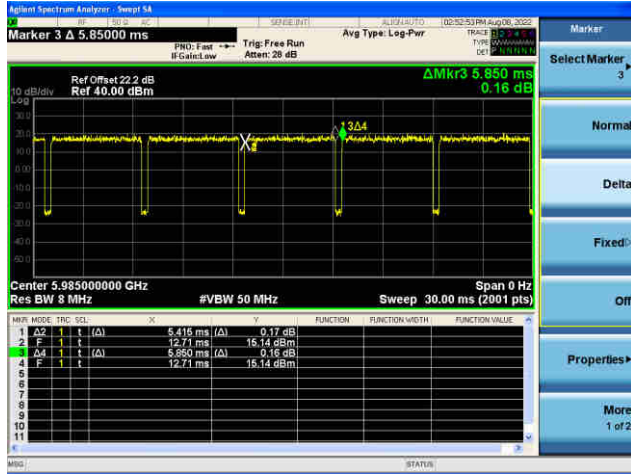

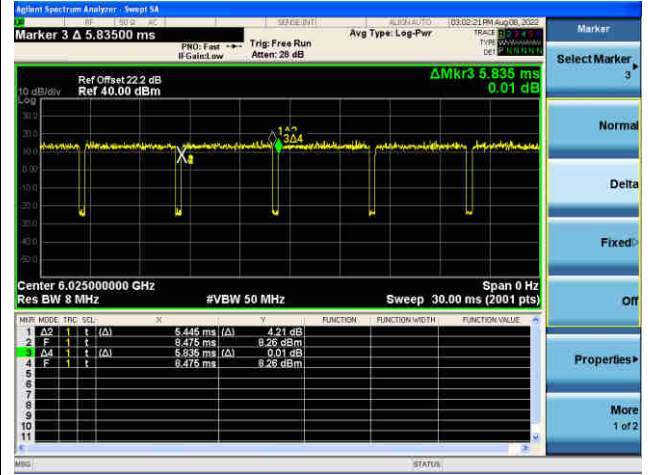

A.2 26dB & 99% Bandwidth Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2022-08-10		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ax-HE20	MCS11	1	5955	21.84	19.035
802.11ax-HE20	MCS11	49	6195	21.69	19.033
802.11ax-HE20	MCS11	93	6415	21.64	19.057
802.11ax-HE20	MCS11	97	6435	21.82	19.012
802.11ax-HE20	MCS11	105	6475	21.54	19.052
802.11ax-HE20	MCS11	113	6515	21.48	19.042
802.11ax-HE20	MCS11	117	6535	21.59	19.056
802.11ax-HE20	MCS11	149	6695	21.51	19.030
802.11ax-HE20	MCS11	181	6855	21.82	19.044
802.11ax-HE20	MCS11	185	6875	21.60	19.018
802.11ax-HE20	MCS11	189	6895	21.56	19.004
802.11ax-HE20	MCS11	209	6995	21.93	19.032
802.11ax-HE20	MCS11	229	7095	21.65	19.043
802.11ax-HE40	MCS11	3	5965	42.81	37.916
802.11ax-HE40	MCS11	51	6205	43.04	38.002
802.11ax-HE40	MCS11	91	6405	43.17	37.916
802.11ax-HE40	MCS11	99	6445	42.80	37.881
802.11ax-HE40	MCS11	107	6485	42.72	37.867
802.11ax-HE40	MCS11	115	6525	42.18	37.927
802.11ax-HE40	MCS11	123	6565	42.40	37.902
802.11ax-HE40	MCS11	147	6685	42.38	37.920
802.11ax-HE40	MCS11	187	6885	42.79	37.891
802.11ax-HE40	MCS11	195	6925	43.06	37.954
802.11ax-HE40	MCS11	211	7005	42.44	37.936
802.11ax-HE40	MCS11	227	7085	42.42	37.919


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ax-HE80	MCS11	7	5985	87.48	77.578
802.11ax-HE80	MCS11	55	6225	88.54	77.693
802.11ax-HE80	MCS11	87	6385	88.75	77.691
802.11ax-HE80	MCS11	103	6465	88.77	77.676
802.11ax-HE80	MCS11	119	6545	88.39	77.718
802.11ax-HE80	MCS11	135	6625	90.03	77.729
802.11ax-HE80	MCS11	151	6705	87.72	77.637
802.11ax-HE80	MCS11	167	6785	87.42	77.730
802.11ax-HE80	MCS11	183	6865	88.08	77.540
802.11ax-HE80	MCS11	199	6945	87.97	77.615
802.11ax-HE80	MCS11	215	7025	88.67	77.659
802.11ax-HE160	MCS0	15	6025	165.80	154.61
802.11ax-HE160	MCS0	47	6185	163.60	154.44
802.11ax-HE160	MCS0	79	6345	162.30	154.80
802.11ax-HE160	MCS0	111	6505	163.80	154.63
802.11ax-HE160	MCS0	143	6665	163.30	154.52
802.11ax-HE160	MCS0	175	6825	163.30	154.88
802.11ax-HE160	MCS0	207	6985	164.00	153.89

802.11ax-HE20 26dB Bandwidth


Channel 1 (5955MHz)




Channel 49 (6195MHz)

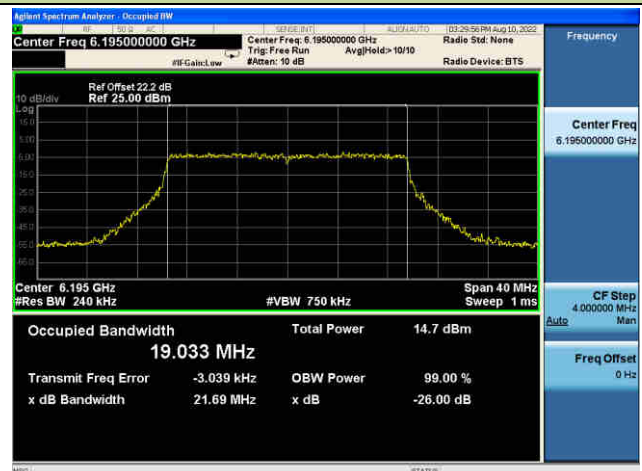

Channel 93 (6415MHz)

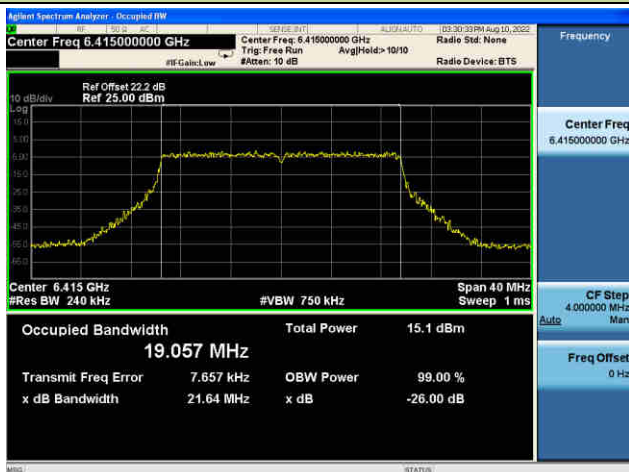


Channel 97 (6435MHz)

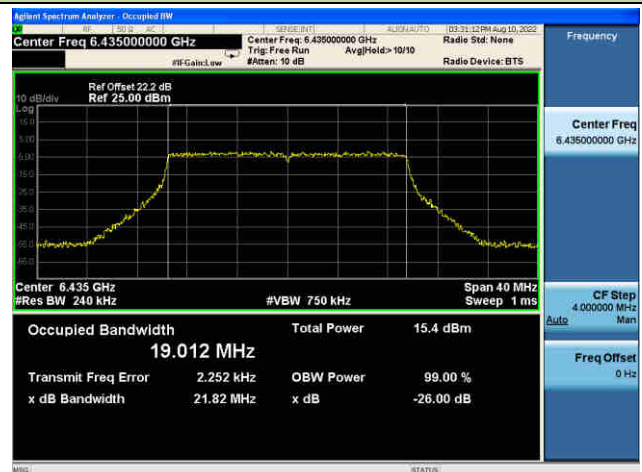

Channel 105 (6475MHz)




Channel 113 (6515MHz)

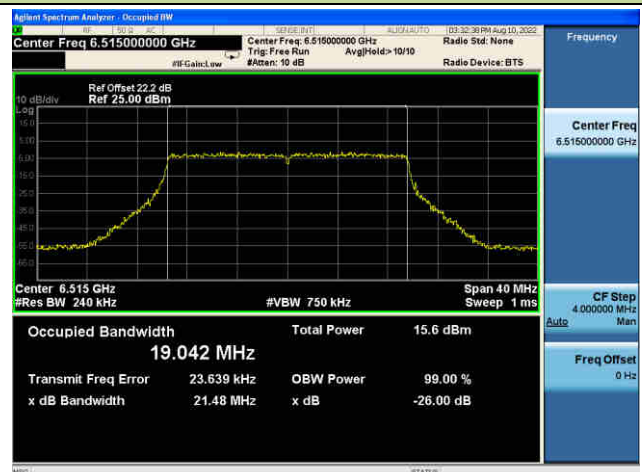


802.11ax-HE20 26dB Bandwidth

Channel 117 (6535MHz)

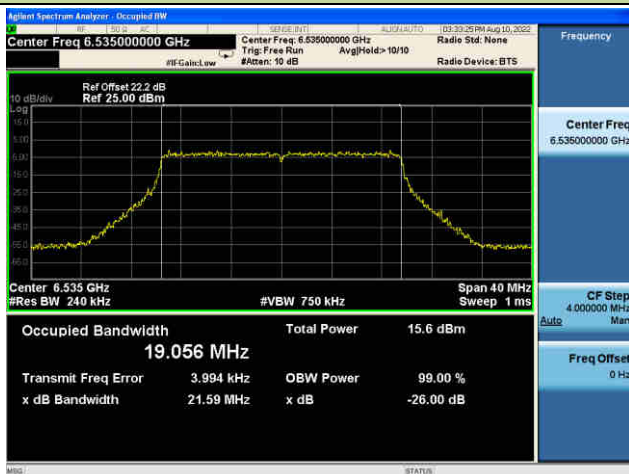

Channel 149 (6695MHz)

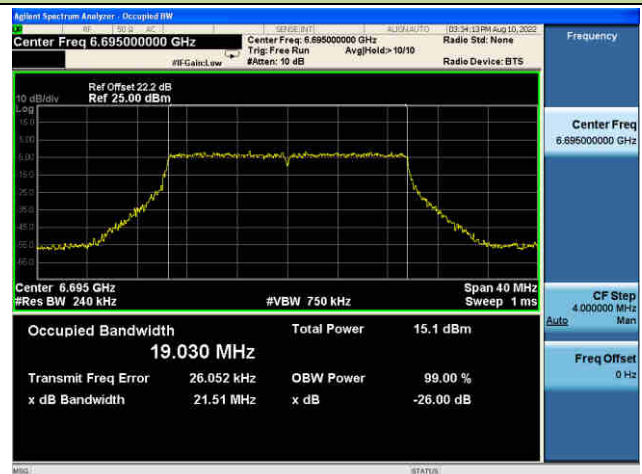


Channel 181 (6855MHz)




Channel 185 (6875MHz)




Channel 189 (6895MHz)

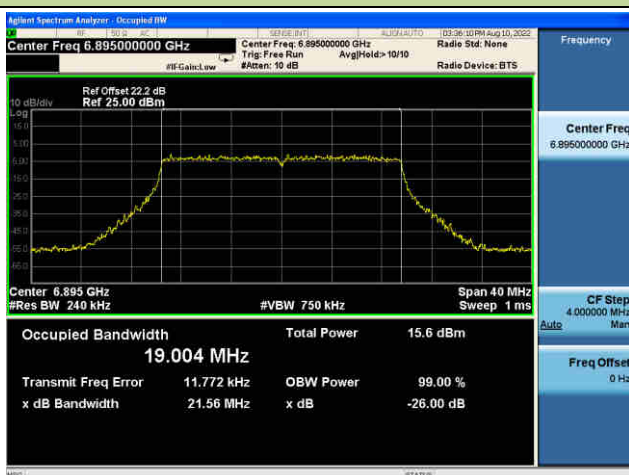

Channel 209 (6995MHz)

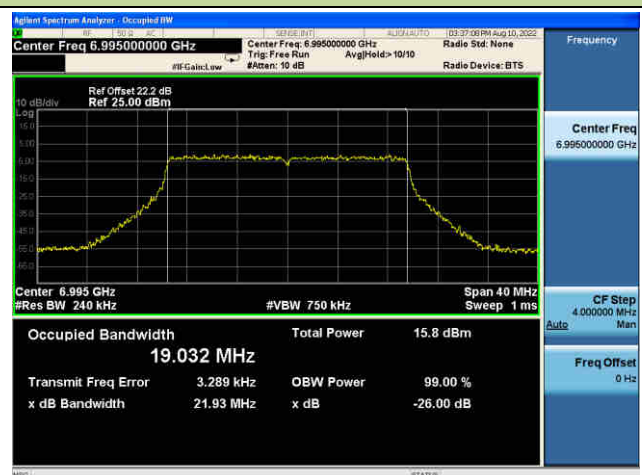

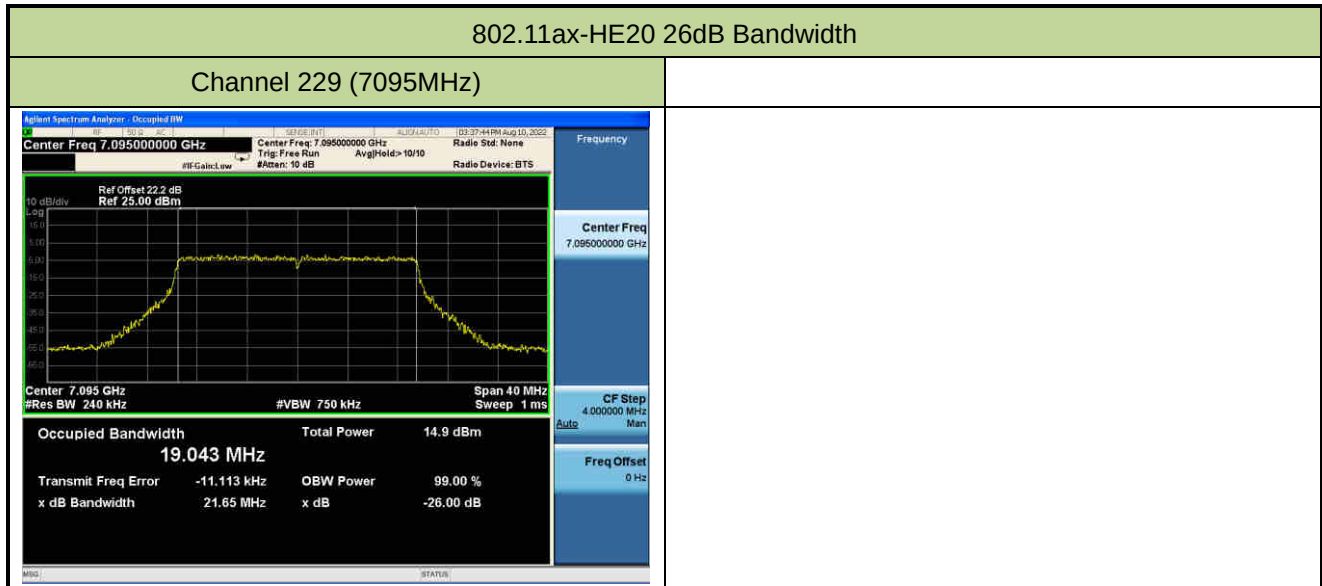


802.11ax-HE40 26dB Bandwidth

Channel 3 (5965MHz)




Channel 51 (6205MHz)

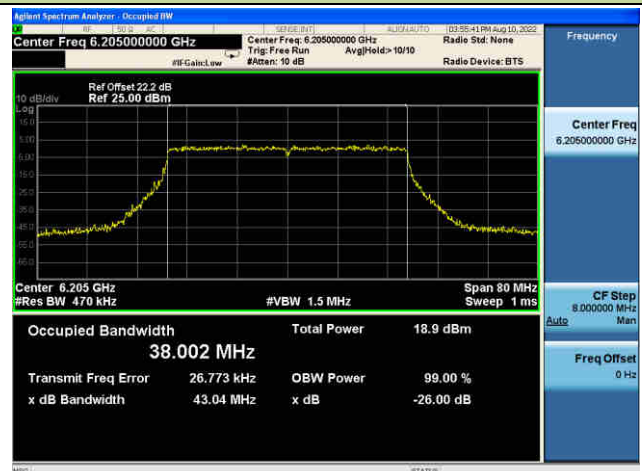

Channel 91 (6405MHz)



Channel 99 (6445MHz)

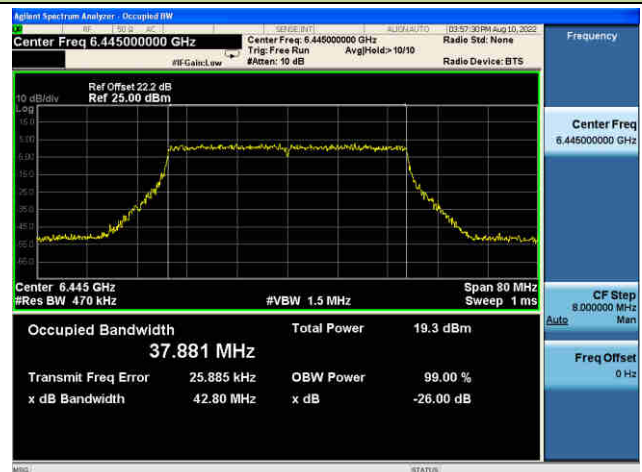

Channel 107 (6485MHz)



Channel 115 (6525MHz)



802.11ax-HE40 26dB Bandwidth


Channel 123 (6565MHz)



Channel 147 (6685MHz)




Channel 187 (6885MHz)

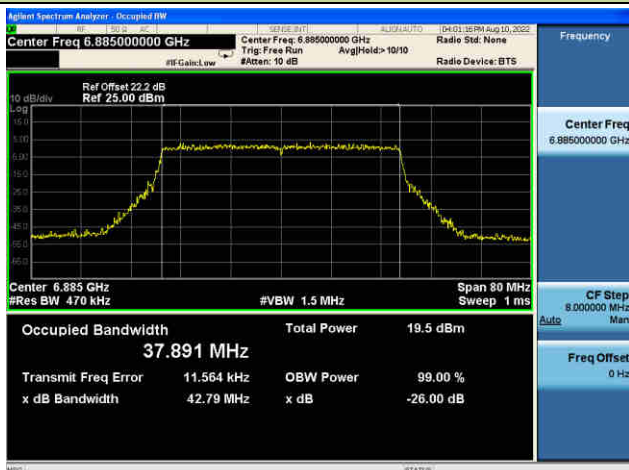


Channel 195 (6925MHz)



Channel 211 (7005MHz)

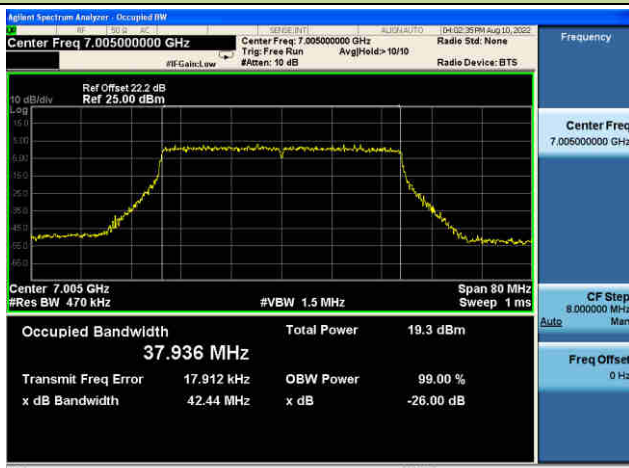


Channel 227 (7085MHz)

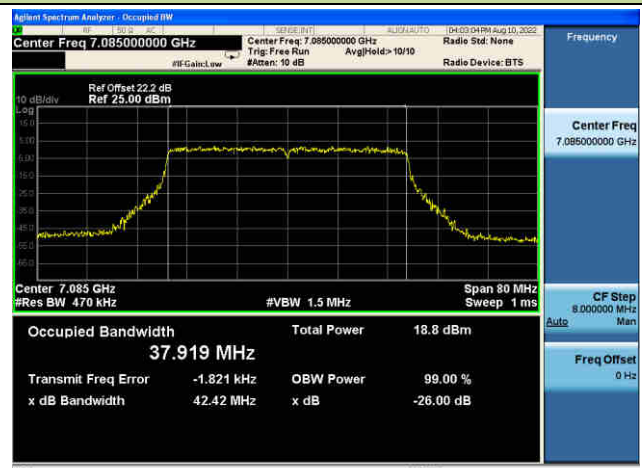


802.11ax-HE80 26dB Bandwidth


Channel 7 (5985MHz)

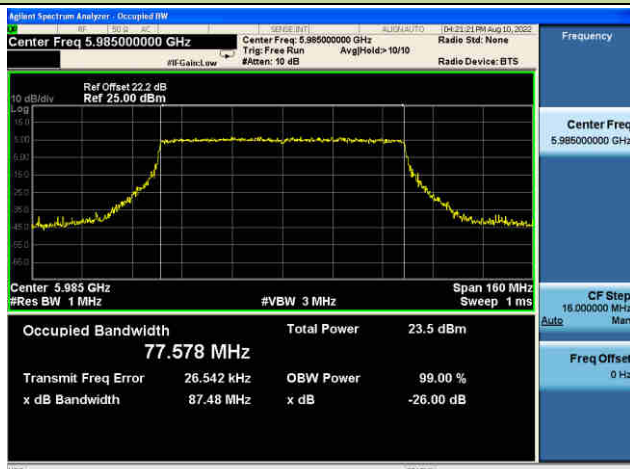


Channel 55 (6225MHz)

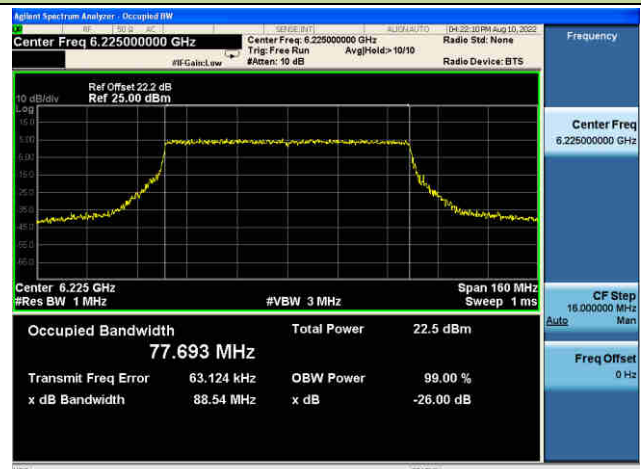


Channel 87 (6385MHz)

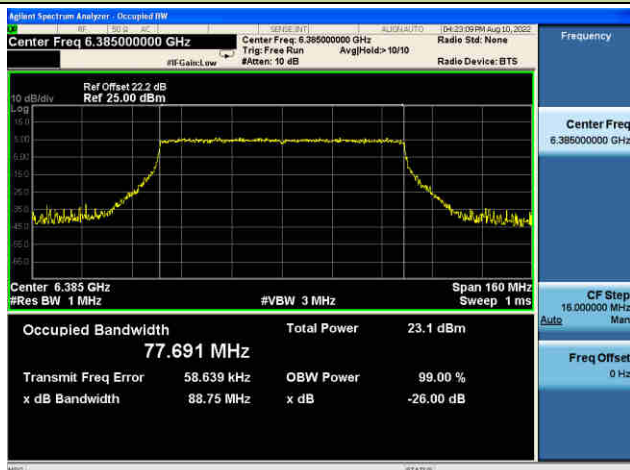


Channel 103 (6465MHz)

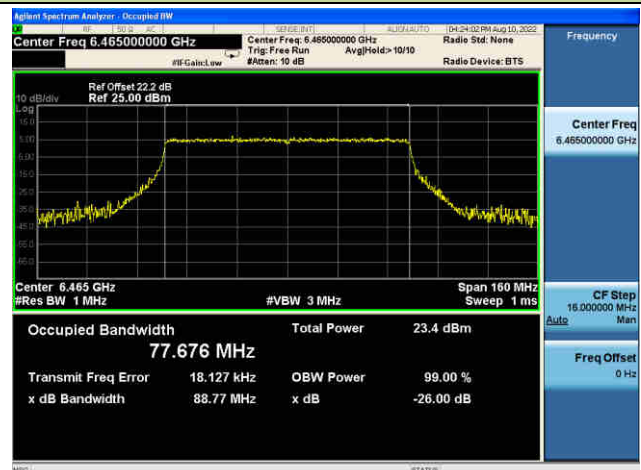

Channel 119 (6545MHz)

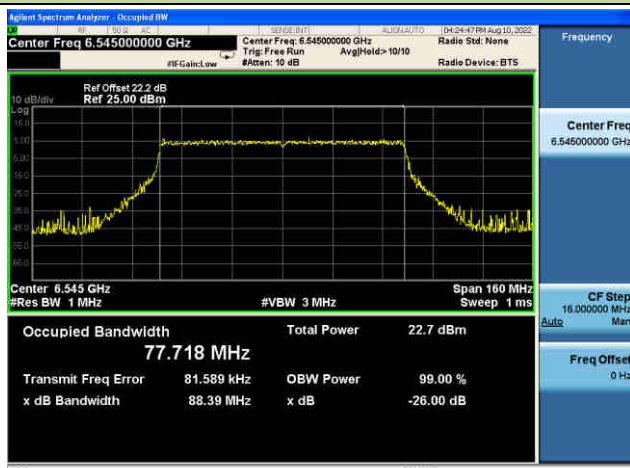


Channel 135 (6625MHz)

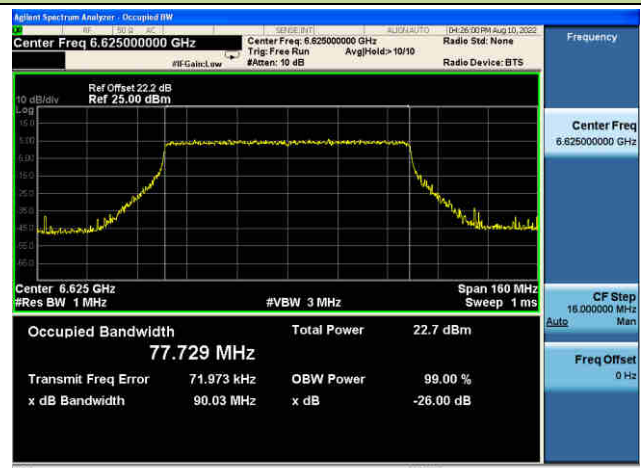


802.11ax-HE80 26dB Bandwidth


Channel 151 (6705MHz)

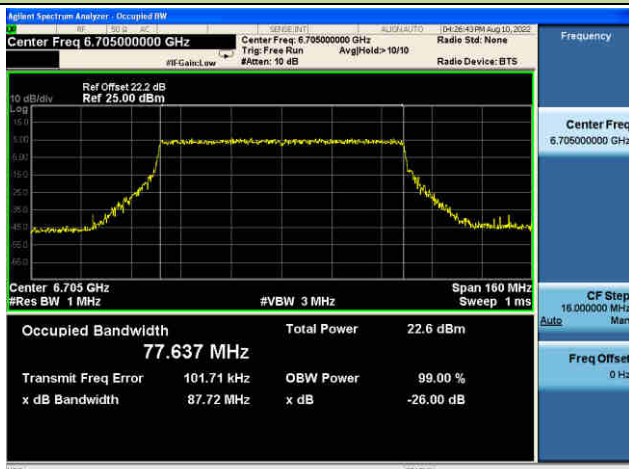

Channel 167 (6785MHz)

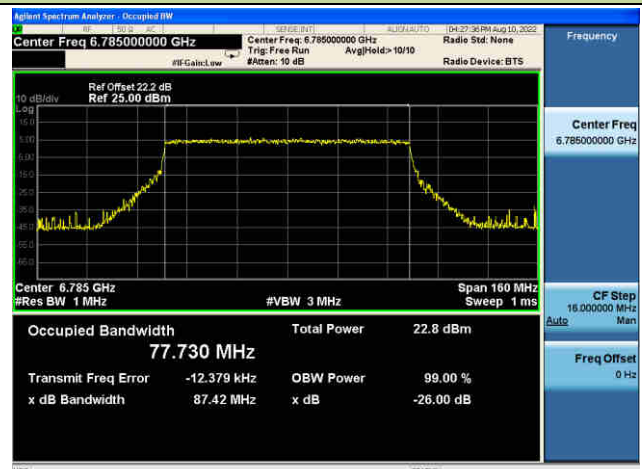


Channel 183 (6865MHz)

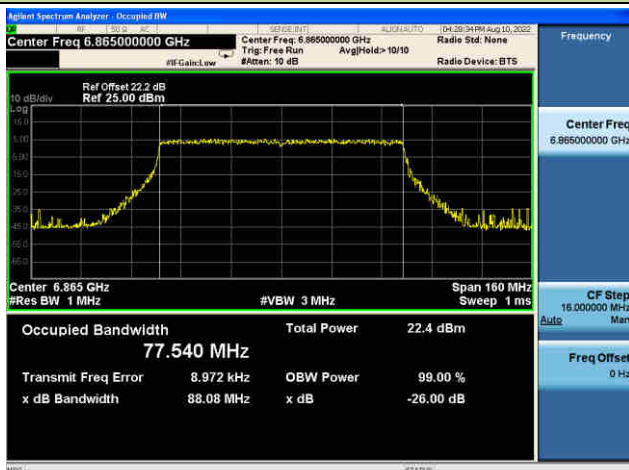

Channel 199 (6945MHz)



Channel 215 (7025MHz)

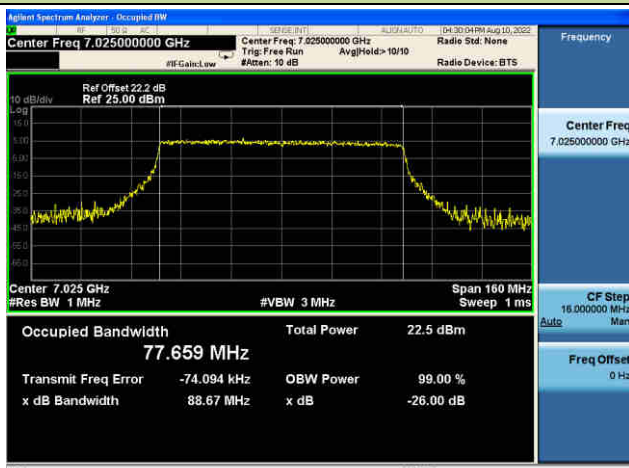


802.11ax-HE160 26dB Bandwidth

Channel 15 (6025MHz)




Channel 47 (6185MHz)

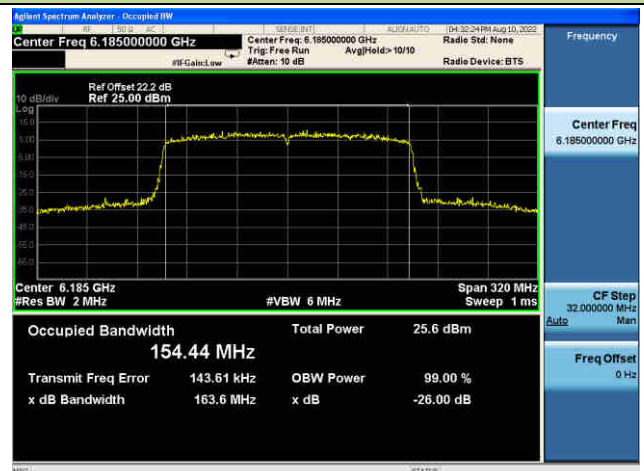


Channel 79 (6345MHz)




Channel 111 (6505MHz)

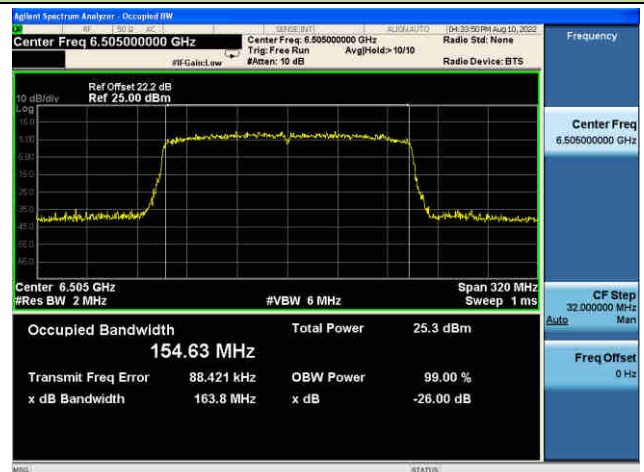


Channel 143 (6665MHz)

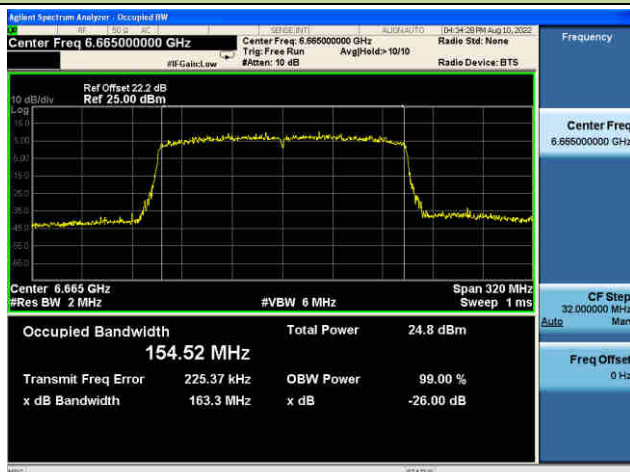

Channel 175 (6825MHz)

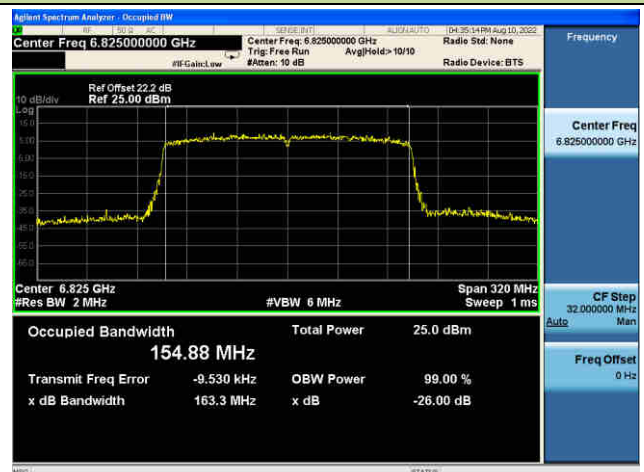

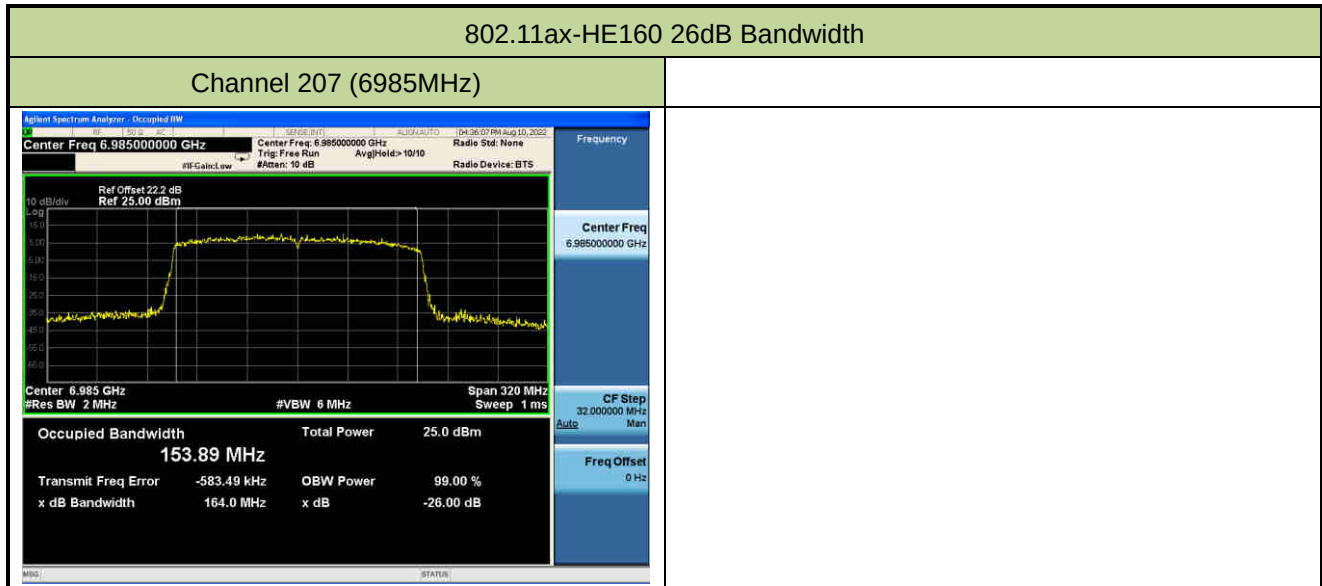

A.3 Output Power Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2022-08-08~2022-08-10		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3			
11ax-HE20	MCS11	1	5955	5.66	6.22	6.23	6.47	12.18	15.28	≤ 30.00
11ax-HE20	MCS11	49	6195	6.56	6.71	6.85	6.68	12.72	15.82	≤ 30.00
11ax-HE20	MCS11	93	6415	6.64	7.19	7.15	7.51	13.15	16.25	≤ 30.00
11ax-HE20	MCS11	97	6435	6.63	7.20	7.19	7.46	13.15	16.25	≤ 30.00
11ax-HE20	MCS11	105	6475	6.58	7.06	7.13	7.45	13.09	16.19	≤ 30.00
11ax-HE20	MCS11	113	6515	7.25	7.31	7.52	7.64	13.45	16.55	≤ 30.00
11ax-HE20	MCS11	117	6535	7.07	7.29	7.49	7.71	13.42	16.52	≤ 30.00
11ax-HE20	MCS11	149	6695	5.98	6.34	6.72	6.73	12.47	15.57	≤ 30.00
11ax-HE20	MCS11	181	6855	6.21	6.44	6.95	7.01	12.69	15.79	≤ 30.00
11ax-HE20	MCS11	185	6875	6.22	6.36	6.97	7.04	12.68	15.78	≤ 30.00
11ax-HE20	MCS11	189	6895	5.78	6.32	6.78	6.83	12.47	15.57	≤ 30.00
11ax-HE20	MCS11	209	6995	5.95	6.47	6.80	6.92	12.57	15.67	≤ 30.00
11ax-HE20	MCS11	229	7095	5.80	6.34	6.93	7.11	12.60	15.70	≤ 30.00
11ax-HE40	MCS11	3	5965	8.96	9.61	10.03	9.91	15.67	18.77	≤ 30.00
11ax-HE40	MCS11	51	6205	9.44	9.88	10.06	9.69	15.79	18.89	≤ 30.00
11ax-HE40	MCS11	91	6405	10.62	11.01	10.96	11.40	17.03	20.13	≤ 30.00
11ax-HE40	MCS11	99	6445	9.88	10.53	10.89	11.05	16.63	19.73	≤ 30.00
11ax-HE40	MCS11	107	6485	10.44	10.71	11.16	11.12	16.89	19.99	≤ 30.00
11ax-HE40	MCS11	115	6525	10.60	10.54	10.87	10.95	16.76	19.86	≤ 30.00
11ax-HE40	MCS11	123	6565	10.53	10.83	10.95	11.25	16.92	20.02	≤ 30.00
11ax-HE40	MCS11	147	6685	9.15	10.02	10.20	10.22	15.94	19.04	≤ 30.00
11ax-HE40	MCS11	187	6885	9.29	10.15	10.30	10.52	16.11	19.21	≤ 30.00
11ax-HE40	MCS11	195	6925	9.37	10.19	10.29	10.48	16.12	19.22	≤ 30.00
11ax-HE40	MCS11	211	7005	9.72	9.92	10.35	10.50	16.15	19.25	≤ 30.00
11ax-HE40	MCS11	227	7085	9.51	9.97	10.52	10.62	16.20	19.30	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3			
11ax-HE80	MCS11	7	5985	12.58	13.08	13.20	13.47	19.11	22.21	≤ 30.00
11ax-HE80	MCS11	55	6225	13.01	13.53	13.65	13.45	19.44	22.54	≤ 30.00
11ax-HE80	MCS11	87	6385	13.30	13.47	13.74	13.91	19.63	22.73	≤ 30.00
11ax-HE80	MCS11	103	6465	13.62	13.87	14.17	14.28	20.01	23.11	≤ 30.00
11ax-HE80	MCS11	119	6545	13.80	13.59	13.90	13.89	19.82	22.92	≤ 30.00
11ax-HE80	MCS11	135	6625	12.53	13.19	13.40	13.32	19.14	22.24	≤ 30.00
11ax-HE80	MCS11	151	6705	12.19	12.84	13.26	13.19	18.91	22.01	≤ 30.00
11ax-HE80	MCS11	167	6785	12.51	13.33	13.50	13.44	19.23	22.33	≤ 30.00
11ax-HE80	MCS11	183	6865	12.39	13.07	13.25	13.31	19.04	22.14	≤ 30.00
11ax-HE80	MCS11	199	6945	12.60	13.11	13.28	13.56	19.17	22.27	≤ 30.00
11ax-HE80	MCS11	215	7025	12.49	13.02	13.34	13.46	19.11	22.21	≤ 30.00
11ax-HE160	MCS0	15	6025	14.61	14.84	14.95	15.21	20.93	24.03	≤ 30.00
11ax-HE160	MCS0	47	6185	15.73	16.05	15.94	15.59	21.85	24.95	≤ 30.00
11ax-HE160	MCS0	79	6345	16.05	16.51	16.61	16.82	22.53	25.63	≤ 30.00
11ax-HE160	MCS0	111	6505	15.80	15.84	16.33	16.14	22.05	25.15	≤ 30.00
11ax-HE160	MCS0	143	6665	14.61	15.55	15.67	15.38	21.34	24.44	≤ 30.00
11ax-HE160	MCS0	175	6825	14.67	15.33	15.52	15.69	21.34	24.44	≤ 30.00
11ax-HE160	MCS0	207	6985	15.02	15.27	15.87	15.75	21.51	24.61	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: EIRP Power (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2022-08-08~2022-08-10		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
802.11ax-HE20	MCS11	1	5955	-5.521	-5.226	-5.175	-4.939	85.55	4.59	≤ 5.00
802.11ax-HE20	MCS11	49	6195	-5.046	-5.063	-4.950	-5.184	85.55	4.74	≤ 5.00
802.11ax-HE20	MCS11	93	6415	-5.535	-5.163	-5.150	-4.914	85.55	4.61	≤ 5.00
802.11ax-HE20	MCS11	97	6435	-5.694	-5.184	-5.230	-4.947	85.55	4.54	≤ 5.00
802.11ax-HE20	MCS11	105	6475	-5.790	-5.272	-5.269	-5.074	85.55	4.46	≤ 5.00
802.11ax-HE20	MCS11	113	6515	-5.111	-5.090	-4.888	-4.810	85.55	4.83	≤ 5.00
802.11ax-HE20	MCS11	117	6535	-5.157	-5.042	-4.801	-4.785	85.55	4.86	≤ 5.00
802.11ax-HE20	MCS11	149	6695	-5.492	-5.116	-4.898	-4.928	85.55	4.70	≤ 5.00
802.11ax-HE20	MCS11	181	6855	-5.385	-5.250	-4.664	-4.668	85.55	4.82	≤ 5.00
802.11ax-HE20	MCS11	185	6875	-5.444	-5.219	-4.645	-4.705	85.55	4.81	≤ 5.00
802.11ax-HE20	MCS11	189	6895	-5.846	-5.357	-4.720	-4.747	85.55	4.66	≤ 5.00
802.11ax-HE20	MCS11	209	6995	-5.589	-5.188	-4.795	-4.744	85.55	4.73	≤ 5.00
802.11ax-HE20	MCS11	229	7095	-6.157	-5.682	-5.129	-4.840	85.55	4.38	≤ 5.00
802.11ax-HE40	MCS11	3	5965	-5.461	-4.706	-4.564	-4.511	93.77	4.61	≤ 5.00
802.11ax-HE40	MCS11	51	6205	-5.259	-4.915	-4.760	-5.068	93.77	4.40	≤ 5.00
802.11ax-HE40	MCS11	91	6405	-5.157	-4.432	-4.602	-4.088	93.77	4.85	≤ 5.00
802.11ax-HE40	MCS11	99	6445	-5.563	-4.978	-4.795	-4.474	93.77	4.47	≤ 5.00
802.11ax-HE40	MCS11	107	6485	-5.076	-4.904	-4.442	-4.481	93.77	4.68	≤ 5.00
802.11ax-HE40	MCS11	115	6525	-5.224	-4.939	-4.602	-4.584	93.77	4.57	≤ 5.00
802.11ax-HE40	MCS11	123	6565	-5.110	-4.508	-4.279	-4.199	93.77	4.89	≤ 5.00
802.11ax-HE40	MCS11	147	6685	-5.536	-4.774	-4.499	-4.547	93.77	4.58	≤ 5.00
802.11ax-HE40	MCS11	187	6885	-5.647	-4.698	-4.625	-4.309	93.77	4.61	≤ 5.00
802.11ax-HE40	MCS11	195	6925	-5.308	-4.530	-4.437	-4.194	93.77	4.80	≤ 5.00
802.11ax-HE40	MCS11	211	7005	-5.118	-4.810	-4.516	-4.211	93.77	4.75	≤ 5.00
802.11ax-HE40	MCS11	227	7085	-5.597	-5.041	-4.605	-4.468	93.77	4.49	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
802.11ax-HE80	MCS11	7	5985	-5.067	-4.707	-4.581	-4.313	92.56	4.80	≤ 5.00
802.11ax-HE80	MCS11	55	6225	-5.145	-4.506	-4.574	-4.763	92.56	4.72	≤ 5.00
802.11ax-HE80	MCS11	87	6385	-5.222	-5.035	-4.826	-4.614	92.56	4.54	≤ 5.00
802.11ax-HE80	MCS11	103	6465	-5.004	-4.748	-4.487	-4.354	92.56	4.82	≤ 5.00
802.11ax-HE80	MCS11	119	6545	-4.715	-4.903	-4.590	-4.549	92.56	4.77	≤ 5.00
802.11ax-HE80	MCS11	135	6625	-5.622	-4.912	-4.754	-4.950	92.56	4.41	≤ 5.00
802.11ax-HE80	MCS11	151	6705	-5.603	-4.733	-4.482	-4.471	92.56	4.66	≤ 5.00
802.11ax-HE80	MCS11	167	6785	-5.175	-4.403	-4.287	-4.503	92.56	4.88	≤ 5.00
802.11ax-HE80	MCS11	183	6865	-5.542	-4.884	-4.723	-4.759	92.56	4.49	≤ 5.00
802.11ax-HE80	MCS11	199	6945	-5.119	-4.641	-4.553	-4.228	92.56	4.83	≤ 5.00
802.11ax-HE80	MCS11	215	7025	-5.173	-4.633	-4.333	-4.248	92.56	4.87	≤ 5.00
802.11ax-HE160	MCS0	15	6025	-5.275	-4.734	-4.724	-4.371	93.32	4.66	≤ 5.00
802.11ax-HE160	MCS0	47	6185	-5.080	-4.603	-4.369	-4.672	93.32	4.75	≤ 5.00
802.11ax-HE160	MCS0	79	6345	-5.055	-4.445	-4.449	-4.211	93.32	4.89	≤ 5.00
802.11ax-HE160	MCS0	111	6505	-5.048	-4.977	-4.399	-4.584	93.32	4.68	≤ 5.00
802.11ax-HE160	MCS0	143	6665	-5.389	-4.533	-4.363	-4.481	93.32	4.75	≤ 5.00
802.11ax-HE160	MCS0	175	6825	-5.572	-4.680	-4.538	-4.398	93.32	4.65	≤ 5.00
802.11ax-HE160	MCS0	207	6985	-5.409	-5.123	-4.784	-4.629	93.32	4.45	≤ 5.00

Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).

802.11ax-HE20 Power Spectral Density - Ant 0

Channel 1 (5955MHz)



Channel 49 (6195MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)



Channel 113 (6515MHz)



802.11ax-HE20 Power Spectral Density - Ant 0

Channel 117 (6535MHz)



Channel 149 (6695MHz)



Channel 181 (6855MHz)



Channel 185 (6875MHz)




Channel 189 (6895MHz)



Channel 209 (6995MHz)



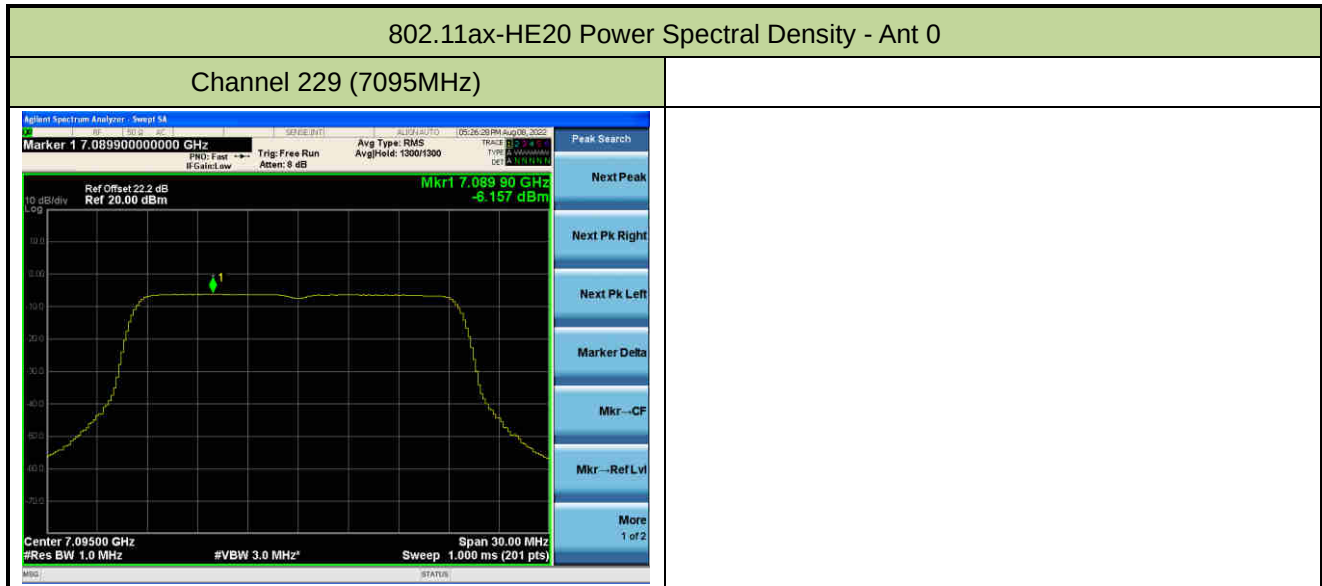


802.11ax-HE40 Power Spectral Density - Ant 0

Channel 3 (5965MHz)



Channel 51 (6205MHz)

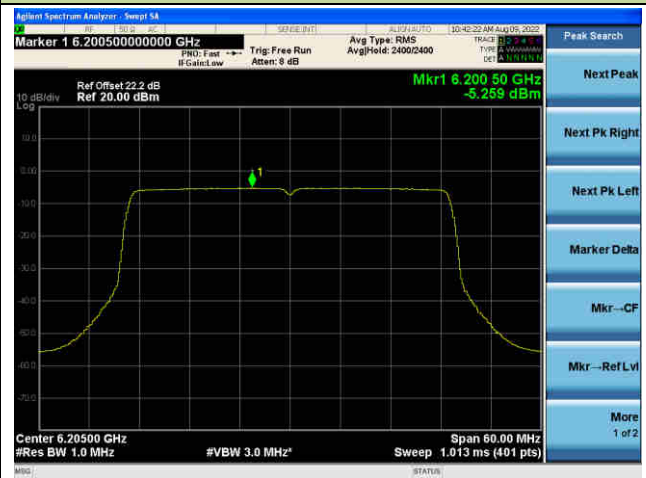

Channel 91 (6405MHz)




Channel 99 (6445MHz)



Channel 107 (6485MHz)



Channel 115 (6525MHz)

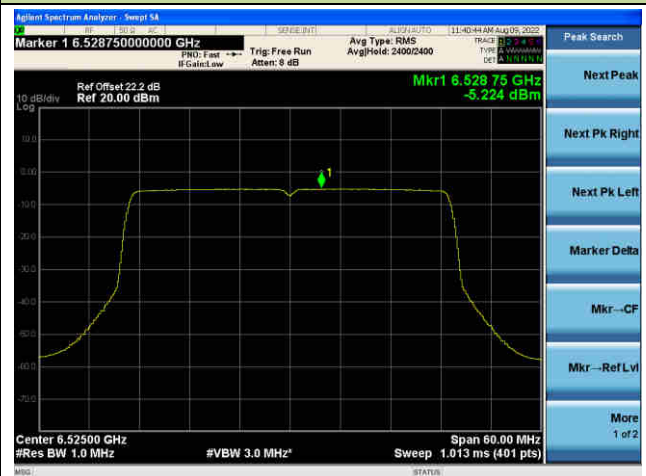


802.11ax-HE40 Power Spectral Density - Ant 0

Channel 123 (6565MHz)




Channel 147 (6685MHz)

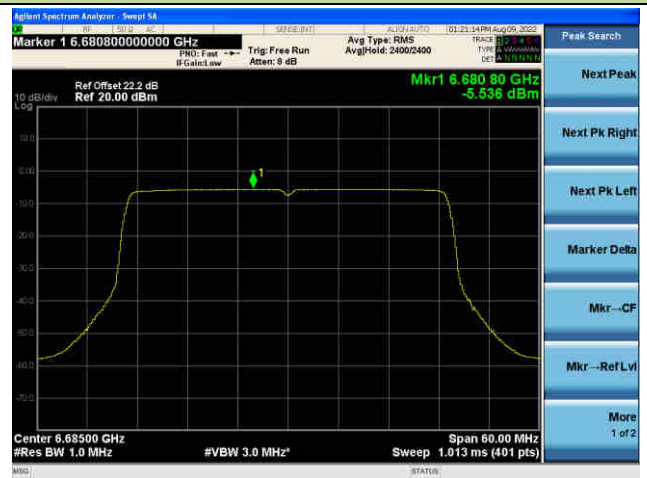

Channel 187 (6885MHz)




Channel 195 (6925MHz)

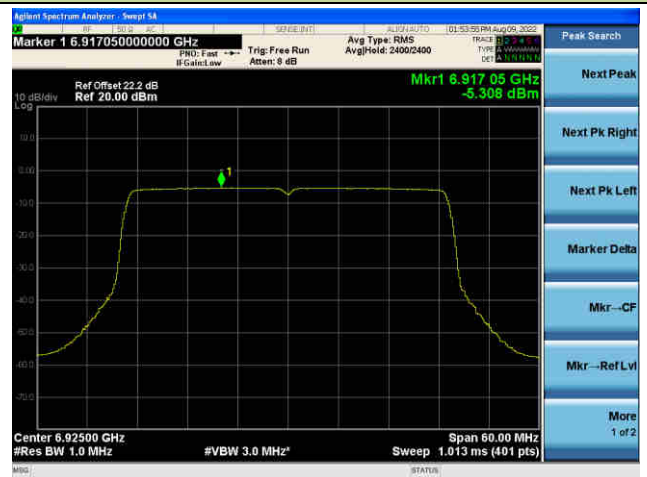

Channel 211 (7005MHz)



Channel 227 (7085MHz)

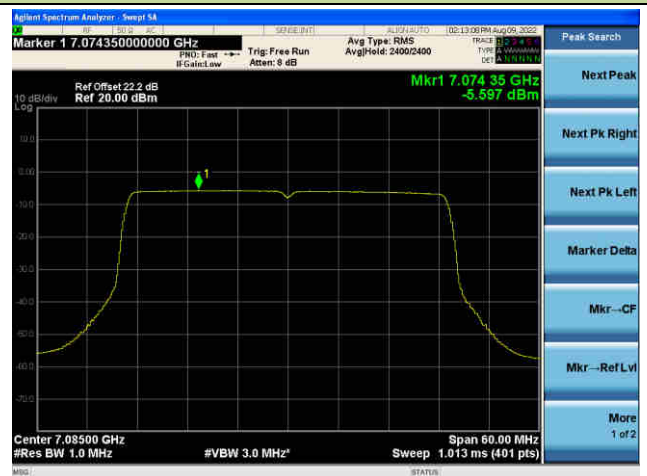

802.11ax-HE80 Power Spectral Density - Ant 0

Channel 7 (5985MHz)



Channel 55 (6225MHz)



Channel 87 (6385MHz)



Channel 103 (6465MHz)



Channel 119 (6545MHz)



Channel 135 (6625MHz)



802.11ax-HE80 Power Spectral Density - Ant 0

Channel 151 (6705MHz)



Channel 167 (6785MHz)



Channel 183 (6865MHz)



Channel 199 (6945MHz)



Channel 215 (7025MHz)



802.11ax-HE160 Power Spectral Density - Ant 0

Channel 15 (6025MHz)



Channel 47 (6185MHz)



Channel 79 (6345MHz)



Channel 111 (6505MHz)




Channel 143 (6665MHz)



Channel 175 (6825MHz)



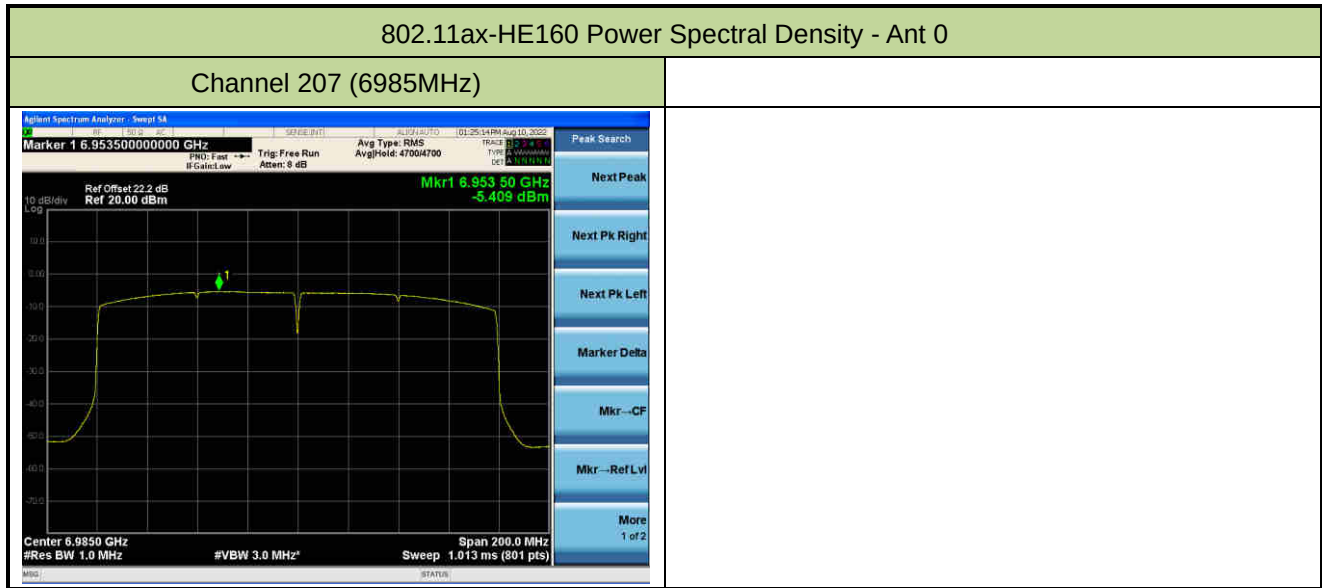

802.11ax-HE20 Power Spectral Density - Ant 1

Channel 1 (5955MHz)



Channel 49 (6195MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)



Channel 113 (6515MHz)



802.11ax-HE20 Power Spectral Density - Ant 1

Channel 117 (6535MHz)



Channel 149 (6695MHz)



Channel 181 (6855MHz)



Channel 185 (6875MHz)




Channel 189 (6895MHz)



Channel 209 (6995MHz)



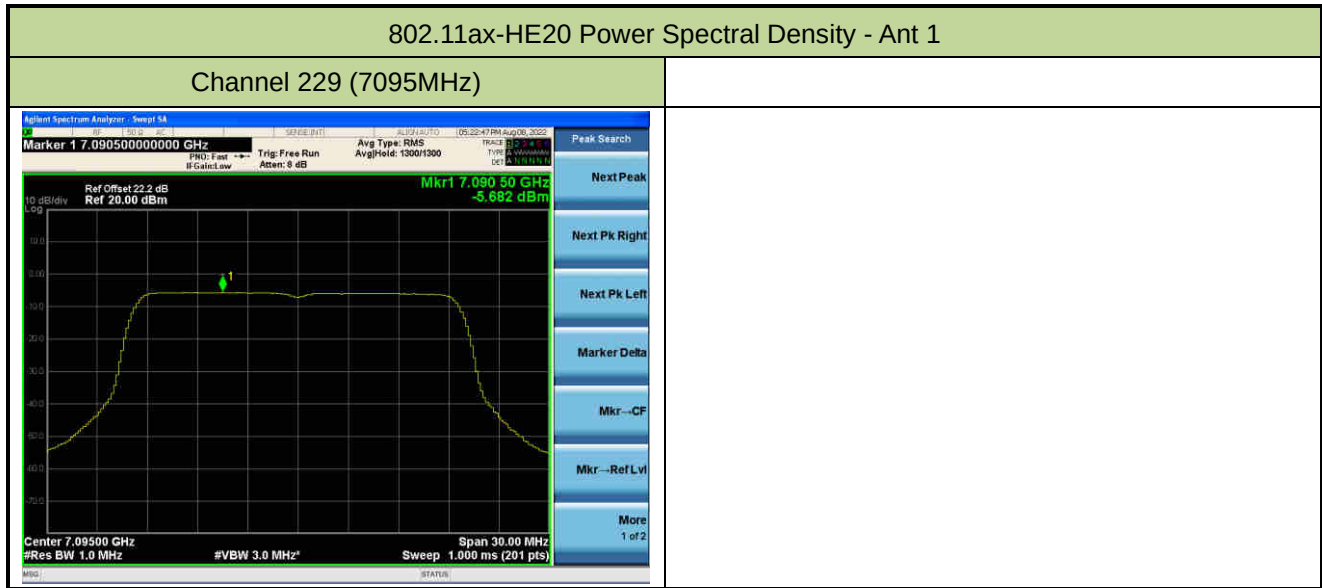

802.11ax-HE40 Power Spectral Density - Ant 1

Channel 3 (5965MHz)




Channel 51 (6205MHz)




Channel 91 (6405MHz)




Channel 99 (6445MHz)

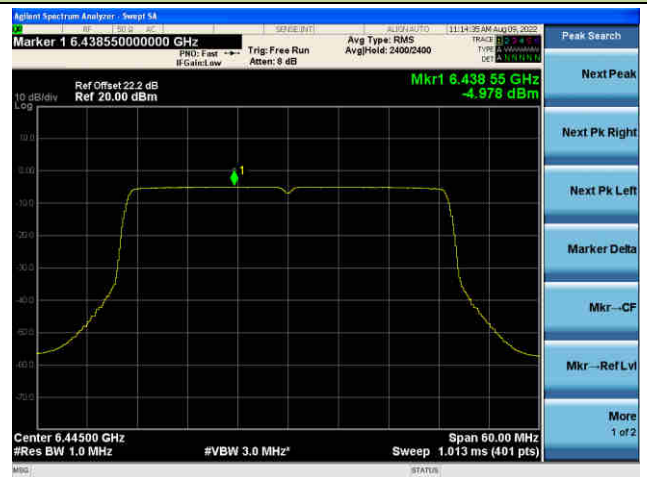

Channel 107 (6485MHz)

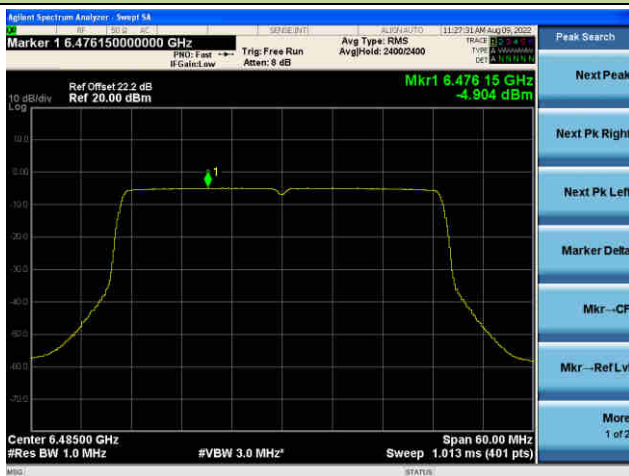

Channel 115 (6525MHz)

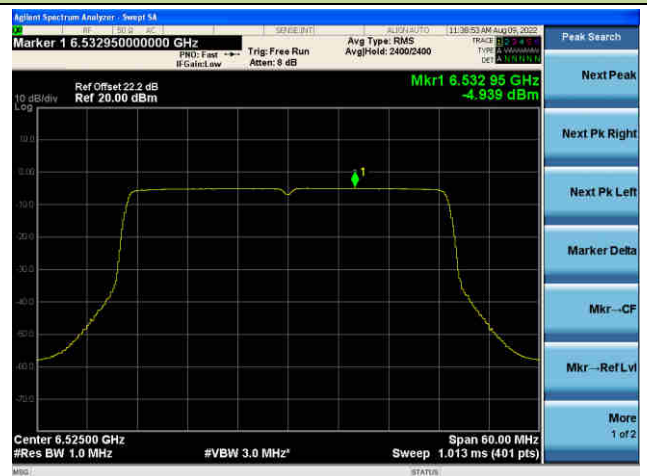

802.11ax-HE40 Power Spectral Density - Ant 1


Channel 123 (6565MHz)




Channel 147 (6685MHz)



Channel 187 (6885MHz)

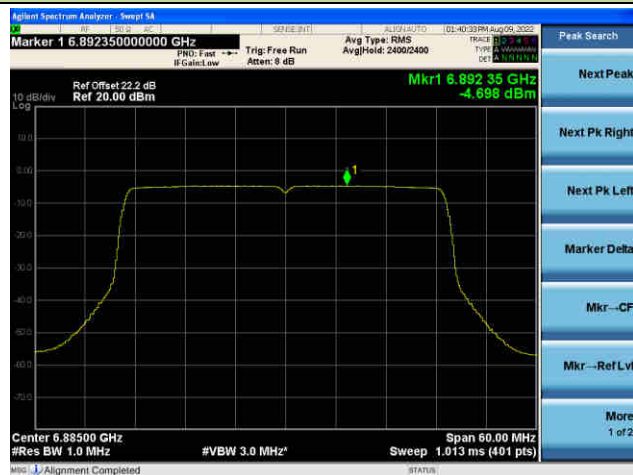

Channel 195 (6925MHz)

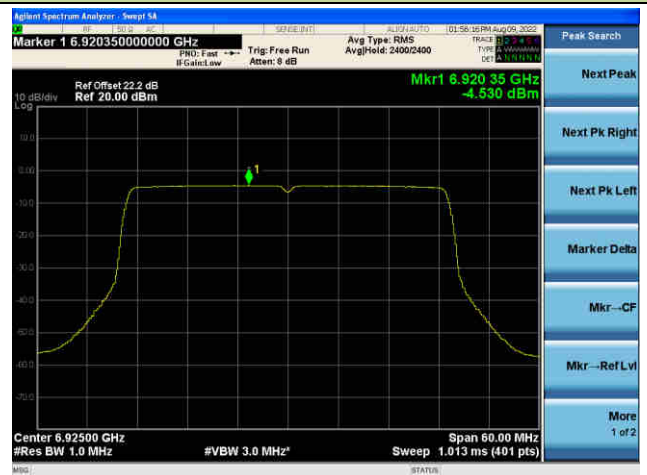

Channel 211 (7005MHz)



Channel 227 (7085MHz)



802.11ax-HE80 Power Spectral Density - Ant 1

Channel 7 (5985MHz)



Channel 55 (6225MHz)



Channel 87 (6385MHz)



Channel 103 (6465MHz)



Channel 119 (6545MHz)



Channel 135 (6625MHz)



802.11ax-HE80 Power Spectral Density - Ant 1

Channel 151 (6705MHz)



Channel 167 (6785MHz)



Channel 183 (6865MHz)



Channel 199 (6945MHz)



Channel 215 (7025MHz)



802.11ax-HE160 Power Spectral Density - Ant 1

Channel 15 (6025MHz)



Channel 47 (6185MHz)



Channel 79 (6345MHz)



Channel 111 (6505MHz)



Channel 143 (6665MHz)



Channel 175 (6825MHz)



802.11ax-HE160 Power Spectral Density - Ant 1

Channel 207 (6985MHz)



802.11ax-HE20 Power Spectral Density - Ant 2

Channel 1 (5955MHz)



Channel 49 (6195MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)



Channel 113 (6515MHz)



802.11ax-HE20 Power Spectral Density - Ant 2

Channel 117 (6535MHz)



Channel 149 (6695MHz)



Channel 181 (6855MHz)



Channel 185 (6875MHz)



Channel 189 (6895MHz)



Channel 209 (6995MHz)

