

FCC ID: 2A74AA46S

Applicant: Xiamen Lujiang Technology Co., Ltd.

Address: Room 601-2, No.63-1, Wanghai Road, Software Park Phase II, Torch Hi-Tech Zone, Xiamen, China

Manufacturer: Xiamen Lujiang Technology Co., Ltd.

Address: Room 601-2, No.63-1, Wanghai Road, Software Park Phase II, Torch Hi-Tech Zone, Xiamen, China

Product Name: Portable Thermal Printer

Trade Mark: N/A

Model Number: A46S, A46, A46PRO, A46H, ITP05, ITP05S, A42, TPA42, A42PRO

Date of Receipt: May. 27, 2026

Test Date: May. 27, 2026 - Jun. 04, 2026

Date of Report: Jun. 04, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2020

Test Result: Pass

Report Number: DLE-260527041R

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.040	/	Pass
		2440	1	1.042	/	Pass
		2480	1	1.042	/	Pass

1.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.674	≥ 0.5	Pass
		2440	1	0.666	≥ 0.5	Pass
		2480	1	0.667	≥ 0.5	Pass

1.2 Test Graph


1.2.1 OBW

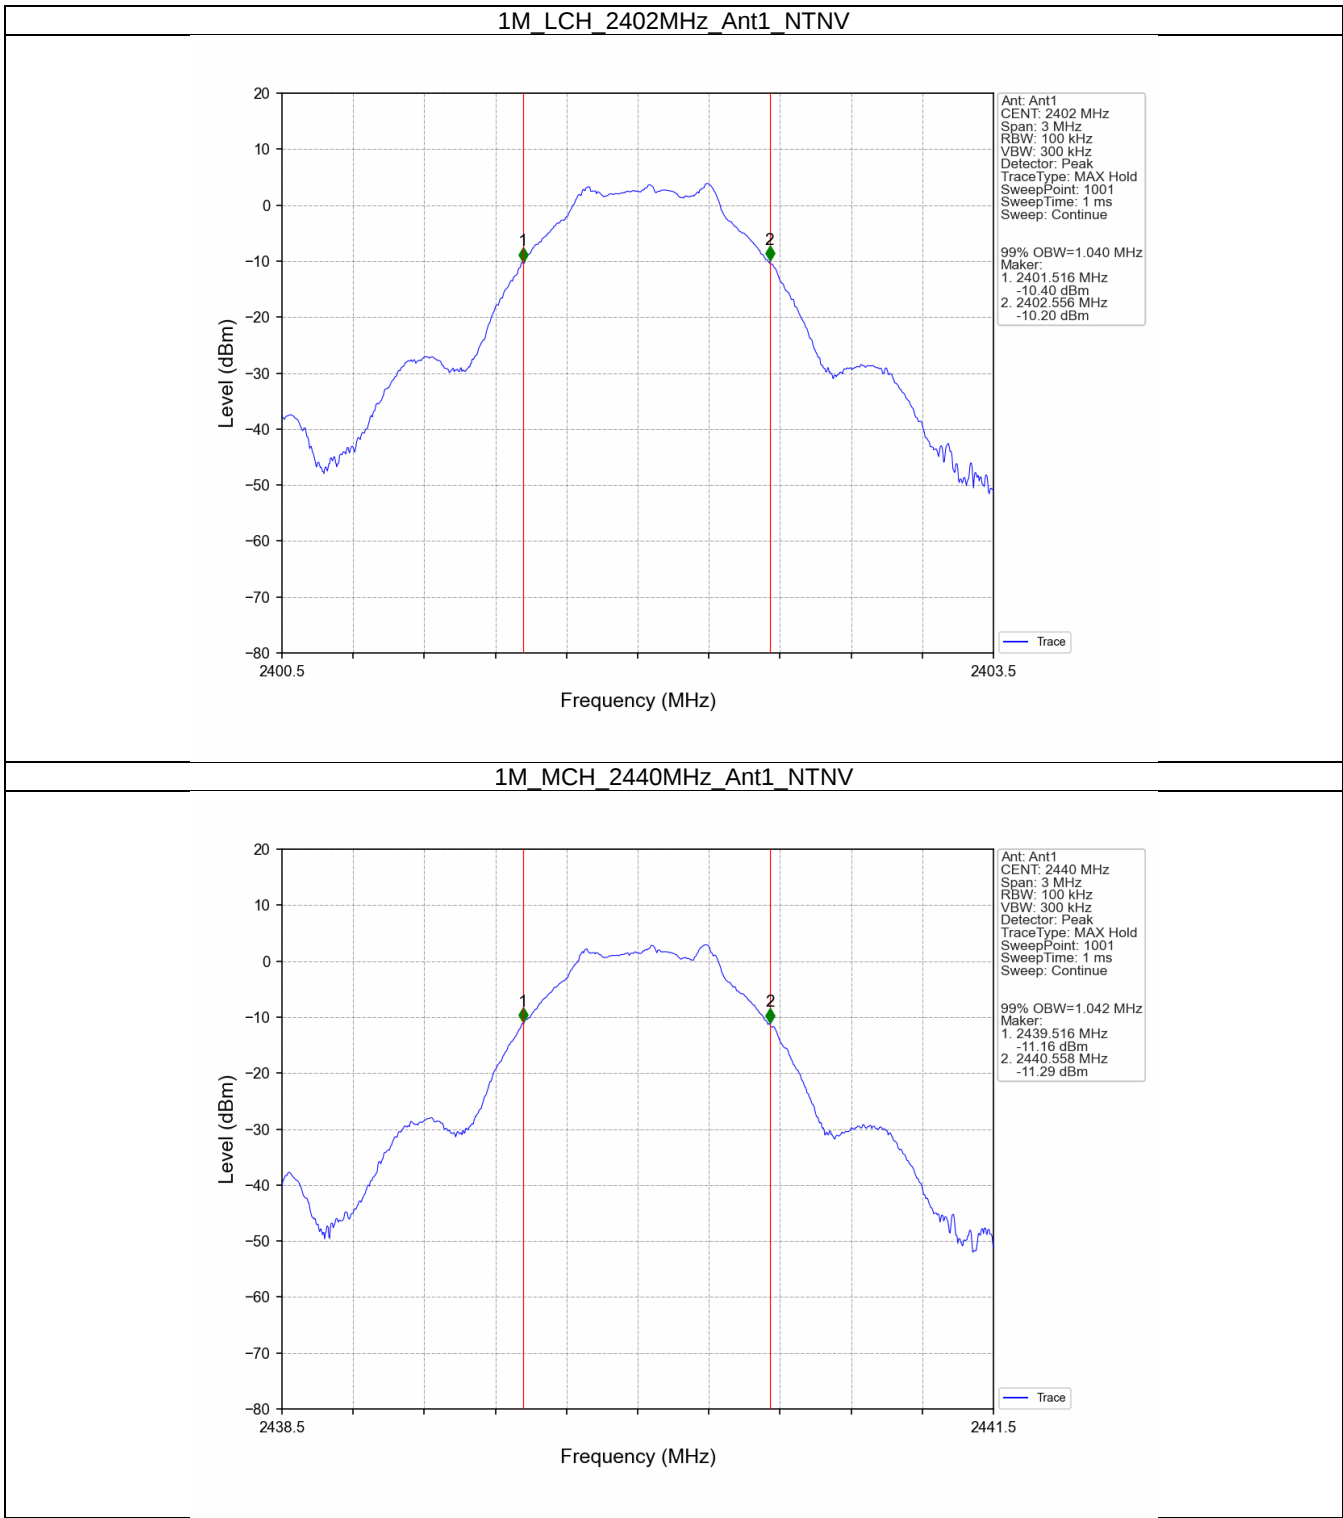


1M_HCH_2480MHz_Ant1_NTNV

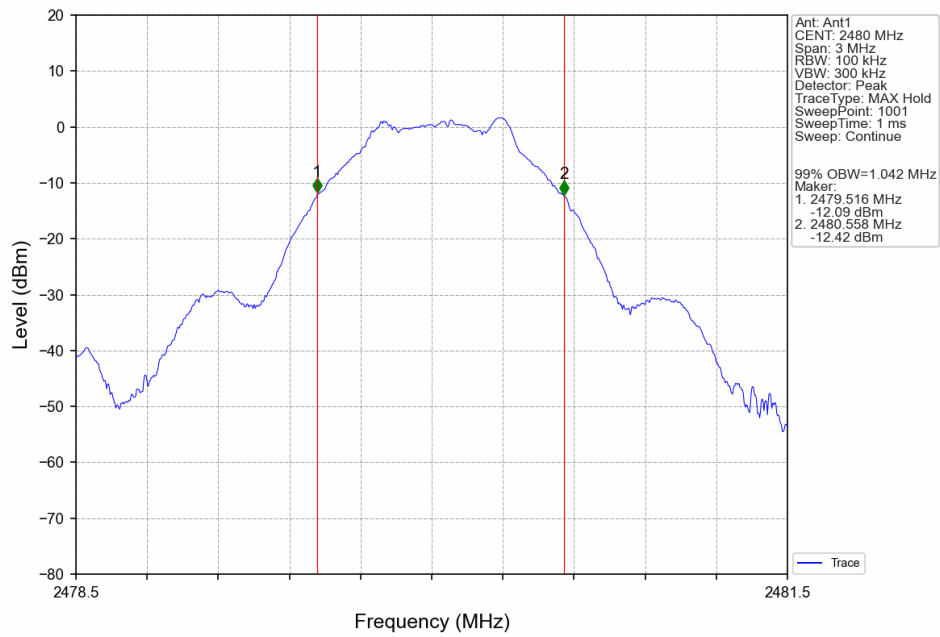

1.2.2 6dB BW

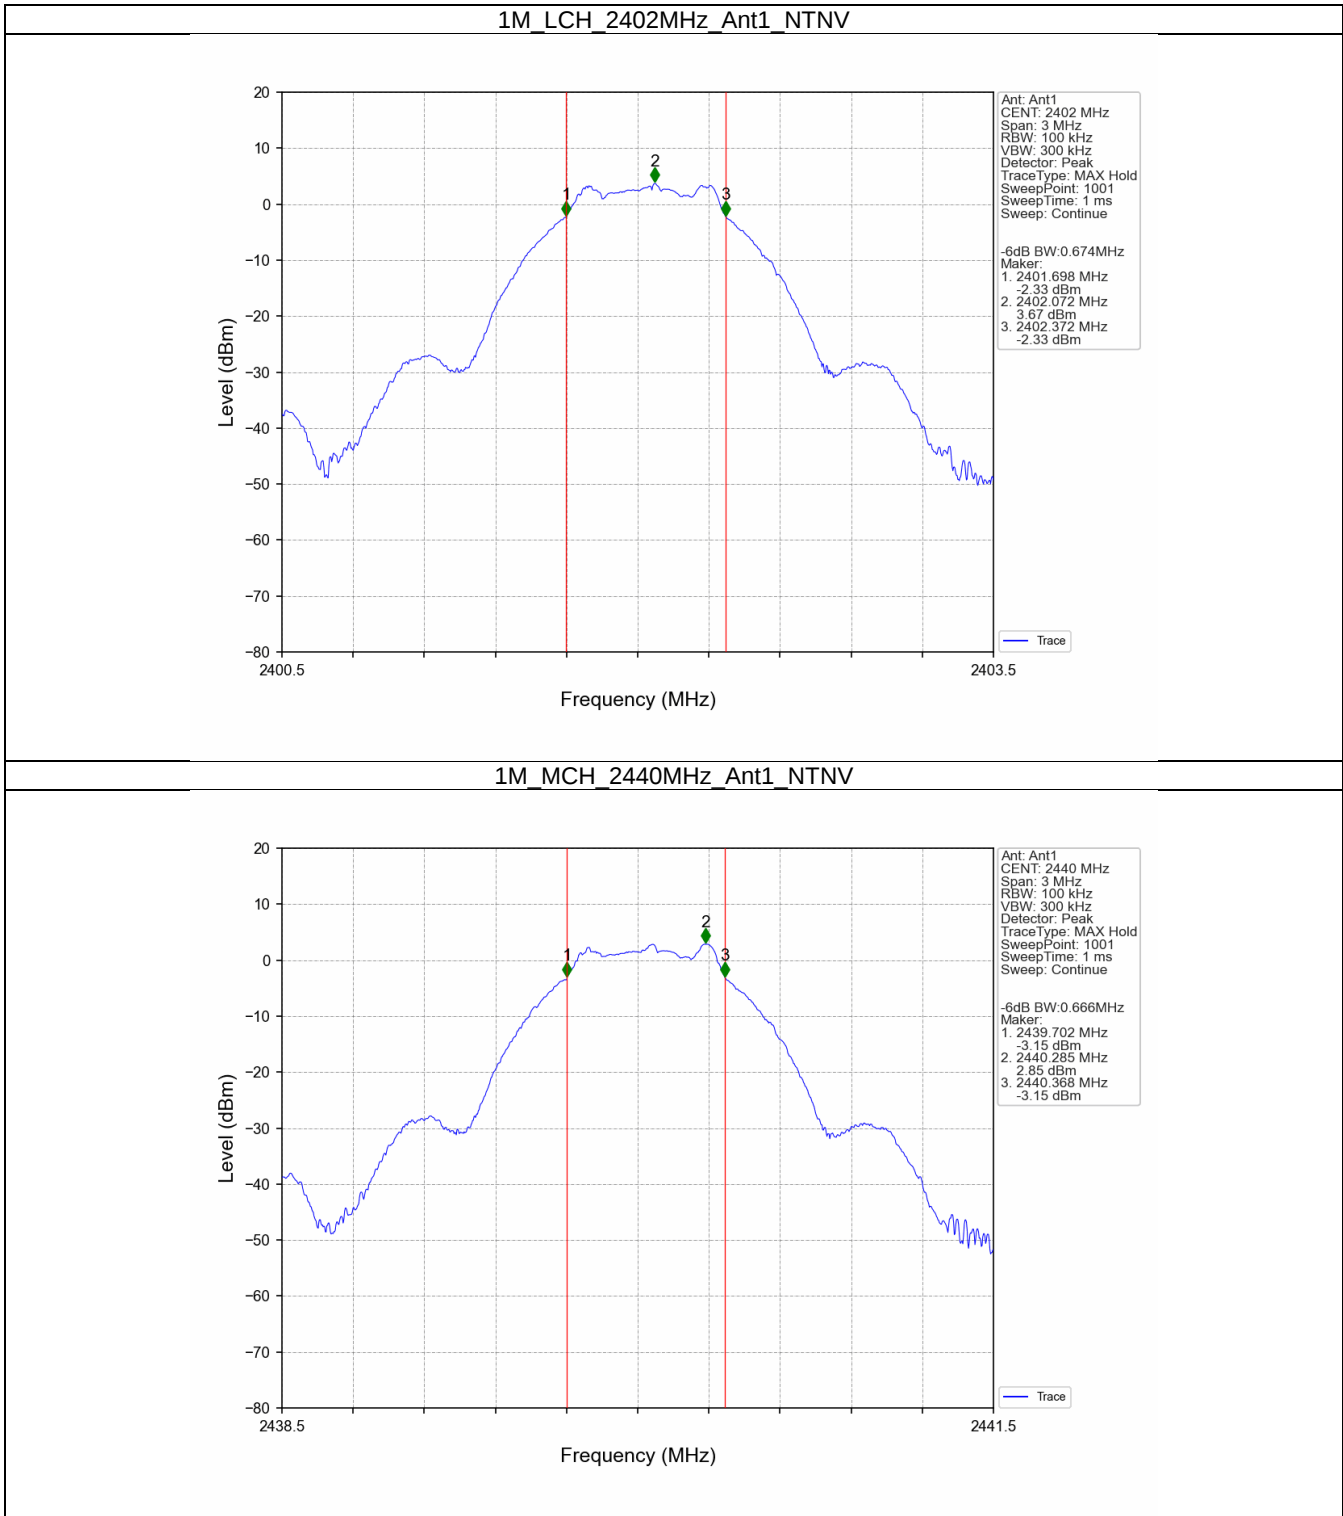

1M_HCH_2480MHz_Ant1_NTNV

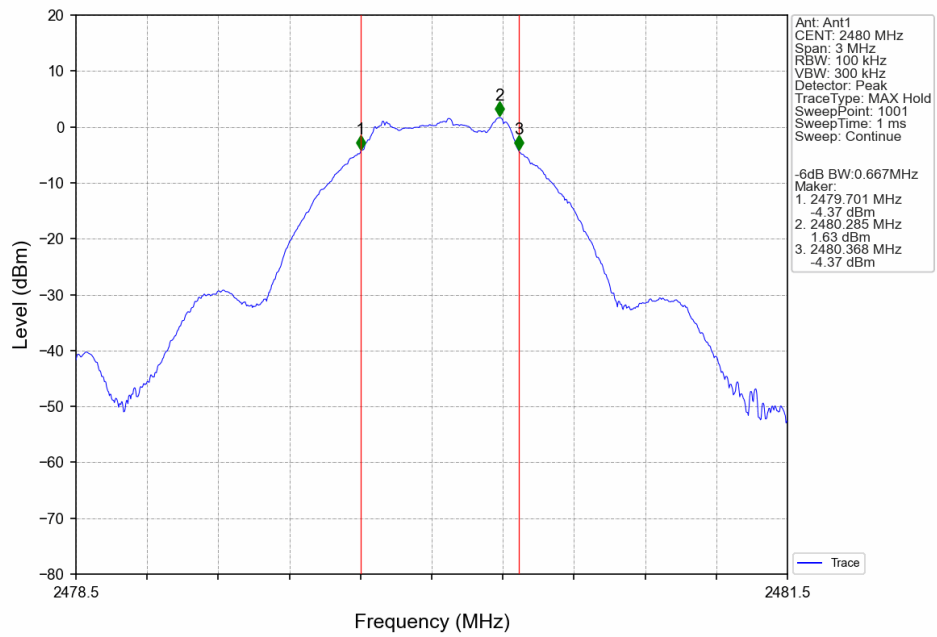

2. Maximum Conducted Output Power


2.1 Test Result

2.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.07	<=30	Pass
		2440	3.09	<=30	Pass
		2480	1.82	<=30	Pass

2.2 Test Graph

2.2.1 Power

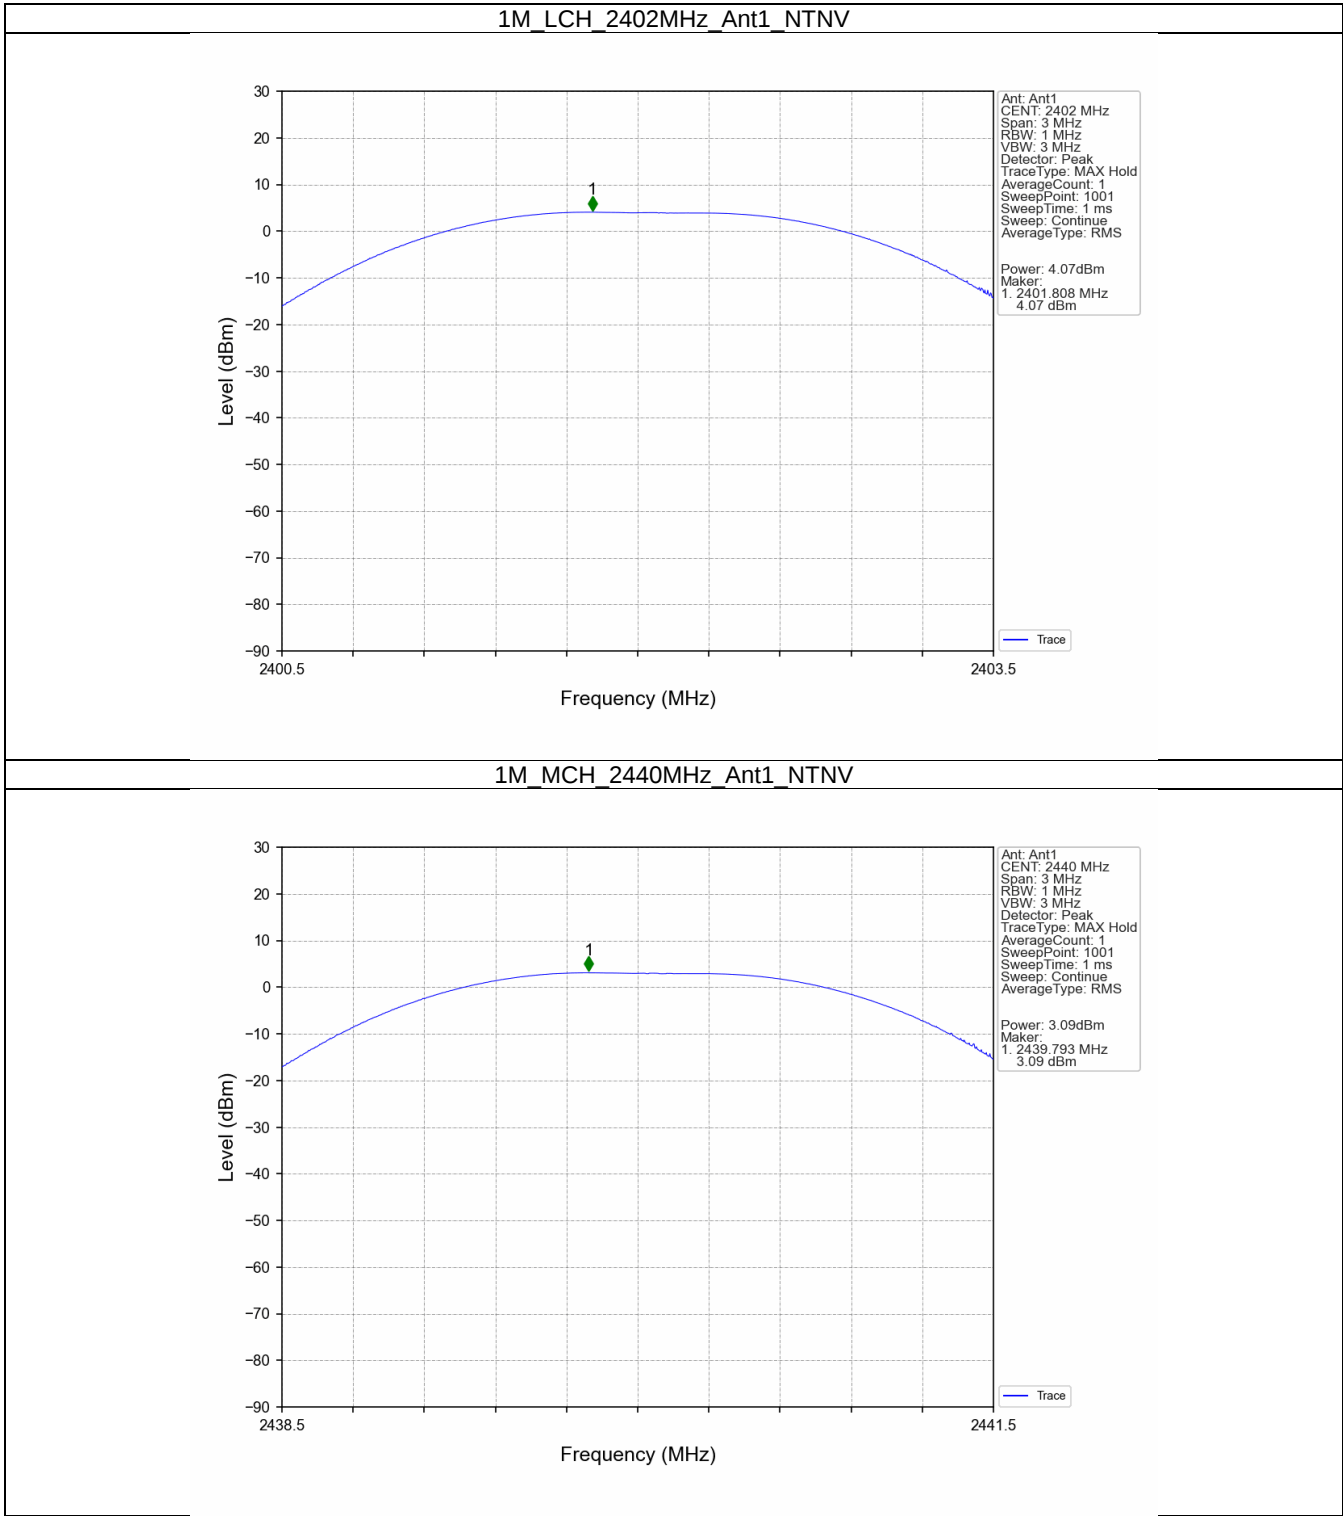

1M_HCH_2480MHz_Ant1_NTNV

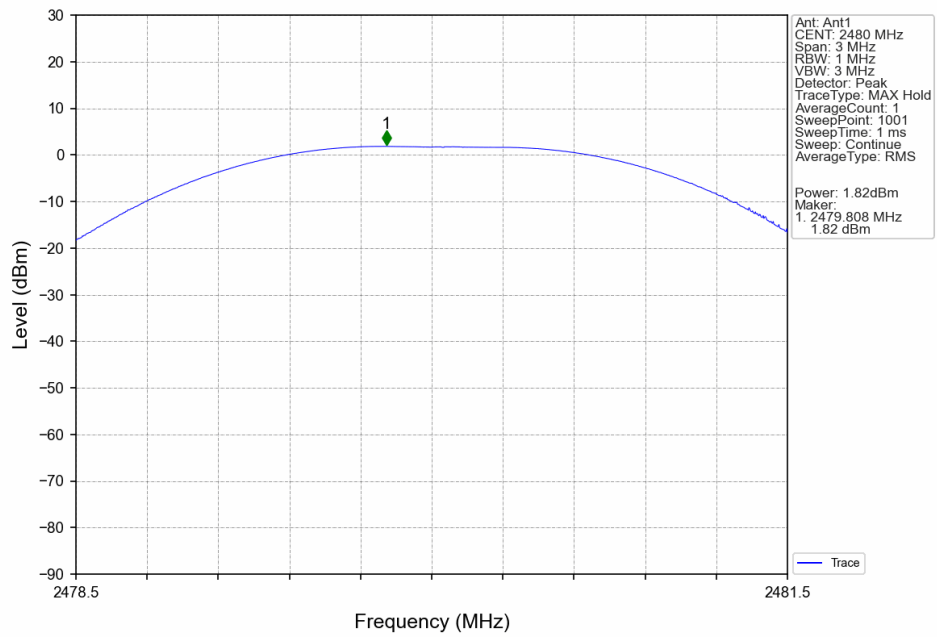

3. Maximum Power Spectral Density


3.1 Test Result

3.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-12.22	<=8	Pass
		2440	-13.17	<=8	Pass
		2480	-14.40	<=8	Pass

3.2 Test Graph

3.2.1 PSD

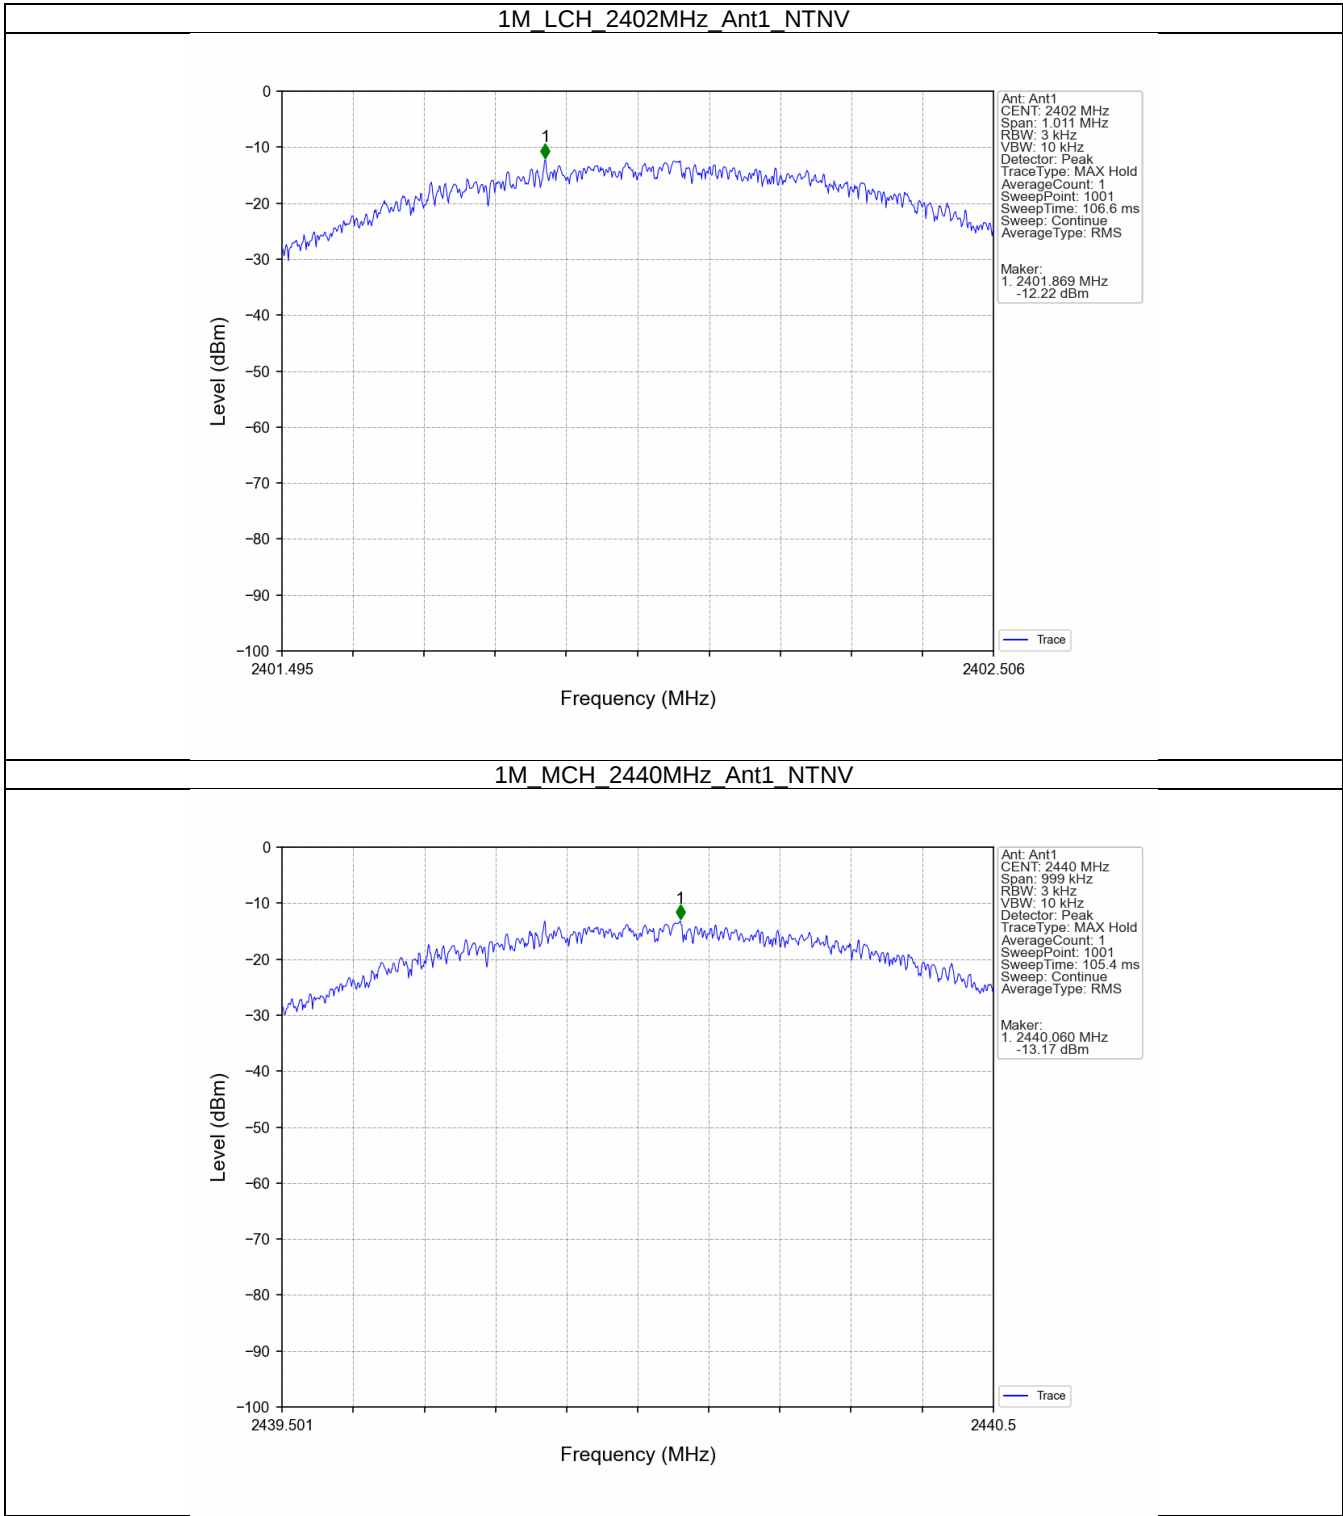

1M_HCH_2480MHz_Ant1_NTNV

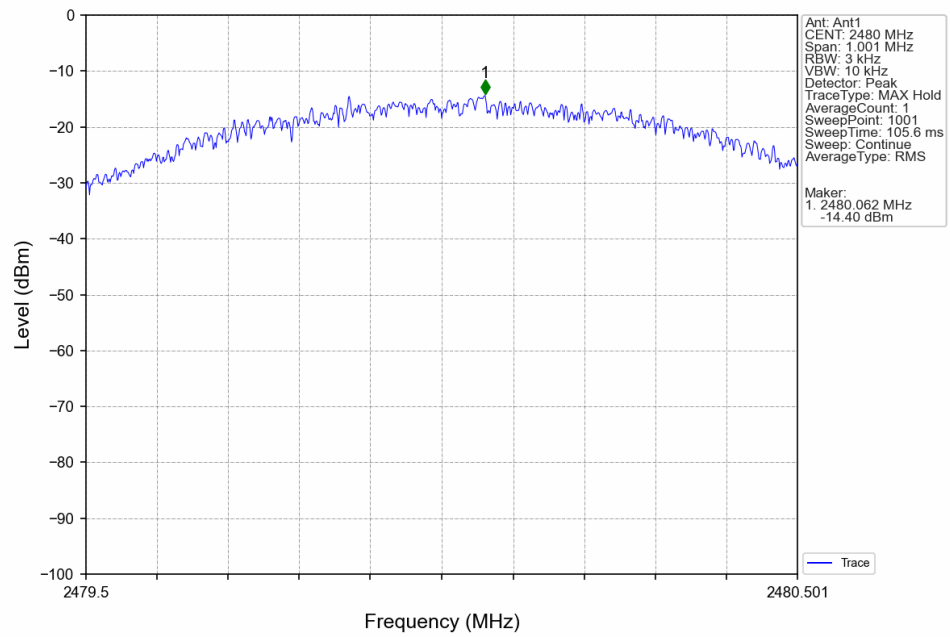

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref


Mode	Tx Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	3.89
		2440	1	2.90
		2480	1	1.64
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10:2020, the channel contains the maximum PSD level was used to establish the reference level.				

4.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	3.89	-16.11	Pass
		2440	1	2.90	-17.10	Pass
		2480	1	1.64	-18.36	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10:2020, the channel contains the maximum PSD level was used to establish the reference level.						

4.2 Test Graph


4.2.1 Ref

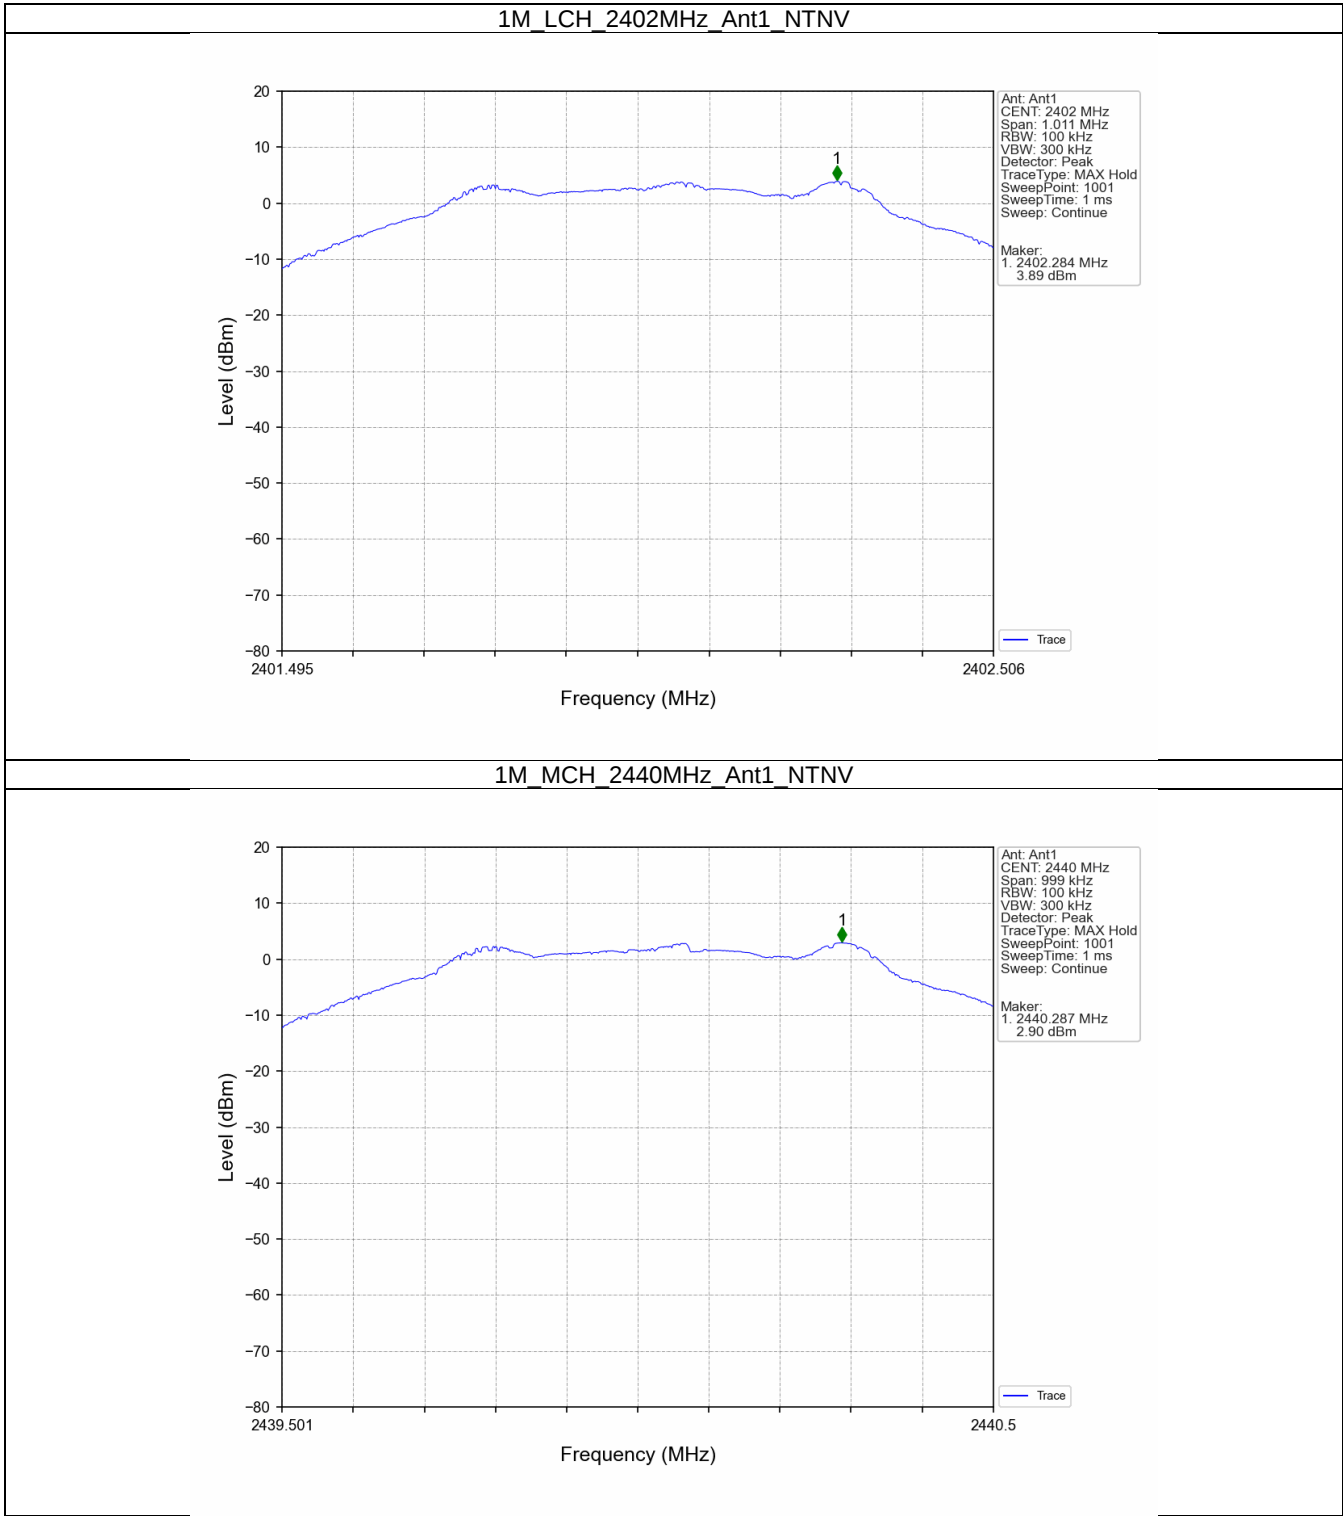


1M_HCH_2480MHz_Ant1_NTNV

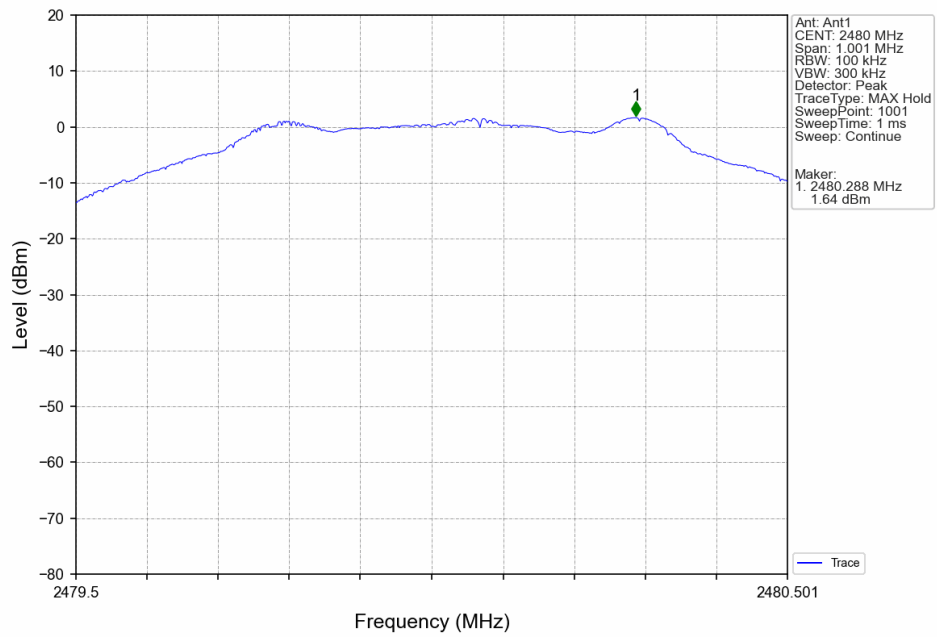


4.2.2 CSE

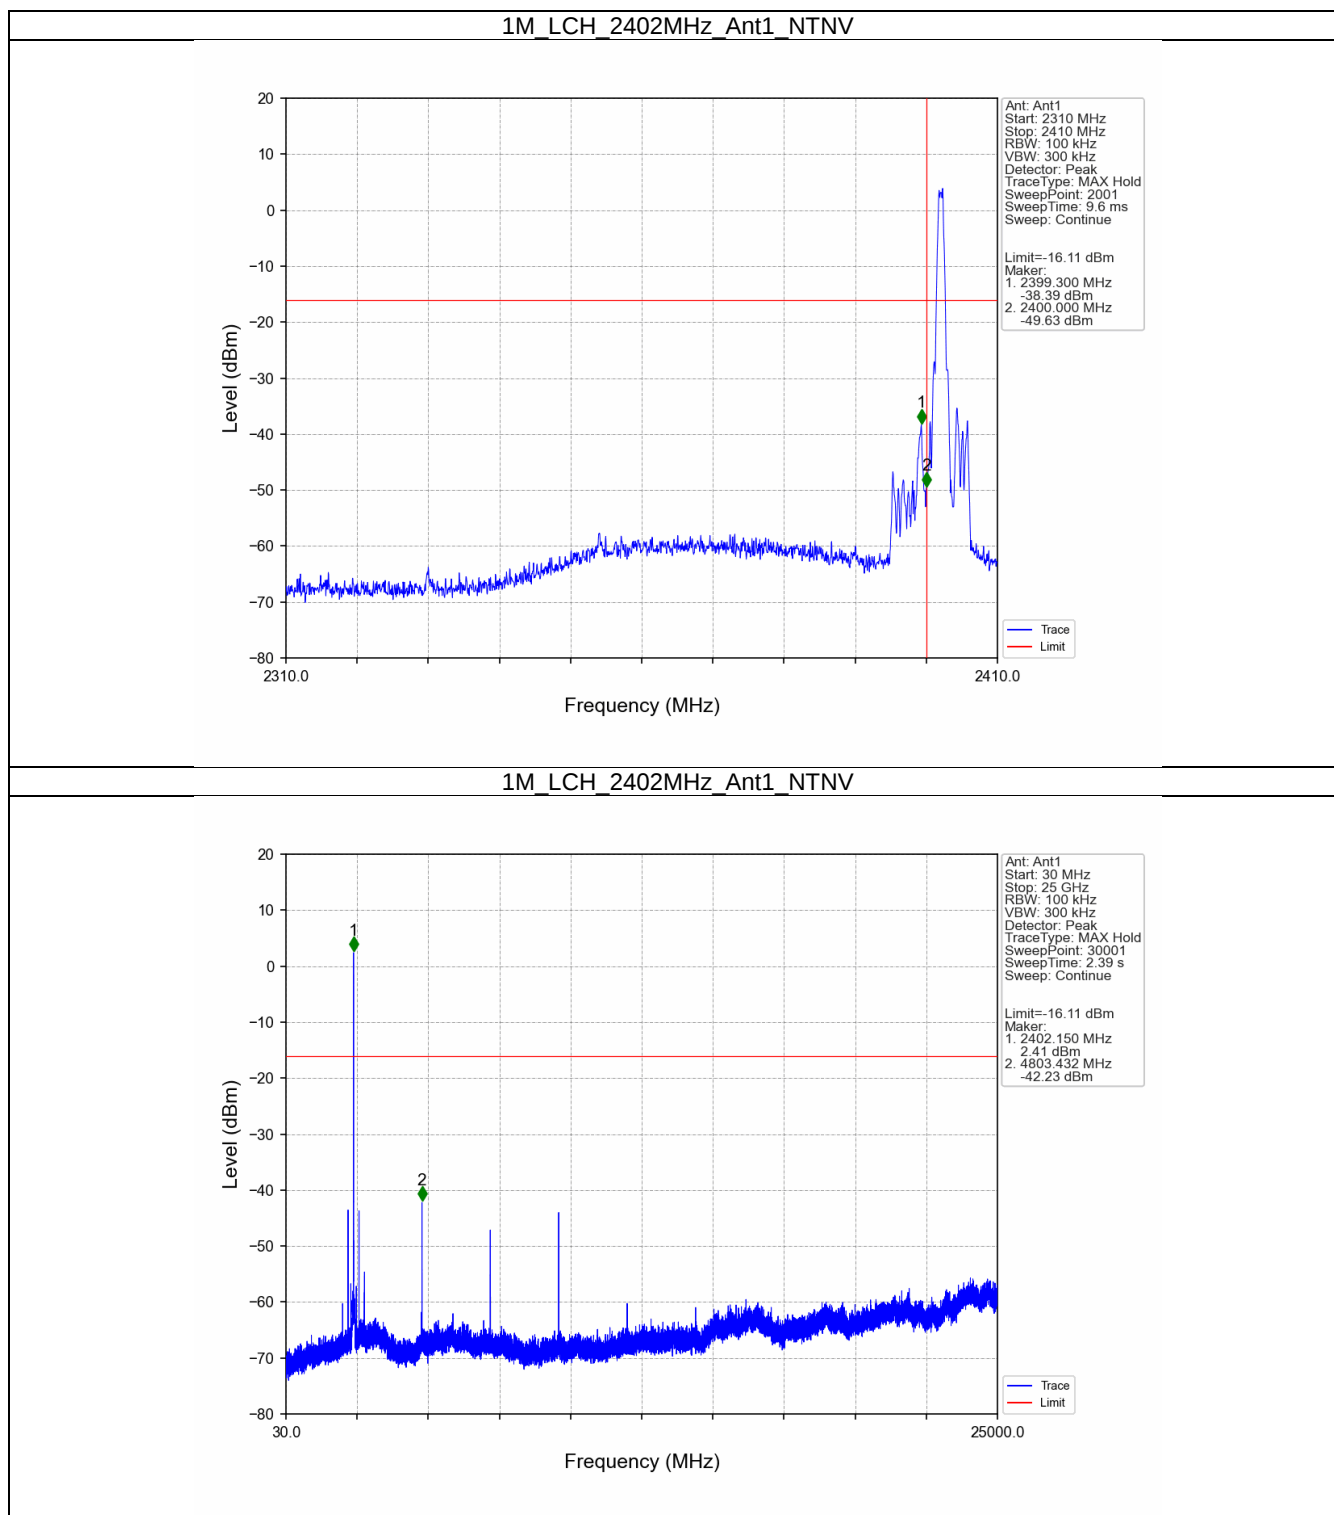

1M_MCH_2440MHz_Ant1_NTNV

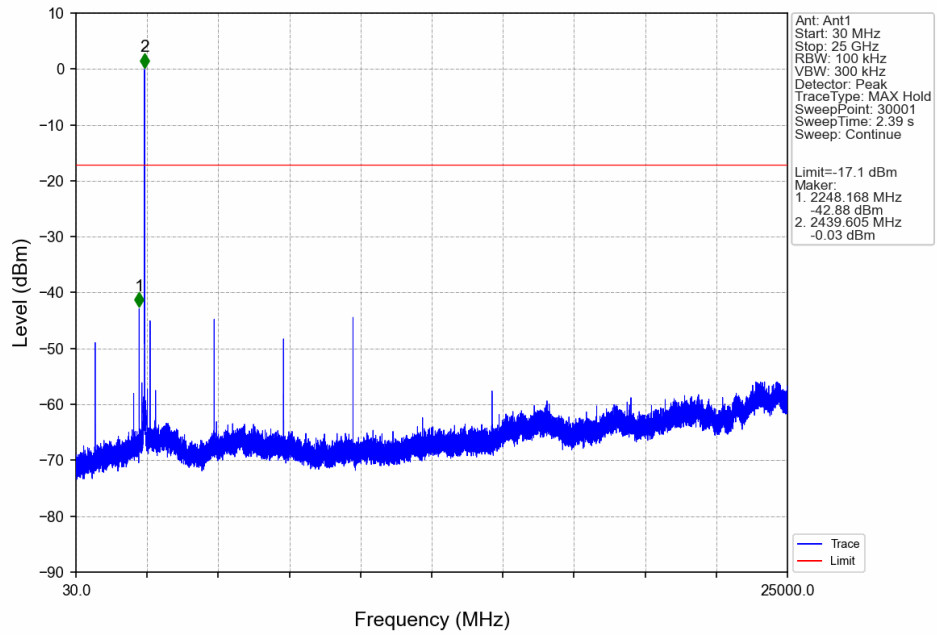

1M_HCH_2480MHz_Ant1_NTNV

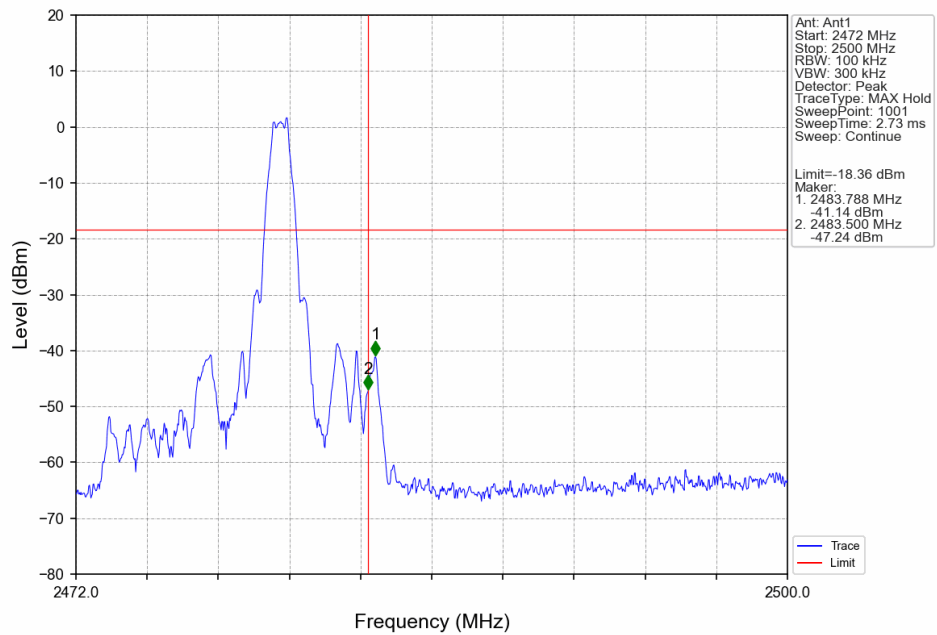

1M_HCH_2480MHz_Ant1_NTNV

