


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	20.48	20.02	--	23.27	27.39	--	Pass
	5220	--	20.34	20.07	--	23.22	27.39	--	Pass
	5240	--	20.32	20.05	--	23.20	27.39	--	Pass
	5260	21.10	14.96	14.66	--	17.82	21.85	24.24	Pass
	5300	21.38	14.97	14.72	--	17.86	21.85	24.30	Pass
	5320	21.10	14.86	14.51	--	17.70	21.85	24.24	Pass
	5500	21.30	14.46	13.96	--	17.23	21.13	24.28	Pass
	5580	20.82	14.48	14.16	--	17.33	21.13	24.18	Pass
	5700	20.70	13.97	13.85	--	16.92	21.13	24.16	Pass
	5720(U-NII-2C)	15.47	12.42	12.47	0.16	15.61	21.13	22.89	Pass
	5720(U-NII-3)	--	6.95	6.90	0.16	10.09	27.43	--	Pass
	5745	--	24.52	23.45	--	27.03	27.43	--	Pass
	5785	--	23.55	23.36	--	26.47	27.43	--	Pass
	5825	--	23.97	23.26	--	26.64	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

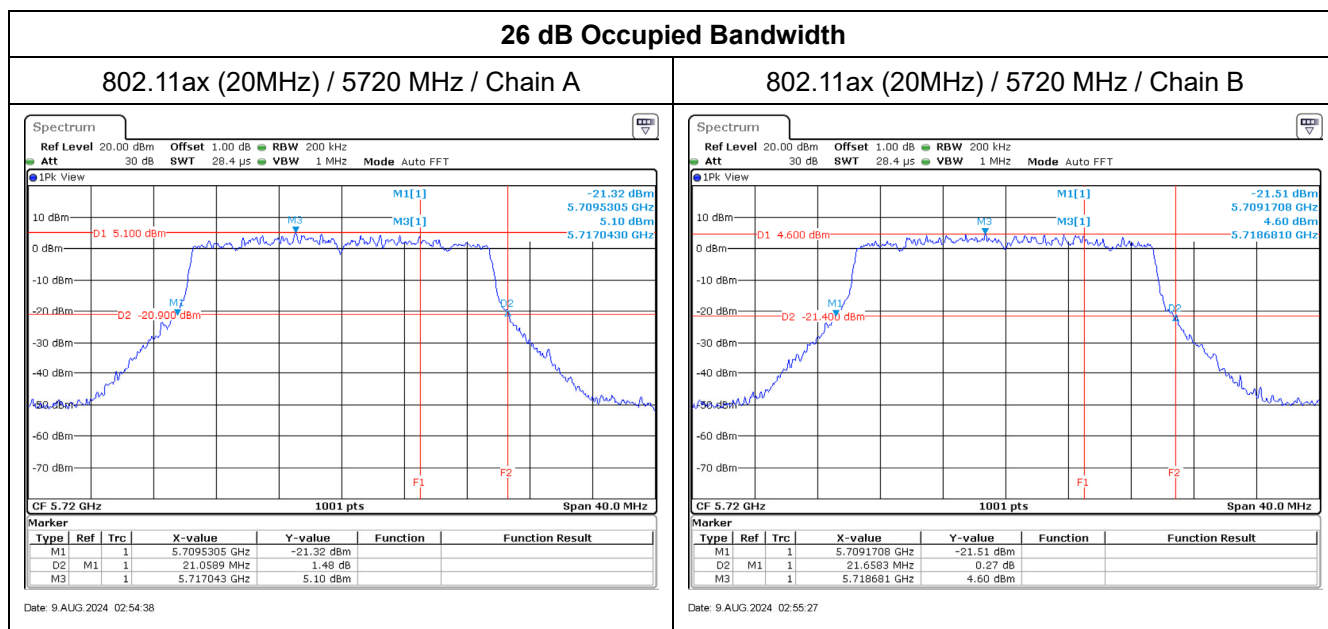


Maximum conducted output power:


802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain A

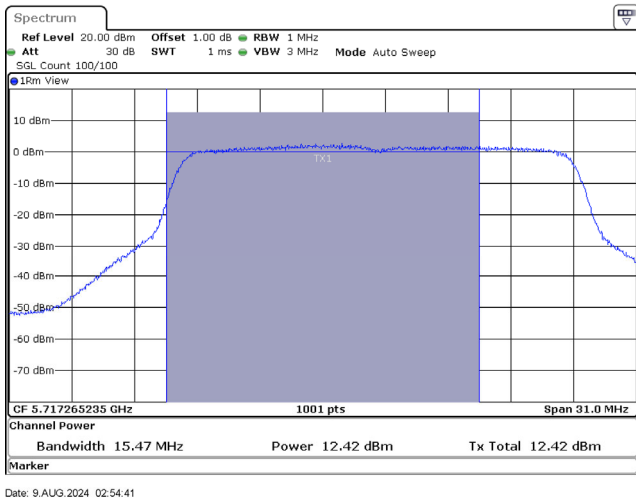


802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain A

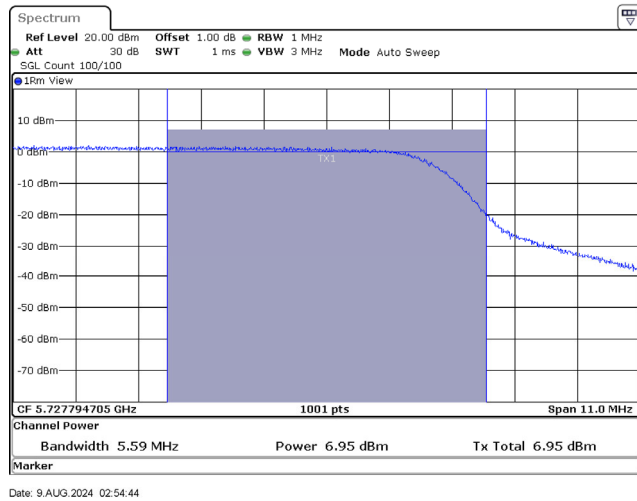

802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain B

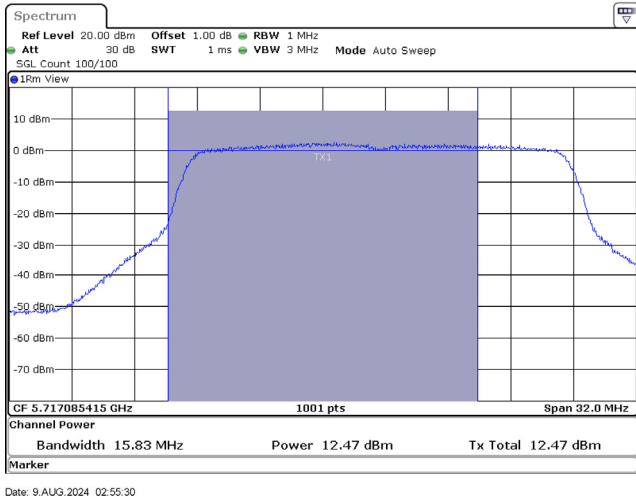


802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain B

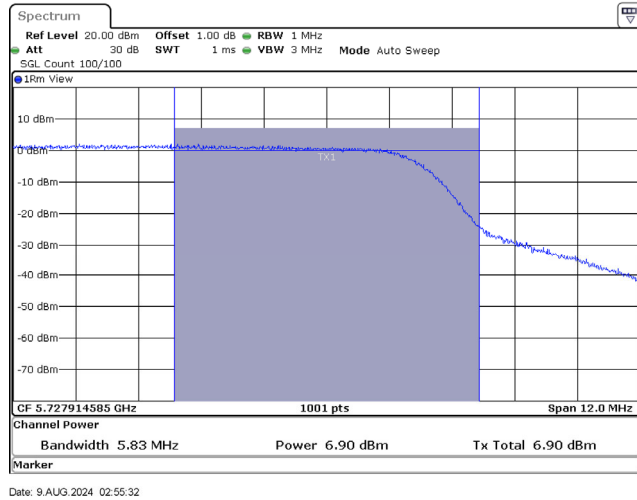

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	16.77	15.96	--	19.39	27.39	--	Pass
	5230	--	22.16	22.02	--	25.10	27.39	--	Pass
	5270	40.76	17.55	17.31	--	20.44	21.85	27.10	Pass
	5310	40.92	17.64	17.16	--	20.42	21.85	27.12	Pass
	5510	40.84	16.85	16.34	--	19.61	21.13	27.11	Pass
	5550	40.76	17.14	16.46	--	19.82	21.13	27.10	Pass
	5670	40.60	17.27	16.58	--	19.95	21.13	27.09	Pass
	5710(U-NII-2C)	35.38	15.81	15.82	0.16	18.98	21.13	26.49	Pass
	5710(U-NII-3)	--	5.57	5.58	0.16	8.74	27.43	--	Pass
	5755	--	22.41	21.82	--	25.14	27.43	--	Pass
	5795	--	21.89	21.92	--	24.92	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

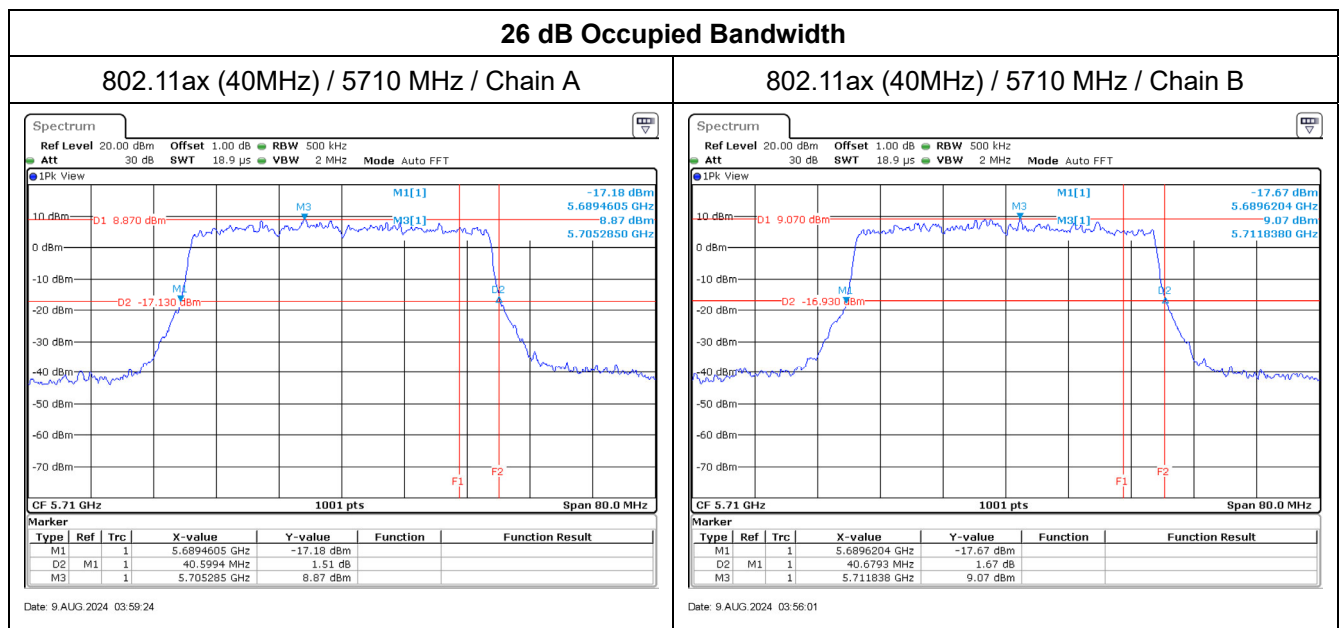


Maximum conducted output power:


802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain A

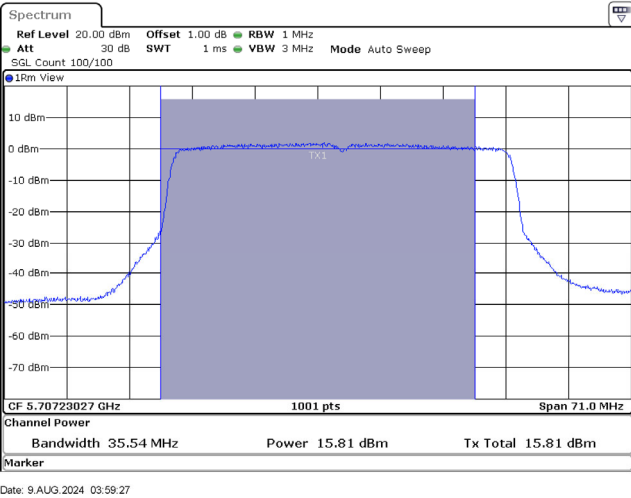


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain A

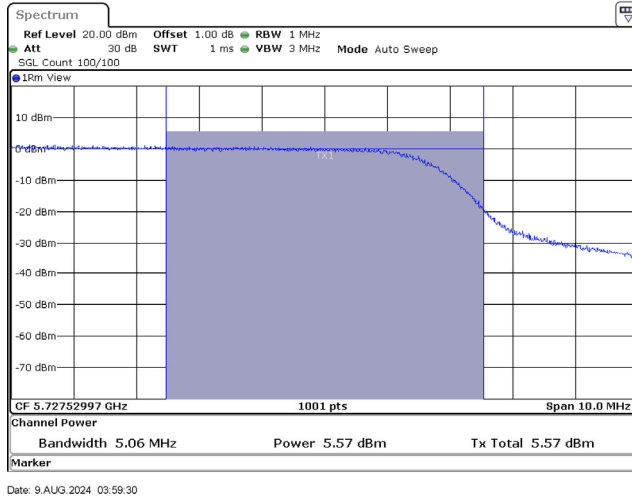

802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain B

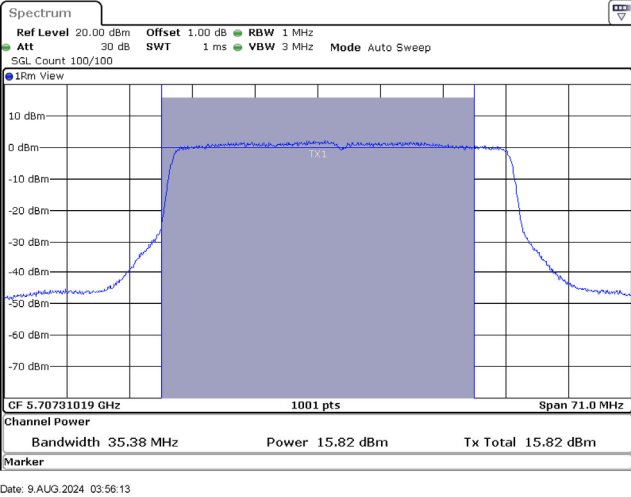


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain B

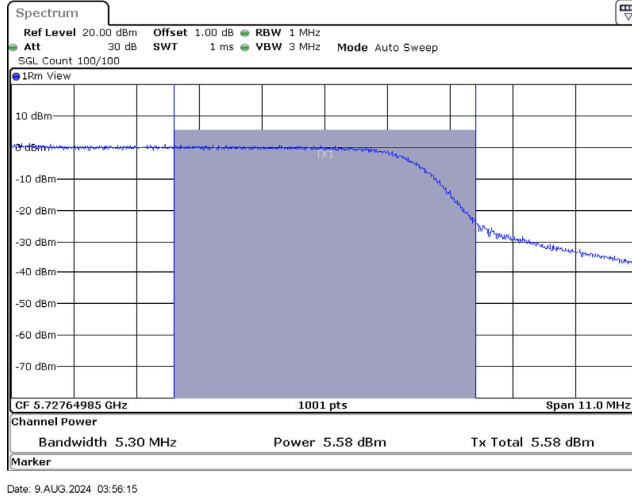

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	15.56	14.82	--	18.22	27.39	--	Pass
	5290	81.84	17.35	16.54	--	19.97	21.85	30.13	Pass
	5530	81.84	15.43	14.96	--	18.21	21.13	30.13	Pass
	5610	80.88	17.85	17.17	--	20.53	21.13	30.08	Pass
	5690(U-NII-2C)	75.76	16.44	16.39	0.19	19.62	21.13	29.79	Pass
	5690(U-NII-3)	--	1.82	1.83	0.19	5.03	27.43	--	Pass
	5775	--	20.56	20.15	--	23.37	27.43	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

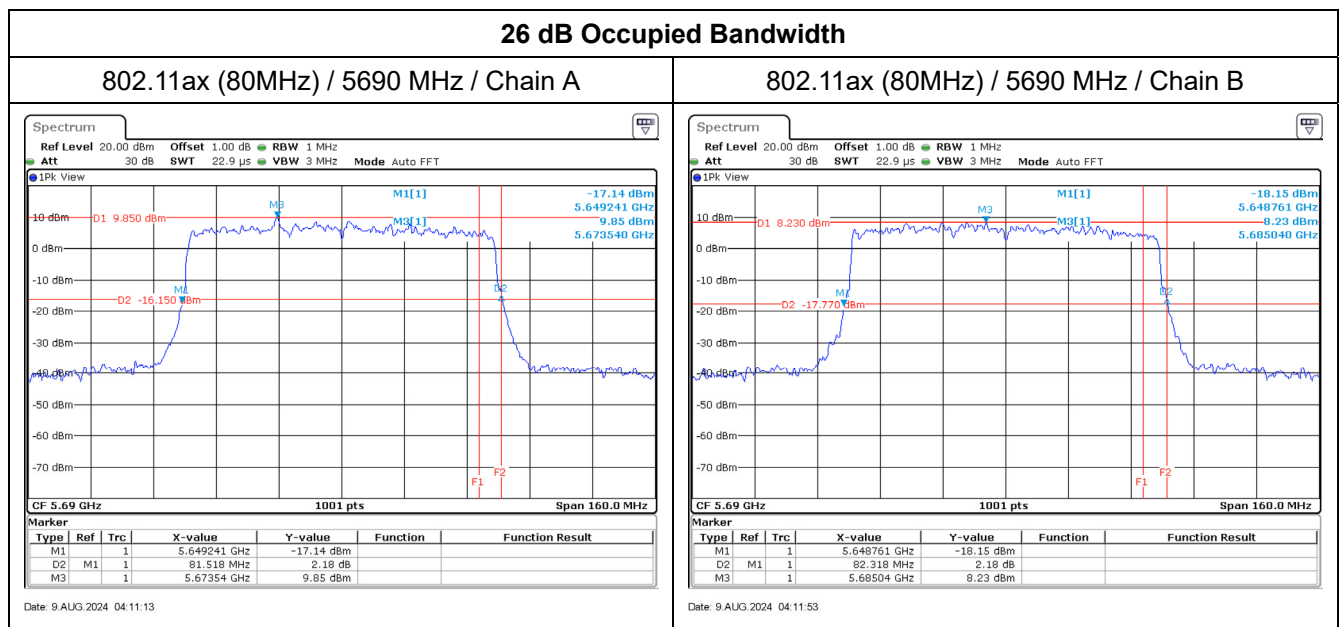


Maximum conducted output power:


802.11ax (80MHz) / 5690 MHz (U-NII-2C) / Chain A

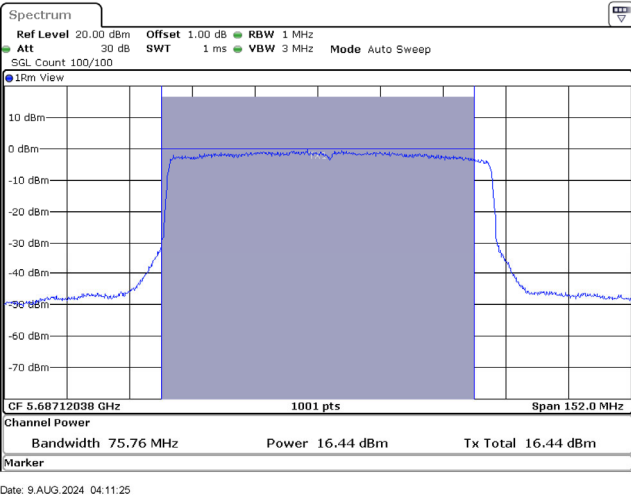


802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain A

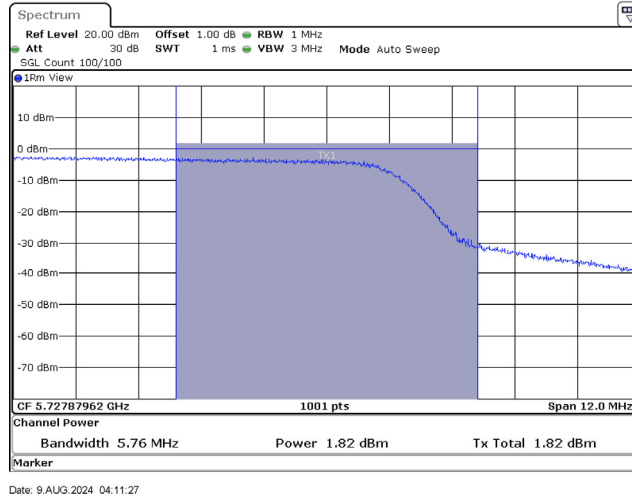

802.11ax (80MHz) / 5690 MHz (U-NII-2C) / Chain B

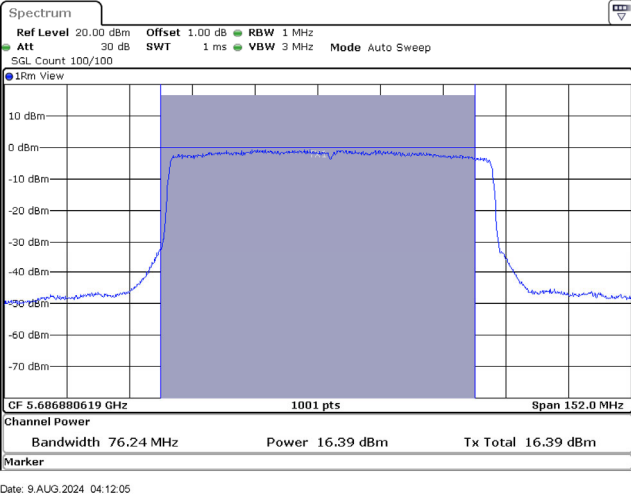

802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain B

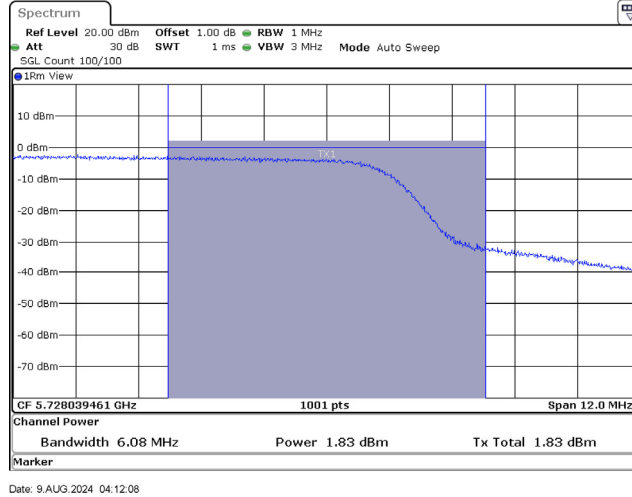

Beamforming mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	17.47	17.01	--	20.26	24.38	--	Pass
	5220	--	17.33	17.06	--	20.21	24.38	--	Pass
	5240	--	17.31	17.04	--	20.19	24.38	--	Pass
	5260	21.10	11.95	11.65	--	14.81	18.84	24.24	Pass
	5300	21.38	11.96	11.71	--	14.85	18.84	24.30	Pass
	5320	21.10	11.85	11.50	--	14.69	18.84	24.24	Pass
	5500	21.30	11.45	10.95	--	14.22	18.12	24.28	Pass
	5580	20.82	11.47	11.15	--	14.32	18.12	24.18	Pass
	5700	20.70	10.96	10.84	--	13.91	18.12	24.16	Pass
	5720(U-NII-2C)	15.47	9.41	9.46	0.16	12.60	18.12	22.89	Pass
	5720(U-NII-3)	--	3.94	3.89	0.16	7.08	24.42	--	Pass
	5745	--	21.51	20.44	--	24.02	24.42	--	Pass
	5785	--	20.54	20.35	--	23.46	24.42	--	Pass
	5825	--	20.96	20.25	--	23.63	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	13.76	12.95	--	16.38	24.38	--	Pass
	5230	--	19.15	19.01	--	22.09	24.38	--	Pass
	5270	40.76	14.54	14.30	--	17.43	18.84	27.10	Pass
	5310	40.92	14.63	14.15	--	17.41	18.84	27.12	Pass
	5510	40.84	13.84	13.33	--	16.60	18.12	27.11	Pass
	5550	40.76	14.13	13.45	--	16.81	18.12	27.10	Pass
	5670	40.60	14.26	13.57	--	16.94	18.12	27.09	Pass
	5710(U-NII-2C)	35.38	12.80	12.81	0.16	15.97	18.12	26.49	Pass
	5710(U-NII-3)	--	2.56	2.57	0.16	5.73	24.42	--	Pass
	5755	--	19.40	18.81	--	22.13	24.42	--	Pass
	5795	--	18.88	18.91	--	21.91	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	12.55	11.81	--	15.21	24.38		Pass
	5290	81.84	14.34	13.53	--	16.96	18.84	30.13	Pass
	5530	81.84	12.42	11.95	--	15.20	18.12	30.13	Pass
	5610	80.88	14.84	14.16	--	17.52	18.12	30.08	Pass
	5690(U-NII-2C)	75.76	13.43	13.38	0.19	16.61	18.12	29.79	Pass
	5690(U-NII-3)	--	-1.19	-1.18	0.19	2.02	24.42	--	Pass
	5775	--	17.55	17.14	--	20.36	24.42	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Slave mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11a	5180	--	14.14	12.89	--	16.57	21.39	--	Pass
	5220	--	14.03	13.21	--	16.65	21.39	--	Pass
	5240	--	14.07	13.31	--	16.72	21.39	--	Pass
	5260	20.14	14.97	14.65	--	17.82	21.85	24.04	Pass
	5300	20.42	15.02	14.56	--	17.81	21.85	24.10	Pass
	5320	20.46	14.93	14.42	--	17.69	21.85	24.11	Pass
	5500	20.42	13.95	13.35	--	16.67	21.13	24.10	Pass
	5580	20.38	13.92	13.56	--	16.75	21.13	24.09	Pass
	5700	19.90	14.02	13.76	--	16.90	21.13	23.99	Pass
	5720(U-NII-2C)	15.31	12.01	11.99	0.28	15.29	21.13	22.85	Pass
	5720(U-NII-3)	--	5.24	5.32	0.28	8.57	27.43	--	Pass
	5745	--	24.46	23.58	--	27.05	27.43	--	Pass
	5785	--	24.05	23.95	--	27.01	27.43	--	Pass
	5825	--	24.25	23.56	--	26.93	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

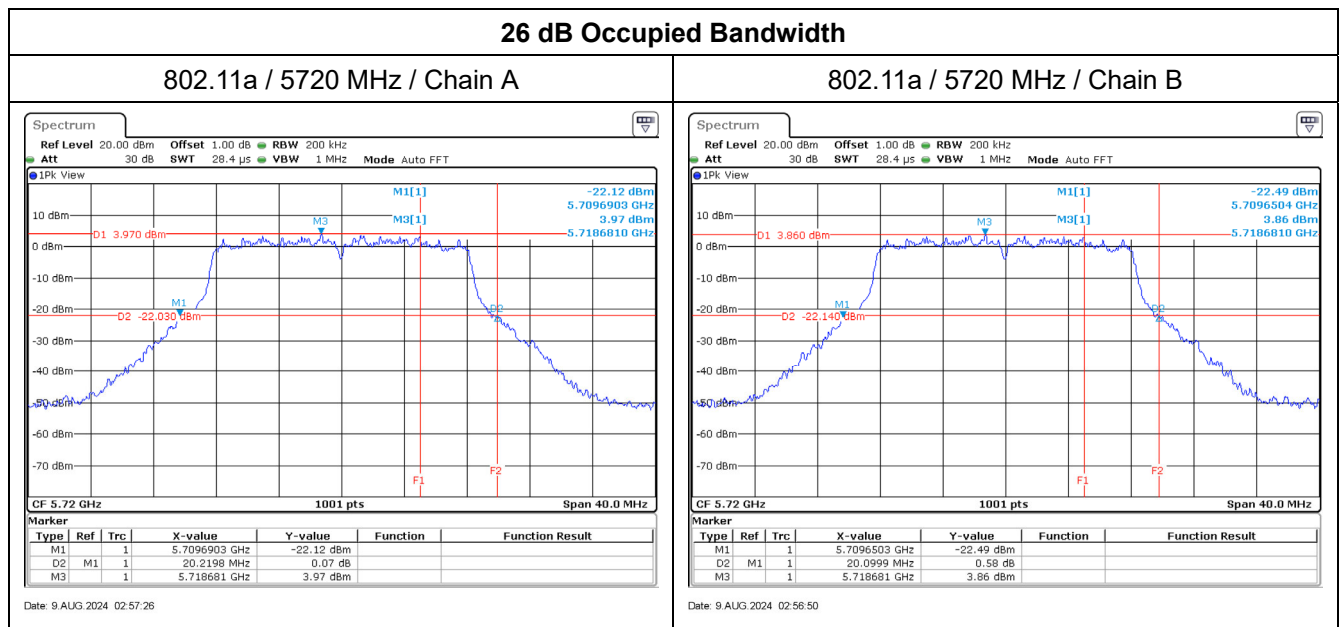


Maximum conducted output power:


802.11a / 5720 MHz (U-NII-2C) / Chain A

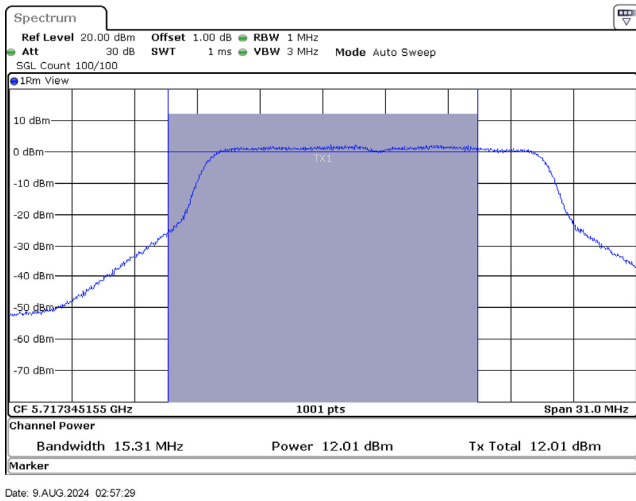


802.11a / 5720 MHz (U-NII-3) / Chain A

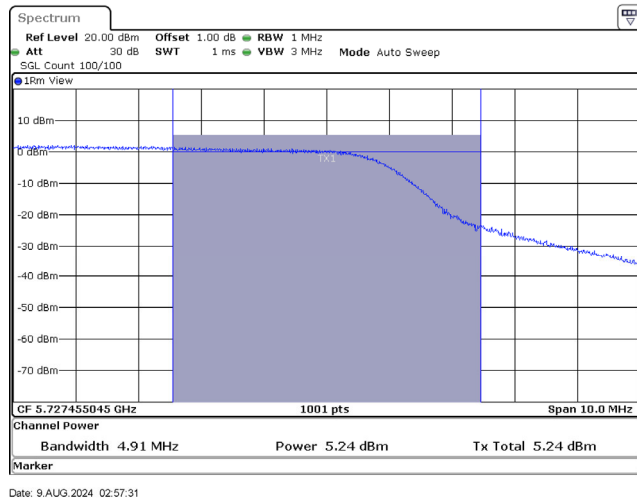

802.11a / 5720 MHz (U-NII-2C) / Chain B

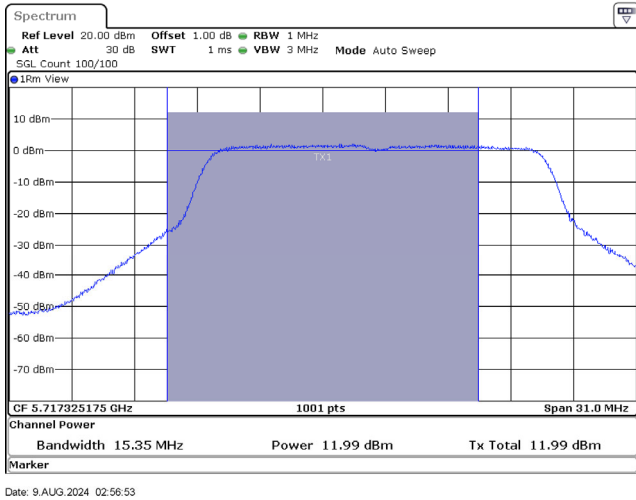


802.11a / 5720 MHz (U-NII-3) / Chain B

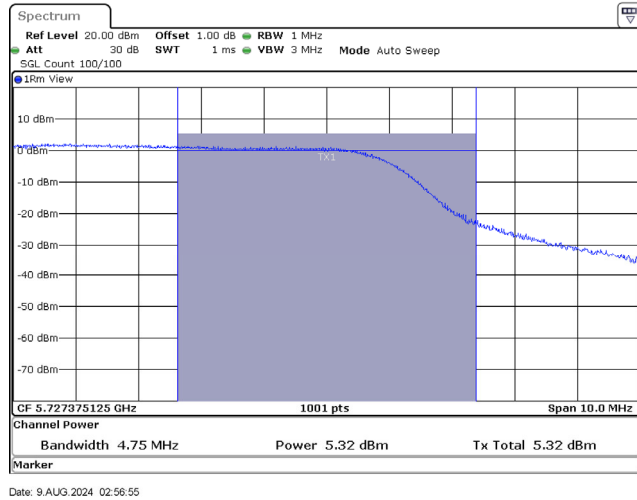

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	14.65	13.35	--	17.06	21.39	--	Pass
	5220	--	14.39	13.65	--	17.05	21.39	--	Pass
	5240	--	14.29	13.75	--	17.04	21.39	--	Pass
	5260	21.10	14.96	14.66	--	17.82	21.85	24.24	Pass
	5300	21.38	14.97	14.72	--	17.86	21.85	24.30	Pass
	5320	21.10	14.86	14.51	--	17.70	21.85	24.24	Pass
	5500	21.30	14.46	13.96	--	17.23	21.13	24.28	Pass
	5580	20.82	14.48	14.16	--	17.33	21.13	24.18	Pass
	5700	20.70	13.97	13.85	--	16.92	21.13	24.16	Pass
	5720(U-NII-2C)	15.47	12.42	12.47	0.16	15.61	21.13	22.89	Pass
	5720(U-NII-3)	--	6.95	6.90	0.16	10.09	27.43	--	Pass
	5745	--	24.52	23.45	--	27.03	27.43	--	Pass
	5785	--	23.55	23.36	--	26.47	27.43	--	Pass
	5825	--	23.97	23.26	--	26.64	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

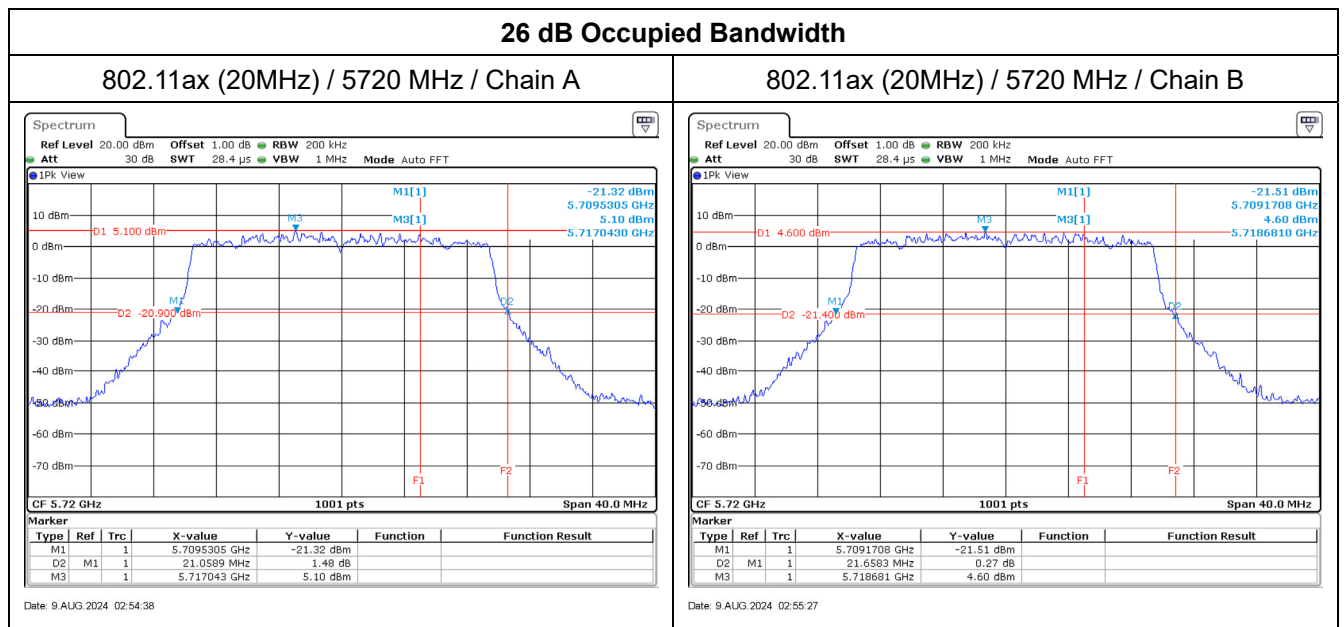


Maximum conducted output power:


802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain A

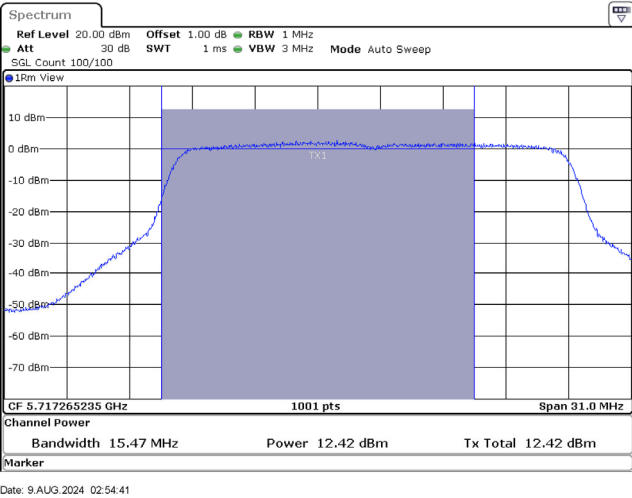


802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain A

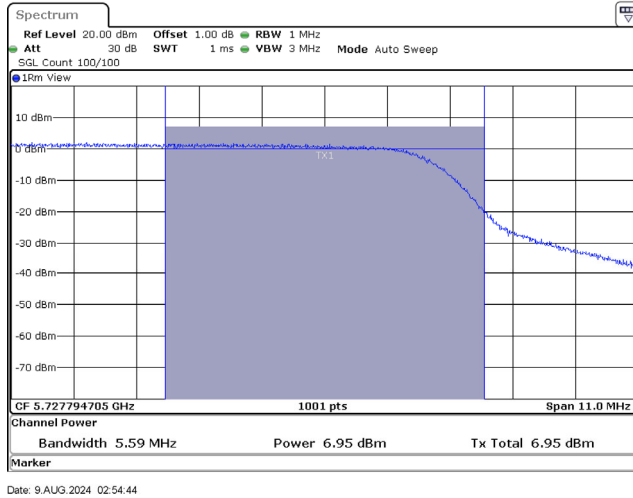

802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain B

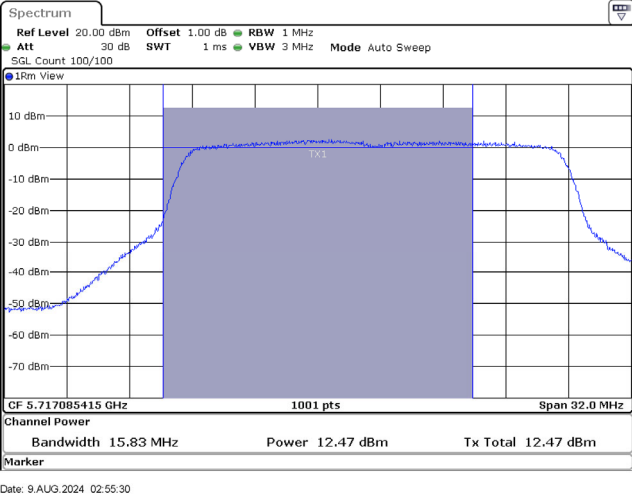


802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain B

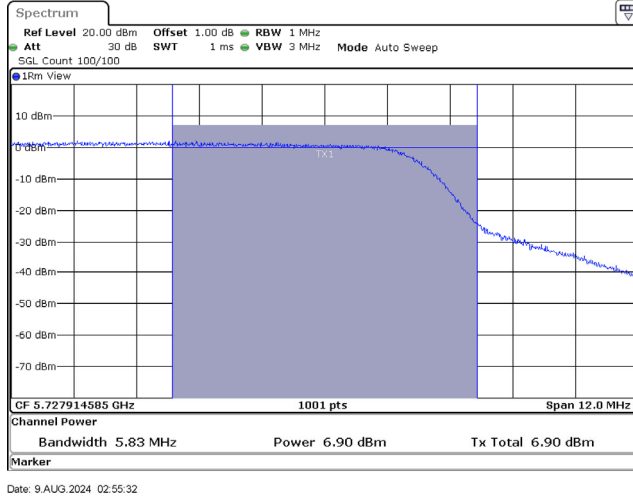

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	16.77	15.96	--	19.39	21.39	--	Pass
	5230	--	17.56	17.05	--	20.32	21.39	--	Pass
	5270	40.76	17.55	17.31	--	20.44	21.85	27.10	Pass
	5310	40.92	17.64	17.16	--	20.42	21.85	27.12	Pass
	5510	40.84	16.85	16.34	--	19.61	21.13	27.11	Pass
	5550	40.76	17.14	16.46	--	19.82	21.13	27.10	Pass
	5670	40.60	17.27	16.58	--	19.95	21.13	27.09	Pass
	5710(U-NII-2C)	35.38	15.81	15.82	0.16	18.98	21.13	26.49	Pass
	5710(U-NII-3)	--	5.57	5.58	0.16	8.74	27.43	--	Pass
	5755	--	22.41	21.82	--	25.14	27.43	--	Pass
	5795	--	21.89	21.92	--	24.92	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

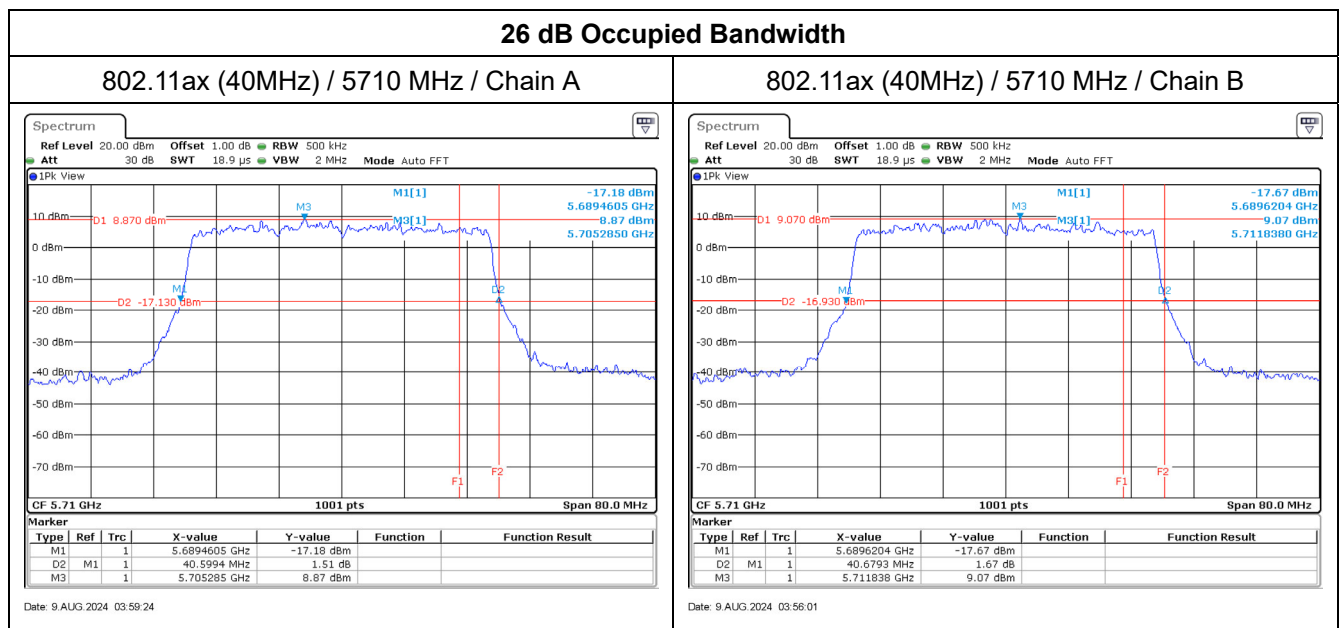


Maximum conducted output power:


802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain A

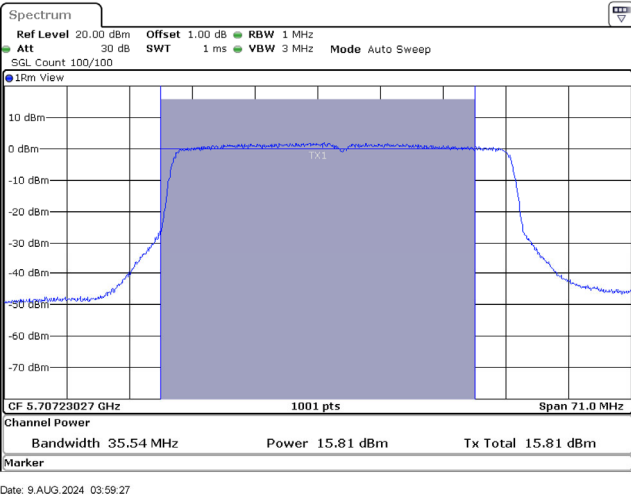


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain A

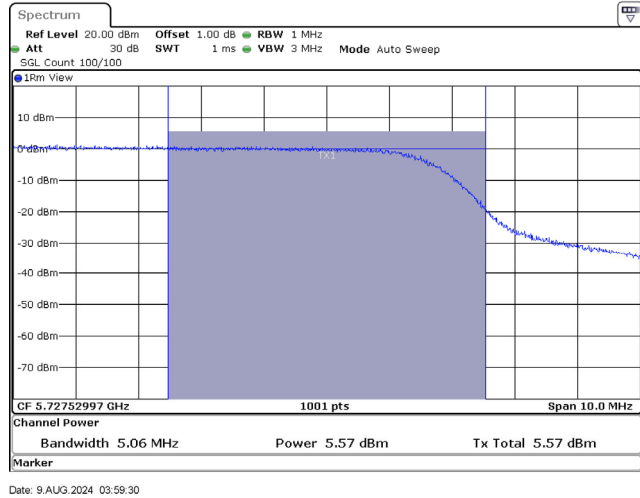

802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain B

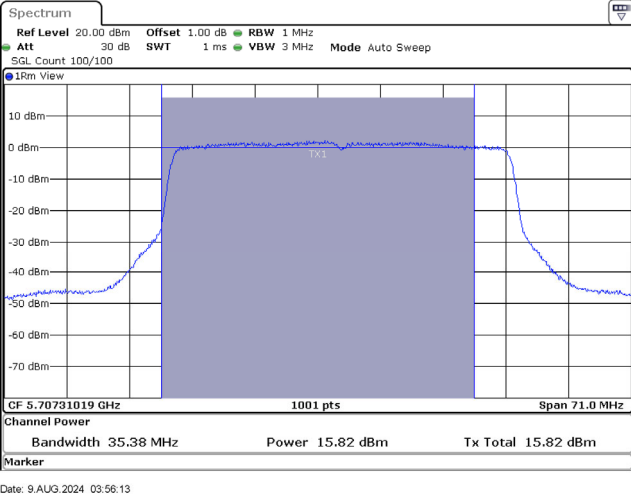


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain B

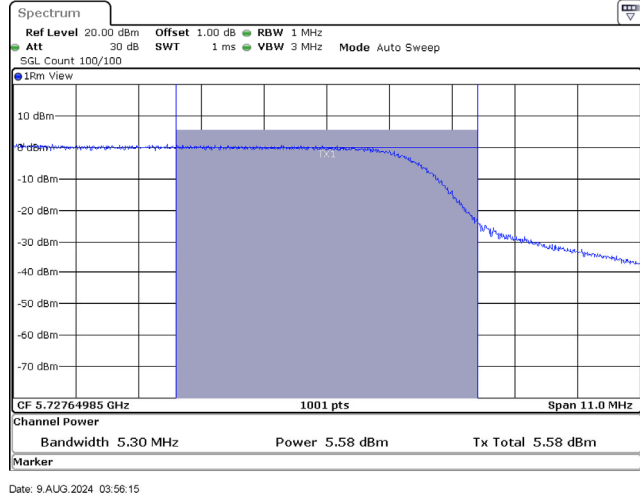

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	15.56	14.82	--	18.22	21.39	--	Pass
	5290	81.84	17.35	16.54	--	19.97	21.85	30.13	Pass
	5530	81.84	15.43	14.96	--	18.21	21.13	30.13	Pass
	5610	80.88	17.85	17.17	--	20.53	21.13	30.08	Pass
	5690(U-NII-2C)	75.76	16.44	16.39	0.19	19.62	21.13	29.79	Pass
	5690(U-NII-3)	--	1.82	1.83	0.19	5.03	27.43	--	Pass
	5775	--	20.56	20.15	--	23.37	27.43	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

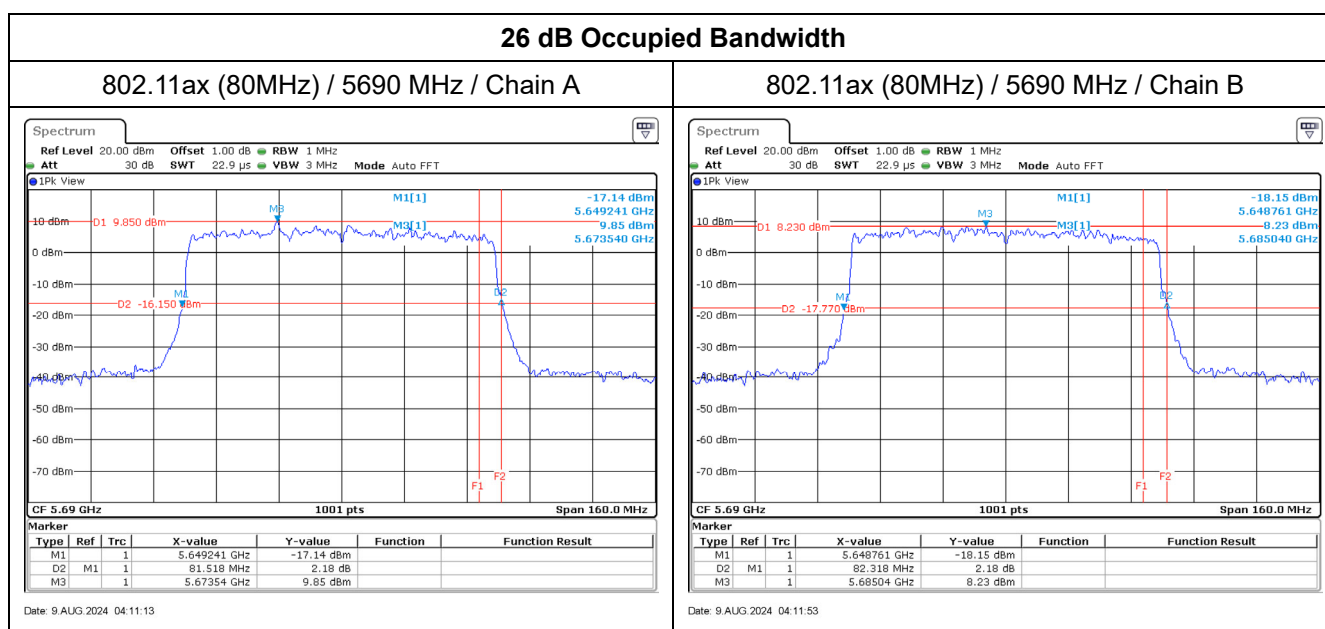


Maximum conducted output power:


802.11ax (80MHz) / 5690 MHz (U-NII-2C) / Chain A

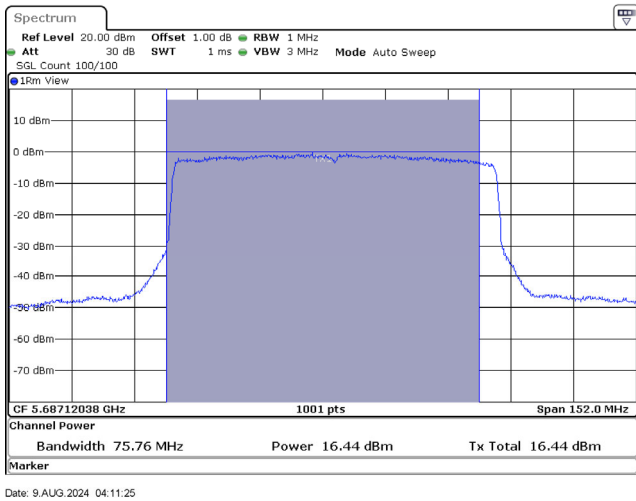


802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain A

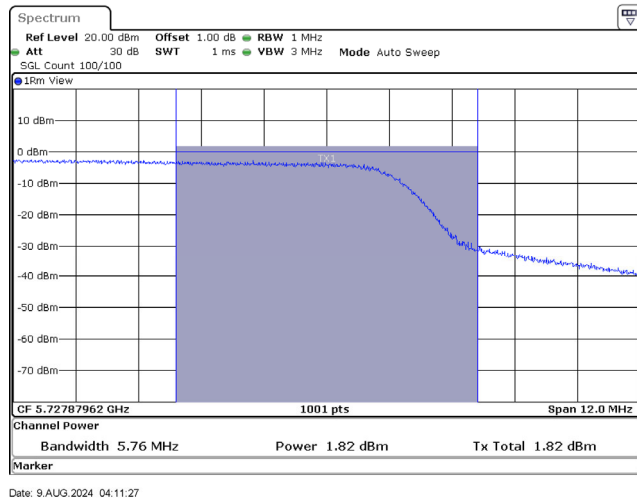

802.11ax (80MHz) / 5690 MHz (U-NII-2C) / Chain B

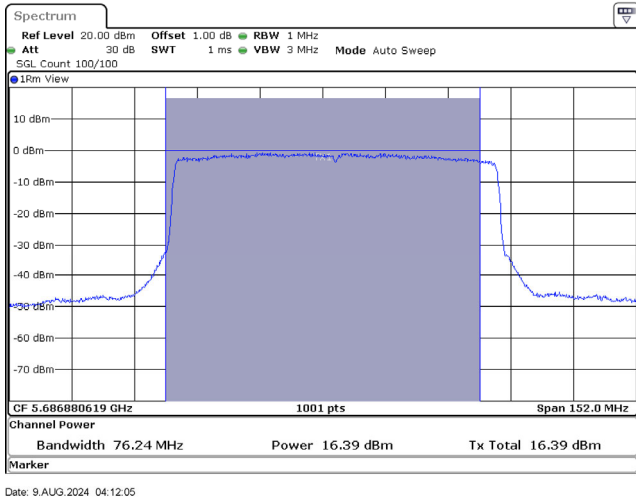

802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain B

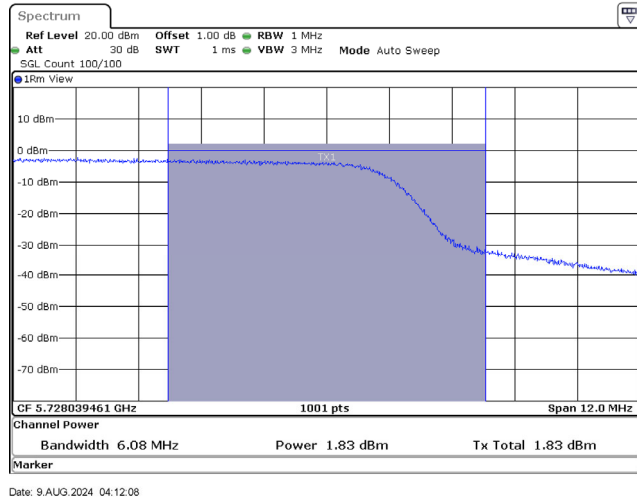

Beamforming mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	11.64	10.34	--	14.05	18.38	--	Pass
	5220	--	11.38	10.64	--	14.04	18.38	--	Pass
	5240	--	11.28	10.74	--	14.03	18.38	--	Pass
	5260	21.10	11.95	11.65	--	14.81	18.84	24.24	Pass
	5300	21.38	11.96	11.71	--	14.85	18.84	24.30	Pass
	5320	21.10	11.85	11.50	--	14.69	18.84	24.24	Pass
	5500	21.30	11.45	10.95	--	14.22	18.12	24.28	Pass
	5580	20.82	11.47	11.15	--	14.32	18.12	24.18	Pass
	5700	20.70	10.96	10.84	--	13.91	18.12	24.16	Pass
	5720(U-NII-2C)	15.47	9.41	9.46	0.16	12.60	18.12	22.89	Pass
	5720(U-NII-3)	--	3.94	3.89	0.16	7.08	24.42	--	Pass
	5745	--	21.51	20.44	--	24.02	24.42	--	Pass
	5785	--	20.54	20.35	--	23.46	24.42	--	Pass
	5825	--	20.96	20.25	--	23.63	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	13.76	12.95	--	16.38	18.38	--	Pass
	5230	--	14.55	14.04	--	17.31	18.38	--	Pass
	5270	40.76	14.54	14.30	--	17.43	18.84	27.10	Pass
	5310	40.92	14.63	14.15	--	17.41	18.84	27.12	Pass
	5510	40.84	13.84	13.33	--	16.60	18.12	27.11	Pass
	5550	40.76	14.13	13.45	--	16.81	18.12	27.10	Pass
	5670	40.60	14.26	13.57	--	16.94	18.12	27.09	Pass
	5710(U-NII-2C)	35.38	12.80	12.81	0.16	15.97	18.12	26.49	Pass
	5710(U-NII-3)	--	2.56	2.57	0.16	5.73	24.42	--	Pass
	5755	--	19.40	18.81	--	22.13	24.42	--	Pass
	5795	--	18.88	18.91	--	21.91	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	12.55	11.81	--	15.21	18.38	--	Pass
	5290	81.84	14.34	13.53	--	16.96	18.84	30.13	Pass
	5530	81.84	12.42	11.95	--	15.20	18.12	30.13	Pass
	5610	80.88	14.84	14.16	--	17.52	18.12	30.08	Pass
	5690(U-NII-2C)	75.76	13.43	13.38	0.19	16.61	18.12	29.79	Pass
	5690(U-NII-3)	--	-1.19	-1.18	0.19	2.02	24.42	--	Pass
	5775	--	17.55	17.14	--	20.36	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Appendix D. Test Result of Maximum Power Spectral Density

Antenna Type: Panel


Master mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	0.21	0.28	3.48	3.61	Pass
		B	0.17				
	5220	A	0.39	0.28	3.40	3.61	Pass
		B	-0.19				
	5240	A	0.01	0.28	3.34	3.61	Pass
		B	0.09				
	5260	A	-5.73	0.28	-2.46	-2.39	Pass
		B	-5.77				
	5300	A	-5.79	0.28	-2.57	-2.39	Pass
		B	-5.92				
	5320	A	-5.95	0.28	-2.73	-2.39	Pass
		B	-6.09				
	5500	A	-6.19	0.28	-3.04	-2.95	Pass
		B	-6.48				
	5580	A	-6.24	0.28	-3.00	-2.95	Pass
		B	-6.34				
	5700	A	-6.27	0.28	-3.17	-2.95	Pass
		B	-6.66				
	5720 (U-NII-2C)	A	-6.50	0.28	-3.24	-2.95	Pass
		B	-6.55				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-10.20	0.28	-6.94	16.05	Pass
		B	-10.25				
	5745	A	2.98	0.28	6.23	16.05	Pass
		B	2.90				
	5785	A	1.36	0.28	4.55	16.05	Pass
		B	1.17				
	5825	A	1.23	0.28	4.55	16.05	Pass
		B	1.30				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

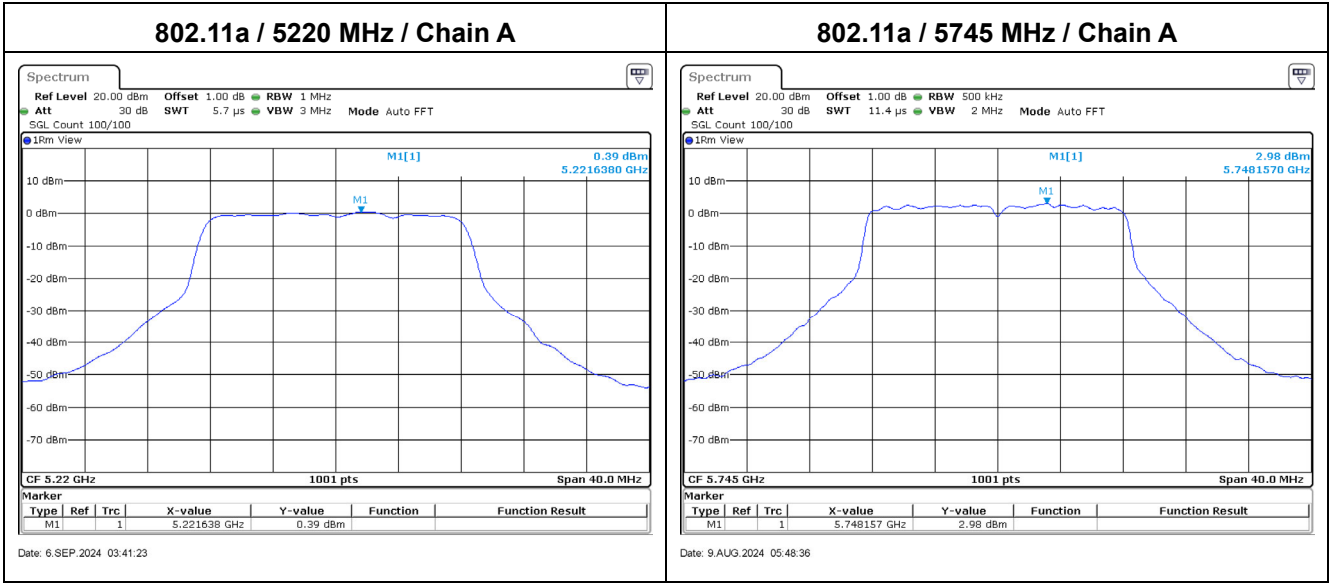


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	0.48	0.16	3.45	3.61	Pass
		B	0.07				
	5220	A	0.21	0.16	3.28	3.61	Pass
		B	0.02				
	5240	A	0.02	0.16	3.22	3.61	Pass
		B	0.09				
	5260	A	-5.84	0.16	-2.82	-2.39	Pass
		B	-6.15				
	5300	A	-5.94	0.16	-2.79	-2.39	Pass
		B	-5.98				
	5320	A	-5.81	0.16	-2.69	-2.39	Pass
		B	-5.91				
	5500	A	-6.00	0.16	-3.06	-2.95	Pass
		B	-6.46				
	5580	A	-6.34	0.16	-2.99	-2.95	Pass
		B	-5.99				
	5700	A	-6.38	0.16	-3.35	-2.95	Pass
		B	-6.67				
	5720 (U-NII-2C)	A	-6.27	0.16	-3.13	-2.95	Pass
		B	-6.32				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-10.34	0.16	-7.01	16.05	Pass
		B	-10.02				
	5745	A	1.66	0.16	4.79	16.05	Pass
		B	1.58				
	5785	A	0.65	0.16	3.54	16.05	Pass
		B	0.08				
	5825	A	0.57	0.16	3.69	16.05	Pass
		B	0.48				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

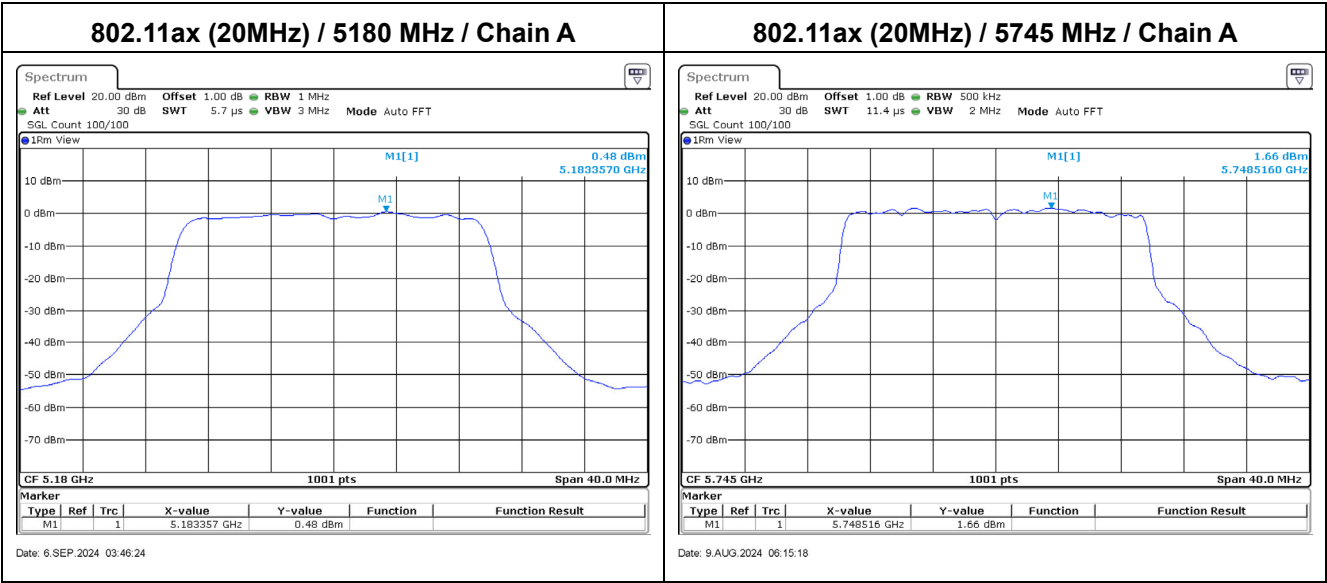


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	-5.84	0.16	-2.82	3.61	Pass
		B	-6.15				
	5230	A	-4.23	0.16	-1.14	3.61	Pass
		B	-4.38				
	5270	A	-5.63	0.16	-2.43	-2.39	Pass
		B	-5.57				
	5310	A	-5.80	0.16	-2.60	-2.39	Pass
		B	-5.73				
	5510	A	-6.58	0.16	-3.25	-2.95	Pass
		B	-6.27				
	5550	A	-5.91	0.16	-2.99	-2.95	Pass
		B	-6.43				
	5670	A	-6.46	0.16	-3.31	-2.95	Pass
		B	-6.50				
	5710 (U-NII-2C)	A	-6.57	0.16	-3.37	-2.95	Pass
		B	-6.51				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-11.40	0.16	-8.05	16.05	Pass
		B	-11.05				
	5755	A	-0.61	0.16	2.64	16.05	Pass
		B	-0.44				
	5795	A	-1.98	0.16	1.04	16.05	Pass
		B	-2.28				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

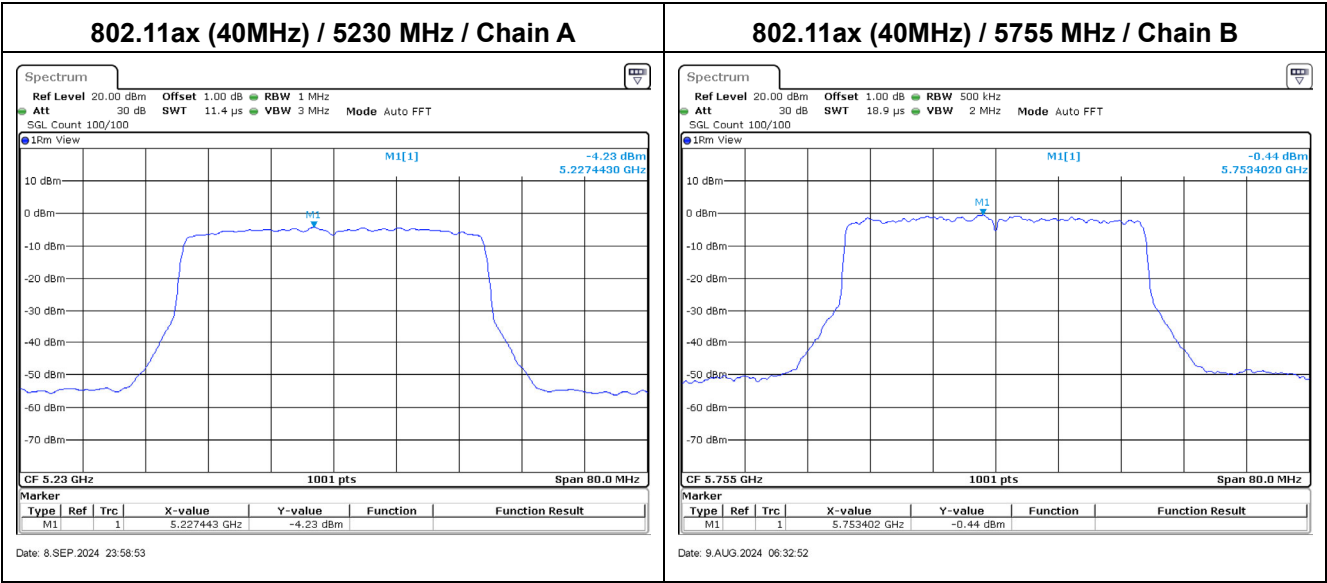


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-8.53	0.19	-5.15	3.61	Pass
		B	-8.19				
	5290	A	-6.96	0.19	-3.71	-2.39	Pass
		B	-6.86				
	5530	A	-8.39	0.19	-5.26	-2.39	Pass
		B	-8.53				
	5610	A	-8.44	0.19	-5.31	-2.95	Pass
		B	-8.59				
	5690 (U-NII-2C)	A	-8.63	0.19	-5.68	-2.95	Pass
		B	-9.16				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-14.55	0.19	-11.28	16.05	Pass
		B	-14.41				
	5775	A	-10.01	0.19	-6.81	16.05	Pass
		B	-10.02				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

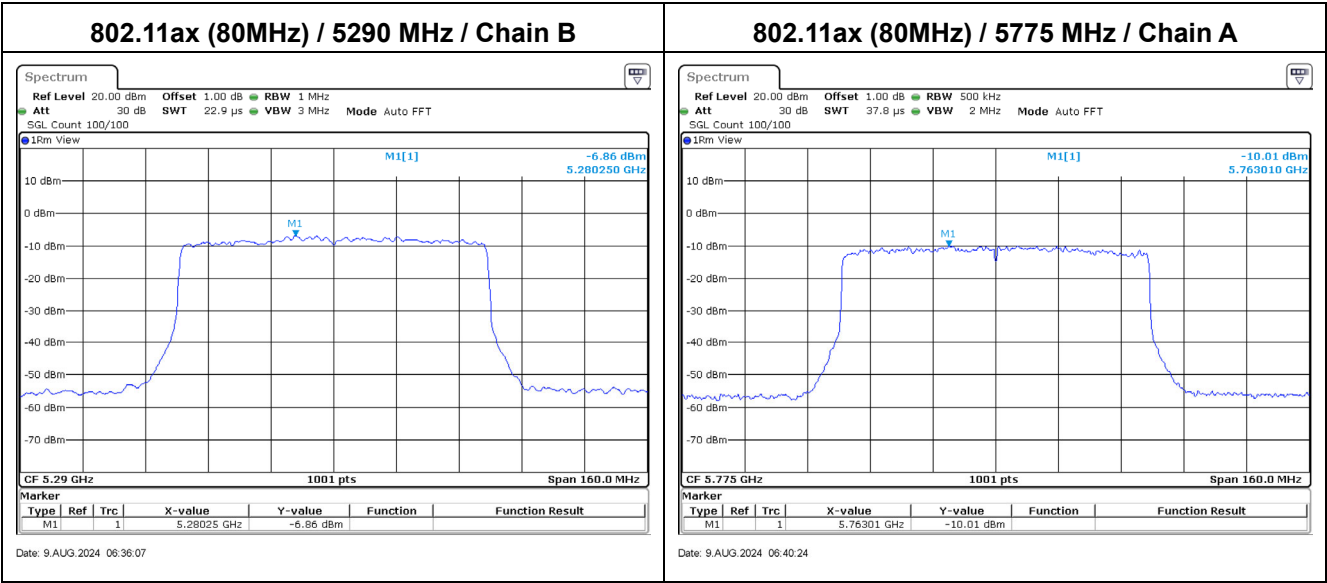


Slave mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	-5.90	0.28	-2.65	-2.39	Pass
		B	-5.98				
	5220	A	-5.69	0.28	-2.41	-2.39	Pass
		B	-5.71				
	5240	A	-5.77	0.28	-2.62	-2.39	Pass
		B	-6.05				
	5260	A	-5.73	0.28	-2.46	-2.39	Pass
		B	-5.77				
	5300	A	-5.79	0.28	-2.57	-2.39	Pass
		B	-5.92				
	5320	A	-5.95	0.28	-2.73	-2.39	Pass
		B	-6.09				
	5500	A	-6.19	0.28	-3.04	-2.95	Pass
		B	-6.48				
	5580	A	-6.24	0.28	-3.00	-2.95	Pass
		B	-6.34				
	5700	A	-6.27	0.28	-3.17	-2.95	Pass
		B	-6.66				
	5720 (U-NII-2C)	A	-6.50	0.28	-3.24	-2.95	Pass
		B	-6.55				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-10.20	0.28	-6.94	16.05	Pass
		B	-10.25				
	5745	A	2.98	0.28	6.23	16.05	Pass
		B	2.90				
	5785	A	1.36	0.28	4.55	16.05	Pass
		B	1.17				
	5825	A	1.23	0.28	4.55	16.05	Pass
		B	1.30				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

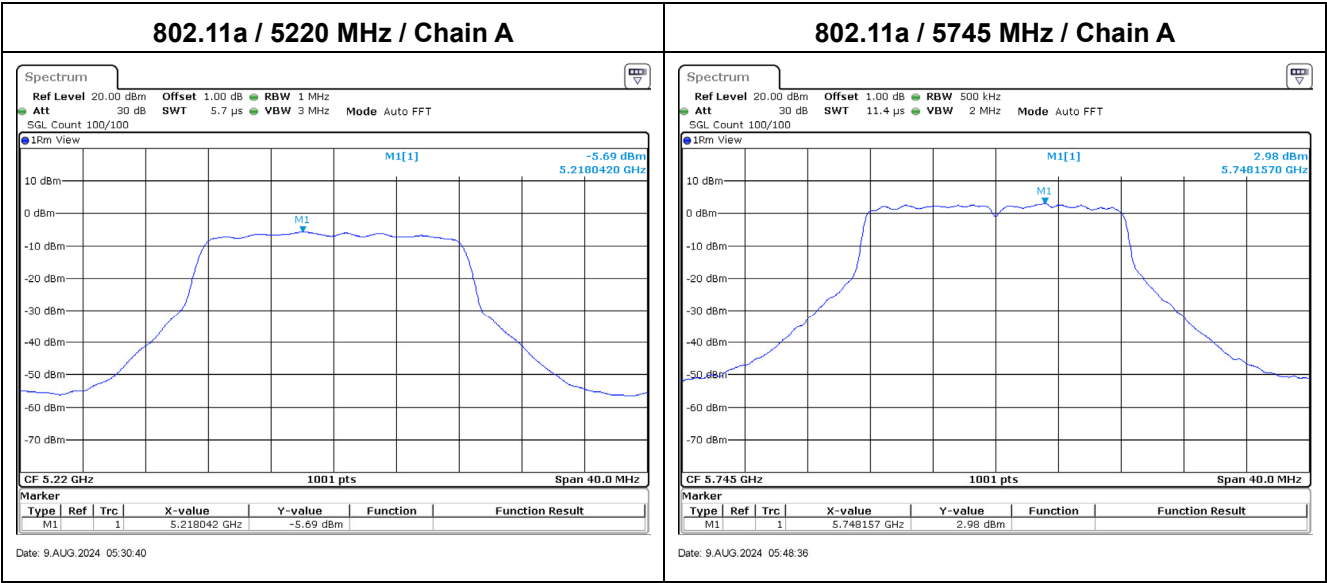


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	-5.59	0.16	-2.63	-2.39	Pass
		B	-6.02				
	5220	A	-6.03	0.16	-2.87	-2.39	Pass
		B	-6.05				
	5240	A	-5.95	0.16	-2.57	-2.39	Pass
		B	-5.53				
	5260	A	-5.84	0.16	-2.82	-2.39	Pass
		B	-6.15				
	5300	A	-5.94	0.16	-2.79	-2.39	Pass
		B	-5.98				
	5320	A	-5.81	0.16	-2.69	-2.39	Pass
		B	-5.91				
	5500	A	-6.00	0.16	-3.06	-2.95	Pass
		B	-6.46				
	5580	A	-6.34	0.16	-2.99	-2.95	Pass
		B	-5.99				
	5700	A	-6.38	0.16	-3.35	-2.95	Pass
		B	-6.67				
	5720 (U-NII-2C)	A	-6.27	0.16	-3.13	-2.95	Pass
		B	-6.32				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-10.34	0.16	-7.01	16.05	Pass
		B	-10.02				
	5745	A	1.66	0.16	4.79	16.05	Pass
		B	1.58				
	5785	A	0.65	0.16	3.54	16.05	Pass
		B	0.08				
	5825	A	0.57	0.16	3.69	16.05	Pass
		B	0.48				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

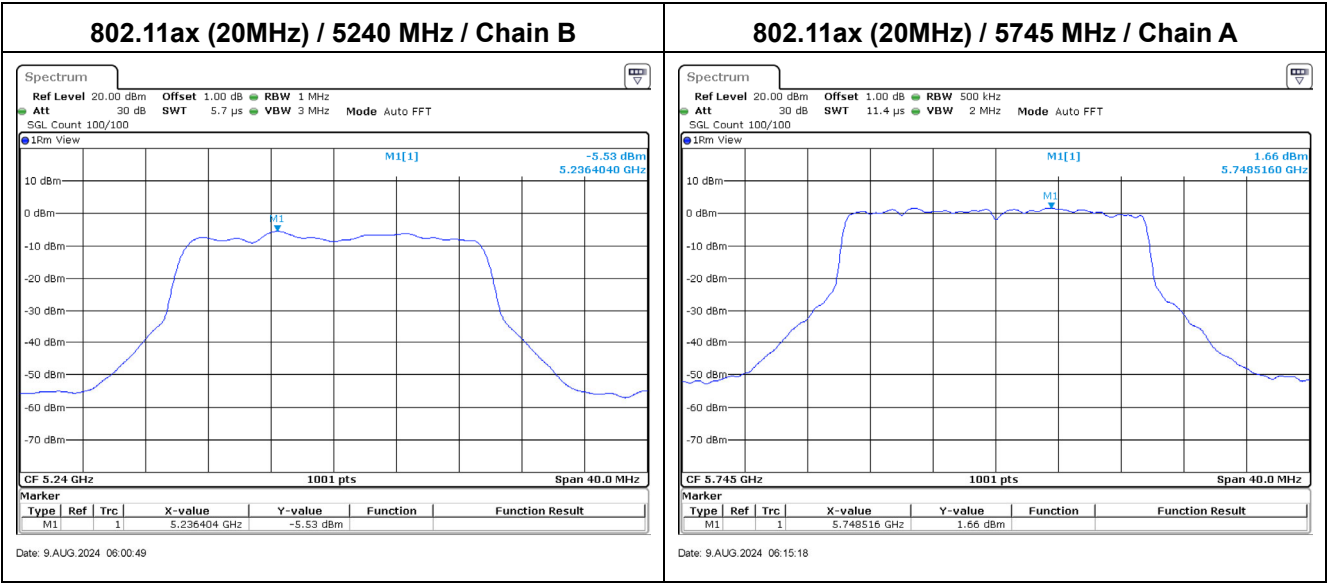


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	-5.84	0.16	-2.82	-2.39	Pass
		B	-6.15				
	5230	A	-5.54	0.16	-2.53	-2.39	Pass
		B	-5.86				
	5270	A	-5.63	0.16	-2.43	-2.39	Pass
		B	-5.57				
	5310	A	-5.80	0.16	-2.60	-2.39	Pass
		B	-5.73				
	5510	A	-6.58	0.16	-3.25	-2.95	Pass
		B	-6.27				
	5550	A	-5.91	0.16	-2.99	-2.95	Pass
		B	-6.43				
	5670	A	-6.46	0.16	-3.31	-2.95	Pass
		B	-6.50				
	5710 (U-NII-2C)	A	-6.57	0.16	-3.37	-2.95	Pass
		B	-6.51				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-11.40	0.16	-8.05	16.05	Pass
		B	-11.05				
	5755	A	-0.61	0.16	2.64	16.05	Pass
		B	-0.44				
	5795	A	-1.98	0.16	1.04	16.05	Pass
		B	-2.28				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

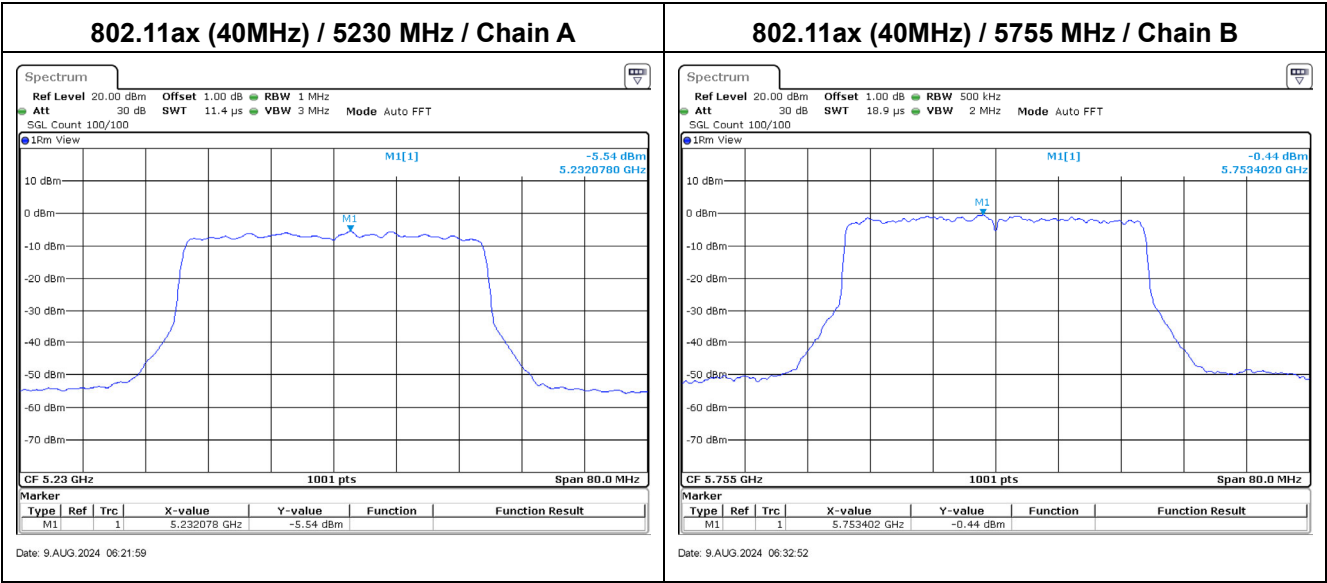


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-8.53	0.19	-5.15	-2.39	Pass
		B	-8.19				
	5290	A	-6.96	0.19	-3.71	-2.39	Pass
		B	-6.86				
	5530	A	-8.39	0.19	-5.26	-2.39	Pass
		B	-8.53				
	5610	A	-8.44	0.19	-5.31	-2.95	Pass
		B	-8.59				
	5690 (U-NII-2C)	A	-8.63	0.19	-5.68	-2.95	Pass
		B	-9.16				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-14.55	0.19	-11.28	16.05	Pass
		B	-14.41				
	5775	A	-10.01	0.19	-6.81	16.05	Pass
		B	-10.02				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

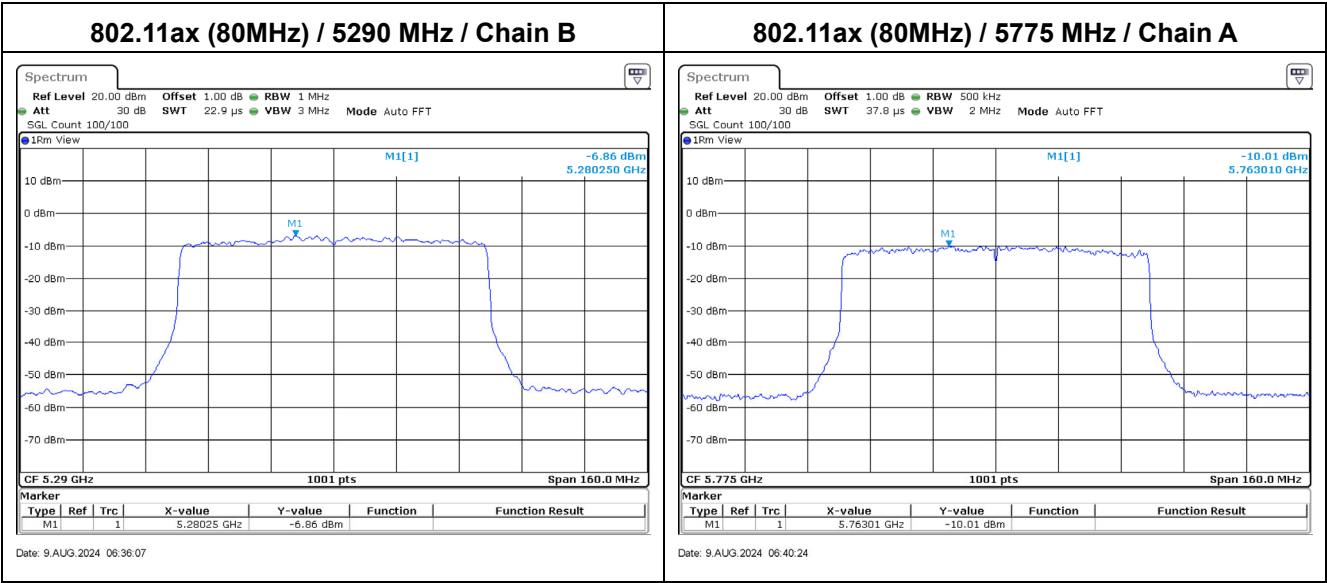


Antenna Type: Dipole**Master mode**

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	7.88	0.28	11.14	11.38	Pass
		B	7.82				
	5220	A	8.07	0.28	11.14	11.38	Pass
		B	7.63				
	5240	A	8.11	0.28	11.26	11.38	Pass
		B	7.84				
	5260	A	2.56	0.28	5.71	5.84	Pass
		B	2.27				
	5300	A	2.36	0.28	5.68	5.84	Pass
		B	2.43				
	5320	A	2.42	0.28	5.60	5.84	Pass
		B	2.21				
	5500	A	1.63	0.28	4.90	5.12	Pass
		B	1.60				
	5580	A	1.68	0.28	4.96	5.12	Pass
		B	1.67				
	5700	A	1.73	0.28	5.03	5.12	Pass
		B	1.76				
	5720 (U-NII-2C)	A	1.84	0.28	3.70	5.12	Pass
		B	-1.73				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-1.80	0.28	1.42	24.42	Pass
		B	-1.93				
	5745	A	10.21	0.28	13.43	24.42	Pass
		B	10.08				
	5785	A	9.27	0.28	12.42	24.42	Pass
		B	8.98				
	5825	A	9.31	0.28	12.36	24.42	Pass
		B	8.82				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

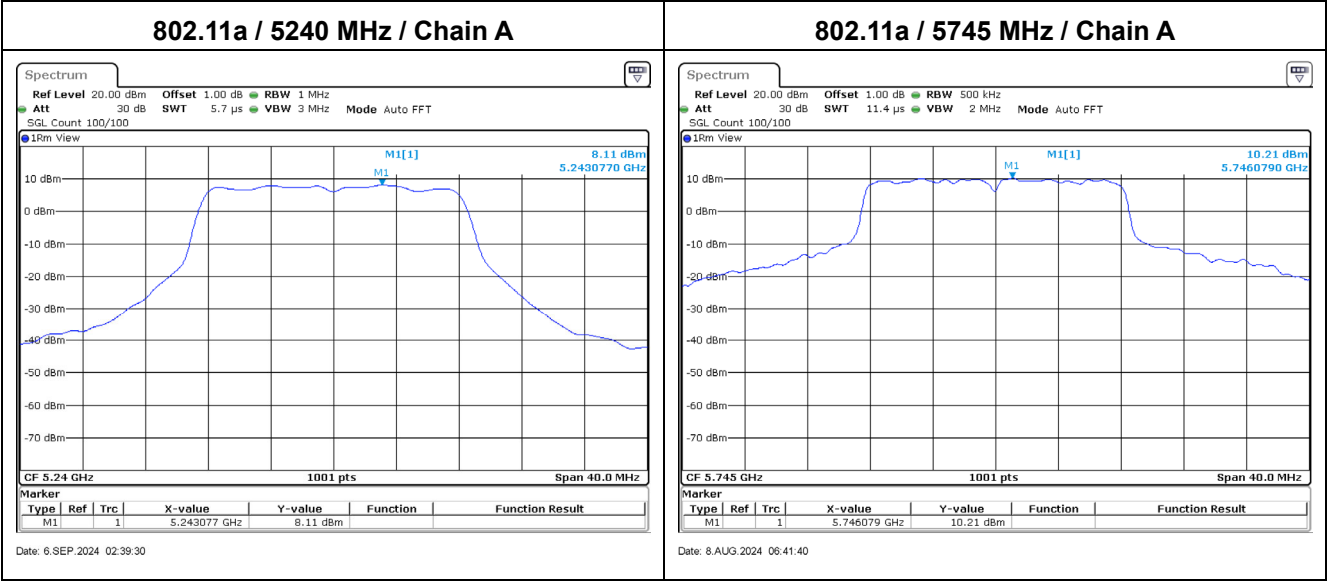


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	7.82	0.16	11.06	11.38	Pass
		B	7.96				
	5220	A	8.15	0.16	11.28	11.38	Pass
		B	8.08				
	5240	A	8.08	0.16	11.19	11.38	Pass
		B	7.96				
	5260	A	2.62	0.16	5.77	5.84	Pass
		B	2.59				
	5300	A	2.72	0.16	5.69	5.84	Pass
		B	2.32				
	5320	A	2.63	0.16	5.55	5.84	Pass
		B	2.11				
	5500	A	1.90	0.16	4.91	5.12	Pass
		B	1.57				
	5580	A	1.92	0.16	5.02	5.12	Pass
		B	1.78				
	5700	A	1.99	0.16	4.96	5.12	Pass
		B	1.59				
	5720 (U-NII-2C)	A	2.22	0.16	5.09	5.12	Pass
		B	1.61				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-1.20	0.16	1.74	24.42	Pass
		B	-1.66				
	5745	A	9.30	0.16	12.45	24.42	Pass
		B	9.26				
	5785	A	7.79	0.16	10.98	24.42	Pass
		B	7.83				
	5825	A	8.47	0.16	11.72	24.42	Pass
		B	8.63				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

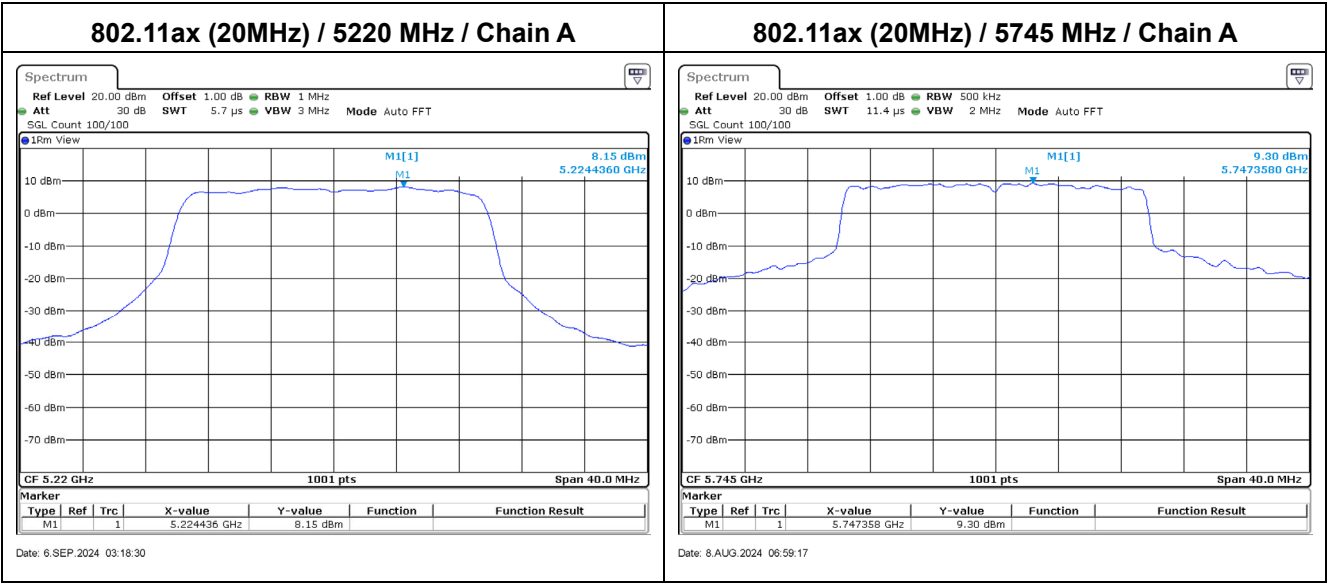


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	1.77	0.16	4.94	11.38	Pass
		B	1.78				
	5230	A	6.54	0.16	9.71	11.38	Pass
		B	6.55				
	5270	A	2.31	0.16	5.60	5.84	Pass
		B	2.55				
	5310	A	2.84	0.16	5.77	5.84	Pass
		B	2.35				
	5510	A	1.24	0.16	4.52	5.12	Pass
		B	1.46				
	5550	A	1.68	0.16	4.69	5.12	Pass
		B	1.36				
	5670	A	1.98	0.16	4.97	5.12	Pass
		B	1.61				
	5710 (U-NII-2C)	A	2.07	0.16	5.01	5.12	Pass
		B	1.60				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-2.48	0.16	0.60	24.42	Pass
		B	-2.66				
	5755	A	3.91	0.16	7.06	24.42	Pass
		B	3.88				
	5795	A	3.98	0.16	7.08	24.42	Pass
		B	3.85				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

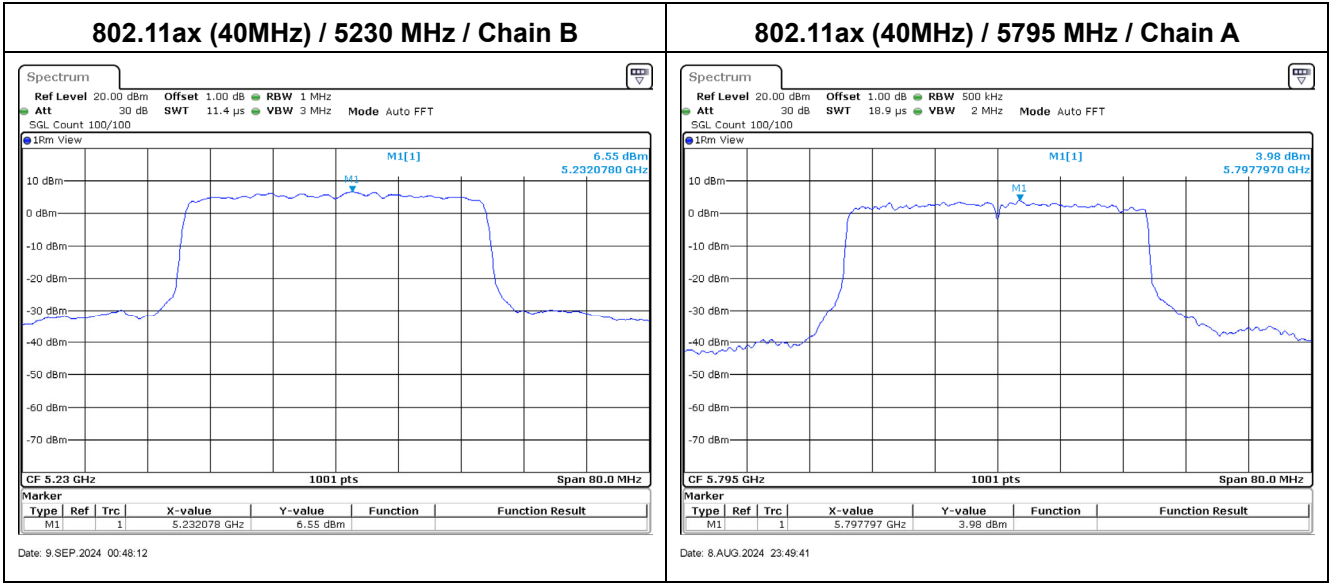


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-2.94	0.19	0.41	11.38	Pass
		B	-2.65				
	5290	A	-1.11	0.19	2.29	5.84	Pass
		B	-0.73				
	5530	A	-3.23	0.19	-0.08	5.12	Pass
		B	-3.34				
	5610	A	-0.40	0.19	2.88	5.12	Pass
		B	-0.24				
	5690 (U-NII-2C)	A	-0.51	0.19	2.61	5.12	Pass
		B	-0.67				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-6.43	0.19	-3.26	24.42	Pass
		B	-6.49				
	5775	A	-0.62	0.19	2.70	24.42	Pass
		B	-0.39				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

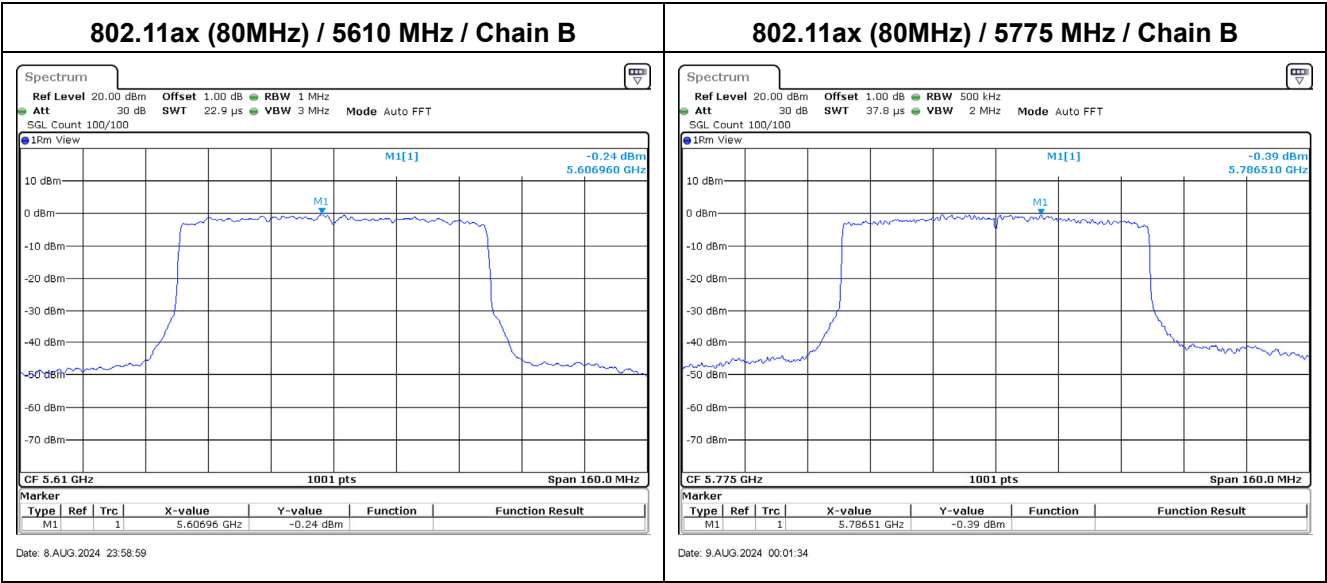


Slave mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	2.09	0.28	5.21	5.38	Pass
		B	1.74				
	5220	A	1.89	0.28	5.20	5.38	Pass
		B	1.94				
	5240	A	1.85	0.28	5.17	5.38	Pass
		B	1.92				
	5260	A	2.56	0.28	5.71	5.84	Pass
		B	2.27				
	5300	A	2.36	0.28	5.68	5.84	Pass
		B	2.43				
	5320	A	2.42	0.28	5.60	5.84	Pass
		B	2.21				
	5500	A	1.63	0.28	4.90	5.12	Pass
		B	1.60				
	5580	A	1.68	0.28	4.96	5.12	Pass
		B	1.67				
	5700	A	1.73	0.28	5.03	5.12	Pass
		B	1.76				
	5720 (U-NII-2C)	A	1.84	0.28	5.07	5.12	Pass
		B	1.73				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-1.80	0.28	1.42	24.42	Pass
		B	-1.93				
	5745	A	10.21	0.28	13.43	24.42	Pass
		B	10.08				
	5785	A	9.27	0.28	12.42	24.42	Pass
		B	8.98				
	5825	A	9.31	0.28	12.36	24.42	Pass
		B	8.82				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

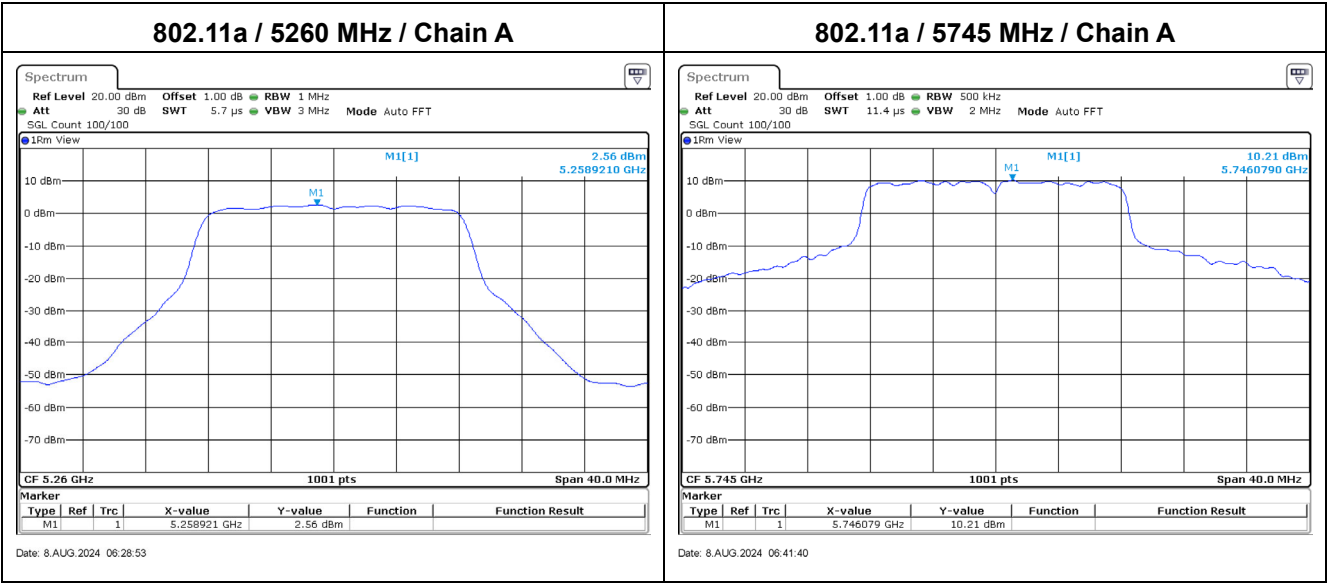


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	1.92	0.16	5.02	5.38	Pass
		B	1.78				
	5220	A	1.89	0.16	5.06	5.38	Pass
		B	1.90				
	5240	A	2.07	0.16	5.13	5.38	Pass
		B	1.84				
	5260	A	2.62	0.16	5.77	5.84	Pass
		B	2.59				
	5300	A	2.72	0.16	5.69	5.84	Pass
		B	2.32				
	5320	A	2.63	0.16	5.55	5.84	Pass
		B	2.11				
	5500	A	1.90	0.16	4.91	5.12	Pass
		B	1.57				
	5580	A	1.92	0.16	5.02	5.12	Pass
		B	1.78				
	5700	A	1.99	0.16	4.96	5.12	Pass
		B	1.59				
	5720 (U-NII-2C)	A	2.22	0.16	5.09	5.12	Pass
		B	1.61				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-1.20	0.16	1.74	24.42	Pass
		B	-1.66				
	5745	A	9.30	0.16	12.45	24.42	Pass
		B	9.26				
	5785	A	7.79	0.16	10.98	24.42	Pass
		B	7.83				
	5825	A	8.47	0.16	11.72	24.42	Pass
		B	8.63				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

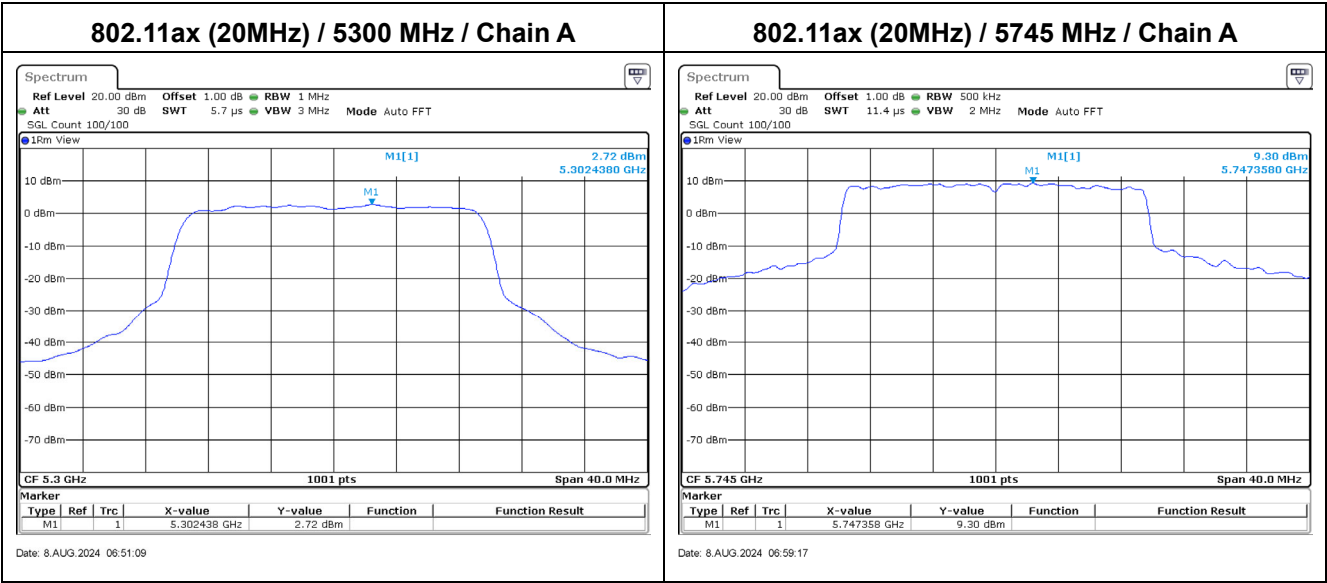


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	1.77	0.16	4.94	5.38	Pass
		B	1.78				
	5230	A	2.02	0.16	4.98	5.38	Pass
		B	1.59				
	5270	A	2.31	0.16	5.60	5.84	Pass
		B	2.55				
	5310	A	2.84	0.16	5.77	5.84	Pass
		B	2.35				
	5510	A	1.24	0.16	4.52	5.12	Pass
		B	1.46				
	5550	A	1.68	0.16	4.69	5.12	Pass
		B	1.36				
	5670	A	1.98	0.16	4.97	5.12	Pass
		B	1.61				
	5710 (U-NII-2C)	A	2.07	0.16	5.01	5.12	Pass
		B	1.60				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-2.48	0.16	0.60	24.42	Pass
		B	-2.66				
	5755	A	3.91	0.16	7.06	24.42	Pass
		B	3.88				
	5795	A	3.98	0.16	7.08	24.42	Pass
		B	3.85				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

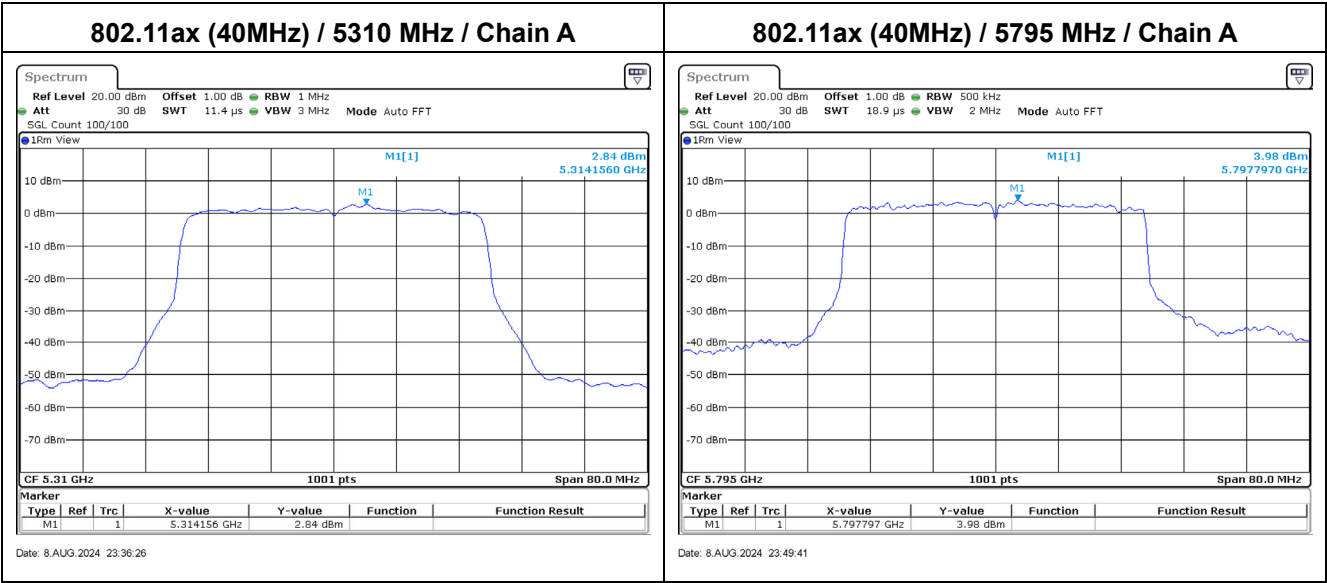


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-2.94	0.19	0.41	5.38	Pass
		B	-2.65				
	5290	A	-1.11	0.19	2.29	5.84	Pass
		B	-0.73				
	5530	A	-3.23	0.19	-0.08	5.12	Pass
		B	-3.34				
	5610	A	-0.40	0.19	2.88	5.12	Pass
		B	-0.24				
	5690 (U-NII-2C)	A	-0.51	0.19	2.61	5.12	Pass
		B	-0.67				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-6.43	0.19	-3.26	24.42	Pass
		B	-6.49				
	5775	A	-0.62	0.19	2.70	24.42	Pass
		B	-0.39				


Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

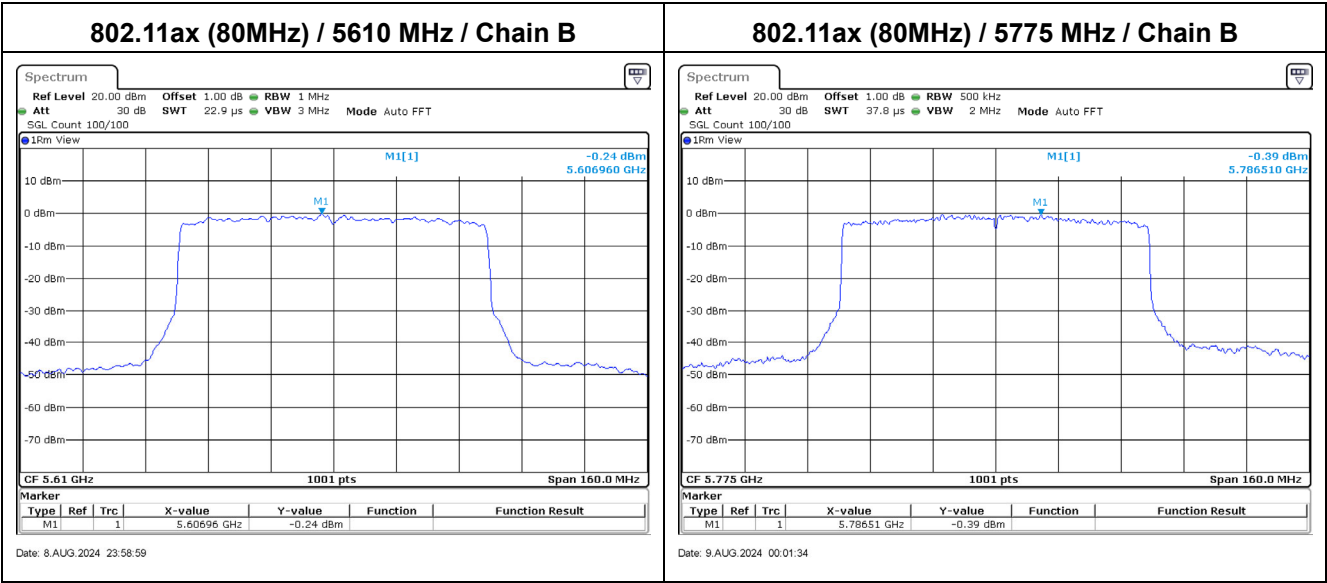

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Antenna Type: Panel


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5180MHz
Test BY :Bob

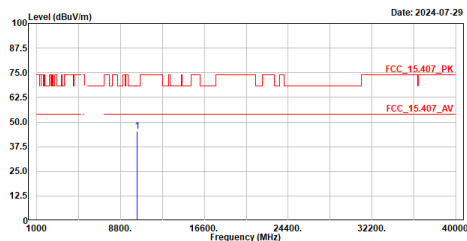

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10360.000	45.18	68.22	-23.04	49.48	-4.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5180MHz
Test BY :Bob

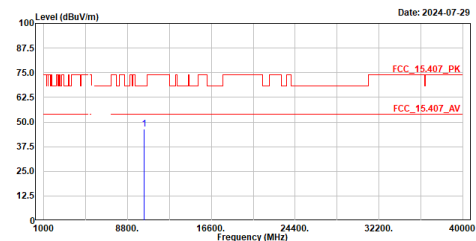

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10360.000	46.47	68.22	-21.75	50.77	-4.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5220MHz
Test BY :Bob

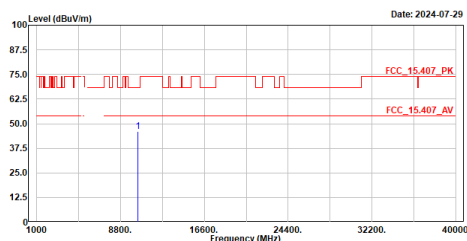

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	45.87	68.22	-22.35	50.10	-4.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5220MHz
Test BY :Bob

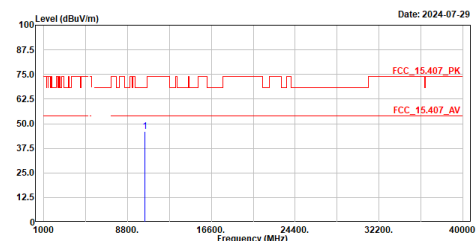

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	46.20	68.22	-22.02	50.43	-4.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5240MHz
Test BY :Bob

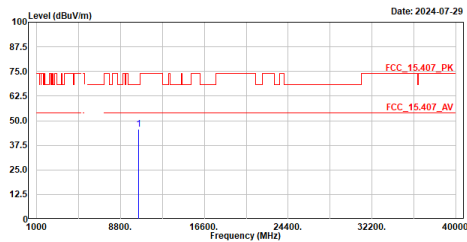


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	45.76	68.22	-22.46	49.96	-4.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5240MHz
Test BY :Bob

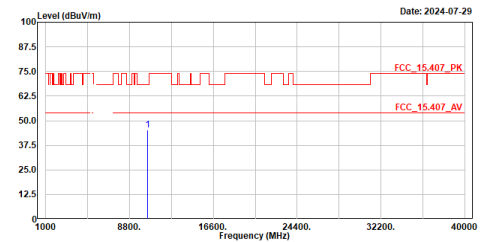


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	45.46	68.22	-22.76	49.66	-4.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5260MHz
Test BY :Bob

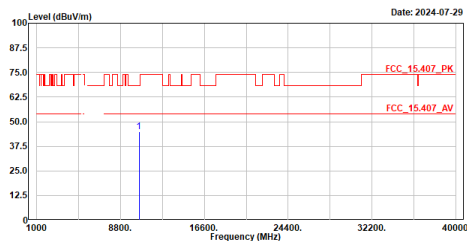


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	44.90	68.22	-23.32	49.05	-4.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5260MHz
Test BY :Bob

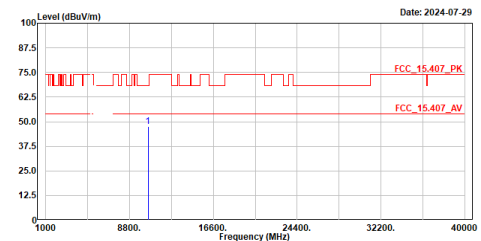


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	47.49	68.22	-20.73	51.64	-4.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5300MHz
Test BY :Bob

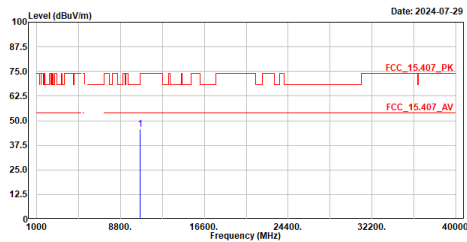


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	45.61	74.00	-28.39	49.27	-3.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5300MHz
Test BY :Bob

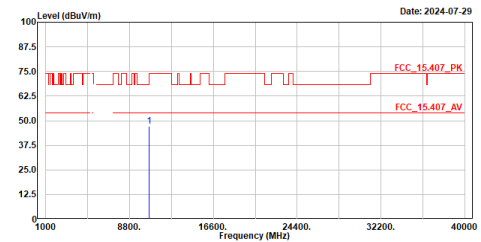


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	47.04	74.00	-26.96	50.70	-3.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5320MHz
Test BY :Bob

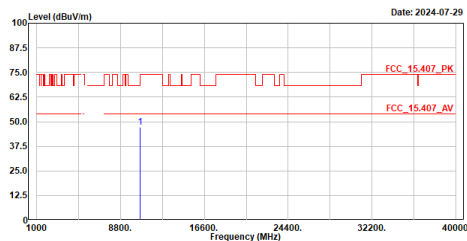


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	47.04	74.00	-26.96	50.58	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5320MHz
Test BY :Bob

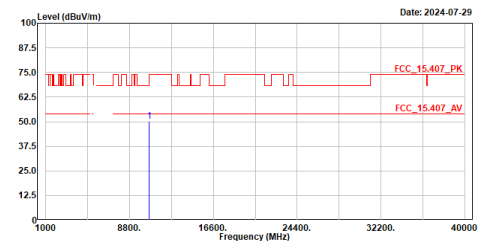


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	50.35	74.00	-23.65	53.89	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5580MHz
Test BY :Bob

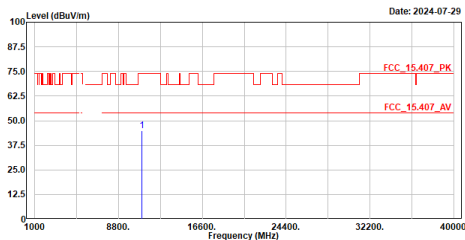

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.09	74.00	-28.91	48.88	-2.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5580MHz
Test BY :Bob

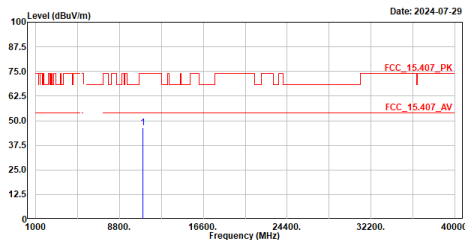

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	46.38	74.00	-27.62	49.37	-2.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5580MHz
Test BY :Bob

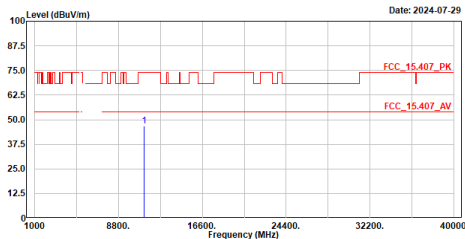

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11160.000	46.74	74.00	-27.26	48.95	-2.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5580MHz
Test BY :Bob

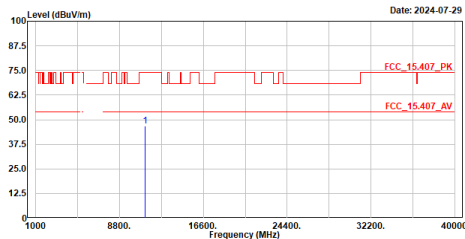

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11160.000	46.68	74.00	-27.32	48.89	-2.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5700MHz
Test BY :Bob

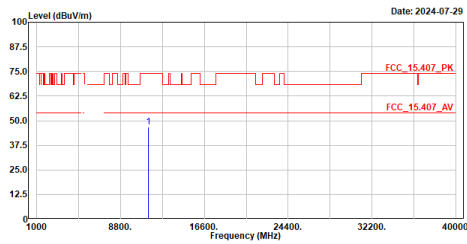


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	46.74	74.00	-27.26	48.31	-1.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5700MHz
Test BY :Bob

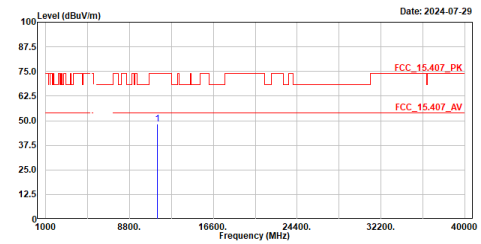


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	48.44	74.00	-25.56	50.01	-1.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5720MHz
Test BY :Bob

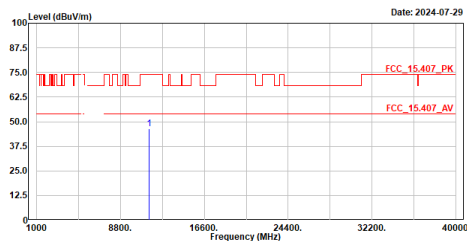


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	46.33	74.00	-27.67	47.71	-1.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5720MHz
Test BY :Bob

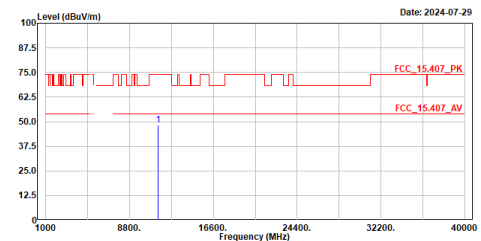


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	48.32	74.00	-25.68	49.70	-1.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5745MHz
Test BY :Bob

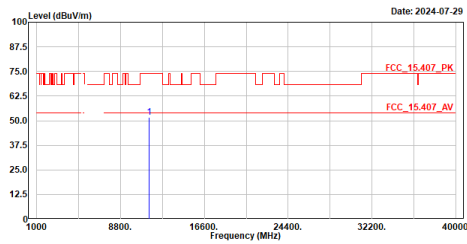


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	51.87	74.00	-22.13	53.13	-1.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5745MHz
Test BY :Bob

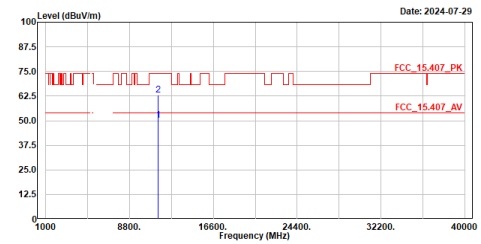


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	50.00	54.00	-4.00	51.26	-1.26	Average
2	11490.000	63.01	74.00	-10.99	64.27	-1.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5785MHz
Test BY :Bob

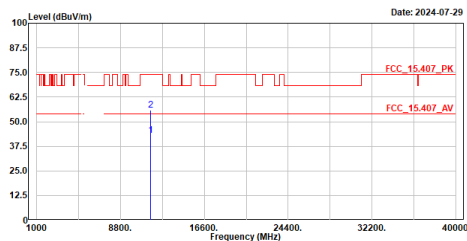


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	42.97	54.00	-11.03	44.11	-1.14	Average
2	11570.000	55.90	74.00	-18.10	57.04	-1.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5785MHz
Test BY :Bob

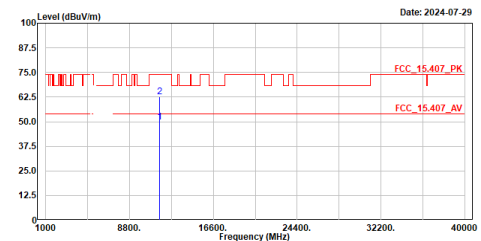


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	49.69	54.00	-4.31	50.83	-1.14	Average
2	11570.000	62.82	74.00	-11.18	63.96	-1.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5825MHz
Test BY :Bob

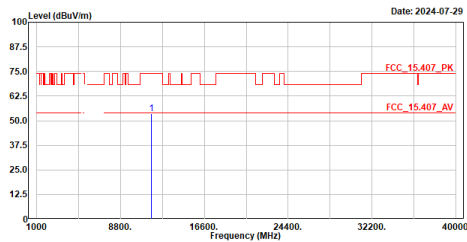


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	53.54	74.00	-20.46	54.70	-1.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5825MHz
Test BY :Bob

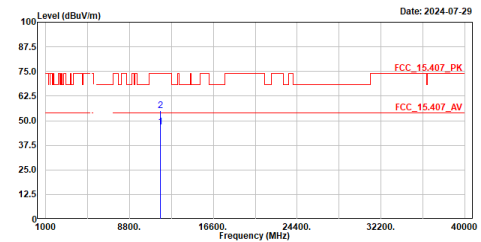


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.85	54.00	-7.15	48.01	-1.16	Average
2	11650.000	55.10	74.00	-18.90	56.26	-1.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax20_5180MHz
Test BY :Bob

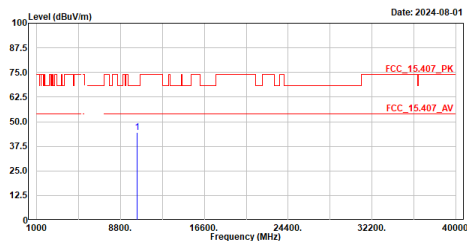


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10360.000	44.35	68.22	-23.87	48.65	-4.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax20_5180MHz
Test BY :Bob

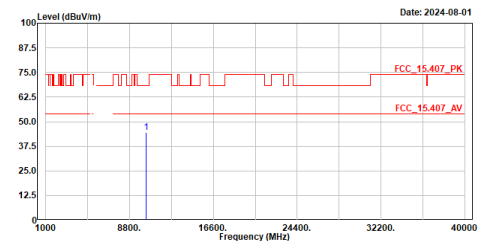


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10360.000	44.51	68.22	-23.71	48.81	-4.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax20_5220MHz
Test BY :Bob

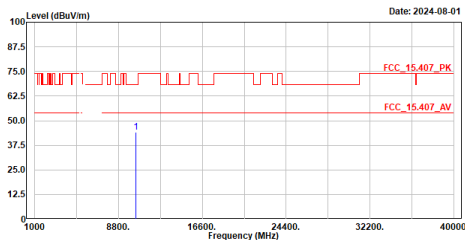


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	44.12	68.22	-24.10	48.35	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax20_5220MHz
Test BY :Bob

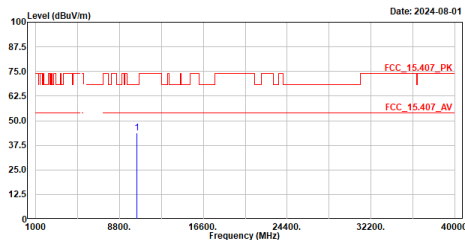


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	43.88	68.22	-24.34	48.11	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax20_5240MHz
Test BY :Bob

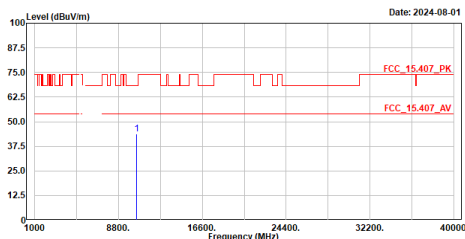


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	43.76	68.22	-24.46	47.96	-4.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax20_5240MHz
Test BY :Bob

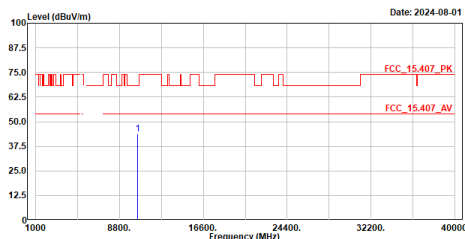


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	43.85	68.22	-24.37	48.05	-4.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax20_5260MHz
Test BY :Bob

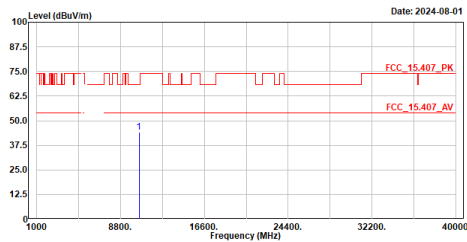


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	44.13	68.22	-24.09	48.28	-4.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax20_5260MHz
Test BY :Bob

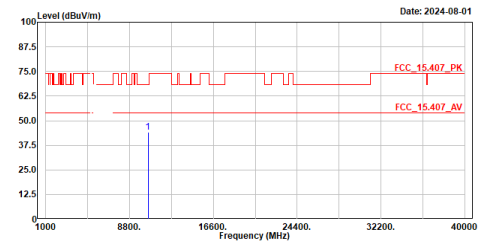


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	44.08	68.22	-24.14	48.23	-4.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax20_5300MHz
Test BY :Bob

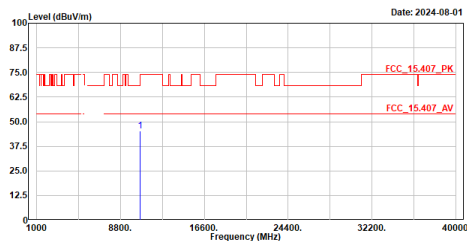


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	45.21	74.00	-28.79	48.87	-3.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax20_5300MHz
Test BY :Bob

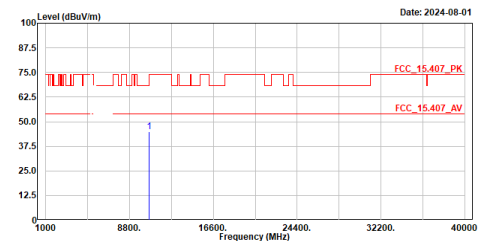

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	44.85	74.00	-29.15	48.51	-3.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.