


FCC Test Report

FCC ID : SQG-VEDAIF912
Equipment : 802.11ax Wi-Fi 6 + BT5.4 Module
Model No. : Veda IF912
Brand Name : Ezurio
Applicant : Ezurio LLC
Address : W66N220 Commerce Court, Cedarburg, WI
53012 United States Of America
Standard : 47 CFR FCC Part 15.407
Received Date : Jan. 12, 2026
Tested Date : Mar. 05 ~ Mar. 26, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	10
1.3	Test Setup Chart	10
1.4	The Equipment List	11
1.5	Test Standards	12
1.6	Reference Guidance	12
1.7	Deviation from Test Standard and Measurement Procedure.....	12
1.8	Measurement Uncertainty	13
2	TEST CONFIGURATION.....	14
2.1	Testing Facility	14
2.2	The Worst Test Modes and Channel Details	15
3	TRANSMITTER TEST RESULTS	17
3.1	Emission Bandwidth	17
3.2	Conducted Output Power	18
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	22
3.5	AC Power Line Conducted Emissions	25
4	TEST LABORATORY INFORMATION	26
Appendix A. Emission Bandwidth		
Appendix B. Conducted Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR611203-1AN	Rev. 01	Initial issue	Jun. 15, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.436MHz 39.05 (Margin -8.09dB) - AV	Pass
15.407(b) 15.209	Unwanted Emissions	[dBm]: 5462.76MHz -29.33 (Margin -2.33dB) - PK	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	Conducted Output Power	Max Power [dBm]: 5150~5250MHz: 19.16 5250~5350MHz: 19.12 5470~5725MHz: 19.14 5725~5850MHz: 19.22	Pass
15.407(a)	Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

Model Name	Part No.	Product Name	Description
Veda IF912	453-00396	802.11ax Wi-Fi 6 + BT5.4 Module	Module, Veda IF912, SIP, Tri Band, No Embedded Memory, RF Trace Pin
	453-00397		Module, Veda IF912, SIP, Tri Band, Embedded Ext. Memory, 8M PSRAM, 8M Flash, RF Trace Pin

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250 5250-5350 5470-5725 5725-5850	a	5180-5240 5260-5320 5500-5720 5745-5825	36-48 [4] 52-64 [4] 100-144 [12] 149-165 [5]	1	6-54 Mbps
5150-5250 5250-5350 5470-5725	n (HT20) ac (VHT20) ax (HE20)	5180-5240 5260-5320 5500-5720 5745-5825	36-48 [4] 52-64 [4] 100-144 [12] 149-165 [5]]	1	MCS 0-7 MCS 0-9 MCS 0-11

Note 1: OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM modulation.
Note 2: TPC function is supported.
Note 3: 802.11ax supports full RU and partial RU configuration. Test results of partial RU configuration are recorded in this report. Refers to report no.: FR611203AN for test results of full RU configuration.

1.1.3 Antenna Details

Integrated Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Yageo / Chip Antenna	ANT1608LL 14R2460A	Chip	NA	2.3	0.1	0.1	1.8	2.5

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
Yageo / Chip Antenna	ANT1608LL 14R2460A	Chip	NA	2.7	3.3	2.8	3.4

External Antenna

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
Ezurio / FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.8	3.8	3.8	3.8
Ezurio / FlexPIFA 6E	EFB2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.9	3.9	3.9	3.9
Ezurio / Mini NanoBlade Flex 6GHz	EMF2471A3 S-10MH4L	PCB Dipole	MHF4L	2.4	4.4	4.4	4.4	4.4
Joymax Electronics / Dipole 6E	TWX-100BR S3B	Dipole	RP-SMA	2	4	4	4	4
Ezurio / FlexPIFA Dual Band	001-0021	PIFA	IPEX MHF4L	2.5	3	3	3	3
Ezurio / FlexPIFA Dual Band	EFB2455A3 S-15MH4L	PIFA	MHF1	2.5	3	3	3	3

Brand / Model	Part Number	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
Ezurio / FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	3.3	3.3	3.3	3.3
Ezurio / FlexPIFA 6E	EFB2471A3 S-10MH4L	PIFA	MHF4L	3.8	3.8	3.8	3.8
Ezurio / Mini NanoBlade Flex 6GHz	EMF2471A3 S-10MH4L	PCB Dipole	MHF4L	5.2	5.2	5.2	5.2
Joymax Electronics / Dipole 6E	TWX-100BR S3B	Dipole	RP-SMA	4	4	4	4

1.1.4 Configuration of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host	
TPC	☒ Support	☐ Not support
RU Configuration	☒ Full RU	☒ Partial RU

1.1.5 Channel List

Channel	Frequency(MHz)
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700
144	5720
149	5745
153	5765
157	5785
161	5805
165	5825

1.1.6 Test Tool and Duty Cycle

Test Tool	GNOME Terminal, Version: 3.52.0		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	ax HE20-OFDMA RU26	99.49%	0.02
	ax HE20-OFDMA RU52	99.49%	0.02
	ax HE20-OFDMA RU106	98.96%	0.05

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
ax HE20-OFDMA RU26	5180	54
ax HE20-OFDMA RU26	5200	56
ax HE20-OFDMA RU26	5240	58
ax HE20-OFDMA RU26	5260	54
ax HE20-OFDMA RU26	5300	54
ax HE20-OFDMA RU26	5320	54
ax HE20-OFDMA RU26	5500	54
ax HE20-OFDMA RU26	5520	58
ax HE20-OFDMA RU26	5580	58
ax HE20-OFDMA RU26	5680	58
ax HE20-OFDMA RU26	5700	44
ax HE20-OFDMA RU26	5720	58
ax HE20-OFDMA RU26	5745	78
ax HE20-OFDMA RU26	5785	78
ax HE20-OFDMA RU26	5825	78
ax HE20-OFDMA RU52	5180	60
ax HE20-OFDMA RU52	5200	64
ax HE20-OFDMA RU52	5240	64
ax HE20-OFDMA RU52	5260	66
ax HE20-OFDMA RU52	5300	66
ax HE20-OFDMA RU52	5320	62
ax HE20-OFDMA RU52	5500	48
ax HE20-OFDMA RU52	5520	68
ax HE20-OFDMA RU52	5580	68
ax HE20-OFDMA RU52	5680	68
ax HE20-OFDMA RU52	5700	42
ax HE20-OFDMA RU52	5720	68


ax HE20-OFDMA RU52	5745	78
ax HE20-OFDMA RU52	5785	78
ax HE20-OFDMA RU52	5825	78
ax HE20-OFDMA RU106	5180	64
ax HE20-OFDMA RU106	5200	78
ax HE20-OFDMA RU106	5240	78
ax HE20-OFDMA RU106	5260	78
ax HE20-OFDMA RU106	5300	78
ax HE20-OFDMA RU106	5320	60
ax HE20-OFDMA RU106	5500	50
ax HE20-OFDMA RU106	5520	76
ax HE20-OFDMA RU106	5580	78
ax HE20-OFDMA RU106	5660	78
ax HE20-OFDMA RU106	5680	74
ax HE20-OFDMA RU106	5700	42
ax HE20-OFDMA RU106	5720	80
ax HE20-OFDMA RU106	5745	78
ax HE20-OFDMA RU106	5785	78
ax HE20-OFDMA RU106	5825	78

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	Lenovo	ThinkPad X230	DoC	---
2	Fixture	---	---	---	Provided by applicant.
3	50 ohm load	woken	WTER-18S2	---	---

1.3 Test Setup Chart

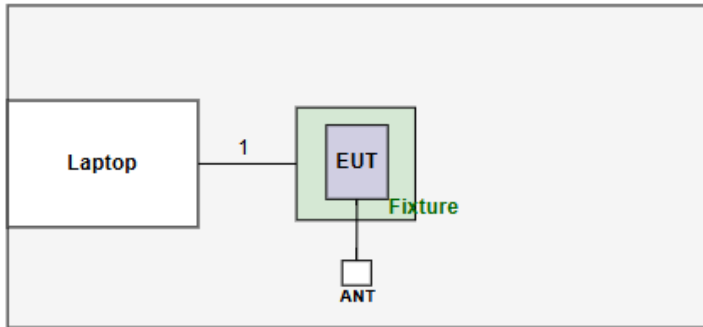Test Setup Diagram (Conducted Emission)	
	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

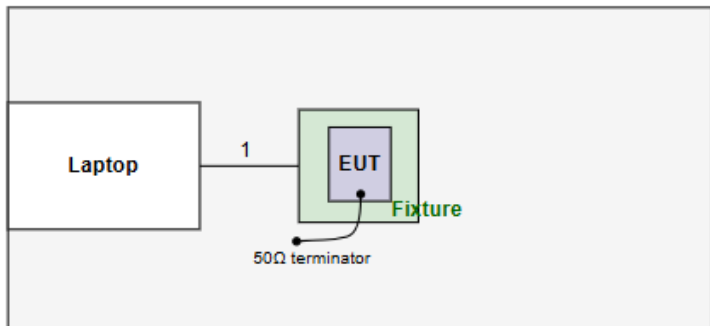Test Setup Diagram (Radiated Emission)	
	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Mar. 05 ~ Mar. 13, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 26, 2026	Feb. 25, 2027
Spectrum Analyzer	R&S	FSV40	101499	Mar. 27, 2025	Mar. 26, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 23, 2026	Jan. 22, 2027
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	K&L	11SH10-7000/T18000-O/OP	21	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 02 ~ Mar. 20, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 09, 2025	Jun. 08, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jun. 26, 2025	Jun. 25, 2026
DC POWER SOURCE	GW INSTRON	GPE-6030	GEZ824073	Oct. 27, 2025	Oct. 26, 2026
Measurement Software	Sperton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Mar. 26, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Jan. 13, 2026	Jan. 12, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	01	Jun. 17, 2025	Jun. 16, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Frequency band 5150~5850 MHz						
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test method	Mode	Note
AC Power Line Conducted Emissions	ax HE20-OFDMA RU106	5825	MCS 0	Conducted	TX	---
Unwanted Emissions ≤1GHz	ax HE20-OFDMA RU106	5825	MCS 0	Radiated	TX	Note 2
Unwanted Emissions ≤1GHz	ax HE20-OFDMA RU106	5825	MCS 0	Conducted	TX	---
Frequency band 5150~5350 MHz / 5470~5725 MHz						
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test method	Mode	Note
Unwanted Emissions >1GHz	ax HE20-OFDMA RU26 RU52 RU106	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	Radiated	TX	Note 2
Unwanted Emissions >1GHz	ax HE20-OFDMA RU26 RU52 RU106	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	Conducted	TX	---
Conducted Output Power	ax HE20-OFDMA RU26	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5520 / 5580 / 5680 / 5700 / 5720	MCS 0	Conducted	TX	---
	ax HE20-OFDMA RU52	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5520 / 5580 / 5680 / 5700 / 5720				
	ax HE20-OFDMA RU106	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5520 / 5580 / 5660 / 5680 / 5700 / 5720				
Emission Bandwidth Power Spectral Density	ax HE20-OFDMA RU26 RU52 RU106	5180 / 5200 / 5240 / 5260 / 5300 / 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	Conducted	TX	---
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane result was found as the worst case and was shown in this report. 2. The 50Ω terminator is connected to antenna port of EUT for radiated emission measurement. 3. Two skus had been covered during the pretest and found that Part No. 453-00397 was the worst case and was selected for the final test. (sku 1: Part No. 453-00396, sku 2: Part No. 453-00397)						

Frequency band 5725-5850 MHz						
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test method	Mode	Note
Unwanted Emissions >1GHz	ax HE20-OFDMA RU26 RU52 RU106	5745 / 5785 / 5825	MCS 0	Radiated	TX	Note 2
Unwanted Emissions >1GHz	ax HE20-OFDMA RU26 RU52 RU106	5745 / 5785 / 5825	MCS 0	Conducted	TX	---
Conducted Output Power Emission Bandwidth 6dB bandwidth Power Spectral Density	ax HE20-OFDMA RU26 RU52 RU106	5745 / 5785 / 5825	MCS 0	Conducted	TX	---
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane result was found as the worst case and was shown in this report. 2. The 50Ω terminator is connected to antenna port of EUT for radiated emission measurement. 3. Two skus had been covered during the pretest and found that Part No. 453-00397 was the worst case and was selected for the final test. (sku 1: Part No. 453-00396, sku 2: Part No. 453-00397)						

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit of Emission Bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.1.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

6dB Bandwidth

1. Set RBW = 100kHz, VBW = 300kHz.
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	22-24°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
☐	Indoor access point	Conducted Power: 1 W
☐	Fixed point-to-point access points	Conducted Power: 1 W
☒	Client devices	Conducted Power: 250 mW

Frequency Band (MHz)		Limit
☒	5250 ~ 5350	Conducted Power: 250mW or 11dBm+10 log B
☒	5470 ~ 5725	Conducted Power: 250mW or 11dBm+10 log B
☒	5725 ~ 5850	Conducted Power: 1 W
Note: "B" is the 26dB emission bandwidth in MHz.		

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Spectrum analyzer (For channel that extends across the 5.725 GHz boundary)

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add 10 log(1/X, X:duty cycle) if duty cycle is <98%.

3.2.3 Test Setup

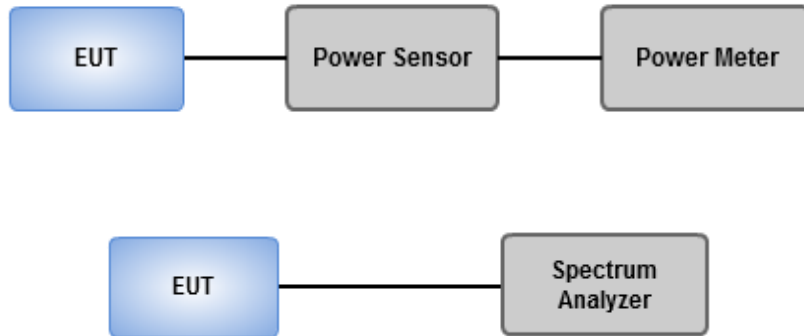

3.2.4 Test Results

Ambient Condition	22-24°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit of Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	17 dBm / MHz
☐	Indoor access point	17 dBm / MHz
☐	Fixed point-to-point access points	17 dBm / MHz
☒	Client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
☒	5250 ~ 5350	11 dBm / MHz
☒	5470 ~ 5725	11 dBm / MHz
☒	5725 ~ 5850	30 dBm /500 kHz

3.3.2 Test Procedures

For 5150 ~ 5250 MHz / 5250 ~ 5350 MHz / 5470 ~ 5725 MHz

Duty cycle $\geq 98\%$

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle $< 98\%$

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz


Duty cycle $\geq 98\%$

1. Set RBW = 500 kHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle $< 98\%$

1. Set RBW = 500 kHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	22-24°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Unwanted Emissions below 1 GHz

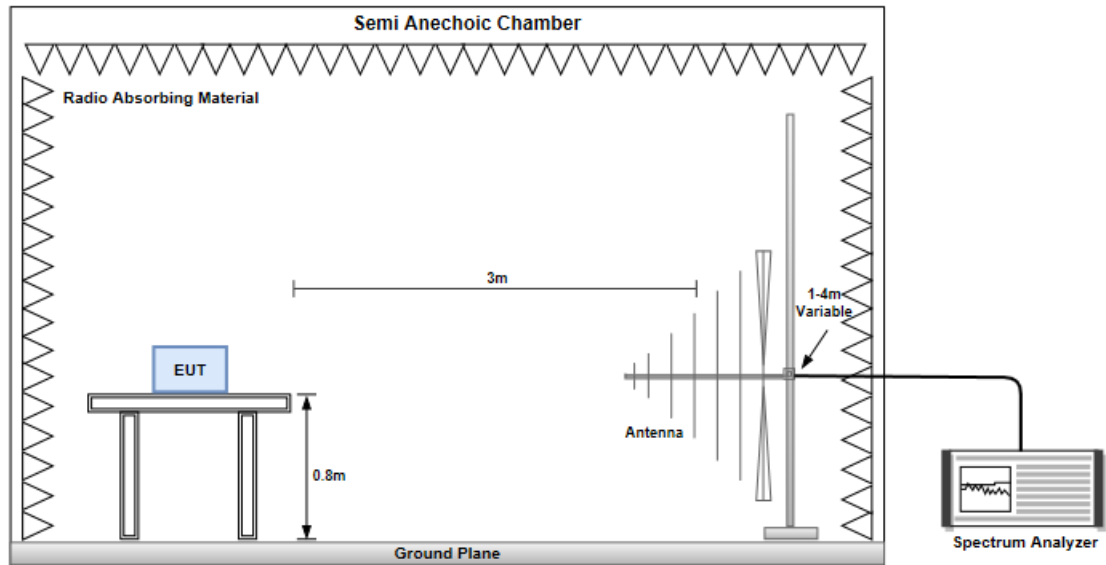

Unwanted Emissions above 1 GHz

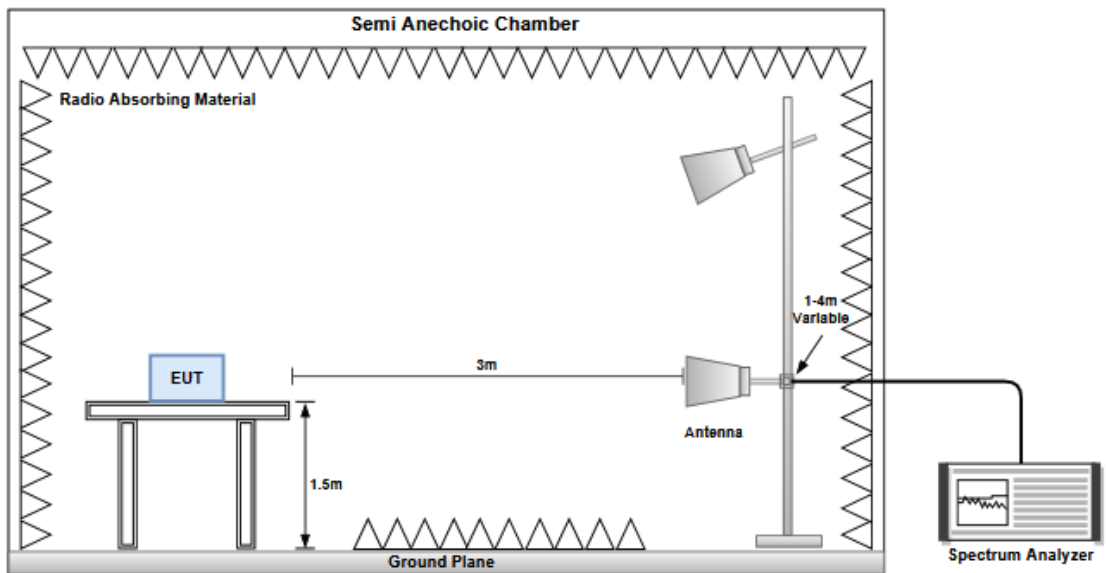

3.4.4 Test Results

Refer to Appendix D.

3.5 AC Power Line Conducted Emissions

3.5.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.5.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.5.3 Test Setup

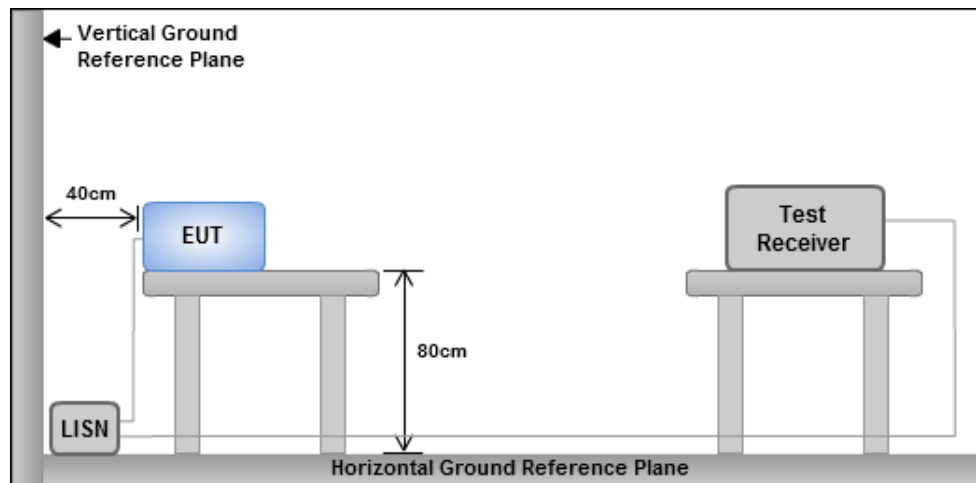

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.5.4 Test Results

Refer to Appendix E.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	18.04M	16.95M	17M0D1D	18.04M	16.917M
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	18.92M	17.005M	17M0D1D	18.755M	16.983M
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	24.475M	18.345M	18M3D1D	21.34M	18.147M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	18.04M	16.938M	16M9D1D	18.04M	16.907M
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	19.305M	17.05M	17M1D1D	18.81M	17.001M
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	25.465M	18.326M	18M3D1D	21.615M	18.159M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	18.04M	16.943M	16M9D1D	14.13M	13.481M
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	18.755M	16.988M	17M0D1D	15.03M	13.568M
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	24.97M	18.288M	18M3D1D	20.13M	14.767M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	3.72M	17.082M	17M1D1D	2.09M	3.888M
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	15.07M	17.146M	17M1D1D	3.22M	4.916M
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	17.16M	18.349M	18M3D1D	3.08M	7.039M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	18.04M	16.917M
5200MHz	Pass	Inf	18.04M	16.923M
5240MHz	Pass	Inf	18.04M	16.95M
5260MHz	Pass	Inf	18.04M	16.932M
5300MHz	Pass	Inf	18.04M	16.907M
5320MHz	Pass	Inf	18.04M	16.938M
5500MHz	Pass	Inf	18.04M	16.938M
5580MHz	Pass	Inf	18.04M	16.943M
5700MHz	Pass	Inf	17.985M	16.893M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.13M	13.481M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.72M	3.888M
5745MHz	Pass	500k	2.09M	17.039M
5785MHz	Pass	500k	2.09M	17.082M
5825MHz	Pass	500k	2.09M	16.998M
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	18.92M	17.005M
5200MHz	Pass	Inf	18.755M	16.995M
5240MHz	Pass	Inf	18.865M	16.983M
5260MHz	Pass	Inf	19.195M	17.036M
5300MHz	Pass	Inf	19.305M	17.05M
5320MHz	Pass	Inf	18.81M	17.001M
5500MHz	Pass	Inf	18.7M	16.957M
5580MHz	Pass	Inf	18.755M	16.988M
5700MHz	Pass	Inf	18.7M	16.966M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.03M	13.568M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.22M	4.916M
5745MHz	Pass	500k	15.015M	17.136M
5785MHz	Pass	500k	15.07M	17.106M
5825MHz	Pass	500k	15.015M	17.146M
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	21.34M	18.147M
5200MHz	Pass	Inf	24.475M	18.26M
5240MHz	Pass	Inf	24.035M	18.345M
5260MHz	Pass	Inf	25.465M	18.28M
5300MHz	Pass	Inf	24.035M	18.326M
5320MHz	Pass	Inf	21.615M	18.159M
5500MHz	Pass	Inf	20.79M	18.107M
5580MHz	Pass	Inf	24.97M	18.288M
5700MHz	Pass	Inf	20.625M	18.117M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	20.13M	14.767M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.08M	7.039M
5745MHz	Pass	500k	17.16M	18.349M
5785MHz	Pass	500k	17.05M	18.258M
5825MHz	Pass	500k	17.16M	18.256M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5180MHz

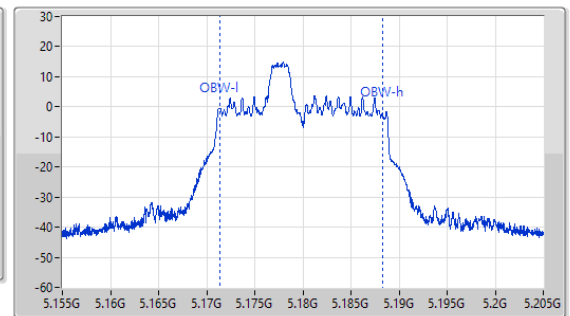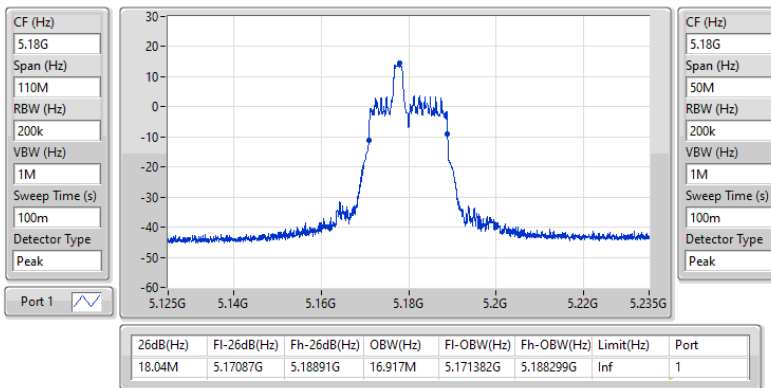

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW


5200MHz

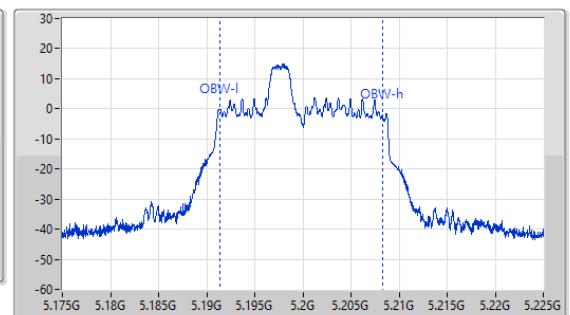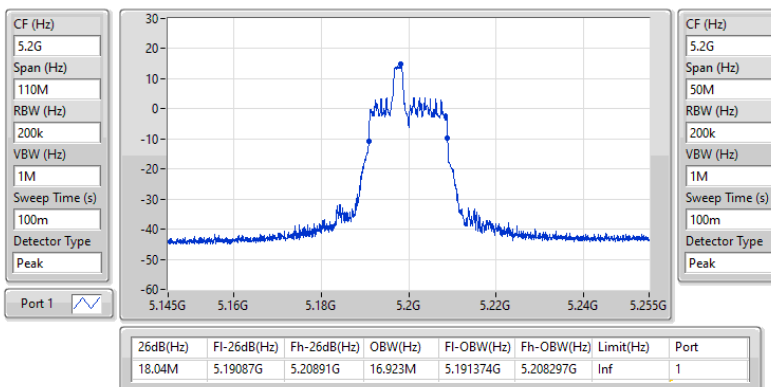

5.15-5.25GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW


5240MHz

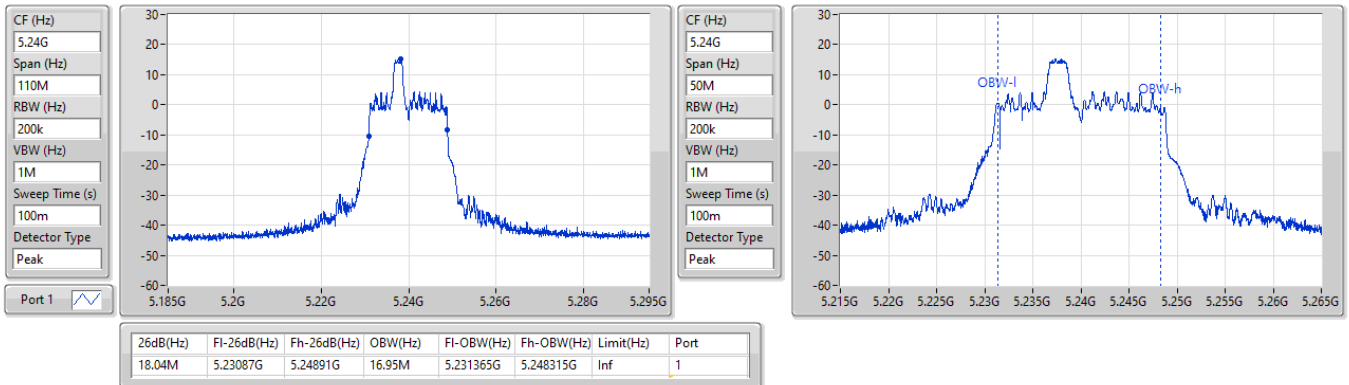

5.25-5.35GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5260MHz

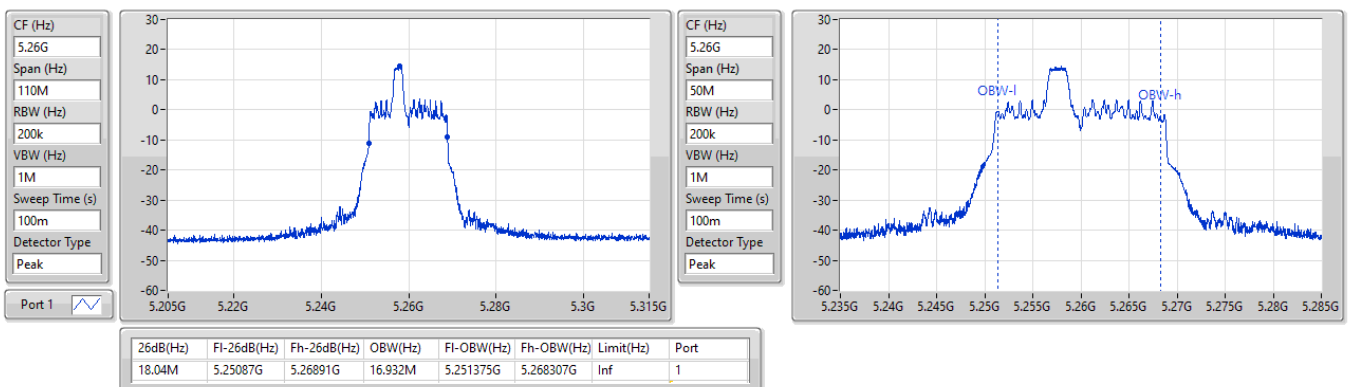

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5300MHz

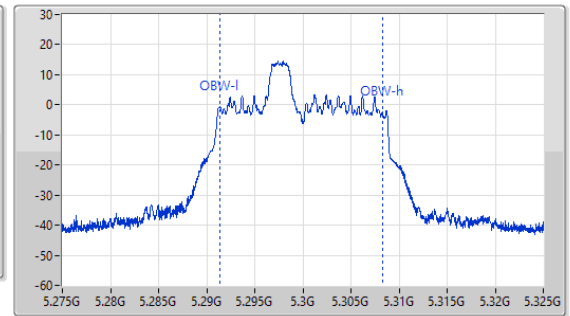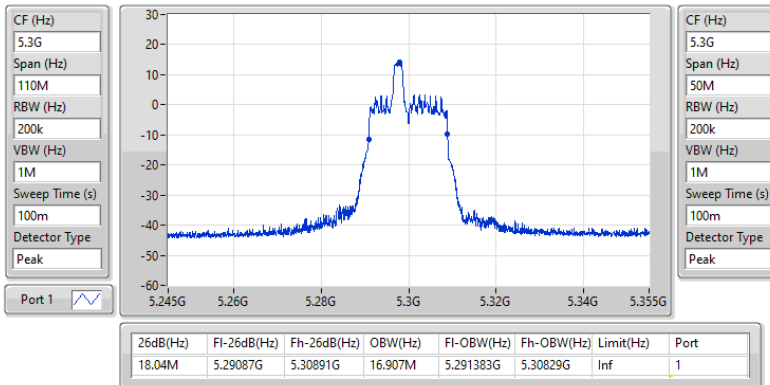

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5320MHz

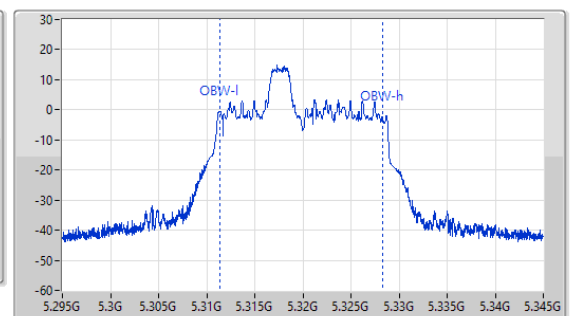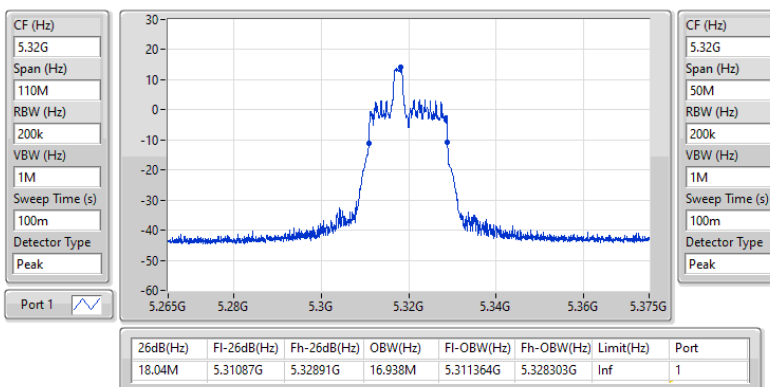

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5500MHz

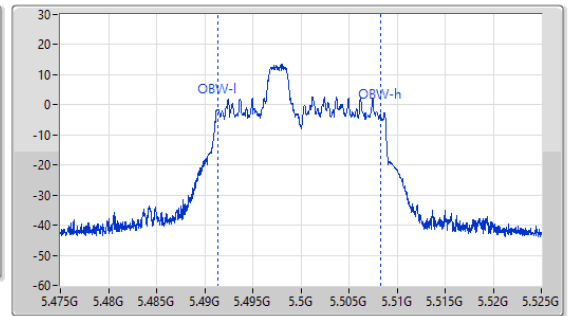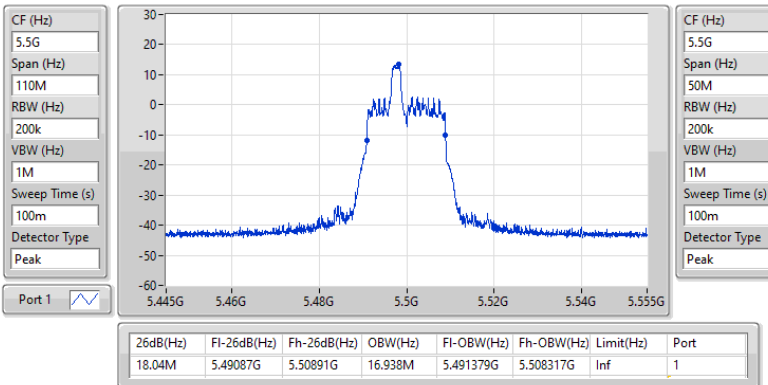

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5580MHz

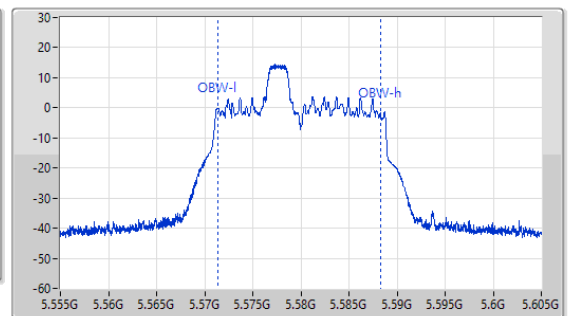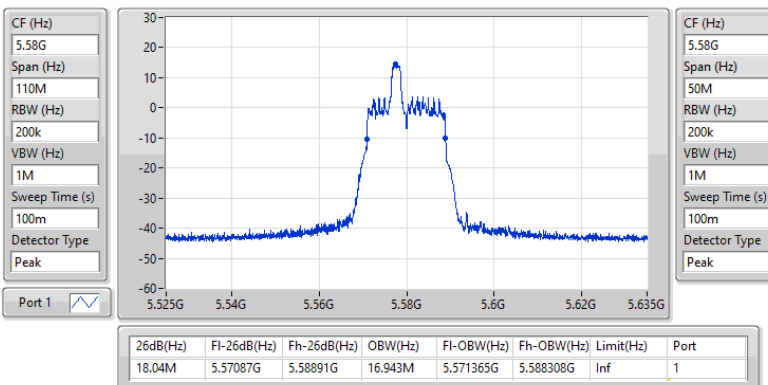

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5700MHz

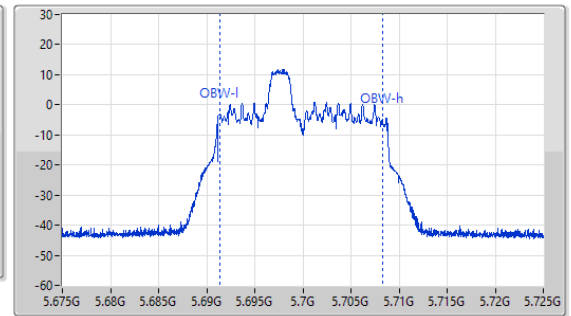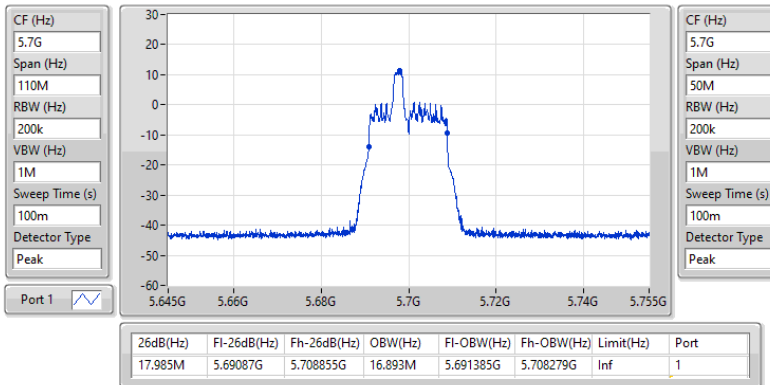

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.47-5.725GHz

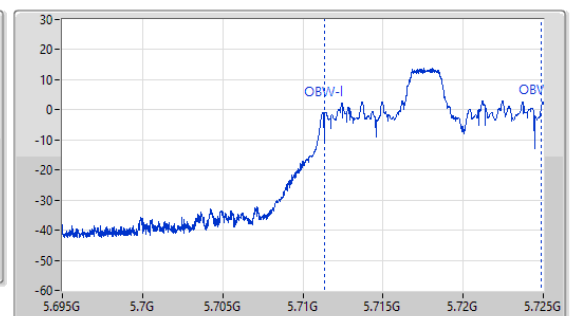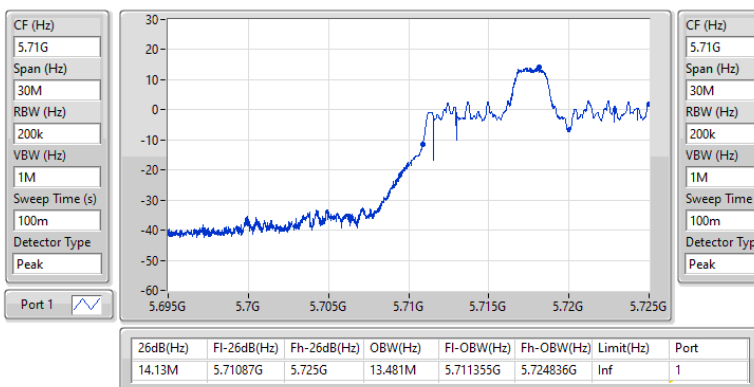

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.725-5.85GHz

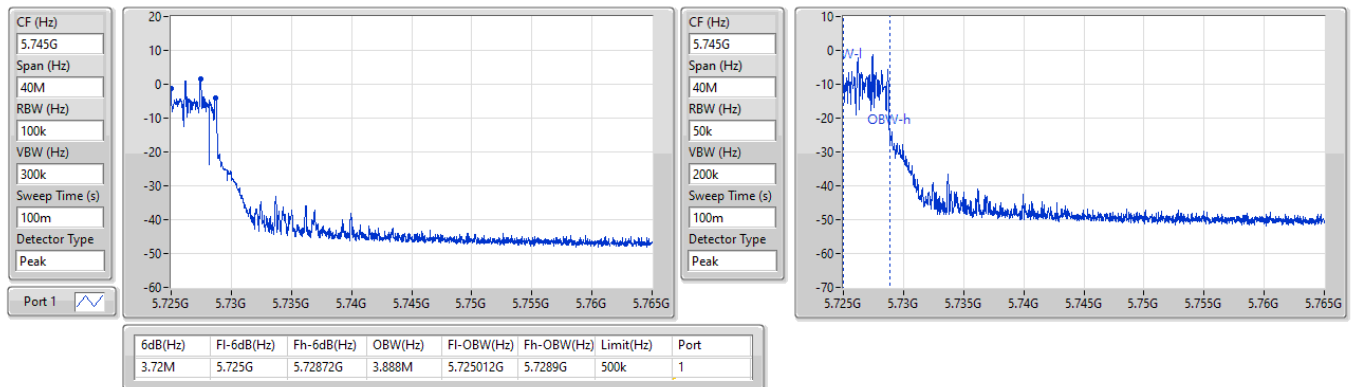

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5745MHz

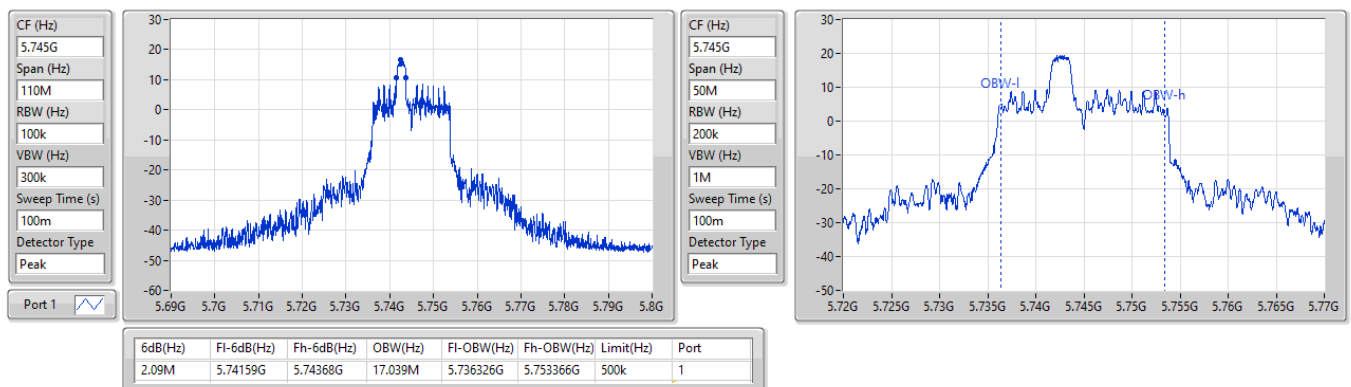

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5785MHz

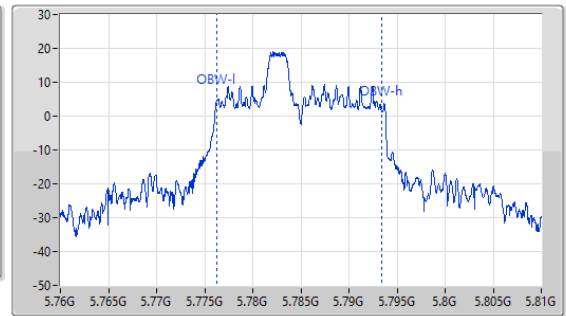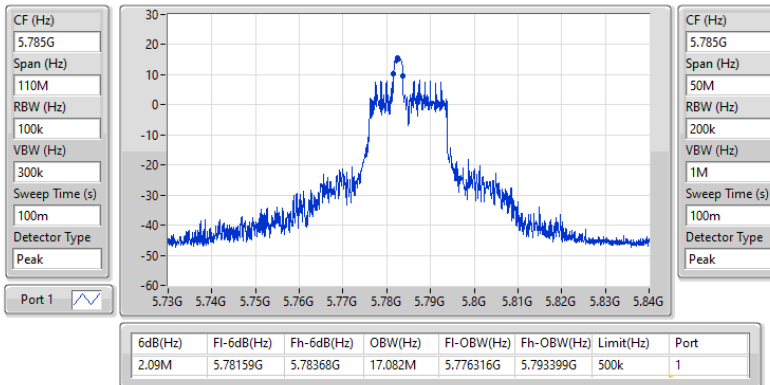

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

EBW



5825MHz

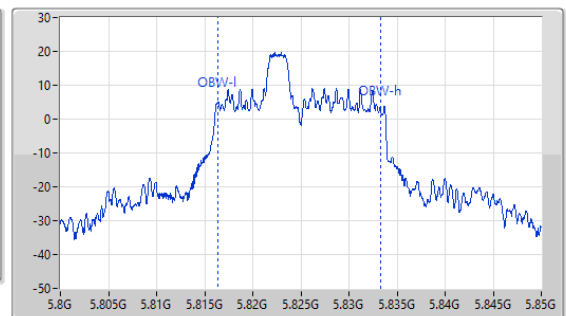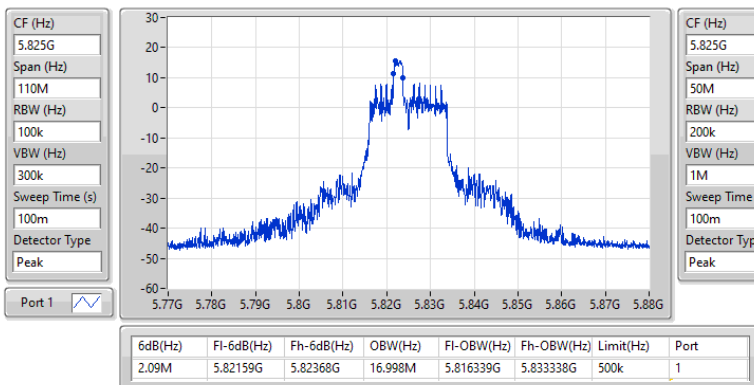

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5180MHz

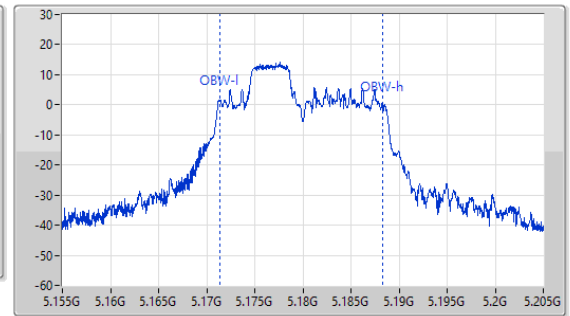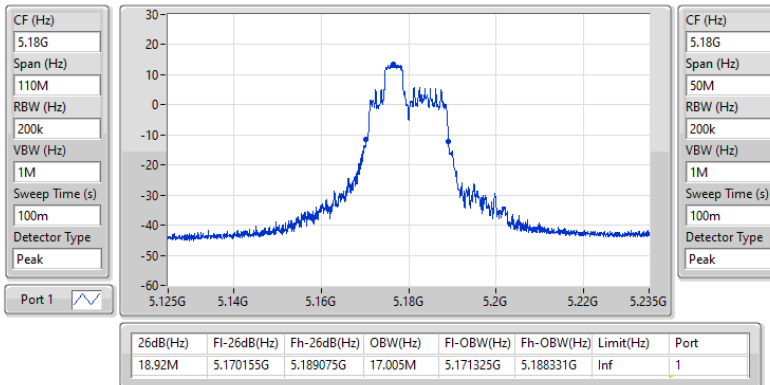

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5200MHz

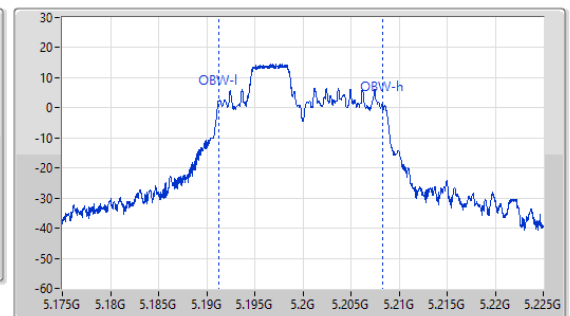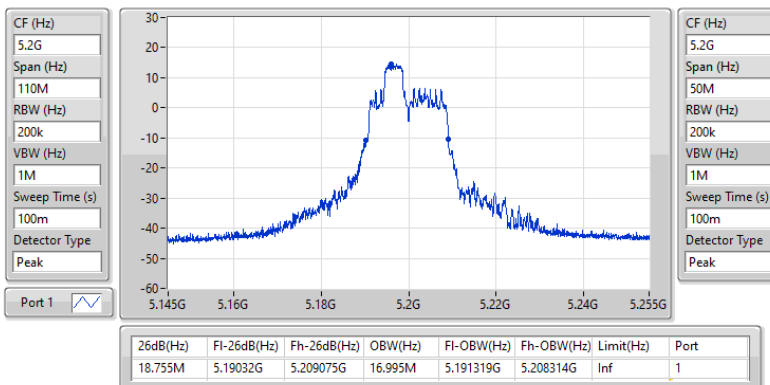

5.15-5.25GHz 802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5240MHz

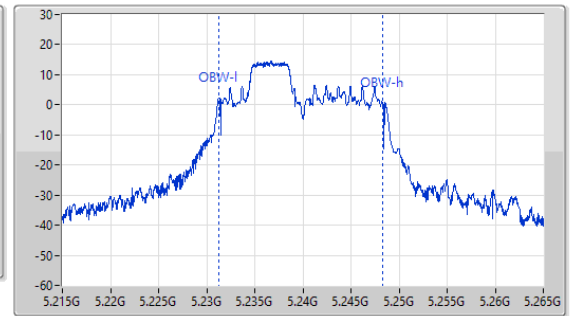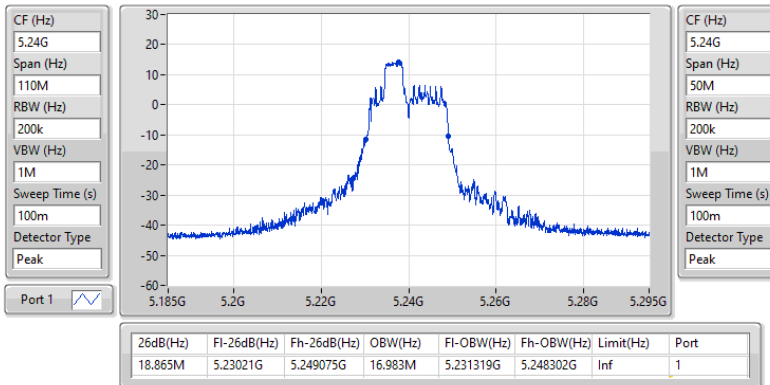

5.25-5.35GHz 802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5260MHz

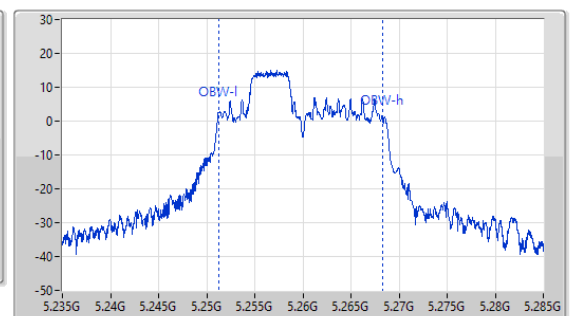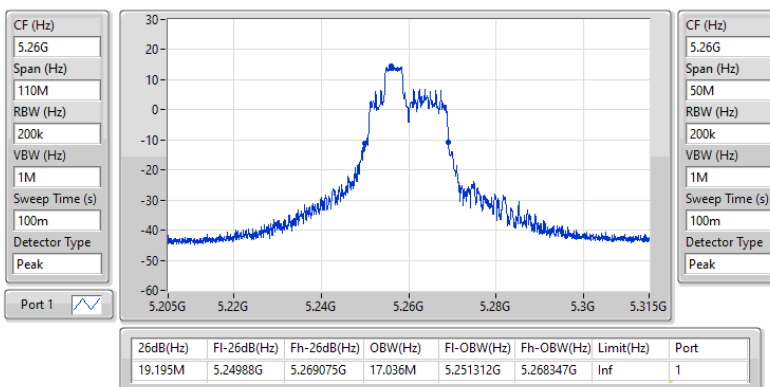

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5300MHz

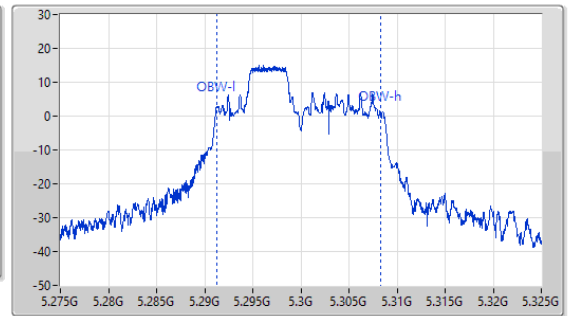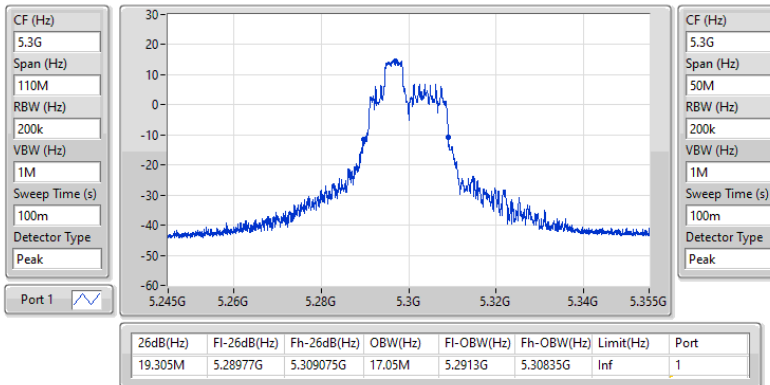

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5320MHz

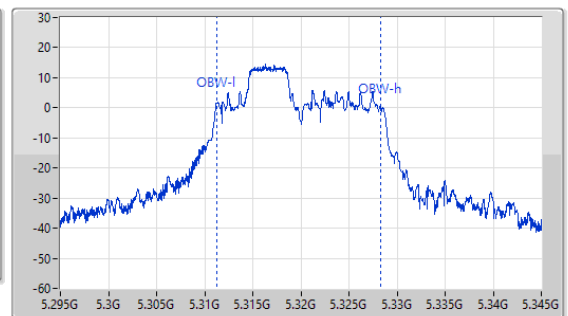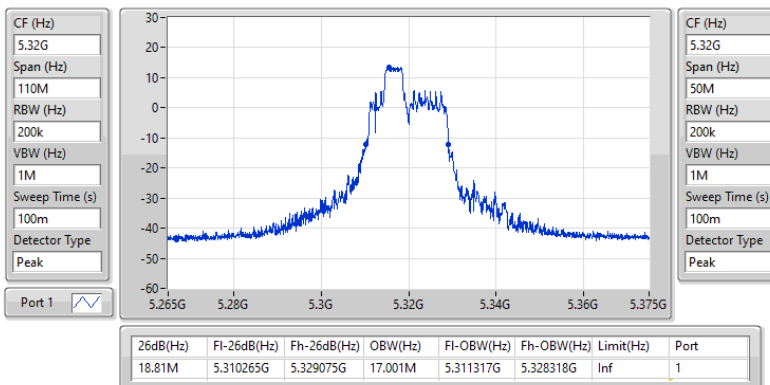

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5500MHz

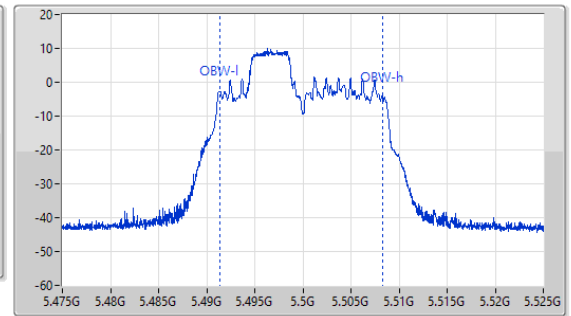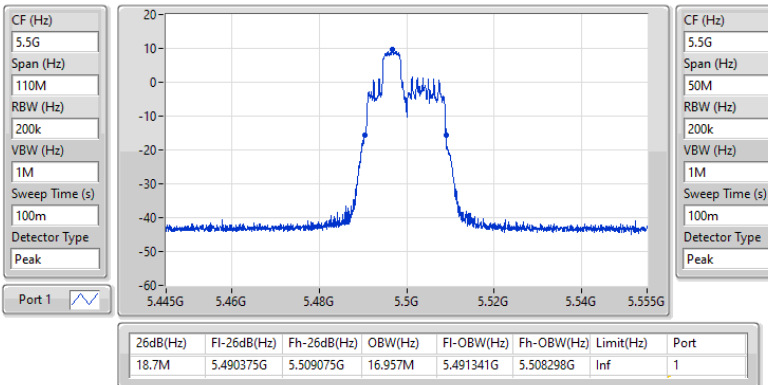

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5580MHz

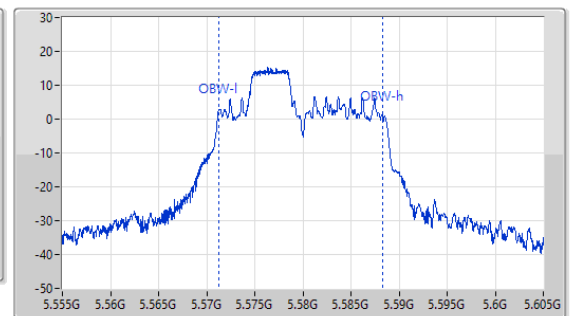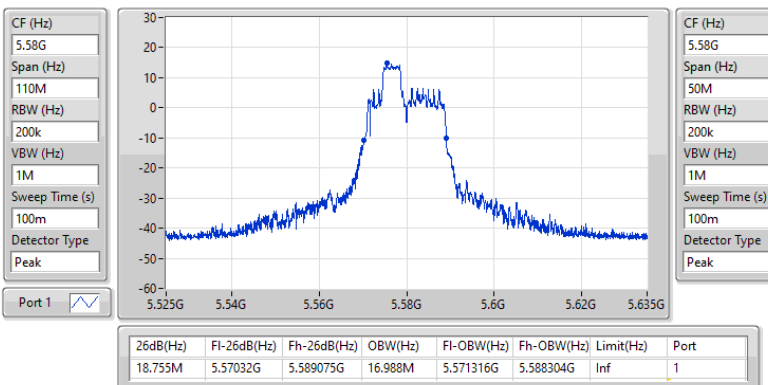

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5700MHz

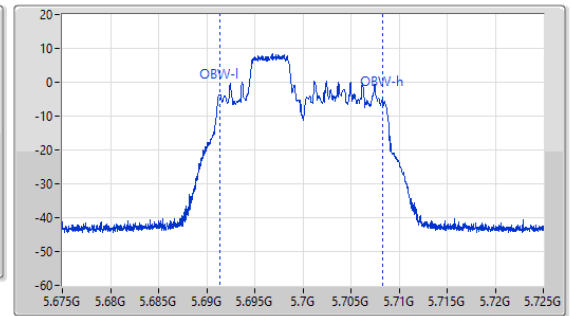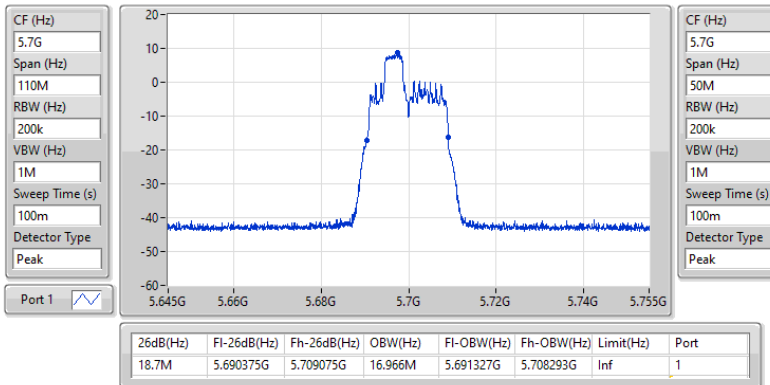

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.47-5.725GHz

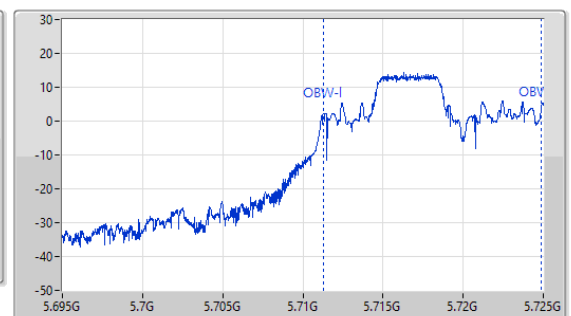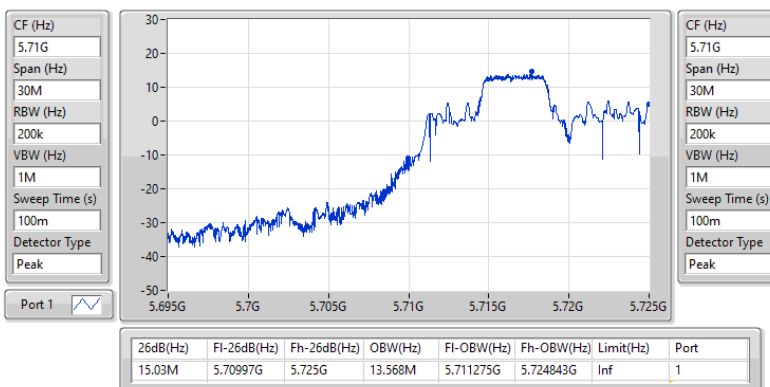

5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.725-5.85GHz

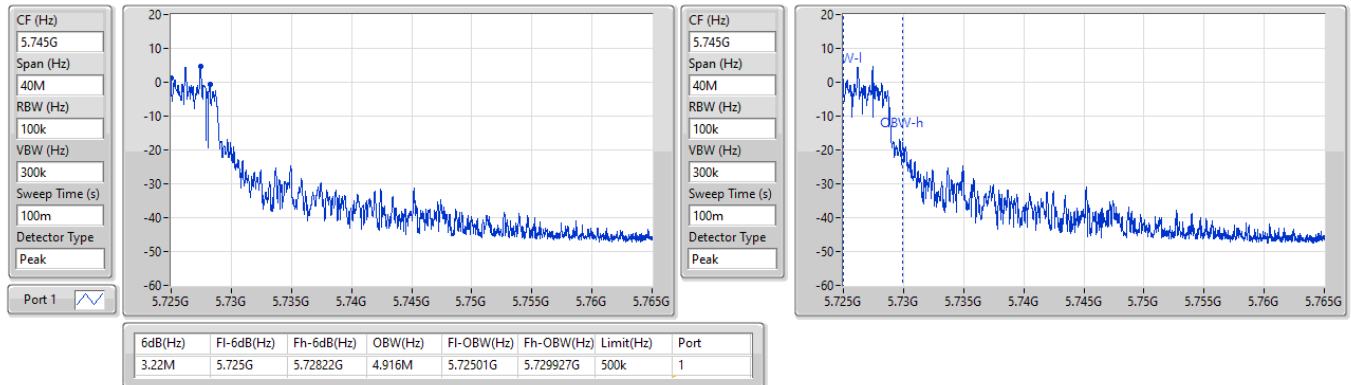

5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW

5745MHz


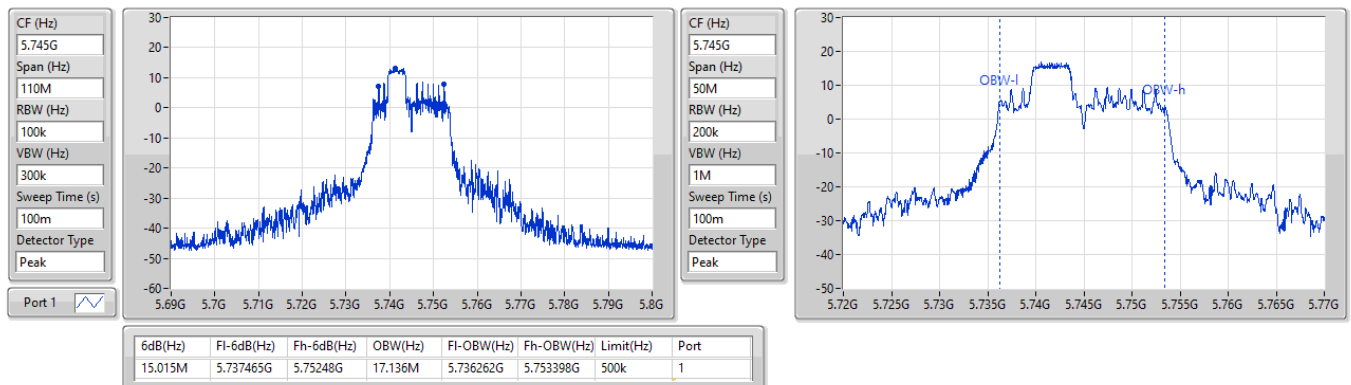




5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5785MHz

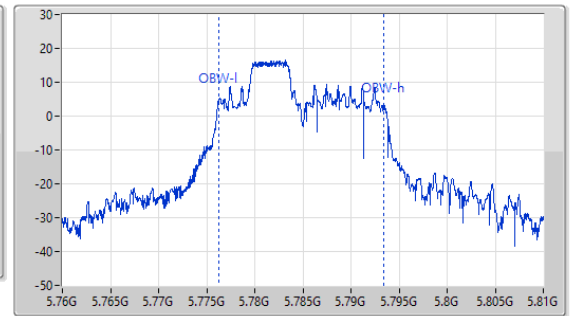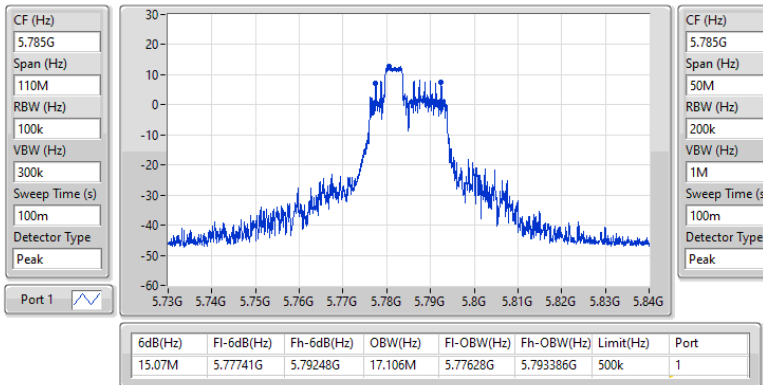

5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

EBW



5825MHz

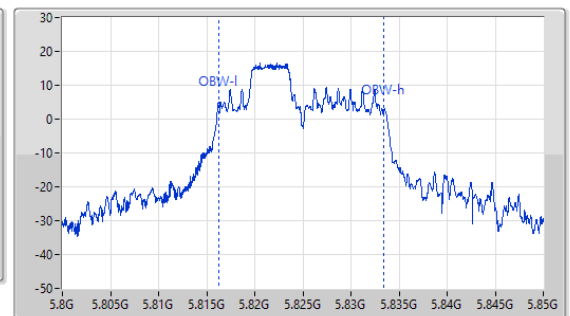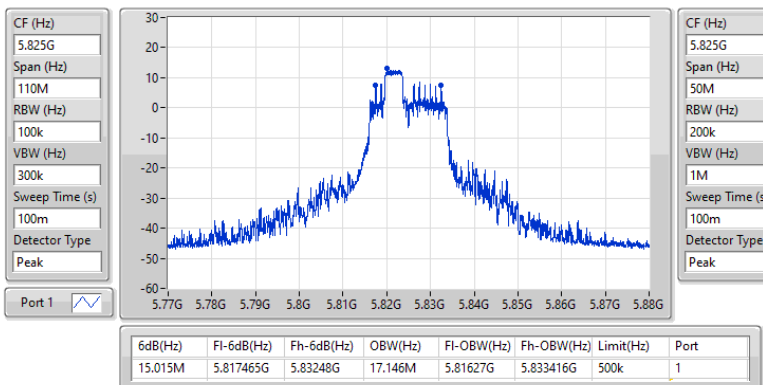

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5180MHz

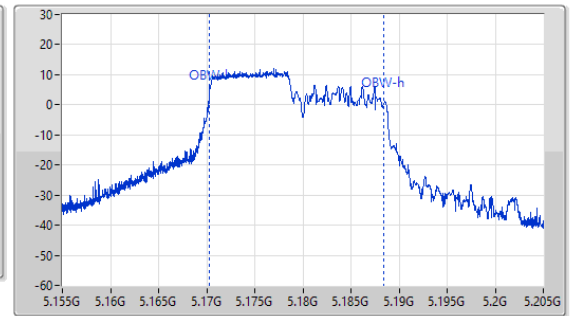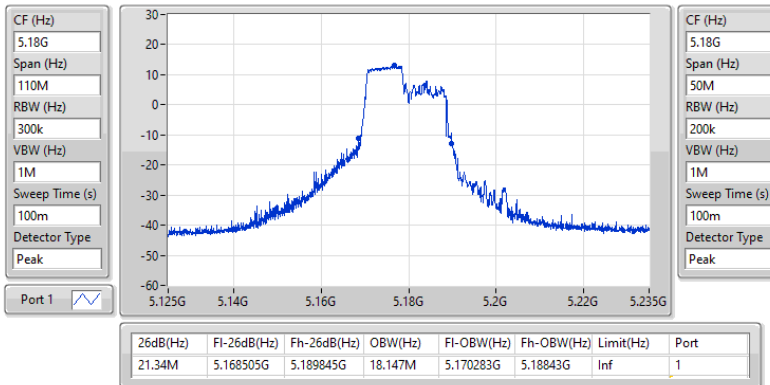

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW

5200MHz

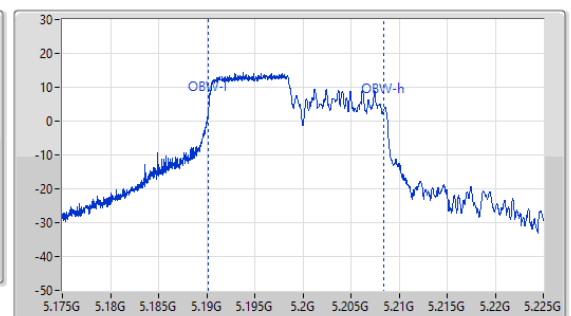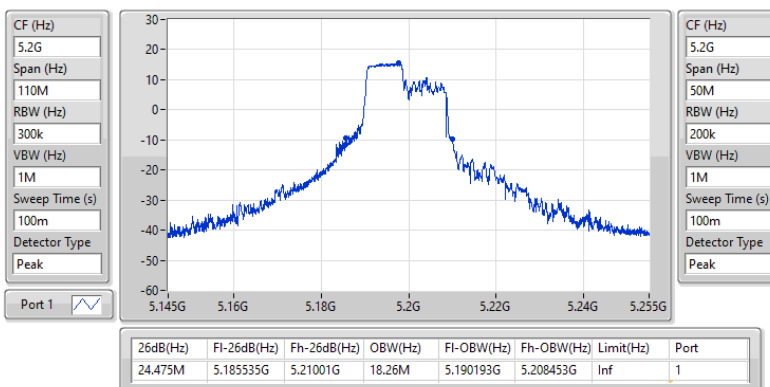




5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW


5240MHz

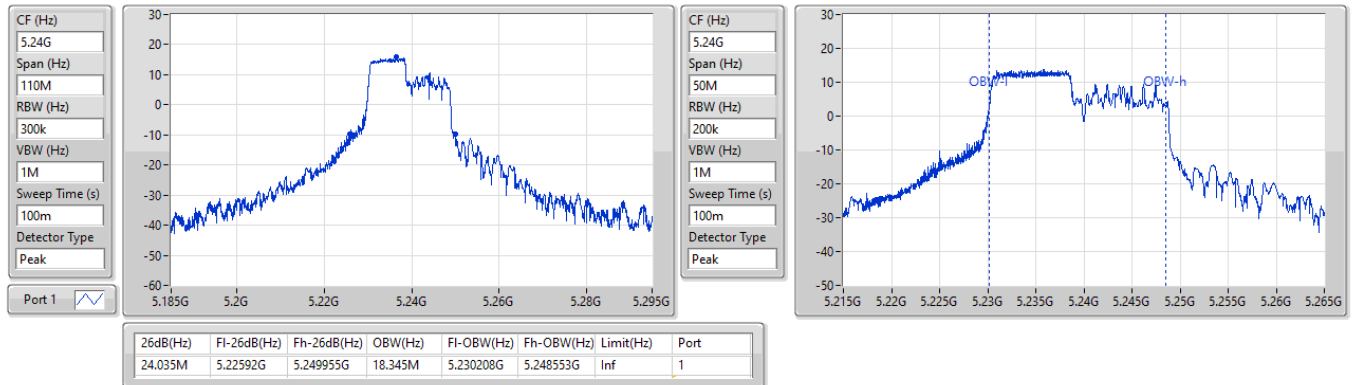

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5260MHz

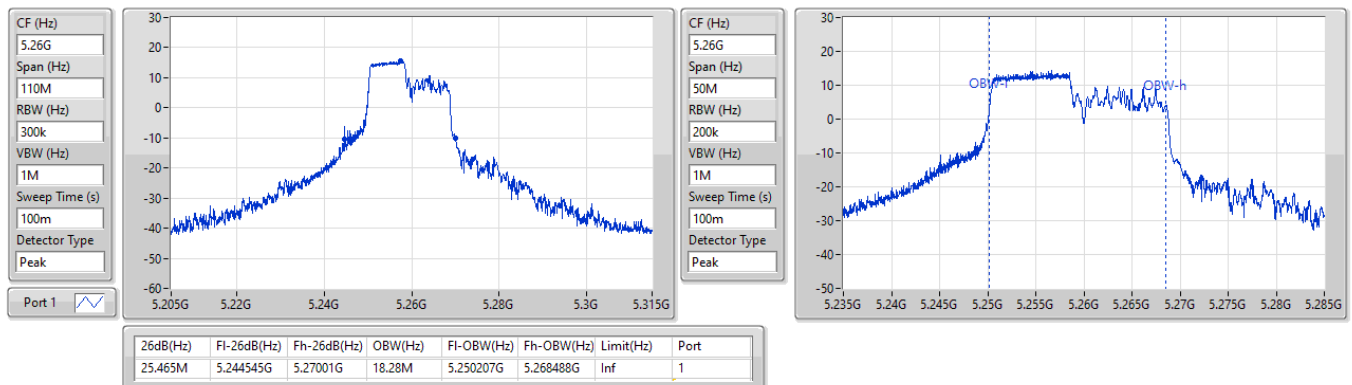

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5300MHz

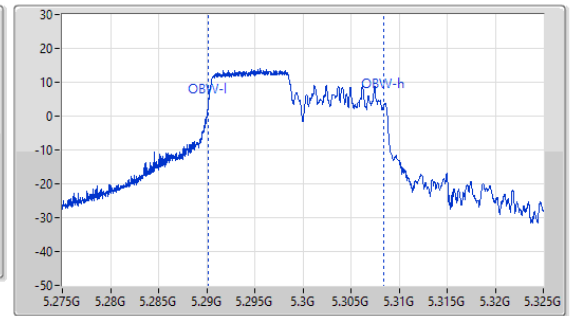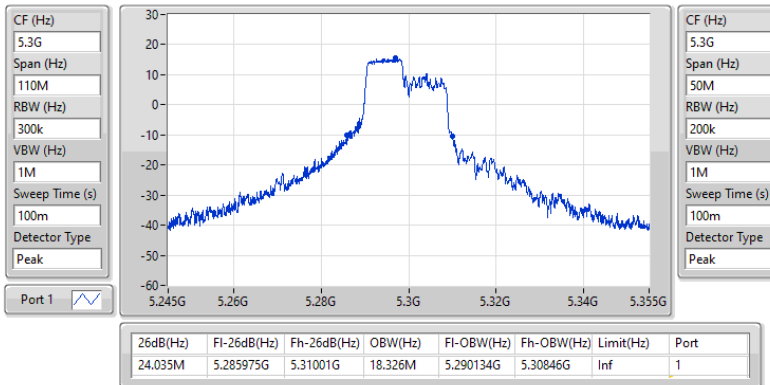

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5320MHz

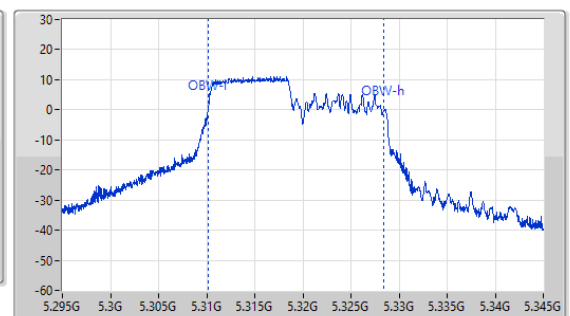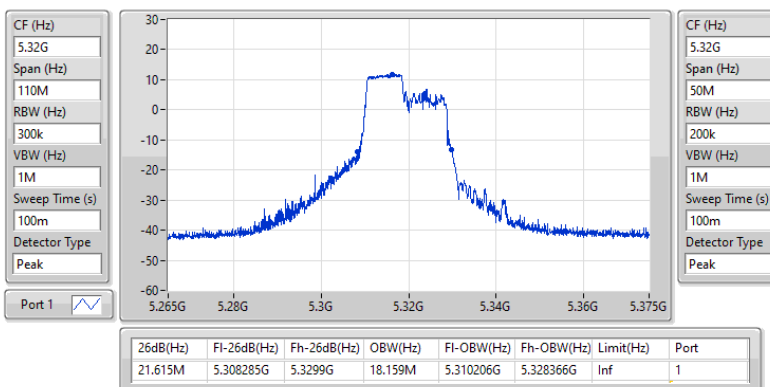

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5500MHz

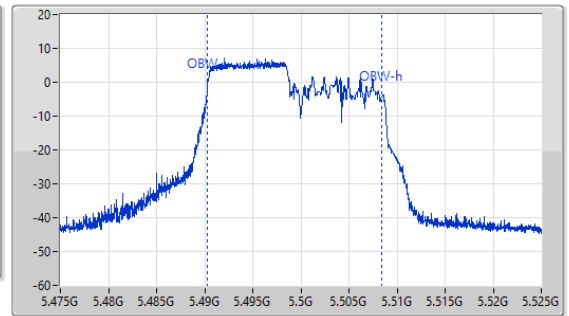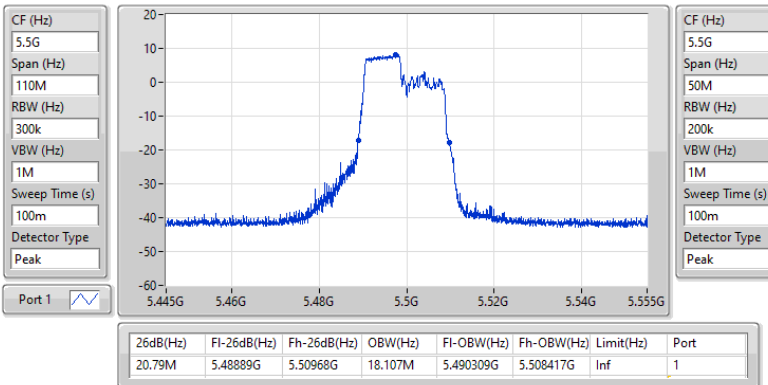

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5580MHz

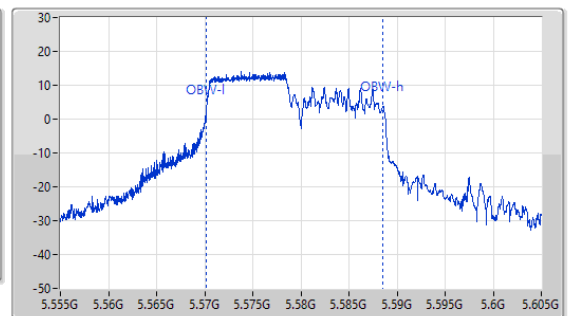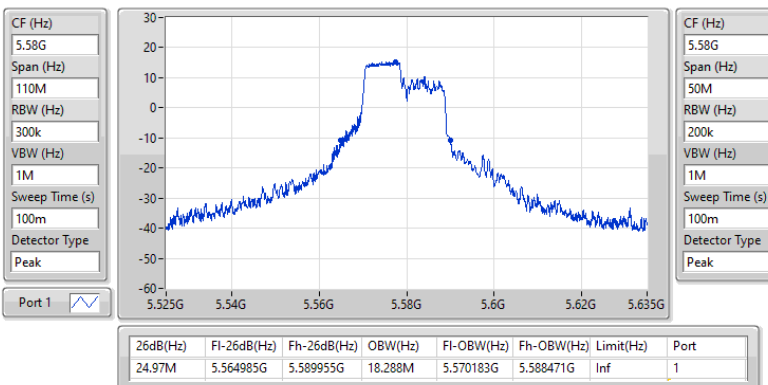

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5700MHz

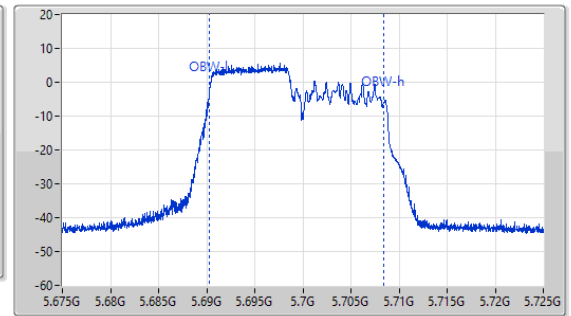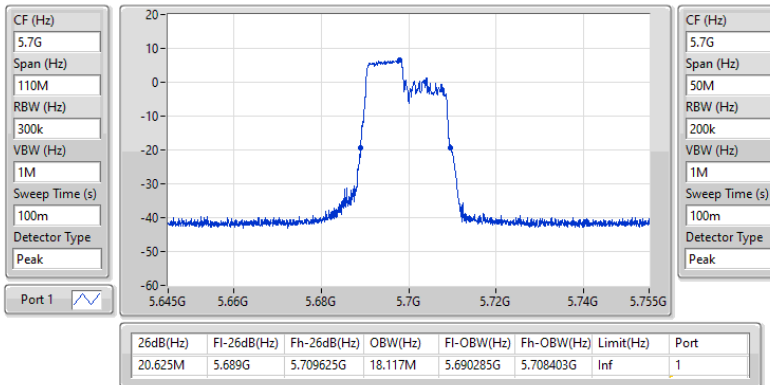

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.47-5.725GHz

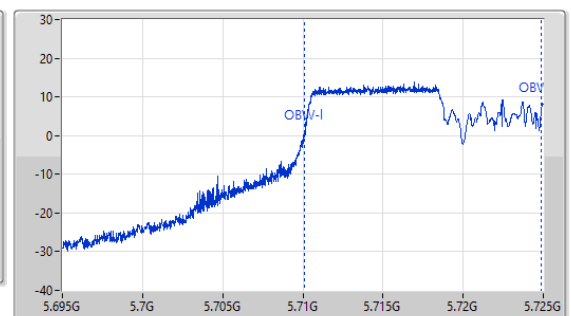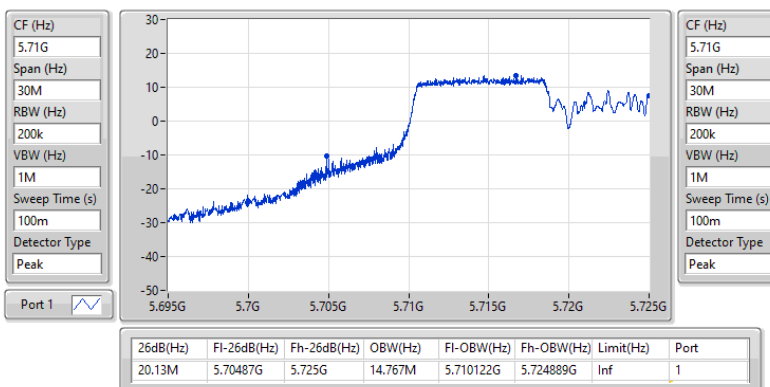

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW


5720MHz Straddle 5.725-5.85GHz

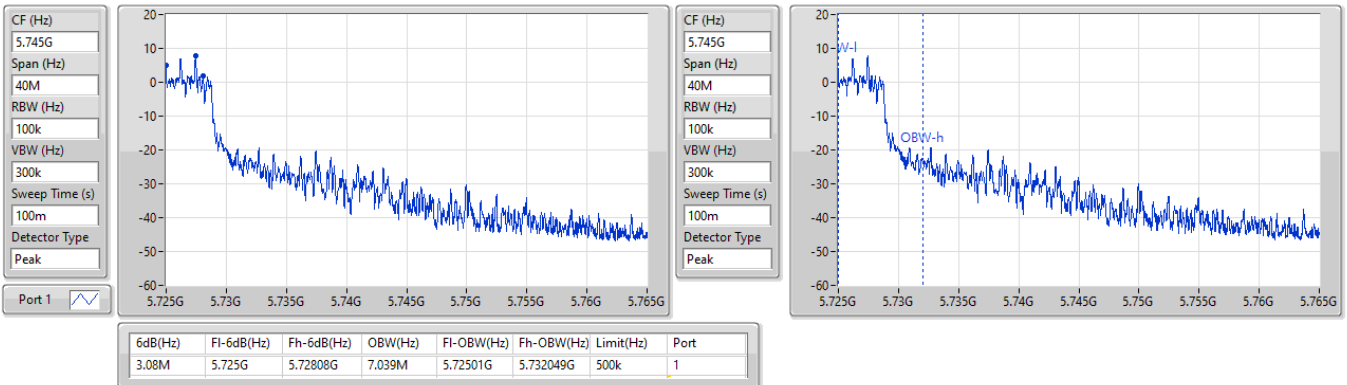

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW

5745MHz


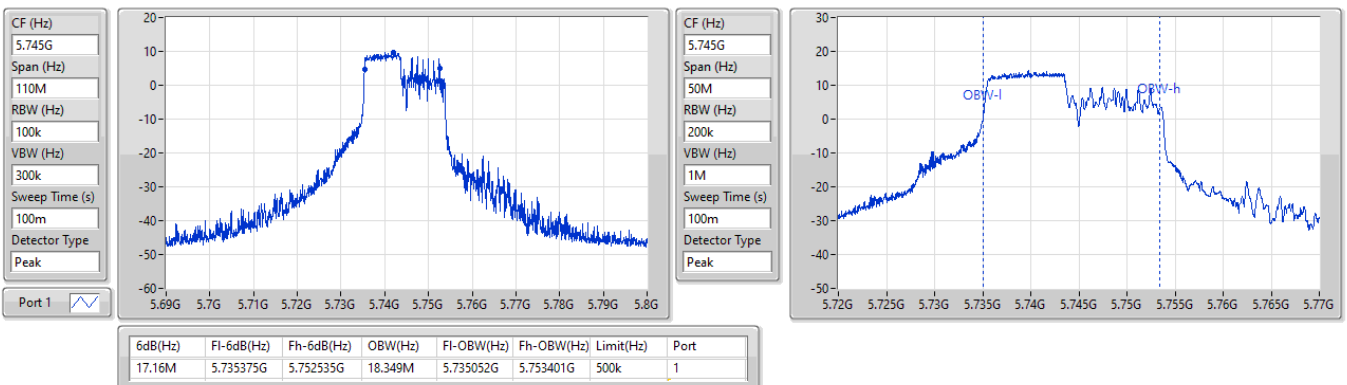




5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW



5785MHz

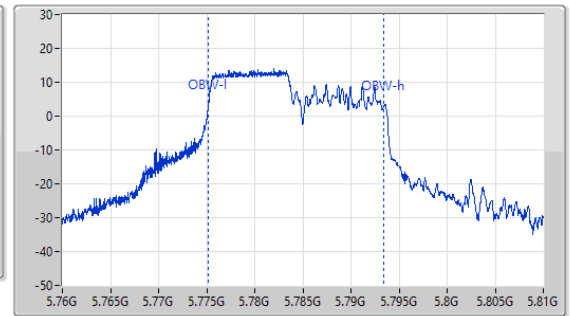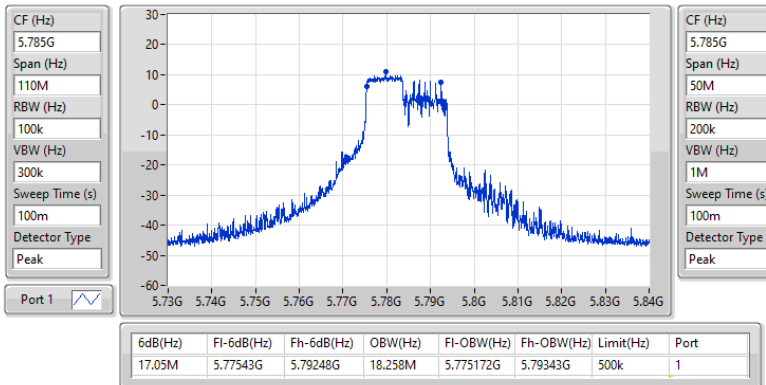

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

EBW

5825MHz

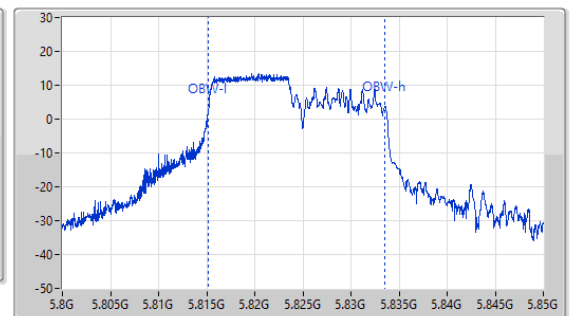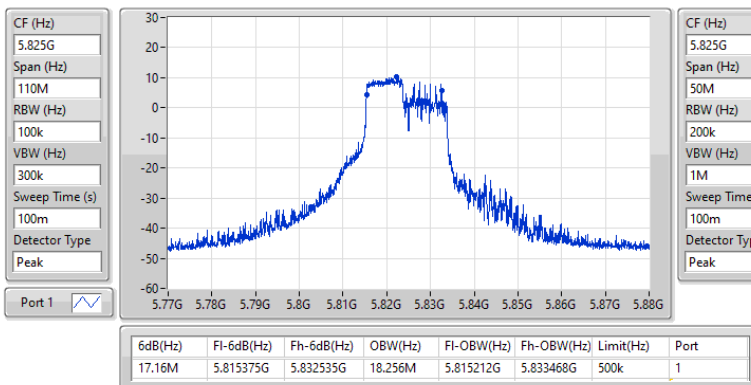

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	14.26	0.02667	18.66	0.07345
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	17.13	0.05164	21.53	0.14223
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	19.16	0.08241	23.56	0.22699
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	14.33	0.02710	18.73	0.07464
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	17.29	0.05358	21.69	0.14757
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	19.12	0.08166	23.52	0.22491
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	14.23	0.02649	18.63	0.07295
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	17.35	0.05433	21.75	0.14962
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	19.14	0.08204	23.54	0.22594
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	19.17	0.08260	23.57	0.22751
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	19.08	0.08091	23.48	0.22284
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	19.22	0.08356	23.62	0.23014

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	14.03	14.03	24.00	18.43	30.00
5200MHz	Pass	4.40	14.26	14.26	24.00	18.66	30.00
5240MHz	Pass	4.40	14.23	14.23	24.00	18.63	30.00
5260MHz	Pass	4.40	14.33	14.33	23.56	18.73	29.56
5300MHz	Pass	4.40	14.15	14.15	23.56	18.55	29.56
5320MHz	Pass	4.40	14.25	14.25	23.56	18.65	29.56
5500MHz	Pass	4.40	13.22	13.22	23.56	17.62	29.56
5520MHz	Pass	4.40	14.15	14.15	23.55	18.55	29.55
5580MHz	Pass	4.40	14.23	14.23	23.56	18.63	29.56
5680MHz	Pass	4.40	14.12	14.12	23.55	18.52	29.55
5700MHz	Pass	4.40	10.82	10.82	23.55	15.22	29.55
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	14.15	14.15	22.50	18.55	28.50
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-15.11	-15.11	30.00	-10.71	36.00
5745MHz	Pass	4.40	19.1	19.10	30.00	23.50	36.00
5785MHz	Pass	4.40	19.16	19.16	30.00	23.56	36.00
5825MHz	Pass	4.40	19.17	19.17	30.00	23.57	36.00
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	15.83	15.83	24.00	20.23	30.00
5200MHz	Pass	4.40	17.02	17.02	24.00	21.42	30.00
5240MHz	Pass	4.40	17.13	17.13	24.00	21.53	30.00
5260MHz	Pass	4.40	17.29	17.29	23.83	21.69	29.83
5300MHz	Pass	4.40	17.14	17.14	23.86	21.54	29.86
5320MHz	Pass	4.40	15.77	15.77	23.74	20.17	29.74
5500MHz	Pass	4.40	11.85	11.85	23.72	16.25	29.72
5520MHz	Pass	4.40	17.26	17.26	23.72	21.66	29.72
5580MHz	Pass	4.40	17.35	17.35	23.73	21.75	29.73
5680MHz	Pass	4.40	17.22	17.22	23.72	21.62	29.72
5700MHz	Pass	4.40	10.51	10.51	23.72	14.91	29.72
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	16.94	16.94	22.77	21.34	28.77
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-10.92	-10.92	30.00	-6.52	36.00
5745MHz	Pass	4.40	19.06	19.06	30.00	23.46	36.00
5785MHz	Pass	4.40	19.02	19.02	30.00	23.42	36.00
5825MHz	Pass	4.40	19.08	19.08	30.00	23.48	36.00
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	16.29	16.29	24.00	20.69	30.00
5200MHz	Pass	4.40	19.12	19.12	24.00	23.52	30.00
5240MHz	Pass	4.40	19.16	19.16	24.00	23.56	30.00

**Conducted Output Power(Average)****Appendix B**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5260MHz	Pass	4.40	19.12	19.12	24.00	23.52	30.00
5300MHz	Pass	4.40	19.11	19.11	24.00	23.51	30.00
5320MHz	Pass	4.40	15.91	15.91	24.00	20.31	30.00
5500MHz	Pass	4.40	11.74	11.74	24.00	16.14	30.00
5520MHz	Pass	4.40	18.69	18.69	24.00	23.09	30.00
5580MHz	Pass	4.40	19.14	19.14	24.00	23.54	30.00
5660MHz	Pass	4.40	19.02	19.02	24.00	23.42	30.00
5680MHz	Pass	4.40	18.21	18.21	24.00	22.61	30.00
5700MHz	Pass	4.40	10.05	10.05	24.00	14.45	30.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	18.95	18.95	24.00	23.35	30.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-6.42	-6.42	30.00	-2.02	36.00
5745MHz	Pass	4.40	19.01	19.01	30.00	23.41	36.00
5785MHz	Pass	4.40	19.05	19.05	30.00	23.45	36.00
5825MHz	Pass	4.40	19.22	19.22	30.00	23.62	36.00


DG = Directional Gain; Port X = Port X output power



5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

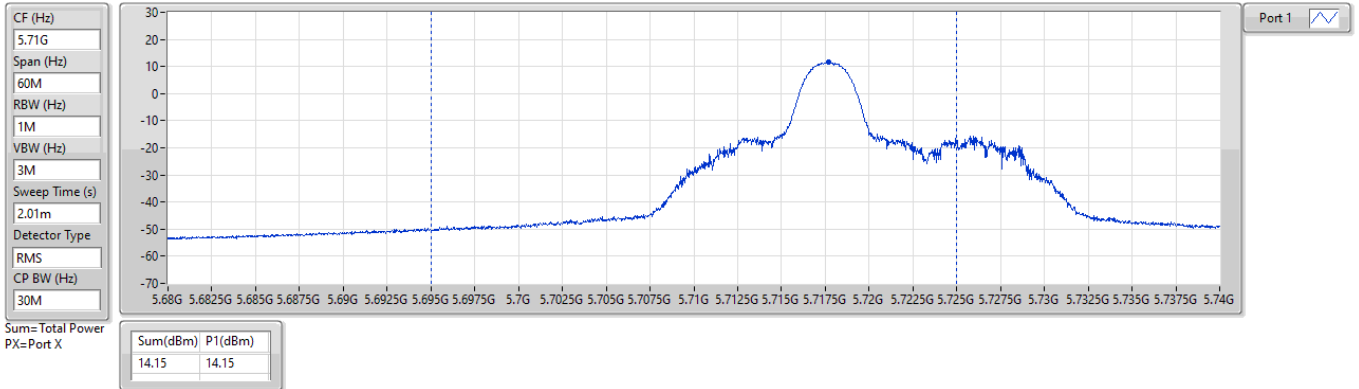

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

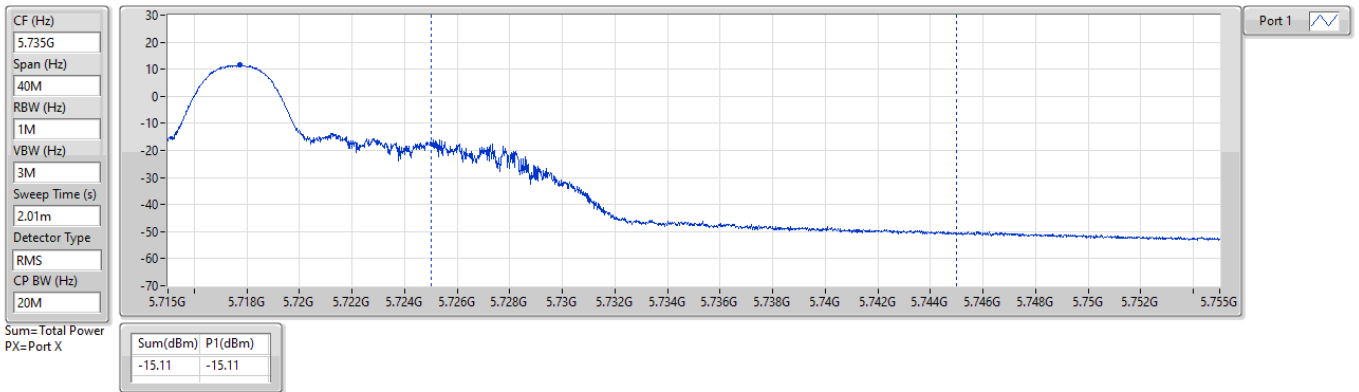




5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

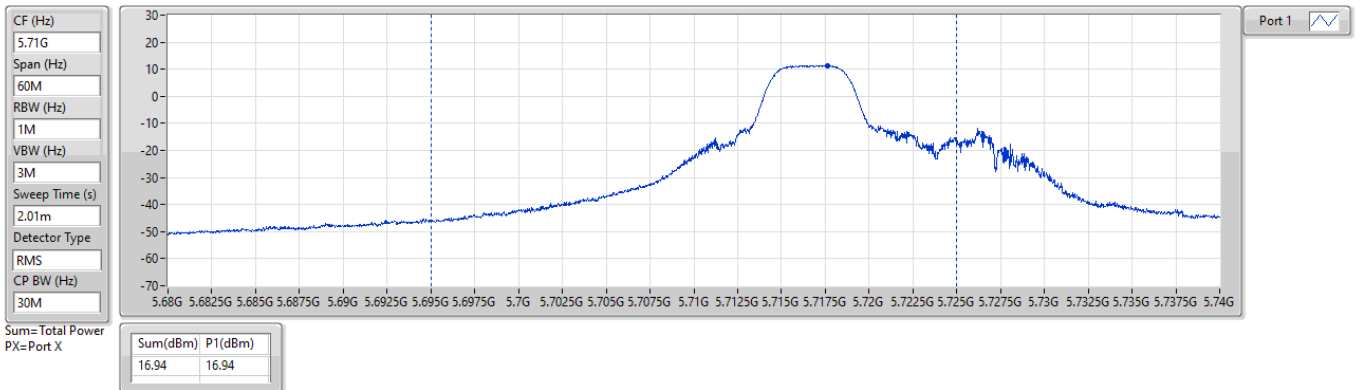

5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX






5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

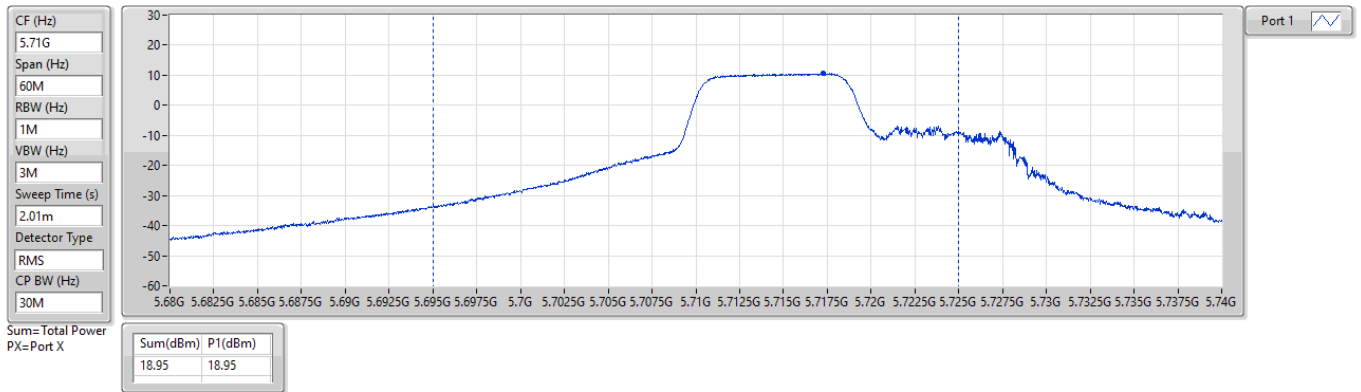

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

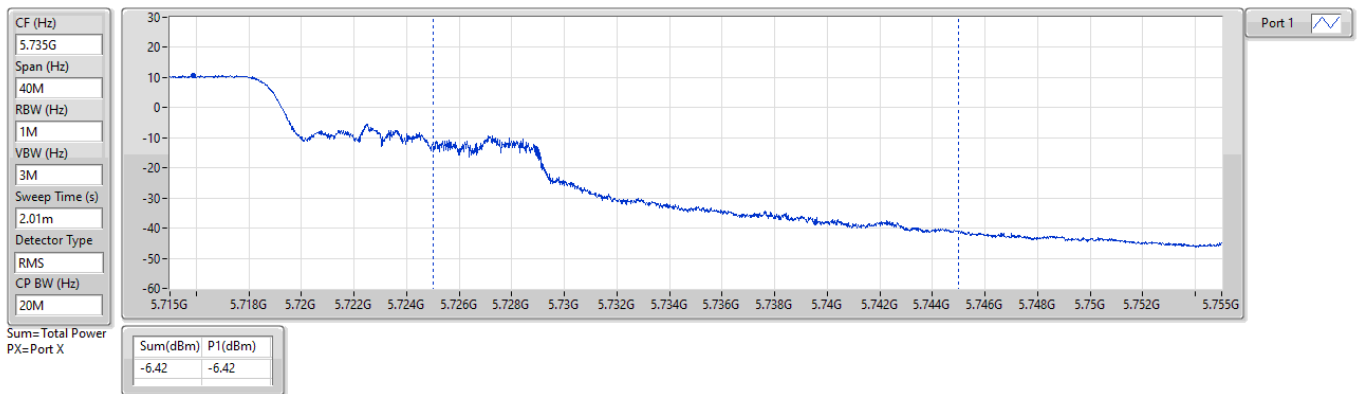

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	9.99	14.39
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	9.96	14.36
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	9.16	13.56
5.25-5.35GHz	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	10.08	14.48
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	10.10	14.50
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	9.03	13.43
5.47-5.725GHz	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	9.94	14.34
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	10.13	14.53
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	9.13	13.53
5.725-5.85GHz	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	13.62	18.02
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	10.78	15.18
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	7.79	12.19

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	9.99	9.99	11.00	14.39	17.00
5200MHz	Pass	4.40	9.99	9.99	11.00	14.39	17.00
5240MHz	Pass	4.40	9.97	9.97	11.00	14.37	17.00
5260MHz	Pass	4.40	10.08	10.08	11.00	14.48	17.00
5300MHz	Pass	4.40	9.93	9.93	11.00	14.33	17.00
5320MHz	Pass	4.40	9.98	9.98	11.00	14.38	17.00
5500MHz	Pass	4.40	8.75	8.75	11.00	13.15	17.00
5580MHz	Pass	4.40	9.94	9.94	11.00	14.34	17.00
5700MHz	Pass	4.40	6.54	6.54	11.00	10.94	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	9.90	9.90	11.00	14.30	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-16.47	-16.47	30.00	-12.07	36.00
5745MHz	Pass	4.40	13.35	13.35	30.00	17.75	36.00
5785MHz	Pass	4.40	13.62	13.62	30.00	18.02	36.00
5825MHz	Pass	4.40	13.44	13.44	30.00	17.84	36.00
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	8.82	8.82	11.00	13.22	17.00
5200MHz	Pass	4.40	9.82	9.82	11.00	14.22	17.00
5240MHz	Pass	4.40	9.96	9.96	11.00	14.36	17.00
5260MHz	Pass	4.40	10.10	10.10	11.00	14.50	17.00
5300MHz	Pass	4.40	9.97	9.97	11.00	14.37	17.00
5320MHz	Pass	4.40	8.65	8.65	11.00	13.05	17.00
5500MHz	Pass	4.40	4.73	4.73	11.00	9.13	17.00
5580MHz	Pass	4.40	10.13	10.13	11.00	14.53	17.00
5700MHz	Pass	4.40	3.59	3.59	11.00	7.99	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	10.11	10.11	11.00	14.51	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-12.47	-12.47	30.00	-8.07	36.00
5745MHz	Pass	4.40	10.67	10.67	30.00	15.07	36.00
5785MHz	Pass	4.40	10.78	10.78	30.00	15.18	36.00
5825MHz	Pass	4.40	10.64	10.64	30.00	15.04	36.00
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	4.40	6.27	6.27	11.00	10.67	17.00
5200MHz	Pass	4.40	8.97	8.97	11.00	13.37	17.00
5240MHz	Pass	4.40	9.16	9.16	11.00	13.56	17.00
5260MHz	Pass	4.40	9.03	9.03	11.00	13.43	17.00
5300MHz	Pass	4.40	8.99	8.99	11.00	13.39	17.00
5320MHz	Pass	4.40	5.78	5.78	11.00	10.18	17.00
5500MHz	Pass	4.40	1.69	1.69	11.00	6.09	17.00
5580MHz	Pass	4.40	9.13	9.13	11.00	13.53	17.00
5700MHz	Pass	4.40	0.01	0.01	11.00	4.41	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.40	8.94	8.94	11.00	13.34	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.40	-9.85	-9.85	30.00	-5.45	36.00
5745MHz	Pass	4.40	7.65	7.65	30.00	12.05	36.00
5785MHz	Pass	4.40	7.70	7.70	30.00	12.10	36.00
5825MHz	Pass	4.40	7.79	7.79	30.00	12.19	36.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = Power density; Port X = Port X Power Density;



5.15-5.25GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5180MHz

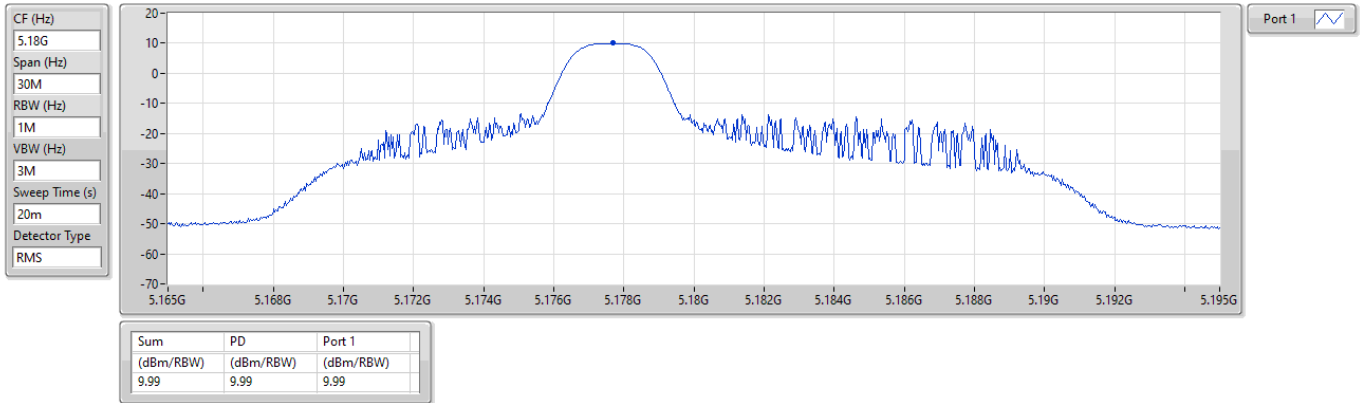

5.15-5.25GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5200MHz

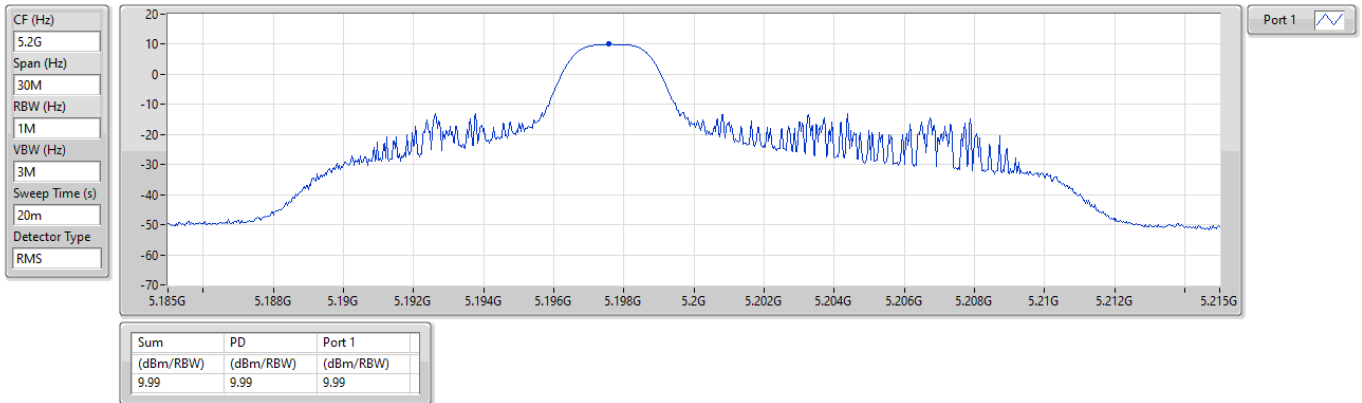




5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5240MHz

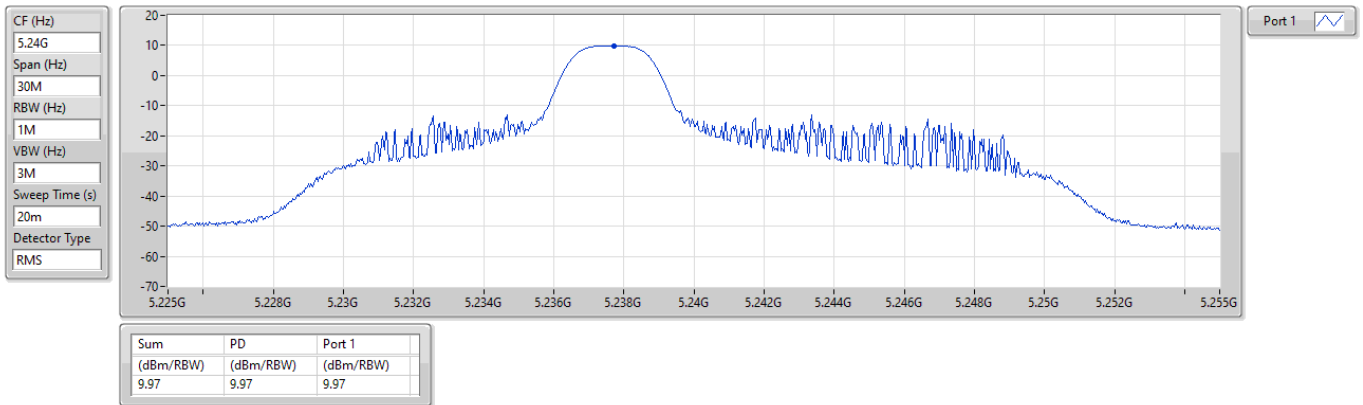

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5260MHz

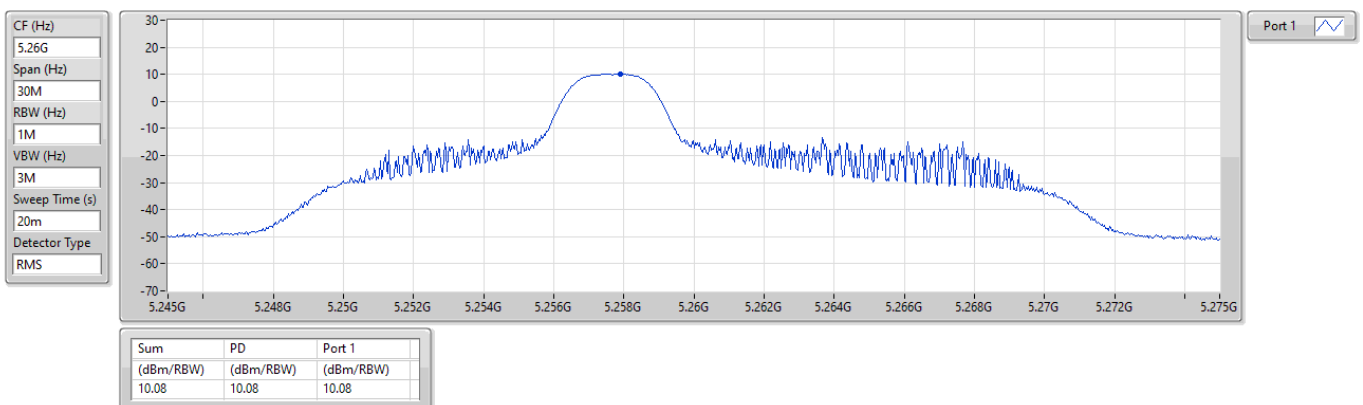




5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5300MHz

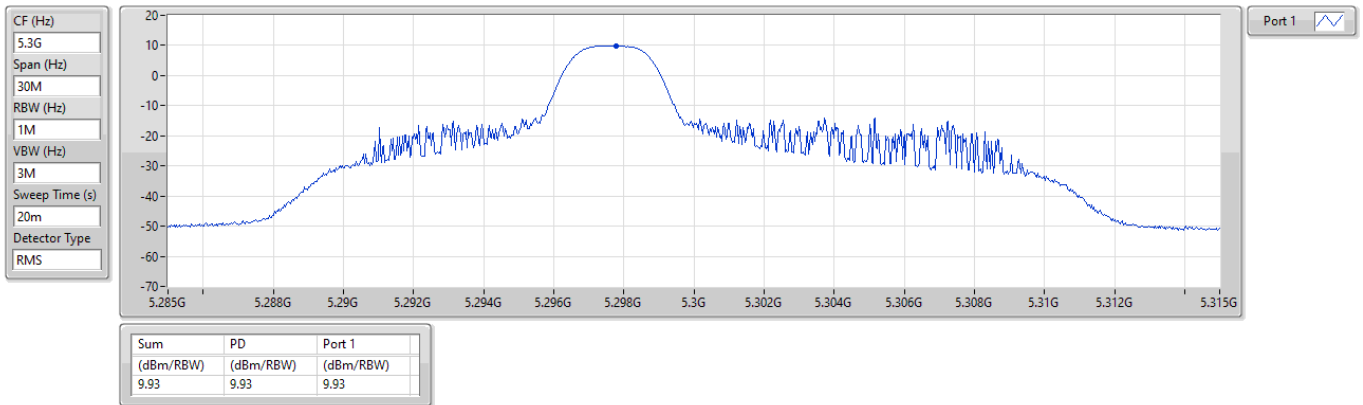

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5320MHz

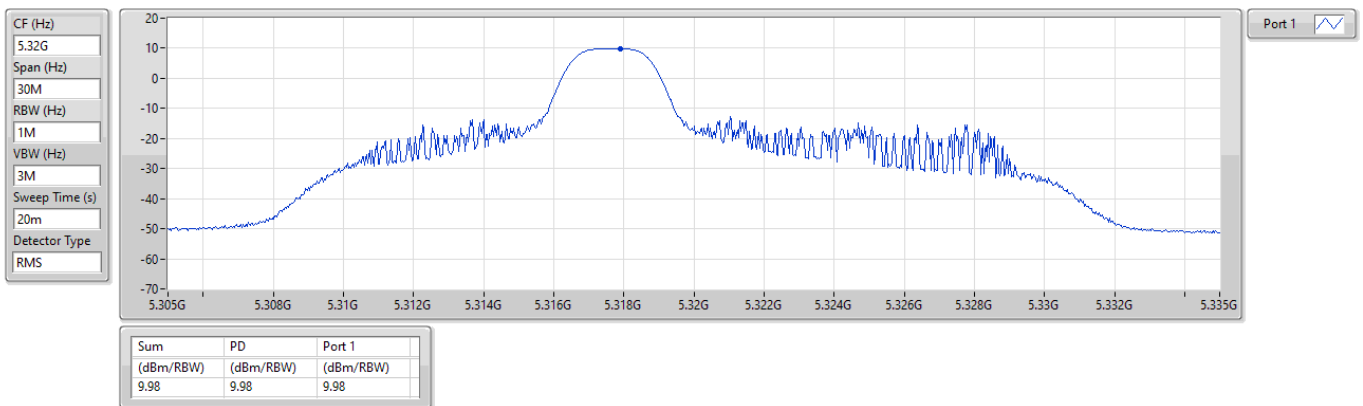




5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5500MHz

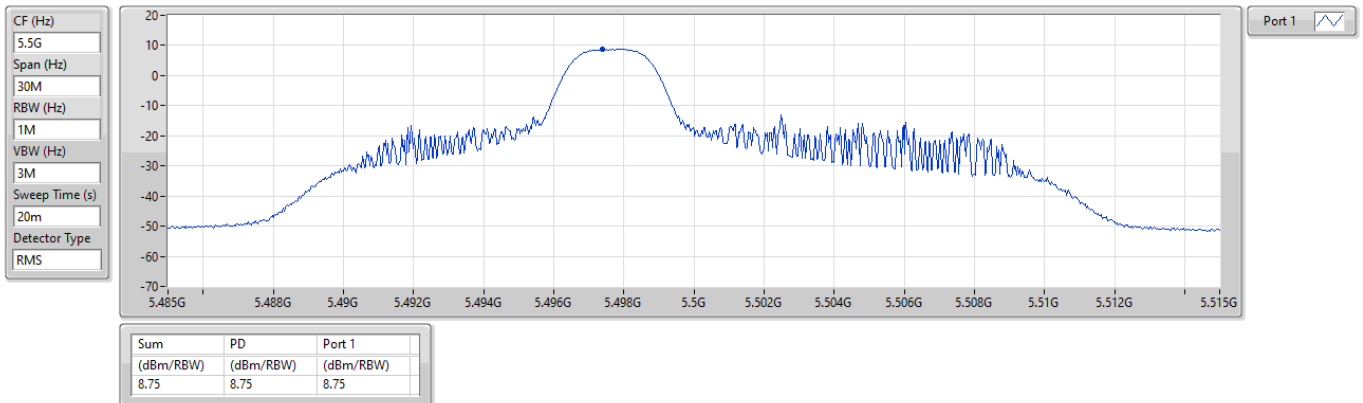

5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5580MHz

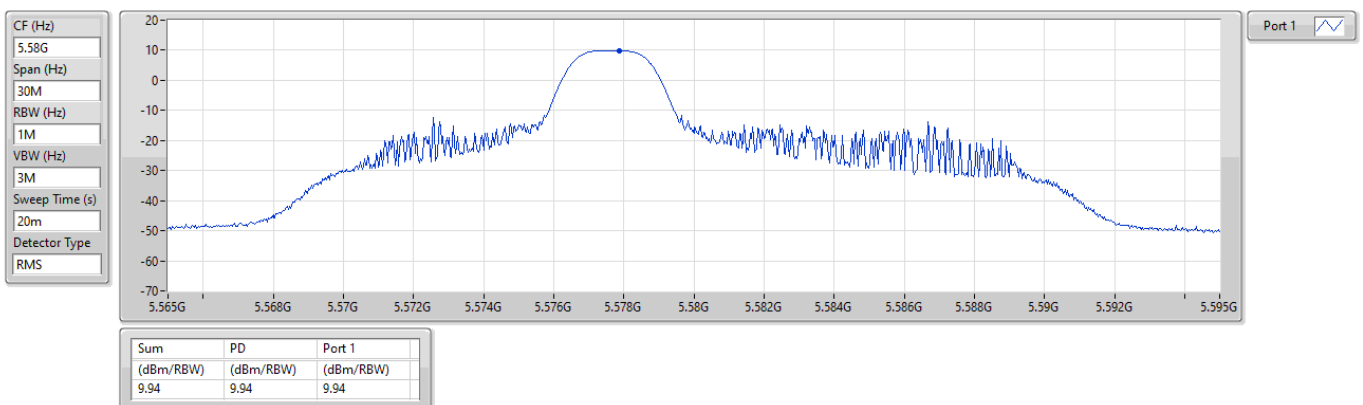




5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5700MHz

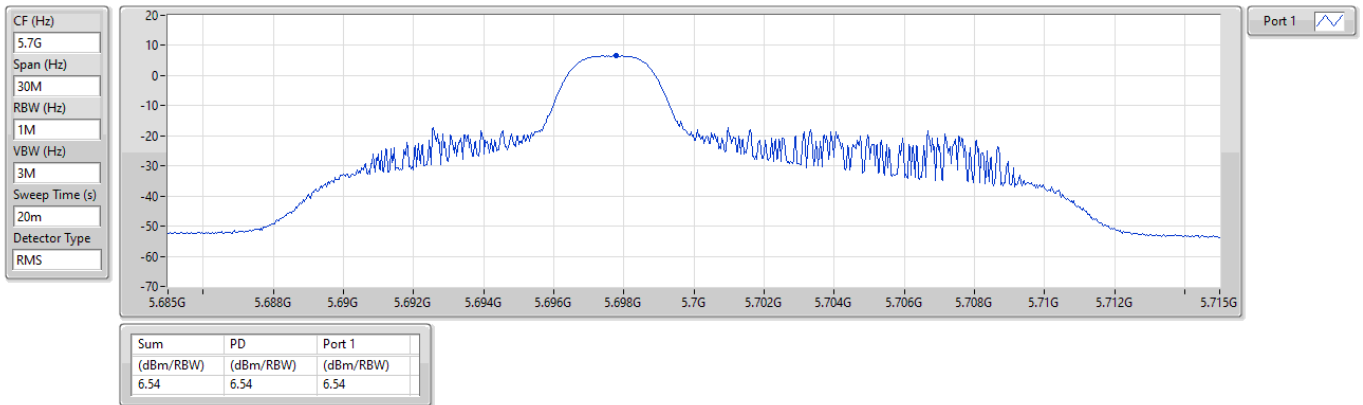

5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

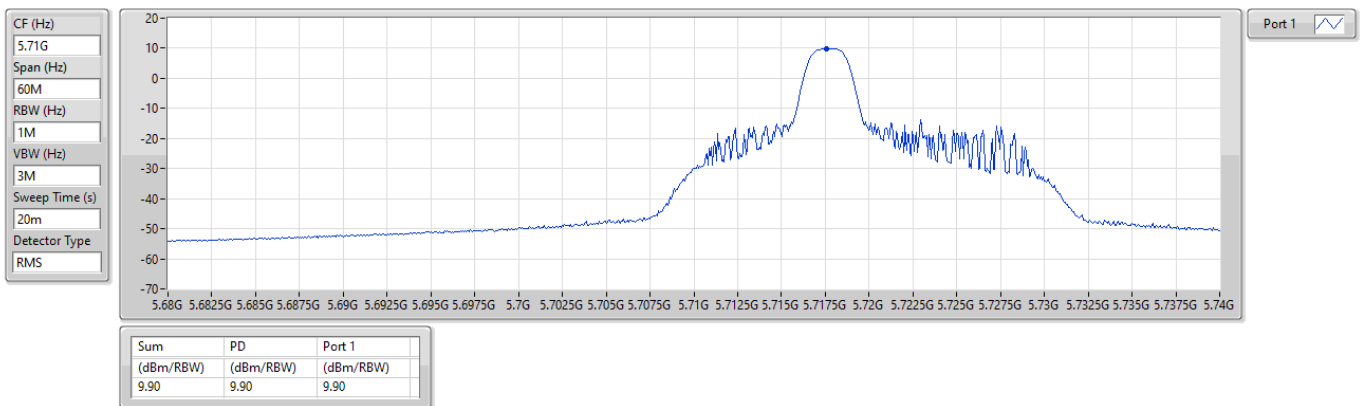




5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5720MHz Straddle 5.725-5.85GHz

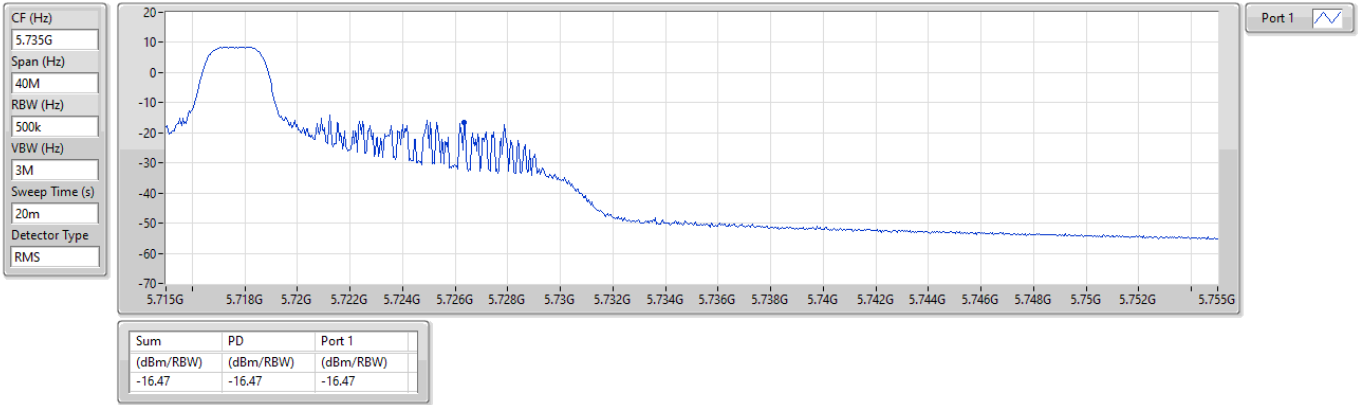

5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5745MHz

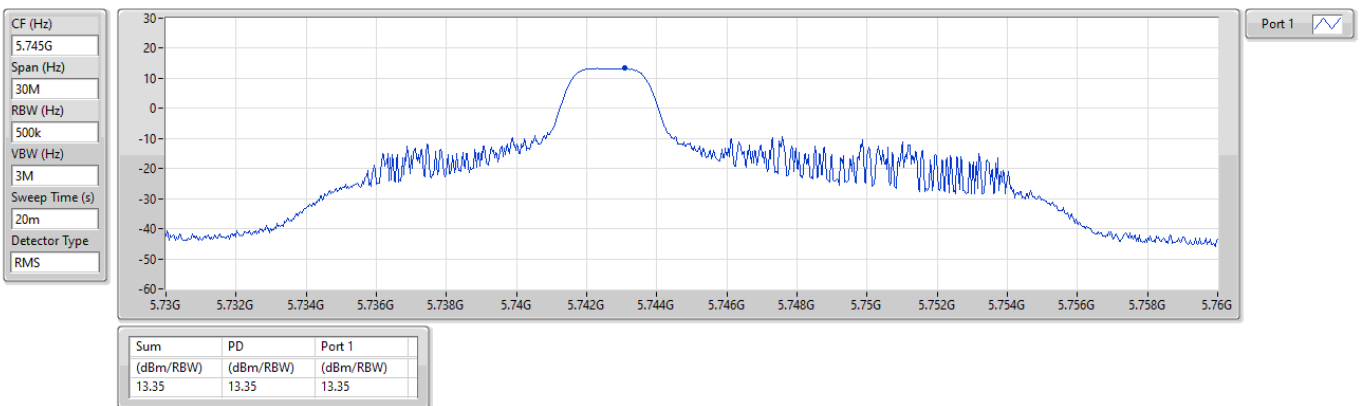




5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD


5785MHz

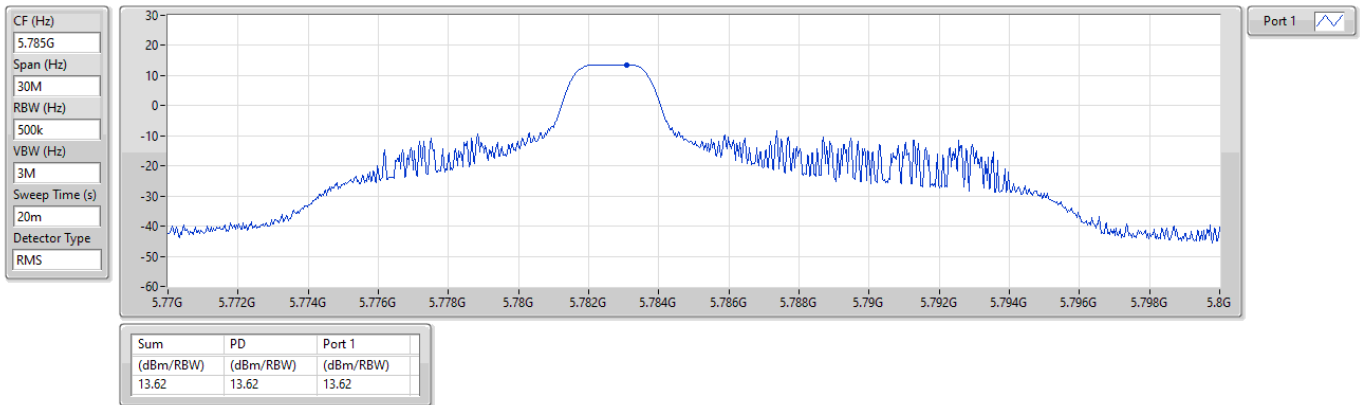

5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

PSD

5825MHz

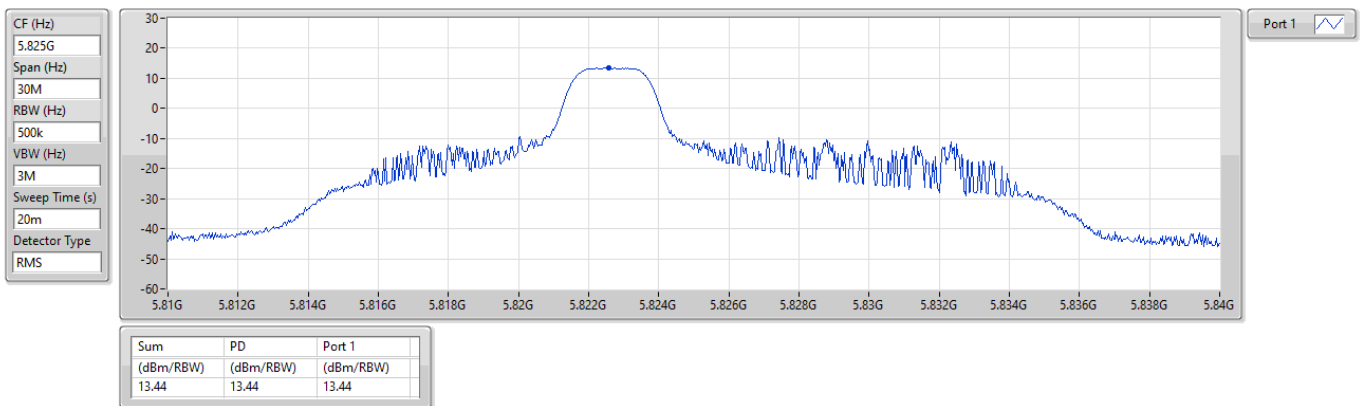




5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5180MHz

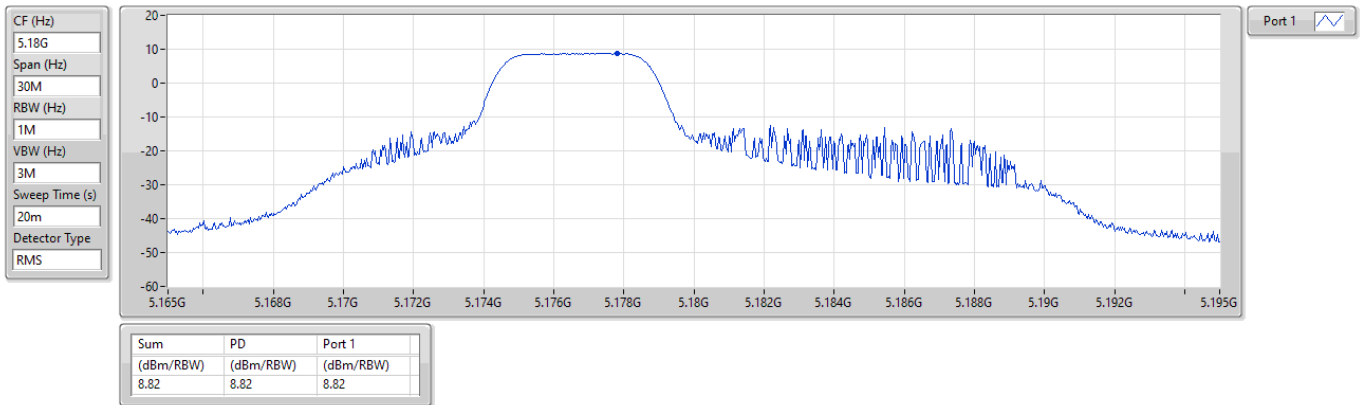

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5200MHz

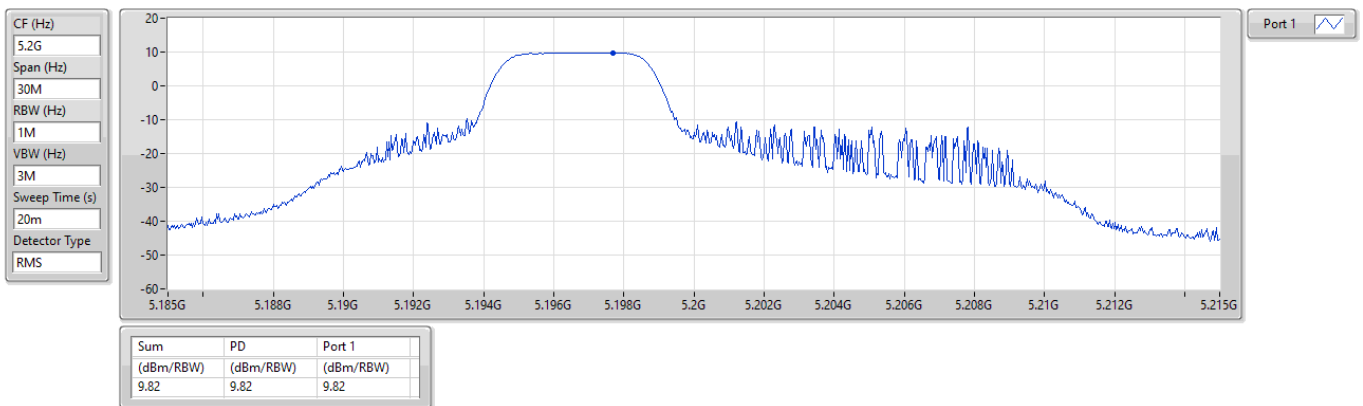




5.15-5.25GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5240MHz

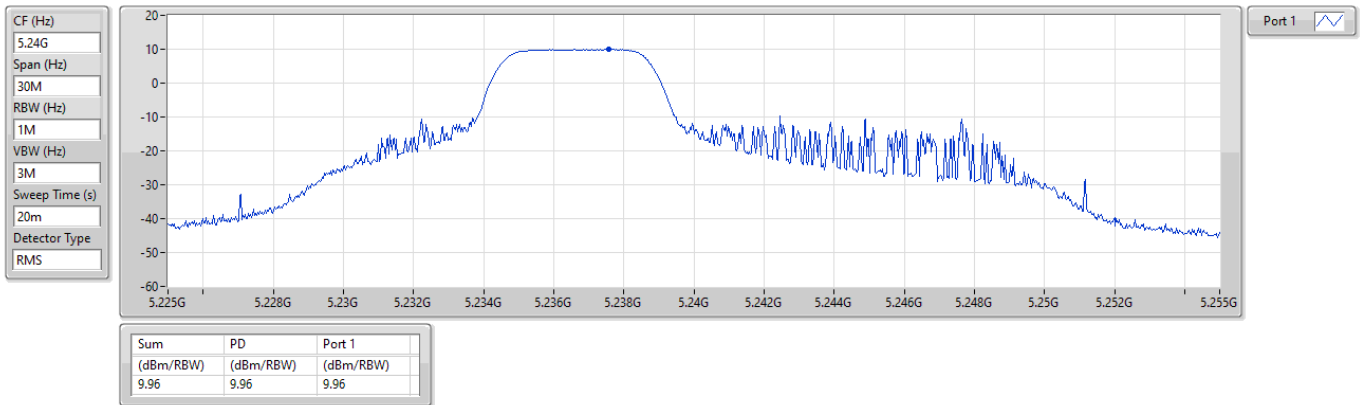

5.25-5.35GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5260MHz

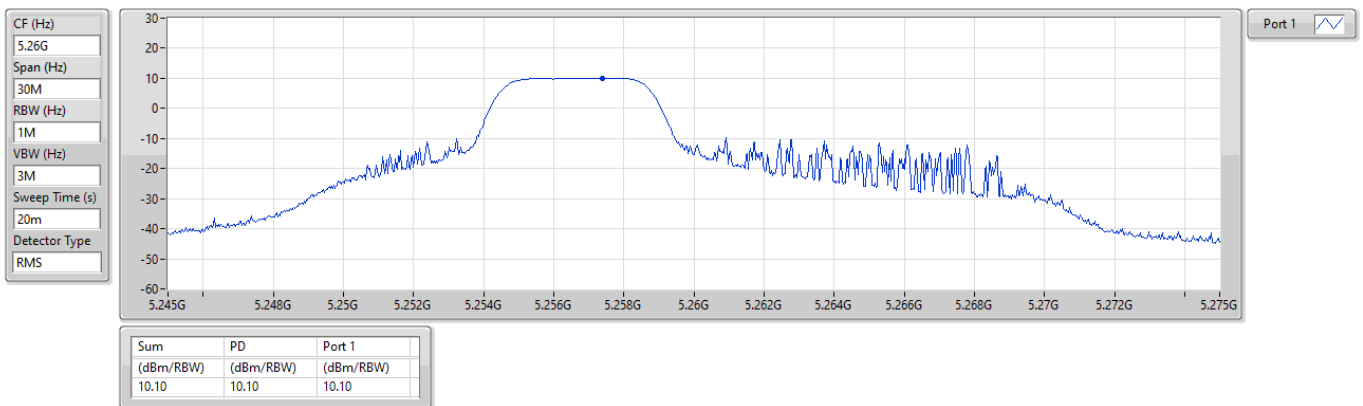




5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5300MHz

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

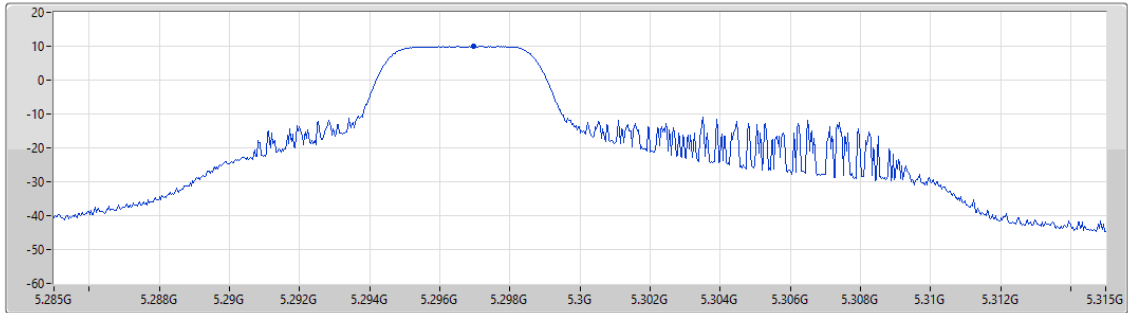

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.97	9.97	9.97

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5320MHz

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

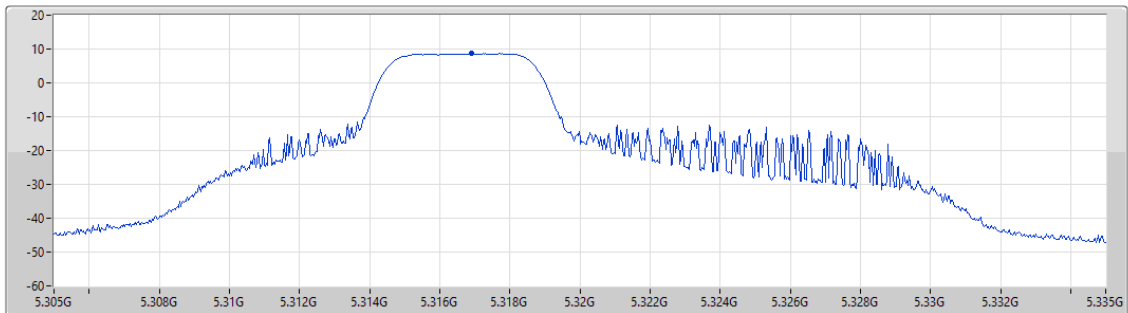

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.65	8.65	8.65



5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5500MHz

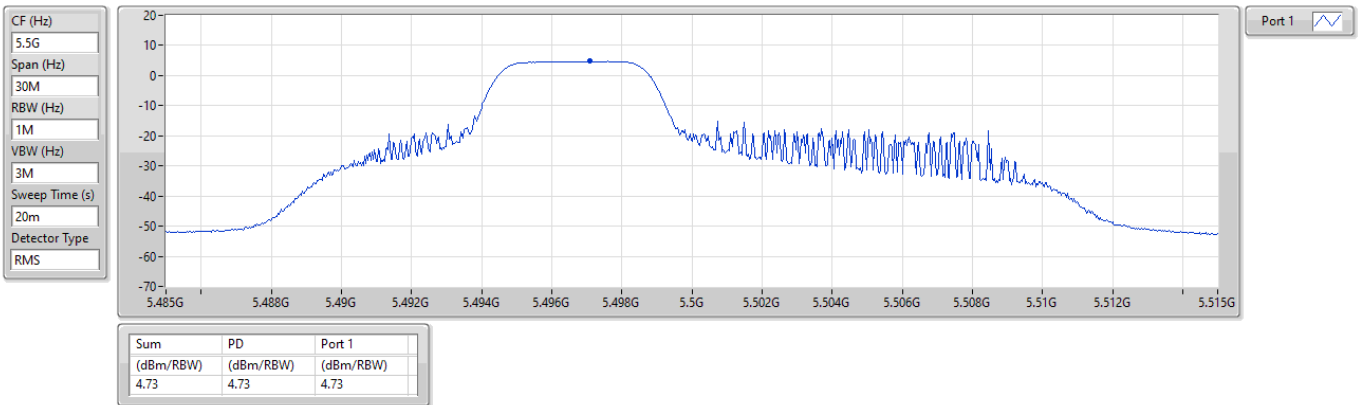

5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5580MHz

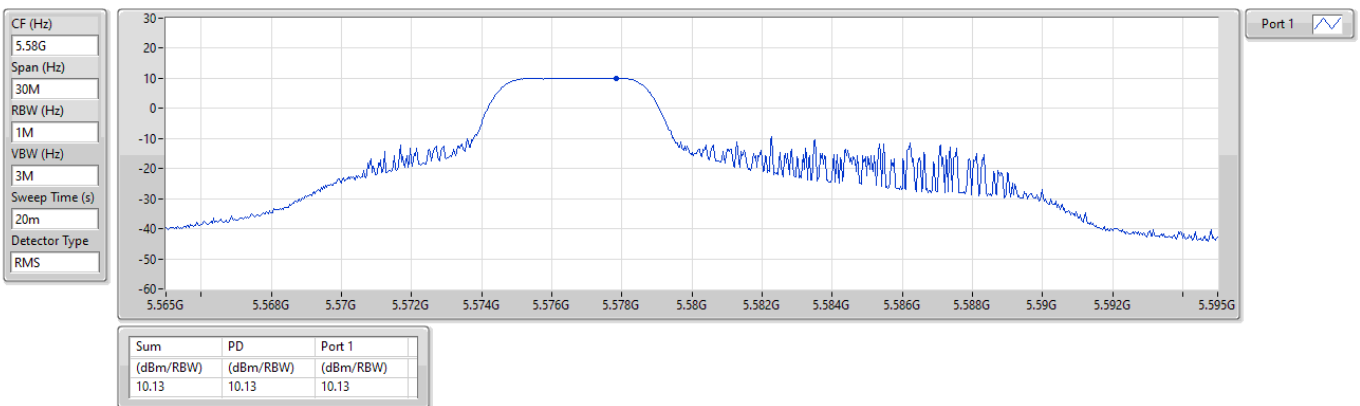




5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5700MHz

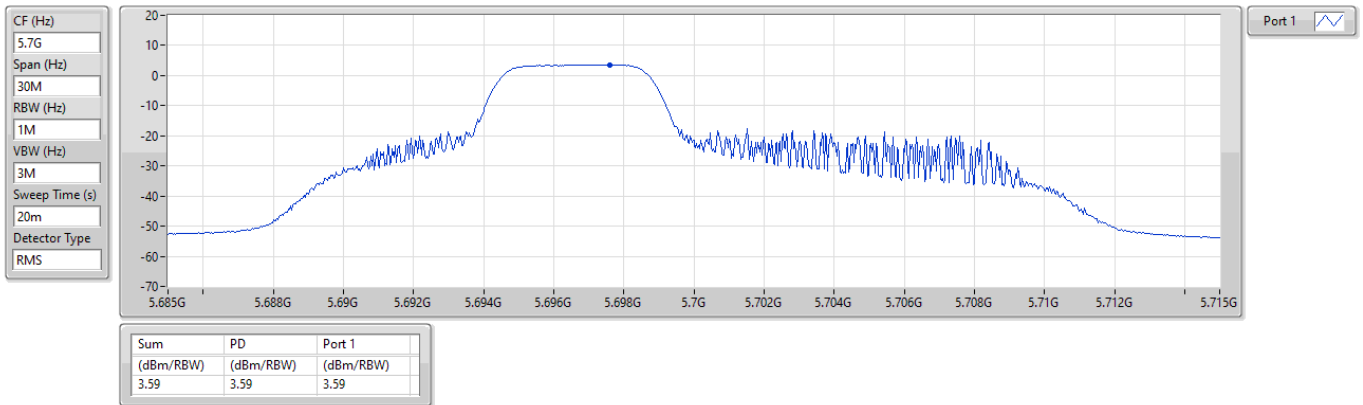

5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

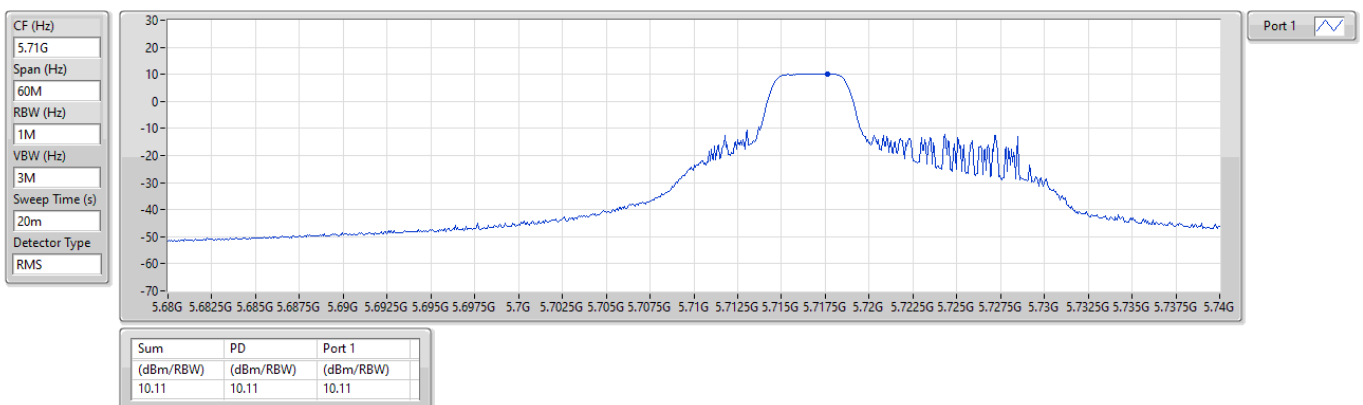




5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5720MHz Straddle 5.725-5.85GHz

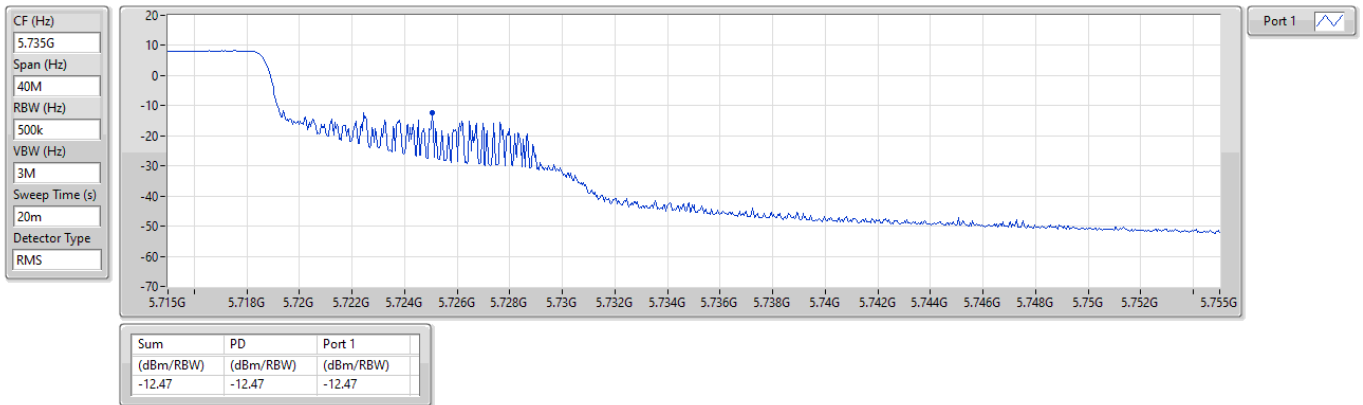

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5745MHz

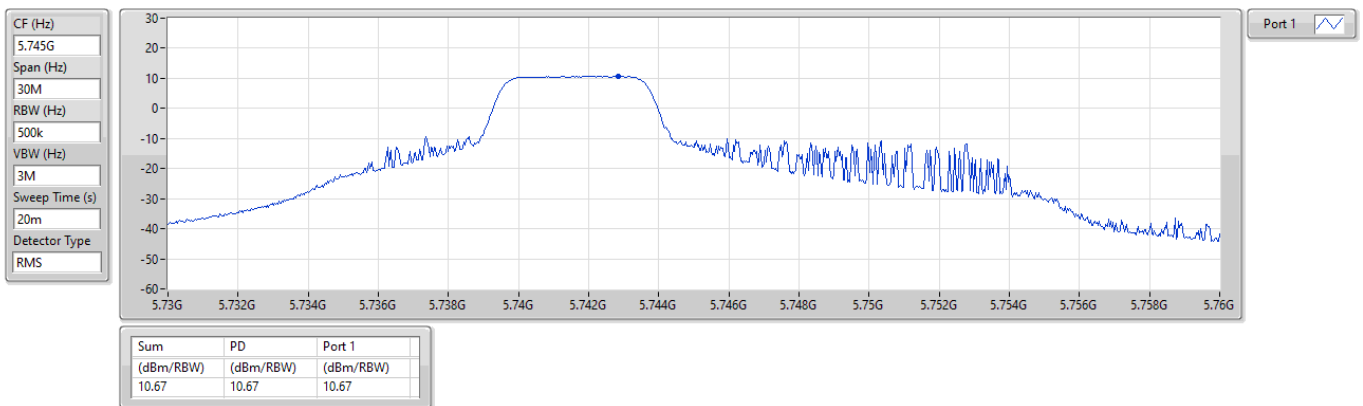

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD


5785MHz

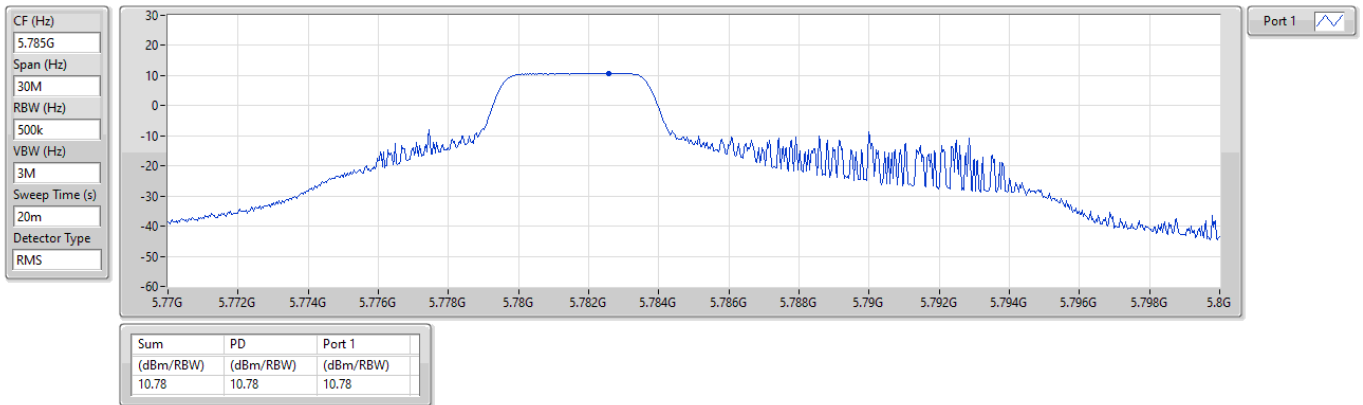

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

PSD

5825MHz

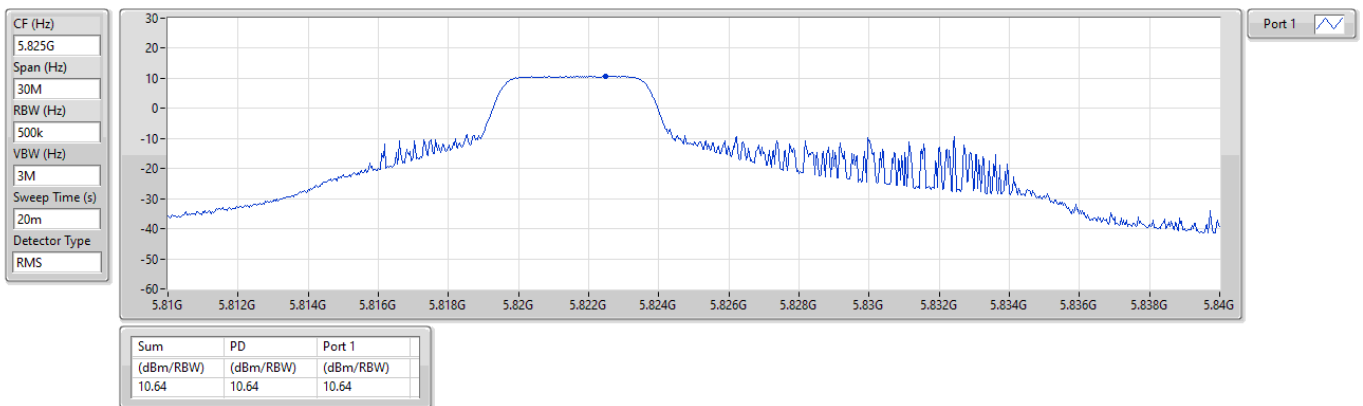




5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5180MHz

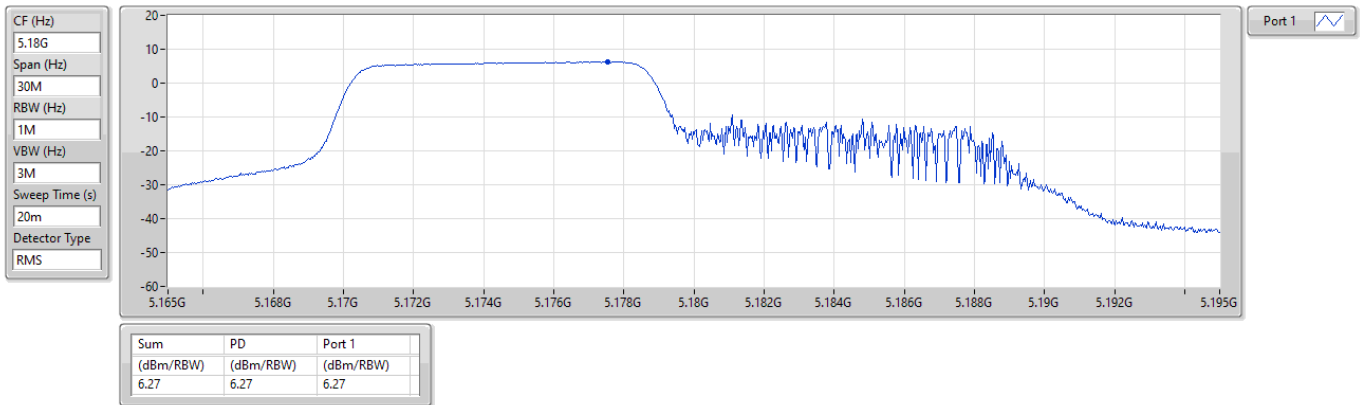

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5200MHz

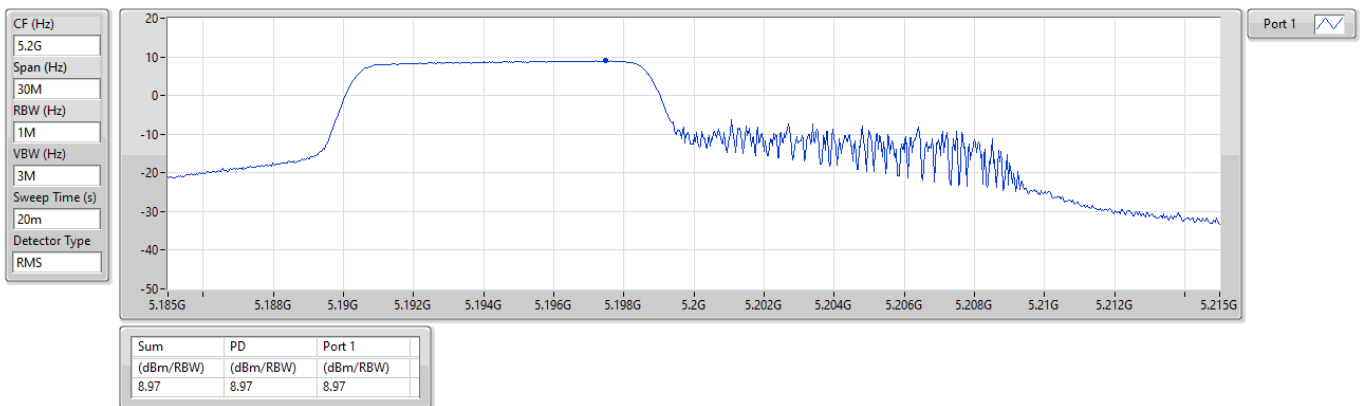




5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5240MHz

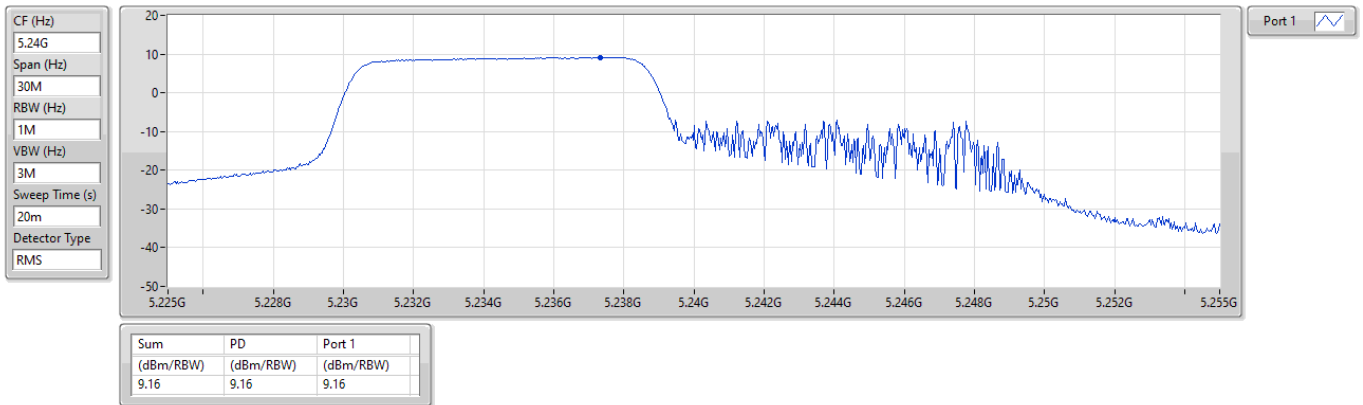

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5260MHz

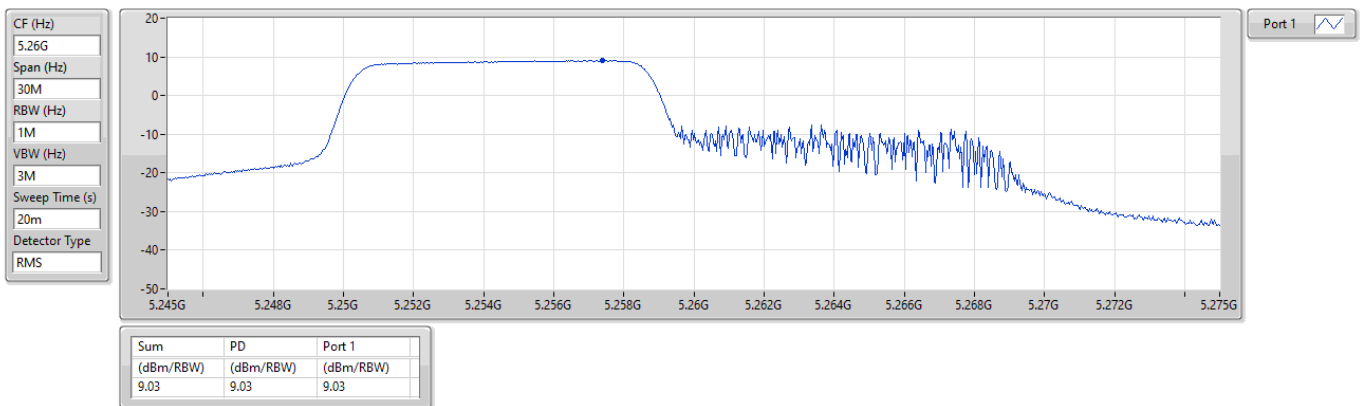




5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5300MHz

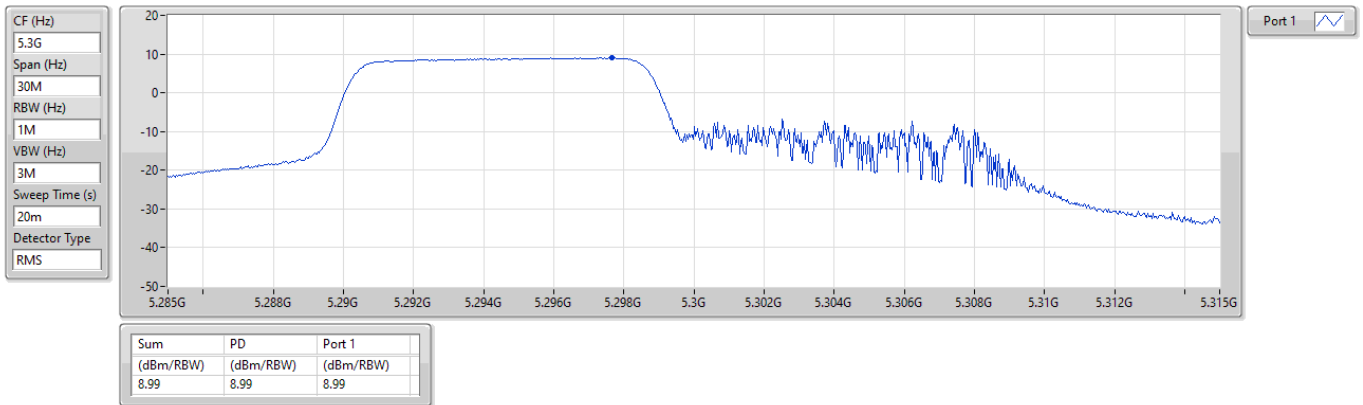

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5320MHz

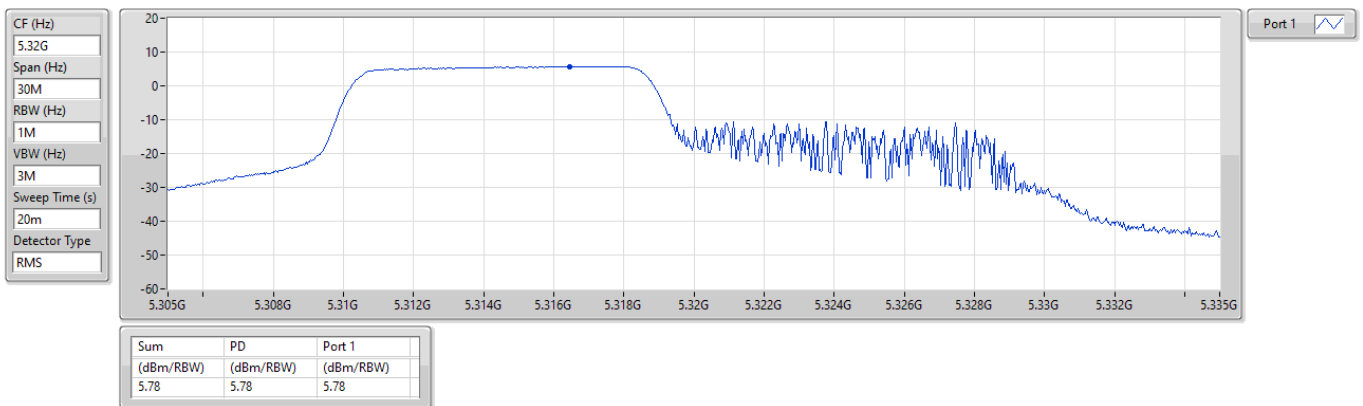




5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5500MHz

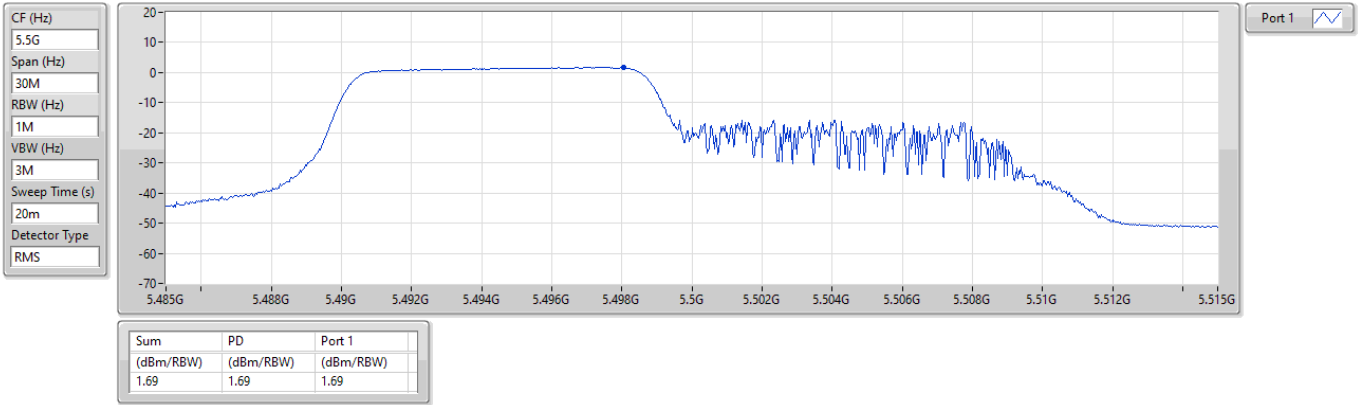

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5580MHz

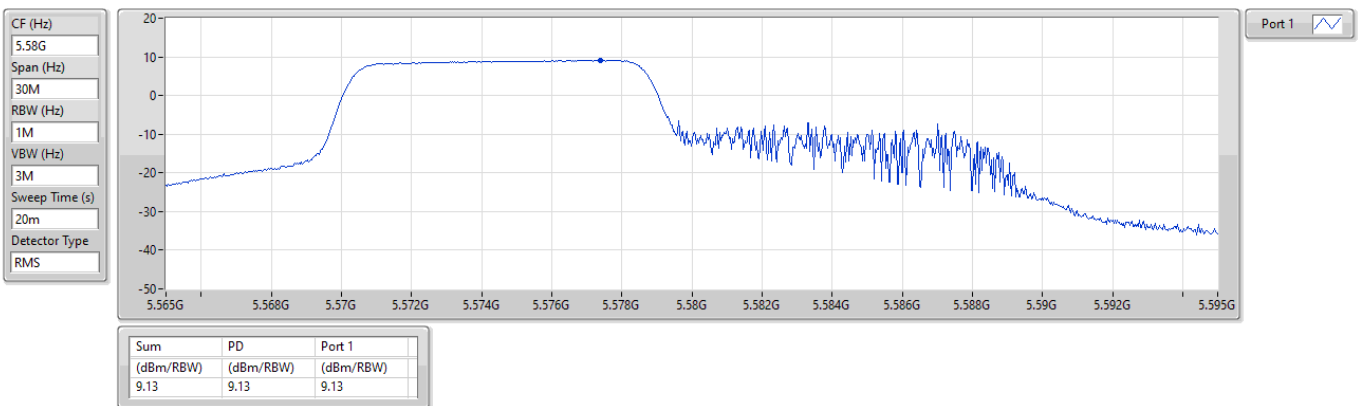




5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5700MHz

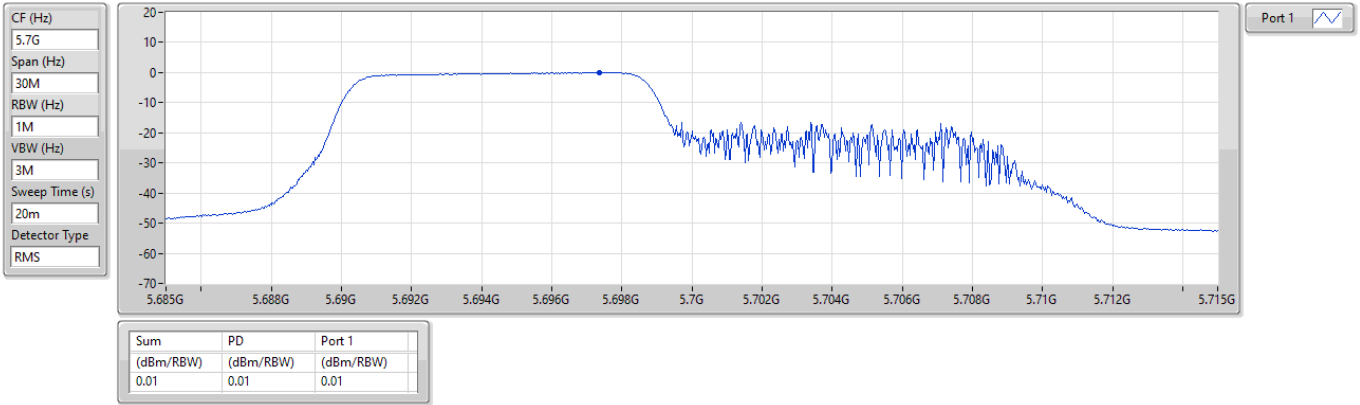

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

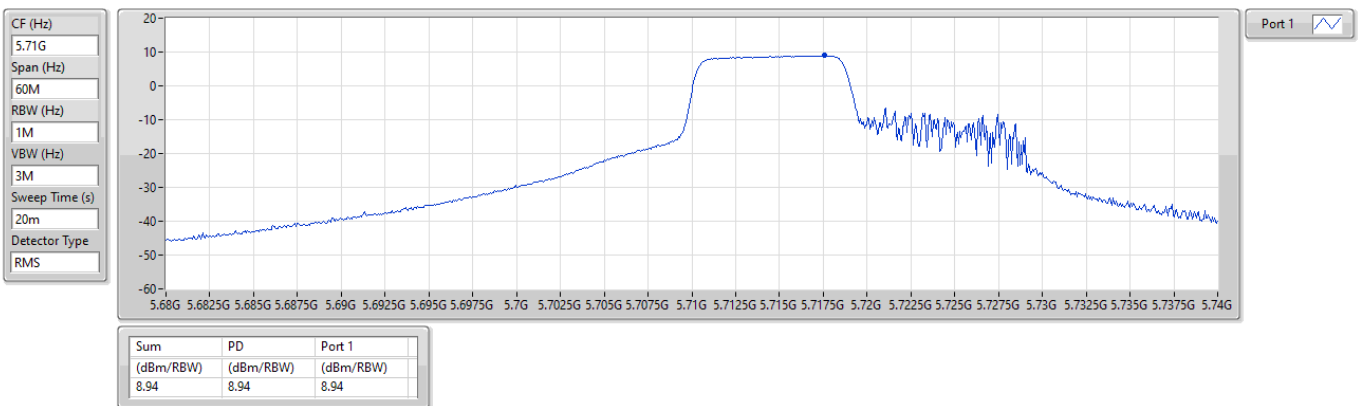




5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD


5720MHz Straddle 5.725-5.85GHz

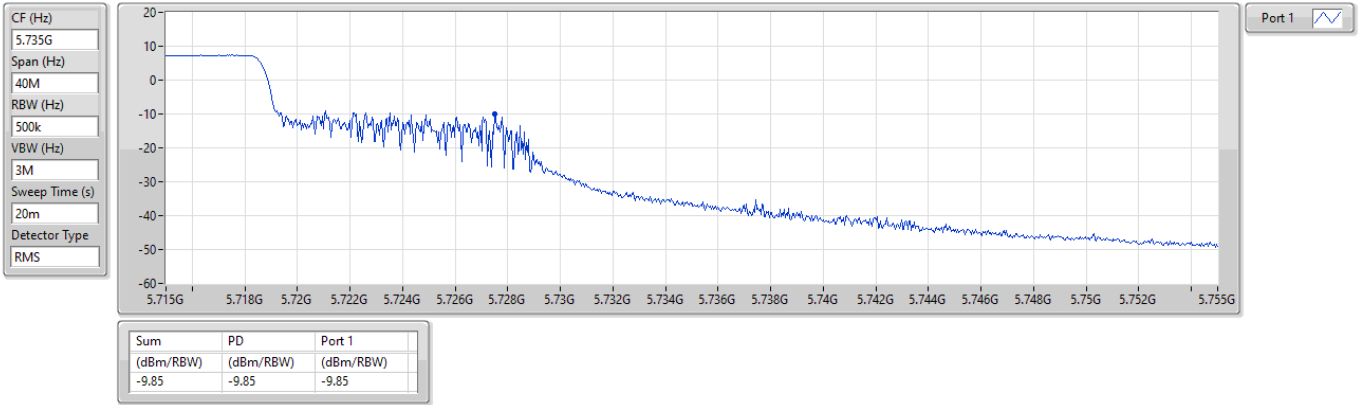

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

PSD

5745MHz

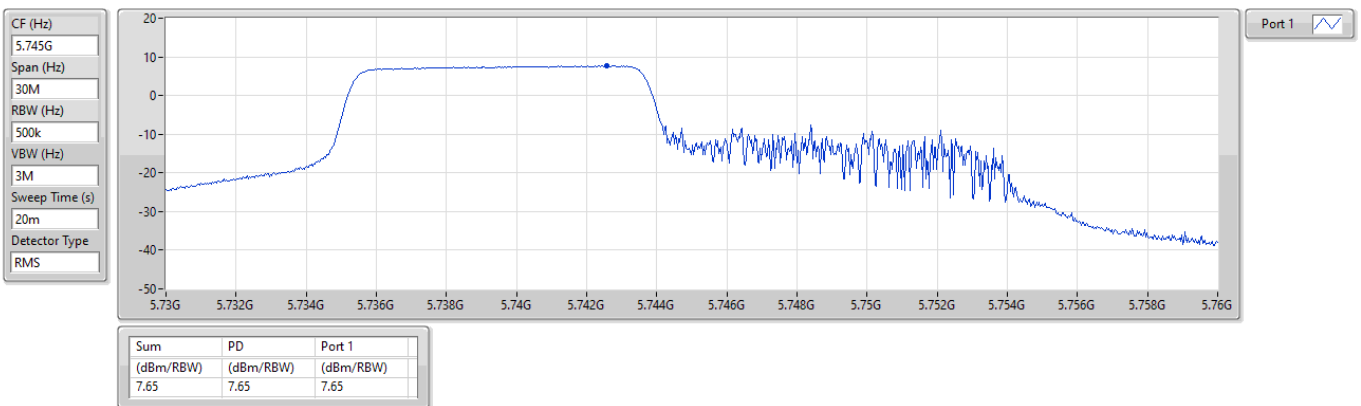



Summary


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	GRF (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	30M	1G	PK	36.31M	4.40	-79.91	-79.91	4.7	-70.81	-55.20	-15.61

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	GRF (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-
5825MHz	Pass	30M	1G	PK	36.31M	4.40	-79.91	-79.91	4.7	-70.81	-55.20	-15.61

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

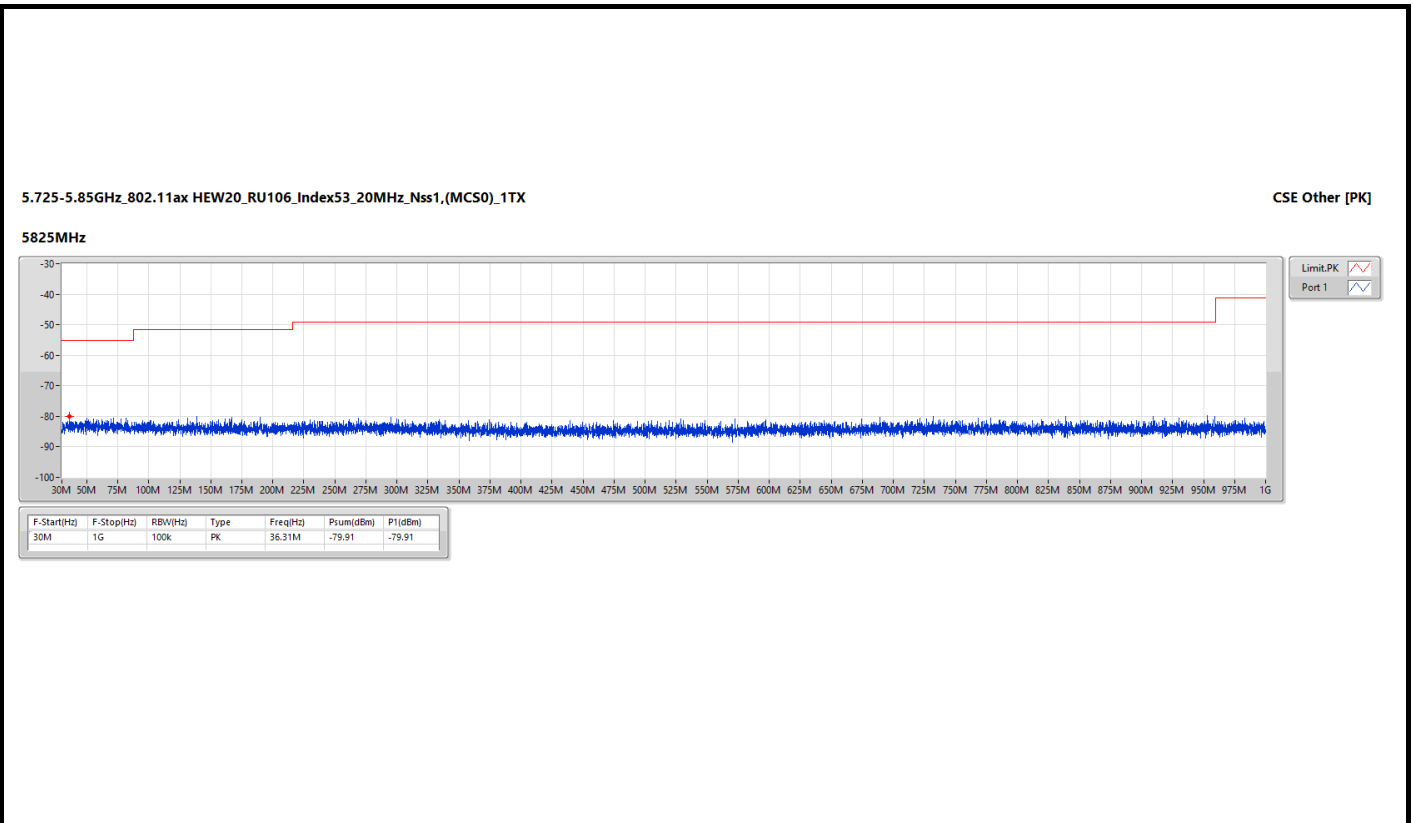

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.92994G	4.40	-51.72	-51.72	-47.32	-41.20	-6.12
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.92994G	4.40	-51.82	-51.82	-47.42	-41.20	-6.22
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.92994G	4.40	-52.54	-52.54	-48.14	-41.20	-6.94
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.99031G	4.40	-50.01	-50.01	-45.61	-41.20	-4.41
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.99031G	4.40	-50.03	-50.03	-45.63	-41.20	-4.43
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.99031G	4.40	-49.86	-49.86	-45.46	-41.20	-4.26
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.81356G	4.40	-56.26	-56.26	-51.86	-41.20	-10.66
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.8G	4.40	-56.38	-56.38	-51.98	-41.20	-10.78
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.81356G	4.40	-56.19	-56.19	-51.79	-41.20	-10.59
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.88356G	4.40	-54.33	-54.33	-49.93	-41.20	-8.73
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.88356G	4.40	-54.46	-54.46	-50.06	-41.20	-8.86
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	1G	4.5G	AV	3.88356G	4.40	-54.20	-54.20	-49.80	-41.20	-8.60

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	1G	4.5G	AV	3.88488G	4.40	-53.10	-53.10	-48.70	-41.20	-7.50
5180MHz	Pass	1G	4.5G	PK	3.88531G	4.40	-51.53	-51.53	-47.13	-21.20	-25.93
5200MHz	Pass	1G	4.5G	AV	3.90019G	4.40	-52.57	-52.57	-48.17	-41.20	-6.97
5200MHz	Pass	1G	4.5G	PK	3.90019G	4.40	-51.44	-51.44	-47.04	-21.20	-25.84
5240MHz	Pass	1G	4.5G	AV	3.92994G	4.40	-51.72	-51.72	-47.32	-41.20	-6.12
5240MHz	Pass	1G	4.5G	PK	3.92994G	4.40	-49.84	-49.84	-45.44	-21.20	-24.24
5260MHz	Pass	1G	4.5G	AV	3.94525G	4.40	-51.23	-51.23	-46.83	-41.20	-5.63
5260MHz	Pass	1G	4.5G	PK	3.94525G	4.40	-49.41	-49.41	-45.01	-21.20	-23.81
5300MHz	Pass	1G	4.5G	AV	3.975G	4.40	-50.36	-50.36	-45.96	-41.20	-4.76
5300MHz	Pass	1G	4.5G	PK	3.975G	4.40	-48.68	-48.68	-44.28	-21.20	-23.08
5320MHz	Pass	1G	4.5G	AV	3.99031G	4.40	-50.01	-50.01	-45.61	-41.20	-4.41
5320MHz	Pass	1G	4.5G	PK	3.99031G	4.40	-48.33	-48.33	-43.93	-21.20	-22.73
5500MHz	Pass	1G	4.5G	AV	3.66656G	4.40	-59.73	-59.73	-55.33	-41.20	-14.13
5500MHz	Pass	1G	4.5G	PK	4.49781G	4.40	-61.08	-61.08	-56.68	-27.00	-29.68
5580MHz	Pass	1G	4.5G	AV	3.71994G	4.40	-58.03	-58.03	-53.63	-41.20	-12.43
5580MHz	Pass	1G	4.5G	PK	2.94163G	4.40	-58.31	-58.31	-53.91	-27.00	-26.91
5700MHz	Pass	1G	4.5G	AV	3.8G	4.40	-56.37	-56.37	-51.97	-41.20	-10.77
5700MHz	Pass	1G	4.5G	PK	2.96175G	4.40	-58.24	-58.24	-53.84	-27.00	-26.84
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	AV	3.81356G	4.40	-56.26	-56.26	-51.86	-41.20	-10.66
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	PK	2.90006G	4.40	-58.59	-58.59	-54.19	-27.00	-27.19
5745MHz	Pass	1G	4.5G	AV	3.83019G	4.40	-55.61	-55.61	-51.21	-41.20	-10.01
5745MHz	Pass	1G	4.5G	PK	2.94994G	4.40	-58.33	-58.33	-53.93	-27.00	-26.93
5785MHz	Pass	1G	4.5G	AV	3.85688G	4.40	-54.99	-54.99	-50.59	-41.20	-9.39
5785MHz	Pass	1G	4.5G	PK	3.85688G	4.40	-51.73	-51.73	-47.33	-21.20	-26.13
5825MHz	Pass	1G	4.5G	AV	3.88356G	4.40	-54.33	-54.33	-49.93	-41.20	-8.73
5825MHz	Pass	1G	4.5G	PK	2.98056G	4.40	-57.08	-57.08	-52.68	-27.00	-25.68
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	1G	4.5G	AV	3.88488G	4.40	-53.15	-53.15	-48.75	-41.20	-7.55
5180MHz	Pass	1G	4.5G	PK	3.88531G	4.40	-51.30	-51.30	-46.90	-21.20	-25.70
5200MHz	Pass	1G	4.5G	AV	3.90019G	4.40	-52.67	-52.67	-48.27	-41.20	-7.07
5200MHz	Pass	1G	4.5G	PK	3.90019G	4.40	-51.11	-51.11	-46.71	-21.20	-25.51
5240MHz	Pass	1G	4.5G	AV	3.92994G	4.40	-51.82	-51.82	-47.42	-41.20	-6.22
5240MHz	Pass	1G	4.5G	PK	3.92994G	4.40	-49.95	-49.95	-45.55	-21.20	-24.35
5260MHz	Pass	1G	4.5G	AV	3.94525G	4.40	-51.24	-51.24	-46.84	-41.20	-5.64
5260MHz	Pass	1G	4.5G	PK	3.94525G	4.40	-49.63	-49.63	-45.23	-21.20	-24.03
5300MHz	Pass	1G	4.5G	AV	3.975G	4.40	-50.51	-50.51	-46.11	-41.20	-4.91
5300MHz	Pass	1G	4.5G	PK	3.975G	4.40	-48.96	-48.96	-44.56	-21.20	-23.36
5320MHz	Pass	1G	4.5G	AV	3.99031G	4.40	-50.03	-50.03	-45.63	-41.20	-4.43
5320MHz	Pass	1G	4.5G	PK	3.99031G	4.40	-48.23	-48.23	-43.83	-21.20	-22.63
5500MHz	Pass	1G	4.5G	AV	3.66656G	4.40	-59.58	-59.58	-55.18	-41.20	-13.98
5500MHz	Pass	1G	4.5G	PK	2.94994G	4.40	-59.00	-59.00	-54.60	-27.00	-27.60
5580MHz	Pass	1G	4.5G	AV	3.71994G	4.40	-58.20	-58.20	-53.80	-41.20	-12.60
5580MHz	Pass	1G	4.5G	PK	2.673G	4.40	-58.47	-58.47	-54.07	-27.00	-27.07
5700MHz	Pass	1G	4.5G	AV	3.8G	4.40	-56.38	-56.38	-51.98	-41.20	-10.78
5700MHz	Pass	1G	4.5G	PK	3.8G	4.40	-54.58	-54.58	-50.18	-21.20	-28.98
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	AV	3.81356G	4.40	-56.49	-56.49	-52.09	-41.20	-10.89
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	PK	2.92325G	4.40	-59.19	-59.19	-54.79	-27.00	-27.79



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5745MHz	Pass	1G	4.5G	AV	3.83019G	4.40	-55.71	-55.71	-51.31	-41.20	-10.11
5745MHz	Pass	1G	4.5G	PK	2.95431G	4.40	-58.31	-58.31	-53.91	-27.00	-26.91
5785MHz	Pass	1G	4.5G	AV	3.85688G	4.40	-55.08	-55.08	-50.68	-41.20	-9.48
5785MHz	Pass	1G	4.5G	PK	2.11956G	4.40	-58.38	-58.38	-53.98	-27.00	-26.98
5825MHz	Pass	1G	4.5G	AV	3.88356G	4.40	-54.46	-54.46	-50.06	-41.20	-8.86
5825MHz	Pass	1G	4.5G	PK	3.88356G	4.40	-52.02	-52.02	-47.62	-21.20	-26.42
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	1G	4.5G	AV	3.88531G	4.40	-52.55	-52.55	-48.15	-41.20	-6.95
5180MHz	Pass	1G	4.5G	PK	3.88531G	4.40	-51.51	-51.51	-47.11	-21.20	-25.91
5200MHz	Pass	1G	4.5G	AV	3.90019G	4.40	-53.27	-53.27	-48.87	-41.20	-7.67
5200MHz	Pass	1G	4.5G	PK	3.90019G	4.40	-50.68	-50.68	-46.28	-21.20	-25.08
5240MHz	Pass	1G	4.5G	AV	3.92994G	4.40	-52.54	-52.54	-48.14	-41.20	-6.94
5240MHz	Pass	1G	4.5G	PK	3.92994G	4.40	-49.52	-49.52	-45.12	-21.20	-23.92
5260MHz	Pass	1G	4.5G	AV	3.94525G	4.40	-51.77	-51.77	-47.37	-41.20	-6.17
5260MHz	Pass	1G	4.5G	PK	3.94525G	4.40	-49.99	-49.99	-45.59	-21.20	-24.39
5300MHz	Pass	1G	4.5G	AV	3.975G	4.40	-50.98	-50.98	-46.58	-41.20	-5.38
5300MHz	Pass	1G	4.5G	PK	3.975G	4.40	-49.37	-49.37	-44.97	-21.20	-23.77
5320MHz	Pass	1G	4.5G	AV	3.99031G	4.40	-49.86	-49.86	-45.46	-41.20	-4.26
5320MHz	Pass	1G	4.5G	PK	3.98988G	4.40	-48.10	-48.10	-43.70	-21.20	-22.50
5500MHz	Pass	1G	4.5G	AV	3.667G	4.40	-59.74	-59.74	-55.34	-41.20	-14.14
5500MHz	Pass	1G	4.5G	PK	2.68963G	4.40	-58.43	-58.43	-54.03	-27.00	-27.03
5580MHz	Pass	1G	4.5G	AV	3.71994G	4.40	-58.20	-58.20	-53.80	-41.20	-12.60
5580MHz	Pass	1G	4.5G	PK	2.94031G	4.40	-58.64	-58.64	-54.24	-27.00	-27.24
5700MHz	Pass	1G	4.5G	AV	3.8G	4.40	-56.26	-56.26	-51.86	-41.20	-10.66
5700MHz	Pass	1G	4.5G	PK	2.64238G	4.40	-57.53	-57.53	-53.13	-27.00	-26.13
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	AV	3.81356G	4.40	-56.19	-56.19	-51.79	-41.20	-10.59
5720MHz Straddle 5.47-5.725GHz	Pass	1G	4.5G	PK	2.95606G	4.40	-58.47	-58.47	-54.07	-27.00	-27.07
5745MHz	Pass	1G	4.5G	AV	3.83019G	4.40	-55.50	-55.50	-51.10	-41.20	-9.90
5745MHz	Pass	1G	4.5G	PK	2.93025G	4.40	-58.14	-58.14	-53.74	-27.00	-26.74
5785MHz	Pass	1G	4.5G	AV	3.85688G	4.40	-55.01	-55.01	-50.61	-41.20	-9.41
5785MHz	Pass	1G	4.5G	PK	2.94381G	4.40	-58.60	-58.60	-54.20	-27.00	-27.20
5825MHz	Pass	1G	4.5G	AV	3.88356G	4.40	-54.20	-54.20	-49.80	-41.20	-8.60
5825MHz	Pass	1G	4.5G	PK	3.88356G	4.40	-51.54	-51.54	-47.14	-21.20	-25.94


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5180MHz

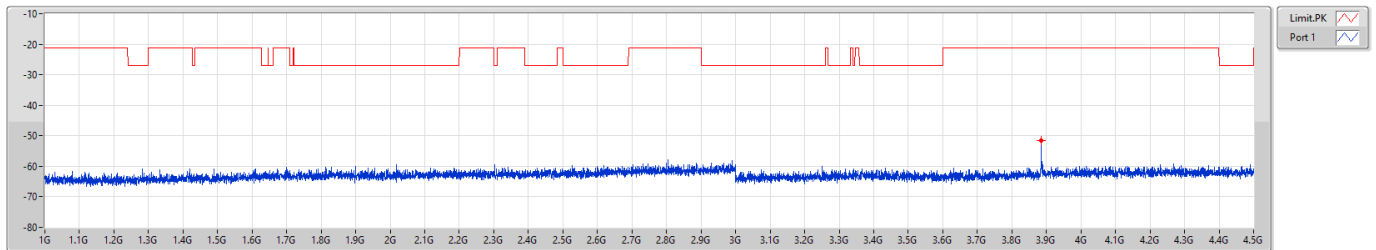


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Prum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.88531G	-51.53	-51.53

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5180MHz

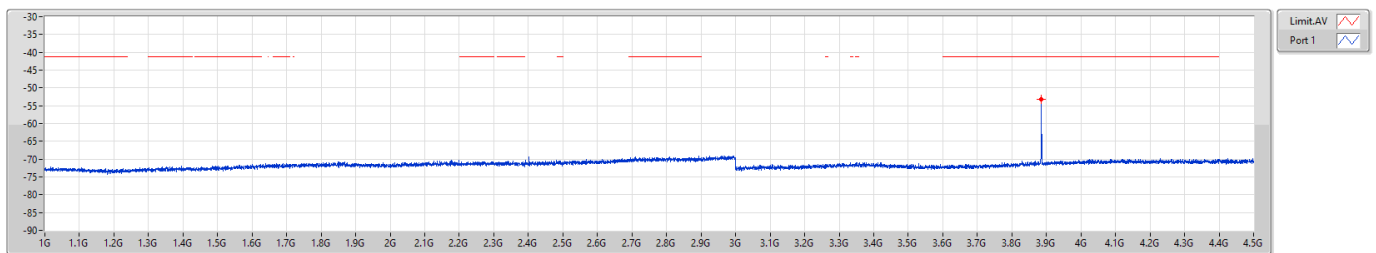


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Prum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.88488G	-53.10	-53.10



5.15-5.25GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5200MHz

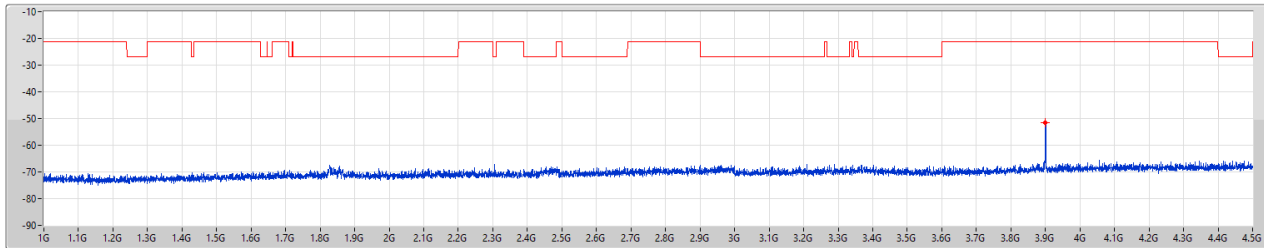


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.90019G	-51.44	-51.44

5.15-5.25GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5200MHz

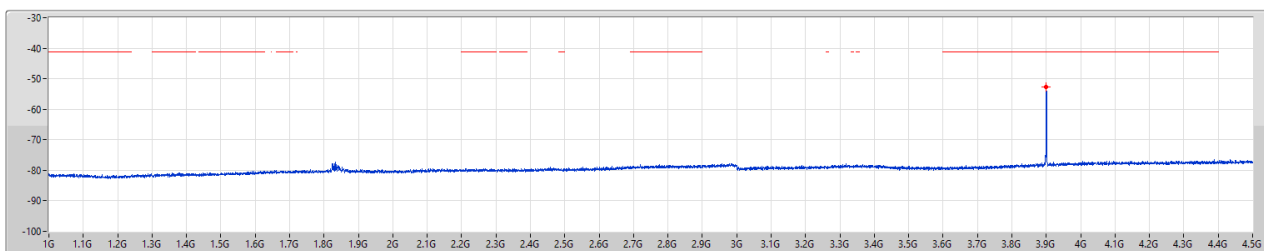

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.90019G	-52.57	-52.57



5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5240MHz

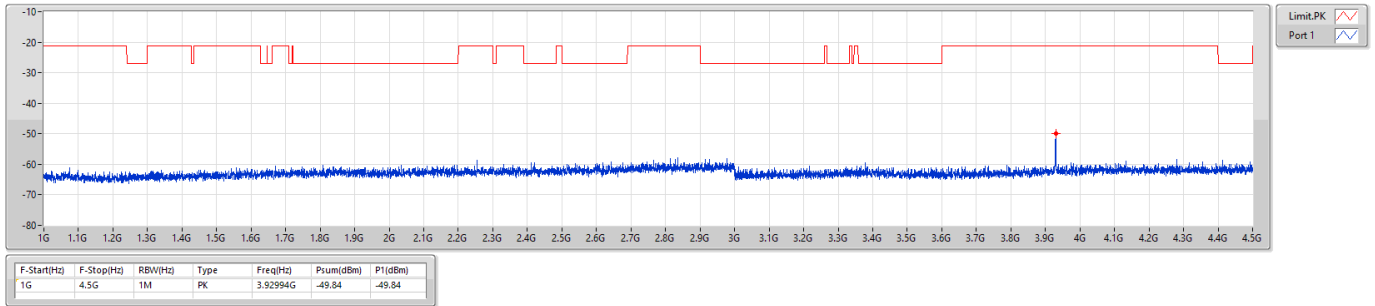

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5240MHz

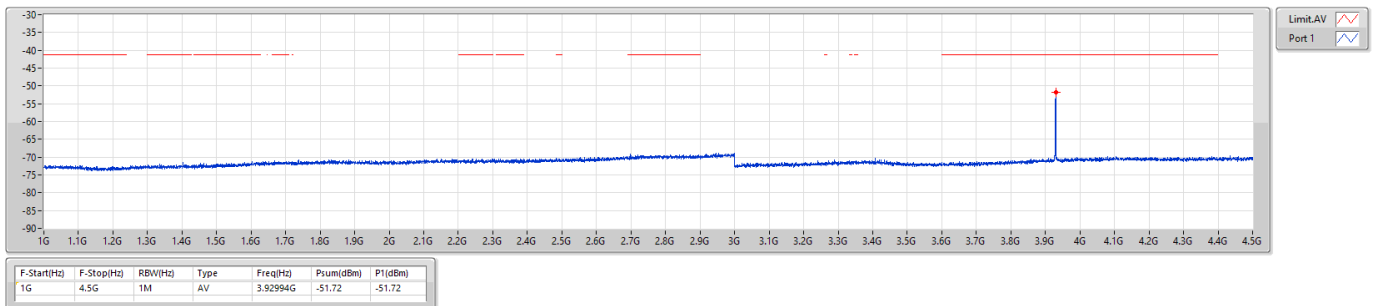




5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5260MHz

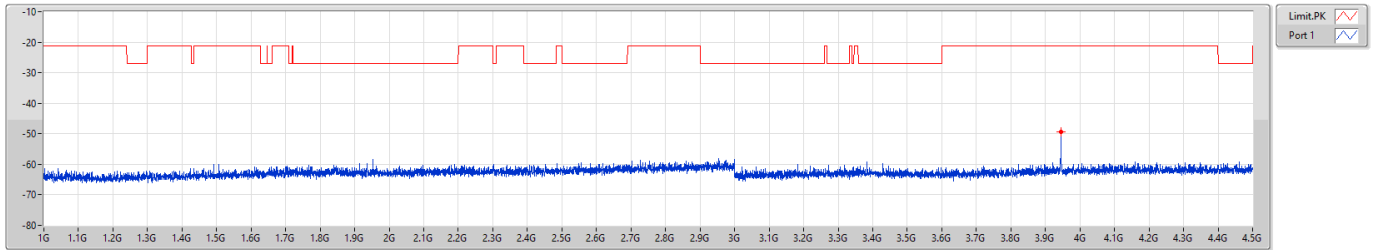


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.94525G	-49.41	-49.41

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5260MHz

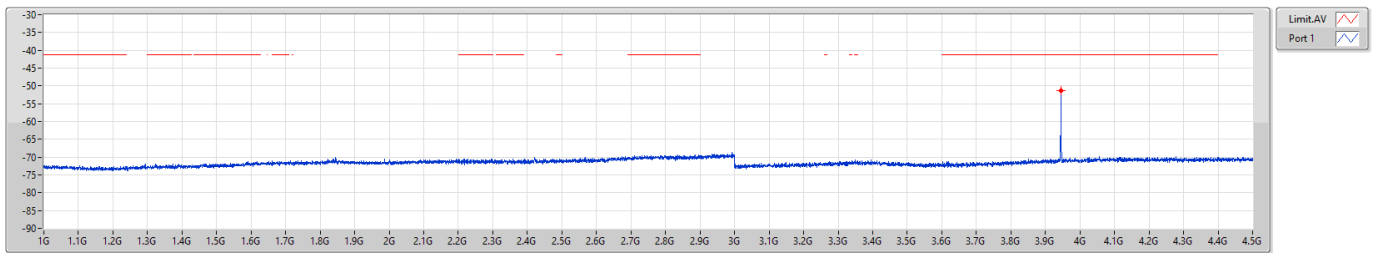


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.94525G	-51.23	-51.23



5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5300MHz

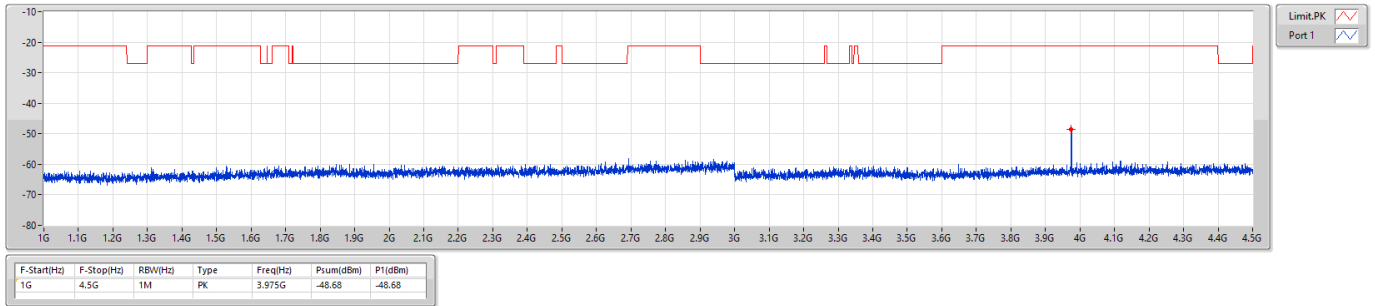

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5300MHz

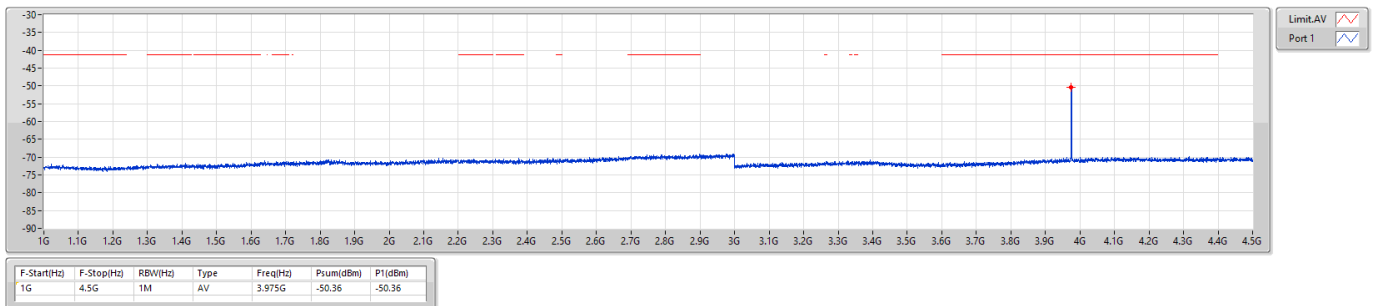




5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5320MHz

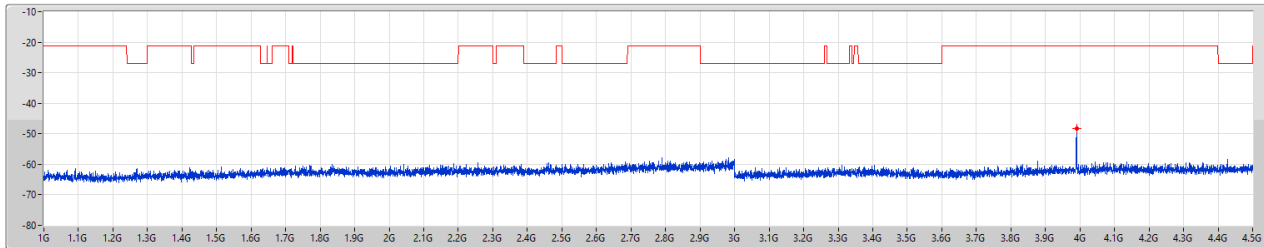


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.99031G	-48.33	-48.33

Limit PK
Port 1

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5320MHz

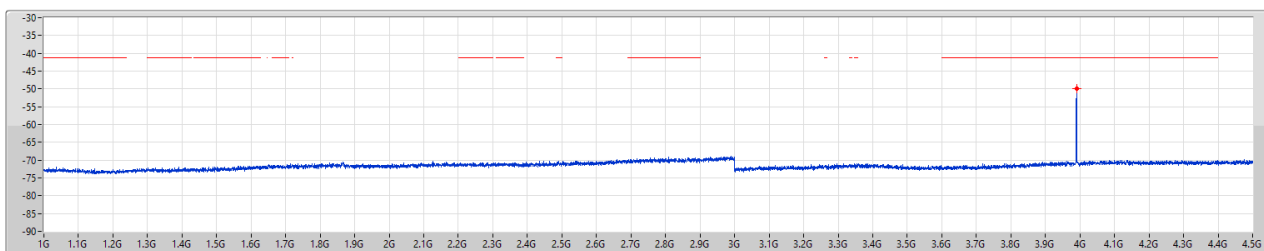

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.99031G	-50.01	-50.01


Limit AV
Port 1



5.47-5.725GHz_802.11ax_HEW20_RU26_index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5500MHz

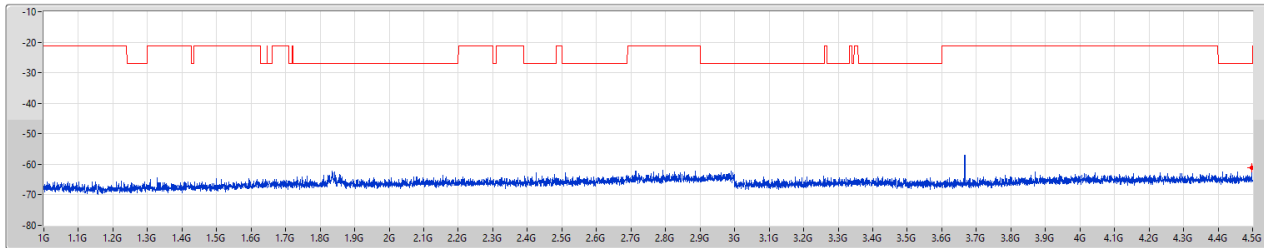

5.47-5.725GHz_802.11ax_HEW20_RU26_index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5500MHz

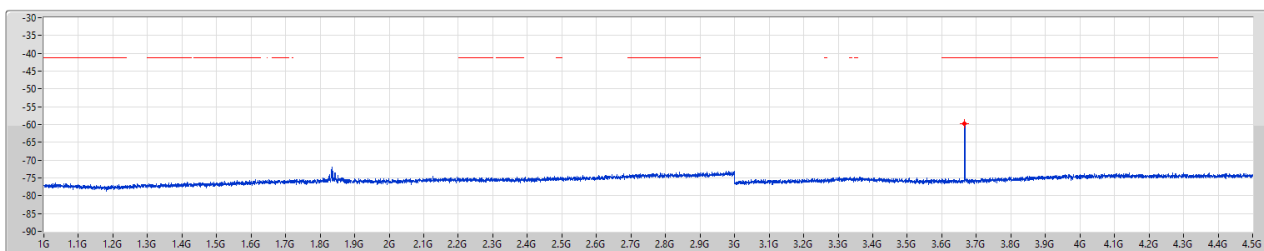




5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5580MHz

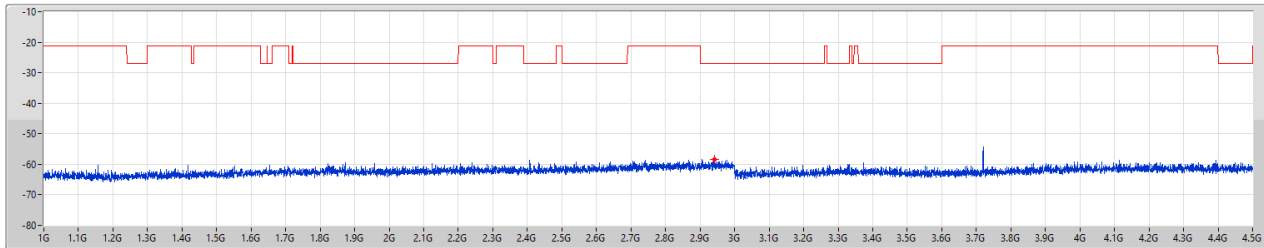

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5580MHz

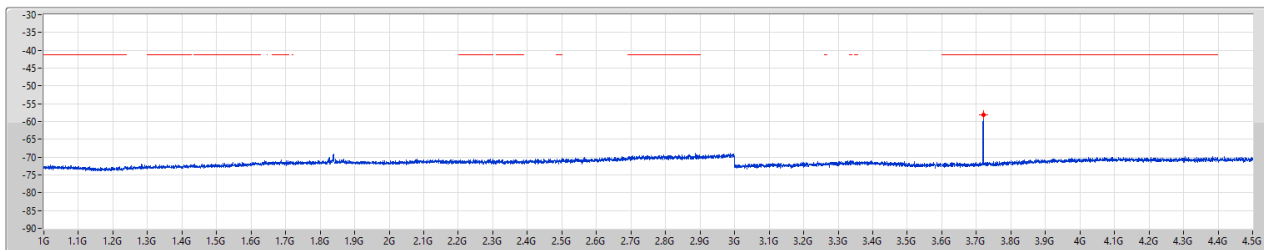




5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5700MHz

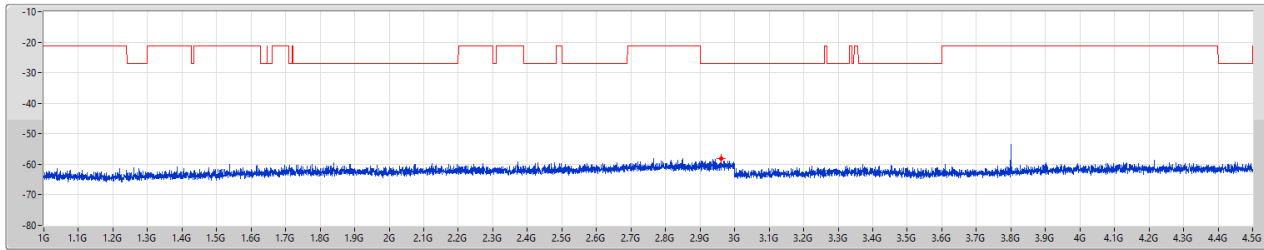


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.96175G	-58.24	-58.24

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5700MHz

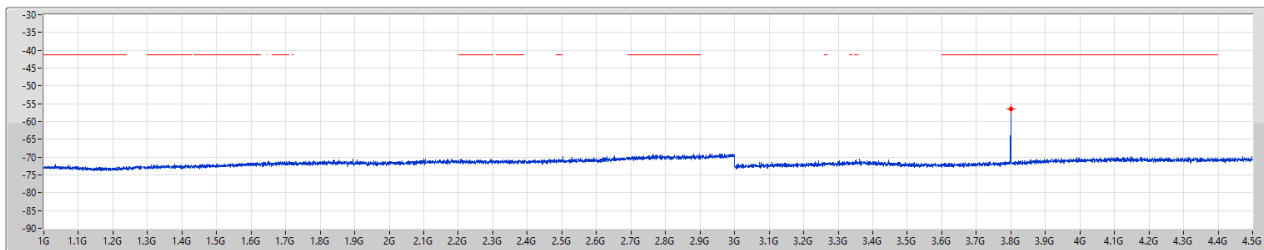


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.8G	-56.37	-56.37



5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5720MHz Straddle 5.47-5.725GHz

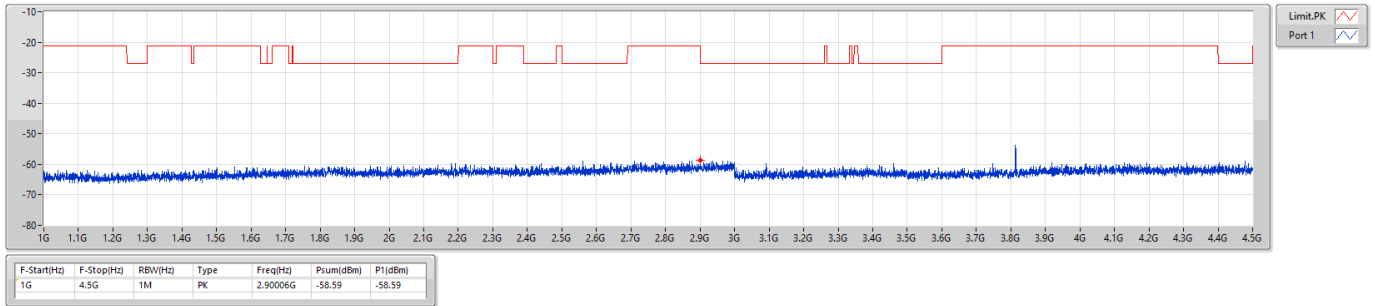

5.47-5.725GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5720MHz Straddle 5.47-5.725GHz

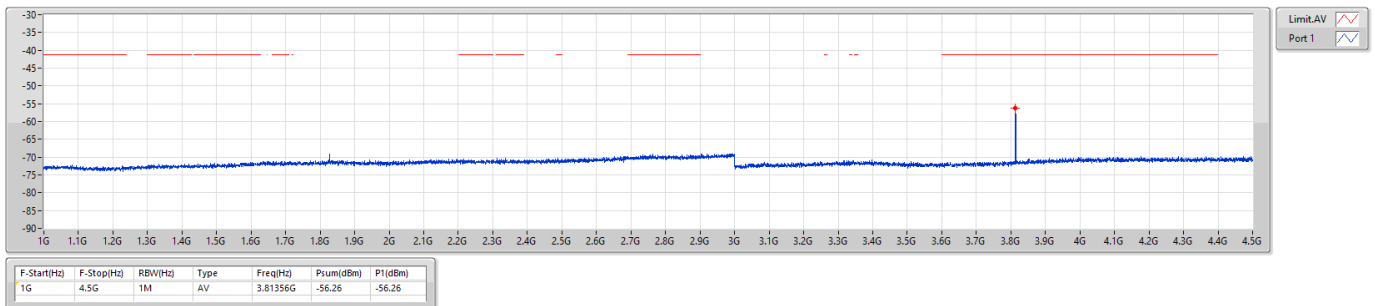




5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5745MHz

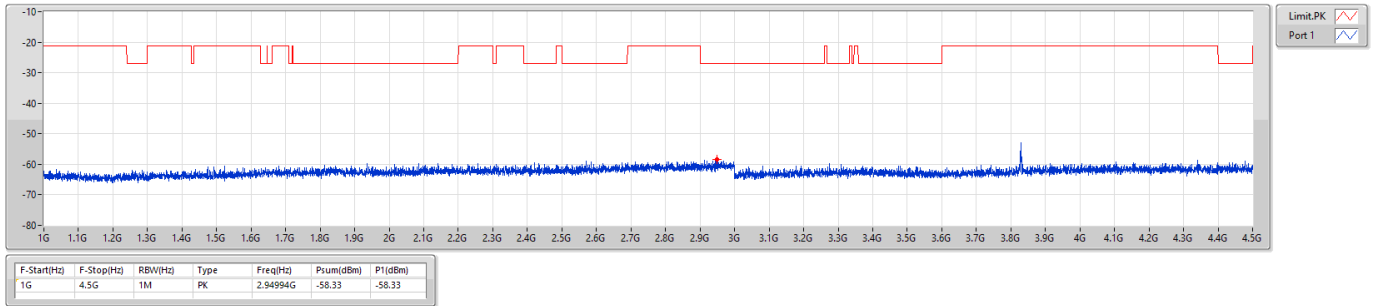

5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5745MHz

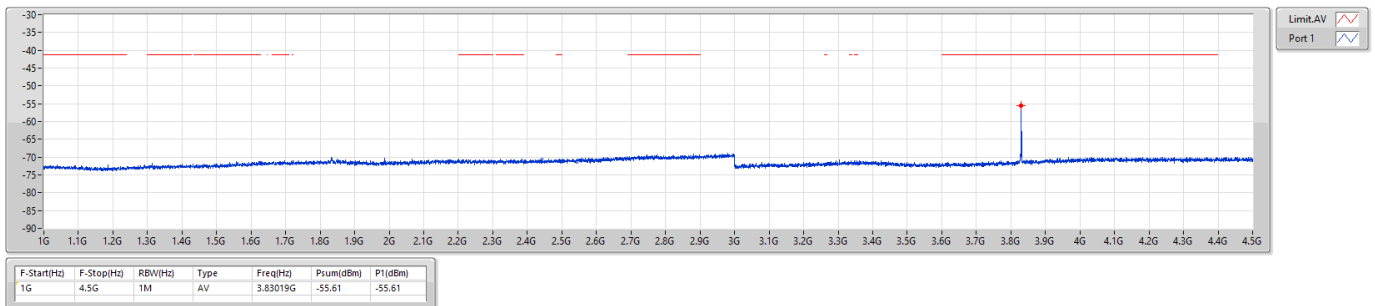




5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5785MHz

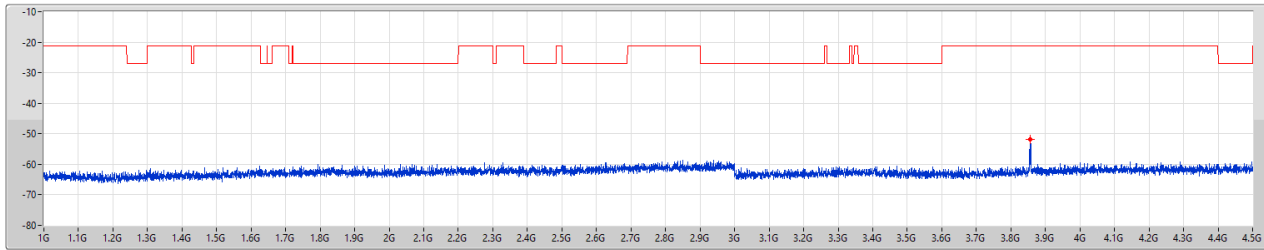


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.85688G	-51.73	-51.73

5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5785MHz

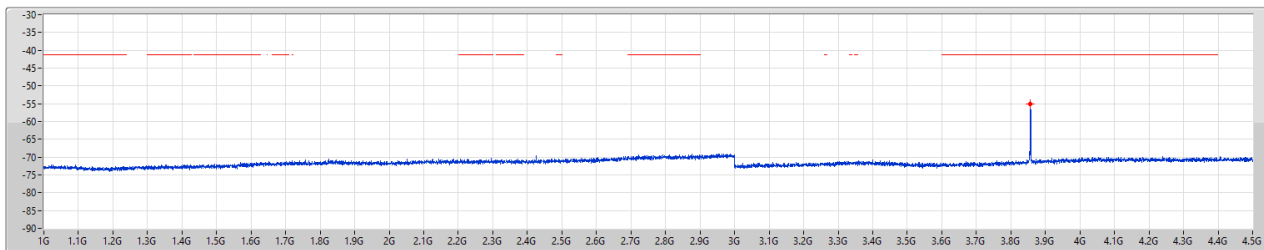


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.85688G	-54.99	-54.99



5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5825MHz

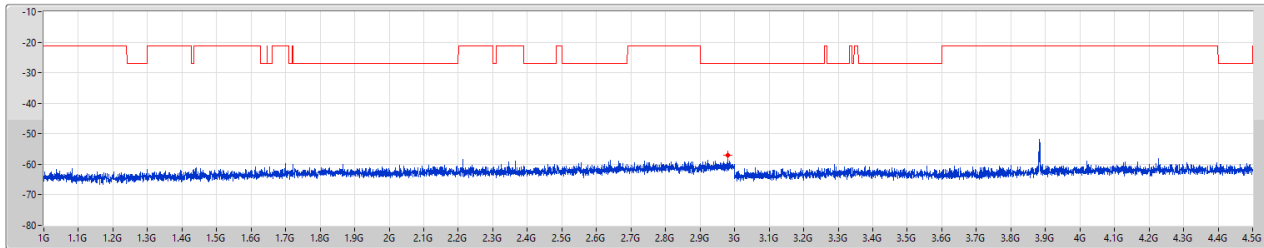


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.98056G	-57.08	-57.08

5.725-5.85GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5825MHz

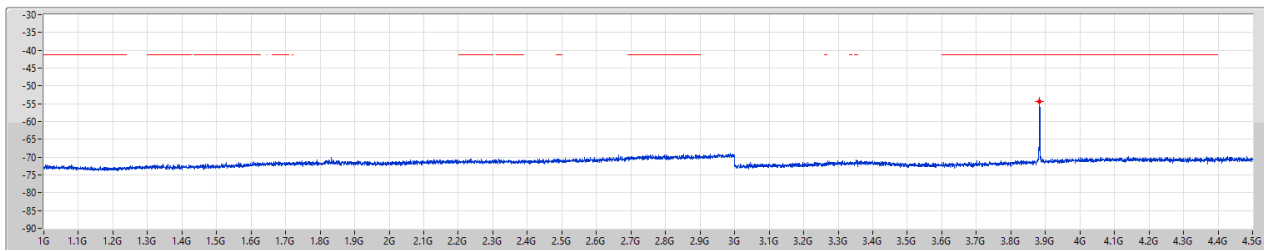


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.88356G	-54.33	-54.33



5.15-5.25GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5180MHz

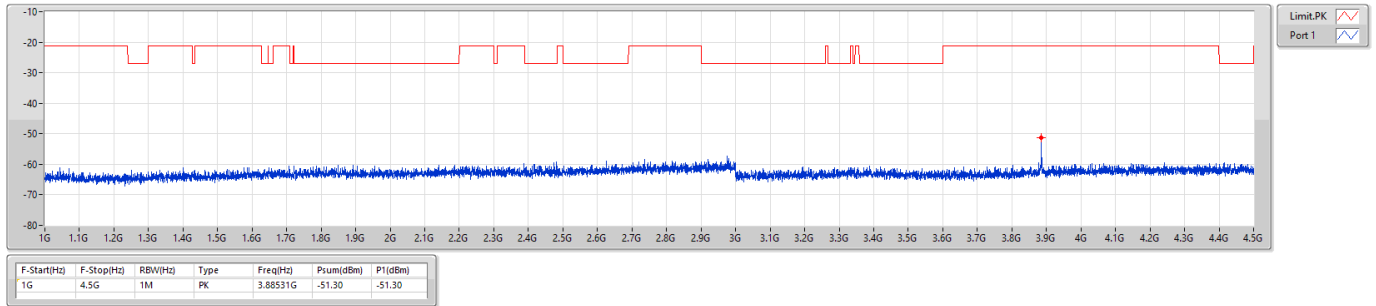

5.15-5.25GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5180MHz

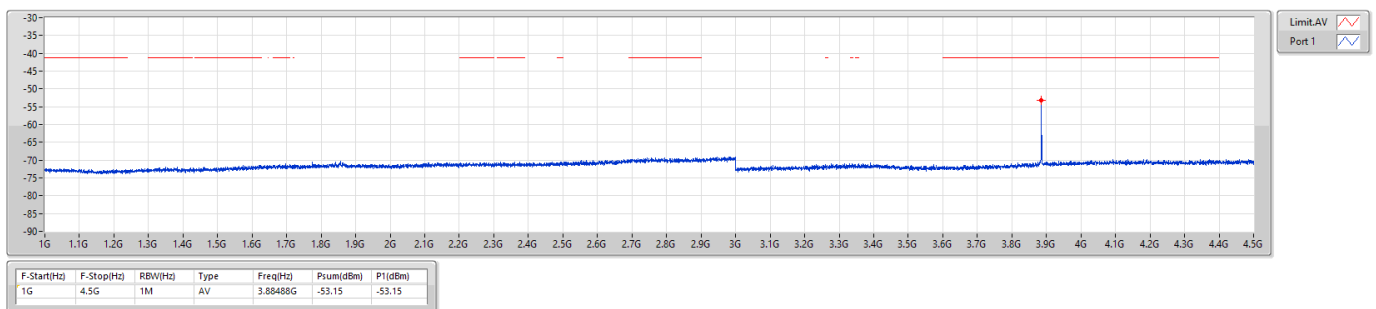




5.15-5.25GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5200MHz

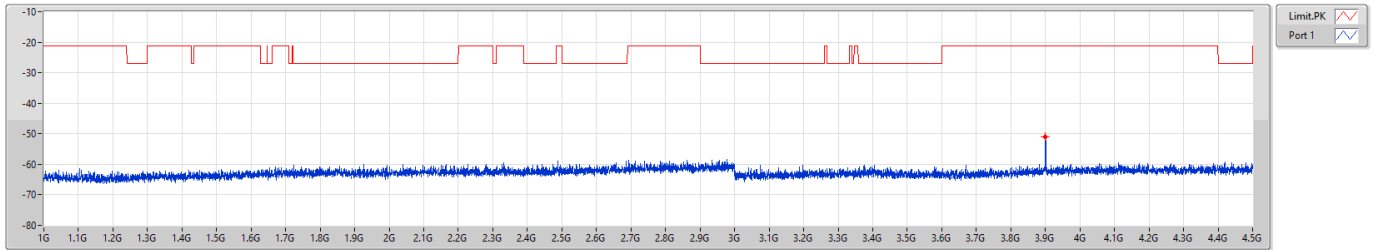


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.90019G	-51.11	-51.11

5.15-5.25GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5200MHz

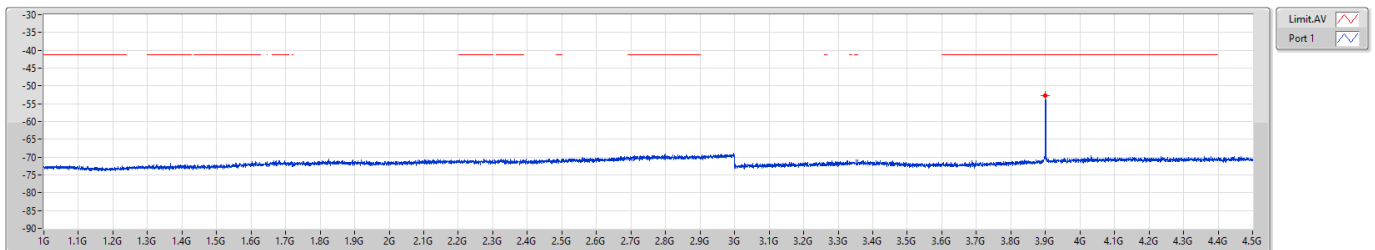


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.90019G	-52.67	-52.67



5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5240MHz

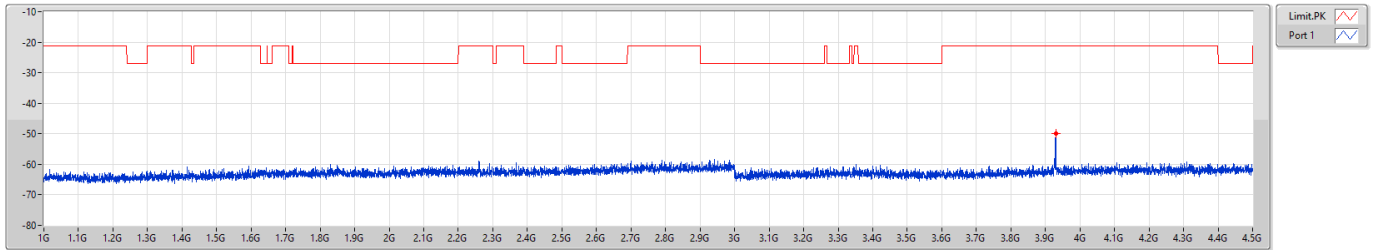


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.92994G	-49.95	-49.95

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5240MHz

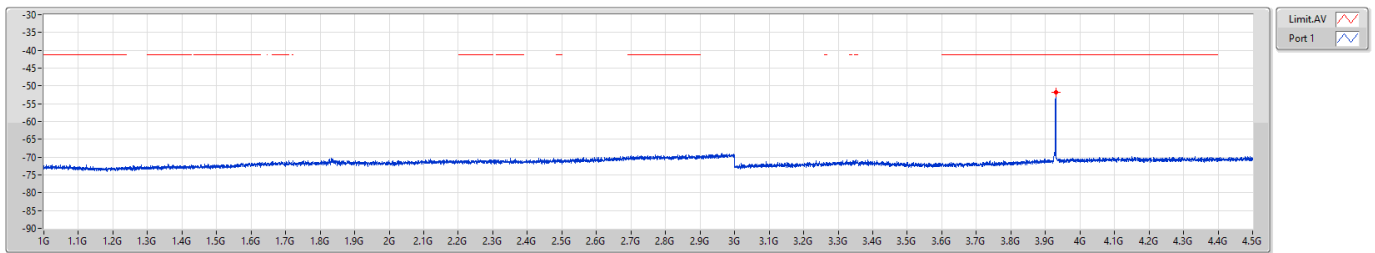


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.92994G	-51.82	-51.82



5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5260MHz

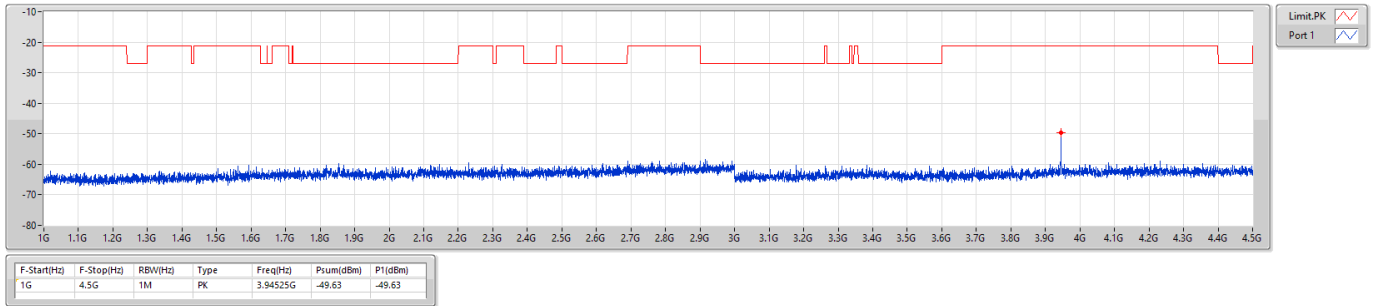

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5260MHz

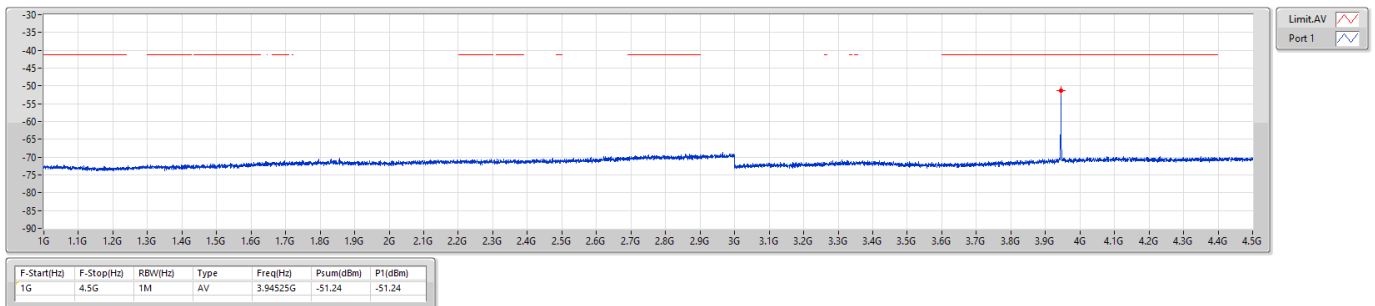




5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5300MHz

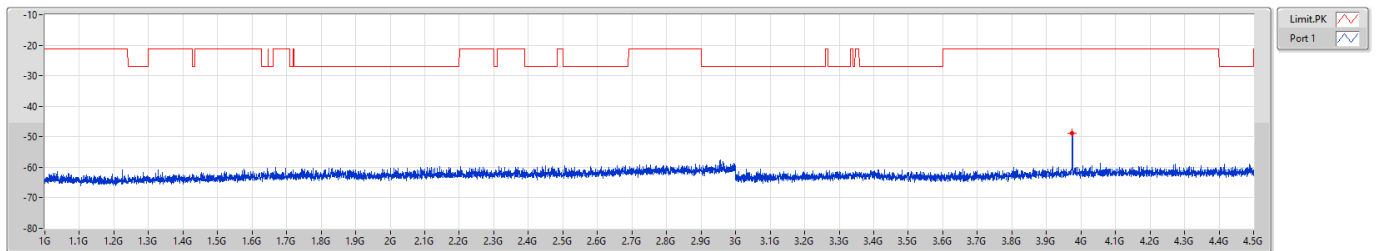


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.975G	-48.96	-48.96

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5300MHz

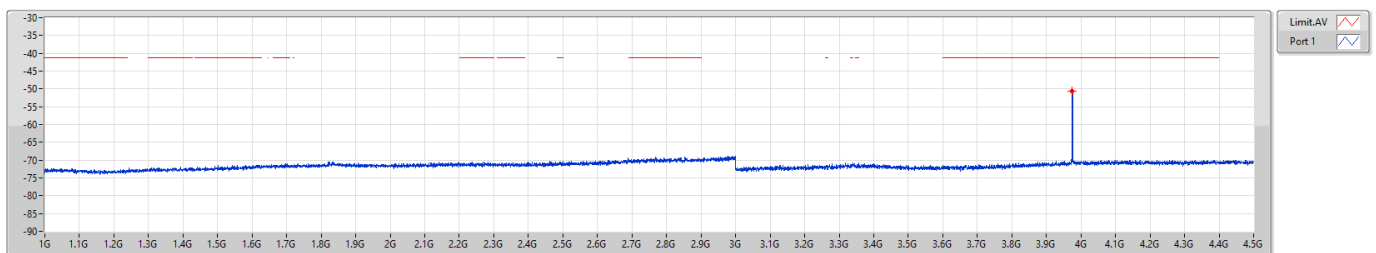


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.975G	-50.51	-50.51



5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5320MHz

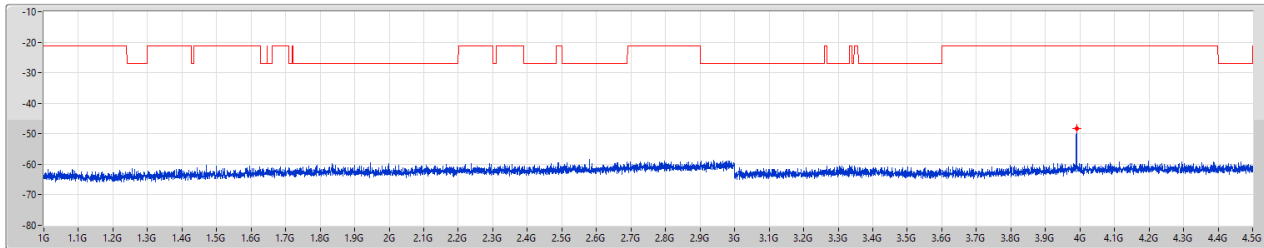


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.99031G	-48.23	-48.23

Limit PK
Port 1

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5320MHz

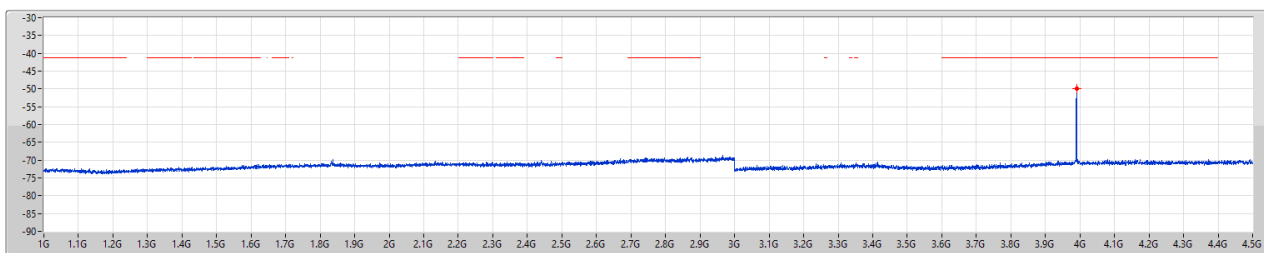

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.99031G	-50.03	-50.03


Limit AV
Port 1



5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5500MHz

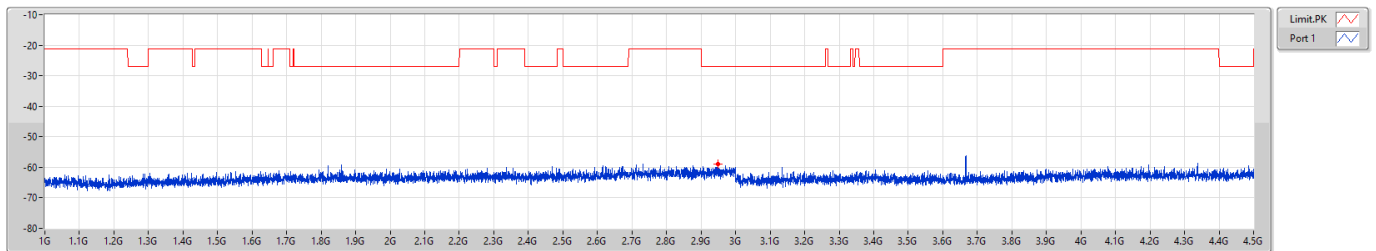


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.94994G	-59.00	-59.00

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5500MHz

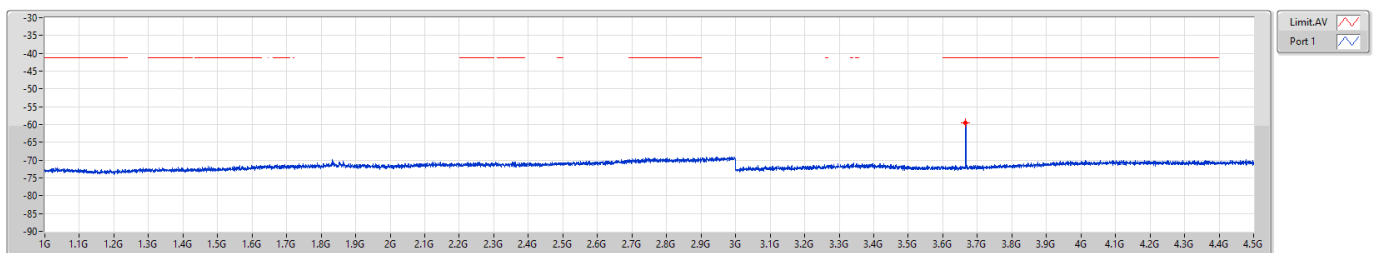


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.66656G	-59.58	-59.58



5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5580MHz

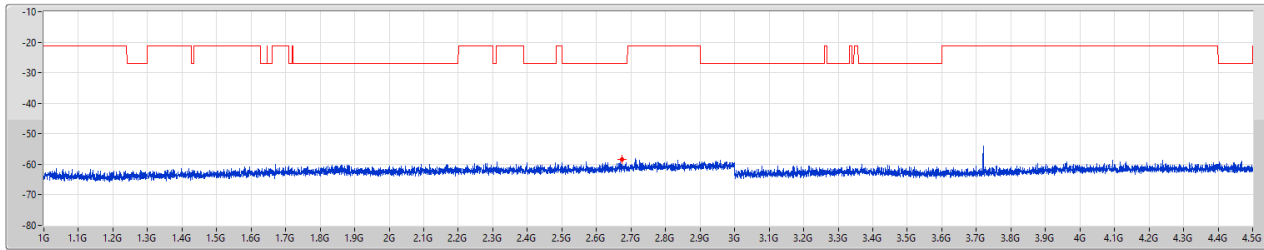


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.673G	-58.47	-58.47

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5580MHz

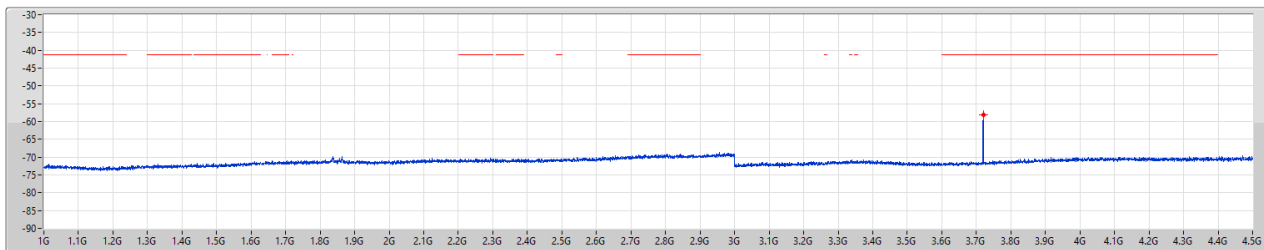


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.71994G	-58.20	-58.20



5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5700MHz

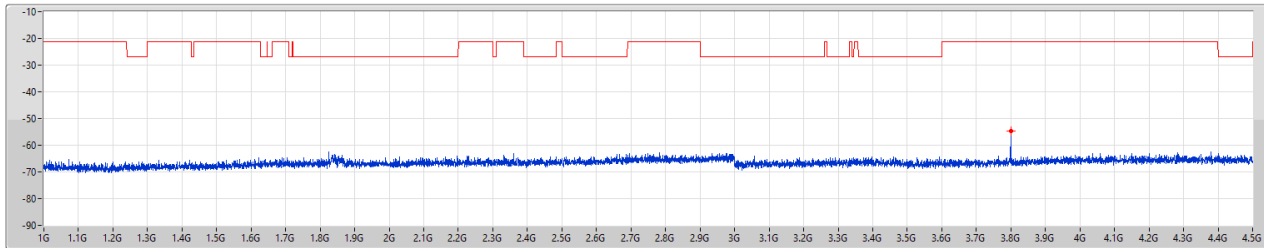


Limit PK
Port 1

F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.8G	-54.58	-54.58

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5700MHz

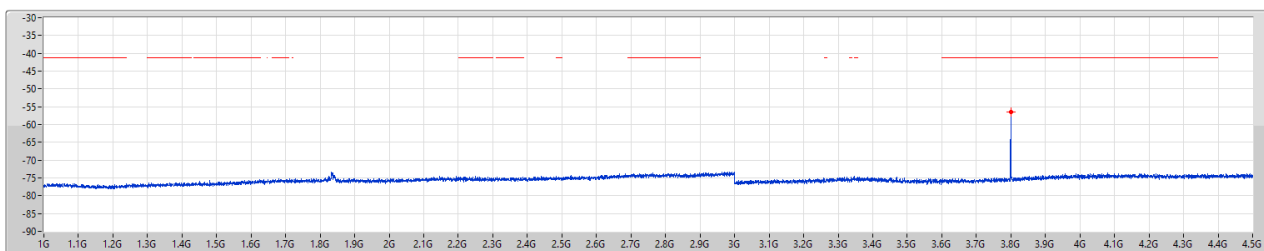

Limit AV
Port 1


F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.8G	-56.38	-56.38



5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5720MHz Straddle 5.47-5.725GHz

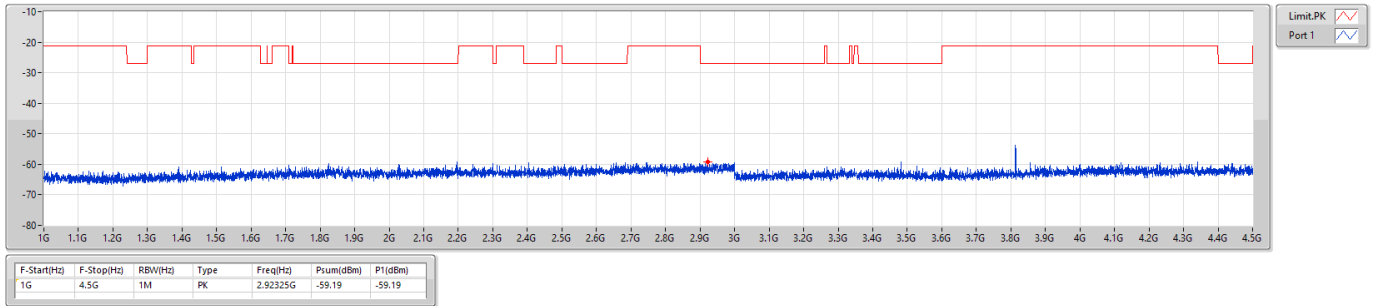

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5720MHz Straddle 5.47-5.725GHz

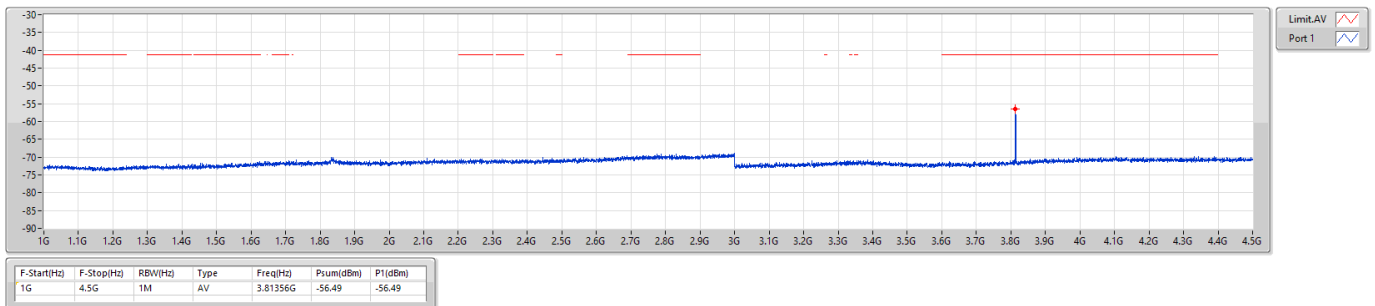




5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5745MHz

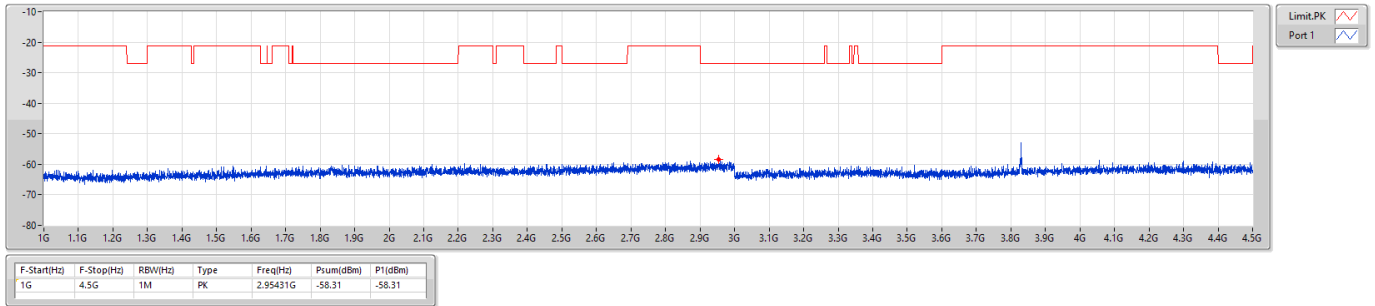

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5745MHz

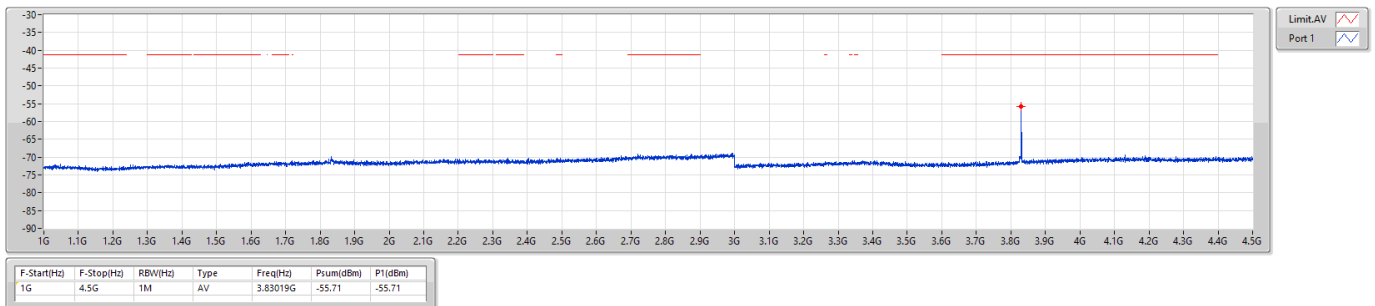




5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5785MHz

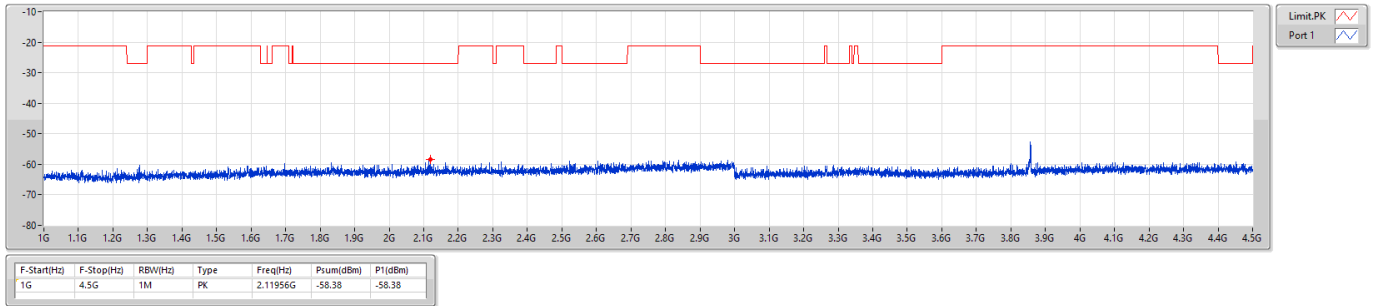

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5785MHz

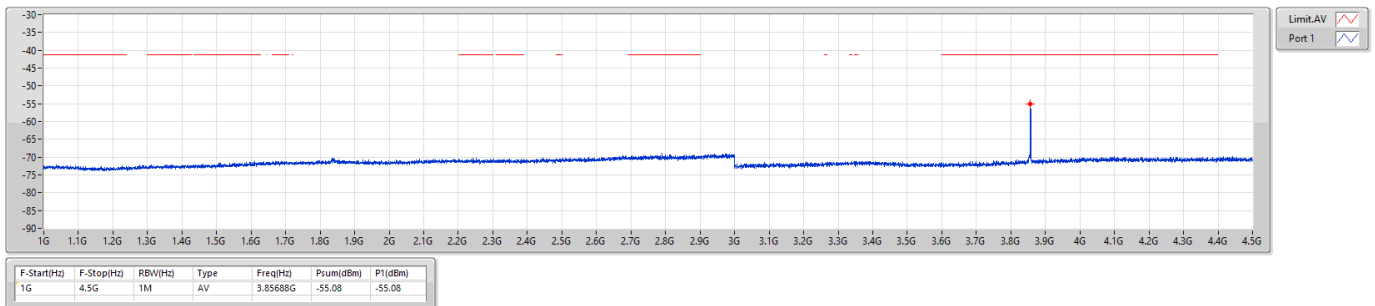




5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5825MHz

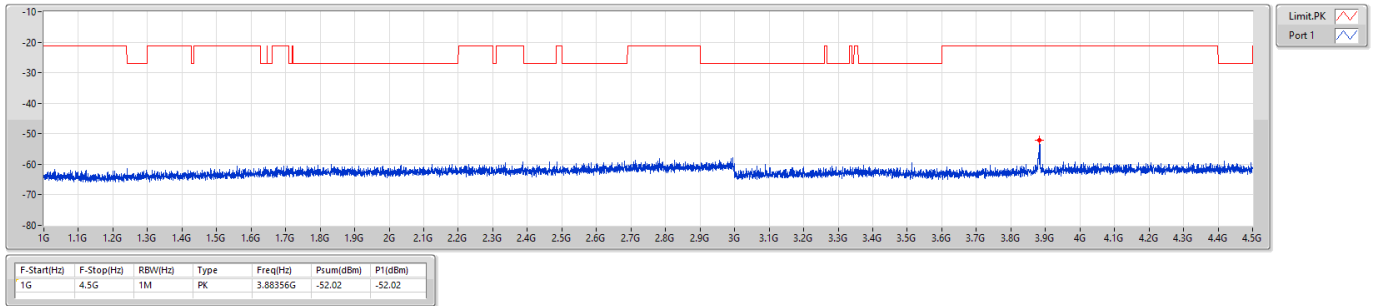

5.725-5.85GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5825MHz

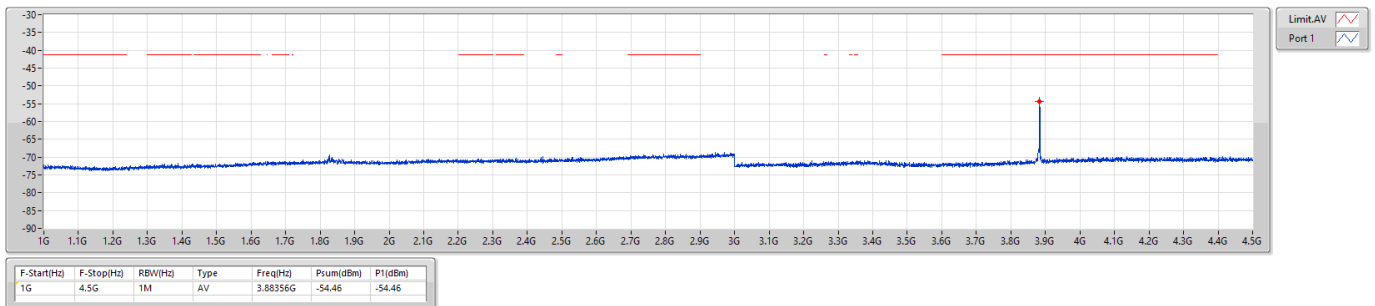




5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5180MHz

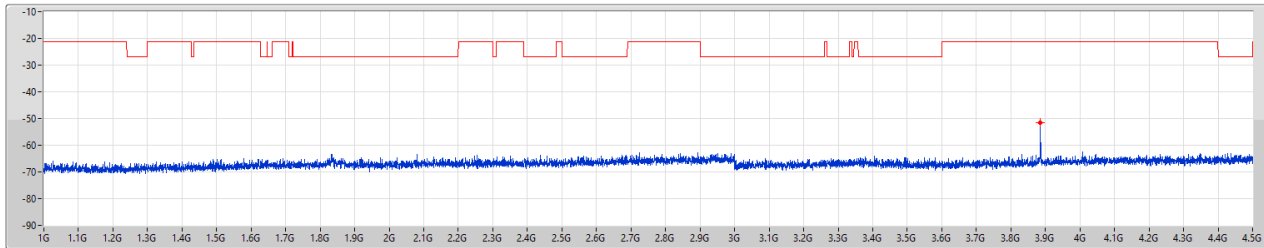


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.88531G	-51.51	-51.51

Limit PK
Port 1

5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5180MHz

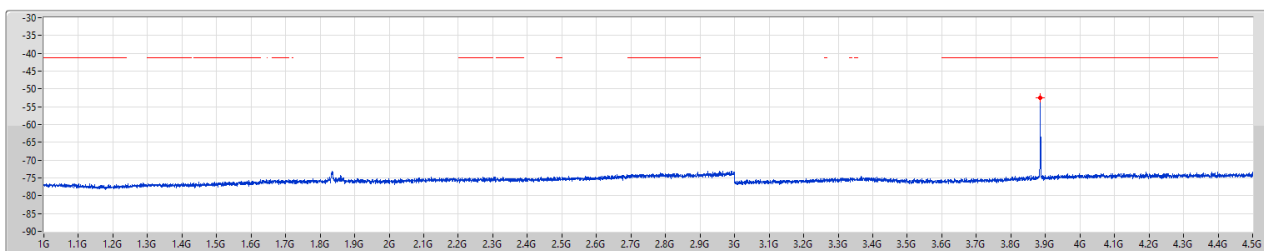

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.88531G	-52.55	-52.55


Limit AV
Port 1



5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5200MHz

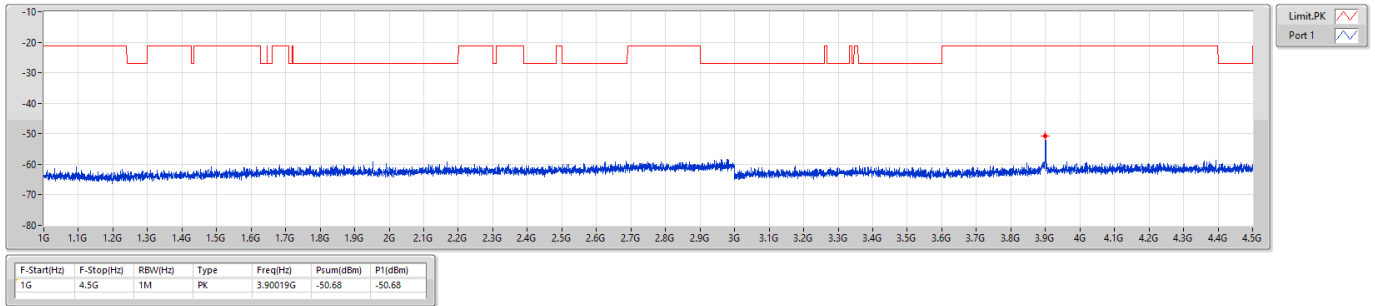

5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5200MHz

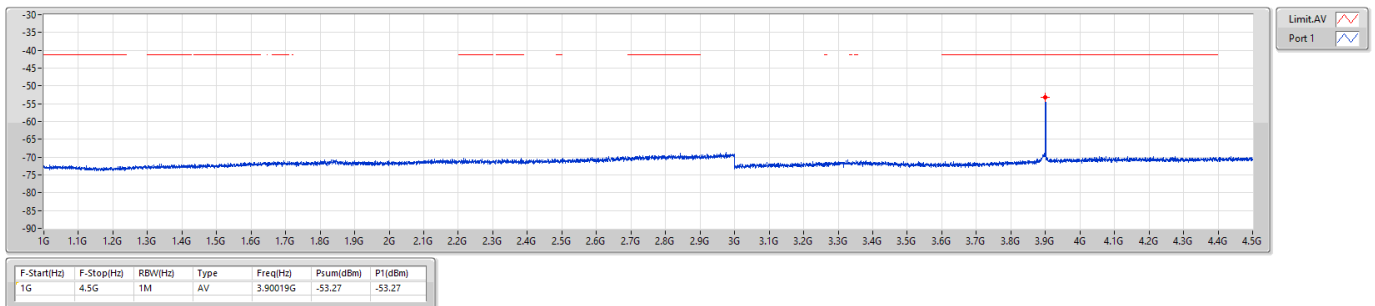




5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5240MHz

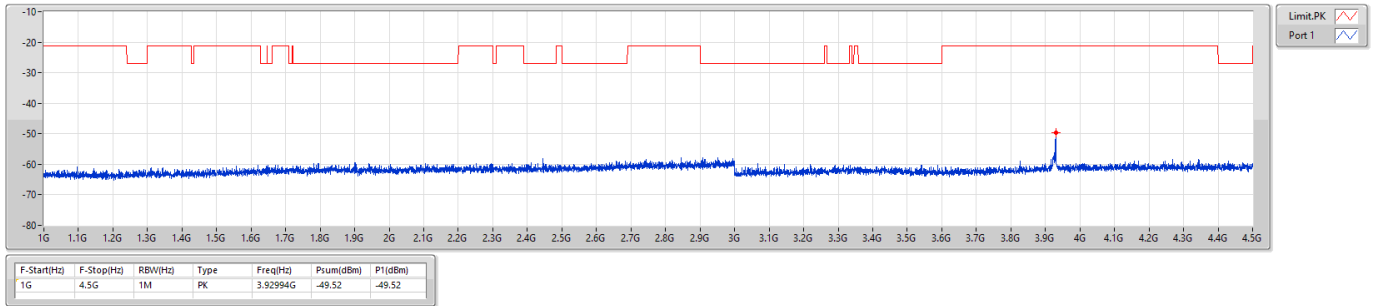

5.15-5.25GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5240MHz

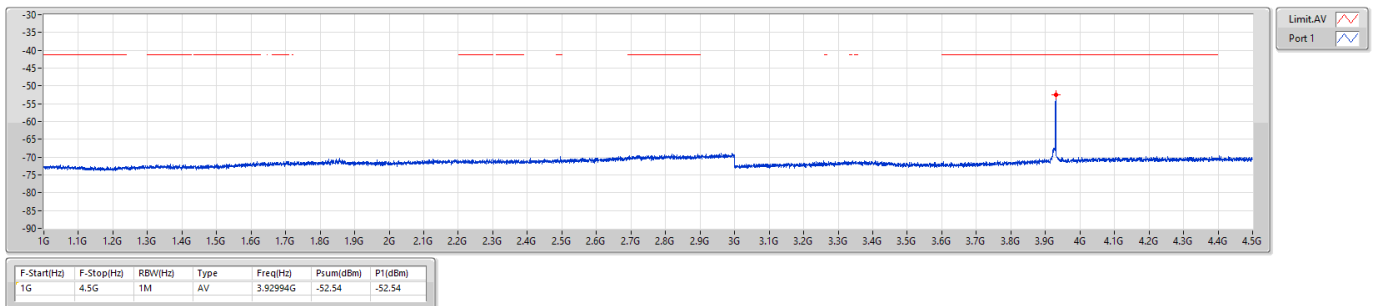




5.25-5.35GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5260MHz

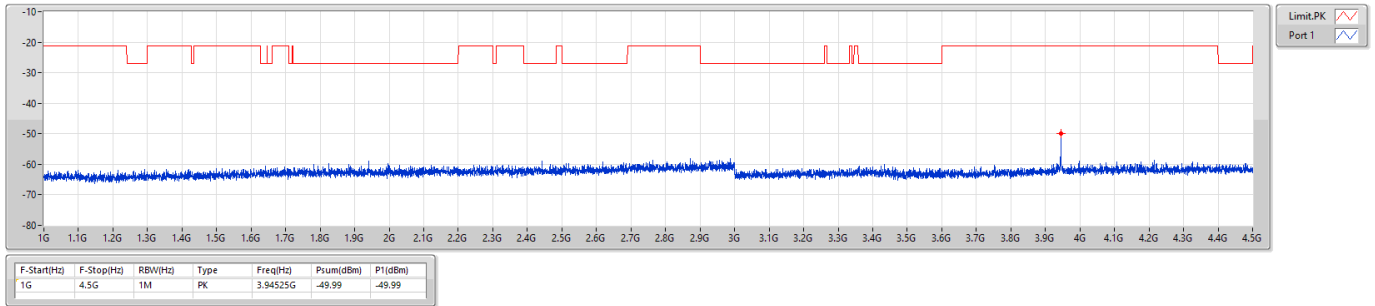

5.25-5.35GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5260MHz

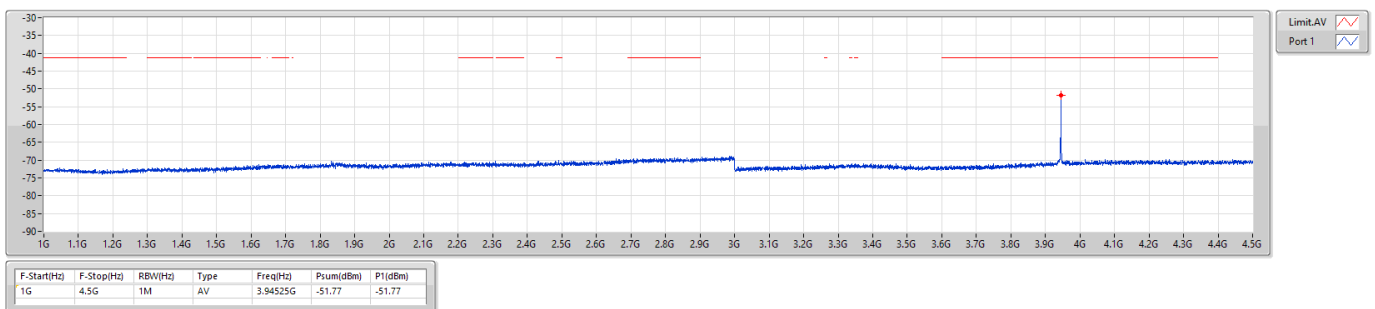




5.25-5.35GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5300MHz

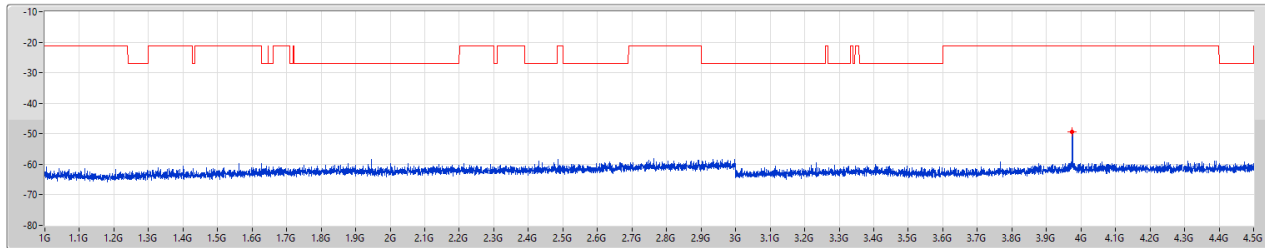


F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	3.975G	-49.37	-49.37

Limit PK
Port 1

5.25-5.35GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5300MHz

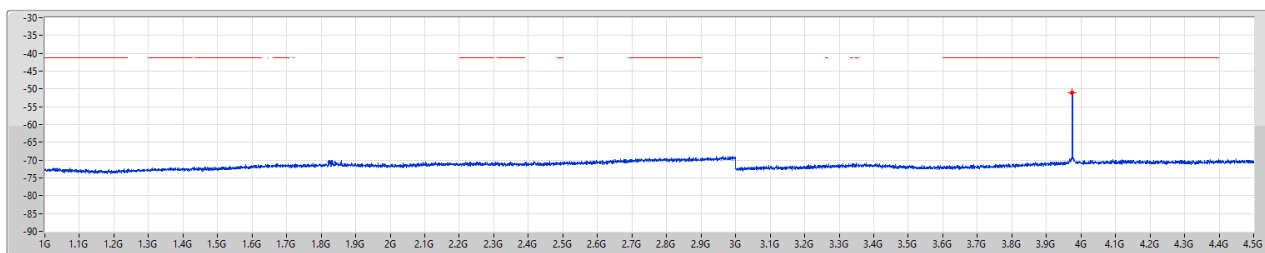

F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.975G	-50.98	-50.98


Limit AV
Port 1



5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5320MHz

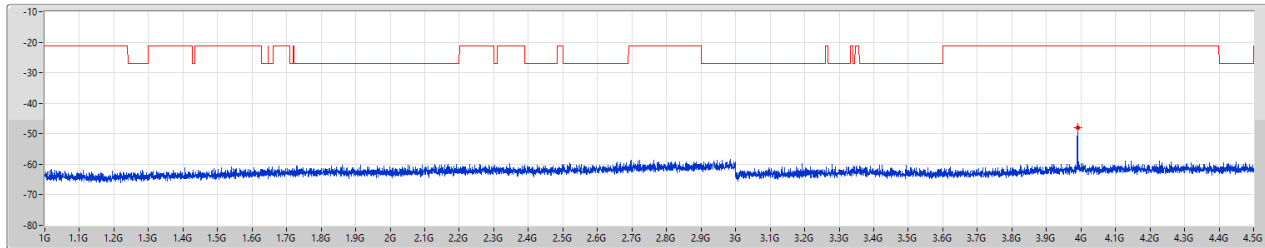

5.25-5.35GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5320MHz

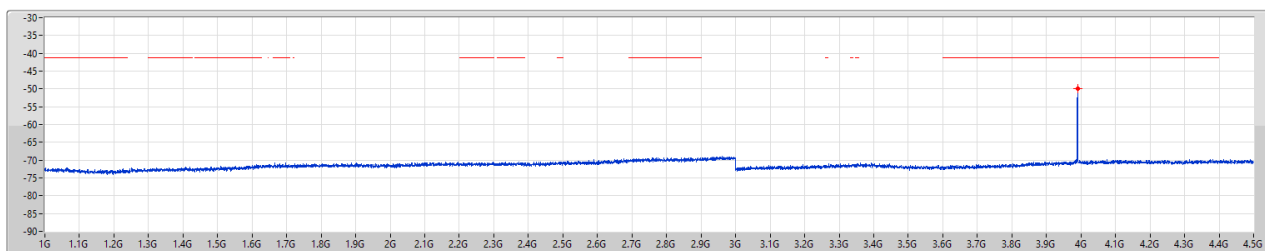




5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5500MHz

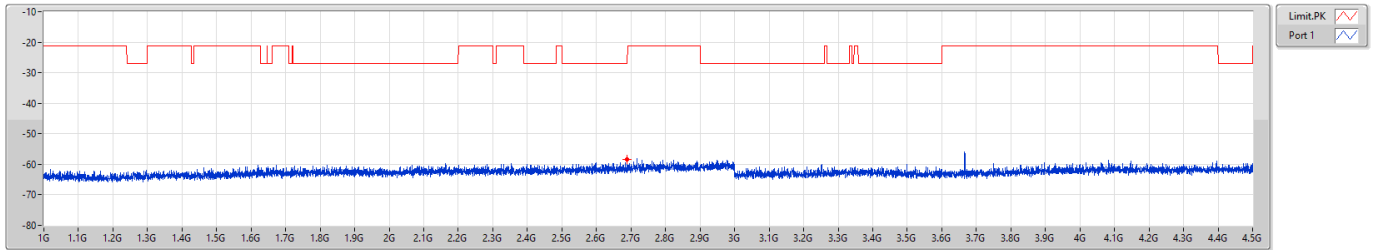


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.68963G	-58.43	-58.43

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5500MHz

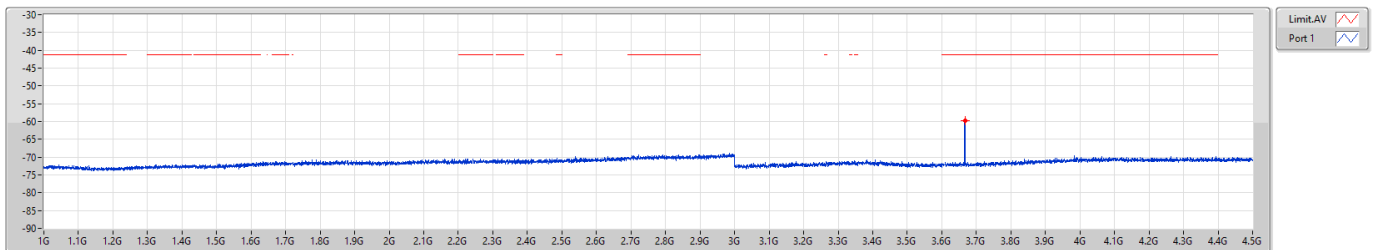


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.667G	-59.74	-59.74



5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5580MHz

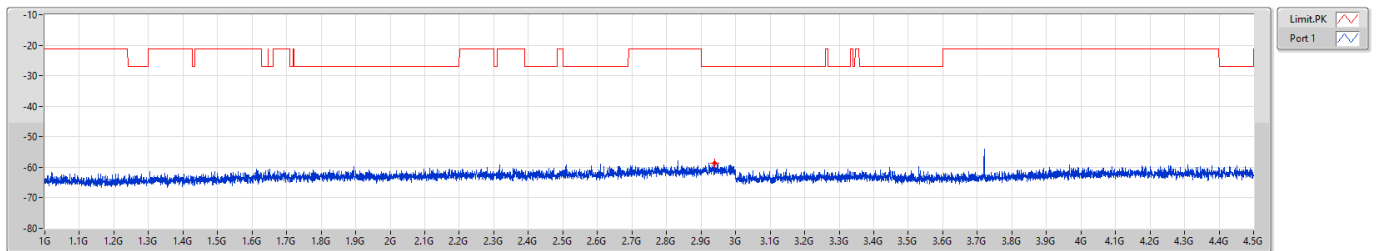


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.94031G	-58.64	-58.64

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5580MHz

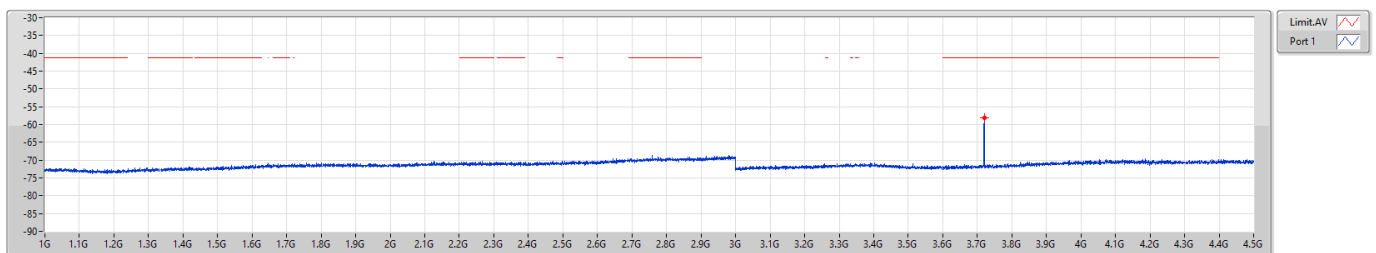


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.71994G	-58.20	-58.20



5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5700MHz

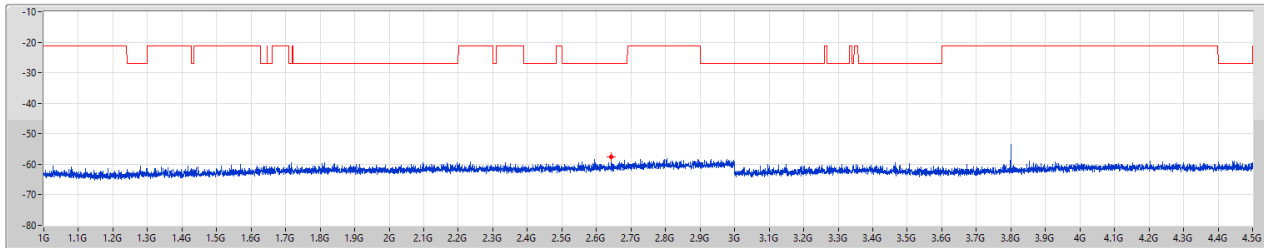


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.64238G	-57.53	-57.53

Limit PK
Port 1

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5700MHz

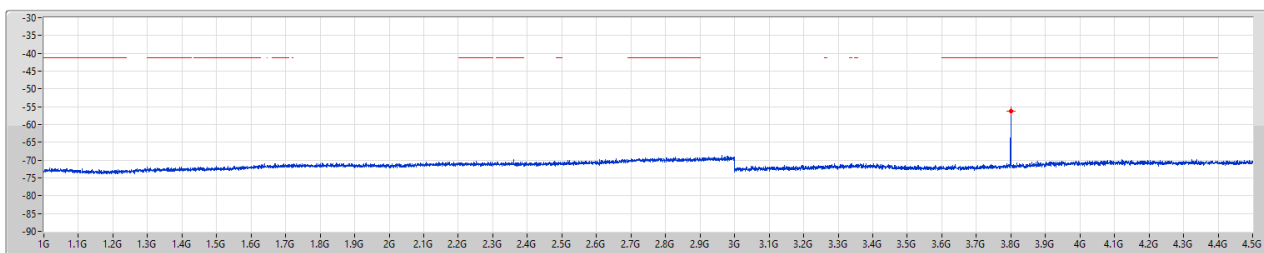


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.8G	-56.26	-56.26

Limit AV
Port 1

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5720MHz Straddle 5.47-5.725GHz

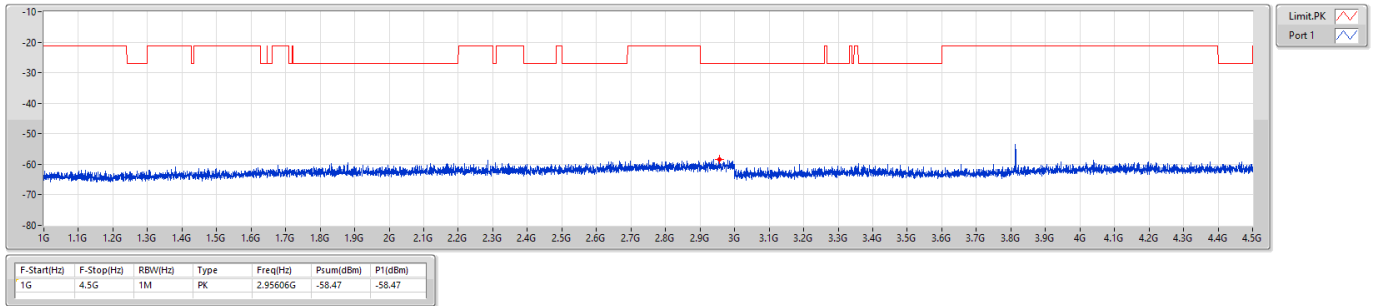

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5720MHz Straddle 5.47-5.725GHz

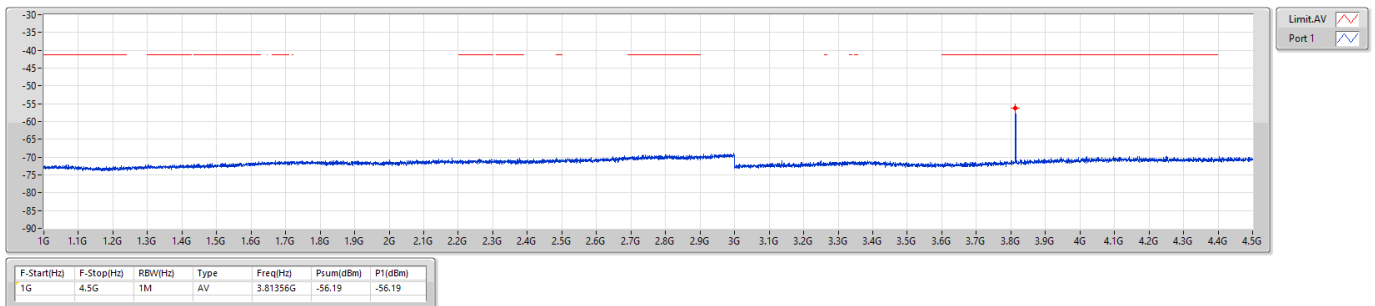




5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]

5745MHz

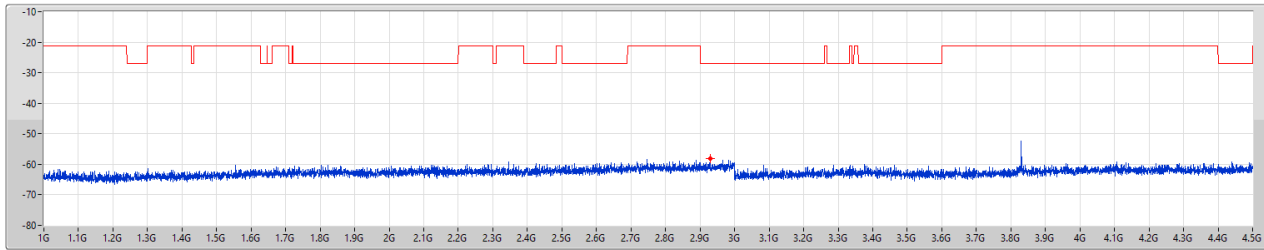


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	PK	2.93025G	-58.14	-58.14

5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5745MHz

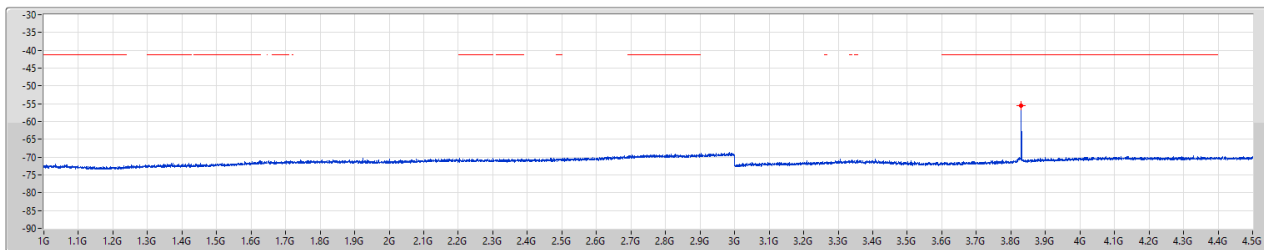


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
1G	4.5G	1M	AV	3.83019G	-55.50	-55.50



5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5785MHz

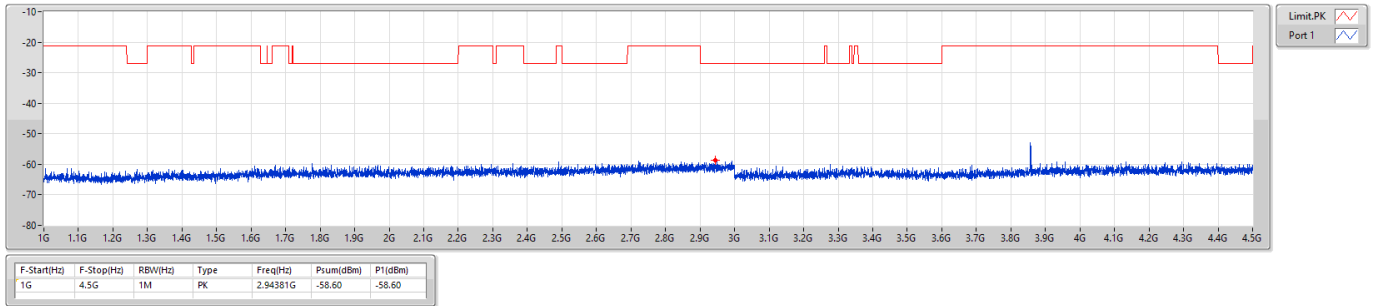

5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5785MHz

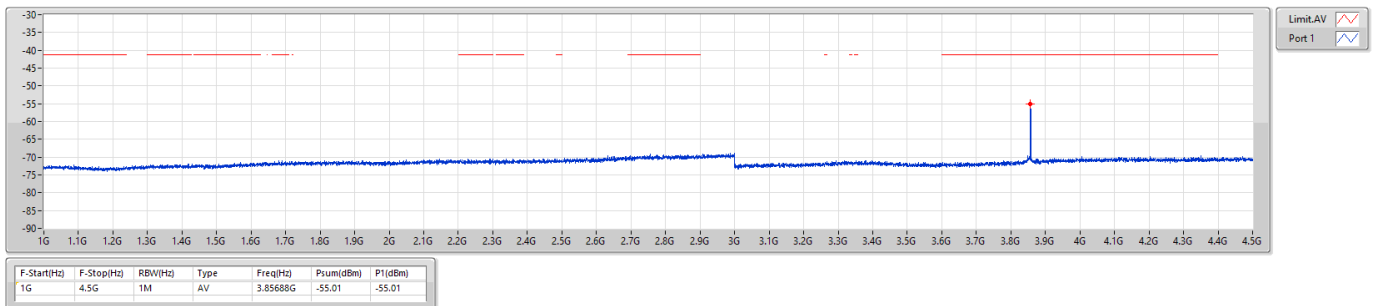




5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [PK]


5825MHz

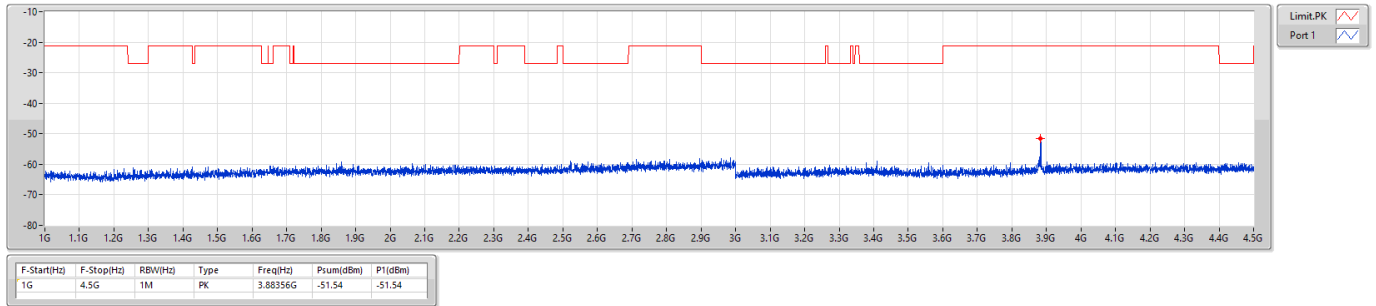

5.725-5.85GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Other [AV]

5825MHz

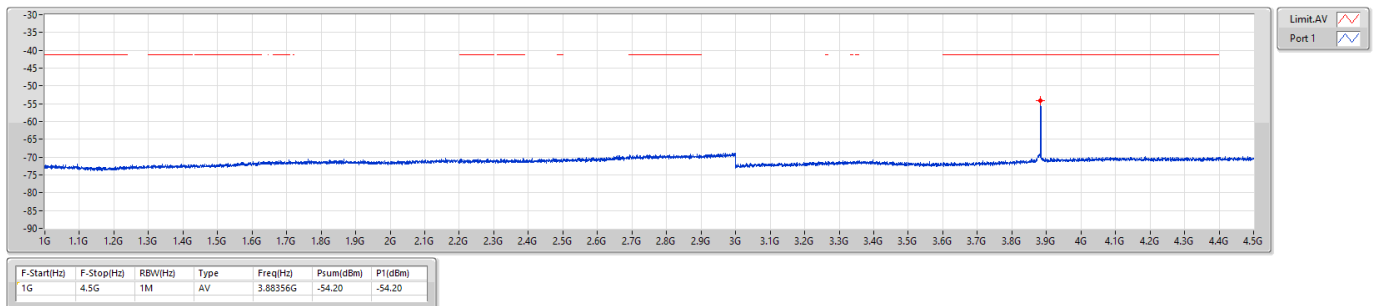

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	Pass	5.1G	5.15G	PK	5.138G	4.40	-29.59	-29.59	-25.19	-21.2	-3.99
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	5.1G	5.15G	AV	5.12335G	4.40	-59.31	-59.31	-54.91	-41.2	-13.71
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	Pass	5.1G	5.15G	PK	5.1481G	4.40	-27.94	-27.94	-23.54	-21.2	-2.34
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	5.1G	5.15G	AV	5.1493G	4.40	-57.33	-57.33	-52.93	-41.2	-11.73
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	5.1G	5.15G	PK	5.14945G	4.40	-28.21	-28.21	-23.81	-21.2	-2.61
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	5.35G	5.38G	AV	5.37259G	4.40	-57.3	-57.3	-52.90	-41.2	-11.70
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	Pass	5.35G	5.38G	PK	5.3614G	4.40	-30.75	-30.75	-26.35	-21.2	-5.15
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	5.35G	5.38G	AV	5.35003G	4.40	-55.9	-55.9	-51.50	-41.2	-10.30
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	Pass	5.35G	5.38G	PK	5.35099G	4.40	-28.7	-28.7	-24.30	-21.2	-3.10
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	Pass	5.35G	5.38G	PK	5.35138G	4.40	-28.18	-28.18	-23.78	-21.2	-2.58
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	Pass	5.46G	5.47G	PK	5.47G	4.40	-33.99	-33.99	-29.59	-27	-2.59
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	4.5G	5.35G	AV	5.35G	4.40	-59.15	-59.15	-54.75	-41.2	-13.55
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	Pass	5.725G	5.75G	PK	5.7426G	4.40	-34.08	-34.08	-29.68	-27	-2.68
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	Pass	5.46G	5.47G	PK	5.46276G	4.40	-33.73	-33.73	-29.33	-27	-2.33
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	4.5G	5.35G	AV	5.35G	4.40	-59.1	-59.1	-54.70	-41.2	-13.50
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	Pass	5.725G	5.75G	PK	5.73463G	4.40	-34.07	-34.07	-29.67	-27	-2.67
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	5.46G	5.47G	PK	5.46966G	4.40	-33.87	-33.87	-29.47	-27	-2.47
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	Pass	5.725G	5.75G	PK	5.7291G	4.40	-34.99	-34.99	-30.59	-27	-3.59
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	Pass	4.5G	5.6G	AV	5.37725G	4.40	-55.23	-55.23	-50.83	-41.2	-9.63
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	5.925G	7G	PK	6.98119G	4.40	-46.36	-46.36	-41.96	-27	-14.96
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	Pass	5.925G	7G	PK	7G	4.40	-45.15	-45.15	-40.75	-27	-13.75
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	Pass	4.5G	5.6G	AV	5.3778G	4.40	-57.27	-57.27	-52.87	-41.2	-11.67
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	5.925G	7G	PK	6.92583G	4.40	-45.71	-45.71	-41.31	-27	-14.31
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	Pass	5.925G	7G	PK	6.94518G	4.40	-45.21	-45.21	-40.81	-27	-13.81
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	4.5G	5.6G	AV	5.37725G	4.40	-59.07	-59.07	-54.67	-41.2	-13.47
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	Pass	5.925G	7G	PK	6.96076G	4.40	-45.51	-45.51	-41.11	-27	-14.11

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.5G	5.1G	AV	5.097G	4.40	-60.67	-60.67	-56.27	-41.2	-15.07
5180MHz	Pass	5.1G	5.15G	AV	5.1496G	4.40	-56.74	-56.74	-52.34	-41.2	-11.14
5180MHz	Pass	5.35G	5.38G	AV	5.35042G	4.40	-62.36	-62.36	-57.96	-41.2	-16.76
5180MHz	Pass	5.38G	7G	AV	5.40714G	4.40	-63.26	-63.26	-58.86	-41.2	-17.66
5180MHz	Pass	4.5G	5.1G	PK	5.097G	4.40	-48	-48	-43.60	-21.2	-22.40
5180MHz	Pass	5.1G	5.15G	PK	5.138G	4.40	-29.59	-29.59	-25.19	-21.2	-3.99
5180MHz	Pass	5.35G	5.38G	PK	5.35711G	4.40	-50.48	-50.48	-46.08	-21.2	-24.88
5180MHz	Pass	5.38G	7G	PK	6.46621G	4.40	-46.39	-46.39	-41.99	-27	-14.99
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5200MHz	Pass	4.5G	5.1G	AV	5.0481G	4.40	-63.39	-63.39	-58.99	-41.2	-17.79
5200MHz	Pass	5.1G	5.15G	AV	5.12335G	4.40	-59.31	-59.31	-54.91	-41.2	-13.71
5200MHz	Pass	5.35G	5.38G	AV	5.35057G	4.40	-62.15	-62.15	-57.75	-41.2	-16.55
5200MHz	Pass	5.38G	7G	AV	5.38081G	4.40	-63.06	-63.06	-58.66	-41.2	-17.46
5200MHz	Pass	4.5G	5.1G	PK	4.8252G	4.40	-51.26	-51.26	-46.86	-21.2	-25.66
5200MHz	Pass	5.1G	5.15G	PK	5.1495G	4.40	-44.07	-44.07	-39.67	-21.2	-18.47
5200MHz	Pass	5.35G	5.38G	PK	5.35318G	4.40	-50.54	-50.54	-46.14	-21.2	-24.94
5200MHz	Pass	5.38G	7G	PK	6.49821G	4.40	-46.56	-46.56	-42.16	-27	-15.16
5240MHz	Pass	4.5G	5.1G	AV	4.8876G	4.40	-63.45	-63.45	-59.05	-41.2	-17.85
5240MHz	Pass	5.1G	5.15G	AV	5.14505G	4.40	-62.55	-62.55	-58.15	-41.2	-16.95
5240MHz	Pass	5.35G	5.38G	AV	5.35024G	4.40	-61.5	-61.5	-57.10	-41.2	-15.90
5240MHz	Pass	5.38G	7G	AV	5.38648G	4.40	-62.71	-62.71	-58.31	-41.2	-17.11
5240MHz	Pass	4.5G	5.1G	PK	4.9452G	4.40	-51.41	-51.41	-47.01	-21.2	-25.81
5240MHz	Pass	5.1G	5.15G	PK	5.14765G	4.40	-50.6	-50.6	-46.20	-21.2	-25.00
5240MHz	Pass	5.35G	5.38G	PK	5.36803G	4.40	-50.36	-50.36	-45.96	-21.2	-24.76
5240MHz	Pass	5.38G	7G	PK	6.54802G	4.40	-46.94	-46.94	-42.54	-27	-15.54
5260MHz	Pass	4.5G	5.1G	AV	5.0466G	4.40	-63.68	-63.68	-59.28	-41.2	-18.08
5260MHz	Pass	5.1G	5.15G	AV	5.14665G	4.40	-63.13	-63.13	-58.73	-41.2	-17.53
5260MHz	Pass	5.35G	5.38G	AV	5.35039G	4.40	-61.55	-61.55	-57.15	-41.2	-15.95
5260MHz	Pass	5.38G	7G	AV	5.38729G	4.40	-62.84	-62.84	-58.44	-41.2	-17.24
5260MHz	Pass	4.5G	5.1G	PK	4.9635G	4.40	-51.56	-51.56	-47.16	-21.2	-25.96
5260MHz	Pass	5.1G	5.15G	PK	5.1368G	4.40	-51.53	-51.53	-47.13	-21.2	-25.93
5260MHz	Pass	5.35G	5.38G	PK	5.35276G	4.40	-49.74	-49.74	-45.34	-21.2	-24.14
5260MHz	Pass	5.38G	7G	PK	6.57313G	4.40	-46.82	-46.82	-42.42	-27	-15.42
5300MHz	Pass	4.5G	5.1G	AV	5.0481G	4.40	-63.65	-63.65	-59.25	-41.2	-18.05
5300MHz	Pass	5.1G	5.15G	AV	5.14785G	4.40	-63.3	-63.3	-58.90	-41.2	-17.70
5300MHz	Pass	5.35G	5.38G	AV	5.37259G	4.40	-57.3	-57.3	-52.90	-41.2	-11.70
5300MHz	Pass	5.38G	7G	AV	5.38446G	4.40	-62.23	-62.23	-57.83	-41.2	-16.63
5300MHz	Pass	4.5G	5.1G	PK	4.9323G	4.40	-50.97	-50.97	-46.57	-21.2	-25.37
5300MHz	Pass	5.1G	5.15G	PK	5.1222G	4.40	-51.86	-51.86	-47.46	-21.2	-26.26
5300MHz	Pass	5.35G	5.38G	PK	5.35099G	4.40	-43.43	-43.43	-39.03	-21.2	-17.83
5300MHz	Pass	5.38G	7G	PK	6.62254G	4.40	-47.69	-47.69	-43.29	-27	-16.29
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5320MHz	Pass	4.5G	5.1G	AV	4.974G	4.40	-61.49	-61.49	-57.09	-41.2	-15.89
5320MHz	Pass	5.1G	5.15G	AV	5.14715G	4.40	-63.45	-63.45	-59.05	-41.2	-17.85
5320MHz	Pass	5.35G	5.38G	AV	5.35096G	4.40	-55.94	-55.94	-51.54	-41.2	-10.34
5320MHz	Pass	5.38G	7G	AV	5.40309G	4.40	-57.82	-57.82	-53.42	-41.2	-12.22

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5320MHz	Pass	4.5G	5.1G	PK	4.9743G	4.40	-50.59	-50.59	-46.19	-21.2	-24.99
5320MHz	Pass	5.1G	5.15G	PK	5.14765G	4.40	-51.69	-51.69	-47.29	-21.2	-26.09
5320MHz	Pass	5.35G	5.38G	PK	5.3614G	4.40	-30.75	-30.75	-26.35	-21.2	-5.15
5320MHz	Pass	5.38G	7G	PK	6.65818G	4.40	-48.07	-48.07	-43.67	-27	-16.67
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	4.5G	5.35G	AV	5.1477G	4.40	-61.78	-61.78	-57.38	-41.2	-16.18
5500MHz	Pass	5.35G	5.47G	AV	5.45968G	4.40	-59.11	-59.11	-54.71	-41.2	-13.51
5500MHz	Pass	4.5G	5.35G	PK	5.3143G	4.40	-50.36	-50.36	-45.96	-27	-18.96
5500MHz	Pass	5.35G	5.46G	PK	5.45637G	4.40	-33.3	-33.3	-28.90	-21.2	-7.70
5500MHz	Pass	5.46G	5.47G	PK	5.47G	4.40	-33.99	-33.99	-29.59	-27	-2.59
5500MHz	Pass	5.725G	5.75G	PK	5.73225G	4.40	-50.64	-50.64	-46.24	-27	-19.24
5500MHz	Pass	5.75G	7G	PK	6.87031G	4.40	-48.95	-48.95	-44.55	-27	-17.55
5520MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.51	-62.51	-58.11	-41.20	-16.91
5520MHz	Pass	5.35G	5.47G	AV	5.43688G	4.40	-60.04	-60.04	-55.64	-41.20	-14.44
5520MHz	Pass	4.5G	5.35G	PK	5.3109G	4.40	-51.40	-51.40	-47.00	-27.00	-20.00
5520MHz	Pass	5.35G	5.46G	PK	5.45791G	4.40	-48.22	-48.22	-43.82	-21.20	-22.62
5520MHz	Pass	5.46G	5.47G	PK	5.46772G	4.40	-42.70	-42.70	-38.30	-27.00	-11.30
5520MHz	Pass	5.725G	5.75G	PK	5.7284G	4.40	-51.26	-51.26	-46.86	-27.00	-19.86
5520MHz	Pass	5.75G	7G	PK	6.98G	4.40	-48.80	-48.80	-44.40	-27.00	-17.40
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5580MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.48	-62.48	-58.08	-41.2	-16.88
5580MHz	Pass	5.35G	5.47G	AV	5.45284G	4.40	-62.77	-62.77	-58.37	-41.2	-17.17
5580MHz	Pass	4.5G	5.35G	PK	5.32068G	4.40	-49.5	-49.5	-45.10	-27	-18.10
5580MHz	Pass	5.35G	5.46G	PK	5.41402G	4.40	-50.64	-50.64	-46.24	-21.2	-25.04
5580MHz	Pass	5.46G	5.47G	PK	5.46096G	4.40	-50.63	-50.63	-46.23	-27	-19.23
5580MHz	Pass	5.725G	5.75G	PK	5.72728G	4.40	-50.1	-50.1	-45.70	-27	-18.70
5580MHz	Pass	5.75G	7G	PK	6.94563G	4.40	-49.01	-49.01	-44.61	-27	-17.61
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-59.15	-59.15	-54.75	-41.2	-13.55
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.47G	AV	5.4172G	4.40	-59.99	-59.99	-55.59	-41.2	-14.39
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	PK	5.316G	4.40	-47.43	-47.43	-43.03	-27	-16.03
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.46G	PK	5.41644G	4.40	-47.91	-47.91	-43.51	-21.2	-22.31
5720MHz Straddle 5.47-5.725GHz	Pass	5.46G	5.47G	PK	5.46109G	4.40	-47.84	-47.84	-43.44	-27	-16.44
5720MHz Straddle 5.47-5.725GHz	Pass	5.85G	7G	PK	6.96349G	4.40	-45.28	-45.28	-40.88	-27	-13.88
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5680MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-63.27	-63.27	-58.87	-41.20	-17.67
5680MHz	Pass	5.35G	5.47G	AV	5.44348G	4.40	-63.68	-63.68	-59.28	-41.20	-18.08
5680MHz	Pass	4.5G	5.35G	PK	5.33385G	4.40	-51.16	-51.16	-46.76	-27.00	-19.76
5680MHz	Pass	5.35G	5.46G	PK	5.39422G	4.40	-51.48	-51.48	-47.08	-21.20	-25.88
5680MHz	Pass	5.46G	5.47G	PK	5.4601G	4.40	-52.17	-52.17	-47.77	-27.00	-20.77
5680MHz	Pass	5.725G	5.75G	PK	5.725G	4.40	-34.30	-34.30	-29.90	-27.00	-2.90
5680MHz	Pass	5.75G	7G	PK	5.76375G	4.40	-47.75	-47.75	-43.35	-27.00	-16.35
5700MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.81	-62.81	-58.41	-41.2	-17.21
5700MHz	Pass	5.35G	5.47G	AV	5.35252G	4.40	-62.05	-62.05	-57.65	-41.2	-16.45
5700MHz	Pass	4.5G	5.35G	PK	5.31558G	4.40	-50.98	-50.98	-46.58	-27	-19.58
5700MHz	Pass	5.35G	5.46G	PK	5.35209G	4.40	-51.03	-51.03	-46.63	-21.2	-25.43
5700MHz	Pass	5.46G	5.47G	PK	5.4621G	4.40	-50.88	-50.88	-46.48	-27	-19.48
5700MHz	Pass	5.725G	5.75G	PK	5.7426G	4.40	-34.08	-34.08	-29.68	-27	-2.68
5700MHz	Pass	5.75G	7G	PK	5.75219G	4.40	-47.4	-47.4	-43.00	-27	-16.00

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	4.5G	5.6G	AV	5.37725G	4.40	-55.23	-55.23	-50.83	-41.2	-9.63
5745MHz	Pass	4.5G	5.6G	PK	5.57378G	4.40	-49.3	-49.3	-44.90	-27	-17.90
5745MHz	Pass	5.6G	5.65G	PK	5.64705G	4.40	-46.37	-46.37	-41.97	-27	-14.97
5745MHz	Pass	5.65G	5.7G	PK	5.6515G	4.40	-45.59	-45.59	-41.19	-25.89	-15.30
5745MHz	Pass	5.7G	5.72G	PK	5.7027G	4.40	-23.18	-23.18	-18.78	10.76	-29.54
5745MHz	Pass	5.72G	5.725G	PK	5.72002G	4.40	-20.73	-20.73	-16.33	15.63	-31.96
5745MHz	Pass	5.85G	5.855G	PK	5.85459G	4.40	-46.98	-46.98	-42.58	16.53	-59.11
5745MHz	Pass	5.855G	5.875G	PK	5.87412G	4.40	-48.62	-48.62	-44.22	10.25	-54.47
5745MHz	Pass	5.875G	5.925G	PK	5.925G	4.40	-49.43	-49.43	-45.03	-27	-18.03
5745MHz	Pass	5.925G	7G	PK	6.97662G	4.40	-45.52	-45.52	-41.12	-27	-14.12
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5785MHz	Pass	4.5G	5.6G	AV	5.44985G	4.40	-61.08	-61.08	-56.68	-41.2	-15.48
5785MHz	Pass	4.5G	5.6G	PK	5.5934G	4.40	-49.25	-49.25	-44.85	-27	-17.85
5785MHz	Pass	5.6G	5.65G	PK	5.6327G	4.40	-49.61	-49.61	-45.21	-27	-18.21
5785MHz	Pass	5.65G	5.7G	PK	5.6501G	4.40	-50.57	-50.57	-46.17	-26.93	-19.24
5785MHz	Pass	5.7G	5.72G	PK	5.71842G	4.40	-35.29	-35.29	-30.89	15.16	-46.05
5785MHz	Pass	5.72G	5.725G	PK	5.72006G	4.40	-40.54	-40.54	-36.14	15.74	-51.88
5785MHz	Pass	5.85G	5.855G	PK	5.8549G	4.40	-41.08	-41.08	-36.68	15.83	-52.51
5785MHz	Pass	5.855G	5.875G	PK	5.87362G	4.40	-44.91	-44.91	-40.51	10.39	-50.90
5785MHz	Pass	5.875G	5.925G	PK	5.9249G	4.40	-49.44	-49.44	-45.04	-26.93	-18.11
5785MHz	Pass	5.925G	7G	PK	6.98119G	4.40	-46.36	-46.36	-41.96	-27	-14.96
802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5825MHz	Pass	4.5G	5.6G	AV	5.41135G	4.40	-60.96	-60.96	-56.56	-41.2	-15.36
5825MHz	Pass	4.5G	5.6G	PK	5.4691G	4.40	-49.69	-49.69	-45.29	-27	-18.29
5825MHz	Pass	5.6G	5.65G	PK	5.63535G	4.40	-49.85	-49.85	-45.45	-27	-18.45
5825MHz	Pass	5.65G	5.7G	PK	5.65095G	4.40	-50.41	-50.41	-46.01	-26.3	-19.71
5825MHz	Pass	5.7G	5.72G	PK	5.7009G	4.40	-48.79	-48.79	-44.39	10.25	-54.64
5825MHz	Pass	5.72G	5.725G	PK	5.72036G	4.40	-47.09	-47.09	-42.69	16.41	-59.10
5825MHz	Pass	5.85G	5.855G	PK	5.85391G	4.40	-18.87	-18.87	-14.47	18.1	-32.57
5825MHz	Pass	5.855G	5.875G	PK	5.86794G	4.40	-23.42	-23.42	-19.02	11.98	-31.00
5825MHz	Pass	5.875G	5.925G	PK	5.92375G	4.40	-47.46	-47.46	-43.06	-26.08	-16.98
5825MHz	Pass	5.925G	7G	PK	7G	4.40	-45.15	-45.15	-40.75	-27	-13.75
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.5G	5.1G	AV	5.0988G	4.40	-60.44	-60.44	-56.04	-41.2	-14.84
5180MHz	Pass	5.1G	5.15G	AV	5.1497G	4.40	-52.04	-52.04	-47.64	-41.2	-6.44
5180MHz	Pass	5.35G	5.38G	AV	5.35027G	4.40	-62.04	-62.04	-57.64	-41.2	-16.44
5180MHz	Pass	5.38G	7G	AV	5.39661G	4.40	-62.89	-62.89	-58.49	-41.2	-17.29
5180MHz	Pass	4.5G	5.1G	PK	5.0973G	4.40	-48.72	-48.72	-44.32	-21.2	-23.12
5180MHz	Pass	5.1G	5.15G	PK	5.1481G	4.40	-27.94	-27.94	-23.54	-21.2	-2.34
5180MHz	Pass	5.35G	5.38G	PK	5.3518G	4.40	-49.95	-49.95	-45.55	-21.2	-24.35
5180MHz	Pass	5.38G	7G	PK	6.46945G	4.40	-48	-48	-43.60	-27	-16.60
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5200MHz	Pass	4.5G	5.1G	AV	5.0985G	4.40	-63.02	-63.02	-58.62	-41.2	-17.42
5200MHz	Pass	5.1G	5.15G	AV	5.1493G	4.40	-57.33	-57.33	-52.93	-41.2	-11.73
5200MHz	Pass	5.35G	5.38G	AV	5.35039G	4.40	-61.64	-61.64	-57.24	-41.2	-16.04
5200MHz	Pass	5.38G	7G	AV	5.42212G	4.40	-62.62	-62.62	-58.22	-41.2	-17.02



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5200MHz	Pass	4.5G	5.1G	PK	5.0082G	4.40	-51.08	-51.08	-46.68	-21.2	-25.48
5200MHz	Pass	5.1G	5.15G	PK	5.14755G	4.40	-40.85	-40.85	-36.45	-21.2	-15.25
5200MHz	Pass	5.35G	5.38G	PK	5.35009G	4.40	-50.38	-50.38	-45.98	-21.2	-24.78
5200MHz	Pass	5.38G	7G	PK	6.49699G	4.40	-46.93	-46.93	-42.53	-27	-15.53
5240MHz	Pass	4.5G	5.1G	AV	4.8855G	4.40	-63.09	-63.09	-58.69	-41.2	-17.49
5240MHz	Pass	5.1G	5.15G	AV	5.1485G	4.40	-61.9	-61.9	-57.50	-41.2	-16.30
5240MHz	Pass	5.35G	5.38G	AV	5.35168G	4.40	-61.46	-61.46	-57.06	-41.2	-15.86
5240MHz	Pass	5.38G	7G	AV	5.38486G	4.40	-62.45	-62.45	-58.05	-41.2	-16.85
5240MHz	Pass	4.5G	5.1G	PK	4.8207G	4.40	-51.53	-51.53	-47.13	-21.2	-25.93
5240MHz	Pass	5.1G	5.15G	PK	5.14645G	4.40	-49.84	-49.84	-45.44	-21.2	-24.24
5240MHz	Pass	5.35G	5.38G	PK	5.37124G	4.40	-49.65	-49.65	-45.25	-21.2	-24.05
5240MHz	Pass	5.38G	7G	PK	6.5464G	4.40	-46.28	-46.28	-41.88	-27	-14.88
5260MHz	Pass	4.5G	5.1G	AV	5.0319G	4.40	-63.36	-63.36	-58.96	-41.2	-17.76
5260MHz	Pass	5.1G	5.15G	AV	5.1465G	4.40	-62.47	-62.47	-58.07	-41.2	-16.87
5260MHz	Pass	5.35G	5.38G	AV	5.35054G	4.40	-60.66	-60.66	-56.26	-41.2	-15.06
5260MHz	Pass	5.38G	7G	AV	5.38729G	4.40	-62.1	-62.1	-57.70	-41.2	-16.50
5260MHz	Pass	4.5G	5.1G	PK	5.0883G	4.40	-51.31	-51.31	-46.91	-21.2	-25.71
5260MHz	Pass	5.1G	5.15G	PK	5.1386G	4.40	-51.57	-51.57	-47.17	-21.2	-25.97
5260MHz	Pass	5.35G	5.38G	PK	5.35375G	4.40	-49.54	-49.54	-45.14	-21.2	-23.94
5260MHz	Pass	5.38G	7G	PK	6.57354G	4.40	-47.38	-47.38	-42.98	-27	-15.98
5300MHz	Pass	4.5G	5.1G	AV	4.9416G	4.40	-63.06	-63.06	-58.66	-41.2	-17.46
5300MHz	Pass	5.1G	5.15G	AV	5.14595G	4.40	-62.75	-62.75	-58.35	-41.2	-17.15
5300MHz	Pass	5.35G	5.38G	AV	5.35003G	4.40	-55.9	-55.9	-51.50	-41.2	-10.30
5300MHz	Pass	5.38G	7G	AV	5.38041G	4.40	-60.72	-60.72	-56.32	-41.2	-15.12
5300MHz	Pass	4.5G	5.1G	PK	5.0478G	4.40	-51.79	-51.79	-47.39	-21.2	-26.19
5300MHz	Pass	5.1G	5.15G	PK	5.12665G	4.40	-50.99	-50.99	-46.59	-21.2	-25.39
5300MHz	Pass	5.35G	5.38G	PK	5.35072G	4.40	-39.98	-39.98	-35.58	-21.2	-14.38
5300MHz	Pass	5.38G	7G	PK	6.62173G	4.40	-47.03	-47.03	-42.63	-27	-15.63
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5320MHz	Pass	4.5G	5.1G	AV	4.9737G	4.40	-61.9	-61.9	-57.50	-41.2	-16.30
5320MHz	Pass	5.1G	5.15G	AV	5.14965G	4.40	-63.2	-63.2	-58.80	-41.2	-17.60
5320MHz	Pass	5.35G	5.38G	AV	5.35027G	4.40	-51.07	-51.07	-46.67	-41.2	-5.47
5320MHz	Pass	5.38G	7G	AV	5.40066G	4.40	-58.19	-58.19	-53.79	-41.2	-12.59
5320MHz	Pass	4.5G	5.1G	PK	4.9743G	4.40	-50.97	-50.97	-46.57	-21.2	-25.37
5320MHz	Pass	5.1G	5.15G	PK	5.14175G	4.40	-51.31	-51.31	-46.91	-21.2	-25.71
5320MHz	Pass	5.35G	5.38G	PK	5.35099G	4.40	-28.7	-28.7	-24.30	-21.2	-3.10
5320MHz	Pass	5.38G	7G	PK	6.65818G	4.40	-47.7	-47.7	-43.30	-27	-16.30
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.8	-62.8	-58.40	-41.2	-17.20
5500MHz	Pass	5.35G	5.47G	AV	5.45932G	4.40	-59.74	-59.74	-55.34	-41.2	-14.14
5500MHz	Pass	4.5G	5.35G	PK	5.32025G	4.40	-51.87	-51.87	-47.47	-27	-20.47
5500MHz	Pass	5.35G	5.46G	PK	5.46G	4.40	-41.62	-41.62	-37.22	-21.2	-16.02
5500MHz	Pass	5.46G	5.47G	PK	5.46276G	4.40	-33.73	-33.73	-29.33	-27	-2.33
5500MHz	Pass	5.725G	5.75G	PK	5.7274G	4.40	-51.84	-51.84	-47.44	-27	-20.44
5500MHz	Pass	5.75G	7G	PK	6.96875G	4.40	-50.16	-50.16	-45.76	-27	-18.76
5520MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-61.88	-61.88	-57.48	-41.20	-16.28
5520MHz	Pass	5.35G	5.47G	AV	5.43892G	4.40	-58.27	-58.27	-53.87	-41.20	-12.67
5520MHz	Pass	4.5G	5.35G	PK	5.16555G	4.40	-50.66	-50.66	-46.26	-27.00	-19.26
5520MHz	Pass	5.35G	5.46G	PK	5.43767G	4.40	-46.89	-46.89	-42.49	-21.20	-21.29

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5520MHz	Pass	5.46G	5.47G	PK	5.46953G	4.40	-41.15	-41.15	-36.75	-27.00	-9.75
5520MHz	Pass	5.725G	5.75G	PK	5.73225G	4.40	-50.69	-50.69	-46.29	-27.00	-19.29
5520MHz	Pass	5.75G	7G	PK	6.93063G	4.40	-49.04	-49.04	-44.64	-27.00	-17.64
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5580MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.28	-62.28	-57.88	-41.2	-16.68
5580MHz	Pass	5.35G	5.47G	AV	5.45308G	4.40	-62.22	-62.22	-57.82	-41.2	-16.62
5580MHz	Pass	4.5G	5.35G	PK	5.25523G	4.40	-49.62	-49.62	-45.22	-27	-18.22
5580MHz	Pass	5.35G	5.46G	PK	5.36771G	4.40	-49.98	-49.98	-45.58	-21.2	-24.38
5580MHz	Pass	5.46G	5.47G	PK	5.4661G	4.40	-48.61	-48.61	-44.21	-27	-17.21
5580MHz	Pass	5.725G	5.75G	PK	5.72613G	4.40	-49.16	-49.16	-44.76	-27	-17.76
5580MHz	Pass	5.75G	7G	PK	6.97219G	4.40	-48.73	-48.73	-44.33	-27	-17.33
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-59.1	-59.1	-54.70	-41.2	-13.50
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.47G	AV	5.35936G	4.40	-59.98	-59.98	-55.58	-41.2	-14.38
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	PK	5.33853G	4.40	-46.74	-46.74	-42.34	-27	-15.34
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.46G	PK	5.3577G	4.40	-47.74	-47.74	-43.34	-21.2	-22.14
5720MHz Straddle 5.47-5.725GHz	Pass	5.46G	5.47G	PK	5.46154G	4.40	-46.99	-46.99	-42.59	-27	-15.59
5720MHz Straddle 5.47-5.725GHz	Pass	5.85G	7G	PK	6.91059G	4.40	-45.14	-45.14	-40.74	-27	-13.74
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5680MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.66	-62.66	-58.26	-41.20	-17.06
5680MHz	Pass	5.35G	5.47G	AV	5.45224G	4.40	-62.63	-62.63	-58.23	-41.20	-17.03
5680MHz	Pass	4.5G	5.35G	PK	5.33258G	4.40	-48.47	-48.47	-44.07	-27.00	-17.07
5680MHz	Pass	5.35G	5.46G	PK	5.40137G	4.40	-50.85	-50.85	-46.45	-21.20	-25.25
5680MHz	Pass	5.46G	5.47G	PK	5.4647G	4.40	-51.18	-51.18	-46.78	-27.00	-19.78
5680MHz	Pass	5.725G	5.75G	PK	5.72503G	4.40	-39.00	-39.00	-34.60	-27.00	-7.60
5680MHz	Pass	5.75G	7G	PK	5.76G	4.40	-47.60	-47.60	-43.20	-27.00	-16.20
5700MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.64	-62.64	-58.24	-41.2	-17.04
5700MHz	Pass	5.35G	5.47G	AV	5.35252G	4.40	-63.18	-63.18	-58.78	-41.2	-17.58
5700MHz	Pass	4.5G	5.35G	PK	5.28753G	4.40	-52.01	-52.01	-47.61	-27	-20.61
5700MHz	Pass	5.35G	5.46G	PK	5.4182G	4.40	-52.26	-52.26	-47.86	-21.2	-26.66
5700MHz	Pass	5.46G	5.47G	PK	5.46148G	4.40	-51.53	-51.53	-47.13	-27	-20.13
5700MHz	Pass	5.725G	5.75G	PK	5.73463G	4.40	-34.07	-34.07	-29.67	-27	-2.67
5700MHz	Pass	5.75G	7G	PK	6.99281G	4.40	-49.55	-49.55	-45.15	-27	-18.15
802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	4.5G	5.6G	AV	5.3778G	4.40	-57.27	-57.27	-52.87	-41.2	-11.67
5745MHz	Pass	4.5G	5.6G	PK	5.52465G	4.40	-48.78	-48.78	-44.38	-27	-17.38
5745MHz	Pass	5.6G	5.65G	PK	5.64335G	4.40	-49.02	-49.02	-44.62	-27	-17.62
5745MHz	Pass	5.65G	5.7G	PK	5.65355G	4.40	-45.82	-45.82	-41.42	-24.37	-17.05
5745MHz	Pass	5.7G	5.72G	PK	5.71826G	4.40	-17.24	-17.24	-12.84	15.11	-27.95
5745MHz	Pass	5.72G	5.725G	PK	5.72025G	4.40	-19.24	-19.24	-14.84	16.17	-31.01
5745MHz	Pass	5.85G	5.855G	PK	5.85491G	4.40	-48.25	-48.25	-43.85	15.82	-59.67
5745MHz	Pass	5.855G	5.875G	PK	5.87482G	4.40	-48.97	-48.97	-44.57	10.05	-54.62
5745MHz	Pass	5.875G	5.925G	PK	5.9244G	4.40	-48.62	-48.62	-44.22	-26.56	-17.66
5745MHz	Pass	5.925G	7G	PK	6.99409G	4.40	-44.06	-44.06	-39.66	-27	-12.66
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5785MHz	Pass	4.5G	5.6G	AV	5.4482G	4.40	-60.87	-60.87	-56.47	-41.2	-15.27
5785MHz	Pass	4.5G	5.6G	PK	5.59762G	4.40	-49.65	-49.65	-45.25	-27	-18.25
5785MHz	Pass	5.6G	5.65G	PK	5.62225G	4.40	-49.15	-49.15	-44.75	-27	-17.75
5785MHz	Pass	5.65G	5.7G	PK	5.65G	4.40	-50.6	-50.6	-46.20	-27	-19.20

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5785MHz	Pass	5.7G	5.72G	PK	5.70002G	4.40	-43.97	-43.97	-39.57	10.01	-49.58
5785MHz	Pass	5.72G	5.725G	PK	5.72035G	4.40	-39.45	-39.45	-35.05	16.39	-51.44
5785MHz	Pass	5.85G	5.855G	PK	5.855G	4.40	-44.09	-44.09	-39.69	15.61	-55.30
5785MHz	Pass	5.855G	5.875G	PK	5.87276G	4.40	-45.94	-45.94	-41.54	10.63	-52.17
5785MHz	Pass	5.875G	5.925G	PK	5.925G	4.40	-48.53	-48.53	-44.13	-27	-17.13
5785MHz	Pass	5.925G	7G	PK	6.92583G	4.40	-45.71	-45.71	-41.31	-27	-14.31
802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5825MHz	Pass	4.5G	5.6G	AV	5.4383G	4.40	-61.11	-61.11	-56.71	-41.2	-15.51
5825MHz	Pass	4.5G	5.6G	PK	5.5989G	4.40	-48.77	-48.77	-44.37	-27	-17.37
5825MHz	Pass	5.6G	5.65G	PK	5.6279G	4.40	-49.65	-49.65	-45.25	-27	-18.25
5825MHz	Pass	5.65G	5.7G	PK	5.6505G	4.40	-50.14	-50.14	-45.74	-26.63	-19.11
5825MHz	Pass	5.7G	5.72G	PK	5.70462G	4.40	-48.11	-48.11	-43.71	11.29	-55.00
5825MHz	Pass	5.72G	5.725G	PK	5.7202G	4.40	-48.64	-48.64	-44.24	16.04	-60.28
5825MHz	Pass	5.85G	5.855G	PK	5.85378G	4.40	-18.89	-18.89	-14.49	18.38	-32.87
5825MHz	Pass	5.855G	5.875G	PK	5.86146G	4.40	-23.87	-23.87	-19.47	13.79	-33.26
5825MHz	Pass	5.875G	5.925G	PK	5.9249G	4.40	-48.06	-48.06	-43.66	-26.93	-16.73
5825MHz	Pass	5.925G	7G	PK	6.94518G	4.40	-45.21	-45.21	-40.81	-27	-13.81
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.5G	5.1G	AV	5.0982G	4.40	-60.59	-60.59	-56.19	-41.2	-14.99
5180MHz	Pass	5.1G	5.15G	AV	5.14995G	4.40	-48.88	-48.88	-44.48	-41.2	-3.28
5180MHz	Pass	5.35G	5.38G	AV	5.35126G	4.40	-61.78	-61.78	-57.38	-41.2	-16.18
5180MHz	Pass	5.38G	7G	AV	5.4039G	4.40	-62.82	-62.82	-58.42	-41.2	-17.22
5180MHz	Pass	4.5G	5.1G	PK	5.0973G	4.40	-49.18	-49.18	-44.78	-21.2	-23.58
5180MHz	Pass	5.1G	5.15G	PK	5.14945G	4.40	-28.21	-28.21	-23.81	-21.2	-2.61
5180MHz	Pass	5.35G	5.38G	PK	5.35105G	4.40	-49.99	-49.99	-45.59	-21.2	-24.39
5180MHz	Pass	5.38G	7G	PK	6.46905G	4.40	-48.25	-48.25	-43.85	-27	-16.85
5200MHz	Pass	4.5G	5.1G	AV	4.8447G	4.40	-61.82	-61.82	-57.42	-41.2	-16.22
5200MHz	Pass	5.1G	5.15G	AV	5.14995G	4.40	-52.09	-52.09	-47.69	-41.2	-6.49
5200MHz	Pass	5.35G	5.38G	AV	5.35048G	4.40	-61.6	-61.6	-57.20	-41.2	-16.00
5200MHz	Pass	5.38G	7G	AV	5.38851G	4.40	-62.79	-62.79	-58.39	-41.2	-17.19
5200MHz	Pass	4.5G	5.1G	PK	5.1G	4.40	-50.61	-50.61	-46.21	-21.2	-25.01
5200MHz	Pass	5.1G	5.15G	PK	5.1494G	4.40	-32.27	-32.27	-27.87	-21.2	-6.67
5200MHz	Pass	5.35G	5.38G	PK	5.3557G	4.40	-49.87	-49.87	-45.47	-21.2	-24.27
5200MHz	Pass	5.38G	7G	PK	6.49294G	4.40	-47.41	-47.41	-43.01	-27	-16.01
5240MHz	Pass	4.5G	5.1G	AV	4.8819G	4.40	-61.53	-61.53	-57.13	-41.2	-15.93
5240MHz	Pass	5.1G	5.15G	AV	5.149G	4.40	-61.24	-61.24	-56.84	-41.2	-15.64
5240MHz	Pass	5.35G	5.38G	AV	5.35159G	4.40	-61.26	-61.26	-56.86	-41.2	-15.66
5240MHz	Pass	5.38G	7G	AV	5.38527G	4.40	-62.32	-62.32	-57.92	-41.2	-16.72
5240MHz	Pass	4.5G	5.1G	PK	4.8822G	4.40	-51.14	-51.14	-46.74	-21.2	-25.54
5240MHz	Pass	5.1G	5.15G	PK	5.1488G	4.40	-45.74	-45.74	-41.34	-21.2	-20.14
5240MHz	Pass	5.35G	5.38G	PK	5.35303G	4.40	-49.02	-49.02	-44.62	-21.2	-23.42
5240MHz	Pass	5.38G	7G	PK	6.5464G	4.40	-48.76	-48.76	-44.36	-27	-17.36
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	4.5G	5.1G	AV	4.9185G	4.40	-61.17	-61.17	-56.77	-41.2	-15.57
5260MHz	Pass	5.1G	5.15G	AV	5.1483G	4.40	-62.14	-62.14	-57.74	-41.2	-16.54
5260MHz	Pass	5.35G	5.38G	AV	5.35003G	4.40	-60.04	-60.04	-55.64	-41.2	-14.44
5260MHz	Pass	5.38G	7G	AV	5.38324G	4.40	-62.08	-62.08	-57.68	-41.2	-16.48
5260MHz	Pass	4.5G	5.1G	PK	4.9185G	4.40	-50.44	-50.44	-46.04	-21.2	-24.84

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5260MHz	Pass	5.1G	5.15G	PK	5.1438G	4.40	-50.21	-50.21	-45.81	-21.2	-24.61
5260MHz	Pass	5.35G	5.38G	PK	5.36257G	4.40	-45.65	-45.65	-41.25	-21.2	-20.05
5260MHz	Pass	5.38G	7G	PK	6.58002G	4.40	-47.57	-47.57	-43.17	-27	-16.17
5300MHz	Pass	4.5G	5.1G	AV	4.9554G	4.40	-61.4	-61.4	-57.00	-41.2	-15.80
5300MHz	Pass	5.1G	5.15G	AV	5.134G	4.40	-62.76	-62.76	-58.36	-41.2	-17.16
5300MHz	Pass	5.35G	5.38G	AV	5.35024G	4.40	-51.35	-51.35	-46.95	-41.2	-5.75
5300MHz	Pass	5.38G	7G	AV	5.38122G	4.40	-57.05	-57.05	-52.65	-41.2	-11.45
5300MHz	Pass	4.5G	5.1G	PK	4.9563G	4.40	-50.53	-50.53	-46.13	-21.2	-24.93
5300MHz	Pass	5.1G	5.15G	PK	5.1471G	4.40	-50.8	-50.8	-46.40	-21.2	-25.20
5300MHz	Pass	5.35G	5.38G	PK	5.35471G	4.40	-33.31	-33.31	-28.91	-21.2	-7.71
5300MHz	Pass	5.38G	7G	PK	6.62821G	4.40	-47.92	-47.92	-43.52	-27	-16.52
5320MHz	Pass	4.5G	5.1G	AV	4.974G	4.40	-62.54	-62.54	-58.14	-41.2	-16.94
5320MHz	Pass	5.1G	5.15G	AV	5.14825G	4.40	-63.24	-63.24	-58.84	-41.2	-17.64
5320MHz	Pass	5.35G	5.38G	AV	5.35003G	4.40	-50.6	-50.6	-46.20	-41.2	-5.00
5320MHz	Pass	5.38G	7G	AV	5.39782G	4.40	-58.74	-58.74	-54.34	-41.2	-13.14
5320MHz	Pass	4.5G	5.1G	PK	4.9734G	4.40	-51.35	-51.35	-46.95	-21.2	-25.75
5320MHz	Pass	5.1G	5.15G	PK	5.1143G	4.40	-51.12	-51.12	-46.72	-21.2	-25.52
5320MHz	Pass	5.35G	5.38G	PK	5.35138G	4.40	-28.18	-28.18	-23.78	-21.2	-2.58
5320MHz	Pass	5.38G	7G	PK	6.9753G	4.40	-47.74	-47.74	-43.34	-27	-16.34
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.35	-62.35	-57.95	-41.2	-16.75
5500MHz	Pass	5.35G	5.47G	AV	5.45992G	4.40	-60.51	-60.51	-56.11	-41.2	-14.91
5500MHz	Pass	4.5G	5.35G	PK	5.29985G	4.40	-50.37	-50.37	-45.97	-27	-18.97
5500MHz	Pass	5.35G	5.46G	PK	5.45846G	4.40	-45.6	-45.6	-41.20	-21.2	-20.00
5500MHz	Pass	5.46G	5.47G	PK	5.46966G	4.40	-33.87	-33.87	-29.47	-27	-2.47
5500MHz	Pass	5.725G	5.75G	PK	5.72525G	4.40	-50.62	-50.62	-46.22	-27	-19.22
5500MHz	Pass	5.75G	7G	PK	6.98625G	4.40	-48.77	-48.77	-44.37	-27	-17.37
5520MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-61.70	-61.70	-57.30	-41.20	-16.10
5520MHz	Pass	5.35G	5.47G	AV	5.43796G	4.40	-57.94	-57.94	-53.54	-41.20	-12.34
5520MHz	Pass	4.5G	5.35G	PK	5.3313G	4.40	-49.85	-49.85	-45.45	-27.00	-18.45
5520MHz	Pass	5.35G	5.46G	PK	5.45868G	4.40	-40.63	-40.63	-36.23	-21.20	-15.03
5520MHz	Pass	5.46G	5.47G	PK	5.46697G	4.40	-34.95	-34.95	-30.55	-27.00	-3.55
5520MHz	Pass	5.725G	5.75G	PK	5.73983G	4.40	-50.72	-50.72	-46.32	-27.00	-19.32
5520MHz	Pass	5.75G	7G	PK	6.95656G	4.40	-49.21	-49.21	-44.81	-27.00	-17.81
5580MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.11	-62.11	-57.71	-41.2	-16.51
5580MHz	Pass	5.35G	5.47G	AV	5.45188G	4.40	-61.69	-61.69	-57.29	-41.2	-16.09
5580MHz	Pass	4.5G	5.35G	PK	5.25948G	4.40	-50.75	-50.75	-46.35	-27	-19.35
5580MHz	Pass	5.35G	5.46G	PK	5.45945G	4.40	-44.33	-44.33	-39.93	-21.2	-18.73
5580MHz	Pass	5.46G	5.47G	PK	5.46771G	4.40	-43.3	-43.3	-38.90	-27	-11.90
5580MHz	Pass	5.725G	5.75G	PK	5.7285G	4.40	-48.63	-48.63	-44.23	-27	-17.23
5580MHz	Pass	5.75G	7G	PK	6.97375G	4.40	-49.26	-49.26	-44.86	-27	-17.86
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-59	-59	-54.60	-41.2	-13.40
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.47G	AV	5.35372G	4.40	-58.85	-58.85	-54.45	-41.2	-13.25
5720MHz Straddle 5.47-5.725GHz	Pass	4.5G	5.35G	PK	5.24205G	4.40	-47.12	-47.12	-42.72	-27	-15.72
5720MHz Straddle 5.47-5.725GHz	Pass	5.35G	5.46G	PK	5.35781G	4.40	-47.83	-47.83	-43.43	-21.2	-22.23
5720MHz Straddle 5.47-5.725GHz	Pass	5.46G	5.47G	PK	5.4636G	4.40	-46.77	-46.77	-42.37	-27	-15.37
5720MHz Straddle 5.47-5.725GHz	Pass	5.85G	7G	PK	6.90426G	4.40	-45.61	-45.61	-41.21	-27	-14.21
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5660MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.38	-62.38	-57.98	-41.20	-16.78

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5660MHz	Pass	5.35G	5.47G	AV	5.45692G	4.40	-62.37	-62.37	-57.97	-41.20	-16.77
5660MHz	Pass	4.5G	5.35G	PK	5.32578G	4.40	-49.55	-49.55	-45.15	-27.00	-18.15
5660MHz	Pass	5.35G	5.46G	PK	5.42909G	4.40	-50.83	-50.83	-46.43	-21.20	-25.23
5660MHz	Pass	5.46G	5.47G	PK	5.46542G	4.40	-50.99	-50.99	-46.59	-27.00	-19.59
5660MHz	Pass	5.725G	5.75G	PK	5.72628G	4.40	-42.58	-42.58	-38.18	-27.00	-11.18
5660MHz	Pass	5.75G	7G	PK	6.9675G	4.40	-49.10	-49.10	-44.70	-27.00	-17.70
5680MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.38	-62.38	-57.98	-41.20	-16.78
5680MHz	Pass	5.35G	5.47G	AV	5.45968G	4.40	-62.43	-62.43	-58.03	-41.20	-16.83
5680MHz	Pass	4.5G	5.35G	PK	5.33258G	4.40	-50.92	-50.92	-46.52	-27.00	-19.52
5680MHz	Pass	5.35G	5.46G	PK	5.45769G	4.40	-51.05	-51.05	-46.65	-21.20	-25.45
5680MHz	Pass	5.46G	5.47G	PK	5.46931G	4.40	-51.06	-51.06	-46.66	-27.00	-19.66
5680MHz	Pass	5.725G	5.75G	PK	5.72618G	4.40	-36.33	-36.33	-31.93	-27.00	-4.93
5680MHz	Pass	5.75G	7G	PK	5.7625G	4.40	-46.78	-46.78	-42.38	-27.00	-15.38
5700MHz	Pass	4.5G	5.35G	AV	5.35G	4.40	-62.75	-62.75	-58.35	-41.2	-17.15
5700MHz	Pass	5.35G	5.47G	AV	5.35132G	4.40	-63.47	-63.47	-59.07	-41.2	-17.87
5700MHz	Pass	4.5G	5.35G	PK	5.34278G	4.40	-50.84	-50.84	-46.44	-27	-19.44
5700MHz	Pass	5.35G	5.46G	PK	5.44746G	4.40	-50.64	-50.64	-46.24	-21.2	-25.04
5700MHz	Pass	5.46G	5.47G	PK	5.46222G	4.40	-51.43	-51.43	-47.03	-27	-20.03
5700MHz	Pass	5.725G	5.75G	PK	5.7291G	4.40	-34.99	-34.99	-30.59	-27	-3.59
5700MHz	Pass	5.75G	7G	PK	6.98219G	4.40	-48.87	-48.87	-44.47	-27	-17.47
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	4.5G	5.6G	AV	5.37725G	4.40	-59.07	-59.07	-54.67	-41.2	-13.47
5745MHz	Pass	4.5G	5.6G	PK	5.59872G	4.40	-49.31	-49.31	-44.91	-27	-17.91
5745MHz	Pass	5.6G	5.65G	PK	5.6204G	4.40	-48.25	-48.25	-43.85	-27	-16.85
5745MHz	Pass	5.65G	5.7G	PK	5.6504G	4.40	-49.24	-49.24	-44.84	-26.7	-18.14
5745MHz	Pass	5.7G	5.72G	PK	5.71836G	4.40	-18.84	-18.84	-14.44	15.14	-29.58
5745MHz	Pass	5.72G	5.725G	PK	5.72025G	4.40	-17.75	-17.75	-13.35	16.16	-29.51
5745MHz	Pass	5.85G	5.855G	PK	5.85481G	4.40	-48.01	-48.01	-43.61	16.04	-59.65
5745MHz	Pass	5.855G	5.875G	PK	5.8748G	4.40	-48.81	-48.81	-44.41	10.06	-54.47
5745MHz	Pass	5.875G	5.925G	PK	5.9236G	4.40	-47.92	-47.92	-43.52	-25.96	-17.56
5745MHz	Pass	5.925G	7G	PK	6.99086G	4.40	-45.44	-45.44	-41.04	-27	-14.04
5785MHz	Pass	4.5G	5.6G	AV	5.45535G	4.40	-60.8	-60.8	-56.40	-41.2	-15.20
5785MHz	Pass	4.5G	5.6G	PK	5.54573G	4.40	-48.71	-48.71	-44.31	-27	-17.31
5785MHz	Pass	5.6G	5.65G	PK	5.6494G	4.40	-49.36	-49.36	-44.96	-27	-17.96
5785MHz	Pass	5.65G	5.7G	PK	5.65025G	4.40	-49.55	-49.55	-45.15	-26.82	-18.33
5785MHz	Pass	5.7G	5.72G	PK	5.70008G	4.40	-44.06	-44.06	-39.66	10.02	-49.68
5785MHz	Pass	5.72G	5.725G	PK	5.72087G	4.40	-39.28	-39.28	-34.88	17.57	-52.45
5785MHz	Pass	5.85G	5.855G	PK	5.8549G	4.40	-44.95	-44.95	-40.55	15.83	-56.38
5785MHz	Pass	5.855G	5.875G	PK	5.8737G	4.40	-47.02	-47.02	-42.62	10.36	-52.98
5785MHz	Pass	5.875G	5.925G	PK	5.9245G	4.40	-48.38	-48.38	-43.98	-26.63	-17.35
5785MHz	Pass	5.925G	7G	PK	6.99839G	4.40	-45.16	-45.16	-40.76	-27	-13.76
802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5825MHz	Pass	4.5G	5.6G	AV	5.4504G	4.40	-61.08	-61.08	-56.68	-41.2	-15.48
5825MHz	Pass	4.5G	5.6G	PK	5.5945G	4.40	-49.75	-49.75	-45.35	-27	-18.35
5825MHz	Pass	5.6G	5.65G	PK	5.6306G	4.40	-50.19	-50.19	-45.79	-27	-18.79
5825MHz	Pass	5.65G	5.7G	PK	5.65025G	4.40	-51.57	-51.57	-47.17	-26.82	-20.35
5825MHz	Pass	5.7G	5.72G	PK	5.70254G	4.40	-49.19	-49.19	-44.79	10.71	-55.50
5825MHz	Pass	5.72G	5.725G	PK	5.72006G	4.40	-49.96	-49.96	-45.56	15.74	-61.30
5825MHz	Pass	5.85G	5.855G	PK	5.85269G	4.40	-19.23	-19.23	-14.83	20.88	-35.71



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5825MHz	Pass	5.855G	5.875G	PK	5.85948G	4.40	-27.01	-27.01	-22.61	14.35	-36.96
5825MHz	Pass	5.875G	5.925G	PK	5.92325G	4.40	-47.09	-47.09	-42.69	-25.7	-16.99
5825MHz	Pass	5.925G	7G	PK	6.96076G	4.40	-45.51	-45.51	-41.11	-27	-14.11


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



5.15-5.25GHz_802.11ax_HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5180MHz

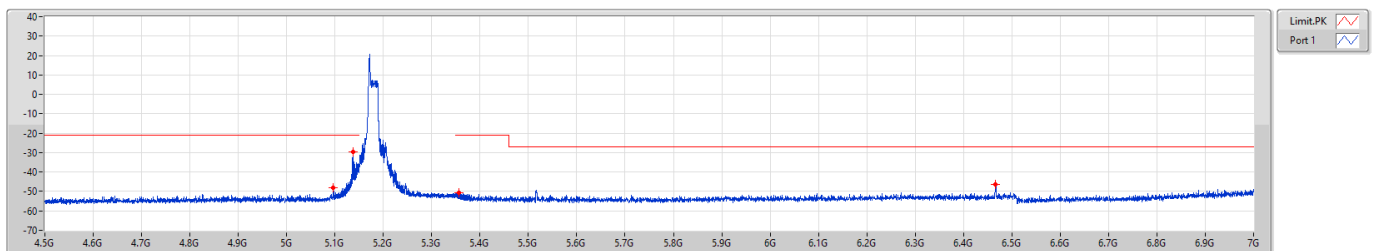


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	5.097G	-48.00	-48.00
5.1G	5.15G	1M	PK	5.138G	-29.59	-29.59
5.35G	5.38G	1M	PK	5.35711G	-50.48	-50.48
5.38G	7G	1M	PK	6.46621G	-46.39	-46.39

5.15-5.25GHz_802.11ax_HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5180MHz

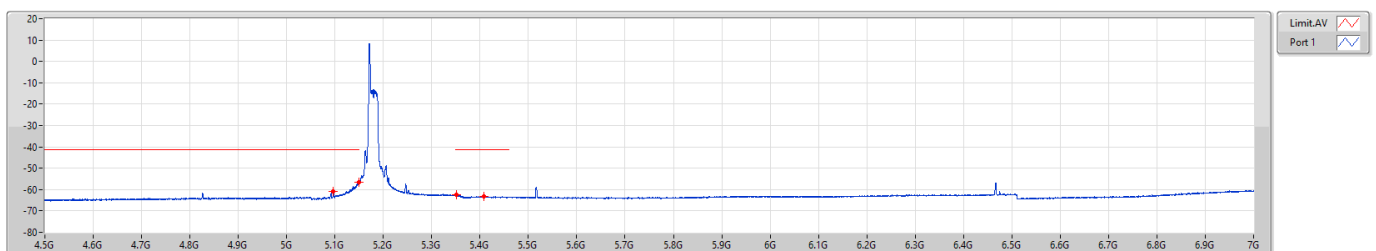


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	5.097G	-60.67	-60.67
5.1G	5.15G	1M	AV	5.1496G	-56.74	-56.74
5.35G	5.38G	1M	AV	5.35042G	-62.36	-62.36
5.38G	7G	1M	AV	5.40714G	-63.26	-63.26



5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5200MHz

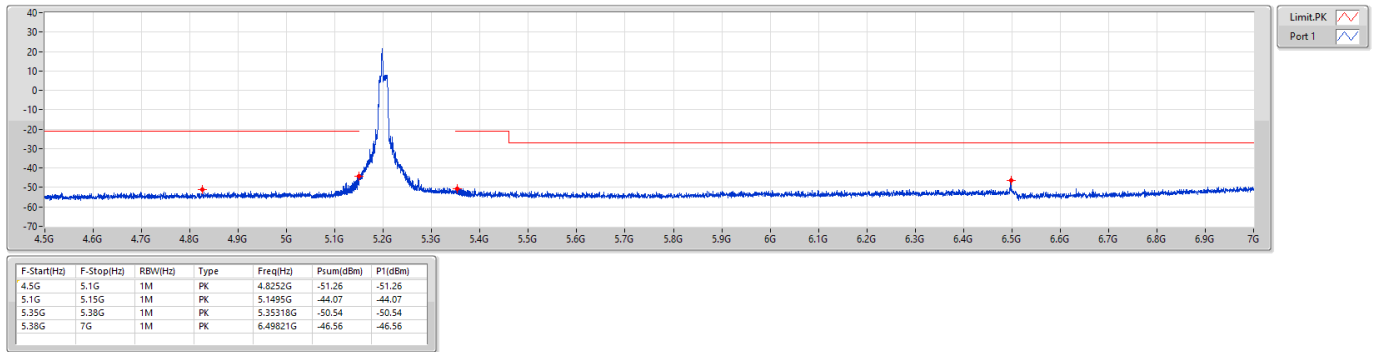

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5200MHz

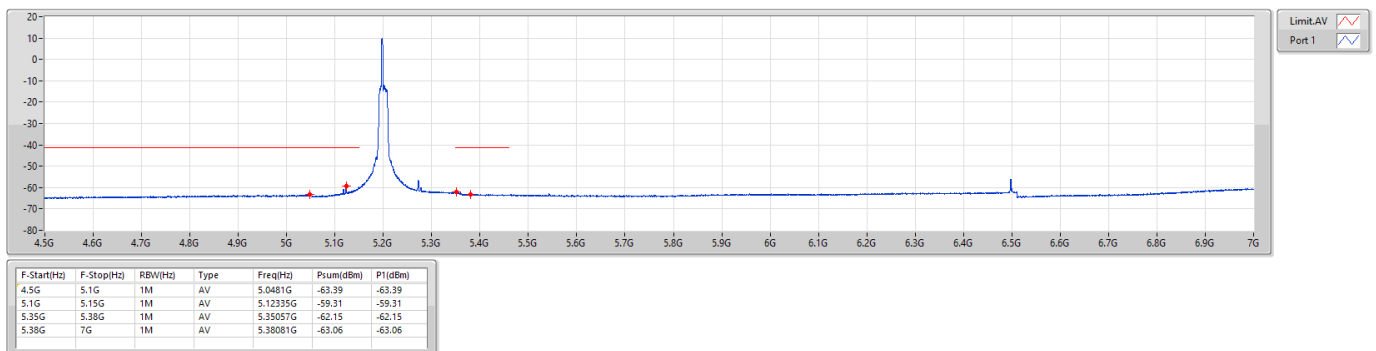




5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5240MHz

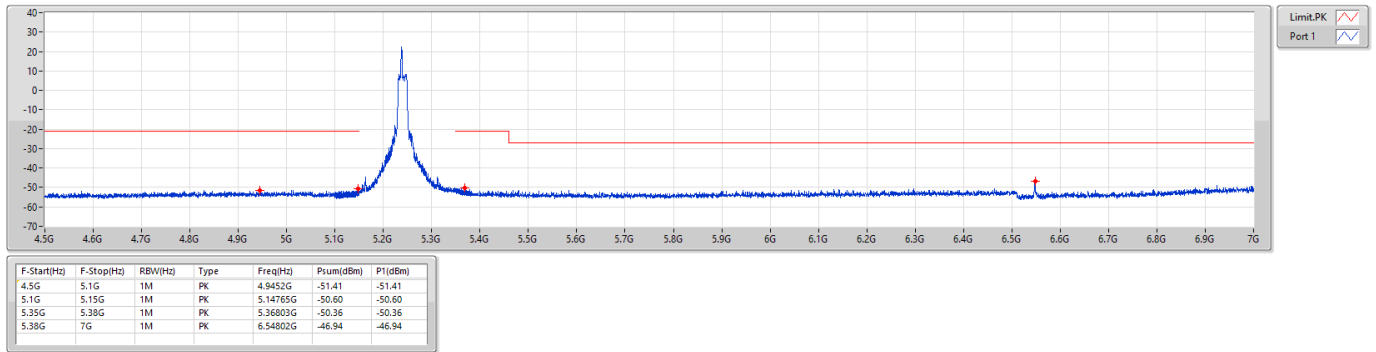

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5240MHz

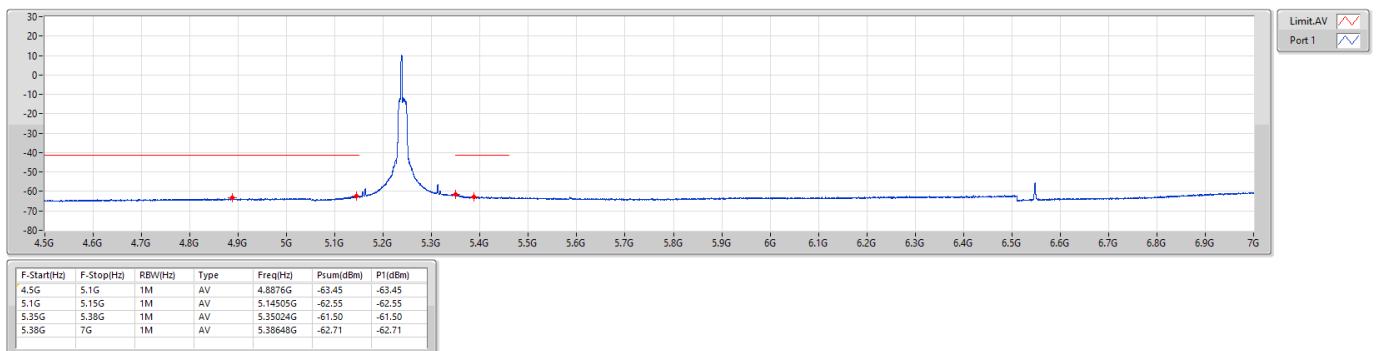




5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5260MHz

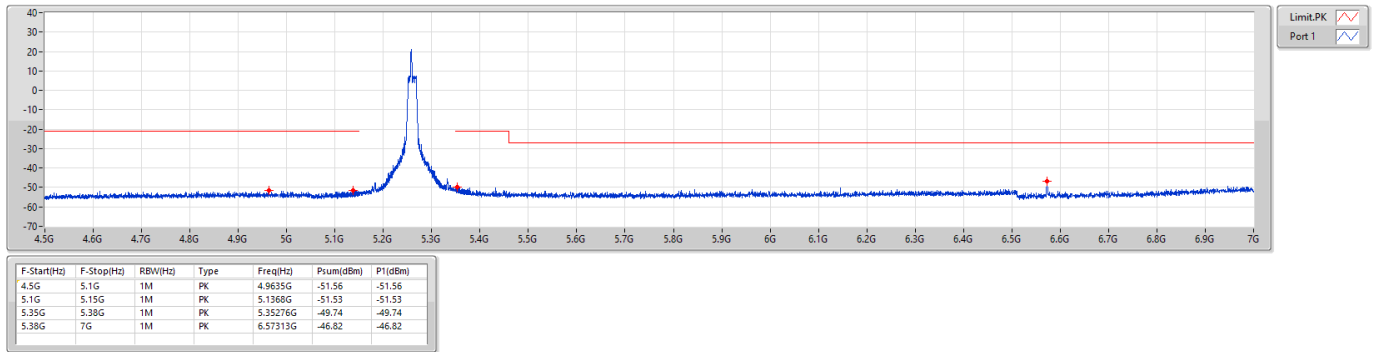

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5260MHz

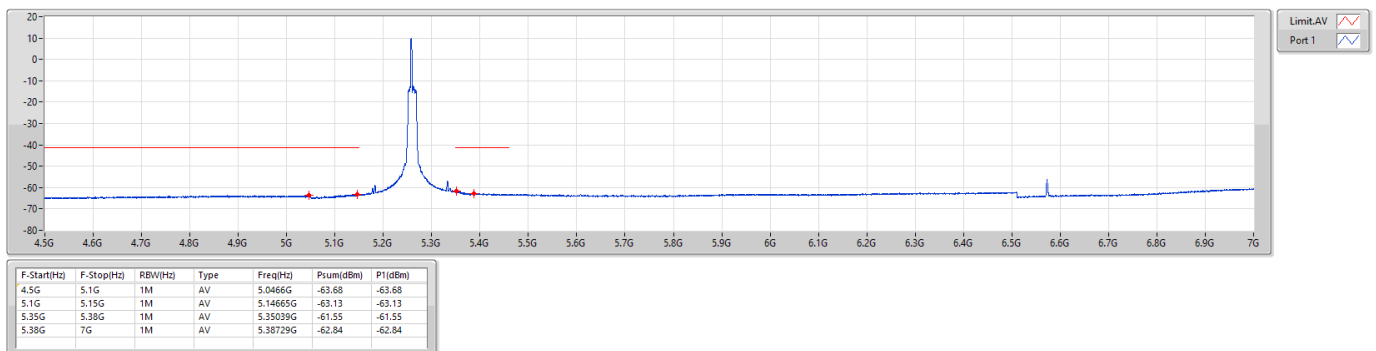




5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5300MHz

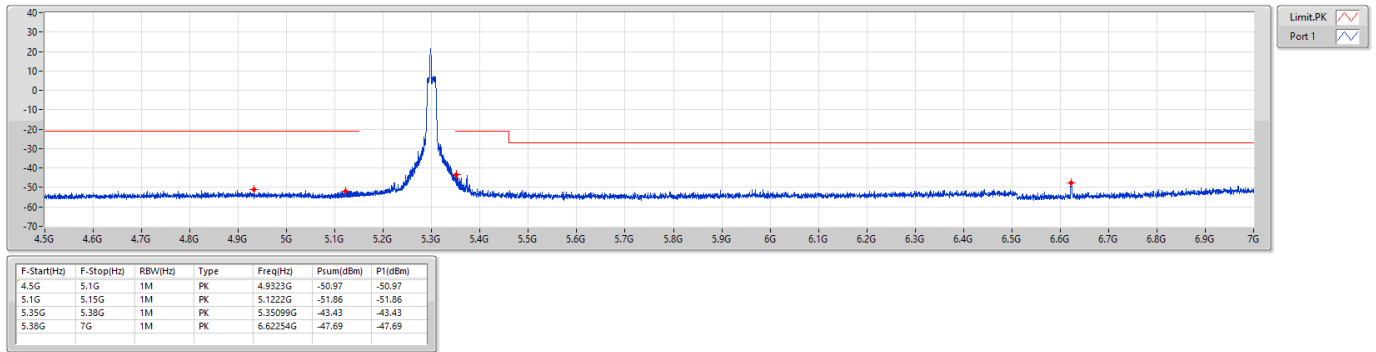

5.25-5.35GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5300MHz

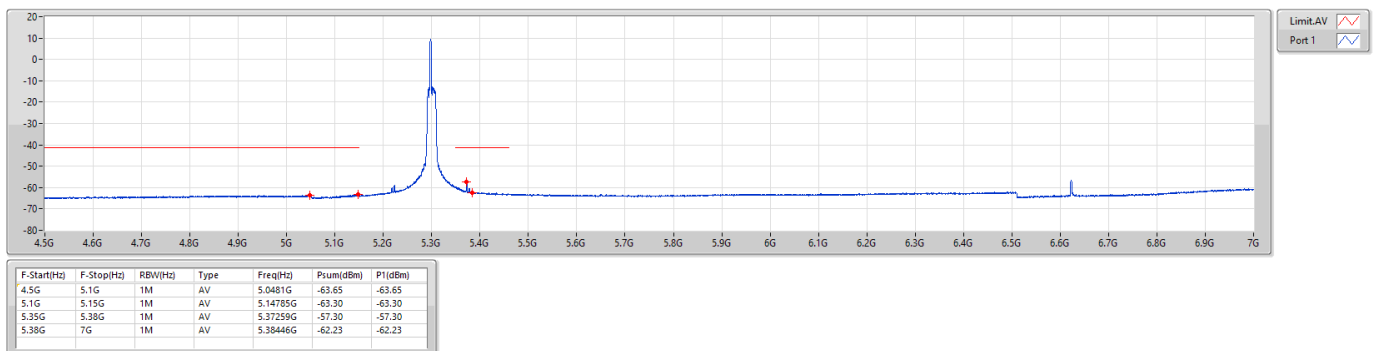




5.25-5.35GHz_802.11ax_HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5320MHz

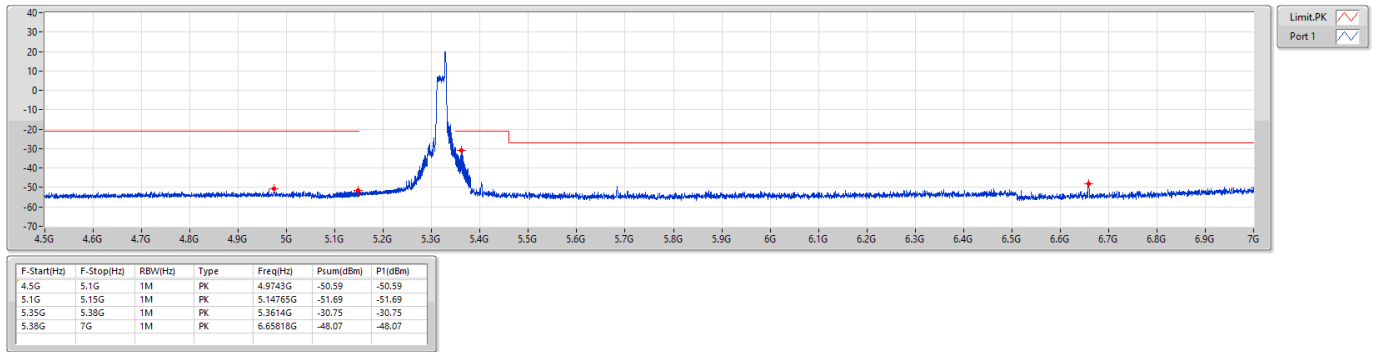

5.25-5.35GHz_802.11ax_HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5320MHz

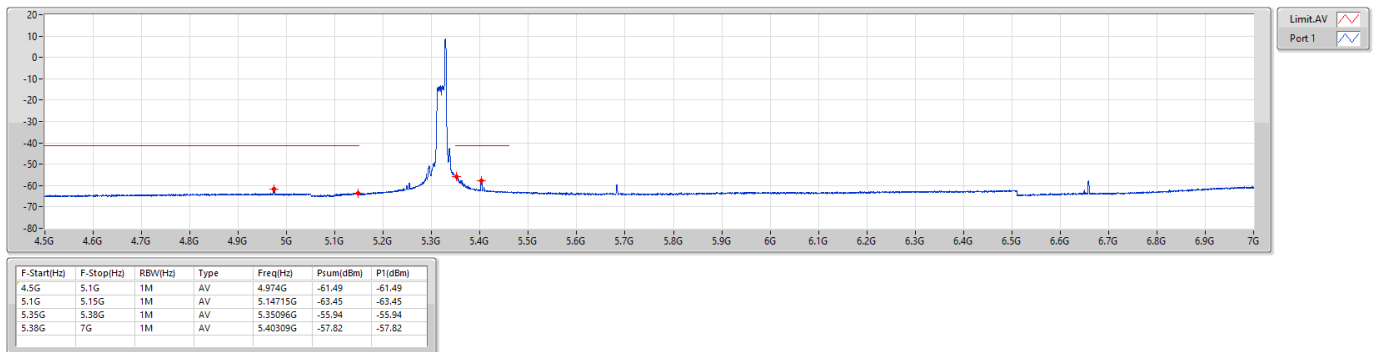




5.47-5.725GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5500MHz

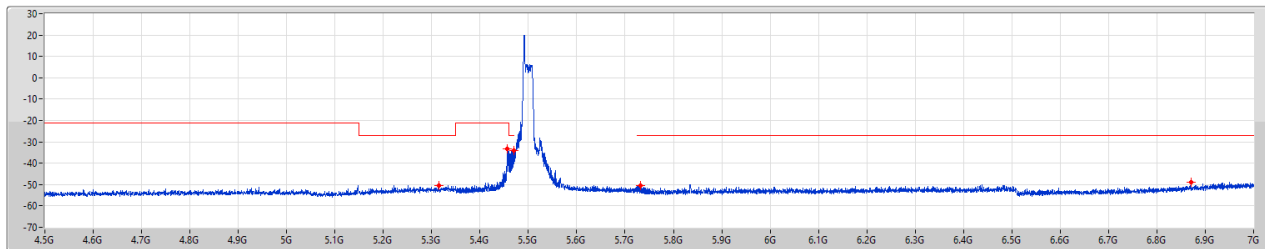


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.3143G	-50.36	-50.36
5.35G	5.46G	1M	PK	5.45637G	-33.30	-33.30
5.46G	5.47G	1M	PK	5.47G	-33.99	-33.99
5.725G	5.75G	1M	PK	5.73225G	-50.64	-50.64
5.75G	7G	1M	PK	6.87031G	-48.95	-48.95

5.47-5.725GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5500MHz

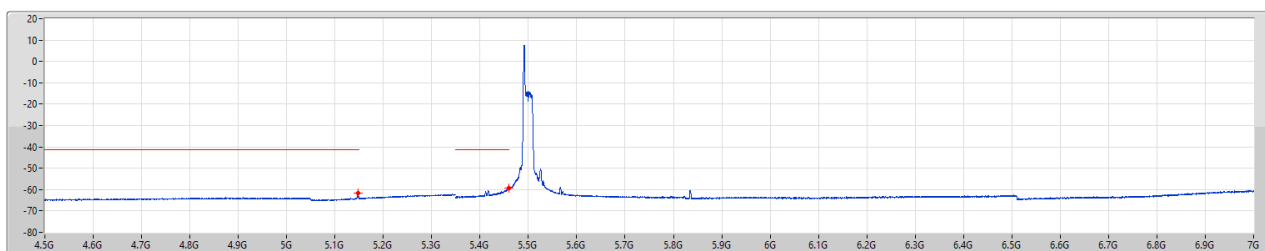

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.1477G	-61.78	-61.78
5.35G	5.47G	1M	AV	5.45968G	-59.11	-59.11



5.47-5.725GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5520MHz

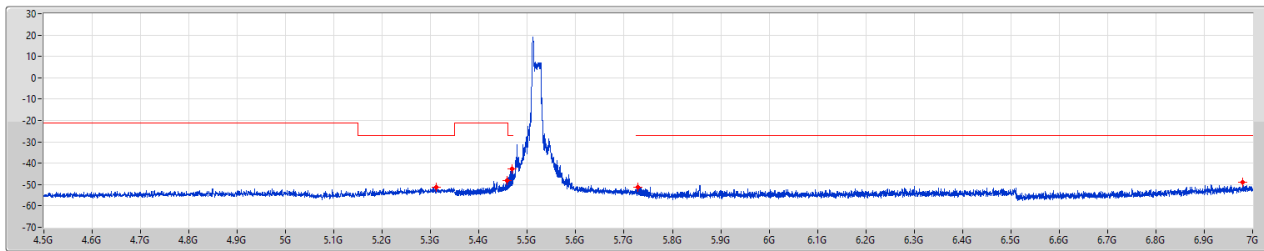


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.3109G	-51.40	-51.40
5.35G	5.46G	1M	PK	5.45791G	-48.22	-48.22
5.46G	5.47G	1M	PK	5.46712G	-42.70	-42.70
5.725G	5.75G	1M	PK	5.7284G	-51.26	-51.26
5.75G	7G	1M	PK	6.98G	-48.80	-48.80

5.47-5.725GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5520MHz

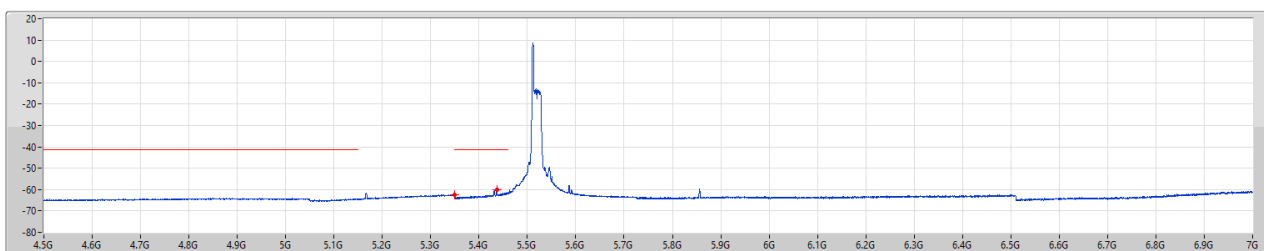


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.51	-62.51
5.35G	5.47G	1M	AV	5.43688G	-60.04	-60.04



5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5580MHz

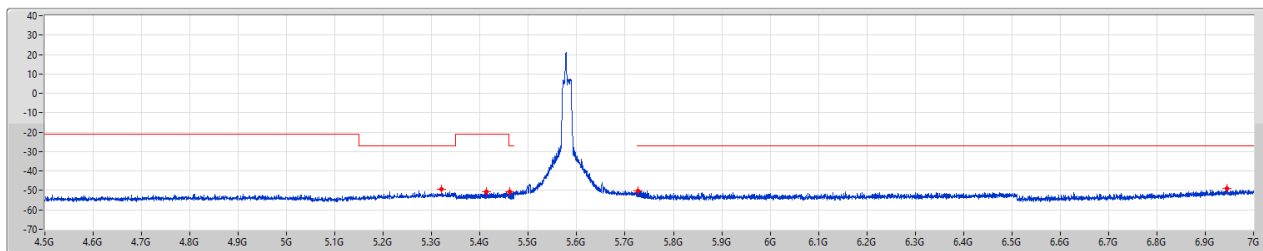


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.32068G	-49.50	-49.50
5.35G	5.46G	1M	PK	5.41402G	-50.64	-50.64
5.46G	5.47G	1M	PK	5.46096G	-50.63	-50.63
5.725G	5.75G	1M	PK	5.72728G	-50.10	-50.10
5.75G	7G	1M	PK	6.94563G	-49.01	-49.01

5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5580MHz

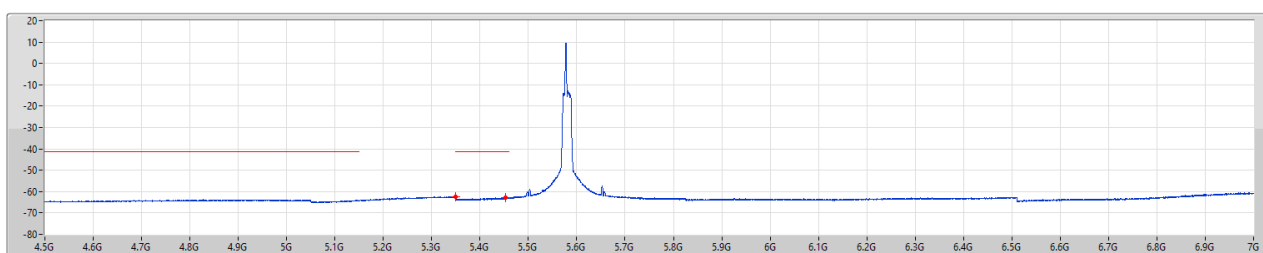


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.48	-62.48
5.35G	5.47G	1M	AV	5.45204G	-62.77	-62.77



5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5720MHz Straddle 5.47-5.725GHz

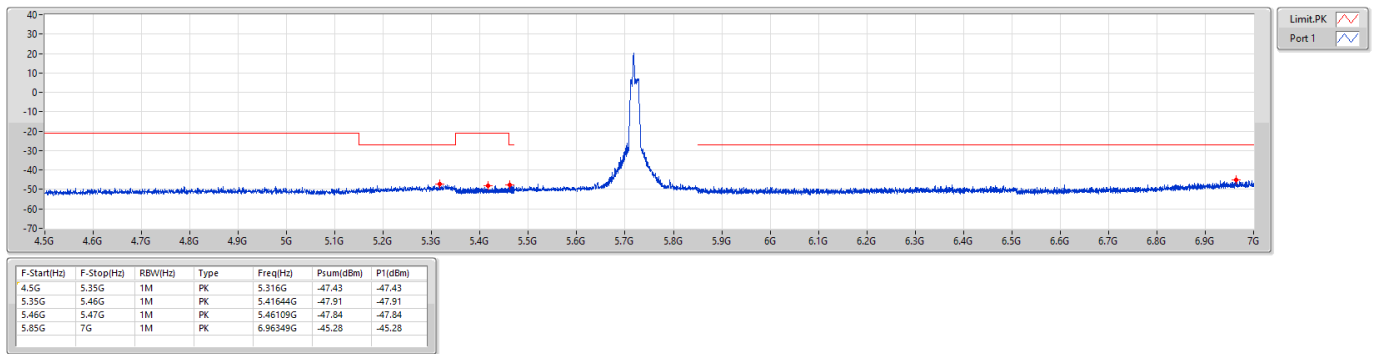

5.47-5.725GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5720MHz Straddle 5.47-5.725GHz

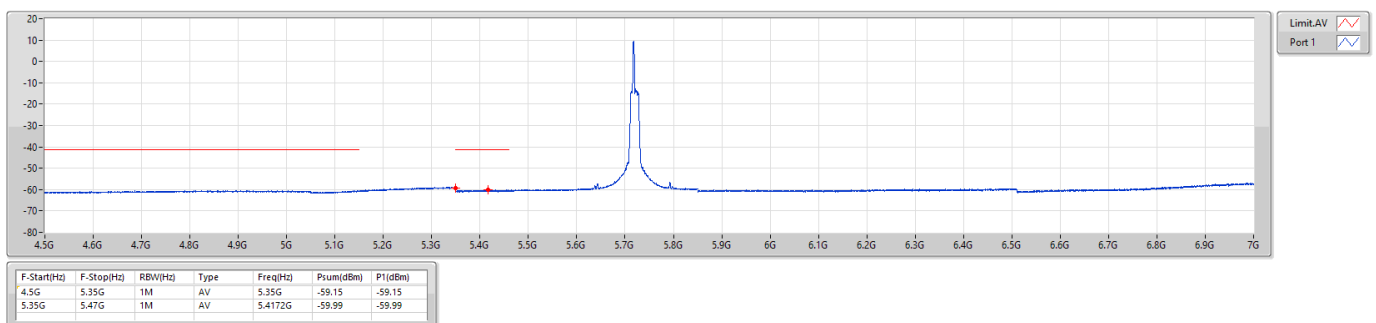




5.47-5.725GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5680MHz

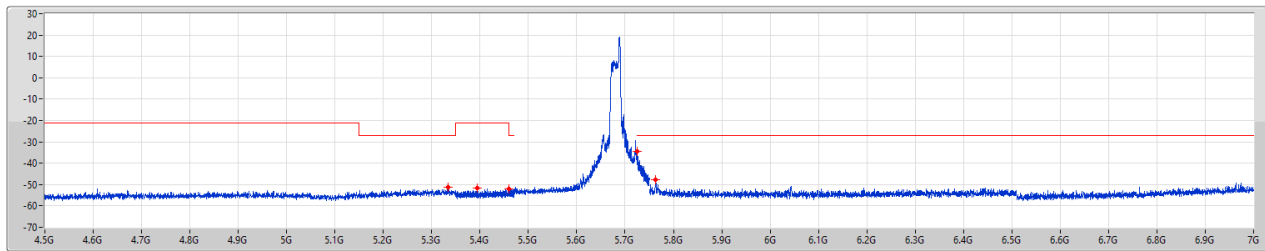


Limit:PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.33385G	-51.16	-51.16
5.35G	5.46G	1M	PK	5.39422G	-51.48	-51.48
5.46G	5.47G	1M	PK	5.4601G	-52.17	-52.17
5.725G	5.75G	1M	PK	5.725G	-34.30	-34.30
5.75G	7G	1M	PK	5.76375G	-47.75	-47.75

5.47-5.725GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5680MHz

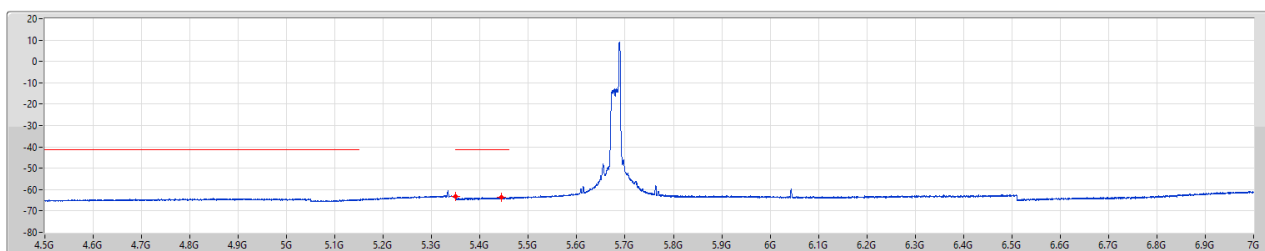

Limit:AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-63.27	-63.27
5.35G	5.47G	1M	AV	5.44348G	-63.68	-63.68



5.47-5.725GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5700MHz

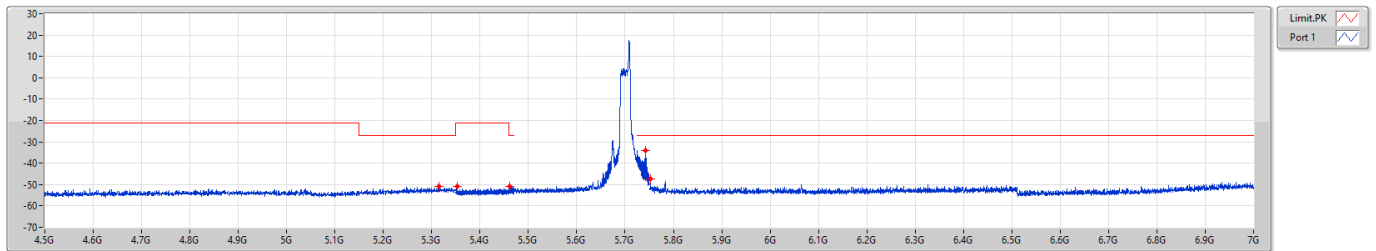

5.47-5.725GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5700MHz

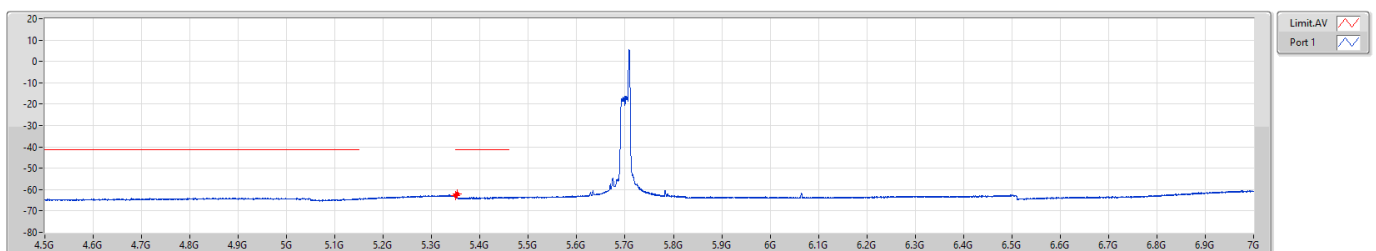




5.725-5.85GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5745MHz

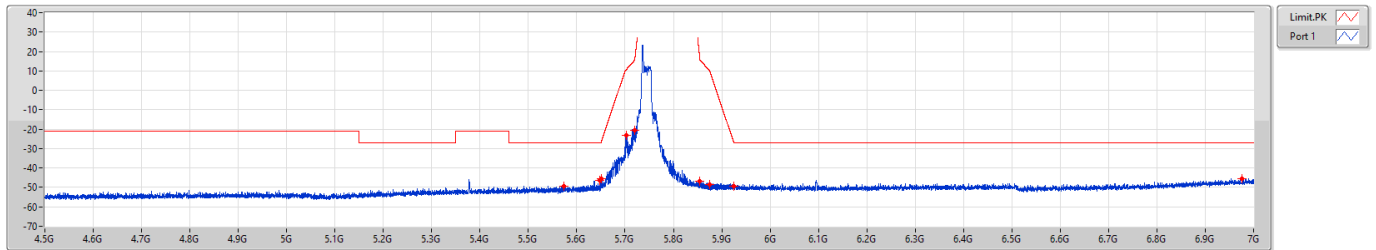

5.725-5.85GHz_802.11ax HEW20_RU26_Index0_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5745MHz

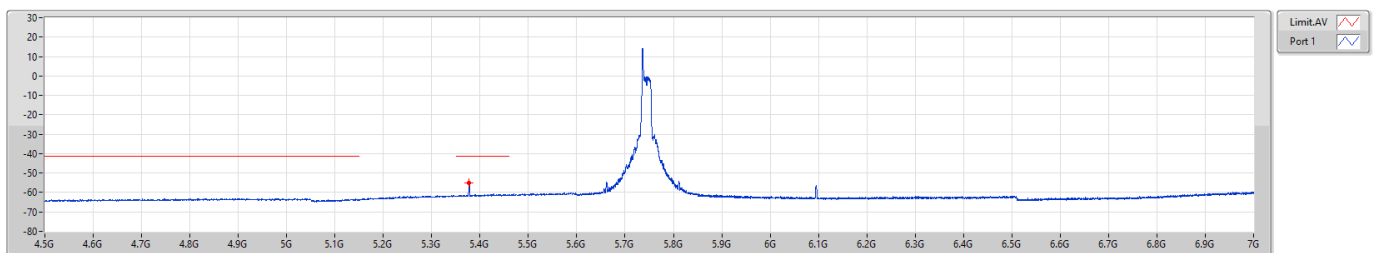




5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5785MHz

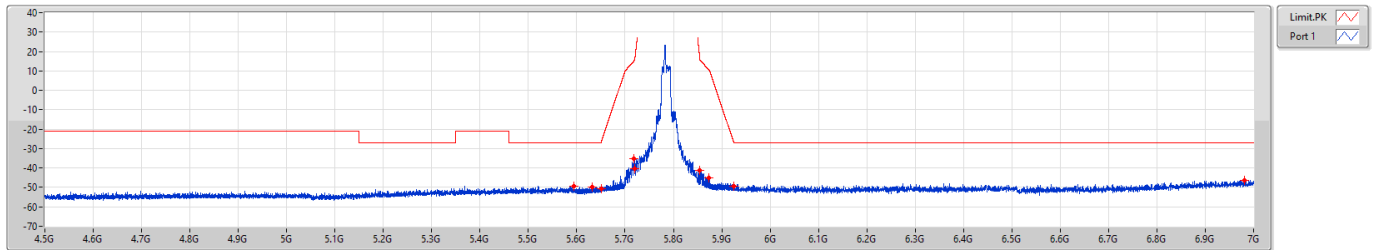


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.5934G	-49.25	-49.25
5.6G	5.65G	1M	PK	5.6327G	-49.61	-49.61
5.65G	5.7G	1M	PK	5.6501G	-50.57	-50.57
5.7G	5.72G	1M	PK	5.71842G	-35.29	-35.29
5.72G	5.725G	1M	PK	5.72006G	-40.54	-40.54
5.85G	5.855G	1M	PK	5.8549G	-41.08	-41.08
5.855G	5.875G	1M	PK	5.87362G	-44.91	-44.91
5.875G	5.925G	1M	PK	5.9249G	-49.44	-49.44
5.925G	7G	1M	PK	6.98119G	-46.36	-46.36

5.725-5.85GHz_802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5785MHz

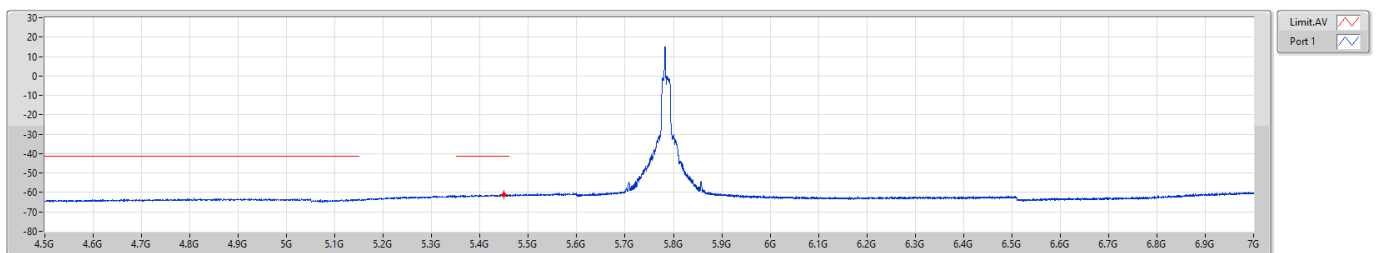


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.44985G	-61.08	-61.08



5.725-5.85GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5825MHz

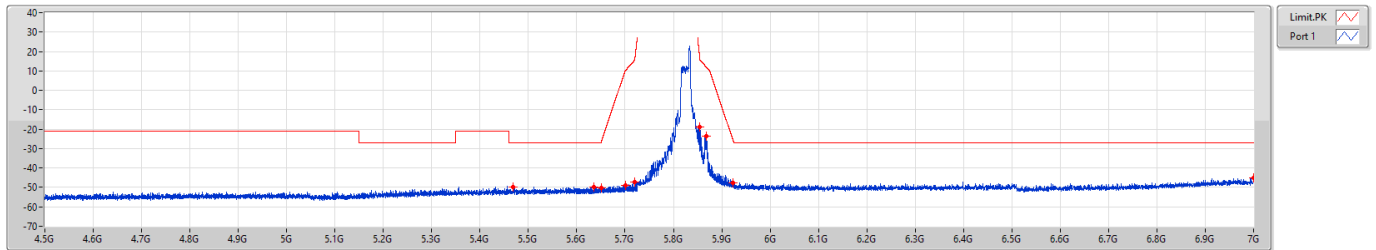


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.4691G	-49.69	-49.69
5.6G	5.65G	1M	PK	5.63535G	-49.85	-49.85
5.65G	5.7G	1M	PK	5.65095G	-50.41	-50.41
5.7G	5.72G	1M	PK	5.7009G	-48.79	-48.79
5.72G	5.725G	1M	PK	5.72036G	-47.09	-47.09
5.85G	5.855G	1M	PK	5.85391G	-18.87	-18.87
5.855G	5.875G	1M	PK	5.86794G	-23.42	-23.42
5.875G	5.925G	1M	PK	5.92375G	-47.46	-47.46
5.925G	7G	1M	PK	7G	-45.15	-45.15

5.725-5.85GHz_802.11ax HEW20_RU26_Index8_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5825MHz

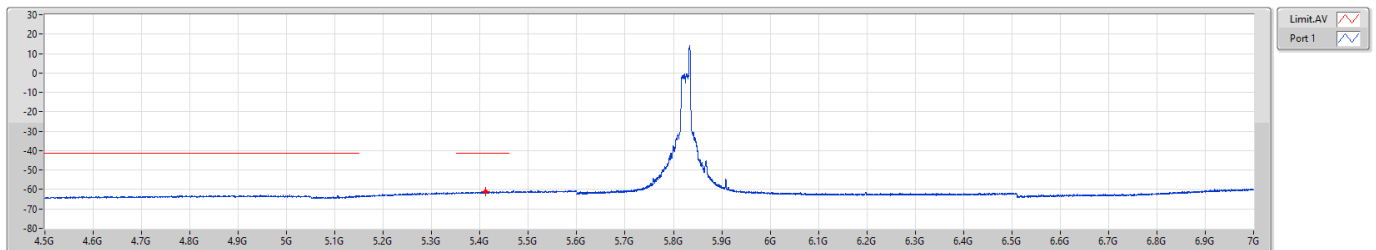


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.41135G	-60.96	-60.96



5.15-5.25GHz_802.11ax_HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5180MHz

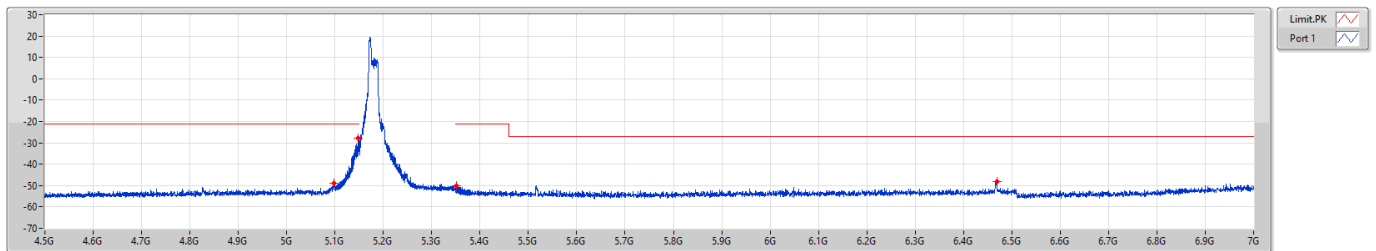


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	5.0973G	-48.72	-48.72
5.1G	5.15G	1M	PK	5.1481G	-27.94	-27.94
5.35G	5.38G	1M	PK	5.3518G	-49.95	-49.95
5.38G	7G	1M	PK	6.46945G	-48.00	-48.00

5.15-5.25GHz_802.11ax_HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5180MHz

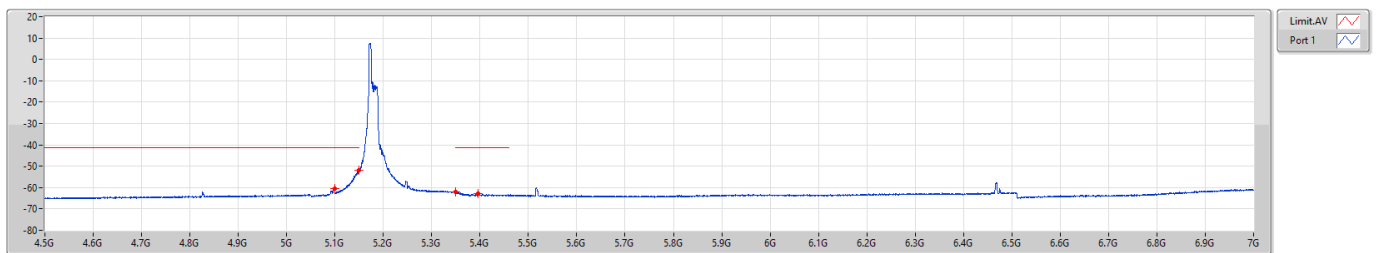


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	5.0988G	-60.44	-60.44
5.1G	5.15G	1M	AV	5.1497G	-52.04	-52.04
5.35G	5.38G	1M	AV	5.35027G	-62.04	-62.04
5.38G	7G	1M	AV	5.39661G	-62.89	-62.89



5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5200MHz

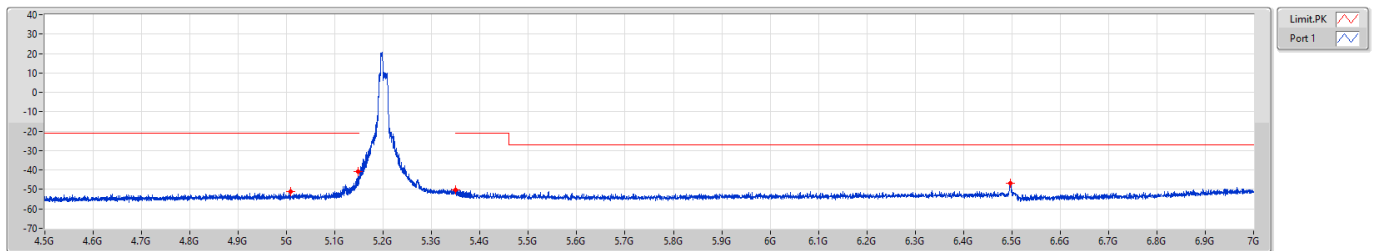


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	5.0082G	-51.08	-51.08
5.1G	5.15G	1M	PK	5.14755G	-40.85	-40.85
5.35G	5.38G	1M	PK	5.35009G	-50.38	-50.38
5.38G	7G	1M	PK	6.49699G	-46.93	-46.93

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5200MHz

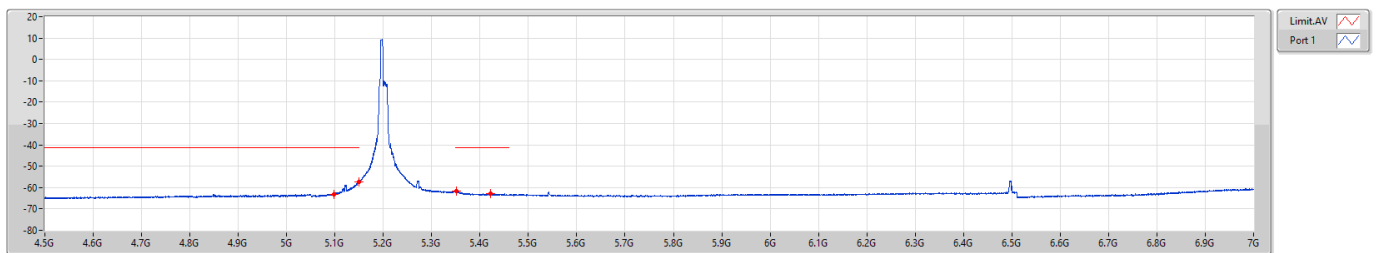


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	5.0985G	-63.02	-63.02
5.1G	5.15G	1M	AV	5.1493G	-57.33	-57.33
5.35G	5.38G	1M	AV	5.35039G	-61.64	-61.64
5.38G	7G	1M	AV	5.42212G	-62.62	-62.62



5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5240MHz

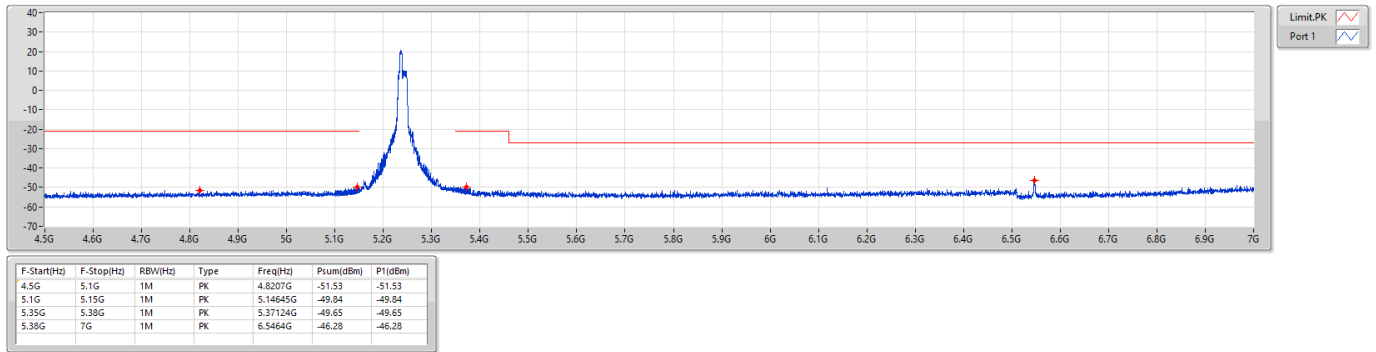

5.15-5.25GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5240MHz

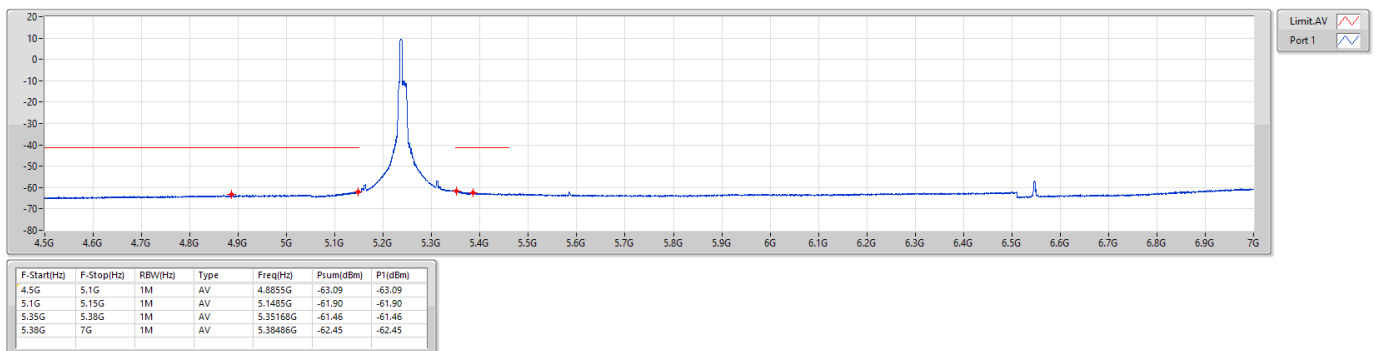




5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5260MHz

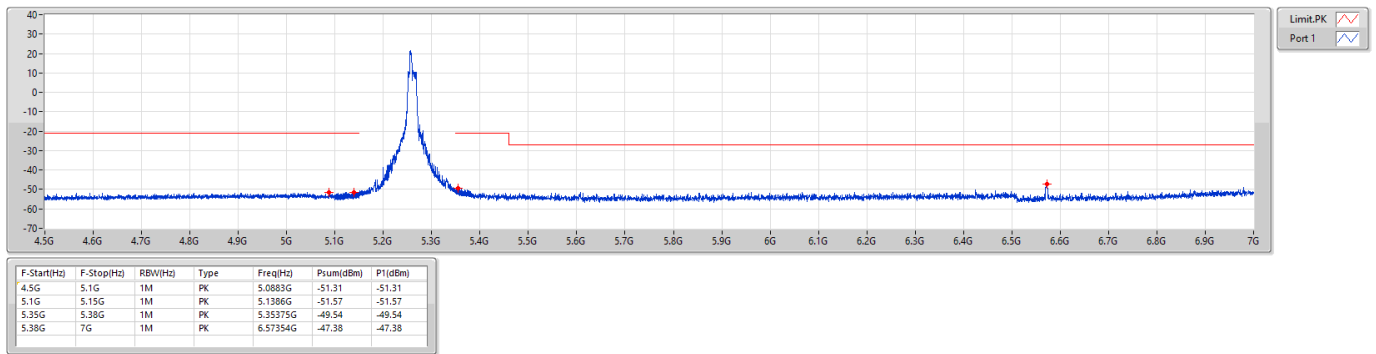

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5260MHz

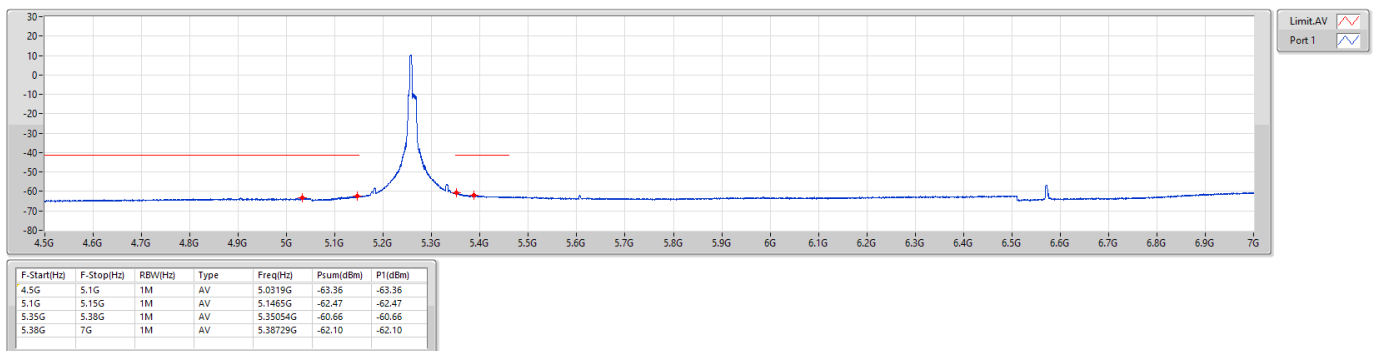




5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5300MHz

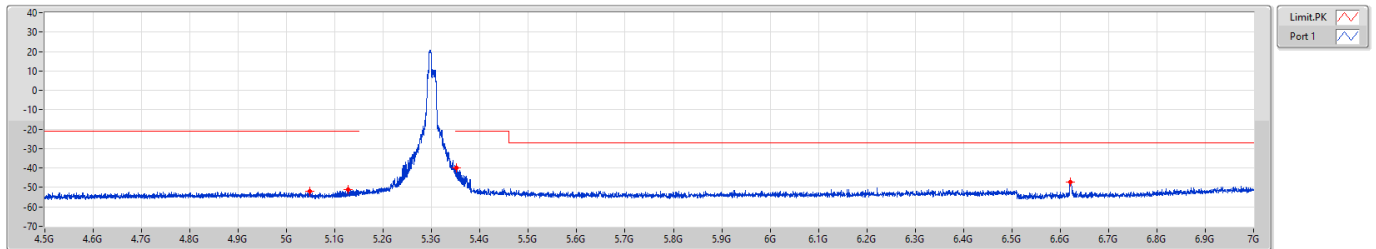


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	5.0478G	-51.79	-51.79
5.1G	5.15G	1M	PK	5.12665G	-50.99	-50.99
5.35G	5.38G	1M	PK	5.35072G	-39.98	-39.98
5.38G	7G	1M	PK	6.62173G	-47.03	-47.03

5.25-5.35GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5300MHz

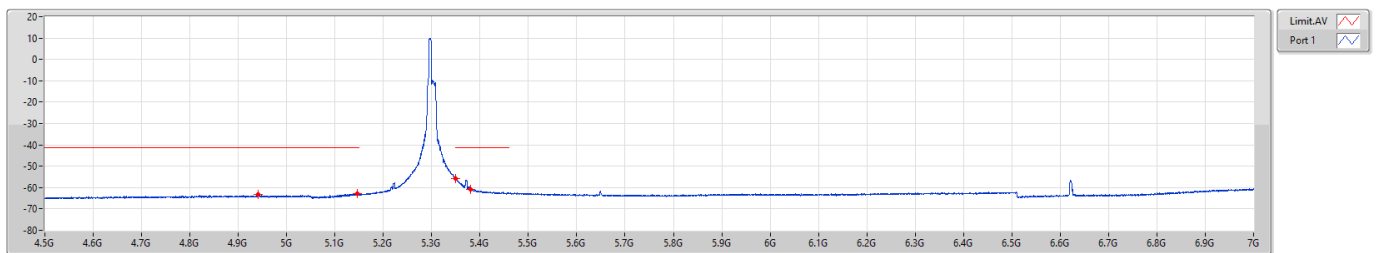


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	4.9416G	-63.06	-63.06
5.1G	5.15G	1M	AV	5.14595G	-62.75	-62.75
5.35G	5.38G	1M	AV	5.35003G	-55.90	-55.90
5.38G	7G	1M	AV	5.38041G	-60.72	-60.72



5.25-5.35GHz_802.11ax_HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5320MHz

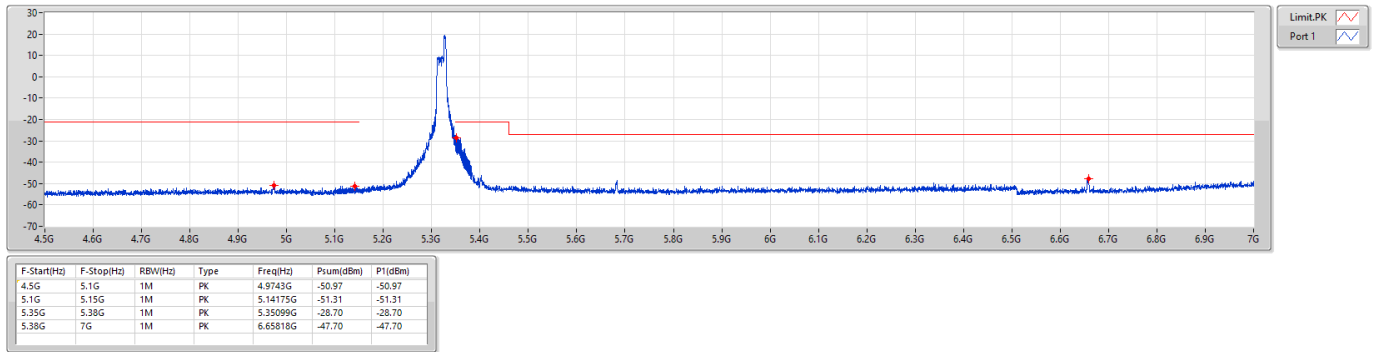

5.25-5.35GHz_802.11ax_HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]


5320MHz

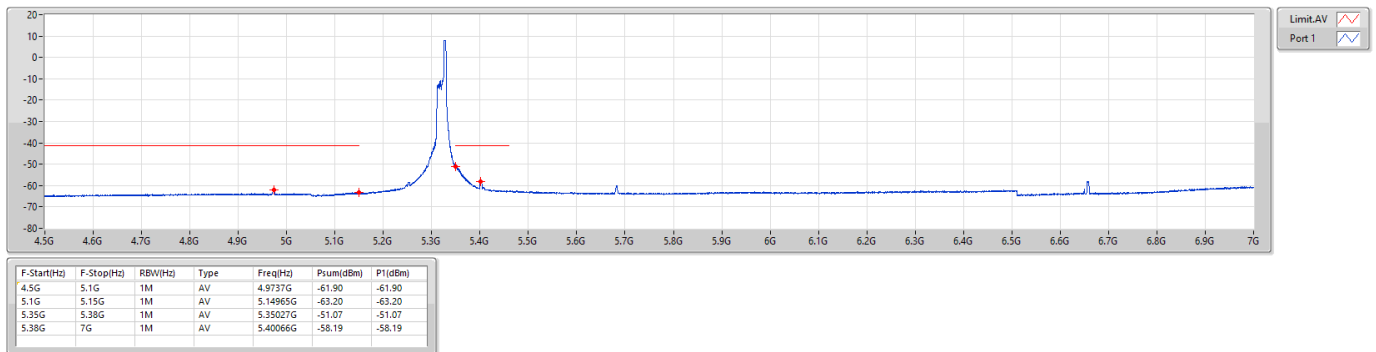

5.47-5.725GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5500MHz

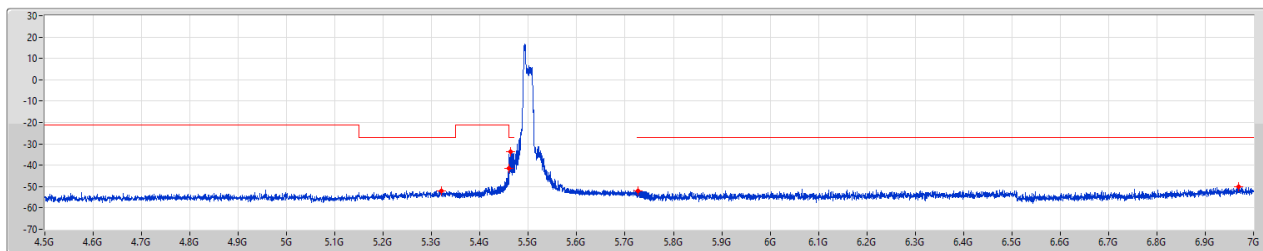


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.32025G	-51.87	-51.87
5.35G	5.46G	1M	PK	5.46G	-41.62	-41.62
5.46G	5.47G	1M	PK	5.46276G	-33.73	-33.73
5.725G	5.75G	1M	PK	5.7274G	-51.84	-51.84
5.75G	7G	1M	PK	6.96875G	-50.16	-50.16

5.47-5.725GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5500MHz

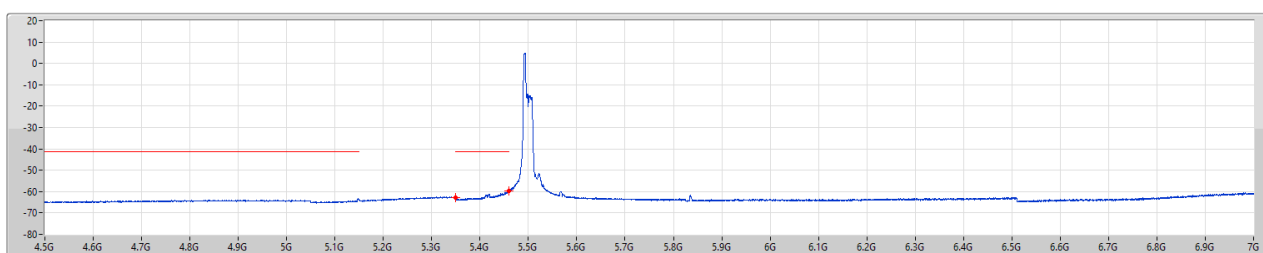


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.80	-62.80
5.35G	5.47G	1M	AV	5.45932G	-59.74	-59.74



5.47-5.725GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5520MHz

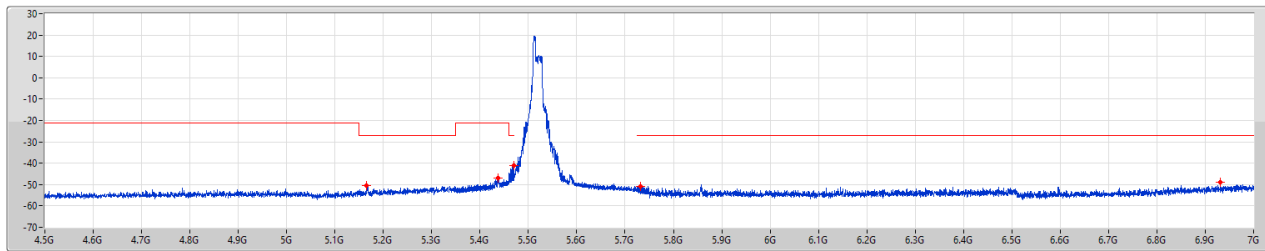


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.16555G	-50.66	-50.66
5.35G	5.46G	1M	PK	5.43767G	-46.89	-46.89
5.46G	5.47G	1M	PK	5.46953G	-41.15	-41.15
5.725G	5.75G	1M	PK	5.73225G	-50.69	-50.69
5.75G	7G	1M	PK	6.93063G	-49.04	-49.04

5.47-5.725GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5520MHz

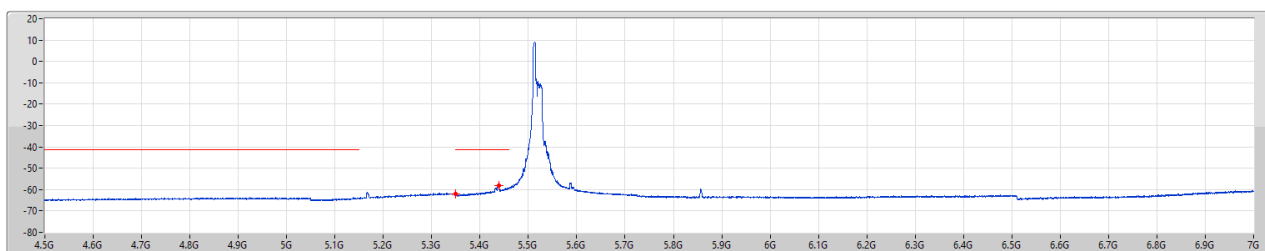

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-61.88	-61.88
5.35G	5.47G	1M	AV	5.43892G	-58.27	-58.27



5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5580MHz

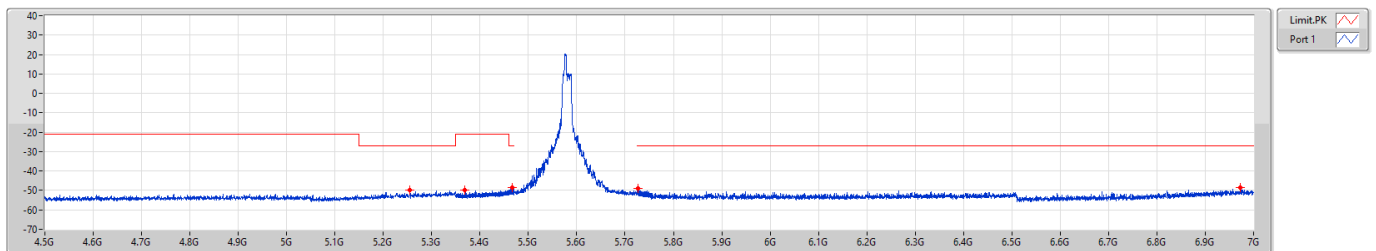


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.25523G	-49.62	-49.62
5.35G	5.46G	1M	PK	5.36771G	-49.90	-49.90
5.46G	5.47G	1M	PK	5.4661G	-48.61	-48.61
5.725G	5.75G	1M	PK	5.72613G	-49.16	-49.16
5.75G	7G	1M	PK	6.97219G	-48.73	-48.73

5.47-5.725GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5580MHz

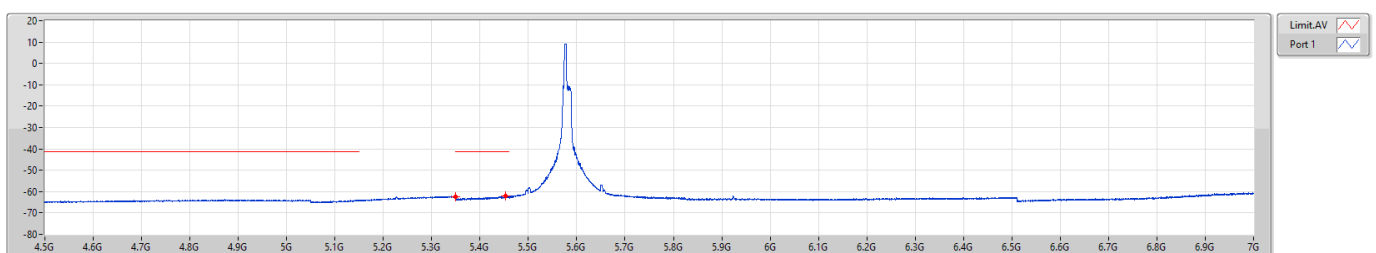


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.28	-62.28
5.35G	5.47G	1M	AV	5.45308G	-62.22	-62.22



5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5720MHz Straddle 5.47-5.725GHz

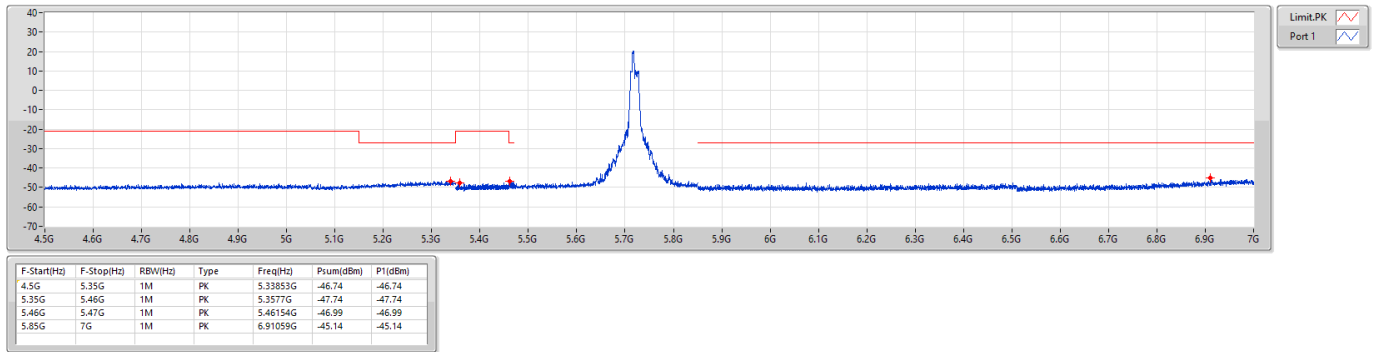

5.47-5.725GHz_802.11ax_HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5720MHz Straddle 5.47-5.725GHz

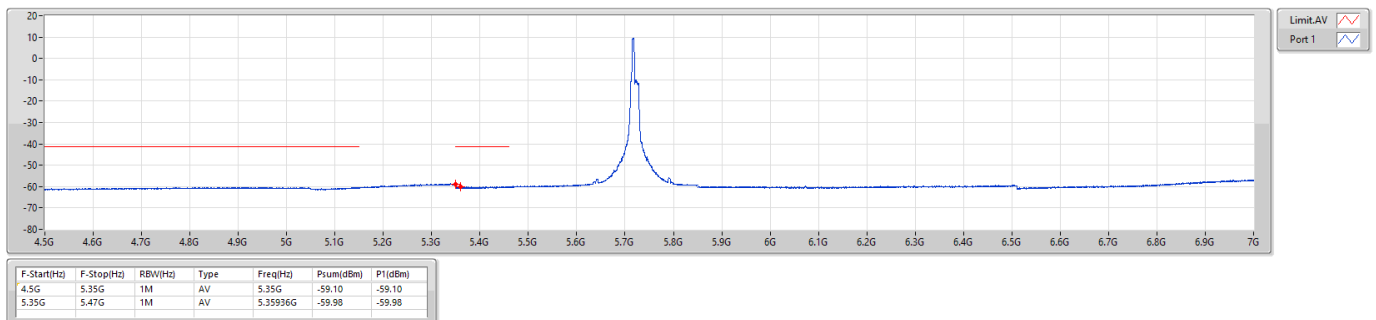




5.47-5.725GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5680MHz

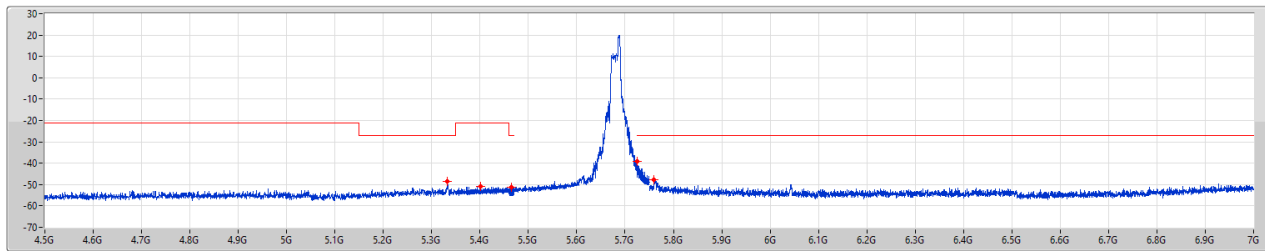


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.33258G	-48.47	-48.47
5.35G	5.46G	1M	PK	5.40137G	-50.85	-50.85
5.46G	5.47G	1M	PK	5.4647G	-51.18	-51.18
5.725G	5.75G	1M	PK	5.72503G	-39.00	-39.00
5.75G	7G	1M	PK	5.76G	-47.60	-47.60

5.47-5.725GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5680MHz

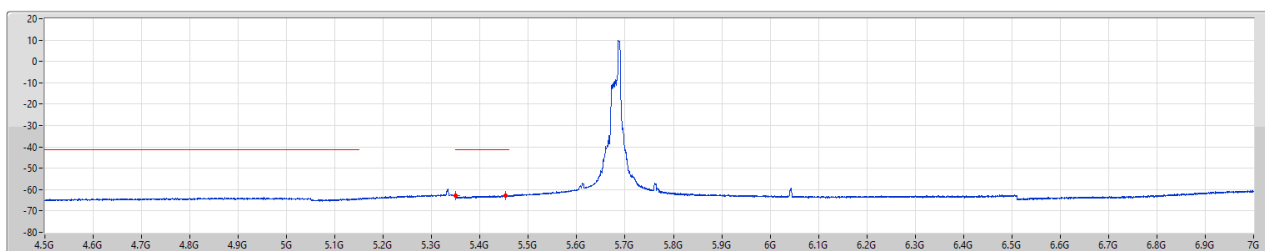


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.66	-62.66
5.35G	5.47G	1M	AV	5.45224G	-62.63	-62.63



5.47-5.725GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5700MHz

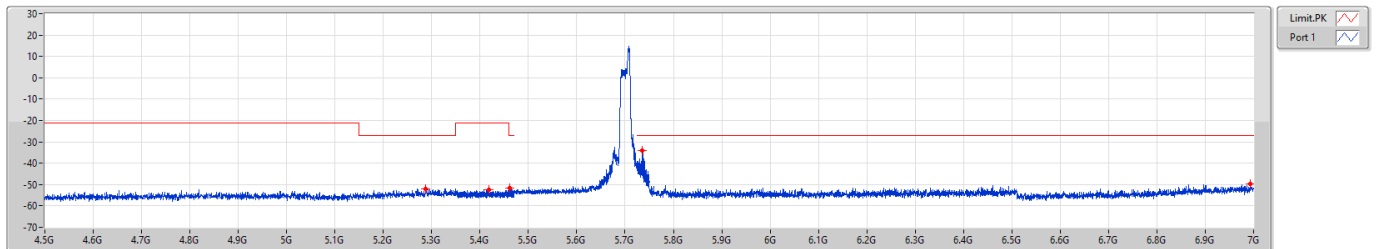

5.47-5.725GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5700MHz

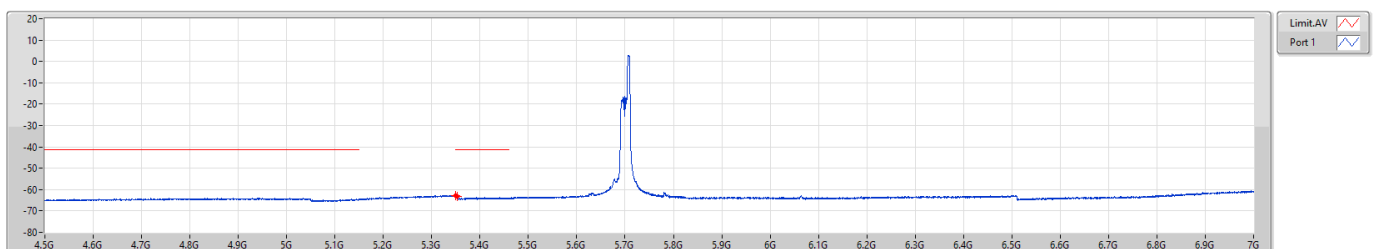




5.725-5.85GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5745MHz

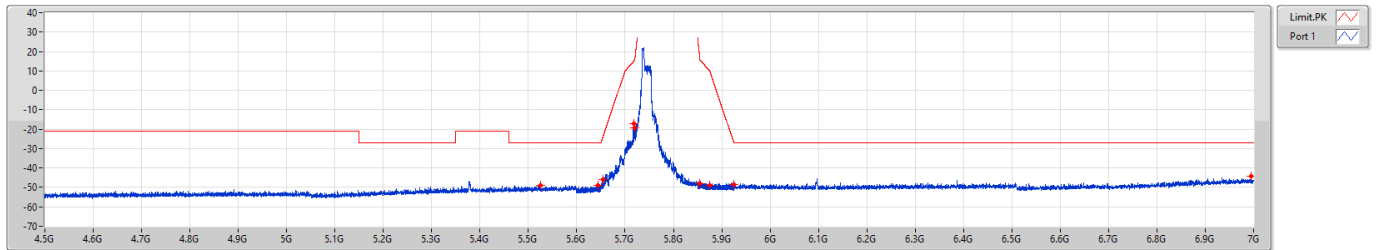

5.725-5.85GHz_802.11ax HEW20_RU52_Index37_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5745MHz

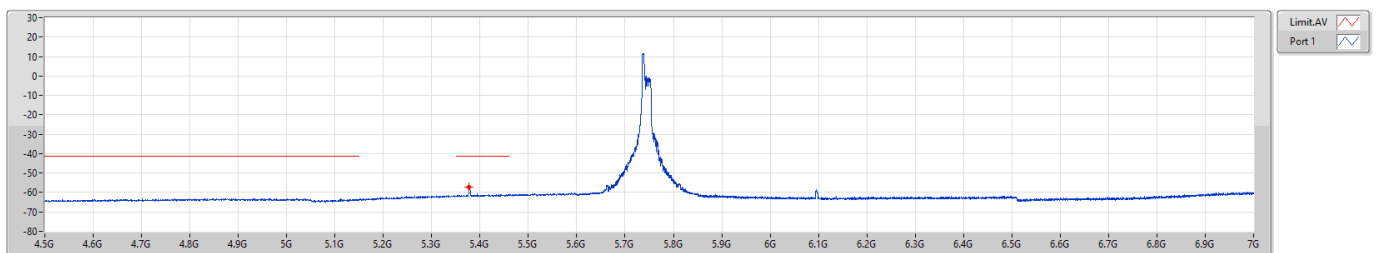




5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5785MHz

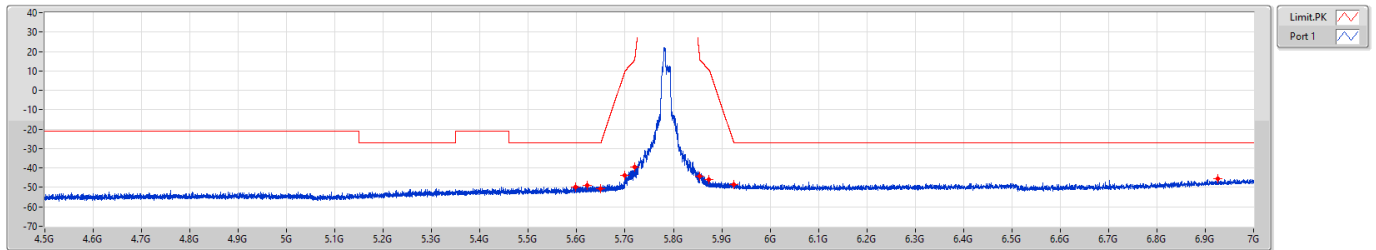


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.59762G	-49.65	-49.65
5.6G	5.65G	1M	PK	5.62225G	-49.15	-49.15
5.65G	5.7G	1M	PK	5.65G	-50.60	-50.60
5.7G	5.72G	1M	PK	5.70002G	-43.97	-43.97
5.72G	5.725G	1M	PK	5.72035G	-39.45	-39.45
5.85G	5.855G	1M	PK	5.855G	-44.09	-44.09
5.855G	5.875G	1M	PK	5.87276G	-45.94	-45.94
5.875G	5.925G	1M	PK	5.925G	-48.53	-48.53
5.925G	7G	1M	PK	6.92583G	-45.71	-45.71

5.725-5.85GHz_802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5785MHz

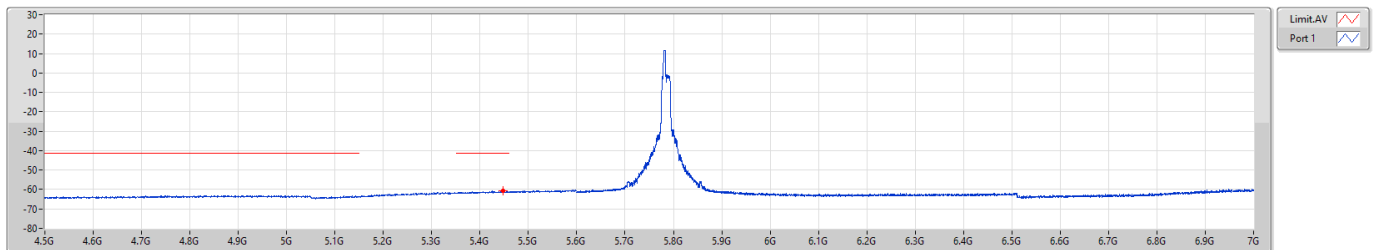


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.4482G	-60.87	-60.87



5.725-5.85GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5825MHz

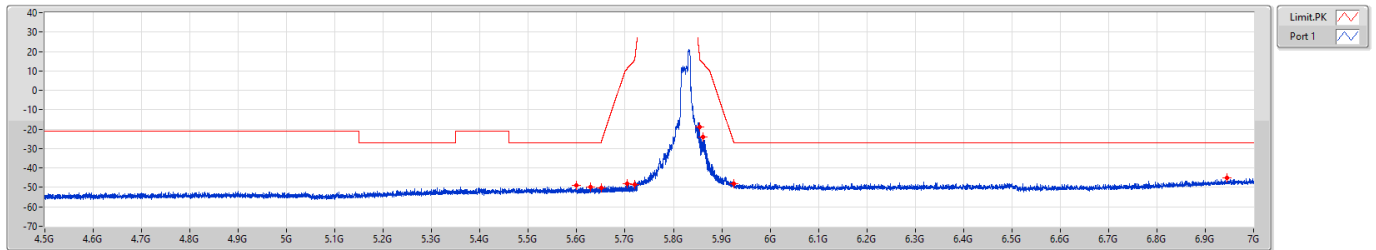


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.5989G	-48.77	-48.77
5.6G	5.65G	1M	PK	5.6279G	-49.65	-49.65
5.65G	5.7G	1M	PK	5.6505G	-50.14	-50.14
5.7G	5.72G	1M	PK	5.70462G	-48.11	-48.11
5.72G	5.725G	1M	PK	5.7202G	-48.64	-48.64
5.85G	5.855G	1M	PK	5.85378G	-18.89	-18.89
5.855G	5.875G	1M	PK	5.86146G	-23.87	-23.87
5.875G	5.925G	1M	PK	5.9249G	-48.06	-48.06
5.925G	7G	1M	PK	6.94518G	-45.21	-45.21

5.725-5.85GHz_802.11ax HEW20_RU52_Index40_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5825MHz

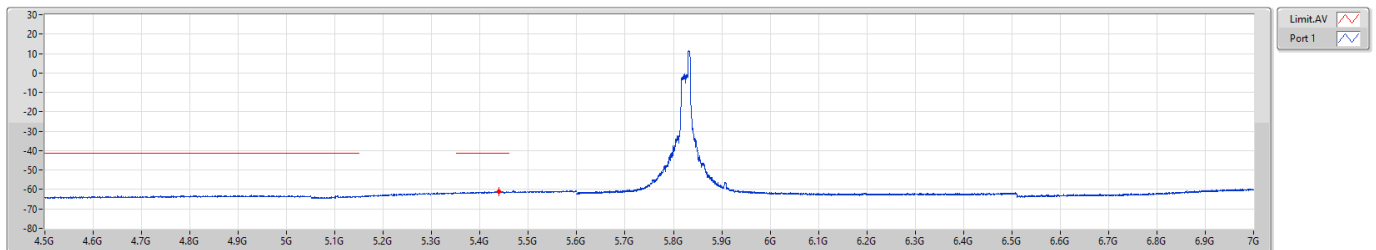


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.4383G	-61.11	-61.11



5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5180MHz

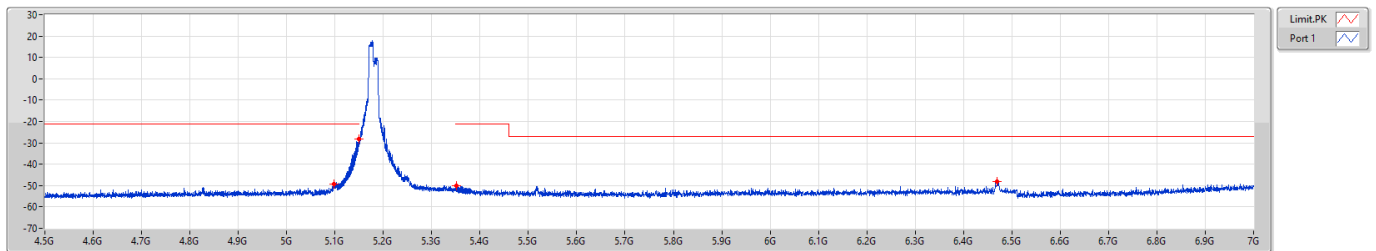


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	5.0973G	-49.18	-49.18
5.1G	5.15G	1M	PK	5.14945G	-28.21	-28.21
5.35G	5.38G	1M	PK	5.35105G	-49.99	-49.99
5.38G	7G	1M	PK	6.46905G	-48.25	-48.25

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5180MHz

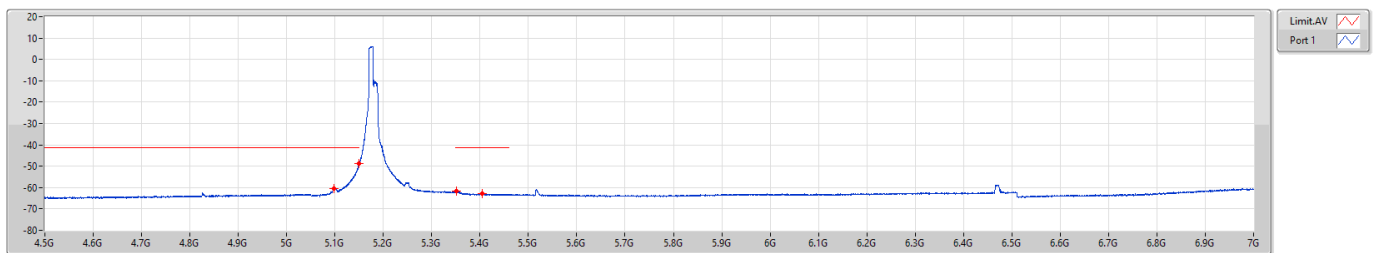


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	5.0982G	-60.59	-60.59
5.1G	5.15G	1M	AV	5.14995G	-48.88	-48.88
5.35G	5.38G	1M	AV	5.35126G	-61.78	-61.78
5.38G	7G	1M	AV	5.4039G	-62.82	-62.82



5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5200MHz

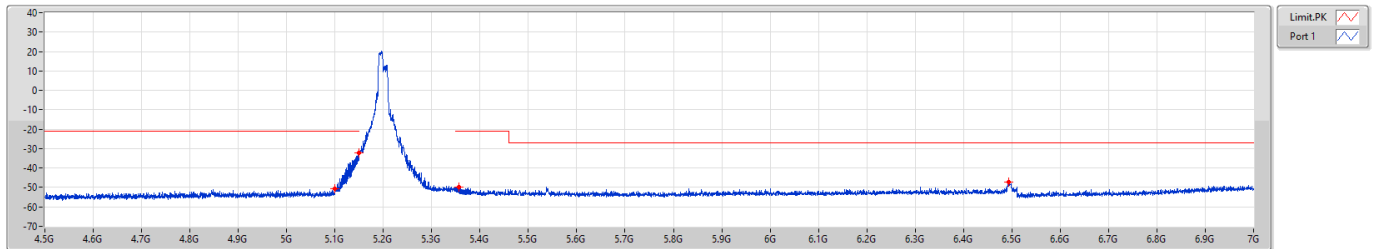

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5200MHz

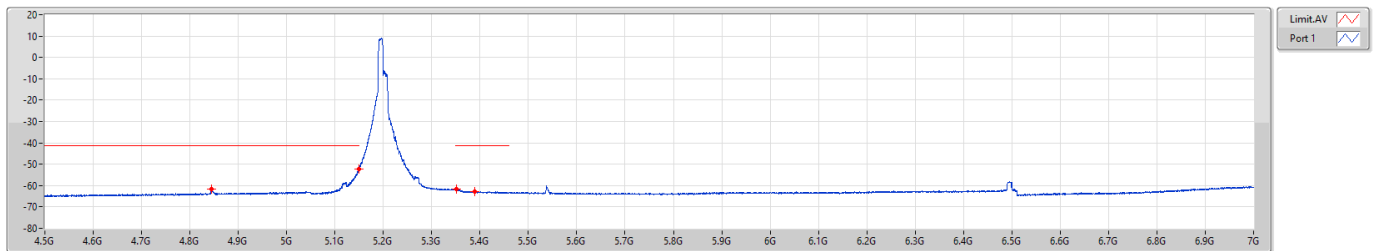




5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5240MHz

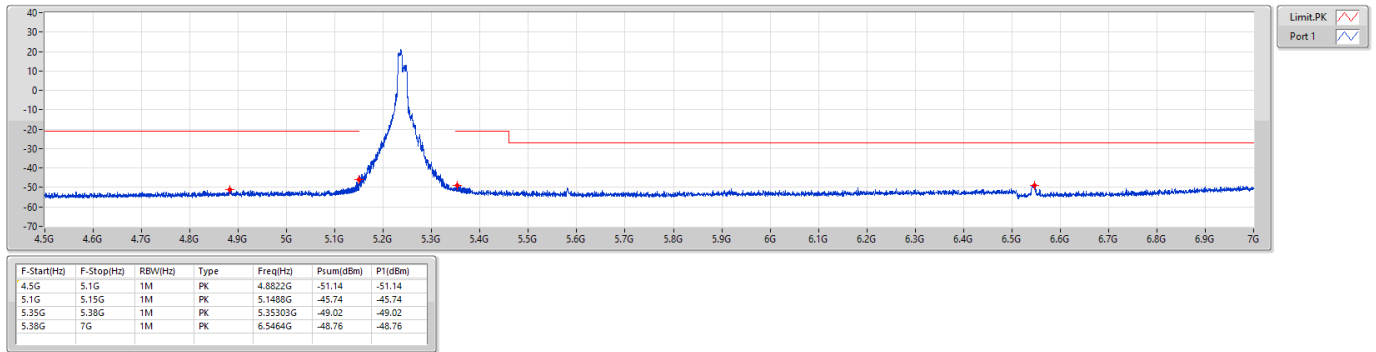

5.15-5.25GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5240MHz

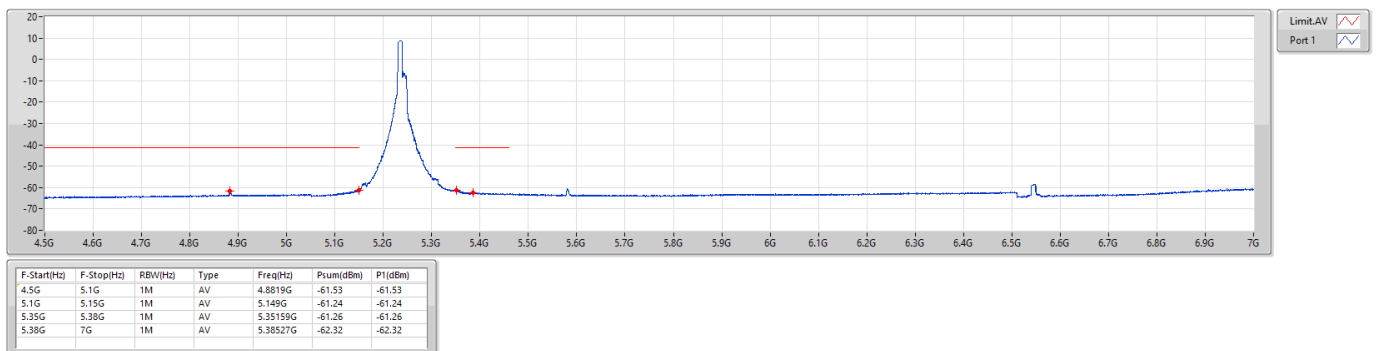




5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5260MHz

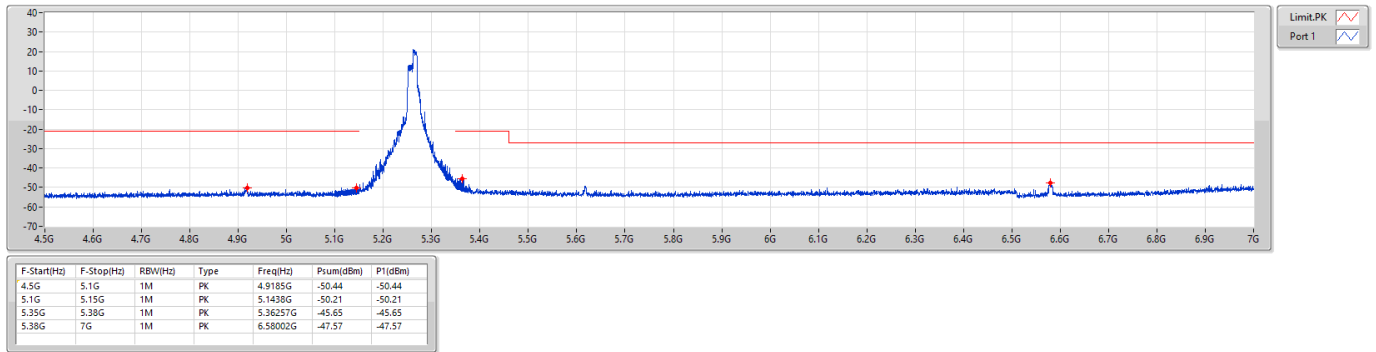

5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5260MHz

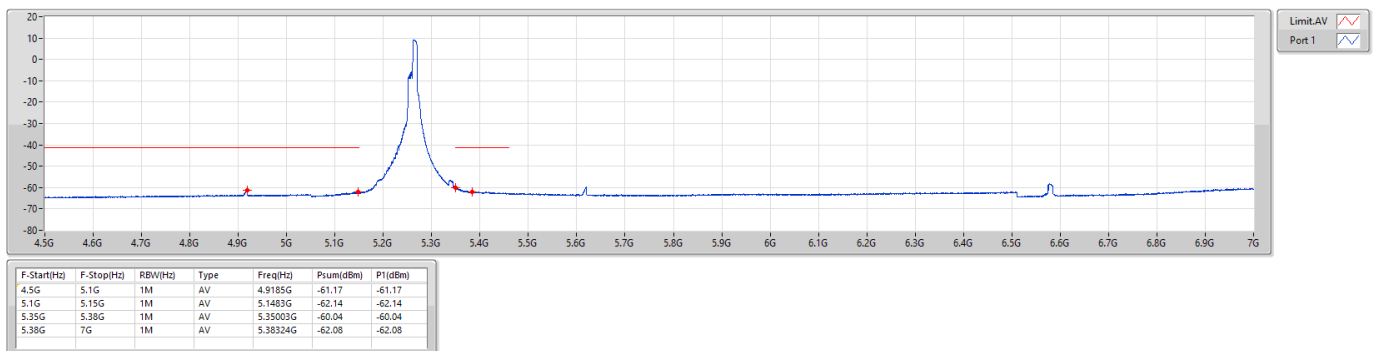




5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5300MHz

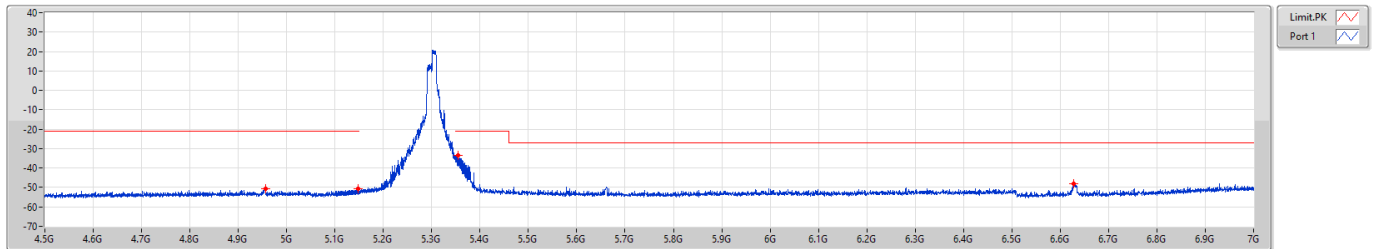


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	PK	4.9563G	-50.53	-50.53
5.1G	5.15G	1M	PK	5.1471G	-50.80	-50.80
5.35G	5.38G	1M	PK	5.35471G	-33.31	-33.31
5.38G	7G	1M	PK	6.62821G	-47.92	-47.92

5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5300MHz

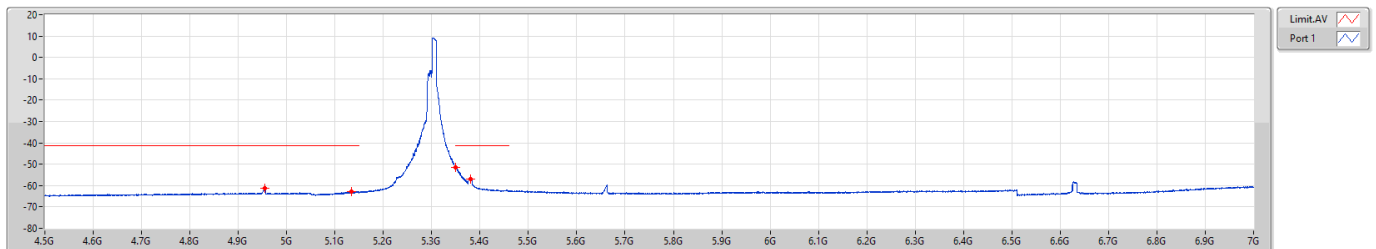


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.1G	1M	AV	4.9554G	-61.40	-61.40
5.1G	5.15G	1M	AV	5.134G	-62.76	-62.76
5.35G	5.38G	1M	AV	5.35024G	-51.35	-51.35
5.38G	7G	1M	AV	5.38122G	-57.05	-57.05

5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5320MHz

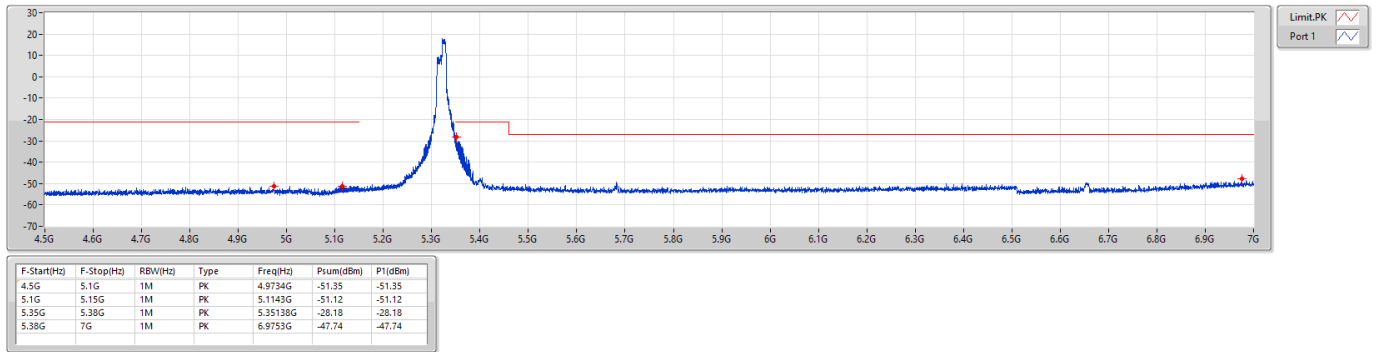

5.25-5.35GHz_802.11ax_HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5320MHz

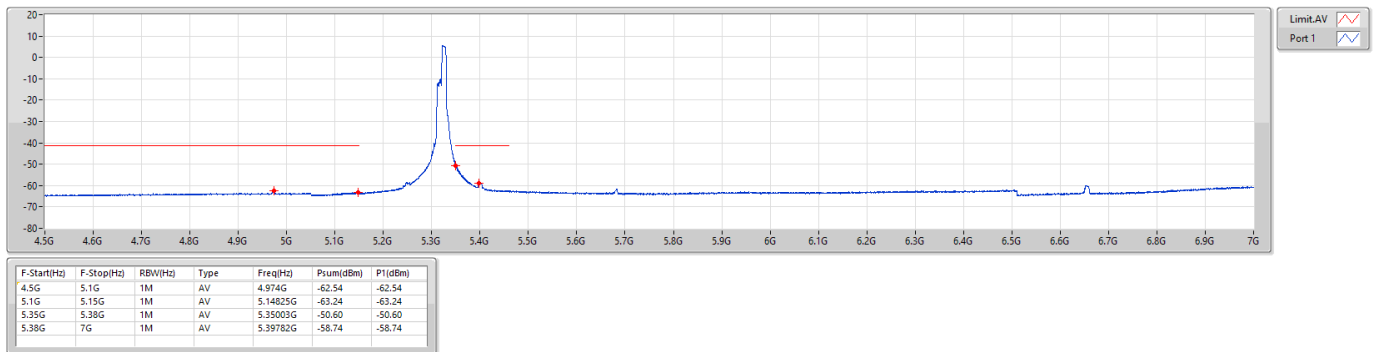




5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5500MHz

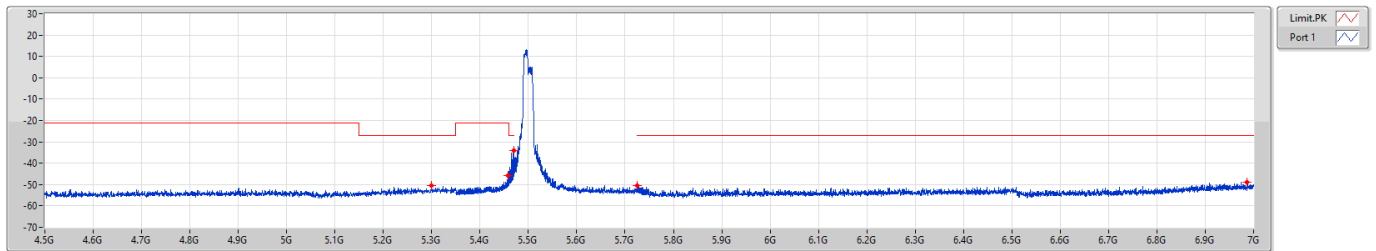


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.29985G	-50.37	-50.37
5.35G	5.46G	1M	PK	5.45946G	-45.60	-45.60
5.46G	5.47G	1M	PK	5.46966G	-33.87	-33.87
5.725G	5.75G	1M	PK	5.72525G	-50.62	-50.62
5.75G	7G	1M	PK	6.98625G	-48.77	-48.77

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5500MHz

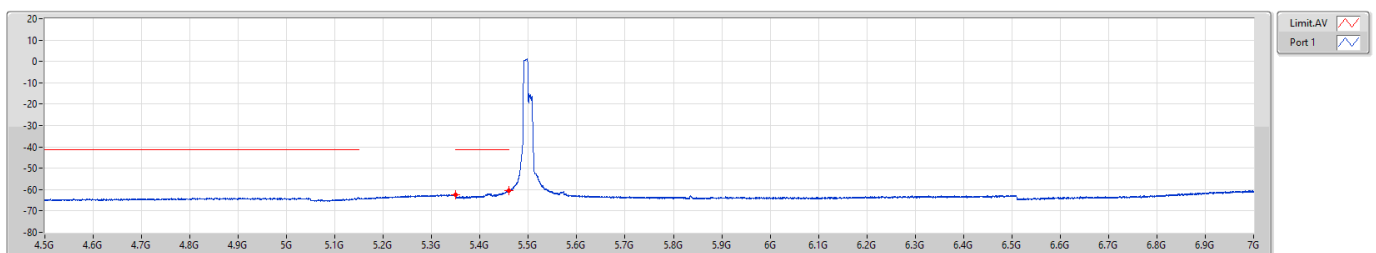


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.35	-62.35
5.35G	5.47G	1M	AV	5.45992G	-60.51	-60.51



5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5520MHz

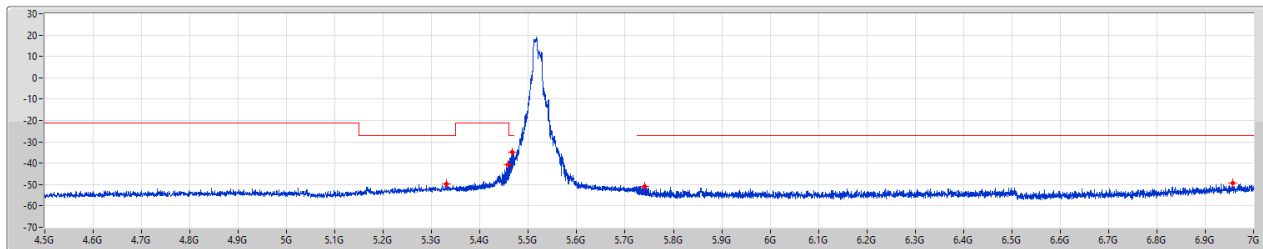


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.3313G	-49.85	-49.85
5.35G	5.46G	1M	PK	5.45888G	-40.63	-40.63
5.46G	5.47G	1M	PK	5.46697G	-34.95	-34.95
5.725G	5.75G	1M	PK	5.73983G	-50.72	-50.72
5.75G	7G	1M	PK	6.95656G	-49.21	-49.21

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5520MHz

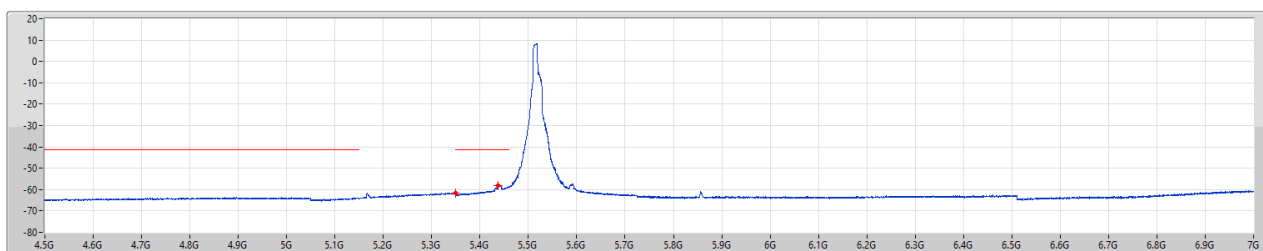


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-61.70	-61.70
5.35G	5.47G	1M	AV	5.43796G	-57.94	-57.94



5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5580MHz

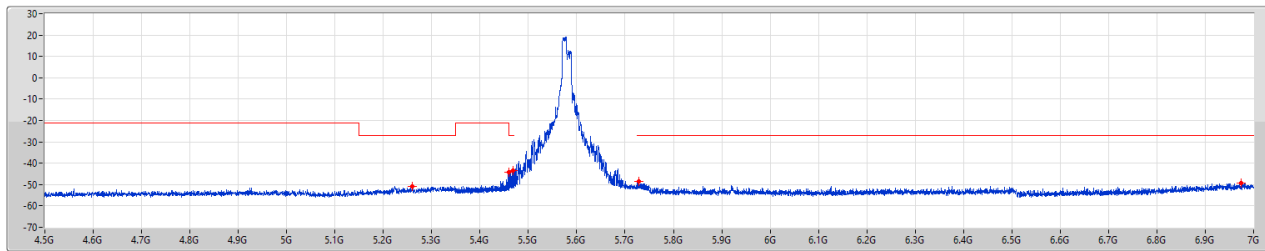


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.25948G	-50.75	-50.75
5.35G	5.46G	1M	PK	5.45945G	-44.33	-44.33
5.46G	5.47G	1M	PK	5.46771G	-43.30	-43.30
5.725G	5.75G	1M	PK	5.7285G	-48.63	-48.63
5.75G	7G	1M	PK	6.97375G	-49.26	-49.26

5.47-5.725GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5580MHz

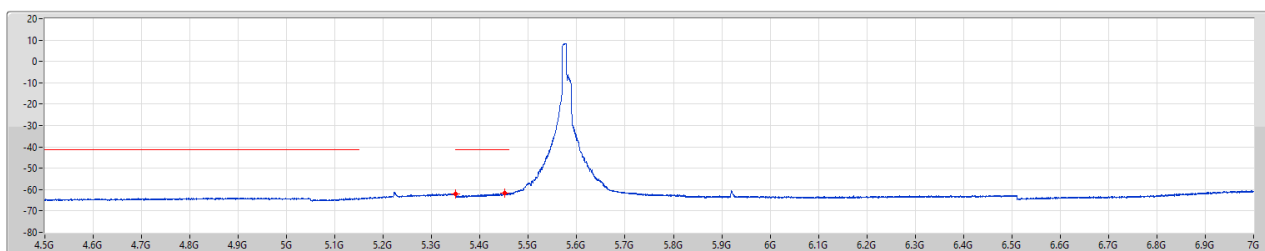

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.11	-62.11
5.35G	5.47G	1M	AV	5.45188G	-61.69	-61.69



5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5720MHz Straddle 5.47-5.725GHz

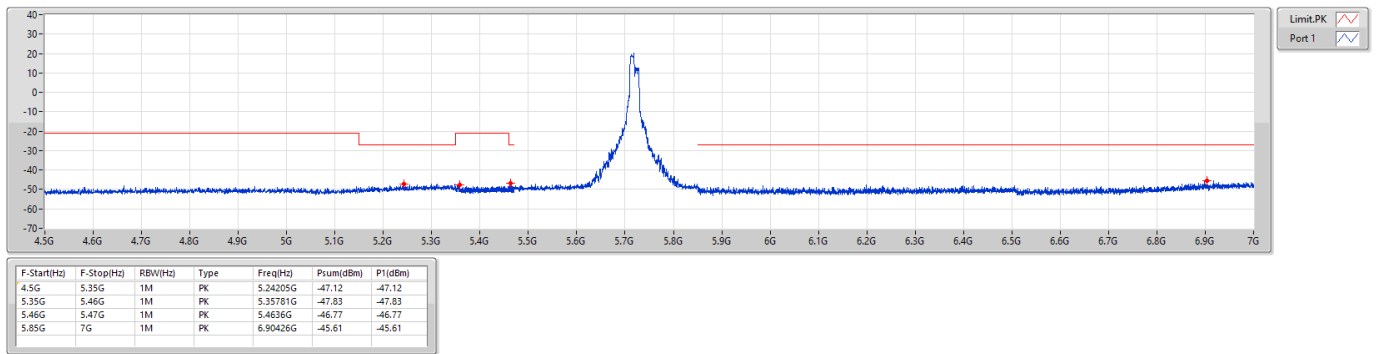

5.47-5.725GHz_802.11ax_HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5720MHz Straddle 5.47-5.725GHz

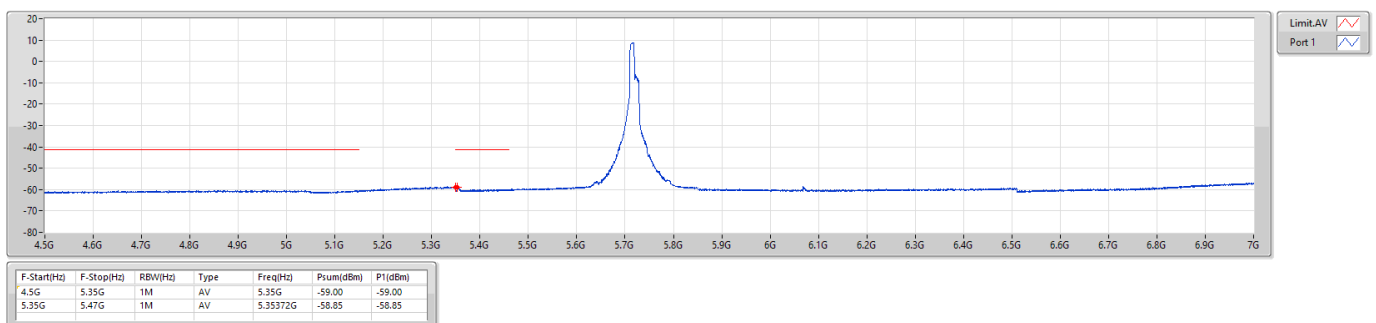




5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5660MHz

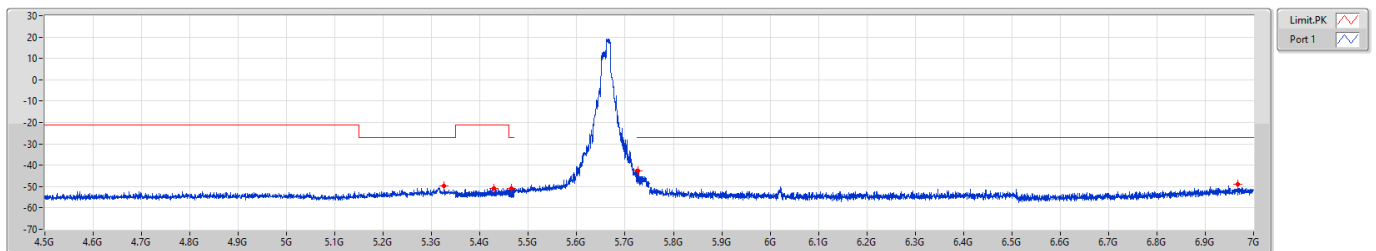

5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5660MHz

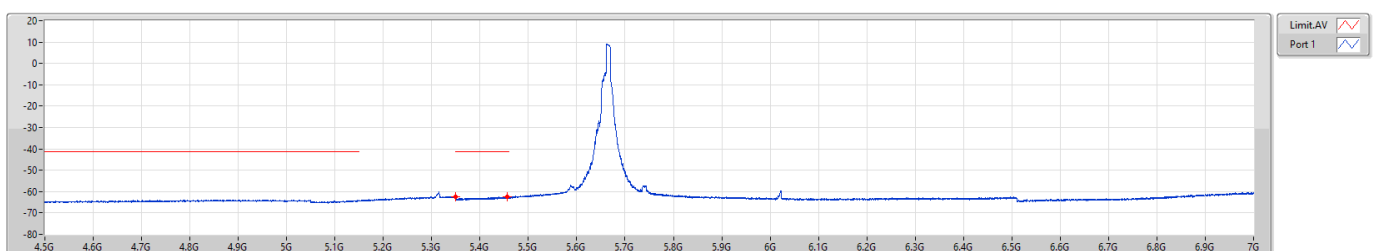




5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5680MHz

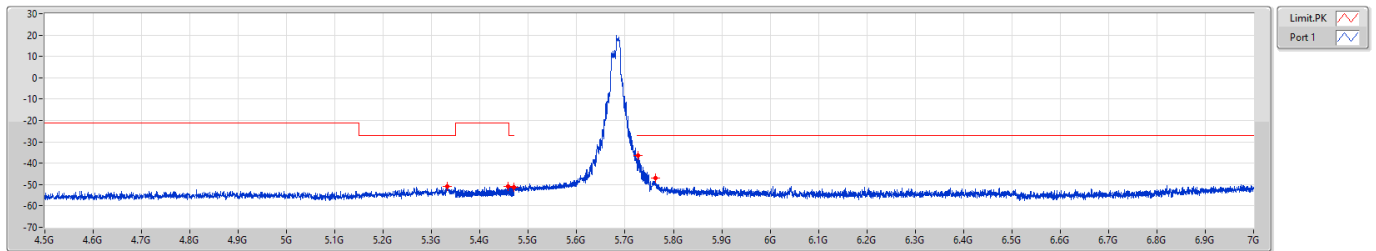

5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]


5680MHz

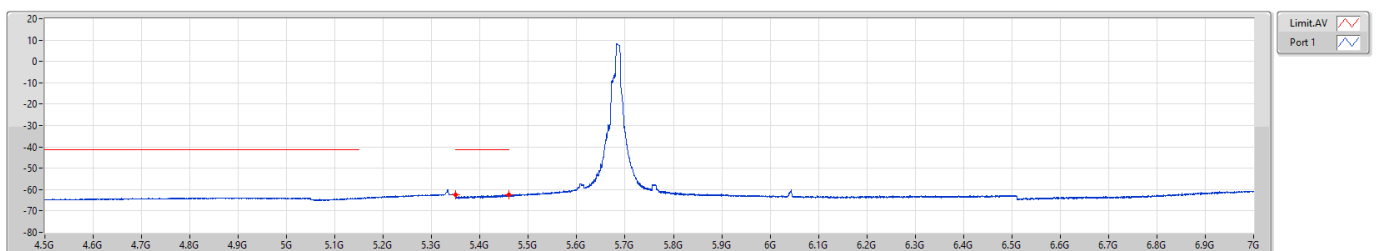

5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5700MHz

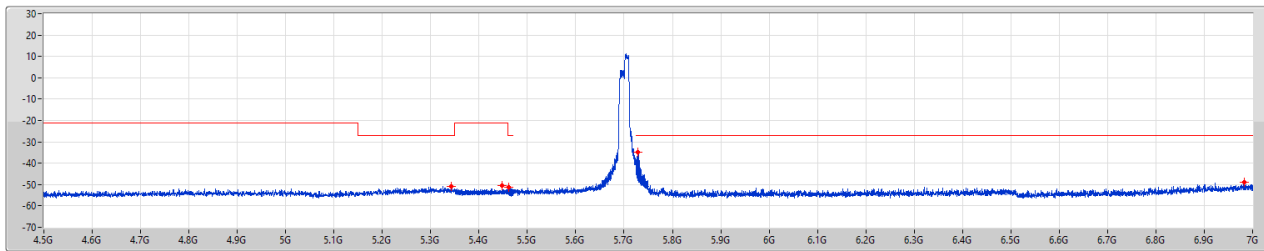


Limit PK
Port 1

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	PK	5.34278G	-50.84	-50.84
5.35G	5.46G	1M	PK	5.44746G	-50.84	-50.84
5.46G	5.47G	1M	PK	5.46222G	-51.43	-51.43
5.725G	5.75G	1M	PK	5.7291G	-34.99	-34.99
5.75G	7G	1M	PK	6.98219G	-48.87	-48.87

5.47-5.725GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5700MHz

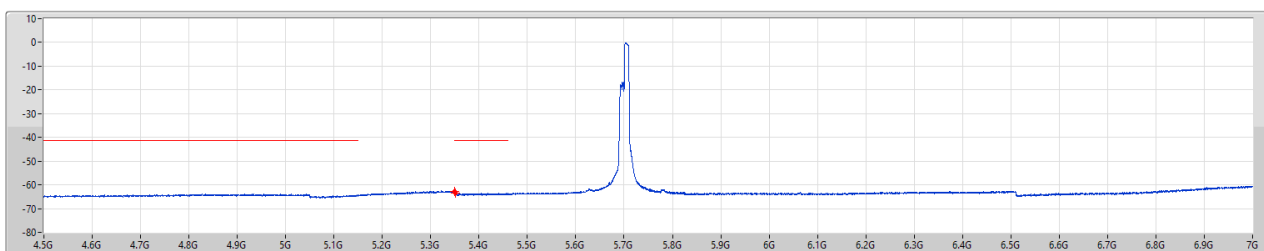

Limit AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.35G	1M	AV	5.35G	-62.75	-62.75
5.35G	5.47G	1M	AV	5.35132G	-63.47	-63.47



5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]


5745MHz

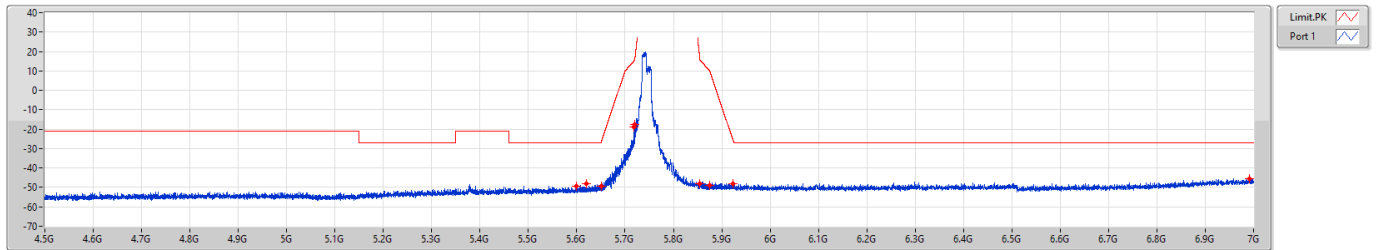

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5745MHz

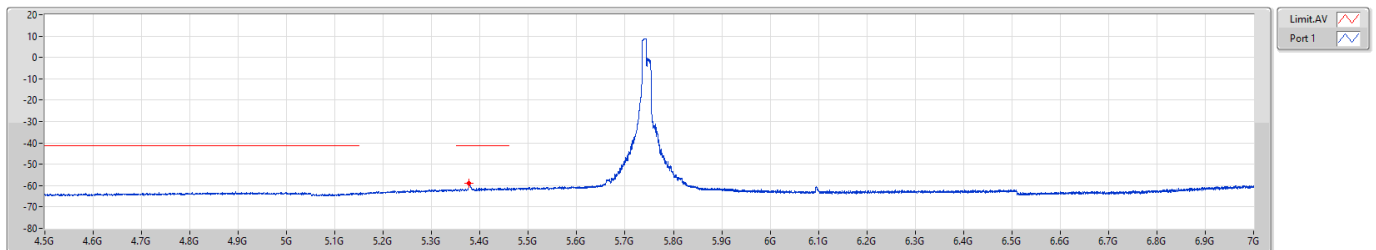




5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5785MHz

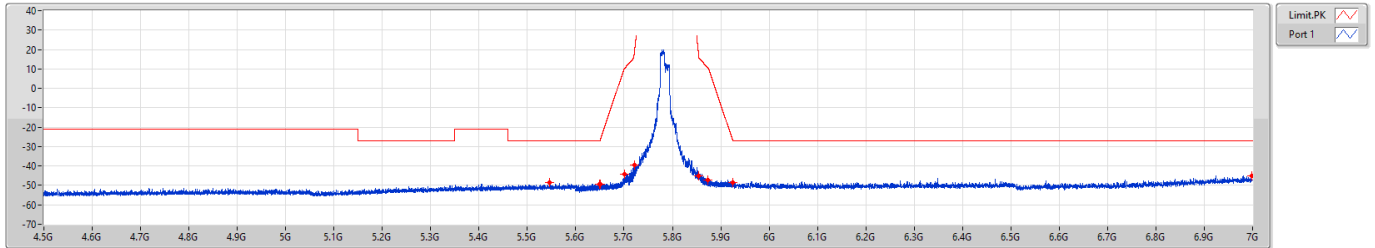


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.54573G	-48.71	-48.71
5.6G	5.65G	1M	PK	5.6494G	-49.36	-49.36
5.65G	5.7G	1M	PK	5.65025G	-49.55	-49.55
5.7G	5.72G	1M	PK	5.70008G	-44.06	-44.06
5.72G	5.725G	1M	PK	5.72067G	-39.28	-39.28
5.85G	5.855G	1M	PK	5.8549G	-44.95	-44.95
5.855G	5.875G	1M	PK	5.8737G	-47.02	-47.02
5.875G	5.925G	1M	PK	5.9245G	-48.38	-48.38
5.925G	7G	1M	PK	6.99899G	-45.16	-45.16

5.725-5.85GHz_802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5785MHz

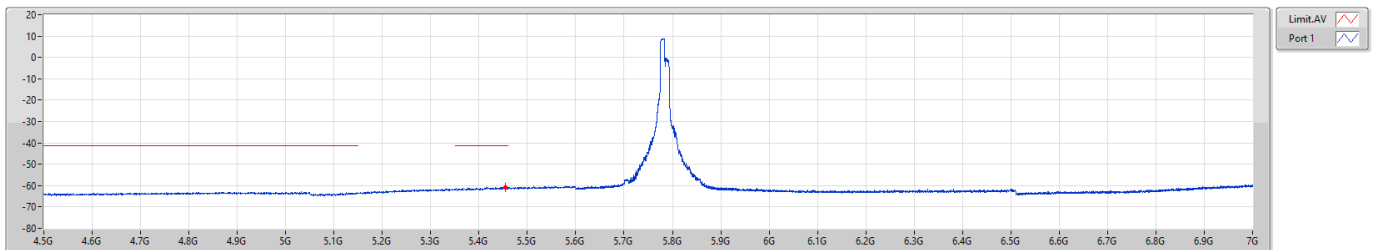


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.45535G	-60.80	-60.80



5.725-5.85GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [PK]

5825MHz

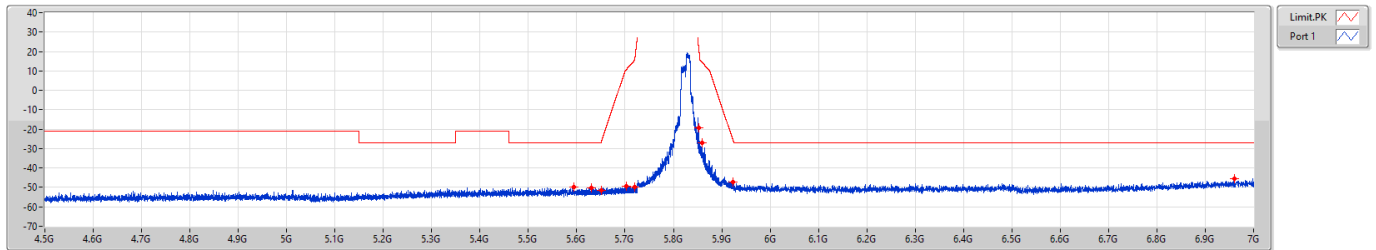


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	PK	5.5945G	-49.75	-49.75
5.6G	5.65G	1M	PK	5.6306G	-50.19	-50.19
5.65G	5.7G	1M	PK	5.65025G	-51.57	-51.57
5.7G	5.72G	1M	PK	5.70254G	-49.19	-49.19
5.72G	5.725G	1M	PK	5.72006G	-49.96	-49.96
5.85G	5.855G	1M	PK	5.85269G	-19.23	-19.23
5.855G	5.875G	1M	PK	5.85948G	-27.01	-27.01
5.875G	5.925G	1M	PK	5.92325G	-47.09	-47.09
5.925G	7G	1M	PK	6.96076G	-45.51	-45.51

5.725-5.85GHz_802.11ax HEW20_RU106_Index54_20MHz_Nss1,(MCS0)_1TX

CSE Bandedge [AV]

5825MHz

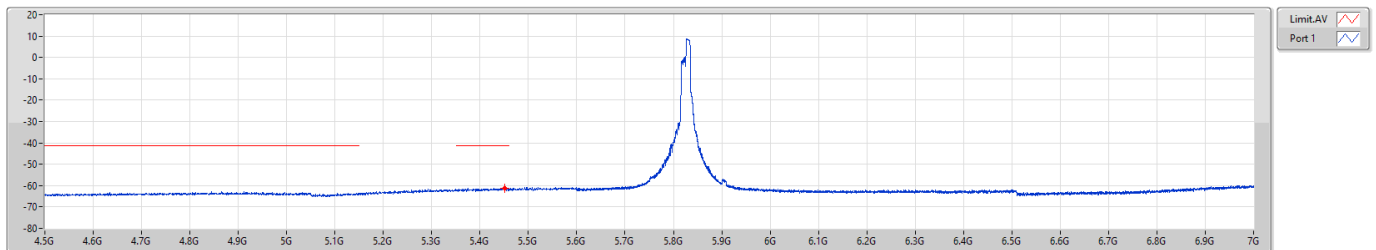

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
4.5G	5.6G	1M	AV	5.4504G	-61.08	-61.08

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	PK	10.47497G	4.40	-45.19	-45.19	-40.79	-27	-13.79
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	PK	10.39178G	4.40	-45.59	-45.59	-41.19	-27	-14.19
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	18G	40G	AV	20.77956G	4.40	-59.85	-59.85	-55.45	-41.2	-14.25
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	10.63516G	4.40	-56.58	-56.58	-52.18	-41.2	-10.98
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	10.63447G	4.40	-56.12	-56.12	-51.72	-41.2	-10.52
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	10.63103G	4.40	-60.13	-60.13	-55.73	-41.2	-14.53
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	10.99506G	4.40	-56.52	-56.52	-52.12	-41.2	-10.92
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	11.15284G	4.40	-56.7	-56.7	-52.30	-41.2	-11.10
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	11.42888G	4.40	-59.73	-59.73	-55.33	-41.2	-14.13
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	11.565G	4.40	-52.17	-52.17	-47.77	-41.2	-6.57
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	11.56363G	4.40	-52.63	-52.63	-48.23	-41.2	-7.03
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	Pass	7G	18G	AV	11.55881G	4.40	-55.26	-55.26	-50.86	-41.2	-9.66

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.05	-78.05	-73.65	-41.2	-32.45
5180MHz	Pass	7G	18G	AV	15.53291G	4.40	-67.25	-67.25	-62.85	-41.2	-21.65
5180MHz	Pass	18G	40G	AV	38.61606G	4.40	-67.61	-67.61	-63.21	-41.2	-22.01
5180MHz	Pass	7G	18G	PK	10.35638G	4.40	-47.88	-47.88	-43.48	-27	-16.48
5180MHz	Pass	7G	18G	PK	15.53291G	4.40	-55.31	-55.31	-50.91	-21.2	-29.71
5180MHz	Pass	18G	40G	PK	38.372G	4.40	-57.77	-57.77	-53.37	-27	-26.37
5200MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.54	-78.54	-74.14	-41.2	-32.94
5200MHz	Pass	7G	18G	AV	15.59375G	4.40	-70.16	-70.16	-65.76	-41.2	-24.56
5200MHz	Pass	18G	40G	AV	38.95913G	4.40	-67.24	-67.24	-62.84	-41.2	-21.64
5200MHz	Pass	7G	18G	PK	10.39556G	4.40	-49.48	-49.48	-45.08	-27	-18.08
5200MHz	Pass	7G	18G	PK	15.59341G	4.40	-59.58	-59.58	-55.18	-21.2	-33.98
5200MHz	Pass	18G	40G	PK	38.04406G	4.40	-58.5	-58.5	-54.10	-27	-27.10
5240MHz	Pass	7G	18G	AV	10.60009G	4.40	-77.83	-77.83	-73.43	-41.2	-32.23
5240MHz	Pass	7G	18G	AV	15.71338G	4.40	-67.23	-67.23	-62.83	-41.2	-21.63
5240MHz	Pass	18G	40G	AV	20.95006G	4.40	-65.92	-65.92	-61.52	-41.2	-20.32
5240MHz	Pass	7G	18G	PK	10.47497G	4.40	-45.19	-45.19	-40.79	-27	-13.79
5240MHz	Pass	7G	18G	PK	15.71269G	4.40	-54.77	-54.77	-50.37	-21.2	-29.17
5240MHz	Pass	18G	40G	PK	26.18881G	4.40	-55.97	-55.97	-51.57	-27	-24.57
5260MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.11	-78.11	-73.71	-41.2	-32.51
5260MHz	Pass	7G	18G	AV	15.77353G	4.40	-69.66	-69.66	-65.26	-41.2	-24.06
5260MHz	Pass	18G	40G	AV	38.89038G	4.40	-67.73	-67.73	-63.33	-41.2	-22.13
5260MHz	Pass	7G	18G	PK	10.51622G	4.40	-46.41	-46.41	-42.01	-27	-15.01
5260MHz	Pass	7G	18G	PK	15.77284G	4.40	-56.51	-56.51	-52.11	-21.2	-30.91
5260MHz	Pass	18G	40G	PK	33.32919G	4.40	-57.71	-57.71	-53.31	-27	-26.31
5300MHz	Pass	7G	18G	AV	10.60456G	4.40	-70.17	-70.17	-65.77	-41.2	-24.57
5300MHz	Pass	7G	18G	AV	15.89247G	4.40	-71.36	-71.36	-66.96	-41.2	-25.76
5300MHz	Pass	18G	40G	AV	38.60025G	4.40	-67.4	-67.4	-63.00	-41.2	-21.80
5300MHz	Pass	7G	18G	PK	10.59494G	4.40	-44.52	-44.52	-40.12	-27	-13.12
5300MHz	Pass	7G	18G	PK	15.89213G	4.40	-57.67	-57.67	-53.27	-21.2	-32.07
5300MHz	Pass	18G	40G	PK	38.01931G	4.40	-57.76	-57.76	-53.36	-27	-26.36
5320MHz	Pass	7G	18G	AV	10.63516G	4.40	-56.58	-56.58	-52.18	-41.2	-10.98
5320MHz	Pass	7G	18G	AV	15.95366G	4.40	-69.7	-69.7	-65.30	-41.2	-24.10
5320MHz	Pass	18G	40G	AV	38.60369G	4.40	-67.94	-67.94	-63.54	-41.2	-22.34
5320MHz	Pass	7G	18G	PK	10.63516G	4.40	-45.53	-45.53	-41.13	-21.2	-19.93
5320MHz	Pass	7G	18G	PK	15.95228G	4.40	-56.74	-56.74	-52.34	-21.2	-31.14
5320MHz	Pass	18G	40G	PK	33.21438G	4.40	-58.3	-58.3	-53.90	-27	-26.90
5500MHz	Pass	7G	18G	AV	10.99506G	4.40	-56.52	-56.52	-52.12	-41.2	-10.92
5500MHz	Pass	7G	18G	AV	16.19978G	4.40	-74.15	-74.15	-69.75	-41.2	-28.55
5500MHz	Pass	18G	40G	AV	38.85325G	4.40	-67.74	-67.74	-63.34	-41.2	-22.14
5500MHz	Pass	7G	18G	PK	10.99438G	4.40	-47.93	-47.93	-43.53	-21.2	-22.33
5500MHz	Pass	7G	18G	PK	10.99472G	4.40	-47.93	-47.93	-43.53	-21.2	-22.33
5500MHz	Pass	7G	18G	PK	16.49231G	4.40	-63.53	-63.53	-59.13	-27	-32.13
5500MHz	Pass	18G	40G	PK	33.38763G	4.40	-58.34	-58.34	-53.94	-27	-26.94
5580MHz	Pass	7G	18G	AV	11.15525G	4.40	-60.21	-60.21	-55.81	-41.2	-14.61
5580MHz	Pass	7G	18G	AV	16.19978G	4.40	-74.8	-74.8	-70.40	-41.2	-29.20
5580MHz	Pass	18G	40G	AV	38.73156G	4.40	-67.81	-67.81	-63.41	-41.2	-22.21
5580MHz	Pass	7G	18G	PK	11.15456G	4.40	-48.77	-48.77	-44.37	-21.2	-23.17
5580MHz	Pass	7G	18G	PK	16.73294G	4.40	-62.52	-62.52	-58.12	-27	-31.12



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5580MHz	Pass	18G	40G	PK	38.07706G	4.40	-56.48	-56.48	-52.08	-27	-25.08
5700MHz	Pass	7G	18G	AV	11.39484G	4.40	-65.21	-65.21	-60.81	-41.2	-19.61
5700MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.45	-76.45	-72.05	-41.2	-30.85
5700MHz	Pass	18G	40G	AV	38.6305G	4.40	-67.39	-67.39	-62.99	-41.2	-21.79
5700MHz	Pass	7G	18G	PK	11.39416G	4.40	-54.99	-54.99	-50.59	-21.2	-29.39
5700MHz	Pass	7G	18G	PK	17.08219G	4.40	-65.69	-65.69	-61.29	-27	-34.29
5700MHz	Pass	18G	40G	PK	38.09013G	4.40	-57.12	-57.12	-52.72	-27	-25.72
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	11.43541G	4.40	-60.11	-60.11	-55.71	-41.2	-14.51
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	17.70025G	4.40	-76.52	-76.52	-72.12	-41.2	-30.92
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	AV	38.99625G	4.40	-67.27	-67.27	-62.87	-41.2	-21.67
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	11.43506G	4.40	-50.83	-50.83	-46.43	-21.2	-25.23
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	17.16159G	4.40	-65.95	-65.95	-61.55	-27	-34.55
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	PK	38.08738G	4.40	-57.59	-57.59	-53.19	-27	-26.19
5745MHz	Pass	7G	18G	AV	11.48525G	4.40	-53.19	-53.19	-48.79	-41.2	-7.59
5745MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.41	-76.41	-72.01	-41.2	-30.81
5745MHz	Pass	18G	40G	AV	38.60025G	4.40	-67.66	-67.66	-63.26	-41.2	-22.06
5745MHz	Pass	7G	18G	PK	11.48491G	4.40	-42.27	-42.27	-37.87	-21.2	-16.67
5745MHz	Pass	7G	18G	PK	17.22759G	4.40	-60.18	-60.18	-55.78	-27	-28.78
5745MHz	Pass	18G	40G	PK	38.08669G	4.40	-57.55	-57.55	-53.15	-27	-26.15
5785MHz	Pass	7G	18G	AV	11.565G	4.40	-52.17	-52.17	-47.77	-41.2	-6.57
5785MHz	Pass	7G	18G	AV	17.70025G	4.40	-75.43	-75.43	-71.03	-41.2	-29.83
5785MHz	Pass	18G	40G	AV	38.64906G	4.40	-67.52	-67.52	-63.12	-41.2	-21.92
5785MHz	Pass	7G	18G	PK	11.565G	4.40	-40.46	-40.46	-36.06	-21.2	-14.86
5785MHz	Pass	7G	18G	PK	17.34859G	4.40	-59.5	-59.5	-55.10	-27	-28.10
5785MHz	Pass	18G	40G	PK	33.39519G	4.40	-58.44	-58.44	-54.04	-27	-27.04
5825MHz	Pass	7G	18G	AV	11.64475G	4.40	-52.59	-52.59	-48.19	-41.2	-6.99
5825MHz	Pass	7G	18G	AV	17.70025G	4.40	-77.01	-77.01	-72.61	-41.2	-31.41
5825MHz	Pass	18G	40G	AV	39.021G	4.40	-67.7	-67.7	-63.30	-41.2	-22.10
5825MHz	Pass	7G	18G	PK	11.64475G	4.40	-40.13	-40.13	-35.73	-21.2	-14.53
5825MHz	Pass	7G	18G	PK	17.46891G	4.40	-61.13	-61.13	-56.73	-27	-29.73
5825MHz	Pass	18G	40G	PK	38.32525G	4.40	-58.24	-58.24	-53.84	-27	-26.84
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.11	-78.11	-73.71	-41.2	-32.51
5180MHz	Pass	7G	18G	AV	15.52981G	4.40	-62	-62	-57.60	-41.2	-16.40
5180MHz	Pass	18G	40G	AV	20.70531G	4.40	-61.68	-61.68	-57.28	-41.2	-16.08
5180MHz	Pass	7G	18G	PK	10.35397G	4.40	-46.63	-46.63	-42.23	-27	-15.23
5180MHz	Pass	7G	18G	PK	15.52844G	4.40	-51.05	-51.05	-46.65	-21.2	-25.45
5180MHz	Pass	18G	40G	PK	20.70394G	4.40	-50.38	-50.38	-45.98	-21.2	-24.78
5200MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.38	-78.38	-73.98	-41.2	-32.78
5200MHz	Pass	7G	18G	AV	15.591G	4.40	-64.41	-64.41	-60.01	-41.2	-18.81
5200MHz	Pass	18G	40G	AV	20.78506G	4.40	-62.74	-62.74	-58.34	-41.2	-17.14
5200MHz	Pass	7G	18G	PK	10.39178G	4.40	-45.59	-45.59	-41.19	-27	-14.19
5200MHz	Pass	7G	18G	PK	15.58756G	4.40	-53.37	-53.37	-48.97	-21.2	-27.77
5200MHz	Pass	18G	40G	PK	20.78438G	4.40	-49.82	-49.82	-45.42	-21.2	-24.22
5240MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.84	-78.84	-74.44	-41.2	-33.24
5240MHz	Pass	7G	18G	AV	15.71166G	4.40	-65.53	-65.53	-61.13	-41.2	-19.93
5240MHz	Pass	18G	40G	AV	20.94456G	4.40	-62.91	-62.91	-58.51	-41.2	-17.31
5240MHz	Pass	7G	18G	PK	10.47497G	4.40	-47.38	-47.38	-42.98	-27	-15.98
5240MHz	Pass	7G	18G	PK	15.70753G	4.40	-53.83	-53.83	-49.43	-21.2	-28.23
5240MHz	Pass	18G	40G	PK	20.94594G	4.40	-51.35	-51.35	-46.95	-21.2	-25.75

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5260MHz	Pass	7G	18G	AV	10.60009G	4.40	-77.69	-77.69	-73.29	-41.2	-32.09
5260MHz	Pass	7G	18G	AV	15.76941G	4.40	-65.47	-65.47	-61.07	-41.2	-19.87
5260MHz	Pass	18G	40G	AV	21.02638G	4.40	-65.42	-65.42	-61.02	-41.2	-19.82
5260MHz	Pass	7G	18G	PK	10.51038G	4.40	-47.01	-47.01	-42.61	-27	-15.61
5260MHz	Pass	7G	18G	PK	15.77422G	4.40	-54.22	-54.22	-49.82	-21.2	-28.62
5260MHz	Pass	18G	40G	PK	32.68225G	4.40	-57.64	-57.64	-53.24	-27	-26.24
5300MHz	Pass	7G	18G	AV	10.60628G	4.40	-64.45	-64.45	-60.05	-41.2	-18.85
5300MHz	Pass	7G	18G	AV	15.88938G	4.40	-65.57	-65.57	-61.17	-41.2	-19.97
5300MHz	Pass	18G	40G	AV	38.60781G	4.40	-67.61	-67.61	-63.21	-41.2	-22.01
5300MHz	Pass	7G	18G	PK	10.59528G	4.40	-45.99	-45.99	-41.59	-27	-14.59
5300MHz	Pass	7G	18G	PK	15.89384G	4.40	-53.82	-53.82	-49.42	-21.2	-28.22
5300MHz	Pass	18G	40G	PK	37.998G	4.40	-57.58	-57.58	-53.18	-27	-26.18
5320MHz	Pass	7G	18G	AV	10.63447G	4.40	-56.12	-56.12	-51.72	-41.2	-10.52
5320MHz	Pass	7G	18G	AV	15.95091G	4.40	-68.09	-68.09	-63.69	-41.2	-22.49
5320MHz	Pass	18G	40G	AV	38.90688G	4.40	-67.59	-67.59	-63.19	-41.2	-21.99
5320MHz	Pass	7G	18G	PK	10.63241G	4.40	-46.77	-46.77	-42.37	-21.2	-21.17
5320MHz	Pass	7G	18G	PK	15.94884G	4.40	-58.09	-58.09	-53.69	-21.2	-32.49
5320MHz	Pass	18G	40G	PK	38.11625G	4.40	-57.7	-57.7	-53.30	-27	-26.30
5500MHz	Pass	7G	18G	AV	10.99369G	4.40	-63.44	-63.44	-59.04	-41.2	-17.84
5500MHz	Pass	7G	18G	AV	16.19978G	4.40	-74.56	-74.56	-70.16	-41.2	-28.96
5500MHz	Pass	18G	40G	AV	38.78863G	4.40	-67.39	-67.39	-62.99	-41.2	-21.79
5500MHz	Pass	7G	18G	PK	10.993G	4.40	-52.27	-52.27	-47.87	-21.2	-26.67
5500MHz	Pass	7G	18G	PK	16.48269G	4.40	-63.49	-63.49	-59.09	-27	-32.09
5500MHz	Pass	18G	40G	PK	38.15819G	4.40	-57.8	-57.8	-53.40	-27	-26.40
5580MHz	Pass	7G	18G	AV	11.15284G	4.40	-56.7	-56.7	-52.30	-41.2	-11.10
5580MHz	Pass	7G	18G	AV	16.19978G	4.40	-74.41	-74.41	-70.01	-41.2	-28.81
5580MHz	Pass	18G	40G	AV	38.92131G	4.40	-67.37	-67.37	-62.97	-41.2	-21.77
5580MHz	Pass	7G	18G	PK	11.15113G	4.40	-47.67	-47.67	-43.27	-21.2	-22.07
5580MHz	Pass	7G	18G	PK	16.7295G	4.40	-60.8	-60.8	-56.40	-27	-29.40
5580MHz	Pass	18G	40G	PK	38.05438G	4.40	-57.22	-57.22	-52.82	-27	-25.82
5700MHz	Pass	7G	18G	AV	11.39313G	4.40	-67.46	-67.46	-63.06	-41.2	-21.86
5700MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.12	-76.12	-71.72	-41.2	-30.52
5700MHz	Pass	18G	40G	AV	38.72538G	4.40	-67.85	-67.85	-63.45	-41.2	-22.25
5700MHz	Pass	7G	18G	PK	11.39416G	4.40	-55.6	-55.6	-51.20	-21.2	-30.00
5700MHz	Pass	7G	18G	PK	17.10006G	4.40	-66.63	-66.63	-62.23	-27	-35.23
5700MHz	Pass	18G	40G	PK	37.91825G	4.40	-57.64	-57.64	-53.24	-27	-26.24
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	11.43403G	4.40	-60.07	-60.07	-55.67	-41.2	-14.47
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	17.70025G	4.40	-76.82	-76.82	-72.42	-41.2	-31.22
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	AV	38.78038G	4.40	-67.76	-67.76	-63.36	-41.2	-22.16
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	11.43369G	4.40	-49.59	-49.59	-45.19	-21.2	-23.99
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	17.15231G	4.40	-66.03	-66.03	-61.63	-27	-34.63
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	PK	38.09425G	4.40	-57.12	-57.12	-52.72	-27	-25.72
5745MHz	Pass	7G	18G	AV	11.48353G	4.40	-53.02	-53.02	-48.62	-41.2	-7.42
5745MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.78	-76.78	-72.38	-41.2	-31.18
5745MHz	Pass	18G	40G	AV	39.47063G	4.40	-67.96	-67.96	-63.56	-41.2	-22.36
5745MHz	Pass	7G	18G	PK	11.48353G	4.40	-43.09	-43.09	-38.69	-21.2	-17.49
5745MHz	Pass	7G	18G	PK	17.22519G	4.40	-63.84	-63.84	-59.44	-27	-32.44
5745MHz	Pass	18G	40G	PK	38.05369G	4.40	-58.27	-58.27	-53.87	-27	-26.87
5785MHz	Pass	7G	18G	AV	11.56363G	4.40	-52.63	-52.63	-48.23	-41.2	-7.03
5785MHz	Pass	7G	18G	AV	17.70025G	4.40	-75.98	-75.98	-71.58	-41.2	-30.38

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5785MHz	Pass	18G	40G	AV	39.00313G	4.40	-67.71	-67.71	-63.31	-41.2	-22.11
5785MHz	Pass	7G	18G	PK	11.56534G	4.40	-42.95	-42.95	-38.55	-21.2	-17.35
5785MHz	Pass	7G	18G	PK	17.3455G	4.40	-64.49	-64.49	-60.09	-27	-33.09
5785MHz	Pass	18G	40G	PK	38.16025G	4.40	-57.83	-57.83	-53.43	-27	-26.43
5825MHz	Pass	7G	18G	AV	11.64303G	4.40	-53.86	-53.86	-49.46	-41.2	-8.26
5825MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.67	-76.67	-72.27	-41.2	-31.07
5825MHz	Pass	18G	40G	AV	38.65525G	4.40	-67.44	-67.44	-63.04	-41.2	-21.84
5825MHz	Pass	7G	18G	PK	11.64234G	4.40	-43.95	-43.95	-39.55	-21.2	-18.35
5825MHz	Pass	7G	18G	PK	17.46513G	4.40	-63.45	-63.45	-59.05	-27	-32.05
5825MHz	Pass	18G	40G	PK	38.00006G	4.40	-57.58	-57.58	-53.18	-27	-26.18
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.2	-78.2	-73.80	-41.2	-32.60
5180MHz	Pass	7G	18G	AV	15.52534G	4.40	-65.25	-65.25	-60.85	-41.2	-19.65
5180MHz	Pass	18G	40G	AV	20.69913G	4.40	-65.9	-65.9	-61.50	-41.2	-20.30
5180MHz	Pass	7G	18G	PK	10.3495G	4.40	-50.03	-50.03	-45.63	-27	-18.63
5180MHz	Pass	7G	18G	PK	15.5305G	4.40	-55.81	-55.81	-51.41	-21.2	-30.21
5180MHz	Pass	18G	40G	PK	37.92306G	4.40	-57.73	-57.73	-53.33	-27	-26.33
5200MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.57	-78.57	-74.17	-41.2	-32.97
5200MHz	Pass	7G	18G	AV	15.58344G	4.40	-61.79	-61.79	-57.39	-41.2	-16.19
5200MHz	Pass	18G	40G	AV	20.77956G	4.40	-59.85	-59.85	-55.45	-41.2	-14.25
5200MHz	Pass	7G	18G	PK	10.38869G	4.40	-47.53	-47.53	-43.13	-27	-16.13
5200MHz	Pass	7G	18G	PK	15.58963G	4.40	-52.05	-52.05	-47.65	-21.2	-26.45
5200MHz	Pass	18G	40G	PK	20.77131G	4.40	-49.89	-49.89	-45.49	-21.2	-24.29
5240MHz	Pass	7G	18G	AV	10.60009G	4.40	-79.1	-79.1	-74.70	-41.2	-33.50
5240MHz	Pass	7G	18G	AV	15.70203G	4.40	-62.83	-62.83	-58.43	-41.2	-17.23
5240MHz	Pass	18G	40G	AV	20.93906G	4.40	-60.95	-60.95	-56.55	-41.2	-15.35
5240MHz	Pass	7G	18G	PK	10.46225G	4.40	-47.72	-47.72	-43.32	-27	-16.32
5240MHz	Pass	7G	18G	PK	15.70891G	4.40	-52.92	-52.92	-48.52	-21.2	-27.32
5240MHz	Pass	18G	40G	PK	20.93631G	4.40	-50.88	-50.88	-46.48	-21.2	-25.28
5260MHz	Pass	7G	18G	AV	10.60009G	4.40	-78.24	-78.24	-73.84	-41.2	-32.64
5260MHz	Pass	7G	18G	AV	15.76253G	4.40	-64.6	-64.6	-60.20	-41.2	-19.00
5260MHz	Pass	18G	40G	AV	21.01813G	4.40	-64.75	-64.75	-60.35	-41.2	-19.15
5260MHz	Pass	7G	18G	PK	10.50866G	4.40	-48.49	-48.49	-44.09	-27	-17.09
5260MHz	Pass	7G	18G	PK	15.76528G	4.40	-54.62	-54.62	-50.22	-21.2	-29.02
5260MHz	Pass	18G	40G	PK	38.526G	4.40	-58.03	-58.03	-53.63	-27	-26.63
5300MHz	Pass	7G	18G	AV	10.60078G	4.40	-61.28	-61.28	-56.88	-41.2	-15.68
5300MHz	Pass	7G	18G	AV	15.88559G	4.40	-63.87	-63.87	-59.47	-41.2	-18.27
5300MHz	Pass	18G	40G	AV	21.17694G	4.40	-65.94	-65.94	-61.54	-41.2	-20.34
5300MHz	Pass	7G	18G	PK	10.59184G	4.40	-46.12	-46.12	-41.72	-27	-14.72
5300MHz	Pass	7G	18G	PK	15.88319G	4.40	-54.69	-54.69	-50.29	-21.2	-29.09
5300MHz	Pass	18G	40G	PK	37.80206G	4.40	-57.62	-57.62	-53.22	-27	-26.22
5320MHz	Pass	7G	18G	AV	10.63103G	4.40	-60.13	-60.13	-55.73	-41.2	-14.53
5320MHz	Pass	7G	18G	AV	15.94197G	4.40	-70.64	-70.64	-66.24	-41.2	-25.04
5320MHz	Pass	18G	40G	AV	38.91925G	4.40	-67.64	-67.64	-63.24	-41.2	-22.04
5320MHz	Pass	7G	18G	PK	10.62931G	4.40	-48.28	-48.28	-43.88	-21.2	-22.68
5320MHz	Pass	7G	18G	PK	15.94506G	4.40	-59.18	-59.18	-54.78	-21.2	-33.58
5320MHz	Pass	18G	40G	PK	38.12106G	4.40	-58.19	-58.19	-53.79	-27	-26.79
5500MHz	Pass	7G	18G	AV	10.99025G	4.40	-64.11	-64.11	-59.71	-41.2	-18.51
5500MHz	Pass	7G	18G	AV	16.19978G	4.40	-75.04	-75.04	-70.64	-41.2	-29.44
5500MHz	Pass	18G	40G	AV	38.86494G	4.40	-67.46	-67.46	-63.06	-41.2	-21.86

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5500MHz	Pass	7G	18G	PK	10.99163G	4.40	-54.87	-54.87	-50.47	-21.2	-29.27
5500MHz	Pass	7G	18G	PK	16.50847G	4.40	-65.28	-65.28	-60.88	-27	-33.88
5500MHz	Pass	18G	40G	PK	38.526G	4.40	-57.15	-57.15	-52.75	-27	-25.75
5580MHz	Pass	7G	18G	AV	10.98991G	4.40	-64.47	-64.47	-60.07	-41.2	-18.87
5580MHz	Pass	7G	18G	AV	11.14666G	4.40	-76.44	-76.44	-72.04	-41.2	-30.84
5580MHz	Pass	7G	18G	AV	16.19978G	4.40	-74.83	-74.83	-70.43	-41.2	-29.23
5580MHz	Pass	18G	40G	AV	38.7515G	4.40	-67.38	-67.38	-62.98	-41.2	-21.78
5580MHz	Pass	7G	18G	PK	10.99059G	4.40	-52.84	-52.84	-48.44	-21.2	-27.24
5580MHz	Pass	7G	18G	PK	11.14975G	4.40	-67.72	-67.72	-63.32	-21.2	-42.12
5580MHz	Pass	7G	18G	PK	16.72641G	4.40	-63.65	-63.65	-59.25	-27	-32.25
5580MHz	Pass	18G	40G	PK	38.0365G	4.40	-57.89	-57.89	-53.49	-27	-26.49
5700MHz	Pass	7G	18G	AV	11.38969G	4.40	-71.6	-71.6	-67.20	-41.2	-26.00
5700MHz	Pass	7G	18G	AV	11.39003G	4.40	-71.6	-71.6	-67.20	-41.2	-26.00
5700MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.24	-76.24	-71.84	-41.2	-30.64
5700MHz	Pass	18G	40G	AV	38.96188G	4.40	-67.67	-67.67	-63.27	-41.2	-22.07
5700MHz	Pass	7G	18G	PK	11.38969G	4.40	-61.79	-61.79	-57.39	-21.2	-36.19
5700MHz	Pass	7G	18G	PK	16.61022G	4.40	-63.94	-63.94	-59.54	-27	-32.54
5700MHz	Pass	7G	18G	PK	17.10213G	4.40	-67.72	-67.72	-63.32	-27	-36.32
5700MHz	Pass	18G	40G	PK	38.07844G	4.40	-58.48	-58.48	-54.08	-27	-27.08
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	11.42888G	4.40	-59.73	-59.73	-55.33	-41.2	-14.13
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	11.43059G	4.40	-59.73	-59.73	-55.33	-41.2	-14.13
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	AV	17.70025G	4.40	-75.88	-75.88	-71.48	-41.2	-30.28
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	AV	38.7405G	4.40	-67.7	-67.7	-63.30	-41.2	-22.10
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	11.43163G	4.40	-49.8	-49.8	-45.40	-21.2	-24.20
5720MHz Straddle 5.47-5.725GHz	Pass	7G	18G	PK	17.14613G	4.40	-64.9	-64.9	-60.50	-27	-33.50
5720MHz Straddle 5.47-5.725GHz	Pass	18G	40G	PK	38.37406G	4.40	-57.57	-57.57	-53.17	-27	-26.17
5745MHz	Pass	7G	18G	AV	11.47906G	4.40	-56.09	-56.09	-51.69	-41.2	-10.49
5745MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.56	-76.56	-72.16	-41.2	-30.96
5745MHz	Pass	18G	40G	AV	38.85119G	4.40	-67.71	-67.71	-63.31	-41.2	-22.11
5745MHz	Pass	7G	18G	PK	11.48113G	4.40	-47.08	-47.08	-42.68	-21.2	-21.48
5745MHz	Pass	7G	18G	PK	17.22003G	4.40	-64.84	-64.84	-60.44	-27	-33.44
5745MHz	Pass	18G	40G	PK	38.14994G	4.40	-58	-58	-53.60	-27	-26.60
5785MHz	Pass	7G	18G	AV	11.55881G	4.40	-55.26	-55.26	-50.86	-41.2	-9.66
5785MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.65	-76.65	-72.25	-41.2	-31.05
5785MHz	Pass	18G	40G	AV	38.62981G	4.40	-67.9	-67.9	-63.50	-41.2	-22.30
5785MHz	Pass	7G	18G	PK	11.55881G	4.40	-44.22	-44.22	-39.82	-21.2	-18.62
5785MHz	Pass	7G	18G	PK	17.34138G	4.40	-64.9	-64.9	-60.50	-27	-33.50
5785MHz	Pass	18G	40G	PK	37.89213G	4.40	-57.81	-57.81	-53.41	-27	-26.41
5825MHz	Pass	7G	18G	AV	11.63925G	4.40	-56.92	-56.92	-52.52	-41.2	-11.32
5825MHz	Pass	7G	18G	AV	17.70025G	4.40	-76.16	-76.16	-71.76	-41.2	-30.56
5825MHz	Pass	18G	40G	AV	38.61813G	4.40	-67.69	-67.69	-63.29	-41.2	-22.09
5825MHz	Pass	7G	18G	PK	11.63788G	4.40	-45.41	-45.41	-41.01	-21.2	-19.81
5825MHz	Pass	7G	18G	PK	17.45963G	4.40	-64.28	-64.28	-59.88	-27	-32.88
5825MHz	Pass	18G	40G	PK	32.79088G	4.40	-58.55	-58.55	-54.15	-27	-27.15


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]


5180MHz

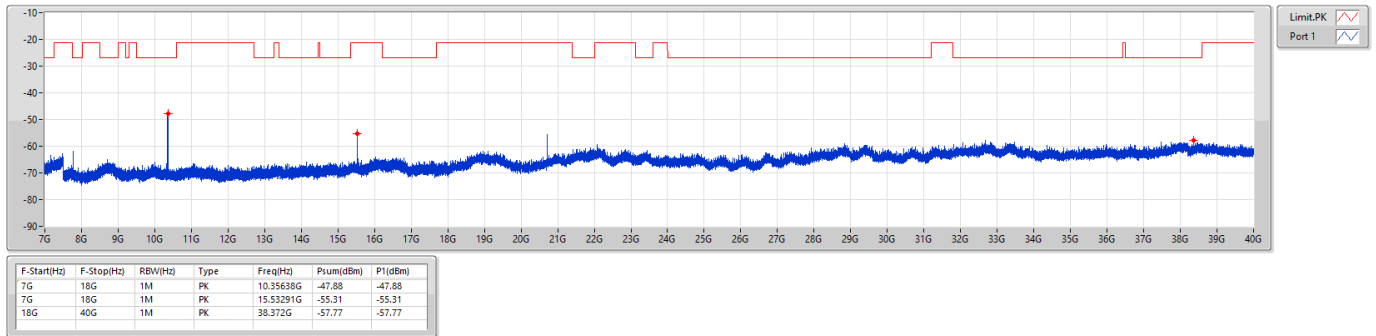

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

5180MHz

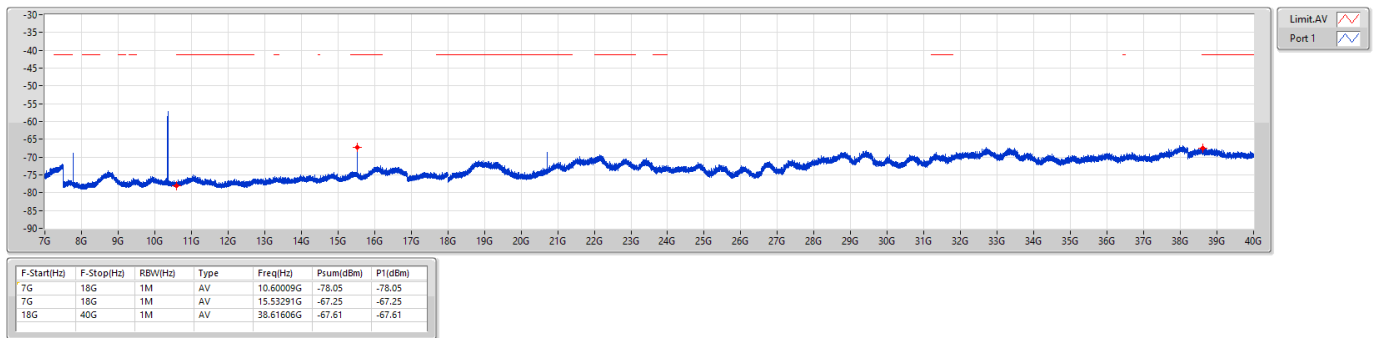




5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [PK]

5200MHz

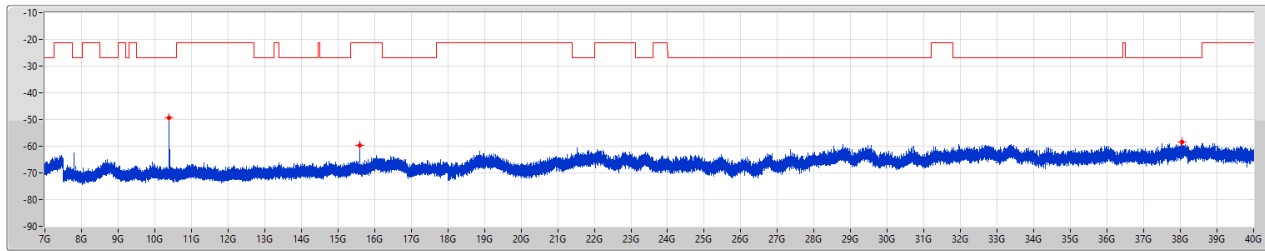


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7G	18G	1M	PK	10.39556G	-49.48	-49.48
7G	18G	1M	PK	15.59341G	-59.50	-59.50
18G	40G	1M	PK	38.04406G	-58.50	-58.50

5.15-5.25GHz_802.11ax_HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_1TX

CSE [AV]

5200MHz

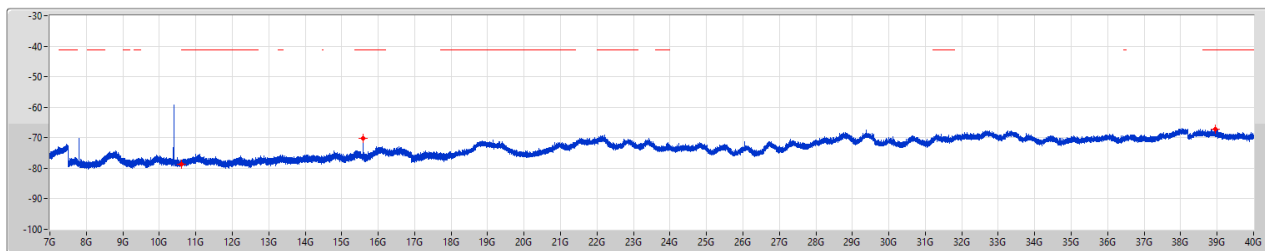

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	Psum(dBm)	P1(dBm)
7G	18G	1M	AV	10.60009G	-78.54	-78.54
7G	18G	1M	AV	15.59375G	-70.16	-70.16
18G	40G	1M	AV	38.95913G	-67.24	-67.24