


QUICK START GUIDE

HaLowLink 2




 Morse Micro

QUICK START GUIDE



Device setup


1. Attach the antenna
2. Press firmly into base (you should hear a click)
3. Plug in the USB-C power cable.

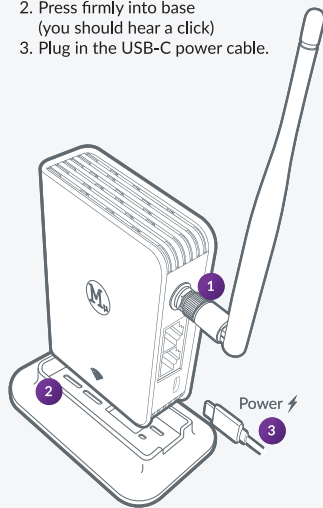

Access Point setup

Your HaLowLink 2 is initially configured as an Access Point. After connecting the power, wait for the Status light to become solid green.

Your HaLowLink 2 Access Point is ready to go!

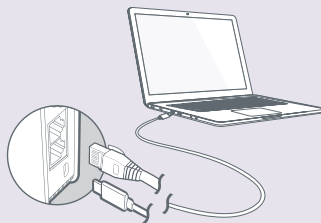


Access Point settings:

1. Connect your computer to the LAN Ethernet port or via USB-C
2. Browse to <https://192.168.12.1>
3. Login with the username and password on the device label.

Extender setup

To change your HaLowLink 2 to Extender mode press and HOLD the mode button. The Status light will slowly flash green, then quickly flash aqua. Release the mode button when it is flashing aqua and then wait for the light to go solid aqua.

Your HaLowLink 2 Extender is ready to go!

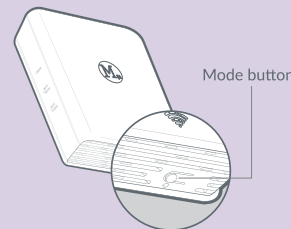


Mode button controls:

- Press: pair with another device.
- Hold until slowly flashing green (> 5 secs): reset to Access Point mode.
- Hold until quickly flashing aqua (> 10 secs): reset to Extender mode.

Pairing

Ensure Access Point is setup before pairing. Confirm this by checking the HaLow light is purple. To pair your Extender with another HaLowLink Access Point, press and release the mode button on the Access Point and then on the Extender.

One of the Wi-Fi lights will start flashing slowly. Once the Wi-Fi HaLow light is solid purple, you're connected.



Wi-Fi HaLow light

Note: Requires two HaLow devices to pair. Keep the devices close together for pairing.

User guide and product details



To view the user guide, scan the QR code,

or visit www.morsemicro.com/halowlink2