






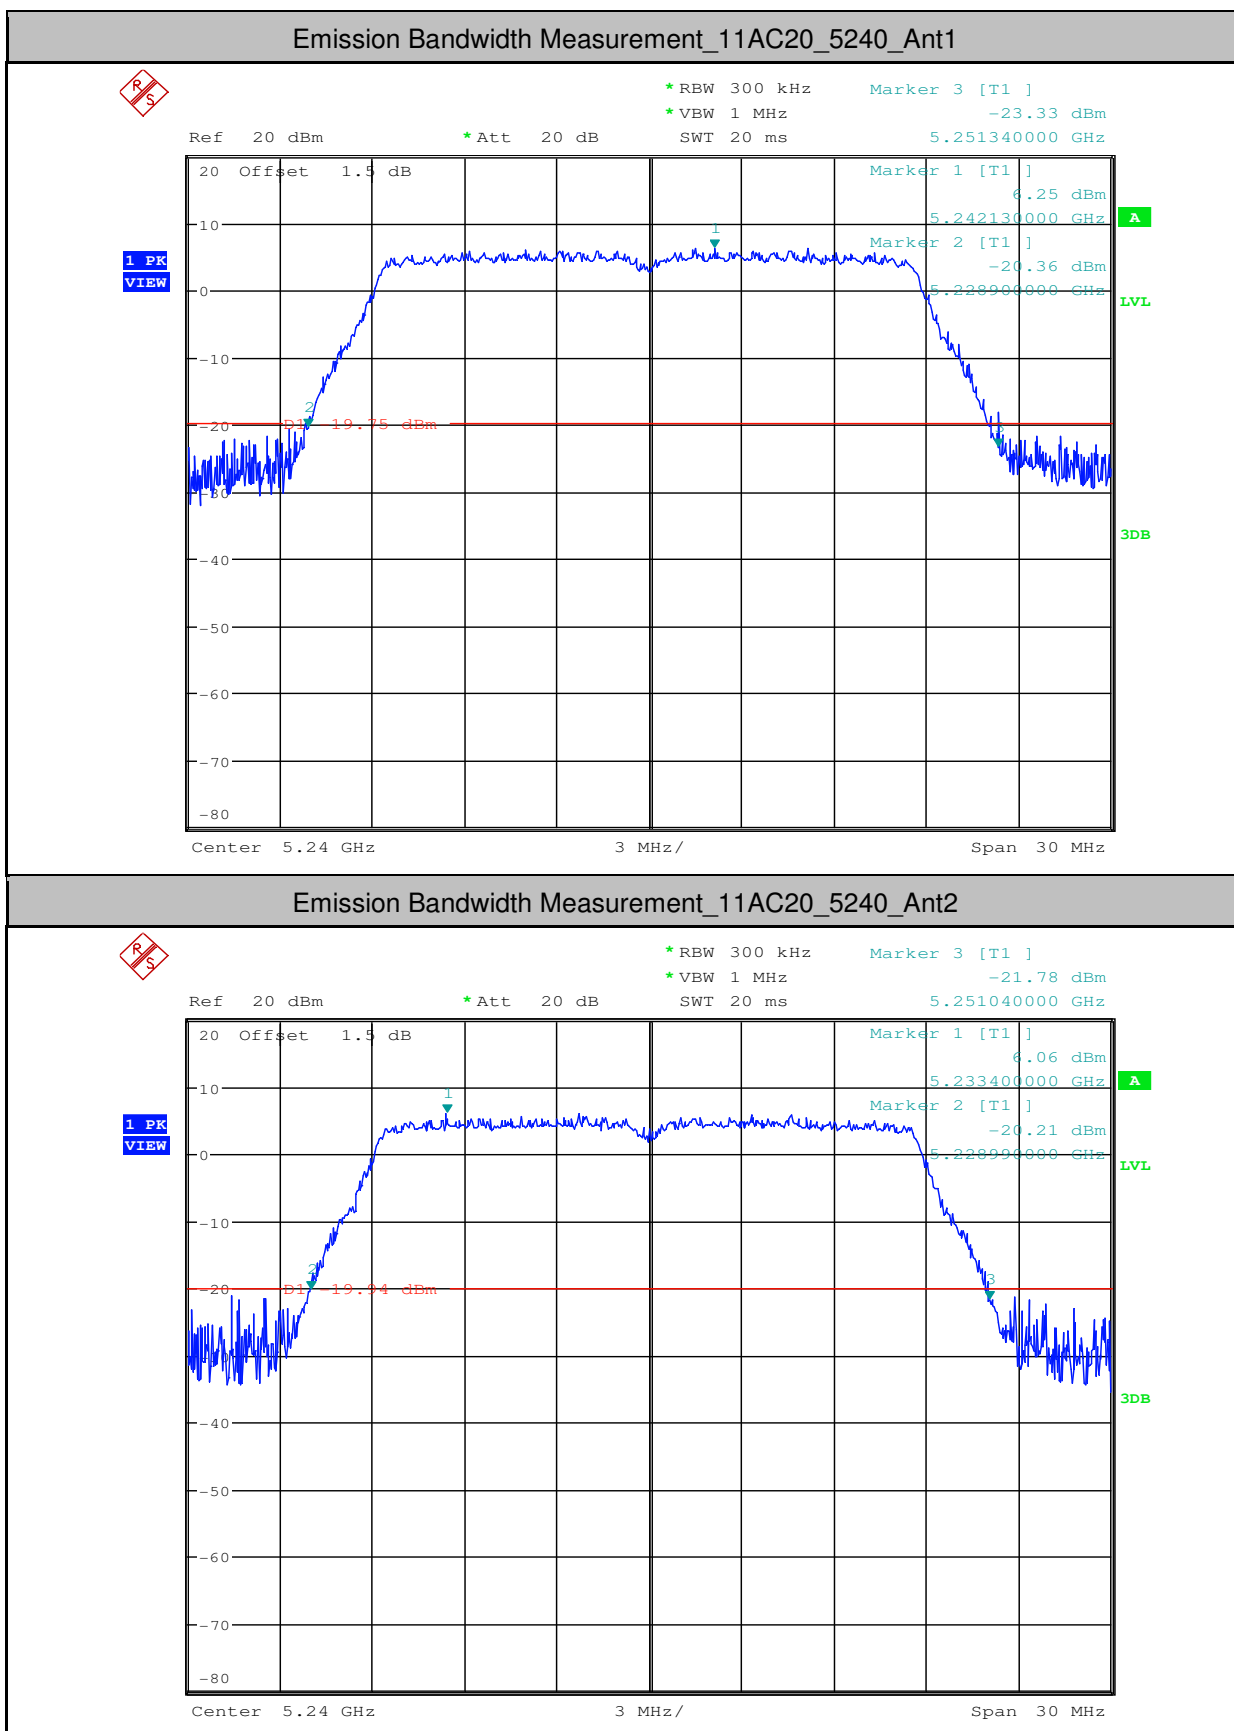


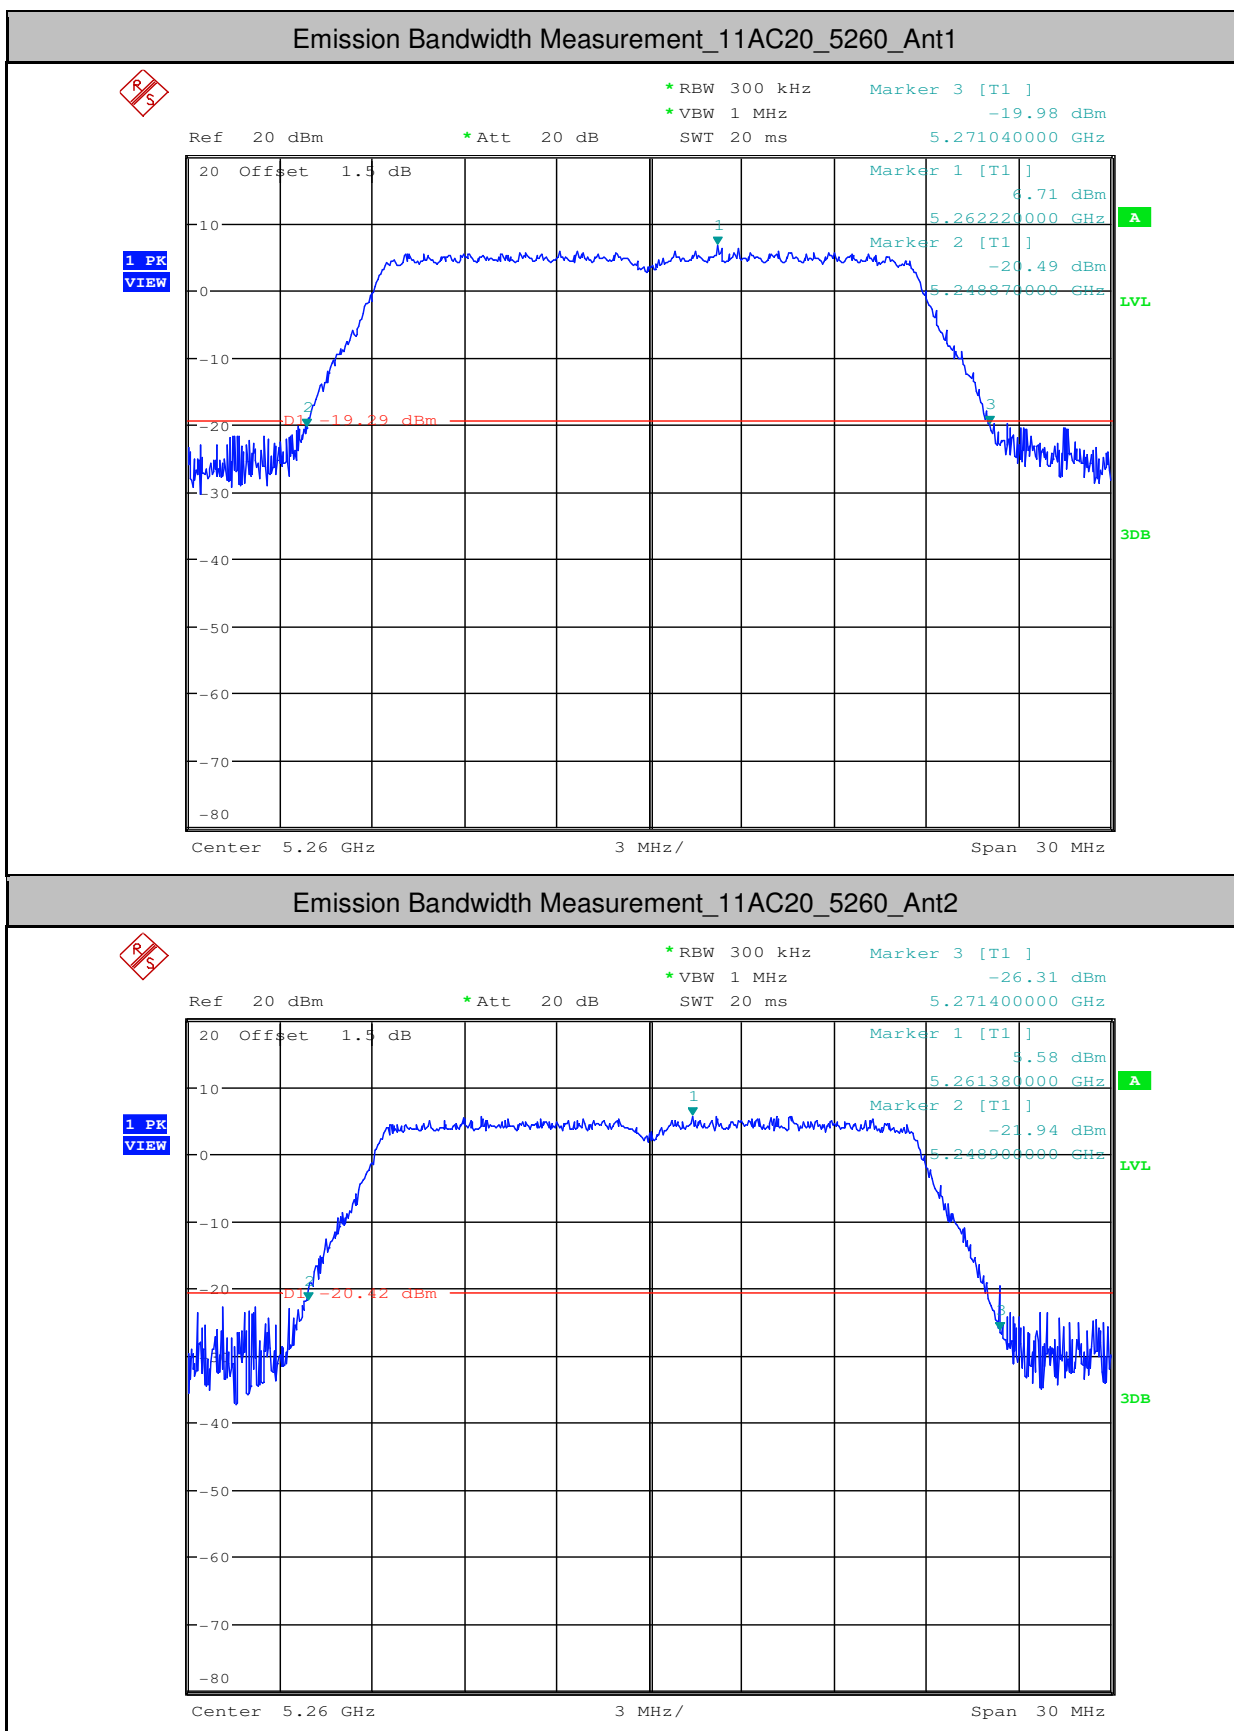


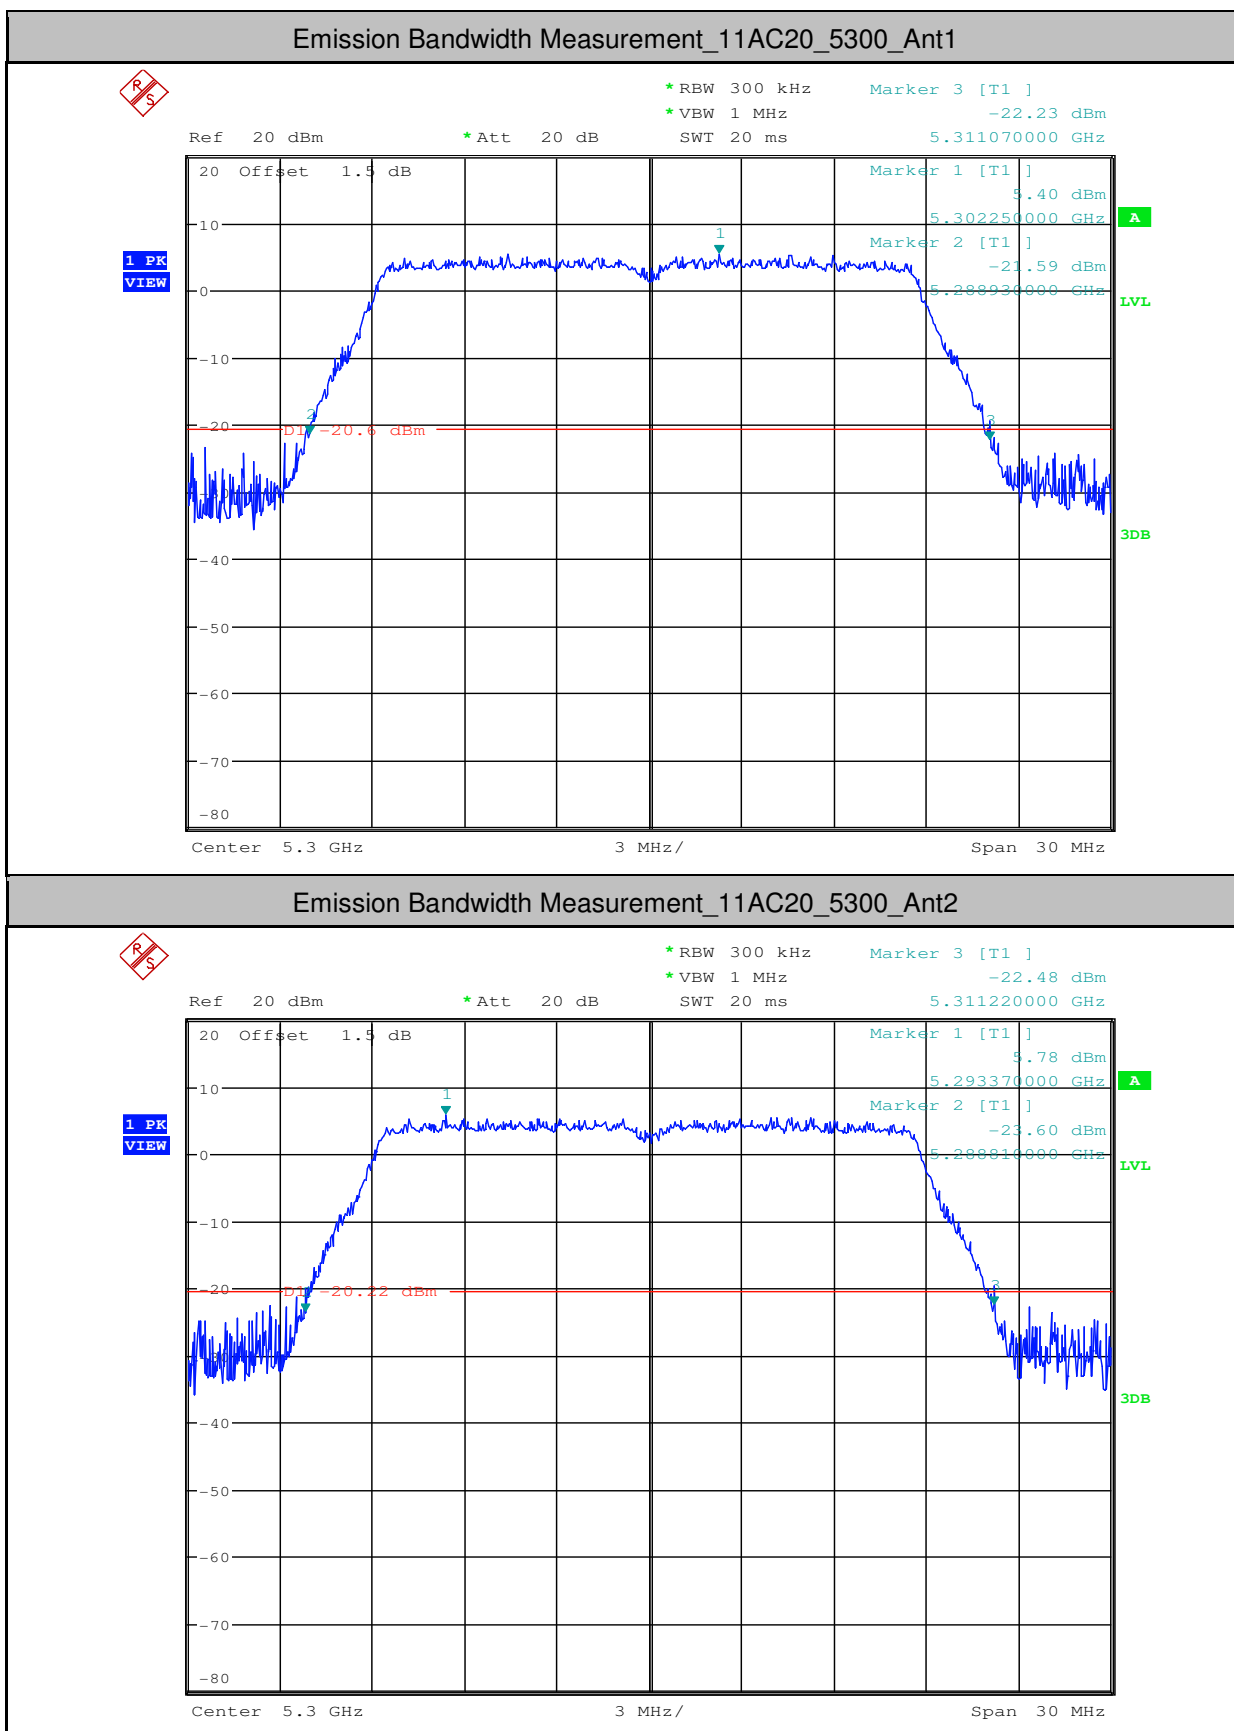


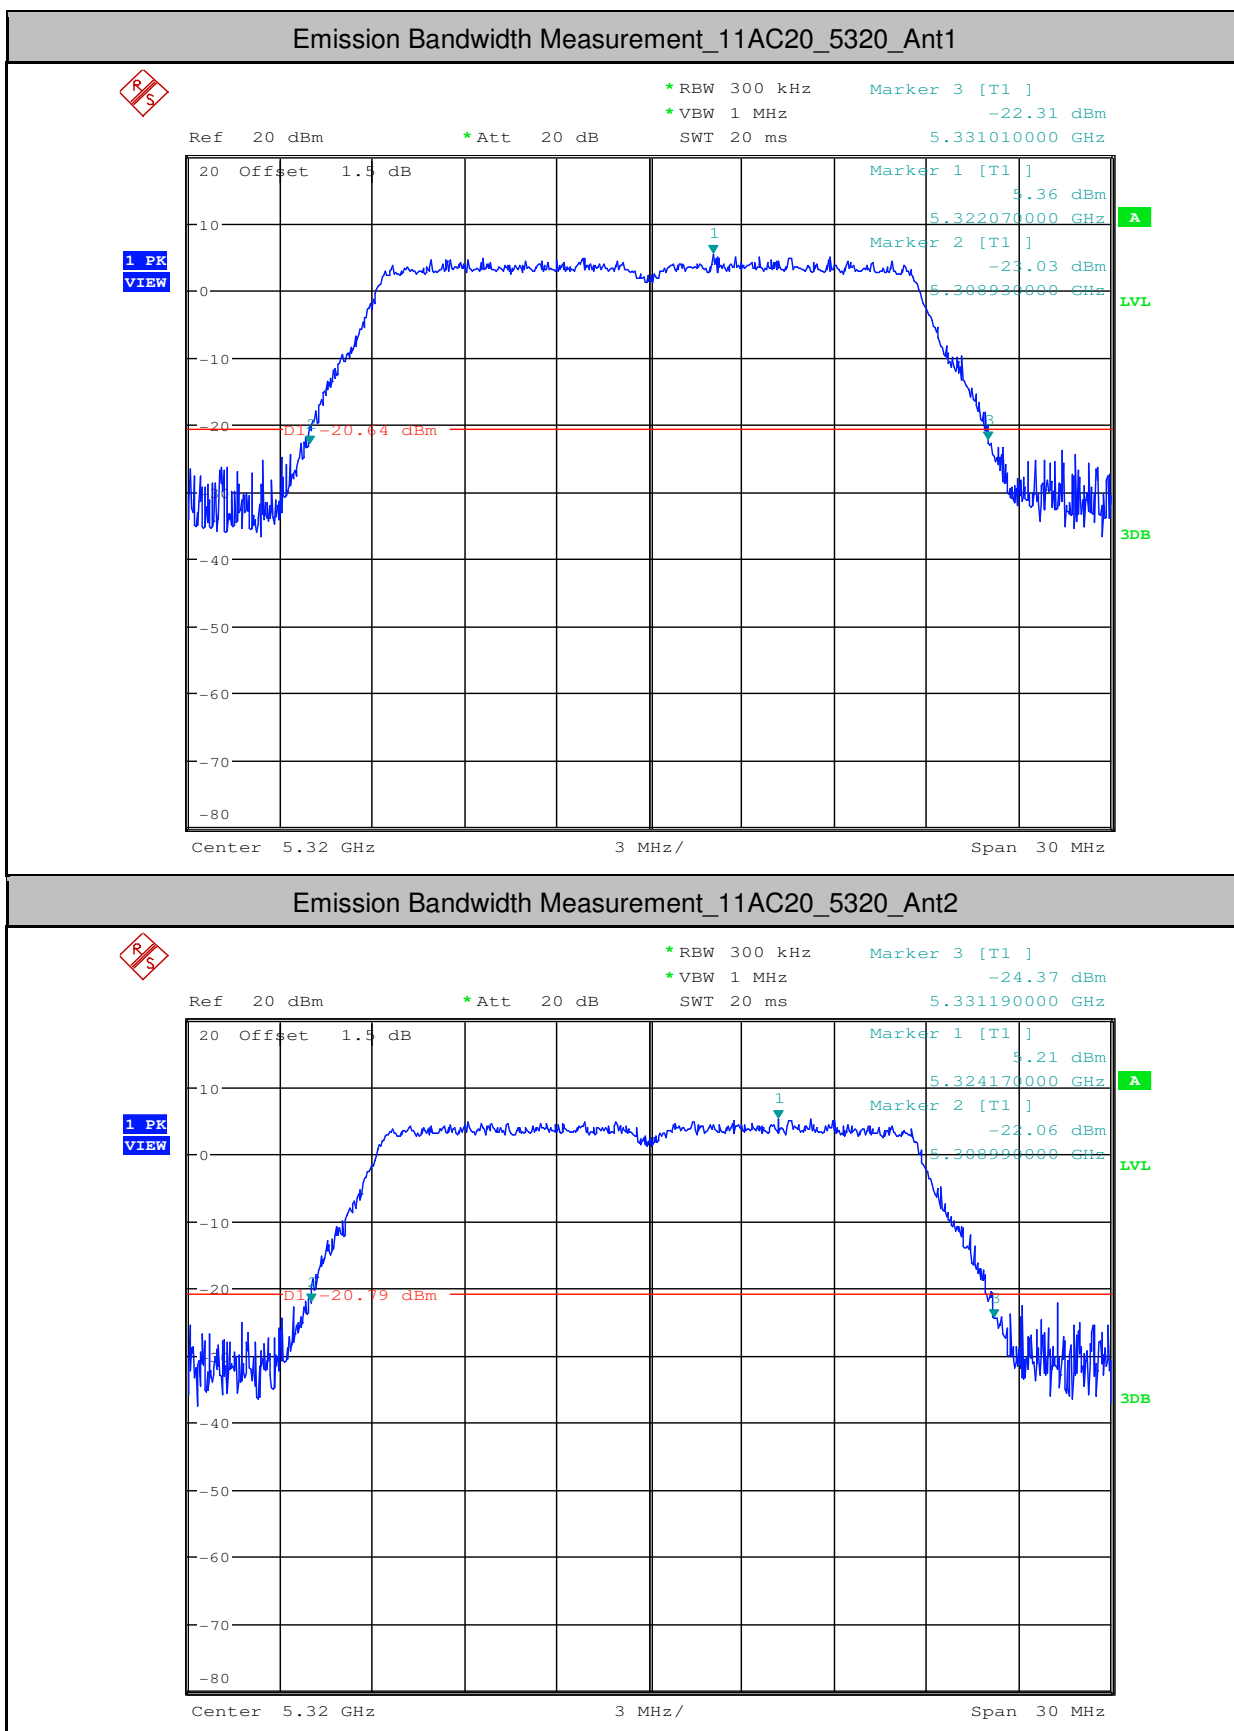


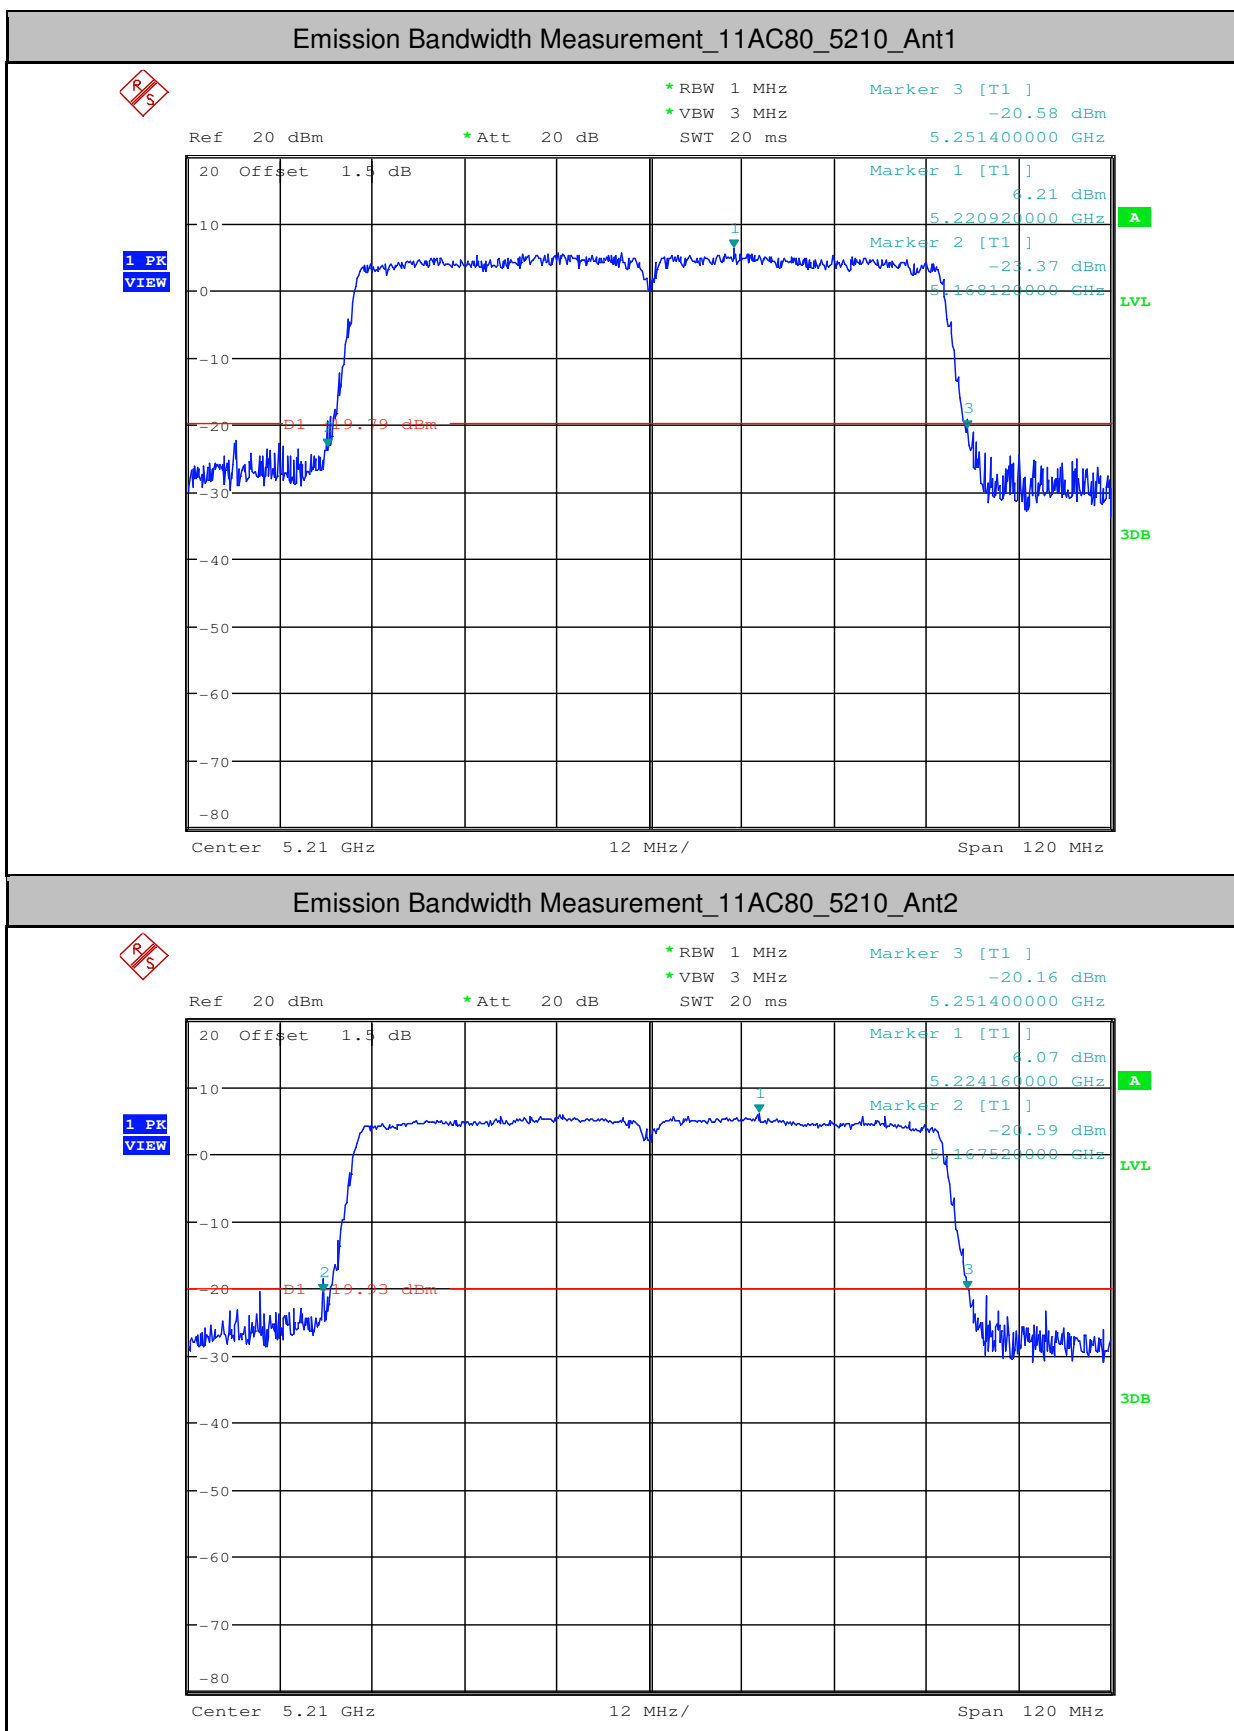


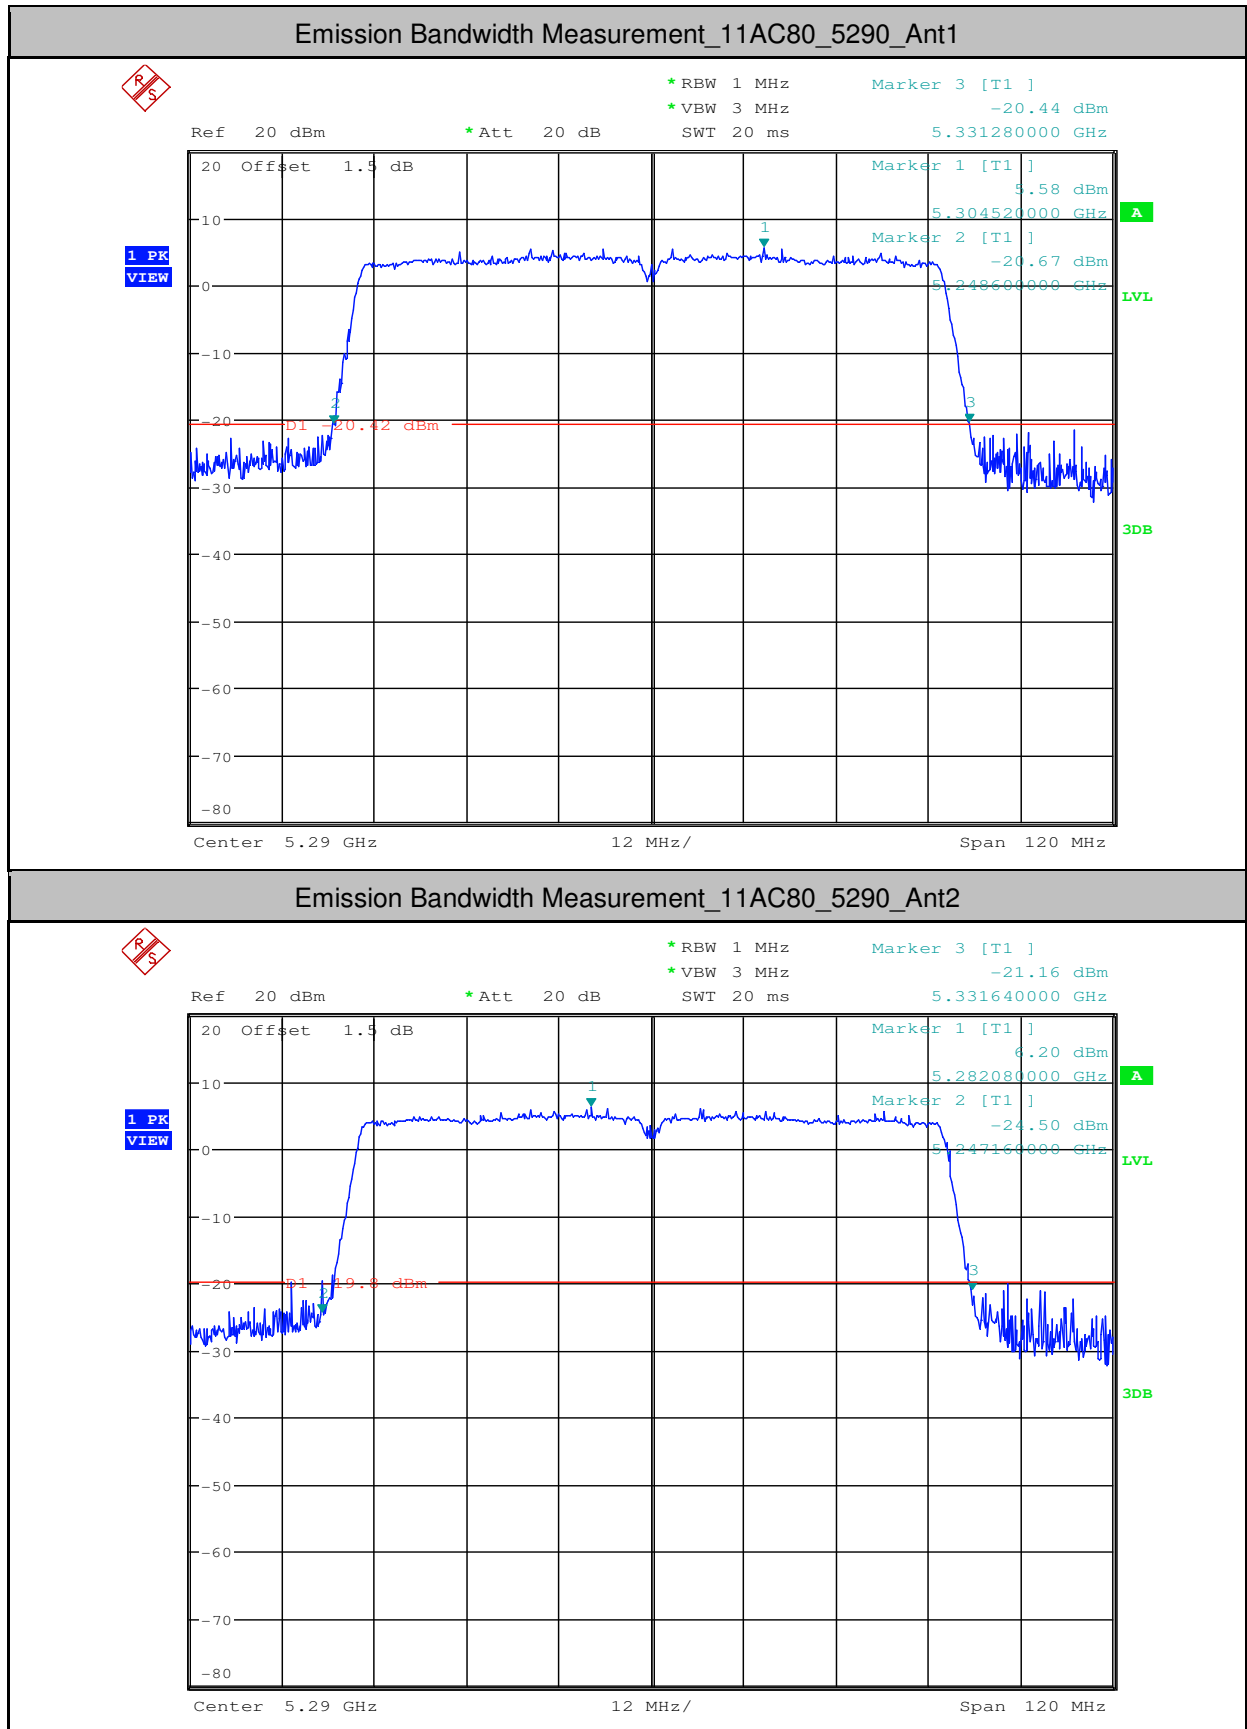

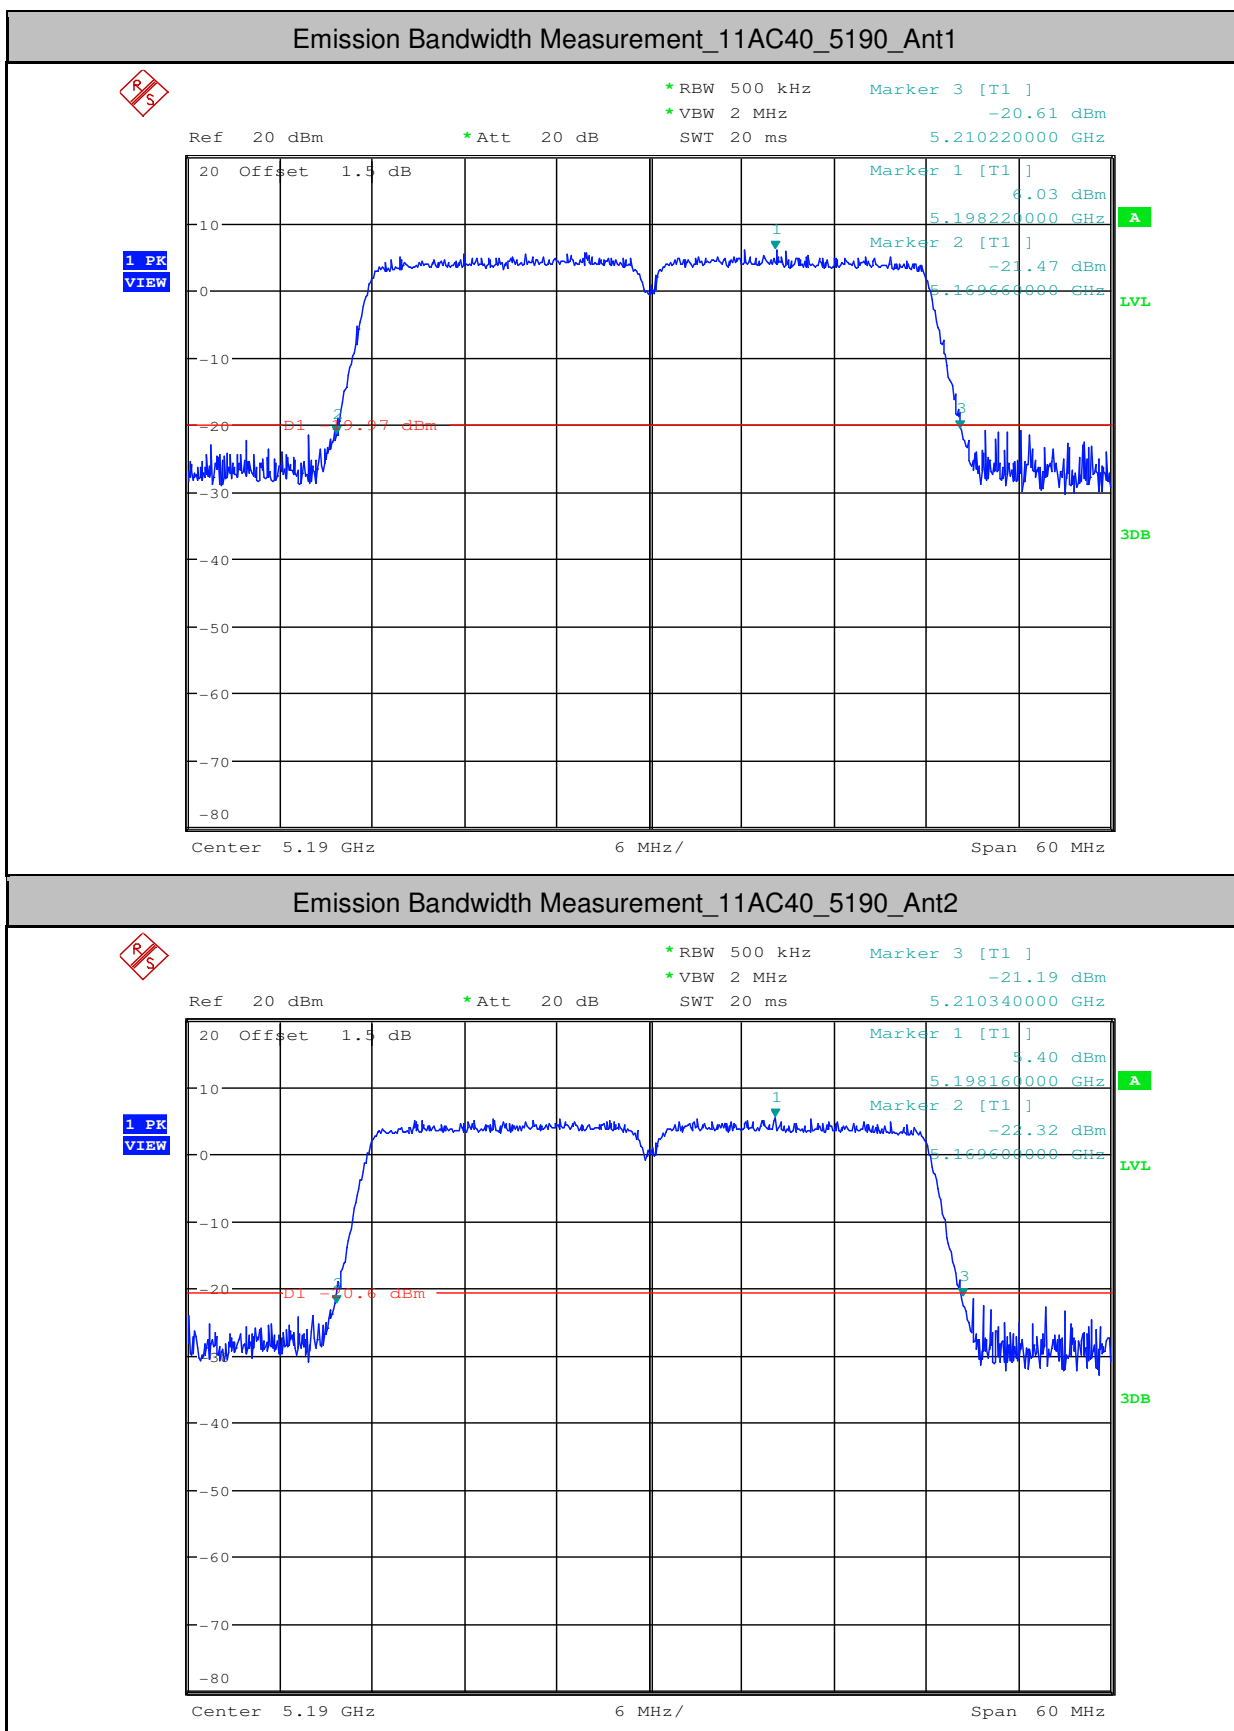

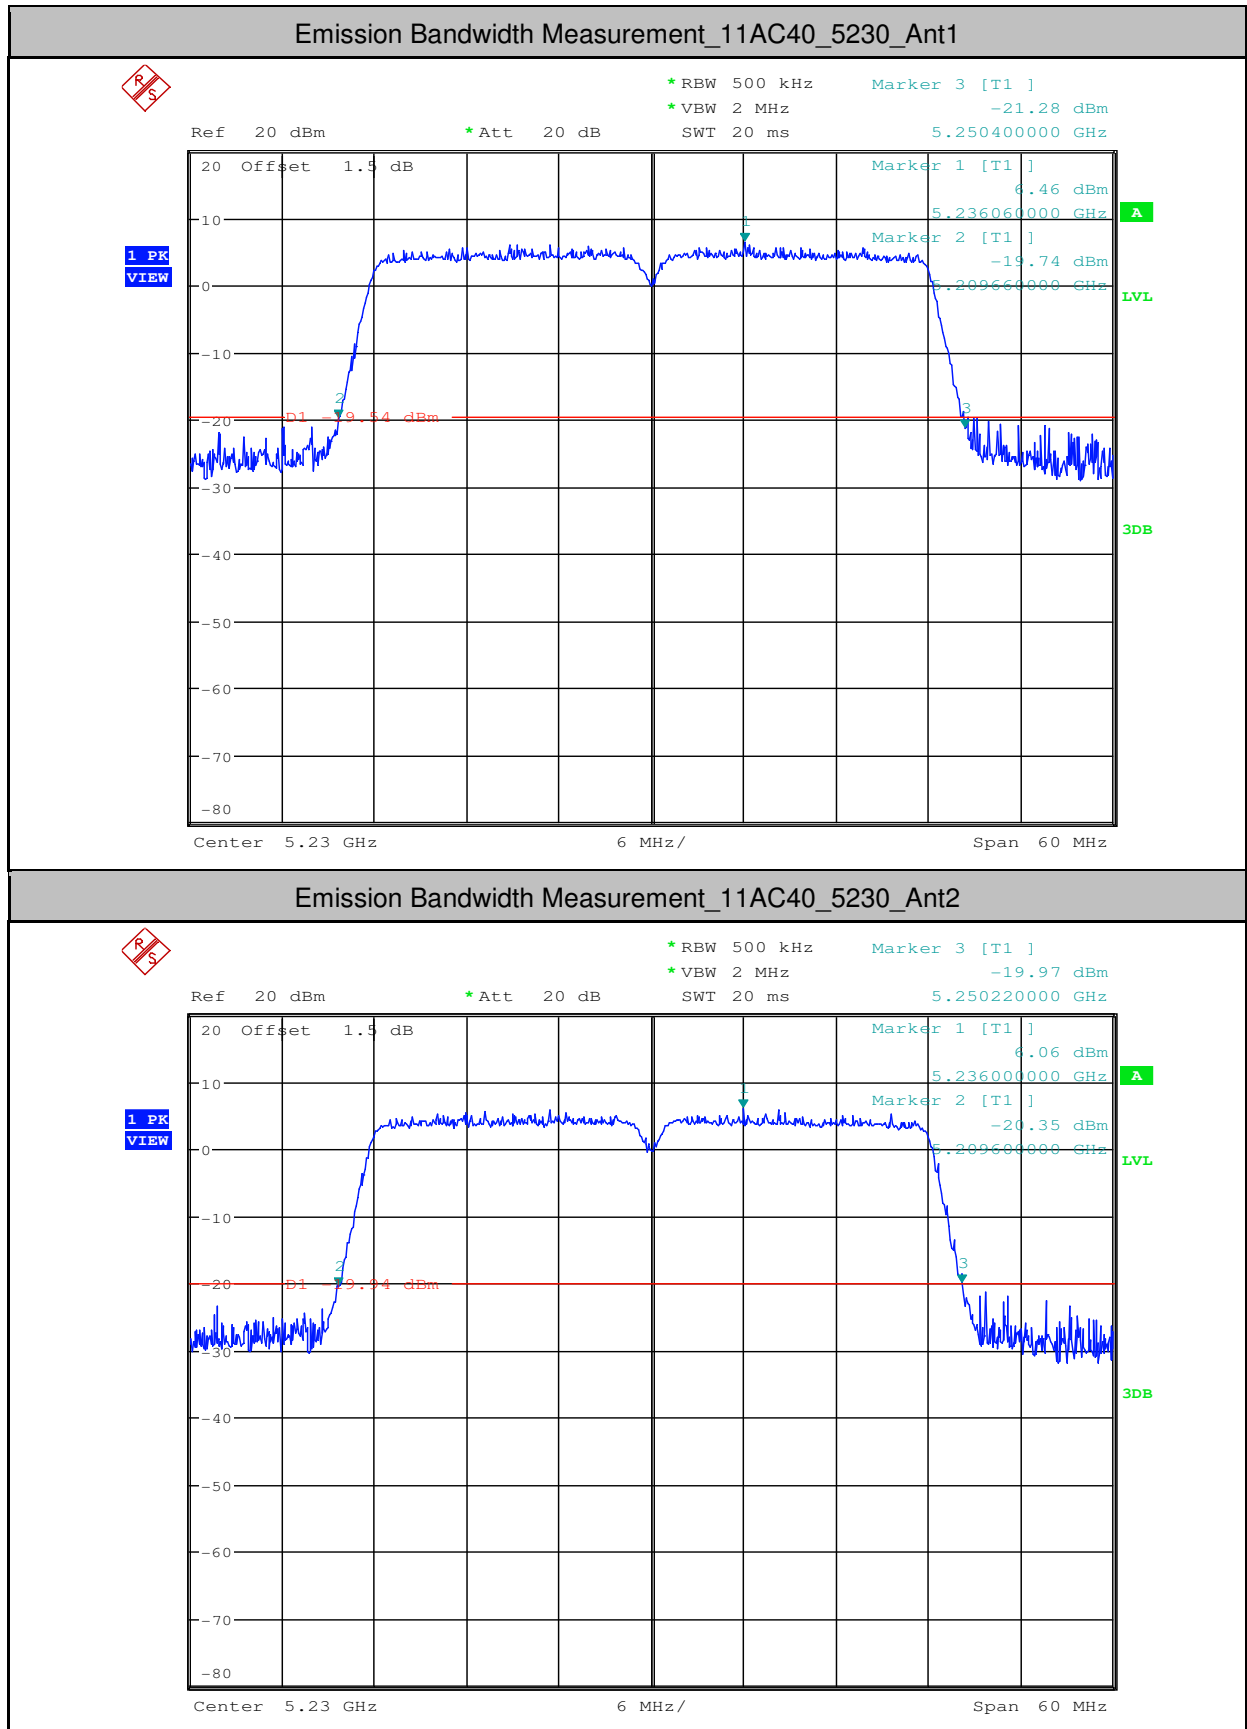

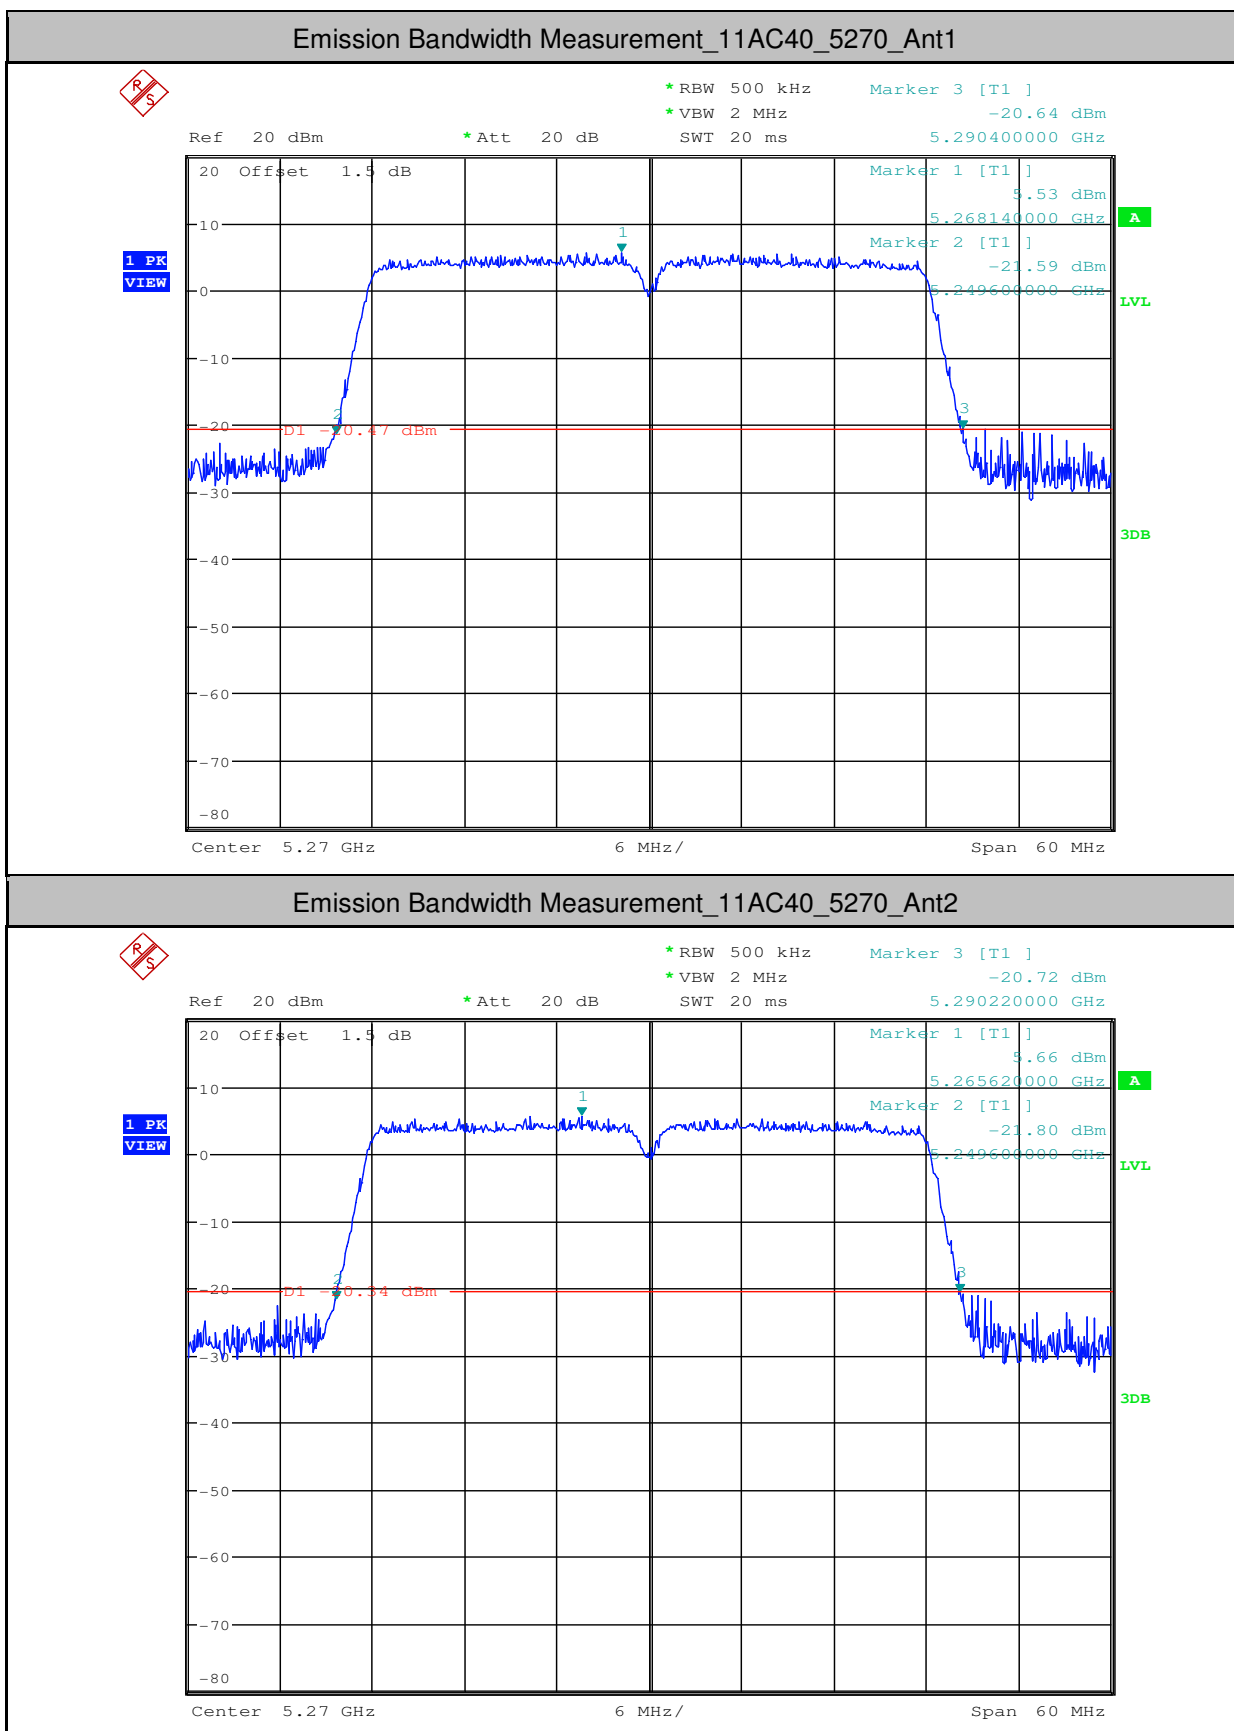

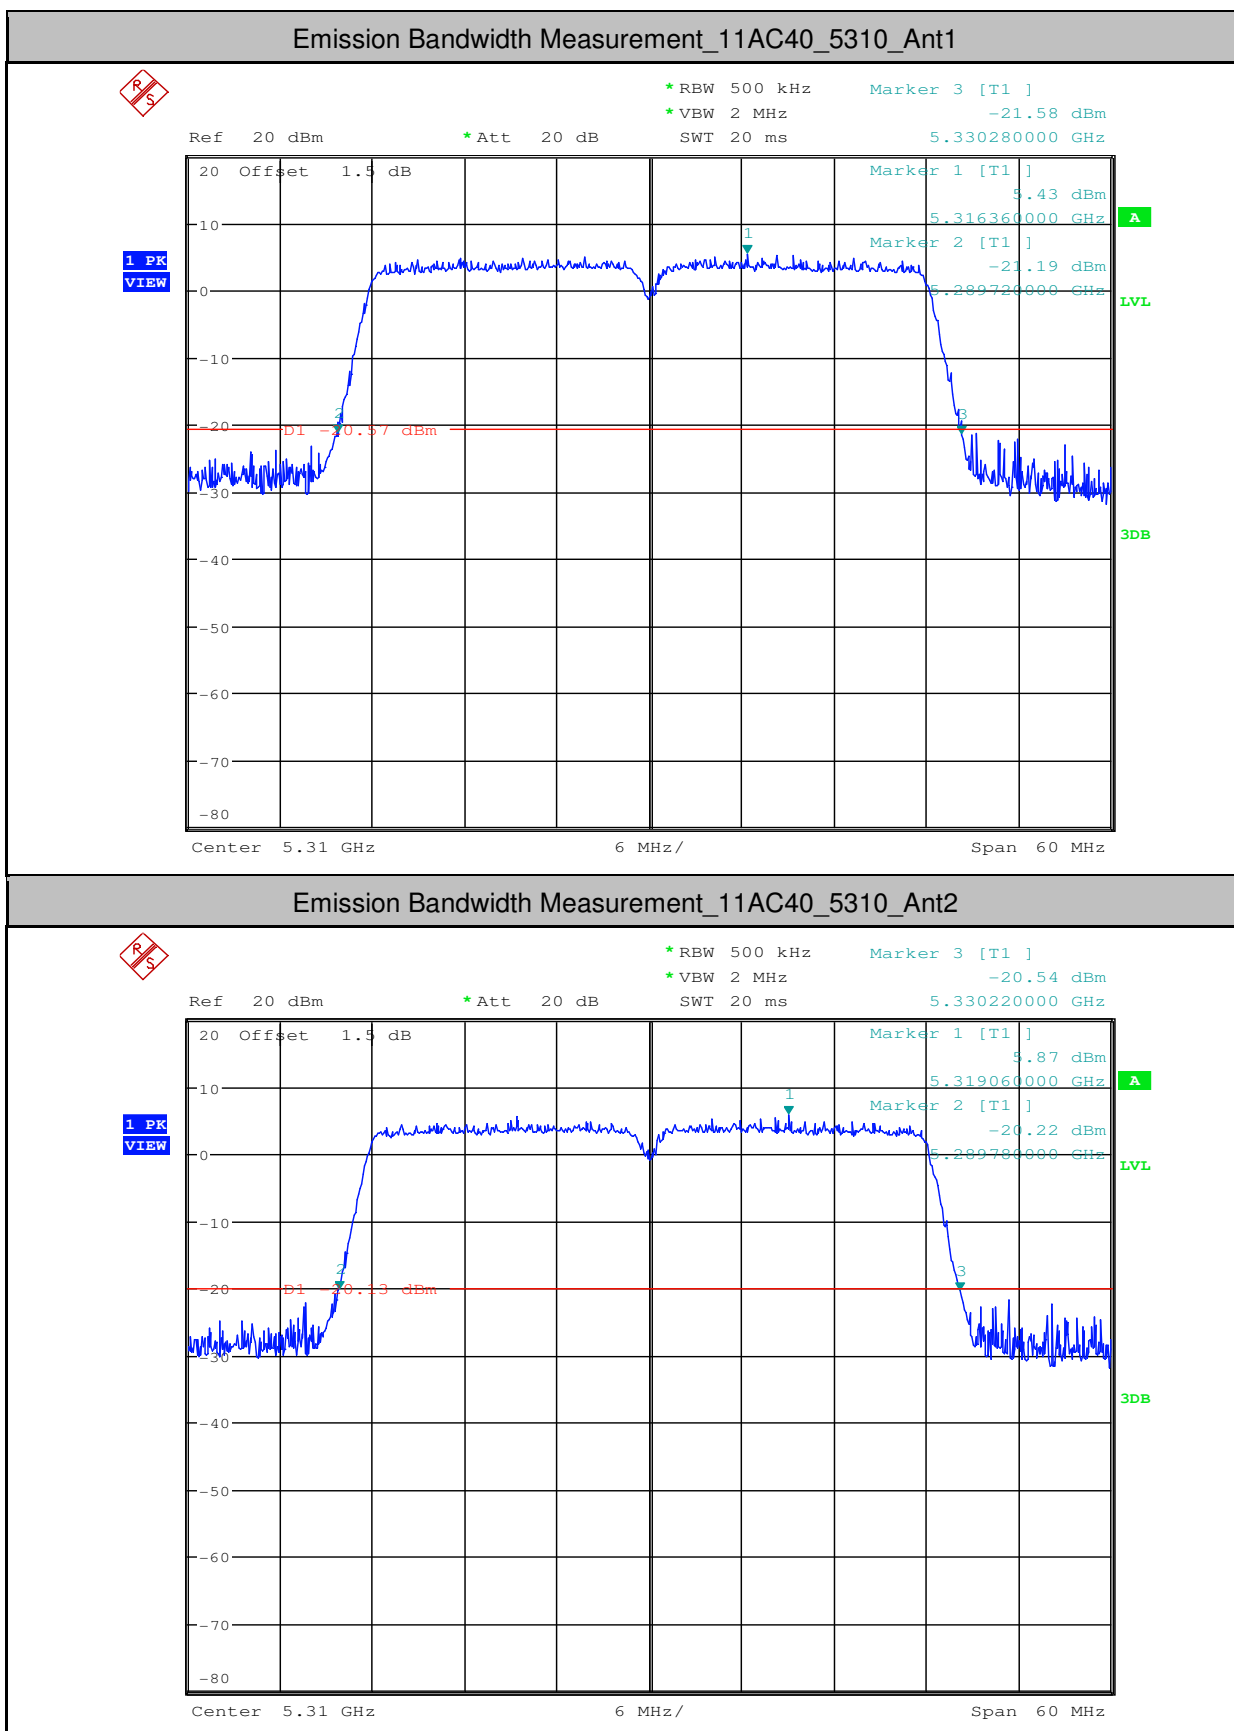



2.Occupied Bandwidth Measurement

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
11A	5180	Ant1	17.460	---	PASS
11A	5180	Ant2	17.460	---	PASS
11A	5220	Ant1	17.490	---	PASS
11A	5220	Ant2	17.460	---	PASS
11A	5240	Ant1	17.430	---	PASS
11A	5240	Ant2	17.490	---	PASS
11A	5260	Ant1	17.490	---	PASS
11A	5260	Ant2	17.490	---	PASS
11A	5300	Ant1	17.460	---	PASS
11A	5300	Ant2	17.430	---	PASS
11A	5320	Ant1	17.430	---	PASS
11A	5320	Ant2	17.460	---	PASS
11N20	5180	Ant1	18.330	---	PASS
11N20	5180	Ant2	18.330	---	PASS
11N20	5220	Ant1	18.360	---	PASS
11N20	5220	Ant2	18.360	---	PASS
11N20	5240	Ant1	18.360	---	PASS
11N20	5240	Ant2	18.330	---	PASS
11N20	5260	Ant1	18.330	---	PASS
11N20	5260	Ant2	18.360	---	PASS
11N20	5300	Ant1	18.270	---	PASS
11N20	5300	Ant2	18.360	---	PASS
11N20	5320	Ant1	18.360	---	PASS
11N20	5320	Ant2	18.390	---	PASS
11N40	5190	Ant1	36.600	---	PASS
11N40	5190	Ant2	36.660	---	PASS
11N40	5230	Ant1	36.600	---	PASS
11N40	5230	Ant2	36.660	---	PASS
11N40	5270	Ant1	36.600	---	PASS
11N40	5270	Ant2	36.660	---	PASS
11N40	5310	Ant1	36.540	---	PASS
11N40	5310	Ant2	36.600	---	PASS





SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM181000906203


Page: 212 of 334


11AC20	5180	Ant1	18.300	---	PASS
11AC20	5180	Ant2	18.330	---	PASS
11AC20	5220	Ant1	18.420	---	PASS
11AC20	5220	Ant2	18.390	---	PASS
11AC20	5240	Ant1	18.390	---	PASS
11AC20	5240	Ant2	18.300	---	PASS
11AC20	5260	Ant1	18.360	---	PASS
11AC20	5260	Ant2	18.330	---	PASS
11AC20	5300	Ant1	18.330	---	PASS
11AC20	5300	Ant2	18.330	---	PASS
11AC20	5320	Ant1	18.420	---	PASS
11AC20	5320	Ant2	18.330	---	PASS
11AC80	5210	Ant1	76.200	---	PASS
11AC80	5210	Ant2	76.200	---	PASS
11AC80	5290	Ant1	76.200	---	PASS
11AC80	5290	Ant2	76.200	---	PASS
11AC40	5190	Ant1	36.540	---	PASS
11AC40	5190	Ant2	36.600	---	PASS
11AC40	5230	Ant1	36.600	---	PASS
11AC40	5230	Ant2	36.540	---	PASS
11AC40	5270	Ant1	36.600	---	PASS
11AC40	5270	Ant2	36.660	---	PASS
11AC40	5310	Ant1	36.600	---	PASS
11AC40	5310	Ant2	36.540	---	PASS

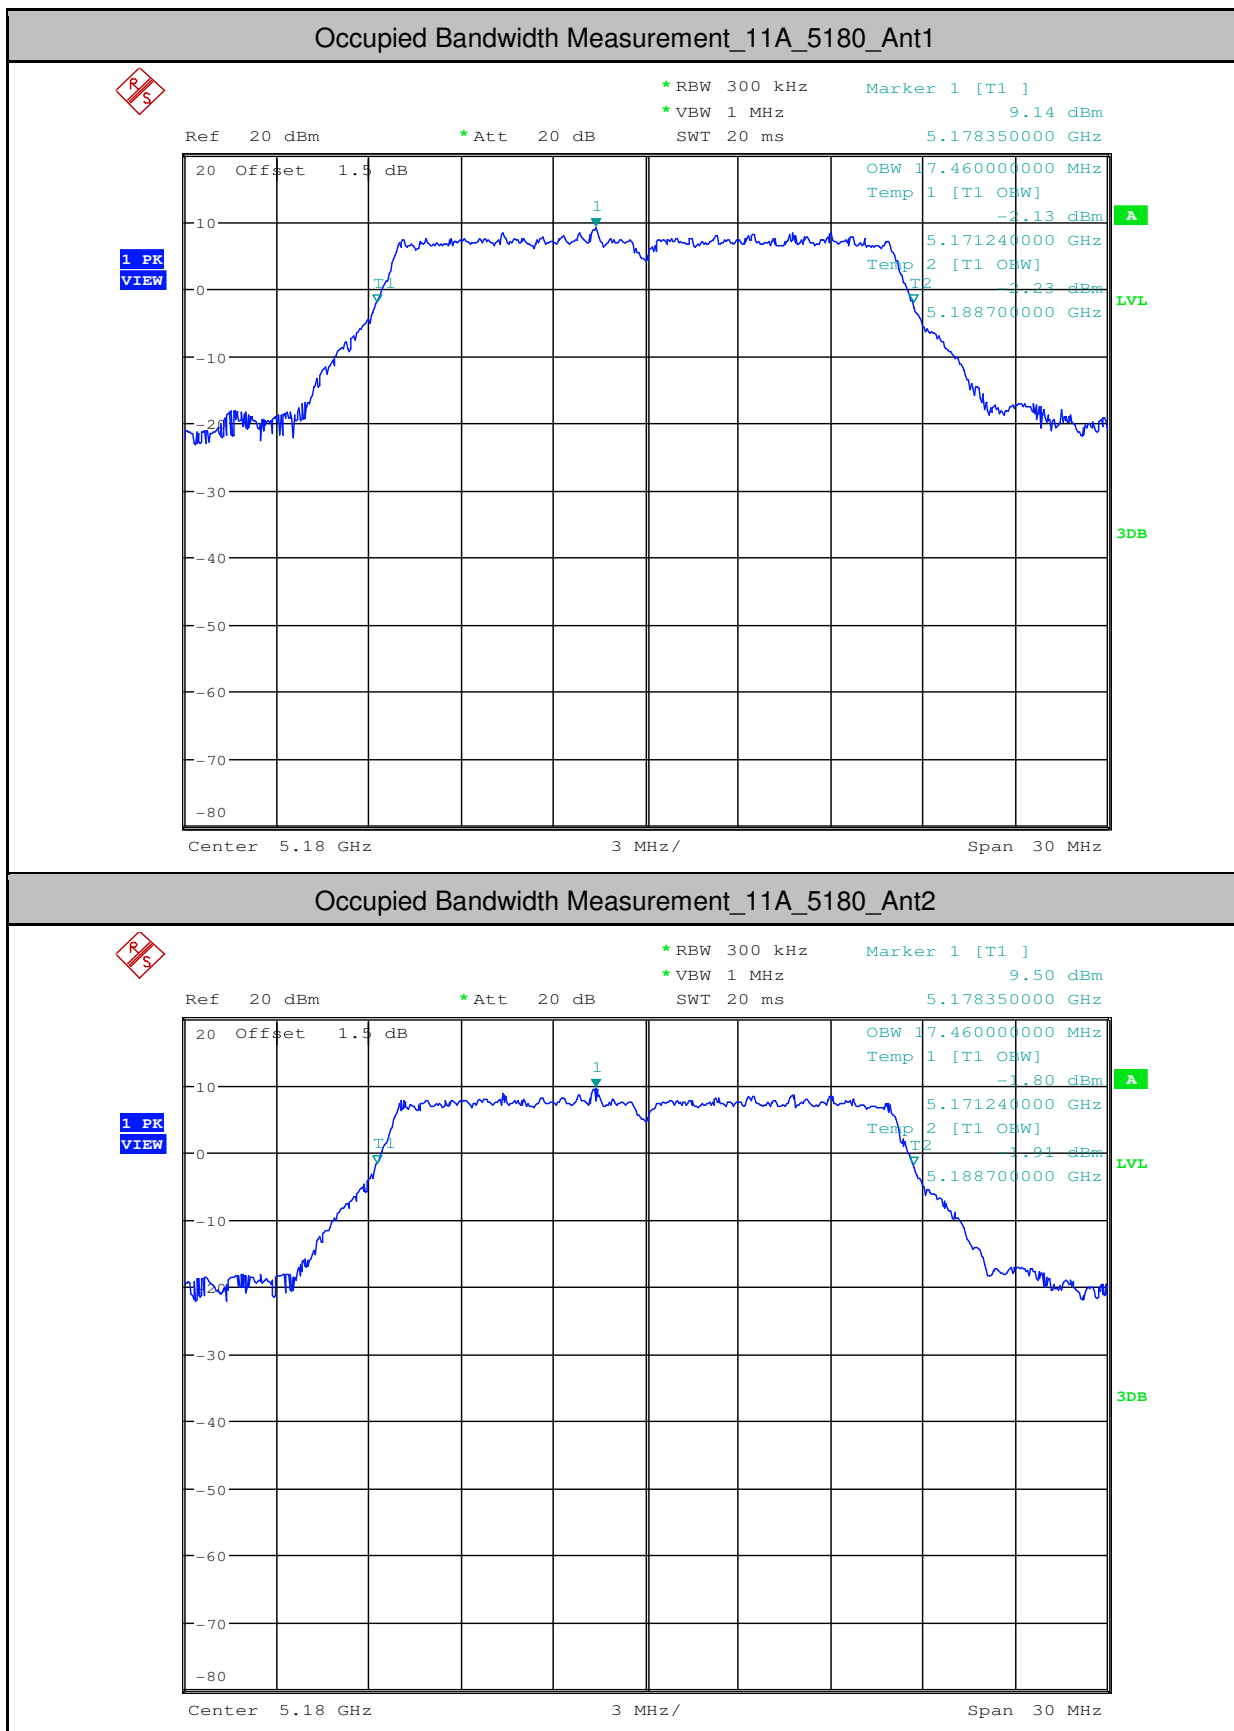


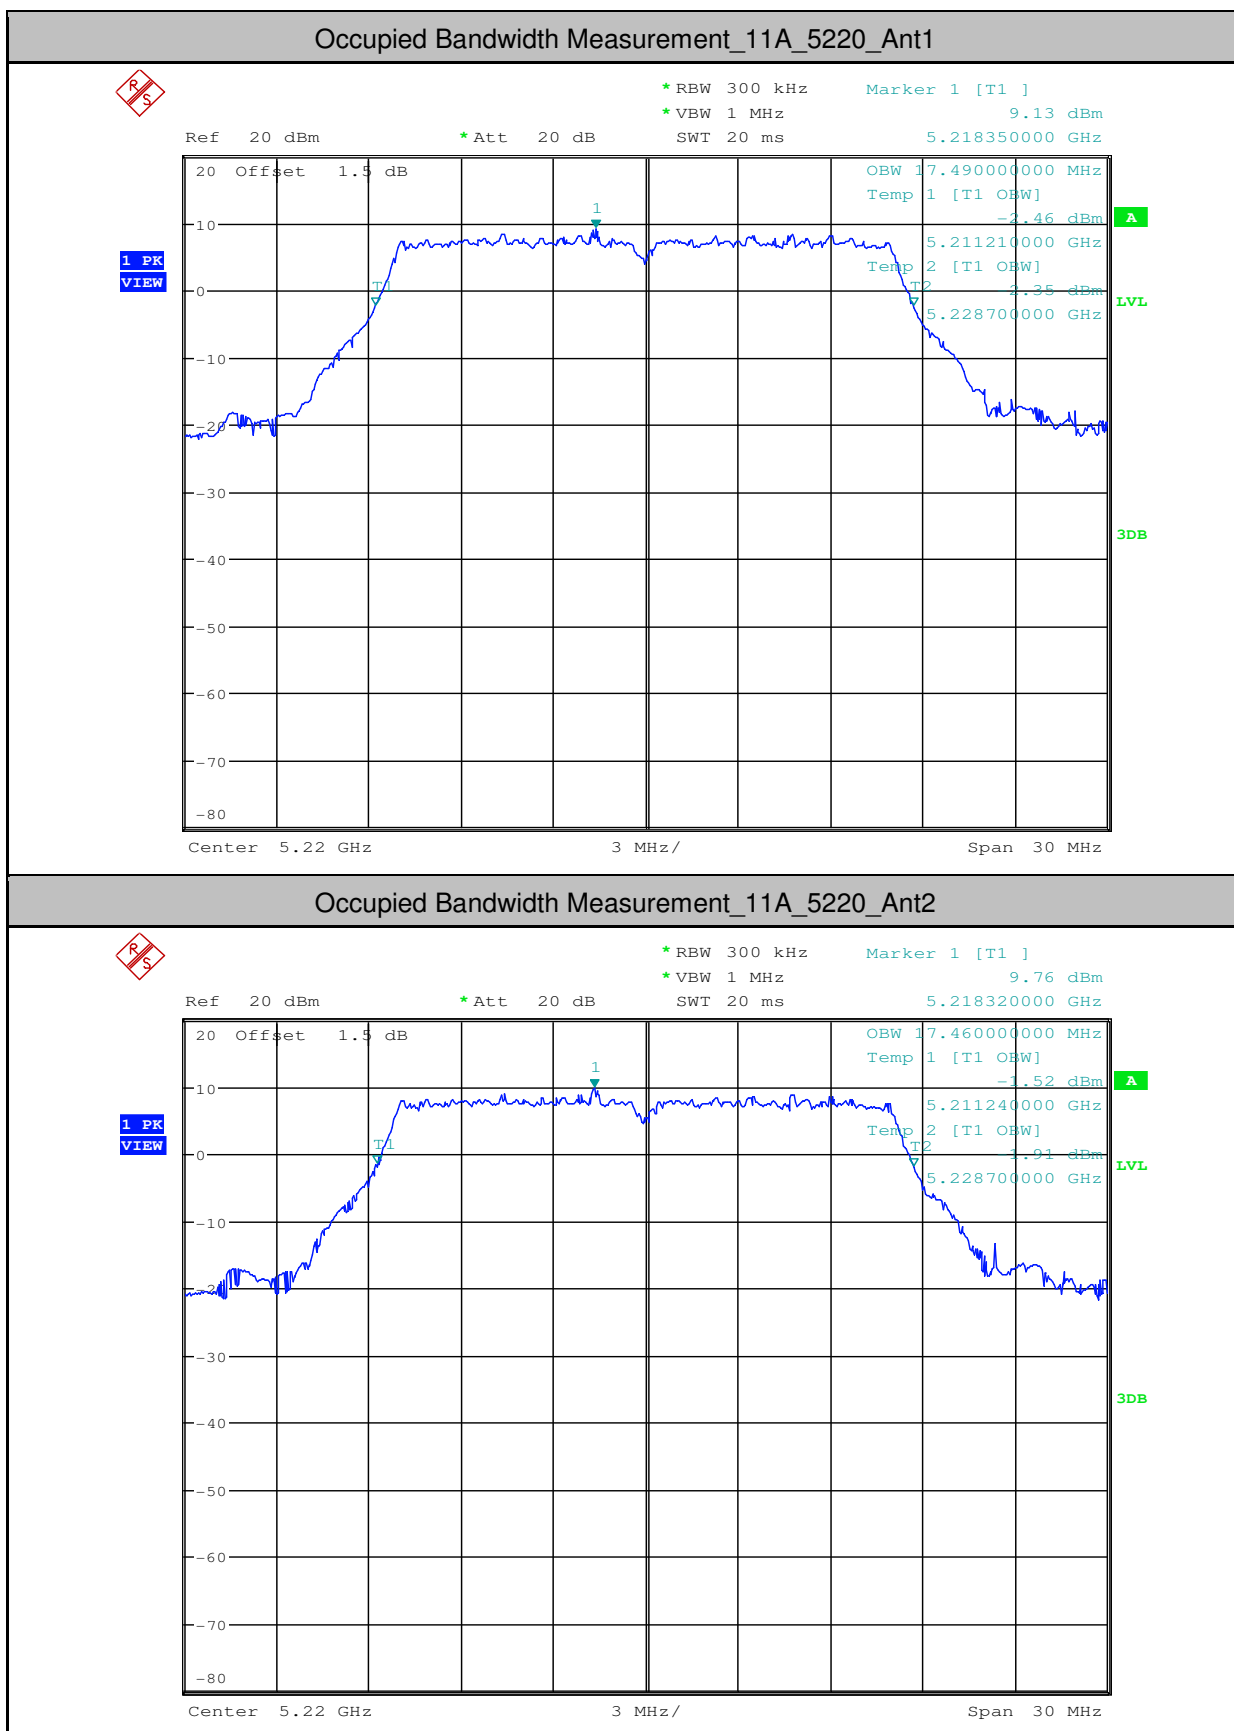


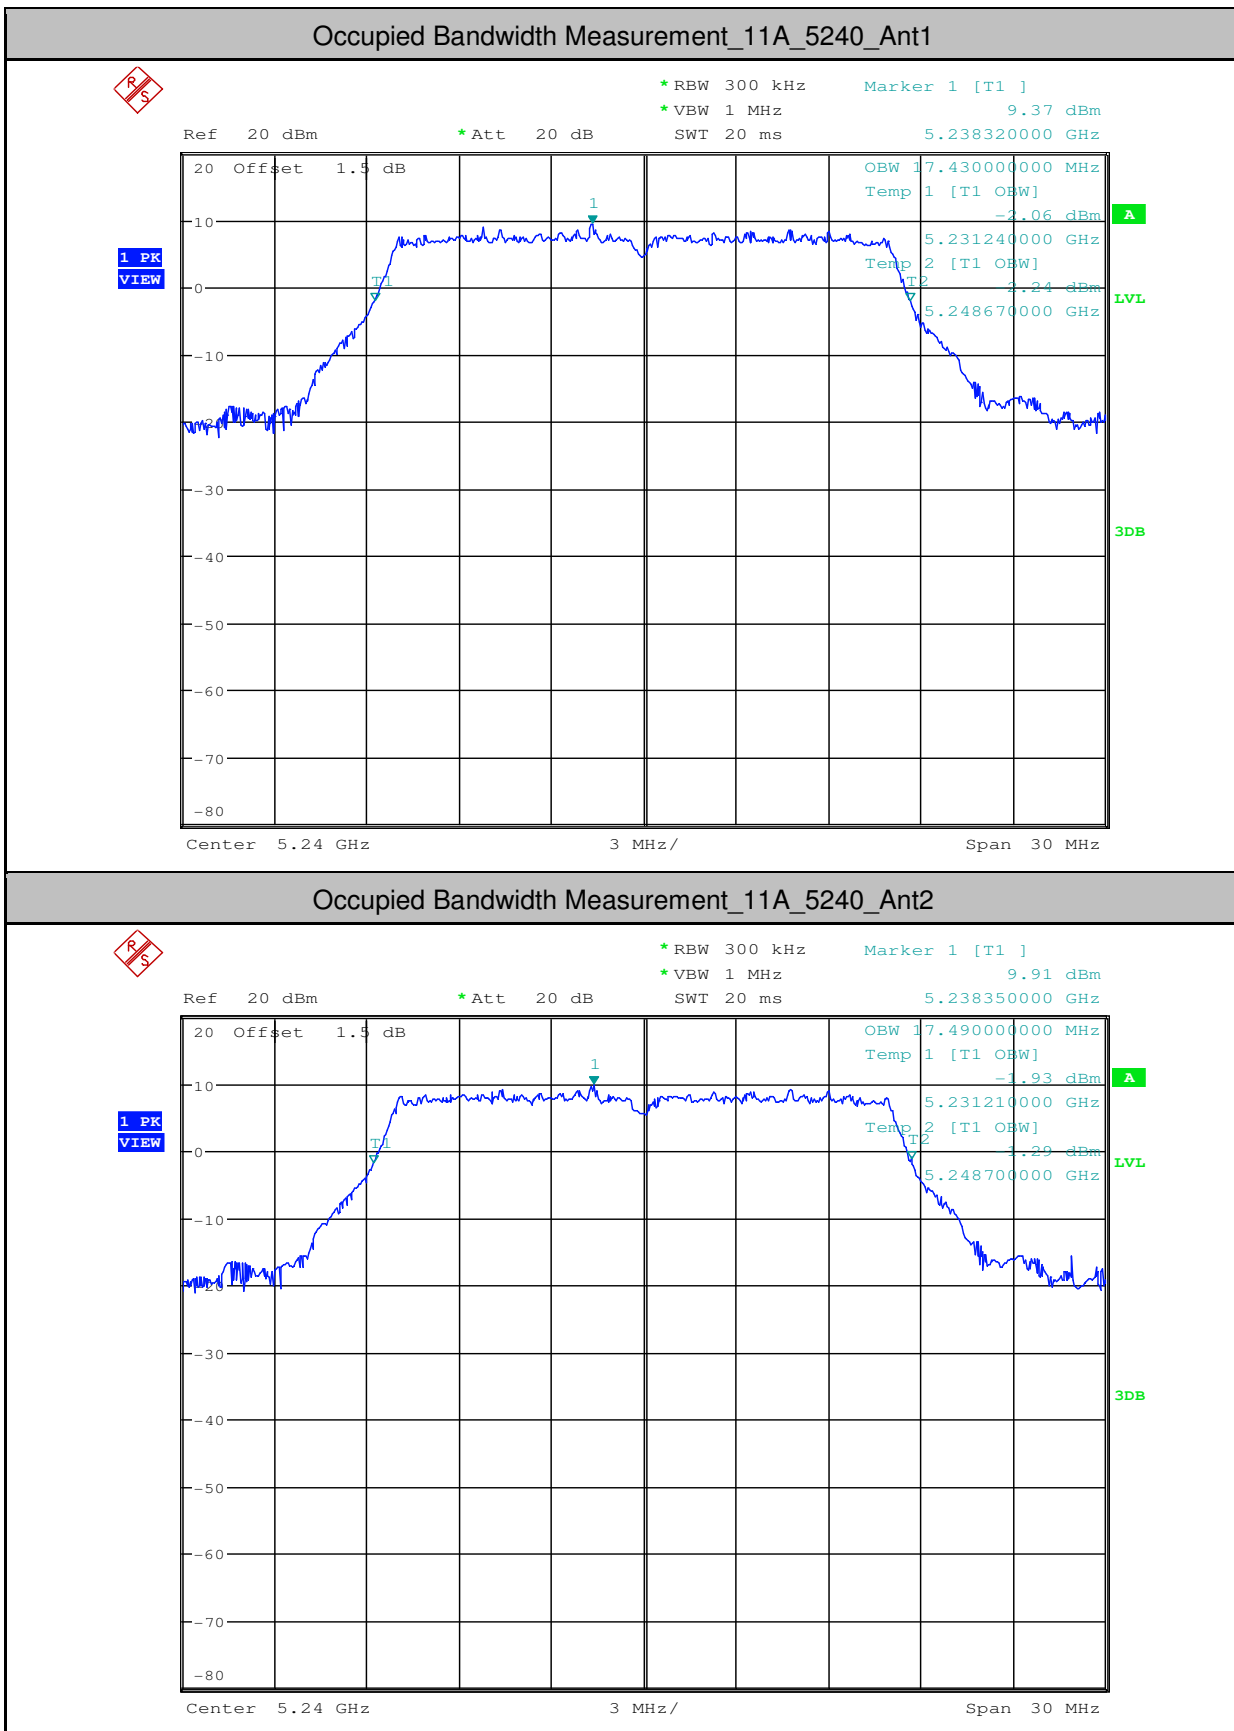


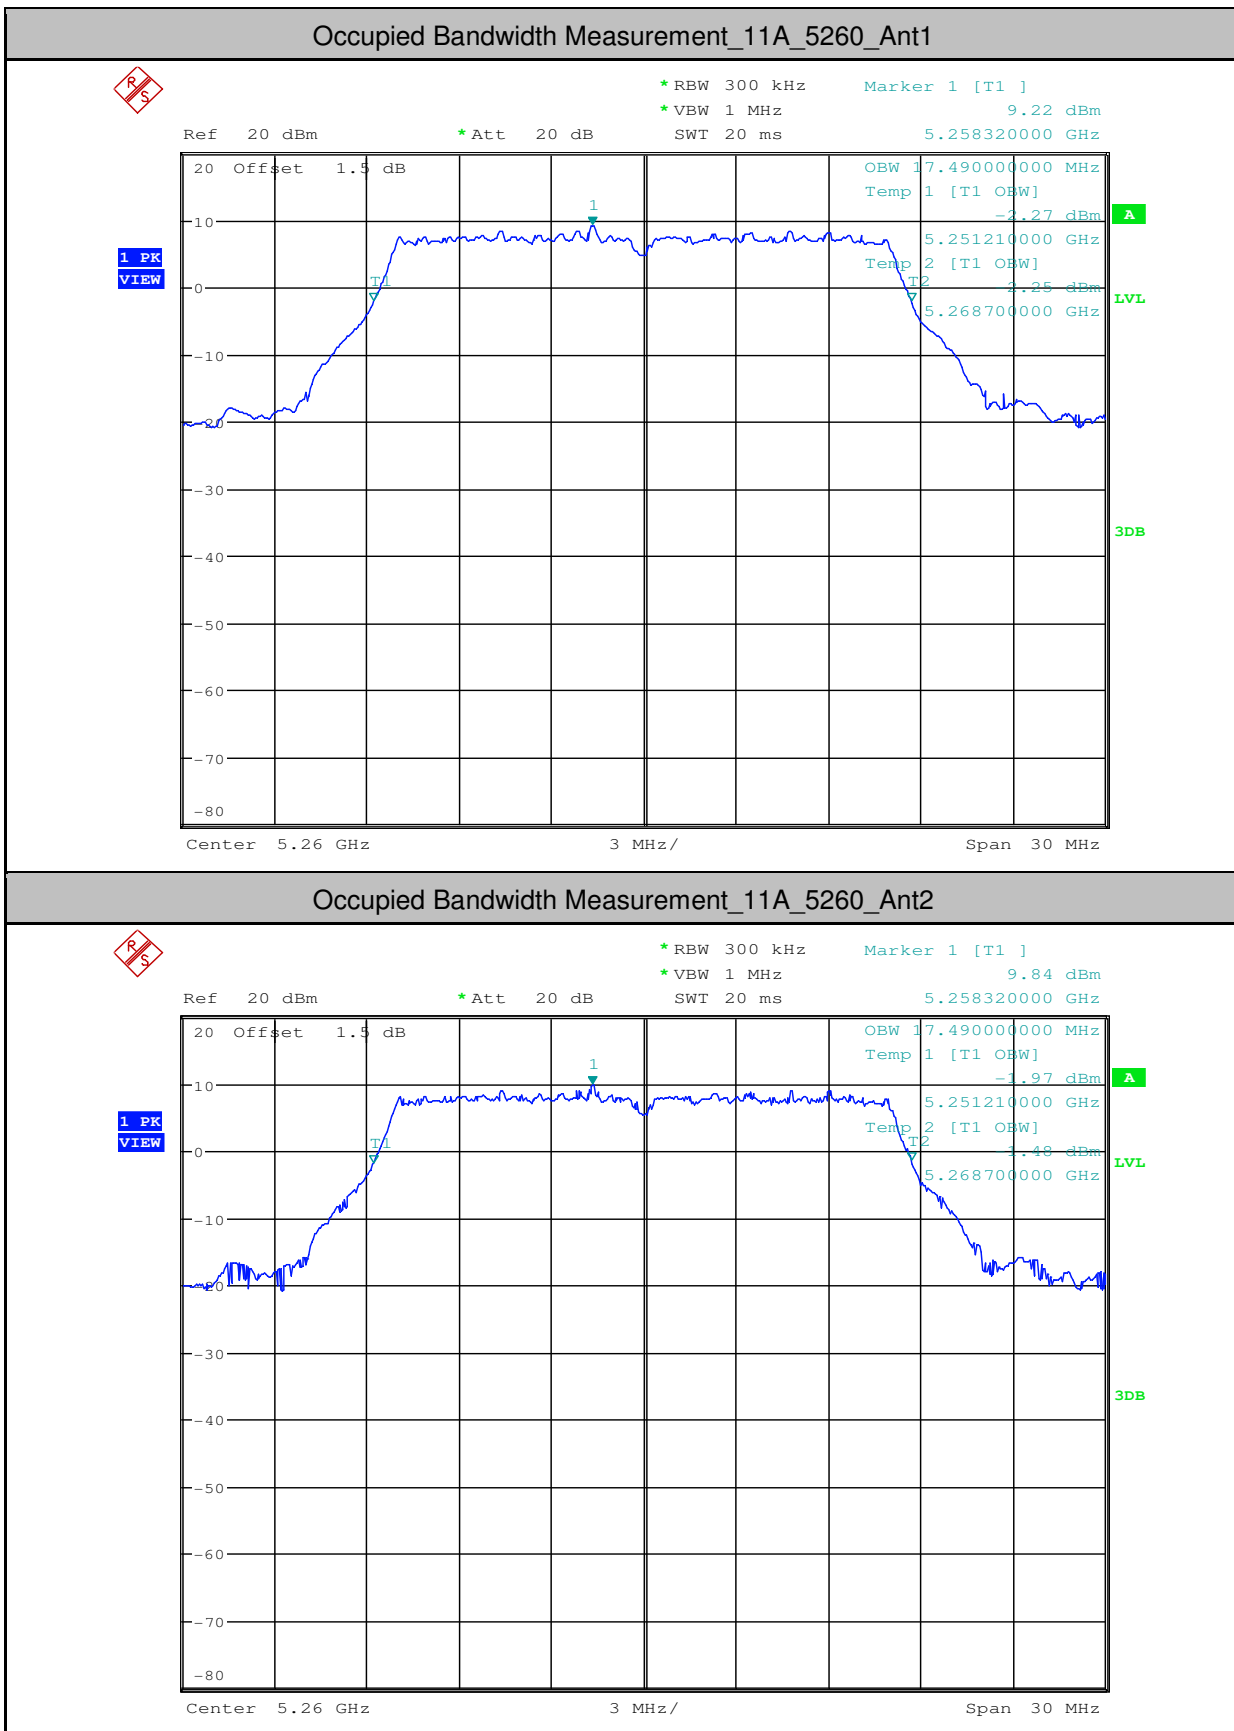


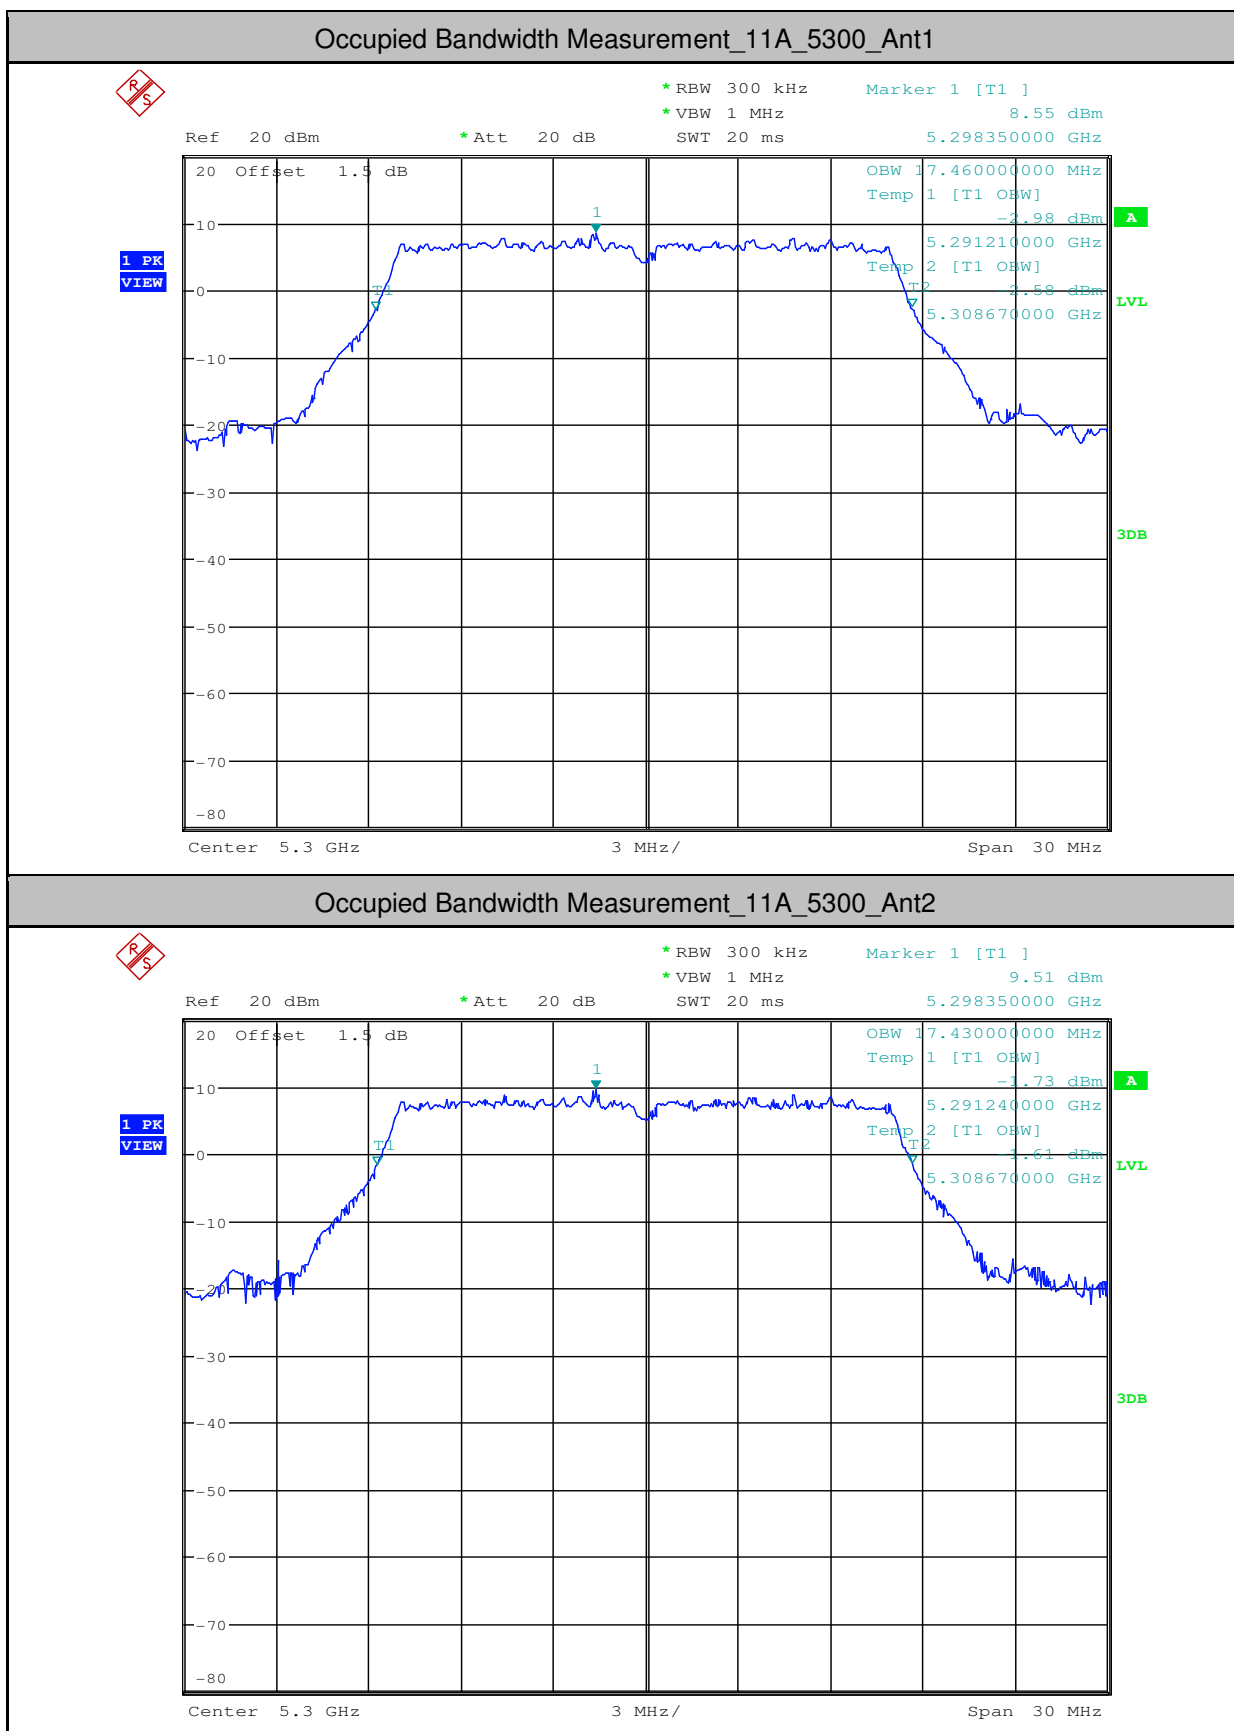


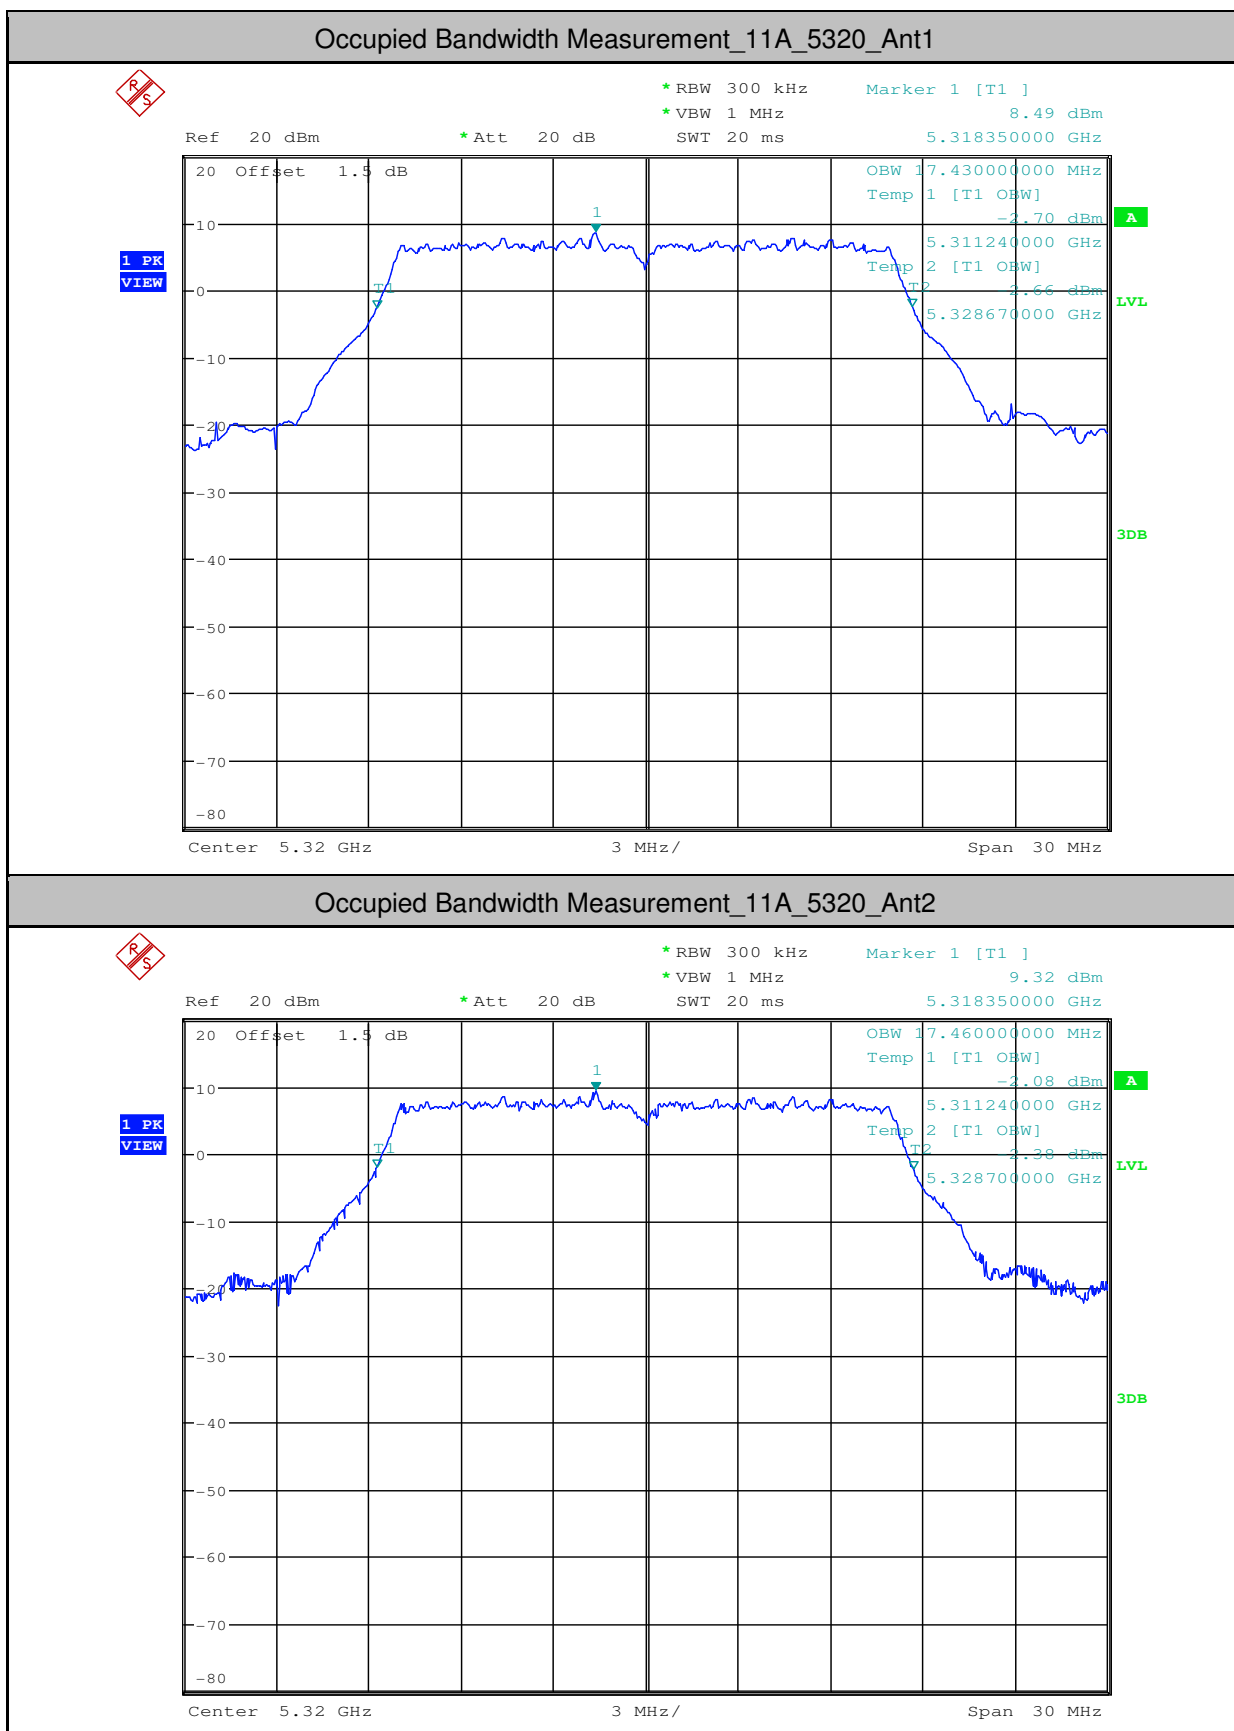


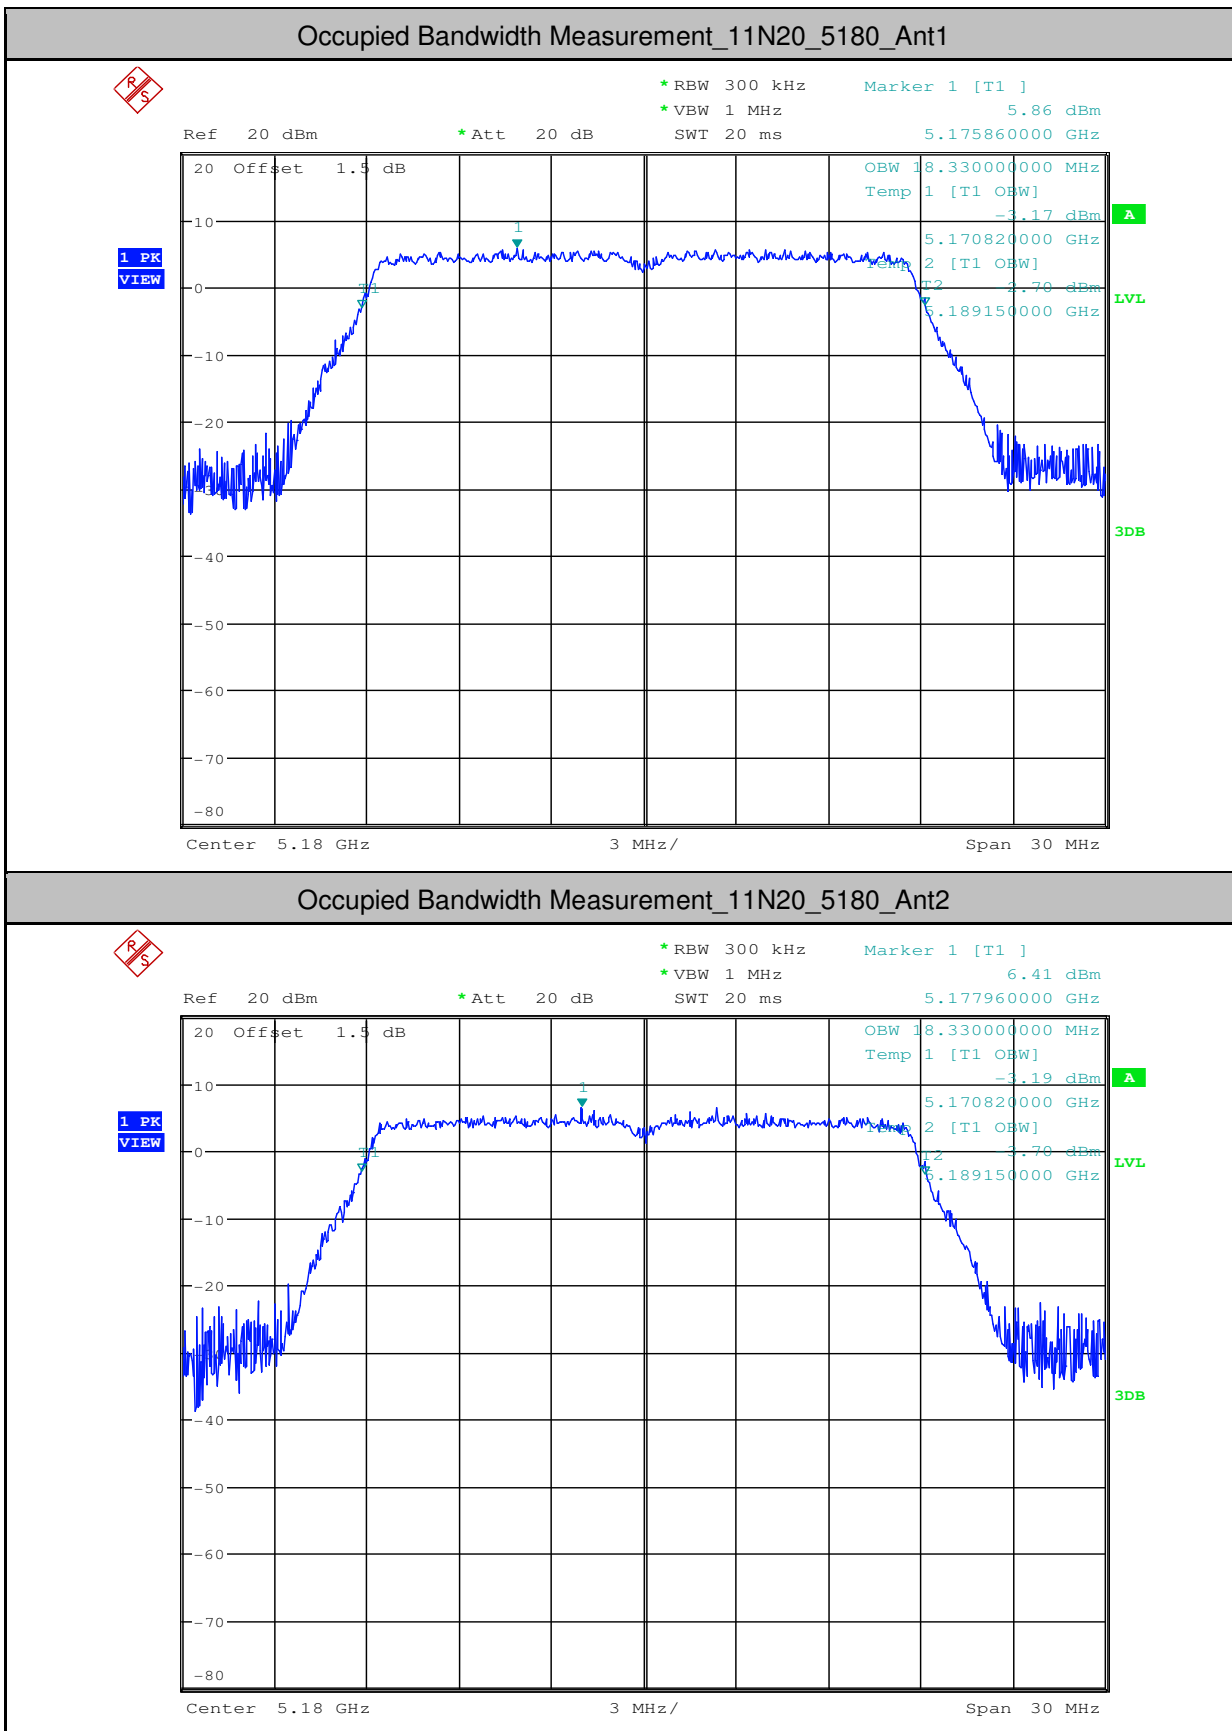


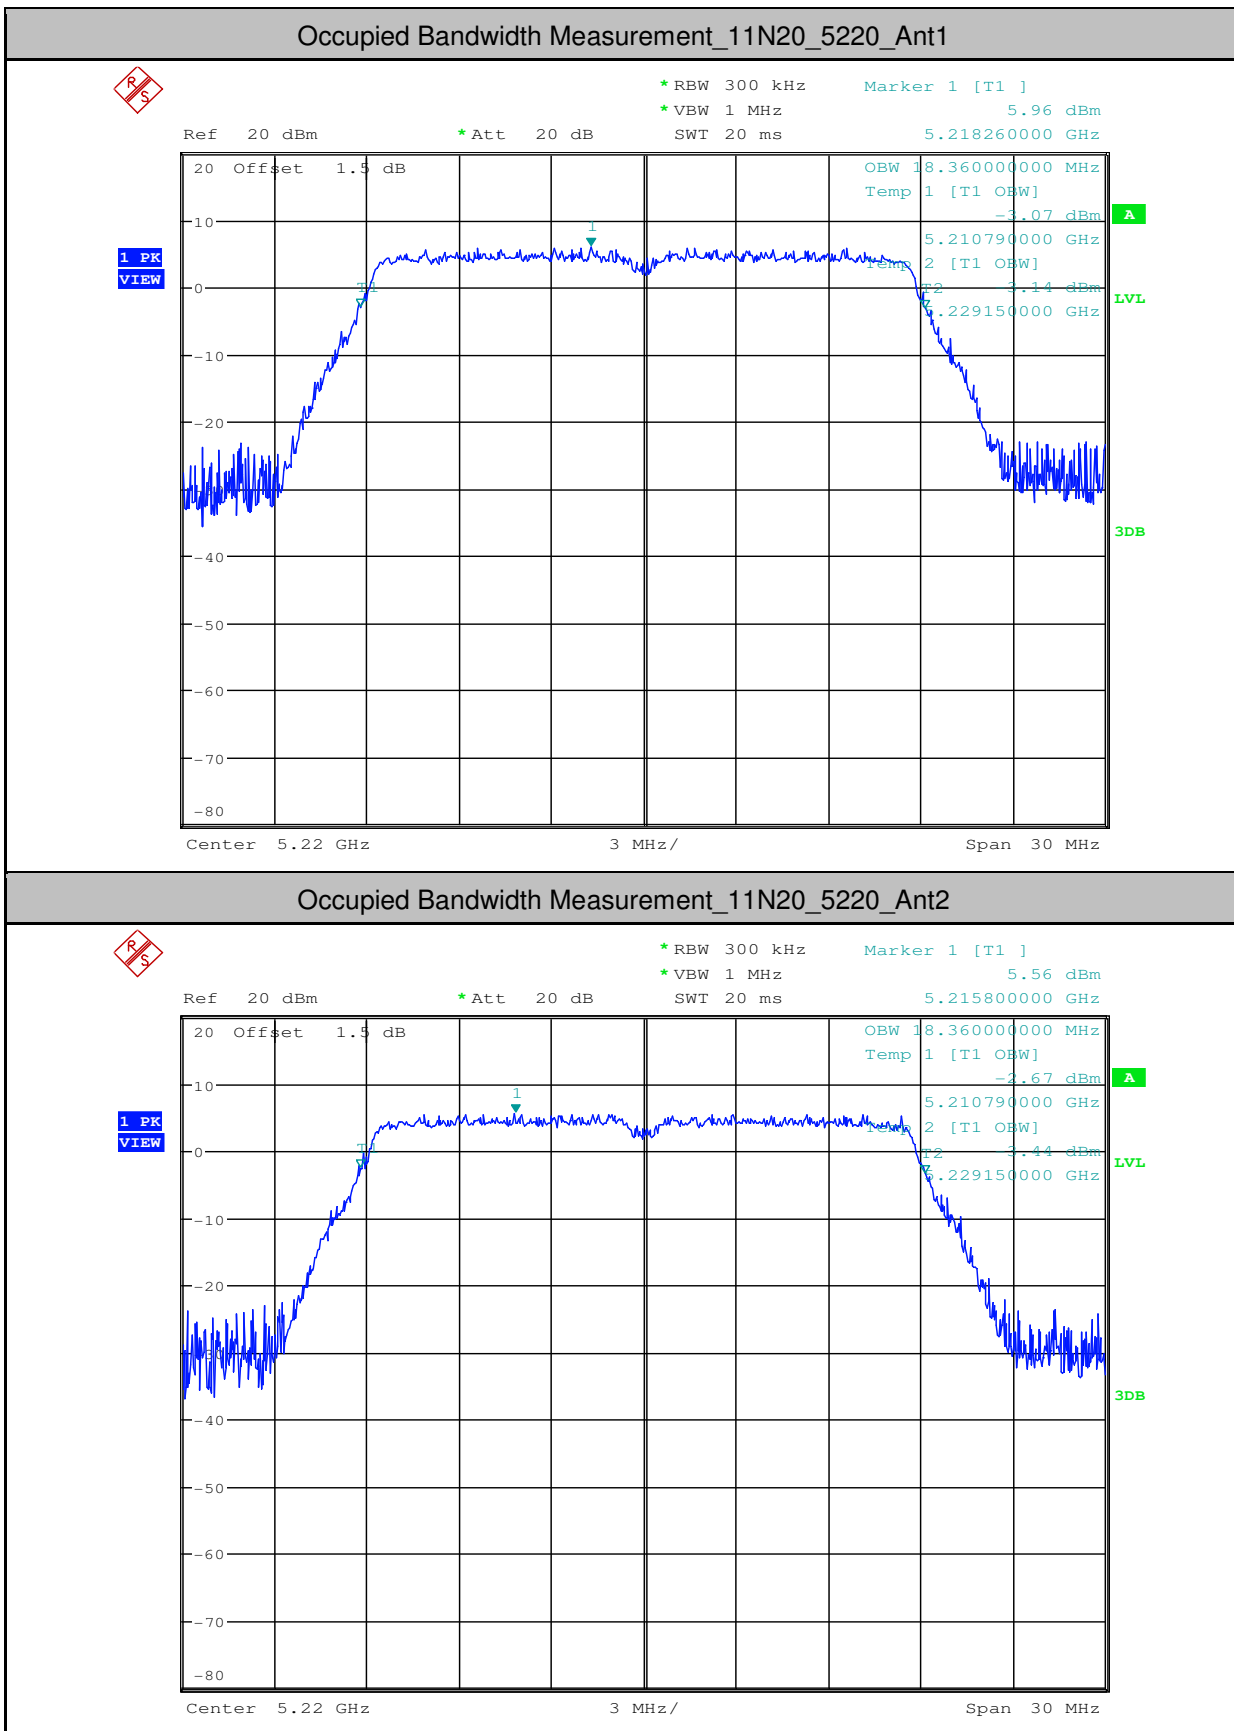


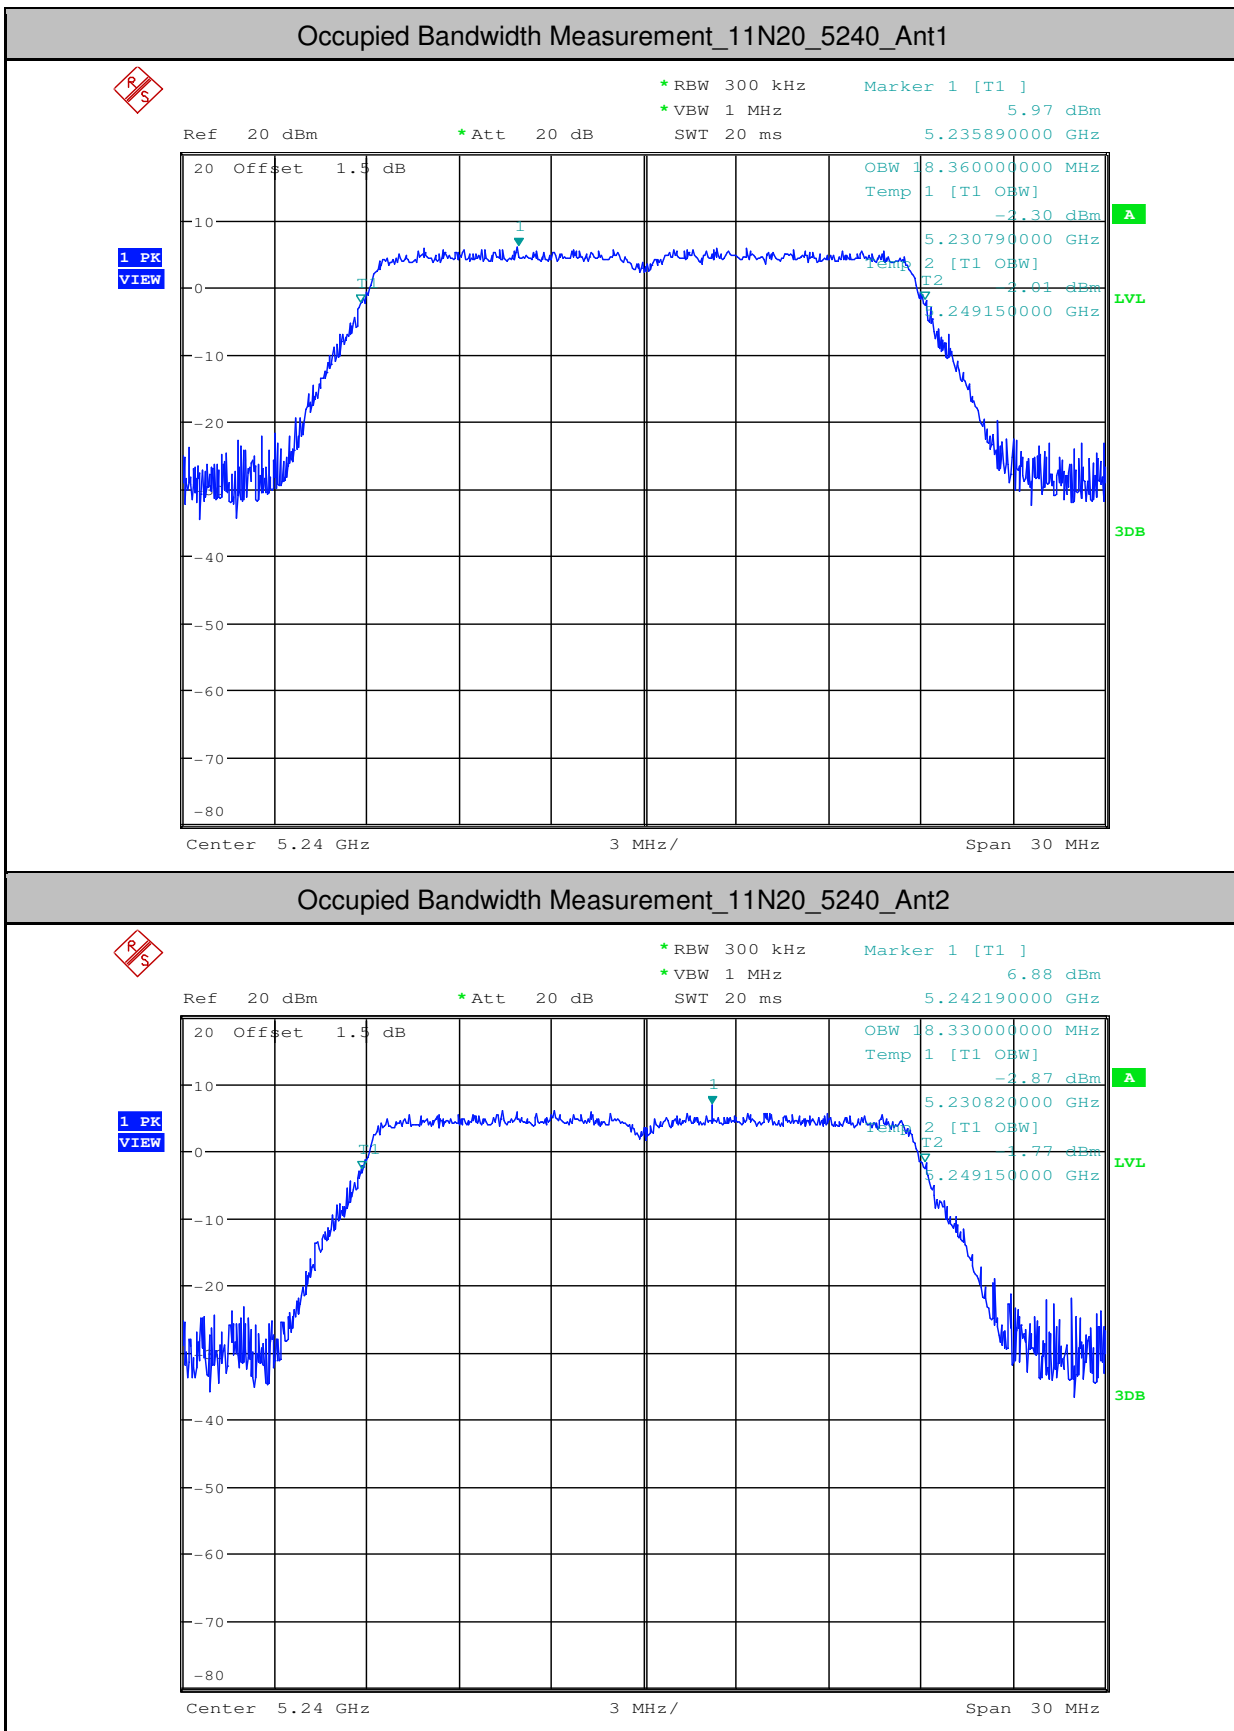


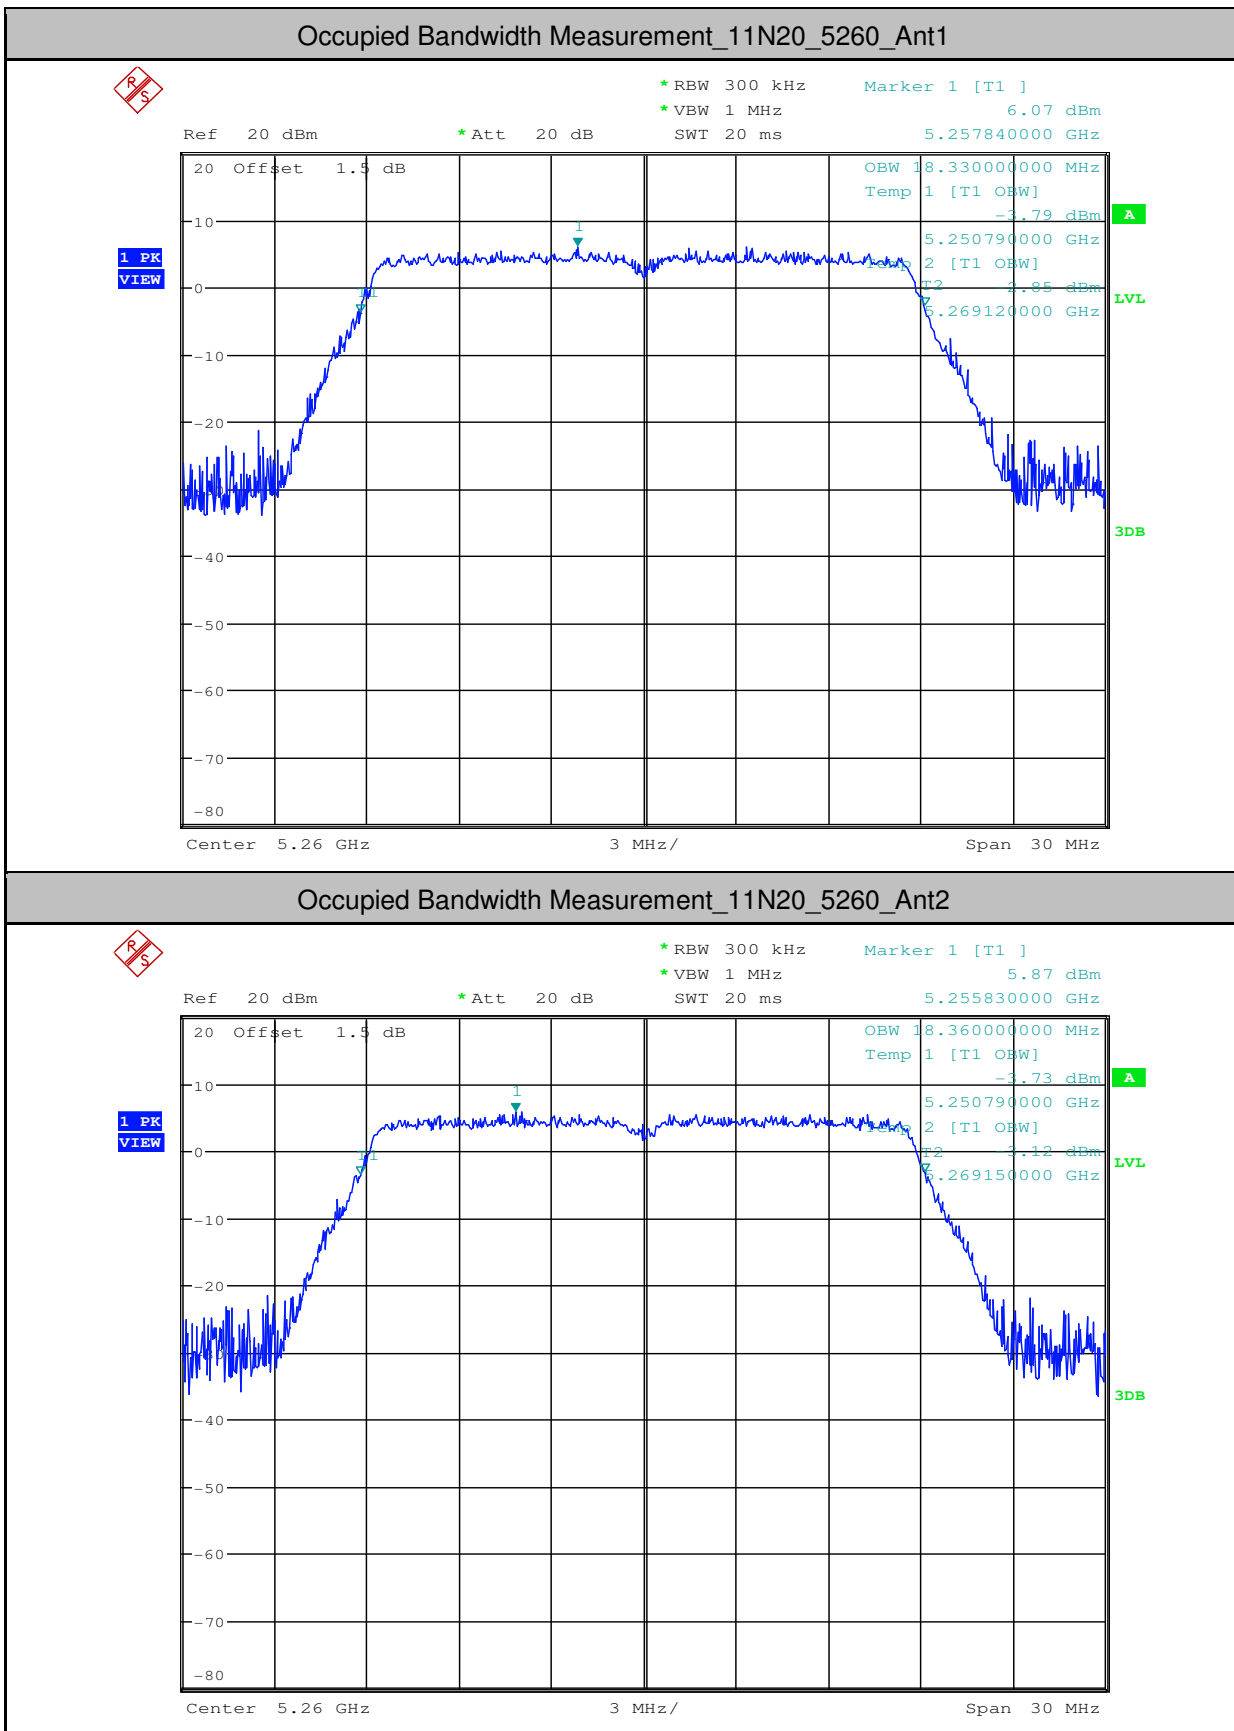


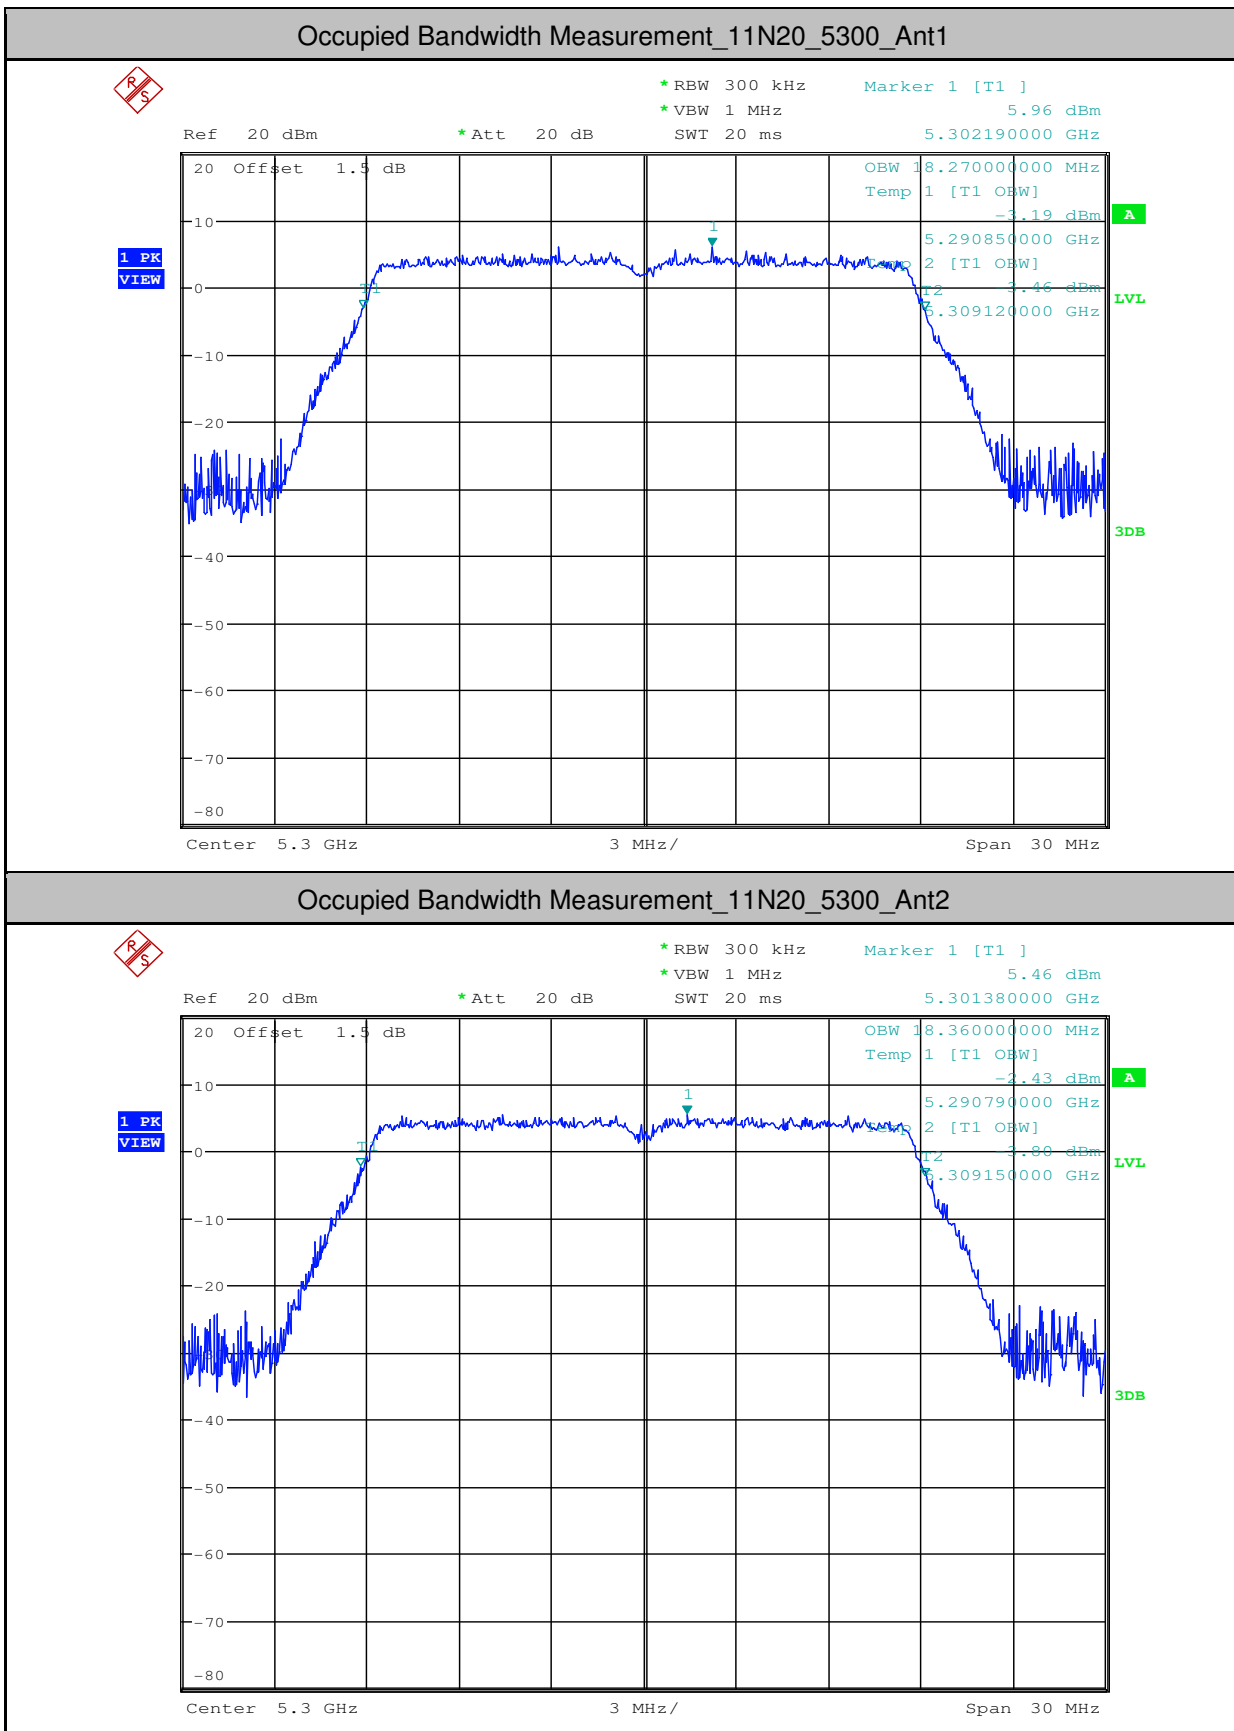


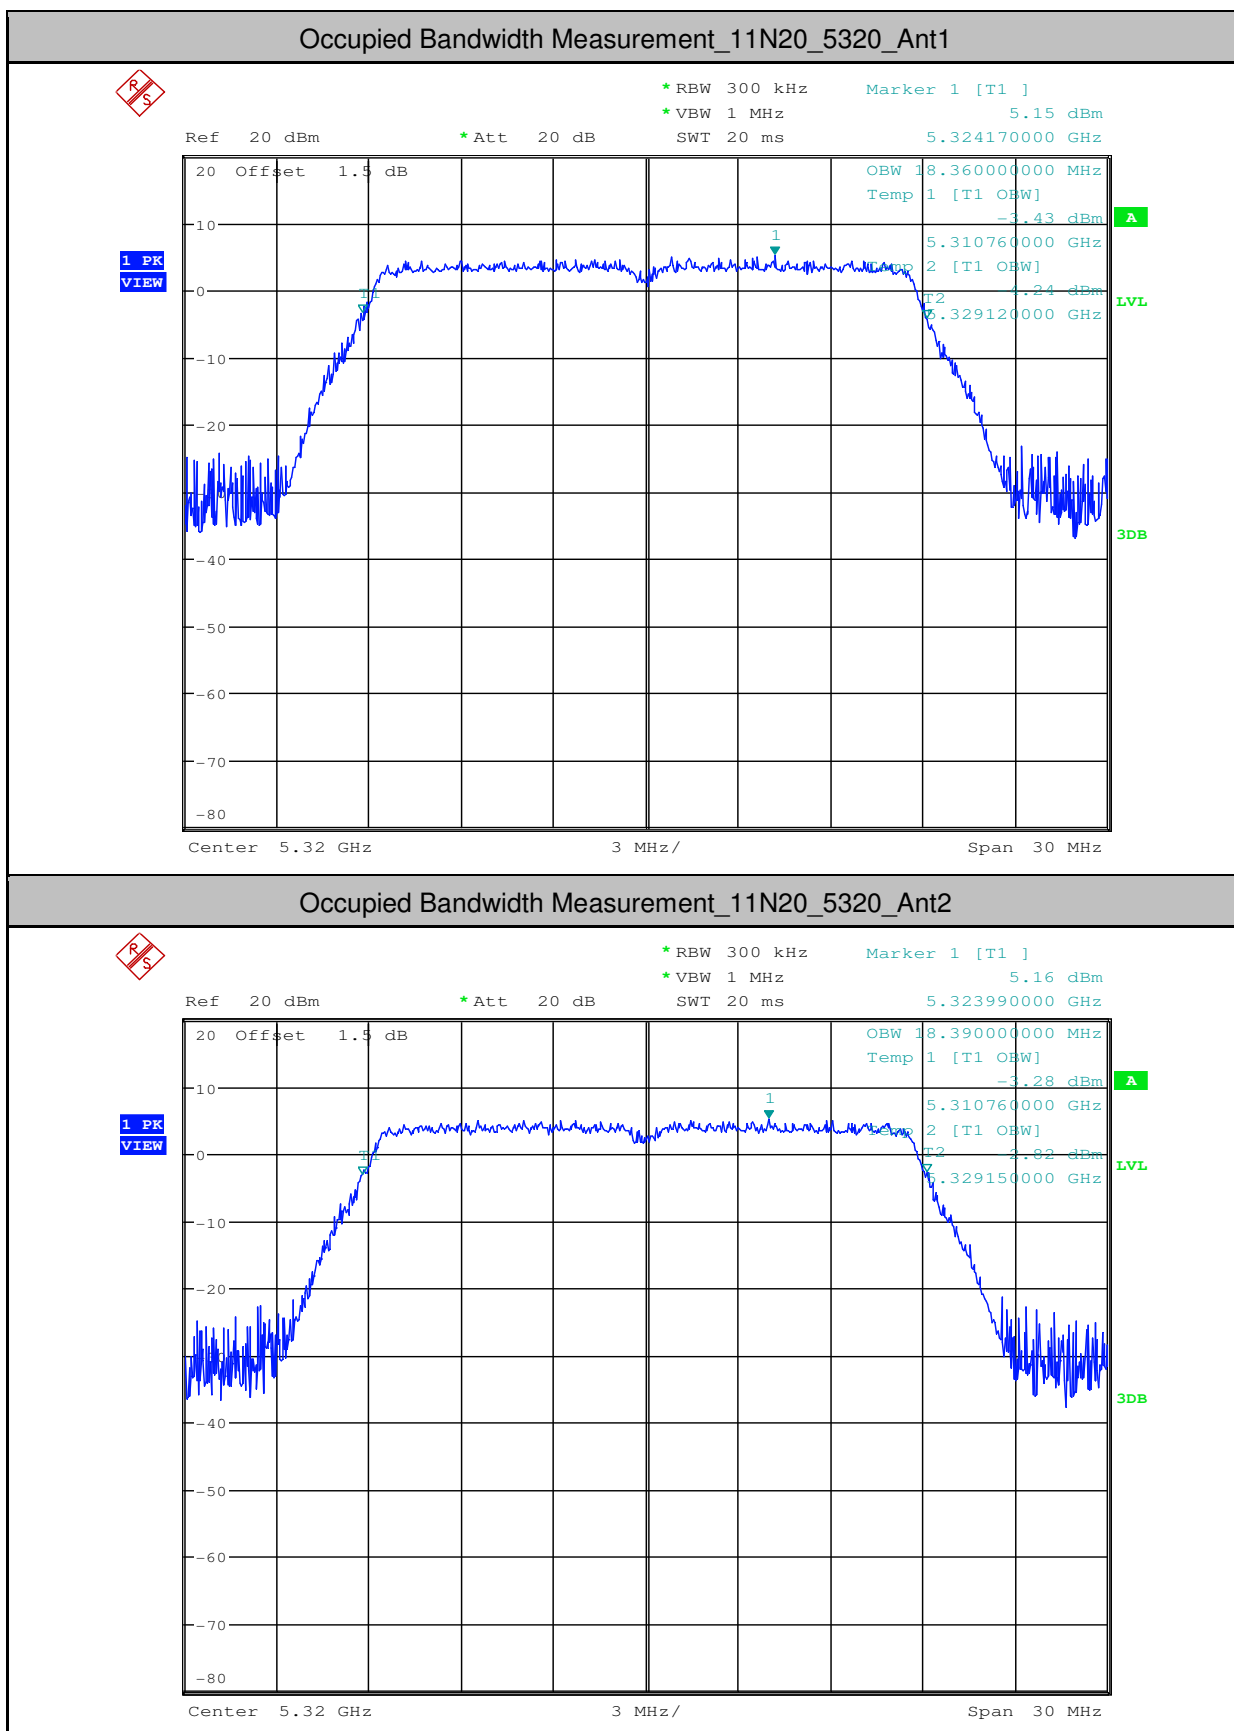


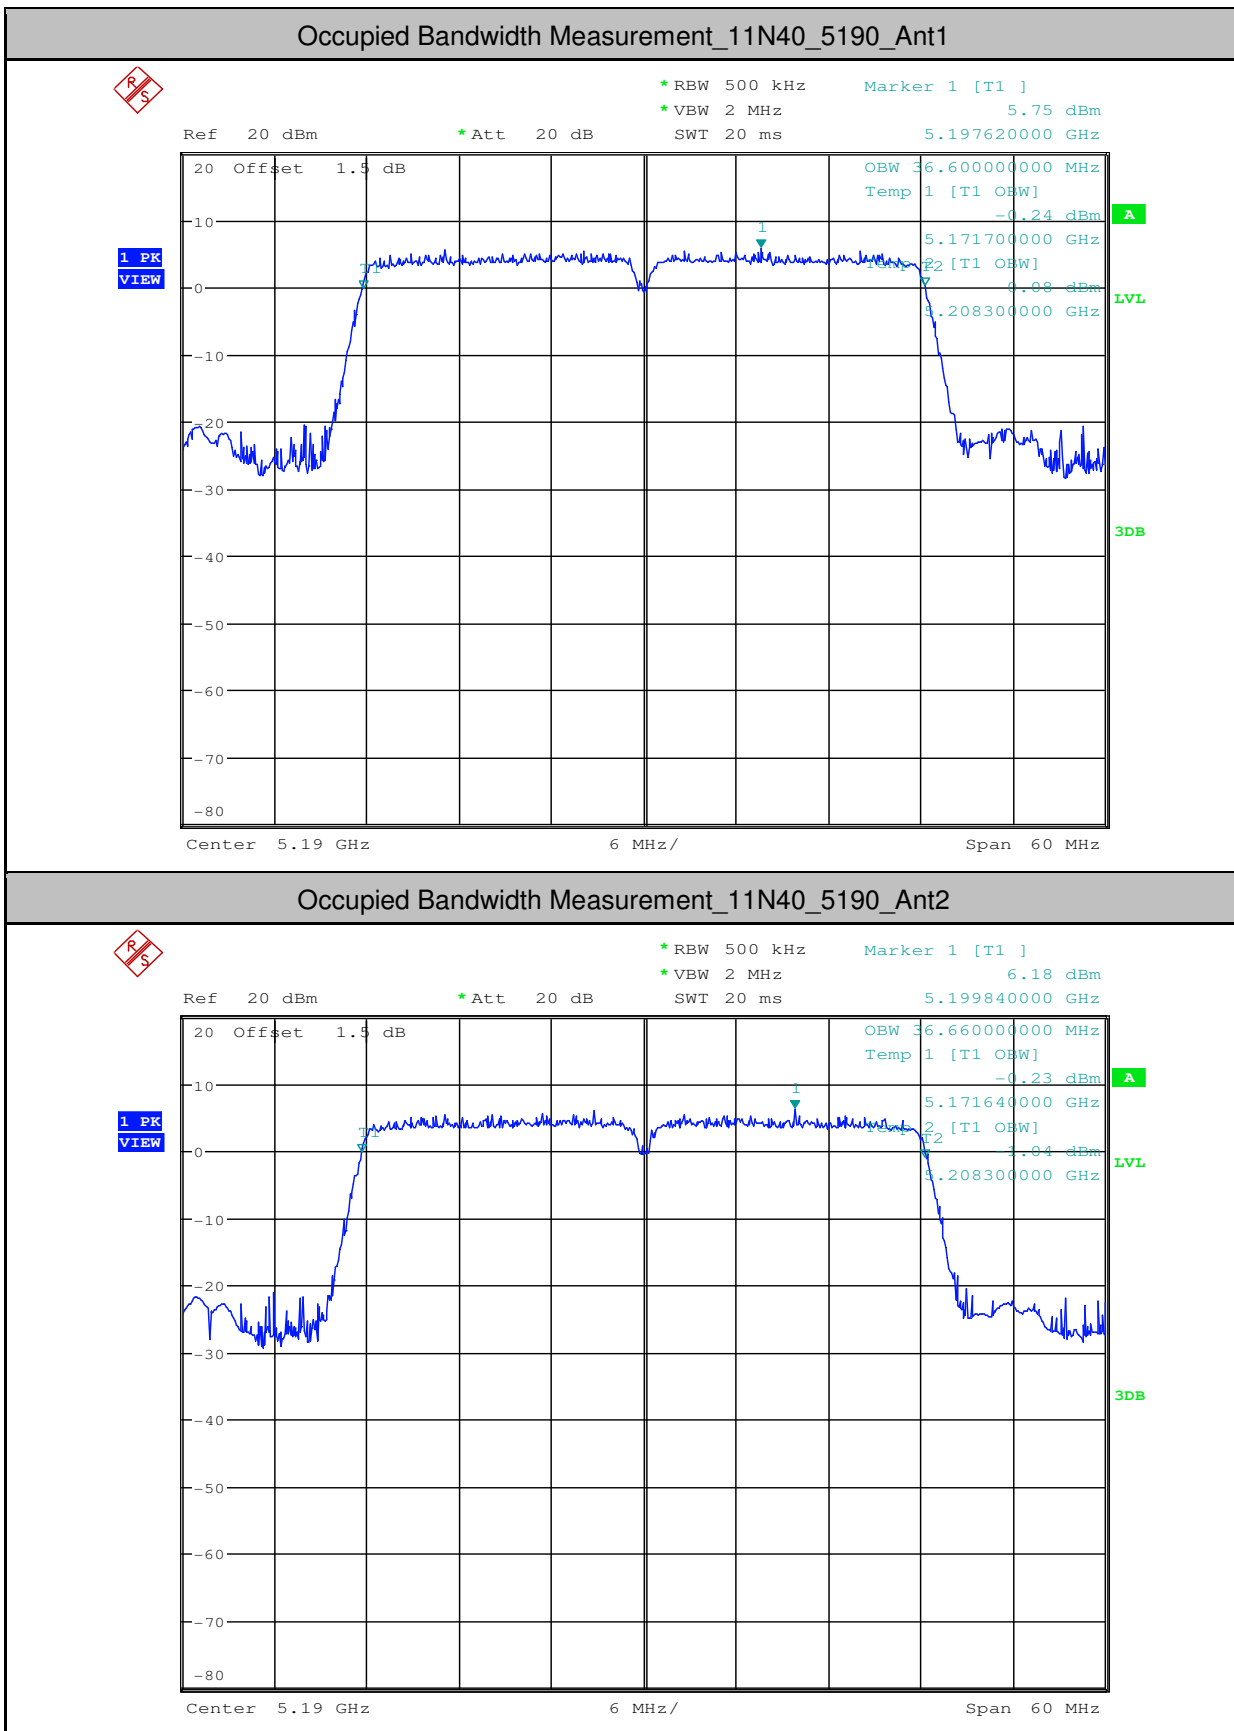


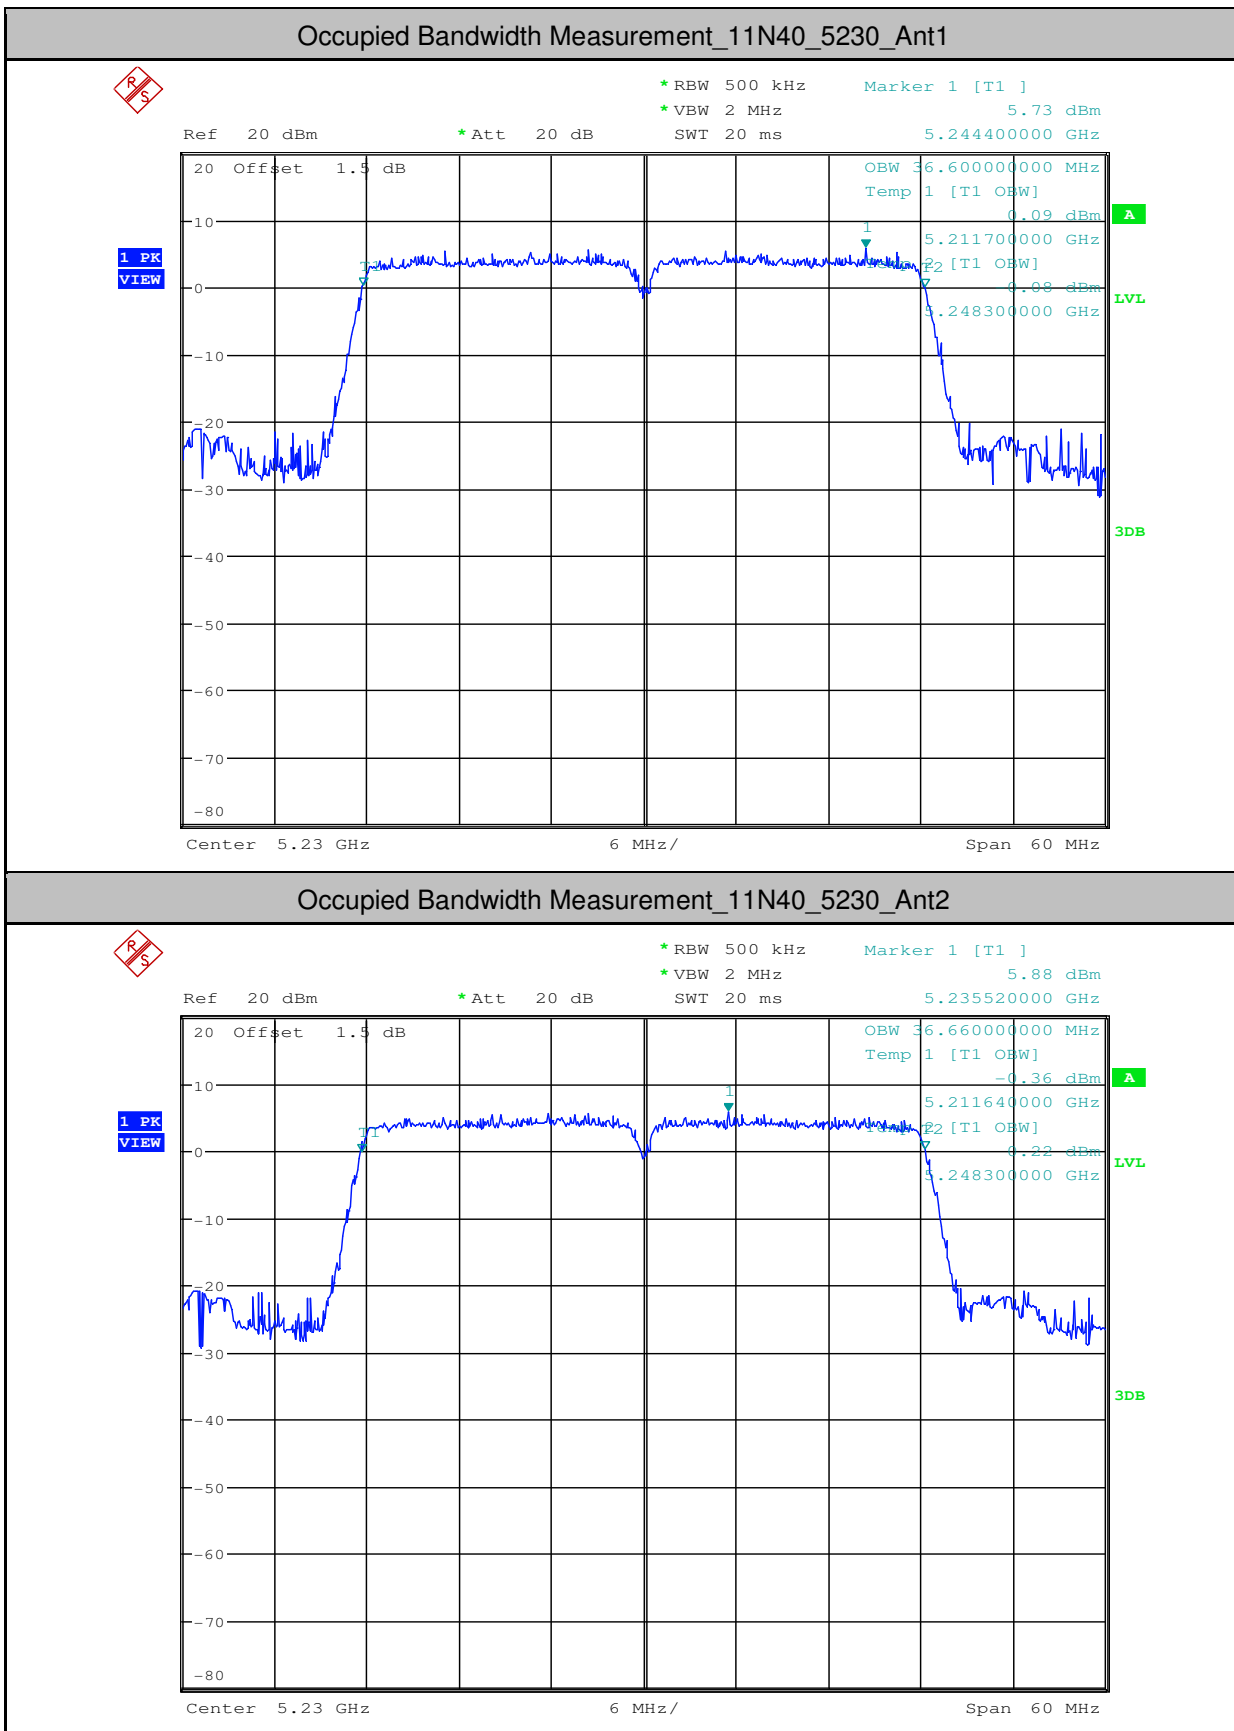


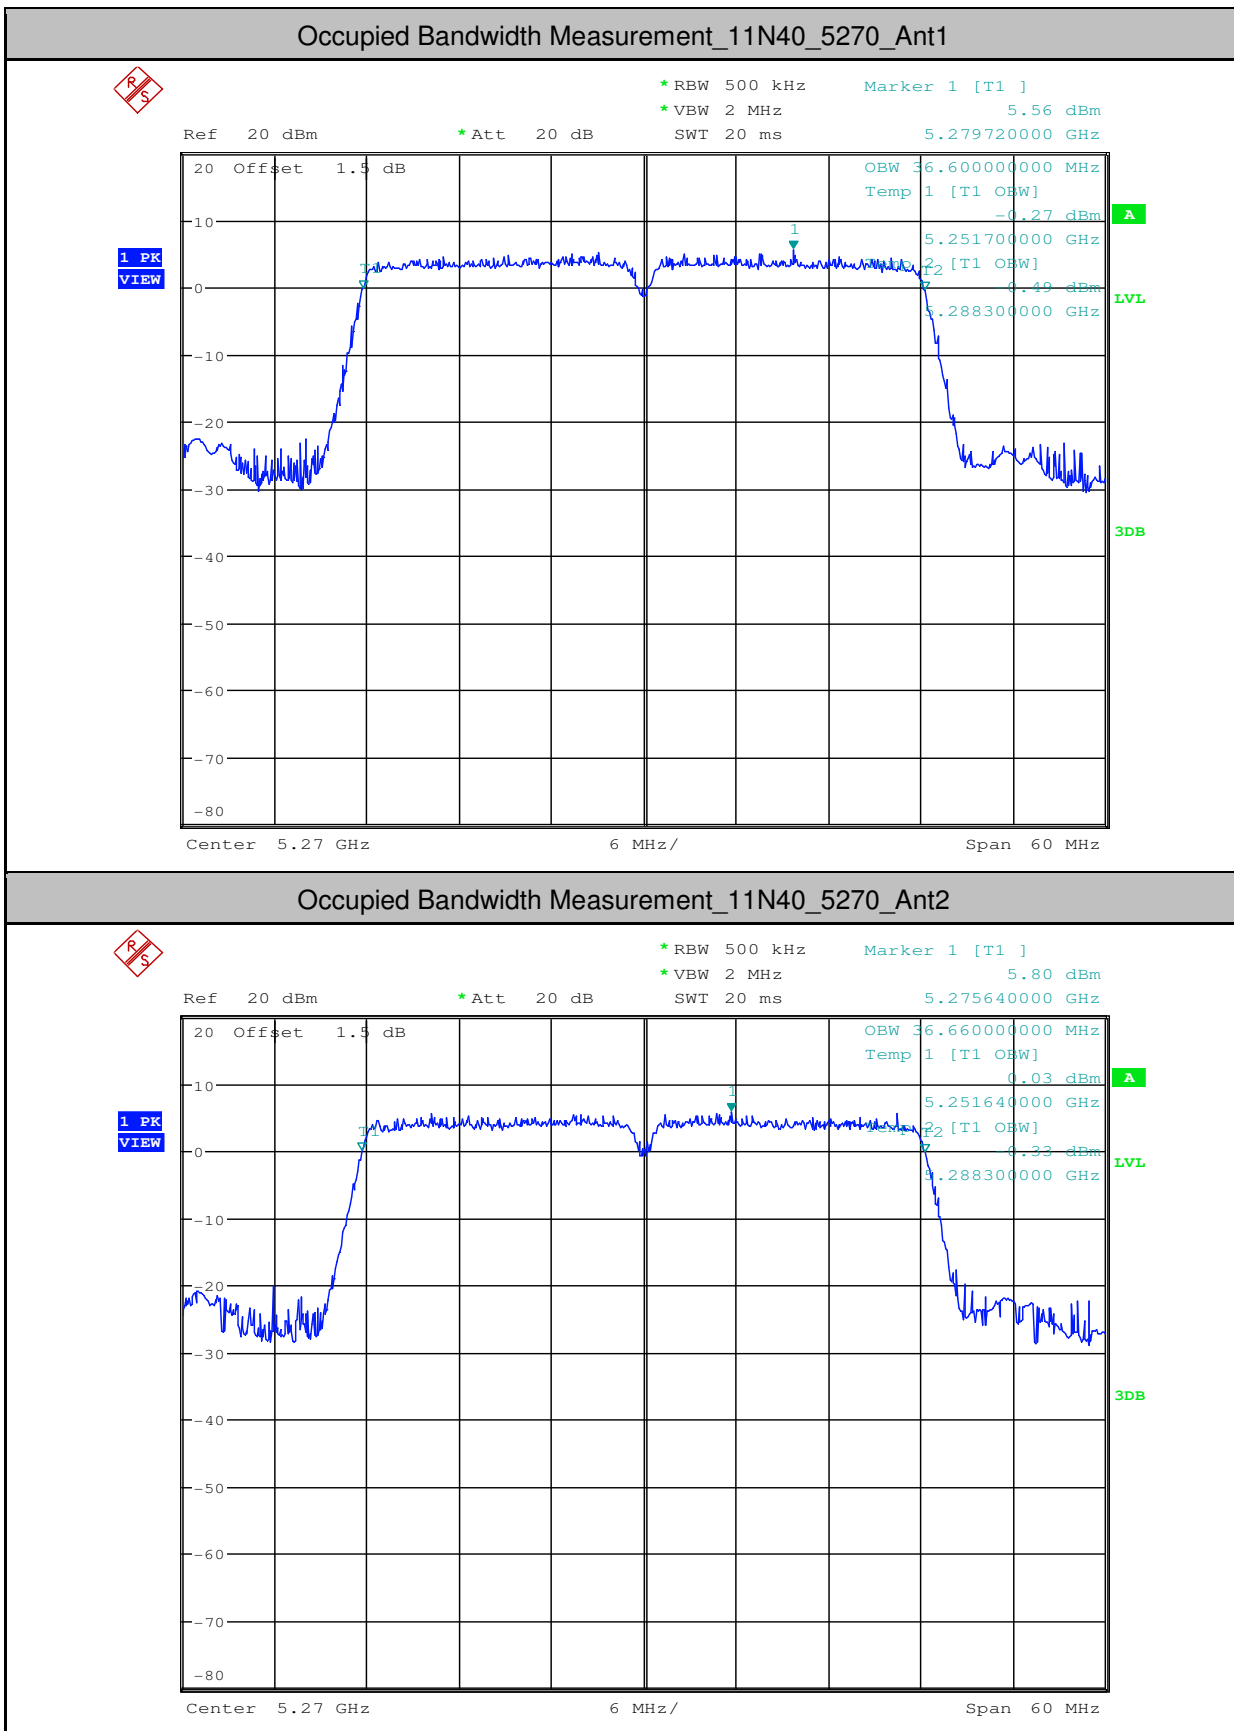


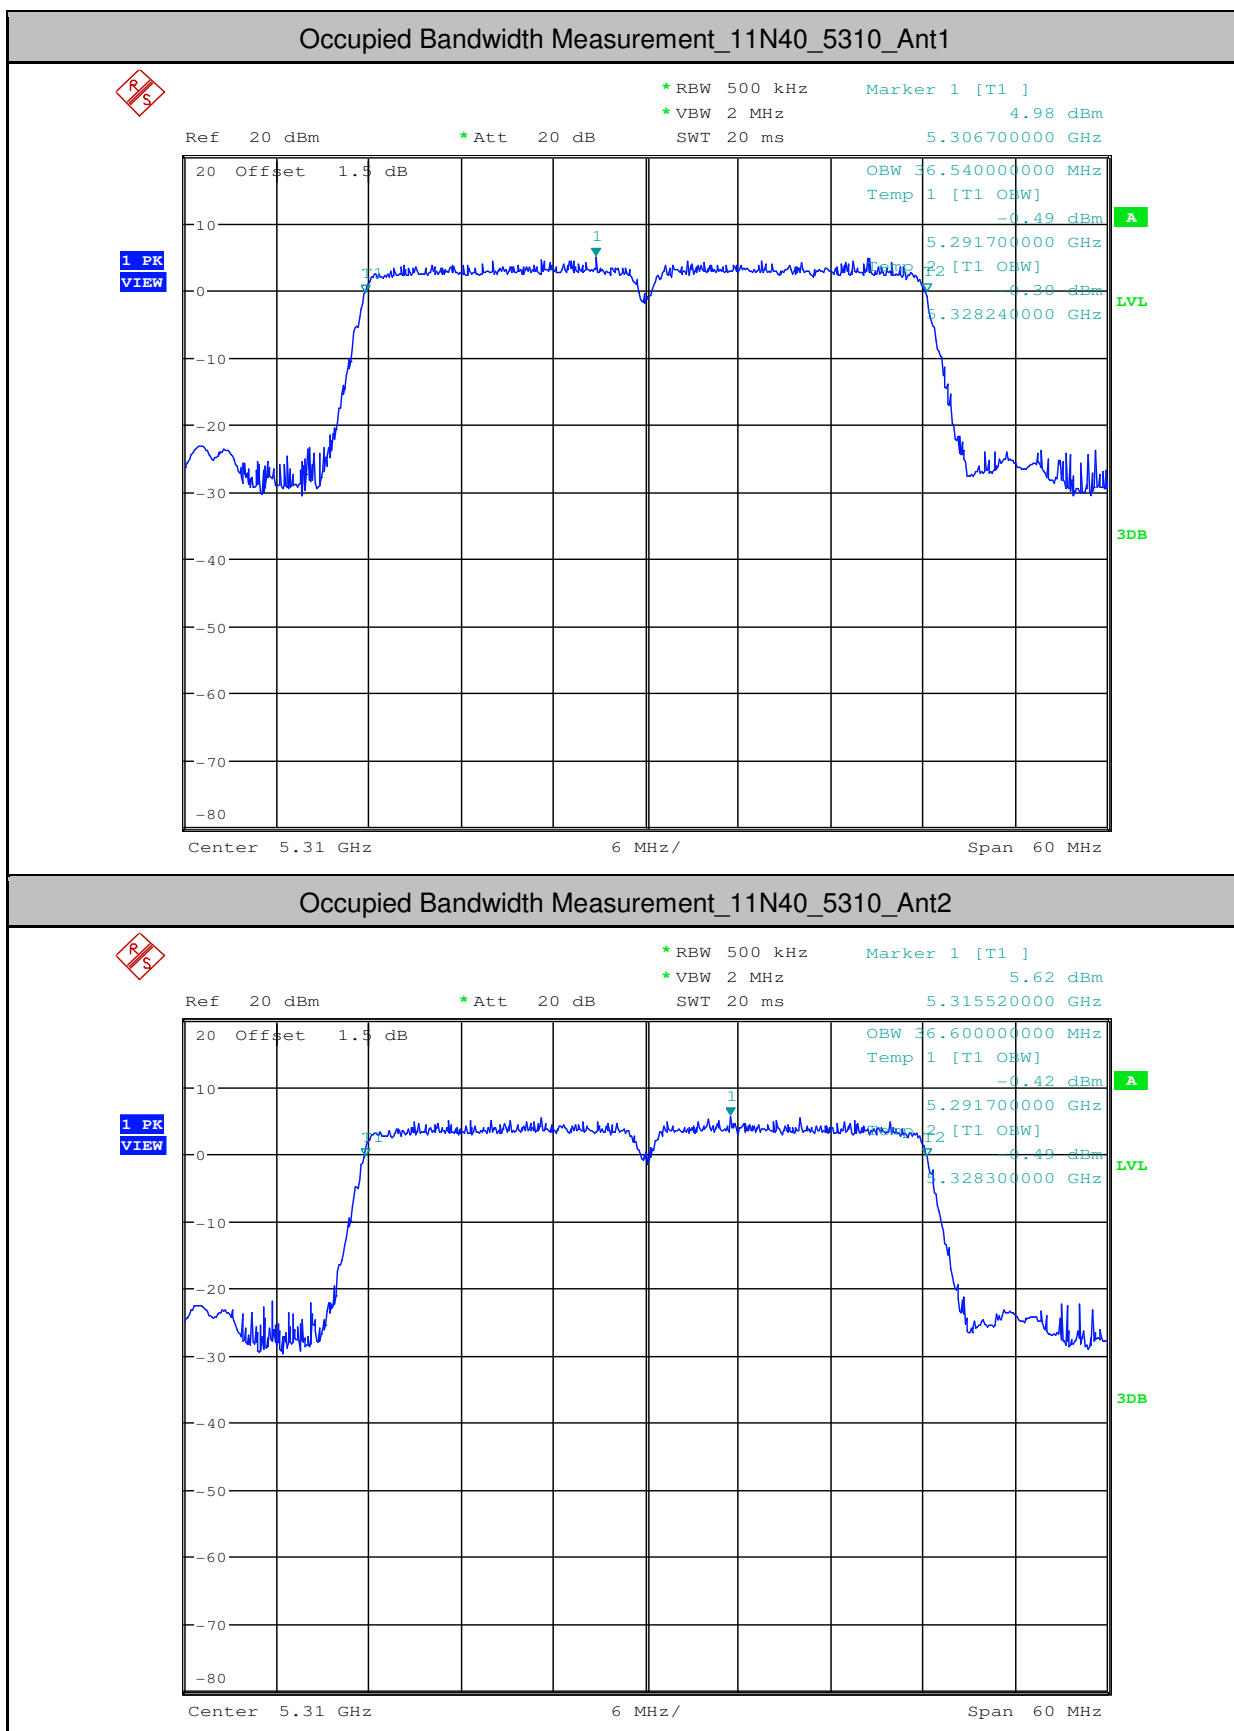


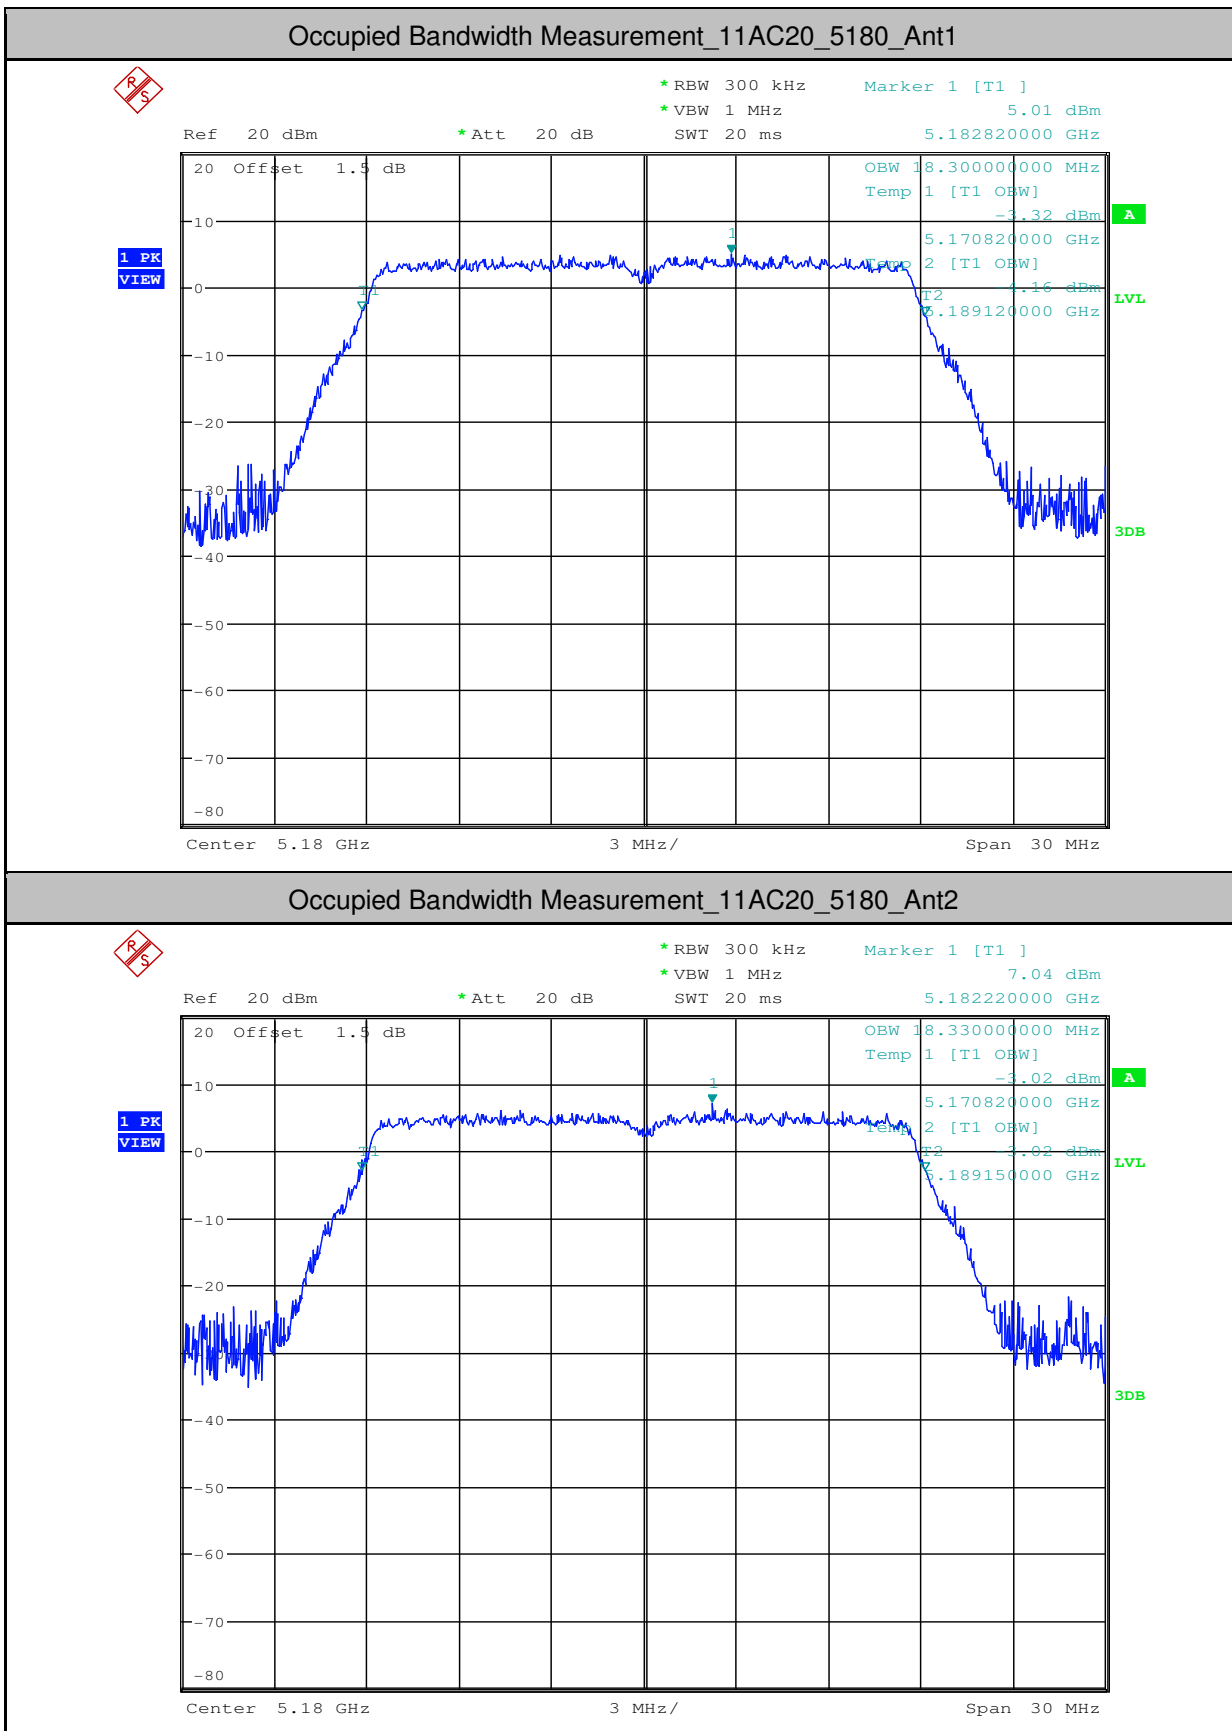


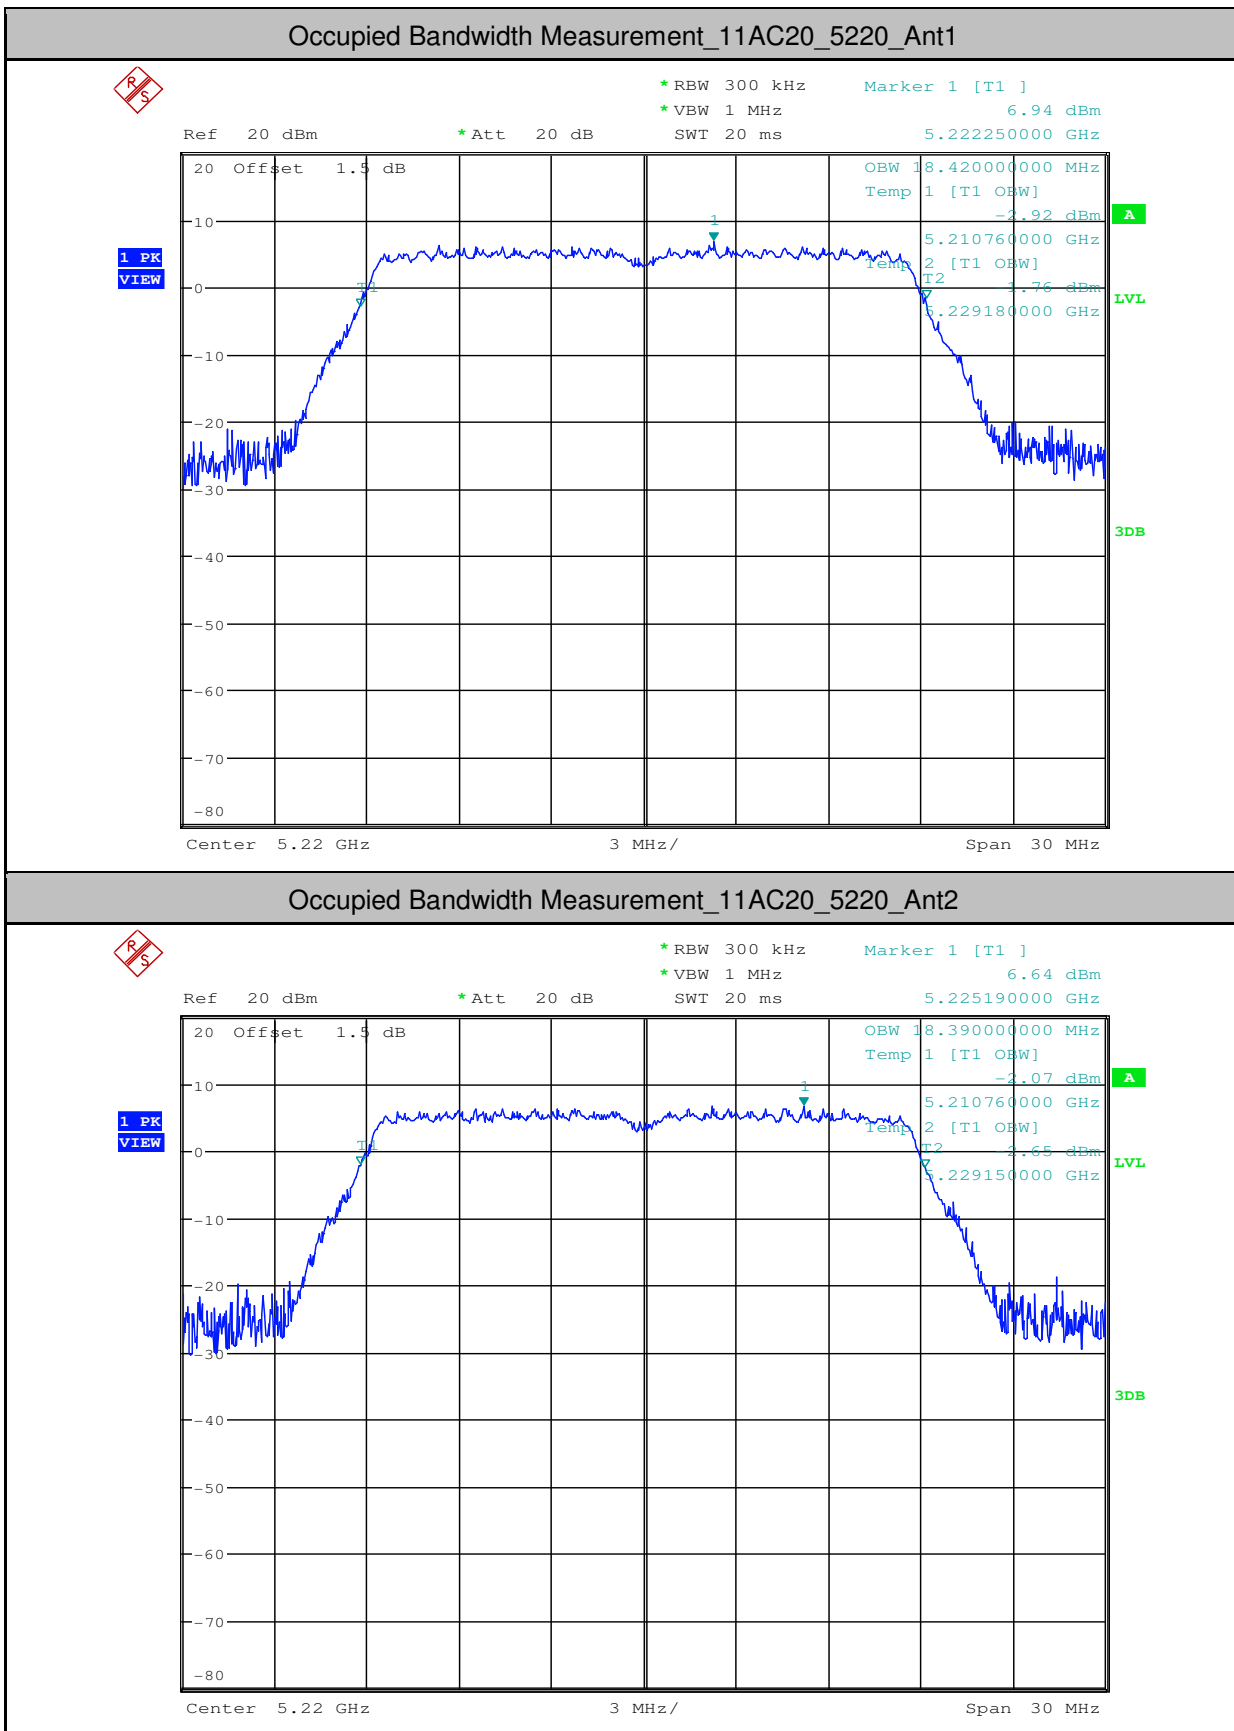


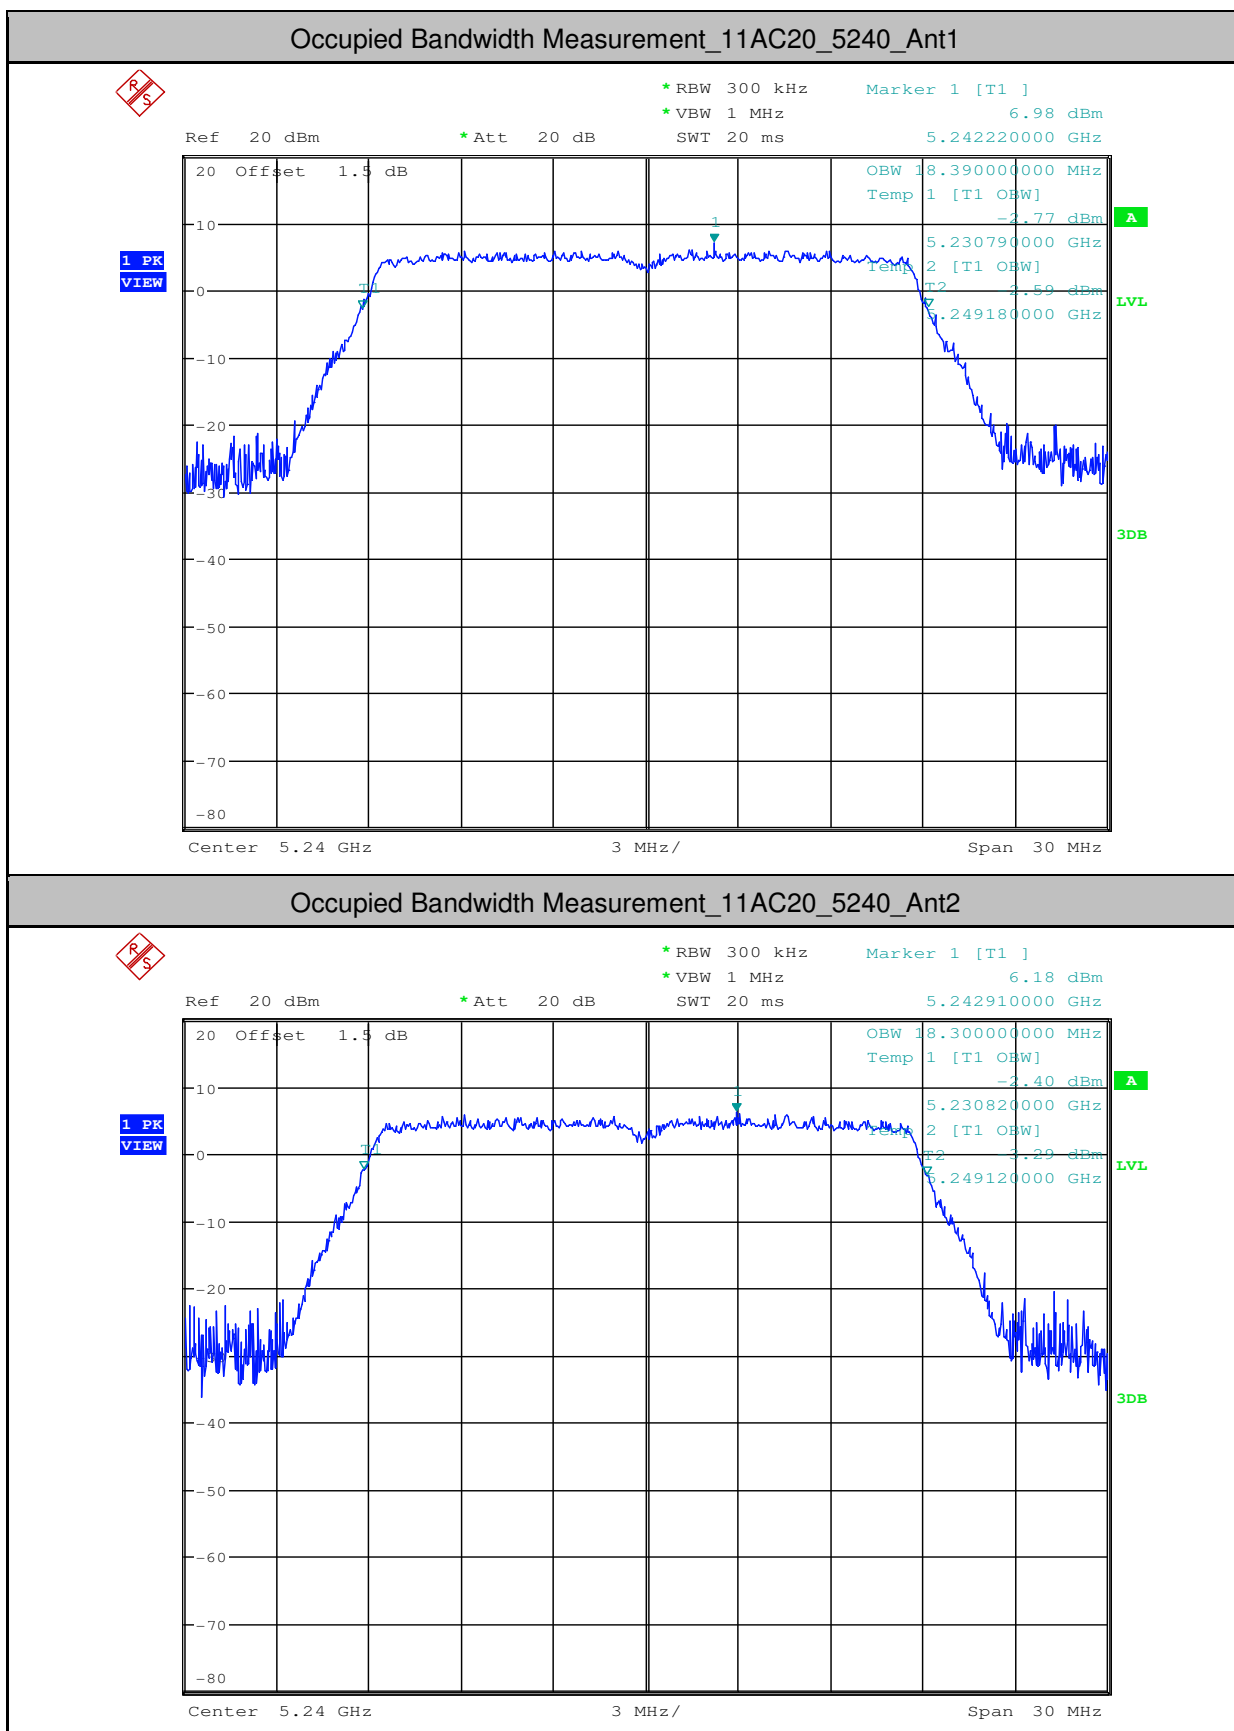


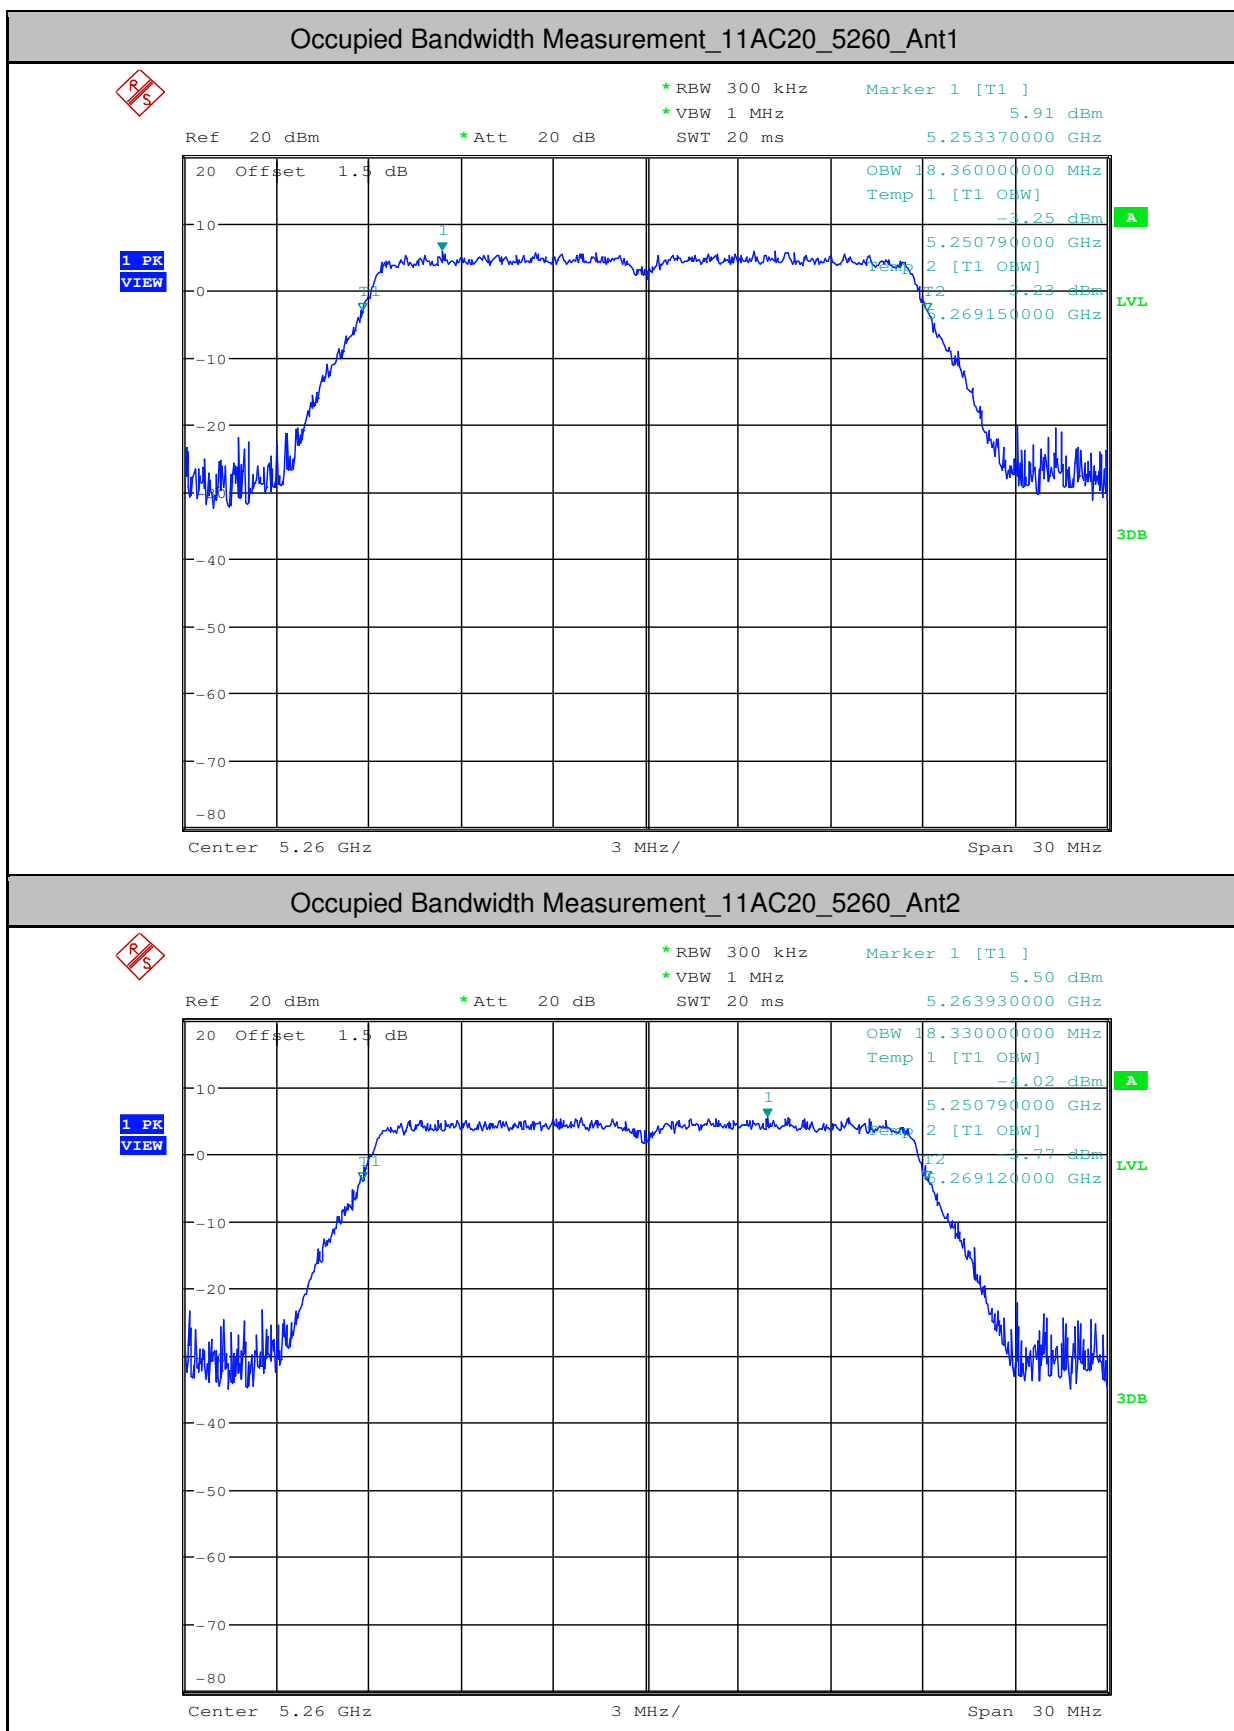


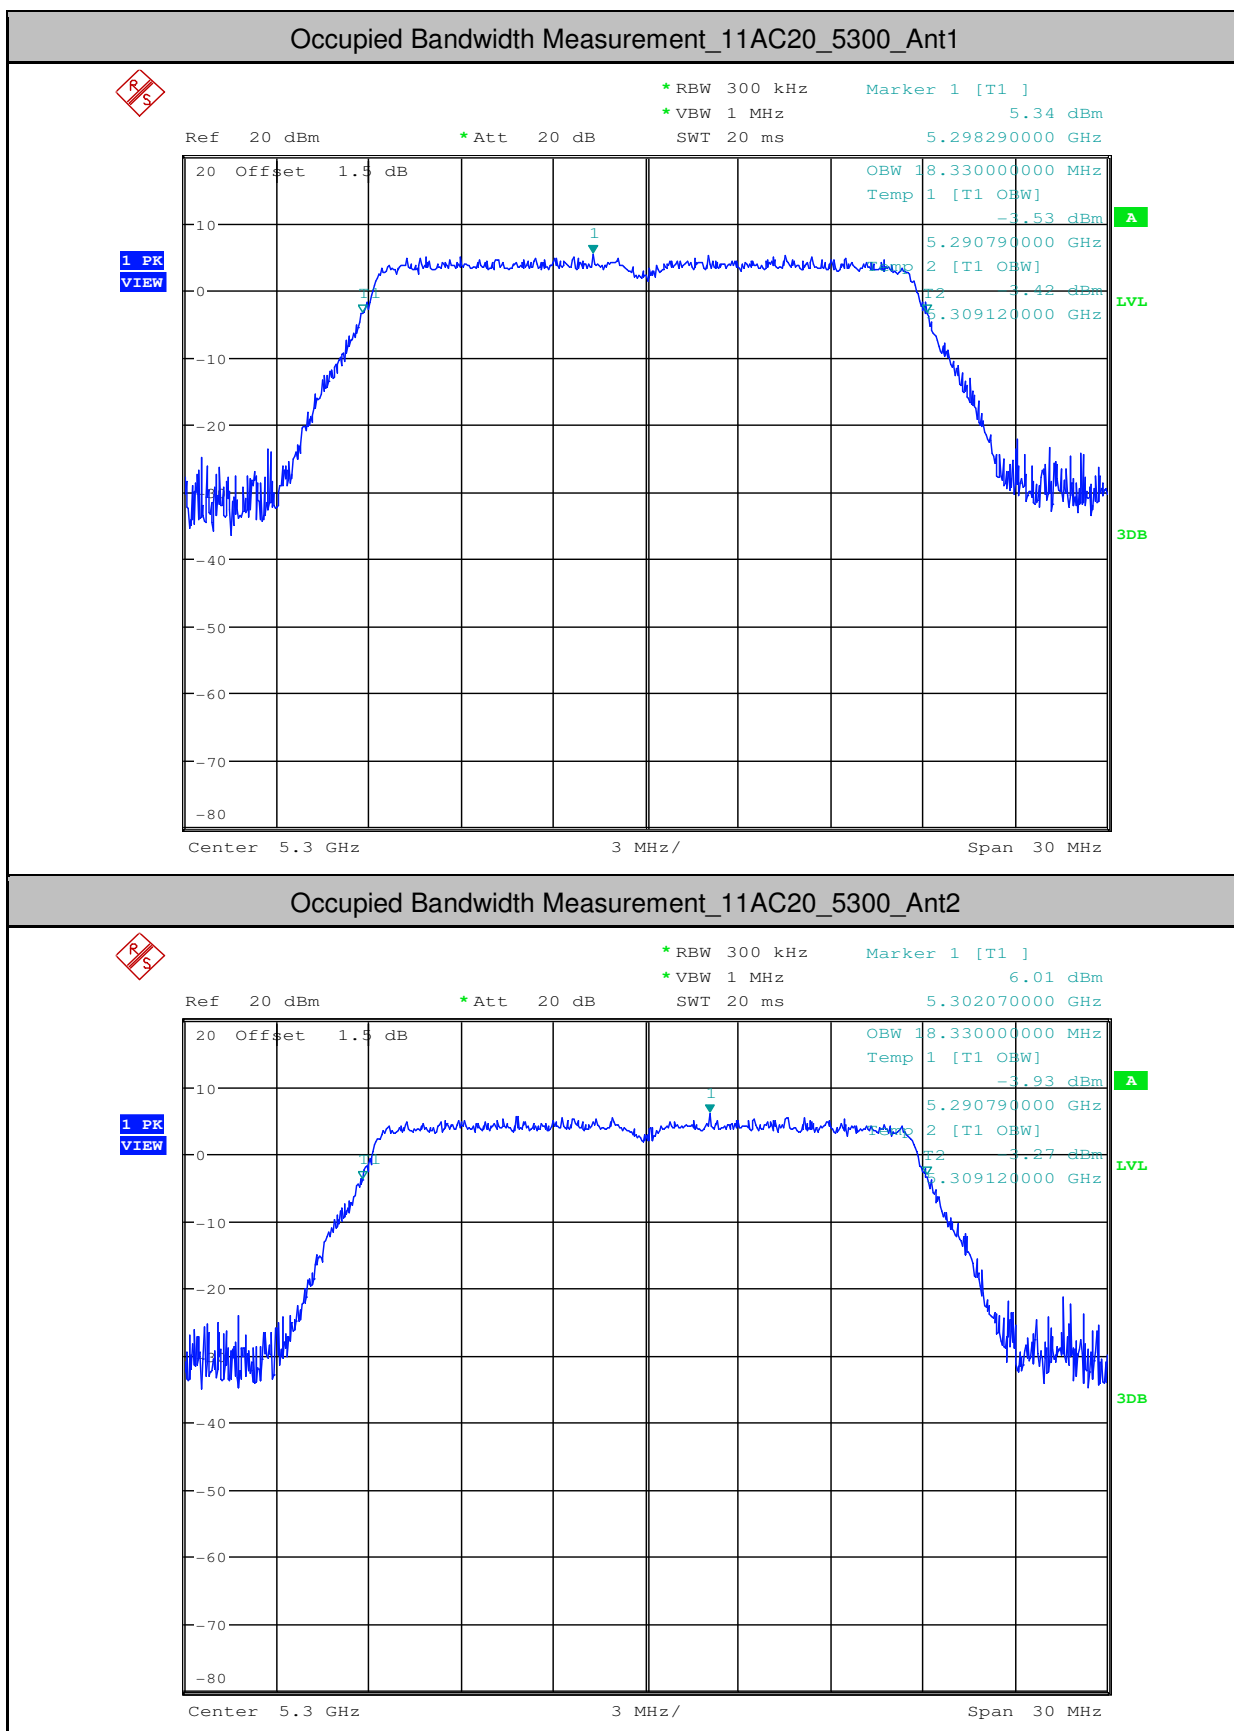


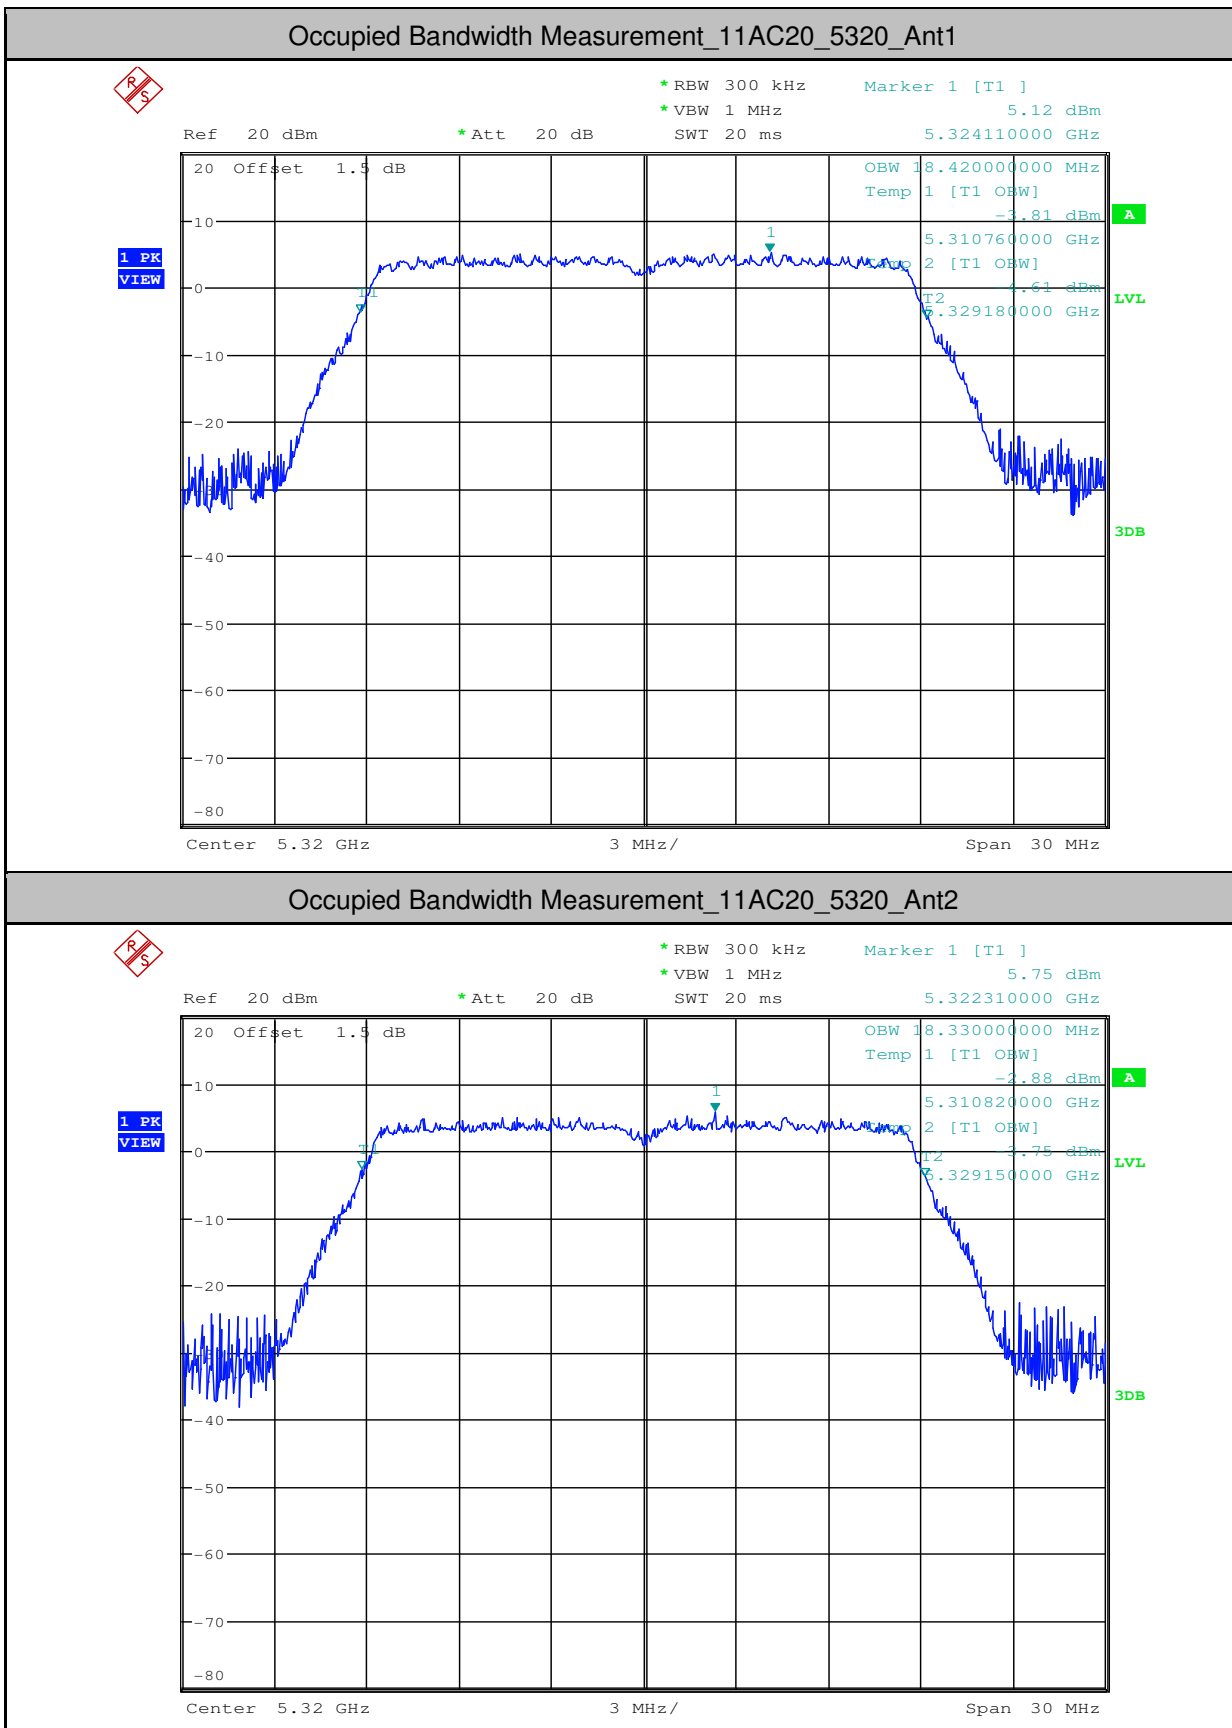


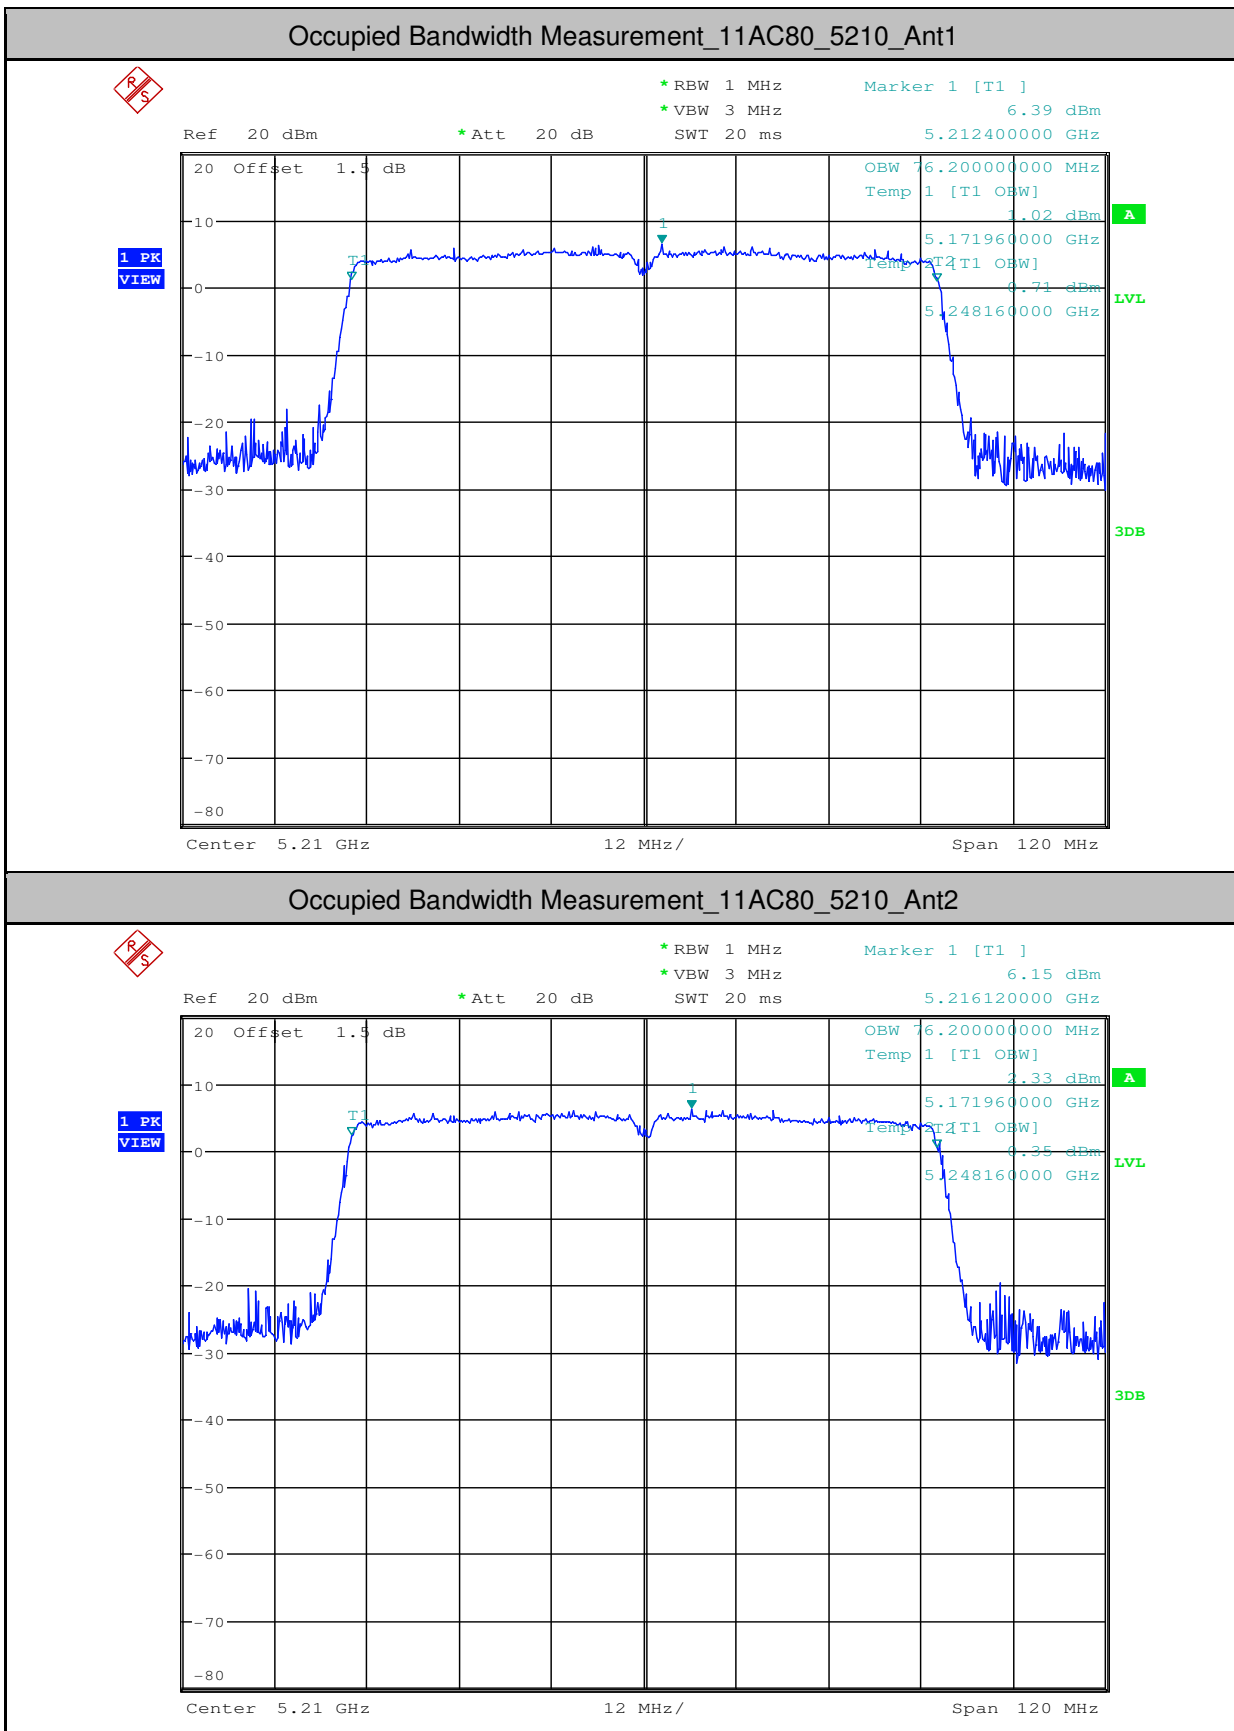


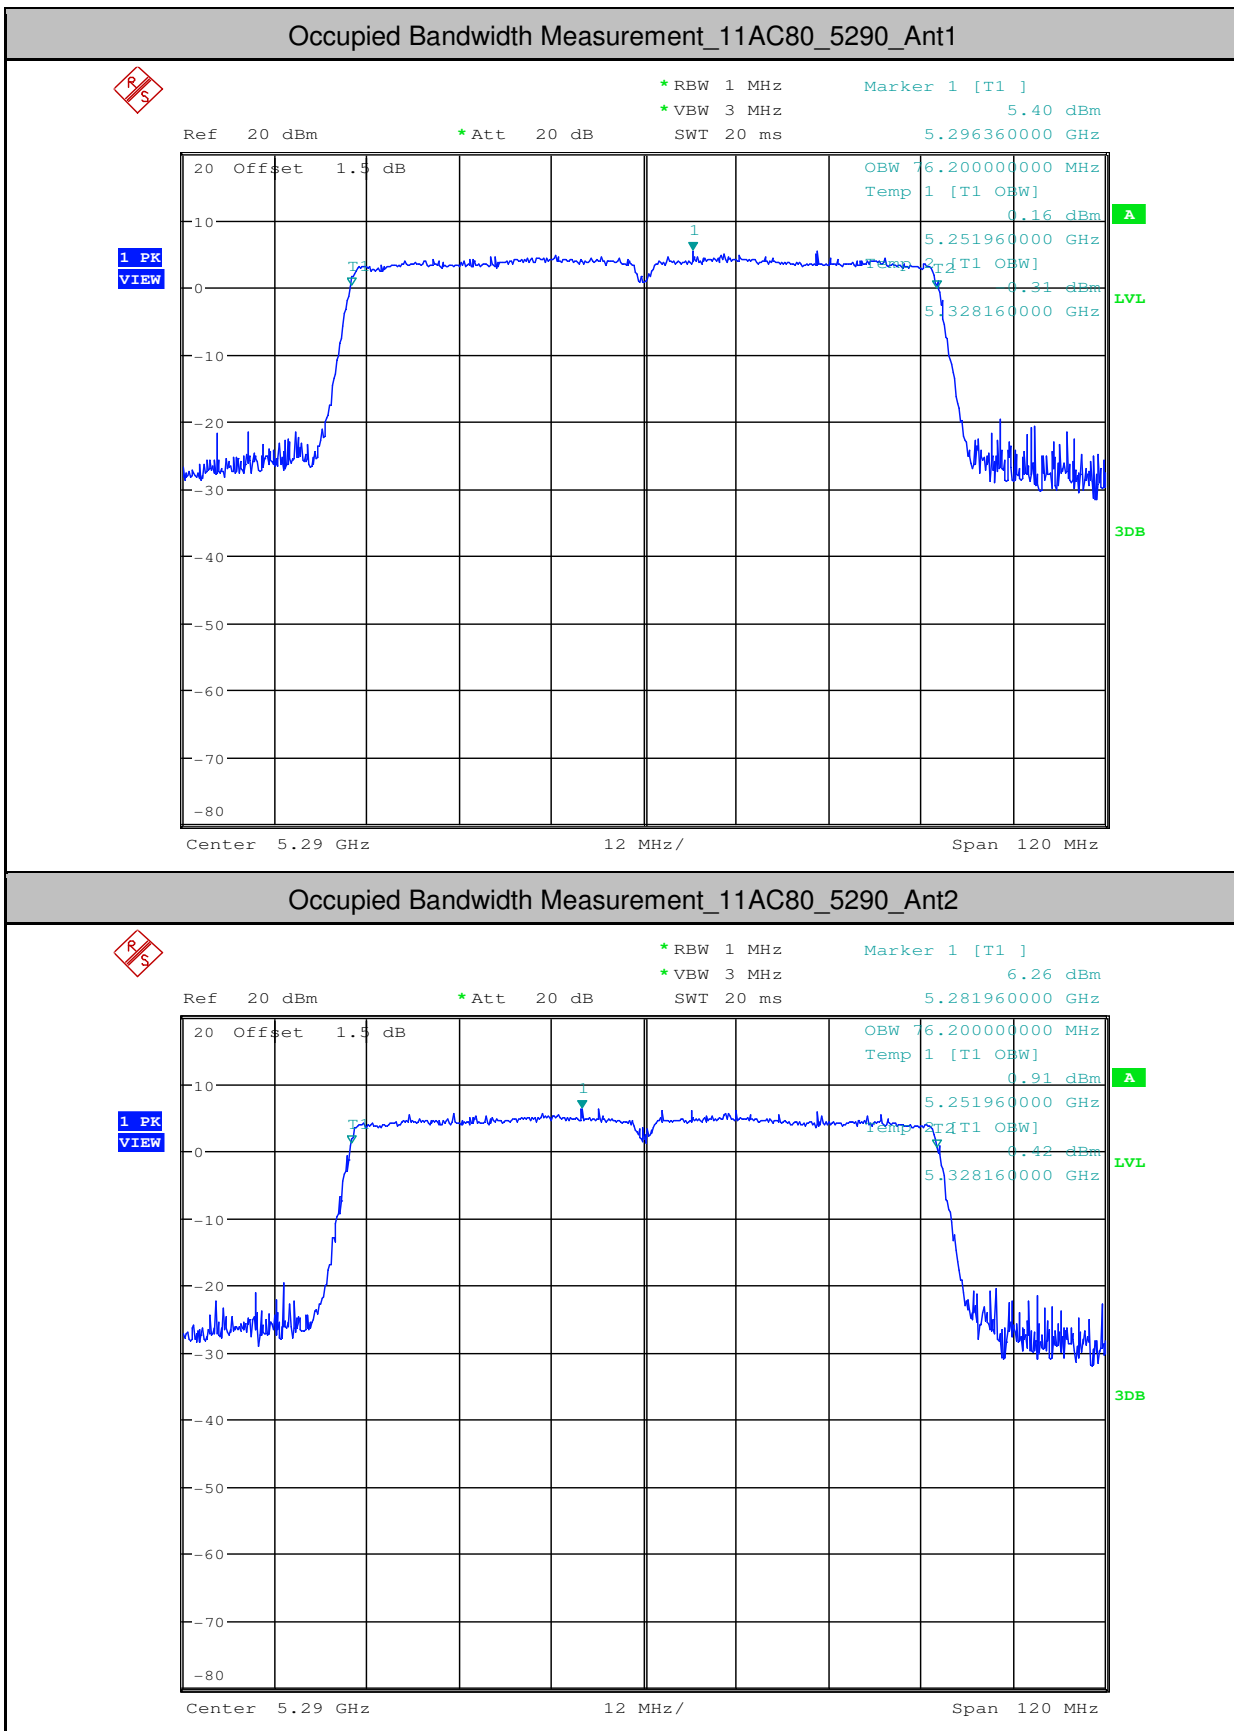

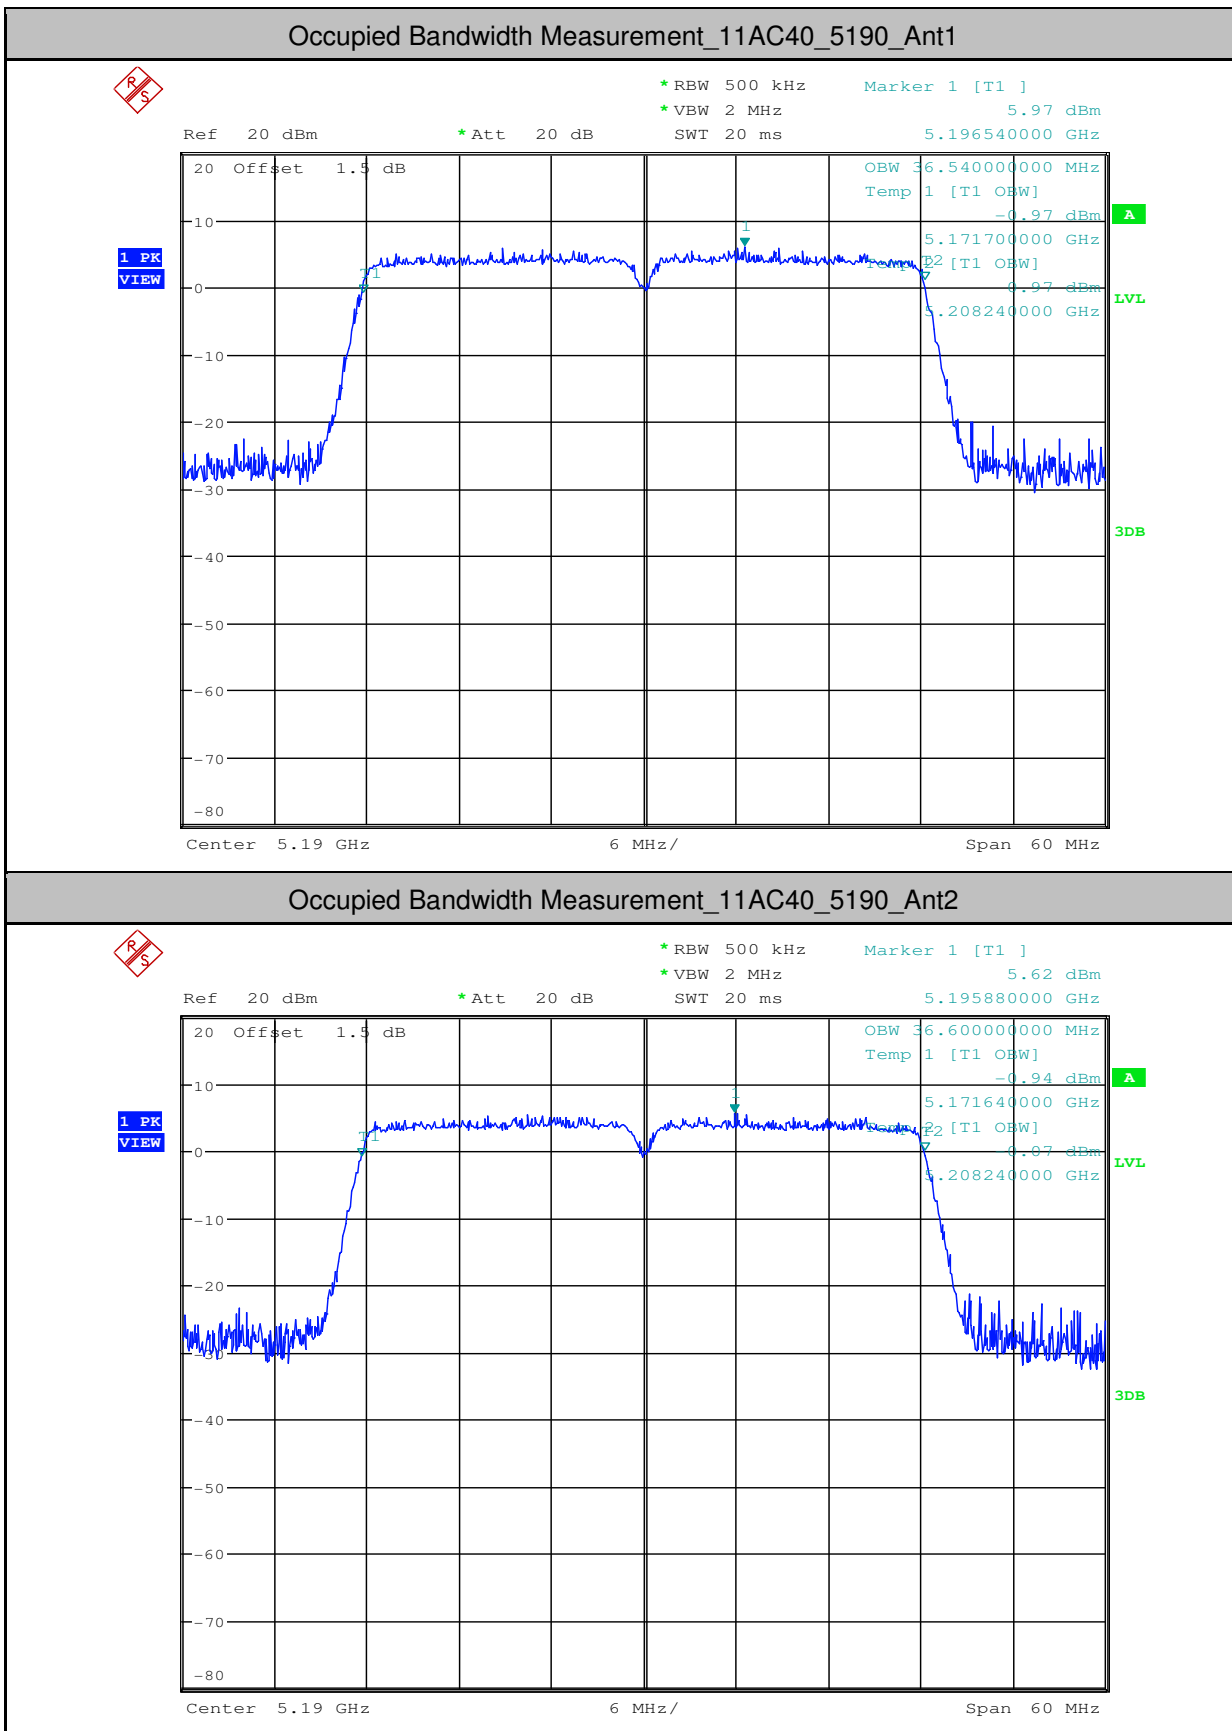

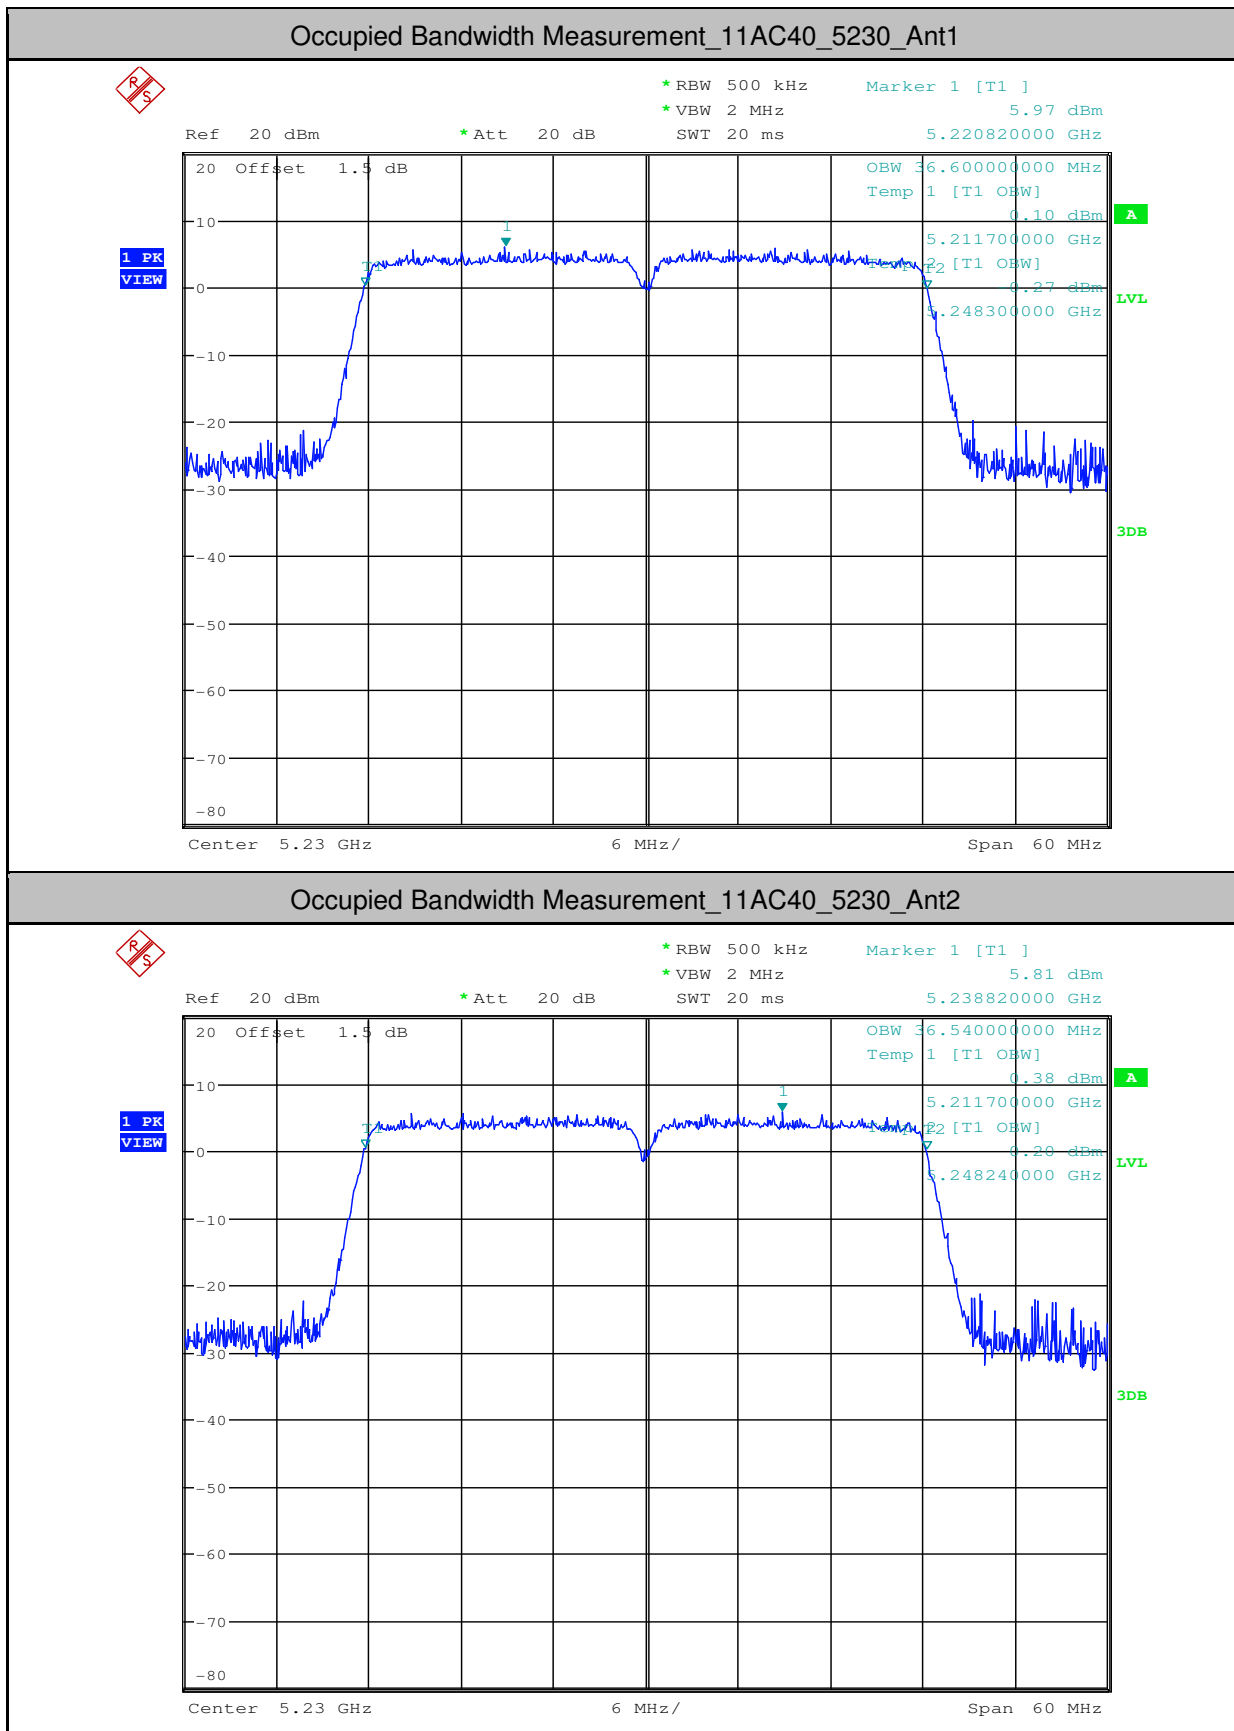

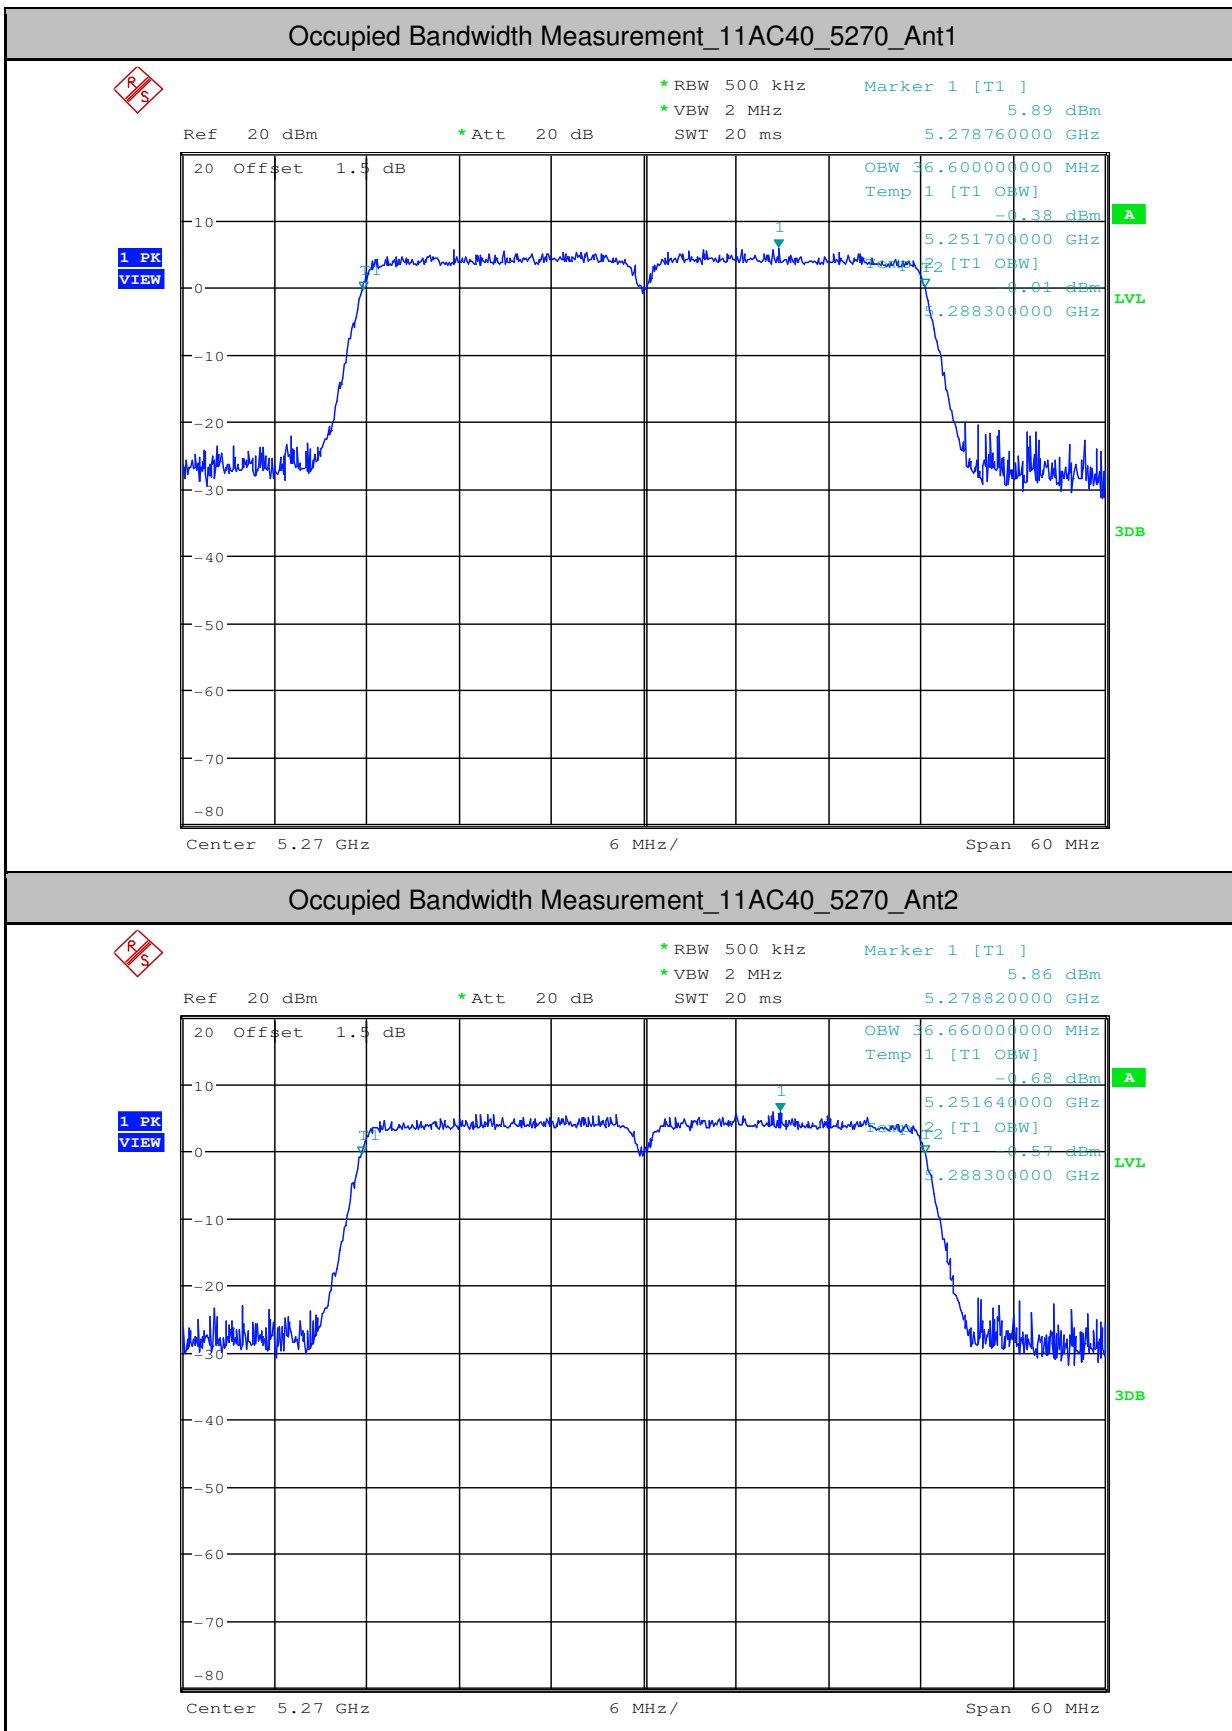

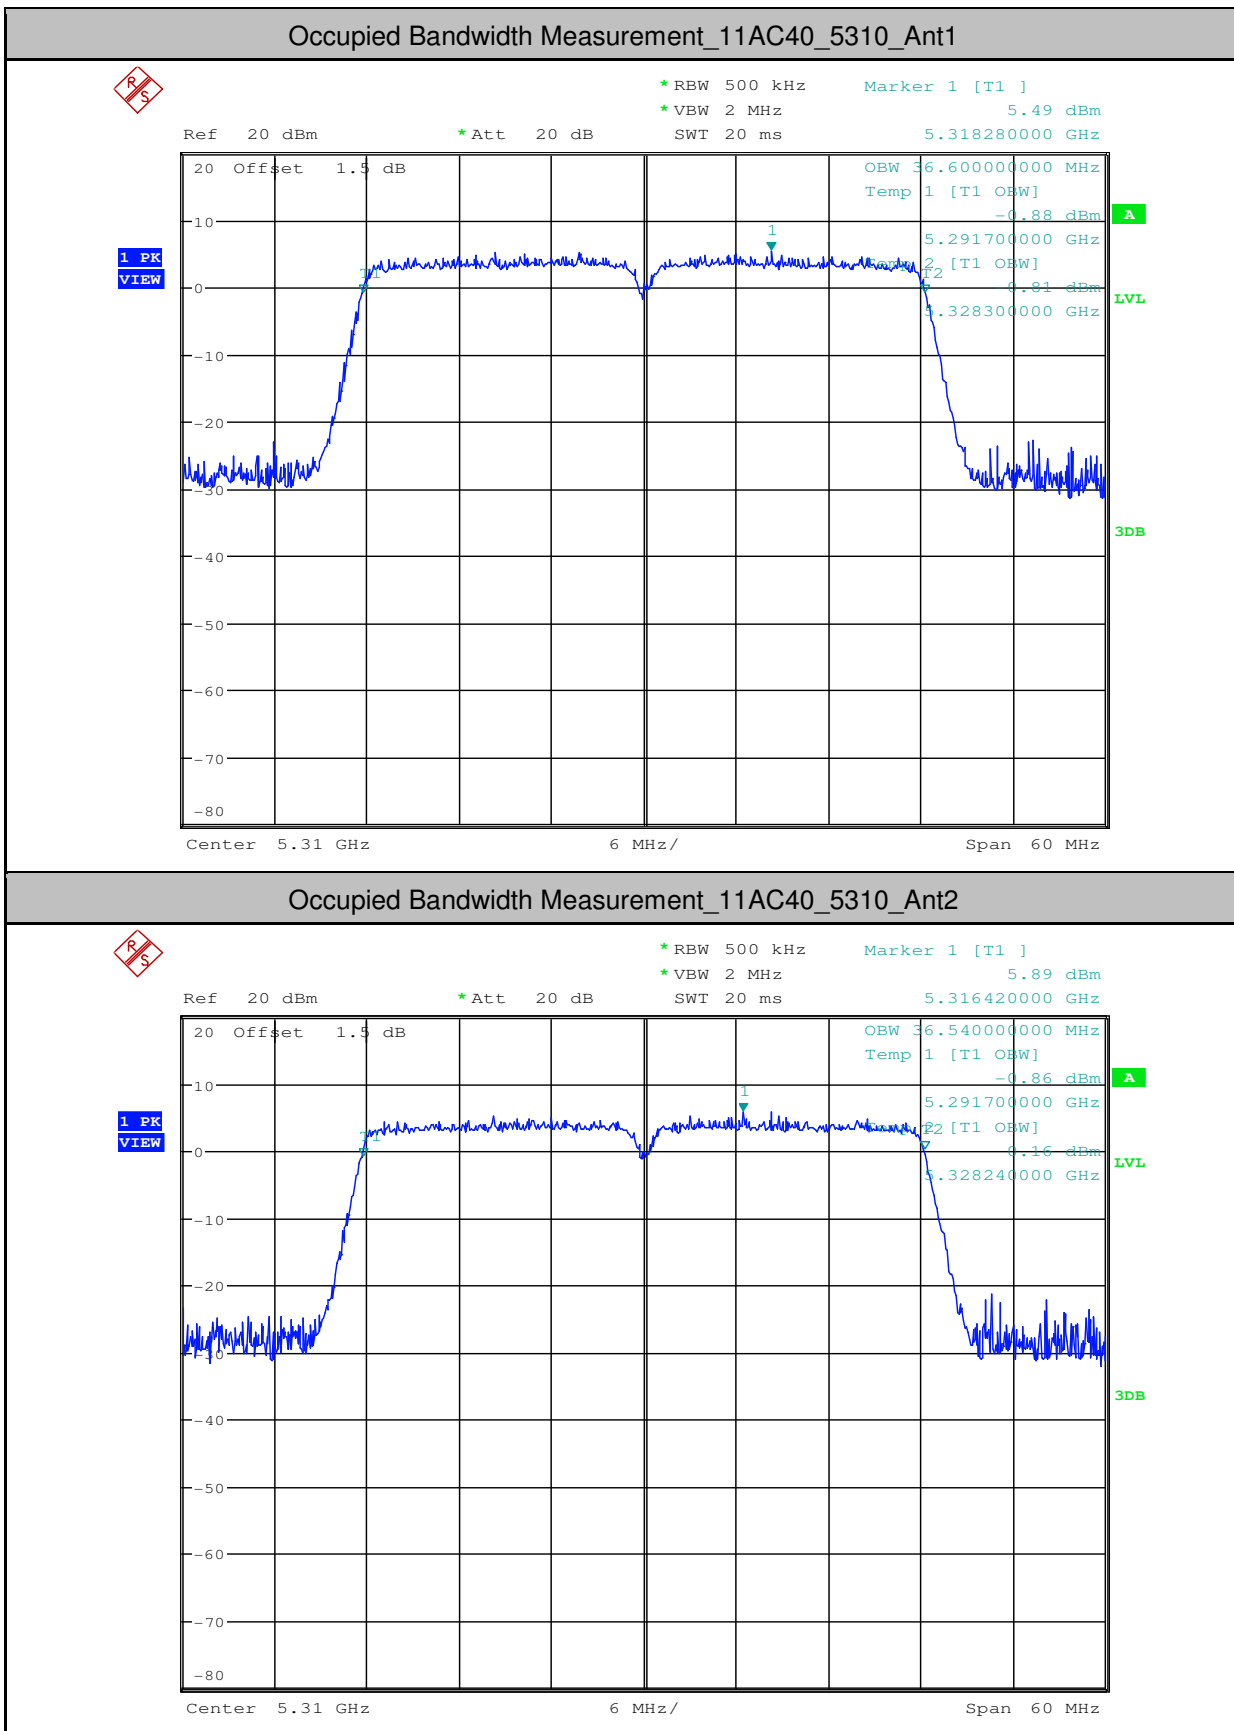



3.Maximum Conduct Output Power

Test Mode	Test Channel	Ant	Level [dBm]	10log(1/x) Factor [dB]	Power [dBm]	Limit [dBm]	Verdict
11A	5180	Ant1	13.67	0.32	13.99	<23.98	PASS
11A	5180	Ant2	14.32	0.32	14.64	<23.98	PASS
11A	5220	Ant1	13.19	0.34	13.53	<23.98	PASS
11A	5220	Ant2	13.86	0.34	14.20	<23.98	PASS
11A	5240	Ant1	13.2	0.32	13.52	<23.98	PASS
11A	5240	Ant2	13.86	0.32	14.18	<23.98	PASS
11A	5260	Ant1	14.38	0.32	14.70	<23.98	PASS
11A	5260	Ant2	15.24	0.34	15.58	<23.98	PASS
11A	5300	Ant1	14.52	0.32	14.84	<23.98	PASS
11A	5300	Ant2	14.81	0.32	15.13	<23.98	PASS
11A	5320	Ant1	14.07	0.32	14.39	<23.98	PASS
11A	5320	Ant2	14.58	0.34	14.92	<23.98	PASS
11N20	5180	Ant1	8.49	0.34	8.83	<23.98	PASS
11N20	5180	Ant2	8.74	0.34	9.08	<23.98	PASS
11N20	5220	Ant1	8.65	0.34	8.99	<23.98	PASS
11N20	5220	Ant2	8.56	0.34	8.90	<23.98	PASS
11N20	5240	Ant1	8.62	0.34	8.96	<23.98	PASS
11N20	5240	Ant2	8.52	0.34	8.86	<23.98	PASS
11N20	5260	Ant1	10.18	0.34	10.52	<23.98	PASS
11N20	5260	Ant2	10.25	0.36	10.61	<23.98	PASS
11N20	5300	Ant1	9.44	0.34	9.78	<23.98	PASS
11N20	5300	Ant2	10.07	0.34	10.41	<23.98	PASS
11N20	5320	Ant1	9.08	0.34	9.42	<23.98	PASS
11N20	5320	Ant2	9.72	0.34	10.06	<23.98	PASS
11N40	5190	Ant1	9.76	0.64	10.40	<23.98	PASS
11N40	5190	Ant2	9.85	0.66	10.51	<23.98	PASS
11N40	5230	Ant1	9.93	0.66	10.59	<23.98	PASS
11N40	5230	Ant2	10.08	0.66	10.74	<23.98	PASS
11N40	5270	Ant1	11.72	0.66	12.38	<23.98	PASS
11N40	5270	Ant2	12.2	0.64	12.84	<23.98	PASS
11N40	5310	Ant1	11.03	0.64	11.67	<23.98	PASS



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000906203

Page: 242 of 334

11N40	5310	Ant2	11.97	0.66	12.63	<23.98	PASS
11AC20	5180	Ant1	8.37	0.34	8.71	<23.98	PASS
11AC20	5180	Ant2	8.36	0.34	8.70	<23.98	PASS
11AC20	5220	Ant1	8.25	0.34	8.59	<23.98	PASS
11AC20	5220	Ant2	8.26	0.34	8.60	<23.98	PASS
11AC20	5240	Ant1	8.48	0.36	8.84	<23.98	PASS
11AC20	5240	Ant2	8.56	0.34	8.90	<23.98	PASS
11AC20	5260	Ant1	9.92	0.34	10.26	<23.98	PASS
11AC20	5260	Ant2	10.52	0.34	10.86	<23.98	PASS
11AC20	5300	Ant1	9.48	0.36	9.84	<23.98	PASS
11AC20	5300	Ant2	10.01	0.34	10.35	<23.98	PASS
11AC20	5320	Ant1	9.42	0.34	9.76	<23.98	PASS
11AC20	5320	Ant2	9.78	0.34	10.12	<23.98	PASS
11AC80	5210	Ant1	8.59	1.19	9.78	<23.98	PASS
11AC80	5210	Ant2	8.87	1.17	10.04	<23.98	PASS
11AC80	5290	Ant1	9.71	1.22	10.93	<23.98	PASS
11AC80	5290	Ant2	10.52	1.22	11.74	<23.98	PASS
11AC40	5190	Ant1	9.78	0.64	10.42	<23.98	PASS
11AC40	5190	Ant2	10.29	0.64	10.93	<23.98	PASS
11AC40	5230	Ant1	9.88	0.66	10.54	<23.98	PASS
11AC40	5230	Ant2	10.19	0.66	10.85	<23.98	PASS
11AC40	5270	Ant1	11.62	0.66	12.28	<23.98	PASS
11AC40	5270	Ant2	12.1	0.64	12.74	<23.98	PASS
11AC40	5310	Ant1	11.16	0.66	11.82	<23.98	PASS
11AC40	5310	Ant2	11.74	0.64	12.38	<23.98	PASS

MIMO:

Test Mode	Test Channel	Ant	Power [dBm]	EIRP [dBm]	Conducted power Limit [dBm]	EIRP Limit [dBm]	Verdict
11N20	5180	Ant1+2	11.97	/	<23.98	/	PASS
11N20	5220	Ant1+2	11.96	/	<23.98	/	PASS
11N20	5240	Ant1+2	11.92	/	<23.98	/	PASS
11N20	5260	Ant1+2	13.58	/	<23.98	/	PASS

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



11N20	5300	Ant1+2	13.12	/	<23.98	/	PASS
11N20	5320	Ant1+2	12.76	/	<23.98	/	PASS
11N40	5190	Ant1+2	13.47	/	<23.98	/	PASS
11N40	5230	Ant1+2	13.68	/	<23.98	/	PASS
11N40	5270	Ant1+2	15.63	/	<23.98	/	PASS
11N40	5310	Ant1+2	15.19	/	<23.98	/	PASS
11AC20	5180	Ant1+2	11.71	/	<23.98	/	PASS
11AC20	5220	Ant1+2	11.60	/	<23.98	/	PASS
11AC20	5240	Ant1+2	11.88	/	<23.98	/	PASS
11AC20	5260	Ant1+2	13.58	/	<23.98	/	PASS
11AC20	5300	Ant1+2	13.11	/	<23.98	/	PASS
11AC20	5320	Ant1+2	12.95	/	<23.98	/	PASS
11AC80	5210	Ant1+2	12.92	/	<23.98	/	PASS
11AC80	5290	Ant1+2	14.36	/	<23.98	/	PASS
11AC40	5190	Ant1+2	13.69	/	<23.98	/	PASS
11AC40	5230	Ant1+2	13.71	/	<23.98	/	PASS
11AC40	5270	Ant1+2	10.34	/	<23.98	/	PASS
11AC40	5310	Ant1+2	10.14	/	<23.98	/	PASS

For band 1:

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + array gain (dB)

Array Gain = 0 dB for $NANT \leq 4$

So the total directional gain=-0.59dBi

For the directional gain is less than 6dBi, so no need to reduce the limit of power.

For band 2:

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + array gain (dB)

Array Gain = 0 dB for $NANT \leq 4$

So the total directional gain=2.72dBi

For the directional gain is less than 6dBi, so no need to reduce the limit of power.


Ref 20 dBm

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

* SWT 100 ms

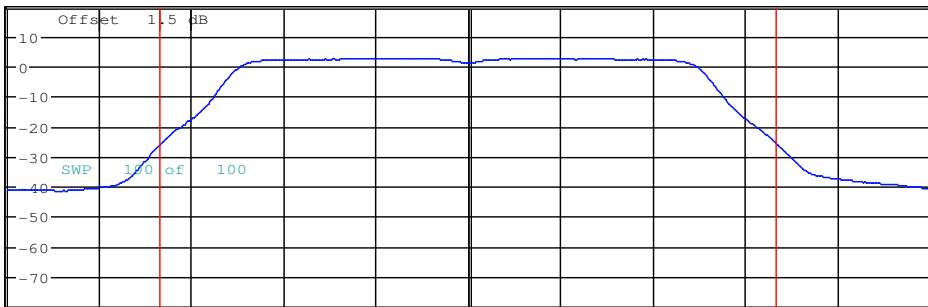

Center 5.18 GHz

3.312 MHz/

Span 33.12 MHz

Tx Channel

Bandwidth

22.08 MHz

Power

13.67 dBm


Ref 20 dBm

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

★ SWT 100 ms

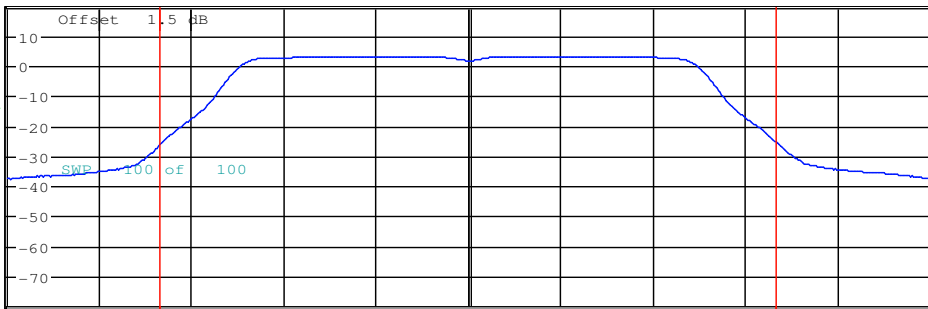

Center 5.18 GHz

3.339 MHz/

Span 33.39 MHz

Tx Channel

Bandwidth


22.26 MHz

Power


14.32 dBm




Maximum Conduct Output Power_11A_5220_Ant1

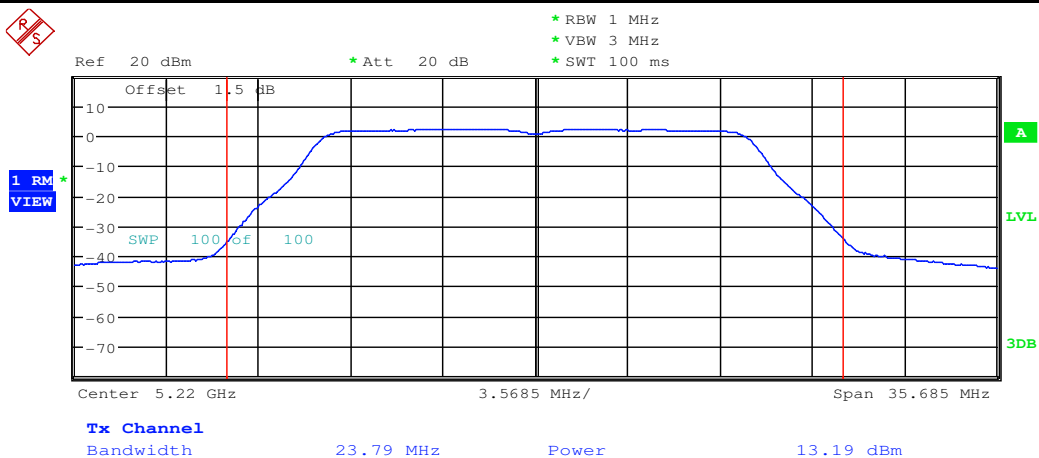


Maximum Conduct Output Power_11A_5220_Ant2

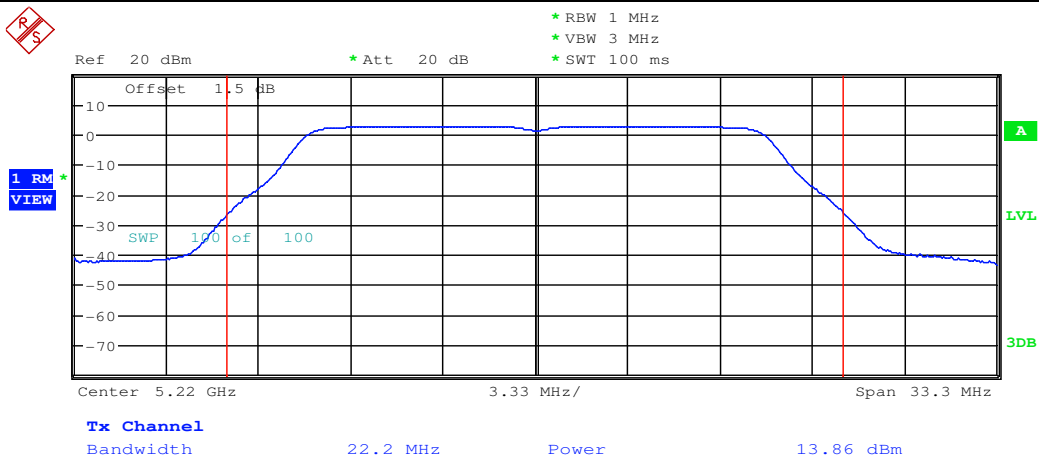


Maximum Conduct Output Power_11A_5240_Ant1

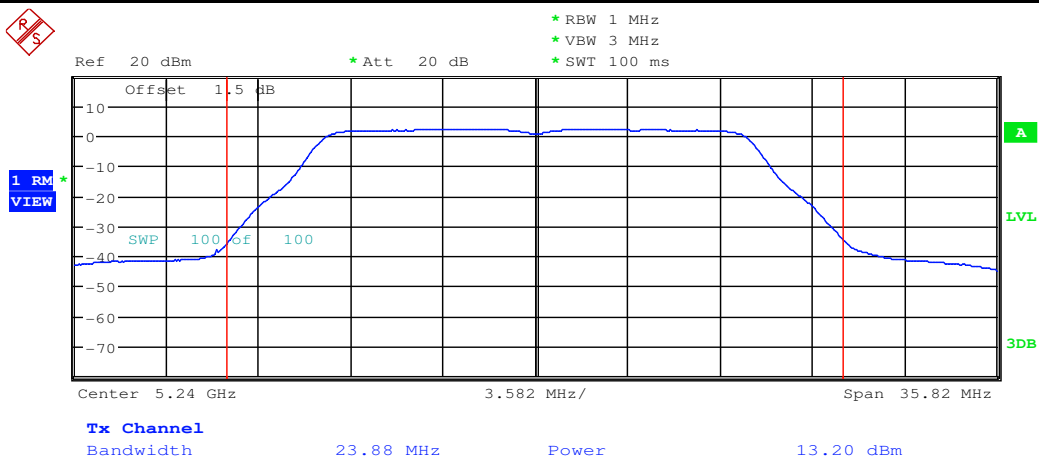


Maximum Conduct Output Power_11A_5240_Ant2

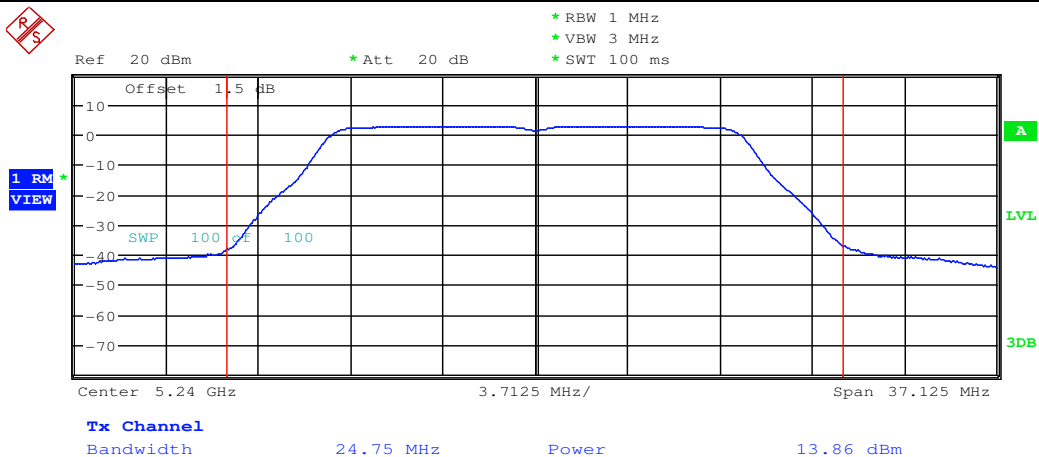


Maximum Conduct Output Power_11A_5260_Ant1

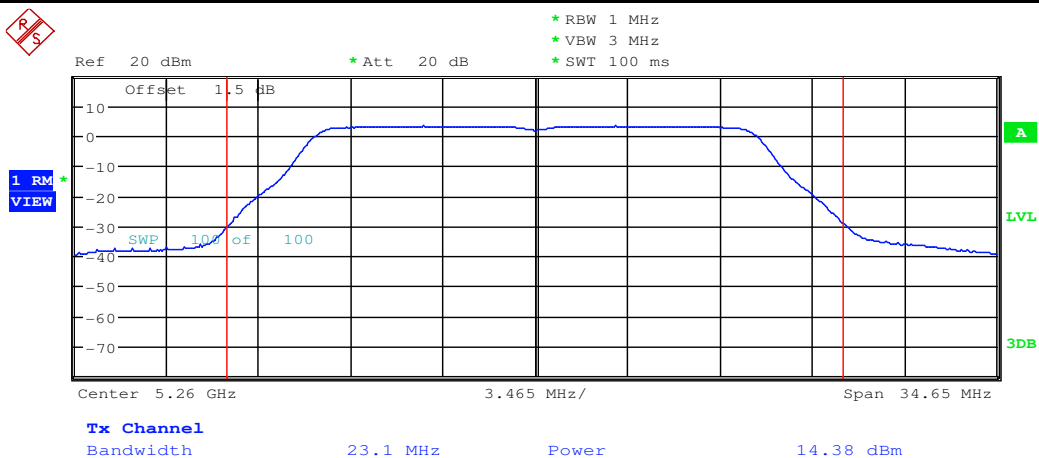


Maximum Conduct Output Power_11A_5260_Ant2

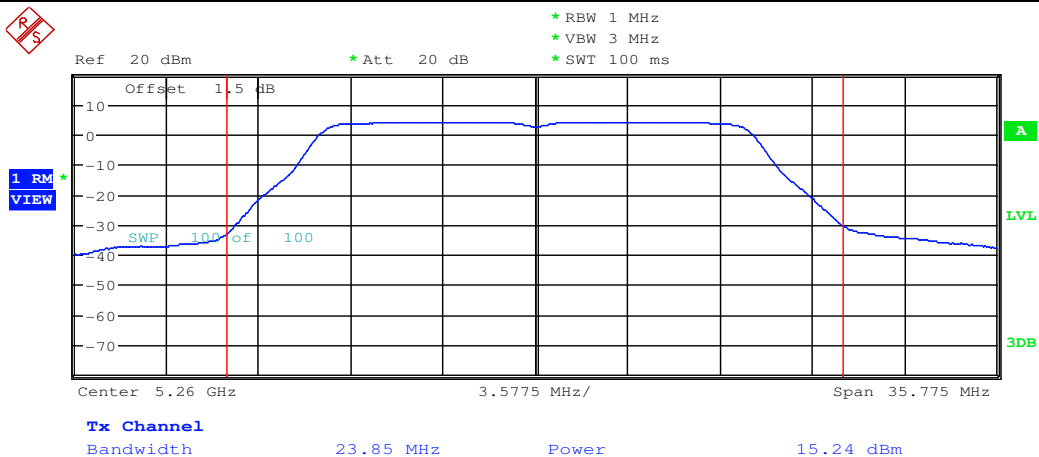


Maximum Conduct Output Power_11A_5300_Ant1

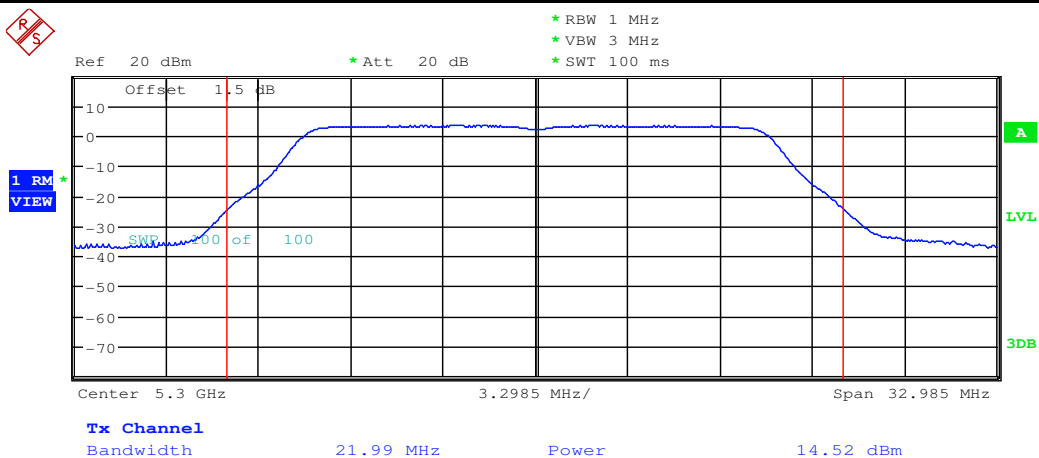


Maximum Conduct Output Power_11A_5300_Ant2

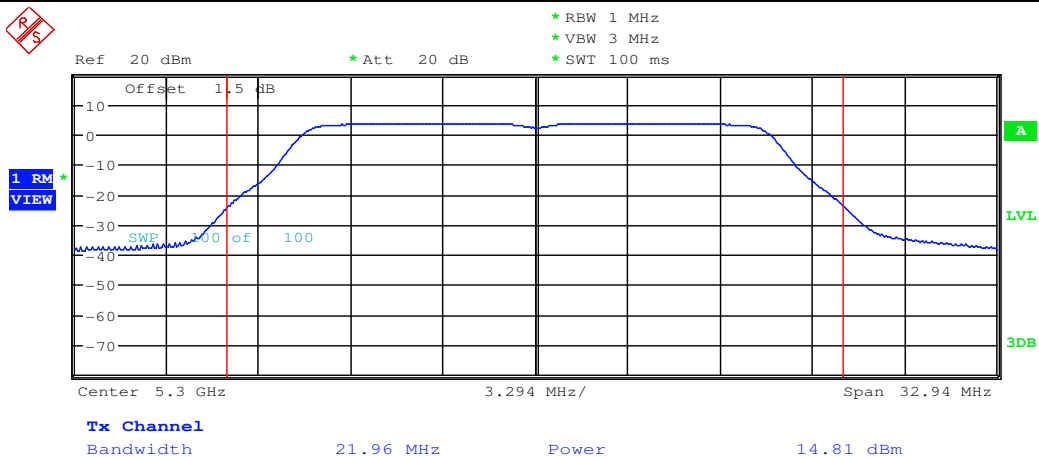


Maximum Conduct Output Power_11A_5320_Ant1

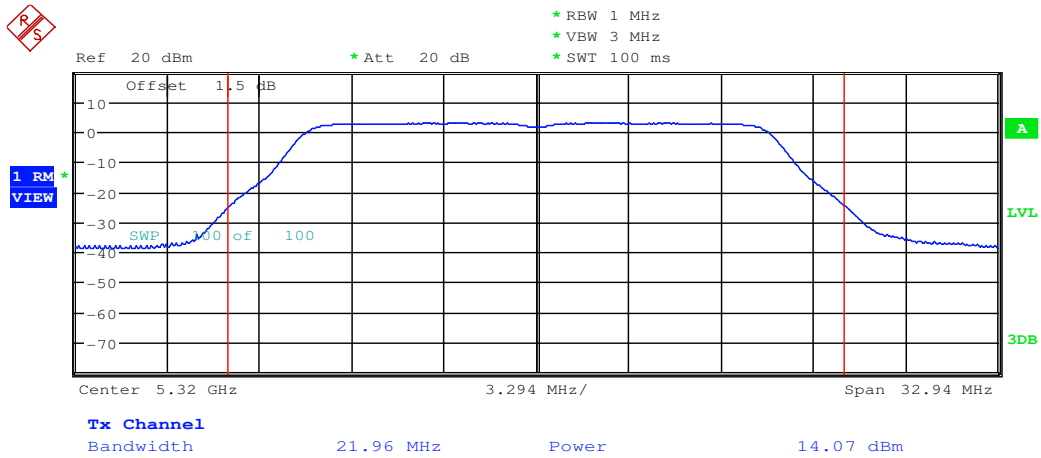


Maximum Conduct Output Power_11A_5320_Ant2


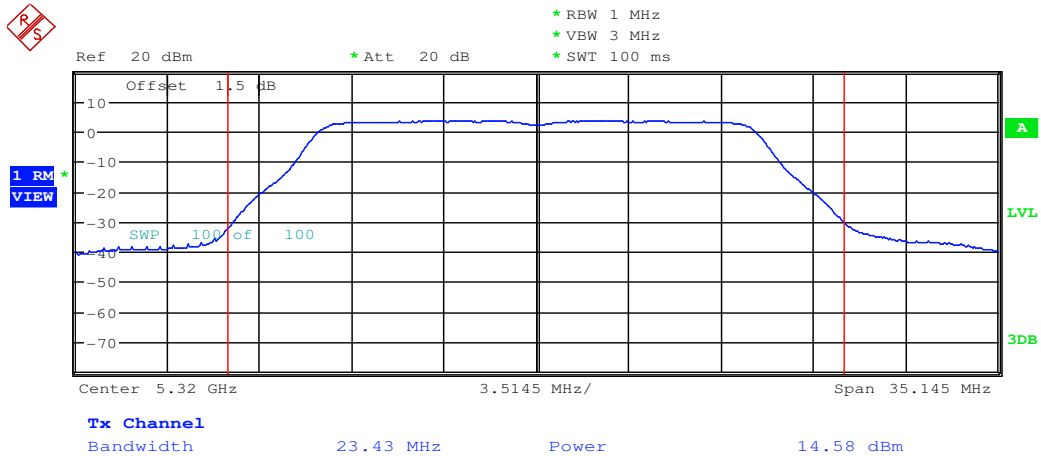


Maximum Conduct Output Power_11N20_5180_Ant1

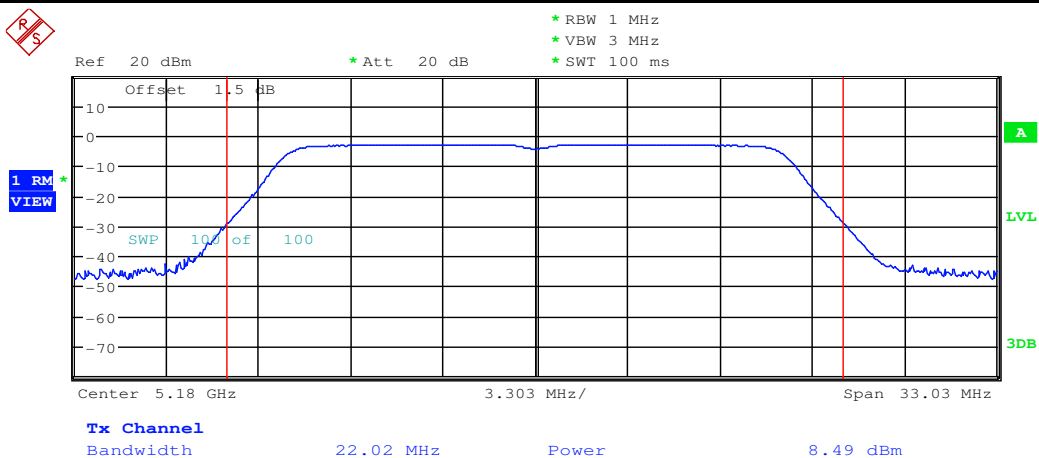


Maximum Conduct Output Power_11N20_5180_Ant2

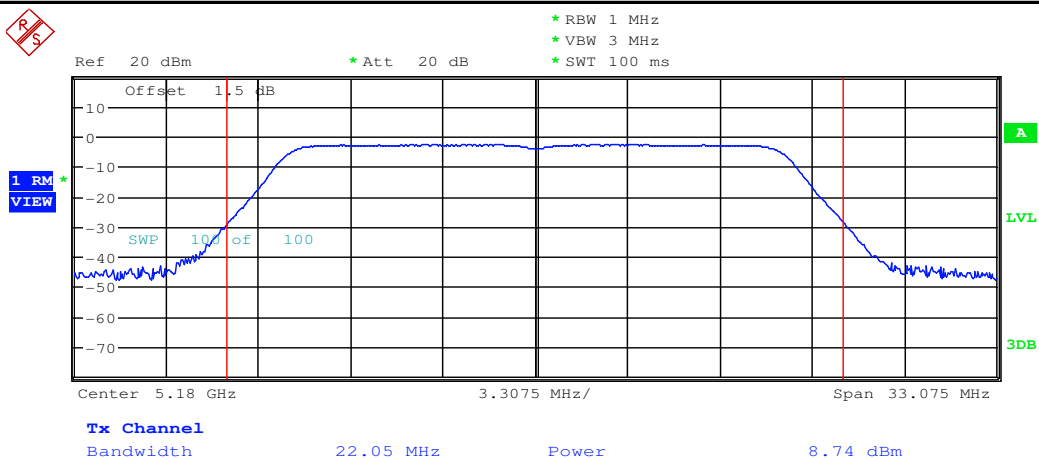


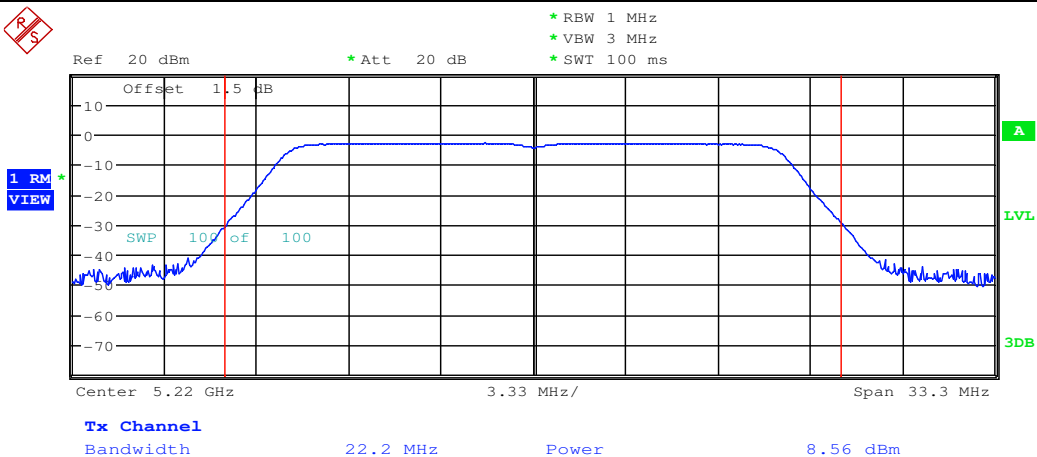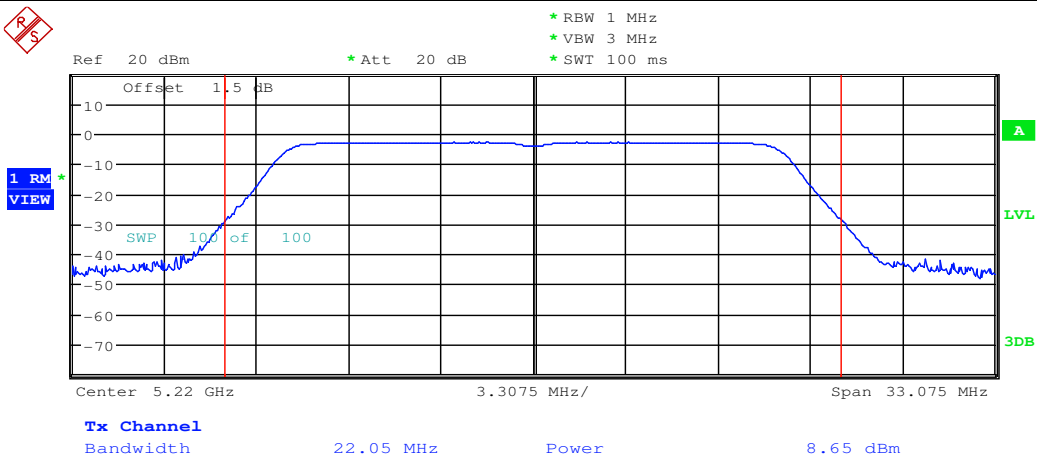


Maximum Conduct Output Power_11N20_5240_Ant1

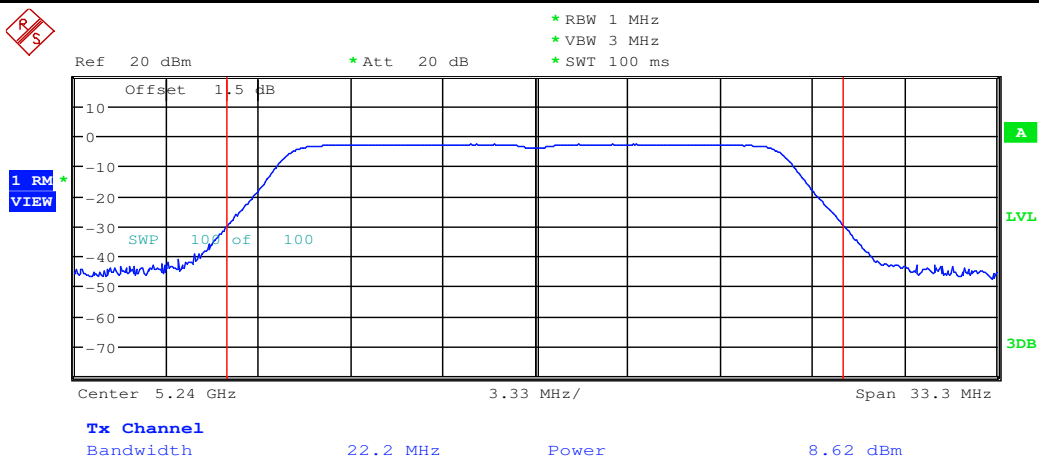


Maximum Conduct Output Power_11N20_5240_Ant2

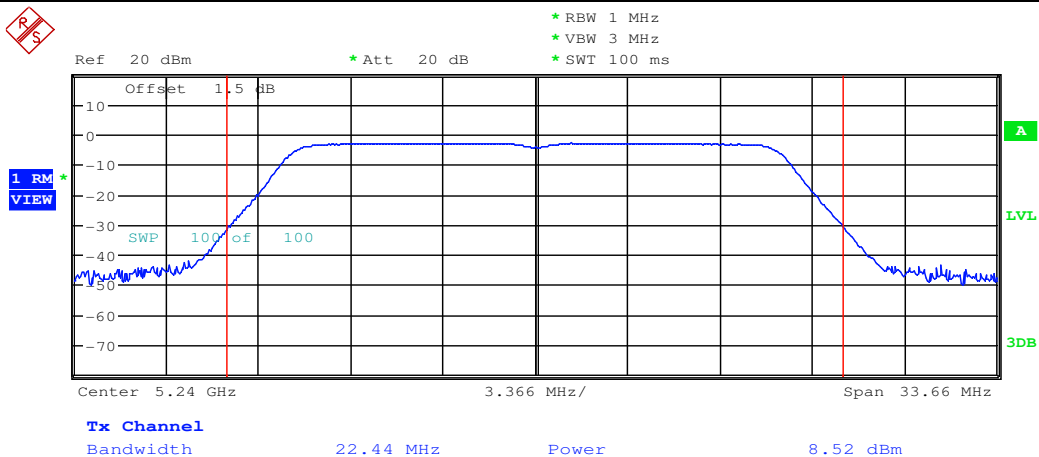


Maximum Conduct Output Power_11N20_5260_Ant1

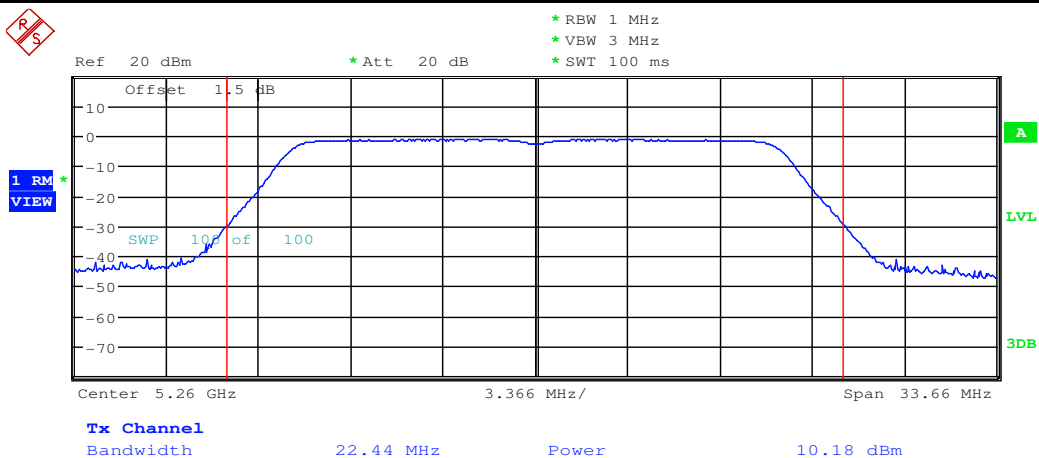


Maximum Conduct Output Power_11N20_5260_Ant2

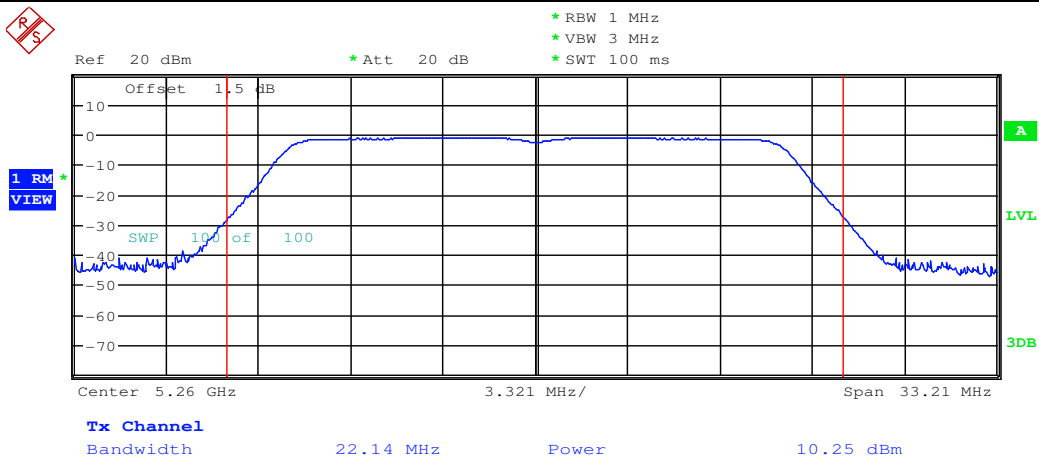


Maximum Conduct Output Power_11N20_5300_Ant1

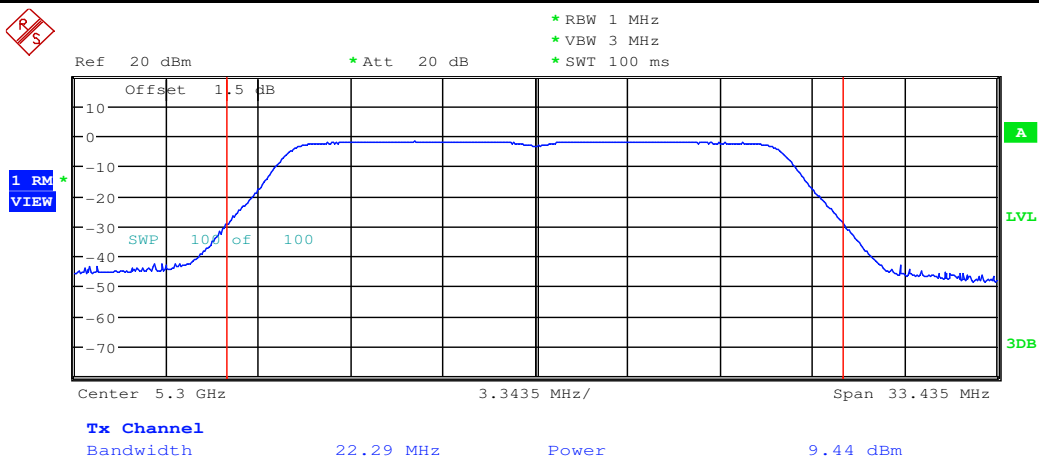


Maximum Conduct Output Power_11N20_5300_Ant2

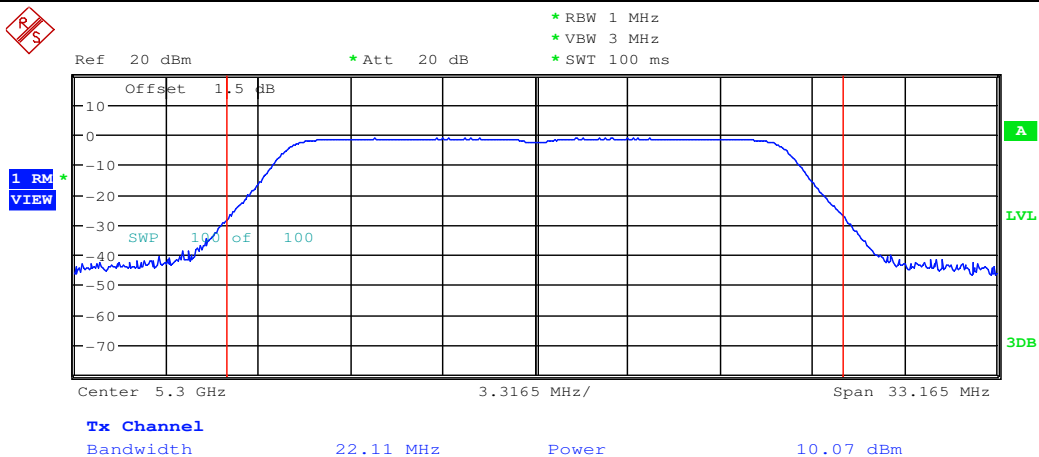


Maximum Conduct Output Power_11N20_5320_Ant1

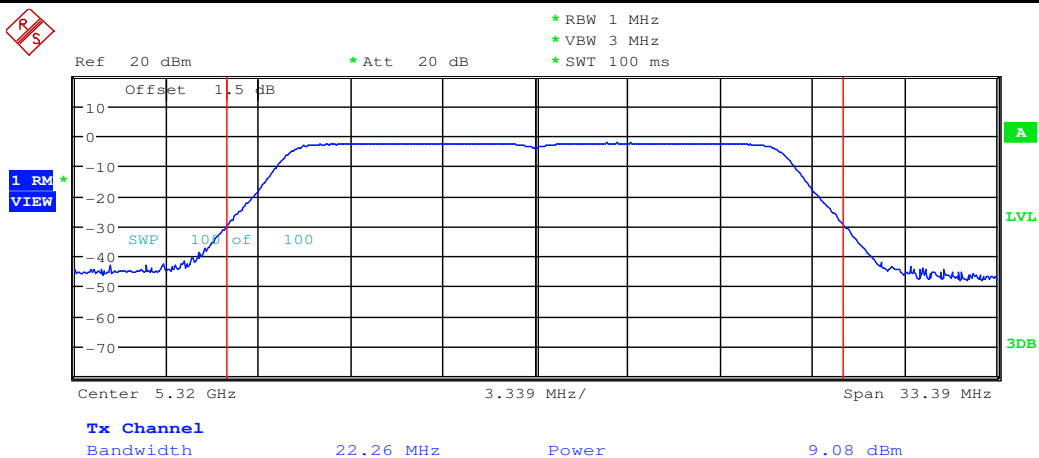


Maximum Conduct Output Power_11N20_5320_Ant2

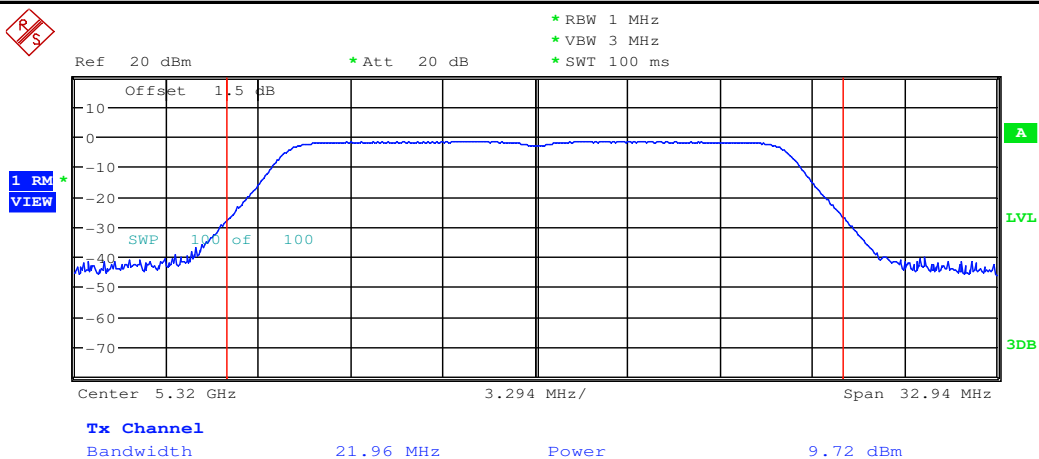


Maximum Conduct Output Power_11N40_5190_Ant1

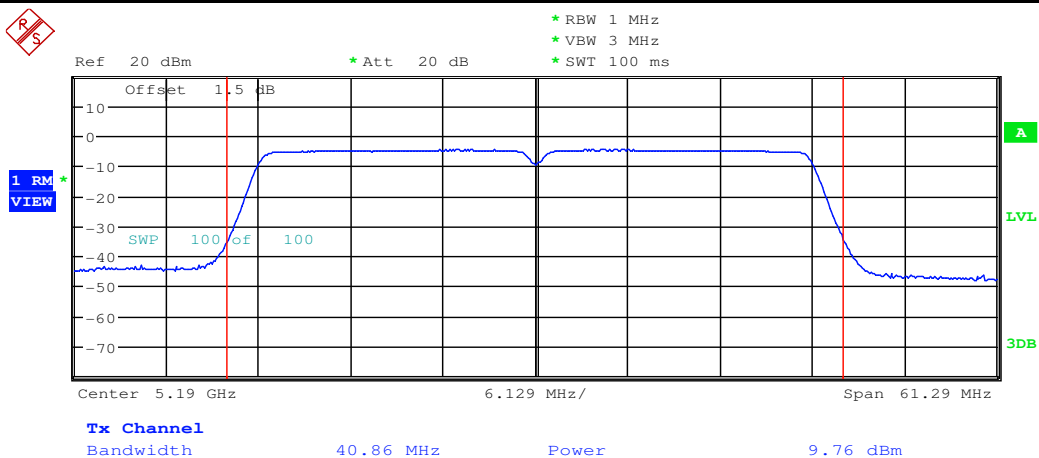


Maximum Conduct Output Power_11N40_5190_Ant2

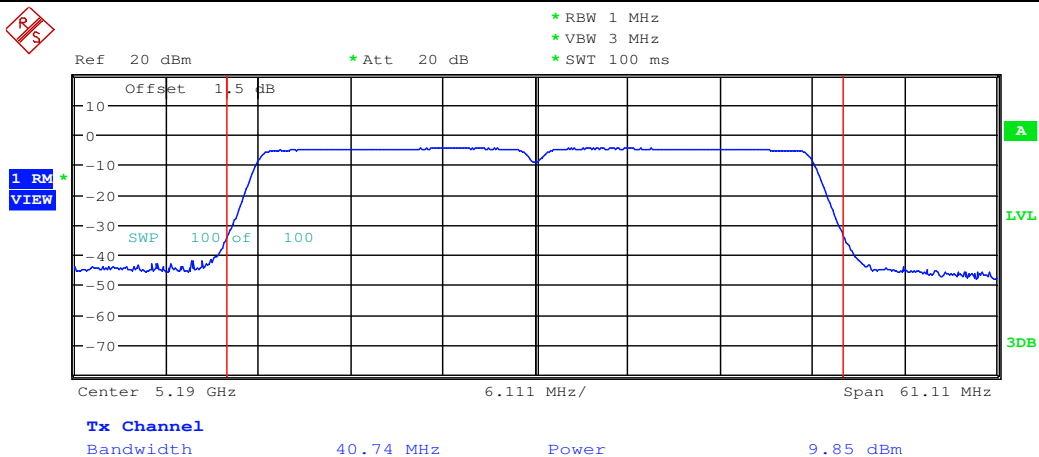


Maximum Conduct Output Power_11N40_5230_Ant1

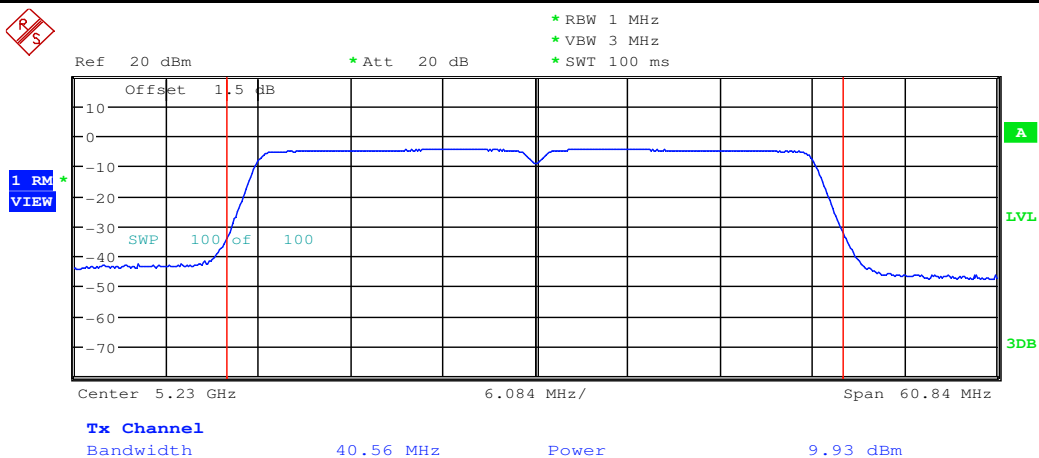


Maximum Conduct Output Power_11N40_5230_Ant2

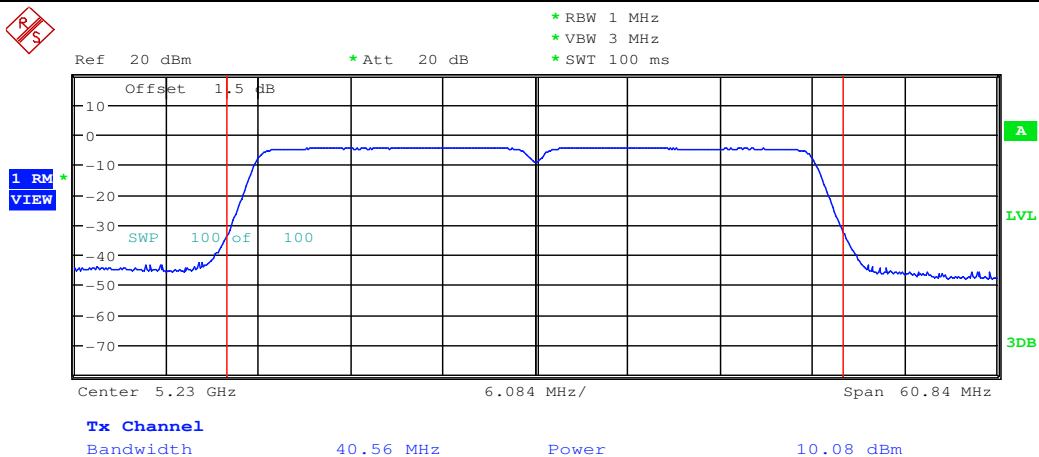


Maximum Conduct Output Power_11N40_5270_Ant1

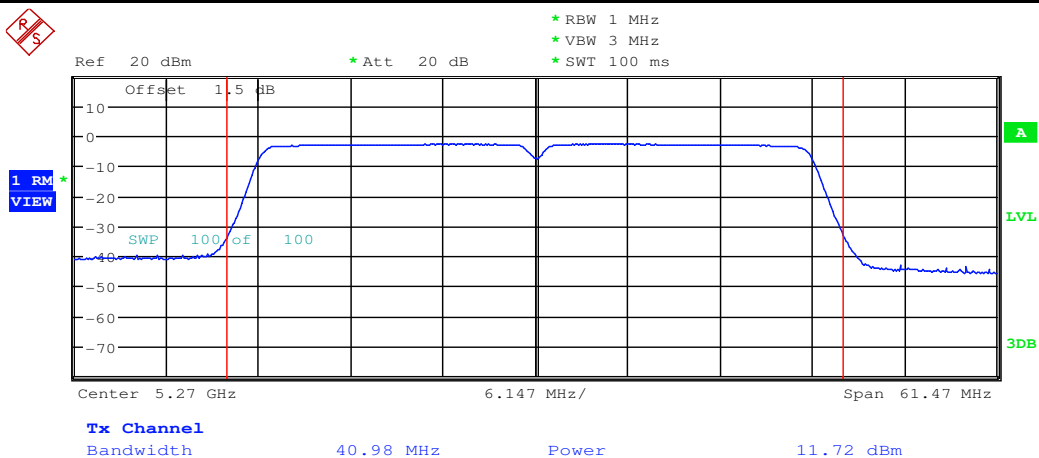


Maximum Conduct Output Power_11N40_5270_Ant2

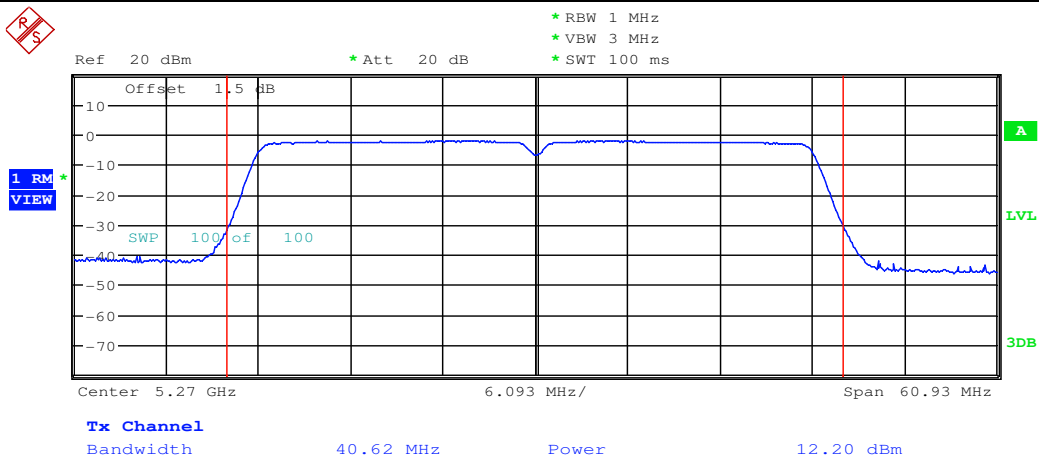


Maximum Conduct Output Power_11N40_5310_Ant1

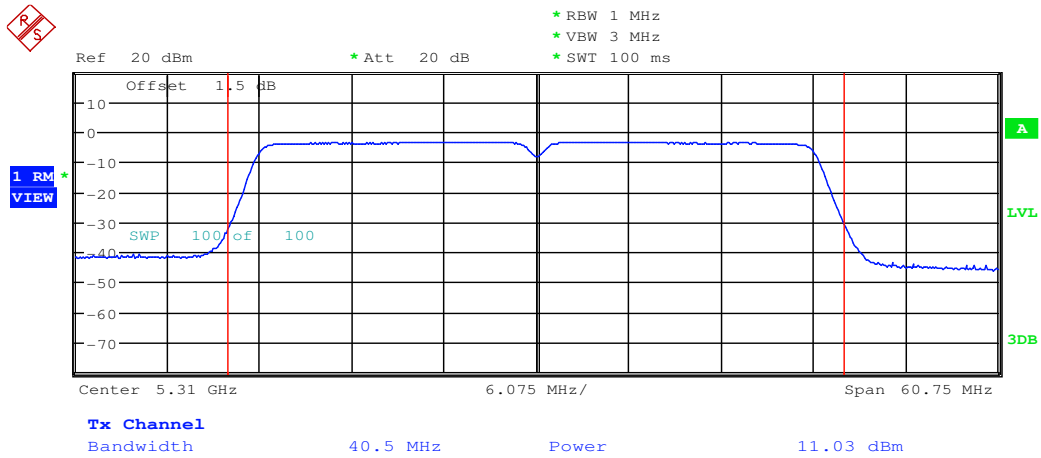


Maximum Conduct Output Power_11N40_5310_Ant2

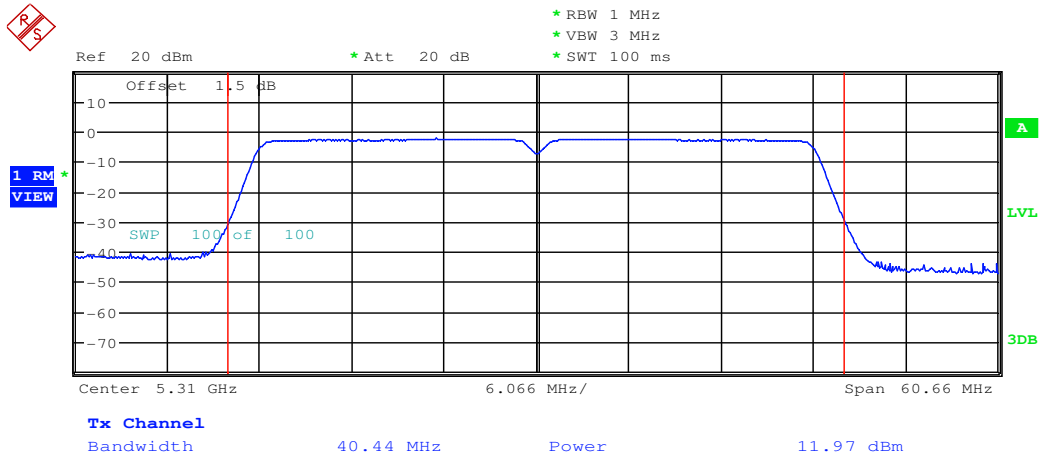


Maximum Conduct Output Power_11AC20_5180_Ant1

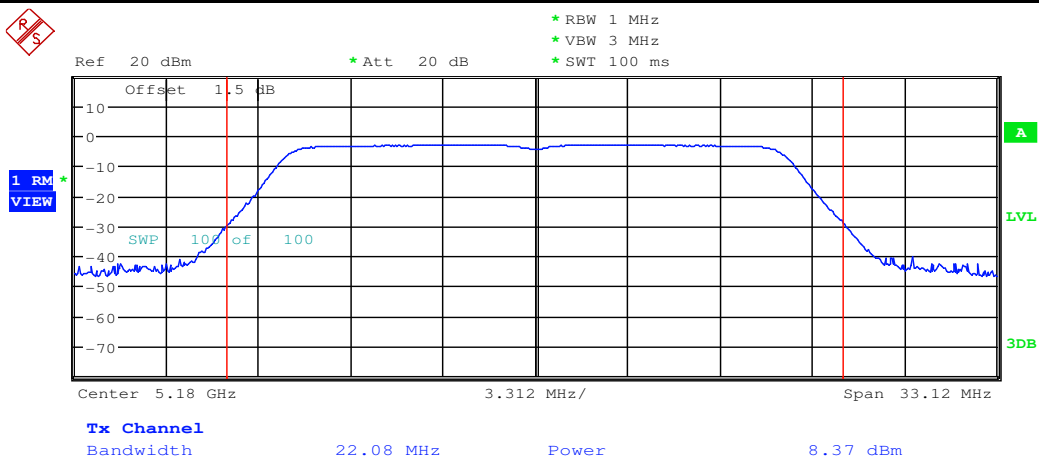


Maximum Conduct Output Power_11AC20_5180_Ant2

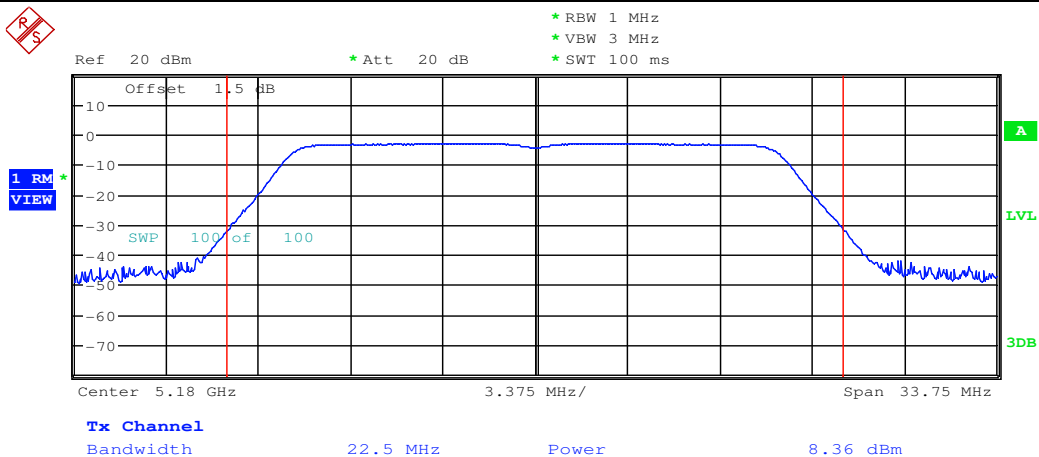


Maximum Conduct Output Power_11AC20_5220_Ant1

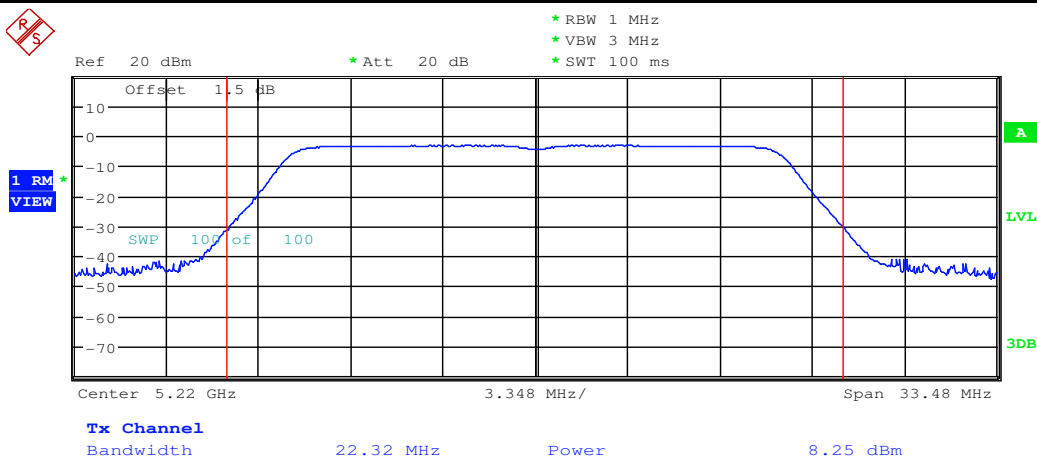


Maximum Conduct Output Power_11AC20_5220_Ant2

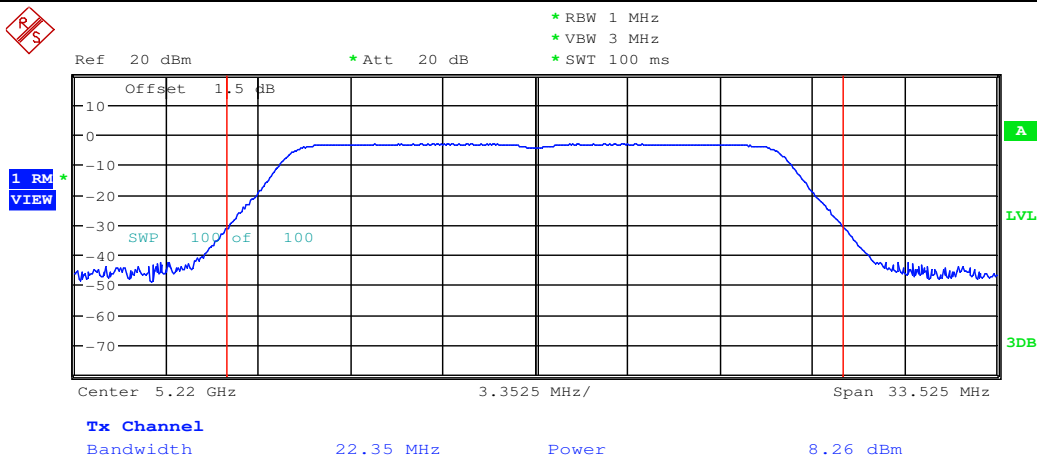


Maximum Conduct Output Power_11AC20_5240_Ant1

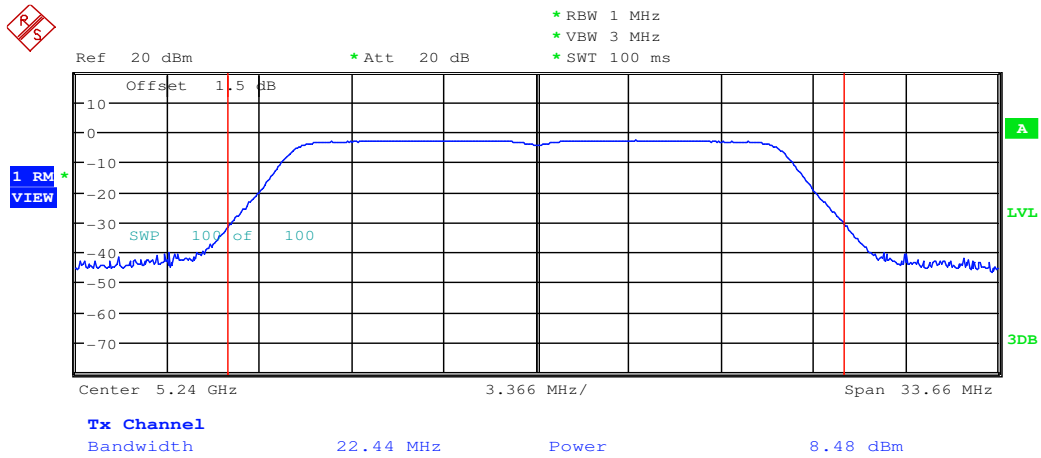


Maximum Conduct Output Power_11AC20_5240_Ant2

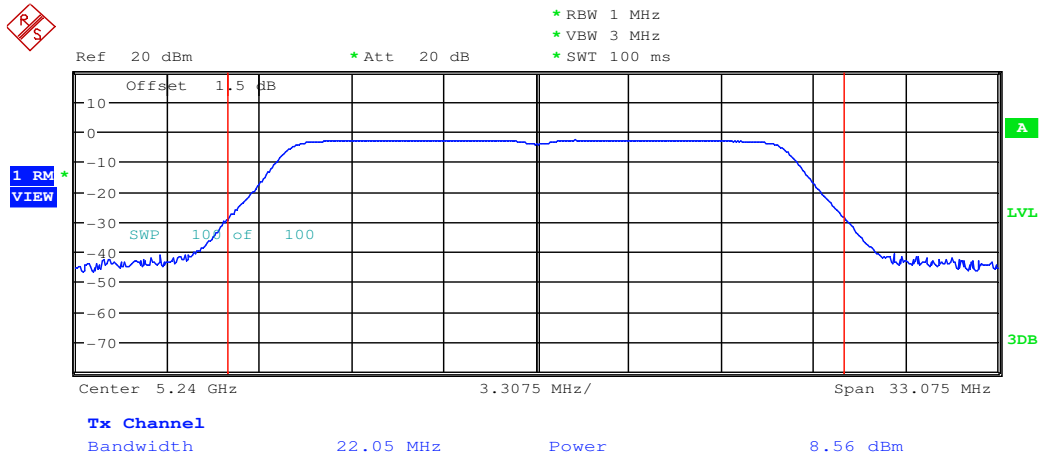


Maximum Conduct Output Power_11AC20_5260_Ant1

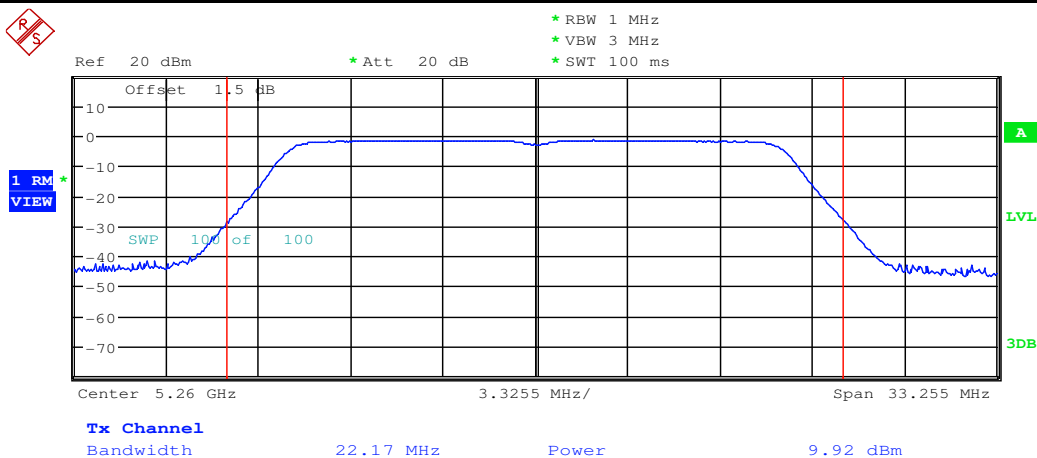


Maximum Conduct Output Power_11AC20_5260_Ant2

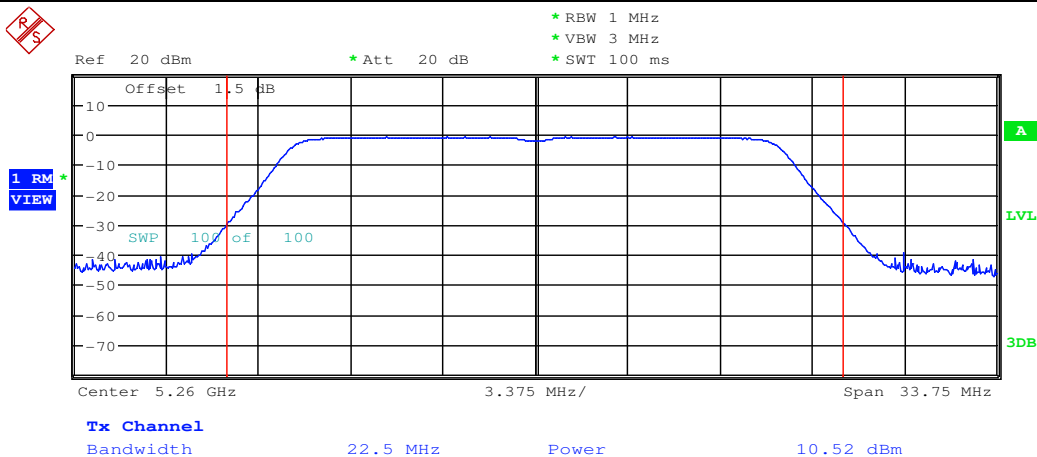


Maximum Conduct Output Power_11AC20_5300_Ant1

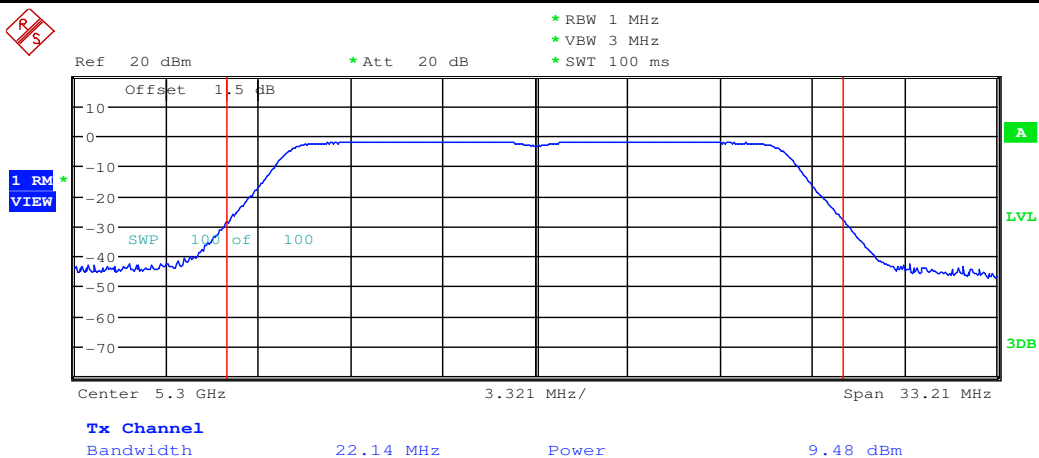


Maximum Conduct Output Power_11AC20_5300_Ant2

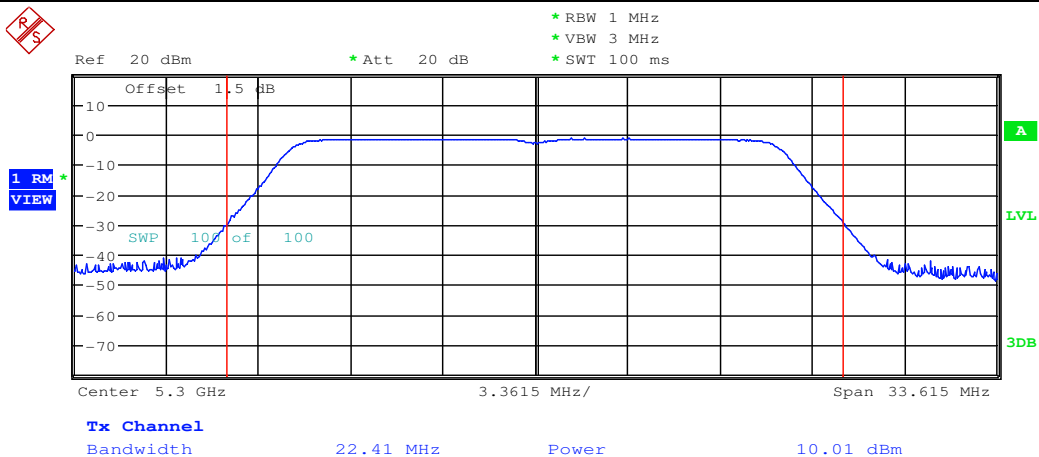


Maximum Conduct Output Power_11AC20_5320_Ant1

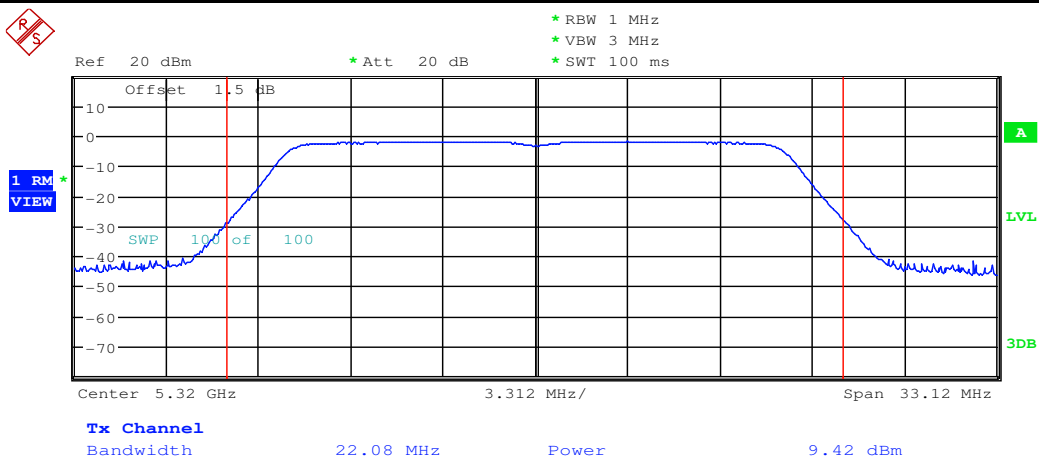


Maximum Conduct Output Power_11AC20_5320_Ant2

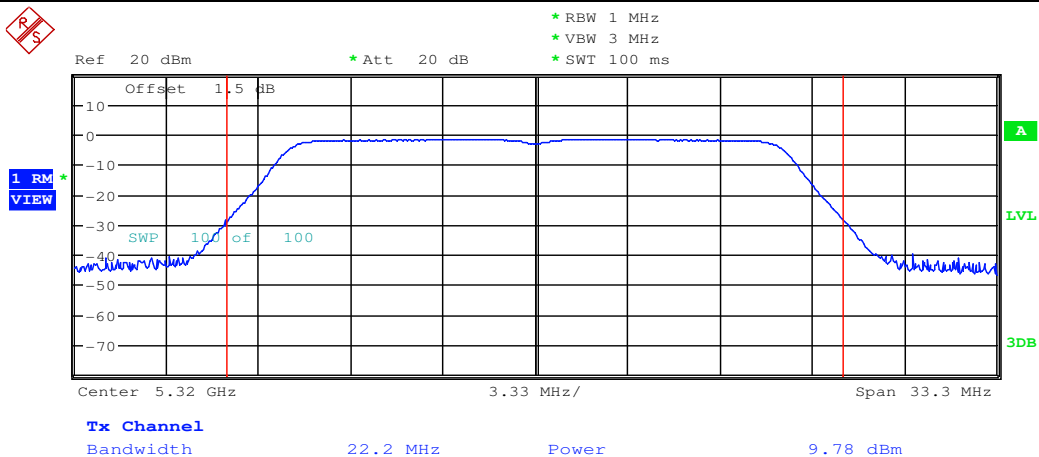


Maximum Conduct Output Power_11AC80_5210_Ant1

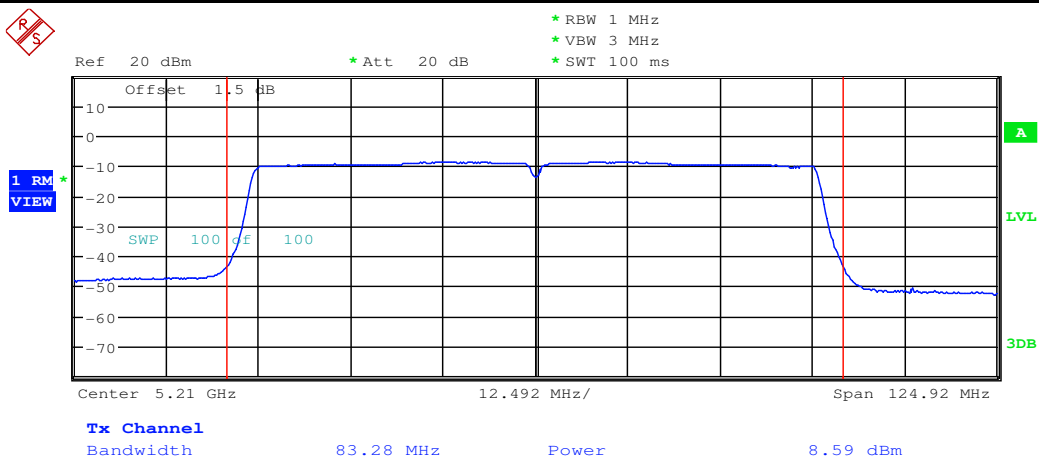


Maximum Conduct Output Power_11AC80_5210_Ant2

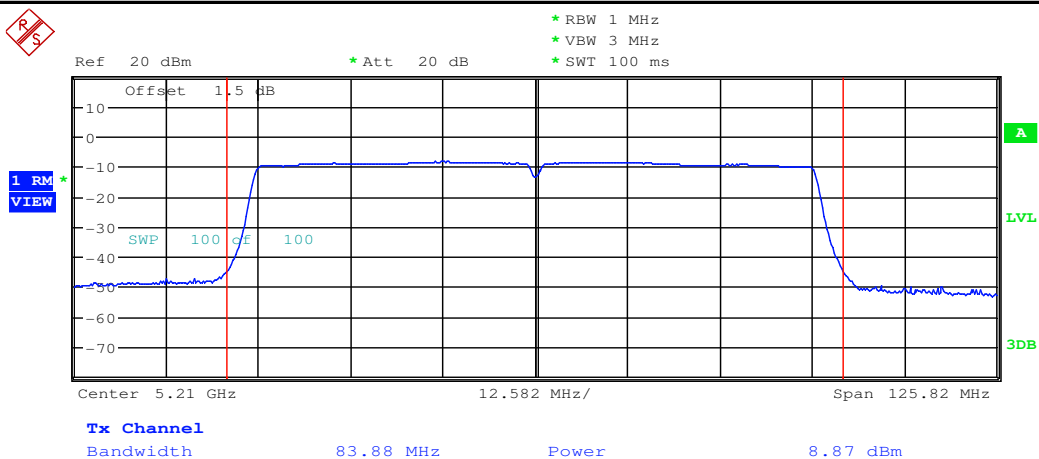


Maximum Conduct Output Power_11AC80_5290_Ant1

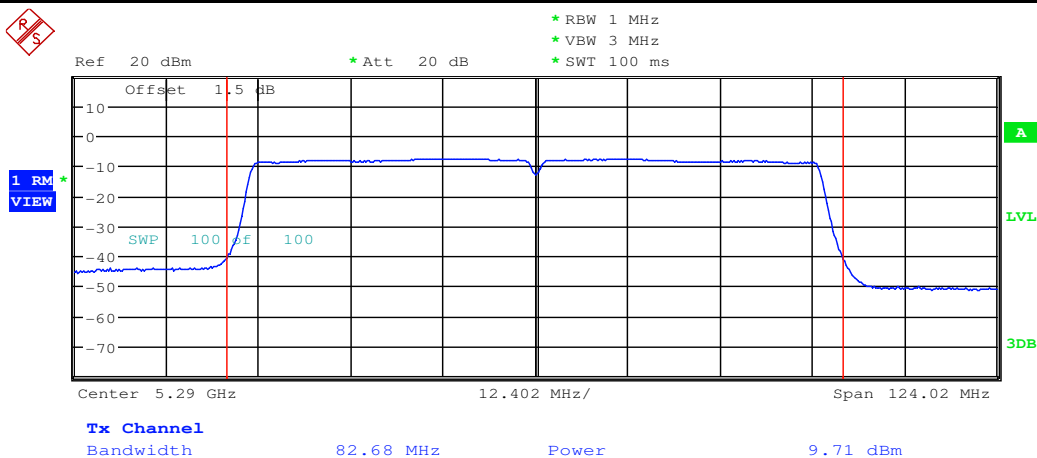


Maximum Conduct Output Power_11AC80_5290_Ant2

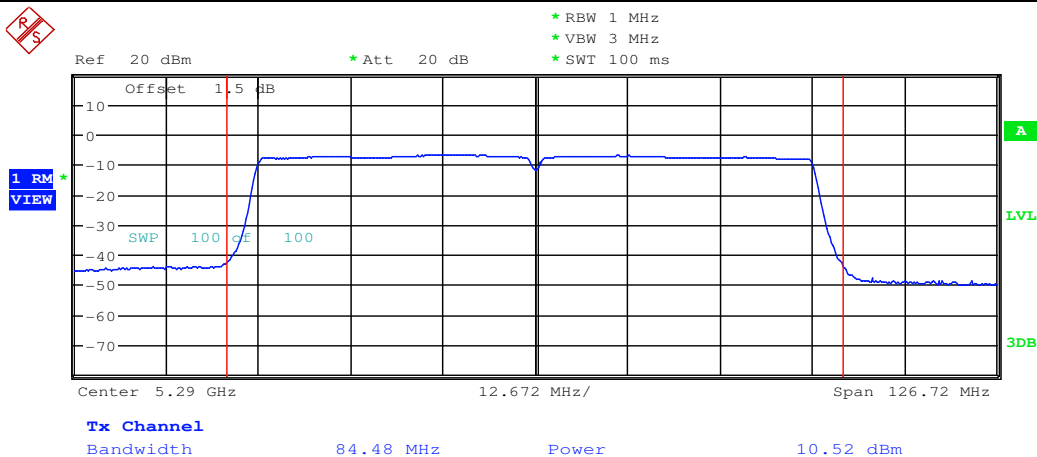


Maximum Conduct Output Power_11AC40_5190_Ant1

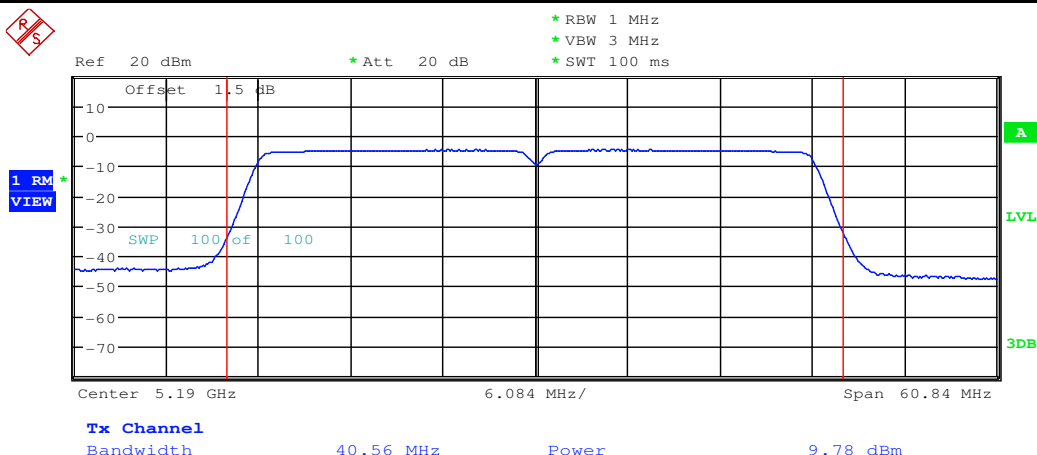


Maximum Conduct Output Power_11AC40_5190_Ant2

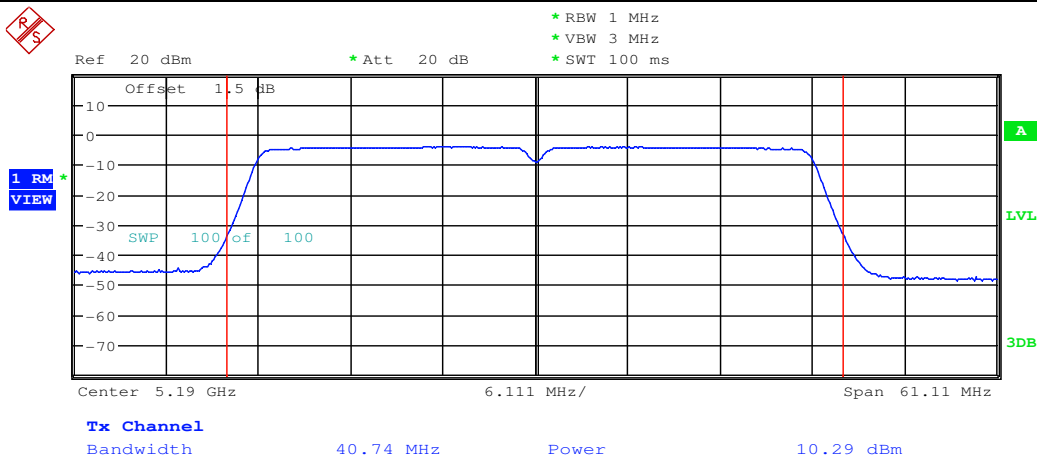


Maximum Conduct Output Power_11AC40_5230_Ant1

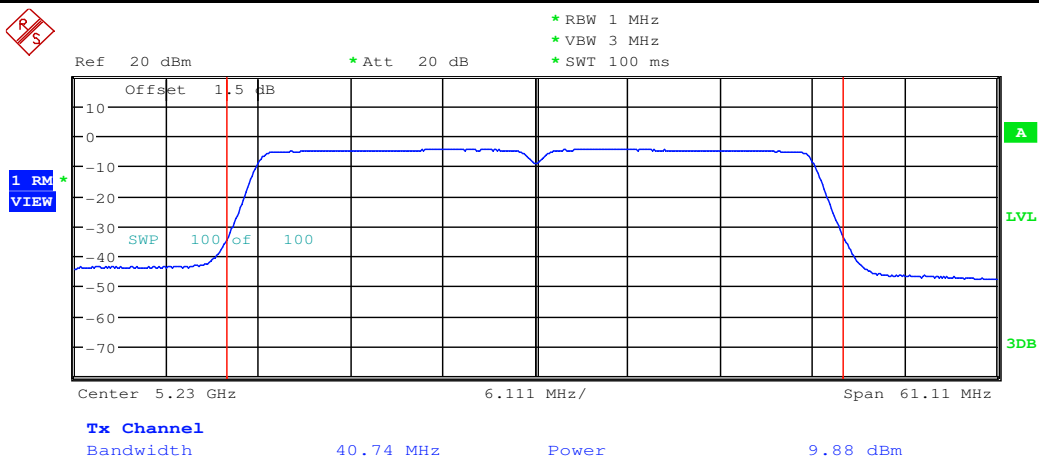


Maximum Conduct Output Power_11AC40_5230_Ant2

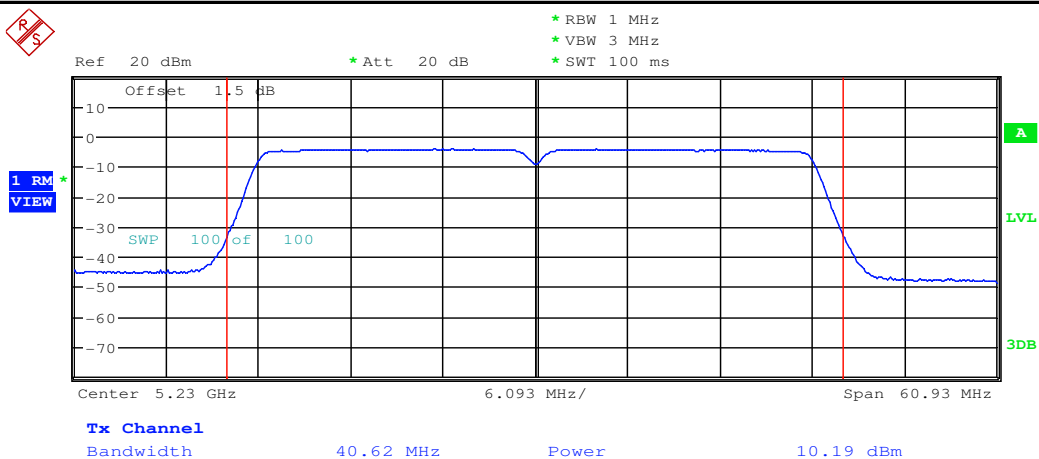


Maximum Conduct Output Power_11AC40_5270_Ant1

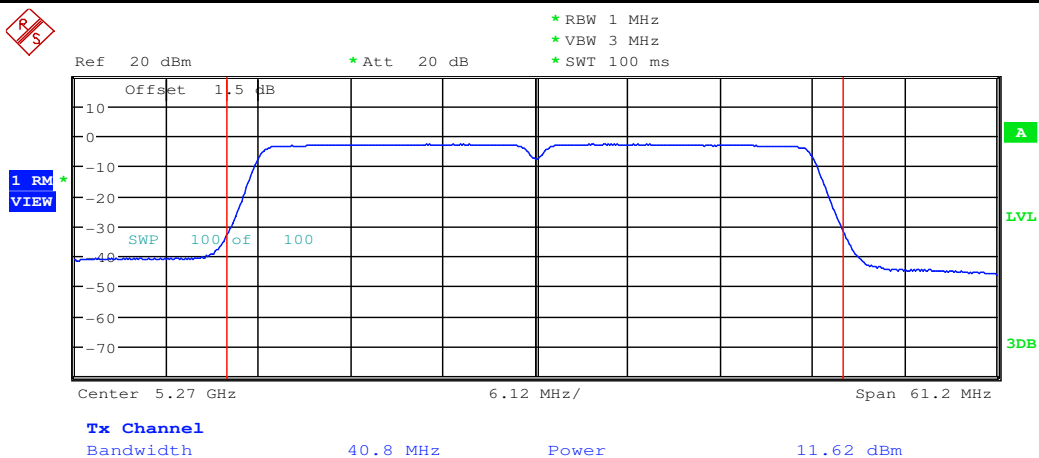


Maximum Conduct Output Power_11AC40_5270_Ant2

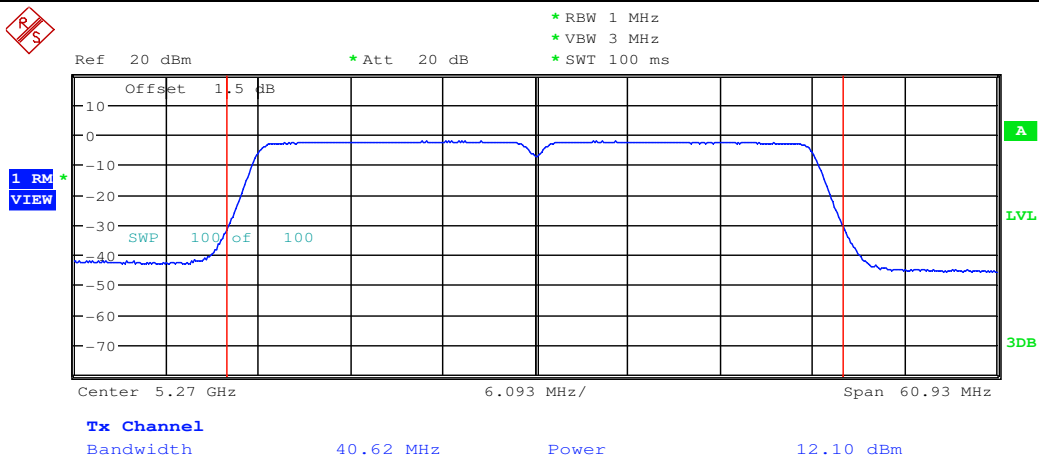

Maximum Conduct Output Power_11AC40_5310_Ant1

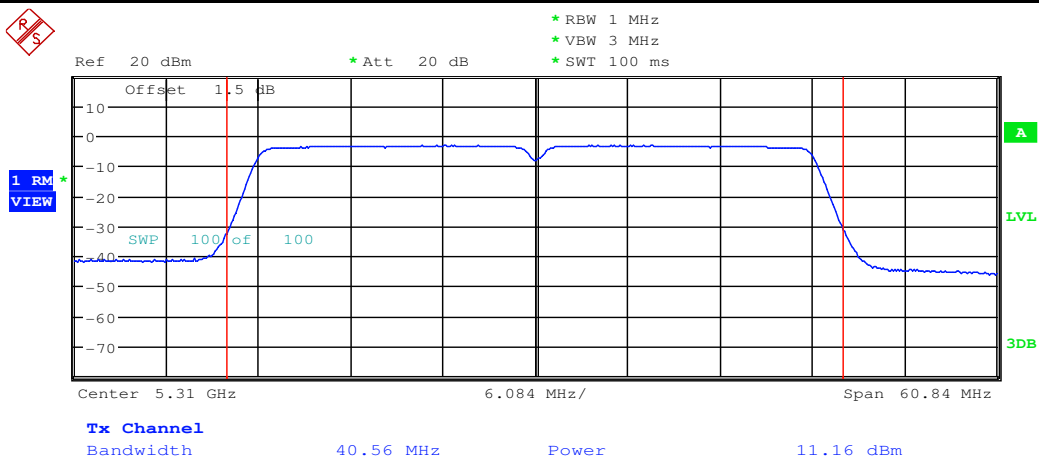

Maximum Conduct Output Power_11AC40_5310_Ant2

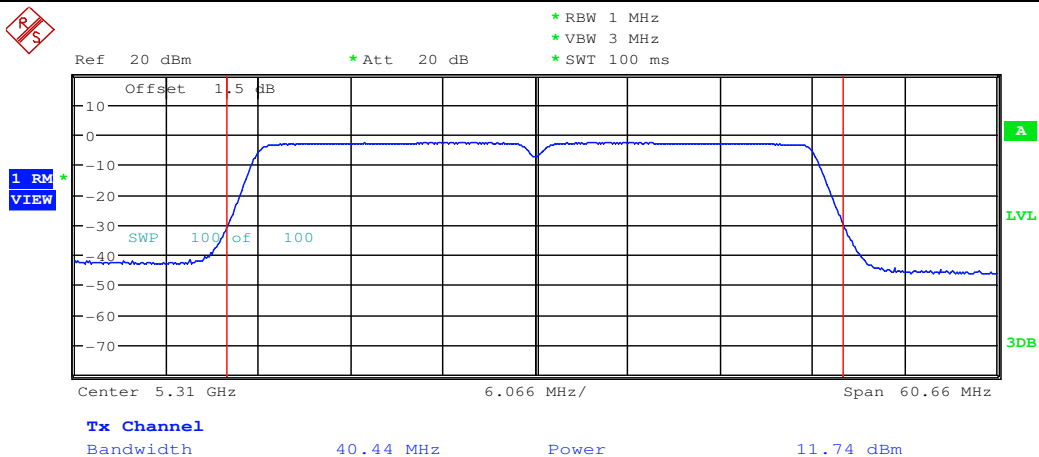



4. Maximum Power Spectral Density

Test Mode	Test Channel	Ant	Level [dBm/MHz]	10log(1/x) Factor [dB]	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	5180	Ant1	3.27	0.32	3.59	<11.00	PASS
11A	5180	Ant2	3.96	0.32	4.28	<11.00	PASS
11A	5220	Ant1	2.84	0.34	3.18	<11.00	PASS
11A	5220	Ant2	3.53	0.34	3.87	<11.00	PASS
11A	5240	Ant1	2.8	0.32	3.12	<11.00	PASS
11A	5240	Ant2	3.49	0.32	3.81	<11.00	PASS
11A	5260	Ant1	4.03	0.32	4.35	<11.00	PASS
11A	5260	Ant2	4.77	0.34	5.11	<11.00	PASS
11A	5300	Ant1	4.15	0.32	4.47	<11.00	PASS
11A	5300	Ant2	4.45	0.32	4.77	<11.00	PASS
11A	5320	Ant1	3.7	0.32	4.02	<11.00	PASS
11A	5320	Ant2	4.2	0.34	4.54	<11.00	PASS
11N20	5180	Ant1	-2.06	0.34	-1.72	<11.00	PASS
11N20	5180	Ant2	-1.8	0.34	-1.46	<11.00	PASS
11N20	5220	Ant1	-1.86	0.34	-1.52	<11.00	PASS
11N20	5220	Ant2	-1.8	0.34	-1.46	<11.00	PASS
11N20	5240	Ant1	-1.92	0.34	-1.58	<11.00	PASS
11N20	5240	Ant2	-2.06	0.34	-1.72	<11.00	PASS
11N20	5260	Ant1	-0.39	0.34	-0.05	<11.00	PASS
11N20	5260	Ant2	-0.26	0.36	0.1	<11.00	PASS
11N20	5300	Ant1	-1.11	0.34	-0.77	<11.00	PASS
11N20	5300	Ant2	-0.47	0.34	-0.13	<11.00	PASS
11N20	5320	Ant1	-1.56	0.34	-1.22	<11.00	PASS
11N20	5320	Ant2	-0.9	0.34	-0.56	<11.00	PASS
11N40	5190	Ant1	-3.77	0.64	-3.13	<11.00	PASS
11N40	5190	Ant2	-3.66	0.66	-3	<11.00	PASS
11N40	5230	Ant1	-3.64	0.66	-2.98	<11.00	PASS
11N40	5230	Ant2	-3.45	0.66	-2.79	<11.00	PASS
11N40	5270	Ant1	-1.8	0.66	-1.14	<11.00	PASS
11N40	5270	Ant2	-1.43	0.64	-0.79	<11.00	PASS
11N40	5310	Ant1	-2.52	0.64	-1.88	<11.00	PASS



11N40	5310	Ant2	-1.55	0.66	-0.89	<11.00	PASS
11AC20	5180	Ant1	-1.85	0.34	-1.51	<11.00	PASS
11AC20	5180	Ant2	-1.94	0.34	-1.6	<11.00	PASS
11AC20	5220	Ant1	-2.02	0.34	-1.68	<11.00	PASS
11AC20	5220	Ant2	-2.08	0.34	-1.74	<11.00	PASS
11AC20	5240	Ant1	-1.85	0.36	-1.49	<11.00	PASS
11AC20	5240	Ant2	-1.8	0.34	-1.46	<11.00	PASS
11AC20	5260	Ant1	-0.36	0.34	-0.02	<11.00	PASS
11AC20	5260	Ant2	0.16	0.34	0.5	<11.00	PASS
11AC20	5300	Ant1	-0.85	0.36	-0.49	<11.00	PASS
11AC20	5300	Ant2	-0.3	0.34	0.04	<11.00	PASS
11AC20	5320	Ant1	-0.91	0.34	-0.57	<11.00	PASS
11AC20	5320	Ant2	-0.58	0.34	-0.24	<11.00	PASS
11AC80	5210	Ant1	-7.67	1.19	-6.48	<11.00	PASS
11AC80	5210	Ant2	-7.32	1.17	-6.15	<11.00	PASS
11AC80	5290	Ant1	-6.46	1.22	-5.24	<11.00	PASS
11AC80	5290	Ant2	-5.65	1.22	-4.43	<11.00	PASS
11AC40	5190	Ant1	-3.8	0.64	-3.16	<11.00	PASS
11AC40	5190	Ant2	-3.12	0.64	-2.48	<11.00	PASS
11AC40	5230	Ant1	-3.66	0.66	-3	<11.00	PASS
11AC40	5230	Ant2	-3.28	0.66	-2.62	<11.00	PASS
11AC40	5270	Ant1	-1.9	0.66	-1.24	<11.00	PASS
11AC40	5270	Ant2	-1.38	0.64	-0.74	<11.00	PASS
11AC40	5310	Ant1	-2.38	0.66	-1.72	<11.00	PASS
11AC40	5310	Ant2	-1.86	0.64	-1.22	<11.00	PASS

MIMO:

Test Mode	Test Channel	Ant	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11N20	5180	Ant1+2	1.42	<11.00	PASS
11N20	5220	Ant1+2	1.52	<11.00	PASS
11N20	5240	Ant1+2	1.36	<11.00	PASS
11N20	5260	Ant1+2	3.04	<11.00	PASS
11N20	5300	Ant1+2	2.57	<11.00	PASS



11N20	5320	Ant1+2	2.13	<11.00	PASS
11N40	5190	Ant1+2	-0.05	<11.00	PASS
11N40	5230	Ant1+2	0.13	<11.00	PASS
11N40	5270	Ant1+2	2.05	<11.00	PASS
11N40	5310	Ant1+2	1.65	<11.00	PASS
11AC20	5180	Ant1+2	1.46	<11.00	PASS
11AC20	5220	Ant1+2	1.30	<11.00	PASS
11AC20	5240	Ant1+2	1.54	<11.00	PASS
11AC20	5260	Ant1+2	3.26	<11.00	PASS
11AC20	5300	Ant1+2	2.79	<11.00	PASS
11AC20	5320	Ant1+2	2.61	<11.00	PASS
11AC80	5210	Ant1+2	-3.30	<11.00	PASS
11AC80	5290	Ant1+2	-1.81	<11.00	PASS
11AC40	5190	Ant1+2	0.20	<11.00	PASS
11AC40	5230	Ant1+2	0.20	<11.00	PASS
11AC40	5270	Ant1+2	2.03	<11.00	PASS
11AC40	5310	Ant1+2	1.55	<11.00	PASS

For band1:

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + array gain (dB)

Array Gain = $10 \log(\text{NANT})$, where NANT is the number of transmit antennas

So the total directional gain=-3.6dBi

For the directional gain is less than 6dBi, so no need to reduce the limit of power.


For band2:


Total directional gain (dBi) = gain of individual transmit antennas (dBi) + array gain (dB)


Array Gain = $10 \log(\text{NANT})$, where NANT is the number of transmit antennas


So the total directional gain=5.73dBi


For the directional gain is less than 6dBi, so no need to reduce the limit of power.

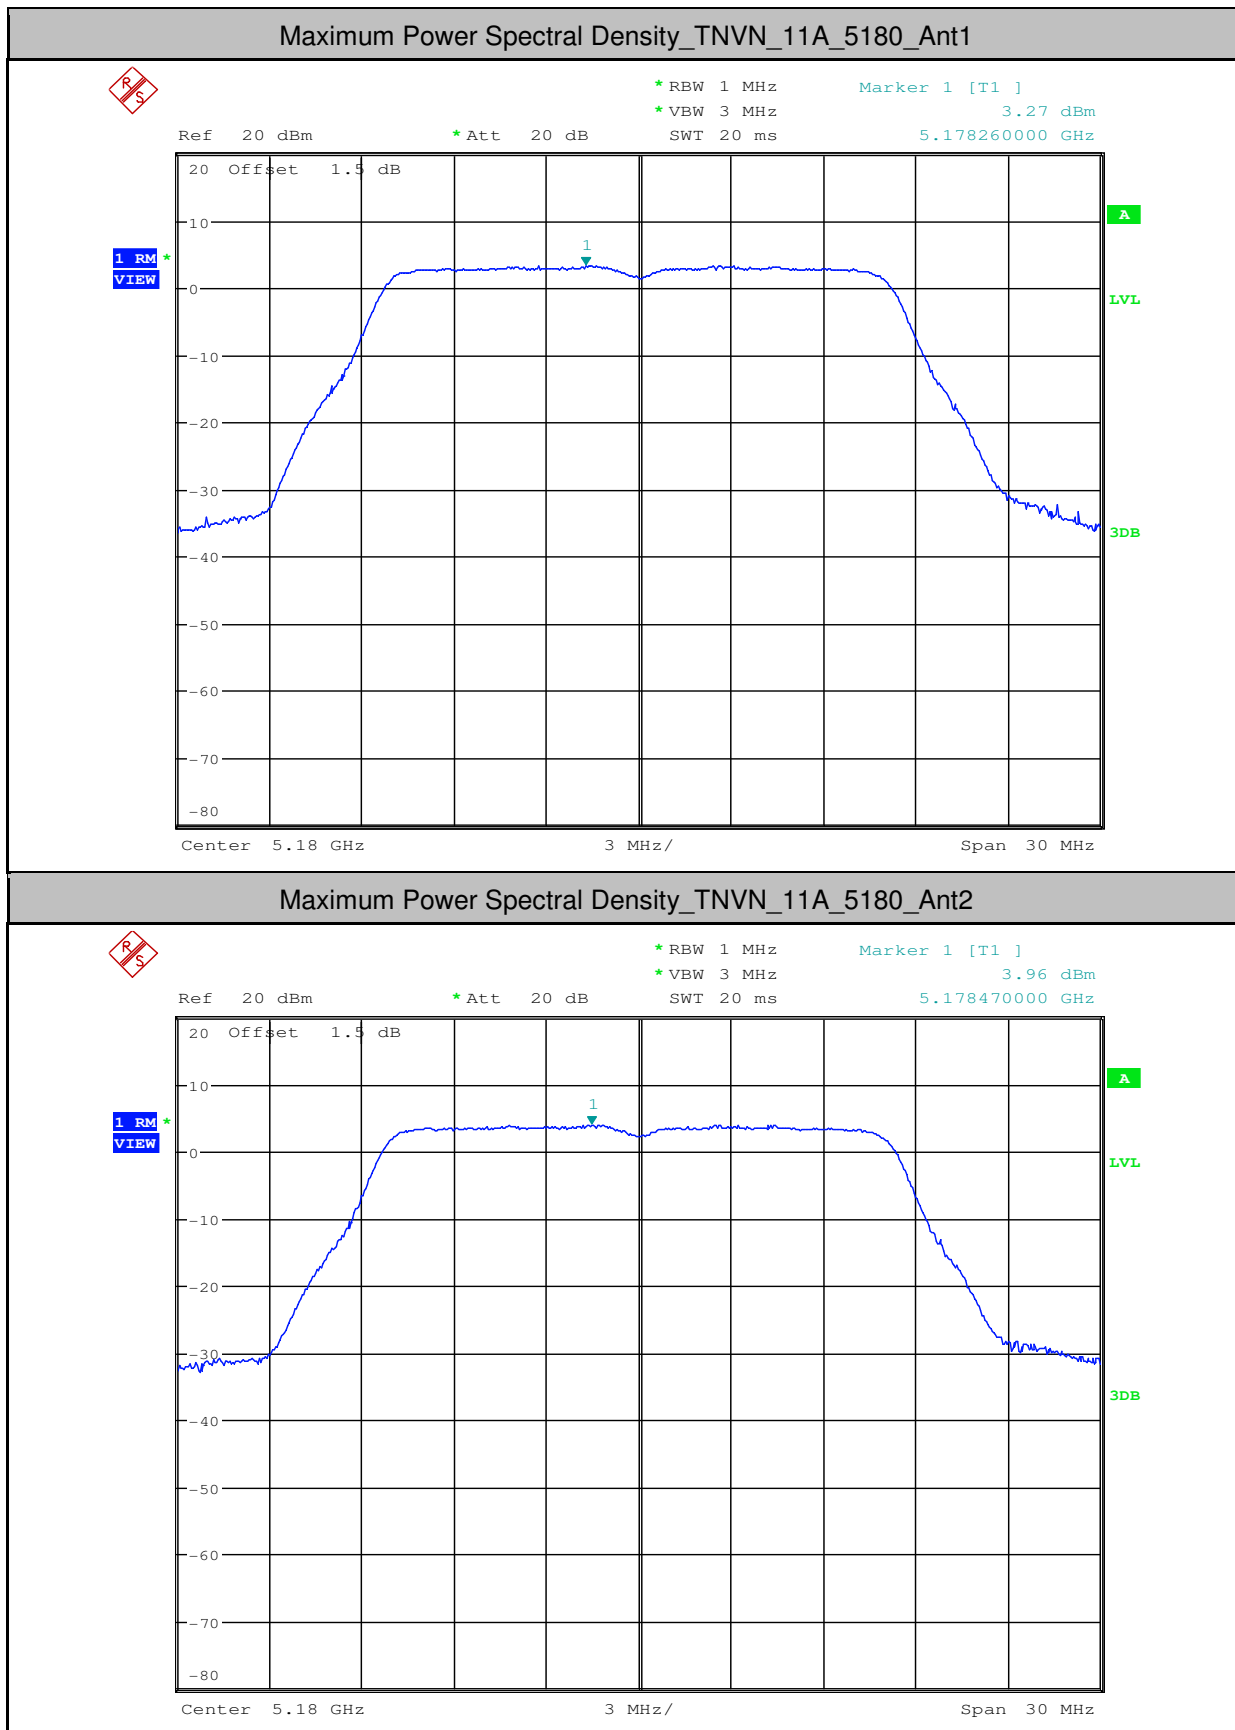


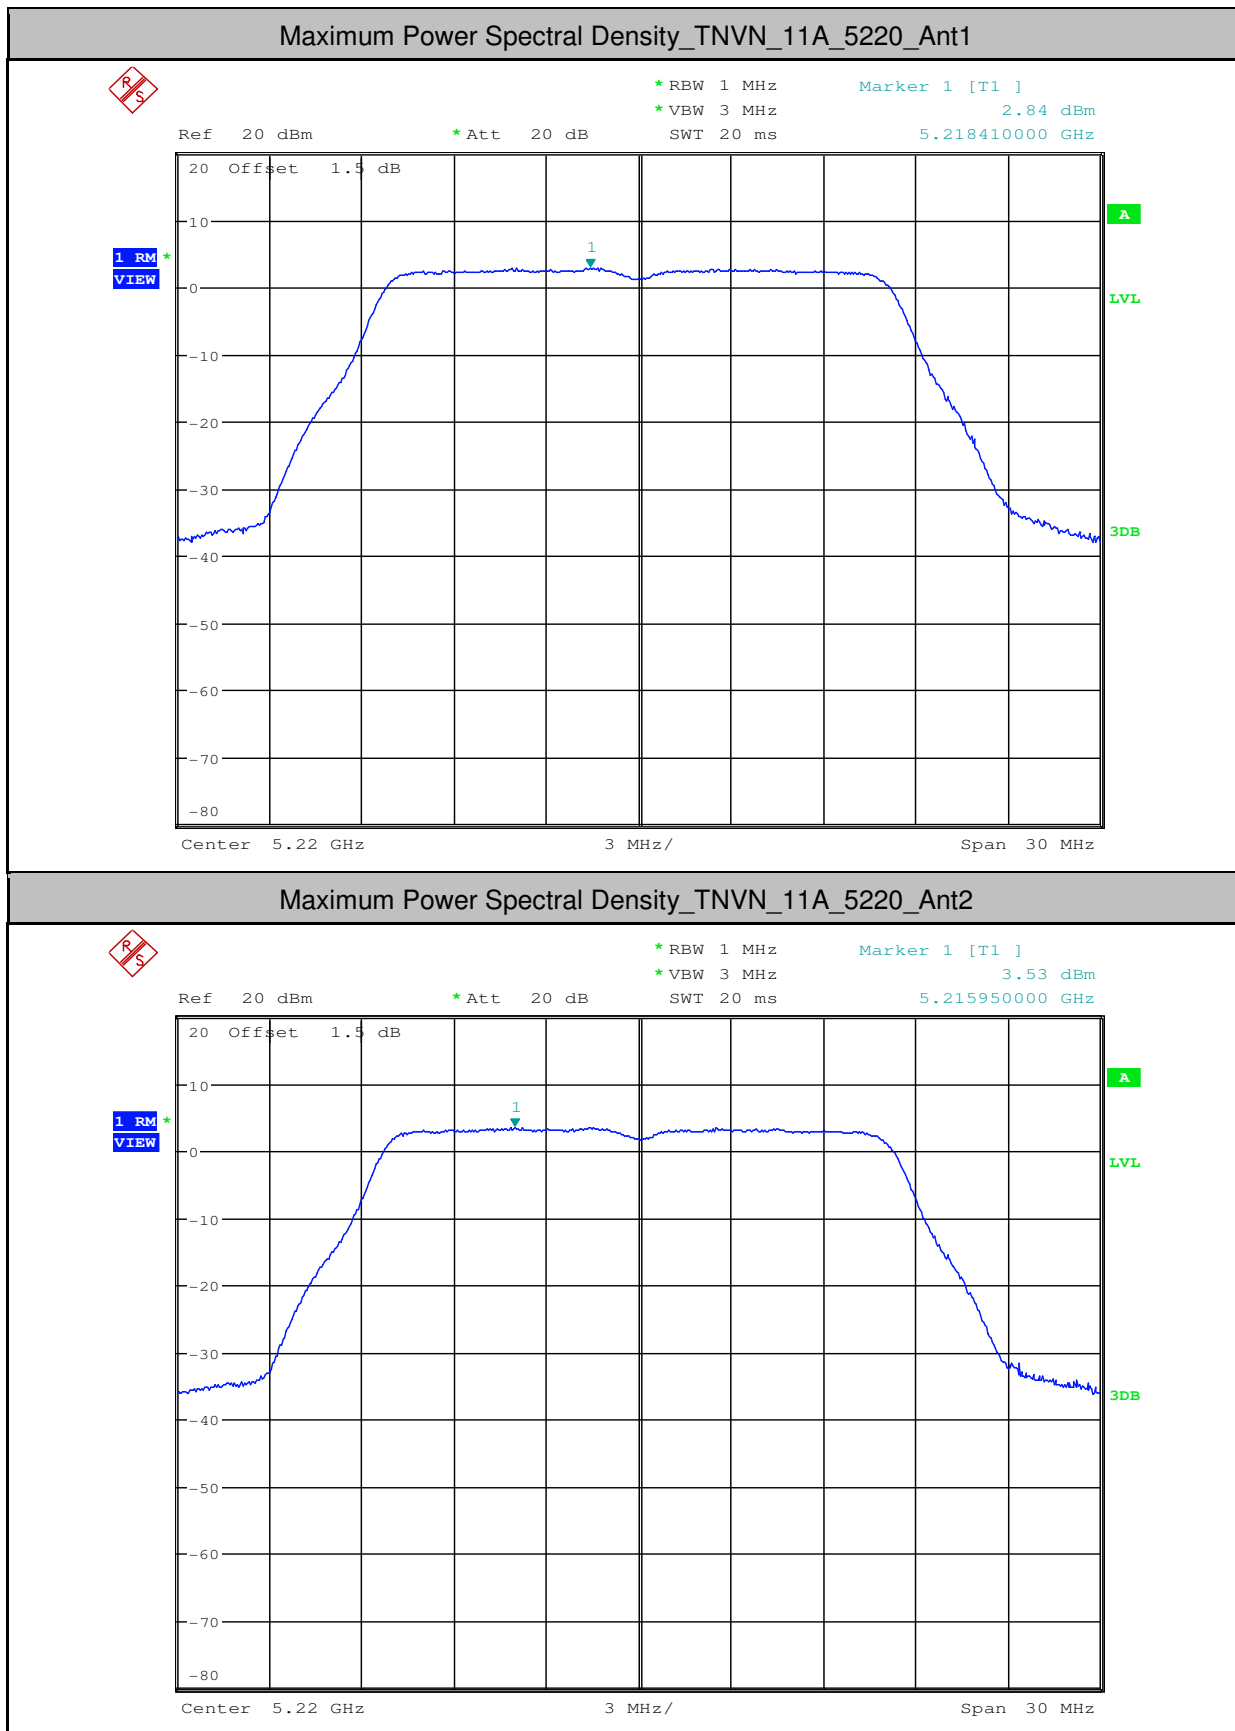


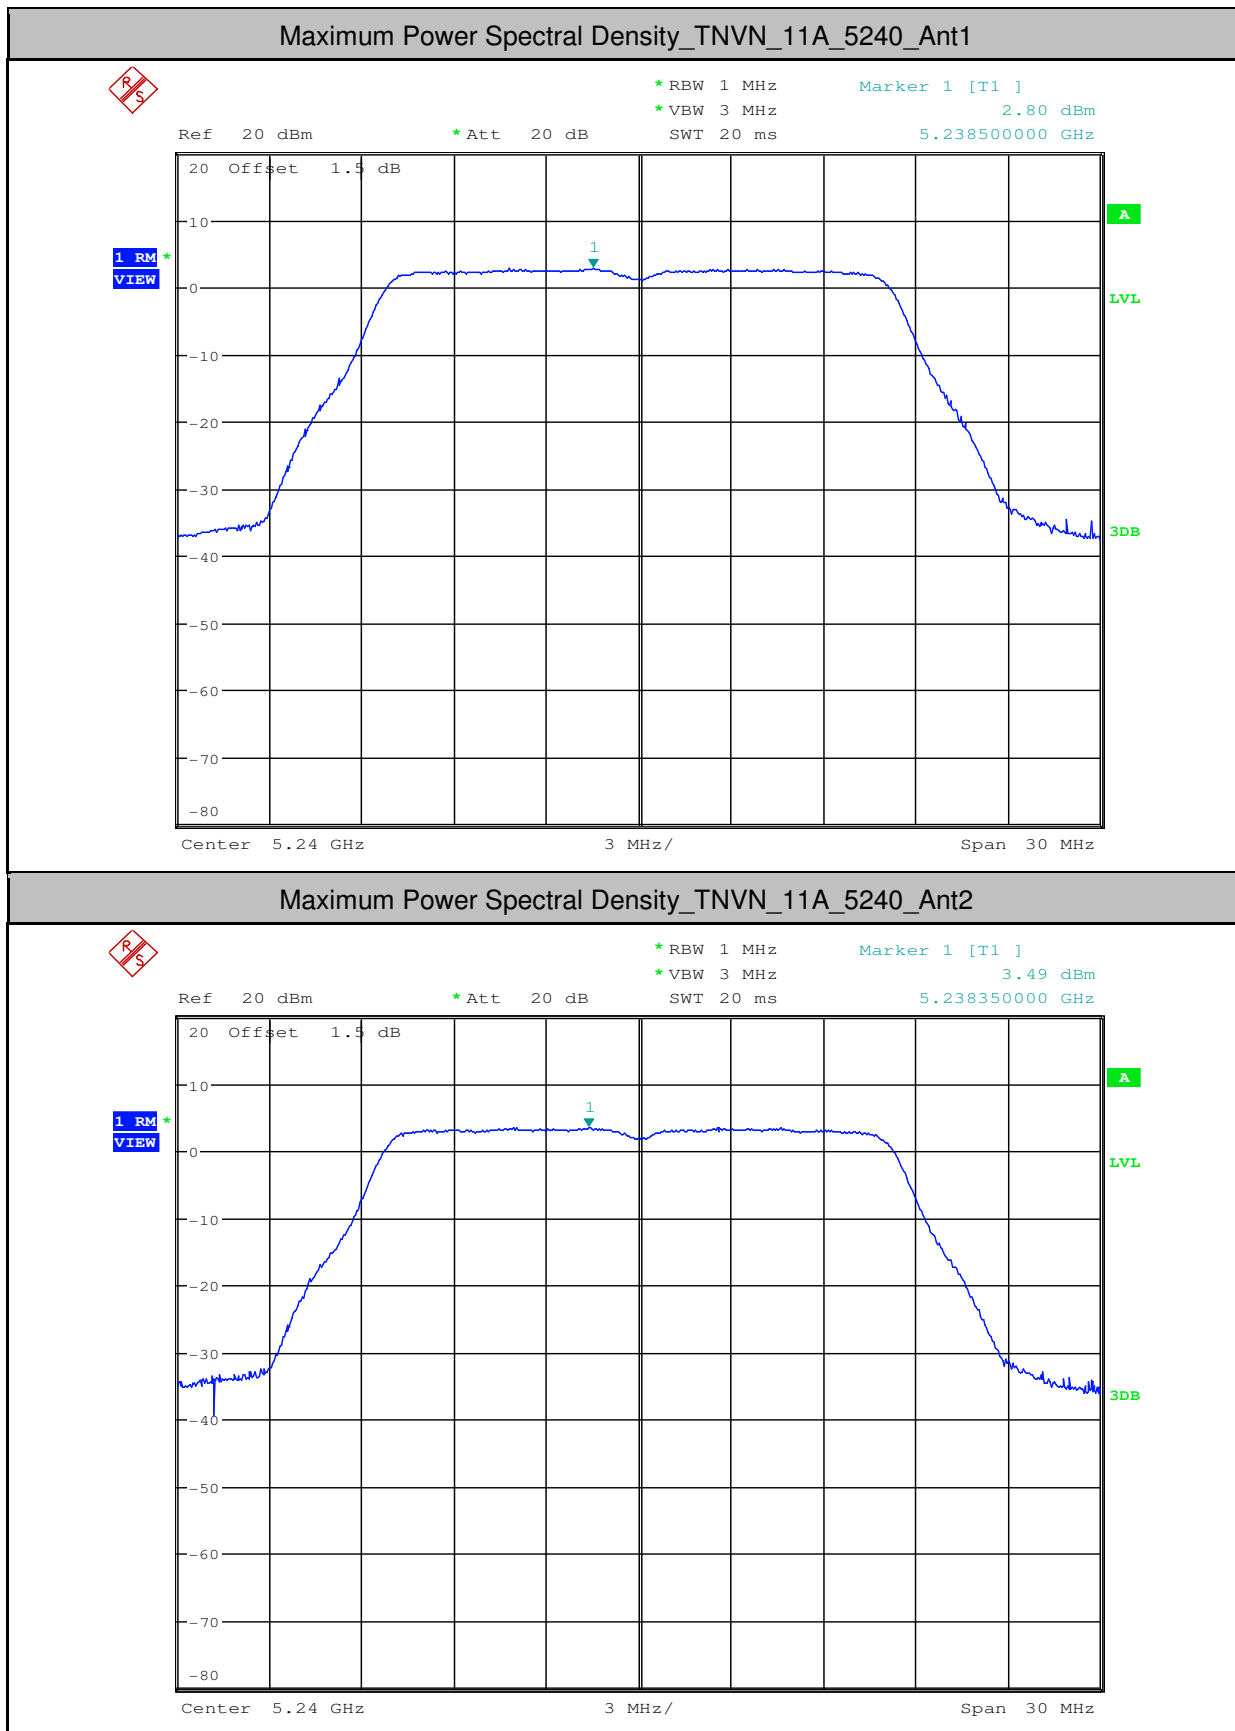


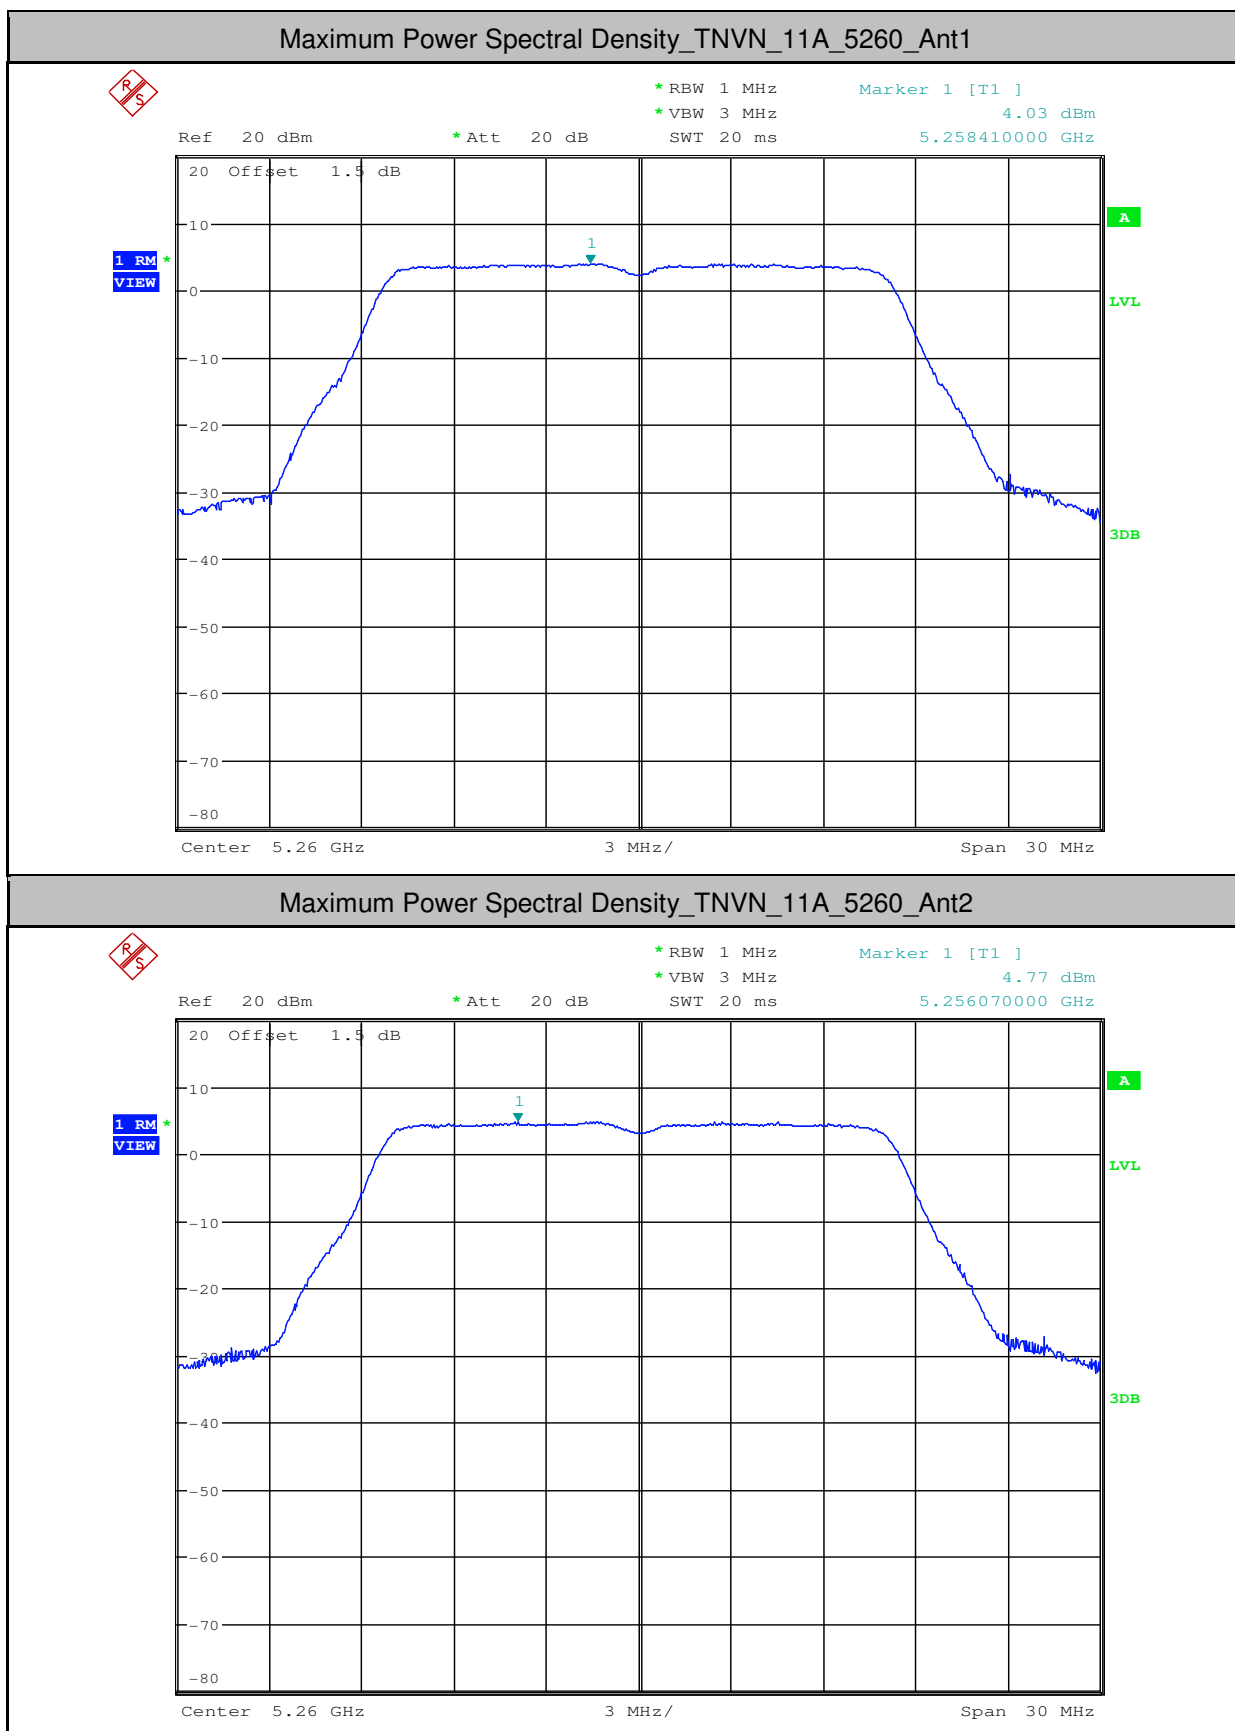


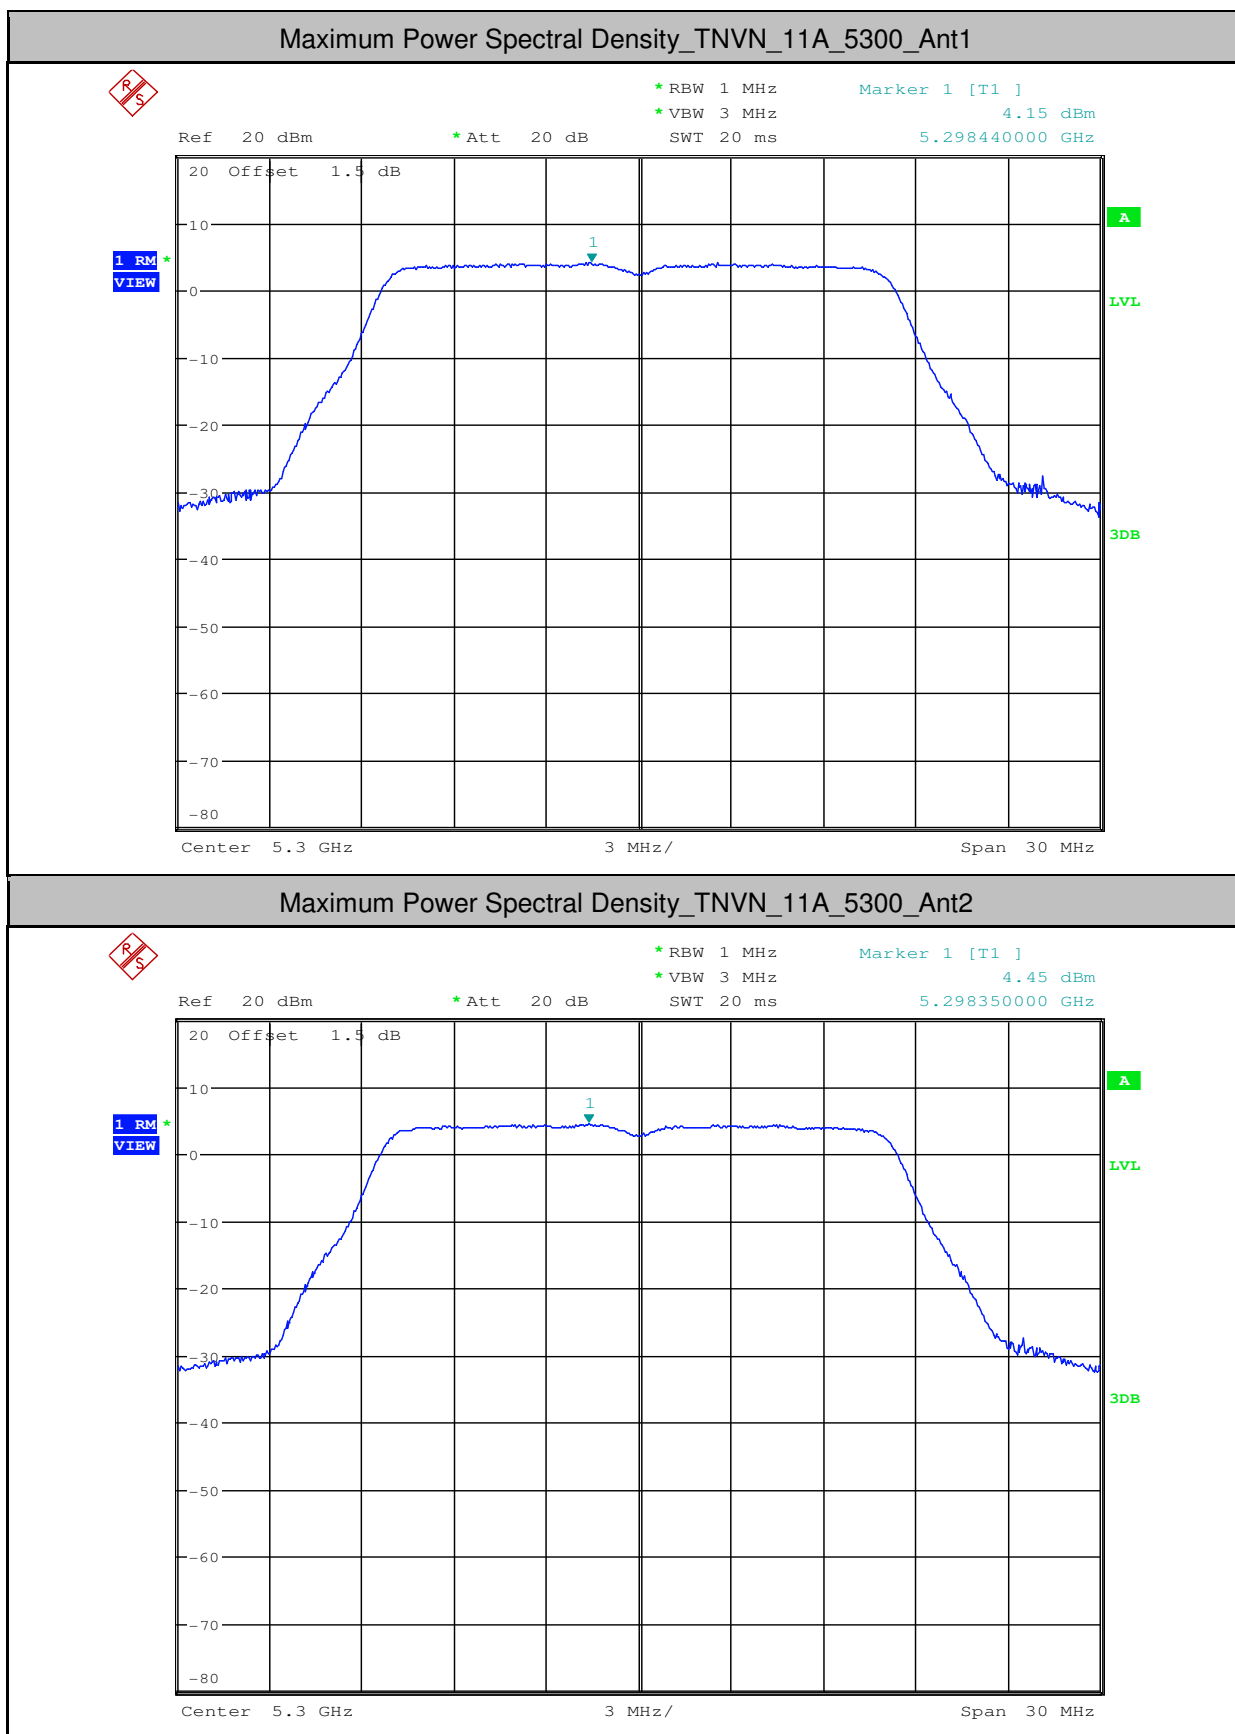


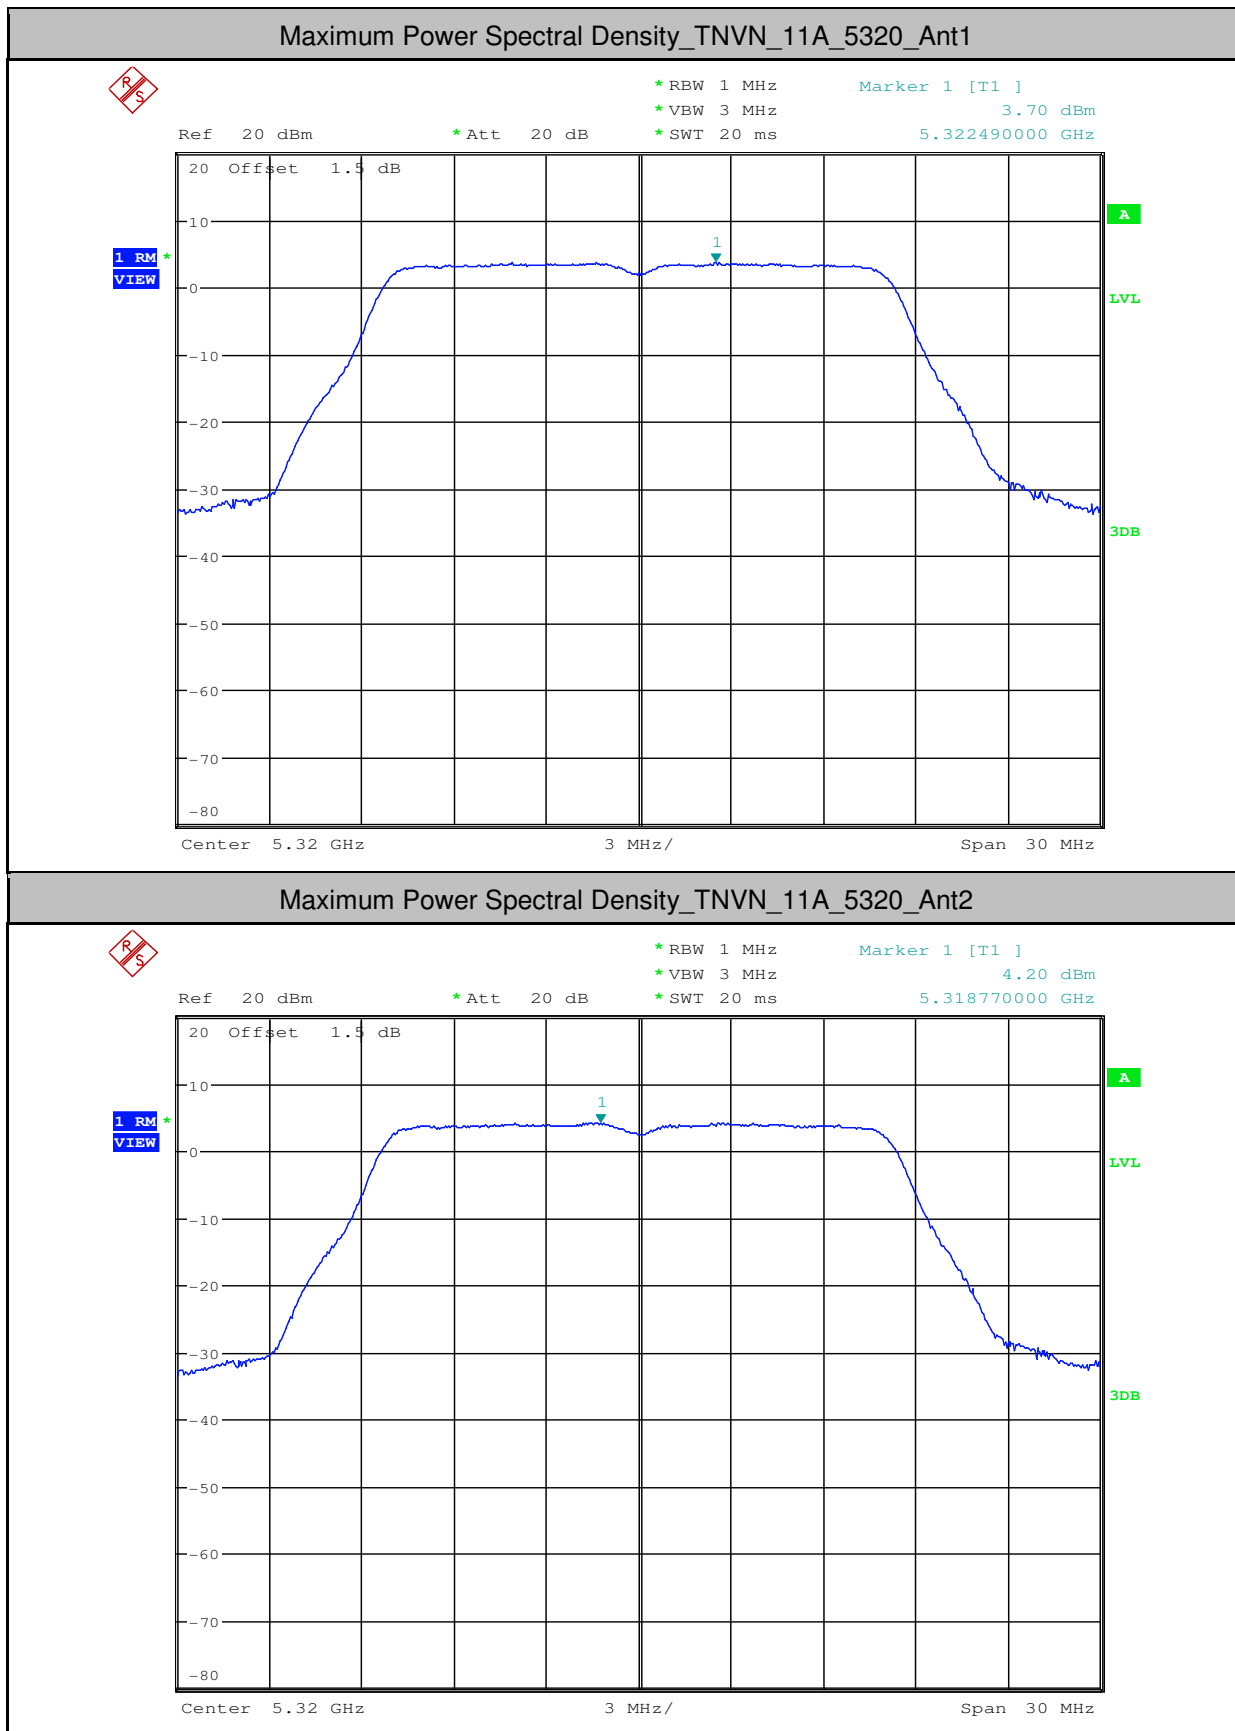


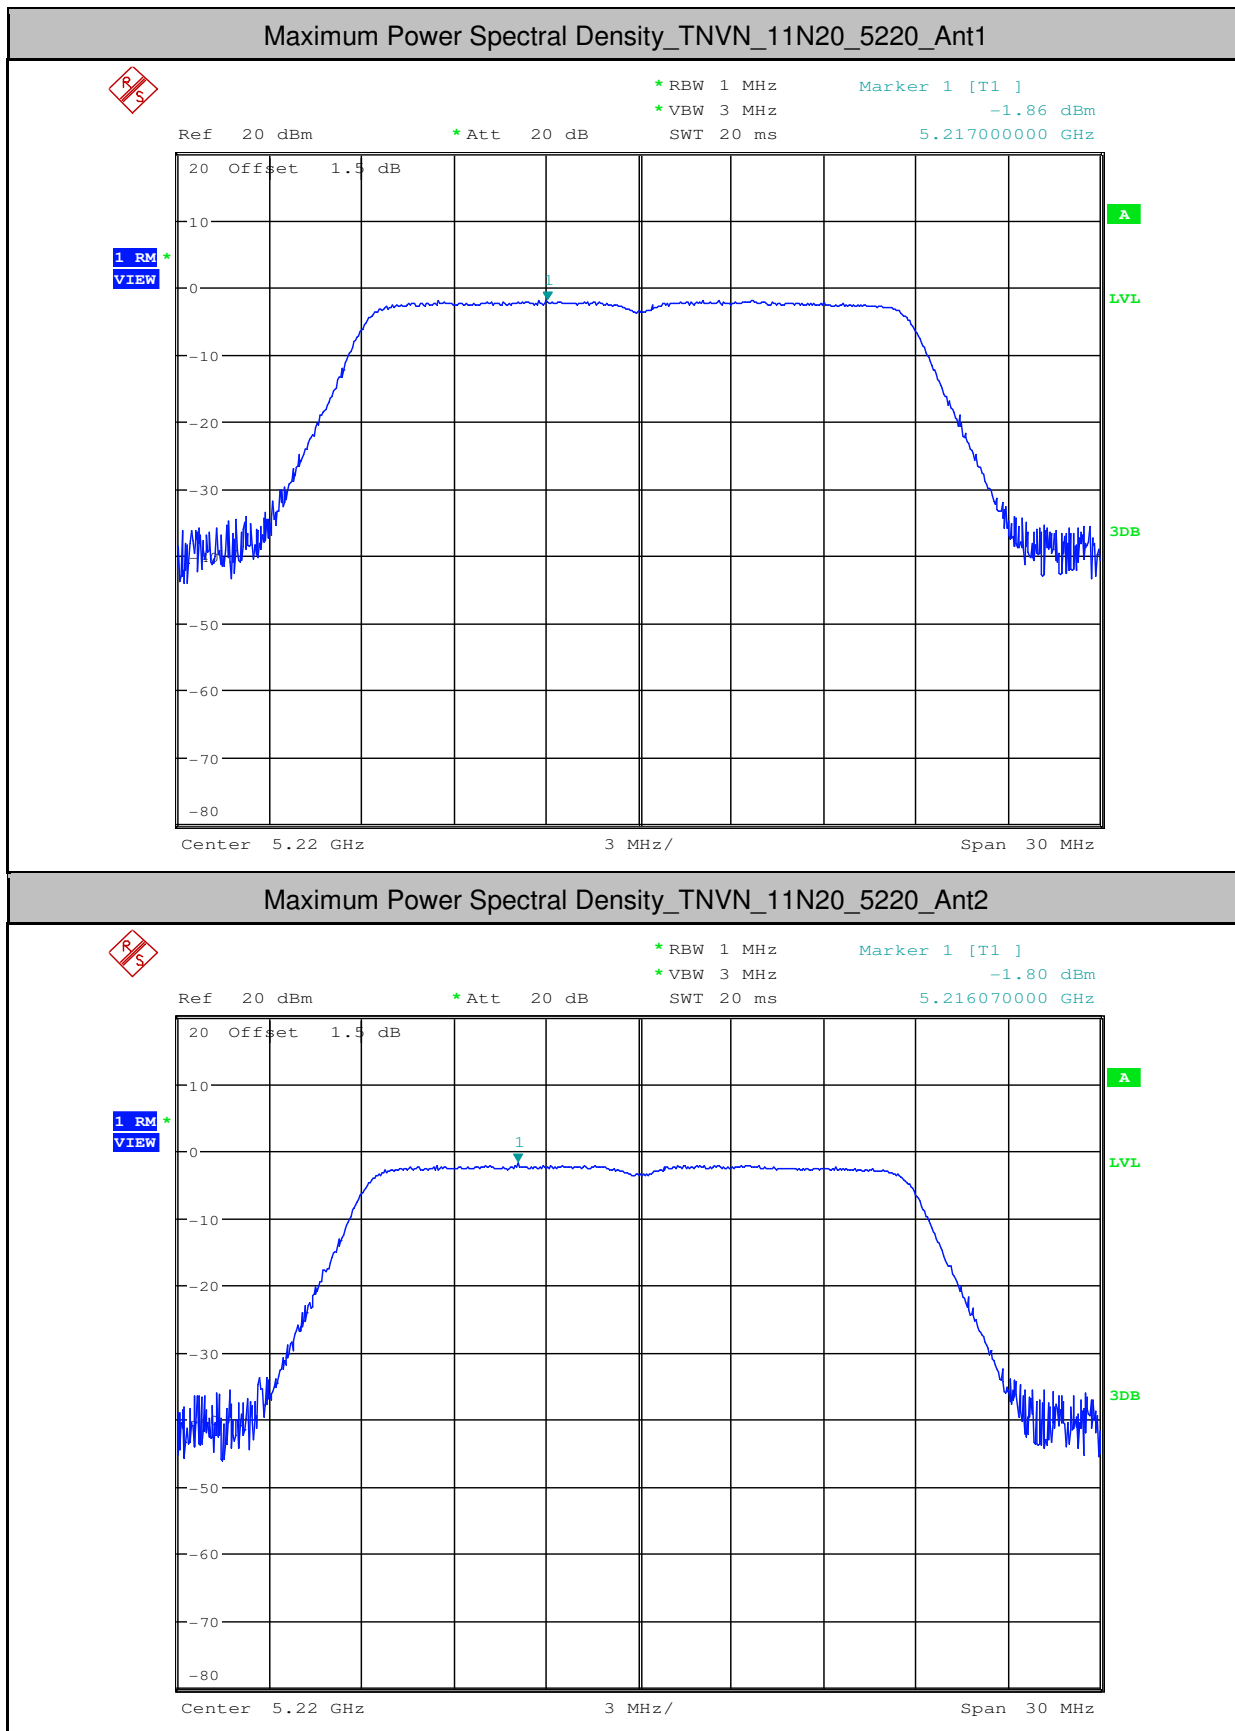


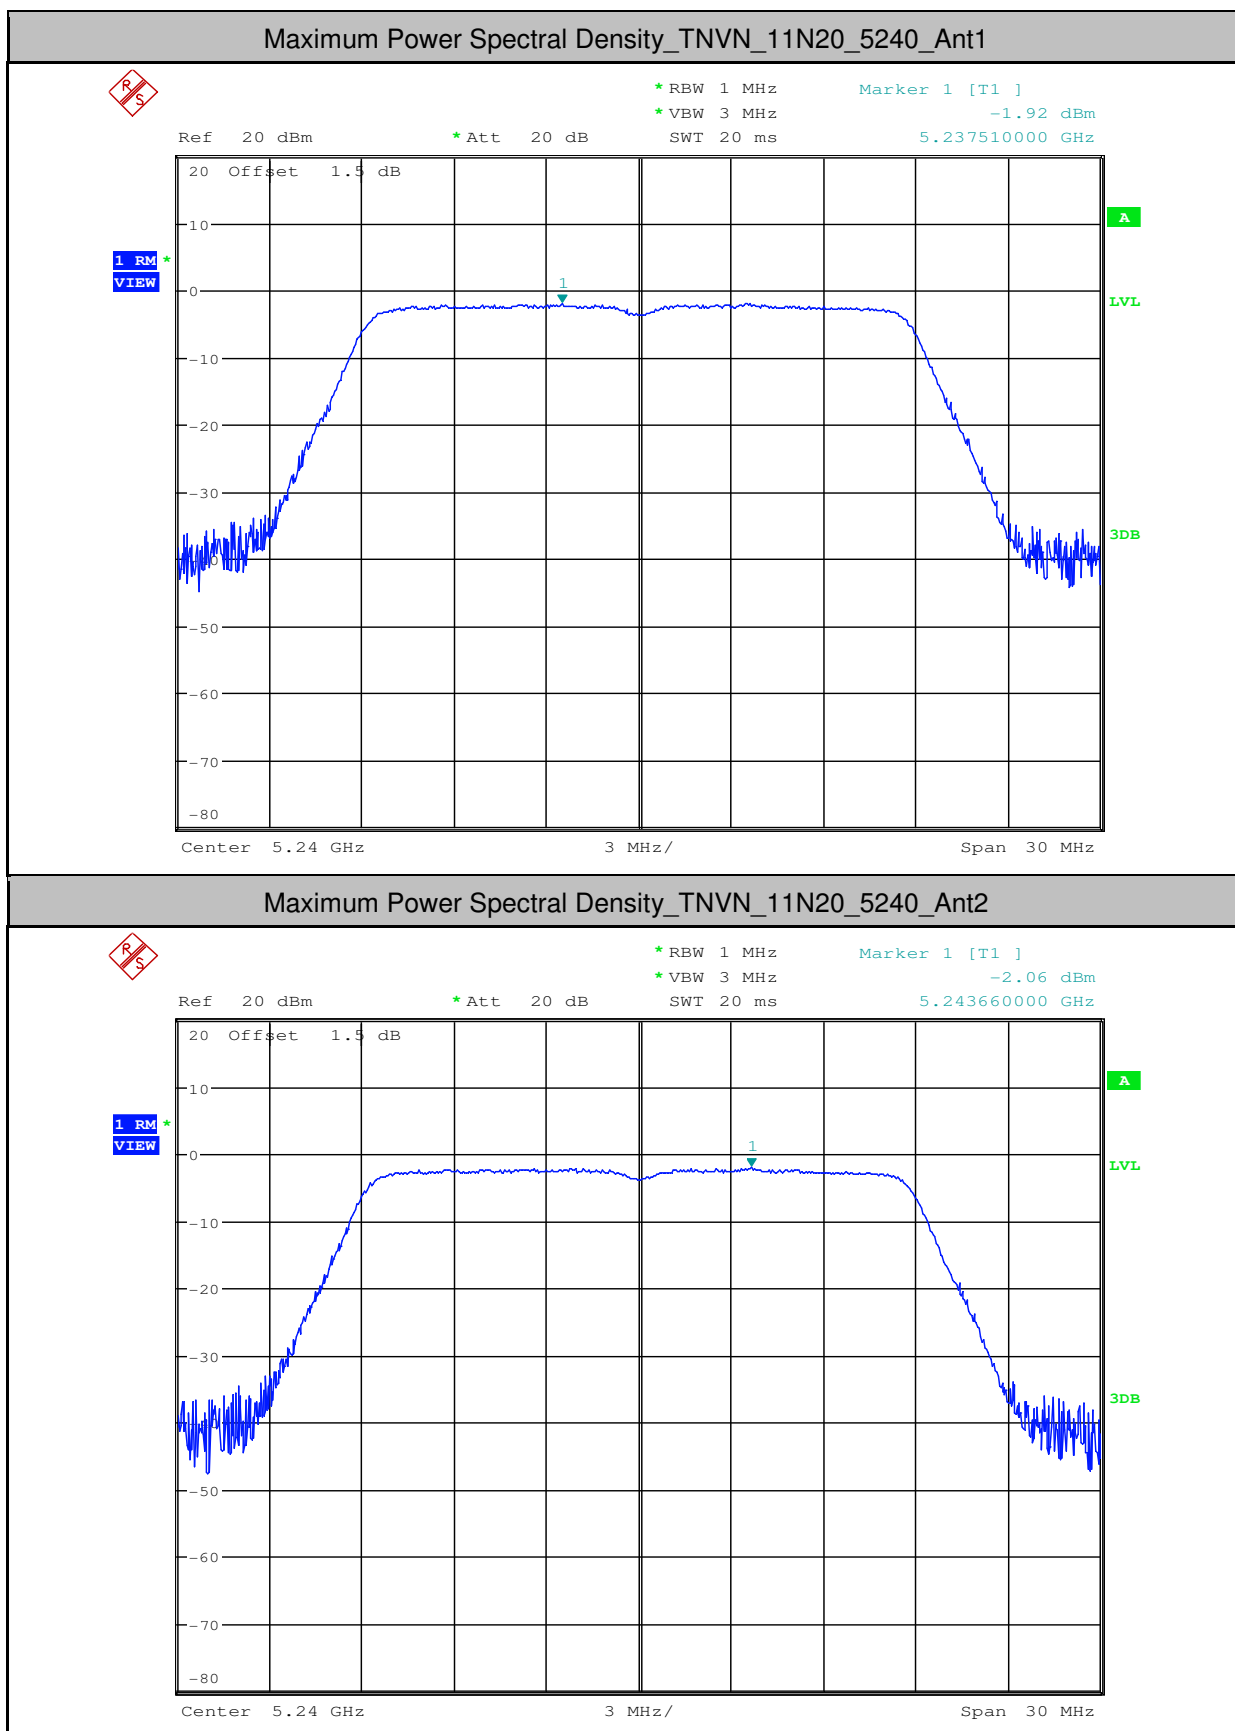


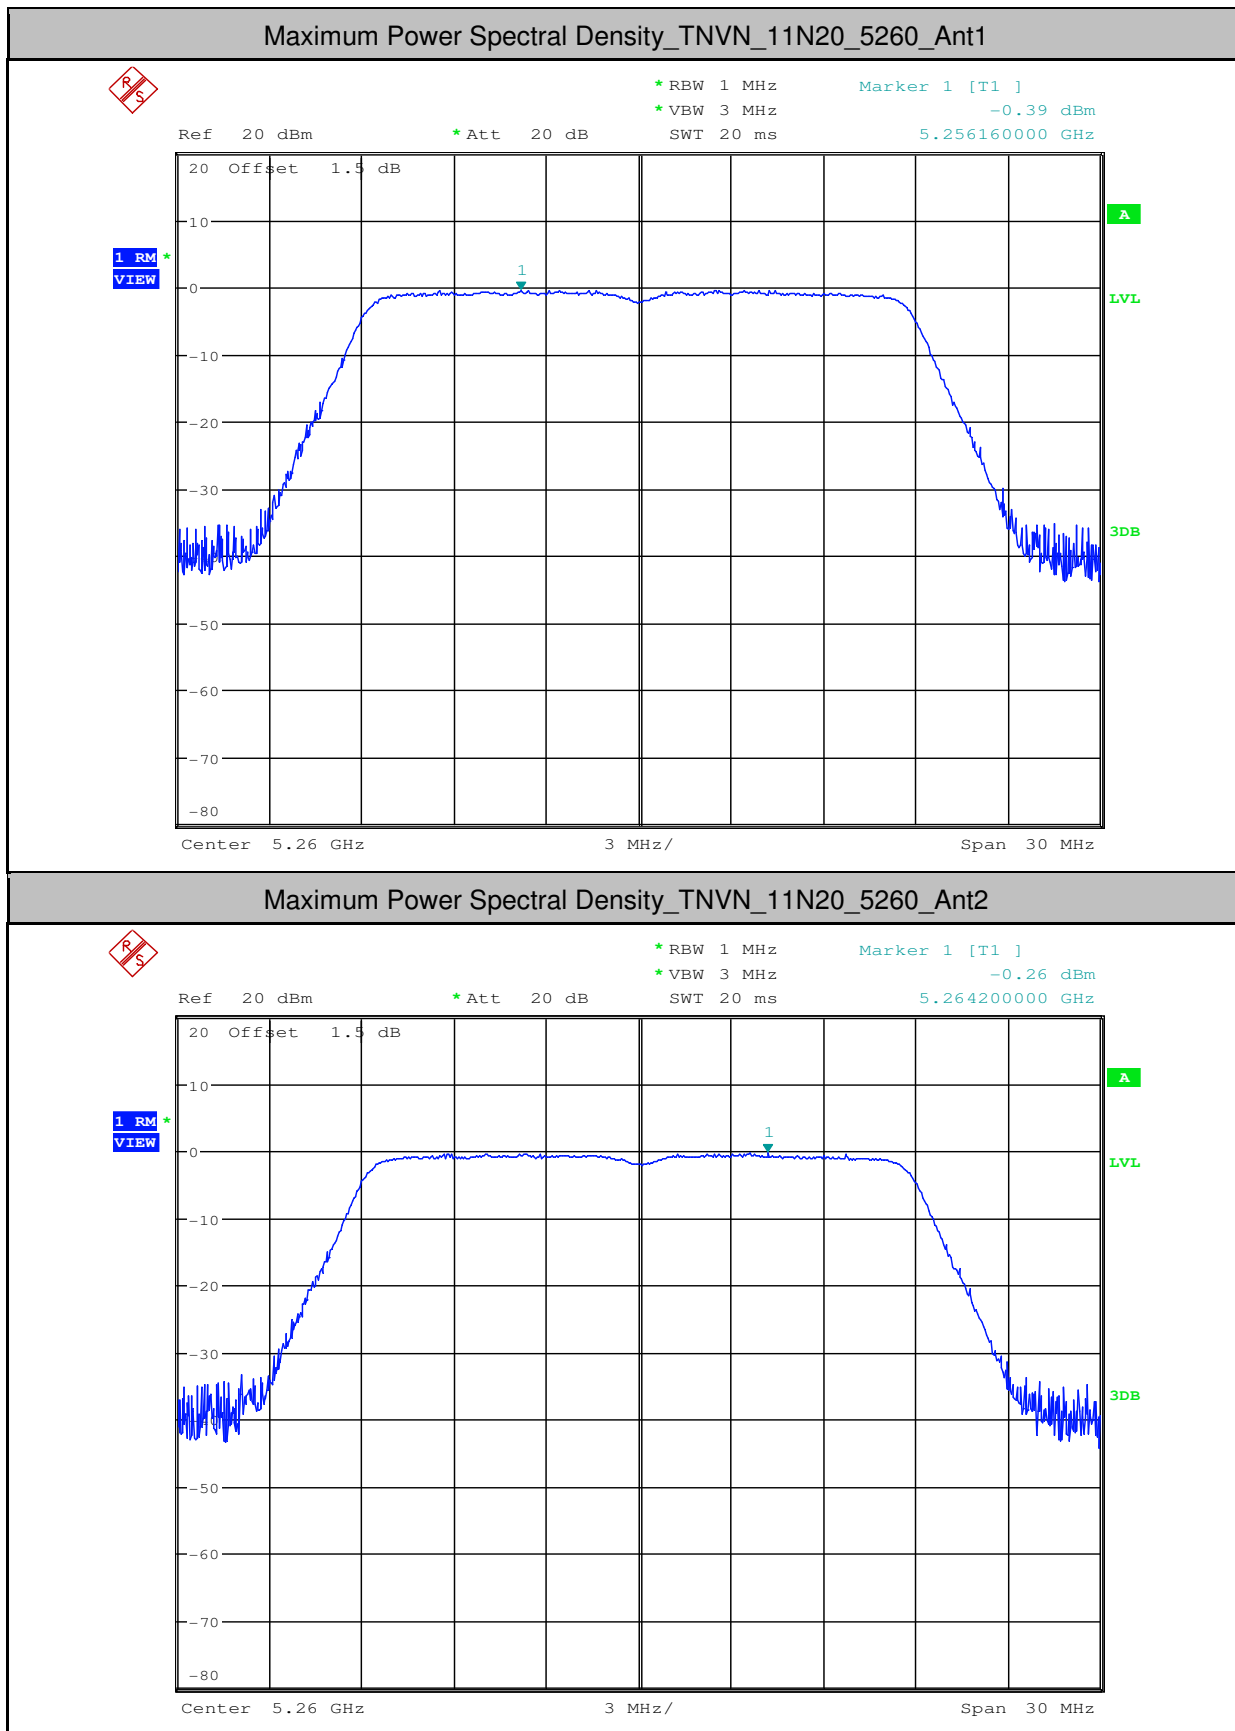


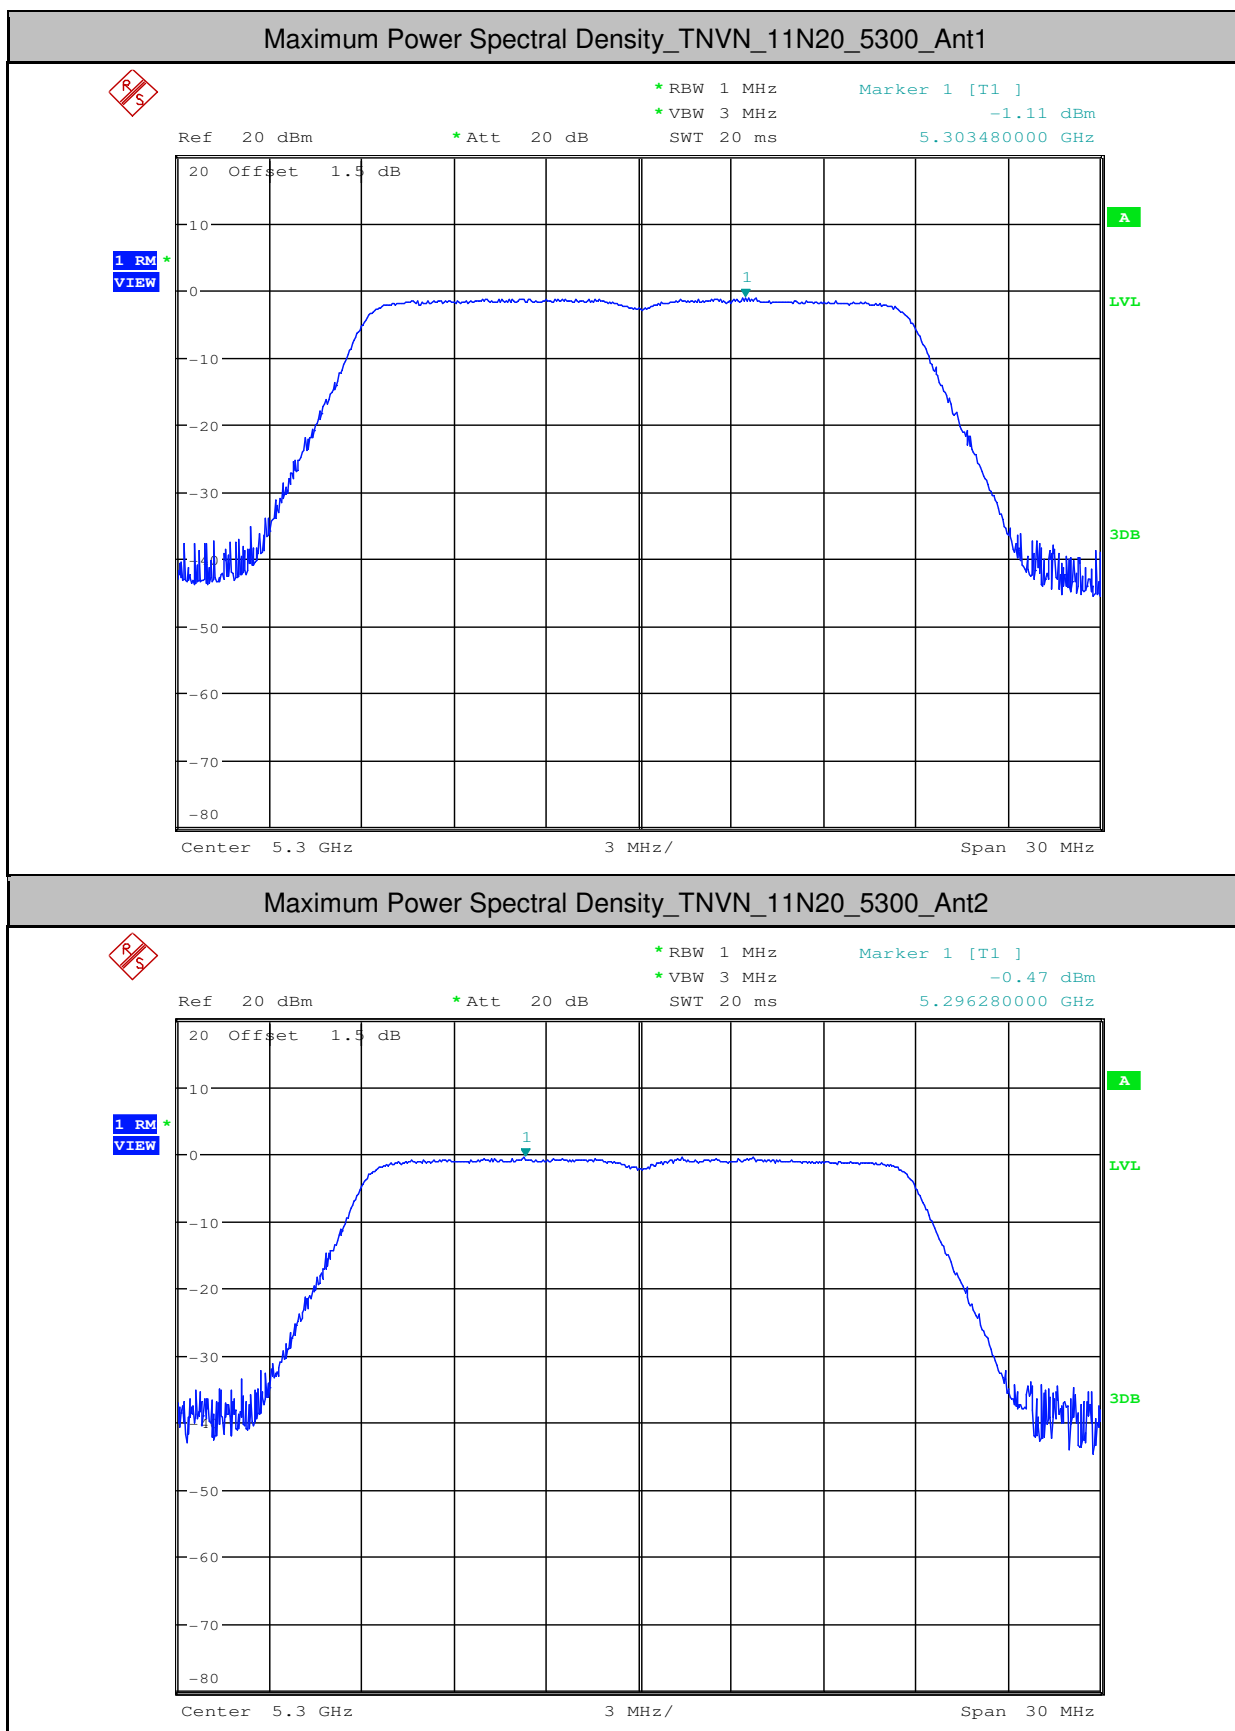


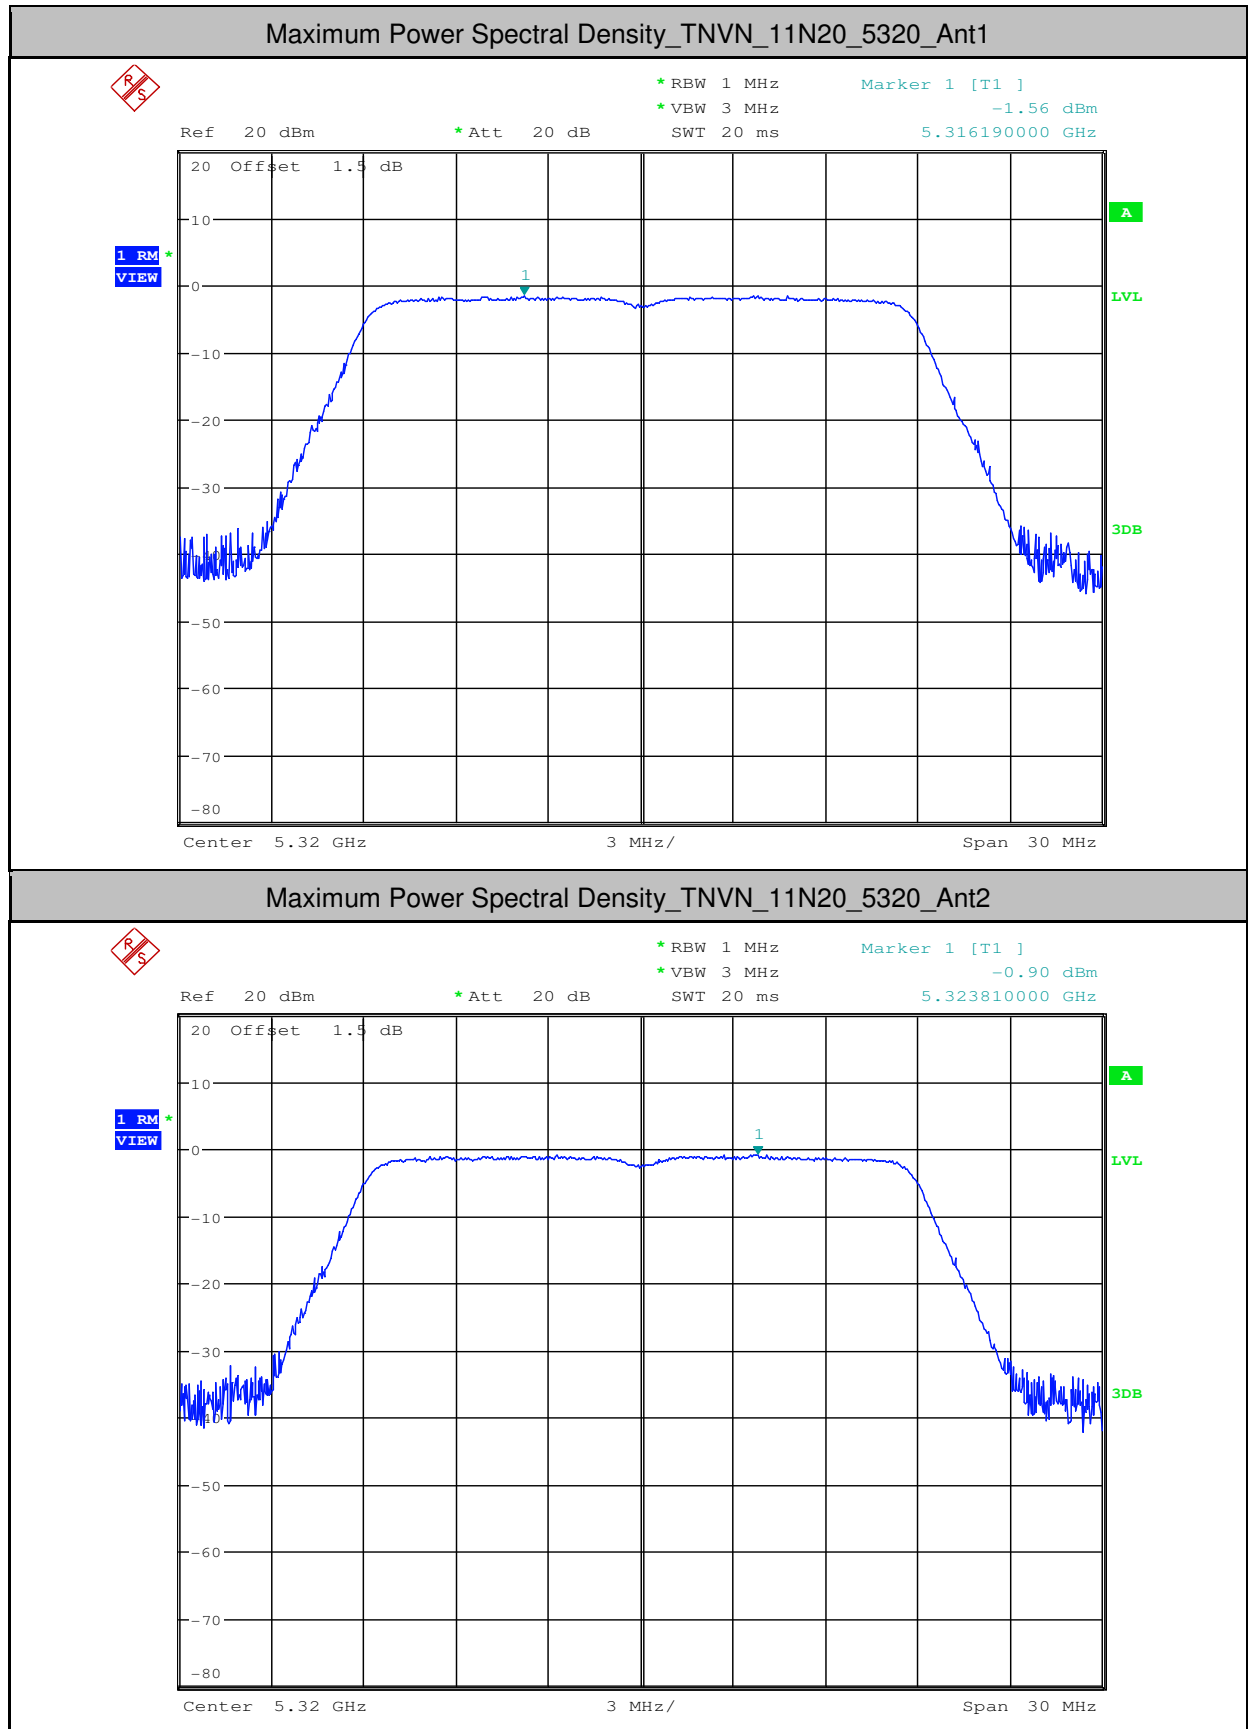


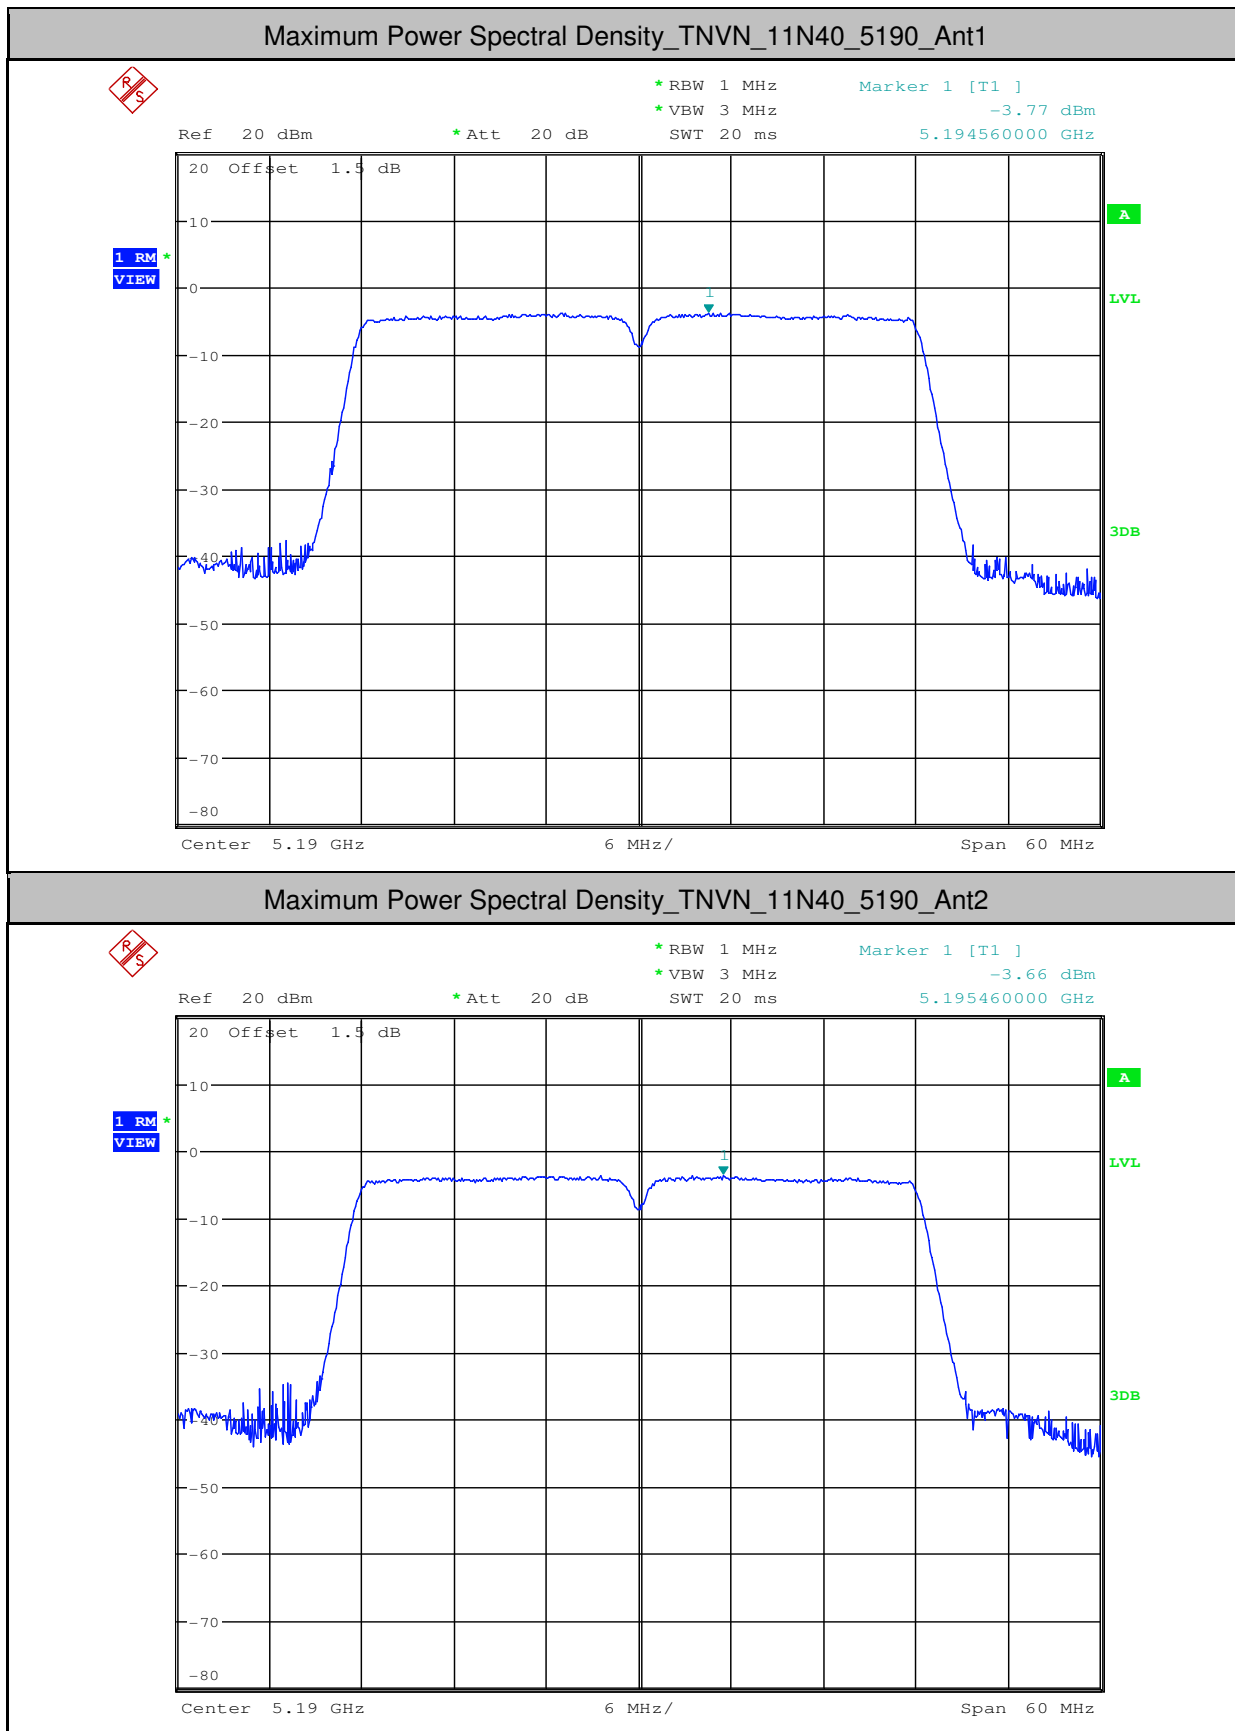


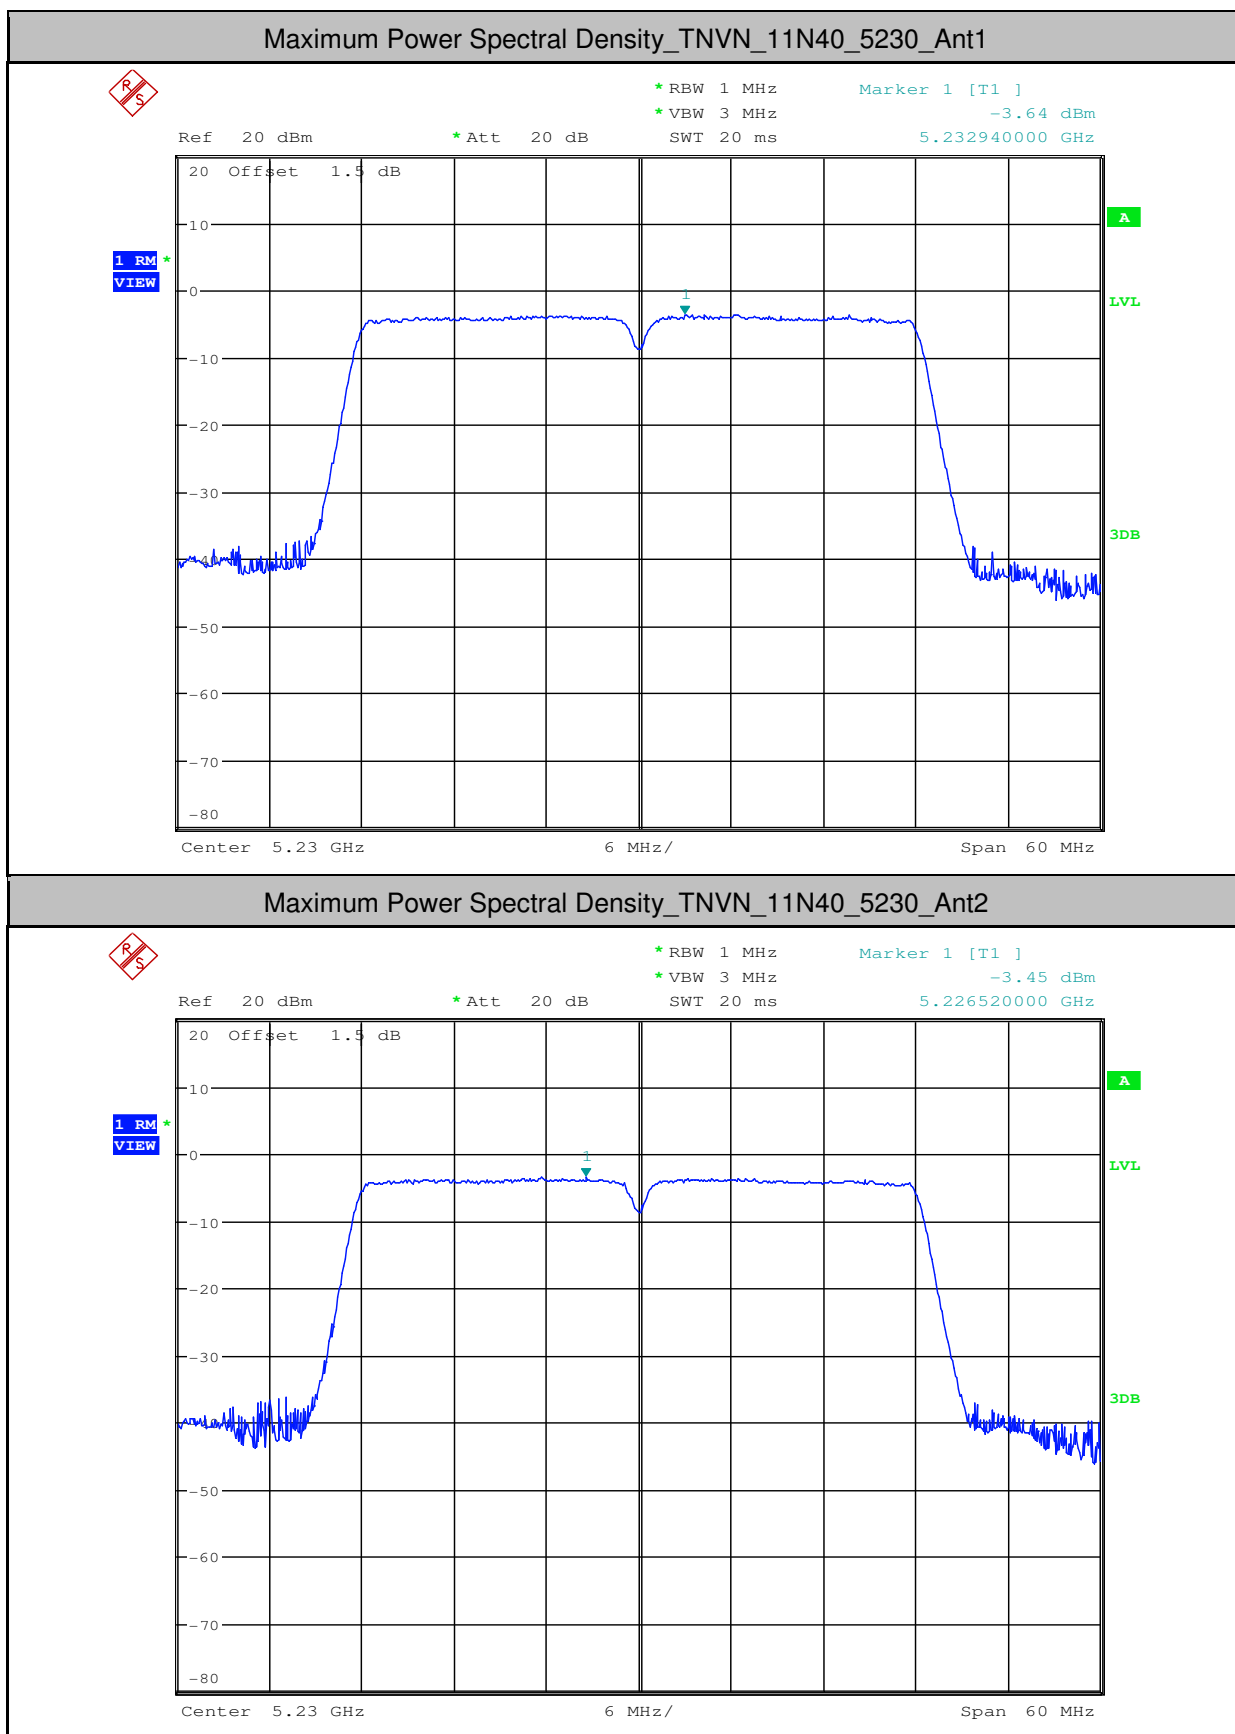


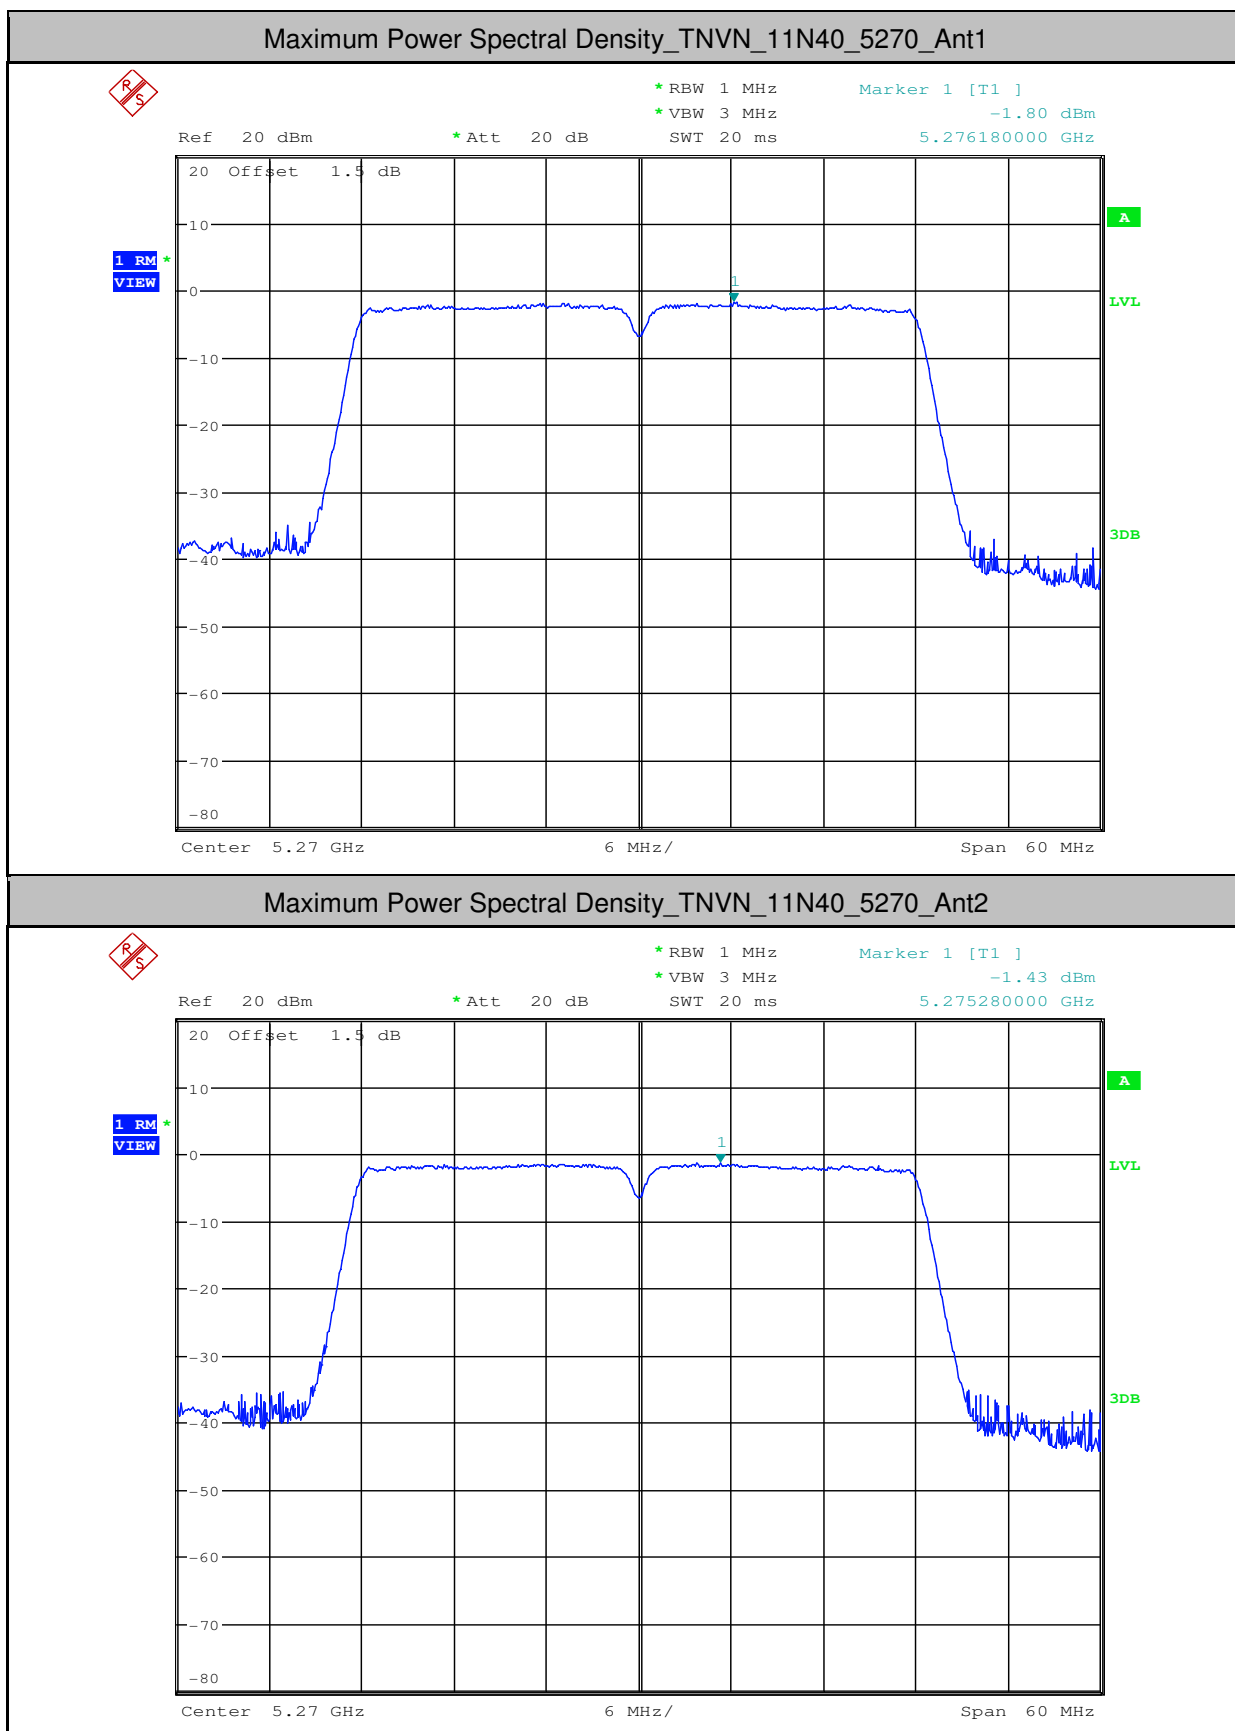


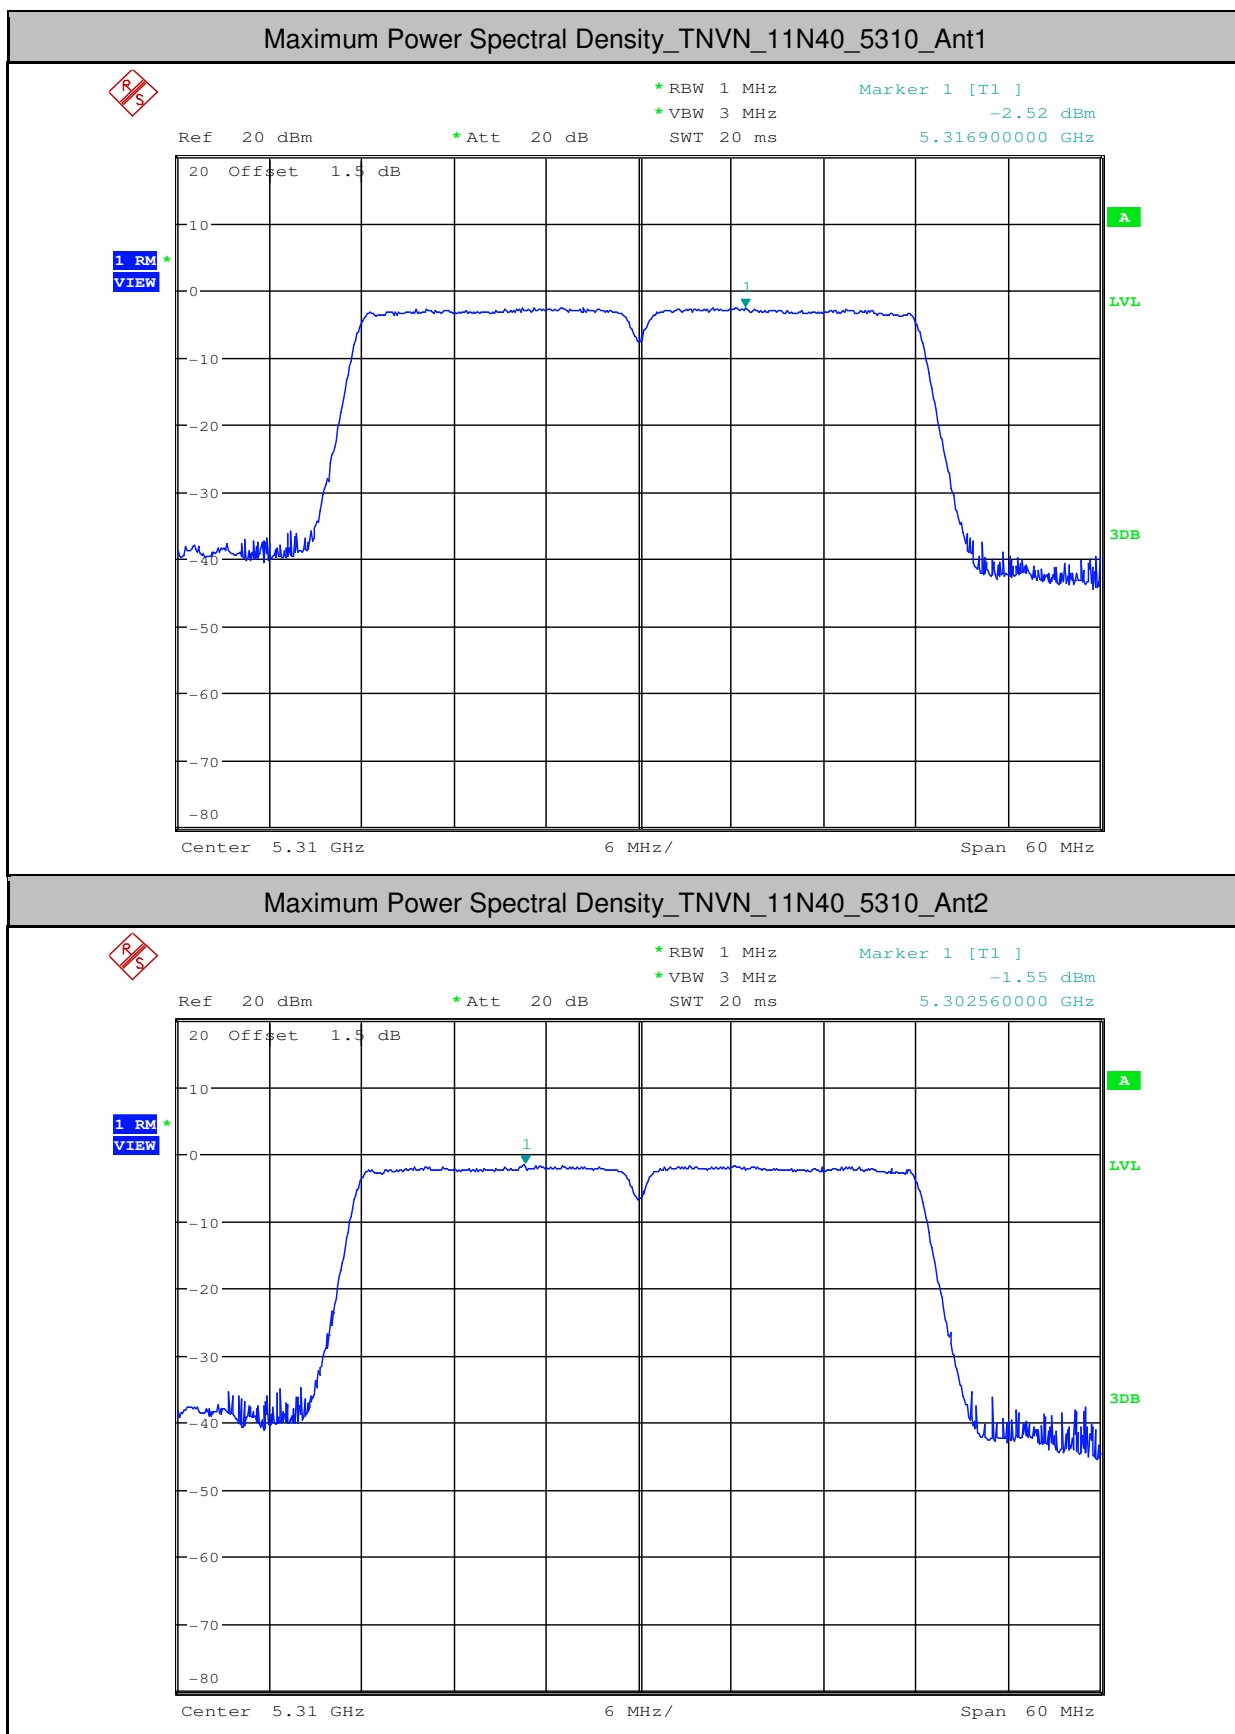


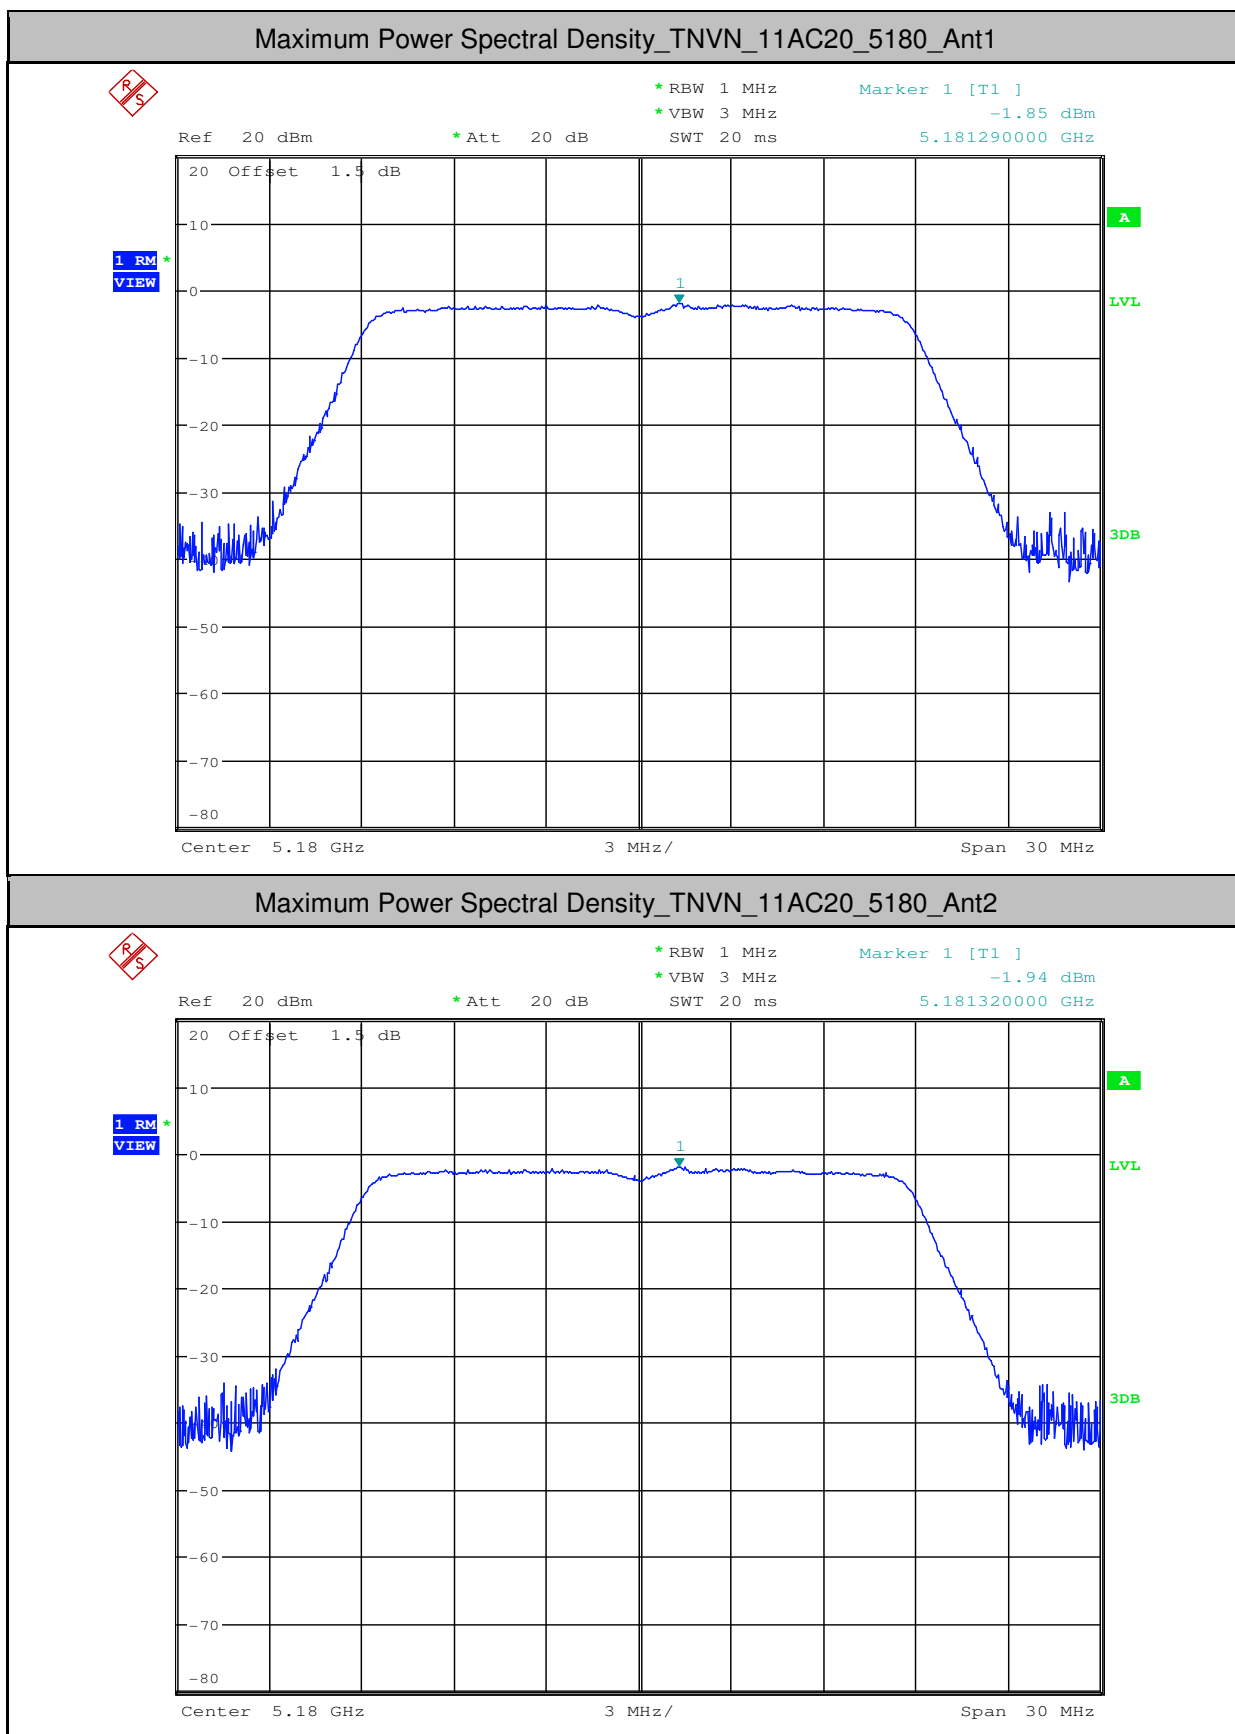


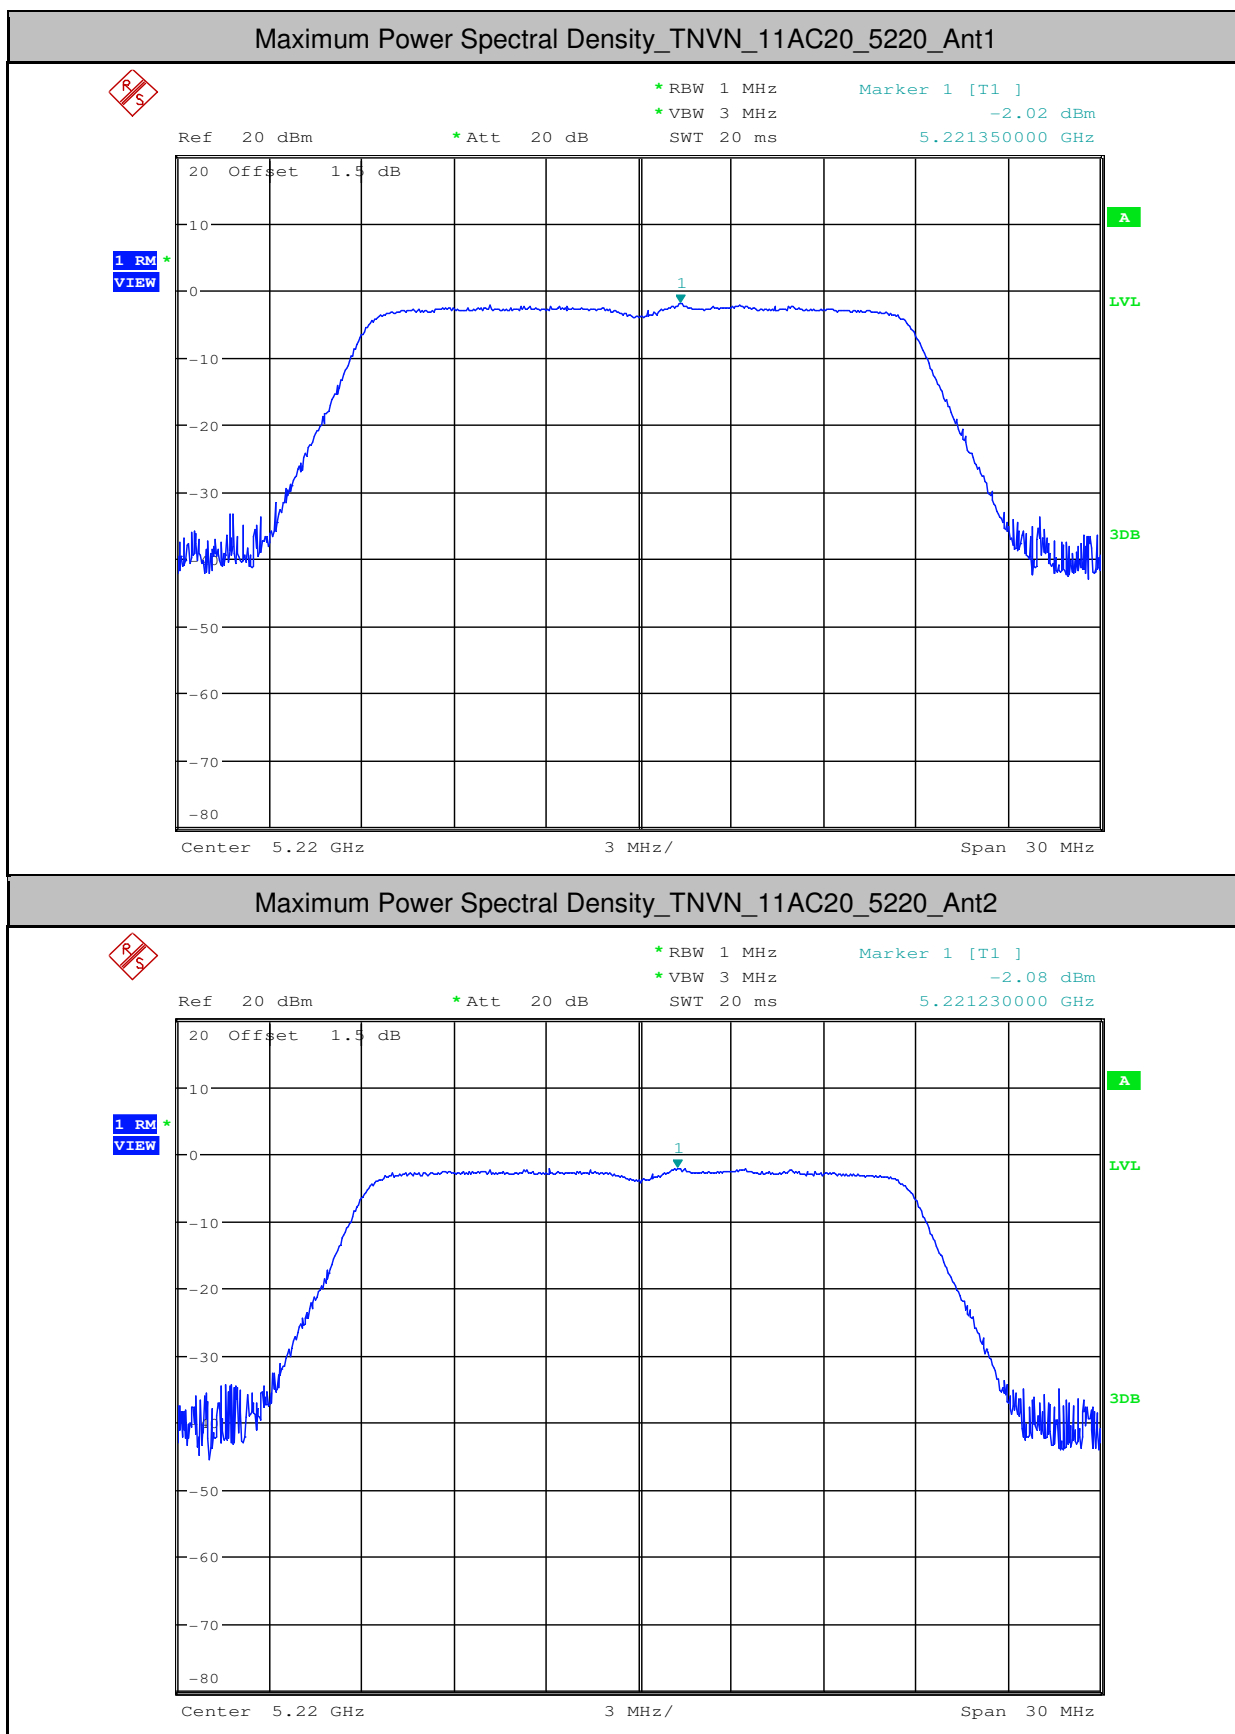


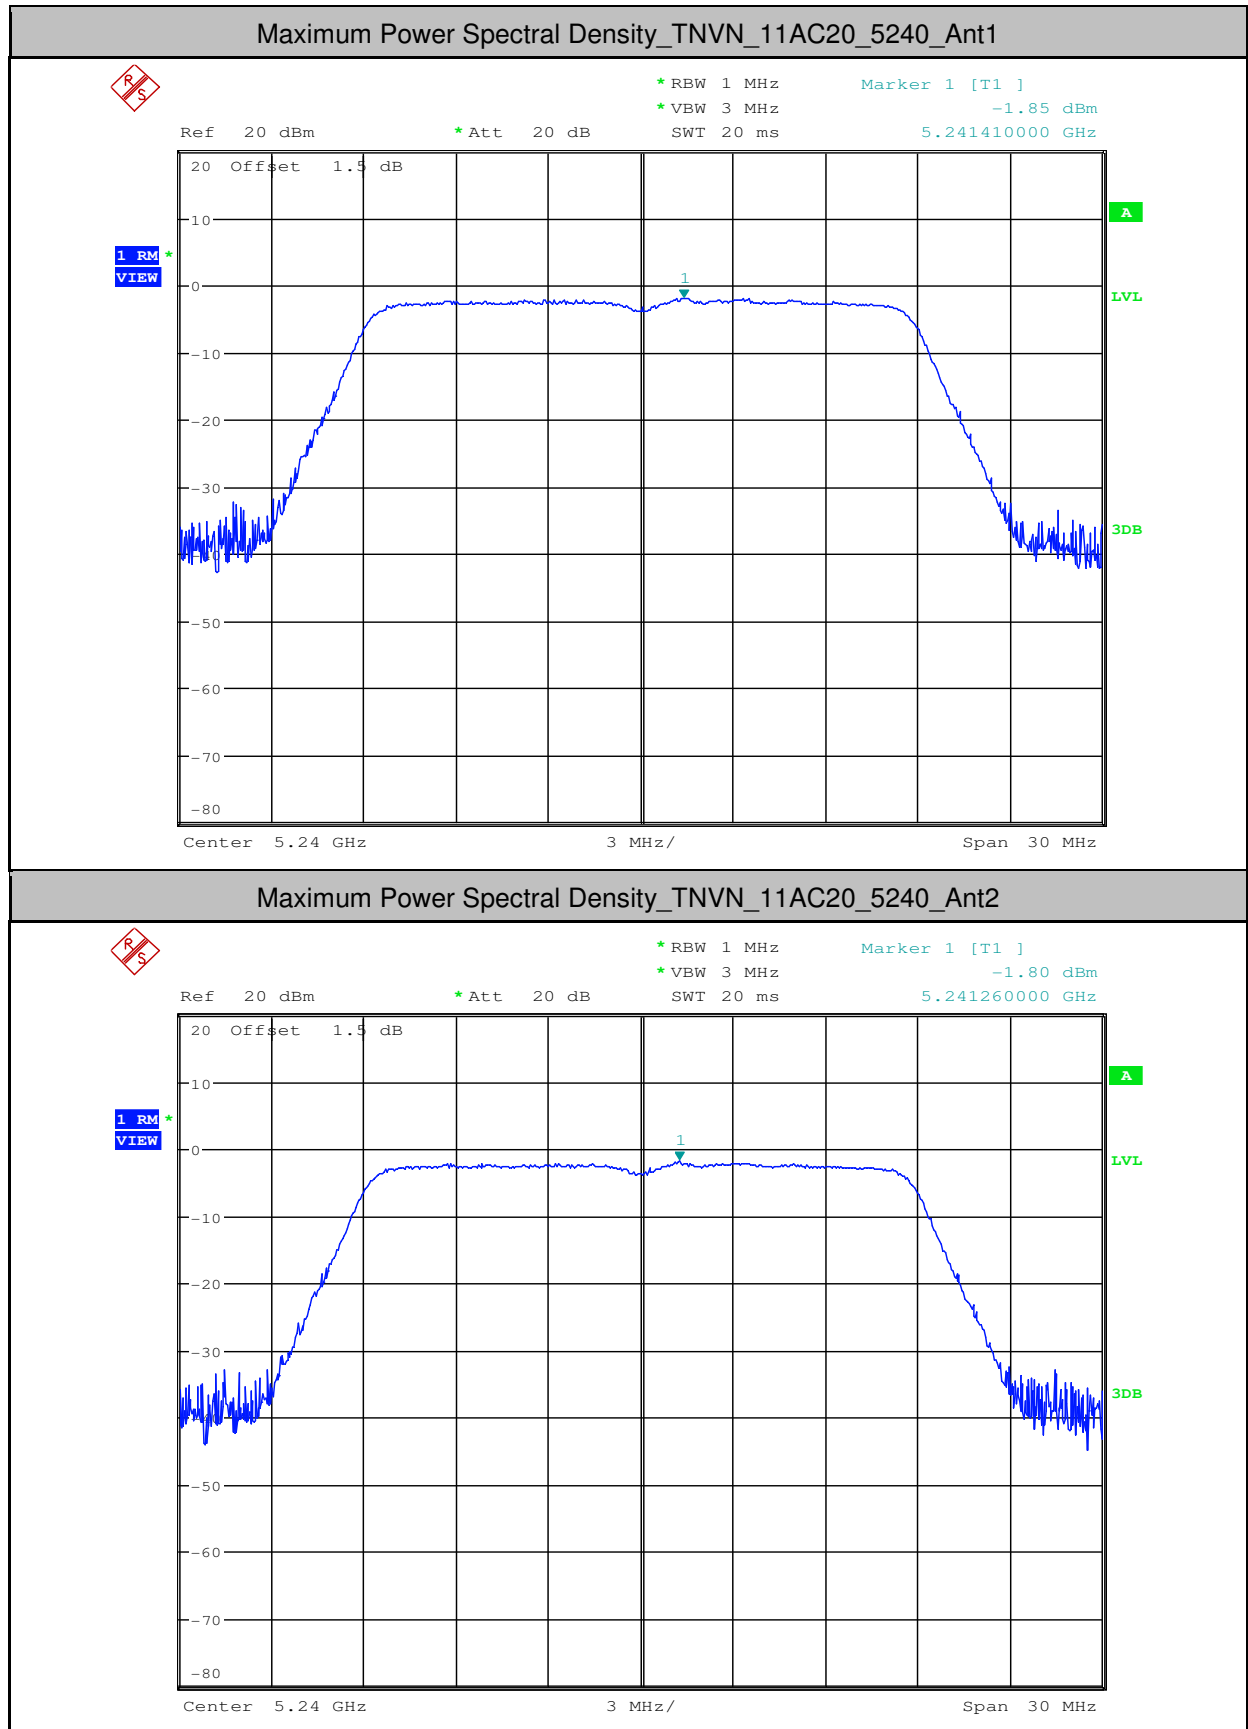


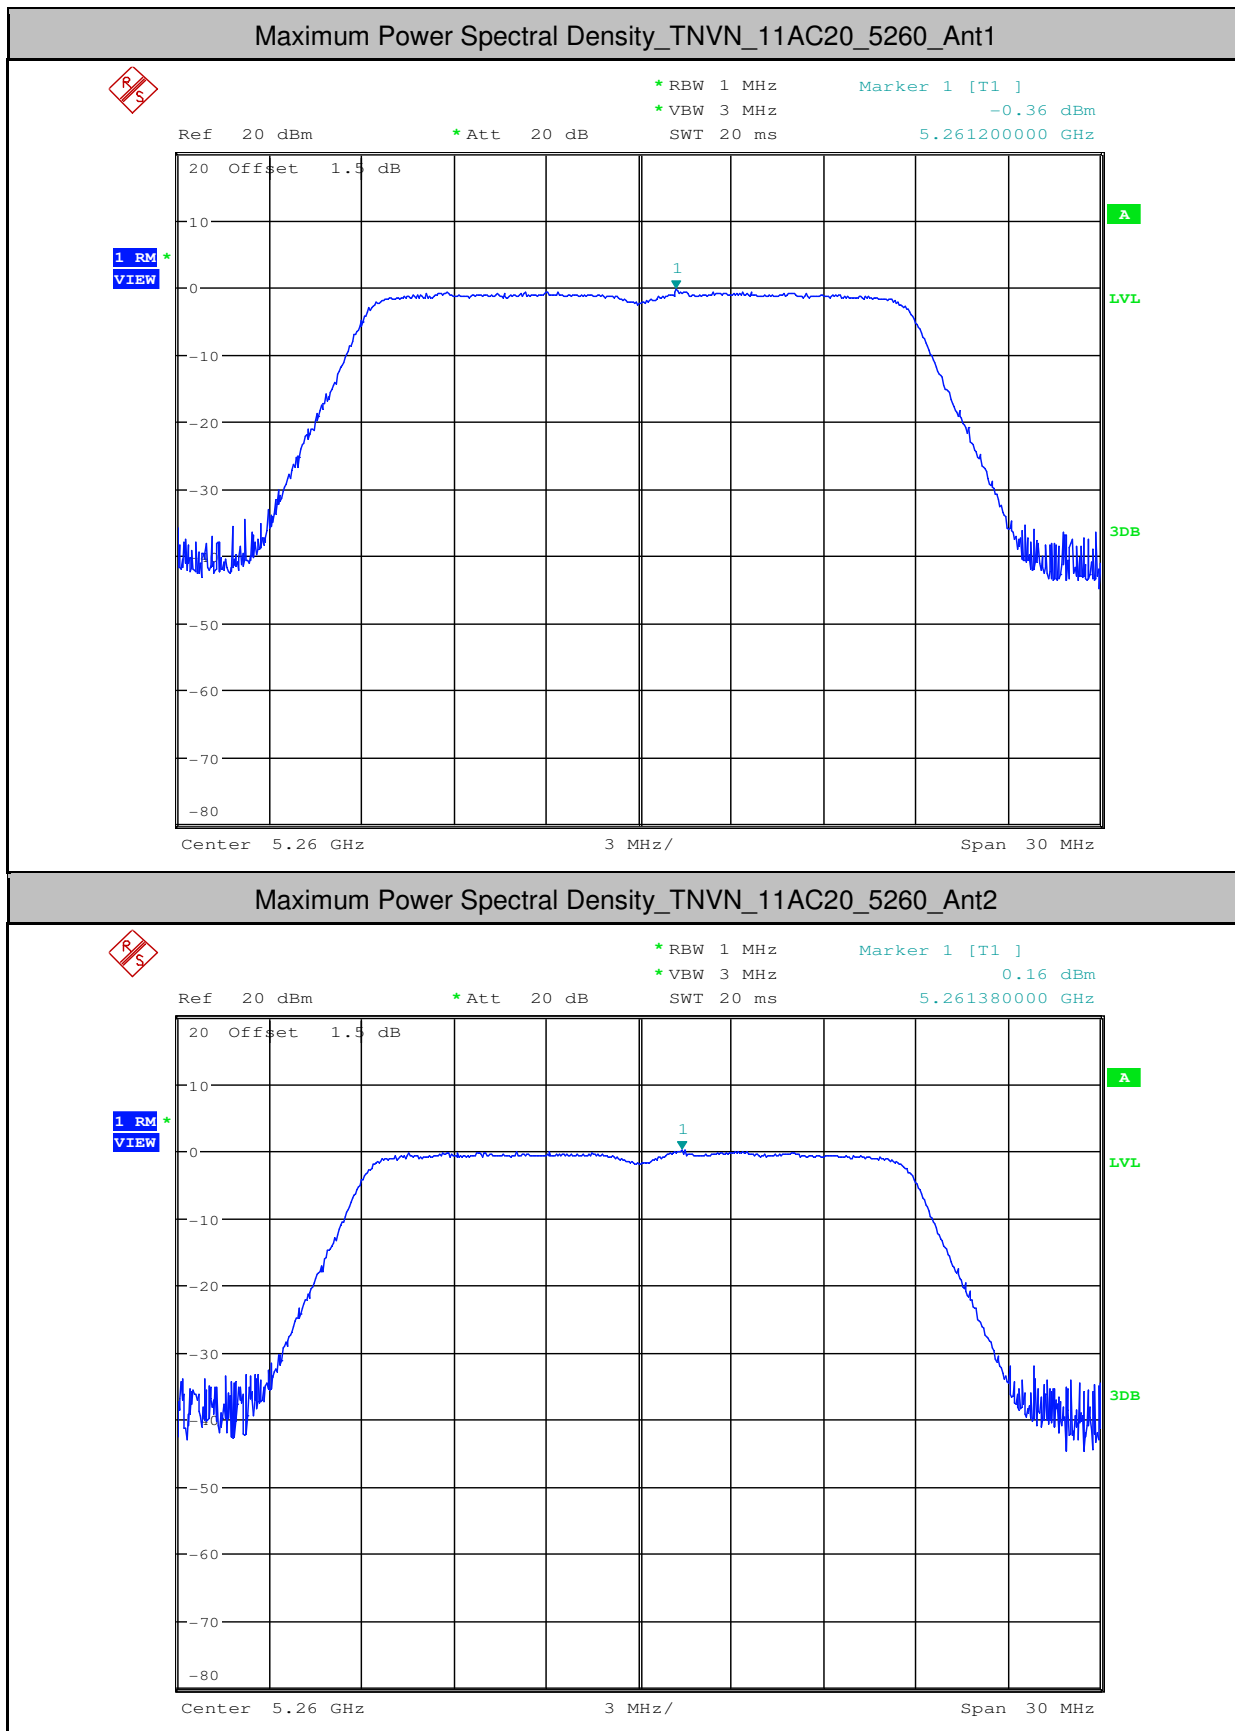


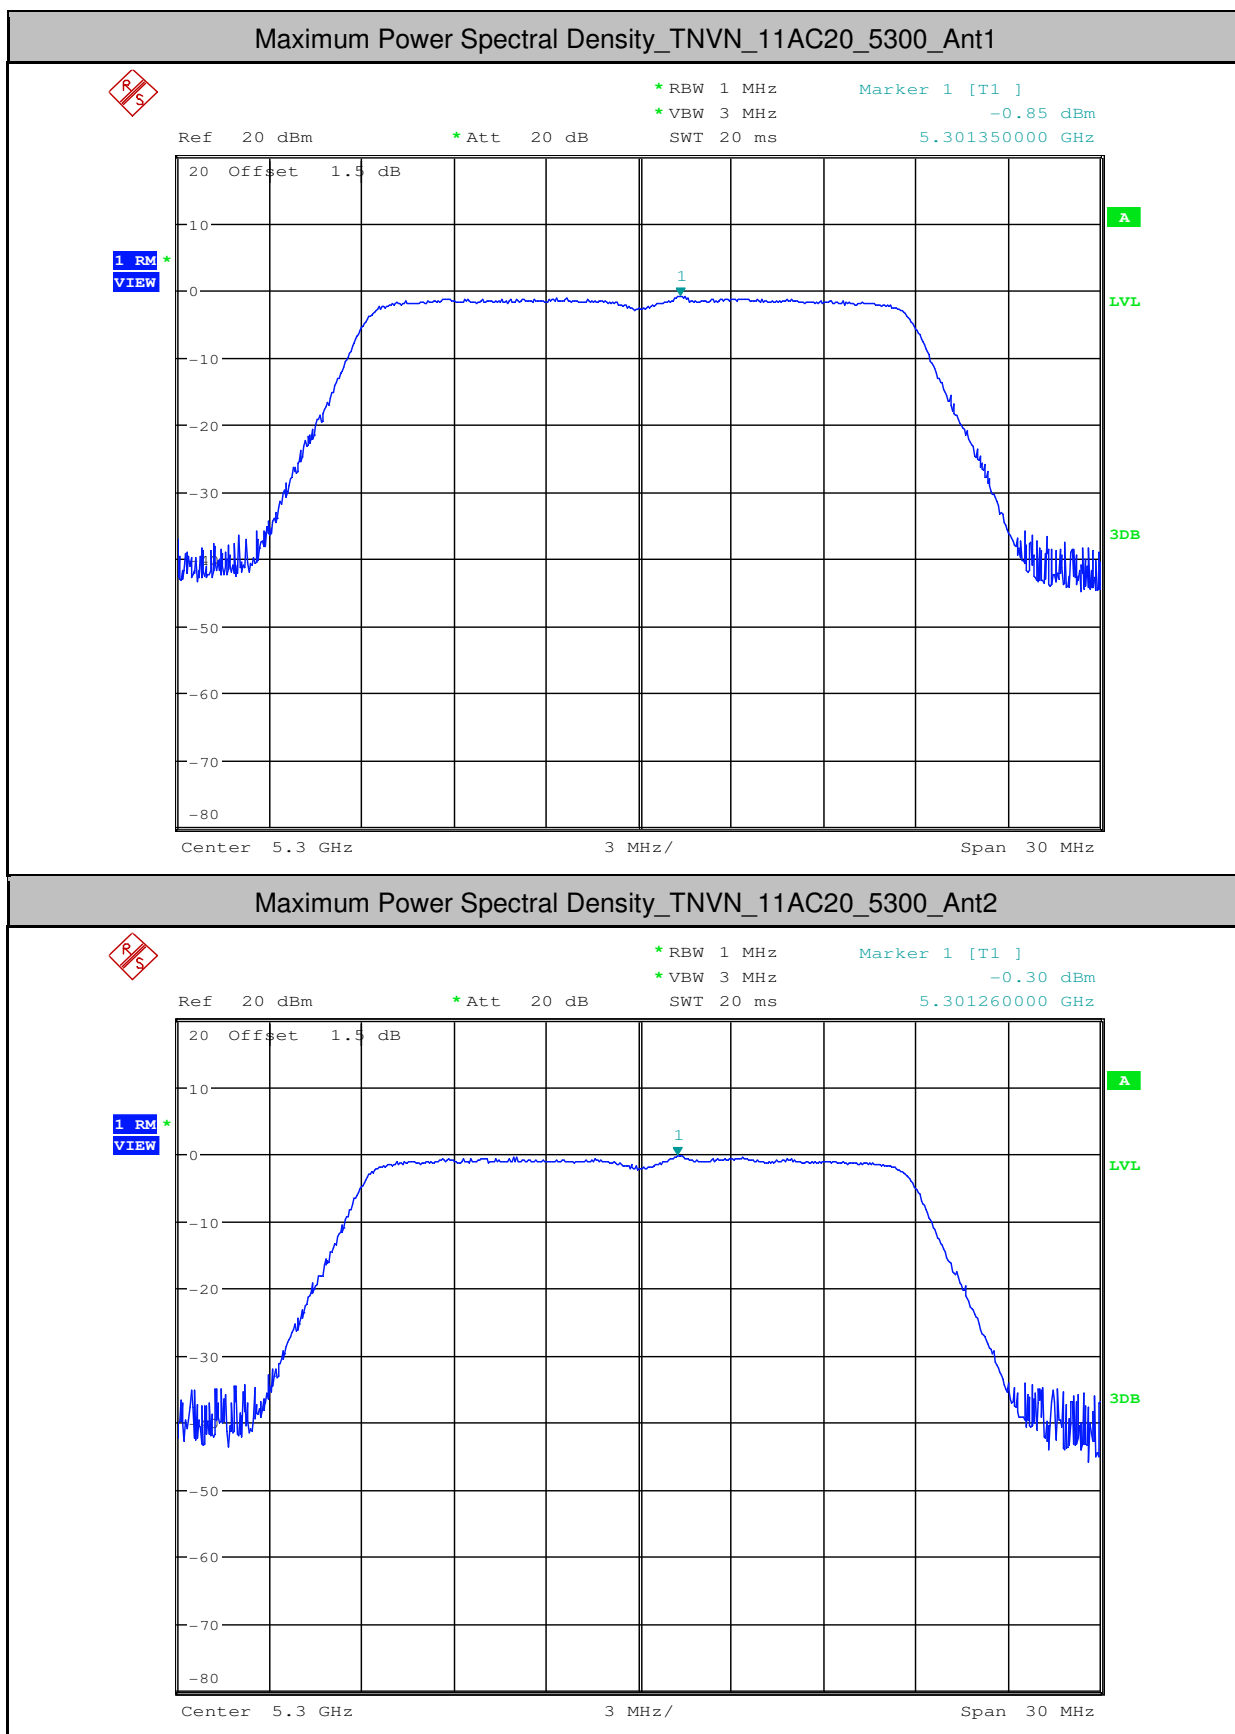


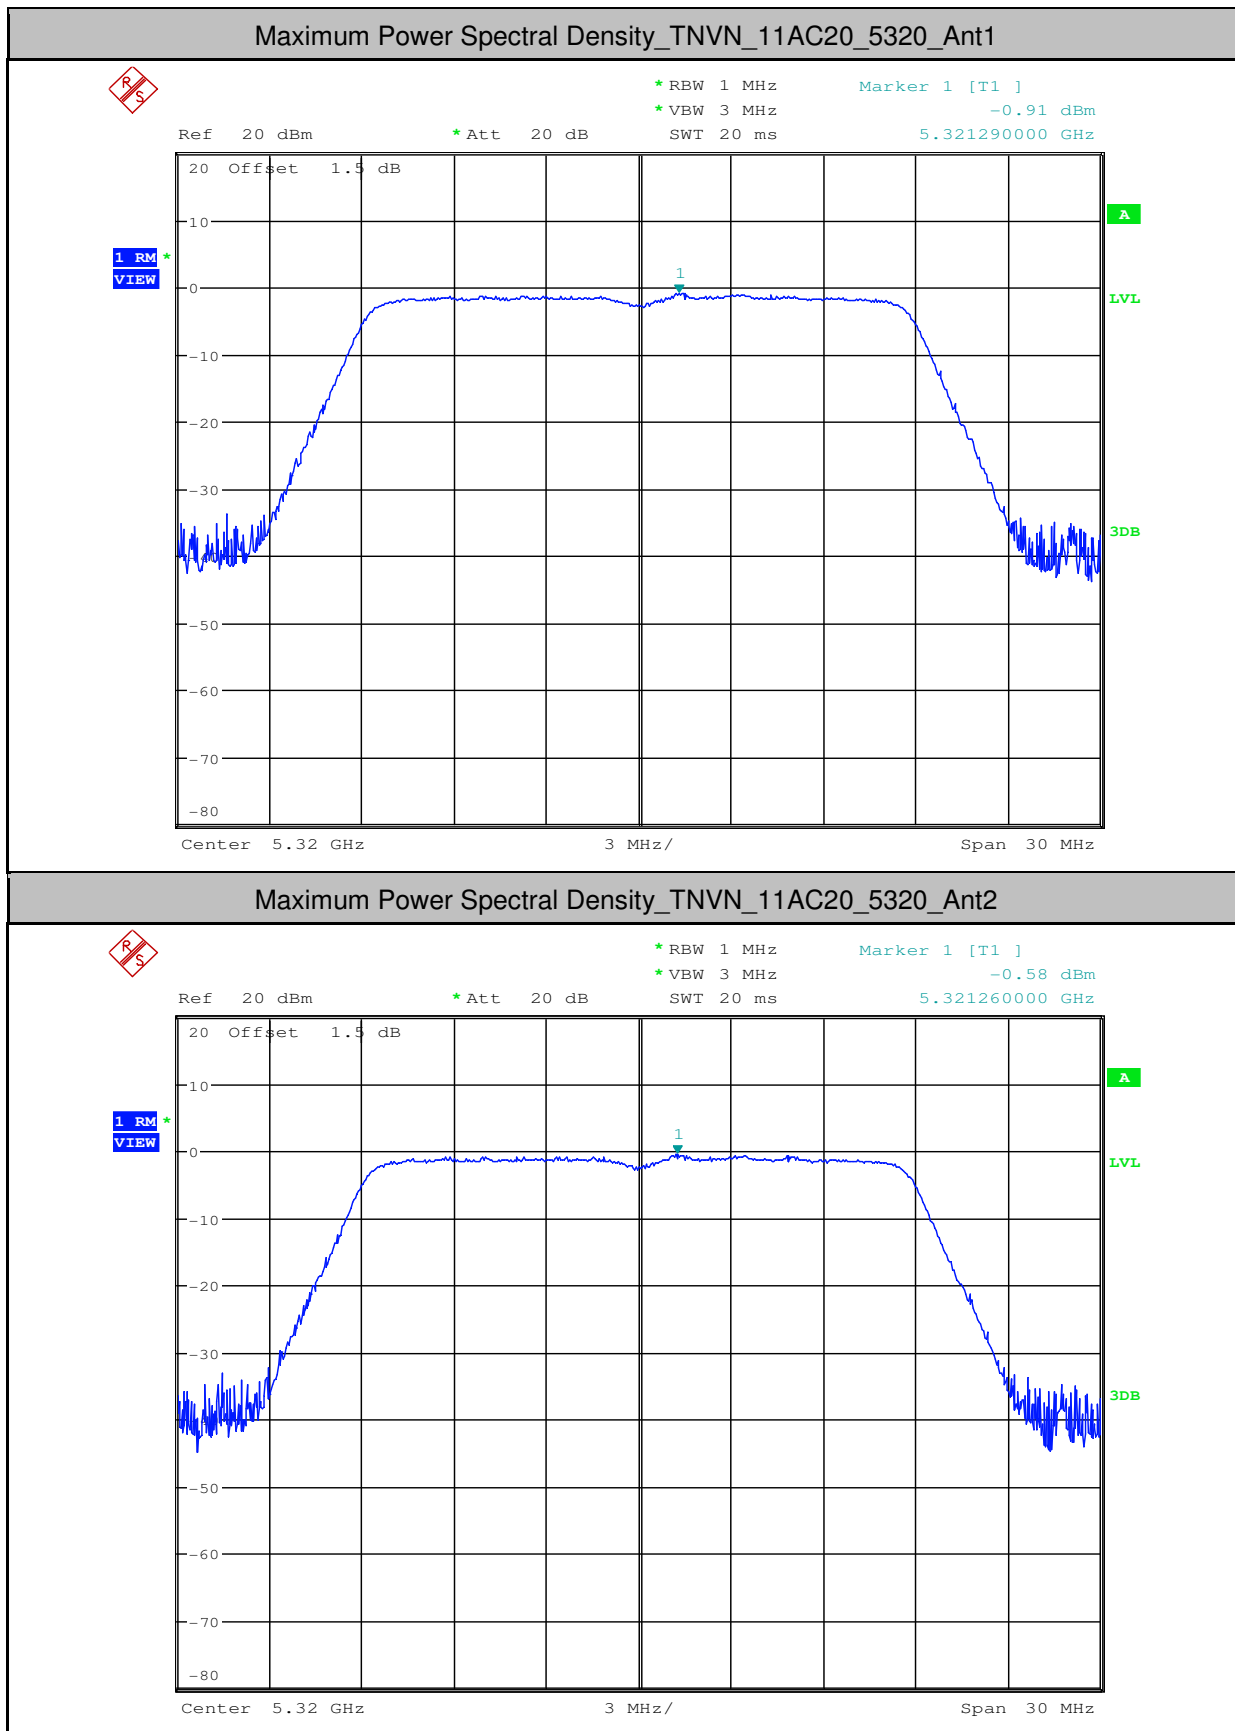


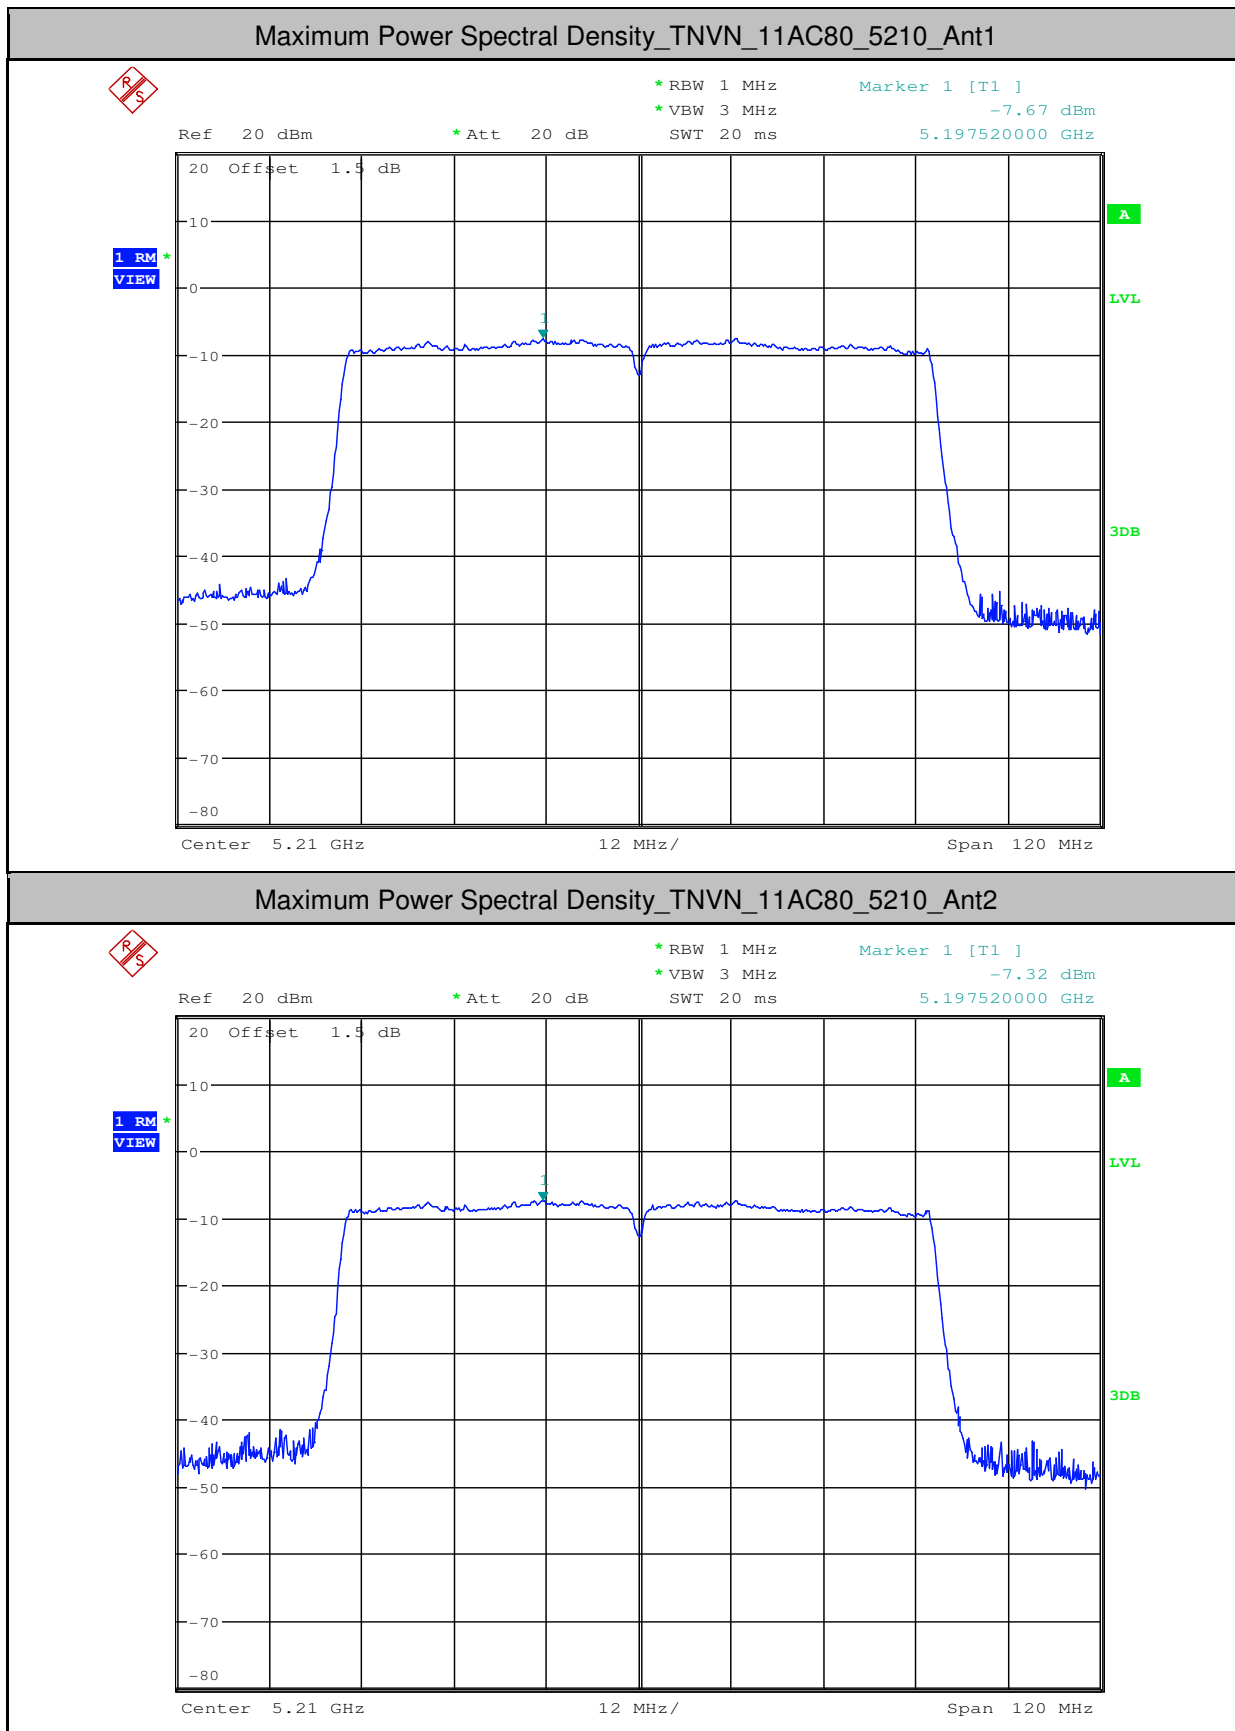


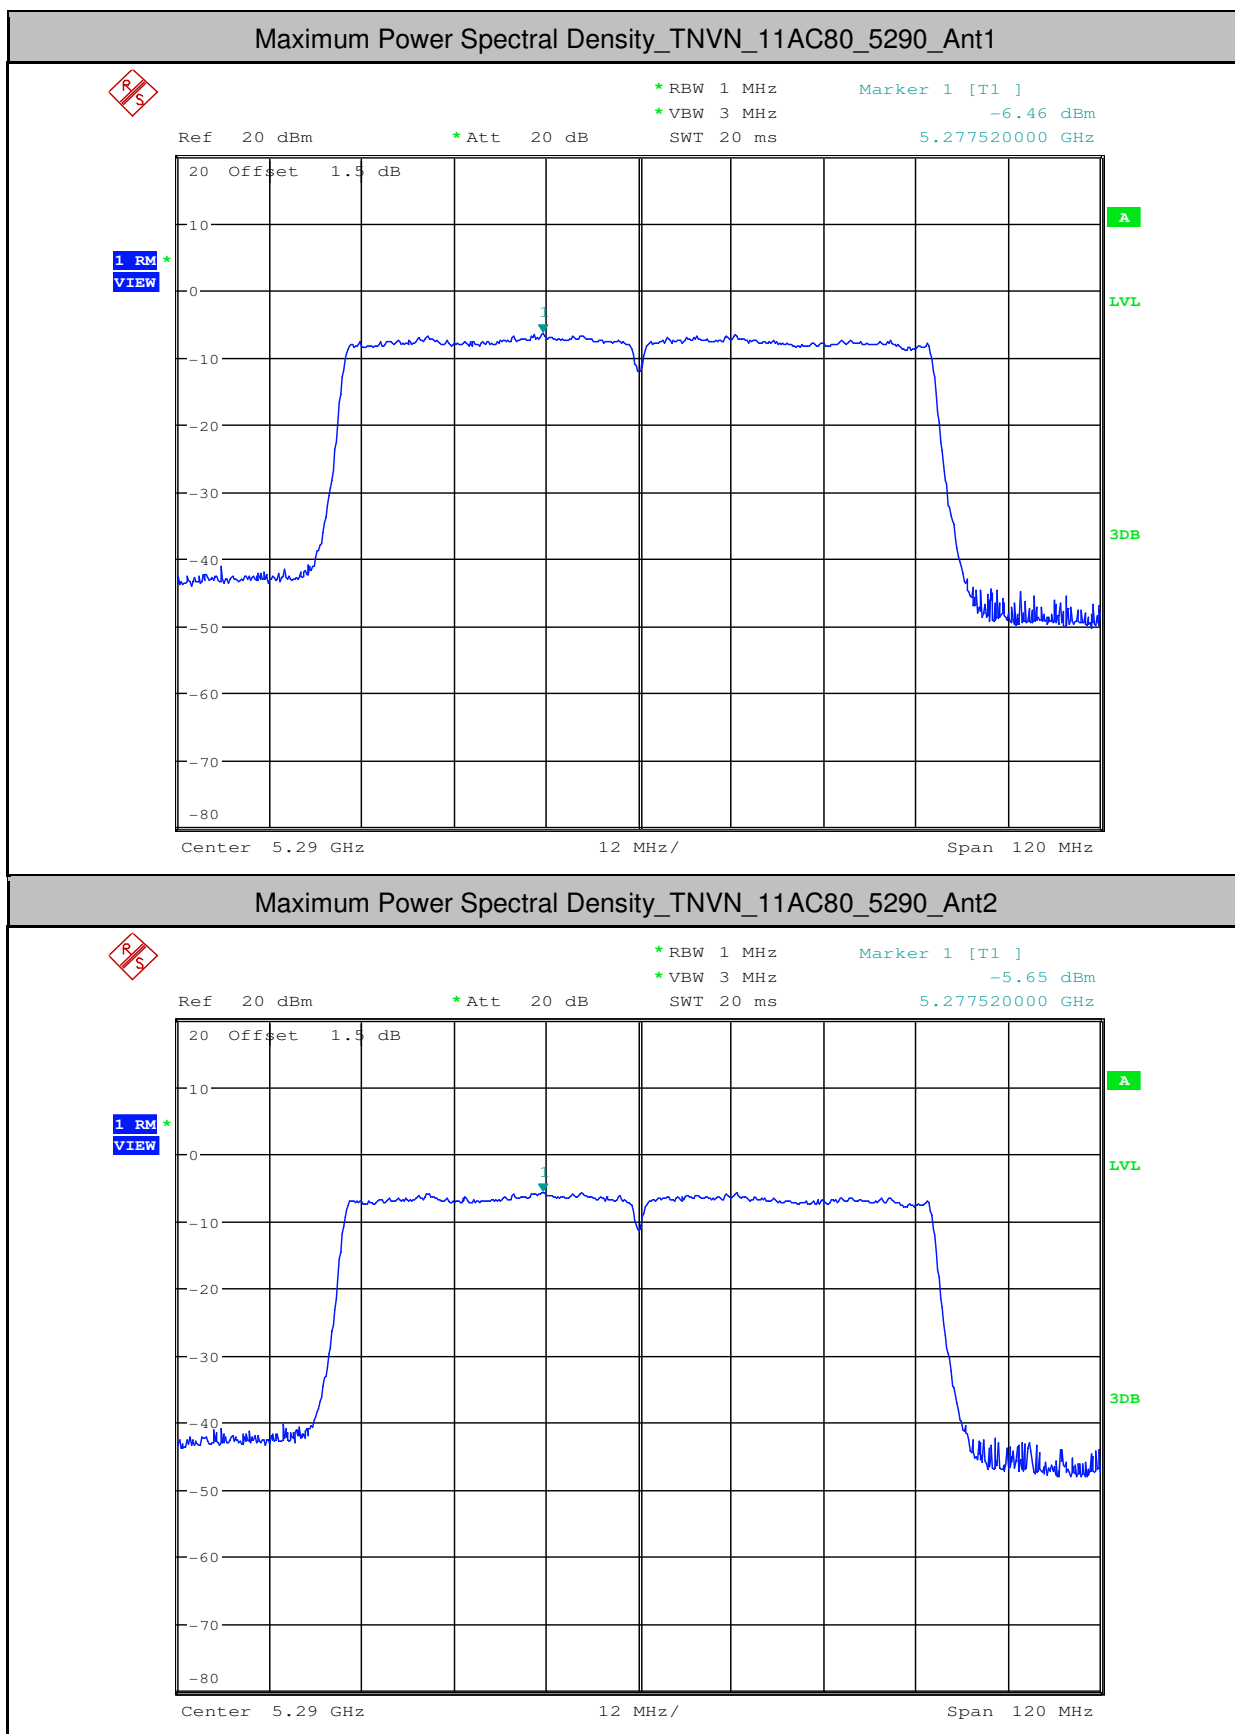

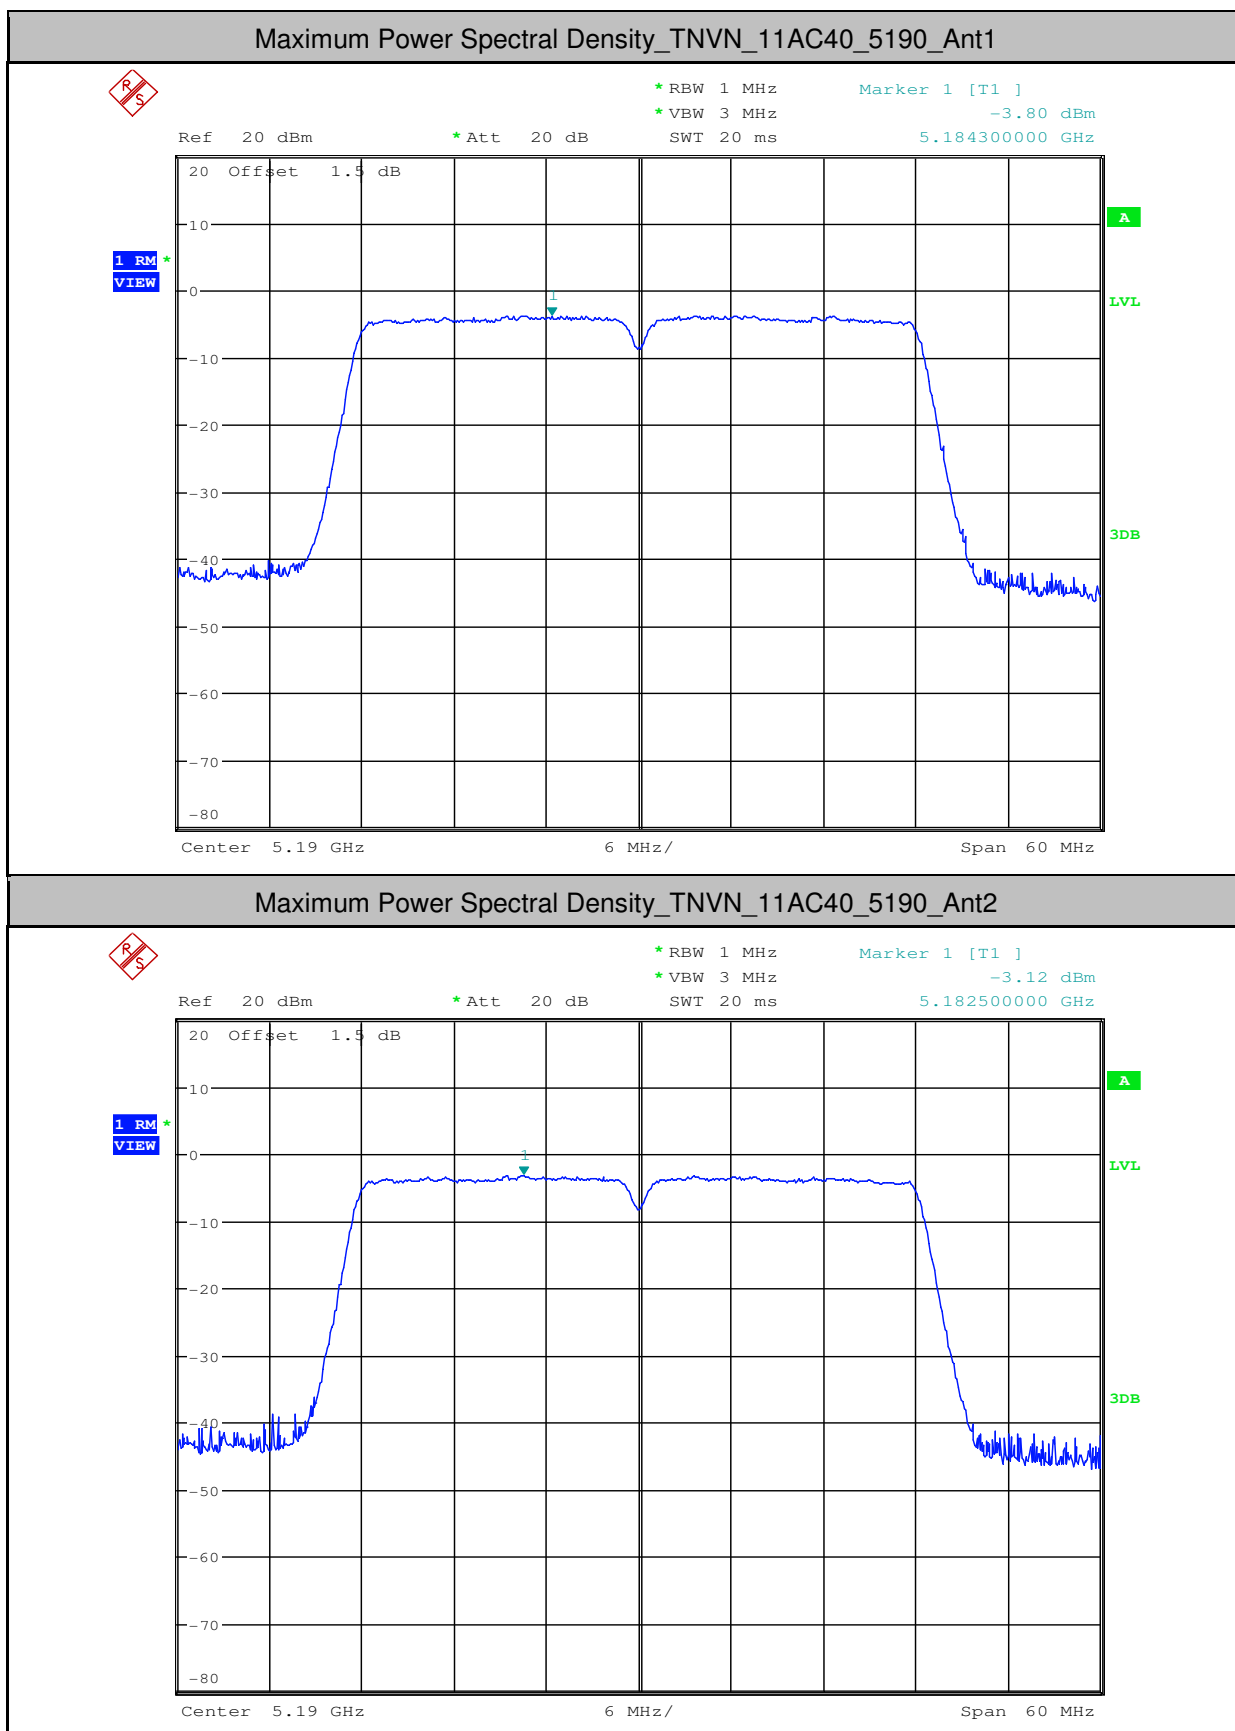

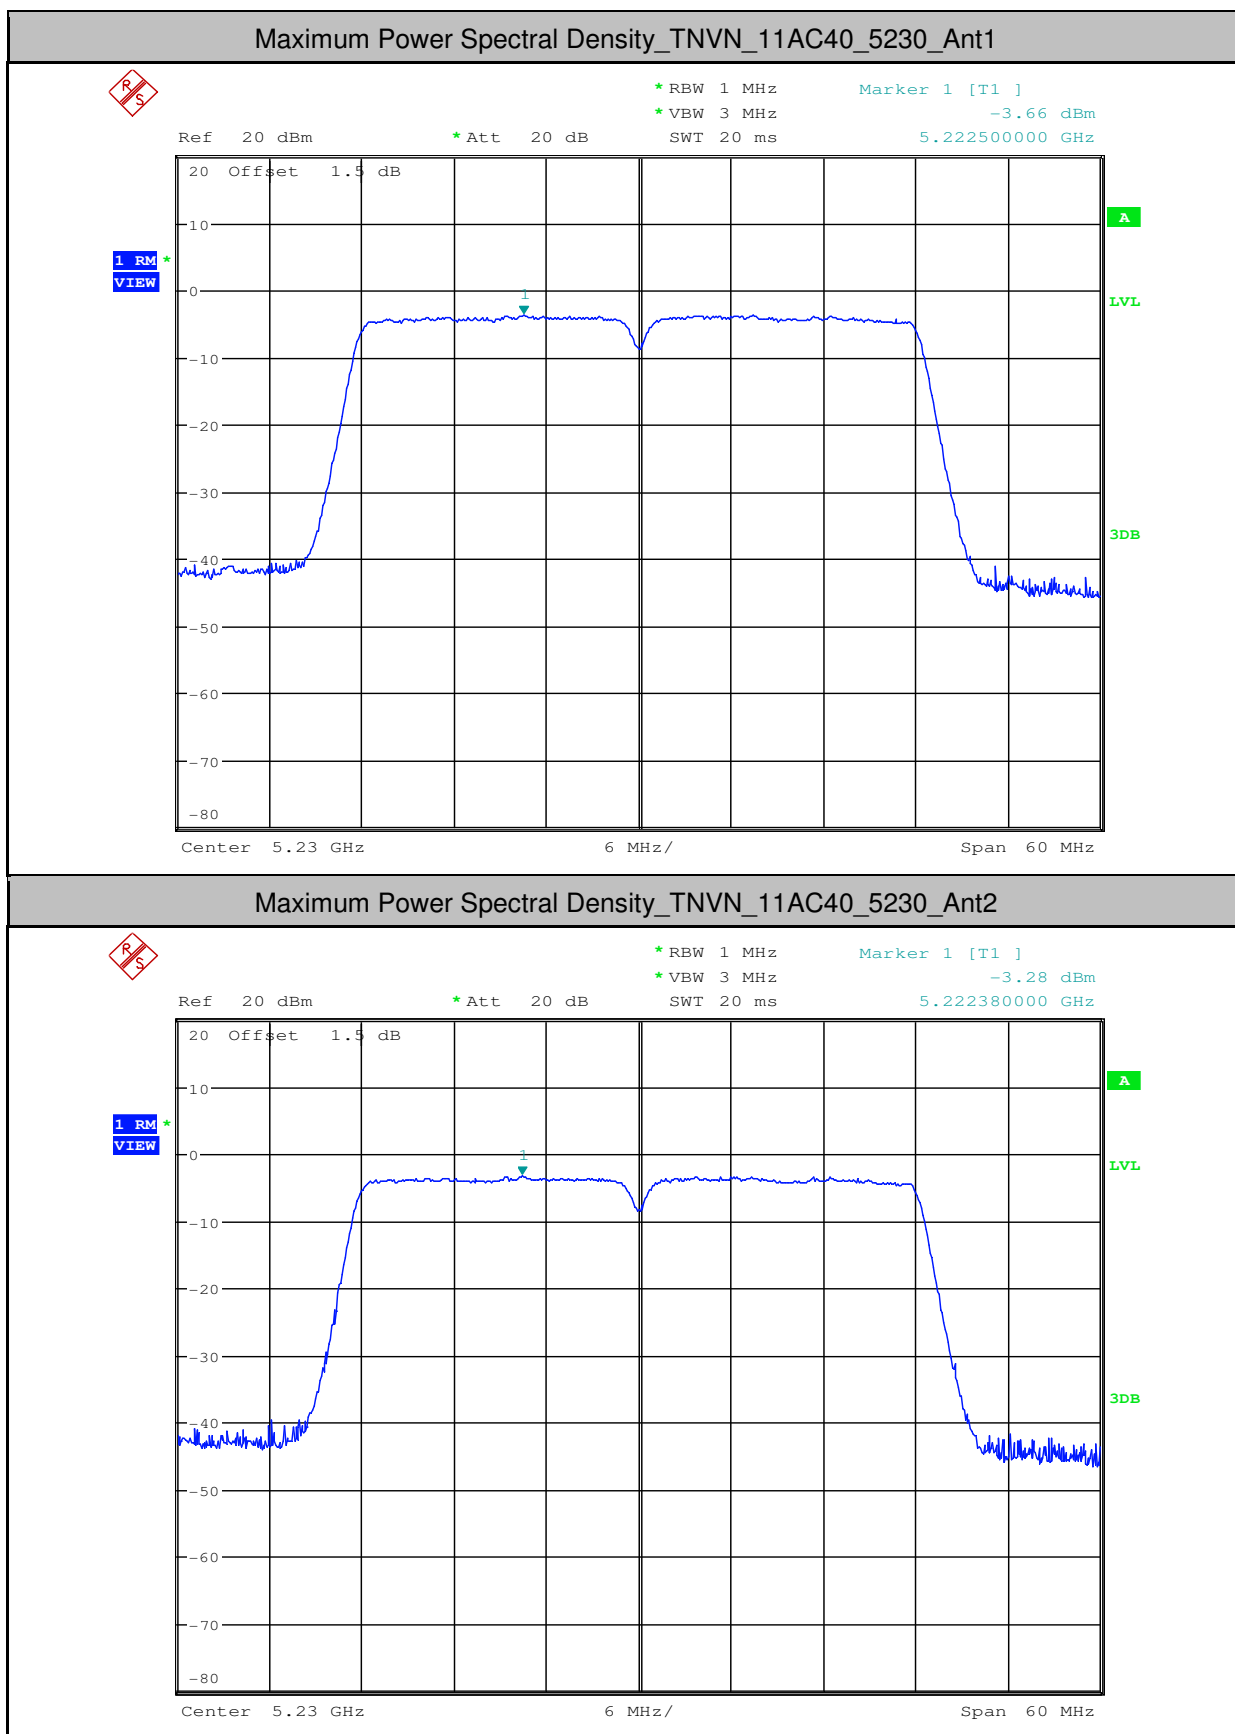

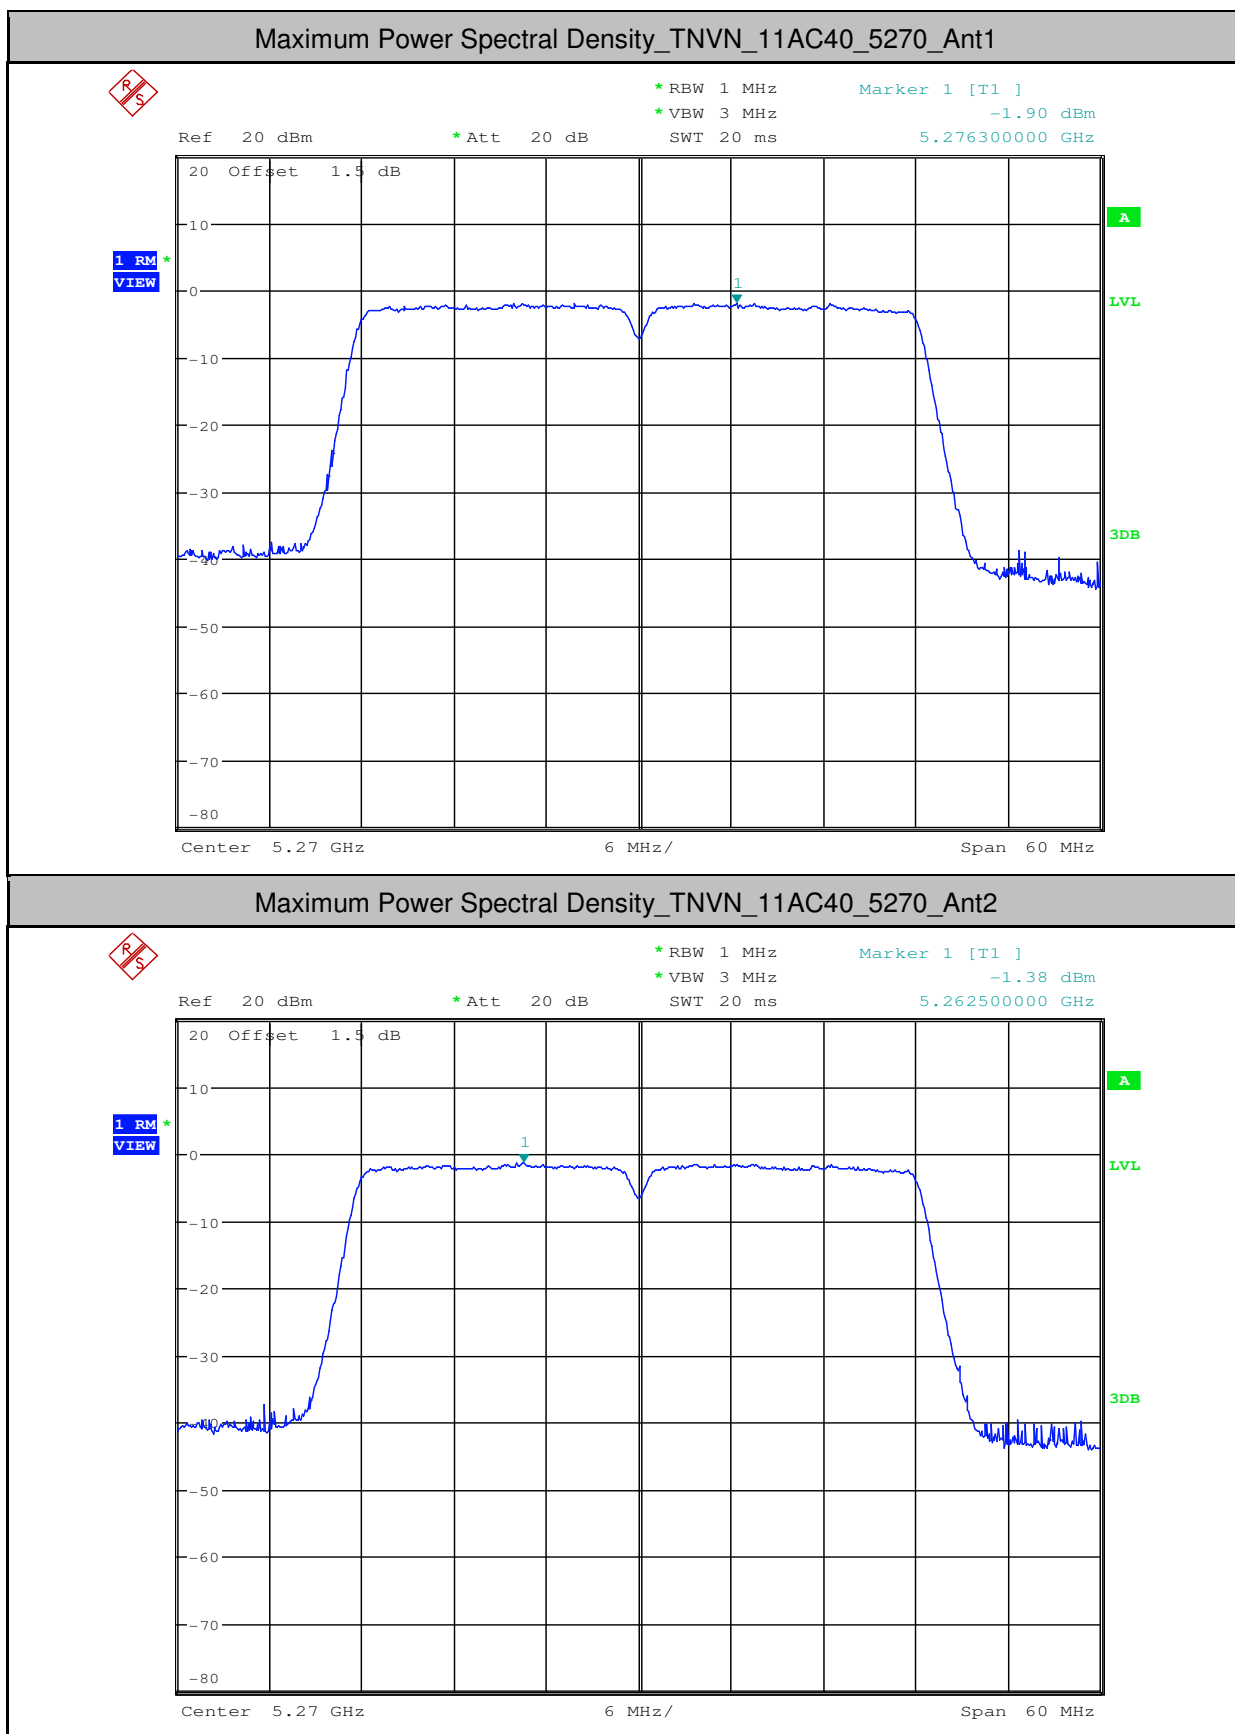

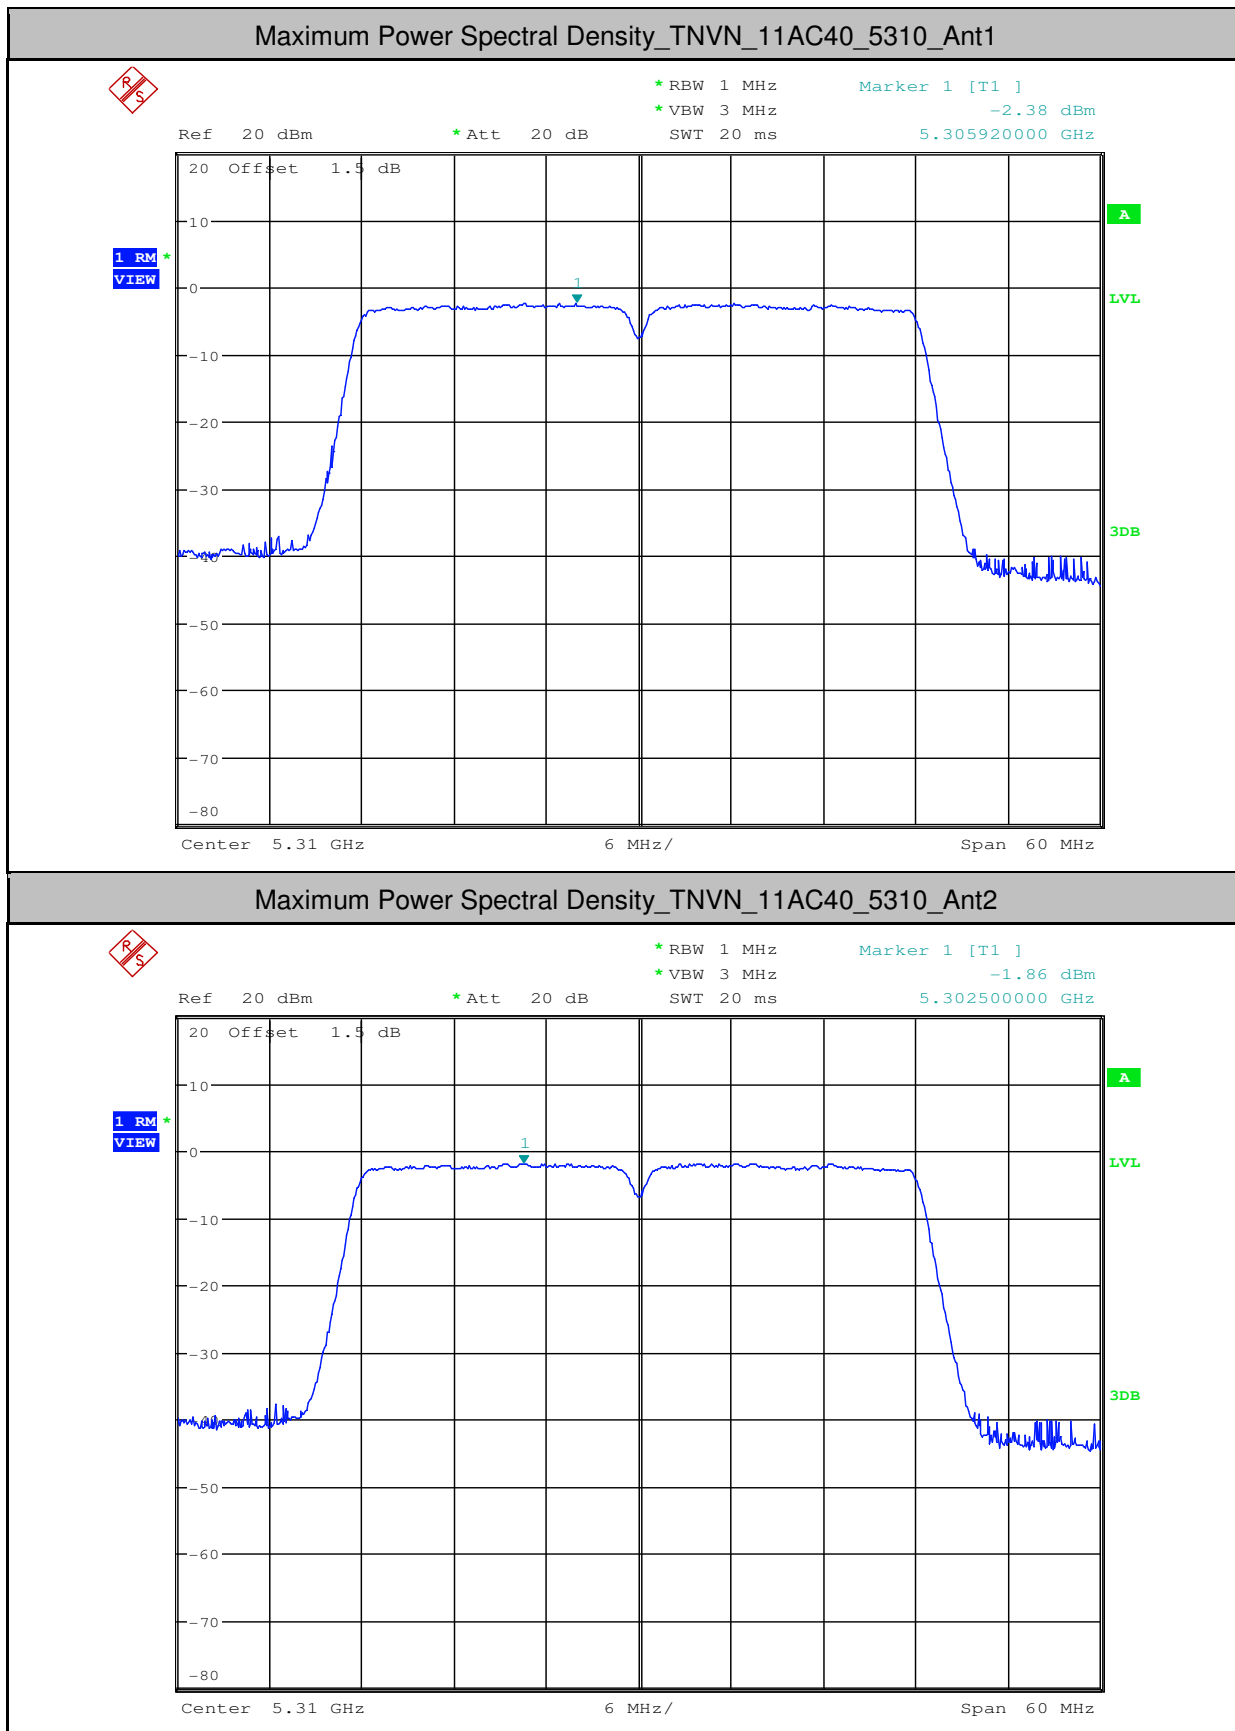



5.Duty Cycle (x)

Test Mode	Test Channel	Ant	Duty Cycle[%]	10log(1/x) Factor[dB]
11A	5180	Ant1	92.83	0.32
11A	5180	Ant2	92.86	0.32
11A	5220	Ant1	92.53	0.34
11A	5220	Ant2	92.53	0.34
11A	5240	Ant1	92.86	0.32
11A	5240	Ant2	92.86	0.32
11A	5260	Ant1	92.86	0.32
11A	5260	Ant2	92.53	0.34
11A	5300	Ant1	92.86	0.32
11A	5300	Ant2	92.83	0.32
11A	5320	Ant1	92.86	0.32
11A	5320	Ant2	92.53	0.34
11N20	5180	Ant1	92.39	0.34
11N20	5180	Ant2	92.39	0.34
11N20	5220	Ant1	92.39	0.34
11N20	5220	Ant2	92.39	0.34
11N20	5240	Ant1	92.39	0.34
11N20	5240	Ant2	92.39	0.34
11N20	5260	Ant1	92.39	0.34
11N20	5260	Ant2	92.04	0.36
11N20	5300	Ant1	92.39	0.34
11N20	5300	Ant2	92.39	0.34
11N20	5320	Ant1	92.39	0.34
11N20	5320	Ant2	92.39	0.34
11N40	5190	Ant1	86.27	0.64
11N40	5190	Ant2	85.94	0.66
11N40	5230	Ant1	85.94	0.66
11N40	5230	Ant2	85.88	0.66
11N40	5270	Ant1	85.88	0.66
11N40	5270	Ant2	86.27	0.64
11N40	5310	Ant1	86.27	0.64





SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM181000906203


Page: 303 of 334


11N40	5310	Ant2	85.94	0.66
11AC20	5180	Ant1	92.41	0.34
11AC20	5180	Ant2	92.41	0.34
11AC20	5220	Ant1	92.41	0.34
11AC20	5220	Ant2	92.41	0.34
11AC20	5240	Ant1	92.1	0.36
11AC20	5240	Ant2	92.44	0.34
11AC20	5260	Ant1	92.44	0.34
11AC20	5260	Ant2	92.44	0.34
11AC20	5300	Ant1	92.1	0.36
11AC20	5300	Ant2	92.41	0.34
11AC20	5320	Ant1	92.44	0.34
11AC20	5320	Ant2	92.44	0.34
11AC80	5210	Ant1	76.04	1.19
11AC80	5210	Ant2	76.39	1.17
11AC80	5290	Ant1	75.46	1.22
11AC80	5290	Ant2	75.46	1.22
11AC40	5190	Ant1	86.33	0.64
11AC40	5190	Ant2	86.33	0.64
11AC40	5230	Ant1	85.99	0.66
11AC40	5230	Ant2	85.99	0.66
11AC40	5270	Ant1	85.99	0.66
11AC40	5270	Ant2	86.33	0.64
11AC40	5310	Ant1	85.99	0.66
11AC40	5310	Ant2	86.33	0.64

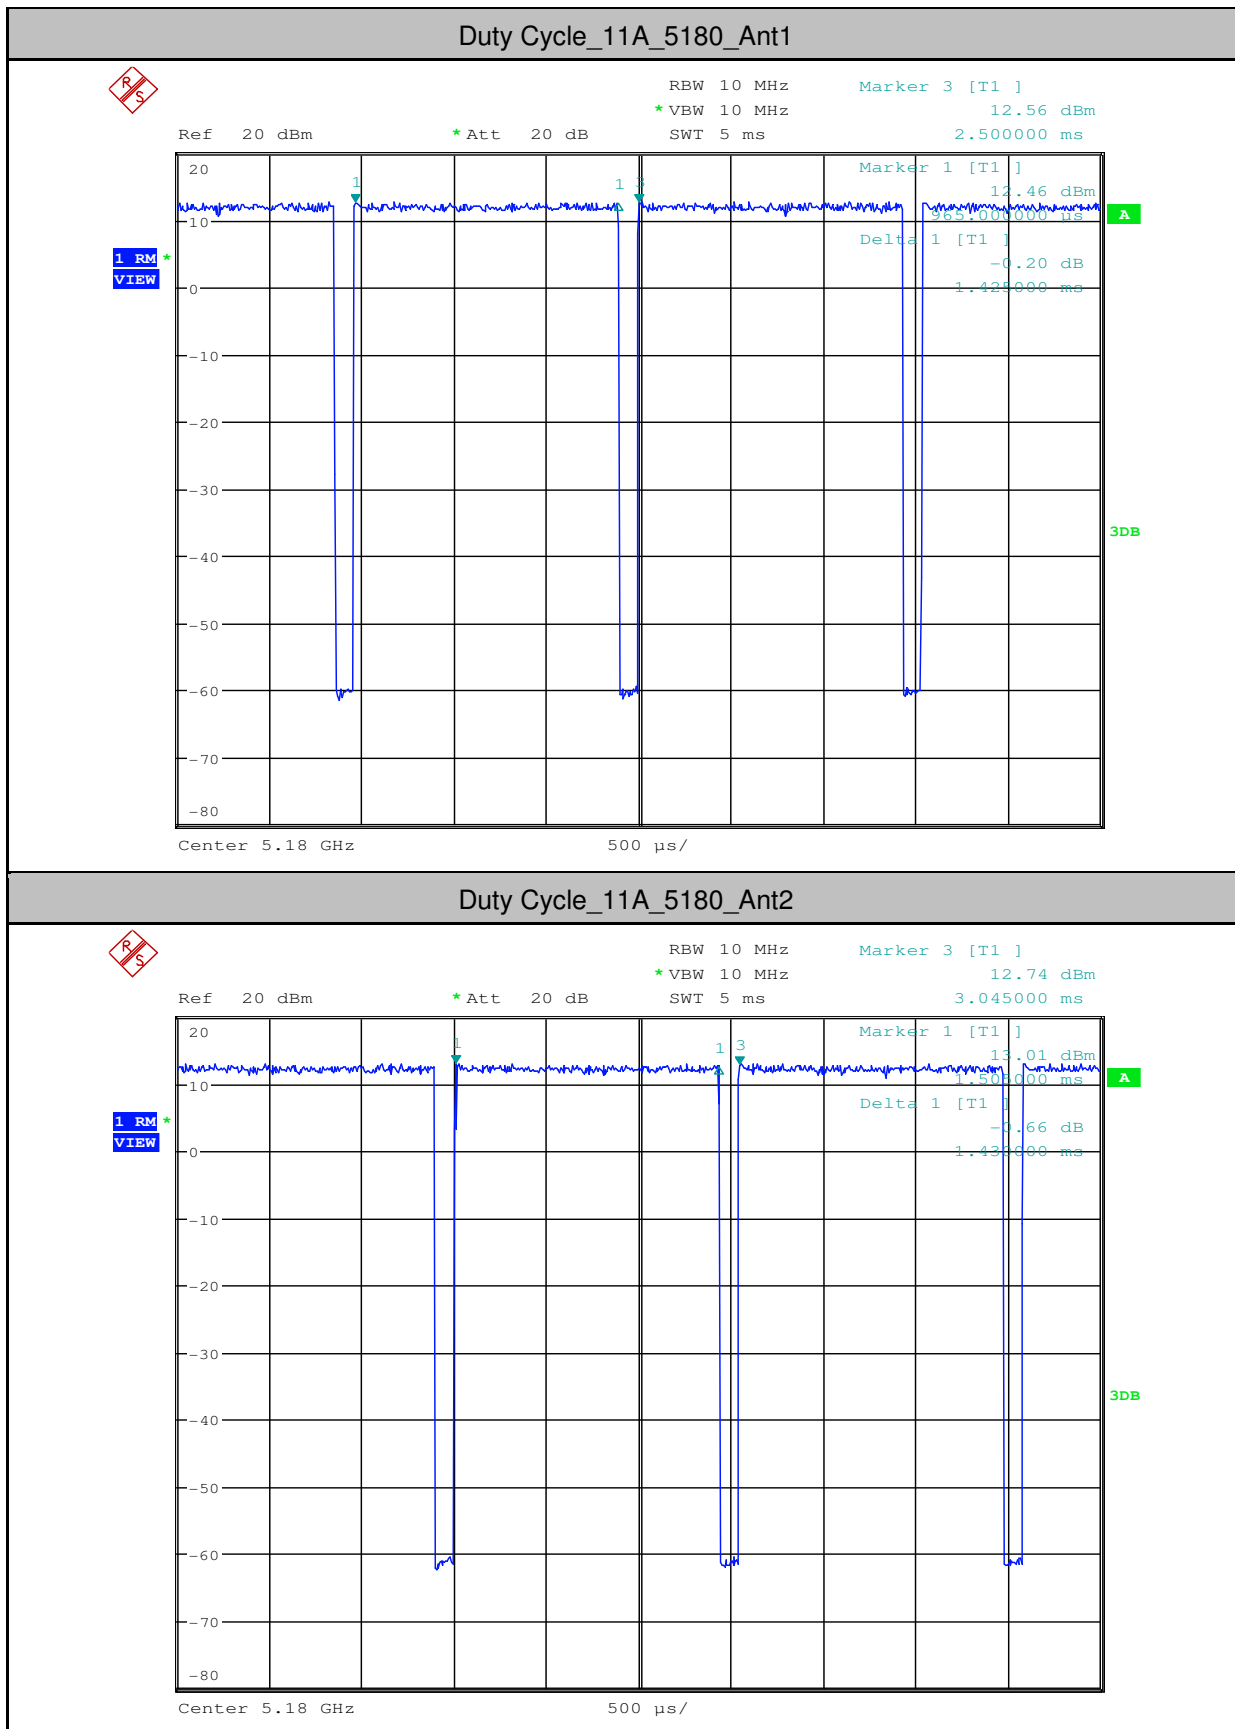


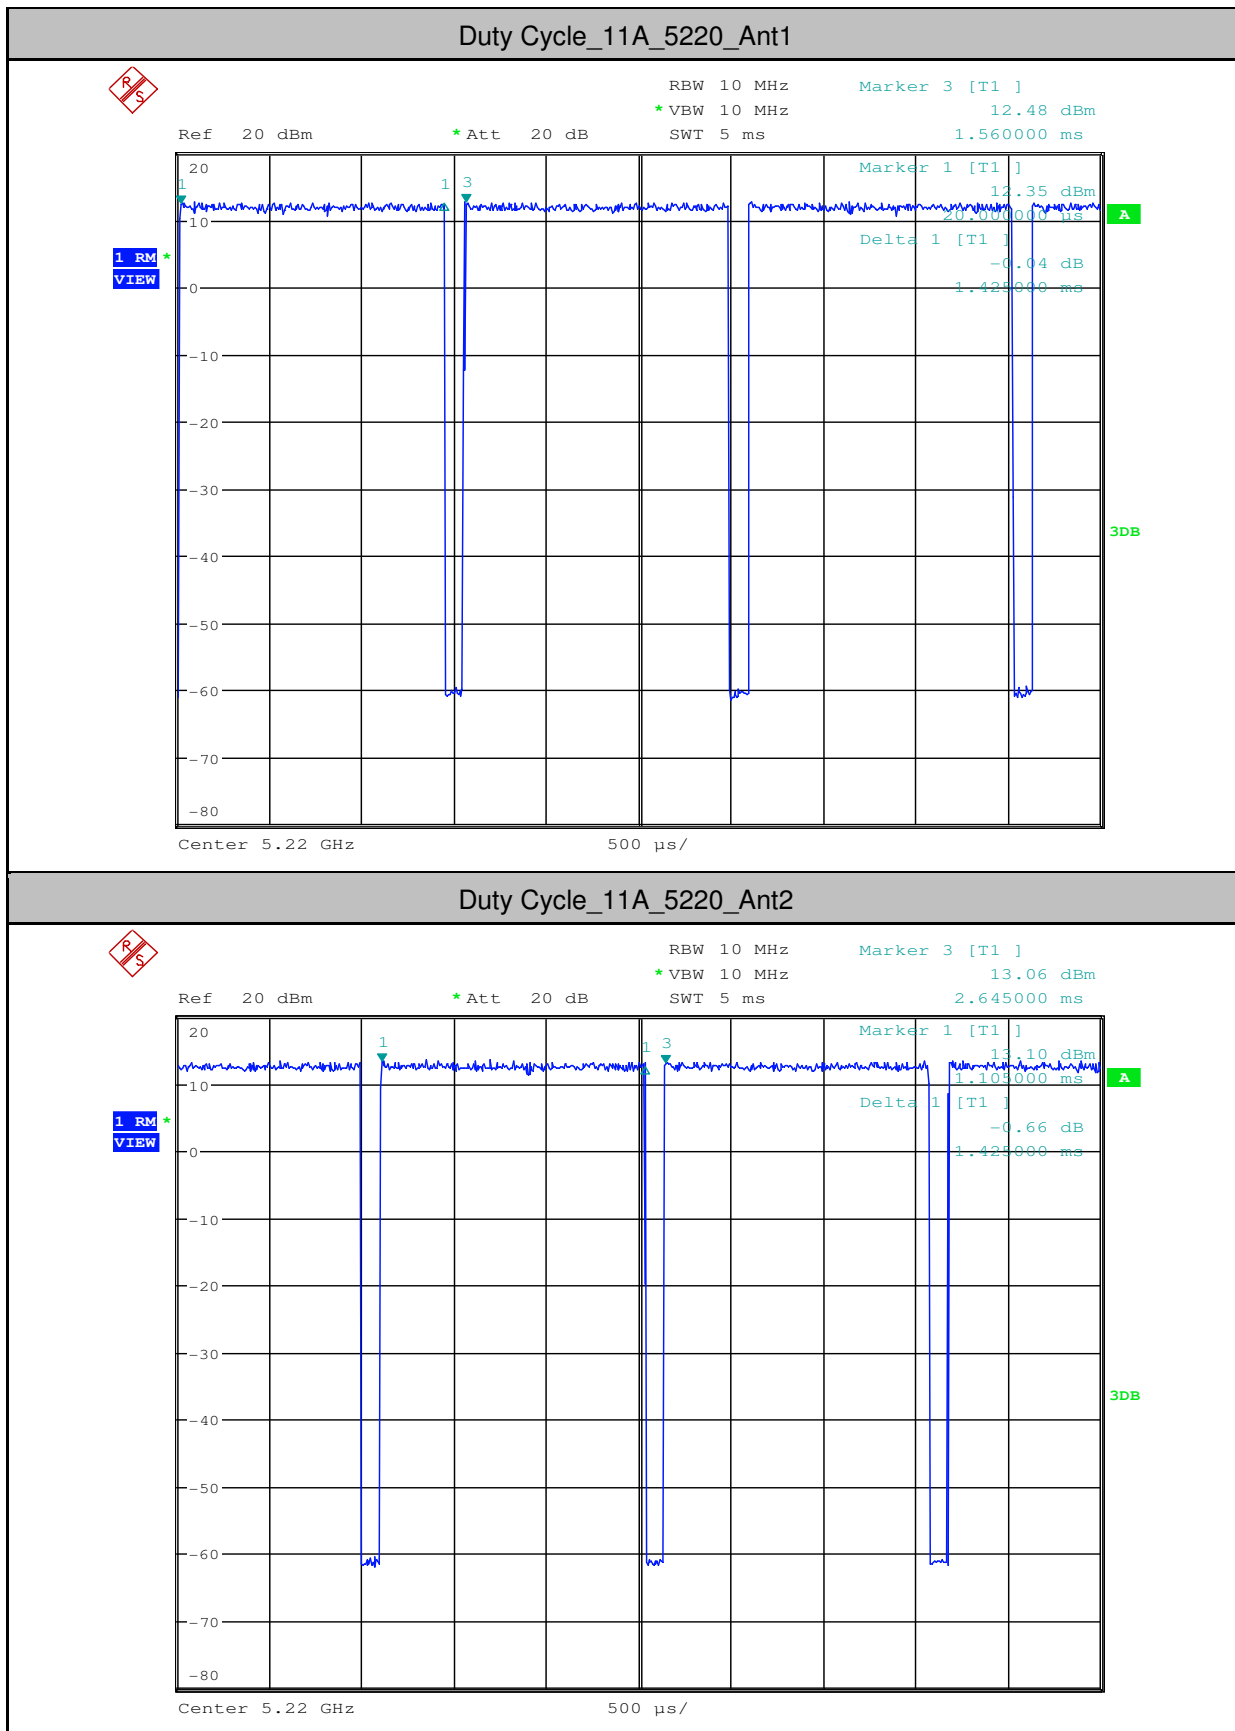


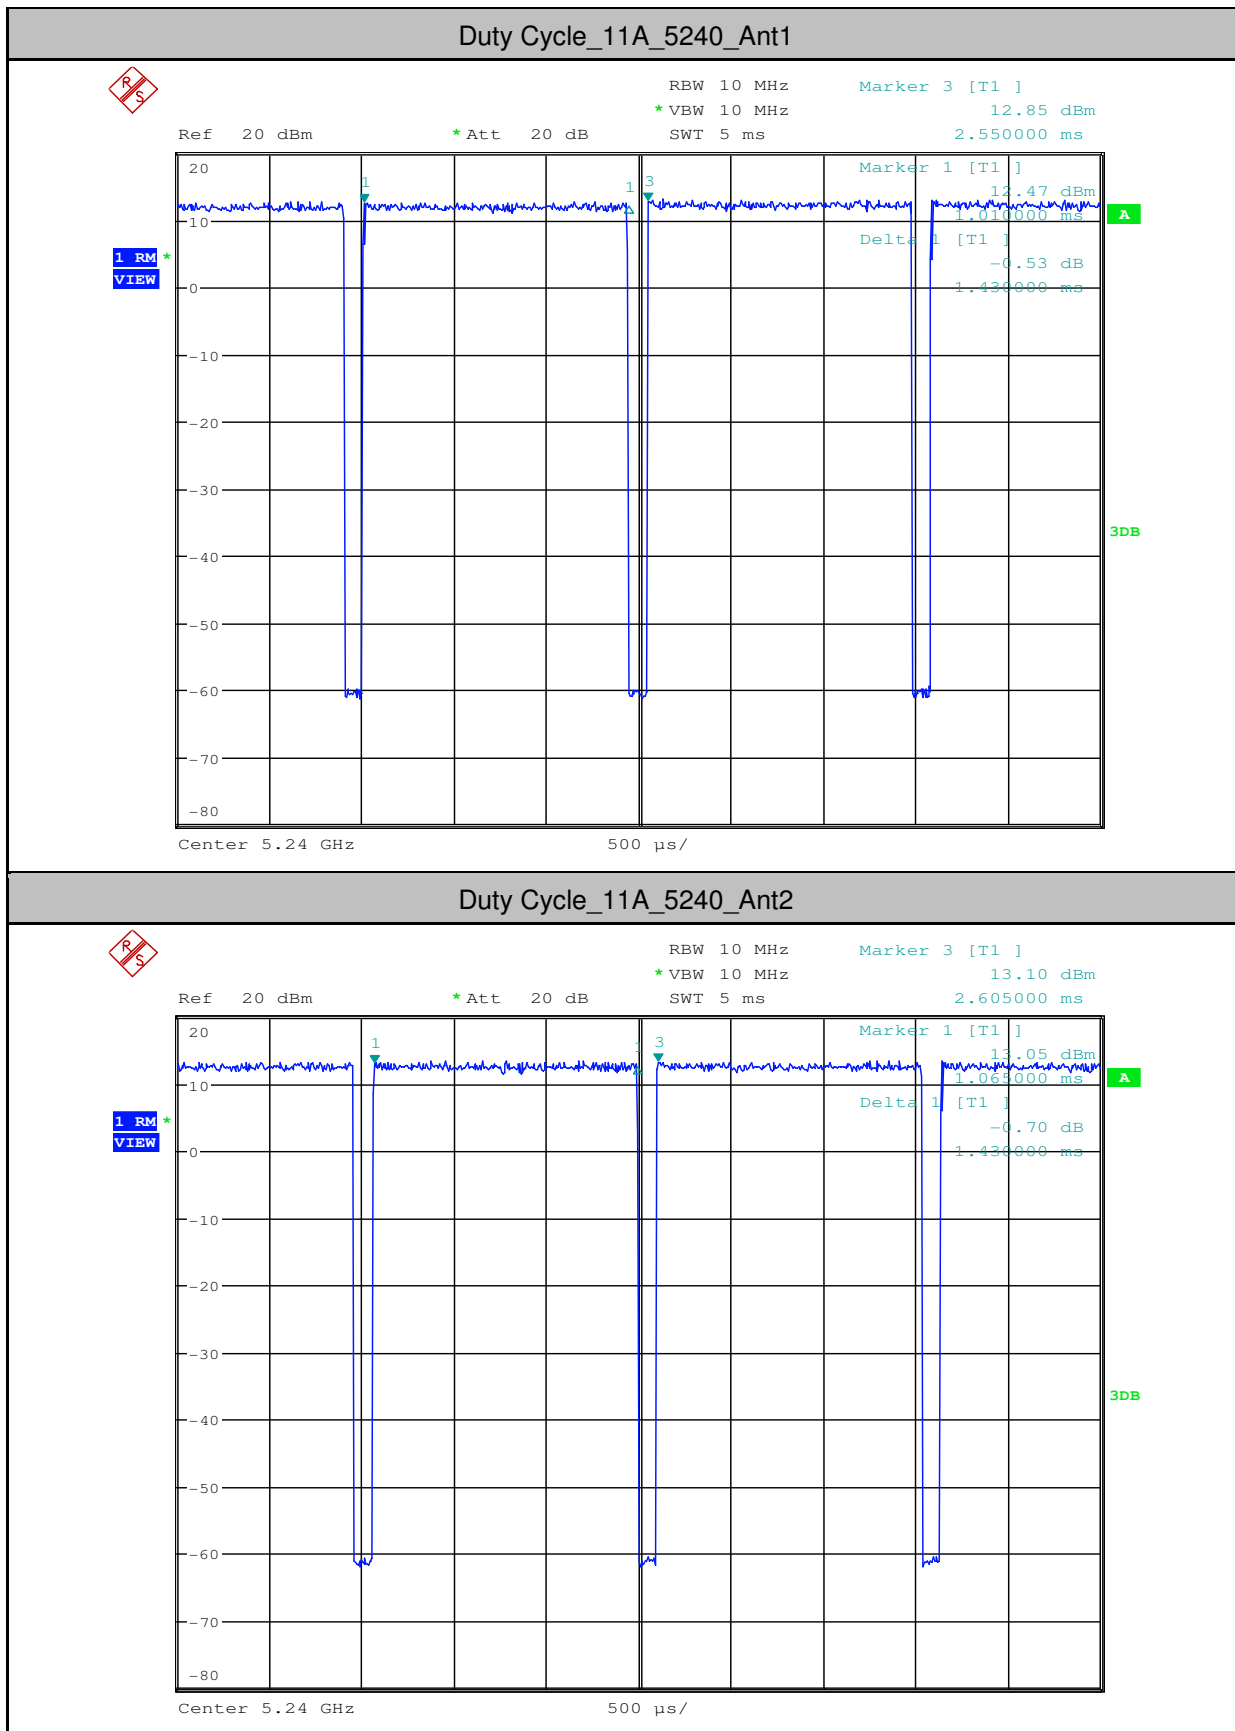


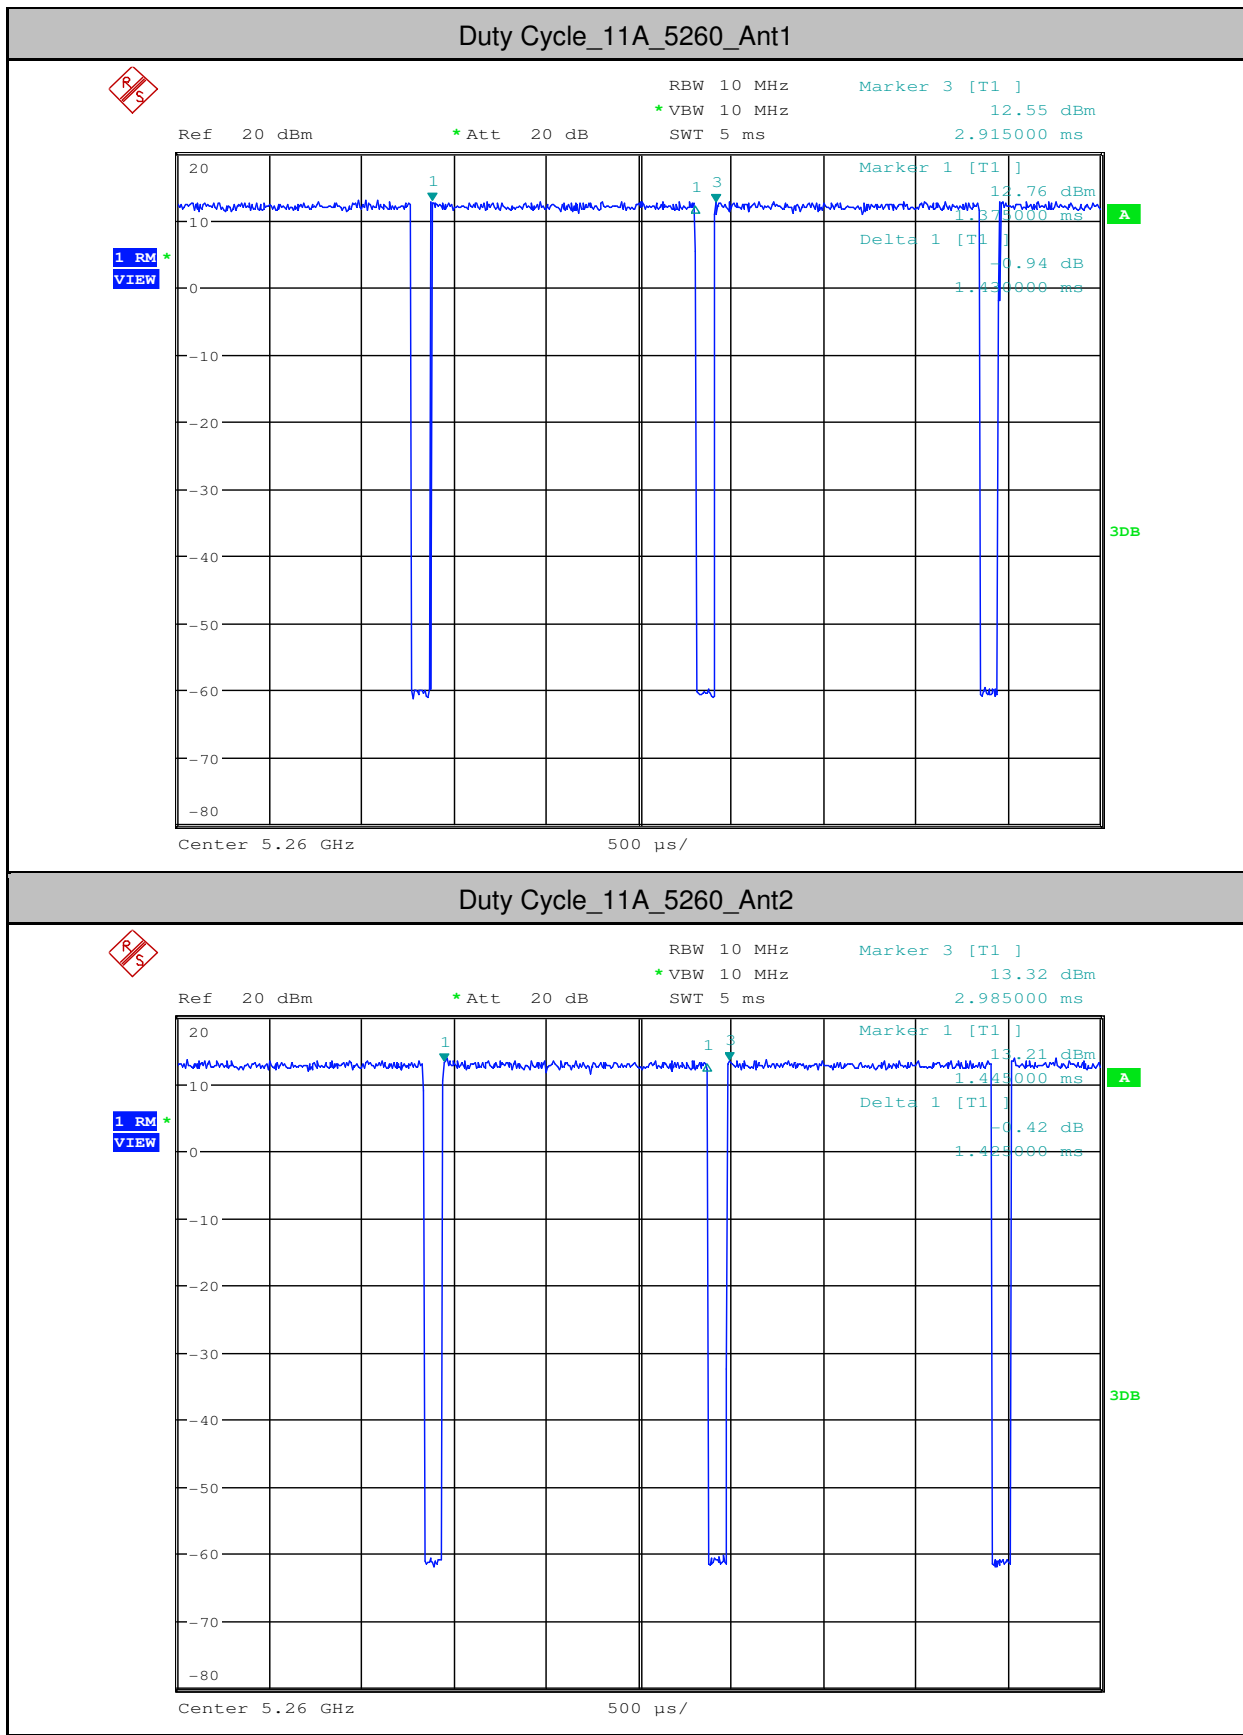


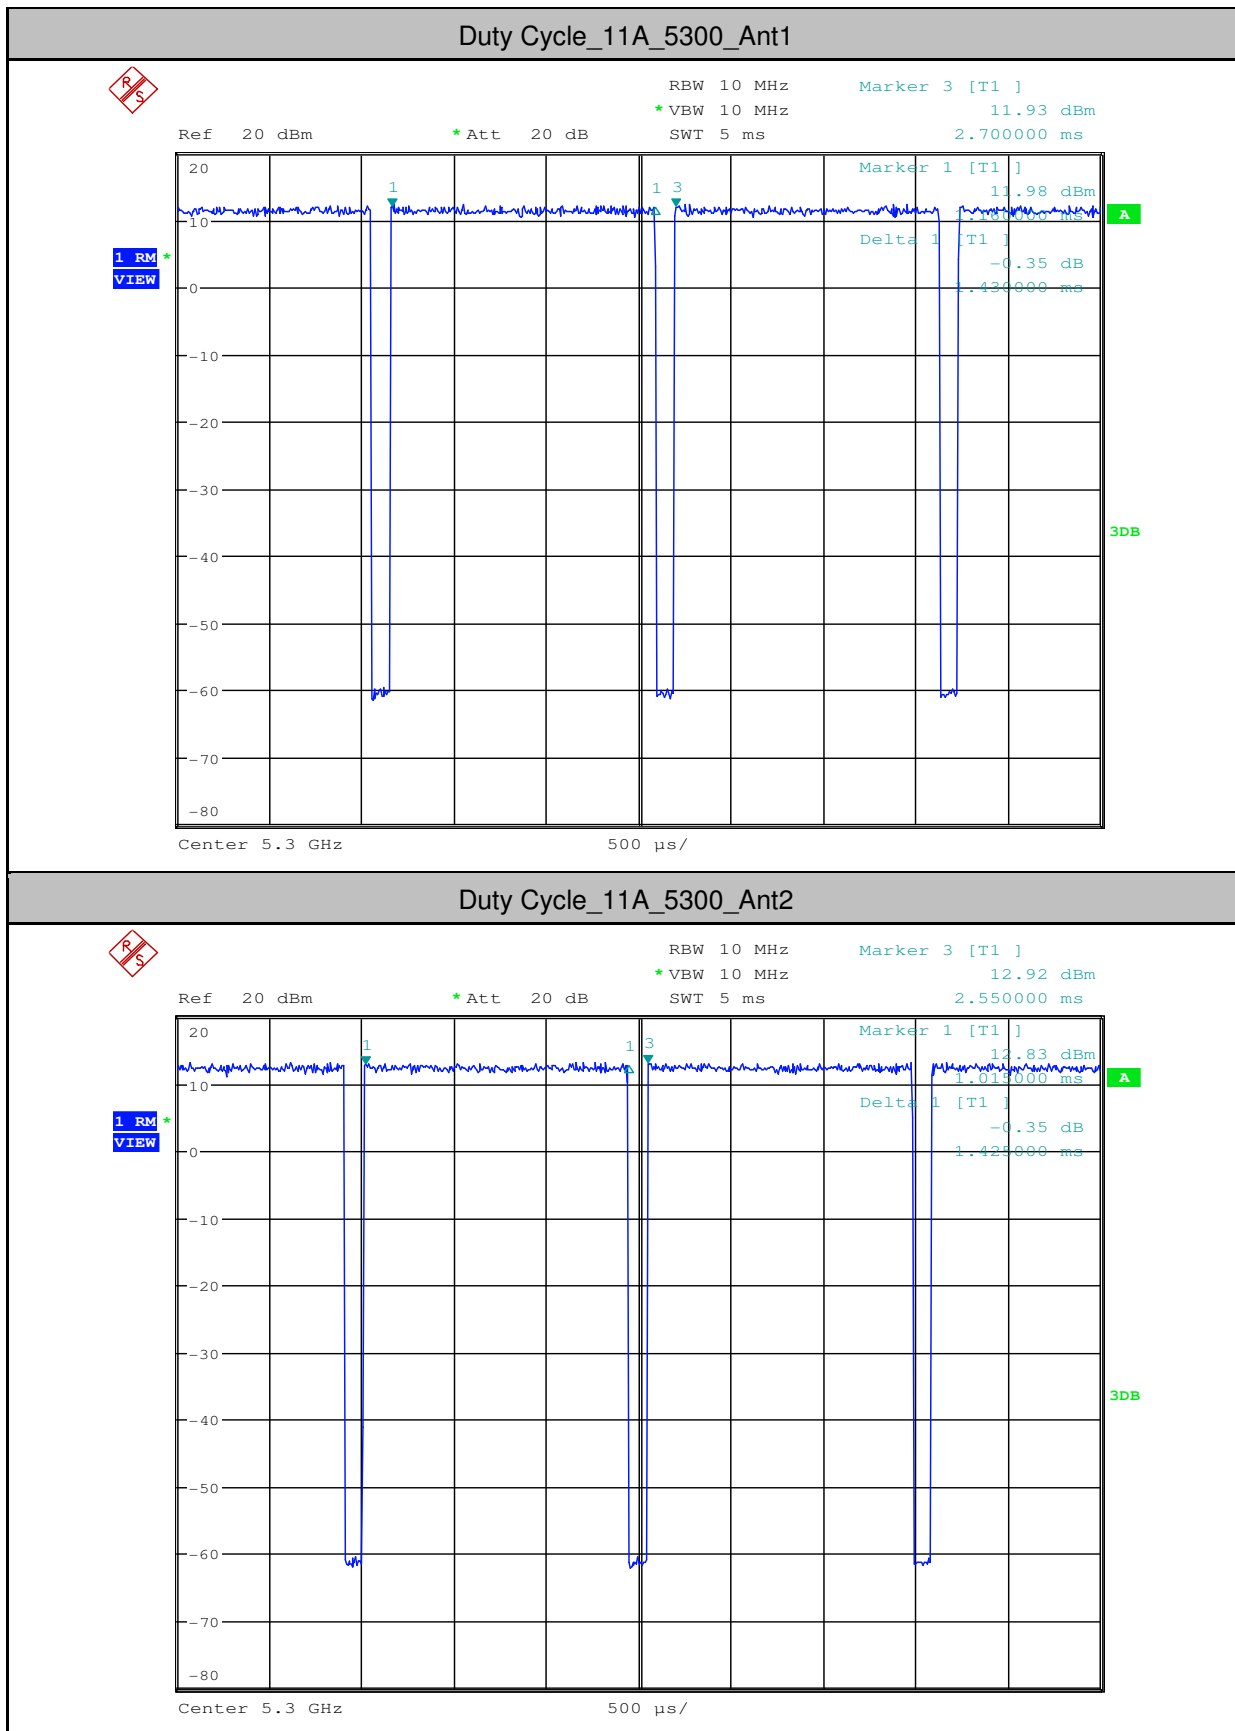


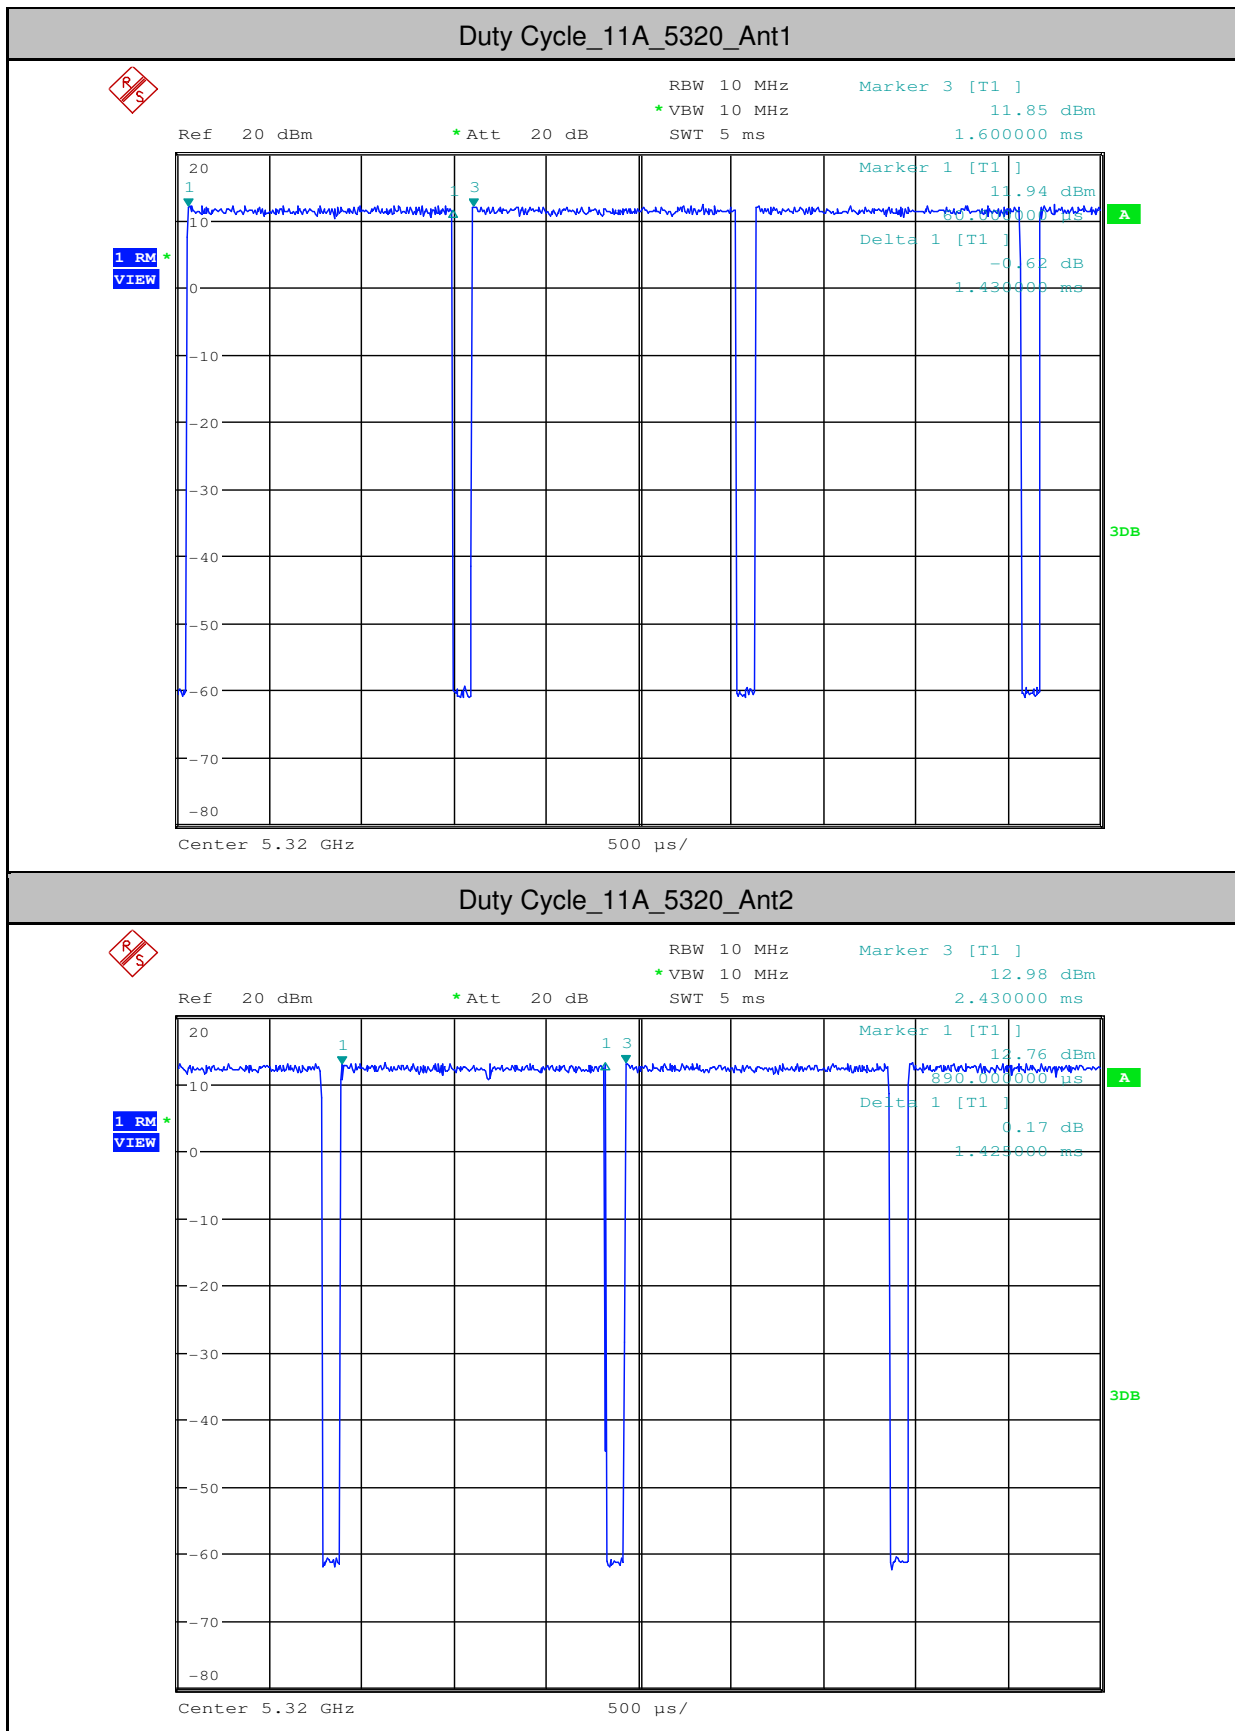


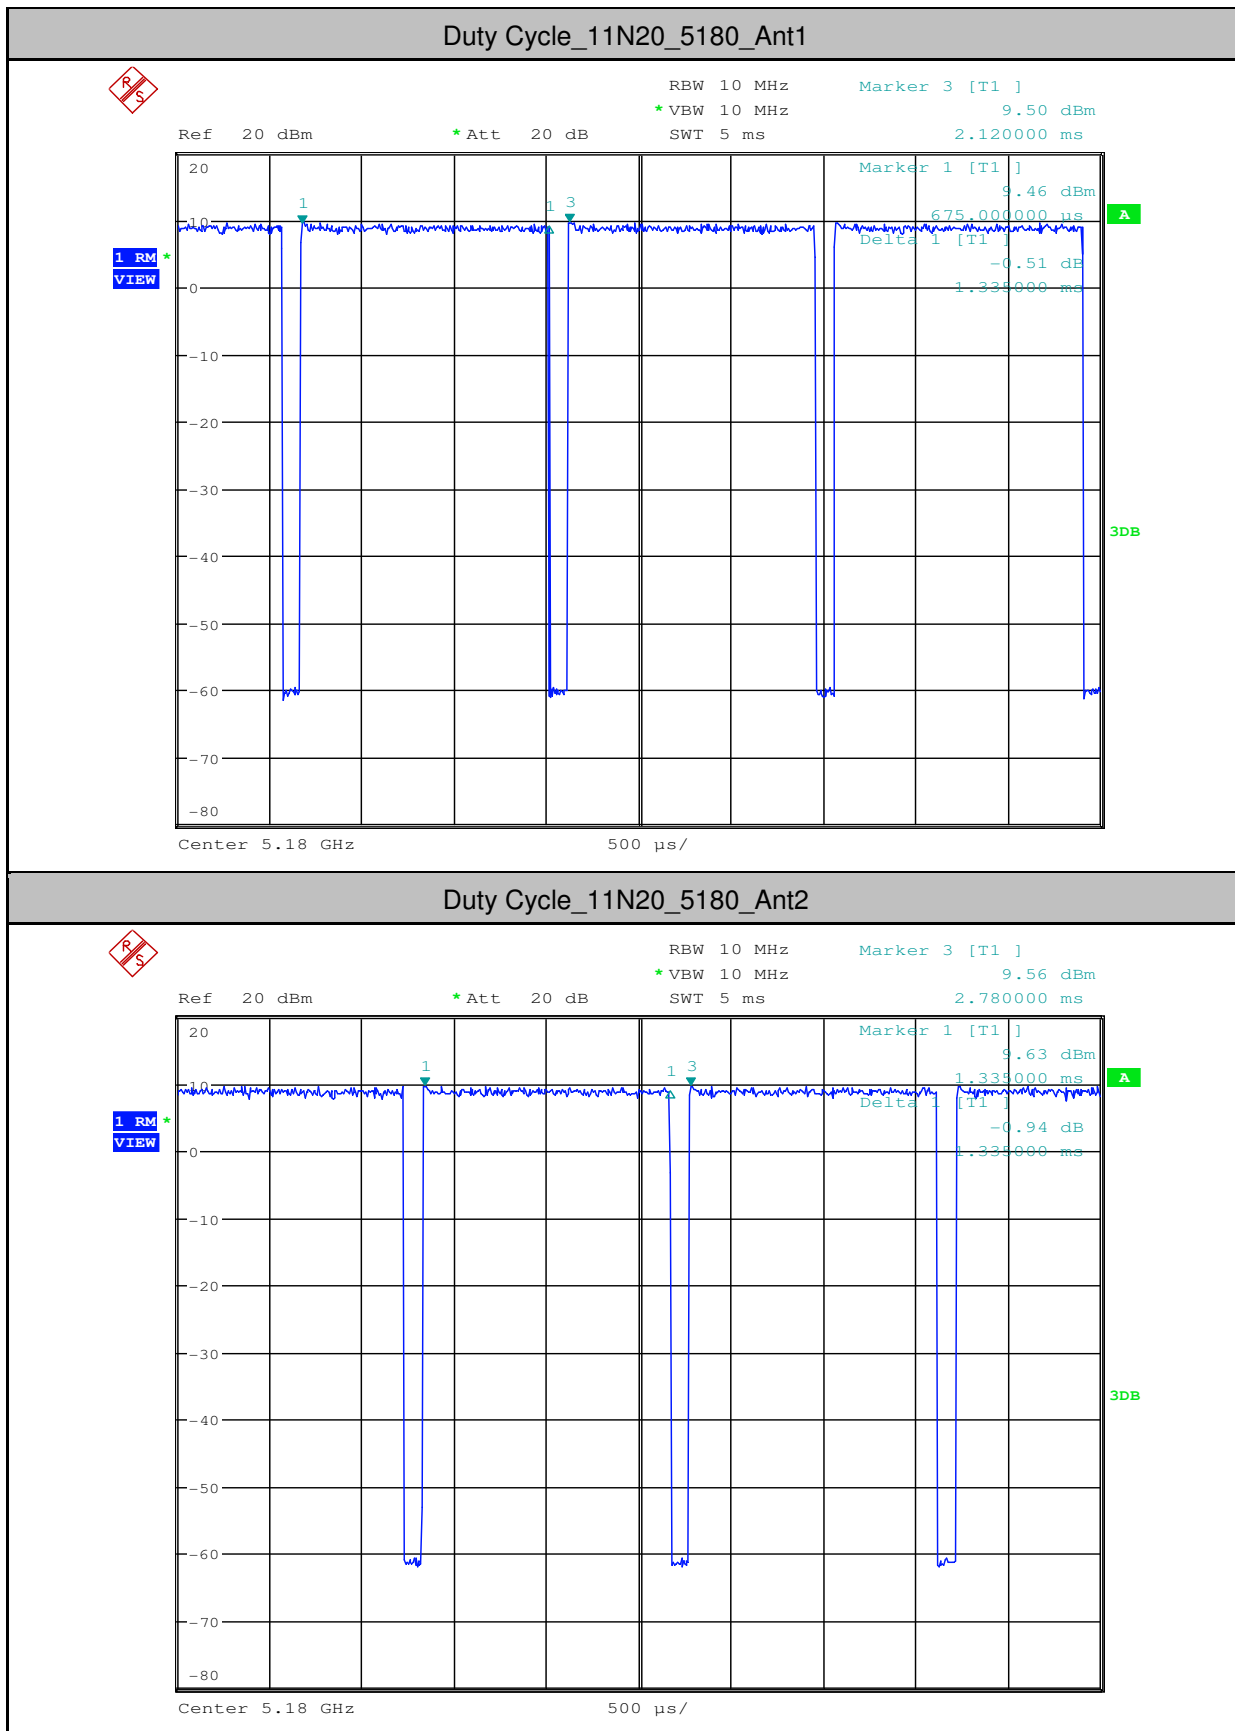


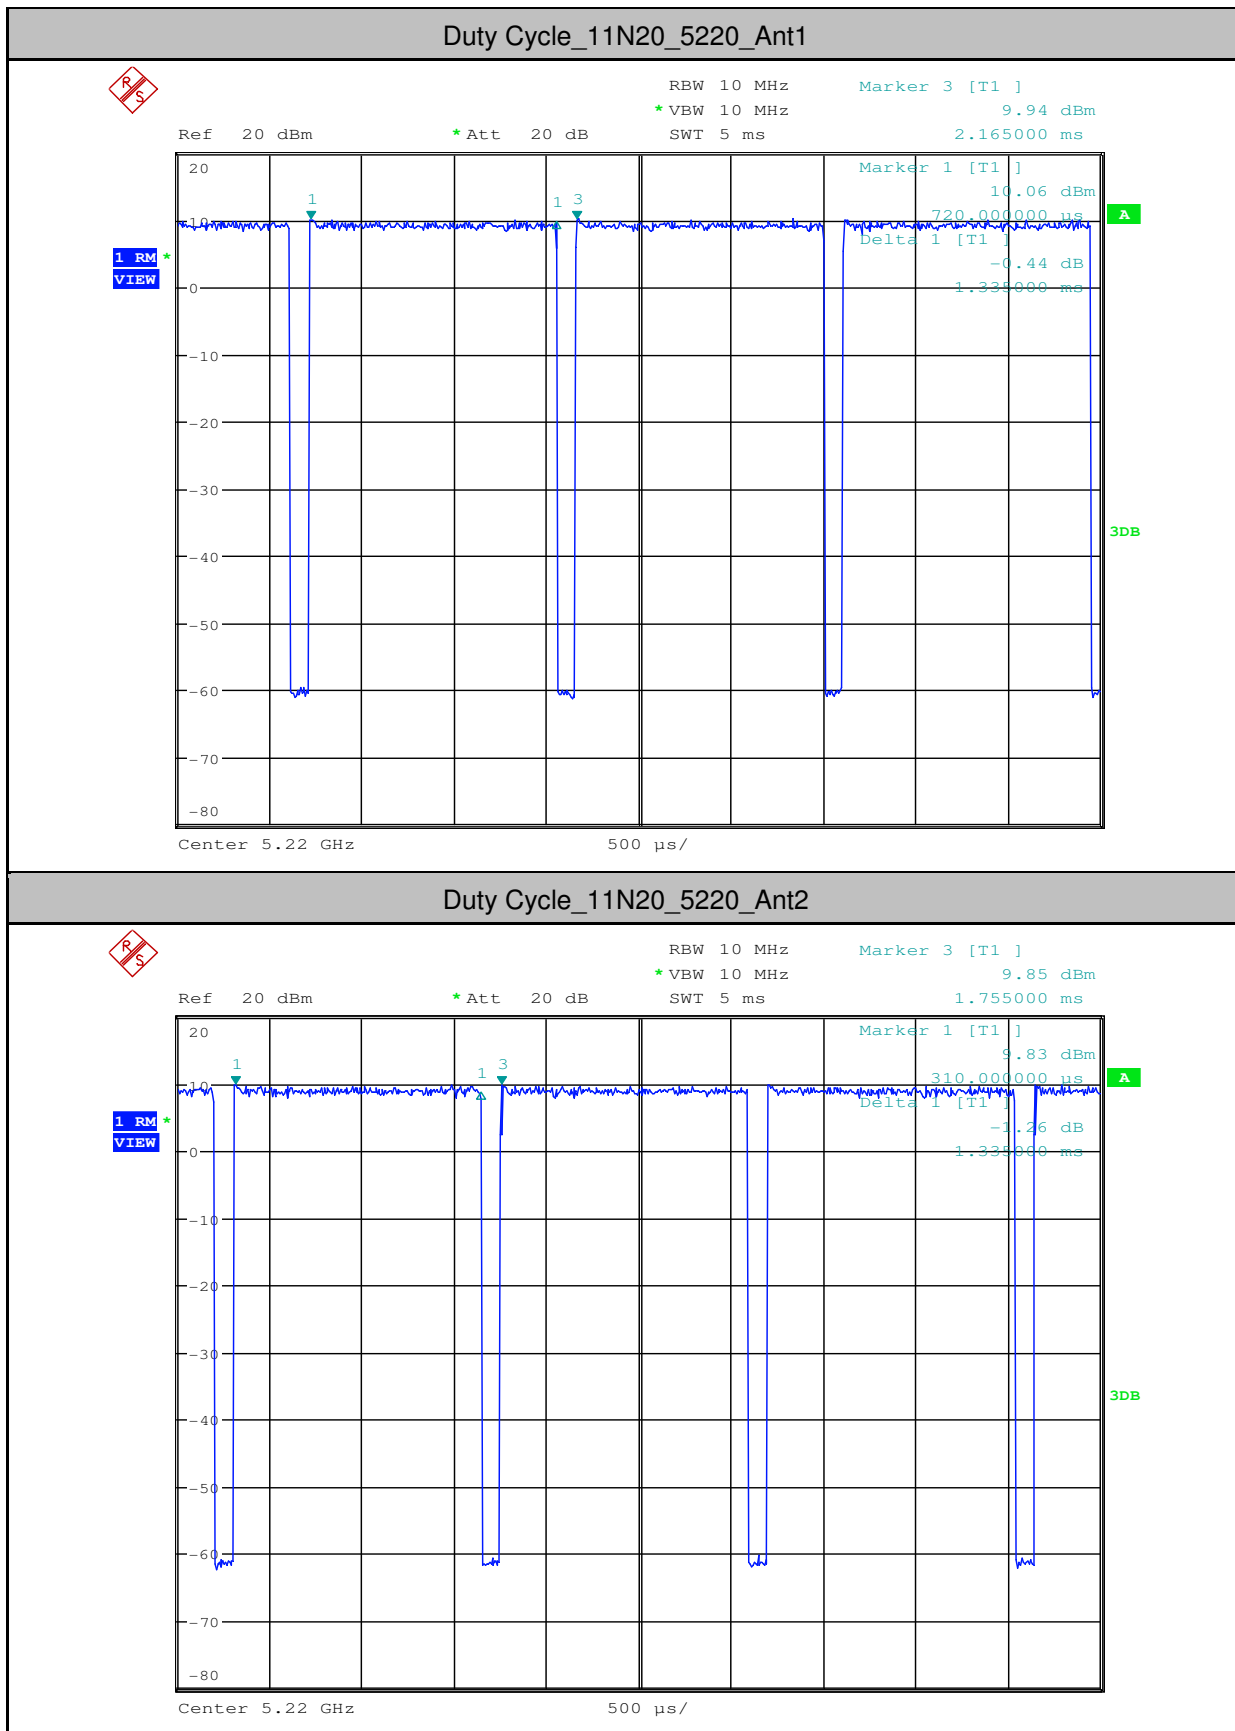


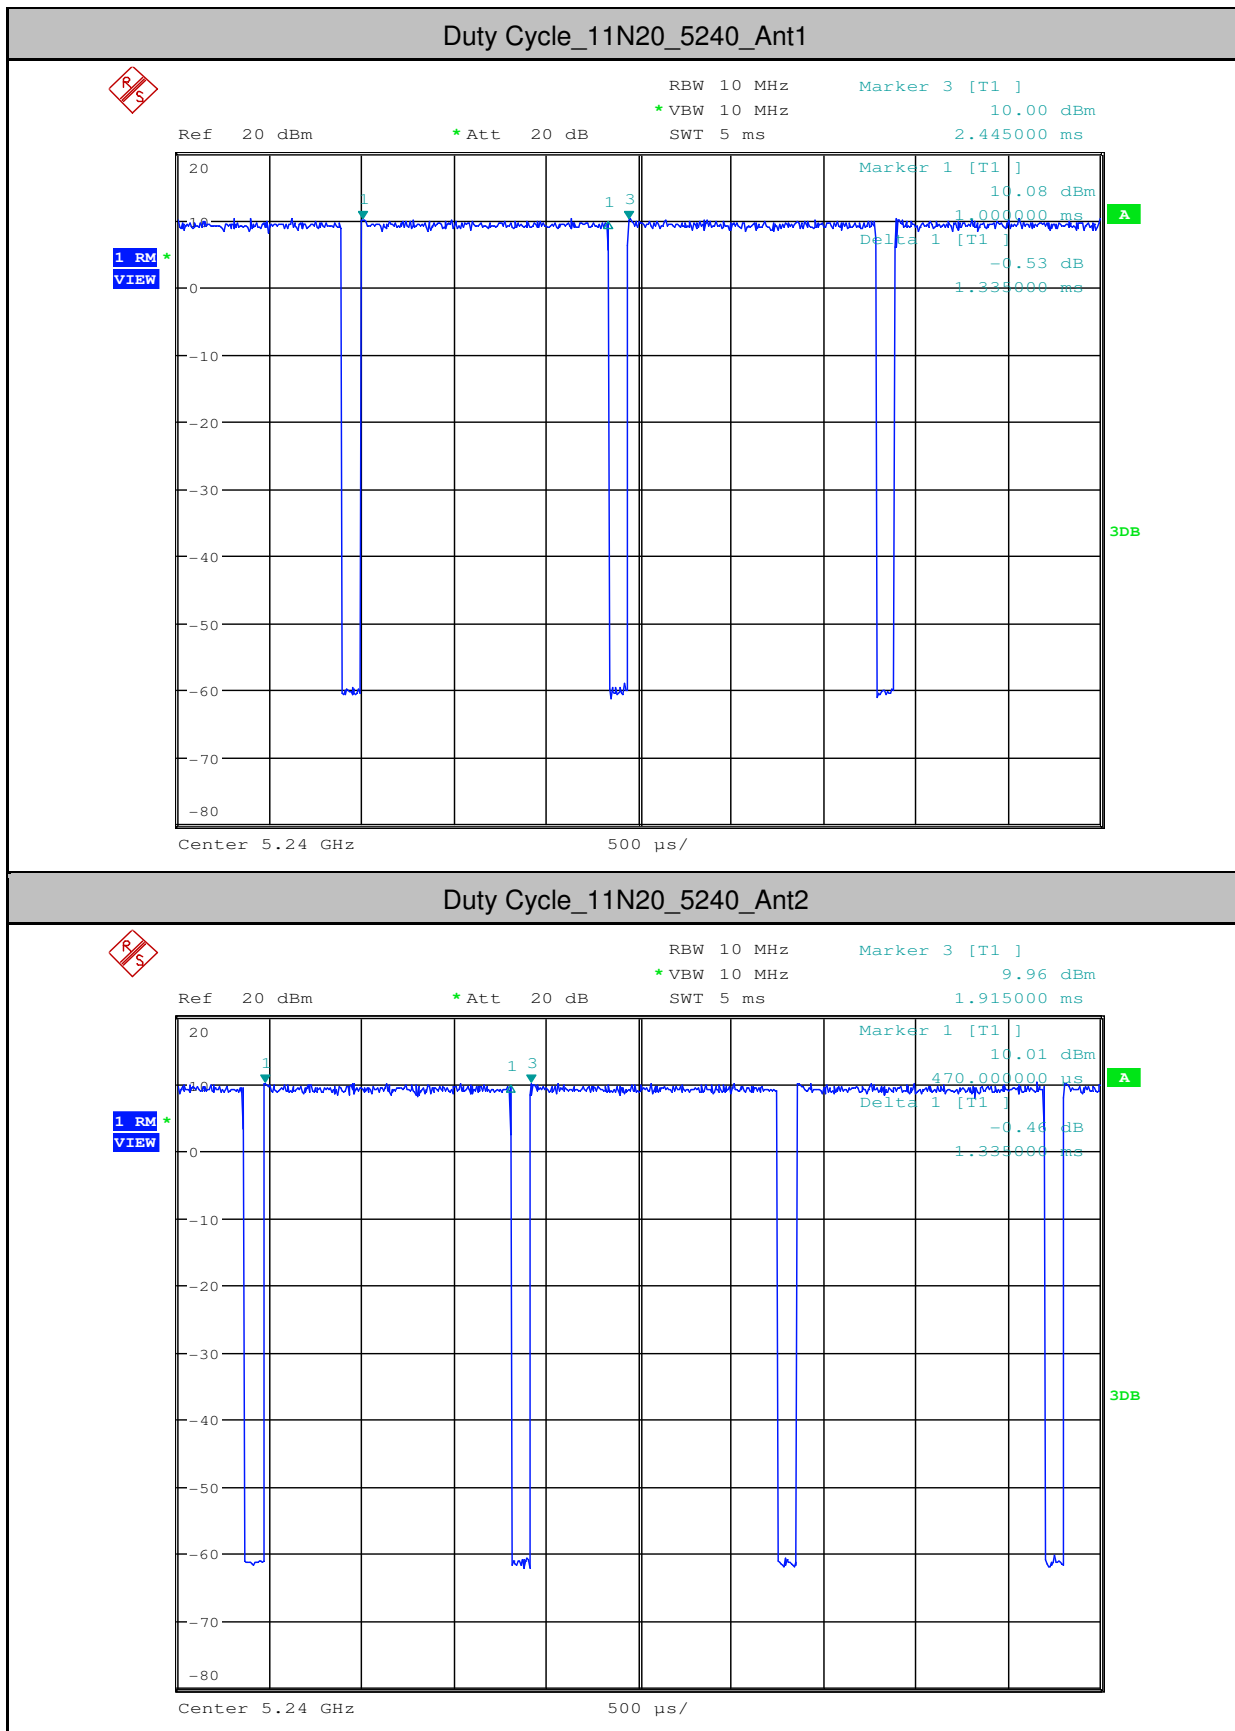


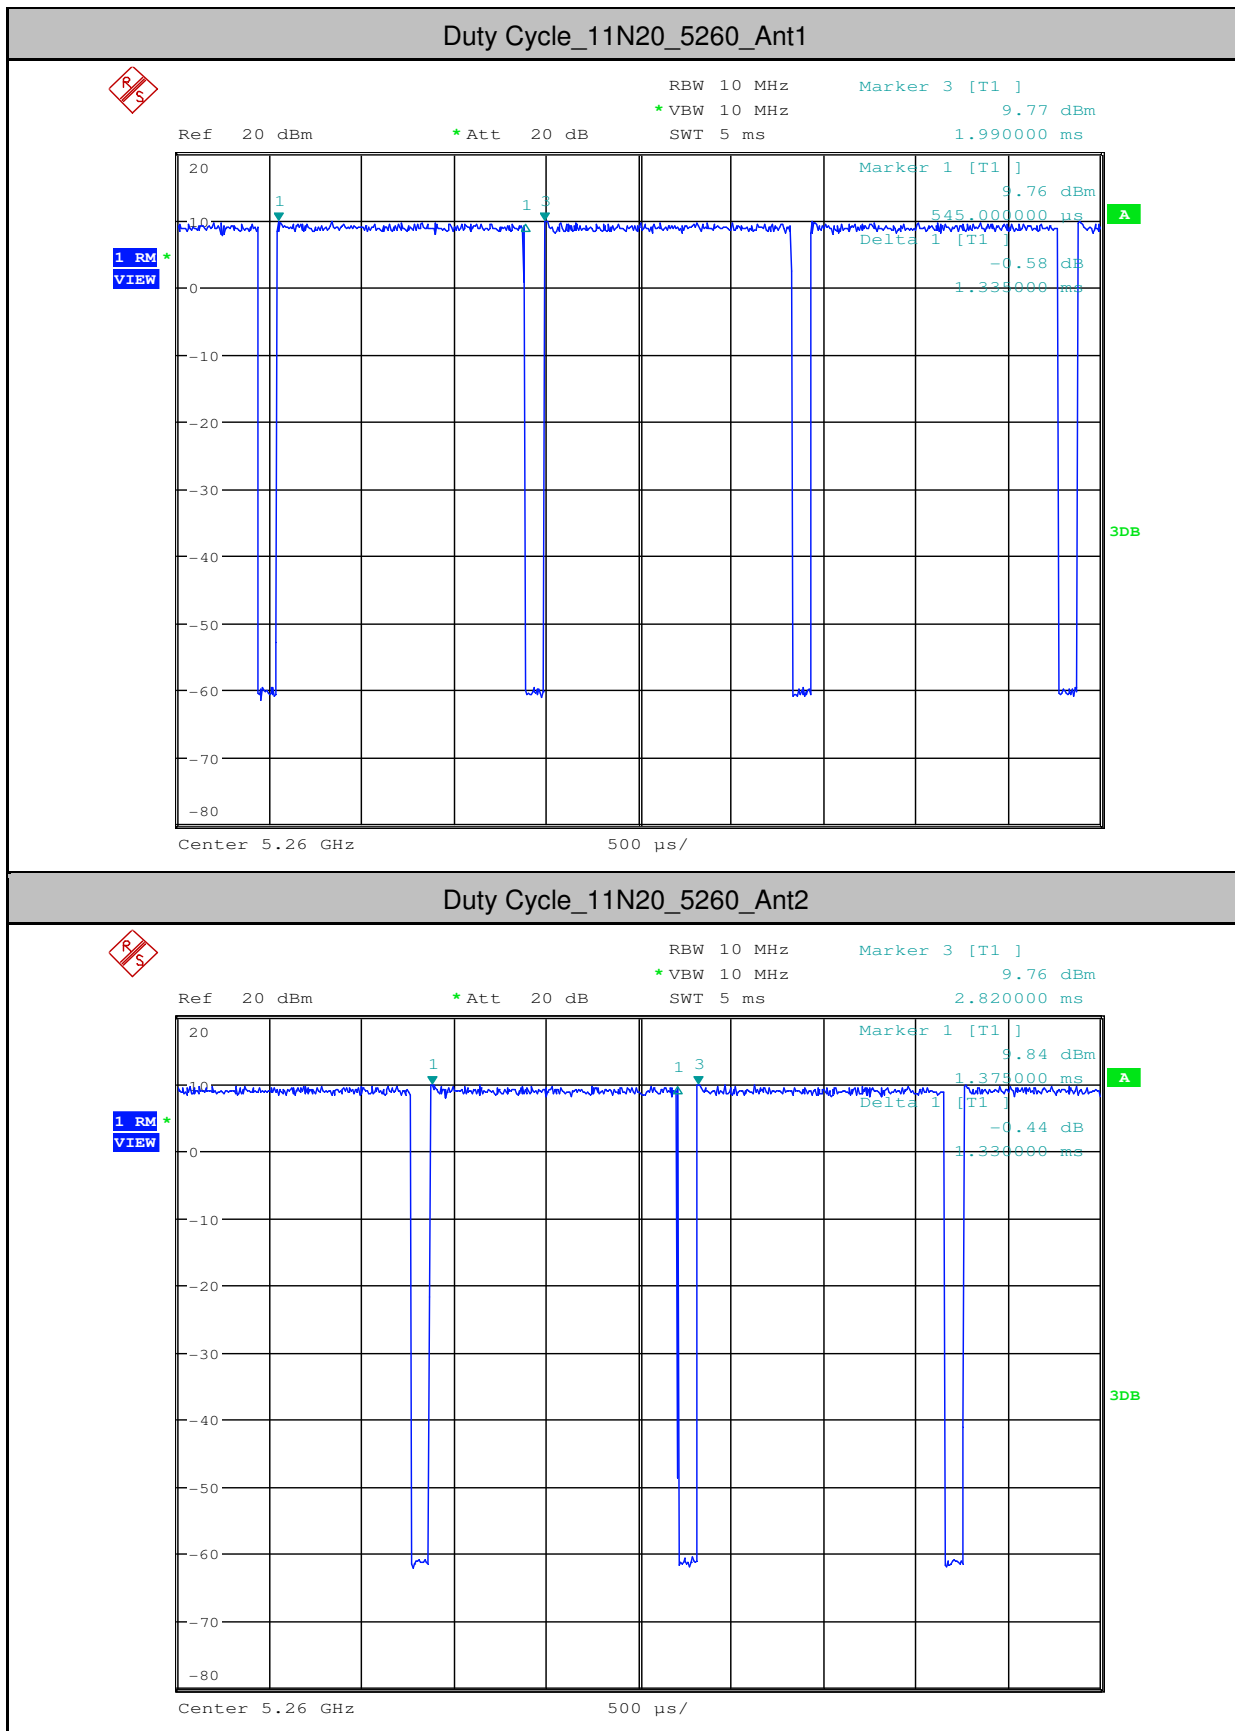


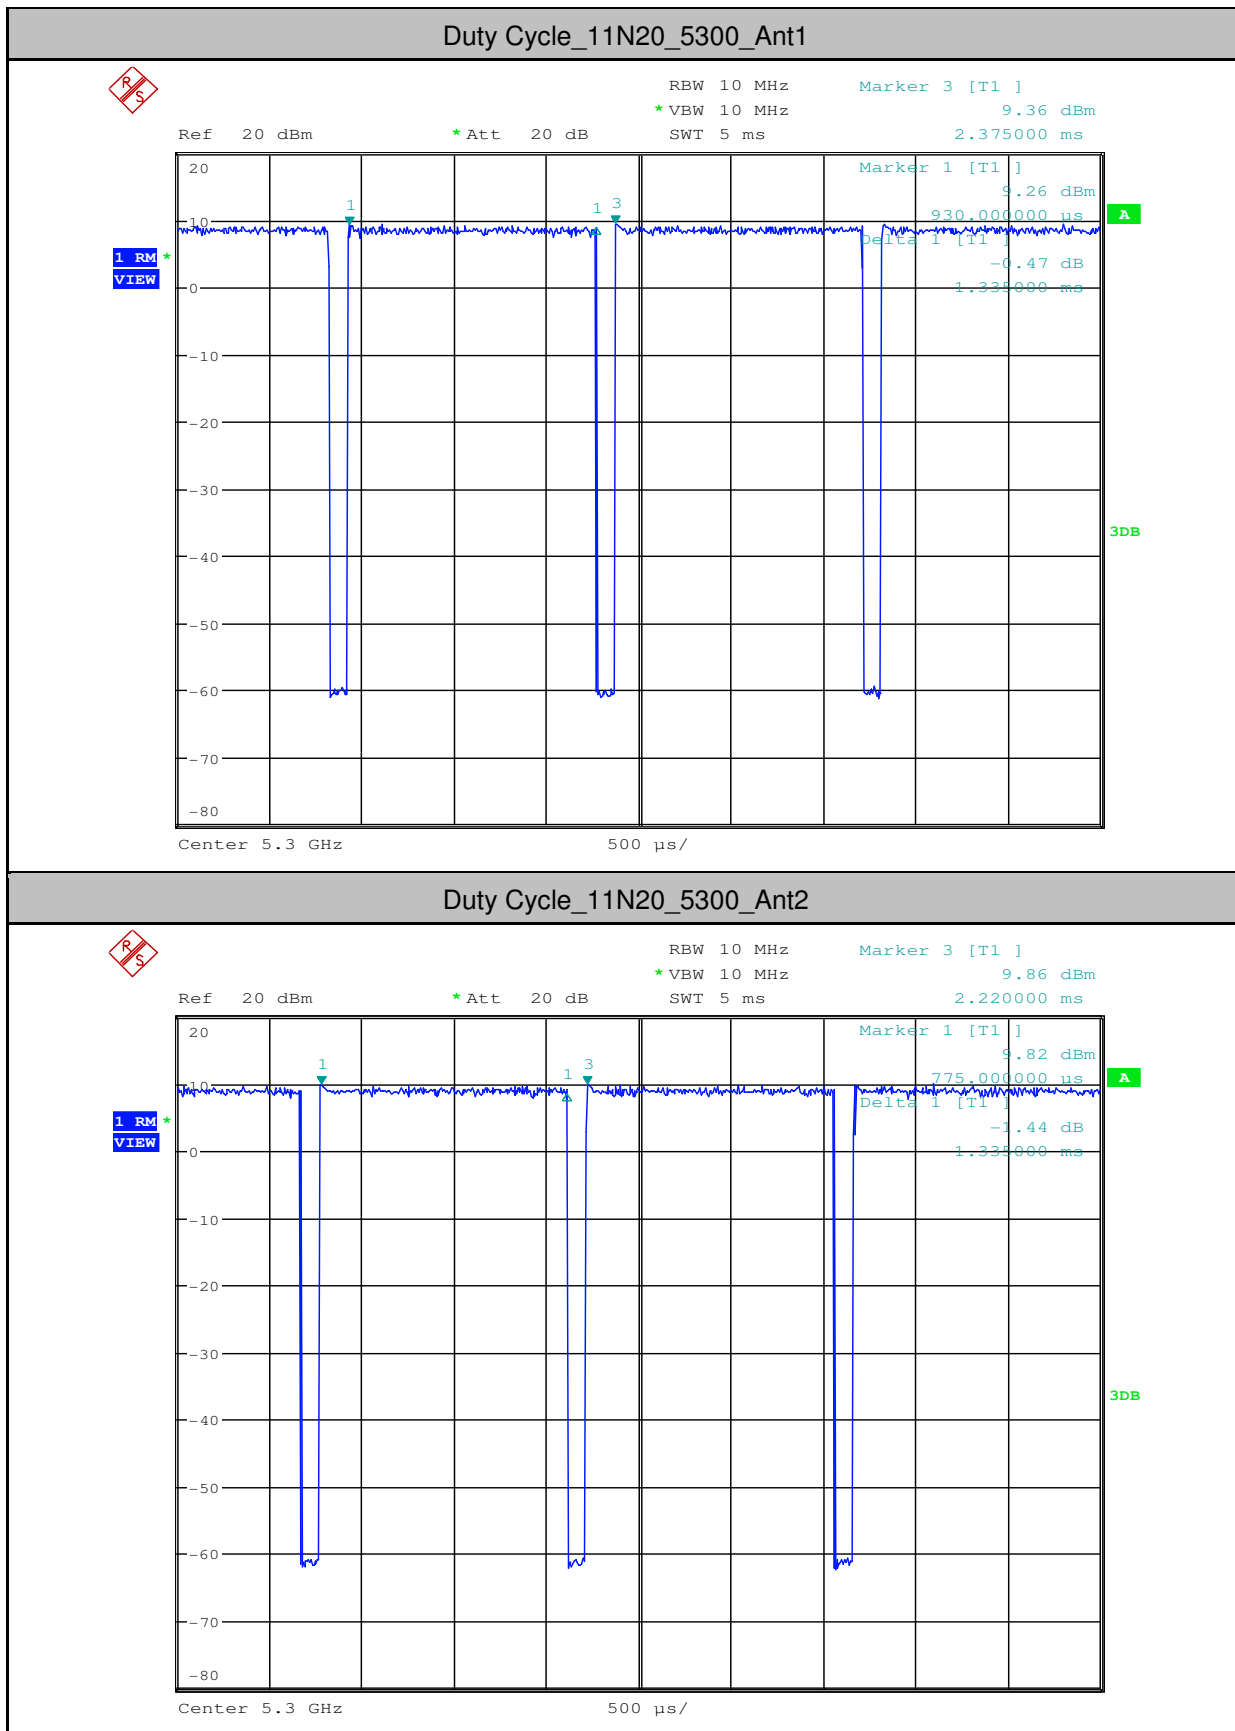


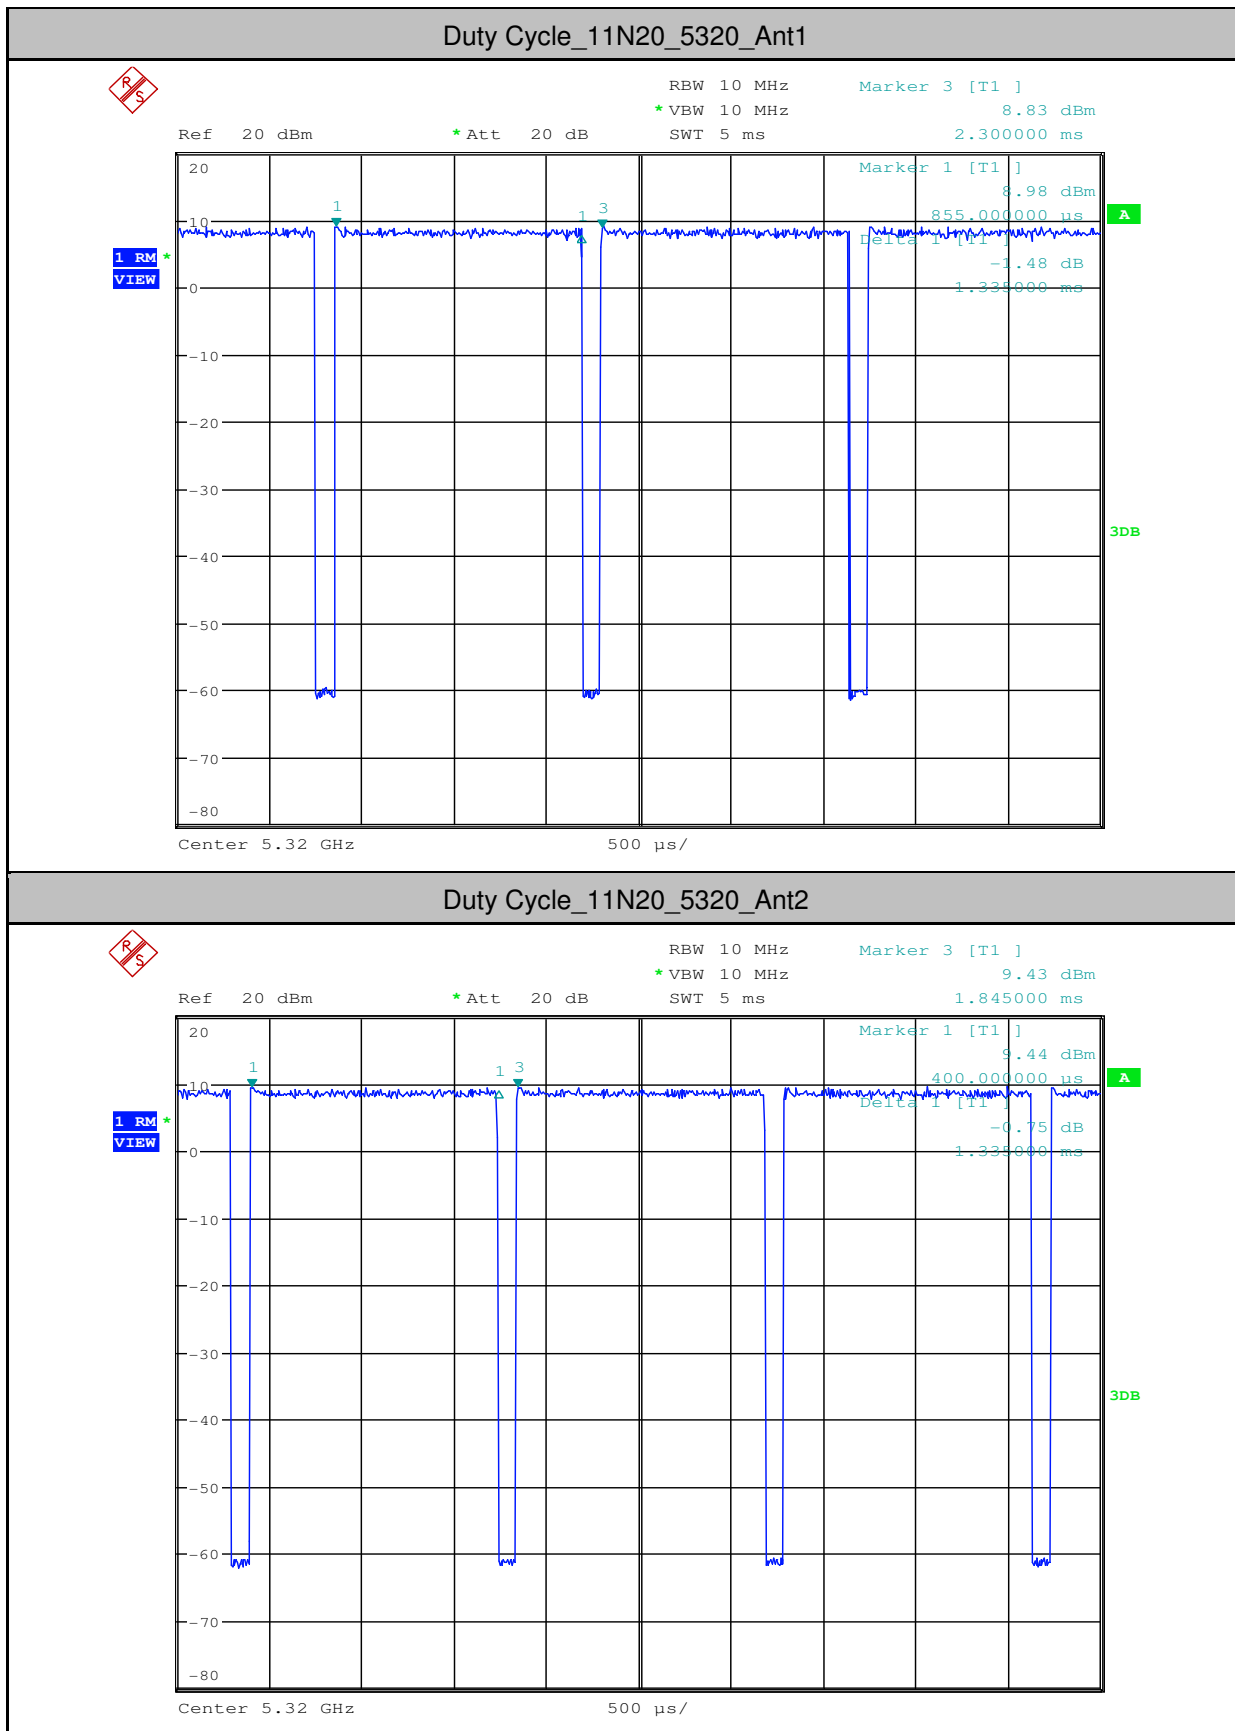


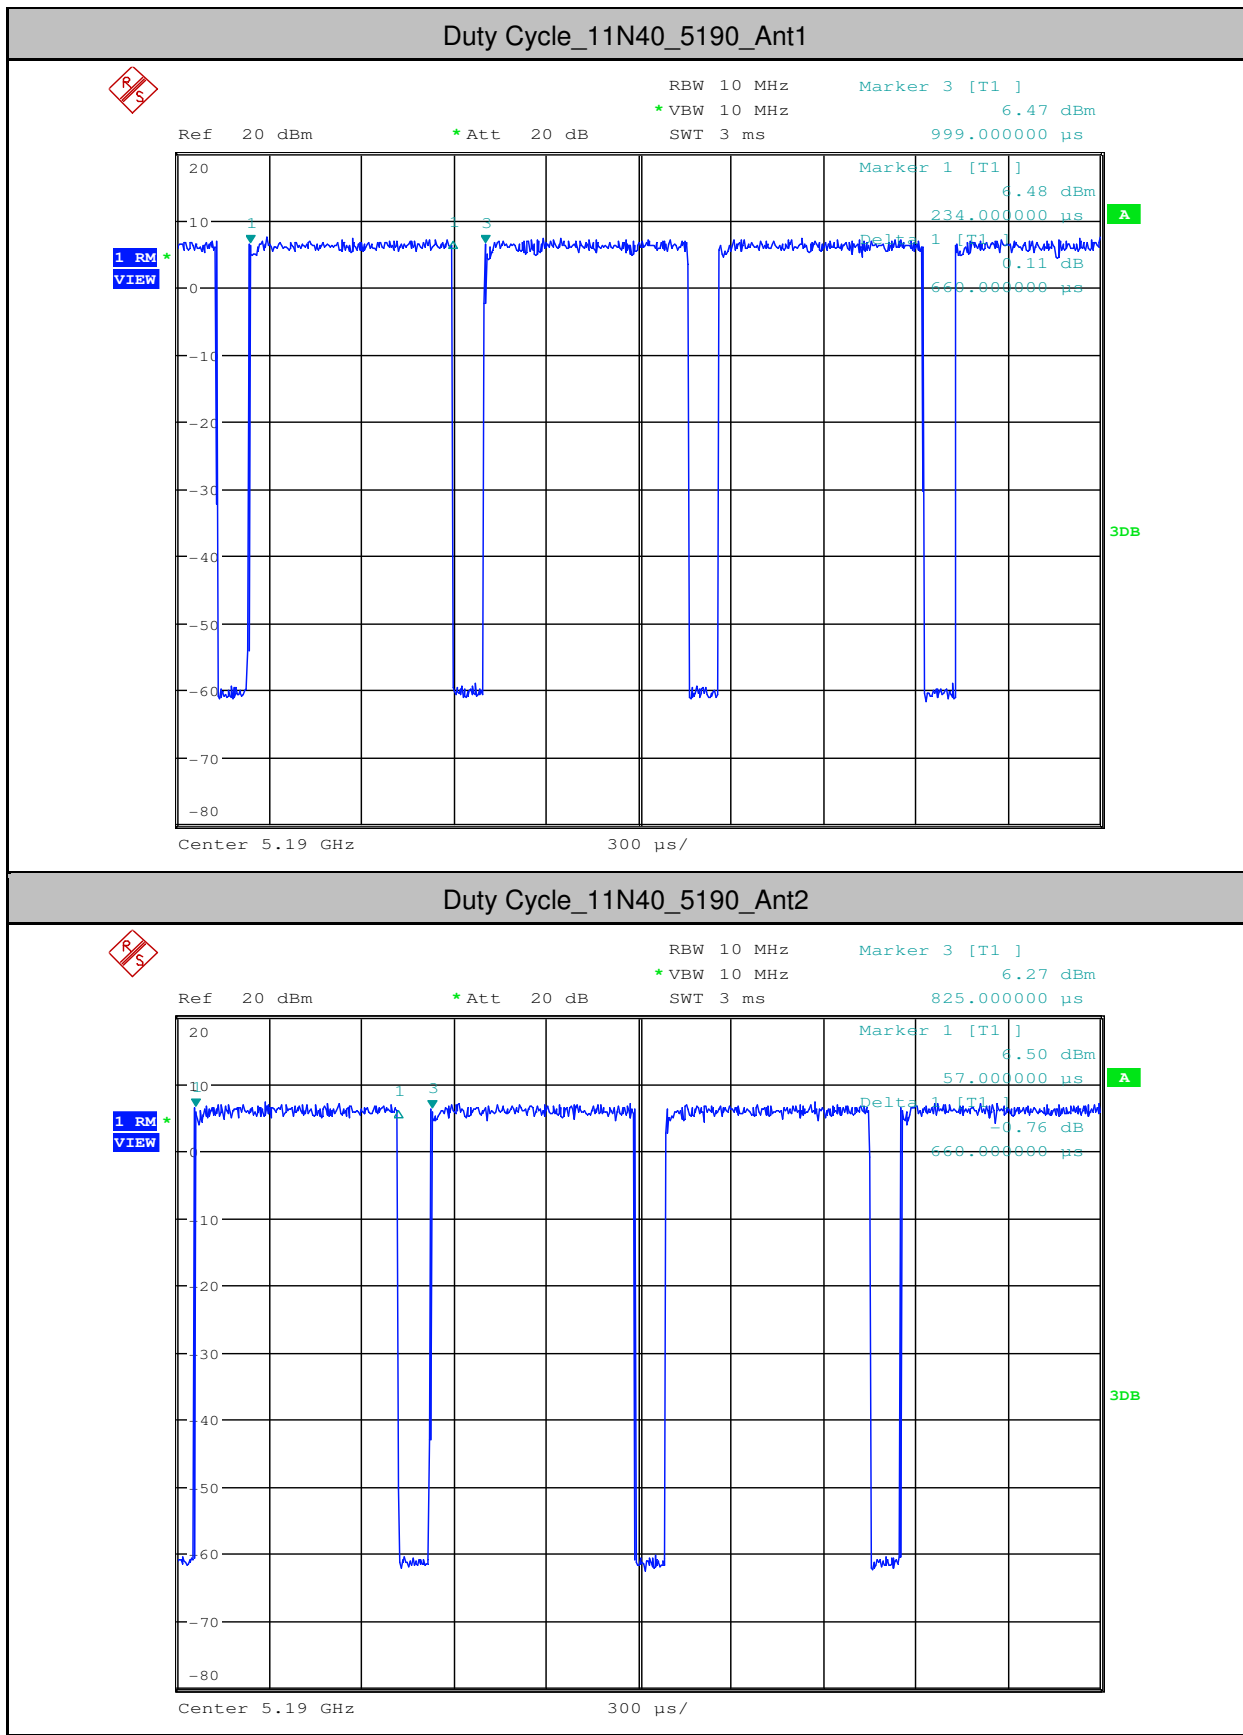


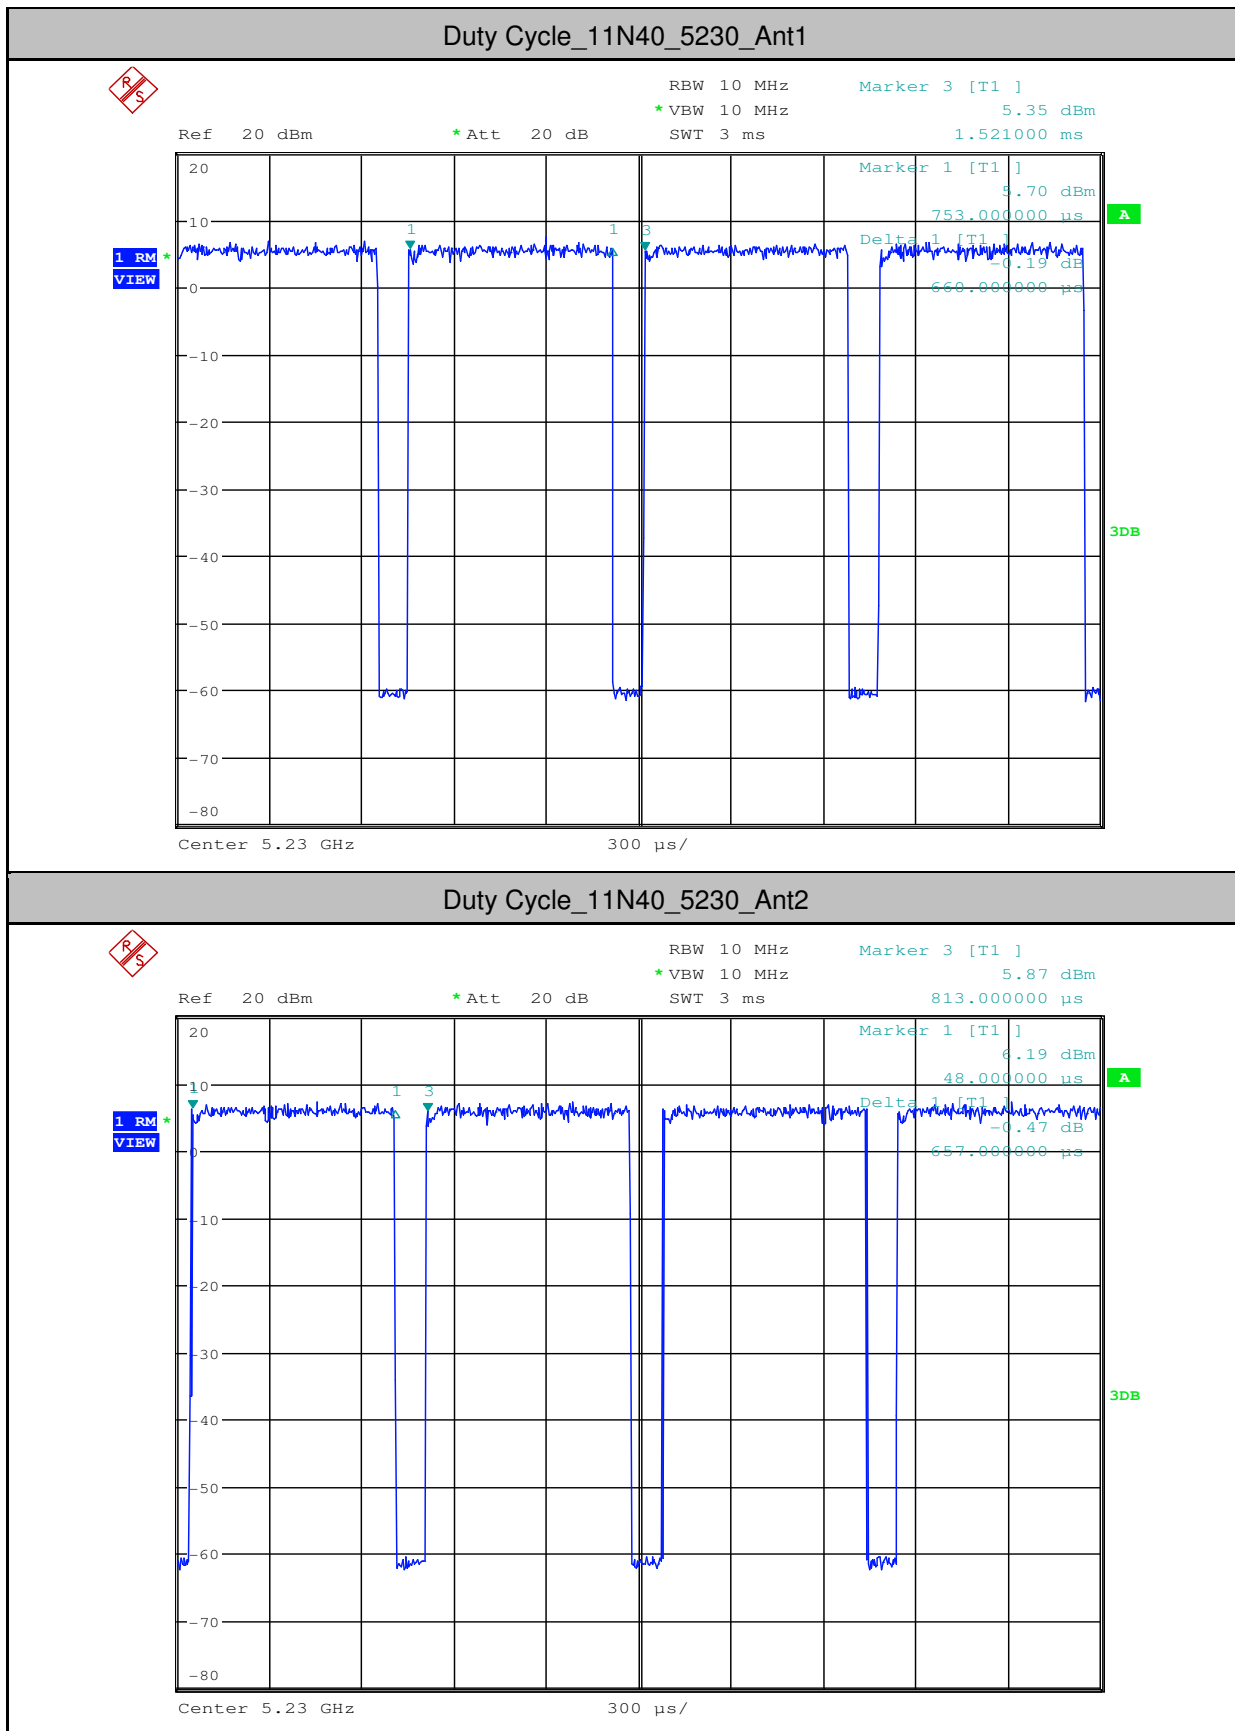


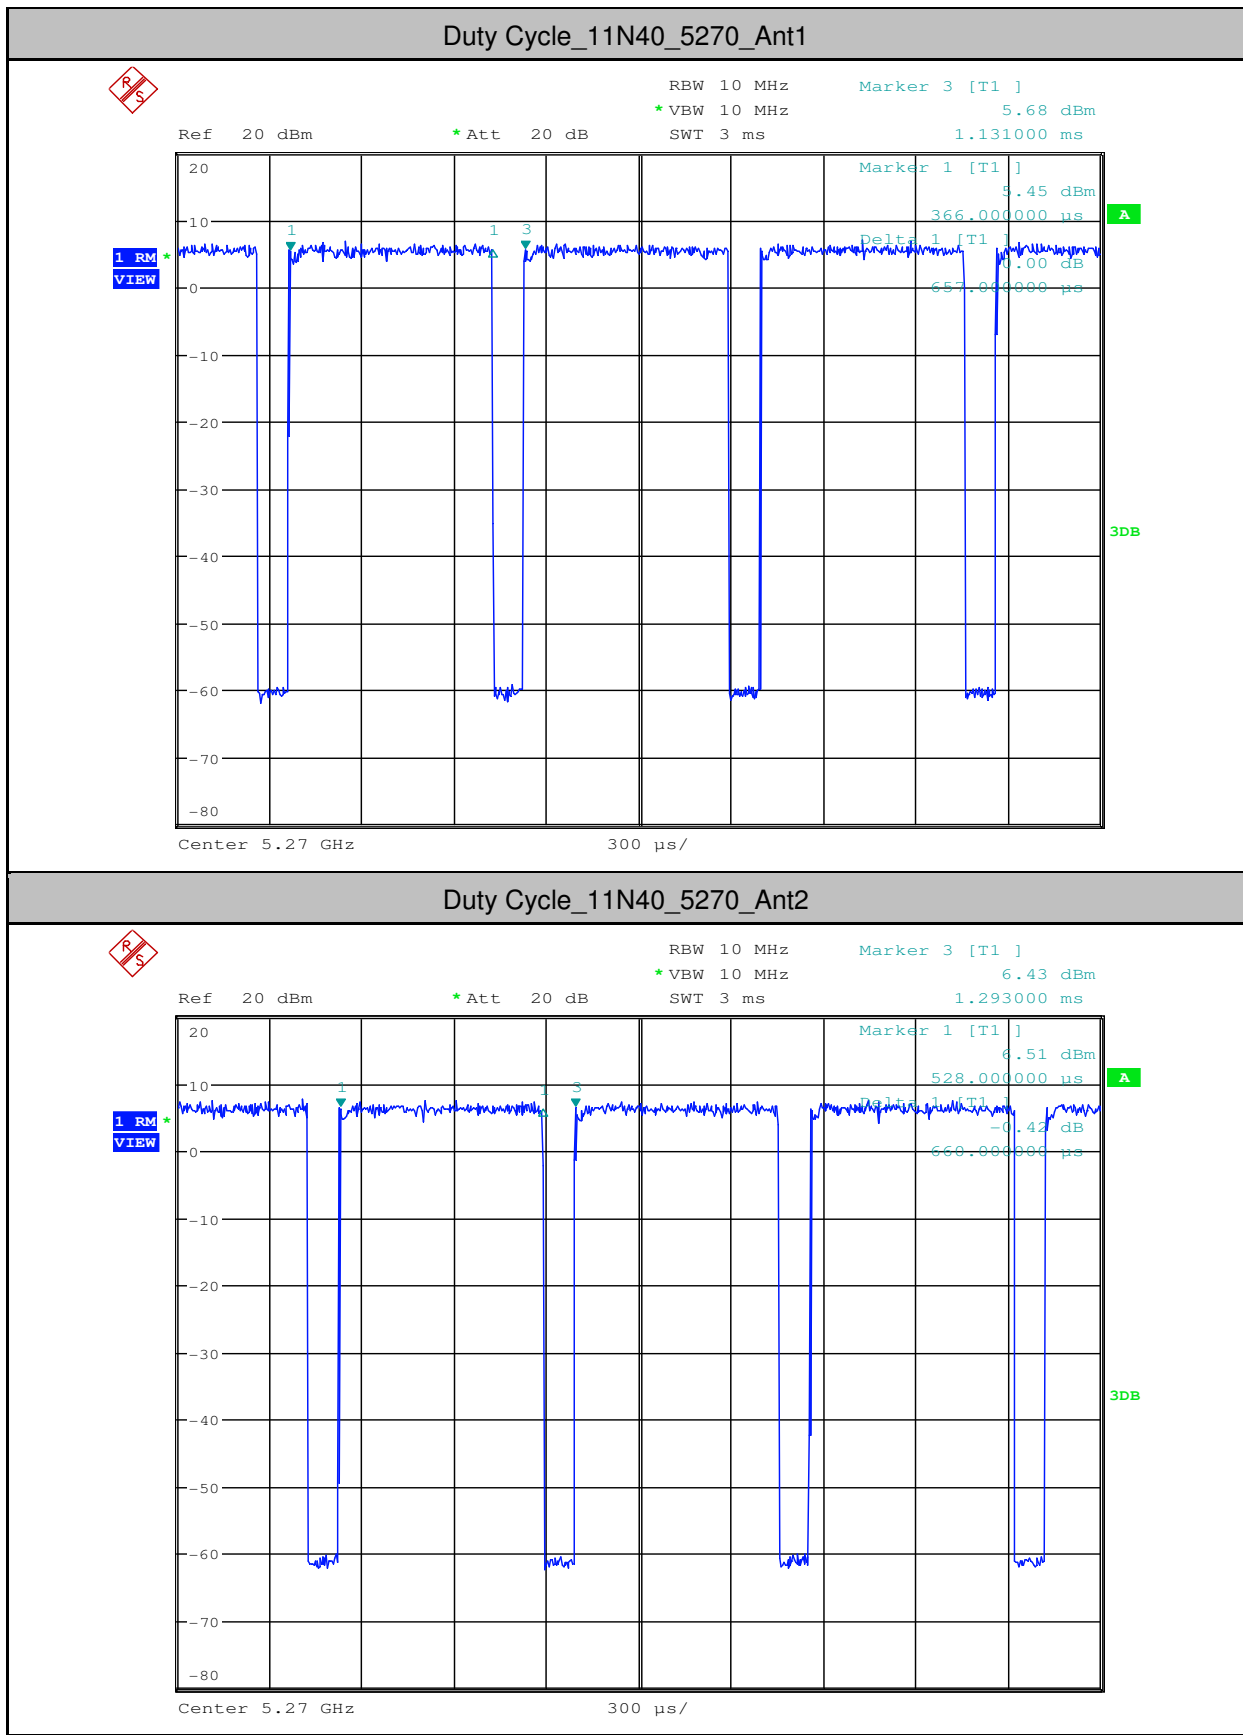


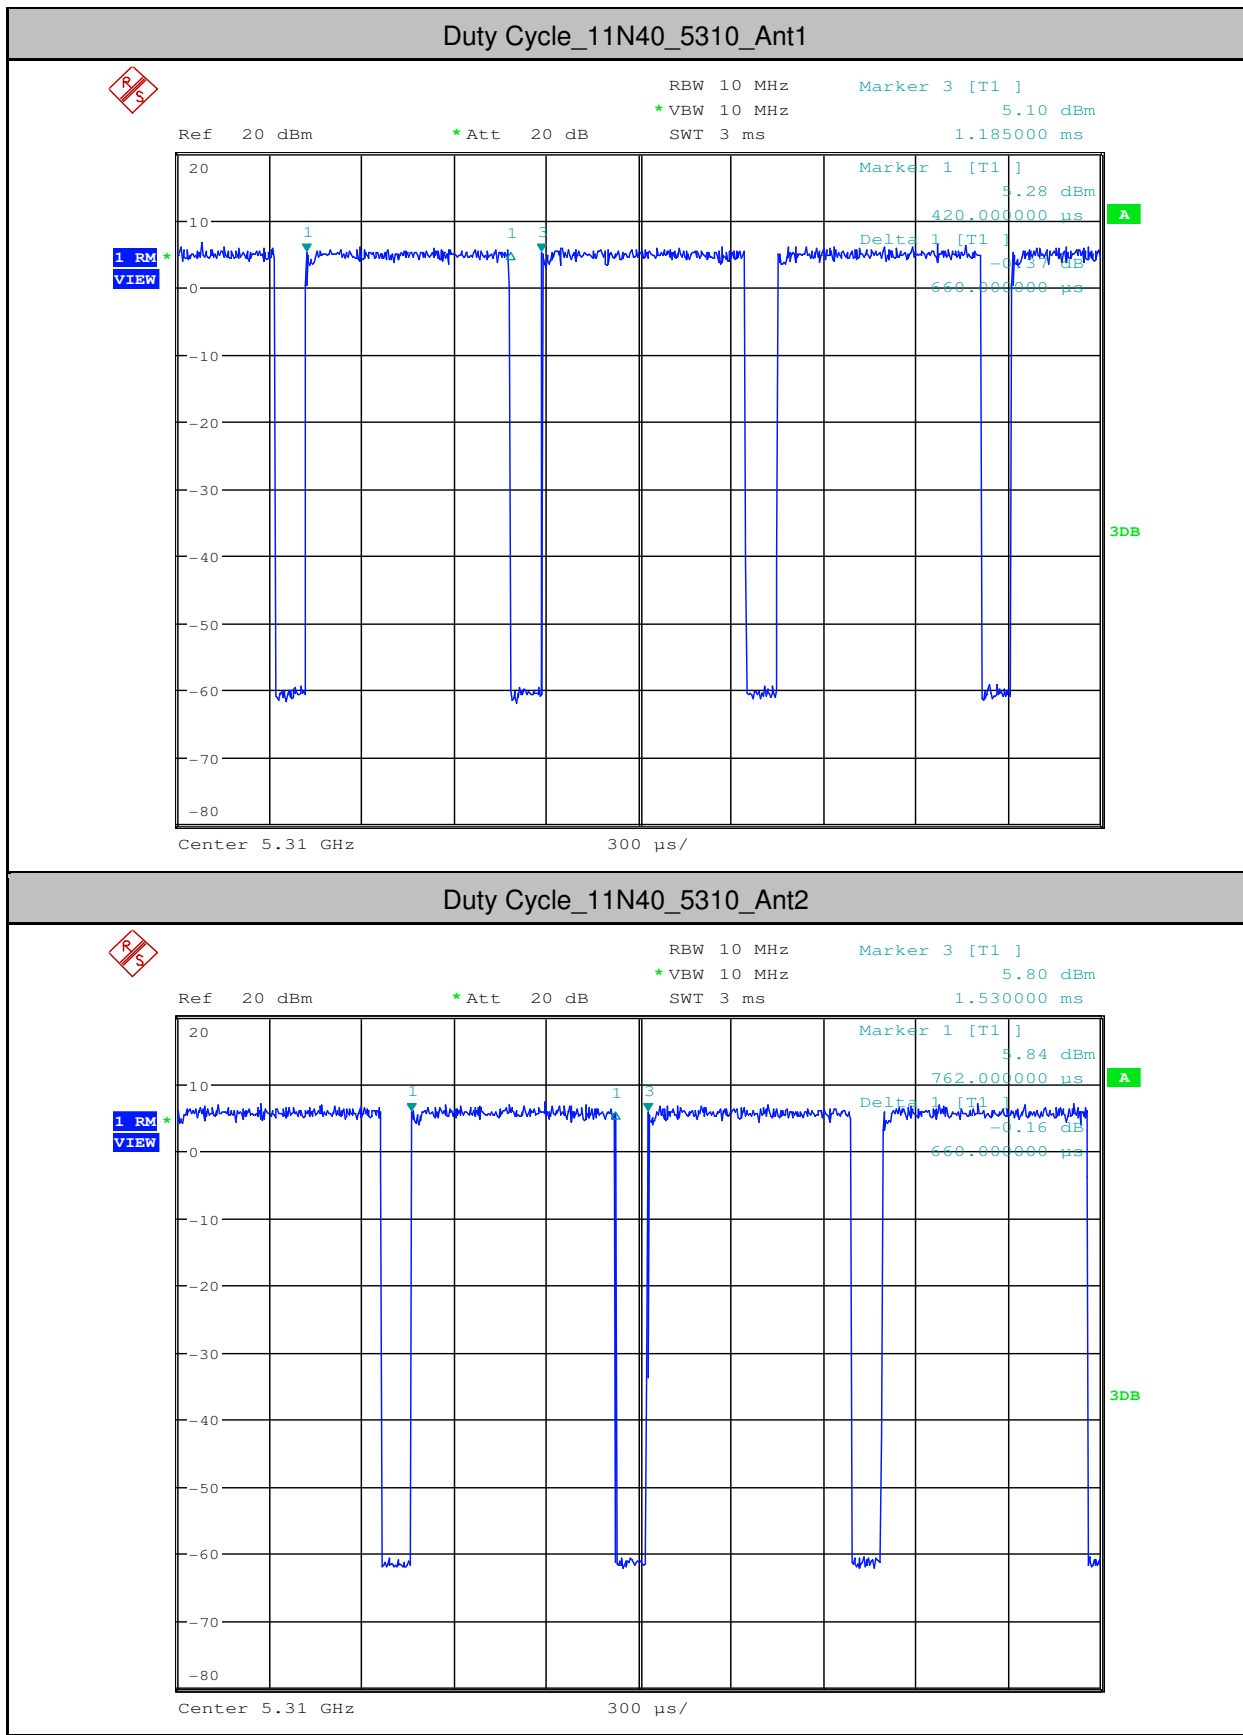


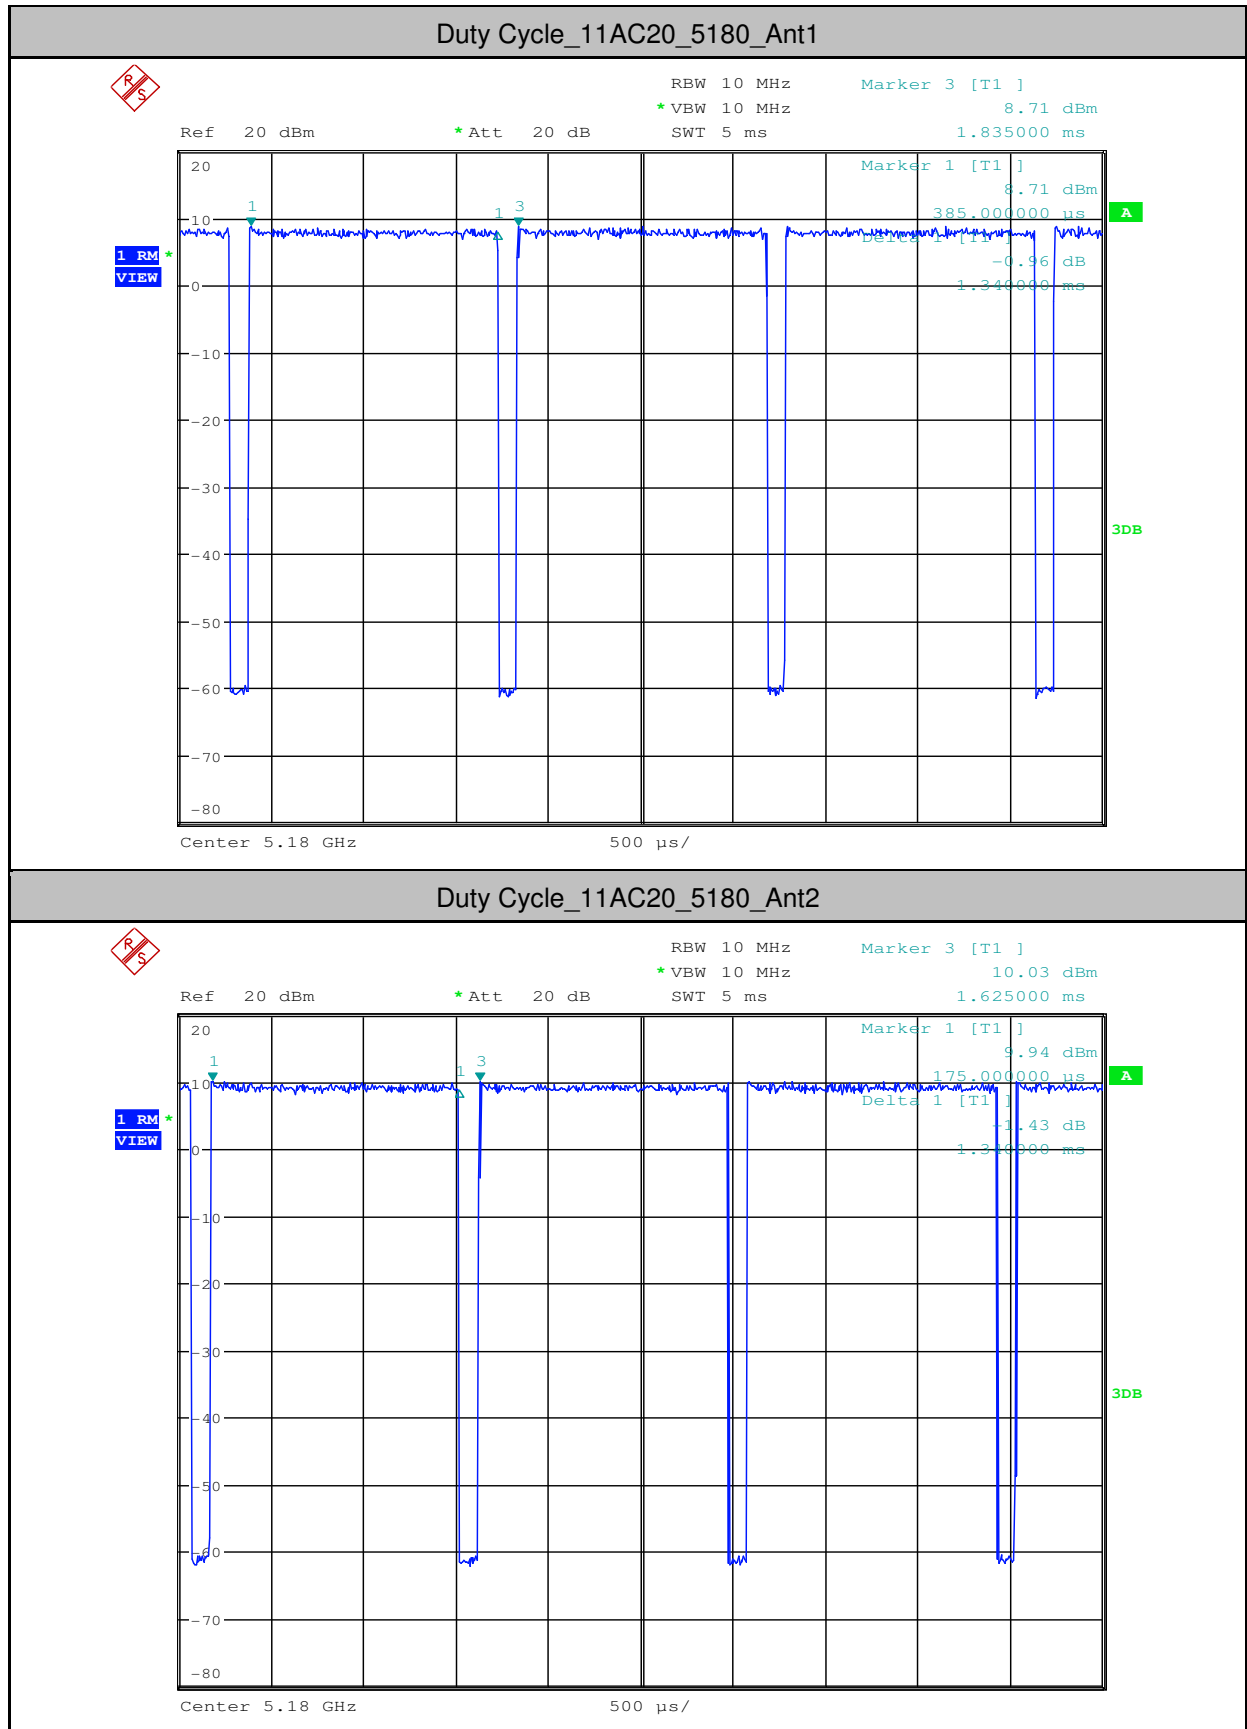


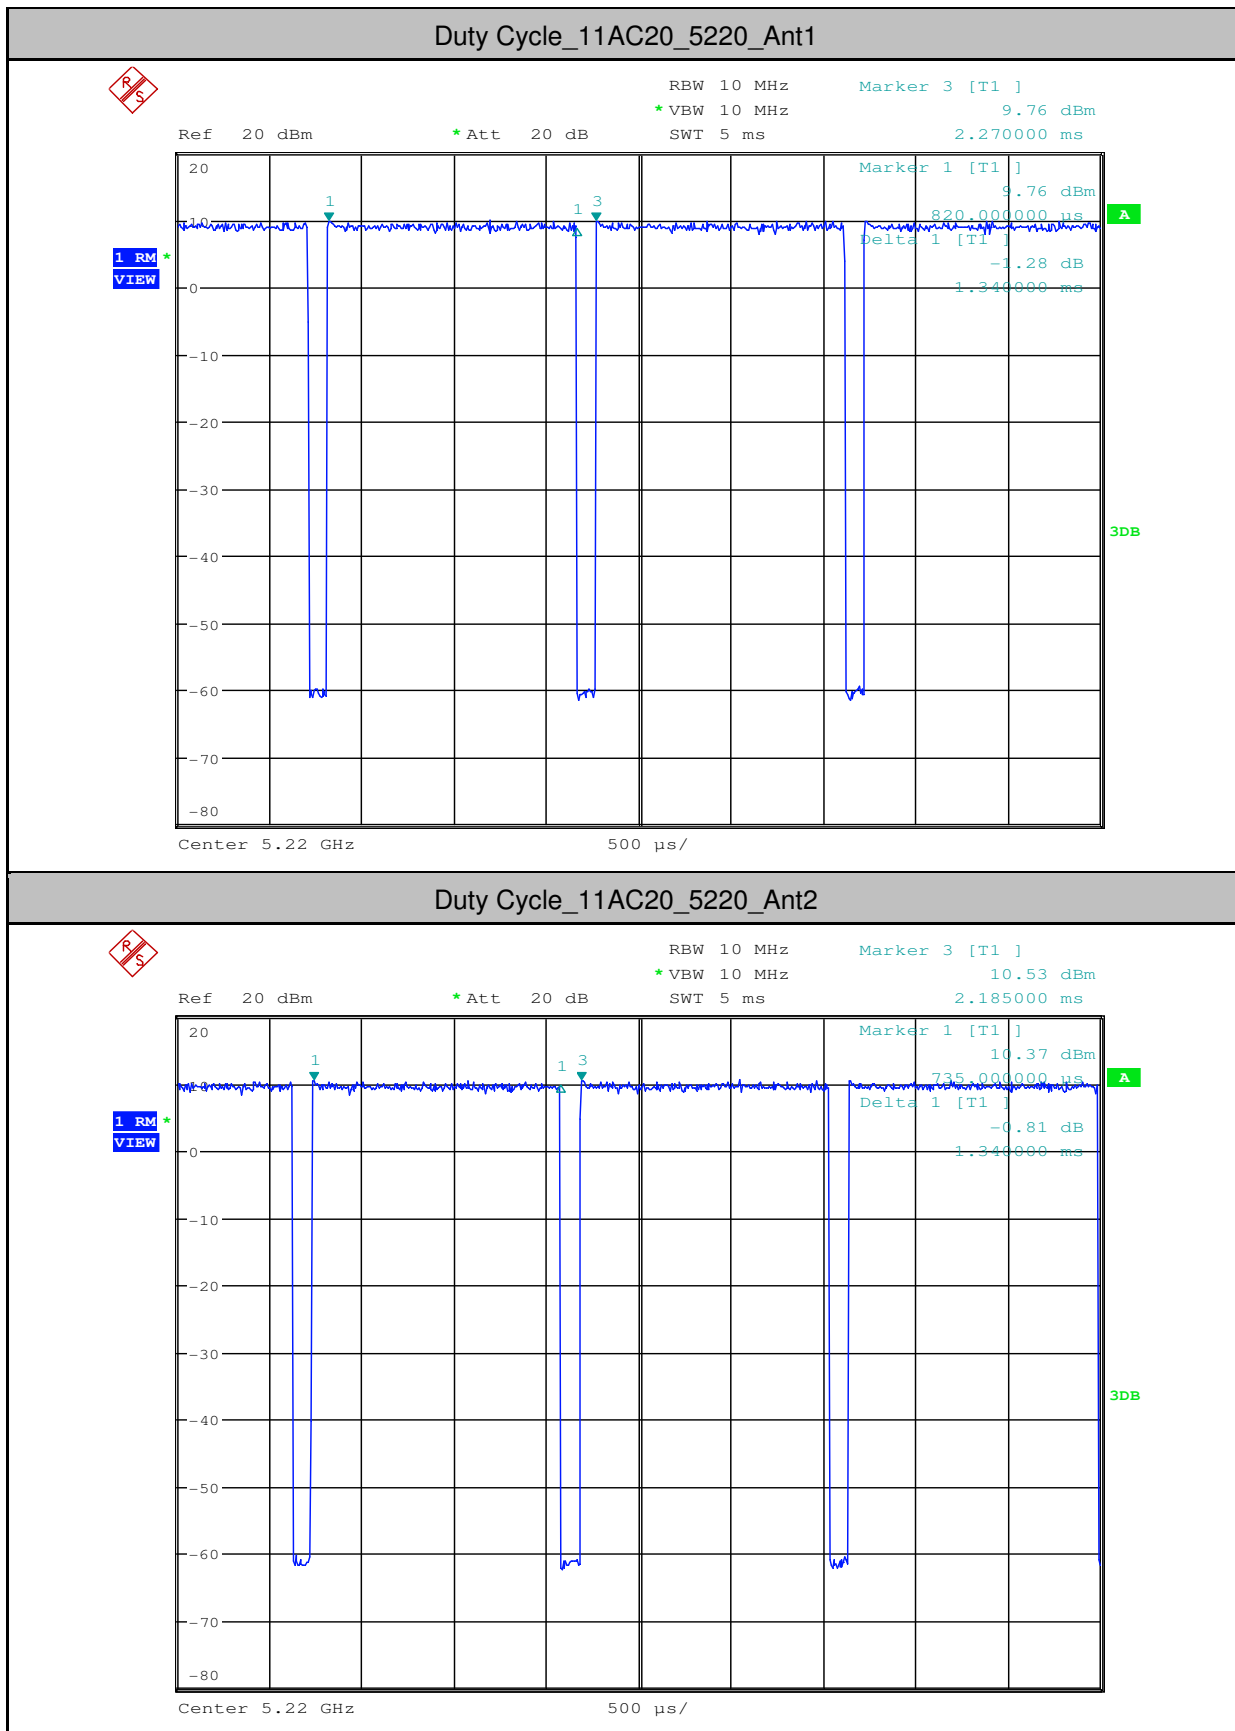


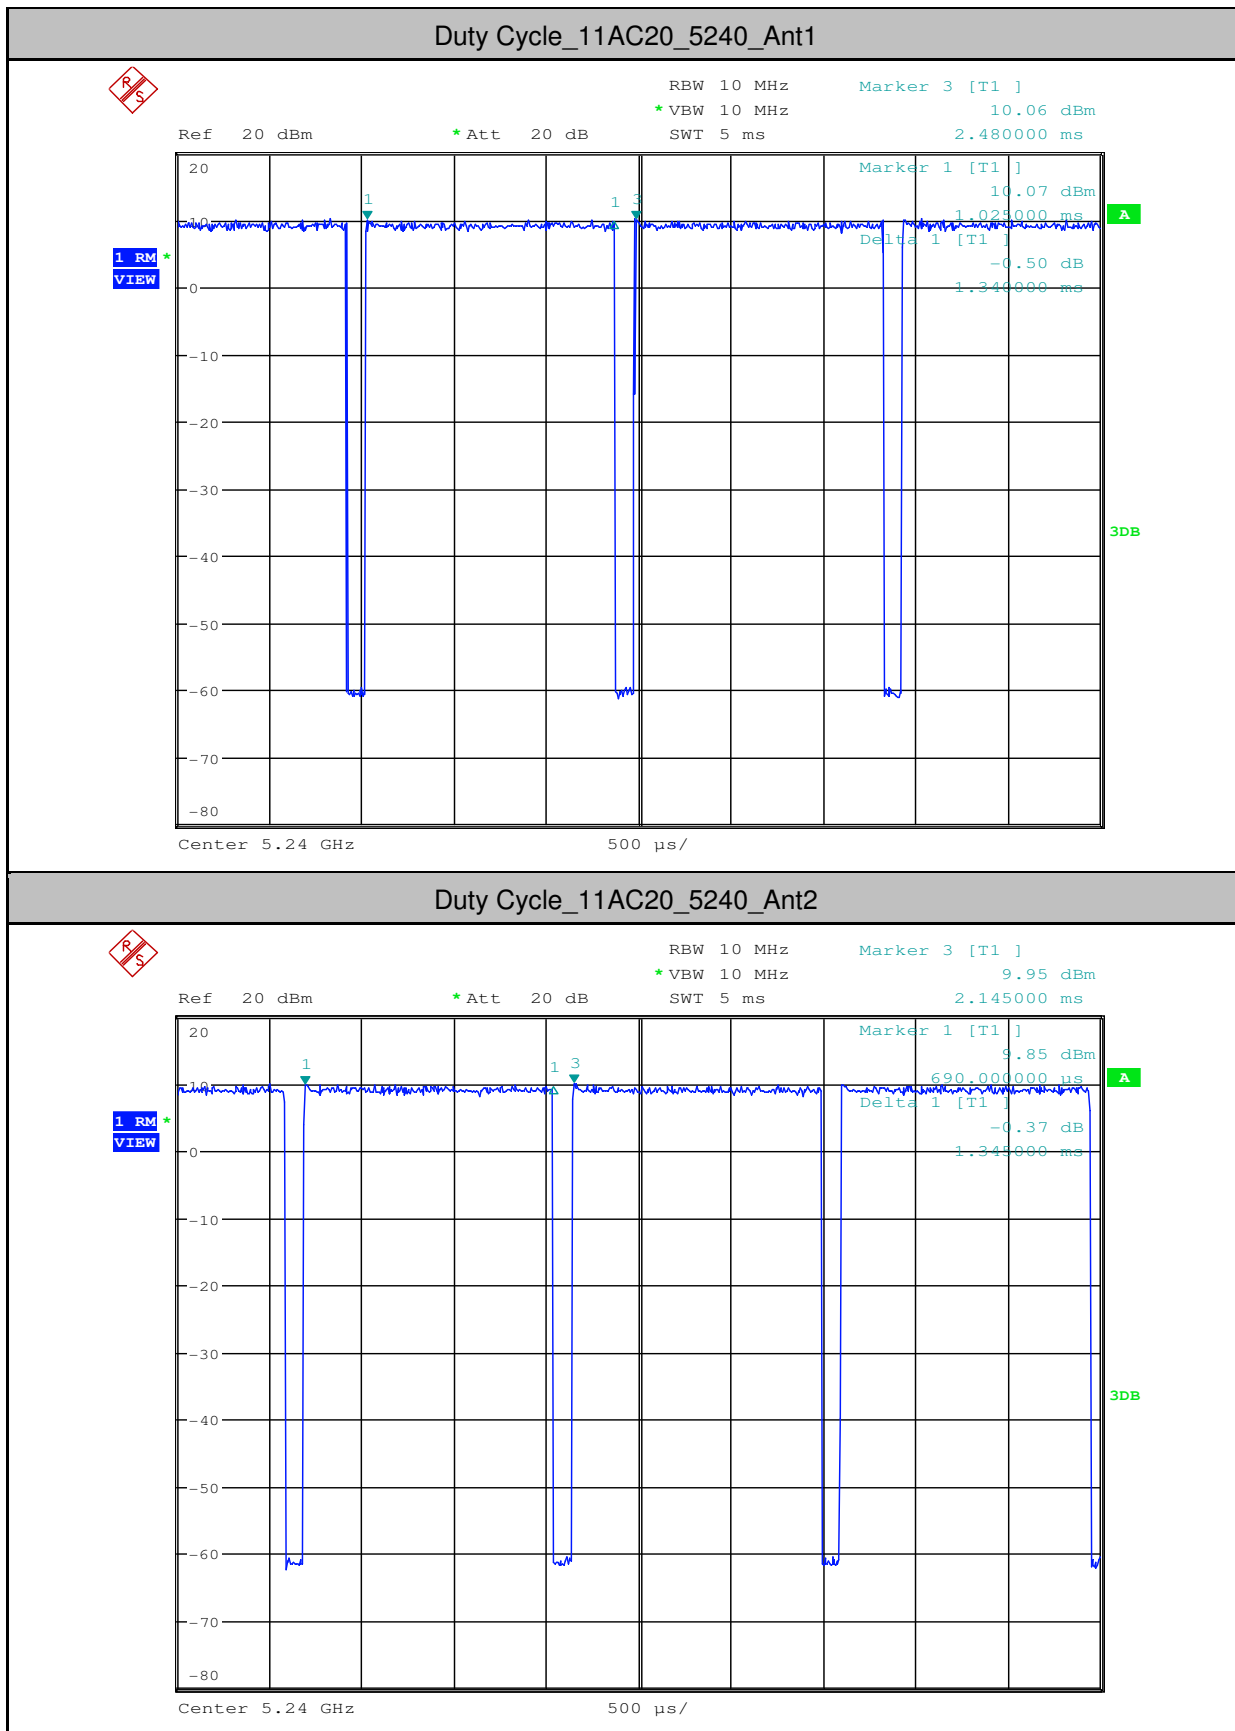


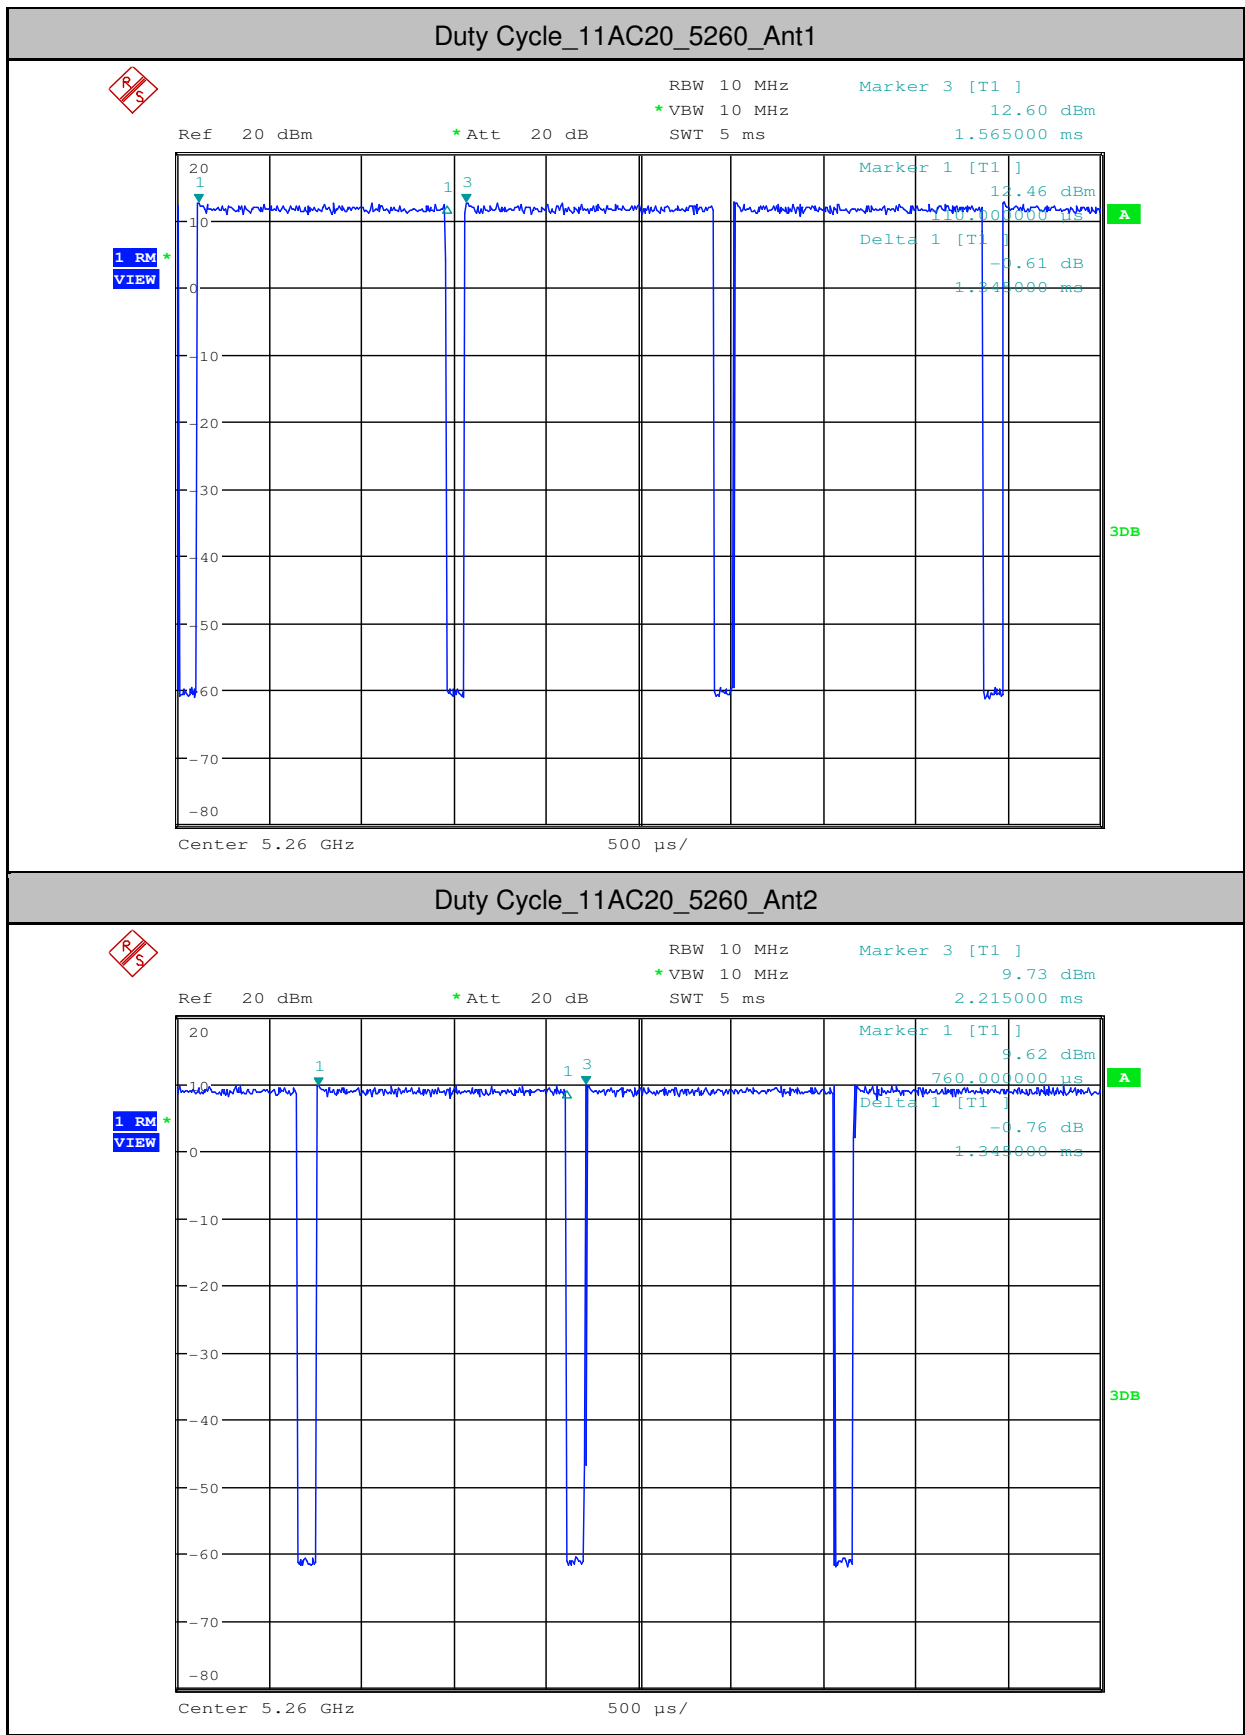


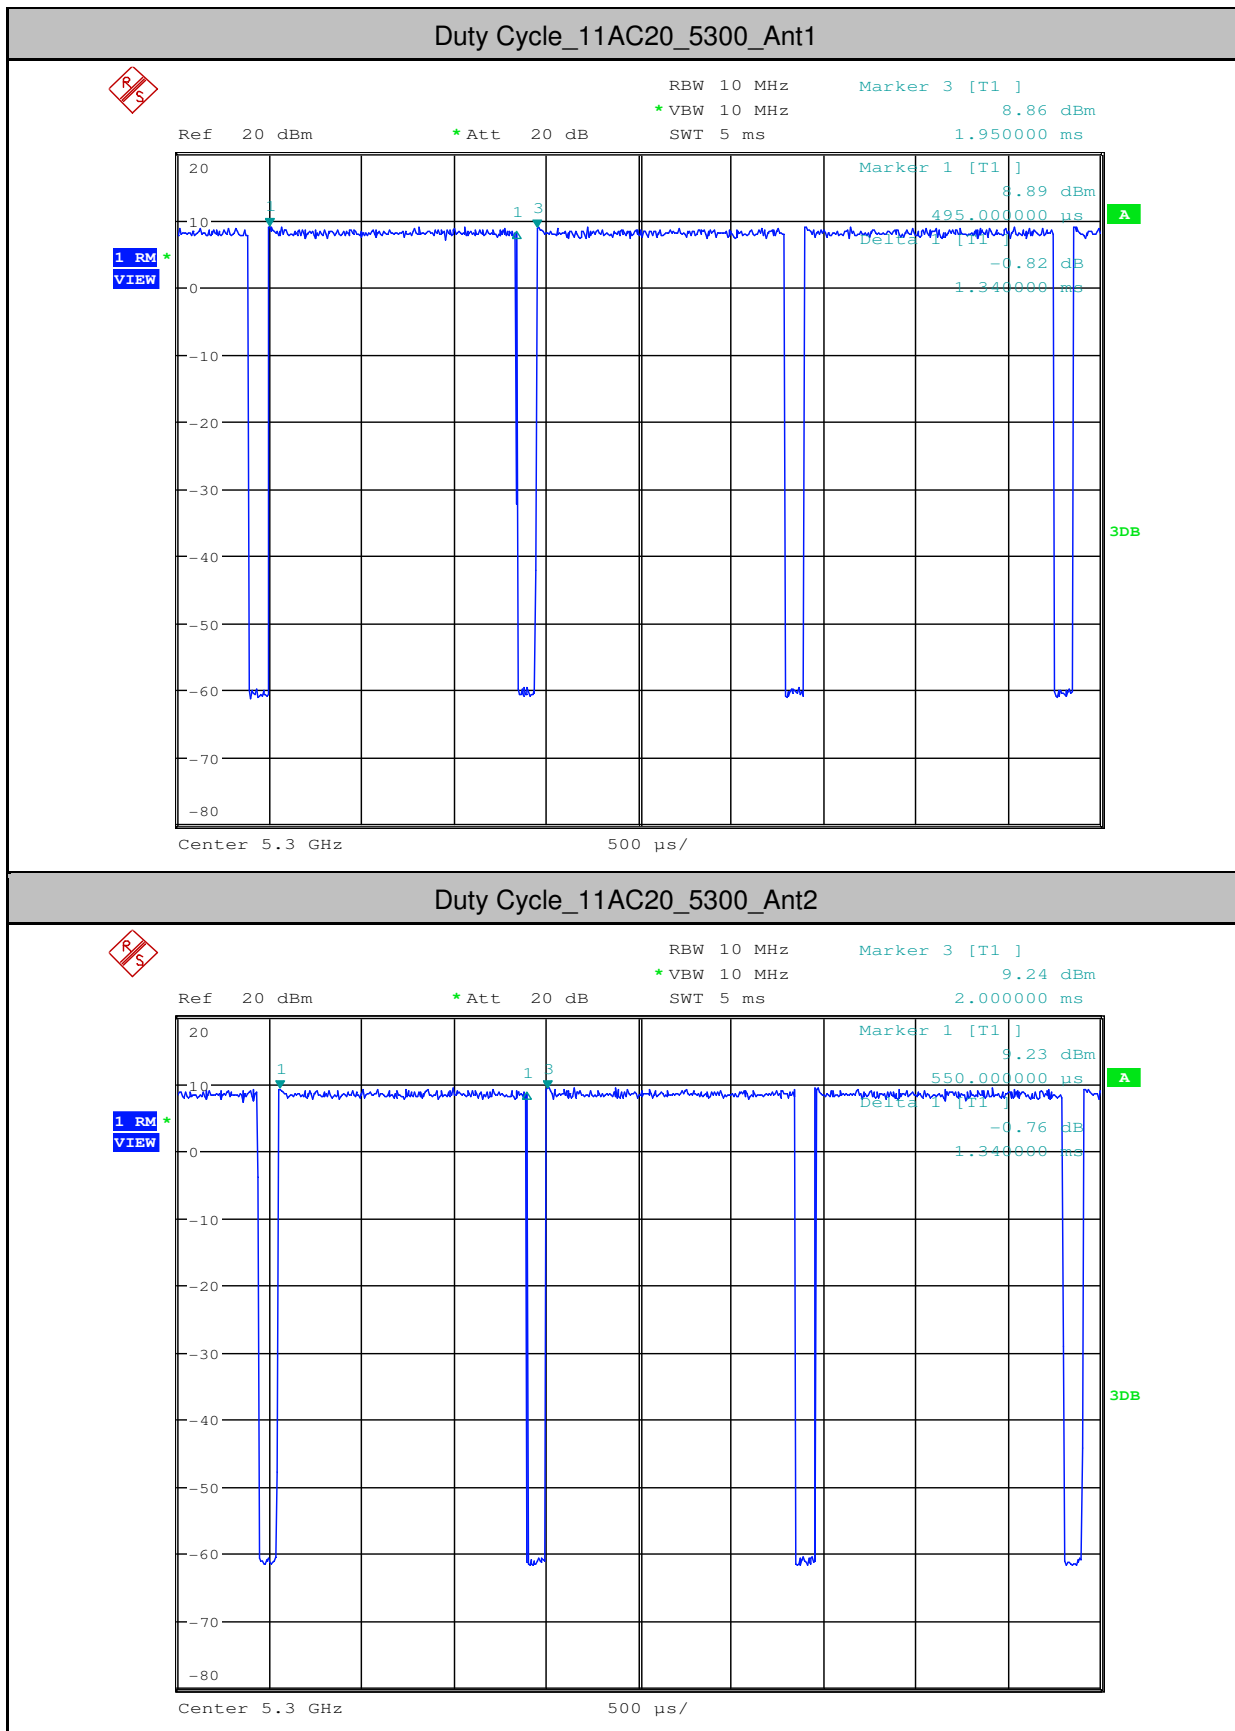


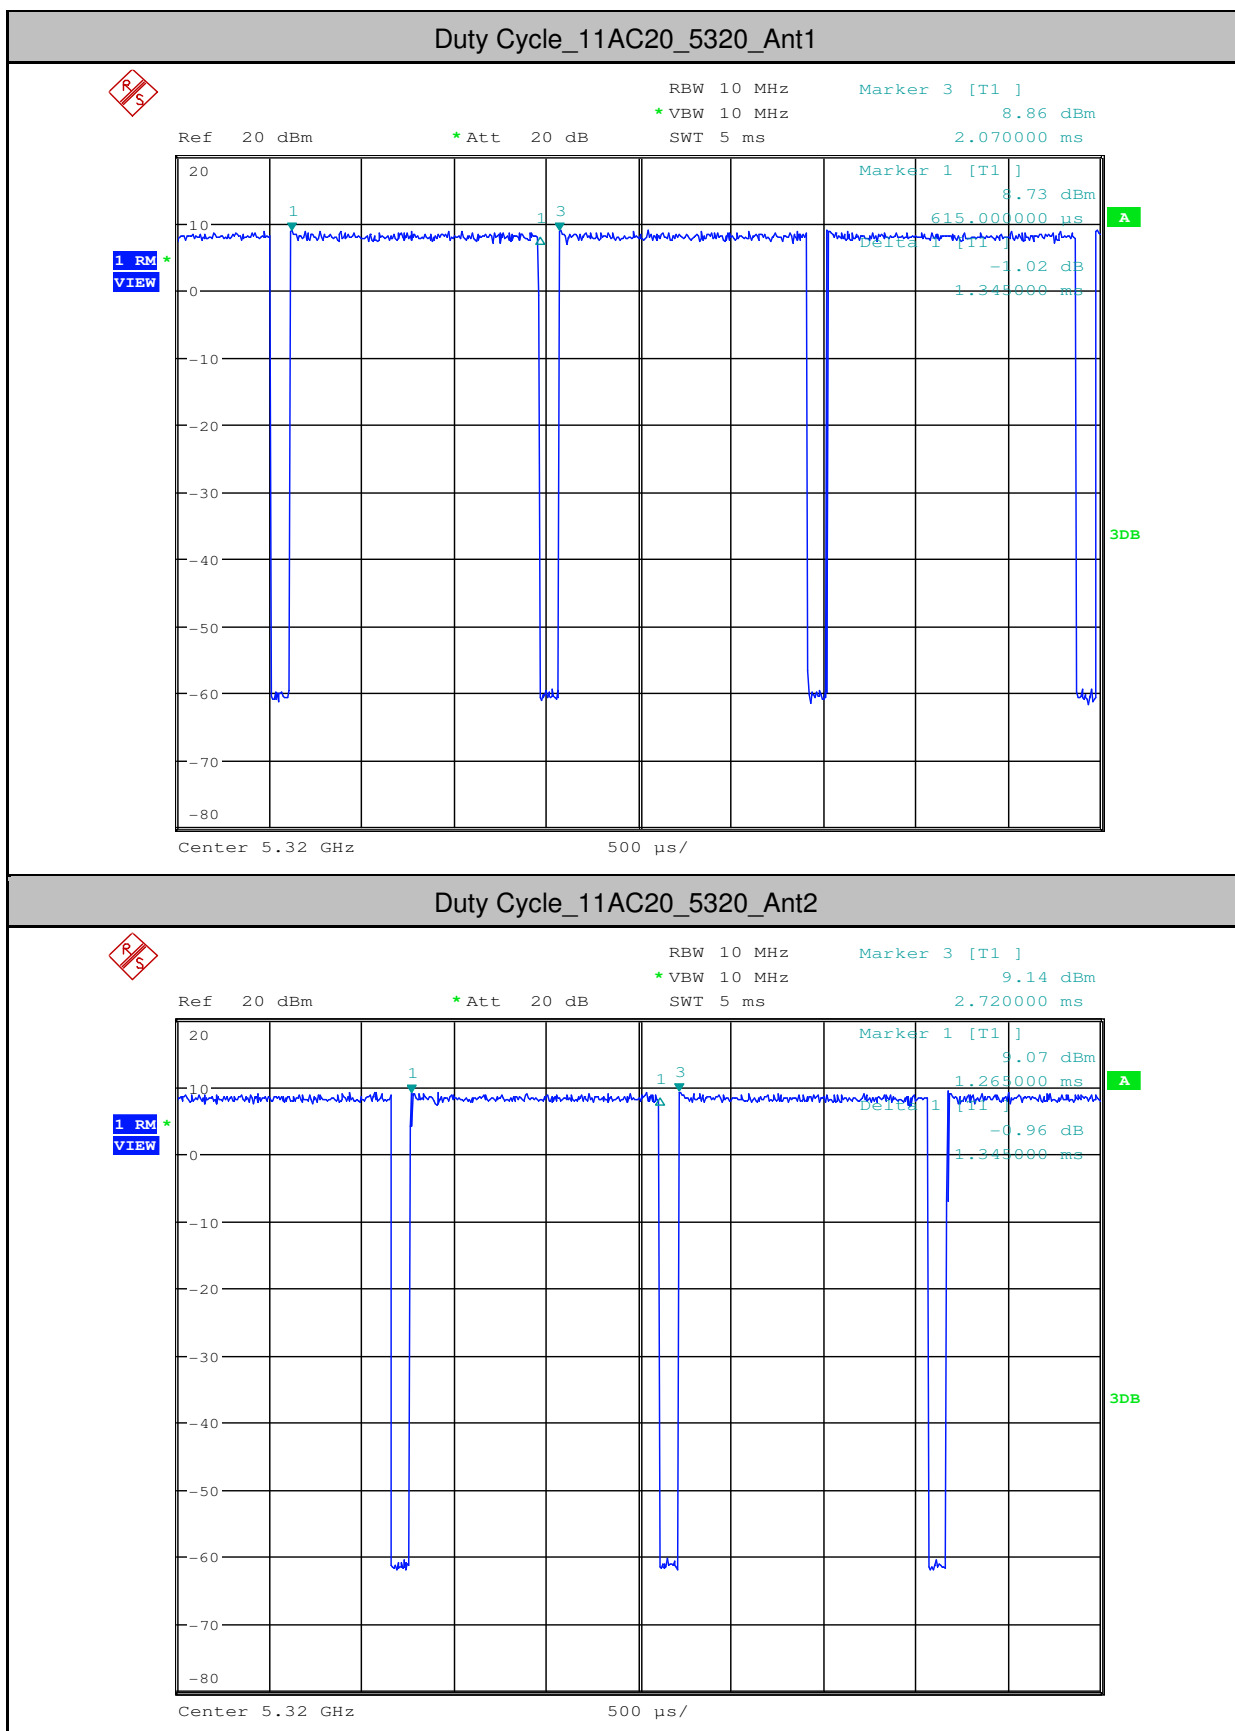


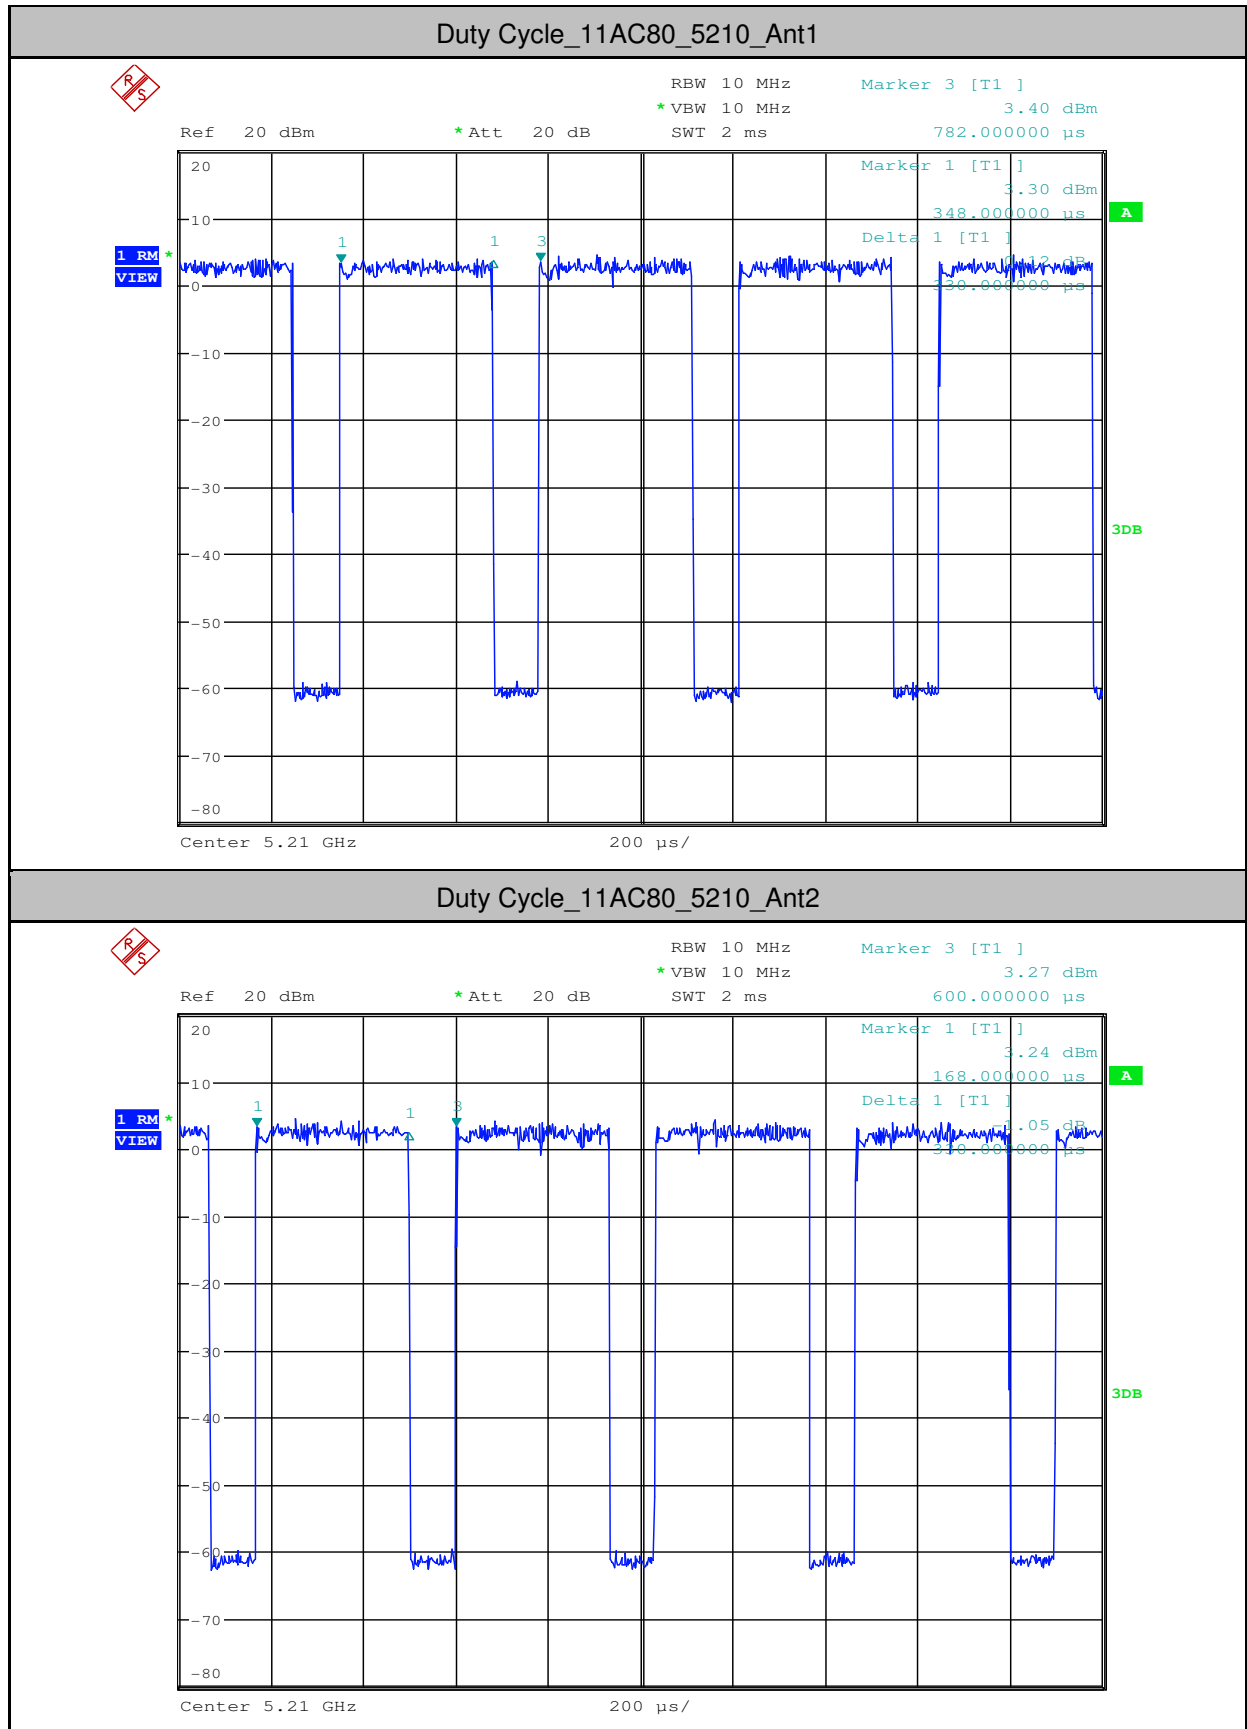


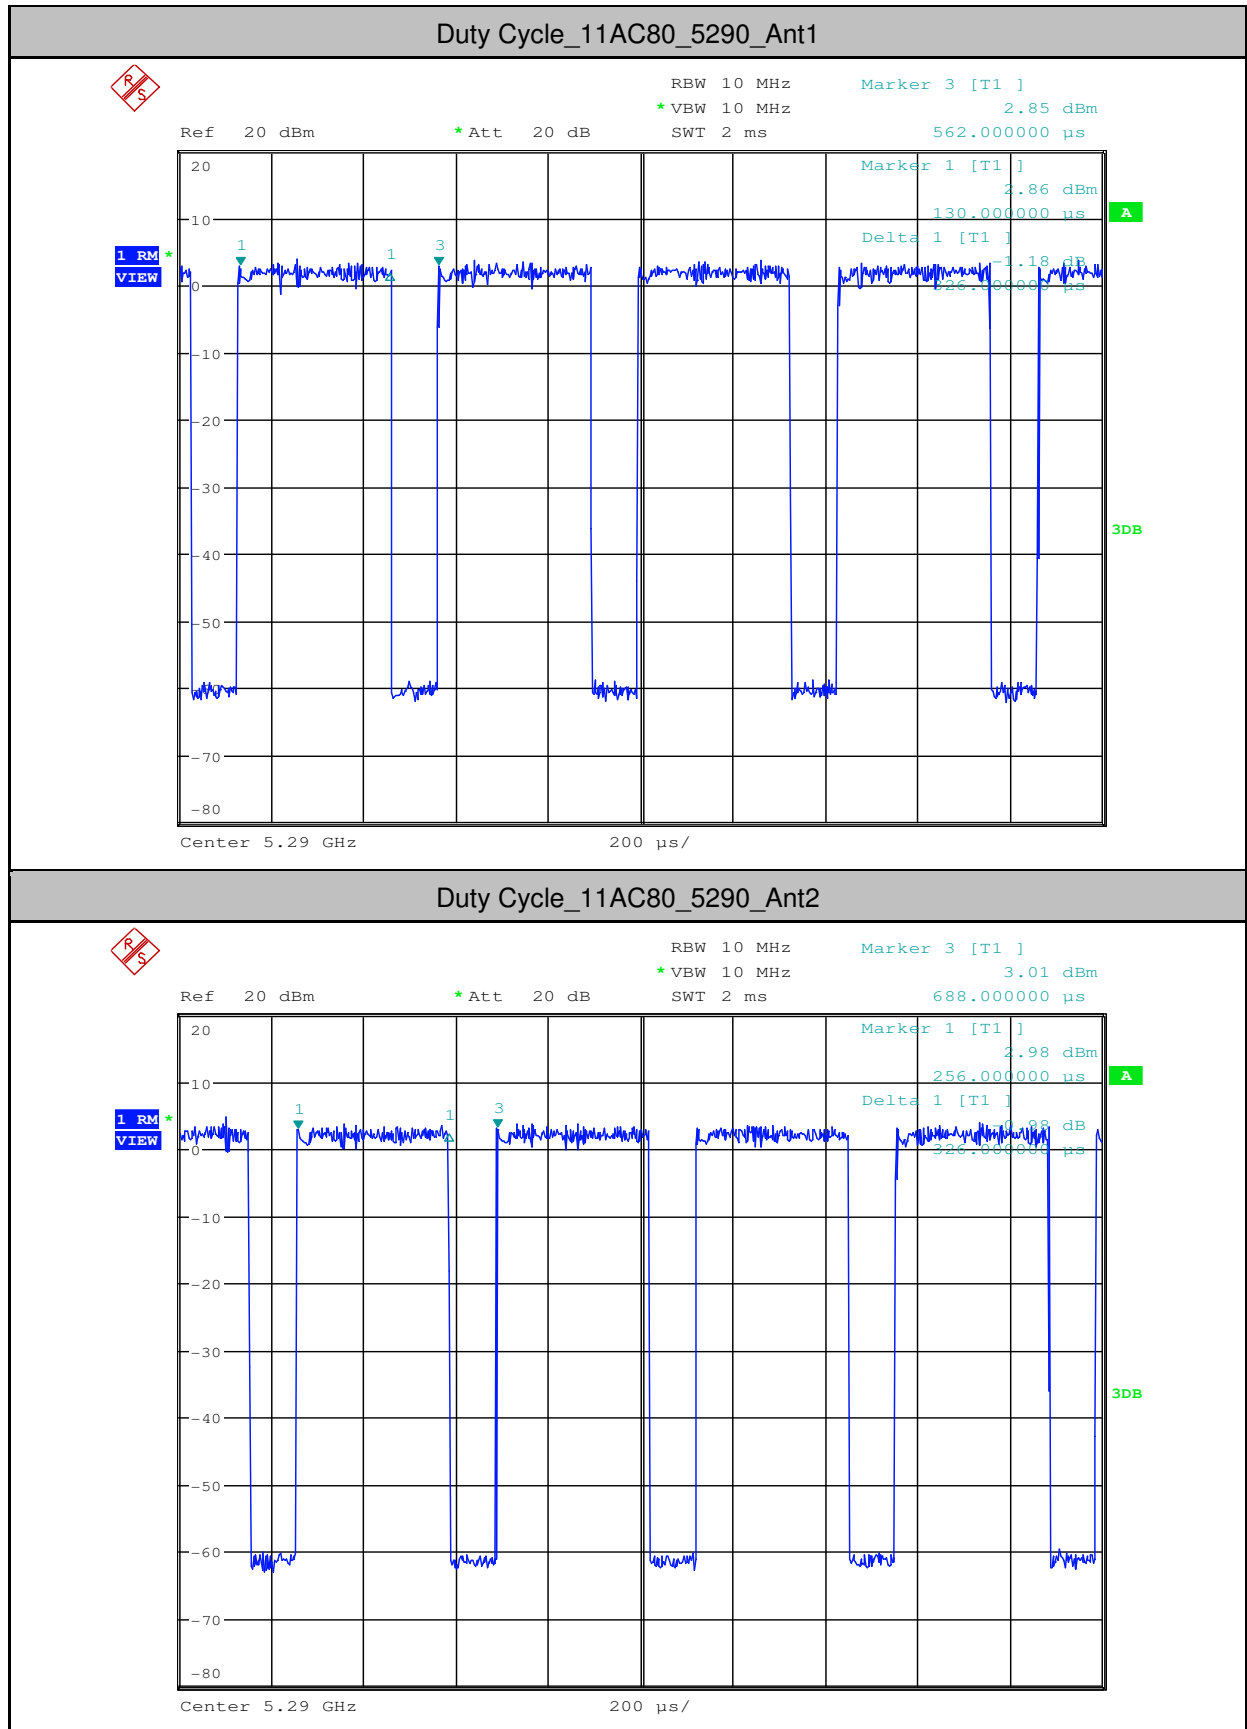



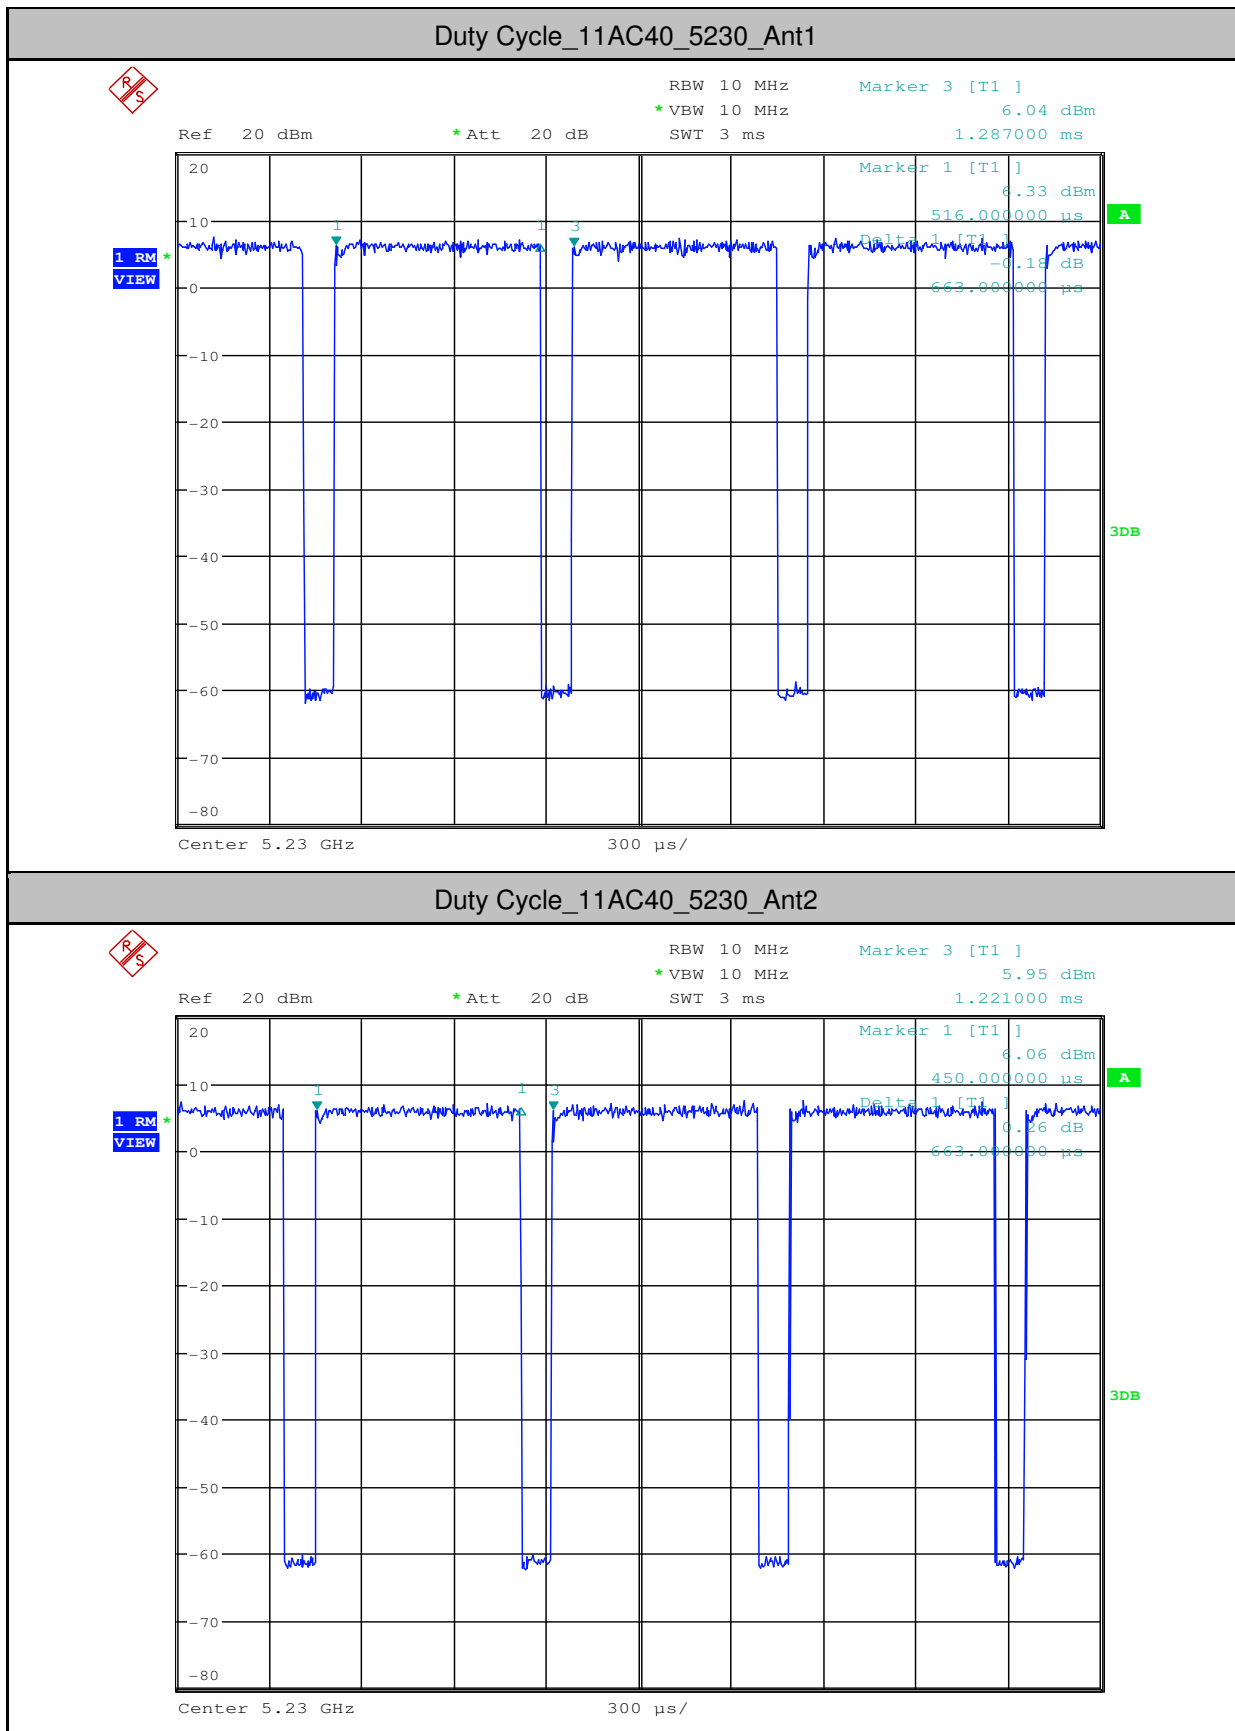




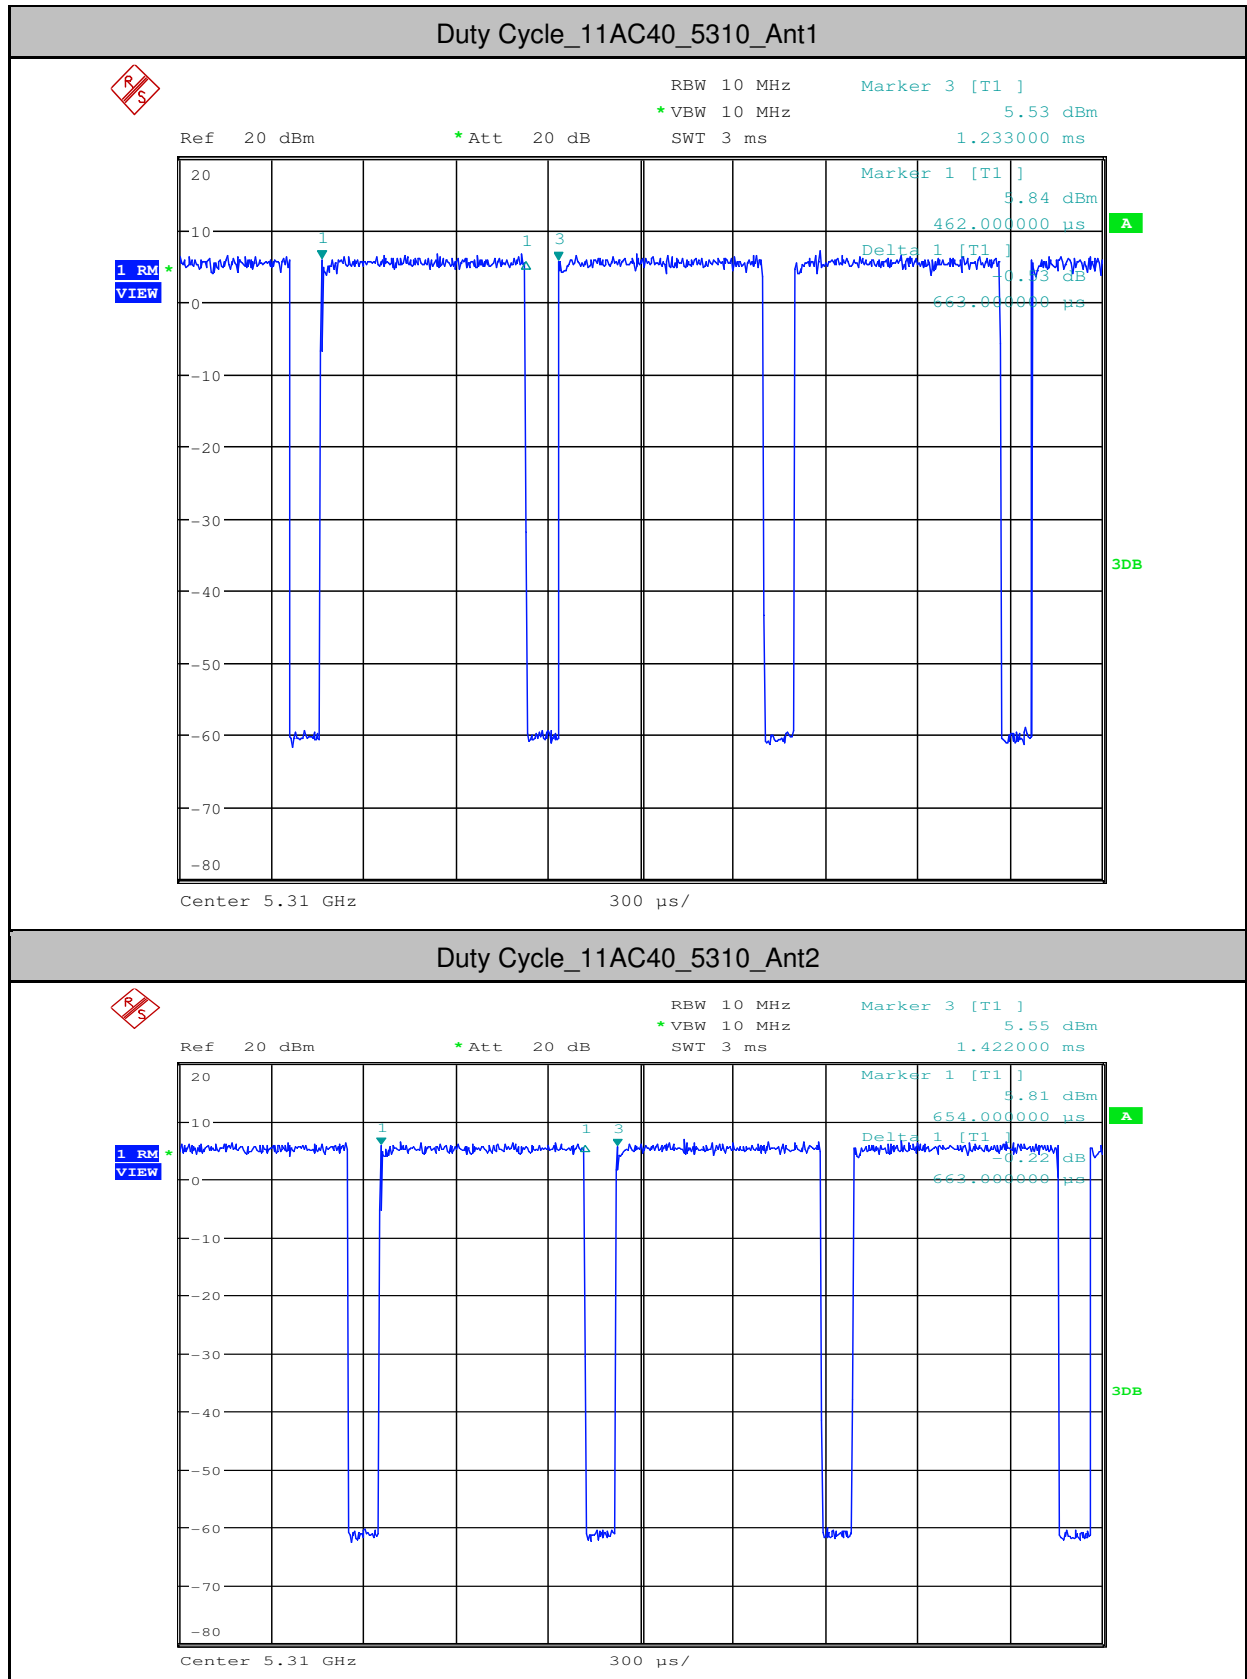



6. (DFS: Non-occupancy period; DFS: Channel Move Time; DFS: Channel Closing Transmission Time)
Test plots as follows:

Radar Waveform Calibration Result
Radar Type 0 (80MHz / 5290MHz)


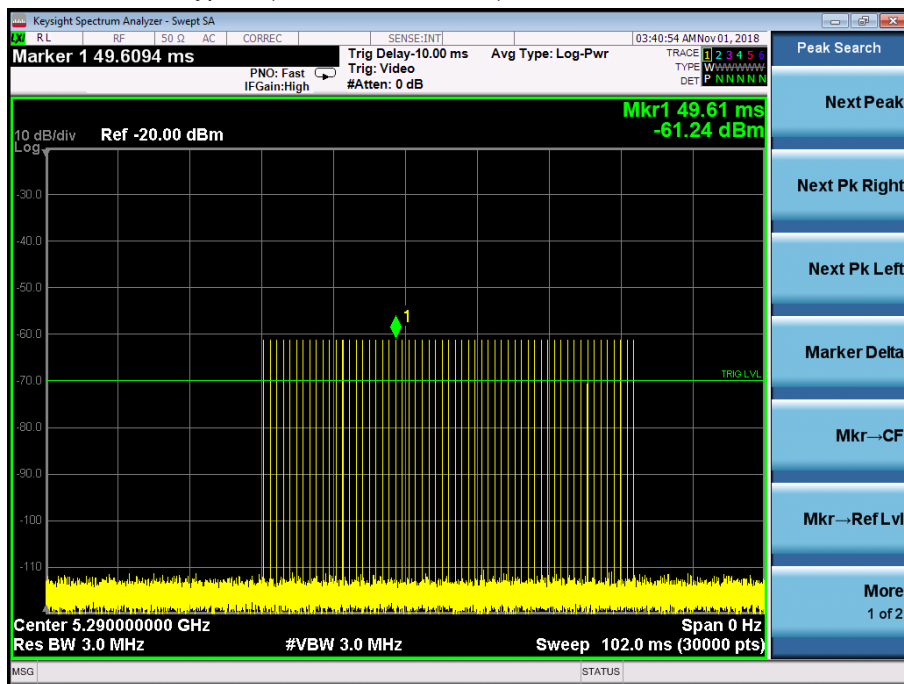




Test Data:

BW/Channel	Test Item	Test data	Limit	Results
80MHz 5290MHz	Non-occupancy period	Refer to test point	>30 min	pass
	Channel Move Time	0.42s	<10 s	Pass
	Channel Closing Transmission Time	0.0015ms	<60ms	Pass



Test plots as follows:
80MHz/5290MHz

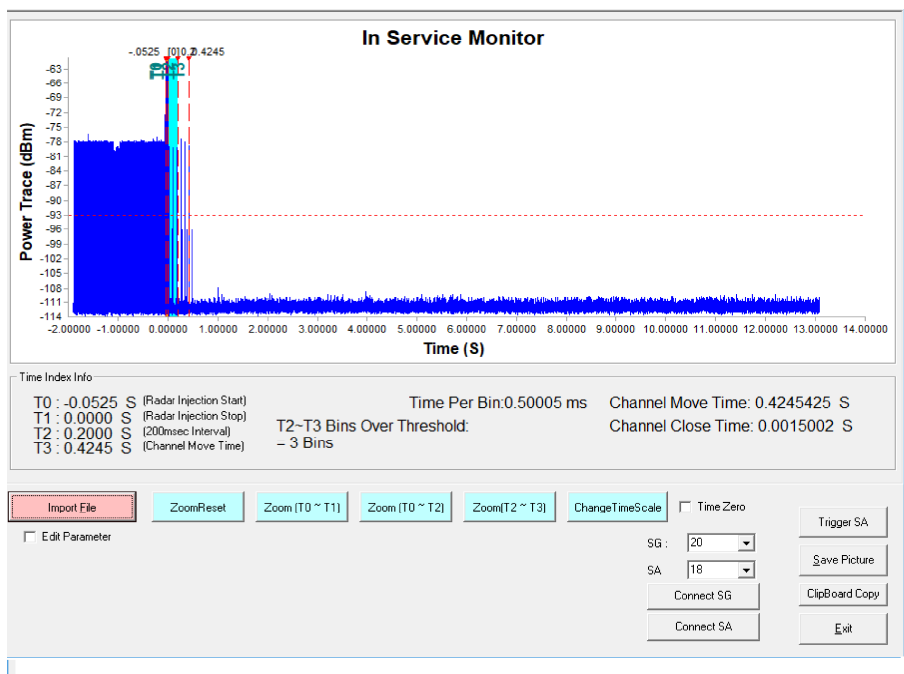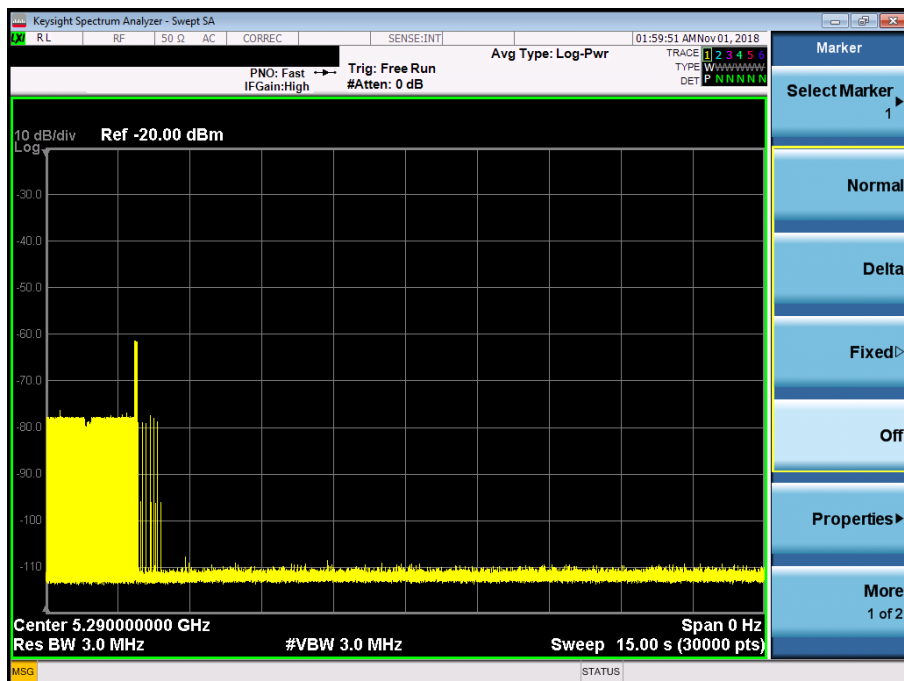

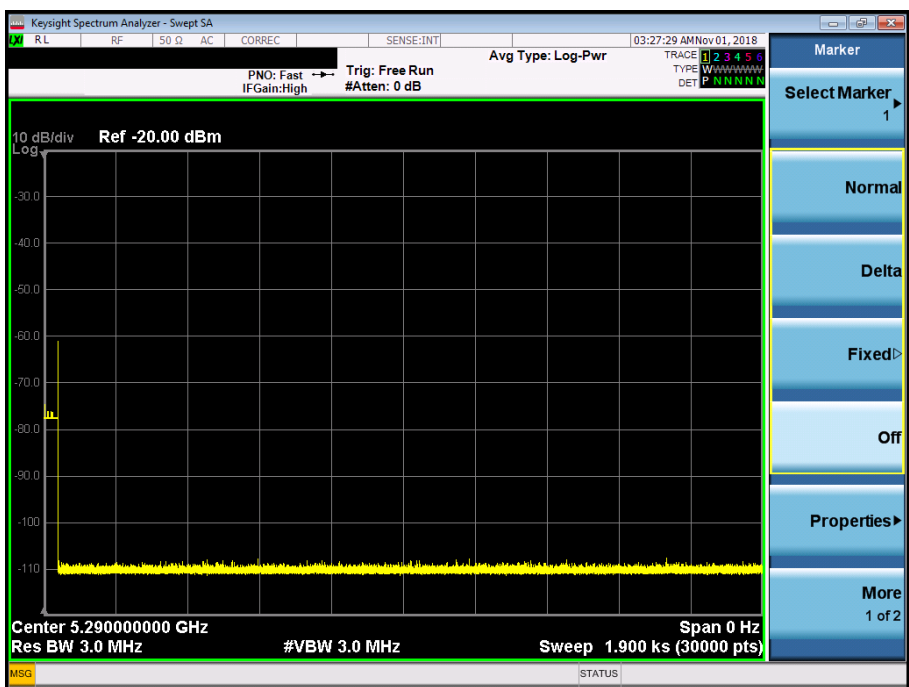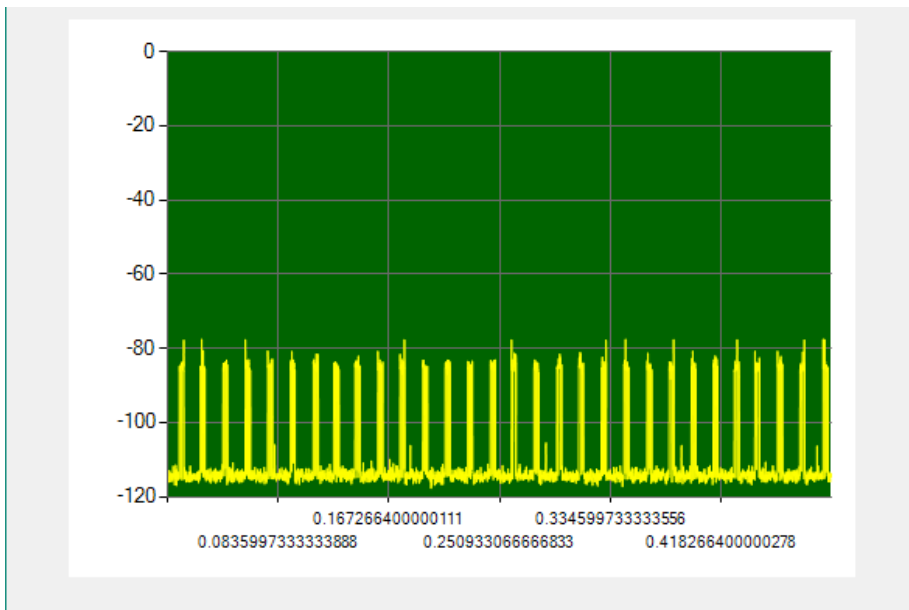

- End of the Report -