


USER **MANUAL**

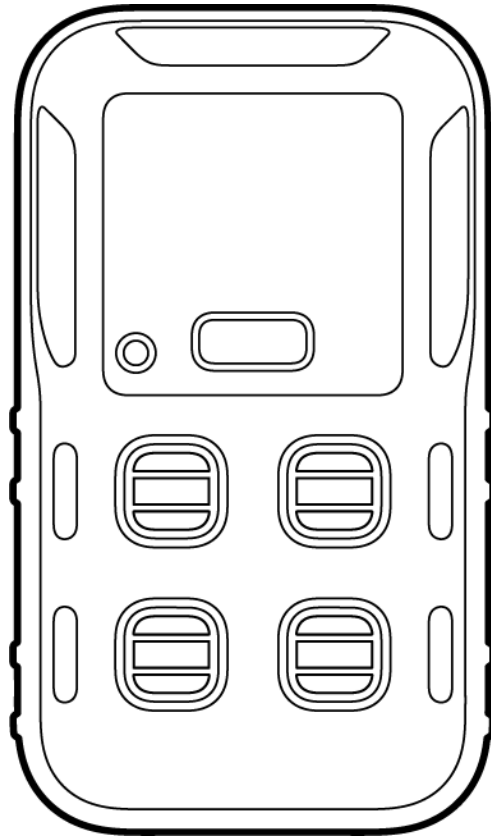

Honeywell BW™ Icon

Portable Multi-Gas Detector

Honeywell

TOC

Introduction	5
Product Description	5
Safety	5
Standards and Certifications	5
What's in the Box	7
Overview	7
Operations	9
Activate the Detector	9
Self Test	9
Deactivate the Detector	9
Common Button Operations	10
Bluetooth Pairing	10
Calibration	11
Bump Test	19
Zero Calibration	21
Capture Real Time Reading	22
Set the Detector via Device Configurator	22
Maintenance	23
Charge the Battery	23
Firmware Update	26
Update the Firmware from Local Drive	26
Additional Information	31
Sensor Poisons and Contaminants	31
Sensor Specifications	32
General Specifications	33
Time Out Events	33
Troubleshooting	34

DataLogs and Event Logs	37
Alarms	38
Replacement Parts	40
Security Information	41
Contact Us	43
Glossary	46

1 Introduction

Learn what you need to know about the Honeywell BW™ Icon Gas Detector before operating.

Product Description

The Honeywell BW™ Icon & Honeywell BW™ Icon+ gas detectors warns of hazardous gas at levels above user-defined alarm setpoints. The detector can monitor up to four gases at a time.

Safety



CAUTION

- The detector is a personal safety device. It is your responsibility to respond properly to the alarm.
- For safety reasons, this equipment must be operated and serviced by qualified personnel only.
- The lithium battery in this product presents a risk of fire, explosion, and chemical burn if misused. Do not disassemble, incinerate, or heat above 212°F (100°C). Batteries exposed to heat at 266°F (130°C) for 10 minutes can cause fire and explosion. Batteries must only be charged in a safe area free of hazardous gas.
- Deactivating the detector by removing the battery pack may cause improper operation and harm the detector.
- Use only Honeywell approved battery chargers such as the vehicle Charger.
- Do not use the apparatus if it is damaged. Inspect the apparatus before use. Look for cracks and missing parts.

Standards and Certifications

IECEX: IECEX SIR 20.0020X

Ex ia op is I Ma Ex ia op is IIC T4 Ga, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$ (with IR sensor installed)

Ex ia I Ma Ex ia IIC T4 Ga, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$

ATEX: Sira 20ATEX2012X



I M1 Ex ia op is I Ma, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$ (with IR sensor installed)



II 1G Ex ia op is IIC T4 Ga, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$ (with IR sensor installed)



I M1 Ex ia I Ma, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$



II 1G Ex ia IIC T4 Ga, $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq 60^{\circ}\text{C}$

RE-D Directive 2014/53/EU

EMC Directive 2014/30/EU

ROHS Directive (EU) 2015/863 amending 2011/65/EU

IP: IP66, IP68 (1.2 meters for 45 minutes)

Contains FCC ID: SU3RMBLED

Contains IC: 20969-RMBLED

CSA C22.2 No.60079-29-1 UL60079-29-1

Class 1, Division 1, Group A,B,C,D, T4;

INT. SAFE: Class 1, Zone0, AEx ia op is IIC, T4;(With IR sensor installed)

Class 1, Division 1, Group A,B,C,D, T4;

INT. SAFE: Class 1, Zone0, AEx ia IIC, T4;

CAN ICES-3(A)/NMB-3(A)

FCC Compliance statement


This device complies with part 15 of the FCC Rules. operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

What's in the Box

1	Honeywell BW™ Icon gas detector
1	Battery (factory-installed)
1	USB charger
1	Calibration cap
1	Klick Fast stud
1	Quick Reference Guide
1	Tubing

Overview

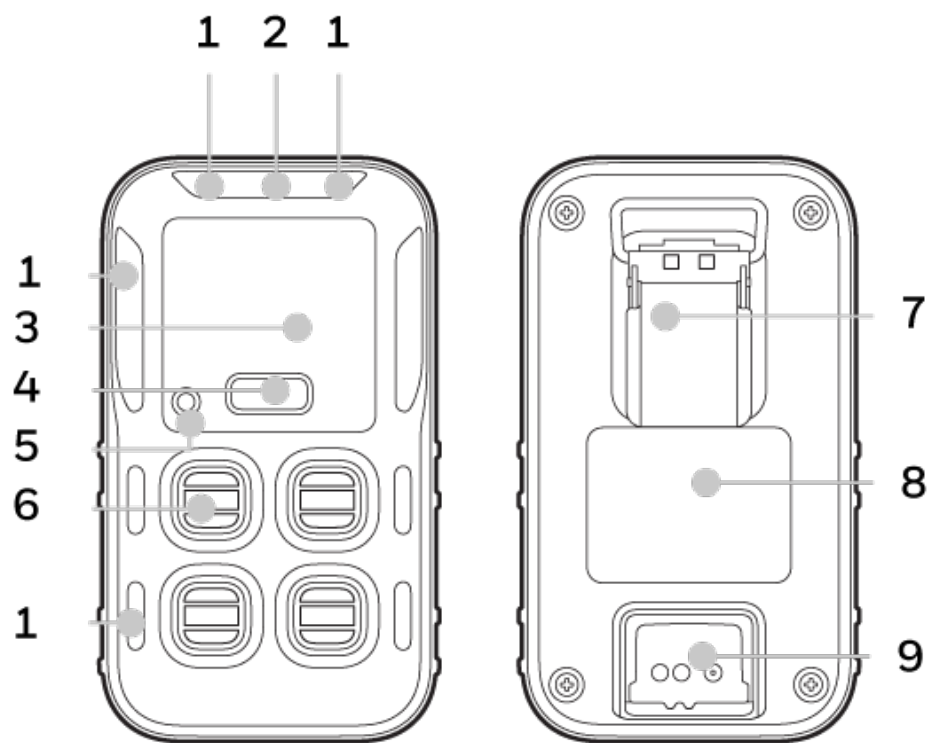

1	LED Alarm	6	Sensor
2	IntelliFlash	7	Clip
3	Display	8	Battery
4	Button	9	Charging Port
5	Beeper		

User Interface	
	Alarm One — Shows when alarm one is breached and gas highlighted next to sensor
	Alarm Two — Shows when alarm two is breached. Alarm two will over write any alarm one status.
TWA	Time Weighted Average — Settable in Safety Suite DC for each toxic sensor.
STEL	Short Term Exposure Limit — Settable in Safety Suite DC for each toxic sensor.
	Bump — Shows when bump is due and you can configure to have a count down.
	Calibration — Shows when bump is due and you can configure to have a count down.
	Battery status — Shows battery status and when on charge will show charging status.
	Bluetooth — All devices have Bluetooth – double click to enter menu. for search mode

2 Operations

Learn what you can do with your Honeywell BW™ Icon Detector, from commissioning to Calibration.

Activate the Detector

To turn the detector on, press, and hold the button for four seconds. LEDs light and the instrument vibrates and beeps.

The detector performs a Self Test and Sensors warm-up.

During the Self Test, the icons light and the IntelliFlash flashes in amber.

During the Sensor warm-up, the sensors LEDs flash clockwise.

In the regular mode, the IntelliFlash flashes in green every five seconds.

Self Test

When the detector is activated, it performs several start-up tests.

- Battery
- Data Flash
- RTC. Real Time Clock
- Temperature sensor.
- BLE module
- Sensors
- Bump and Calibration due date

When the detector has passed all the start-up self-tests, it enters the regular operation mode.

Deactivate the Detector

To deactivate your Honeywell BW™ Icon, press the button for three seconds.

The instrument beeps and vibrates, and the alarm LEDs light in red.

Common Button Operations

Feature	Operation
Power On	4-second hold
Power Off	4-second hold
Enter or Exit menu	Double-Press
Switch Menu (bump, cal, & BLE)	Single-Press
Initiate selected	3-second hold
Acknowledge latched alarm	1-second hold

Bluetooth Pairing

The user can pair the Honeywell BW™ Icon to a mobile device via built-in Bluetooth Low Energy (BLE). The Honeywell Device Configurator app, installed on the mobile device, can then show gas readings and alarms from the BW Icon unit that is connected.

Readings and alarms can then be sent to Honeywell remote monitoring software

On the Honeywell BW™ Icon, the Bluetooth connection is on by default.

1. Turn On the BW Icon.
2. In your mobile device, open the Device Configurator app
3. In your BW Icon:
 - Double press to enter the menu
 - Single press until the BLE icon is displayed
 - Hold press 3 secs to initiate the pairing mode.
4. In the Device list screen from the Device Configurator app, select the BW Icon Serial Number to start pairing.

BLE Status		Description
Pairing		The BLE icon flashes every second, Tee IntelliFlash flashes every five seconds, and two shot beeps.
Succeed		The BLE flashes in blue every 15 seconds. The IntelliFlash flashes every five seconds in green.
Fail		The BLE icon is solid red, and two short beeps.

Calibration

Perform a calibration to adjust the sensitivity levels of sensors and ensure accurate responses to gases.

The detector can be calibrated in two ways:

- Apply gas from a cylinder to the sensors using the Safety Suite Device Configurator (SSDC) software or the Device Configurator (DC) app.
- Use an IntelliDoX module. For further reference see the IntelliDox User Manual.



CAUTION


Move to a normal atmosphere (20.9% v/v O₂) that is free of hazardous gas. Use 50% LEL for test gas.

Details for calibration and maintenance:


- Recommendations for calibration of the equipment on a routine basis including the maximum time interval between calibrations.
- Calibrate the apparatus before first-time use and then on a regular schedule, depending on use and sensor exposure to poisons and contaminants. Honeywell recommends that the sensors be calibrated regularly and at least once every 180 days (6 months).
- The combustible sensor is factory calibrated to 50% LEL methane. If monitoring a different combustible gas in the % LEL range, calibrate the sensor using the appropriate gas.

Procedure to calibrate the detector via the calibration cap and the DC app on a mobile device


1. Turn On the BW Icon. Place the cap over the detector, and then press down on both tabs to snap it into place. Wait a few minutes to sensors warm up.

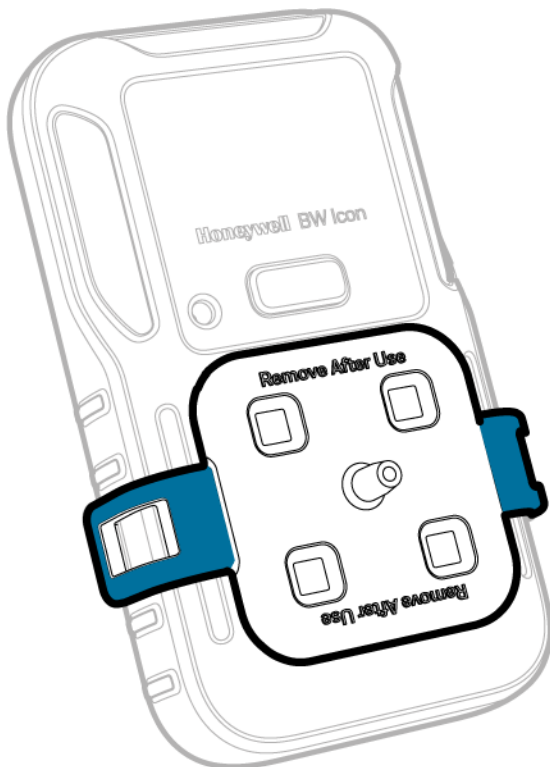


2. Attach the hose.

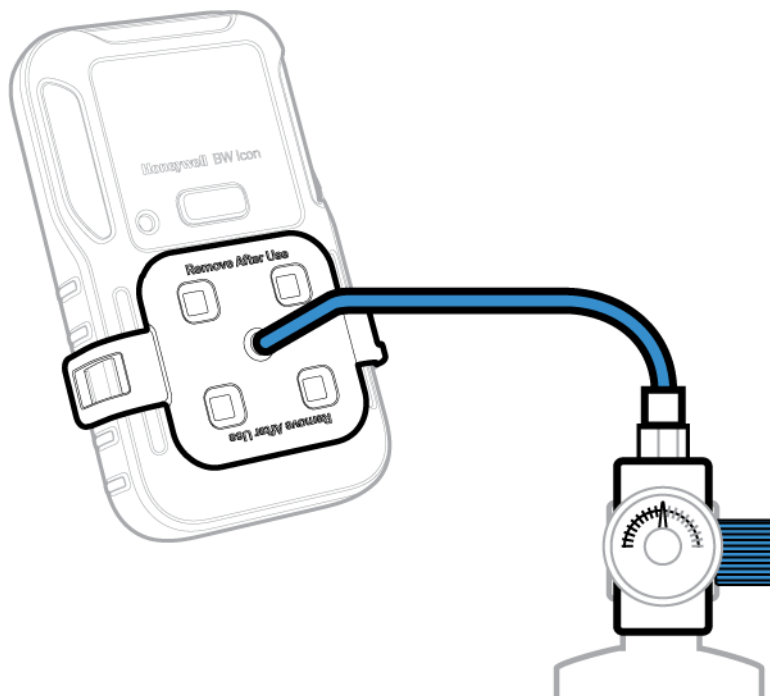

3. In your mobile device, open the **Device Configurator** app
4. In your BW Icon:
 - Double press to enter the menu.
 - Single press until the BLE icon is displayed.
 - Hold press 3 secs to initiate the pairing mode.
5. In the Device list screen from the Device Configurator app, select the BW Icon Serial Number to start pairing.
6. In your Mobile device, tap on the Menu button and then select **Remote Calibration**
7. Tap **Calibration**, the IntelliFlash flashes amber to indicate the calibration process has started.

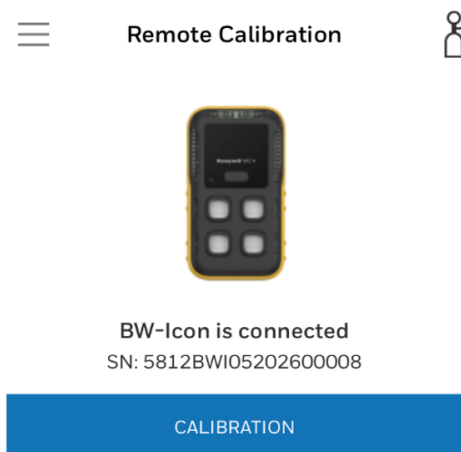


8. Enter the **Operator Name**, and then Tap **START**. The instrument will start Zero calibration; the IntelliFlash flashes amber, and the Calibration icon lights in blue.

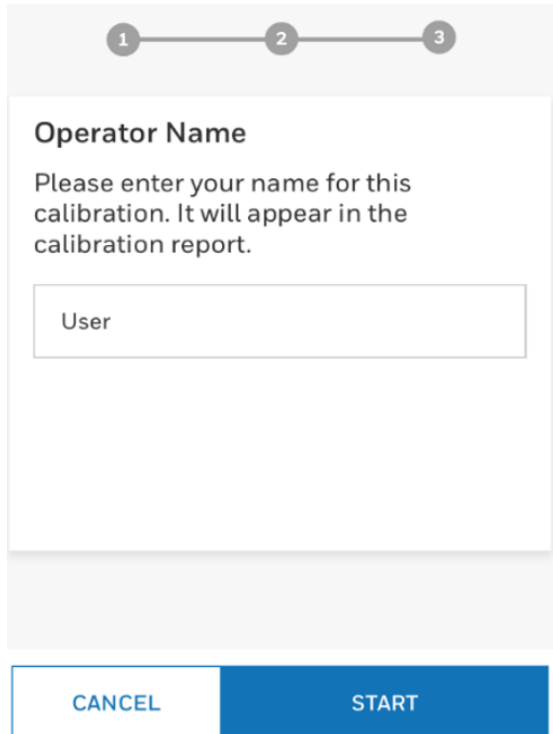


The screenshot shows a mobile application interface for entering an operator name. At the top, there is a progress bar with three steps: 1, 2, and 3. Step 1 is highlighted. Below the progress bar, the title "Operator Name" is displayed. Underneath the title, a message reads: "Please enter your name for this calibration. It will appear in the calibration report." Below this message is a text input field containing the word "User". At the bottom of the screen, there are two buttons: "CANCEL" and "START".

9. After the Zero calibration is completed, use any of the following three ways to select the gas cylinder, and then click **START**.

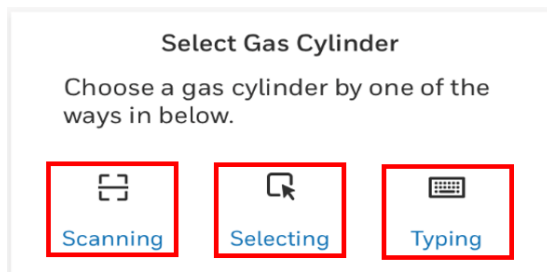

The screenshot shows a mobile application interface for selecting a gas cylinder. The title "Select Gas Cylinder" is displayed. Below the title, a message reads: "Choose a gas cylinder by one of the ways in below." Below this message are three options, each with an icon and a label: "Scanning" (with a barcode icon), "Selecting" (with a cursor icon), and "Typing" (with a keyboard icon). Each option is enclosed in a red rectangular box. At the bottom of the screen, there are two buttons: "SKIP" and "START".

10. Select the sensor that you want to calibrate and then tap **START**.

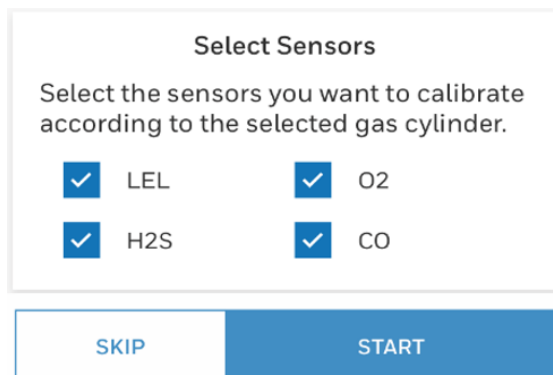


The screenshot shows a mobile application interface for selecting sensors. The title "Select Sensors" is displayed. Below the title, a message reads: "Select the sensors you want to calibrate according to the selected gas cylinder." Below this message are four checkboxes, each with a label: "LEL", "O2", "H2S", and "CO". All four checkboxes are checked. At the bottom of the screen, there are two buttons: "SKIP" and "START".

11. Open the cylinder valve by turning the pressure regulator knob counterclockwise. Follow onscreen instructions to know when to apply gas. The IntelliFlash lights amber.

Calibration



BW-Icon is connected
SN :5812BWIO5202600008

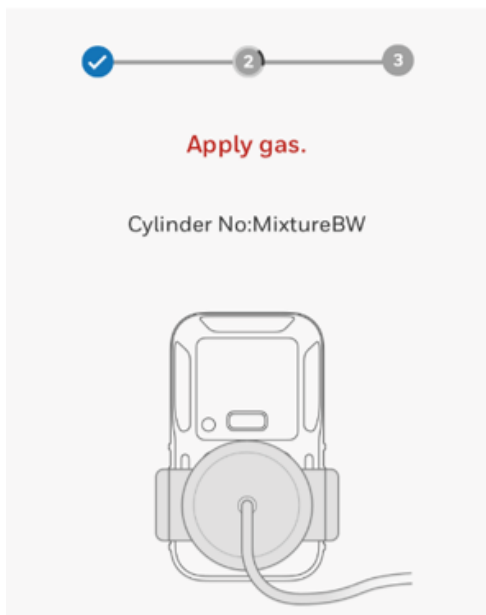

Calibration



BW-Icon is connected
SN :5812BWIO5202600008



- After calibration is complete, a report is displayed. Tap the Return Arrow button to exit the report and go back to the remote calibration main screen.

< Calibration Certificate

Calibration Certificate
Certification Generated On: Jul 09 2020 17:49:47

Instrument Information

Product Name BW-ICDS
Serial Number 18120W03202400008
Firmware V1.000

Calibration Summary

Calibration Performed On Jul 09 2020 17:49:47
Calibration Operator User
Zero Calibration Pass
Span Calibration Pass
Recommended Action N/A

Calibration Details

Zero Calibration Results

Sensor	Gas	Unit	Result	Concentration
LEL	LEL	%LEL	Pass	0
O2	O2	%VOL	Pass	0
H2S	H2S	ppm	Pass	0
CO	CO	ppm	Pass	0

Span Calibration Results


Sensor	Gas	Unit	Result	Concentration
LEL	LEL	%LEL	Pass	50
O2	O2	%VOL	Pass	18
H2S	H2S	ppm	Pass	25
CO	CO	ppm	Pass	100

The detector will start purge, and the slots LEDs will flash in yellow clockwise. After purge is completed, the instrument will back to the regular mode.


Procedure to calibrate the detector via the SSDC

Calibrate the BW Icon via the Safety Suite Device Configurator (SSDC).


1. Turn On the BW Icon. Place the cap over the detector, and then press down on both tabs to snap it into place. Wait a few minutes to sensors warm up.

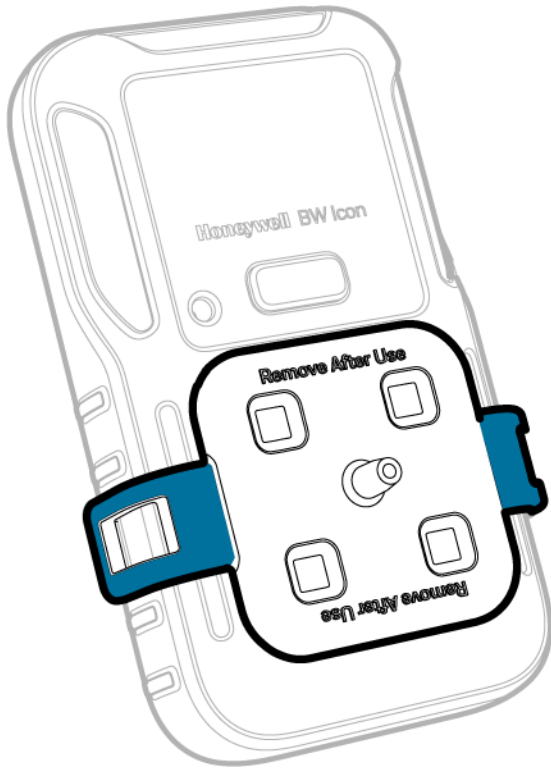

2. Attach the hose.

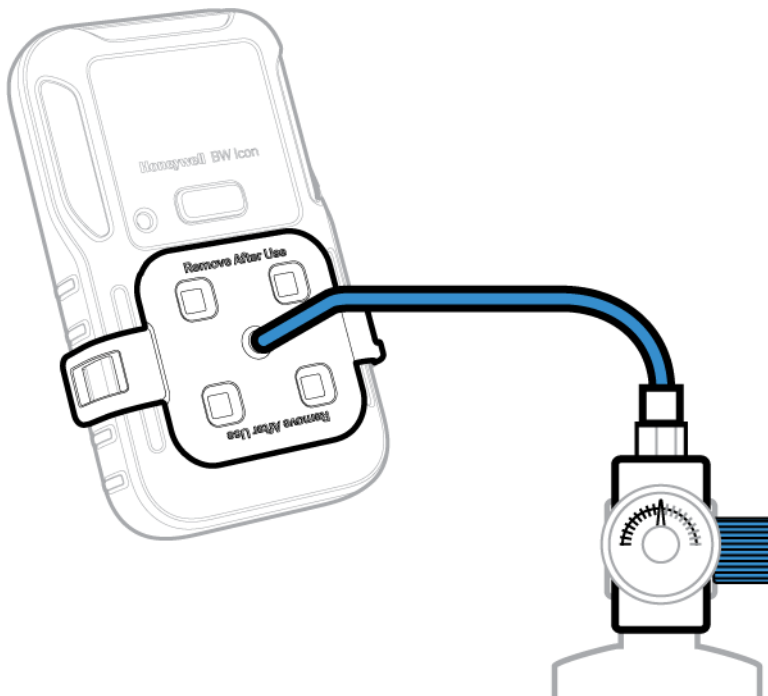

3. Connect the instrument to the PC via the IR link.
4. Log in to SSDC with an authorized user account. For further information, refer to the SSDC User Manual.
5. Click on the **Device List View** tab, the SSDC scans for connected devices or you can click Refresh to browse manually.

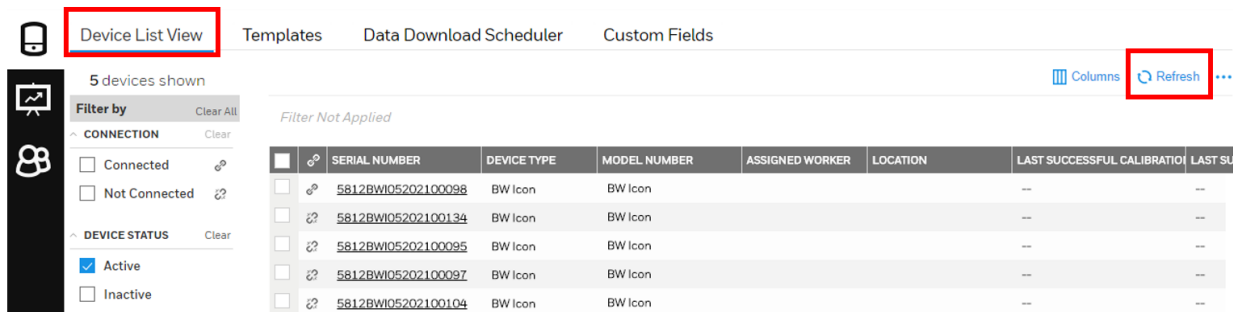

6. Select the connected detector and then click **Start Bump/Cal.**
7. In the Start Bump/Calibration Test window, do the following:
 - Select **Calibration**;
 - Select the calibration sensor. You can modify the default values;
 - Click **START TEST**
 - Wait for several seconds. The detector starts ZERO Calibration, and the four slots LEDs flash blue clockwise. After Zero Calibration is complete, the LEDs are solid blue if calibration passed, or red if failed.

8. Optional Step. You can either remove or keep the IR link connection, the remaining operation is in the instrument.
9. Apply span gas when the slot LEDs start flashing. Span calibration starts after the instrument detects gas. The four slots LEDs flash blue clockwise. After the Span calibration is completed, the LEDs are solid green if calibration passed, or red if failed.
10. Remove the calibration cap. The detector starts purging, and the slots LEDs flash in yellow clockwise.
After the purge is complete, the device is back to the regular mode.

Bump Test

The detector can be tested in two ways:

- Apply gas from a cylinder to the sensors manually through the calibration cap, and using the Safety Suite Device Configurator (SSDC) software or the Device Configurator (DC) app.
- Use an IntelliDoX module. For further reference see the IntelliDoX User Manual.



CAUTION


Move to a normal atmosphere (20.9% v/v O₂) that is free of hazardous gas. Use 50% LEL for test gas.

Details for Bump Test and maintenance:


- Recommendations for initial checking of the equipment on a routine basis including the maximum time interval between calibrations.
- Perform a functional check with gas before each day of use.
- Honeywell recommends bump testing the sensors before each day's use to confirm their ability to respond to gas by exposing the apparatus to a gas concentration that exceeds the alarm setpoints. Manually verify that the audible and visual alarms activate.
- The combustible sensor is factory calibrated to 50% LEL methane. If monitoring a different combustible gas in the % LEL range, calibrate the sensor using the appropriate gas.

Procedure to Bump Test the detector via the calibration cap and the DC app on a mobile device

1. Turn On the BW Icon. Place the cap over the detector, and then press down on both tabs to snap it into place. Wait a few minutes to sensors warm up.

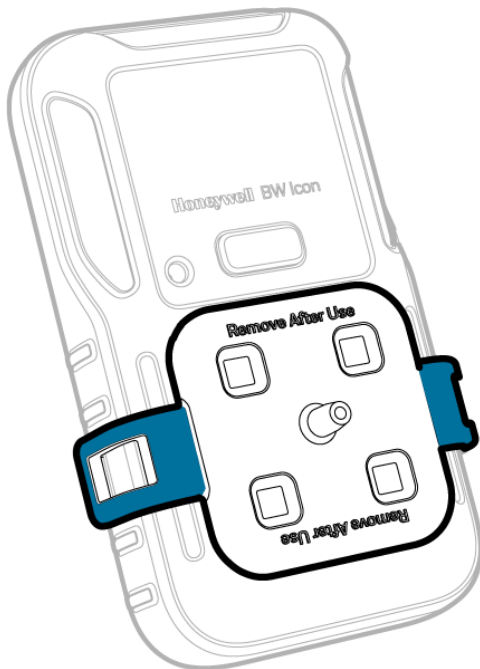

2. Attach the hose.

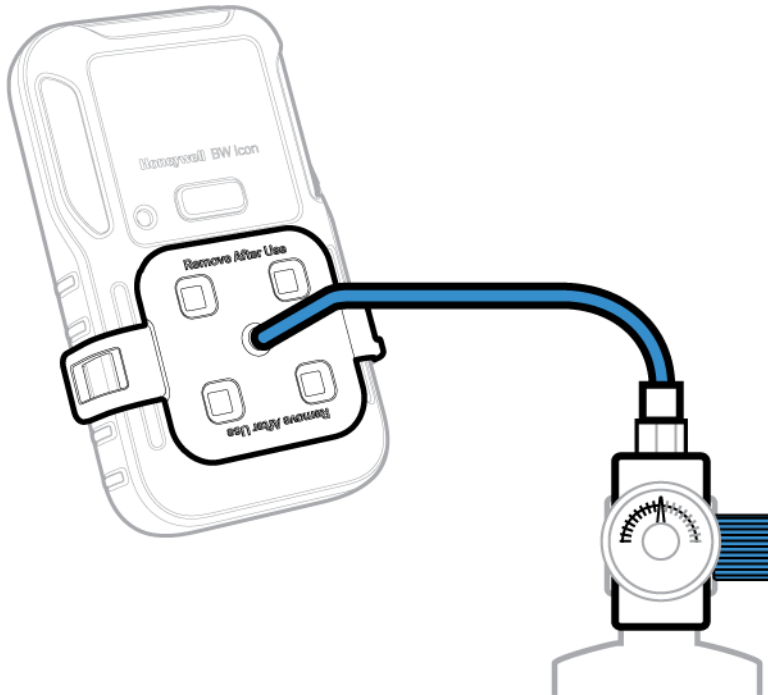


3. In your mobile device, open the Device Configurator app
4. In your BW Icon:
 - Double press to enter the menu
 - Single press until the BLE icon is displayed
 - Hold press 3 secs to initiate the pairing mode.
5. In the Device list screen from the Device Configurator app, select the BW Icon Serial Number to start pairing.
6. In your Mobile device, tap on the Menu button and then select **Bump Test**.
7. Enter the **Operator Name**, and then Tap **Save**. The IntelliFlash LED flashes amber to indicate the bump test process has started.
8. In the Input Gas level screen, check the sensor that you want to test and enter the Span gas concentration, and then tap **START**.
9. Open the cylinder valve by turning the pressure regulator knob counterclockwise. The Zero process starts and a message is displayed when succeeded.
10. Follow onscreen instructions to know when to apply gas and when the bump test process is complete.
11. The process is complete when the results are displayed on your mobile device. You can now remove the cap by pulling on the tabs.

Capture Real Time Reading

1. Pair your BW Icon with a mobile device.
2. In your mobile device, open the **Device Configurator** app.
3. Tap **Menu** 
4. Tap **Measurements** 
5. Tap **Start Recording**.

Set the Detector via Device Configurator

1. Pair the BW Icon with the Device Configurator App on your mobile device.
2. Tap the menu button 
3. Tap **Device Setup** 
4. Tap Download, to get the configuration table.

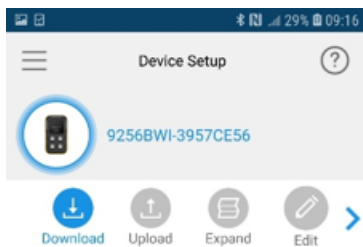

5. Confirm the value of the setting: 1 to turn on, 0 to turn off. Multiply 100 times for the value of the concentration. For example, for 50ppm, you need to input 5000. Finally, tap **Upload** to apply changes.

3 Maintenance

Charge the Battery

You can charge the battery via an IntelliDox module, the charger adaptor & USB Charger, and the Cradle Charger.

Note:

The lithium battery may require 5 hours to full capacity. While charging, the battery icon will flash amber once per second. The time needed to charge will increase if the apparatus is activated. The detector may be warm during charging; this is normal. To preserve the life of the battery, deactivate the device when not in use.

The battery operating temperature is $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$.



WARNING

The Icon uses a lithium battery that may present a risk of fire or chemical burn hazard if misused. Do not disassemble, heat above 100°C , or incinerate.



CAUTION

- To avoid personal injury and property damage, adhere to the following:
- Charge the battery immediately when the apparatus emits a low battery alarm.
- Charge the battery in a safe area that is free of hazardous gas in a temperature range from $0 \sim 45^{\circ}\text{C}$.
- If the device is out of charging range, the battery icon flashes in blue.
- Charge the battery using Honeywell charger adapters designed for this apparatus only. Do not use any other charger adapters. Failure to adhere to this caution can lead to fire and explosion.
- If replacing the battery, use only approved lithium polymer cells that are available through Honeywell. User of any other cell can cause fire and explosion.

-   Dispose of used lithium cells immediately. Do not disassemble and do not dispose of in fire. Do not mix with the solid waste stream. Spent batteries must be disposed of by a qualified recycler or hazardous materials handler.
- Keep lithium cells away from children.

Battery Capacity Indicator



Status	Duration	Indication or Alarm
Battery low	Less than 7 days	IntelliFlash, the battery icon, and the sensor LEDs flash in amber every 5 seconds.
Battery low	Less than 12 hours	IntelliFlash, the battery icon, and the sensor LEDs flash every 5 seconds. Beeps and vibrates.
Battery critical	Less than 20 minutes	IntelliFlash flashes every 5 seconds, the battery icon and the sensor LEDs flash every second. Beeps and vibrates. The IR Link is invalid, and the Menu cannot be accessed.
Battery depleted		The battery icon LED is solid red for five seconds, and then the detector powers off.

Status	Percentage	Indication or Alarm
Charging	Less than 100%	The Battery icon flashes in amber.
Fully charged	100%	The Battery icon lights in solid green, and one short beep.
Can't charge	0 %	When the Temperature: >45 °C, <0°C. The battery icon flashes twice per second.

Notes when charging with an IntelliDox:

- The auto-power is on if the device is inserted into an IntelliDox module.
- If the battery is low, the device will auto-power on after the battery capacity exceeds.
- The auto-power is off if there is no communication with the IntelliDox for five minutes.
- For further information, refer to the IntelliDox user Manual.

Charge the battery via the USB Charger

1. Press and hold the button to deactivate the detector.
2. Plug the USB charger into an USB port.
3. Attach the charging adapter to the charging Port.

Charge the battery via the Cradle Charger

1. Deactivate the detector.
2. Insert the detector into the detector bay and press down firmly on the detector to ensure contact between the detector and the contact pins. The detector can be activated during charging.
3. After charge is complete, the battery icon flashes green.
4. Remove the detector.



Note: For further information, refer to the Multi-Unit Cradle Charger User Manual.

Firmware Update

1. Open the Device Configurator app on your mobile phone.

2. Tap **Menu** 

3. Tap **Firmware** 

4. Tap Update



5. Tap **YES** to implement the Firmware update, and wait until Update Successfully is displayed.

6. Tap **OK**.

Learn from about strategic information related to the Honeywell BW™ Icon Detector.

Sensor Poisons and Contaminants

Several cleaners, solvents, and lubricants can contaminate and cause permanent damage to sensors.

Cleaners and Lubricants	Silicones	Aerosols
Brake cleaners	Silicone cleaners and protectants	Bug repellents and sprays
Lubricants	Silicone based adhesives, sealants, and gels	Lubricants
Rust inhibitors	Hand/body and medicinal creams that contain silicone	Rust inhibitors
Window and glass cleaners	Tissues containing silicone	Window and glass cleaners
Dish soaps	Mold releasing agents	
Citrus based cleaners	Polishes	
Alcohol based cleaners		
Hand sanitizers		
Anionic detergents		
Methanol (fuels and antifreezes)		

Sensor Specifications

Gas Type	Measuring Range	Resolution	Measuring Unit	New Sensor Warm Up Time	Working Temperature
CO	0~2000 ppm	1 ppm	ppm, mg/m3, umol/mol	0.5h	-40°C to +60°C
H2S	0~200 ppm	0.1 ppm	ppm, mg/m3, umol/mol	0.5h	-40°C to +60°C
O2	0~30% VOL	0.1% VOL	%VOL	12h	-40°C to +60°C
NDIR-CH4	0~100% LEL	1% LEL	%LEL/%VOL		-40°C to +60°C
SO2	0~150 ppm	0.1 ppm	ppm, mg/m3, umol/mol	0.5h	-20°C to +50°C/ intermittent -40°C to +55°C

Gas Type	Default SPAN Value	SPAN Value Range	Calibration Flow Rate
CO	100	35~500	500ml/min
H2S	25	10~100	500ml/min
O2	18.0%	0~25%	500ml/min
NDIR-CH4	50%	10~100%	500ml/min
SO2	20	10~100	500ml/min

Gas Type	Default Low Alarm	Low Alarm Setting Range	Default High Alarm	High Alarm Setting Range	Default TWA	TWA Setting Range	Default STEL	STEL Setting Range
CO	35	10~2000	200	10~2000	35	0 (disable), 10~2000	50	0 (disable), 10~2000
H2S	10.0	1~200	15	1~200	10	0 (disable), 1~200	15	0 (disable), 1~200
SO2	2	0.5~150	5	0.5~150	0.5	0 (disable), 0.3~150	1	0 (disable), 0.3~150
O2	19.5%	0.5~20.2, 21.6~25%	23.0%	0.5~20.2, 21.6~25%	N/A	N/A	N/A	N/A
NDIR-CH4	10%	5~60%	20%	5~60%	N/A	N/A	N/A	N/A

General Specifications

	BW Icon	BW Icon +
Size	108.2mm x 61.5mm x 43.2mm(4.29" x 2.44" x 1.7 ") with Alligator Clip 108.2mm x 61.5mm x 37.8 mm(4.29" x 2.44" x 1.49") with Klick Fast Stud	
Weight	185g with Alligator Clip, 169g with Klick Fast Stud	
Appearance Colour	Yellow, Dark Gray	
Working Temperature	-40°C to +60°C	
Working Humidity	0%~95%	
IP Rating	IP 66 IP 68, 45min@underwater 1.2m	
Gas Type	CO,H2S,O2,SO2,CH4	
Display	8 Icon LED to show Alarm and Information, Green and Amber LED to show device status.	
Alarms Condition	Low Alarm, High Alarm, TWA Alarm, STEL Alarm, Negative Drift Alarm, Over Limit Alarm, Multi Gas Alarm.	
Visual Alarm	6 Red LED	
Audible Alarm	95 dB at 10cm	
Battery Life	2 months (8 hour per day at room temperature with NDIR CH4 sensor)	
Datalogging	Continuous datalogging (45 days at 15 seconds interval and 8 hours per day). User configurable datalogging interval (5 to 60 seconds)	
Calibration	Manual calibrate with Safety Suite Device Configurator or Device Configurator app, Automatic with IntelliDoX.	

Time Out Events

Action	Time Out
Auto exit error screen and power off	5 seconds
Auto skip error message screen and enter warmup	5 seconds
Auto exit menu and turn off Icon LED	6 seconds
Auto exit Force bump and Calibration	30 seconds
Exit auto detected span gas	60 seconds
Pairing, bump, and calibration result display	5 seconds
BLE pairing timeout	60 seconds

Troubleshooting

Problem	Cause	Solution
Battery icon blinks for 5 seconds when press button to power on.	Depleted battery	Charge the rechargeable battery pack
The detector, side LEDs, all bays, and IntelliFlash blink for 5 seconds when press the button to power on.	The detector expired	The apparatus is over two years lifetime, cannot continue to use.
All bays and IntelliFlash light for 5 seconds	All sensors fail	Replace the sensor or the PCBA
The detector, side LEDs, and IntelliFlash light for 5 seconds, and sound two long beeps.	RTC fail	Replace PCBA
The detector, side LEDs, and IntelliFlash light for 5 seconds, and sound five short beeps.	Data flash fail	Replace PCBA
The detector, side LEDs, and IntelliFlash light for 5 seconds, and sound one long beep and two short beeps.	Temperature sensor fail	Replace PCBA
BLE icon and IntelliFlash	BLE fail	Replace PCBA

Problem	Cause	Solution
light for 5 seconds		
Sensor bay and IntelliFlash light for 5 seconds	Sensors fail	Replace the sensors
Bump icon lights for 30 seconds.	Bump overdue and must carry out bump testing before use.	Hold the button for 3 seconds to start the bump testing or detector will auto power off after 30 secs.
Detector alarms after start-up sequence	Sensor not stabilized	SPE O2 sensor: Wait for at least 10 min before power on.
	Sensors require calibration	NDIR-CH4 sensor must carry out calibration 5 minutes after warmed up for power on
Detector does not respond when button is pressed	The battery state is critically low, or the battery is depleted.	Charge the rechargeable battery pack
	Apparatus is performing operations that do not require user input.	Button operation restores automatically when the operation ends.
Apparatus Doesn't accurately measure gas.	Sensor(s) require calibration.	Carry out calibration.
	Apparatus is colder/hotter than gas temperature.	Allow the apparatus to attain ambient temperature before use.
	The sensor filter is blocked.	Replace sensor filter
The detector does not alarm.	Alarm setpoints set incorrectly.	Define the alarm setpoint in Device Configurator.
	Alarm setpoints set to zero.	Define the alarm setpoint in Device Configurator.
	Apparatus is in calibration mode.	Complete the calibration procedure.
	Apparatus is in DC mode.	Stop data communication via a mobile phone.
	Apparatus is in IR communication.	Stop data communication via IR Link.
The device alarms without reason	The sensor is exposed to a puff of the target gas.	Apparatus is operating normally. Use caution in suspected areas. Check the

Problem	Cause	Solution
		peak gas exposure reading.
	Alarm setpoints are set incorrectly.	Define the alarm setpoint in Device Configurator.
	Sensors require calibration.	Carry out calibration.
	Missing or faulty sensors.	Replace the sensors.
	Battery temperature is out of acceptable range.	Move to lower temperature ambient to charge the battery.
Battery indicator doesn't display when charging.	Battery is depleted.	Charge the battery for 8 hours. If the battery indicator doesn't light after charging, contact Honeywell
Battery icon flashes in blue.	Battery is out of required charging temperature range.	Move to 0~45°C ambient temperature.

DataLogs and Event Logs

DataLogs

The detector records various information to create a report. The detector is capable of storing 45 days of data.

When the memory is full, the detector replaces the oldest datalogs with the most recent datalogs.

Event Logs

The detector records a maximum of 50 gas alarm, maintenance events, and error conditions.

The following alarm events are recorded:

- 0: No alarm
- 1: Gas high
- 2: Gas low
- 3: Gas stel
- 4: Gas twa
- 5: Gas over range
- 6: Gas negative
- 7: Sensor failure
- 8: Multi alarm
- 9: Zeroing
- 10: Spanning
- 11: Bumping
- 12: Disabled

Alarms

A gas detected event supersedes anything. When a gas alarm occurs, even when displaying other behavior, the device goes back to the home screen and displays appropriate gas behavior.

When more than one alarm occurs on one sensor, the highest priority is displayed: Over Range > High > STEL, TWA, Low, Negative.

When more than one sensor alarms, the alarm status is displayed as multi-alarm no matter what kind of gas alarms they are.

Alarm type from high priority to low		Description
Multi-Alarm		Alarm 2 icon lights in red and flash once every second. Left and Right alarm LEDs flash every second. Alarmed sensor LEDs flash twice every second. Beeps and vibrates.
Over Range		Alarm 2 icon lights in red and flash twice every one second. Left and Right alarm LEDs flash every second. Alarmed sensor LED flashes twice every second. Beeps and vibrates.
High		Alarm 2 icon lights in red and flash once every one second. Left and Right alarm LEDs flash every second. Alarmed sensor LED flashes twice every second. Beeps and vibrates.

Alarm type from high priority to low		Description
STEL		STEL icon lights in red. Left and Right alarm LEDs flash every second. Alarmed sensor LED flashes twice every second. Beeps and vibrates.
TWA		TWA icon lights in red. Left and Right alarm LEDs flash every second. Alarmed sensor LED flashes twice every second. Beeps and vibrates.
Low		Alarm 1 icon lights in red. Left, Right, and sensor alarm LEDs flash every second. Beeps and vibrates.
Negative		Calibration icon flashes in red every second. IntelliFlash flashes in amber every five seconds. Sensor LED lights in solid red.

Item	Alarm Set-point	Ressetting	Silencing
Negative Alarm	<-5%LEL	Keep alarm until reading increase above or equal to -5%LEL	Silence when transmitting data to Device Configurator or IR Link
Default	10%LEL	Keep alarm until reading	Silence when transmitting data

Item	Alarm Set-point	Ressetting	Silencing
Low Alarm		decrease to below 10%LEL	to Device Configurator or IR Link
Default High Alarm	20%LEL	Keep alarm until reading decrease to below 20%LEL	Silence when transmitting data to Device Configurator or IR Link
Default TWA	N/A		
Default STEL	N/A		
Over Alarm	>100%LEL	Keep alarm until reading increase over 100%LEL	Silence when transmitting data to Device Configurator or IR Link

Gas Type	Setting Resolution	Low Alarm Setting Range	High Alarm Setting Range	TWA Setting range	STEL Setting Range
NDIR-CH4	1% LEL	5~60%	5~60%	N/A	N/A

Replacement Parts

CP-SS-K1 Sensor membrane(kit of 20)

CP-LBL-1 Sensor name plate

Accessories:

M05-2011-000 Calibration cap

Security Information

This manual provides additional information for the customer and organization related to identification and risk management associated with the use of the system in connected infrastructure. It applies to a system with the following components:

- Safety Suite Device Configurator
- IntelliDoX Docking Station
- Gas Detection Instruments

Some controls such as custom operating system, encrypted data for firmware updates, and elimination of confidential data from the system (except for gas log files if designated as confidential by the customer) are already built into the system. This manual is focusing on additional controls that could be added by the customer.

Security considerations for system installation

- To minimize unauthorized external access to the system, Safety Suite Device Configurator should operate behind a sufficiently robust and current company firewall.
- Ensure virus protection is installed, signature files are up-to-date, and subscriptions are active as per applicable IT policies.
- Allow only digitally signed software from trusted sources to run on PC, where Safety Suite Device Configurator is installed.
- To minimize the possibility of tampering with docking stations, instruments, and PCs, it is recommended to limit physical access to authorized personnel only.

Security considerations for instruments equipped with wireless connectivity

- Bluetooth communication is always ON. It cannot be turned OFF by the user.
- If possible pair devices ONLY when in a physically secure area

System Monitoring

It is highly recommended to perform regular security inspections of the system and review authorized access data.

Honeywell does not represent that the software is compatible with any specific third-party hardware or software other than as expressly specified by Honeywell. The Customer is responsible for providing and maintaining an operating environment with at least the minimum standards specified by Honeywell. The Customer understands and warrants that Customer must implement and maintain reasonable and appropriate security measures relating to the software, the information used therein, and the network environment. This obligation includes complying with applicable cybersecurity standards and best practices including, but not limited to, the Federal Trade Commission consent decrees and other declarations of reasonable and appropriate security measures, the National Institute of Standards and Technology (“NIST”) Cybersecurity Framework and NIST Alerts, InfraGard Alerts, and the United States Computer Emergency Readiness Team (“US-CERT”) Alerts and Bulletins, and their equivalents.

The software is provided “as is” without any express or implied warranties. Honeywell, its affiliated companies, and licensors expressly disclaim any implied warranty of merchantability, warranty of fitness for a particular purpose, and warranty of non-infringement. In no event are

Honeywell, its affiliates, and licensors liable for any loss of data, loss of profit, or any loss or damage, whether direct, indirect, incidental, special, or consequential, however arising, as a result of accessing or using the software. So long as this provision is enforceable in Customer's jurisdiction, the foregoing limitations, exclusions, and disclaimers apply to the fullest extent permitted by law even if any remedy fails of its essential purpose.

In terms of North America flammable gas performance approval:

Honeywell BW™ Icon and Icon+ is approved for CSA 60079-29-1

Only Honeywell BW™ Icon and Icon+ infrared sensor was evaluated for CSA 60079-29-1.

The evaluation is valid with flow rate 500ml/min, CH₄ (Methane) gas and Safety Suite Device Configurator in CSA lab test.

The other options are not the scope of CSA 60079-29-1.

For the compliance of CSA 60079-29-1, the adjustable alarm point shall not exceed 5% to 60 %. The highest alarm can be configured as latching alarm.

Honeywell BW™ Icon and Icon+ was pressure tested for 80 to 120 kPa, temperature tested for -40°C to 60°C, humidity tested 5% to 95% RH and air velocity less than 6m/s in CSA lab test.

Battery voltage is 3.7V and the duration time till low battery condition mentioned is verified by manufacturer, performance test in CSA lab only verify the low battery duration.

Infrared CH₄ sensor warm up time is 30s or up to 2 min and 1 hour for calibration in CSA lab test.
Performance Temperature Dependence

- T90<30
- -20 to 60°C, ±5%LEL or ±10% of reading at 20°C, whichever value is greater
- -40 to -21°C, ±10%LEL or ±20% of reading at 20°C, whichever value is greater

Contact Us

Europe, Middle East, Africa

Life Safety Distribution GmbH

Toll-Free 00800 333 222 44

Middle East +971 4 450 5800

Middle East +971 4 450 5852

(Portable Gas Detection)

gasdetection@honeywell.com

Americas

Honeywell Analytics

Distribution Inc.

Tel: +1 847 955 8200

Toll free: +1 800 538 0363

detectgas@honeywell.com

Asia Pacific

Honeywell Analytics Asia Pacific

Tel: +82 (0) 2 6909 0300

India Tel: +91 124 4752700

analytics.ap@honeywell.com

Technical Services

EMEA: HAexpert@honeywell.com

US: ha.us.service@honeywell.com

AP: ha.ap.service@honeywell.com



www.honeywellanalytics.com

Honeywell

© 2020, August 17

Glossary

M	
My Term	My definition
