




Annex F

A/C Powerline

Conducted Emission



Line 1 (Neutral)

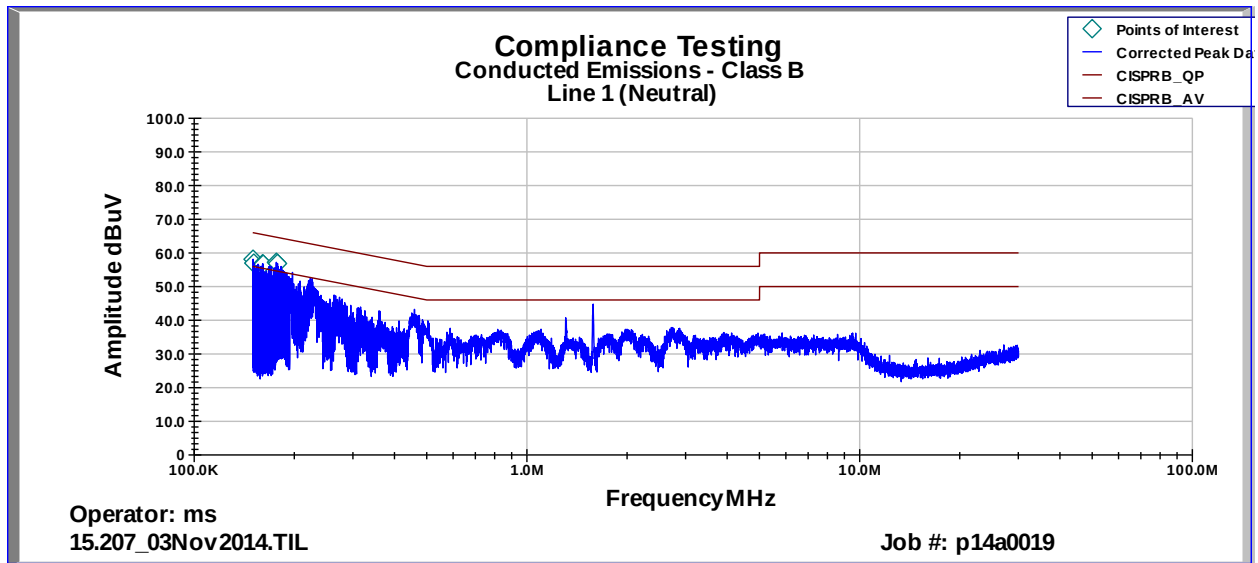

L1 AVG


Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
182.35 KHz	25.07	0.2	0.02	10.1	35.39	55.076	-19.686
182.08 KHz	25.03	0.2	0.02	10.1	35.347	55.083	-19.737
153.11 KHz	13.51	0.27	0.02	10.2	23.999	55.911	-31.912
152.43 KHz	14.92	0.28	0.02	10.2	25.419	55.93	-30.511
152.39 KHz	14.74	0.28	0.02	10.2	25.233	55.932	-30.699
150.52 KHz	17.12	0.29	0.02	10.2	27.638	55.985	-28.347

L1 QP

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
182.35 KHz	42.63	0.2	0.02	10.1	52.95	65.076	-12.126
182.08 KHz	42.67	0.2	0.02	10.1	52.99	65.083	-12.093
153.11 KHz	38.55	0.269	0.02	10.2	49.039	65.911	-16.872
152.43 KHz	37.85	0.276	0.02	10.2	48.346	65.93	-17.585
152.39 KHz	37.95	0.276	0.02	10.2	48.446	65.932	-17.486
150.52 KHz	38.8	0.295	0.02	10.2	49.315	65.985	-16.67



Line 2 (Phase)

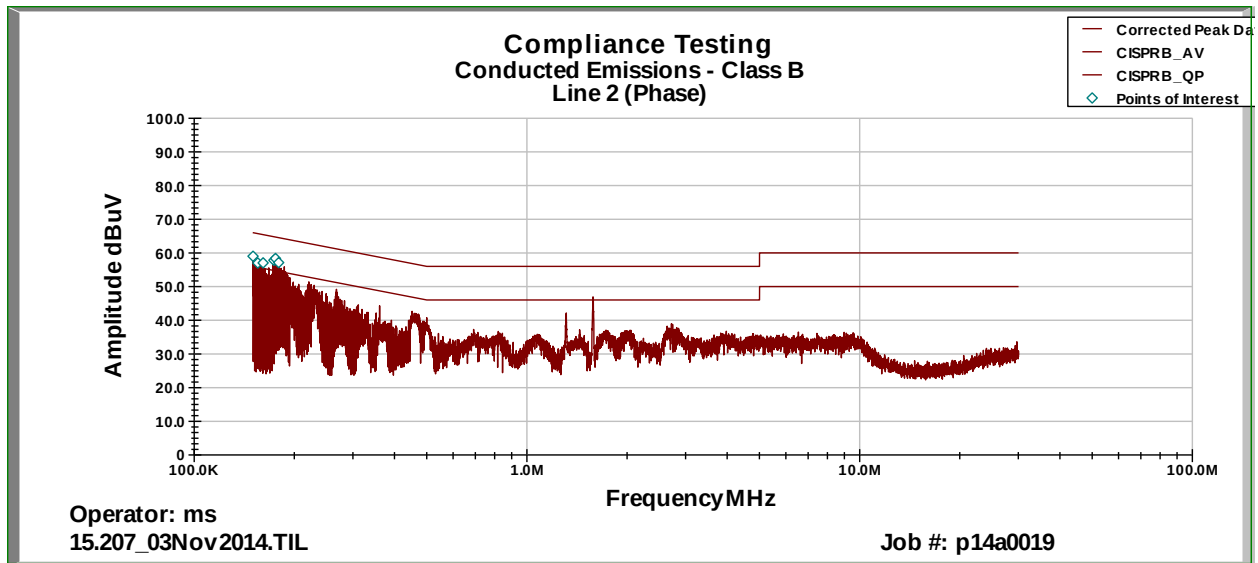

L2 AVG

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
181.22 KHz	24.72	0.2	0.02	10.1	35.04	55.108	-20.068
179.36 KHz	23.35	0.2	0.02	10.1	33.667	55.161	-21.494
168.93 KHz	11.4	0.2	0.02	10.111	21.731	55.459	-33.728
153.4 KHz	14.21	0.27	0.02	10.2	24.696	55.903	-31.207
152.01 KHz	15.25	0.28	0.02	10.2	25.753	55.943	-30.189
151.68 KHz	15.24	0.28	0.02	10.2	25.74	55.952	-30.212

L2 QP

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
181.22 KHz	42.35	0.2	0.02	10.1	52.67	65.108	-12.438
179.36 KHz	41.99	0.2	0.02	10.1	52.31	65.161	-12.851
168.93 KHz	34.59	0.2	0.02	10.111	44.921	65.459	-20.538
153.4 KHz	37.6	0.27	0.02	10.2	48.086	65.903	-17.817
152.01 KHz	38.58	0.28	0.02	10.2	49.08	65.943	-16.863
151.68 KHz	37.29	0.28	0.02	10.2	47.793	65.952	-18.159