




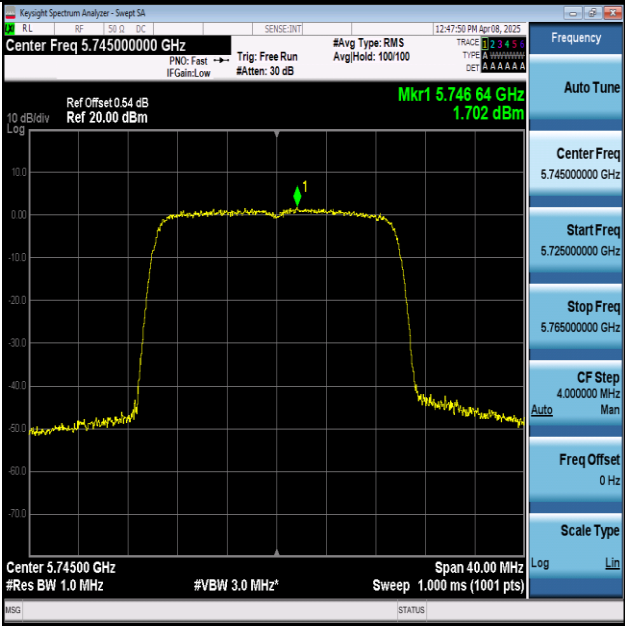


11AX20MIMO-Ant1-5745-PASS

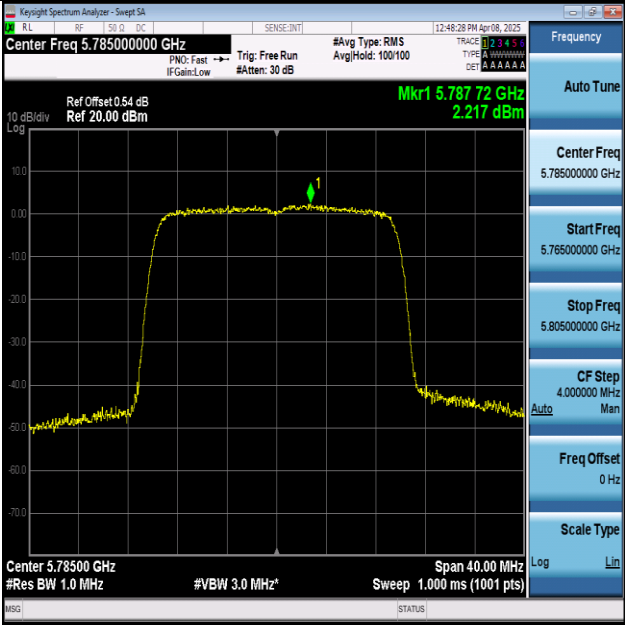


11AX20MIMO-Ant1-5785-PASS

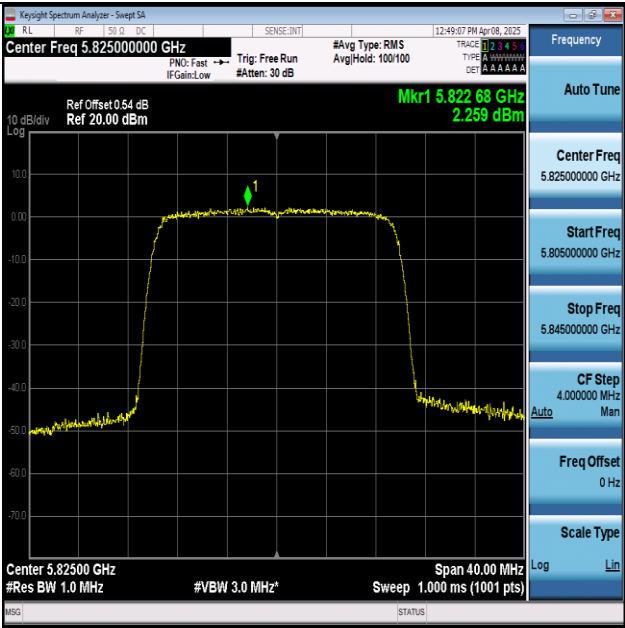


11AX20MIMO-Ant1-5825-PASS

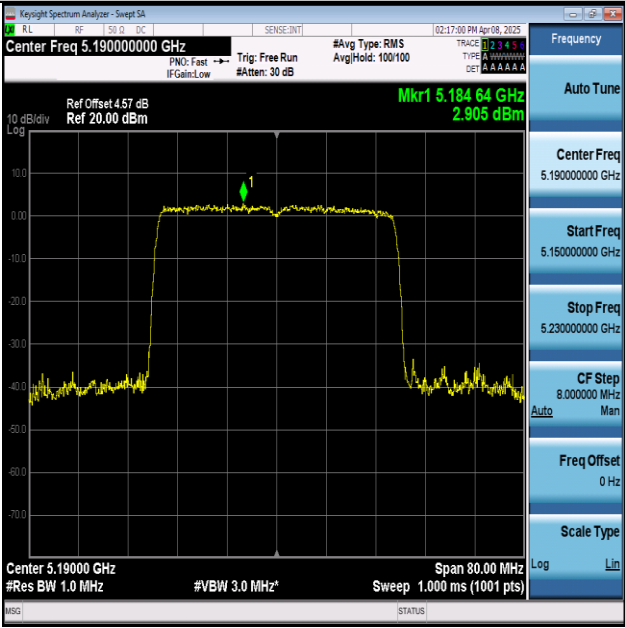


11AX40MIMO-Ant1-5190-PASS

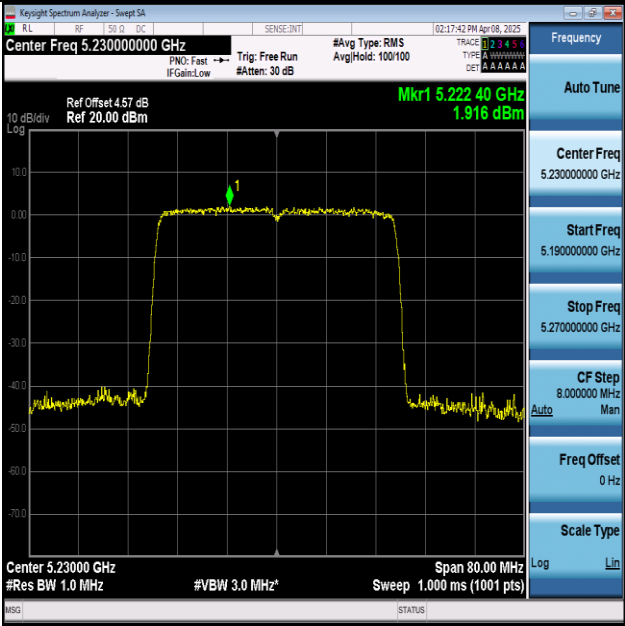


11AX40MIMO-Ant1-5230-PASS

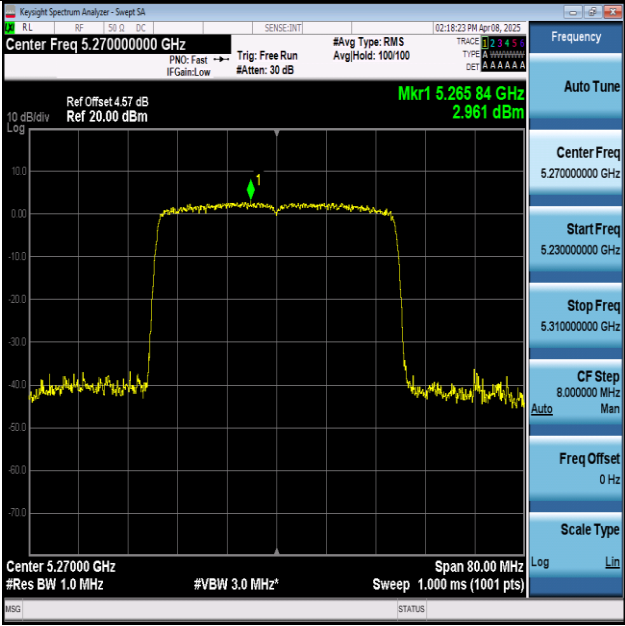


11AX40MIMO-Ant1-5270-PASS

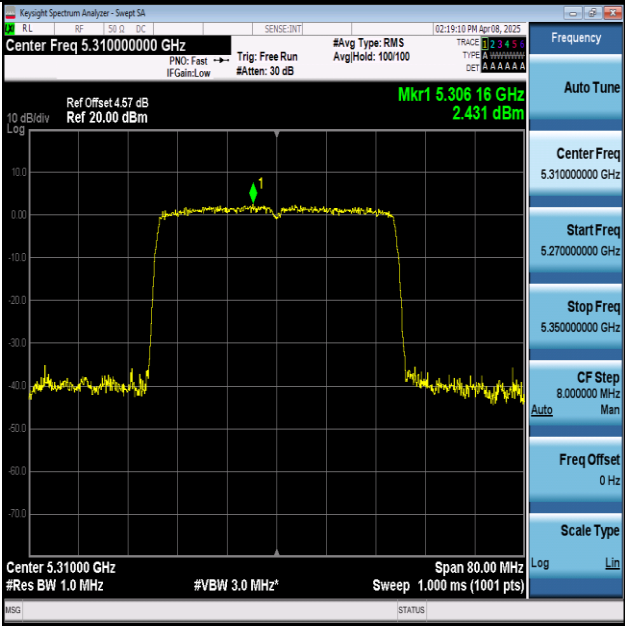


11AX40MIMO-Ant1-5310-PASS

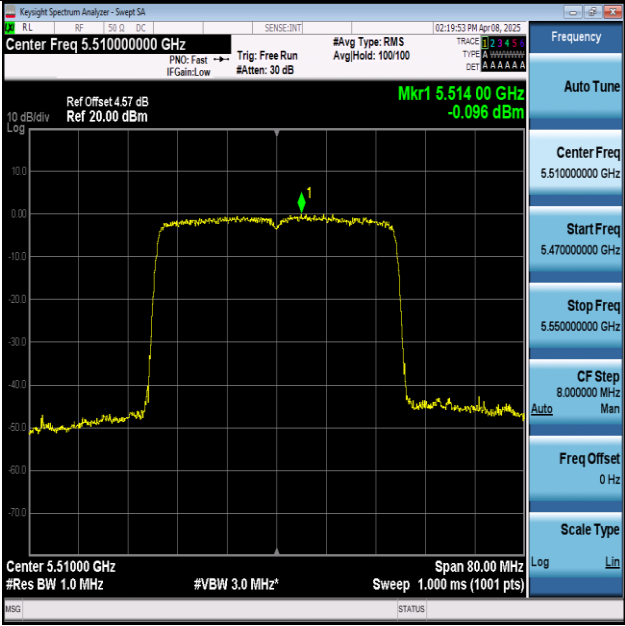


11AX40MIMO-Ant1-5510-PASS

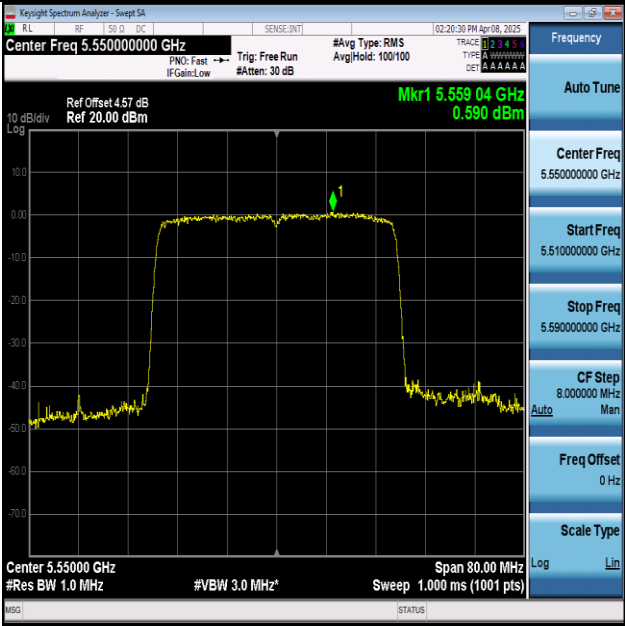


11AX40MIMO-Ant1-5550-PASS

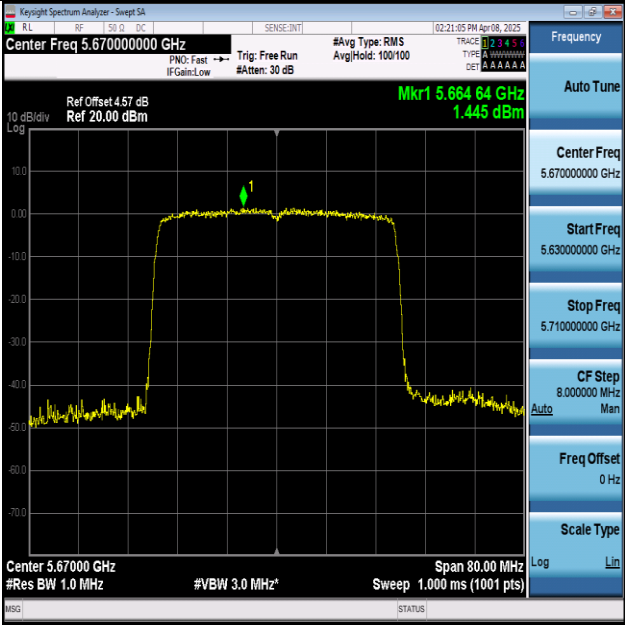


11AX40MIMO-Ant1-5670-PASS

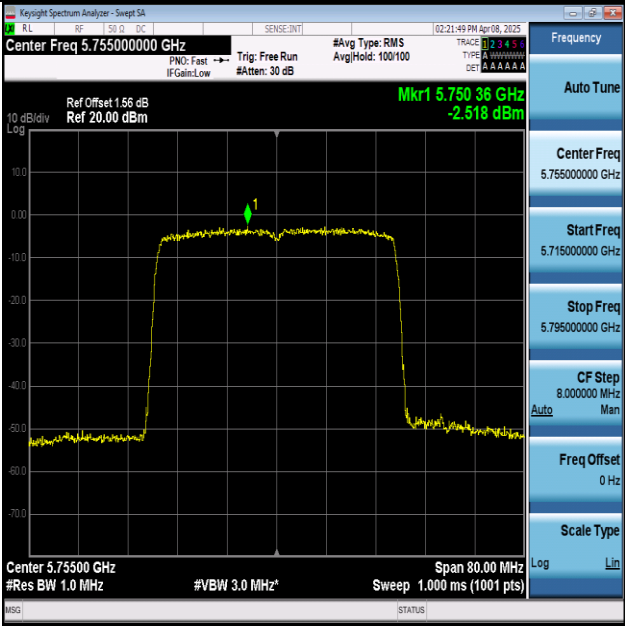


11AX40MIMO-Ant1-5755-PASS

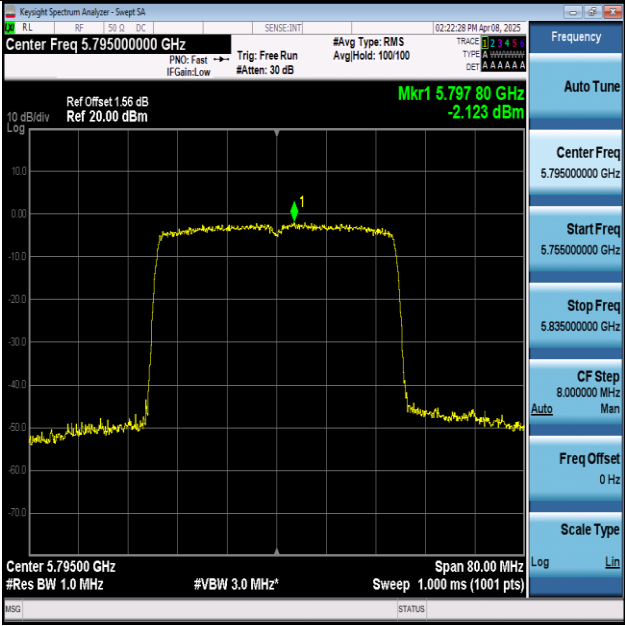


11AX40MIMO-Ant1-5795-PASS

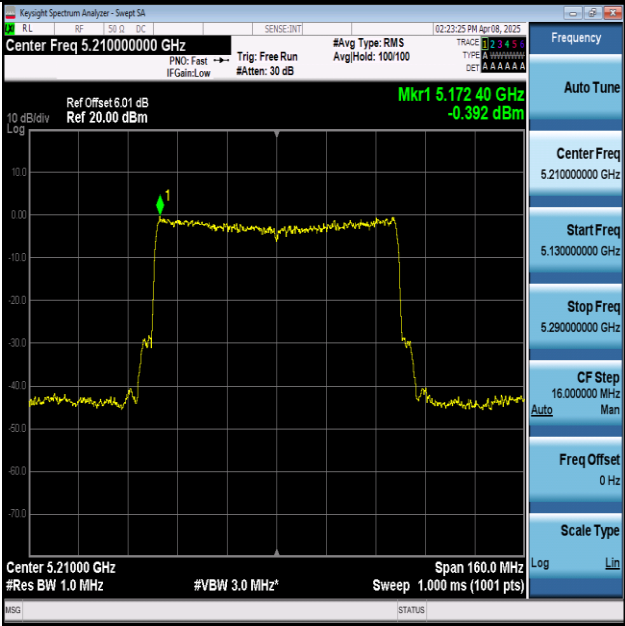


11AX80MIMO-Ant1-5210-PASS

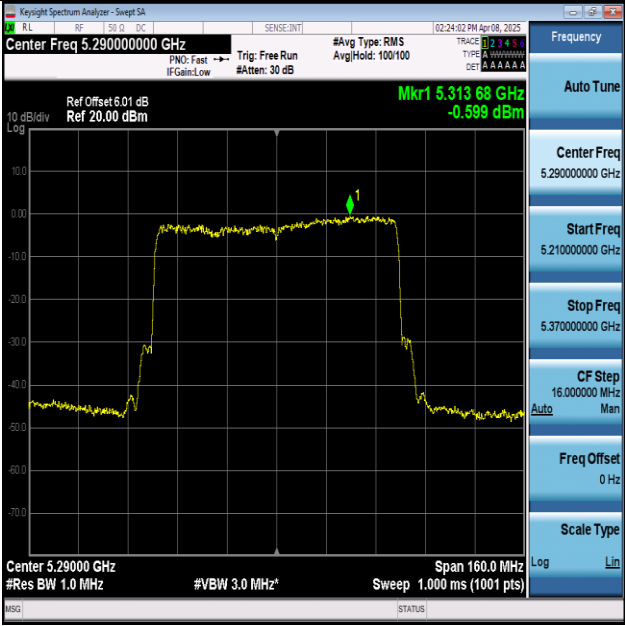


11AX80MIMO-Ant1-5290-PASS

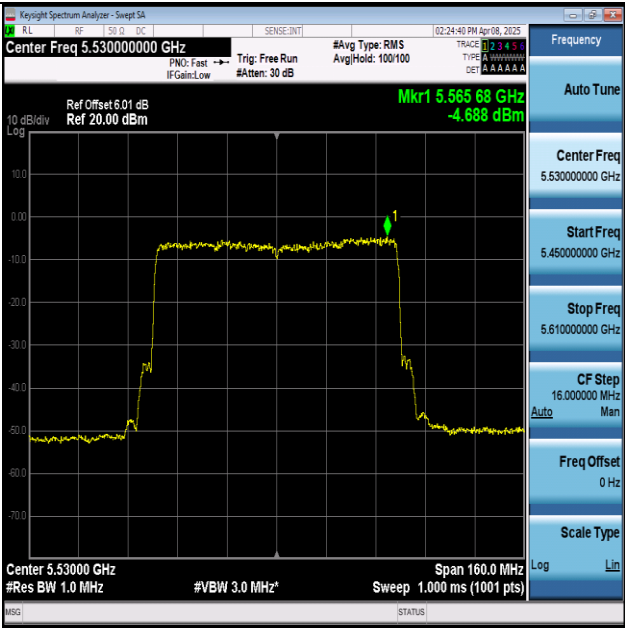

11AX80MIMO-Ant1-5530-PASS

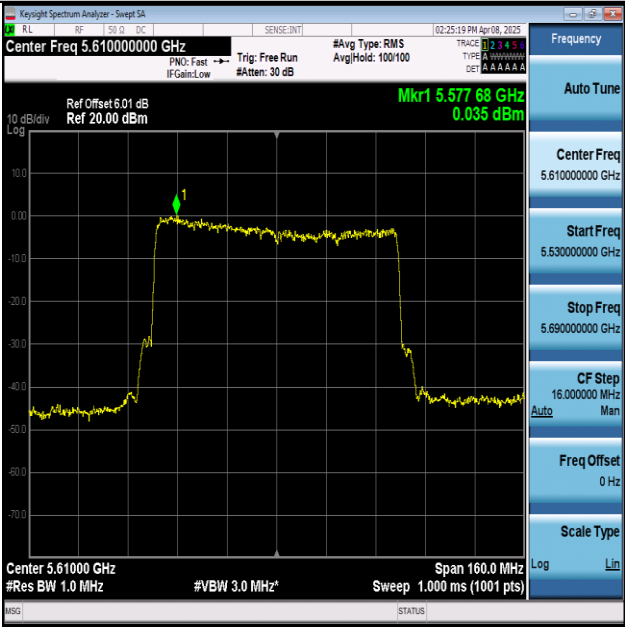


11AX80MIMO-Ant1-5610-PASS

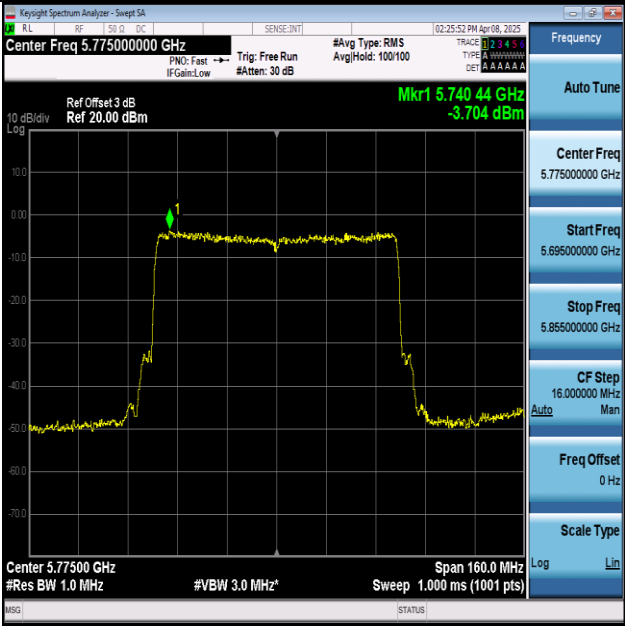

11AX80MIMO-Ant1-5775-PASS

Appendix G: Radiated Emission Band Edge**Test Report****Project Information**

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

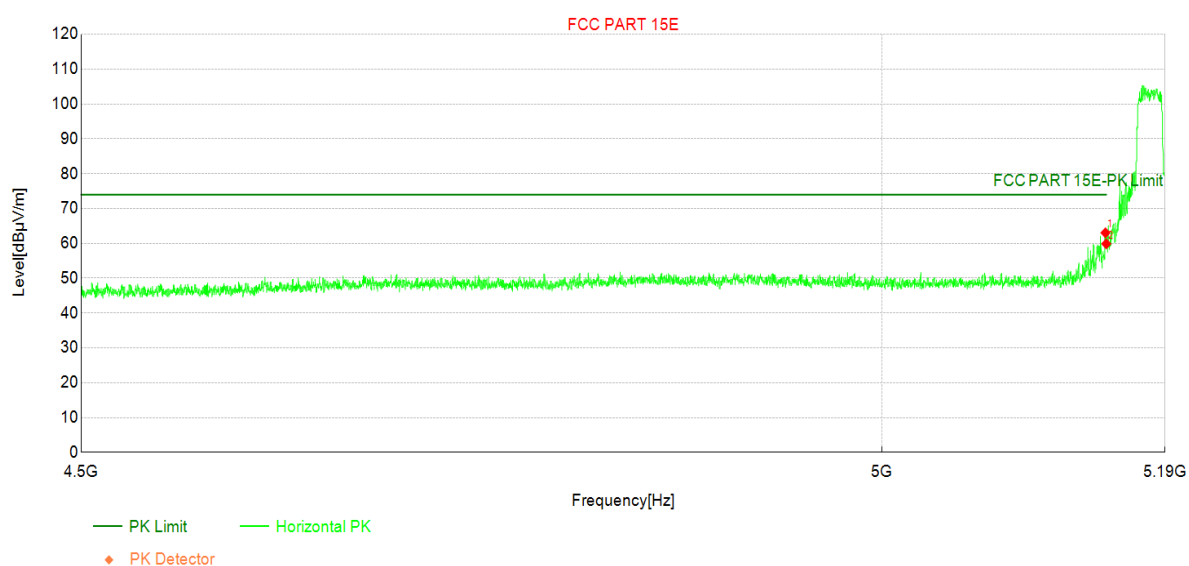Test Graph**Suspected Data List**


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5149.46	47.90	63.01	15.11	74.00	10.99	PK	Horizo	PASS
2	5150.00	44.75	59.86	15.11	74.00	14.14	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

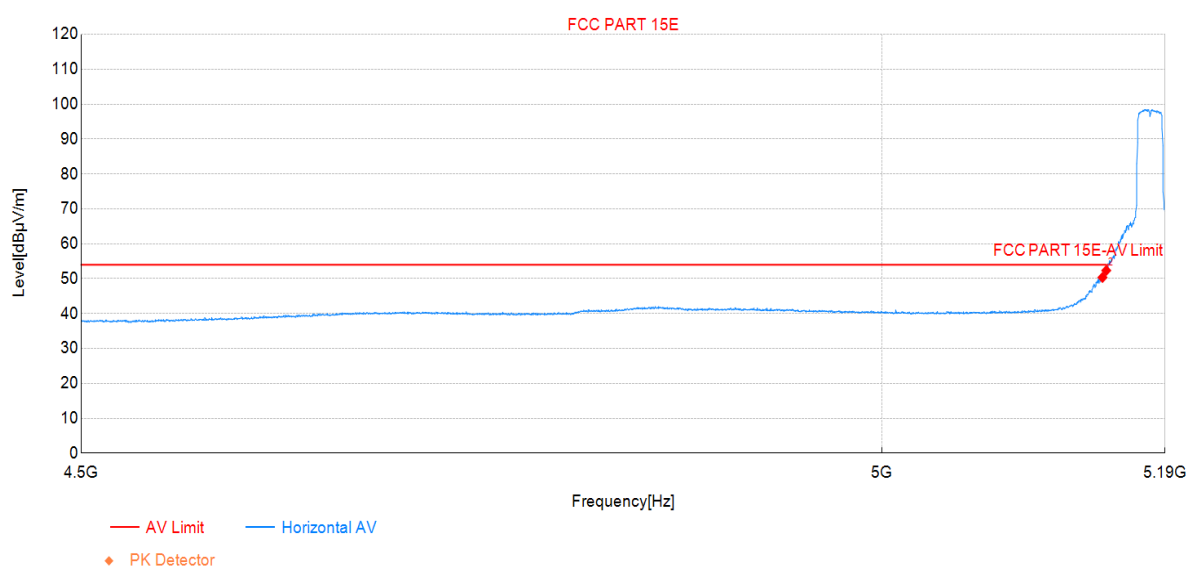

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5147.45	35.24	50.34	15.10	54.00	3.66	AV	Horizo	PASS
2	5150.00	37.22	52.33	15.11	54.00	1.67	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

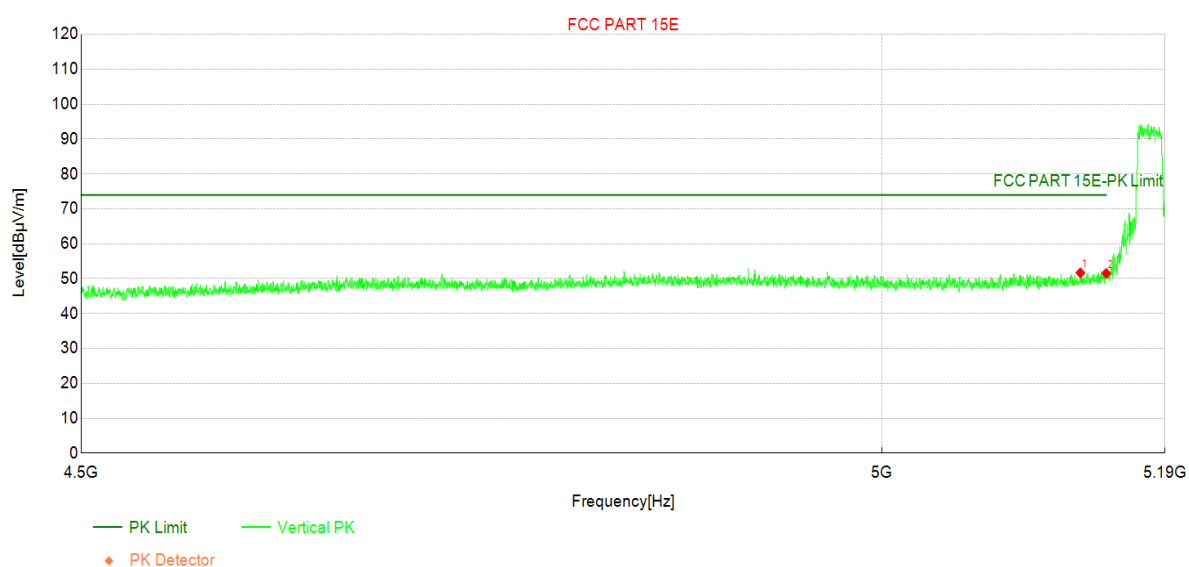

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5132.47	36.68	51.69	15.01	74.00	22.31	PK	Vertic	PASS
2	5150.00	36.39	51.50	15.11	74.00	22.50	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

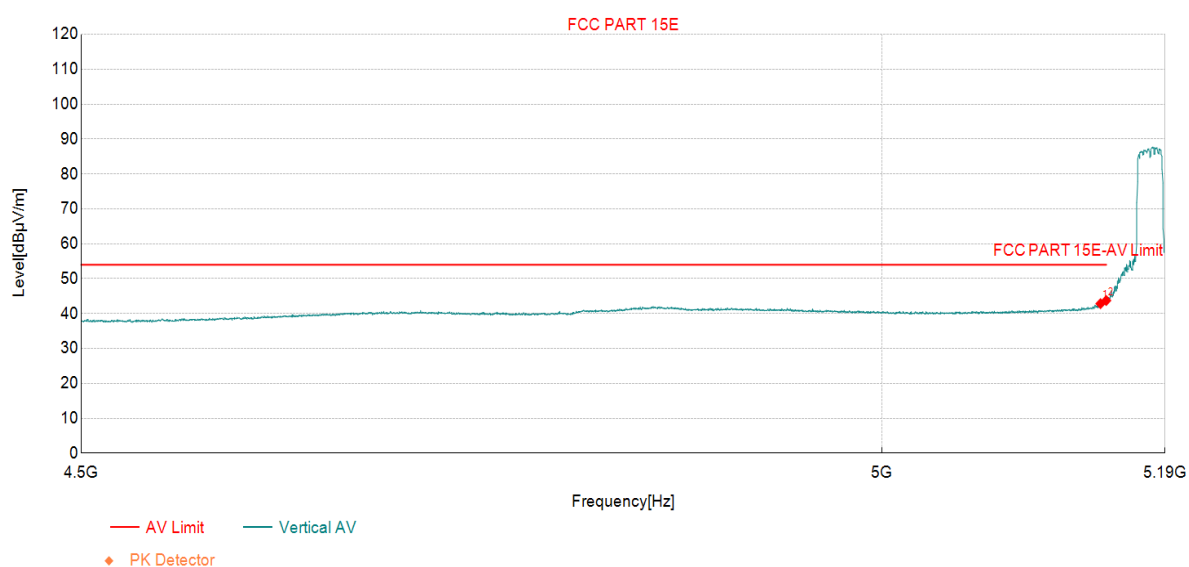

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146.07	27.75	42.84	15.09	54.00	11.16	AV	Vertic	PASS
2	5150.00	28.63	43.74	15.11	54.00	10.26	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

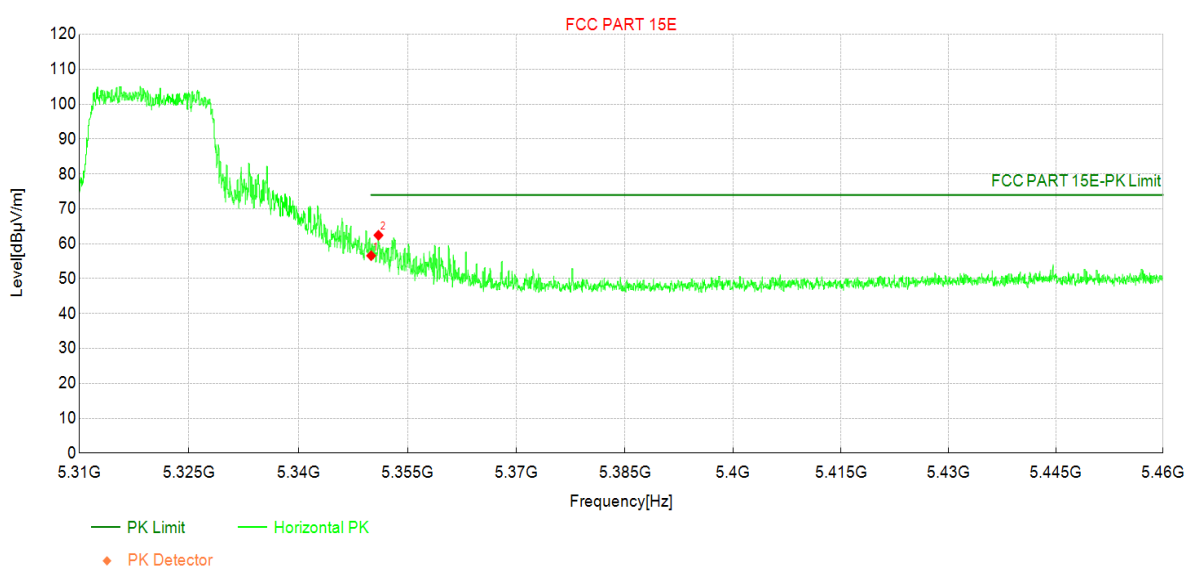

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	40.87	56.58	15.71	74.00	17.42	PK	Horizo	PASS
2	5351.01	46.72	62.43	15.71	74.00	11.57	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

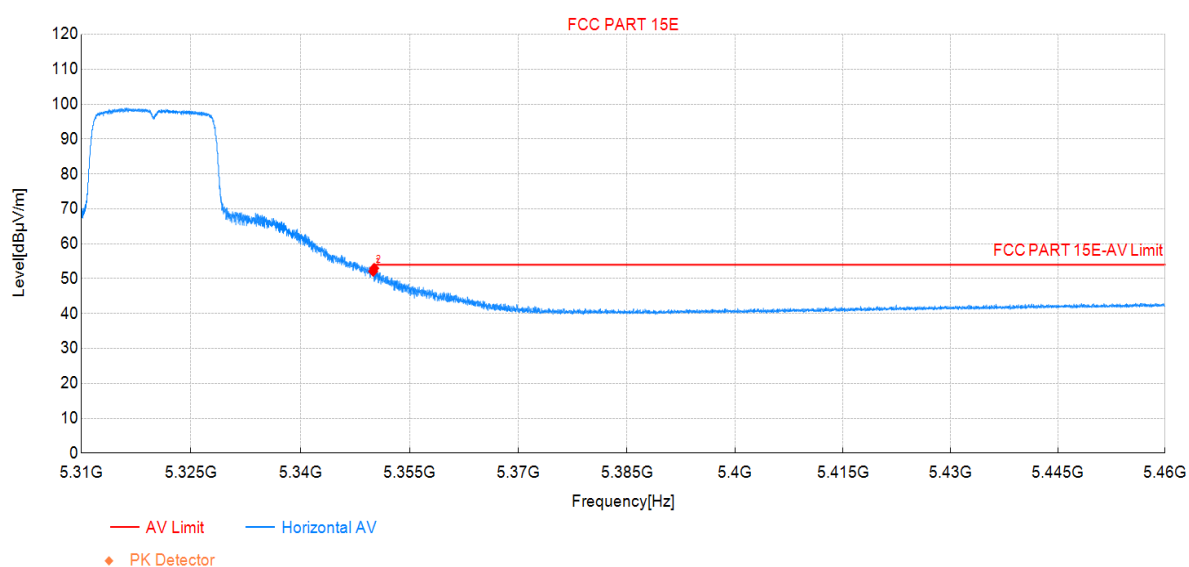

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	36.39	52.10	15.71	54.00	1.90	AV	Horizo	PASS
2	5350.14	37.26	52.97	15.71	54.00	1.03	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

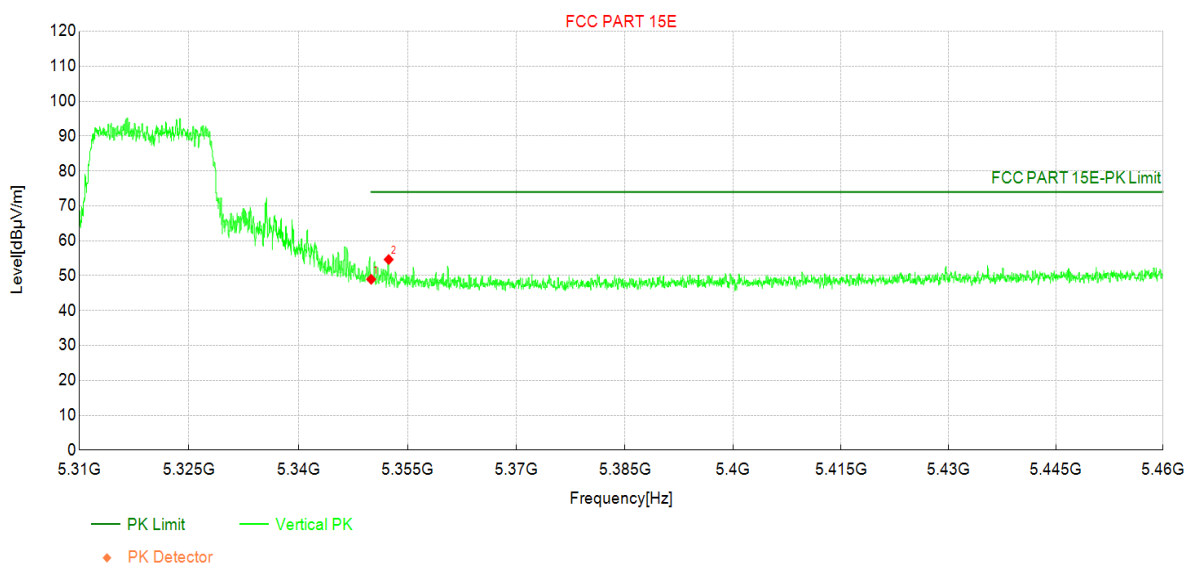

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.25	48.96	15.71	74.00	25.04	PK	Vertic	PASS
2	5352.41	38.92	54.63	15.71	74.00	19.37	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

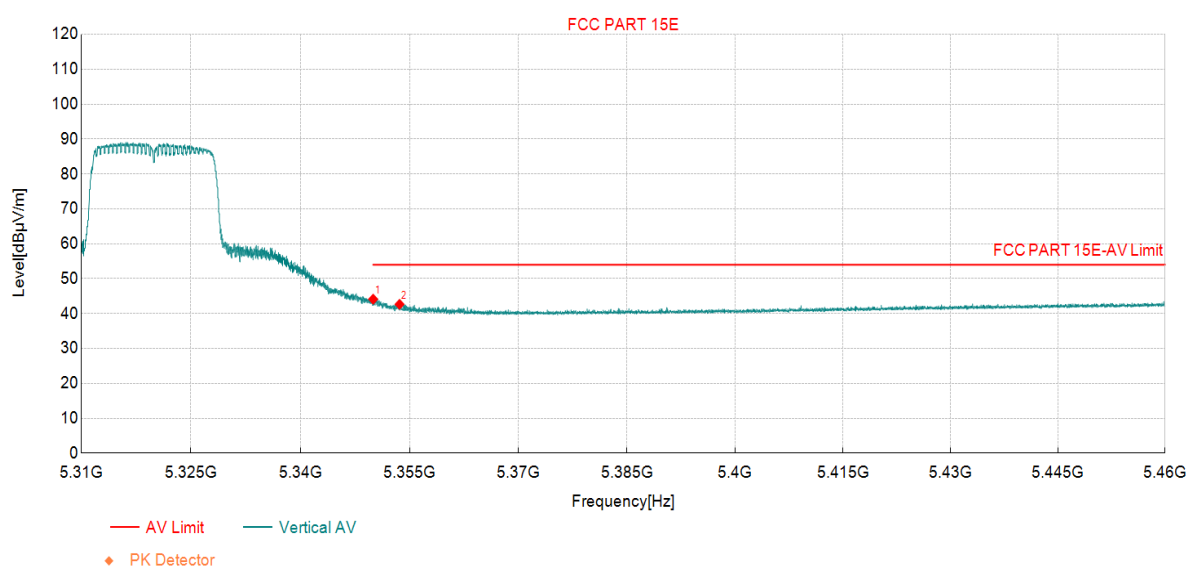

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	28.41	44.12	15.71	54.00	9.88	AV	Vertic	PASS
2	5353.63	26.95	42.65	15.70	54.00	11.35	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

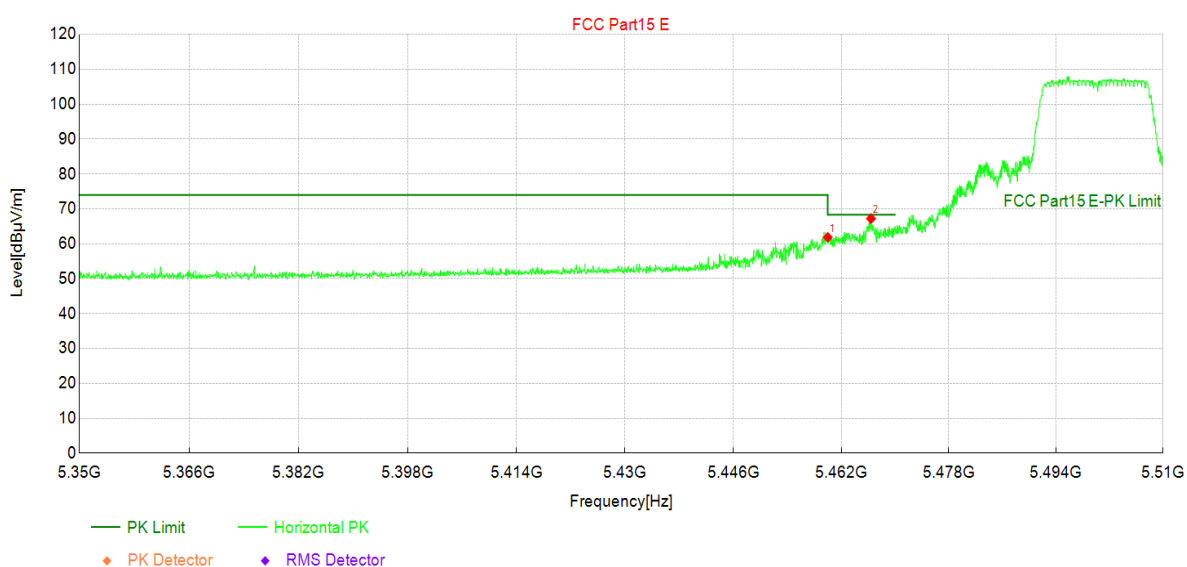

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	45.49	61.83	16.34	68.30	6.47	PK	Horizo	PASS
2	5466.43	50.79	67.20	16.41	68.30	1.10	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

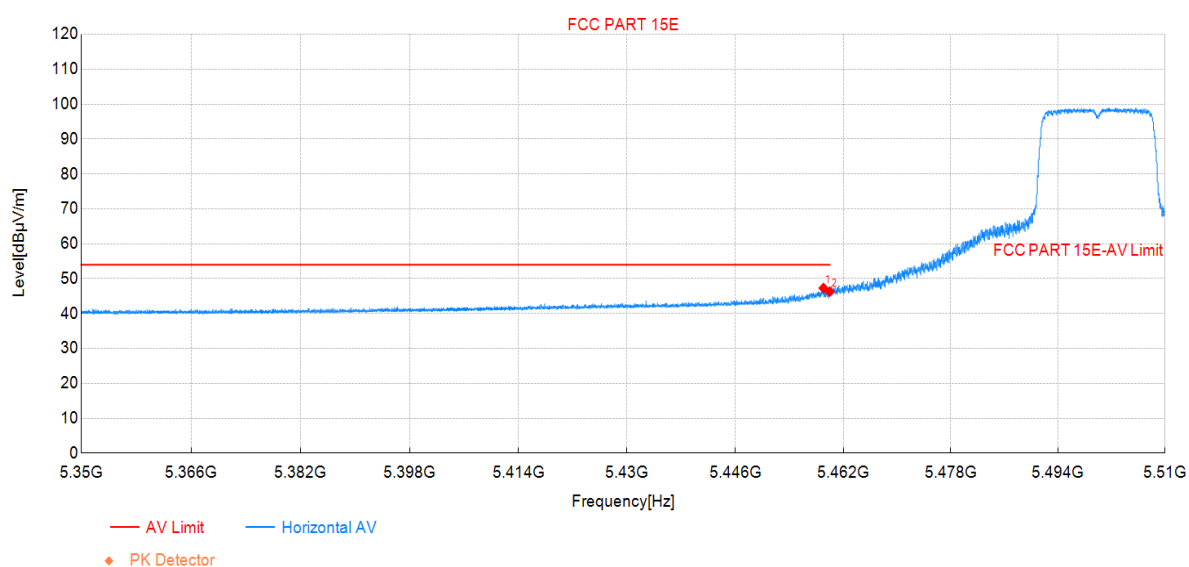

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5459.06	30.97	47.30	16.33	54.00	6.70	AV	Horizo	PASS
2	5460.00	29.92	46.26	16.34	54.00	7.74	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

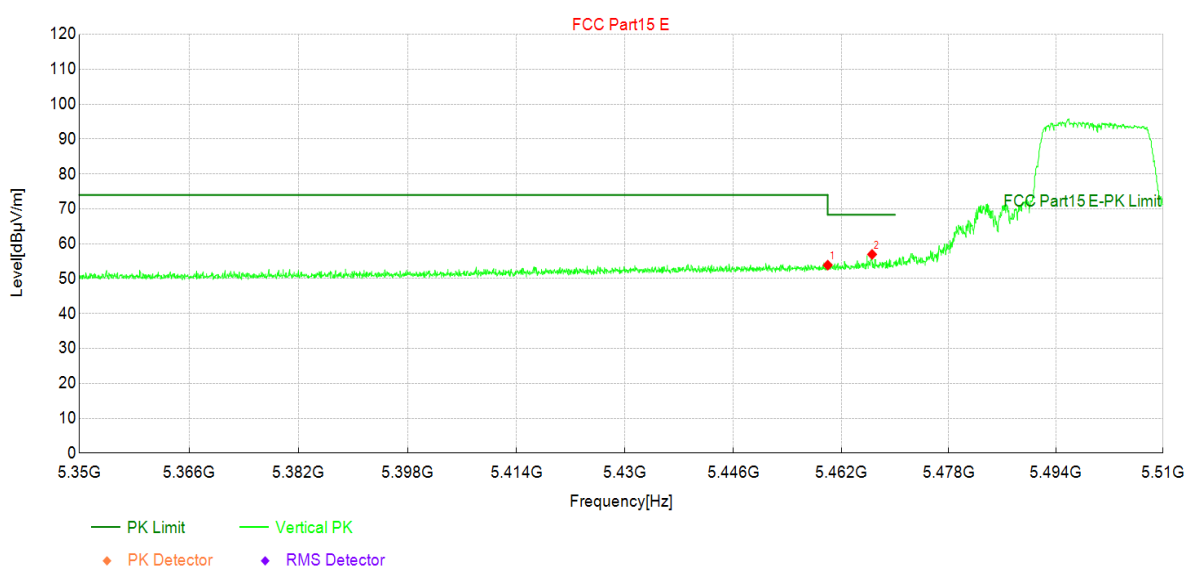

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	37.53	53.87	16.34	68.30	14.43	PK	Vertic	PASS
2	5466.59	40.54	56.95	16.41	68.30	11.35	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

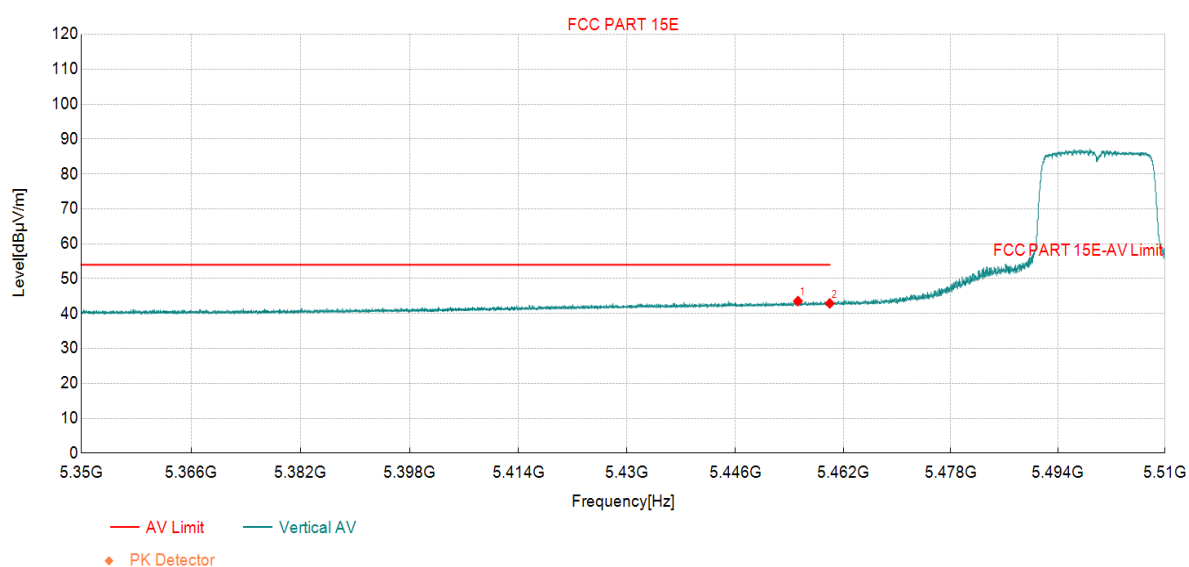

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5455.28	27.27	43.56	16.29	54.00	10.44	AV	Vertic	PASS
2	5460.00	26.56	42.90	16.34	54.00	11.10	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

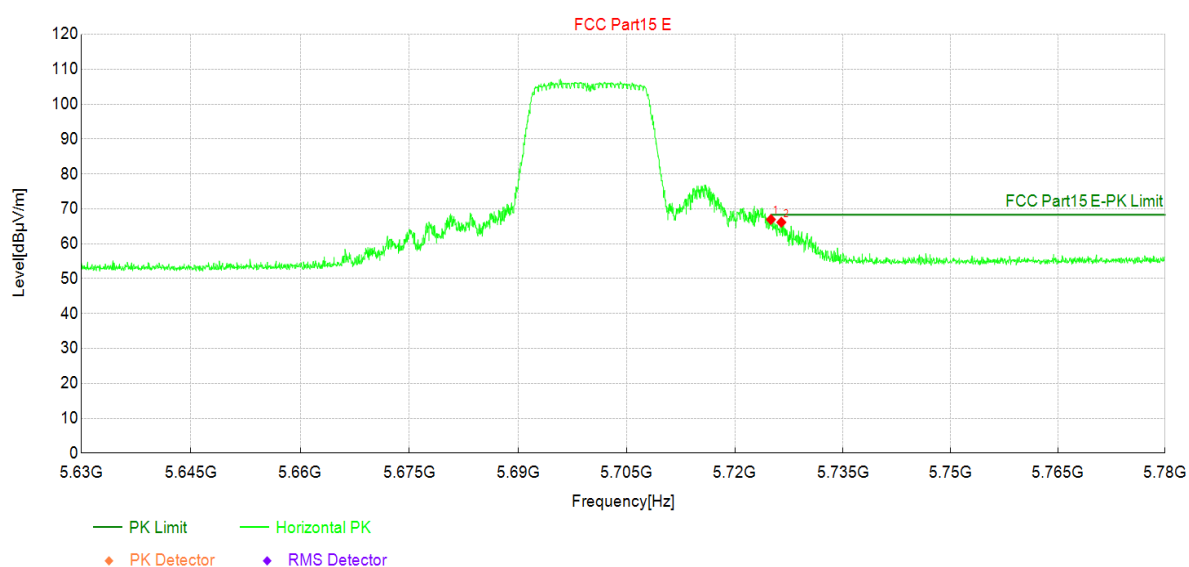

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	48.27	66.94	18.67	68.30	1.36	PK	Horizo	PASS
2	5726.45	47.49	66.15	18.66	68.30	2.15	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

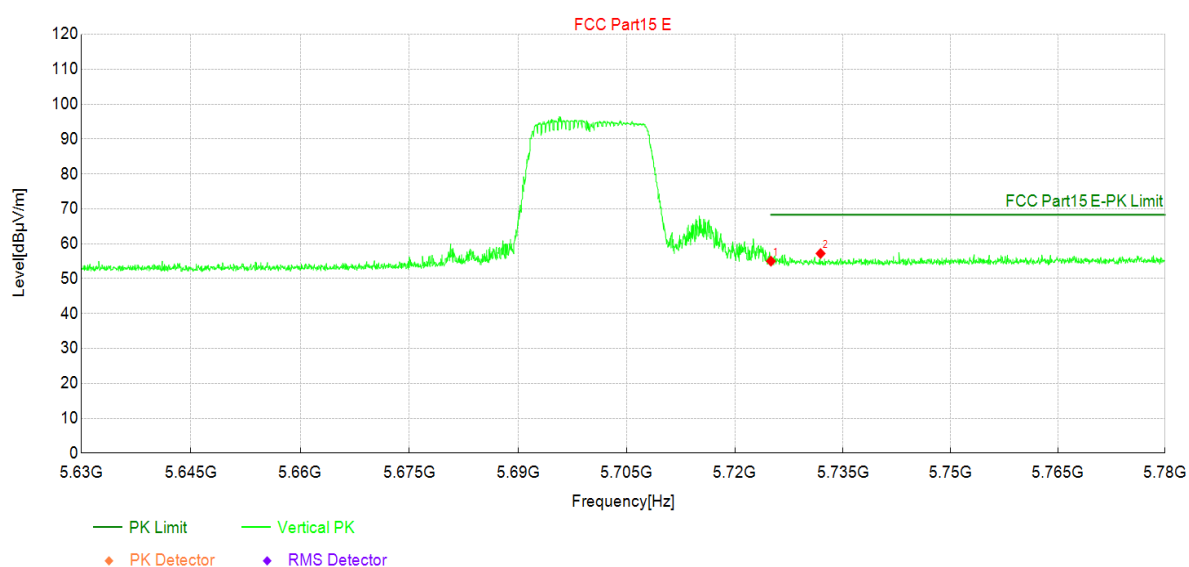

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	36.35	55.02	18.67	68.30	13.28	PK	Vertic	PASS
2	5731.90	38.55	57.20	18.65	68.30	11.10	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

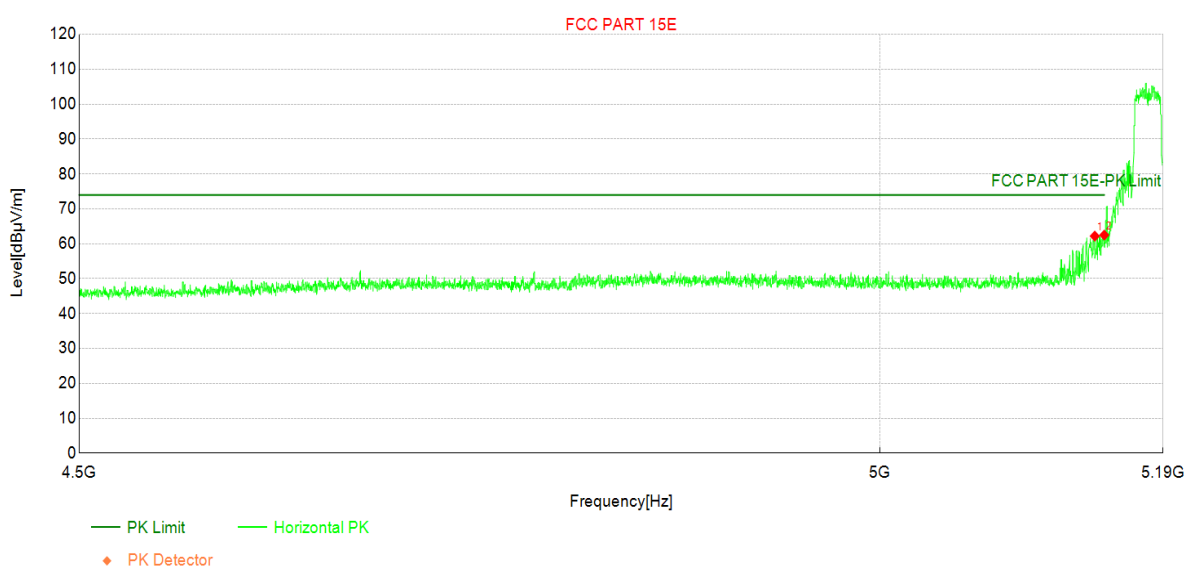

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.60	47.12	62.19	15.07	74.00	11.81	PK	Horizo	PASS
2	5150.00	47.38	62.49	15.11	74.00	11.51	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

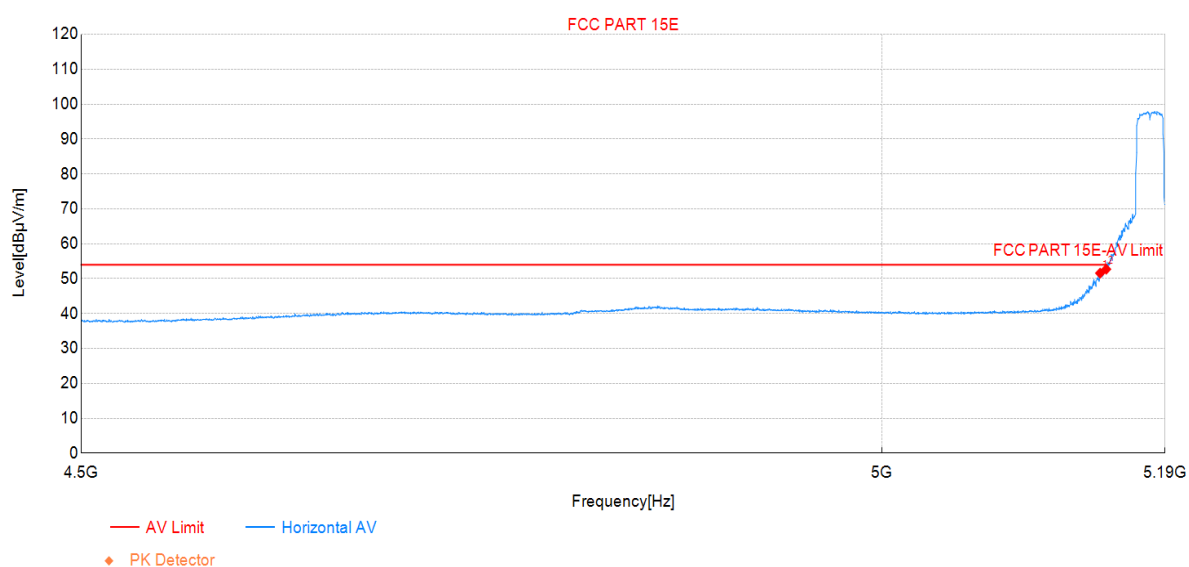

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5145.84	36.49	51.58	15.09	54.00	2.42	AV	Horizo	PASS
2	5150.00	37.60	52.71	15.11	54.00	1.29	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

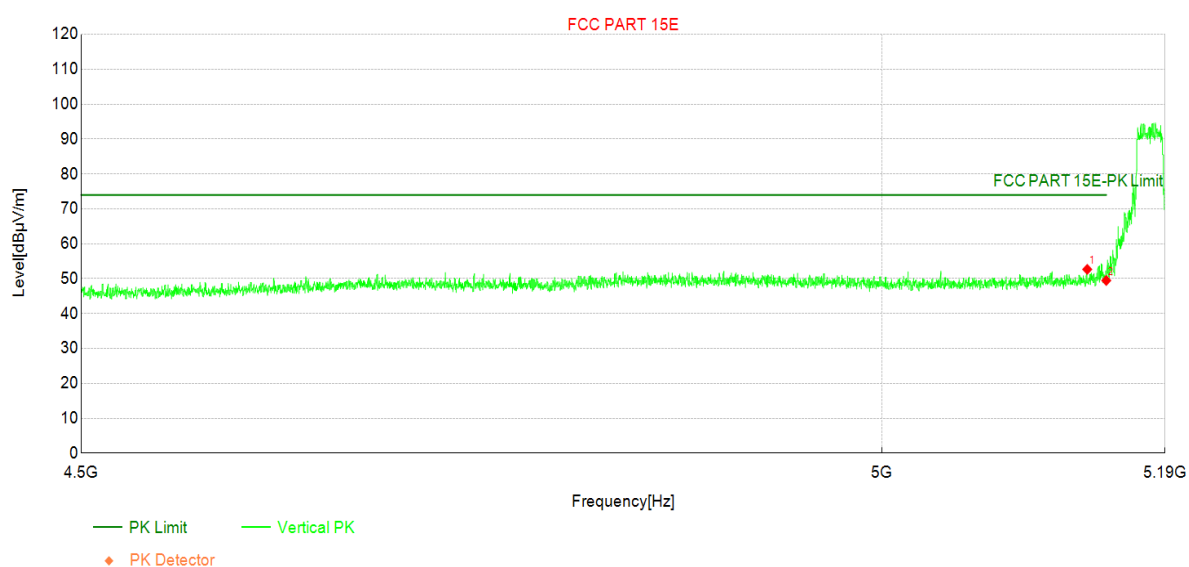

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5137.13	37.62	52.66	15.04	74.00	21.34	PK	Vertic	PASS
2	5150.00	34.36	49.47	15.11	74.00	24.53	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

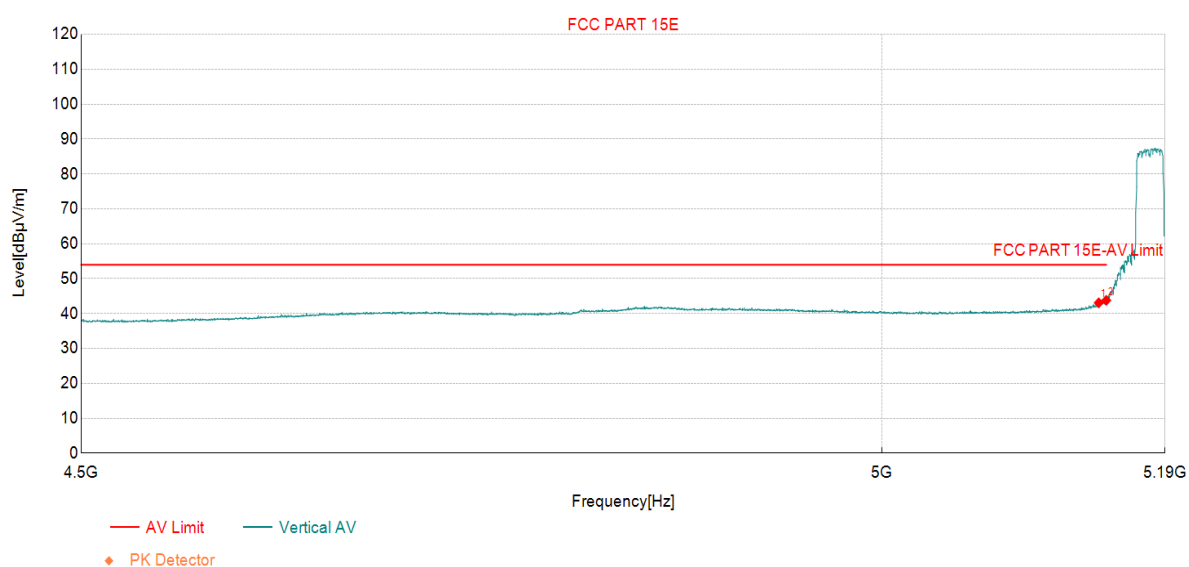

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144.92	28.00	43.08	15.08	54.00	10.92	AV	Vertic	PASS
2	5150.00	28.67	43.78	15.11	54.00	10.22	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

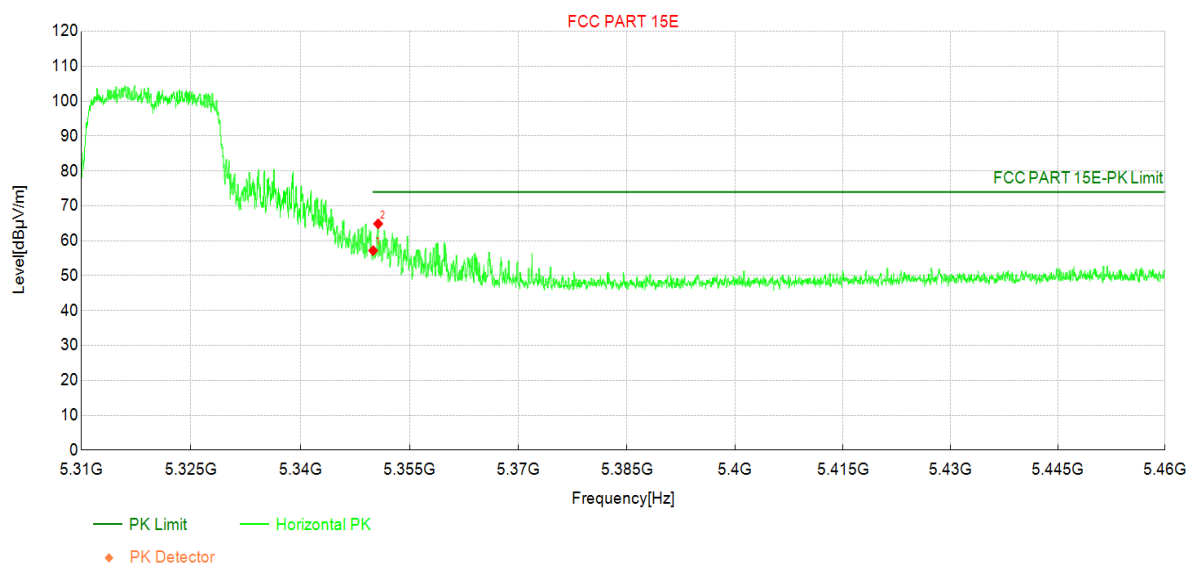

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	41.46	57.17	15.71	74.00	16.83	PK	Horizo	PASS
2	5350.69	49.15	64.86	15.71	74.00	9.14	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

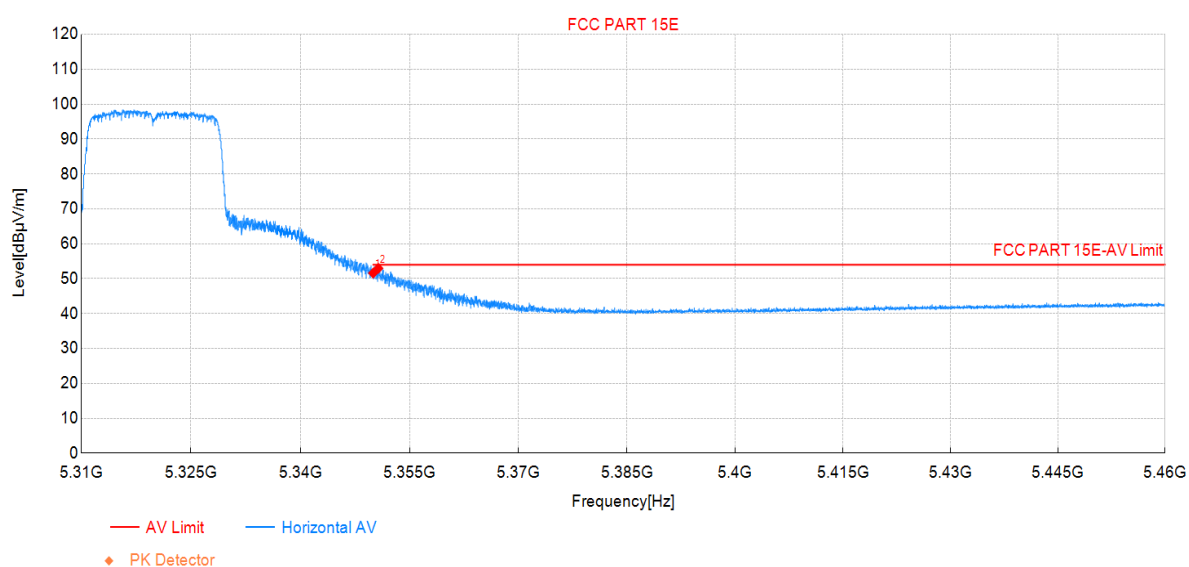

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	35.88	51.59	15.71	54.00	2.41	AV	Horizo	PASS
2	5350.71	37.26	52.97	15.71	54.00	1.03	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

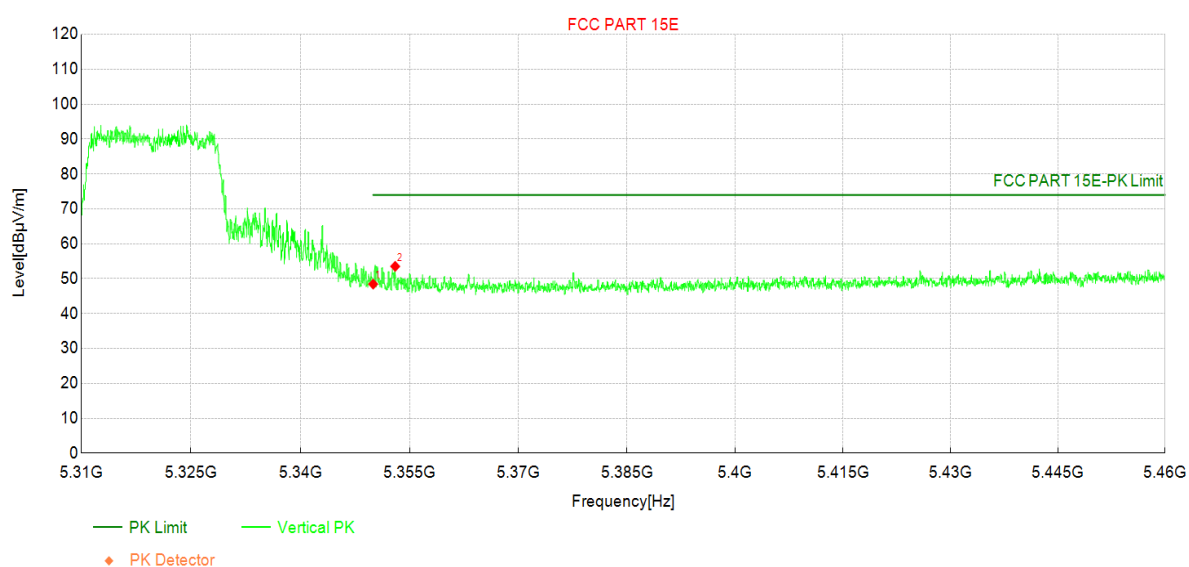

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.73	48.44	15.71	74.00	25.56	PK	Vertic	PASS
2	5353.03	37.81	53.52	15.71	74.00	20.48	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

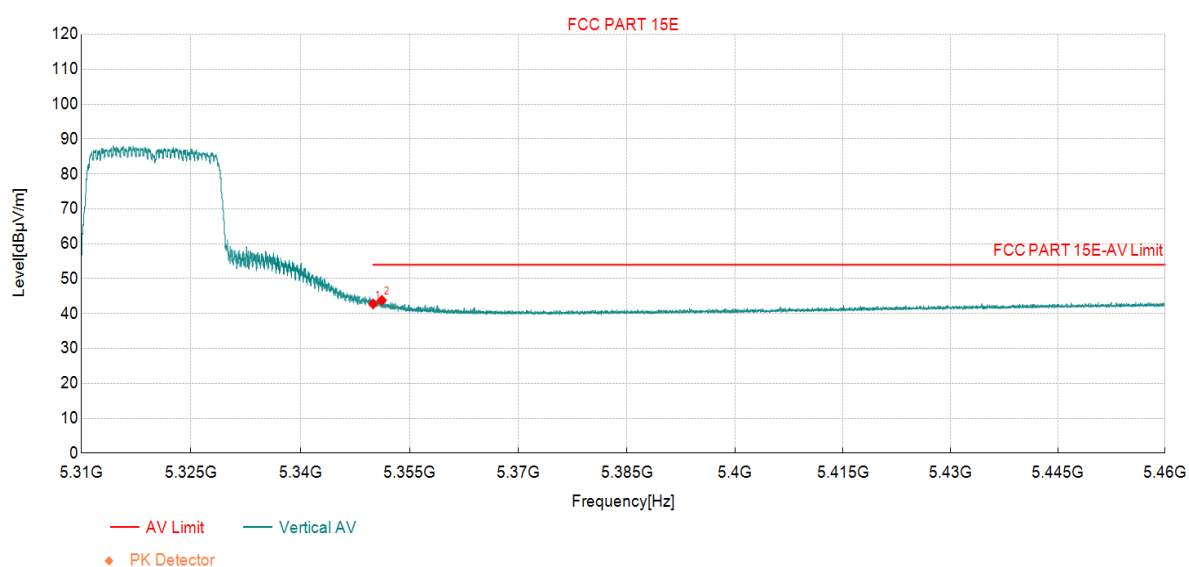

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	27.05	42.76	15.71	54.00	11.24	AV	Vertic	PASS
2	5351.19	28.08	43.79	15.71	54.00	10.21	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

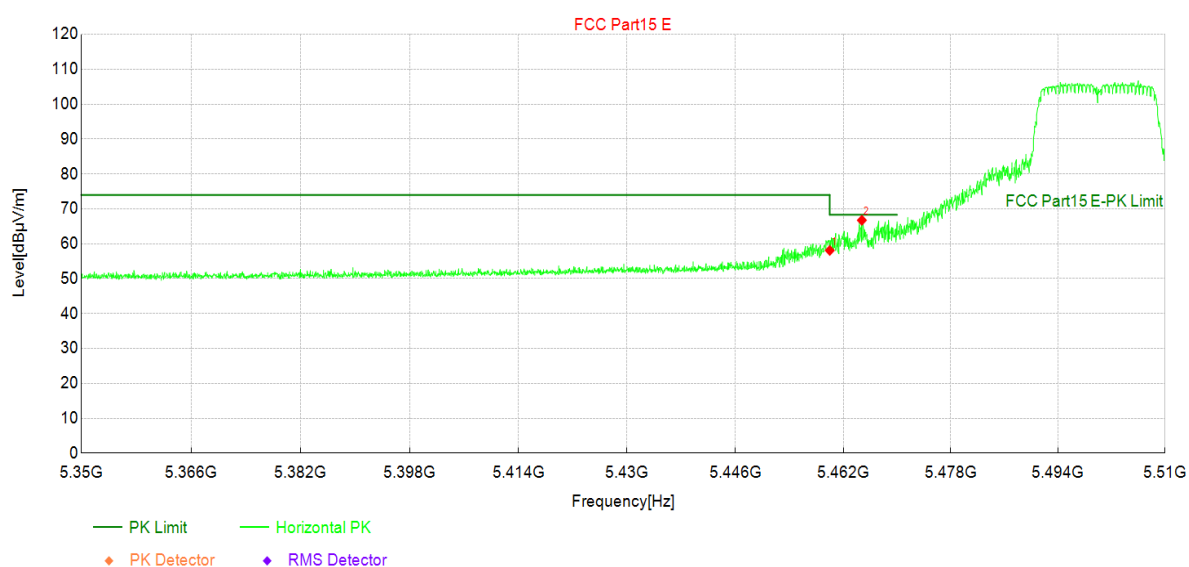

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	41.74	58.08	16.34	68.30	10.22	PK	Horizo	PASS
2	5464.77	50.34	66.74	16.40	68.30	1.56	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

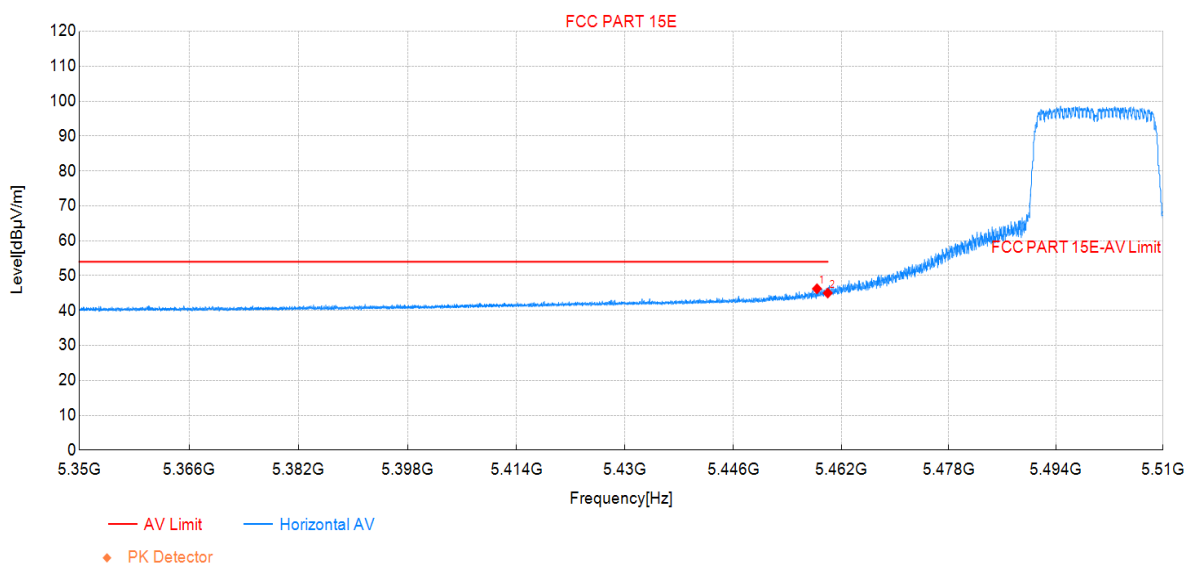

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.40	29.92	46.24	16.32	54.00	7.76	AV	Horizo	PASS
2	5460.00	28.67	45.01	16.34	54.00	8.99	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

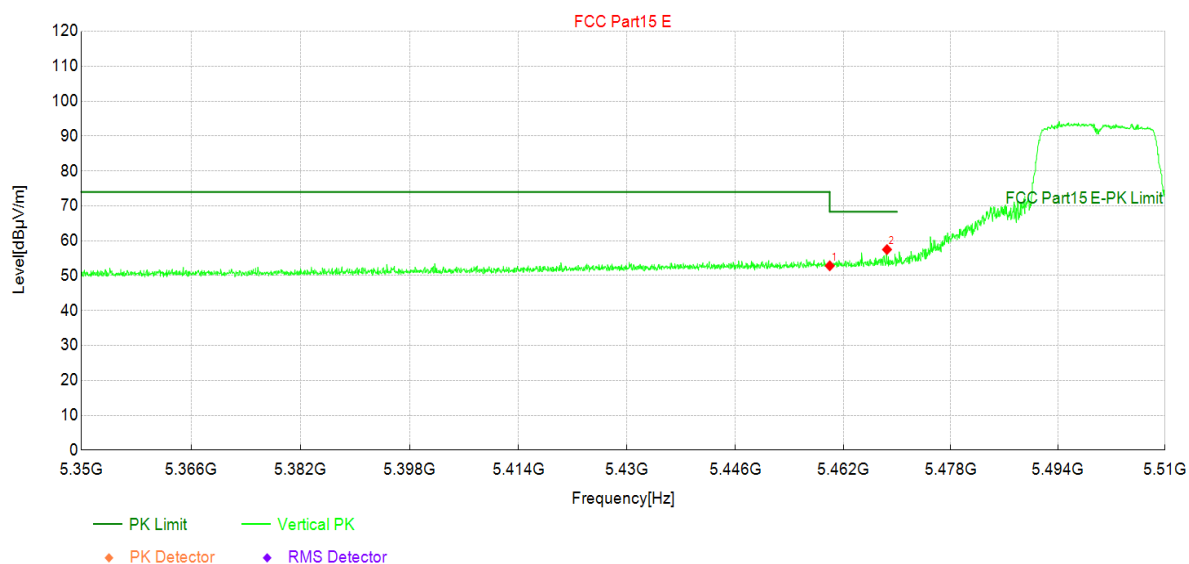

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	36.48	52.82	16.34	68.30	15.48	PK	Vertic	PASS
2	5468.51	41.04	57.48	16.44	68.30	10.82	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

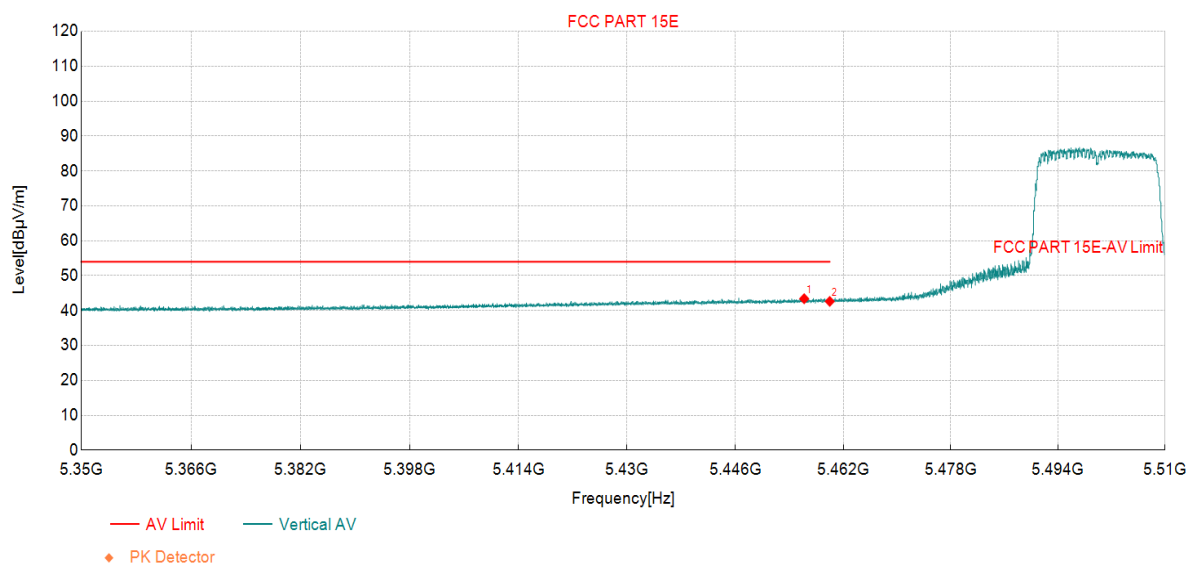

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5456.20	27.09	43.39	16.30	54.00	10.61	AV	Vertic	PASS
2	5460.00	26.28	42.62	16.34	54.00	11.38	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5700MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

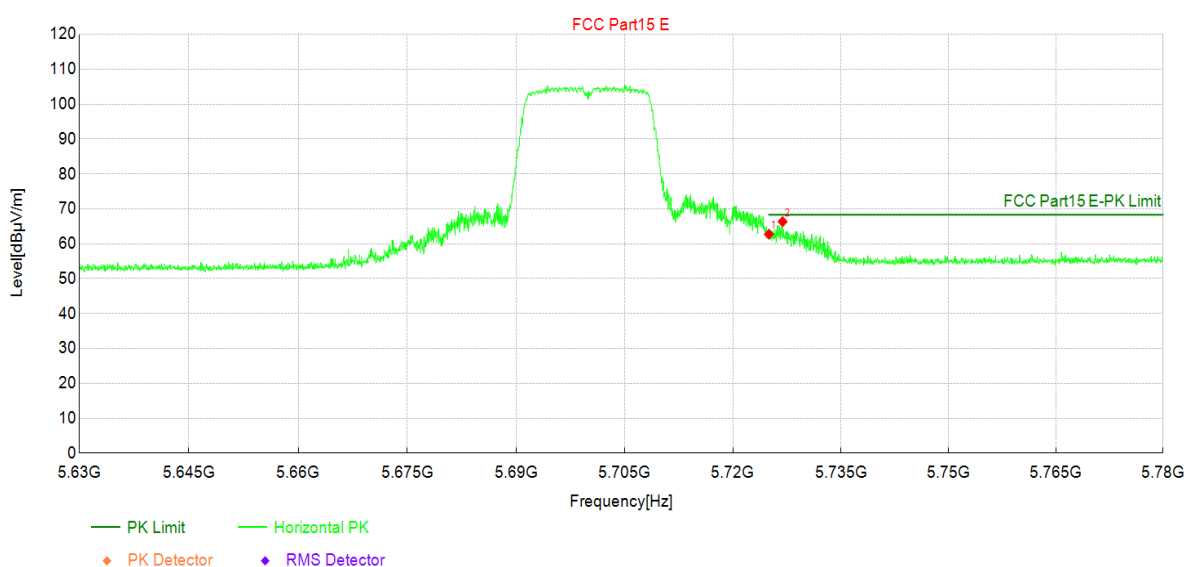

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	44.06	62.73	18.67	68.30	5.57	PK	Horizo	PASS
2	5726.90	47.68	66.34	18.66	68.30	1.96	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode2:Transmit at 5700MHz by 802.11n(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

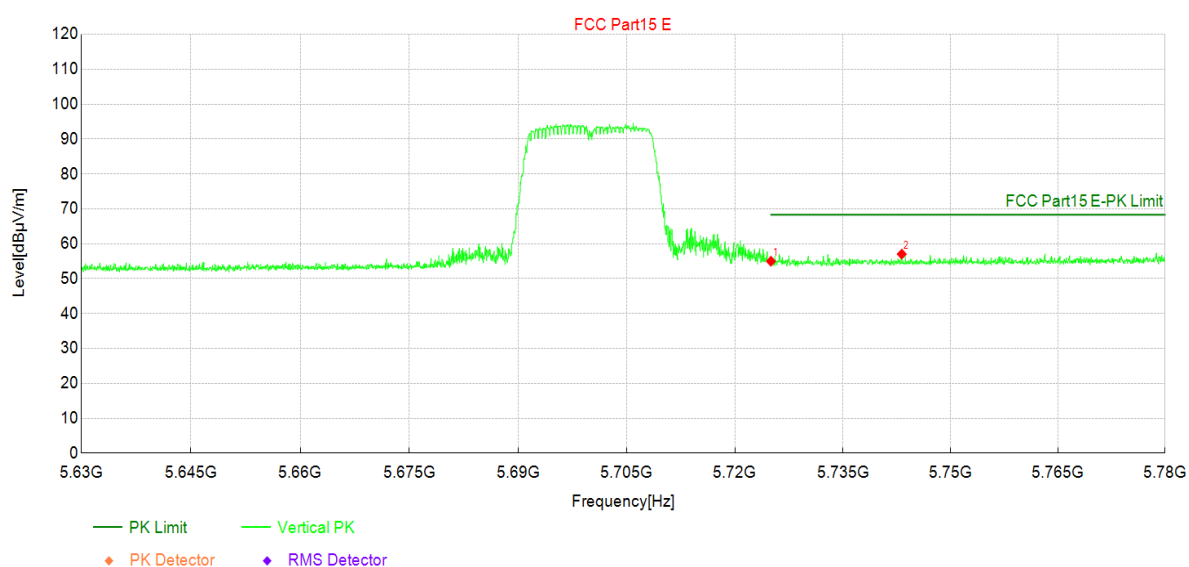

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	36.33	55.00	18.67	68.30	13.30	PK	Vertic	PASS
2	5743.20	38.39	57.03	18.64	68.30	11.27	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

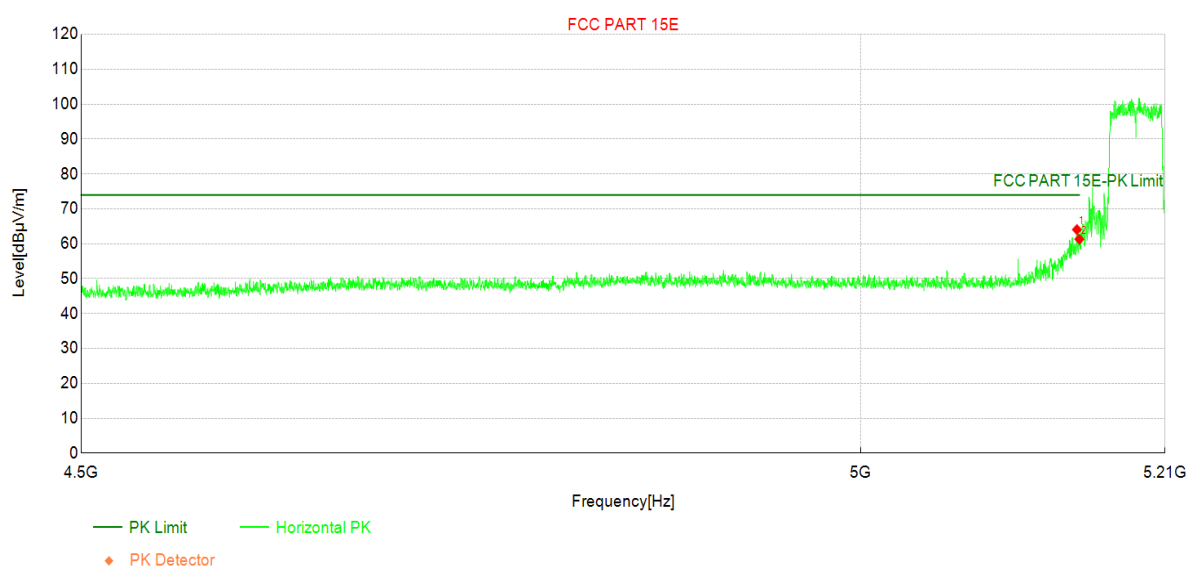

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5148.32	48.96	64.06	15.10	74.00	9.94	PK	Horizo	PASS
2	5150.00	46.21	61.32	15.11	74.00	12.68	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

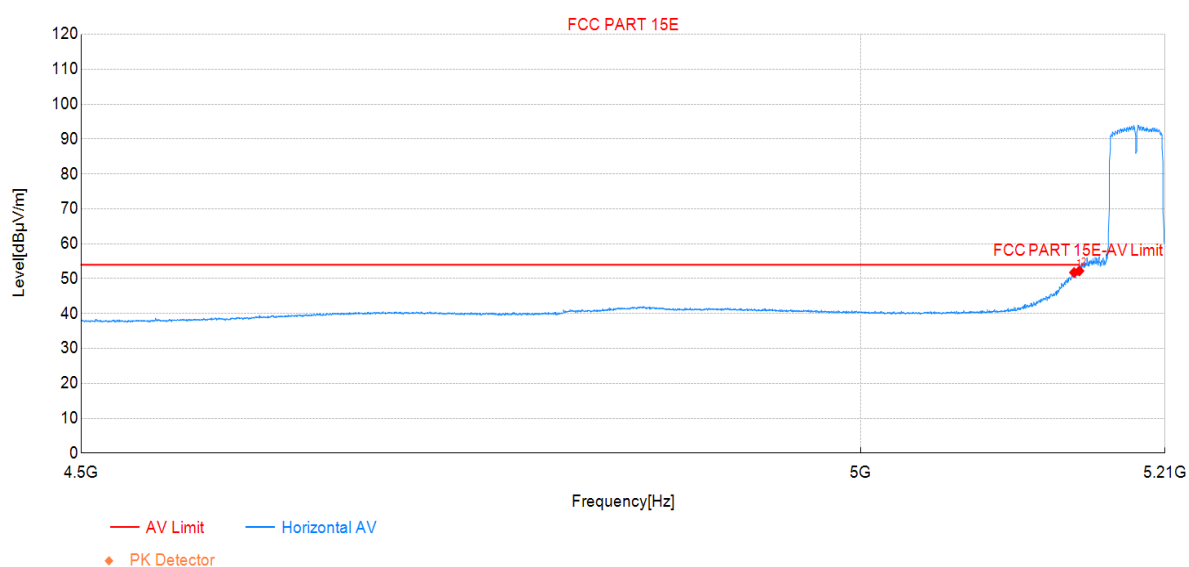

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146.34	36.67	51.76	15.09	54.00	2.24	AV	Horizo	PASS
2	5150.00	37.11	52.22	15.11	54.00	1.78	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

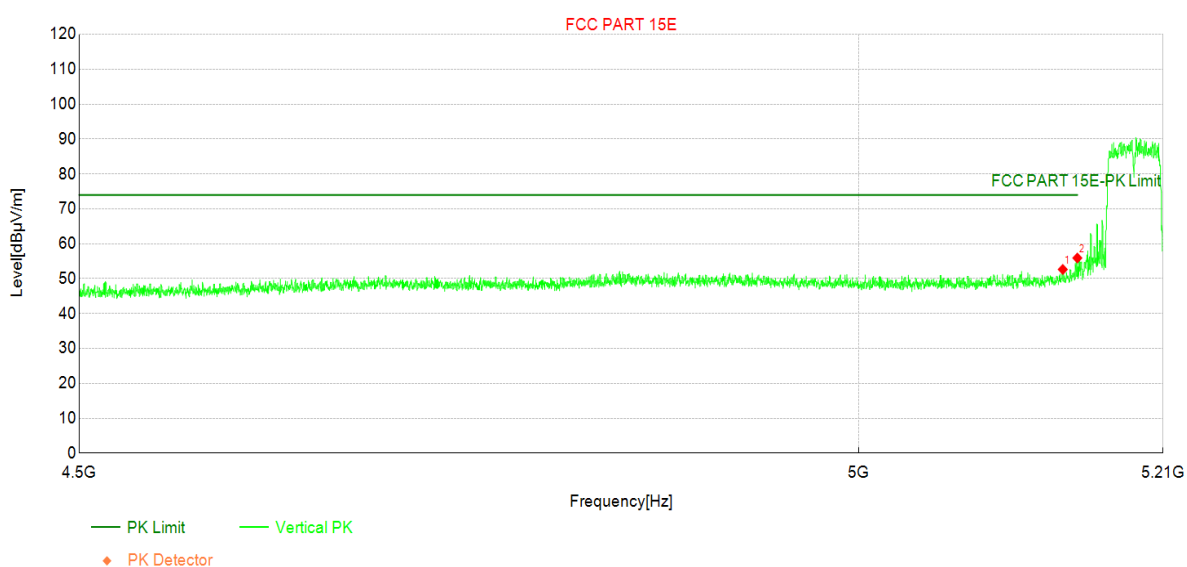

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5139.89	37.59	52.64	15.05	74.00	21.36	PK	Vertic	PASS
2	5150.00	40.81	55.92	15.11	74.00	18.08	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

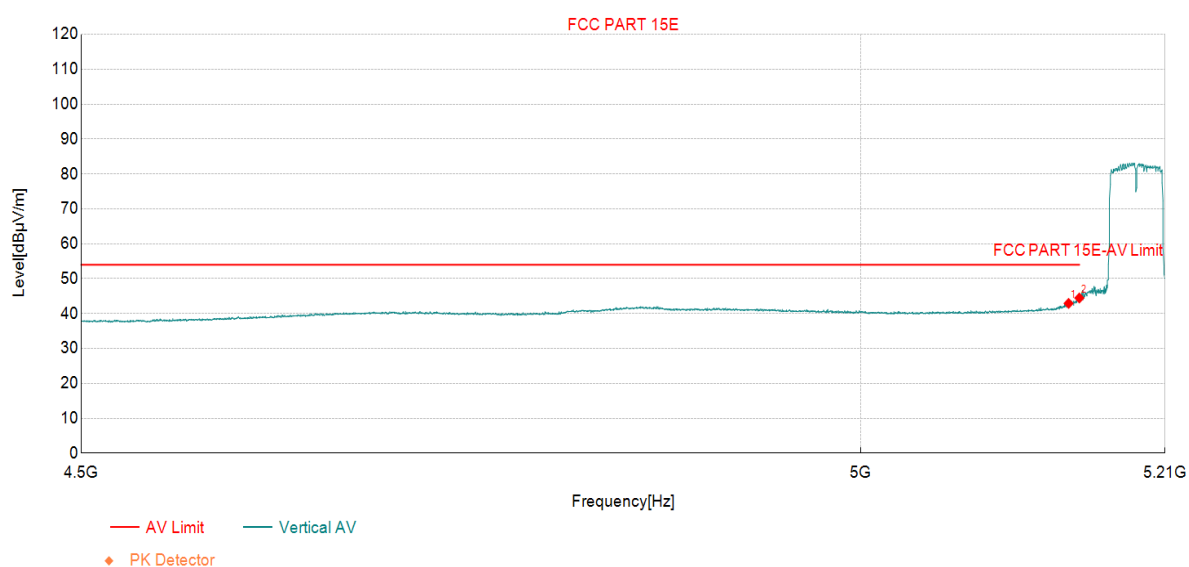

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5142.55	27.84	42.91	15.07	54.00	11.09	AV	Vertic	PASS
2	5150.00	29.35	44.46	15.11	54.00	9.54	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

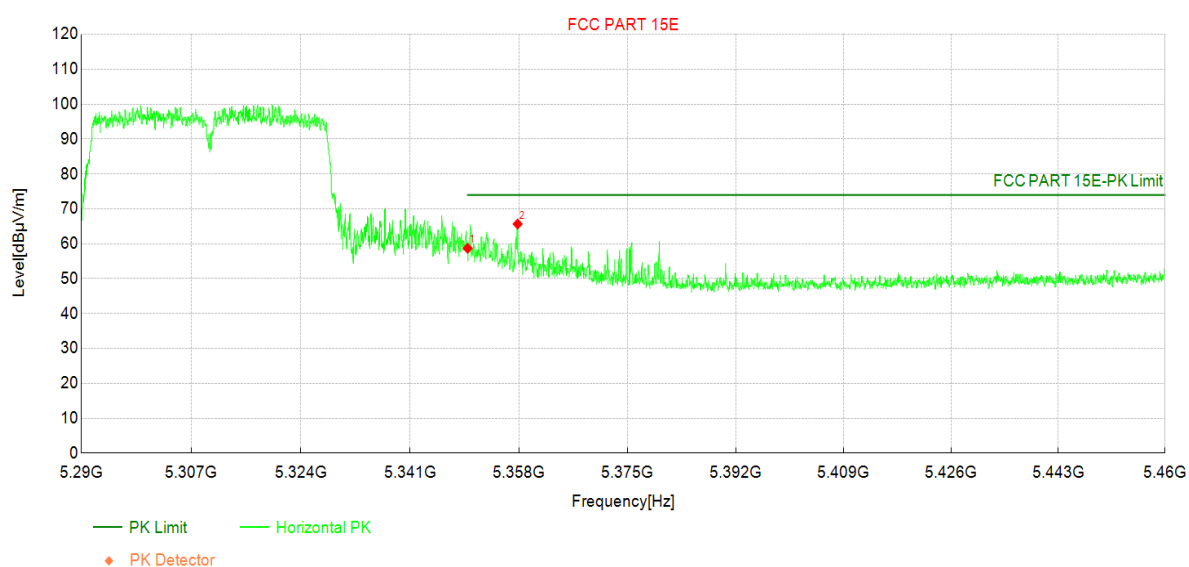

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	42.99	58.70	15.71	74.00	15.30	PK	Horizo	PASS
2	5357.81	49.96	65.66	15.70	74.00	8.34	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

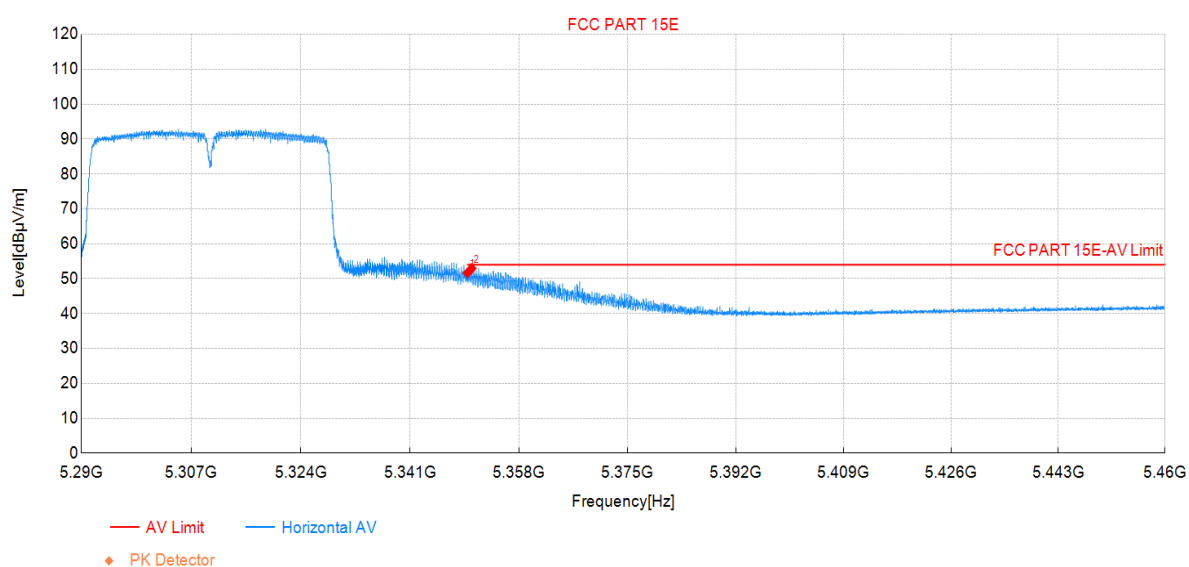

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	35.94	51.65	15.71	54.00	2.35	AV	Horizo	PASS
2	5350.63	37.22	52.93	15.71	54.00	1.07	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

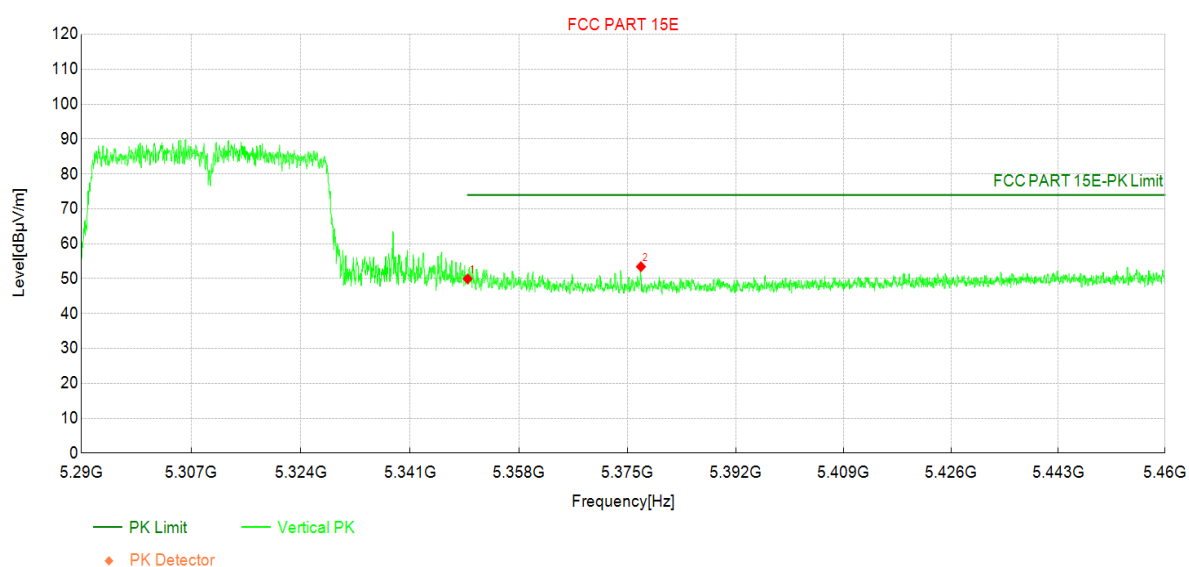

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	34.24	49.95	15.71	74.00	24.05	PK	Vertic	PASS
2	5377.13	37.77	53.44	15.67	74.00	20.56	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

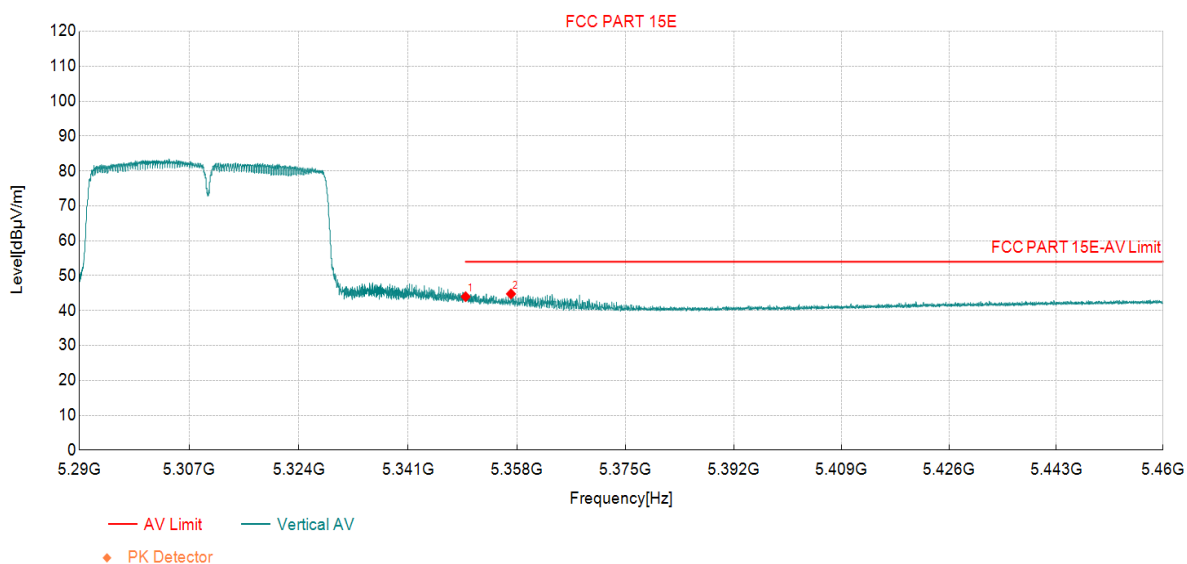

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	28.27	43.98	15.71	54.00	10.02	AV	Vertic	PASS
2	5357.09	29.07	44.77	15.70	54.00	9.23	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

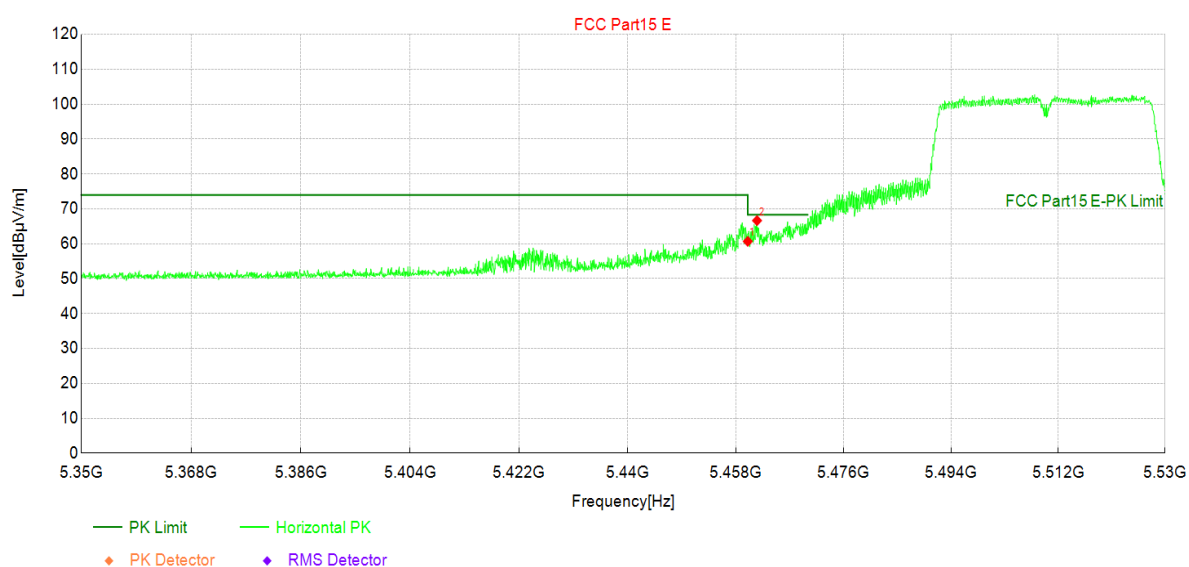

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	44.35	60.69	16.34	68.30	7.61	PK	Horizo	PASS
2	5461.54	50.28	66.64	16.36	68.30	1.66	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

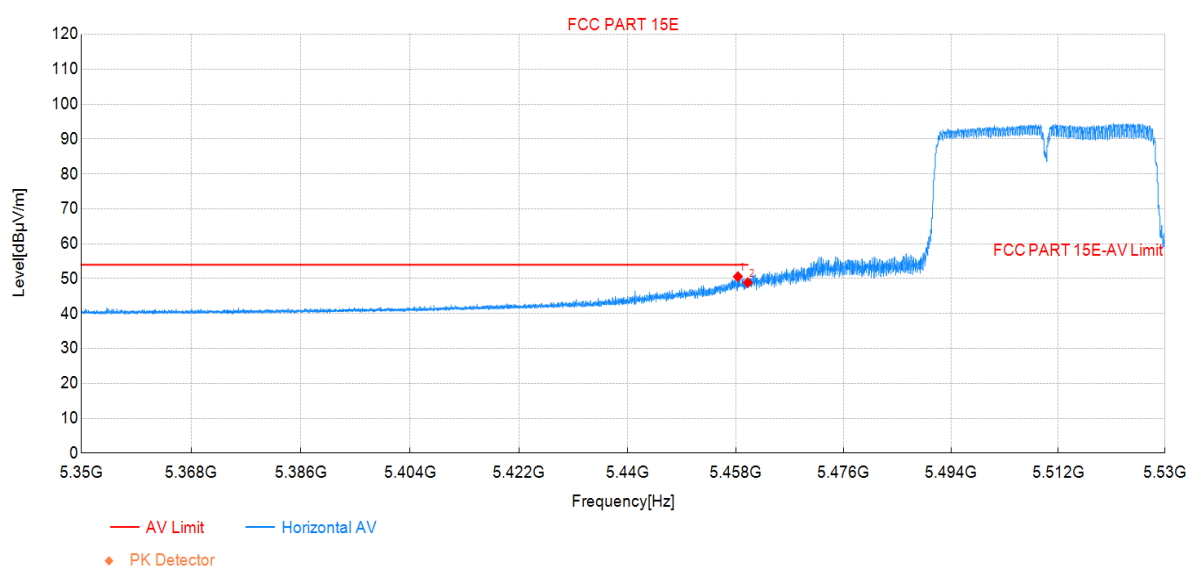

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.36	34.26	50.58	16.32	54.00	3.42	AV	Horizo	PASS
2	5460.00	32.51	48.85	16.34	54.00	5.15	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

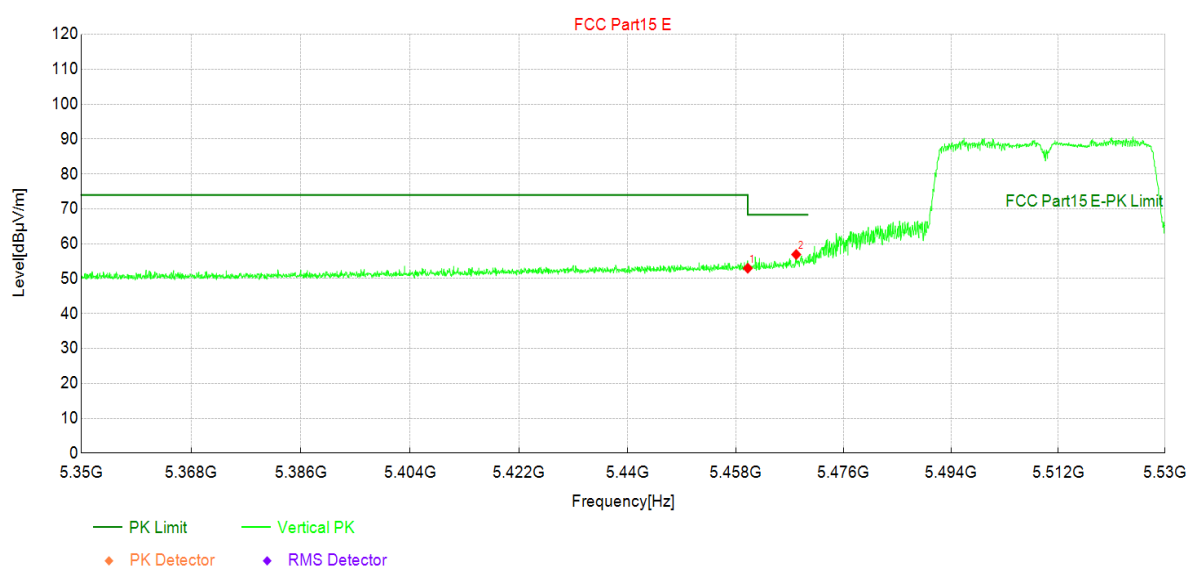

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	36.65	52.99	16.34	68.30	15.31	PK	Vertic	PASS
2	5468.08	40.48	56.92	16.44	68.30	11.38	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

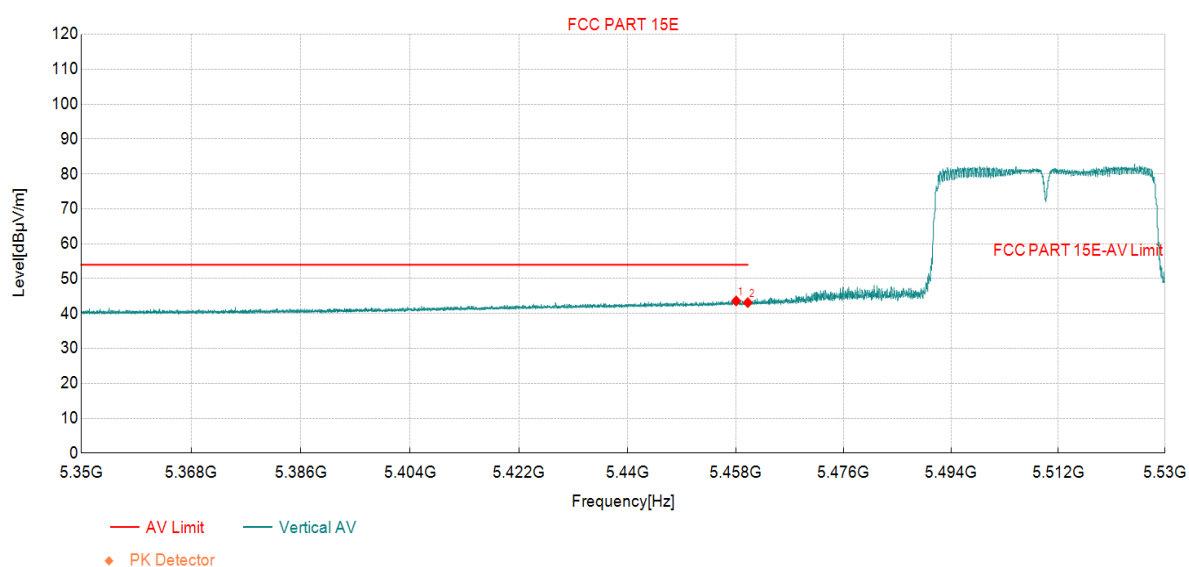

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.07	27.30	43.61	16.31	54.00	10.39	AV	Vertic	PASS
2	5460.00	26.79	43.13	16.34	54.00	10.87	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

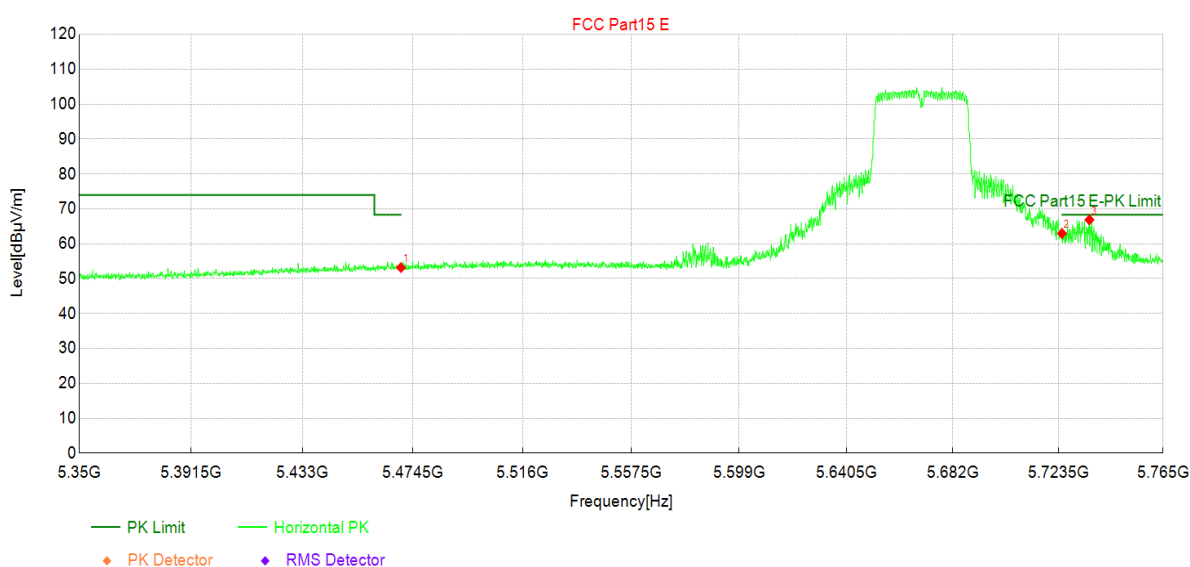

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	36.72	53.17	16.45	68.30	15.13	PK	Horizo	PASS
2	5725.00	44.28	62.95	18.67	68.30	5.35	PK	Horizo	PASS
3	5735.81	48.21	66.86	18.65	68.30	1.44	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

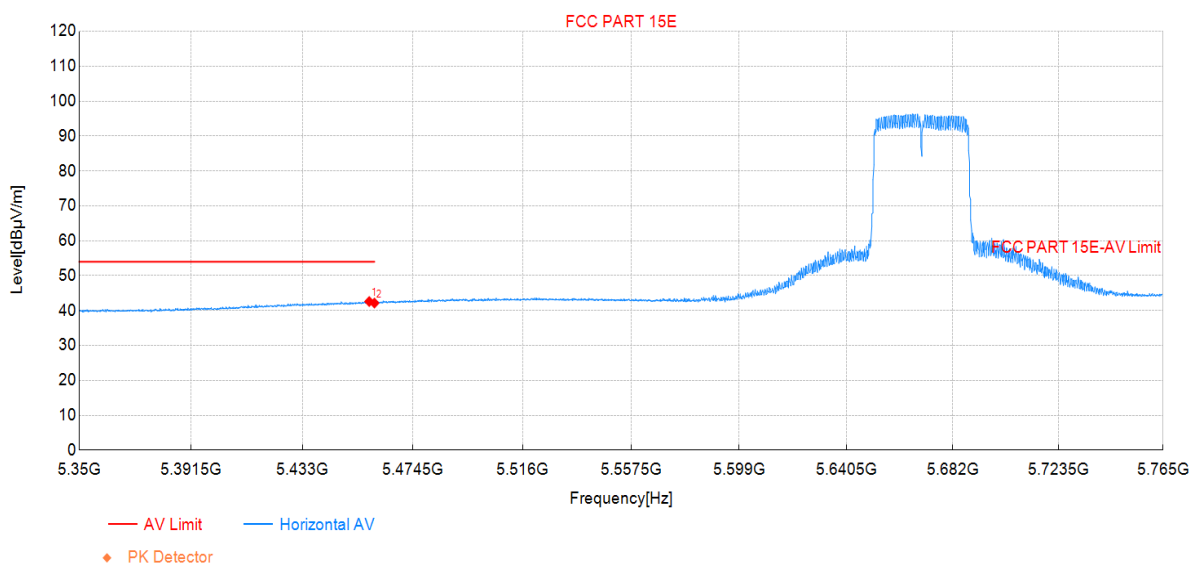

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.04	26.28	42.59	16.31	54.00	11.41	AV	Horizo	PASS
2	5460.00	25.81	42.15	16.34	54.00	11.85	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

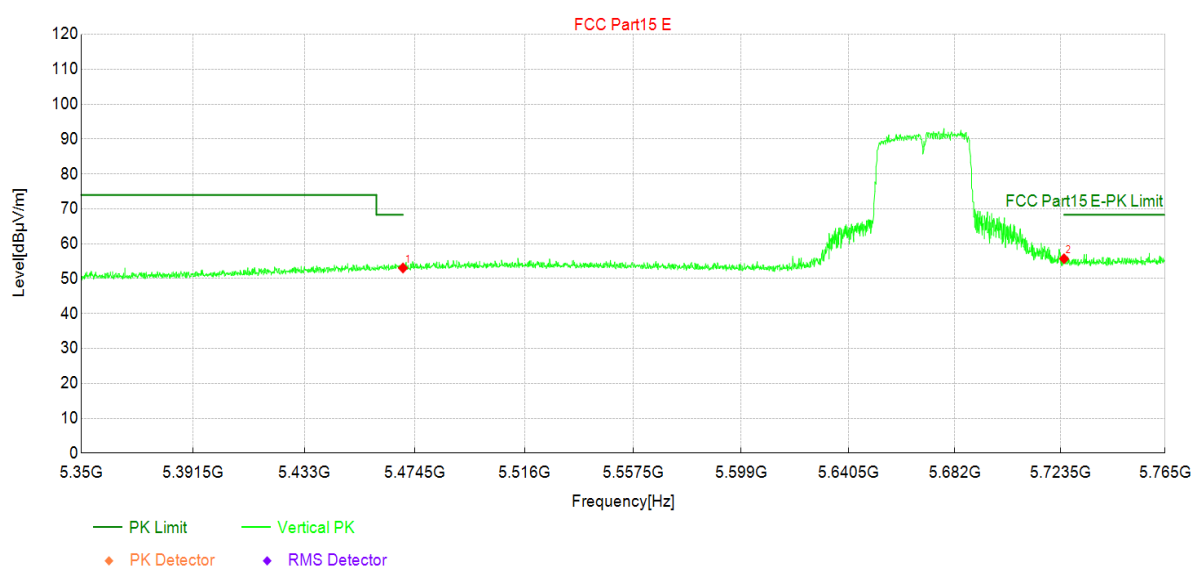

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	36.60	53.05	16.45	68.30	15.25	PK	Vertic	PASS
2	5725.00	37.03	55.70	18.67	68.30	12.60	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

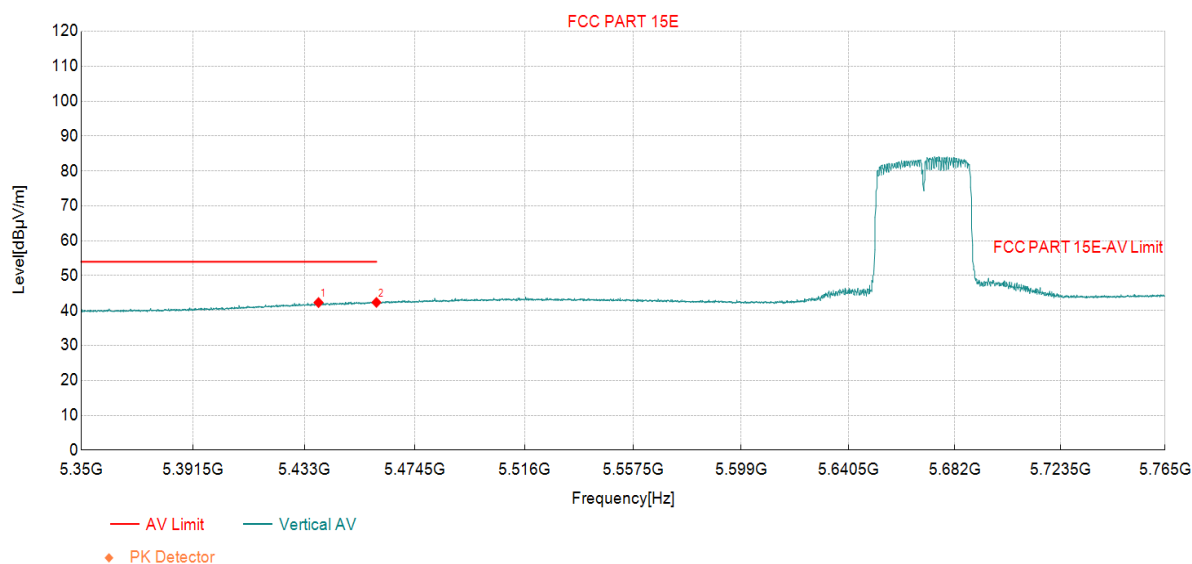

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5438.26	26.20	42.29	16.09	54.00	11.71	AV	Vertic	PASS
2	5460.00	26.00	42.34	16.34	54.00	11.66	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

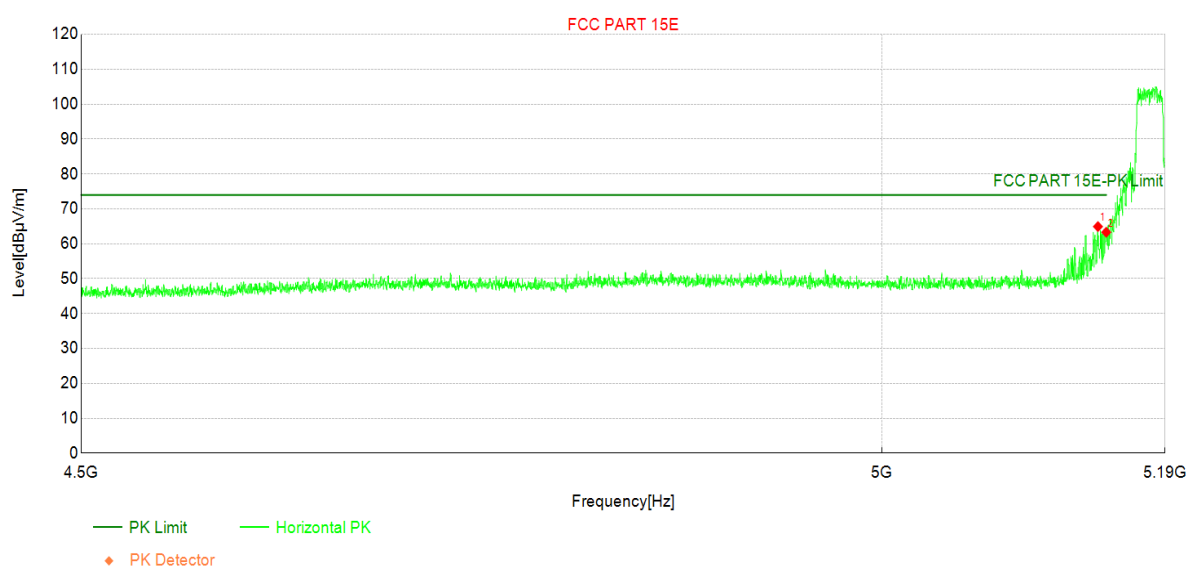

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144.37	49.84	64.92	15.08	74.00	9.08	PK	Horizo	PASS
2	5150.00	48.19	63.30	15.11	74.00	10.70	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

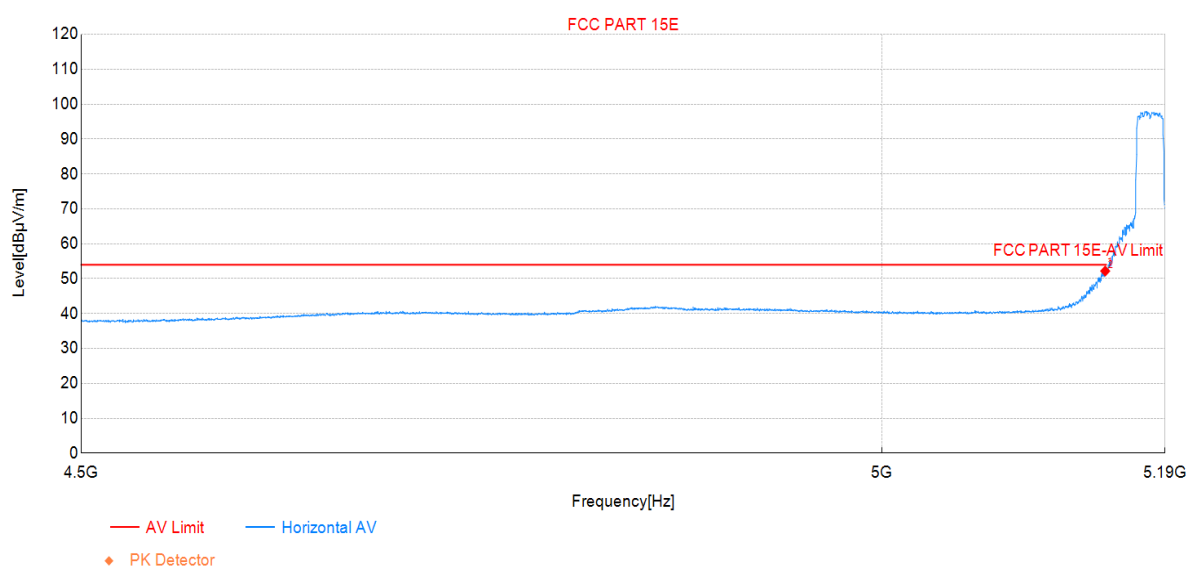

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5149.29	37.08	52.19	15.11	54.00	1.81	AV	Horizo	PASS
2	5150.00	36.37	51.48	15.11	54.00	2.52	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

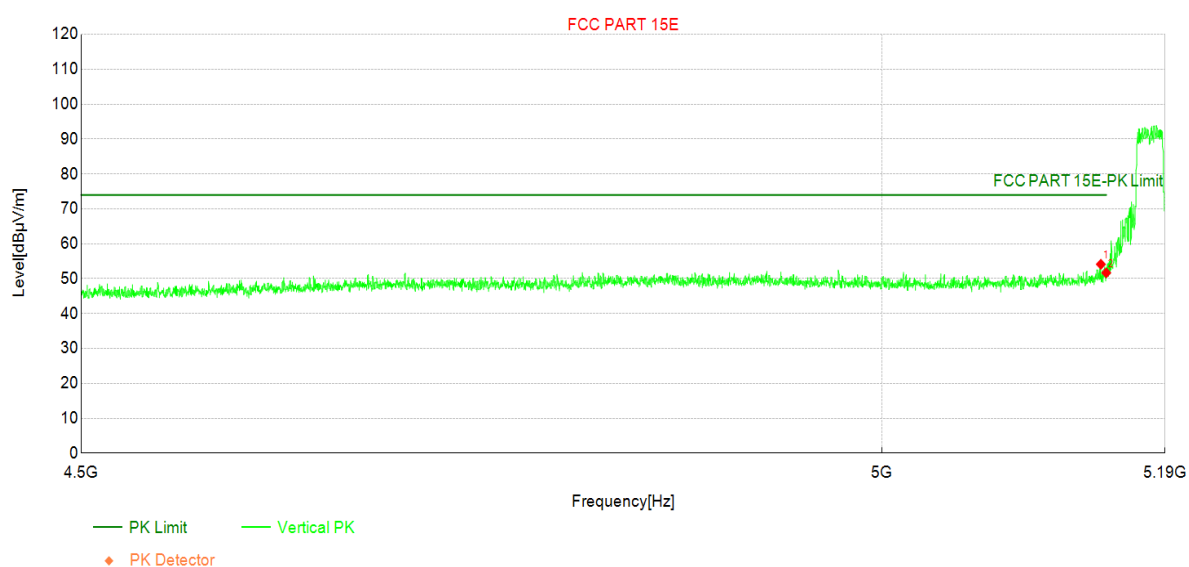

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146.36	39.03	54.12	15.09	74.00	19.88	PK	Vertic	PASS
2	5150.00	36.56	51.67	15.11	74.00	22.33	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

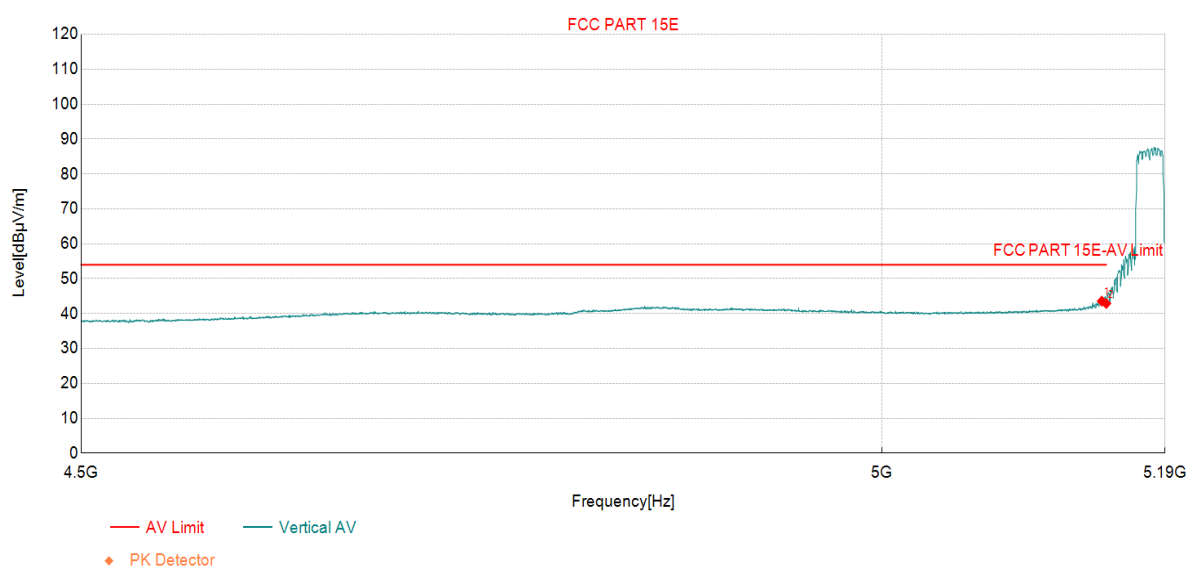

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146.99	28.47	43.56	15.09	54.00	10.44	AV	Vertic	PASS
2	5150.00	27.76	42.87	15.11	54.00	11.13	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

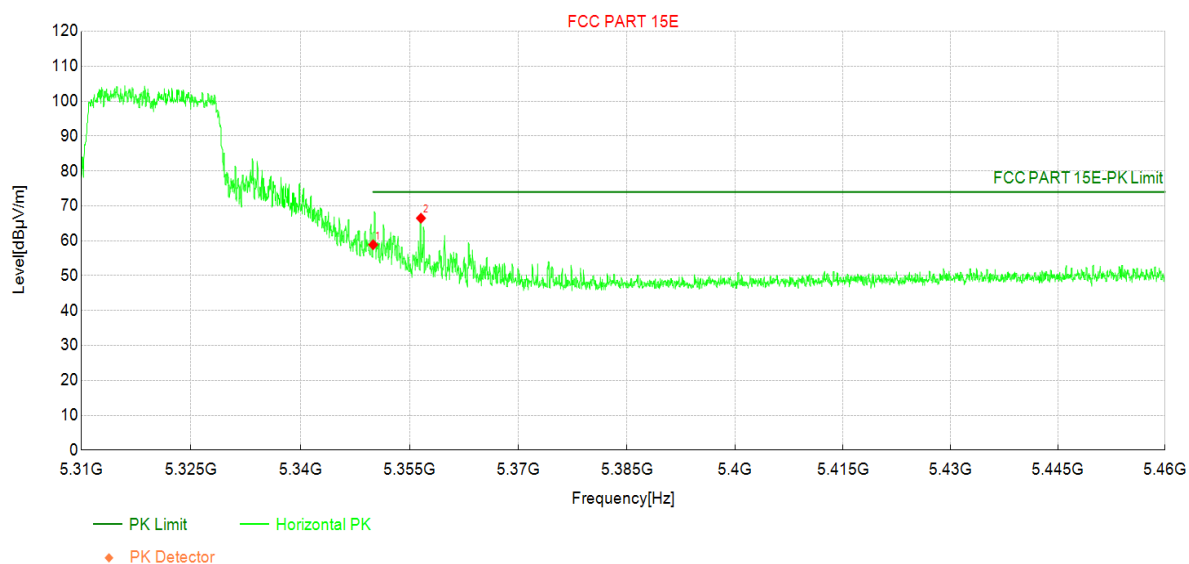

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	43.15	58.86	15.71	74.00	15.14	PK	Horizo	PASS
2	5356.58	50.76	66.46	15.70	74.00	7.54	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

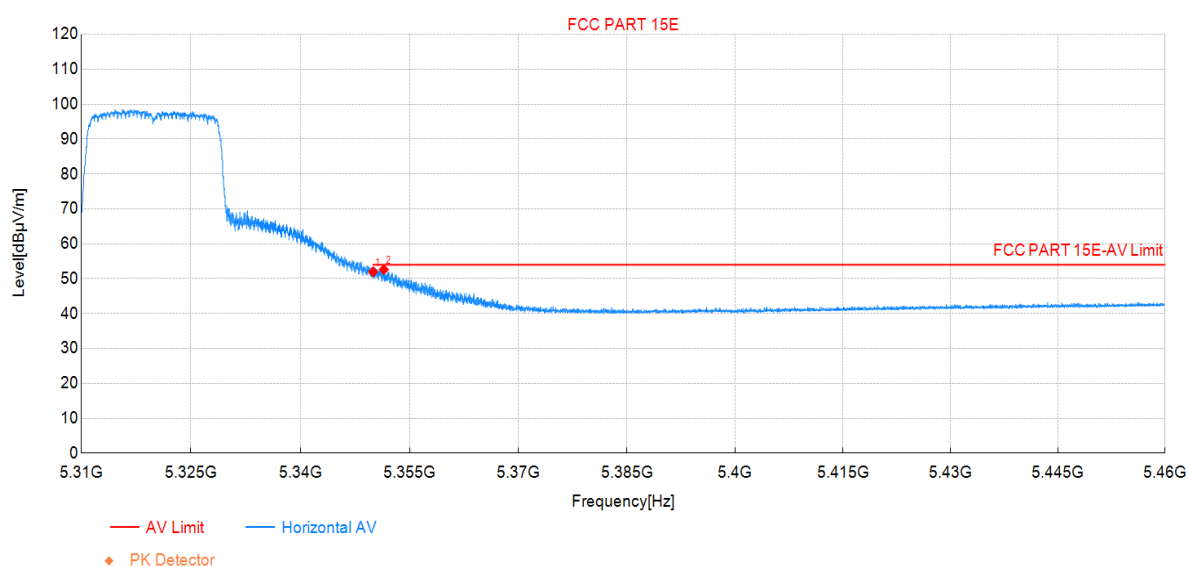

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	36.27	51.98	15.71	54.00	2.02	AV	Horizo	PASS
2	5351.46	36.89	52.60	15.71	54.00	1.40	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

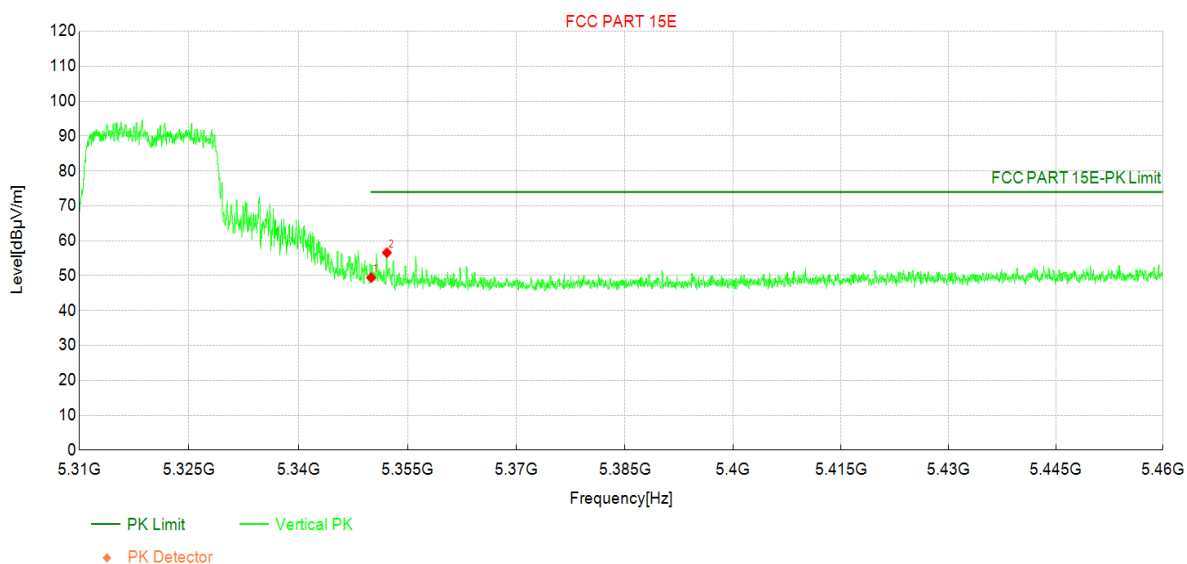

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.72	49.43	15.71	74.00	24.57	PK	Vertic	PASS
2	5352.17	40.88	56.59	15.71	74.00	17.41	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

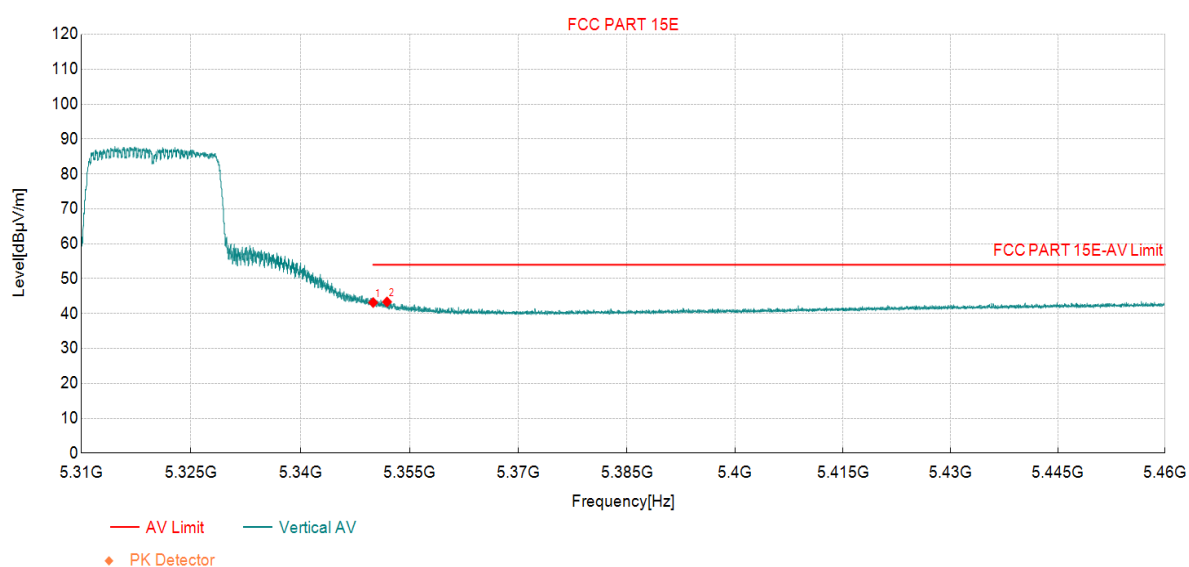

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	27.44	43.15	15.71	54.00	10.85	AV	Vertic	PASS
2	5351.91	27.63	43.34	15.71	54.00	10.66	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

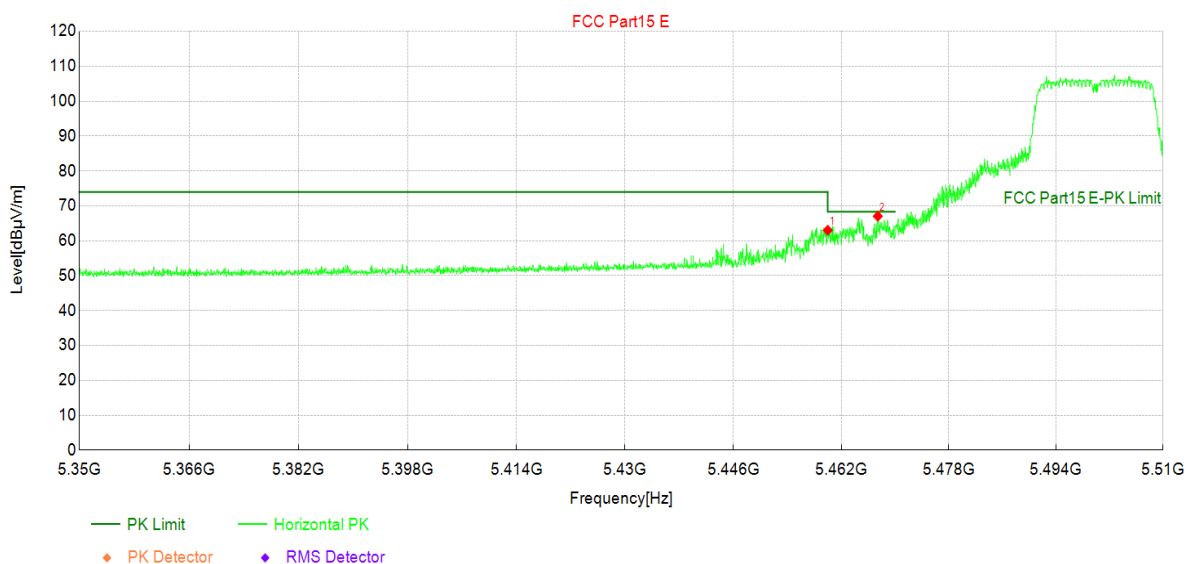

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	46.67	63.01	16.34	68.30	5.29	PK	Horizo	PASS
2	5467.44	50.60	67.03	16.43	68.30	1.27	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

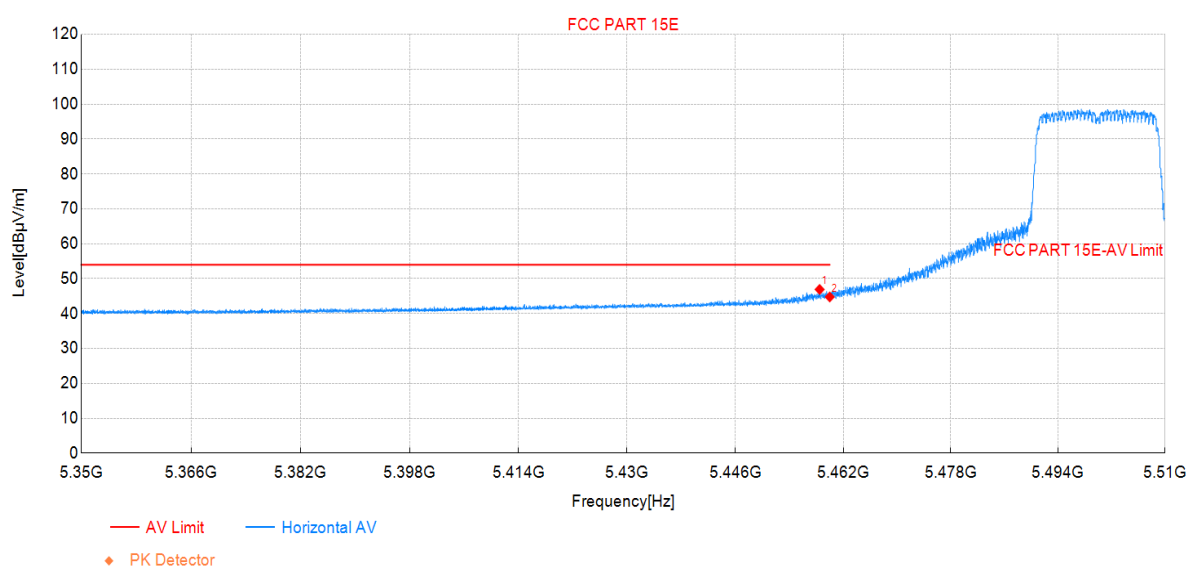

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.50	30.58	46.90	16.32	54.00	7.10	AV	Horizo	PASS
2	5460.00	28.42	44.76	16.34	54.00	9.24	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

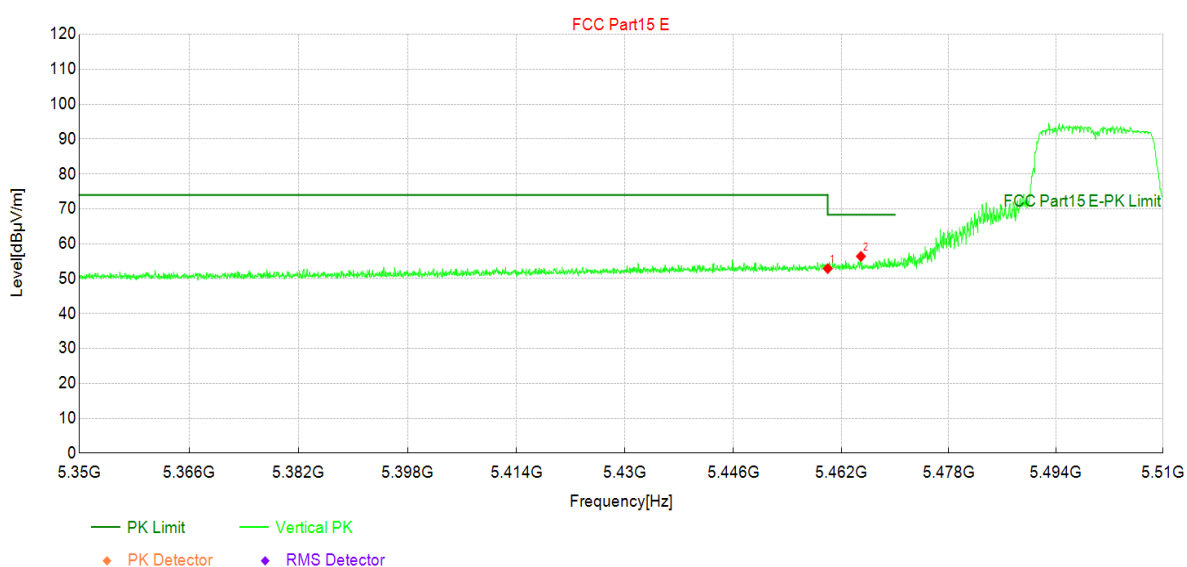

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	36.54	52.88	16.34	68.30	15.42	PK	Vertic	PASS
2	5464.93	39.99	56.39	16.40	68.30	11.91	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

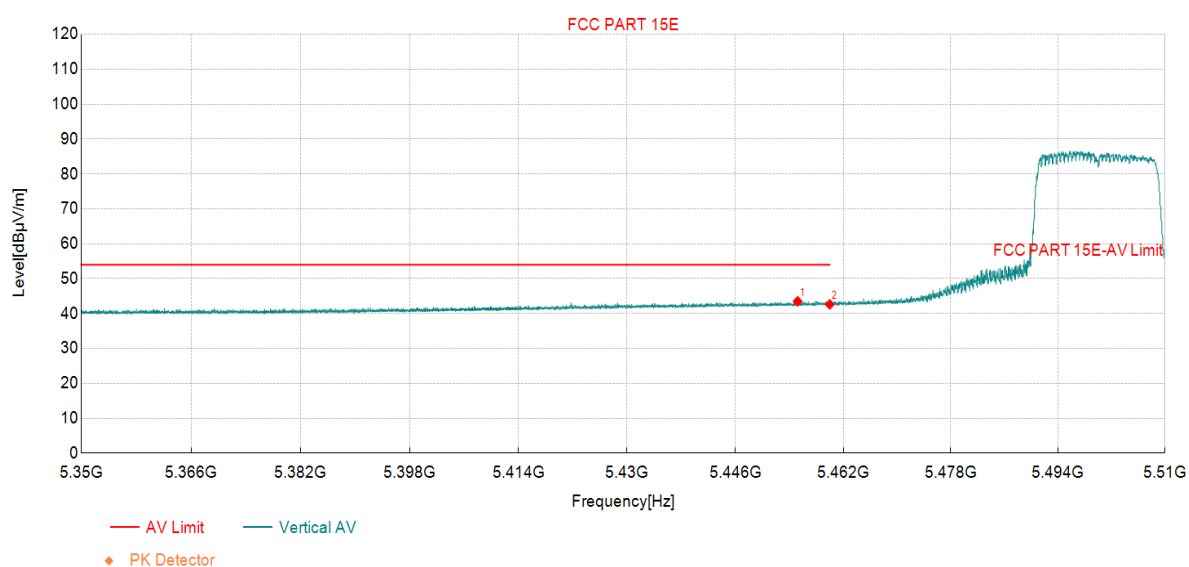

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5455.24	27.20	43.49	16.29	54.00	10.51	AV	Vertic	PASS
2	5460.00	26.28	42.62	16.34	54.00	11.38	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

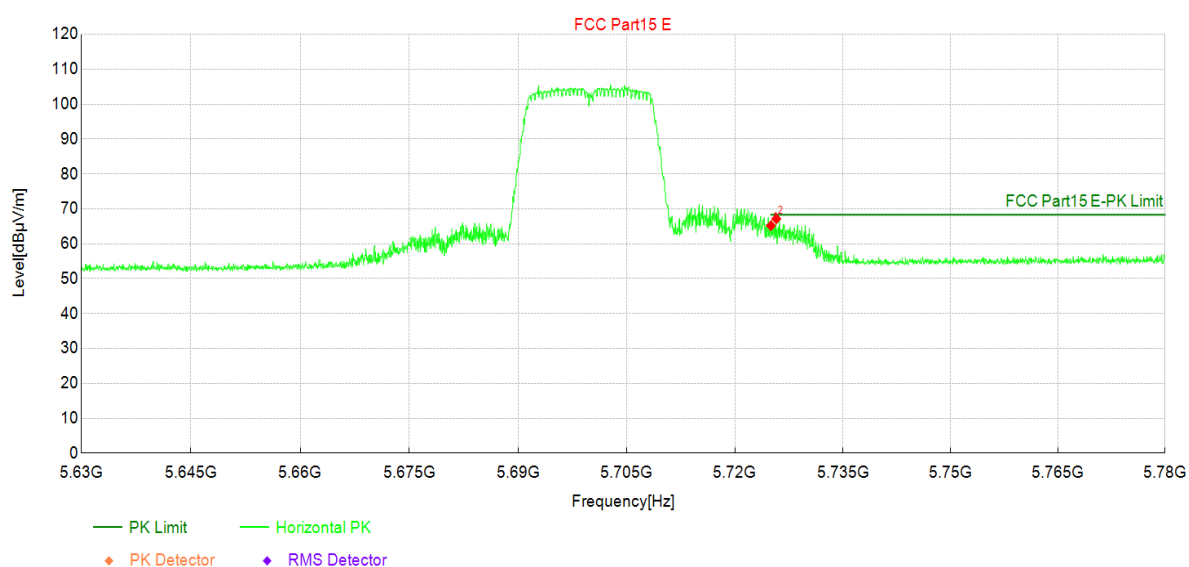

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	46.51	65.18	18.67	68.30	3.12	PK	Horizo	PASS
2	5725.75	48.48	67.15	18.67	68.30	1.15	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

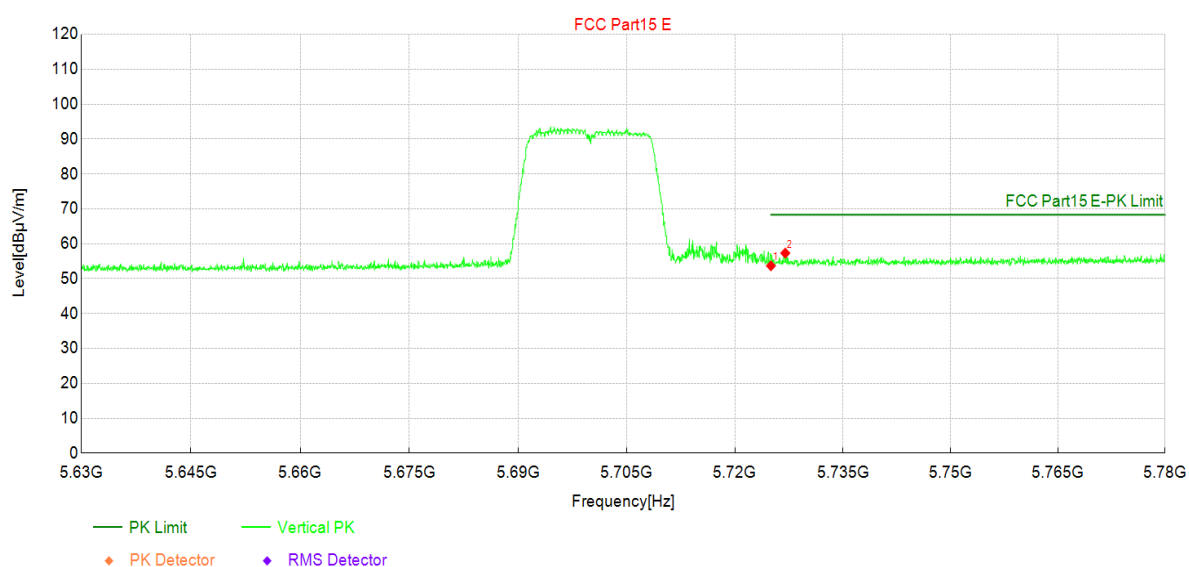

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5725.00	35.01	53.68	18.67	68.30	14.62	PK	Vertic	PASS
2	5727.00	38.65	57.31	18.66	68.30	10.99	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

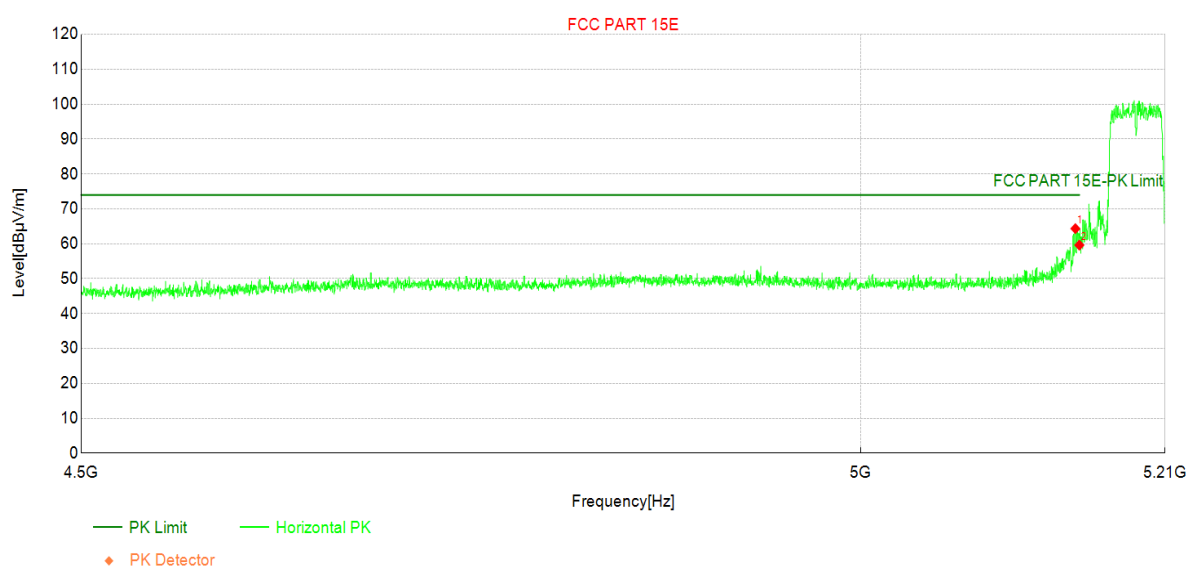

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5147.25	49.24	64.33	15.09	74.00	9.67	PK	Horizo	PASS
2	5150.00	44.50	59.61	15.11	74.00	14.39	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

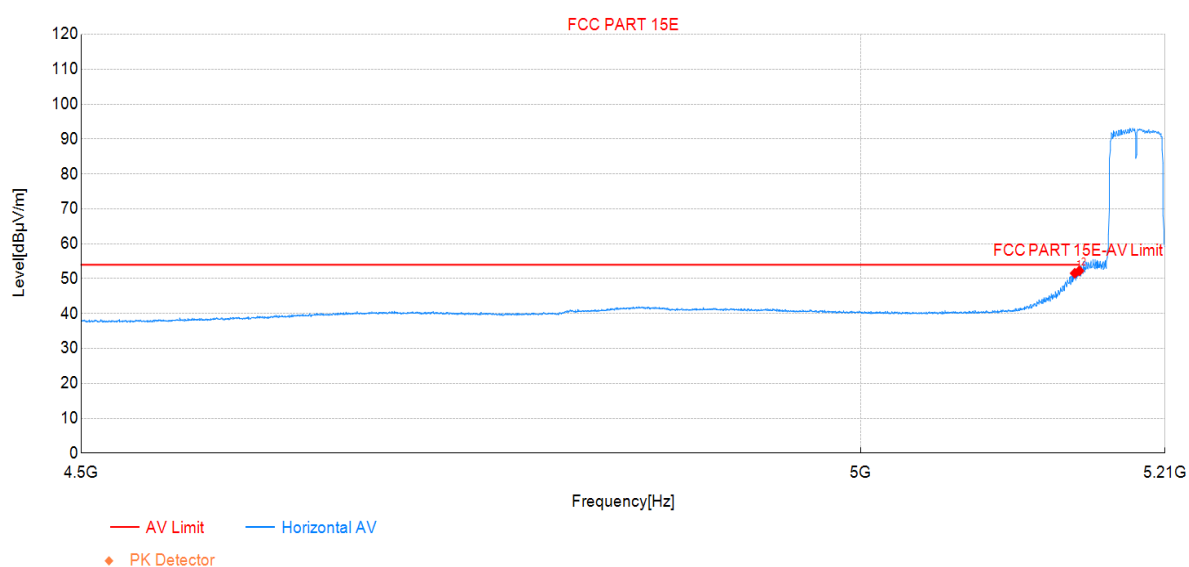

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146.81	36.46	51.55	15.09	54.00	2.45	AV	Horizo	PASS
2	5150.00	37.13	52.24	15.11	54.00	1.76	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

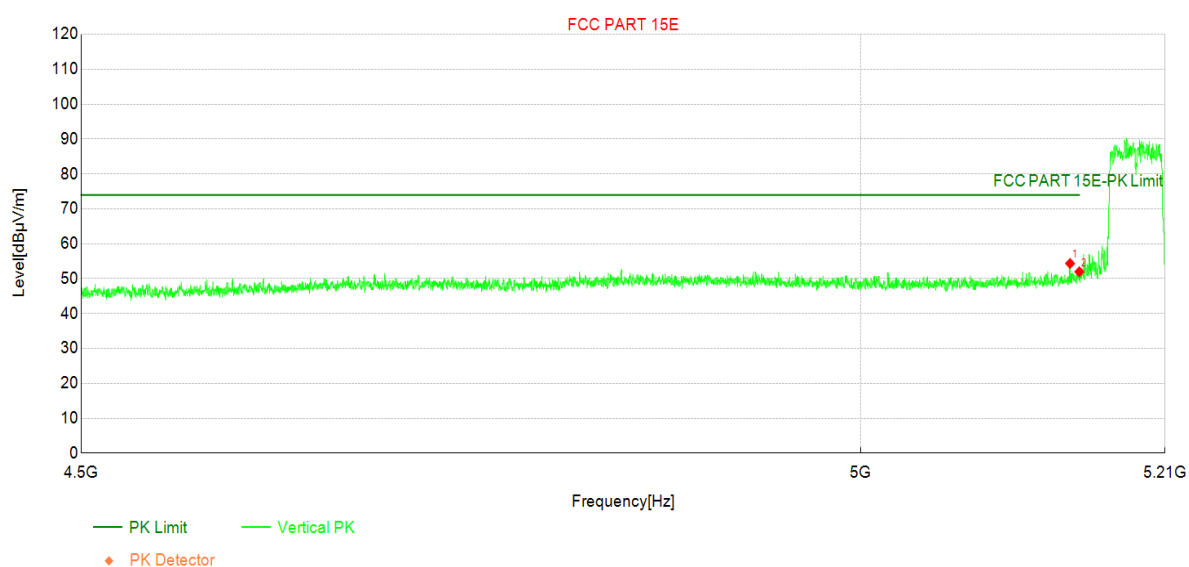

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.53	39.29	54.36	15.07	74.00	19.64	PK	Vertic	PASS
2	5150.00	36.87	51.98	15.11	74.00	22.02	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

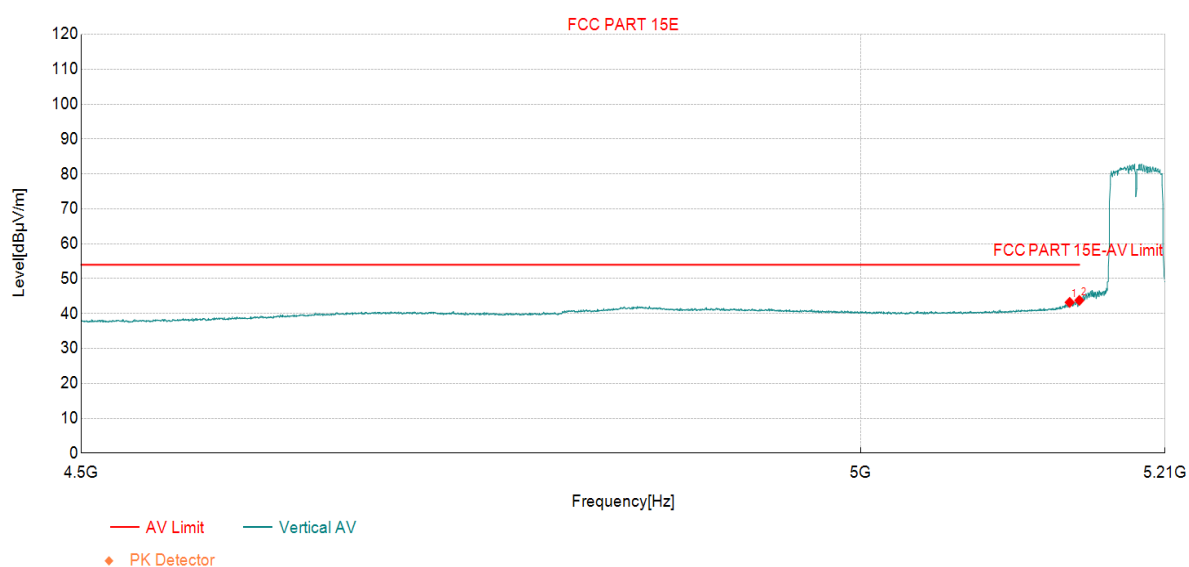

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5143.26	28.13	43.20	15.07	54.00	10.80	AV	Vertic	PASS
2	5150.00	28.66	43.77	15.11	54.00	10.23	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

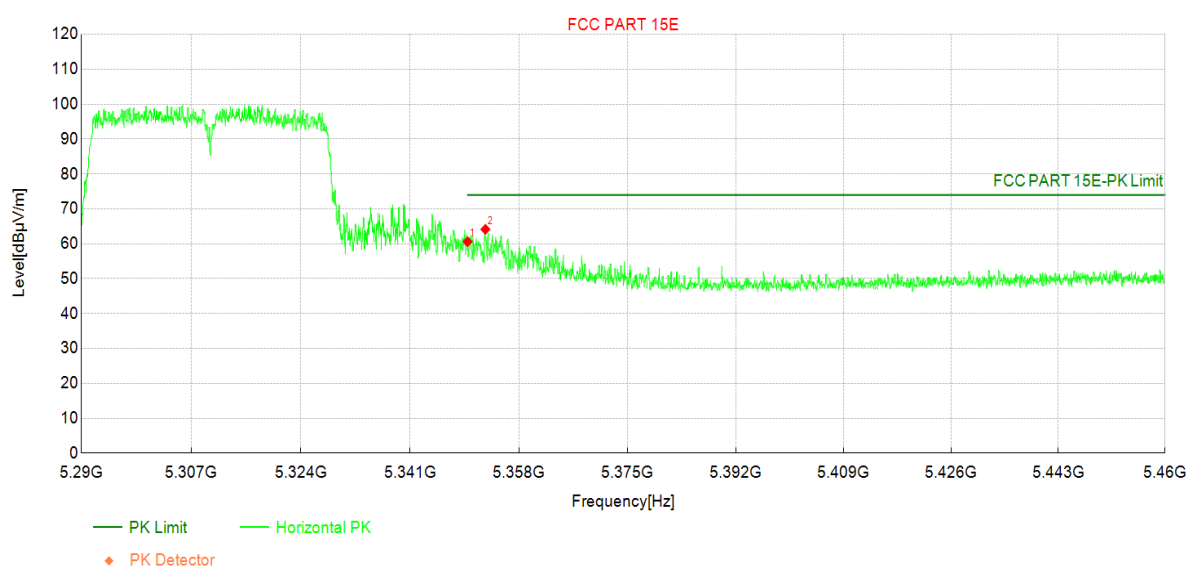

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	44.91	60.62	15.71	74.00	13.38	PK	Horizo	PASS
2	5352.77	48.42	64.13	15.71	74.00	9.87	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

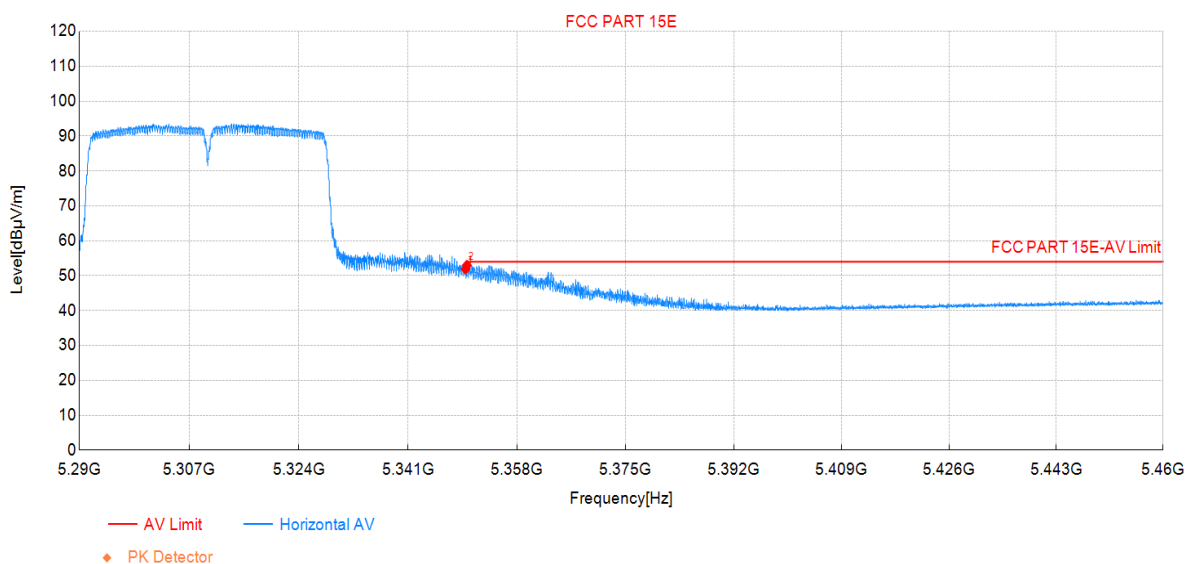

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	36.17	51.88	15.71	54.00	2.02	AV	Horizo	PASS
2	5350.20	37.28	52.99	15.71	54.00	1.01	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

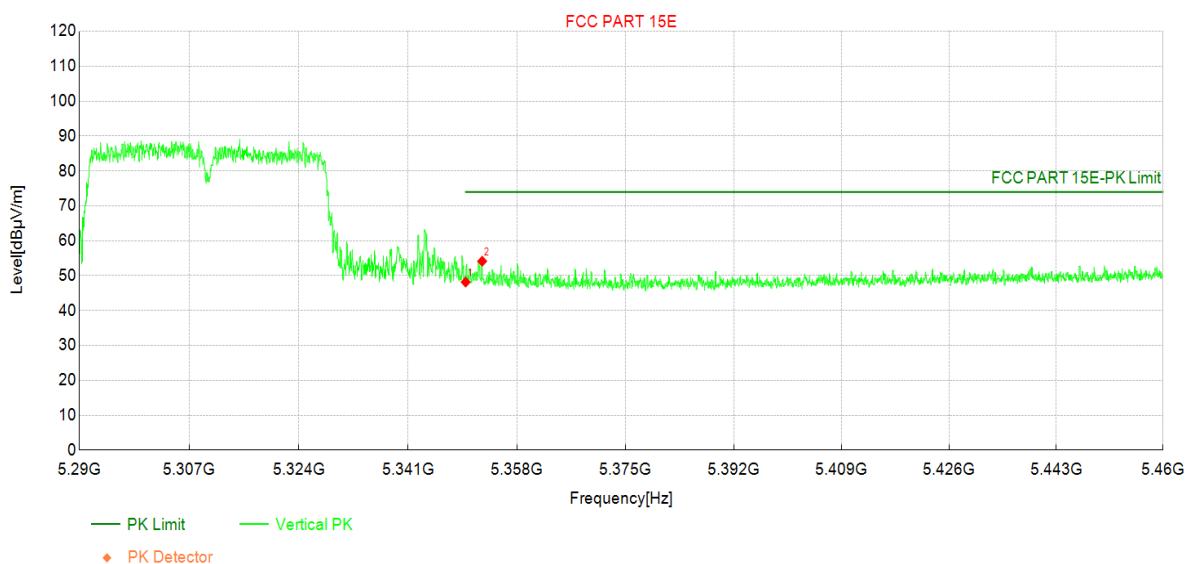

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	32.45	48.16	15.71	74.00	25.84	PK	Vertic	PASS
2	5352.58	38.42	54.13	15.71	74.00	19.87	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

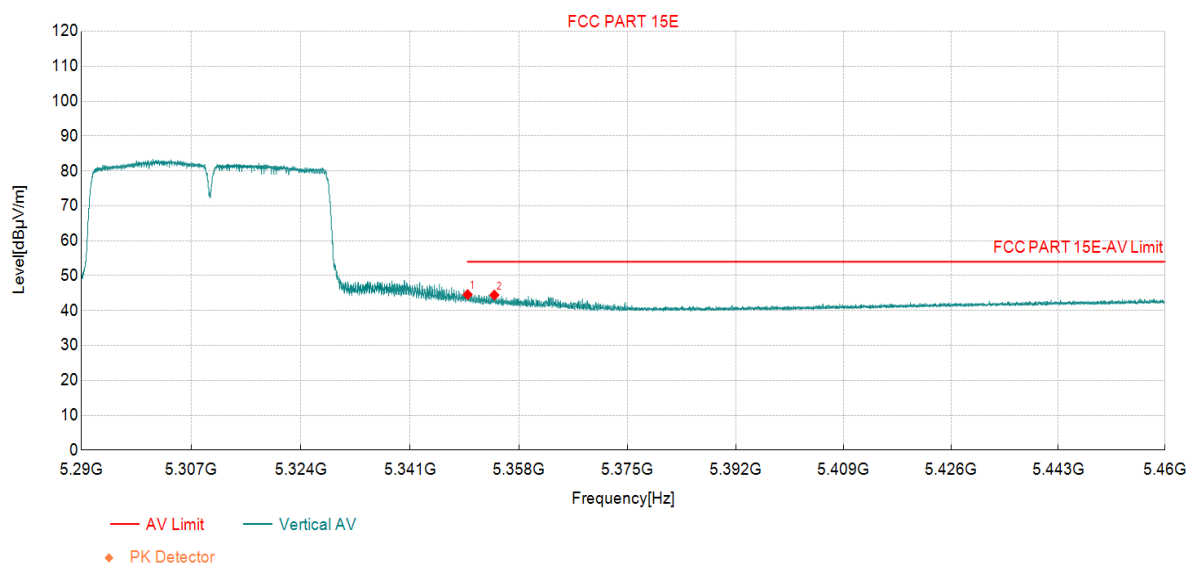

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	28.88	44.59	15.71	54.00	9.41	AV	Vertic	PASS
2	5354.18	28.76	44.46	15.70	54.00	9.54	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

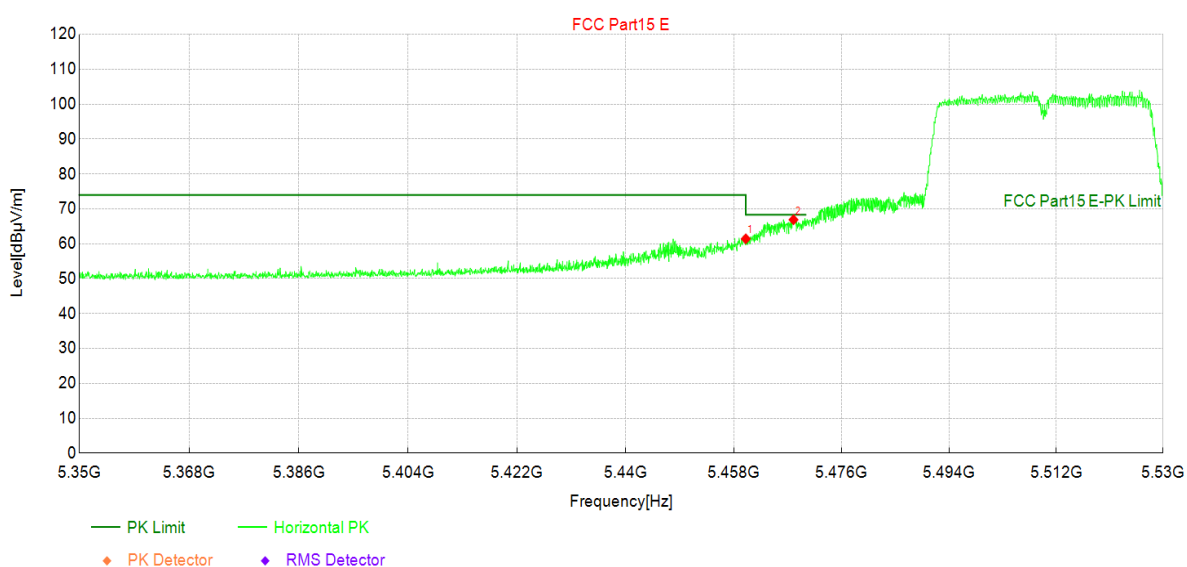

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	45.07	61.41	16.34	68.30	6.89	PK	Horizo	PASS
2	5467.96	50.45	66.89	16.44	68.30	1.41	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

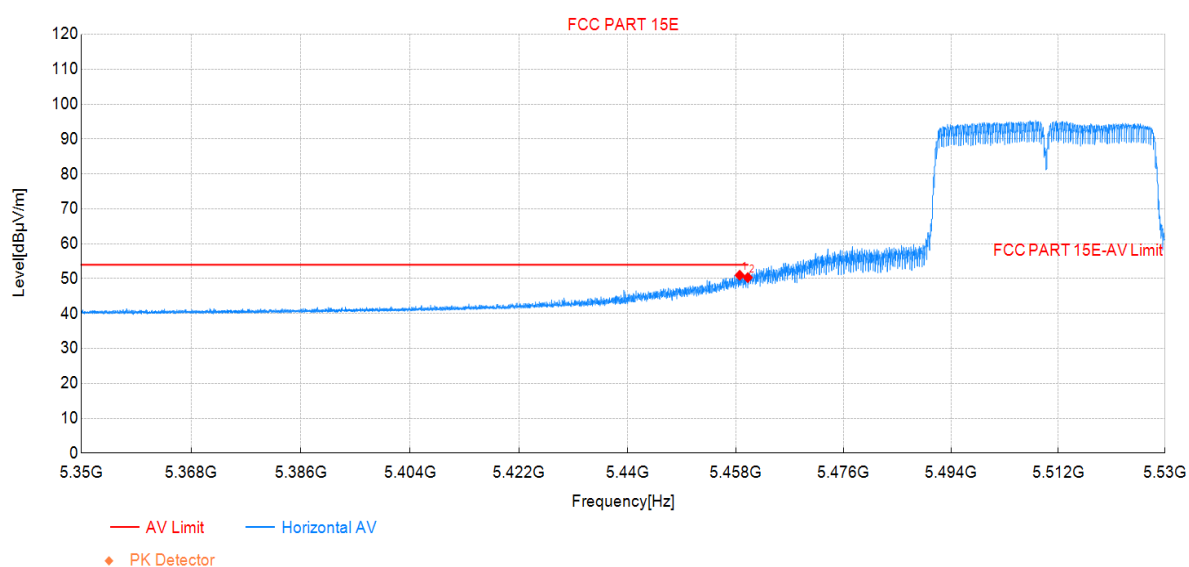

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.65	34.66	50.98	16.32	54.00	3.02	AV	Horizo	PASS
2	5460.00	33.97	50.31	16.34	54.00	3.69	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

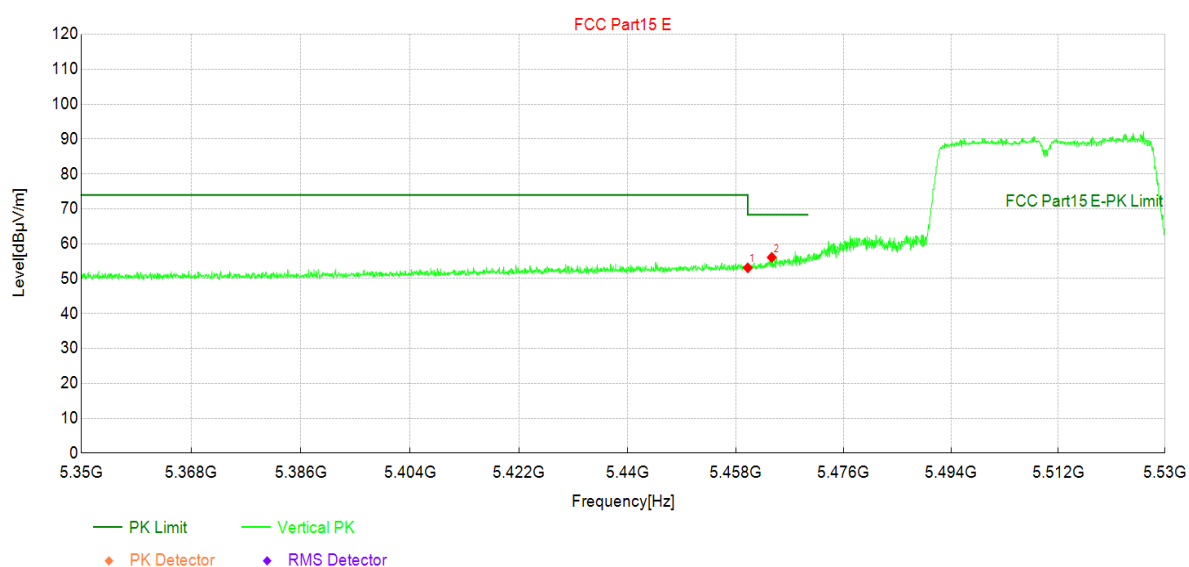

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	36.76	53.10	16.34	68.30	15.20	PK	Vertic	PASS
2	5464.00	39.70	56.09	16.39	68.30	12.21	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

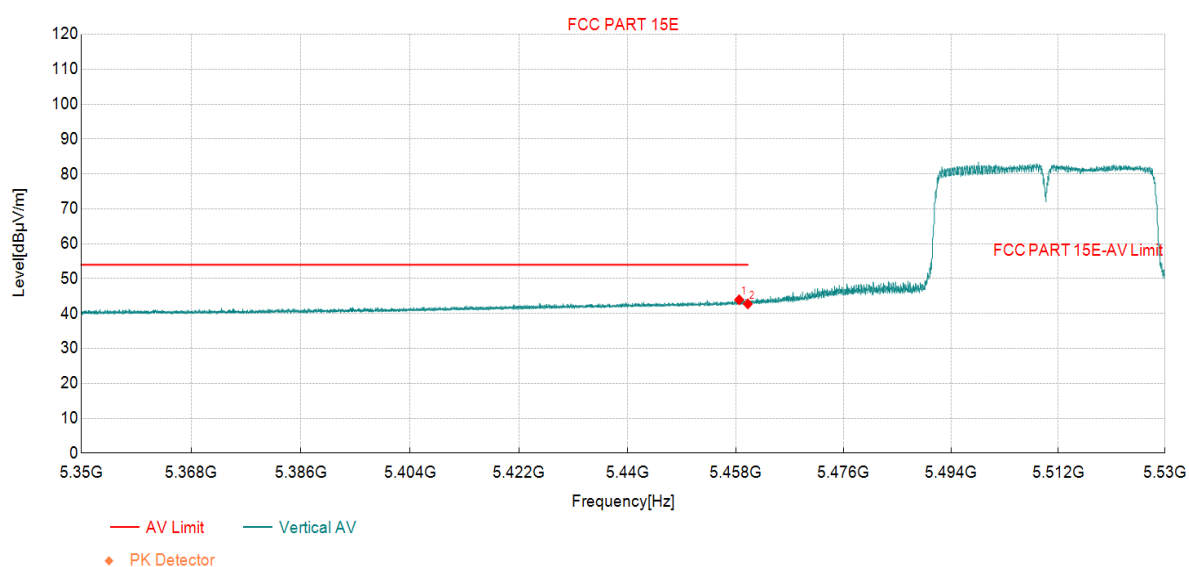

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458.56	27.63	43.95	16.32	54.00	10.05	AV	Vertic	PASS
2	5460.00	26.42	42.76	16.34	54.00	11.24	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

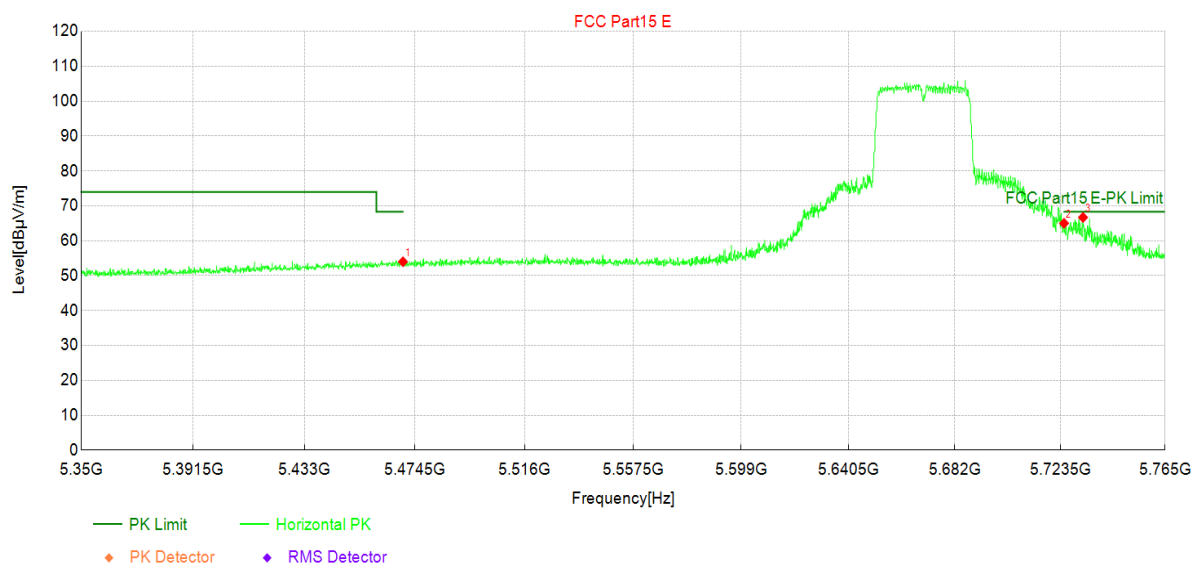

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	37.53	53.98	16.45	68.30	14.32	PK	Horizo	PASS
2	5725.00	46.33	65.00	18.67	68.30	3.30	PK	Horizo	PASS
3	5732.49	48.03	66.68	18.65	68.30	1.62	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

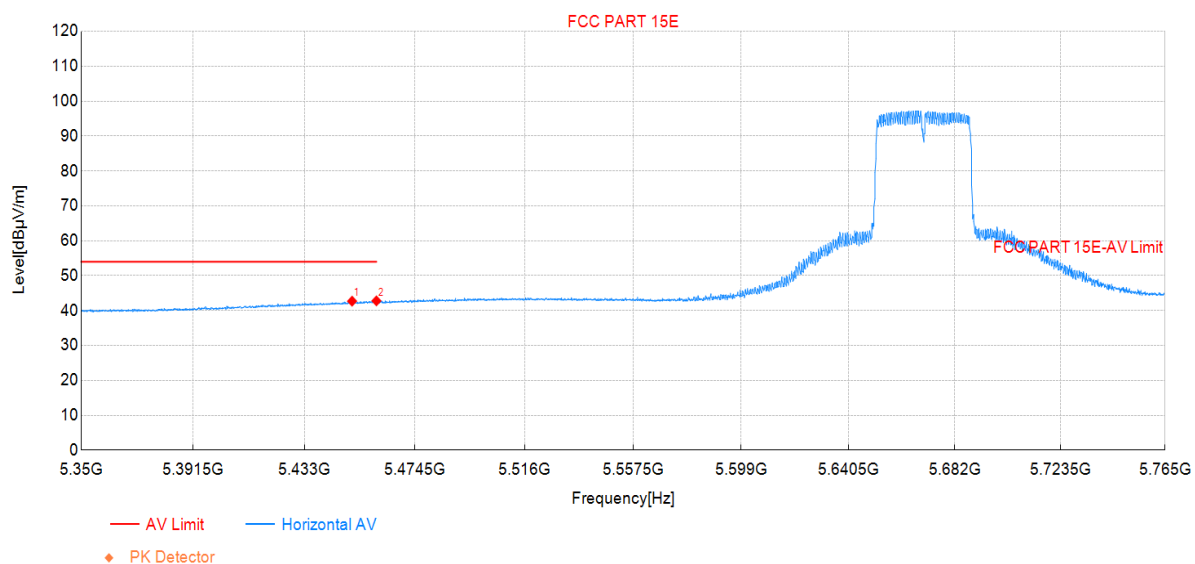

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5450.85	26.45	42.69	16.24	54.00	11.31	AV	Horizo	PASS
2	5460.00	26.44	42.78	16.34	54.00	11.22	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

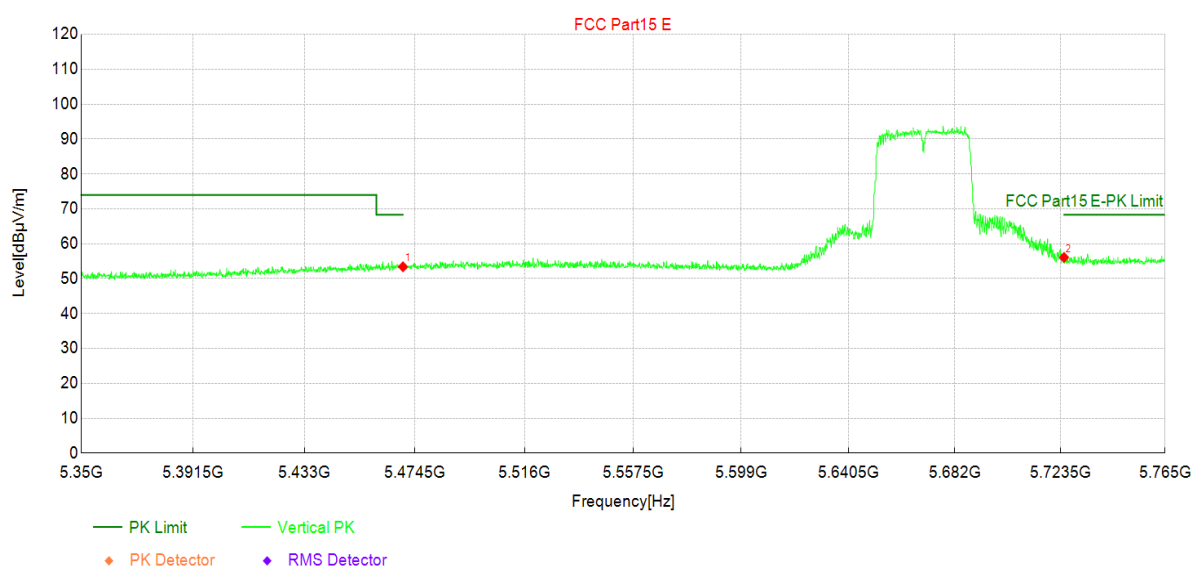

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5470.00	36.95	53.40	16.45	68.30	14.90	PK	Vertic	PASS
2	5725.00	37.43	56.10	18.67	68.30	12.20	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

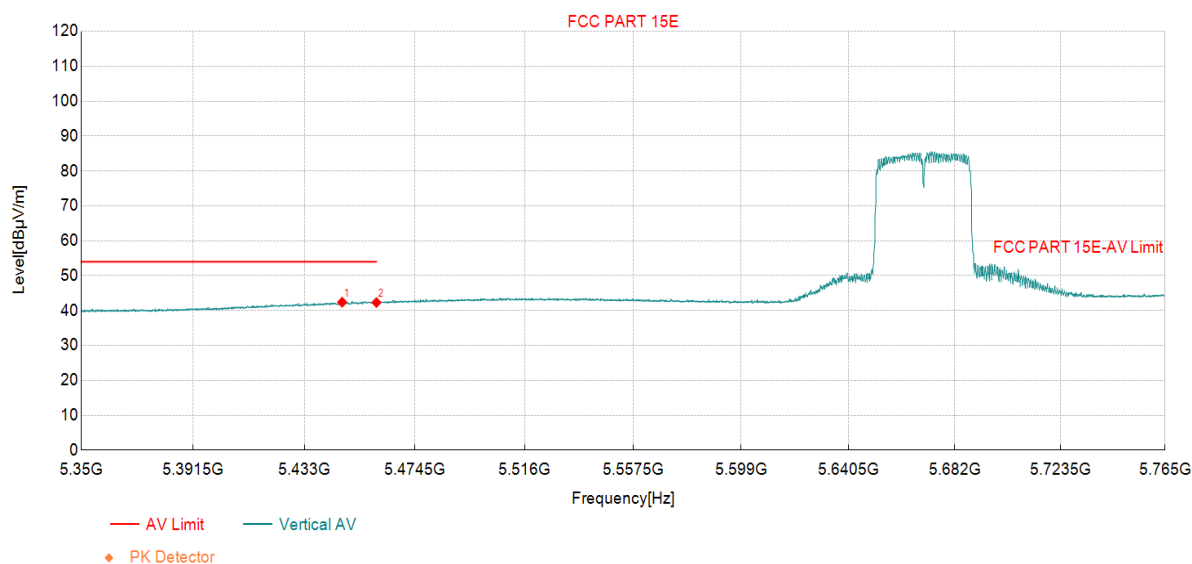

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5447.11	26.21	42.40	16.19	54.00	11.60	AV	Vertic	PASS
2	5460.00	25.96	42.30	16.34	54.00	11.70	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

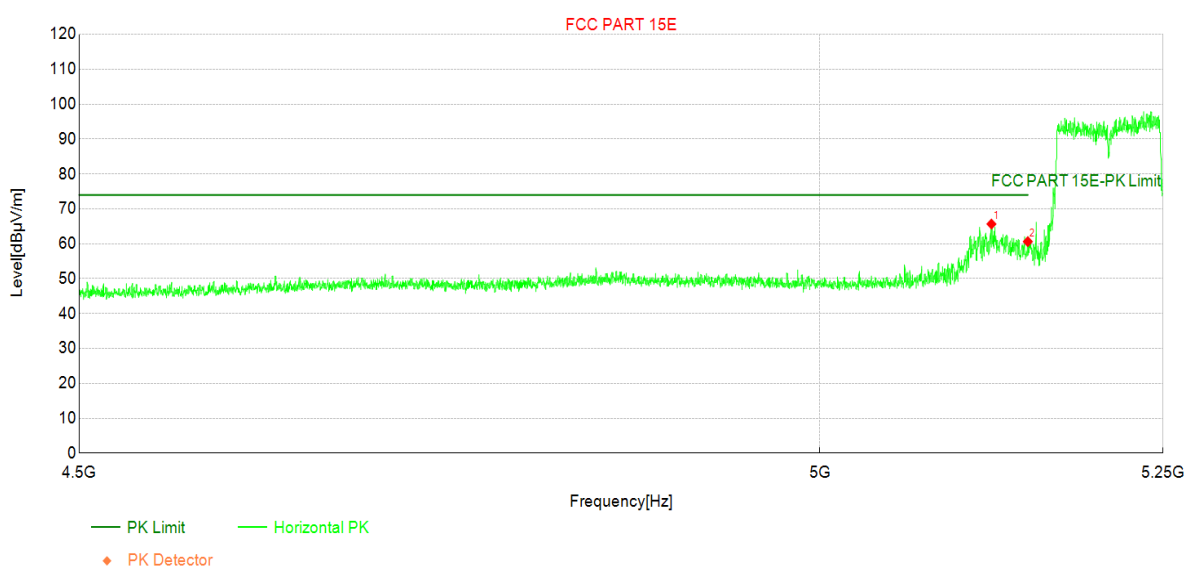

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5123.44	50.69	65.65	14.96	74.00	8.35	PK	Horizo	PASS
2	5150.00	45.50	60.61	15.11	74.00	13.39	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

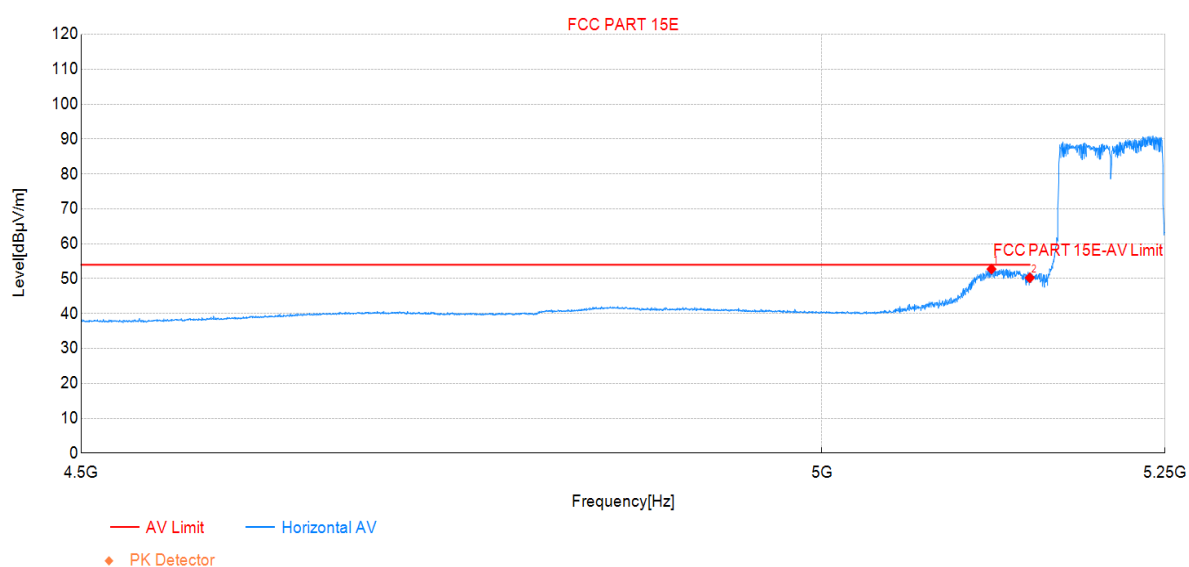

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5122.00	37.79	52.74	14.95	54.00	1.26	AV	Horizo	PASS
2	5150.00	35.14	50.25	15.11	54.00	3.75	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

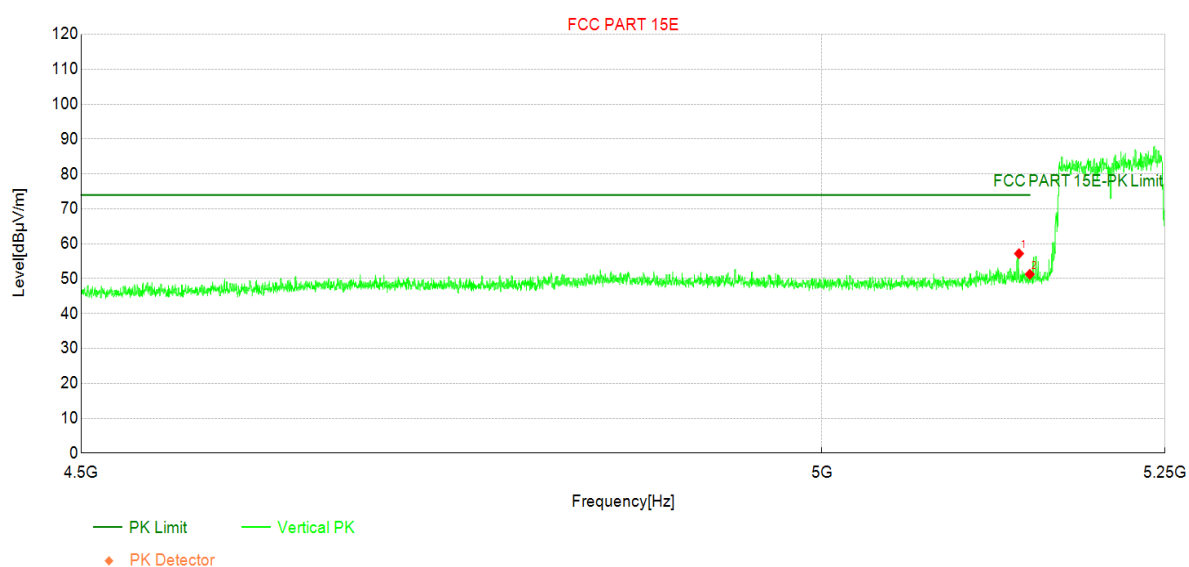

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5142.09	42.11	57.17	15.06	74.00	16.83	PK	Vertic	PASS
2	5150.00	36.16	51.27	15.11	74.00	22.73	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

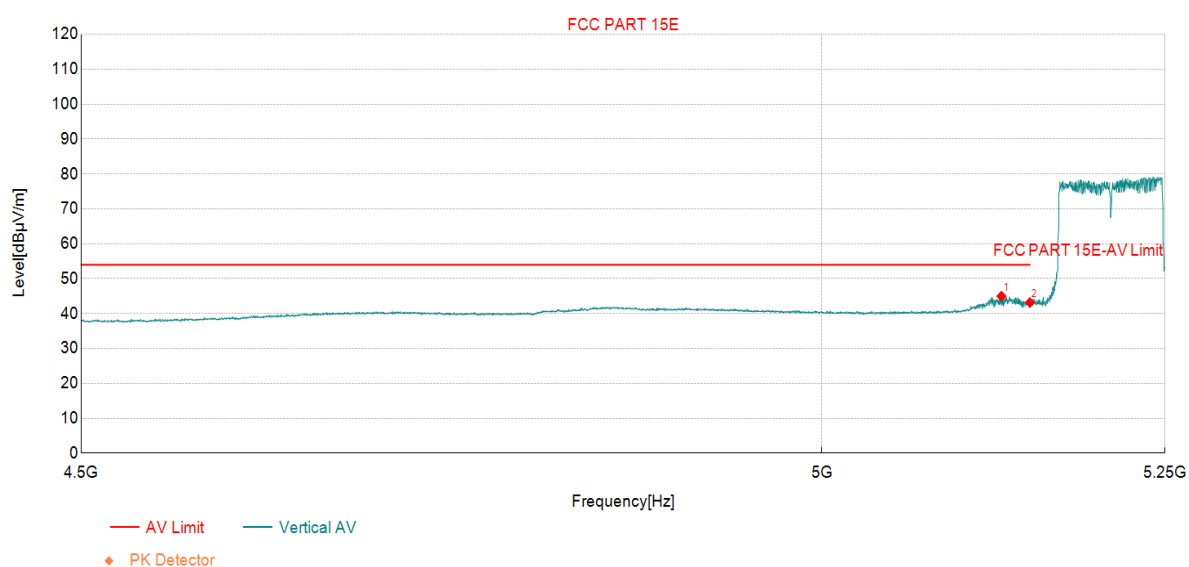

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5129.25	29.99	44.98	14.99	54.00	9.02	AV	Vertic	PASS
2	5150.00	28.05	43.16	15.11	54.00	10.84	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

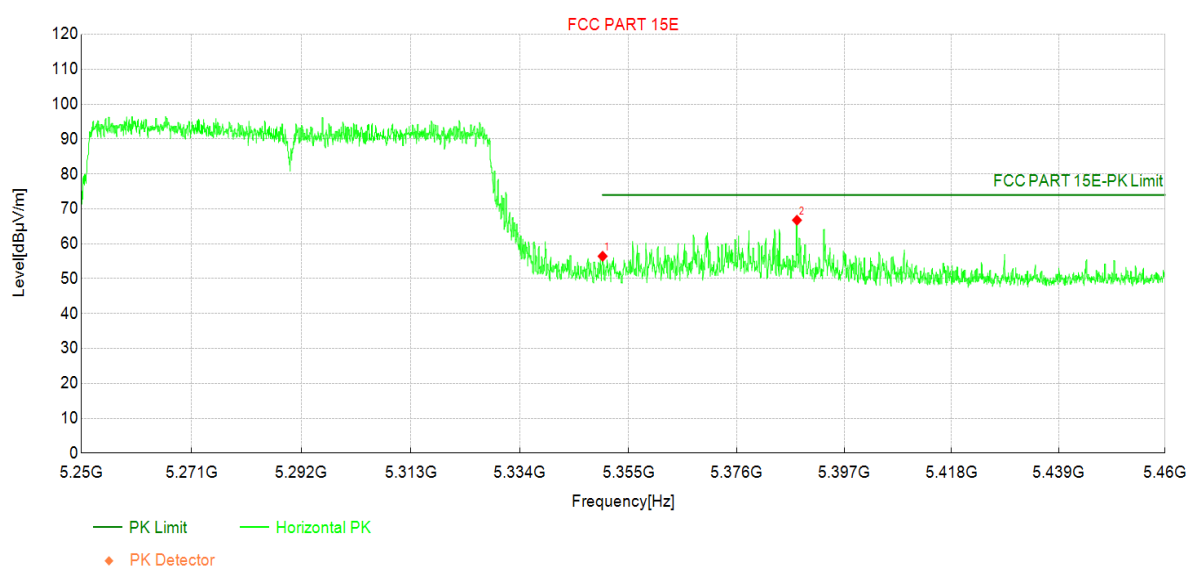

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	40.71	56.42	15.71	74.00	17.58	PK	Horizo	PASS
2	5387.76	51.08	66.75	15.67	74.00	7.25	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

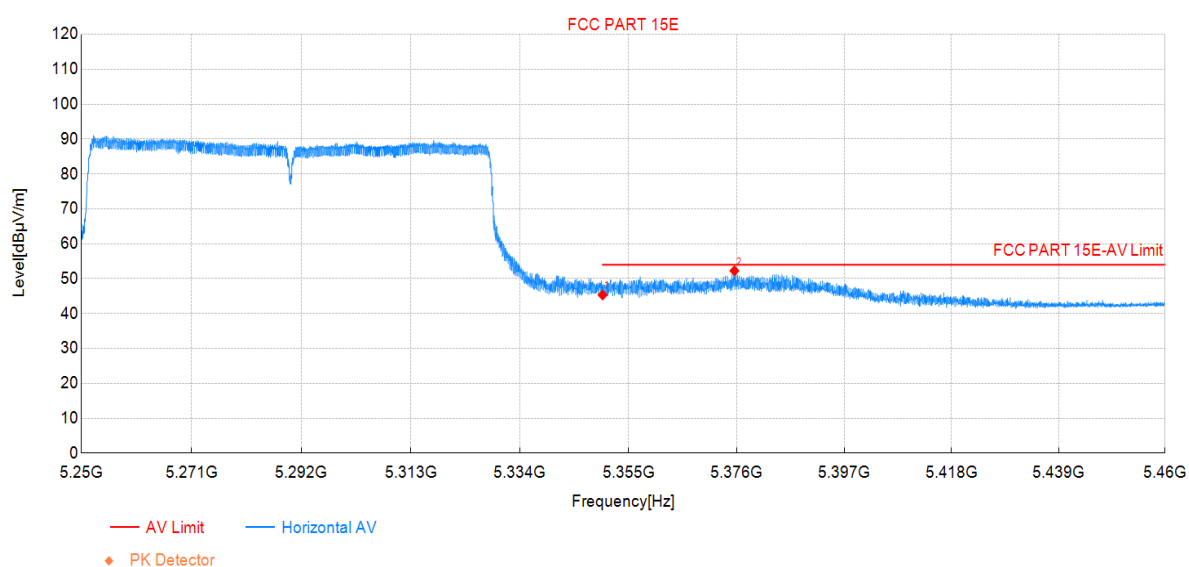

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	29.61	45.32	15.71	54.00	8.68	AV	Horizo	PASS
2	5375.58	36.58	52.25	15.67	54.00	1.75	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

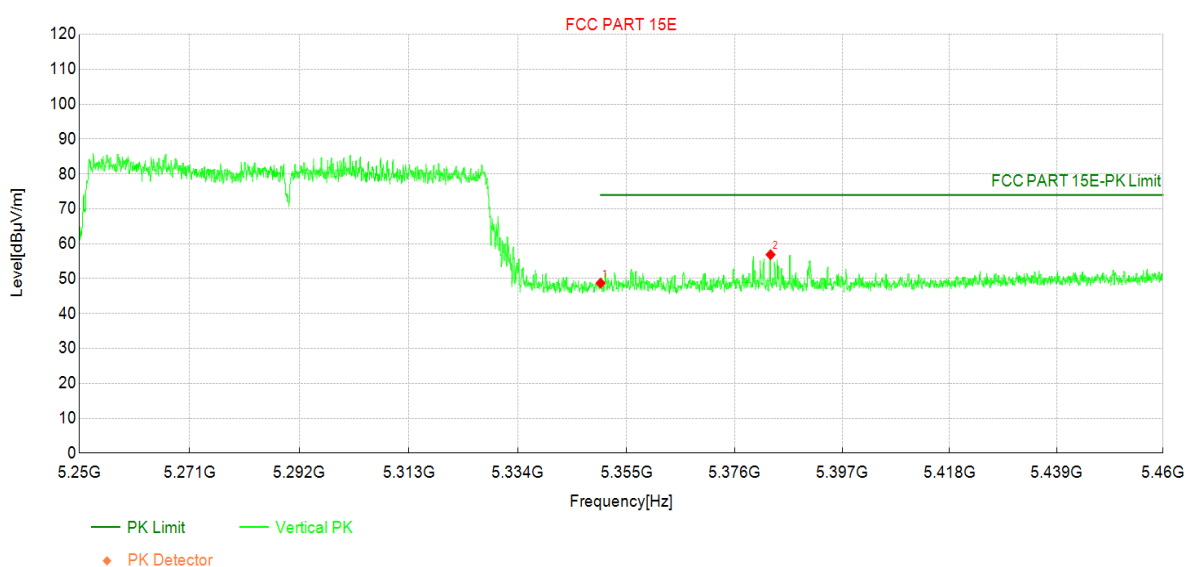

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	33.01	48.72	15.71	74.00	25.28	PK	Vertic	PASS
2	5383.01	41.21	56.88	15.67	74.00	17.12	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15E		

Test Graph

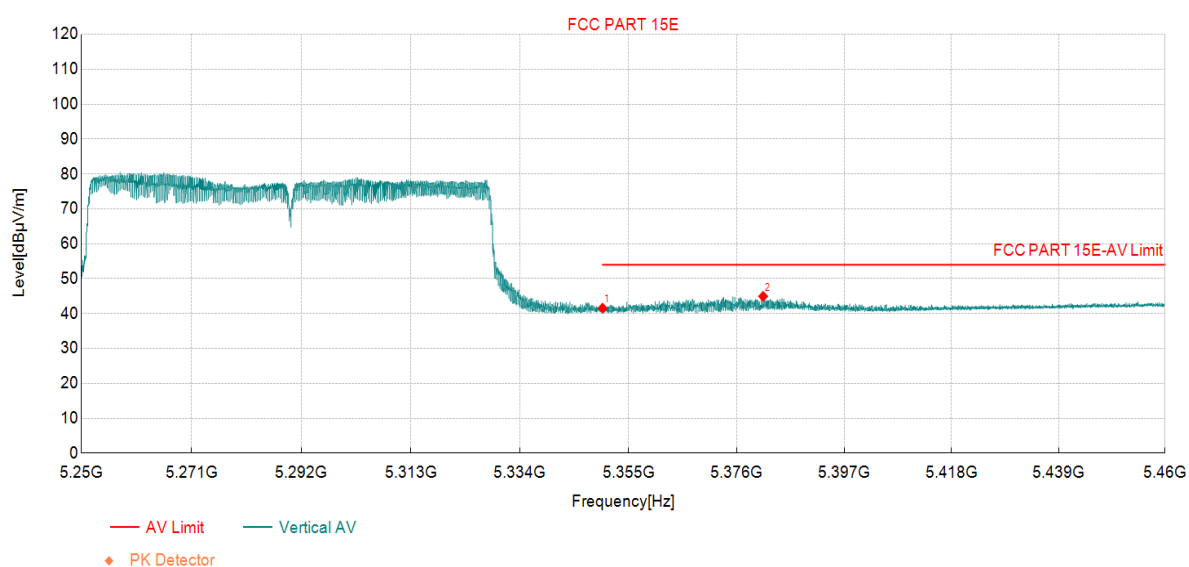

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350.00	25.84	41.55	15.71	54.00	12.45	AV	Vertic	PASS
2	5381.17	29.26	44.93	15.67	54.00	9.07	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2 /5.2
Mode:	Mode6:Transmit at 5530MHz by 802.11ac(80Mhz)	Voltage:	3.3 Vdc
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15 E		

Test Graph

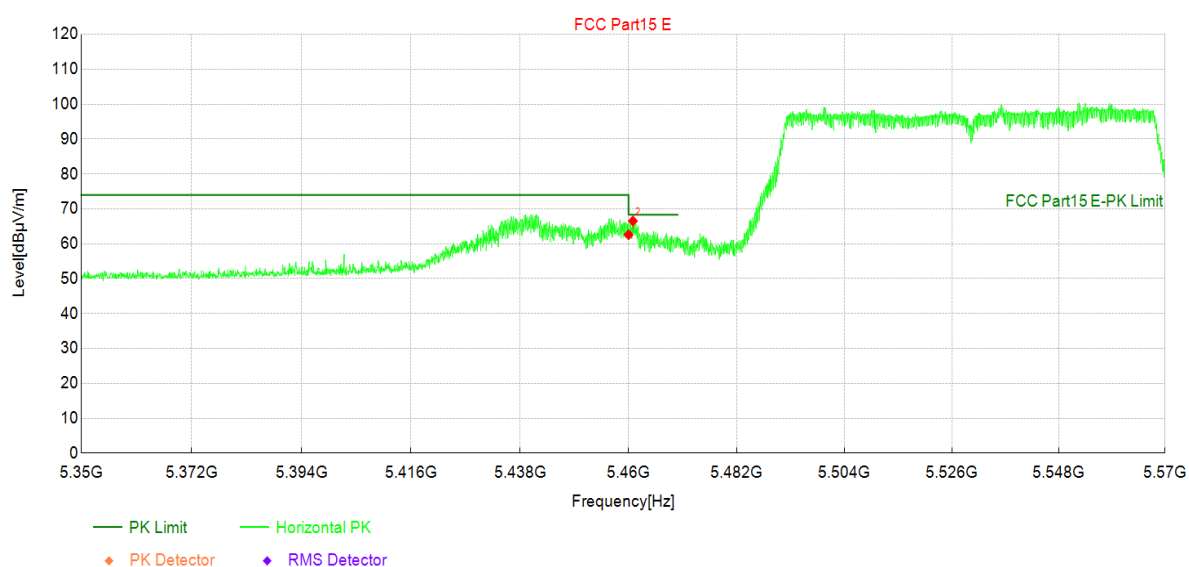

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460.00	46.25	62.59	16.34	68.30	5.71	PK	Horizo	PASS
2	5460.88	50.18	66.53	16.35	68.30	1.77	PK	Horizo	PASS