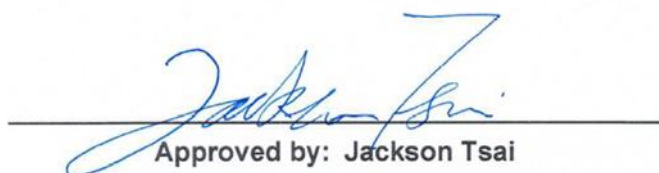


Radio Exposure Evaluation Report

FCC ID : TOR-C460D
Equipment : Wireless Access Point
Brand Name : ARISTA
Model Name : C-460D
Applicant : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Manufacturer : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Standard : 47 CFR FCC Part 2 Subpart J, section 2.1091

The product was received on Jan. 13, 2026, and testing was started from May 19, 2026 and completed on Jul. 09, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR FCC Part 2 Subpart J, section 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location	9
2 MAXIMUM PERMISSIBLE EXPOSURE	10
2.1 Limit of Maximum Permissible Exposure	10
2.2 RF Exposure Exempt Measurement	11
2.3 Multiple RF Sources Exposure.....	12
2.4 MPE Calculation Method	13
2.5 Calculated Result and Limit.....	14
Photographs of EUT V01	



History of this test report

Report No.	Version	Description	Issued Date
FA611324	01	Initial issue of report	Sep. 16, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None

Reviewed by: Ryan Hsiao

Report Producer: Michelle Tsai

1 General Description

1.1 Information

1.1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
6GHz WLAN	5925-7125	5955-7115	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Bluetooth	2400-2483.5	2402-2480	LE: DSSS (GFSK)

**1.1.2 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	ADANT	ARSDP256	Directional	I-Pex	2.4G	Radio 1
2	ADANT	ARSDP256	Directional	I-Pex	5G	Radio 3
3	ADANT	ARSDP256	Directional	I-Pex	5G	
4	ADANT	ARSDP256	Directional	I-Pex	2.4G	Radio 1
2	ADANT	ARSDP256	Directional	I-Pex	5G	Radio 3
5	ADANT	ARSDP256	Directional	I-Pex	5G	
6	ADANT	ARSDP256	Directional	I-Pex	2.4G	Radio 1
7	ADANT	ARSDP256	Directional	I-Pex	5G	Radio 3
8	ADANT	ARSDP256	Directional	I-Pex	5G	
9	ADANT	ARSDP256	Directional	I-Pex	2.4G	Radio 1
7	ADANT	ARSDP256	Directional	I-Pex	5G	Radio 3
10	ADANT	ARSDP256	Directional	I-Pex	5G	
11	ADANT	ARSDP256	Directional	I-Pex	2.4G	Radio 0
12	ADANT	ARSDP256	Directional	I-Pex	5G+6G	
13	ADANT	ARSDP256	Directional	I-Pex	5G+6G	
14	ADANT	ARSDP256	Directional	I-Pex	2.4G	
12	ADANT	ARSDP256	Directional	I-Pex	5G+6G	
15	ADANT	ARSDP256	Directional	I-Pex	5G+6G	
16	ADANT	ARSDP256	Directional	I-Pex	6G	Radio 2
17	ADANT	ARSDP256	Directional	I-Pex	6G	
16	ADANT	ARSDP256	Directional	I-Pex	6G	
18	ADANT	ARSDP256	Directional	I-Pex	6G	
19	ADANT	ARSDP256	Directional	I-Pex	6G	
20	ADANT	ARSDP256	Directional	I-Pex	6G	
19	ADANT	ARSDP256	Directional	I-Pex	6G	
21	ADANT	ARSDP256	Directional	I-Pex	6G	
22	ADANT	ARSDP256	PIFA	I-Pex	BT	-
23	ADANT	ARSDP256	PIFA	I-Pex	GPS	-



Ant.	Port	Gain (dBi)										
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	GPS
1	1	4.7	-	-	-	-	-	-	-	-	-	-
2		-	5	4.4	4.3	4.8	-	-	-	-	-	-
3		-	2.7	2.6	2.3	1.6	-	-	-	-	-	-
4	2	2.8	-	-	-	-	-	-	-	-	-	-
2		-	4.1	3.6	2.6	3.9	-	-	-	-	-	-
5		-	2.7	2.1	2.3	3.1	-	-	-	-	-	-
6	3	3.3	-	-	-	-	-	-	-	-	-	-
7		-	4.9	5.2	4.6	4	-	-	-	-	-	-
8		-	4	3	3.1	3.3	-	-	-	-	-	-
9	4	4.8	-	-	-	-	-	-	-	-	-	-
7		-	3.8	4	4.5	3.2	-	-	-	-	-	-
10		-	2.8	3	2.9	2.8	-	-	-	-	-	-
11	5	3.1	-	-	-	-	-	-	-	-	-	-
12		-	3.2	3.8	5.2	3.2	2.5	2.5	2.8	1.6	-	-
13		-	2.9	3.1	3.1	2.9	3.2	0.9	1.6	2.1	-	-
14	6	4.3	-	-	-	-	-	-	-	-	-	-
12		-	3.9	4.6	4.1	2.2	2.7	4	4.4	5	-	-
15		-	3.8	3.5	3.3	3.5	1.6	3	3.3	2.8	-	-
16	7	-	-	-	-	-	4.1	3.8	3.7	1.7	-	-
17		-	-	-	-	-	3.4	4.8	5	4.1	-	-
16	8	-	-	-	-	-	2.5	3.5	3.9	1.7	-	-
18		-	-	-	-	-	2.2	3.9	4.3	2.4	-	-
19	9	-	-	-	-	-	4.3	5.9	3.1	3.3	-	-
20		-	-	-	-	-	4.2	4.1	4.5	4.3	-	-
19	10	-	-	-	-	-	3.1	4.7	5.1	2.9	-	-
21		-	-	-	-	-	5.2	3.9	4.3	3.5	-	-
22	11	-	-	-	-	-	-	-	-	-	1.0	-
23	12	-	-	-	-	-	-	-	-	-	-	0.9

Note 1: The EUT has twenty-three antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax mode (2TX/2RX) **(Radio 0)**

Ant. 11 and Ant. 14 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX) **(Radio 1)**

Ant. 1, Ant. 4, Ant. 6, and Ant. 9 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (2TX/2RX) (Radio 0)

Ant. 12 / Ant.13 and Ant.15 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) **(Radio 3)**

Ant. 2 and Ant. 7 / Ant. 3, Ant.5, Ant.8 and Ant.10 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax mode (2TX/2RX) **(Radio 0)**

Ant. 12 / Ant.13 and Ant.15 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) **(Radio 2)**

Ant. 16 and Ant.19 / Ant. 17, Ant. 18, Ant. 20 and Ant. 21 could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 22 could transmit/receive.

Note 2: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.1.3 Accessories

Accessories				
Ceiling	Brand Name	ARISTA	Model Name	MNT-AP-15MM

Reminder: Regarding to more detail and other information, please refer to user manual.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 2 Subpart J, section 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.3 Testing Location

Test Lab. : Sporton International Inc. Hsinhua Laboratory		
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)	
	TEL: 886-3-327-3456	FAX: 886-3-327-0973
Test site Designation No. TW3785 with FCC.		

2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F/1500	30
1500-100,000	-	-	1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

Multiple Transmitters Condition

Co-location as simultaneously transmitting (co-transmitting) and the evaluation shall be consider that simultaneous transmissions from co-located devices the individual transmitters are evaluated separately. After sum of the individual value (basic restriction / reference level) are measured/calculated also have to under basic restriction / reference level.

Co-transmitting mode:

1. Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (2.4G) + Bluetooth
2. Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (5G_B1B4) + Bluetooth
3. Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (Low Power Indoor Client) + Bluetooth

2.2 RF Exposure Exempt Measurement

Option	Refer Std.	Exemption Exposure Thresholds (TL)
A	§1.1307(b)(3)(i)(A)	Available maximum time-averaged power is no more than 1 mW
B	§1.1307(b)(3)(i)(B)	$P_{th}(mW) = \begin{cases} ERP_{20cm} (d / 20cm)^x \rightarrow d \leq 20cm \\ ERP_{20cm} \rightarrow 20cm < d \leq 40cm \end{cases}$ $x = -\log_{10} \left(\frac{60}{ERP_{20cm} \sqrt{f}} \right) \text{ and } f \text{ is in GHz}$ $\begin{cases} ERP_{20cm} : 0.3GHz \leq f < 1.5GHz \rightarrow 2040f(mW) \\ ERP_{20cm} : 1.5GHz \leq f \leq 6GHz \rightarrow 3060(mW) \end{cases}$
C	§1.1307(b)(3)(i)(C)	$\begin{cases} 0.3 \sim 1.34MHz \rightarrow ERP(W) = 1920R^2 \\ 1.34 \sim 30MHz \rightarrow ERP(W) = 3450R^2 / f^2 \\ 30 \sim 300MHz \rightarrow ERP(W) = 3.83R^2 \\ 300 \sim 1500MHz \rightarrow ERP(W) = 0.0128R^2 f \\ 1500 \sim 100000MHz \rightarrow ERP(W) = 19.2R^2 \end{cases}$ $f \text{ is in MHz; } R \text{ is in m; } R > \lambda / 2\pi$

2.3 Multiple RF Sources Exposure

Refer Std.	Exemption Exposure Thresholds (TL)
§1.1307(b)(3)(ii)(A)	The available maximum time-averaged power of each source is no more than 1 mW and there is a separation distance of two centimeters between any portion of a radiating structure operating and the nearest portion of any other radiating structure in the same device, except if the sum of multiple sources is less than 1 mW during the time-averaging period, in which case they may be treated as a single source (separation is not required)
§1.1307(b)(3)(ii)(B)	$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{ExposureLimit_k} \leq 1$ a = number of fixed, mobile, or portable RF sources claiming exemption using paragraph §1.1307(b)(3)(i)(B) of this section for P , including existing exempt transmitters and those being added. b = number of fixed, mobile, or portable RF sources claiming exemption using paragraph §1.1307(b)(3)(i)(C) of this section for Threshold ERP, including existing exempt transmitters and those being added. c = number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance including existing evaluated transmitters. P_i = the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive). $P_{th,i}$ = the exemption threshold power (P_{th}) according to paragraph §1.1307(b)(3)(i)(B) of this section for fixed, mobile, or portable RF source i. ERP_j = the ERP of fixed, mobile, or portable RF source j. $ERP_{th,j}$ = exemption threshold ERP for fixed, mobile, or portable RF source j, at a distance of at least $\lambda/2\pi$ according to the applicable formula of paragraph §1.1307(b)(3)(i)(C) of this section. $Evaluated_k$ = the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation at the location of exposure. $Evaluated Limit_k$ = either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable RF source k, as applicable from § 1.1310 of this chapter.

2.4 MPE Calculation Method

The MPE was calculated at 53 cm to show compliance with the power density limit.
The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.5 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Non-Beamforming

2.4GHz WLAN_Radio 0

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;G1D	4.30	21.93	24.08	0.50	287.078	53	C	5393.3	0.0532
2.4G;D1D	4.30	22.59	24.74	0.50	334.195	53	C	5393.3	0.0620

2.4GHz WLAN_Radio 1

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;G1D	4.80	27.76	30.41	0.50	1233.105	53	C	5393.3	0.2287
2.4G;D1D	4.80	26.02	28.67	0.50	826.038	53	C	5393.3	0.1532

5GHz WLAN_Radio 0_Full RU

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
5.2G;D1D	3.90	21.06	22.81	0.50	214.289	53	C	5393.3	0.0397
5.8G;D1D	3.50	20.74	22.09	0.50	181.552	53	C	5393.3	0.0337

5GHz WLAN_Radio 3_Full RU

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
5.2G;D1D	5.00	23.44	26.29	0.50	477.529	53	C	5393.3	0.0886
5.8G;D1D	4.80	23.11	25.76	0.50	422.669	53	C	5393.3	0.0784

6GHz WLAN_Radio 0_Full RU_Low Power Indoor Client

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
6.2G;D1D	3.20	14.98	16.03	0.50	44.978	53	C	5393.3	0.0083
6.4G;D1D	4.00	14.24	16.09	0.50	45.604	53	C	5393.3	0.0085
6.7G;D1D	4.40	13.65	15.90	0.50	43.652	53	C	5393.3	0.0081
7.0G;D1D	5.00	13.73	16.58	0.50	51.050	53	C	5393.3	0.0095

**6GHz WLAN_Radio 2_Full RU_LPI**

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
6.2G;D1D	5.20	21.03	24.08	0.50	287.078	53	C	5393.3	0.0532
6.4G;D1D	5.90	19.80	23.55	0.50	254.097	53	C	5393.3	0.0471
6.7G;D1D	5.10	20.41	23.36	0.50	243.220	53	C	5393.3	0.0451
7.0G;D1D	4.30	17.95	20.10	0.50	114.815	53	C	5393.3	0.0213

Bluetooth

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;BT-LE	1.00	9.80	8.65	0.50	8.222	53	C	5393.3	0.0015

Beamforming**2.4GHz WLAN_Radio 0**

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	6.73	22.48	27.06	0.50	570.164	53	C	5393.3	0.1058

2.4GHz WLAN_Radio 1

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	9.96	25.40	33.21	0.50	2349.633	53	C	5393.3	0.4358

5GHz WLAN_Radio 0

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
5.2G;D1D	6.57	21.06	25.48	0.50	396.278	53	C	5393.3	0.0735
5.8G;D1D	6.22	20.74	24.81	0.50	339.625	53	C	5393.3	0.0630

5GHz WLAN_Radio 3

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
5.2G;D1D	10.49	23.44	31.78	0.50	1690.441	53	C	5393.3	0.3135
5.8G;D1D	10.01	23.11	30.97	0.50	1402.814	53	C	5393.3	0.2602

**6GHz WLAN_Radio 0_Low Power Indoor Client**

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
6.2G;D1D	5.45	14.98	18.28	0.50	75.509	53	C	5393.3	0.0140
6.4G;D1D	6.29	14.24	18.38	0.50	77.268	53	C	5393.3	0.0143
6.7G;D1D	6.65	13.65	18.15	0.50	73.282	53	C	5393.3	0.0136
7.0G;D1D	6.48	13.73	18.06	0.50	71.779	53	C	5393.3	0.0133

6GHz WLAN_Radio 2_LPI

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
6.2G;D1D	9.84	19.39	27.08	0.50	572.796	53	C	5393.3	0.1062
6.4G;D1D	10.55	18.68	27.08	0.50	572.796	53	C	5393.3	0.1062
6.7G;D1D	10.00	19.28	27.13	0.50	579.429	53	C	5393.3	0.1075
7.0G;D1D	9.63	17.95	25.43	0.50	391.742	53	C	5393.3	0.0727

Note 1: Option A, B and C refer as clause 2.2

Note 2: For option B, Pth(mW) convert to TL ERP(mW); For option C, ERP(W) convert to TL ERP(mW)

Note 3: TL Ratio=Tune-up ERP(mW)/TL ERP(mW)



Simultaneous Transmission Analysis Mode:

Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (2.4G) + Bluetooth

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	9.96	25.40	33.21	0.50	2349.633	53	C	5393.3	0.4358
5.2G;D1D	10.49	23.44	31.78	0.50	1690.441	53	C	5393.3	0.3135
6.7G;D1D	10.00	19.28	27.13	0.50	579.429	53	C	5393.3	0.1075
2.4G;D1D	6.73	22.48	27.06	0.50	570.164	53	C	5393.3	0.1058
2.4G;BT-LE	1.00	9.80	8.65	0.50	8.222	53	C	5393.3	0.0015
Sum TL Ratio_C	0.9641								
Ratio Limit	1								

Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (5G_B1B4) + Bluetooth

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	9.96	25.40	33.21	0.50	2349.633	53	C	5393.3	0.4358
5.2G;D1D	10.49	23.44	31.78	0.50	1690.441	53	C	5393.3	0.3135
6.7G;D1D	10.00	19.28	27.13	0.50	579.429	53	C	5393.3	0.1075
5.2G;D1D	6.57	21.06	25.48	0.50	396.278	53	C	5393.3	0.0735
2.4G;BT-LE	1.00	9.80	8.65	0.50	8.222	53	C	5393.3	0.0015
Sum TL Ratio_C	0.9318								
Ratio Limit	1								

Radio 1 + Radio 3 (5G_B1B4) + Radio 2 (6G_LPI) + Radio 0 (Low Power Indoor Client) + Bluetooth

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	9.96	25.40	33.21	0.50	2349.633	53	C	5393.3	0.4358
5.2G;D1D	10.49	23.44	31.78	0.50	1690.441	53	C	5393.3	0.3135
6.7G;D1D	10.00	19.28	27.13	0.50	579.429	53	C	5393.3	0.1075
6.4G;D1D	6.29	14.24	18.38	0.50	77.268	53	C	5393.3	0.0143
2.4G;BT-LE	1.00	9.80	8.65	0.50	8.222	53	C	5393.3	0.0015
Sum TL Ratio_C	0.8726								
Ratio Limit	1								

Note 1: Option A, B and C refer as clause 2.2

Note 2: For option B, Pth(mW) convert to TL ERP(mW); For option C, ERP(W) convert to TL ERP(mW)

Note 3: TL Ratio=Tune-up ERP(mW)/TL ERP(mW)

Note 4: Refer as clause 2.3 Multiple RF Sources Exposure. Please follow below option and sum TL ration table.

Option	Sum TL Ratio_B	Option	Sum TL Ratio_C	Option	Sum TL Ratio_E
B	$\sum_{i=1}^a \frac{P_i}{P_{th,i}}$	C	$\sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}}$	E	$\sum_{k=1}^c \frac{Evaluated_k}{ExposureLimit_k}$

Note: The above antenna gain was declared by manufacturer.

—THE END—