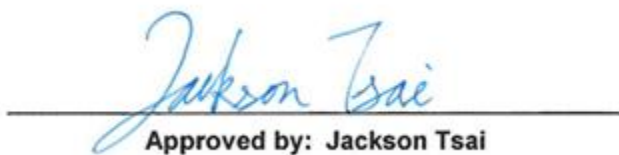


FCC Radio Test Report

FCC ID : TOR-W318
Equipment : 802.11 a/n/ac/ax + b/g/n/ax Access Point
Brand Name : Arista
Model Name : W-318
Applicant : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA
95054 USA
Manufacturer : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA
95054 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 05, 2022, and testing was started from Aug. 25, 2022 and completed on Oct. 11, 2022. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 TEST CONFIGURATION OF EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration	14
2.3 Support Equipment.....	16
2.4 Test Setup Diagram	17
3 TRANSMITTER TEST RESULT	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	22
3.4 Peak Power Spectral Density (E.I.R.P.)	25
3.5 Unwanted Emissions.....	28
3.6 Contention Based Protocol.....	34
3.7 Frequency Stability	35
4 TEST EQUIPMENT AND CALIBRATION DATA.....	36
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM EQUIVALENT ISOTOPICALLY RADIATED POWER (E.I.R.P.)	
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY (E.I.R.P.)	
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX F. TEST RESULTS OF CONTENTION-BASED PROTOCOL	
APPENDIX G. TEST RESULTS OF FREQUENCY STABILITY	
APPENDIX H. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX I. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver2.4
FCC ID: TOR-W318



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-
3.7	15.407(g)	Frequency Stability	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Amber Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	a, n (HT20), ac (VHT20), ax (HEW20)	5935 ~ 7115	1 ~ 233 [60]
5925 ~ 7125	n (HT40), ac (VHT40), ax (HEW40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ac (VHT80), ax (HEW80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ac (VHT160), ax (HEW160)	6025 ~ 6985	15 ~ 207 [7]

Non-Beamforming

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11a	20	2TX
6.425-6.525GHz	802.11a	20	2TX
6.525-6.875GHz	802.11a	20	2TX
6.875-7.125GHz	802.11a	20	2TX
5.925-6.425GHz	802.11ax HEW20	20	2TX
6.425-6.525GHz	802.11ax HEW20	20	2TX
6.525-6.875GHz	802.11ax HEW20	20	2TX
6.875-7.125GHz	802.11ax HEW20	20	2TX
5.925-6.425GHz	802.11ax HEW40	40	2TX
6.425-6.525GHz	802.11ax HEW40	40	2TX
6.525-6.875GHz	802.11ax HEW40	40	2TX
6.875-7.125GHz	802.11ax HEW40	40	2TX
5.925-6.425GHz	802.11ax HEW80	80	2TX
6.425-6.525GHz	802.11ax HEW80	80	2TX
6.525-6.875GHz	802.11ax HEW80	80	2TX
6.875-7.125GHz	802.11ax HEW80	80	2TX
5.925-6.425GHz	802.11ax HEW160	160	2TX
6.425-6.525GHz	802.11ax HEW160	160	2TX
6.525-6.875GHz	802.11ax HEW160	160	2TX
6.875-7.125GHz	802.11ax HEW160	160	2TX

**Beamforming**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11ax HEW20-BF	20	2TX
6.425-6.525GHz	802.11ax HEW20-BF	20	2TX
6.525-6.875GHz	802.11ax HEW20-BF	20	2TX
6.875-7.125GHz	802.11ax HEW20-BF	20	2TX
5.925-6.425GHz	802.11ax HEW40-BF	40	2TX
6.425-6.525GHz	802.11ax HEW40-BF	40	2TX
6.525-6.875GHz	802.11ax HEW40-BF	40	2TX
6.875-7.125GHz	802.11ax HEW40-BF	40	2TX
5.925-6.425GHz	802.11ax HEW80-BF	80	2TX
6.425-6.525GHz	802.11ax HEW80-BF	80	2TX
6.525-6.875GHz	802.11ax HEW80-BF	80	2TX
6.875-7.125GHz	802.11ax HEW80-BF	80	2TX
5.925-6.425GHz	802.11ax HEW160-BF	160	2TX
6.425-6.525GHz	802.11ax HEW160-BF	160	2TX
6.525-6.875GHz	802.11ax HEW160-BF	160	2TX
6.875-7.125GHz	802.11ax HEW160-BF	160	2TX

Note:

- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
3	M-gear	7004A0576000	Dipole	I-Pex	6E	3
4	M-gear	7004A0577000	Dipole	I-Pex	6E	

Ant.	Port	Gain (dBi)
		6G
3	1	5.64
4	2	5.39

For 6GHz function:

For IEEE 802.11 a/n/ac/ax mode (2TX/2RX)

Ant. 3 (port 1) and Ant. 4 (port 2) could transmit/receive simultaneously.



1.1.3 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter / PoE		
EUT Function	☒	Indoor Access Point	☐ Subordinate
	☐	Indoor Client	☐ Standard Power Access Point
	☐	Dual Client	☐ Standard Client
	☐	Fixed Client	
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit(802.11ax)	☒	Full RU	☐ Partial RU
Software / Firmware Version for CBP		Linux OpenWrt 4.4.60 #104 SMP PREEMPT Fri May 20 15:45:37 CST 2022 aarch64 GNU/Linux	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

1.1.4 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11a_Nss1,(6Mbps)_2TX	0.947	0.24	1.98m	1k
802.11ax HEW20_Nss1,(MCS0)_2TX	0.92	0.36	5.448m	300
802.11ax HEW40_Nss1,(MCS0)_2TX	0.906	0.43	5.448m	300
802.11ax HEW80_Nss1,(MCS0)_2TX	0.94	0.27	5.448m	300
802.11ax HEW160_Nss1,(MCS0)_2TX	0.917	0.38	5.448m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**Beamforming**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq$ 1/T
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	0.92	0.36	5.448m	300
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	0.906	0.43	5.448m	300
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	0.94	0.27	5.448m	300
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	0.917	0.38	5.448m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v01r02
- ♦ KDB 987594 D02 v01r01
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Wayne Chiu	20.5~20.8℃ / 54~57%	25/Aug/2022~26/Aug/2022
RF Conducted	TH07-HY	Yuna Lin	22.6~26.0℃ / 50~63%	07/Sep/2022~11/Oct/2022
Radiated	03CH02-HY	Daniel Lin	20.4~24.2℃ / 58~60%	31/Aug/2022~06/Oct/2022
Contention-Based Protocol	DFS01-HY	John Yang	22.2~24.4℃ / 57~61%	27/Aug/2022
☐ Wen 33rd.St. (TAF: 3785)	ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)			
	TEL: 886-3-318-0787		FAX: 886-3-318-0287	
Test site Designation No. TW0008 with FCC.				

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Emission Bandwidth	1.5 MHz	Confidence levels of 95%
Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Contention-Based Protocol	1 ms	Confidence levels of 95%
Frequency Stability	1.18 ppm	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00089.1
-----------------------	--------------------------------------

Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5935MHz	8
5955MHz	6.5
6175MHz	6
6415MHz	5.5
6435MHz	6.5
6475MHz	6.5
6515MHz	6.5
6535MHz	8.5
6695MHz	8.5
6855MHz	6
6875MHz	6
6895MHz	5.5
6995MHz	5.5
7095MHz	5.5
7115MHz	10
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5935MHz	5
5955MHz	6
6175MHz	5.5
6415MHz	6
6435MHz	6.5
6475MHz	6
6515MHz	6.5
6535MHz	7.5
6695MHz	8
6855MHz	6
6875MHz	5.5
6895MHz	10



Mode	Power Setting
6995MHz	11
7095MHz	9.5
7115MHz	8
802.11ax HEW40_Nss1,(MCS0)_2TX	-
5965MHz	9
6165MHz	8.5
6405MHz	9.5
6445MHz	9.5
6485MHz	8.5
6525MHz	9.5
6565MHz	8
6685MHz	8.5
6845MHz	9.5
6885MHz	14
6925MHz	13.5
7005MHz	15
7085MHz	11
802.11ax HEW80_Nss1,(MCS0)_2TX	-
5985MHz	12
6145MHz	11
6385MHz	11
6465MHz	11
6545MHz	11
6625MHz	16
6705MHz	17.5
6785MHz	17.5
6865MHz	16.5
6945MHz	16
7025MHz	14
802.11ax HEW160_Nss1,(MCS0)_2TX	-
6025MHz	14.5
6185MHz	14
6345MHz	14
6505MHz	14
6665MHz	13



Mode	Power Setting
6825MHz	14
6985MHz	17.5

Beamforming

Mode	Power Setting
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
5935MHz	5
5955MHz	6
6175MHz	5.5
6415MHz	6
6435MHz	6.5
6475MHz	6
6515MHz	6.5
6535MHz	7.5
6695MHz	8
6855MHz	6
6875MHz	5.5
6895MHz	10
6995MHz	11
7095MHz	9.5
7115MHz	8
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-
5965MHz	9
6165MHz	8.5
6405MHz	9.5
6445MHz	9.5
6485MHz	8.5
6525MHz	9.5
6565MHz	8
6685MHz	8.5
6845MHz	9.5
6885MHz	14
6925MHz	13.5
7005MHz	15
7085MHz	11
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-



Mode	Power Setting
5985MHz	12
6145MHz	11
6385MHz	11
6465MHz	11
6545MHz	11
6625MHz	16
6705MHz	17.5
6785MHz	17.5
6865MHz	16.5
6945MHz	16
7025MHz	14
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-
6025MHz	14.5
6185MHz	14
6345MHz	14
6505MHz	14
6665MHz	13
6825MHz	14
6985MHz	17.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode
2	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Unwanted Emissions Contention Based Protocol Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	R1_2.4G+R2_5G+R3_6E+BT
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	CTX
1	R1_2.4G+R2_5G+R3_6E+BT
Refer to Sporton Test Report No.: FA222104 for Co-location RF Exposure Evaluation.	



2.3 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Power Cable	Power Sync	PW-GPC180-3	-	-
2	Adapter	Powertron Electronics Corp.	PA1030-120HUB300	-	-
3	PoE	EnGenius	PNA90BGS-54-TG	-	-
4	AC Power Cord	EnGenius	E315167	-	-
5	RJ45 Cable	Power Sync	CAT-6E-02	-	-


Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Power Cable	Power Sync	PW-GPC180-3	-	-
2	Adapter	Powertron Electronics Corp.	PA1030-120HUB300	-	-

Support Equipment – Contention-Based Protocol					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Client(Slave)	HP	EliteBook 820	-	-
2	Notebook	DELL	Latitude E5510	-	-


2.4 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test (Adapter)

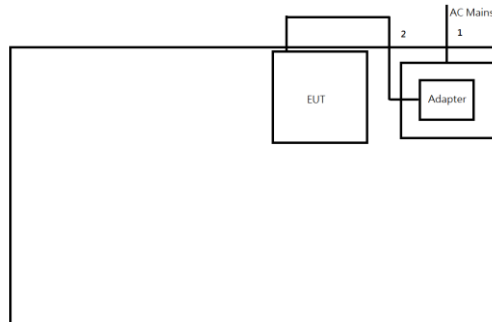


Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power Cable	No	1.5	-

Test Setup Diagram – AC Line Conducted Emission Test (PoE)

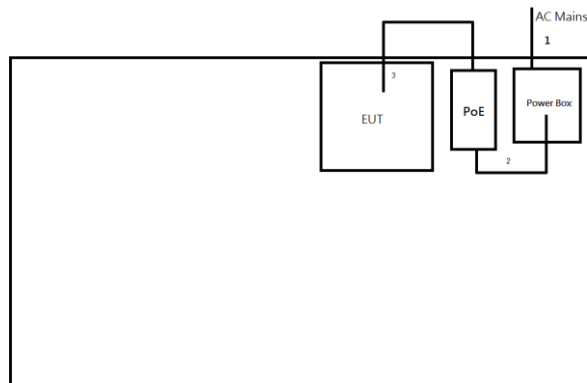

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	AC Power Cord	No	0.5	-
3	RJ45 Cable	No	2.0	-

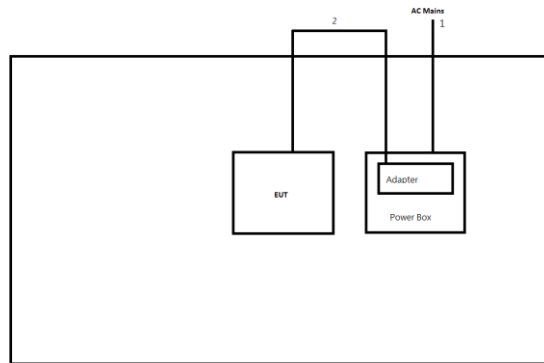Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable	No	1.5	-



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

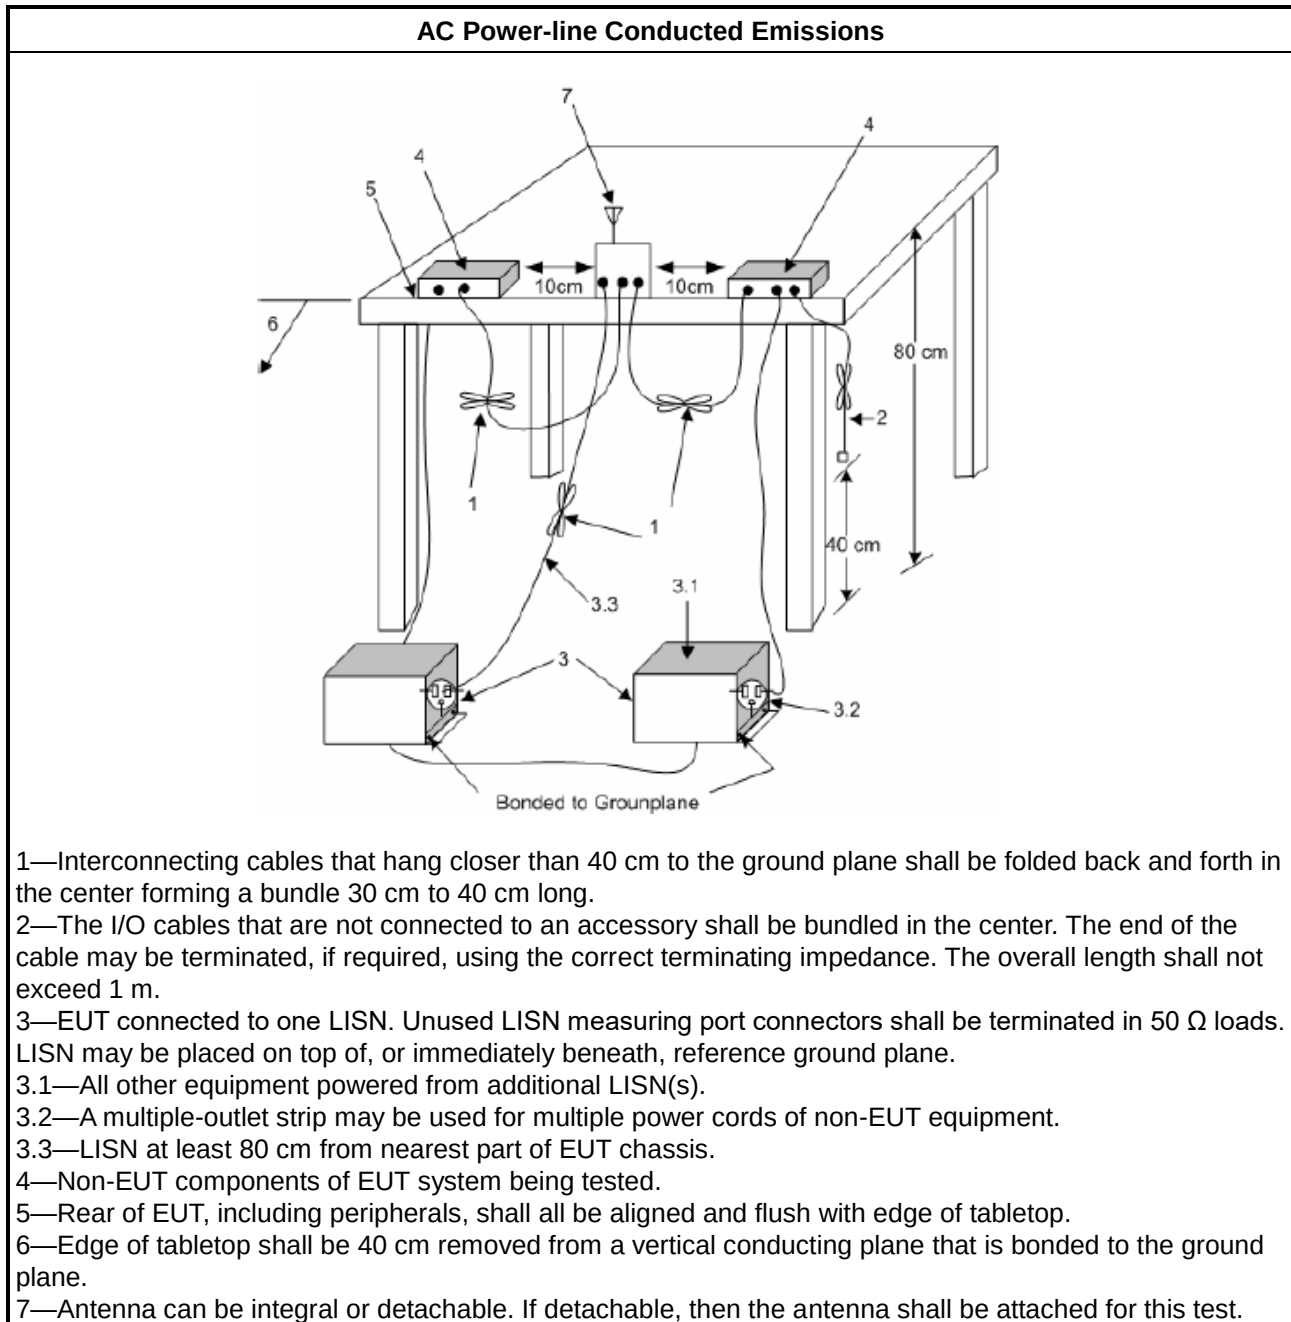

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☒	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☒	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

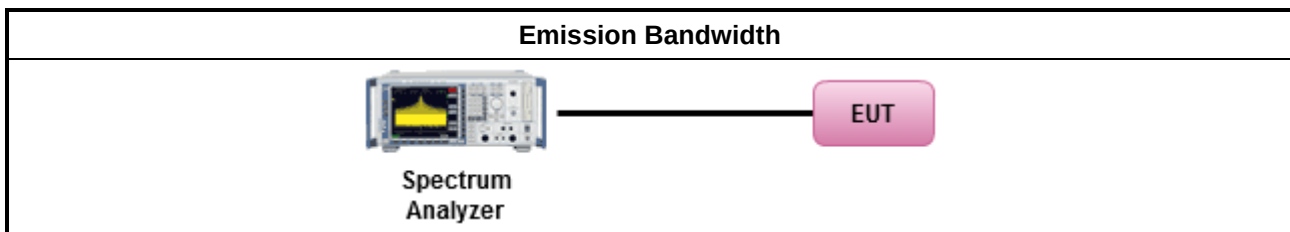

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.



3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Output Power Setting	
	Duty cycle $\geq 98\%$
	☐ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
	☐ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
	☐ Refer as KDB 789033, clause E Method PM-G (using an RF average power meter).
☐ For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☒ For radiated measurement.	
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as KDB 412172, clause 2.2 for EIRP calculation.

Note :

The test is the final test result, It includes antenna /cable loss factor & FSL factor.

The EIRP calculation refer to "KDB 412172 D01 Determining ERP and EIRP v01r01"

EIRP Formula :

$$EIRP(dBm) = P_R(dBm) + L_P(dB)$$

where;

$P_R(dBm)$: Power measurement level include antenna/cable loss

L_P : Free Space Loss(dB)

P_R Formula :

$$P_R(dBm) = P_{Meas}(dBm) - G_R(dBi) + L_C(dB) - G_{AMP}$$

where;

$P_{Meas}(dBm)$: Power measurement level

$G_R(dBi)$: Gain of the receive(measurement) antenna (dBi)

$L_C(dB)$: Measurement cable loss (dB)

$G_{AMP}(B)$: value of external amplification

L_P (FSL factor) Formula :

$$L_P(dB) = 20 \log F + 20 \log D - 27.54$$

where;

F(MHz) : EUT center frequency

D(m) : Measurement distance

For Example:

Test mode 11a 2TX 5935MHz EIRP measurement

P_R Formula :

$$P_R(\text{dBm}) = -12.33 - 11.44 + 10.28 - 30.11 = -43.60$$


L_P(FSL factor) Formula :

$$L_P(\text{dB}) = 20\log(5935) + 20\log(3) - 27.5 = 57.51$$

EIRP Formula :

$$\text{EIRP(dBm)} = -43.60 + 57.51 = 13.91$$

3.3.4 Test Setup

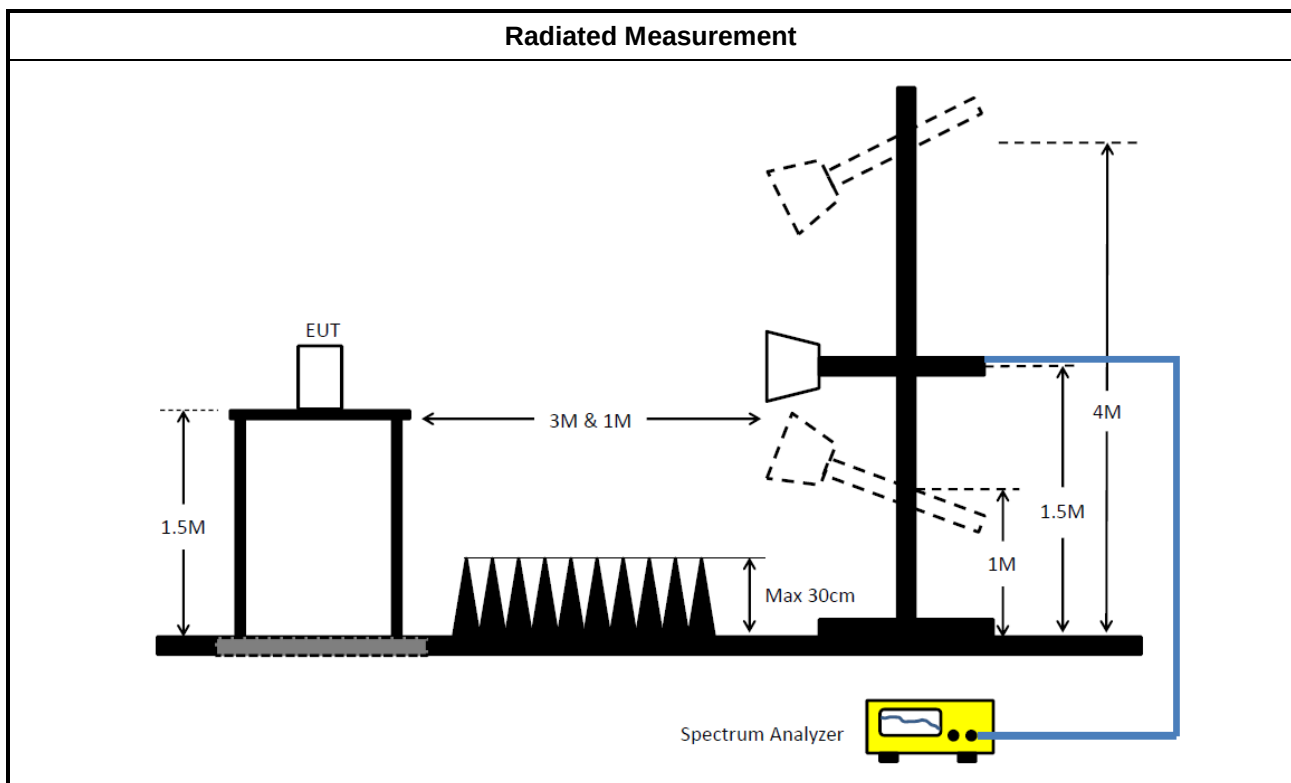

3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒	For the 5.925 ~ 6.425 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒	For the 6.425 ~ 6.525 GHz band:
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒	For the 6.525 ~ 6.875 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒	For the 6.875 ~ 7.125 GHz band:
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☐	Refer as KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☒ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	

Note :

The test is the final test result, It includes antenna /cable loss factor & FSL factor.

The EIRP PSD calculation refer to "KDB 412172 D01 Determining ERP and EIRP v01r01"

EIRP PSD Formula :

$$EIRP \text{ PSD(dBm/MHz)} = P_R(\text{dBm}) + L_P(\text{dB})$$

where;

$P_R(\text{dBm/MHz})$: Power measurement level include antenna/cable loss

L_P : Free Space Loss(dB)

P_R Formula :

$$P_R(\text{dBm/MHz}) = P_{\text{Meas}}(\text{dBm/MHz}) - G_R(\text{dBi}) + L_C(\text{dB}) - G_{\text{AMP}}$$

where;

$P_{\text{Meas}}(\text{dBm/MHz})$: PSD measurement level

$G_R(\text{dBi})$: Gain of the receive(measurement) antenna (dBi)

$L_C(\text{dB})$: Measurement cable loss (dB)

$G_{\text{AMP}}(\text{B})$: value of external amplification

L_P (FSL factor) Formula :

$$L_P(\text{dB}) = 20 \log F + 20 \log D - 27.54$$

where;

$F(\text{MHz})$: EUT center frequency

$D(\text{m})$: Measurement distance

For Example:

Test mode 11a 2TX 5935MHz EIRP PSD measurement

P_R Formula :

$$P_R(\text{dBm/MHz}) = -21.77 - 11.47 + 10.29 - 30.11 = -53.06$$


L_P (FSL factor) Formula :

$$L_P(\text{dB}) = 20 \log(5935) + 20 \log(3) - 27.5 = 57.52$$

EIRP PSD Formula

$$\text{EIRP PSD}(\text{dBm/MHz}) = -53.06 + 57.52 = 4.46$$

3.4.4 Test Setup

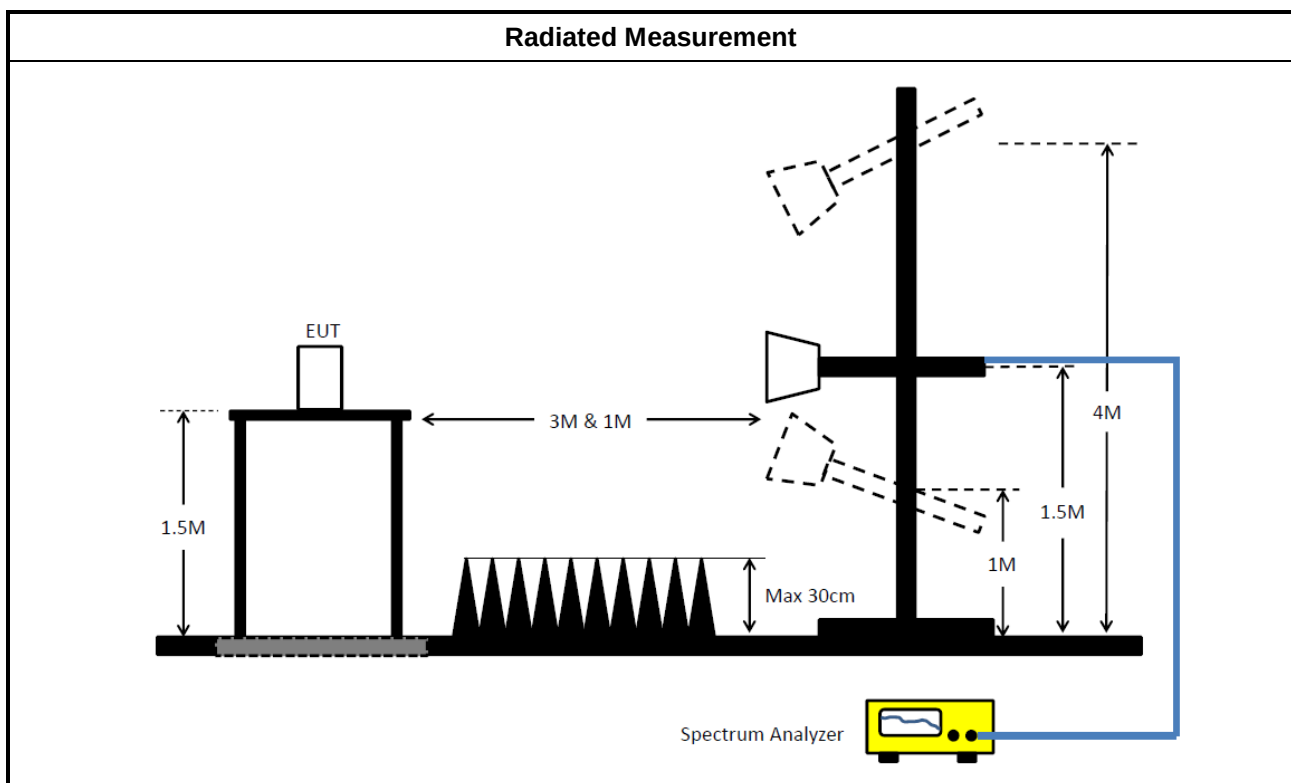

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

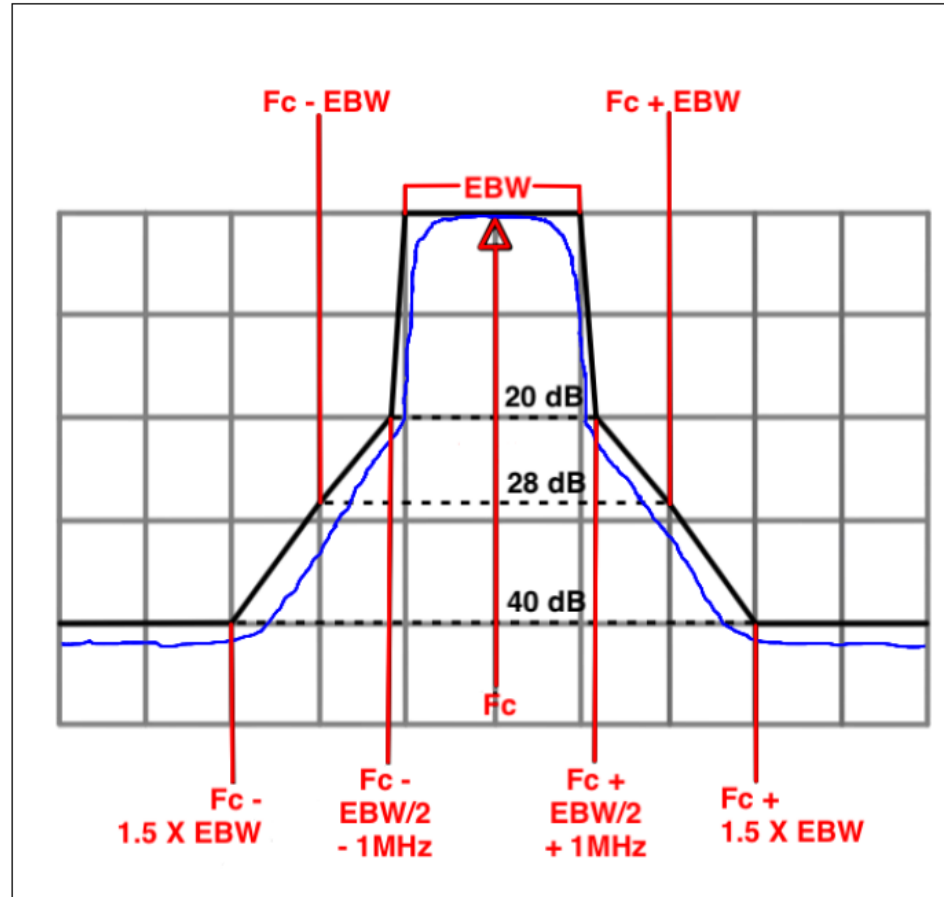



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	☒ Refer as KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

3.5.4 Measurement Results Calculation


The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)


3.5.5 Test Setup

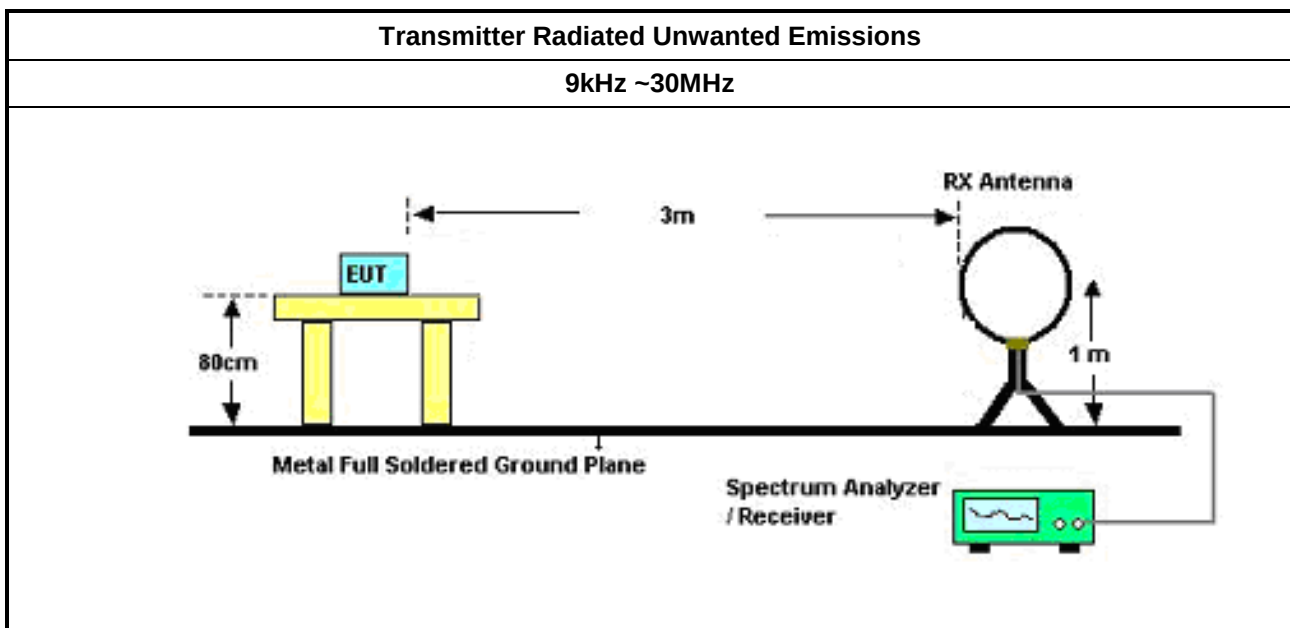

30MHz~1GHz

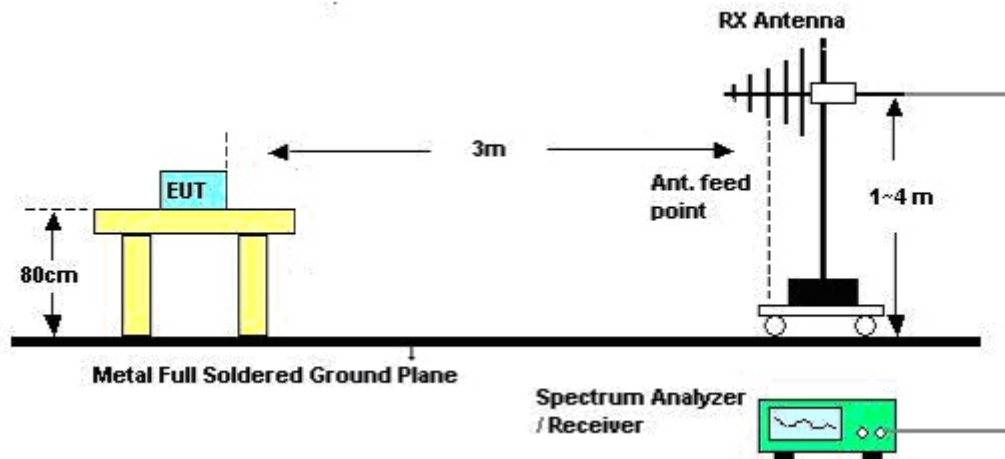

Above 1GHz

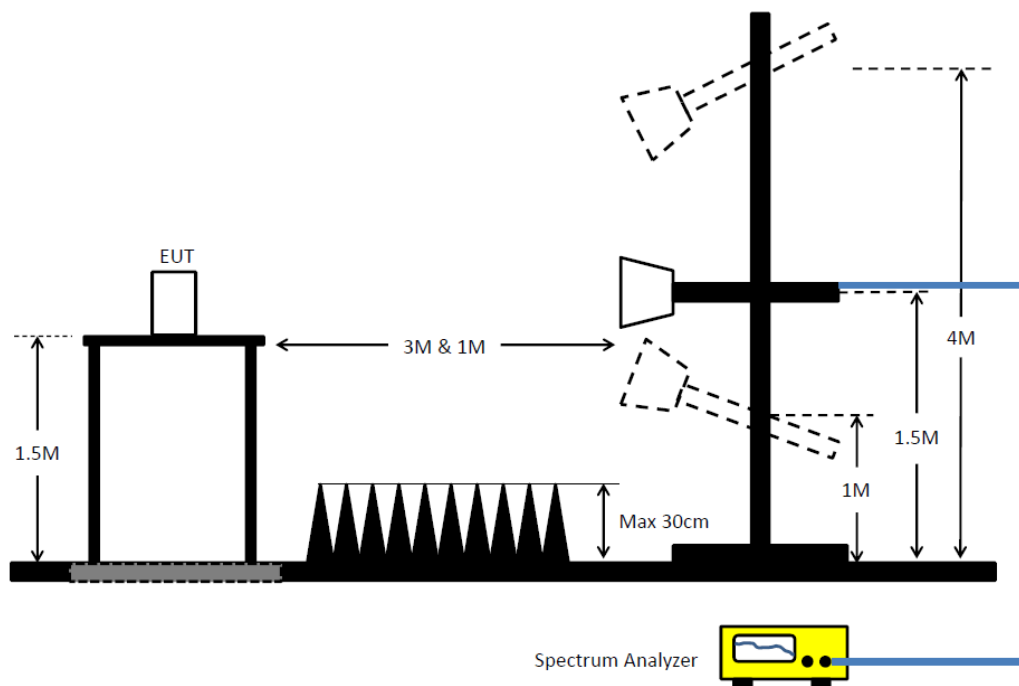



3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as KDB 987594 D02, I) In-Band Emissions

3.6.4 Test Setup

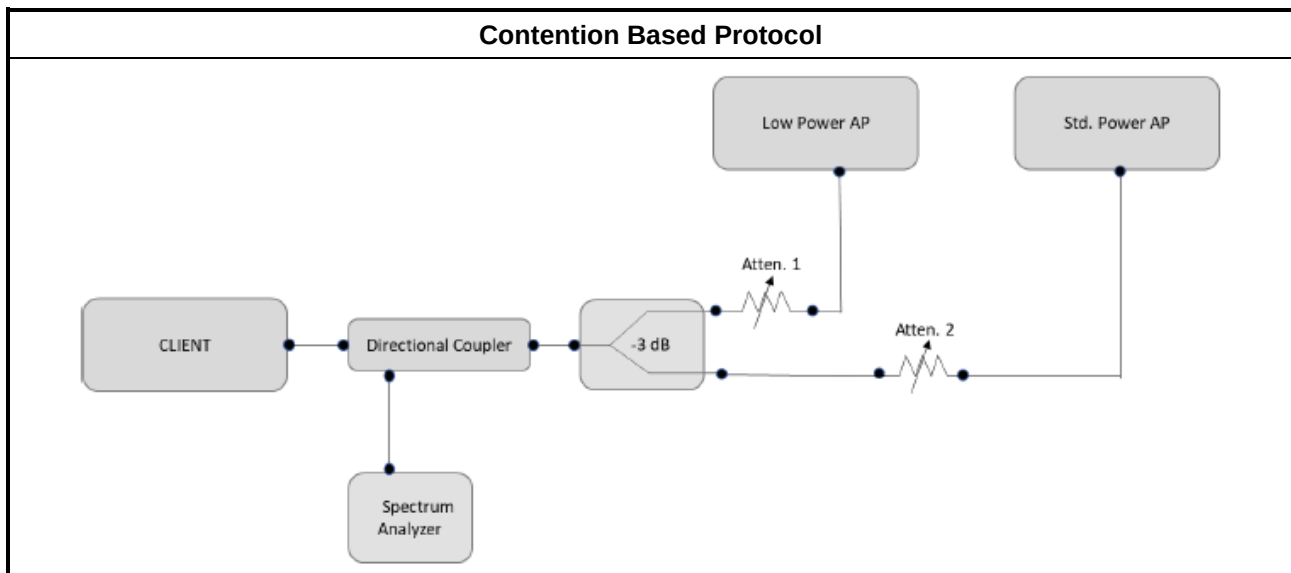

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F

3.7 Frequency Stability

3.7.1 Frequency Stability Limit

Frequency Stability Limit	
	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
	Frequency stability with respect to ambient temperature
	Frequency stability when varying supply voltage
	Extreme temperature is -30°C~50°C.

3.7.4 Test Setup

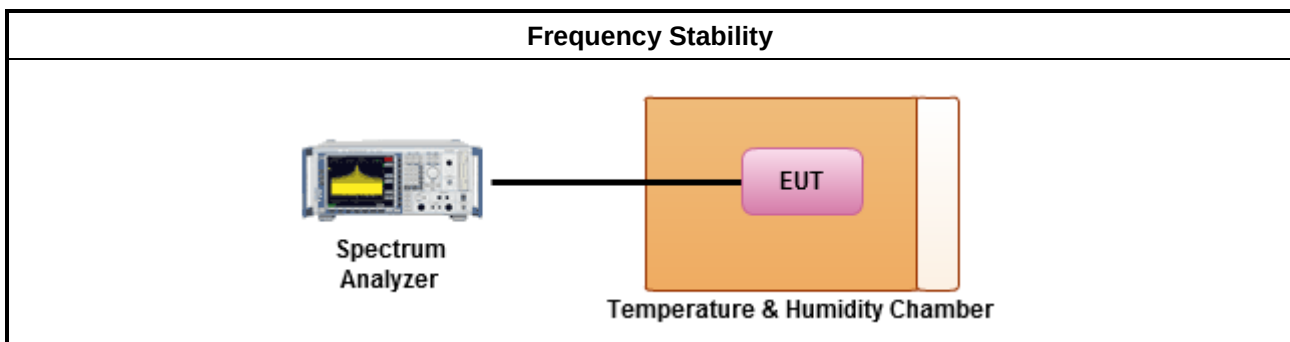

3.7.5 Test Result of Frequency Stability

Refer as Appendix G



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR3	102051	9kHz ~ 3.6GHz	13/May/2022	12/May/2023
Two-Line V-Network	R&S	ENV 216	100003	9kHz ~ 30MHz	18/Feb/2022	17/Feb/2023
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	01/Mar/2022	28/Feb/2023
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	26/Oct/2021	25/Oct/2022
Software	Sporton	SENSE-EMI	V5.10.8.2	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	10Hz~40GHz	14/Feb/2022	13/Feb/2023
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	21/Oct/2021	20/Oct/2022
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	17/Dec/2021	16/Dec/2022
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	20/Dec/2021	19/Dec/2022
SENSE-15407_NII	Sporton	V5.10.8.3	N/A	N/A	N/A	N/A

**Instrument for Radiated Test**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3m	31/Jul/2022	30/Jul/2023
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz~18GHz 3m	30/Jul/2022	29/Jul/2023
Signal Analyzer	R&S	FSP40	100593	9kHz~40GHz	08/Apr/2022	07/Apr/2023
Amplifier	Agilent	8447D	2944A11149	100kHz~1.3GHz	28/Jun/2022	27/Jun/2023
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz~26.5GHz	03/Nov/2021	02/Nov/2022
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz ~18GHz	14/Sep/2021	13/Sep/2022
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz ~18GHz	27/Sep/2022	26/Sep/2023
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723 / 2	30MHz~1GHz	04/Sep/2021	03/Sep/2022
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723 / 2	30MHz~1GHz	28/Aug/2022	27/Aug/2023
RF Cable	MVE	400LL	MVE-1-0802	9kHz~30MHz	04/May/2022	03/May/2023
RF Cable	MVE	400LL	MVE-1-0802	30MHz~1GHz	04/May/2022	03/May/2023
RF Cable-R03m	HUBER+SUHNER	SUCOFLEX104	805193/4+805192/4	1GHz~40GHz	01/Apr/2022	31/Mar/2023
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170221	15GHz~40GHz	18/Mar/2022	17/Mar/2023
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz~40GHz	08/Mar/2022	07/Mar/2023
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	18/Mar/2022	17/Mar/2023
EMI Test Receiver	R&S	ESR3	102052	9kHz~3.6GHz	13/May/2022	12/May/2023
SENSE-15407_NII	Sporton	V5.10.8.1	N/A	N/A	N/A	N/A
Microwave Premplifier	Keysight	83017A	MY53270197	1GHz~26.5GHz	30/Nov/2021	29/Nov/2022

Instrument for Contention-Based Protocol Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Vector Signal Generator	R&S	SMU200A	102098	100kHz~6GHz	26/Apr/2022	25/Apr/2023
Spectrum Analyzer	R&S	FSP30	100793	9 kHz ~ 30GHz	13/Jun/2022	12/Jun/2023
DFS-Adaptivity	Sporton	Ver 2.7	N/A	N/A	N/A	N/A
Adaptivity Analysis-5G	Sporton	Ver 2.8	N/A	N/A	N/A	N/A




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	3.821M	17.05	46.00	-28.95	Neutral
Mode 2	Pass	QP	156.109k	51.15	65.67	-14.52	Neutral

Mode Configure


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	171.806k	28.66	64.87	-36.21	Line	-
Mode 1	Pass	AV	171.806k	18.33	54.87	-36.54	Line	-
Mode 1	Pass	QP	224.49k	25.30	62.65	-37.35	Line	-
Mode 1	Pass	AV	224.49k	17.69	52.65	-34.96	Line	-
Mode 1	Pass	QP	455.055k	22.23	56.78	-34.55	Line	-
Mode 1	Pass	AV	455.055k	12.90	46.78	-33.88	Line	-
Mode 1	Pass	QP	1.811M	15.75	56.00	-40.25	Line	-
Mode 1	Pass	AV	1.811M	13.53	46.00	-32.47	Line	-
Mode 1	Pass	QP	3.701M	20.02	56.00	-35.98	Line	-
Mode 1	Pass	AV	3.701M	16.68	46.00	-29.32	Line	-
Mode 1	Pass	QP	13.816M	15.35	60.00	-44.65	Line	-
Mode 1	Pass	AV	13.816M	14.06	50.00	-35.94	Line	-
Mode 1	Pass	QP	218.303k	21.74	62.88	-41.14	Neutral	-
Mode 1	Pass	AV	218.303k	17.62	52.88	-35.26	Neutral	-
Mode 1	Pass	QP	337.314k	15.22	59.27	-44.05	Neutral	-
Mode 1	Pass	AV	337.314k	12.96	49.27	-36.31	Neutral	-
Mode 1	Pass	QP	466.086k	24.35	56.59	-32.24	Neutral	-
Mode 1	Pass	AV	466.086k	13.06	46.59	-33.53	Neutral	-
Mode 1	Pass	QP	1.126M	15.05	56.00	-40.95	Neutral	-
Mode 1	Pass	AV	1.126M	12.42	46.00	-33.58	Neutral	-
Mode 1	Pass	QP	3.821M	19.65	56.00	-36.35	Neutral	-
Mode 1	Pass	AV	3.821M	17.05	46.00	-28.95	Neutral	-
Mode 1	Pass	QP	19.868M	15.44	60.00	-44.56	Neutral	-
Mode 1	Pass	AV	19.868M	13.97	50.00	-36.03	Neutral	-
Mode 2	Pass	QP	158.622k	46.73	65.54	-18.81	Line	-
Mode 2	Pass	AV	158.622k	32.85	55.54	-22.69	Line	-
Mode 2	Pass	QP	178.091k	49.02	64.57	-15.55	Line	-
Mode 2	Pass	AV	178.091k	35.79	54.57	-18.78	Line	-
Mode 2	Pass	QP	280.727k	35.38	60.80	-25.42	Line	-
Mode 2	Pass	AV	280.727k	22.87	50.80	-27.93	Line	-
Mode 2	Pass	QP	1.84M	18.72	56.00	-37.28	Line	-
Mode 2	Pass	AV	1.84M	16.63	46.00	-29.37	Line	-
Mode 2	Pass	QP	2.453M	17.14	56.00	-38.86	Line	-
Mode 2	Pass	AV	2.453M	14.90	46.00	-31.10	Line	-
Mode 2	Pass	QP	19.244M	35.80	60.00	-24.20	Line	-
Mode 2	Pass	AV	19.244M	31.87	50.00	-18.13	Line	-
Mode 2	Pass	QP	156.109k	51.15	65.67	-14.52	Neutral	-
Mode 2	Pass	AV	156.109k	38.37	55.67	-17.30	Neutral	-
Mode 2	Pass	QP	197.568k	33.72	63.71	-29.99	Neutral	-
Mode 2	Pass	AV	197.568k	21.60	53.71	-32.11	Neutral	-
Mode 2	Pass	QP	241.214k	29.90	62.06	-32.16	Neutral	-
Mode 2	Pass	AV	241.214k	15.24	52.06	-36.82	Neutral	-
Mode 2	Pass	QP	1.254M	18.57	56.00	-37.43	Neutral	-
Mode 2	Pass	AV	1.254M	16.56	46.00	-29.44	Neutral	-
Mode 2	Pass	QP	2.357M	21.50	56.00	-34.50	Neutral	-
Mode 2	Pass	AV	2.357M	16.29	46.00	-29.71	Neutral	-
Mode 2	Pass	QP	20.027M	34.40	60.00	-25.60	Neutral	-
Mode 2	Pass	AV	20.027M	29.72	50.00	-20.28	Neutral	-

Conducted Emissions at Powerline_Mode 1

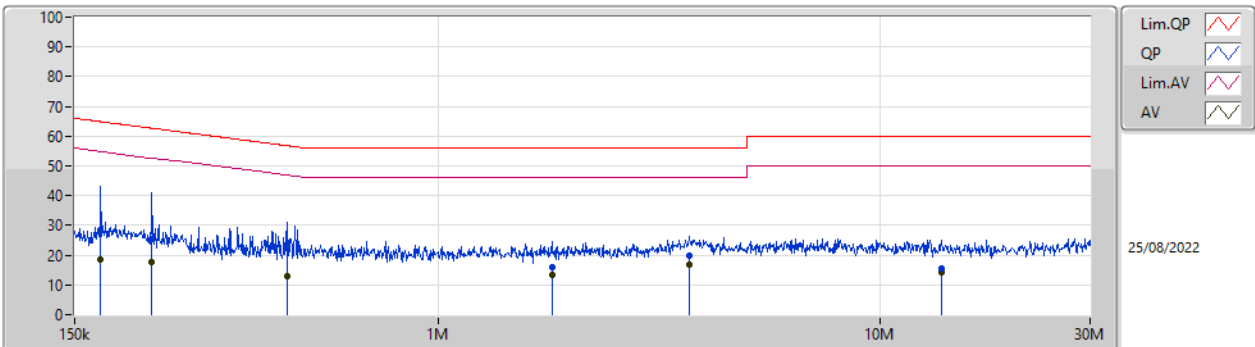


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	171.806k	28.66	64.87	-36.21	19.63	Line	-	9.03	9.69	0.03	9.91			
AV	171.806k	18.33	54.87	-36.54	19.63	Line	-	-1.30	9.69	0.03	9.91			
QP	224.49k	25.30	62.65	-37.35	19.63	Line	-	5.67	9.69	0.03	9.91			
AV	224.49k	17.69	52.65	-34.96	19.63	Line	-	-1.94	9.69	0.03	9.91			
QP	455.055k	22.23	56.78	-34.55	19.63	Line	-	2.60	9.68	0.04	9.91			
AV	455.055k	12.90	46.78	-33.88	19.63	Line	-	-6.73	9.68	0.04	9.91			
QP	1.811M	15.75	56.00	-40.25	19.70	Line	-	-3.95	9.70	0.08	9.92			
AV	1.811M	13.53	46.00	-32.47	19.70	Line	-	-6.17	9.70	0.08	9.92			
QP	3.701M	20.02	56.00	-35.98	19.75	Line	-	0.27	9.71	0.12	9.92			
AV	3.701M	16.68	46.00	-29.32	19.75	Line	-	-3.07	9.71	0.12	9.92			
QP	13.816M	15.35	60.00	-44.65	19.96	Line	-	-4.61	9.80	0.23	9.93			
AV	13.816M	14.06	50.00	-35.94	19.96	Line	-	-5.90	9.80	0.23	9.93			

Conducted Emissions at Powerline_Mode 1

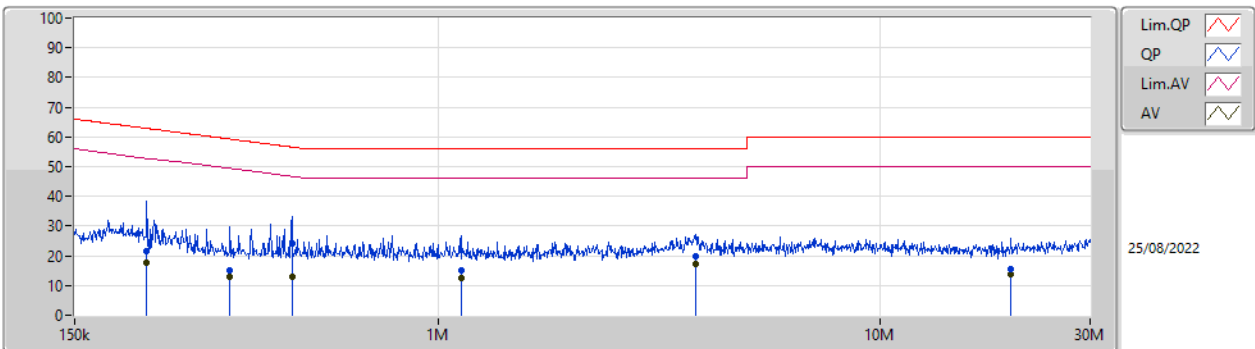


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	218.303k	21.74	62.88	-41.14	19.66	Neutral	-	2.08	9.72	0.03	9.91			
AV	218.303k	17.62	52.88	-35.26	19.66	Neutral	-	-2.04	9.72	0.03	9.91			
QP	337.314k	15.22	59.27	-44.05	19.67	Neutral	-	-4.45	9.72	0.04	9.91			
AV	337.314k	12.96	49.27	-36.31	19.67	Neutral	-	-6.71	9.72	0.04	9.91			
QP	466.086k	24.35	56.59	-32.24	19.67	Neutral	-	4.68	9.72	0.04	9.91			
AV	466.086k	13.06	46.59	-33.53	19.67	Neutral	-	-6.61	9.72	0.04	9.91			
QP	1.126M	15.05	56.00	-40.95	19.71	Neutral	-	-4.66	9.73	0.06	9.92			
AV	1.126M	12.42	46.00	-33.58	19.71	Neutral	-	-7.29	9.73	0.06	9.92			
QP	3.821M	19.65	56.00	-36.35	19.81	Neutral	-	-0.16	9.76	0.13	9.92			
AV	3.821M	17.05	46.00	-28.95	19.81	Neutral	-	-2.76	9.76	0.13	9.92			
QP	19.868M	15.44	60.00	-44.56	20.19	Neutral	-	-4.75	9.99	0.27	9.93			
AV	19.868M	13.97	50.00	-36.03	20.19	Neutral	-	-6.22	9.99	0.27	9.93			

Conducted Emissions at Powerline_Mode 2

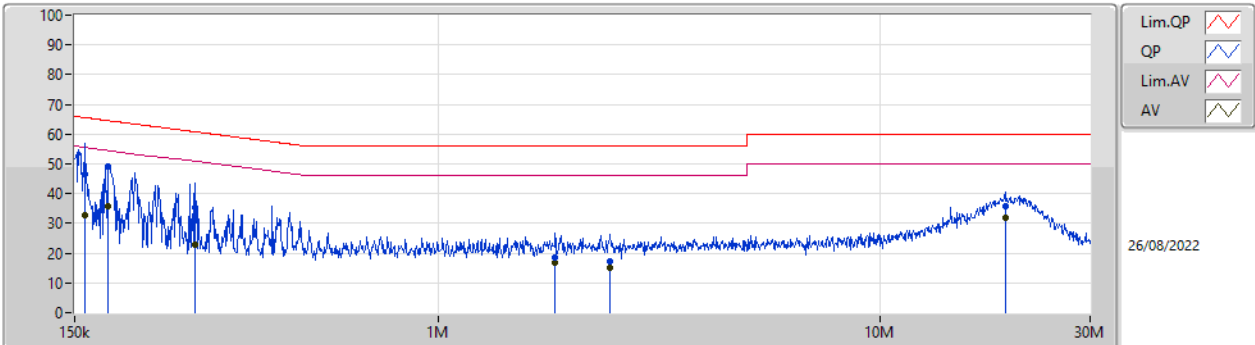

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	158.622k	46.73	65.54	-18.81	19.63	Line	-	27.10	9.69	0.03	9.91			
AV	158.622k	32.85	55.54	-22.69	19.63	Line	-	13.22	9.69	0.03	9.91			
QP	178.091k	49.02	64.57	-15.55	19.63	Line	-	29.39	9.69	0.03	9.91			
AV	178.091k	35.79	54.57	-18.78	19.63	Line	-	16.16	9.69	0.03	9.91			
QP	280.727k	35.38	60.80	-25.42	19.63	Line	-	15.75	9.69	0.03	9.91			
AV	280.727k	22.87	50.80	-27.93	19.63	Line	-	3.24	9.69	0.03	9.91			
QP	1.84M	18.72	56.00	-37.28	19.70	Line	-	-0.98	9.70	0.08	9.92			
AV	1.84M	16.63	46.00	-29.37	19.70	Line	-	-3.07	9.70	0.08	9.92			
QP	2.453M	17.14	56.00	-38.86	19.71	Line	-	-2.57	9.70	0.09	9.92			
AV	2.453M	14.90	46.00	-31.10	19.71	Line	-	-4.81	9.70	0.09	9.92			
QP	19.244M	35.80	60.00	-24.20	19.99	Line	-	15.81	9.79	0.27	9.93			
AV	19.244M	31.87	50.00	-18.13	19.99	Line	-	11.88	9.79	0.27	9.93			

Conducted Emissions at Powerline_Mode 2

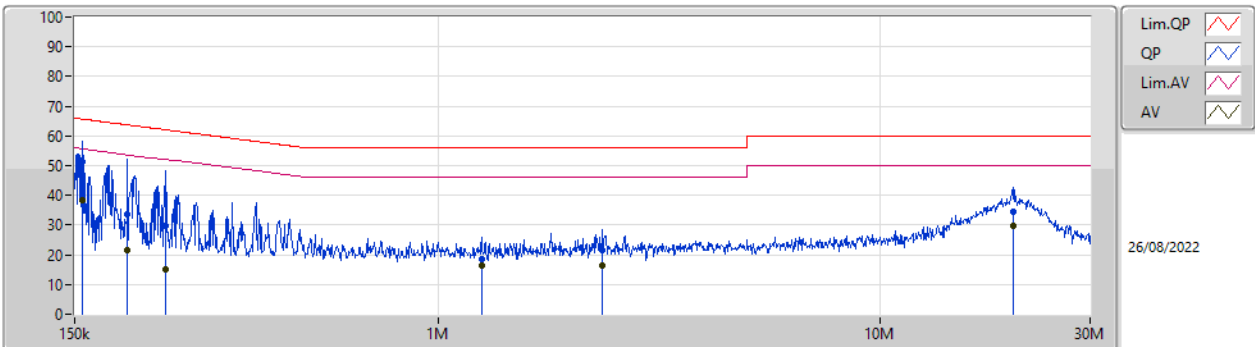

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	156.109k	51.15	65.67	-14.52	19.67	Neutral	-	31.48	9.73	0.03	9.91			
AV	156.109k	38.37	55.67	-17.30	19.67	Neutral	-	18.70	9.73	0.03	9.91			
QP	197.568k	33.72	63.71	-29.99	19.66	Neutral	-	14.06	9.72	0.03	9.91			
AV	197.568k	21.60	53.71	-32.11	19.66	Neutral	-	1.94	9.72	0.03	9.91			
QP	241.214k	29.90	62.06	-32.16	19.66	Neutral	-	10.24	9.72	0.03	9.91			
AV	241.214k	15.24	52.06	-36.82	19.66	Neutral	-	-4.42	9.72	0.03	9.91			
QP	1.254M	18.57	56.00	-37.43	19.71	Neutral	-	-1.14	9.73	0.06	9.92			
AV	1.254M	16.56	46.00	-29.44	19.71	Neutral	-	-3.15	9.73	0.06	9.92			
QP	2.357M	21.50	56.00	-34.50	19.75	Neutral	-	1.75	9.74	0.09	9.92			
AV	2.357M	16.29	46.00	-29.71	19.75	Neutral	-	-3.46	9.74	0.09	9.92			
QP	20.027M	34.40	60.00	-25.60	20.19	Neutral	-	14.21	9.99	0.27	9.93			
AV	20.027M	29.72	50.00	-20.28	20.19	Neutral	-	9.53	9.99	0.27	9.93			

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.7M	16.541M	16M5D1D	20.16M	16.516M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.11M	19.16M	19M2D1D	21.66M	19.1M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.8M	37.901M	37M9D1D	40.32M	37.721M
802.11ax HEW80_Nss1,(MCS0)_2TX	82.68M	77.361M	77M4D1D	81.6M	77.121M
802.11ax HEW160_Nss1,(MCS0)_2TX	165.12M	155.442M	155MD1D	163.92M	154.243M
	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.79M	16.541M	16M5D1D	20.01M	16.516M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.08M	19.16M	19M2D1D	21.87M	19.1M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.68M	37.901M	37M9D1D	40.44M	37.841M
802.11ax HEW80_Nss1,(MCS0)_2TX	82.56M	77.361M	77M4D1D	82.08M	77.121M
802.11ax HEW160_Nss1,(MCS0)_2TX	164.64M	154.963M	155MD1D	163.92M	154.963M
	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.64M	16.541M	16M5D1D	19.98M	16.516M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.29M	19.13M	19M1D1D	21.78M	19.1M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.56M	37.901M	37M9D1D	40.2M	37.781M
802.11ax HEW80_Nss1,(MCS0)_2TX	92.04M	78.201M	78M2D1D	82.44M	77.361M
802.11ax HEW160_Nss1,(MCS0)_2TX	164.88M	154.963M	155MD1D	163.68M	154.483M
	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.7M	16.541M	16M5D1D	20.07M	16.49M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.2M	19.13M	19M1D1D	21.72M	19.07M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.62M	37.901M	37M9D1D	40.38M	37.781M
802.11ax HEW80_Nss1,(MCS0)_2TX	83.04M	77.841M	77M8D1D	82.32M	77.481M
802.11ax HEW160_Nss1,(MCS0)_2TX	248.64M	158.081M	158MD1D	243.12M	157.121M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5935MHz	Pass	Inf	20.37M	16.541M	20.58M	16.516M
5955MHz	Pass	Inf	20.16M	16.516M	20.61M	16.541M
6175MHz	Pass	Inf	20.46M	16.516M	20.7M	16.516M
6415MHz	Pass	Inf	20.37M	16.516M	20.43M	16.541M
6435MHz	Pass	Inf	20.01M	16.516M	20.73M	16.516M
6475MHz	Pass	Inf	20.37M	16.516M	20.28M	16.516M
6515MHz	Pass	Inf	20.34M	16.516M	20.79M	16.541M
6535MHz	Pass	Inf	20.16M	16.516M	20.31M	16.516M
6695MHz	Pass	Inf	19.98M	16.516M	20.28M	16.541M
6855MHz	Pass	Inf	20.4M	16.516M	20.19M	16.541M
6875MHz	Pass	Inf	20.46M	16.516M	20.64M	16.516M
6895MHz	Pass	Inf	20.1M	16.516M	20.7M	16.541M
6995MHz	Pass	Inf	20.07M	16.49M	20.22M	16.49M
7095MHz	Pass	Inf	20.49M	16.516M	20.52M	16.541M
7115MHz	Pass	Inf	20.43M	16.516M	20.43M	16.516M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5935MHz	Pass	Inf	22.11M	19.13M	22.02M	19.1M
5955MHz	Pass	Inf	21.87M	19.16M	21.75M	19.13M
6175MHz	Pass	Inf	21.66M	19.13M	22.11M	19.13M
6415MHz	Pass	Inf	21.84M	19.13M	21.84M	19.13M
6435MHz	Pass	Inf	21.96M	19.13M	21.9M	19.13M
6475MHz	Pass	Inf	22.08M	19.1M	21.99M	19.13M
6515MHz	Pass	Inf	21.87M	19.13M	21.96M	19.16M
6535MHz	Pass	Inf	21.93M	19.1M	21.9M	19.13M
6695MHz	Pass	Inf	22.29M	19.13M	22.14M	19.13M
6855MHz	Pass	Inf	21.96M	19.13M	21.78M	19.13M
6875MHz	Pass	Inf	22.17M	19.1M	21.99M	19.13M
6895MHz	Pass	Inf	21.72M	19.1M	21.87M	19.1M
6995MHz	Pass	Inf	21.96M	19.07M	21.75M	19.07M
7095MHz	Pass	Inf	22.2M	19.13M	21.99M	19.1M
7115MHz	Pass	Inf	21.9M	19.13M	21.9M	19.1M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	40.38M	37.781M	40.44M	37.721M
6165MHz	Pass	Inf	40.8M	37.841M	40.32M	37.781M
6405MHz	Pass	Inf	40.32M	37.901M	40.38M	37.841M
6445MHz	Pass	Inf	40.44M	37.841M	40.68M	37.901M
6485MHz	Pass	Inf	40.68M	37.841M	40.44M	37.841M
6525MHz	Pass	Inf	40.44M	37.901M	40.44M	37.901M
6565MHz	Pass	Inf	40.2M	37.841M	40.56M	37.841M
6685MHz	Pass	Inf	40.32M	37.901M	40.32M	37.781M
6845MHz	Pass	Inf	40.26M	37.841M	40.44M	37.901M
6885MHz	Pass	Inf	40.5M	37.841M	40.32M	37.781M
6925MHz	Pass	Inf	40.38M	37.901M	40.44M	37.841M
7005MHz	Pass	Inf	40.62M	37.901M	40.38M	37.841M
7085MHz	Pass	Inf	40.38M	37.901M	40.44M	37.781M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	82.44M	77.241M	81.6M	77.241M
6145MHz	Pass	Inf	81.84M	77.361M	82.08M	77.361M
6385MHz	Pass	Inf	81.96M	77.361M	82.68M	77.121M
6465MHz	Pass	Inf	82.08M	77.121M	82.44M	77.241M
6545MHz	Pass	Inf	82.32M	77.361M	82.56M	77.361M
6625MHz	Pass	Inf	82.8M	77.361M	83.04M	77.601M
6705MHz	Pass	Inf	92.04M	78.201M	82.68M	78.081M
6785MHz	Pass	Inf	82.44M	77.841M	82.8M	77.601M



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
6865MHz	Pass	Inf	83.64M	77.481M	82.92M	77.601M
6945MHz	Pass	Inf	82.56M	77.841M	82.32M	77.721M
7025MHz	Pass	Inf	83.04M	77.481M	82.44M	77.601M
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	163.92M	154.483M	164.16M	154.243M
6185MHz	Pass	Inf	164.16M	155.442M	164.64M	155.202M
6345MHz	Pass	Inf	165.12M	155.202M	164.4M	154.963M
6505MHz	Pass	Inf	163.92M	154.963M	164.64M	154.963M
6665MHz	Pass	Inf	163.68M	154.963M	164.88M	154.723M
6825MHz	Pass	Inf	164.16M	154.723M	163.68M	154.483M
6985MHz	Pass	Inf	248.64M	158.081M	243.12M	157.121M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_2TX

5935MHz

EBW

11/10/2022

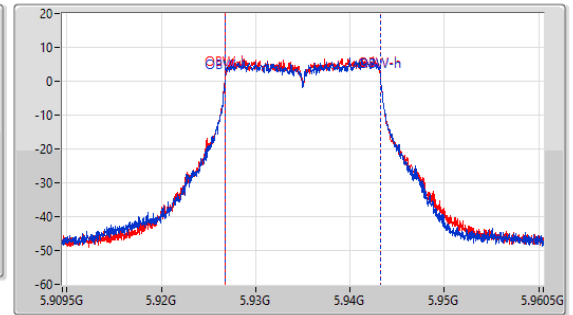
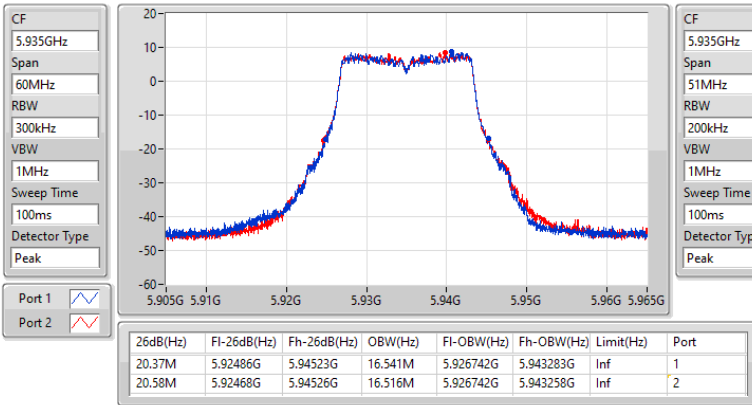


802.11a_Nss1,(6Mbps)_2TX

5955MHz

EBW

11/10/2022

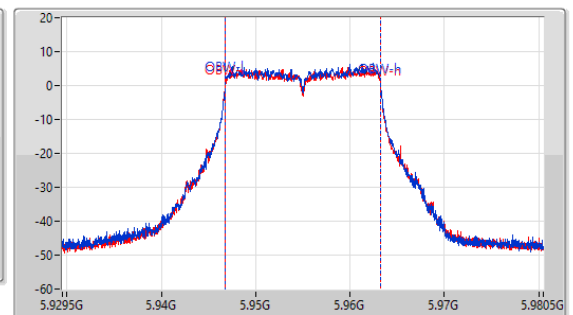
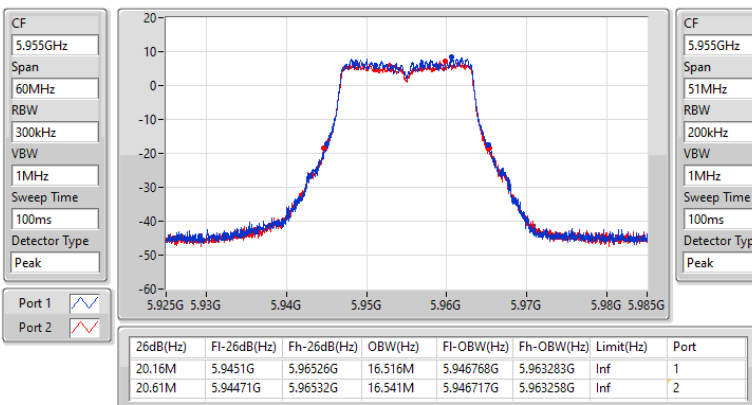


802.11a_Nss1,(6Mbps)_2TX

6175MHz

EBW

11/10/2022

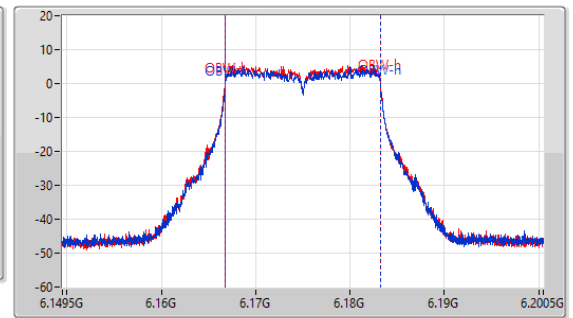
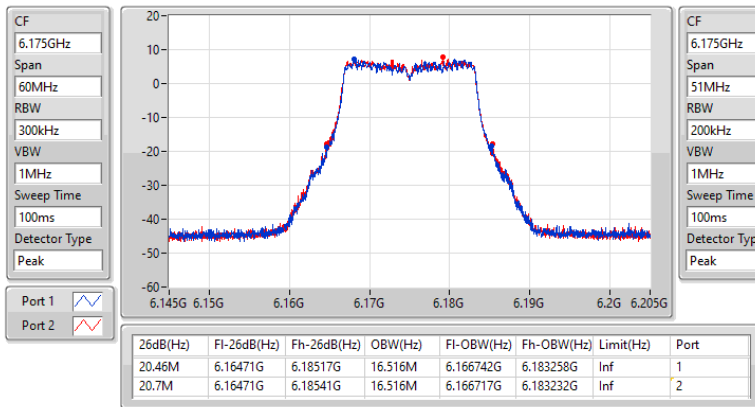


802.11a_Nss1,(6Mbps)_2TX

6415MHz

EBW

11/10/2022

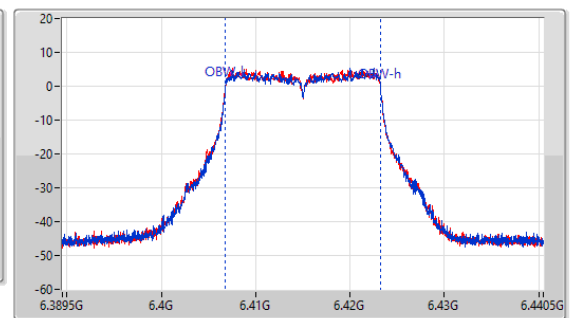
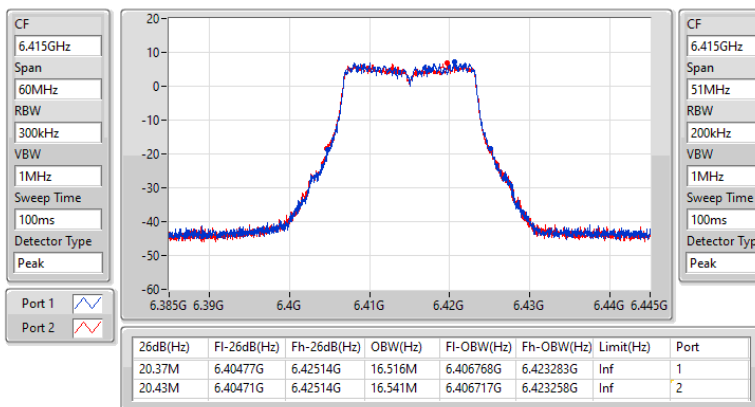


802.11a_Nss1,(6Mbps)_2TX

6435MHz

EBW

11/10/2022

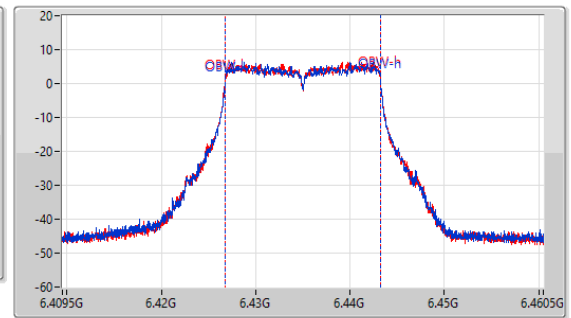
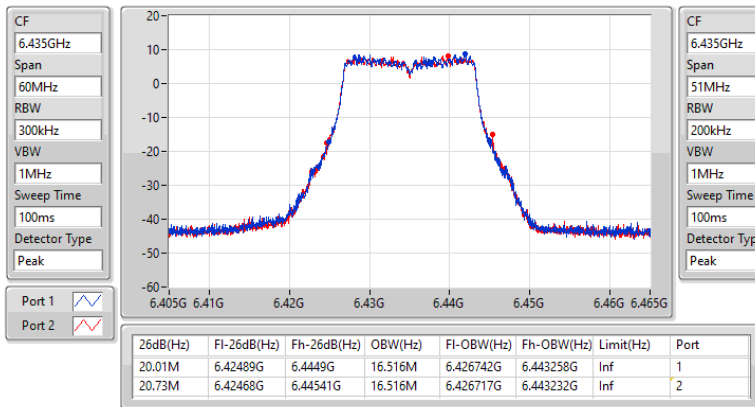


802.11a_Nss1,(6Mbps)_2TX

6475MHz

EBW

11/10/2022

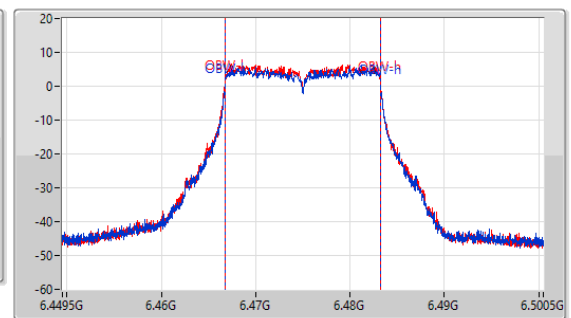
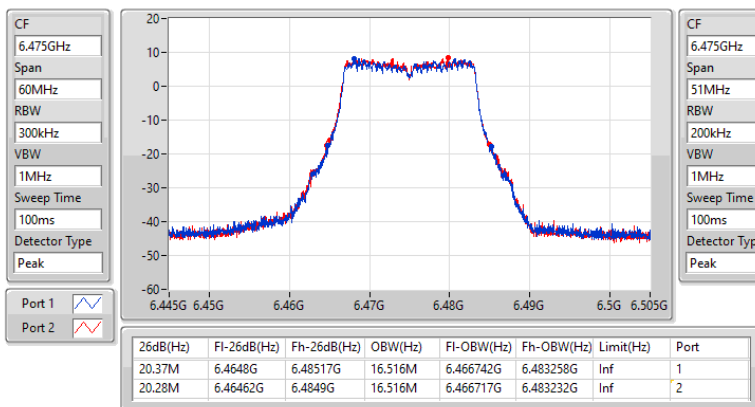


802.11a_Nss1,(6Mbps)_2TX

6515MHz

EBW

11/10/2022

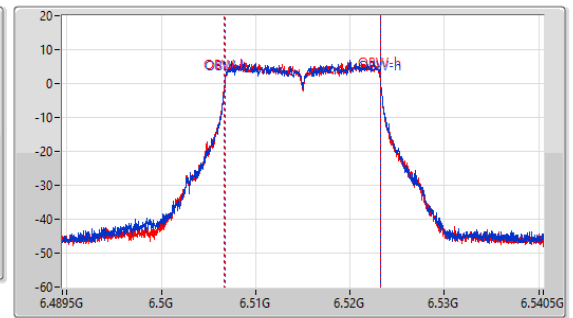
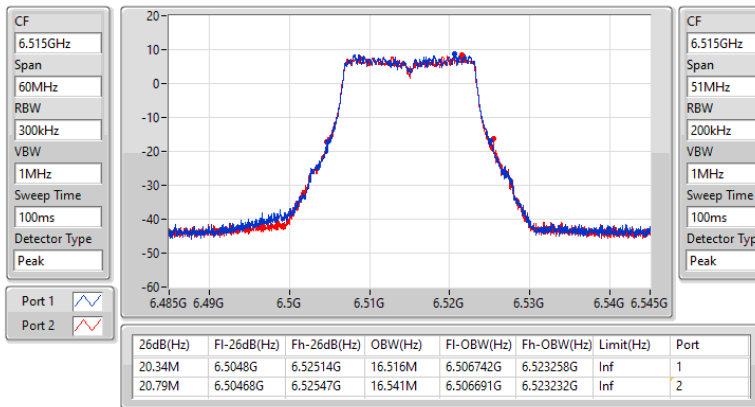


802.11a_Nss1,(6Mbps)_2TX

6535MHz

EBW

11/10/2022

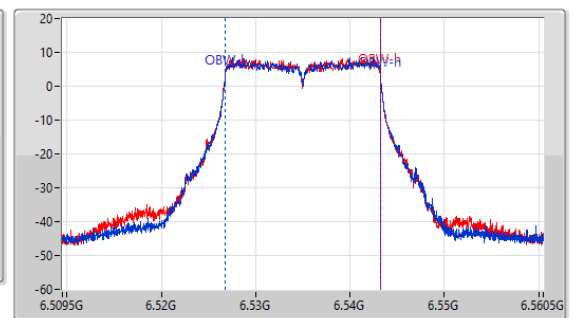
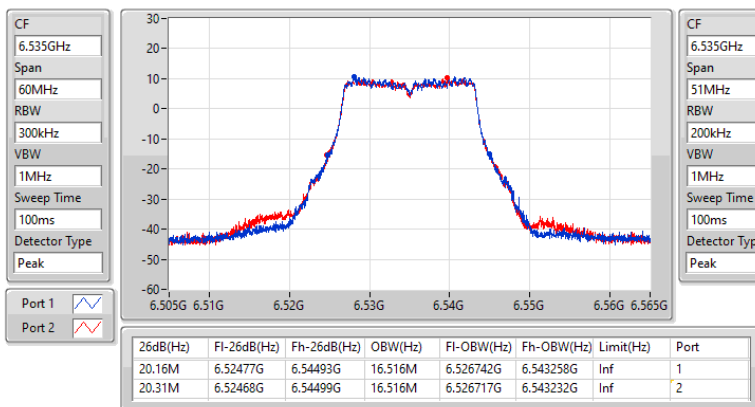


802.11a_Nss1,(6Mbps)_2TX

6695MHz

EBW

11/10/2022

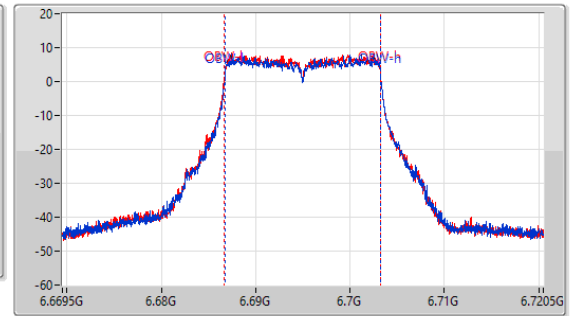
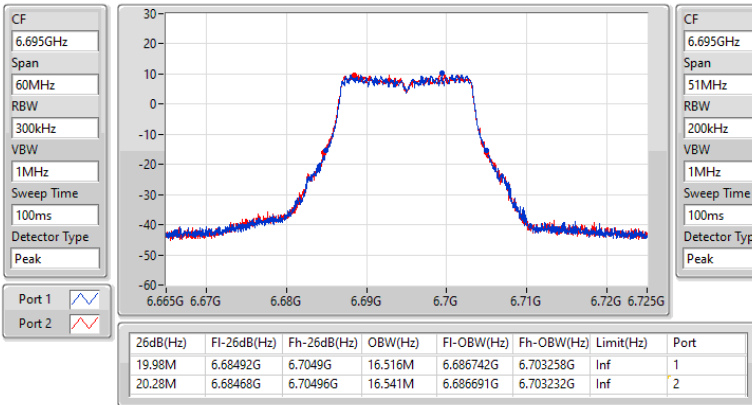


802.11a_Nss1,(6Mbps)_2TX

6855MHz

EBW

11/10/2022

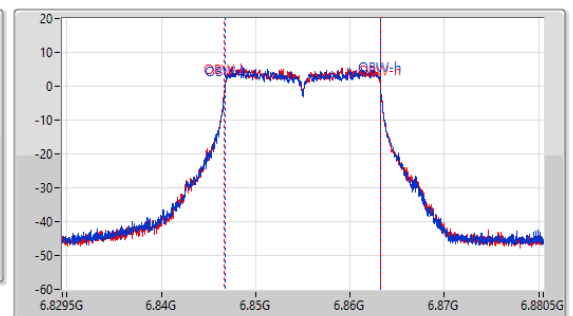
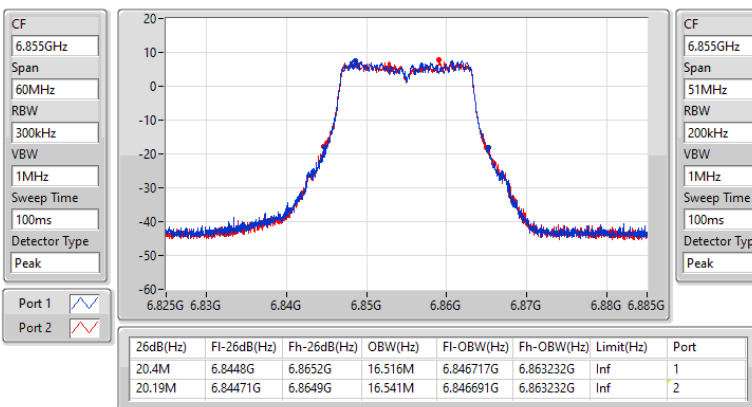


802.11a_Nss1,(6Mbps)_2TX

6875MHz

EBW

11/10/2022

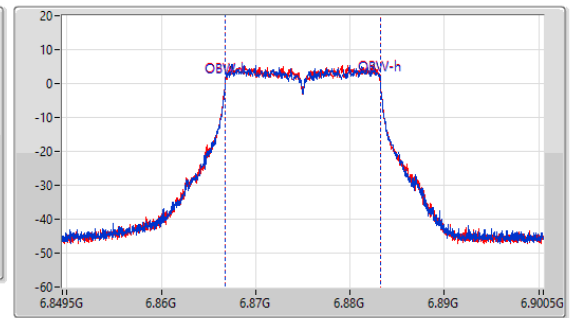
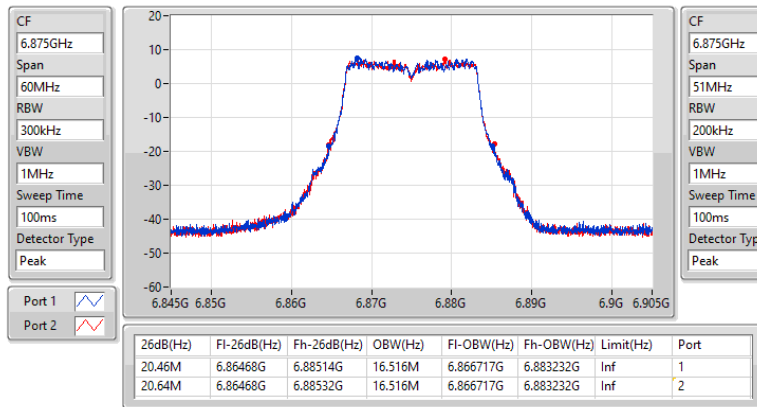


802.11a_Nss1,(6Mbps)_2TX

6895MHz

EBW

11/10/2022

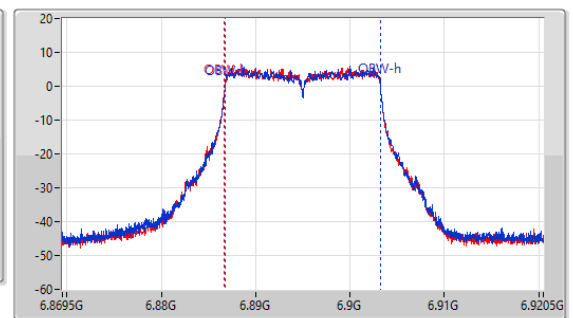
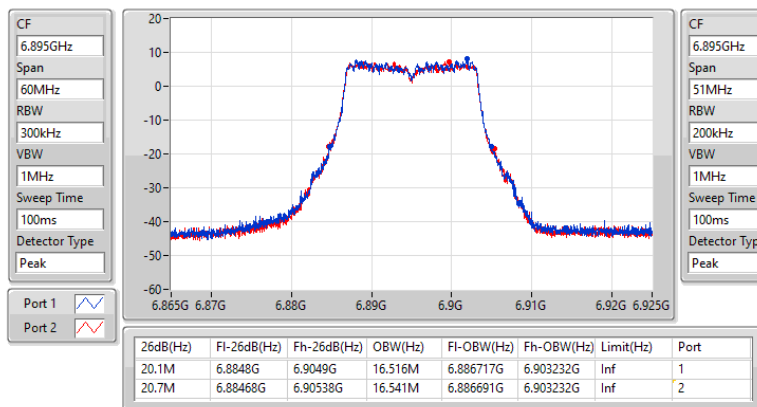


802.11a_Nss1,(6Mbps)_2TX

6995MHz

EBW

11/10/2022

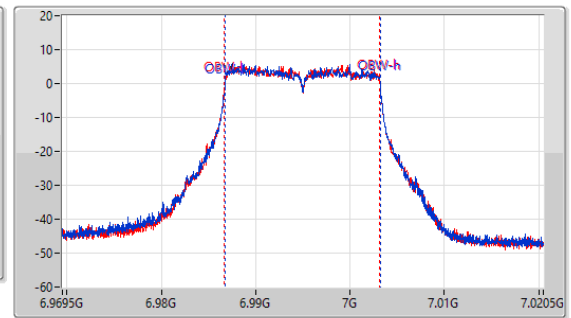
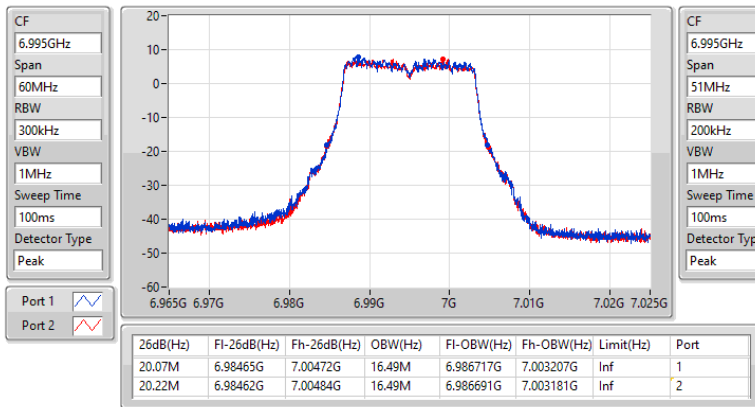


802.11a_Nss1,(6Mbps)_2TX

7095MHz

EBW

11/10/2022

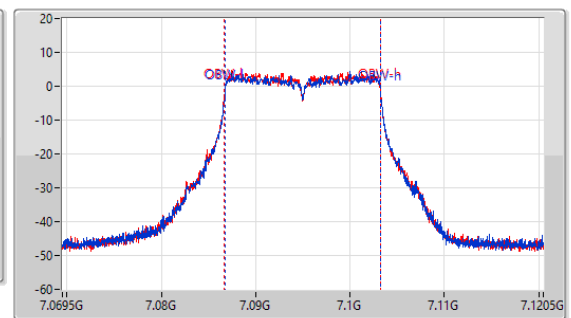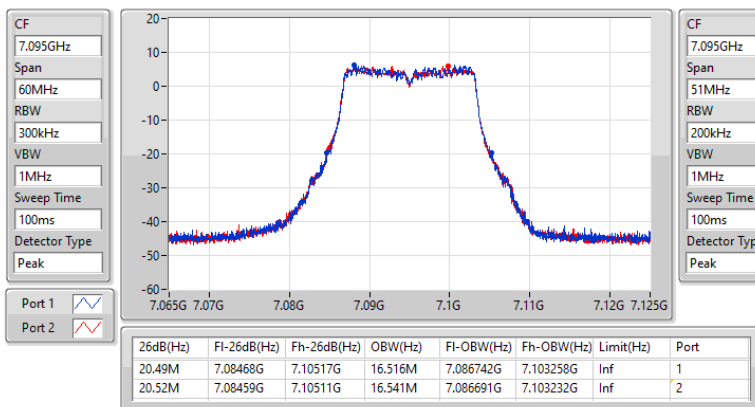


802.11a_Nss1,(6Mbps)_2TX

EBW

7115MHz

11/10/2022

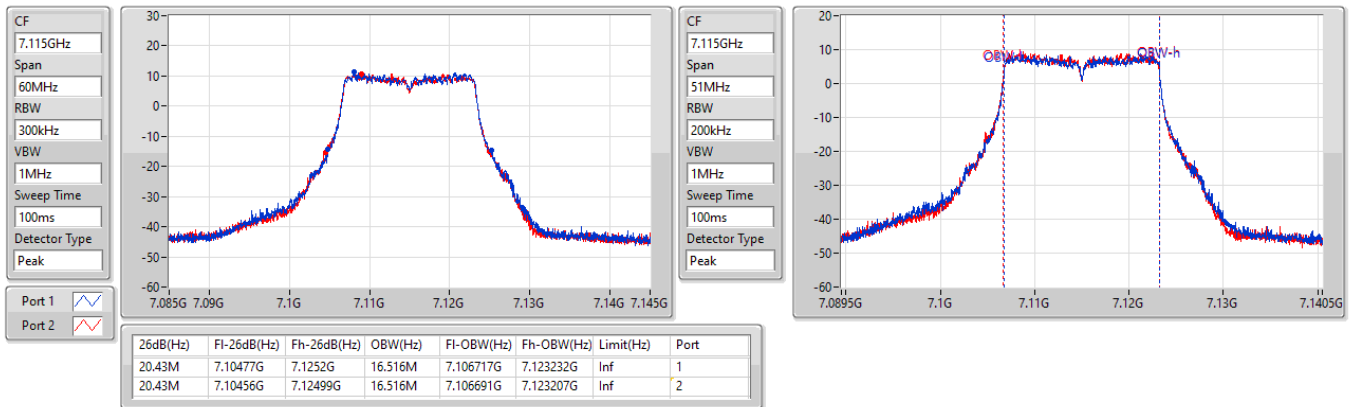


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5935MHz

07/09/2022

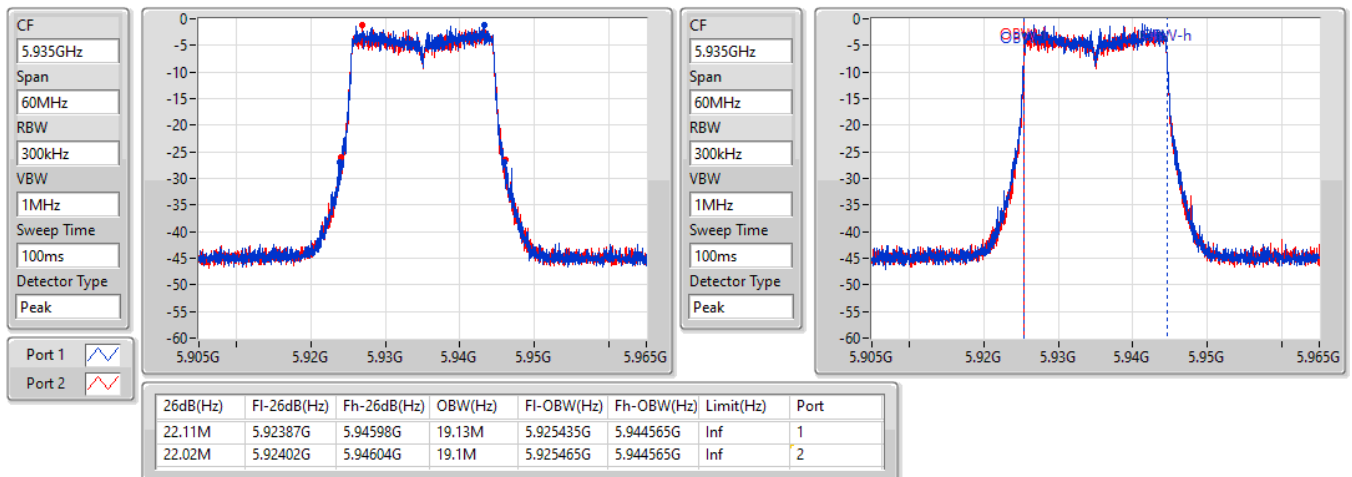


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5955MHz

07/09/2022

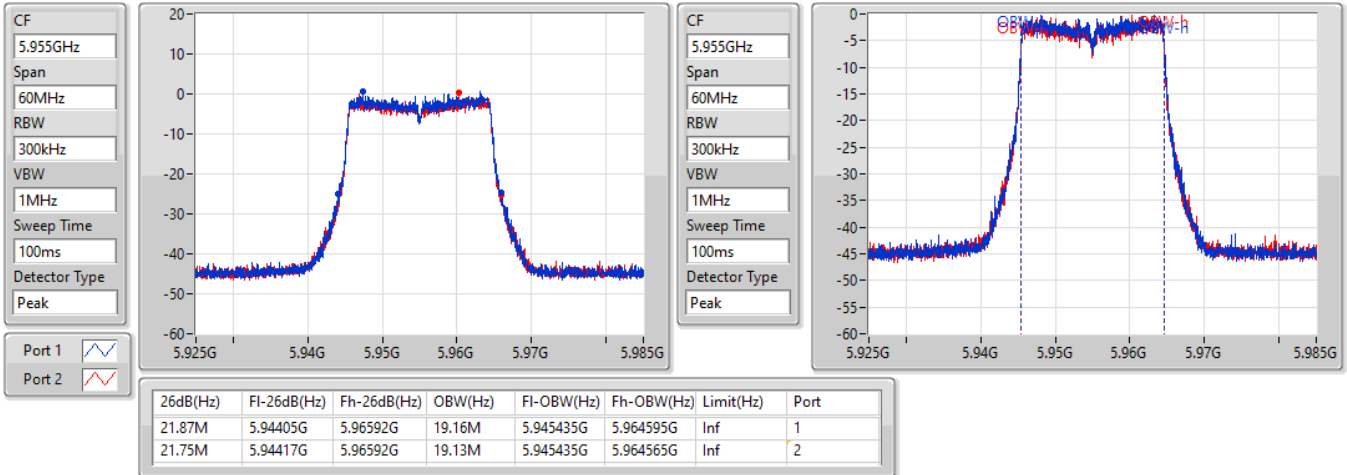


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6175MHz

07/09/2022

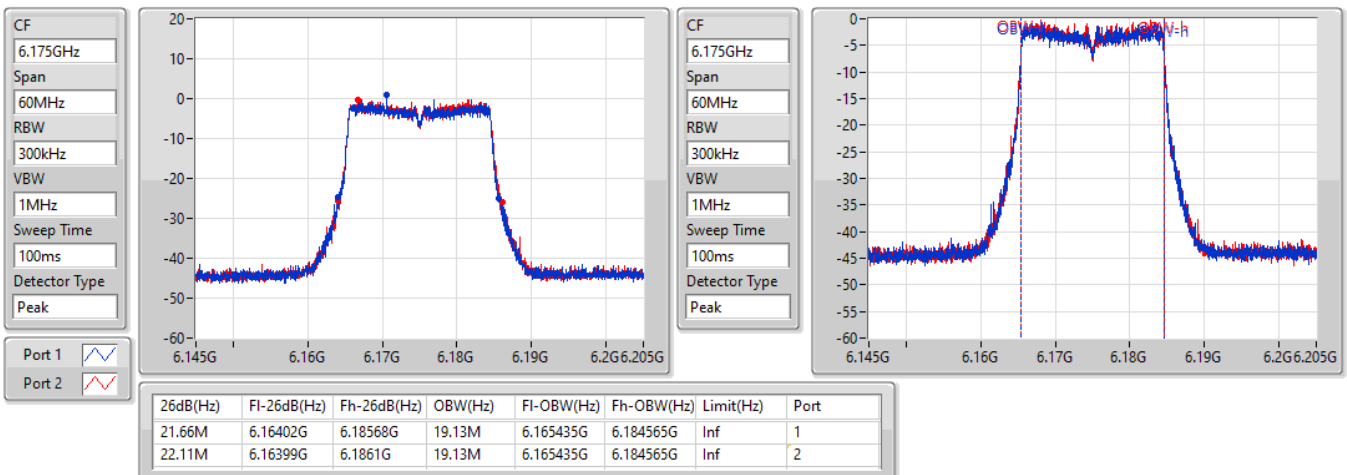


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6415MHz

07/09/2022

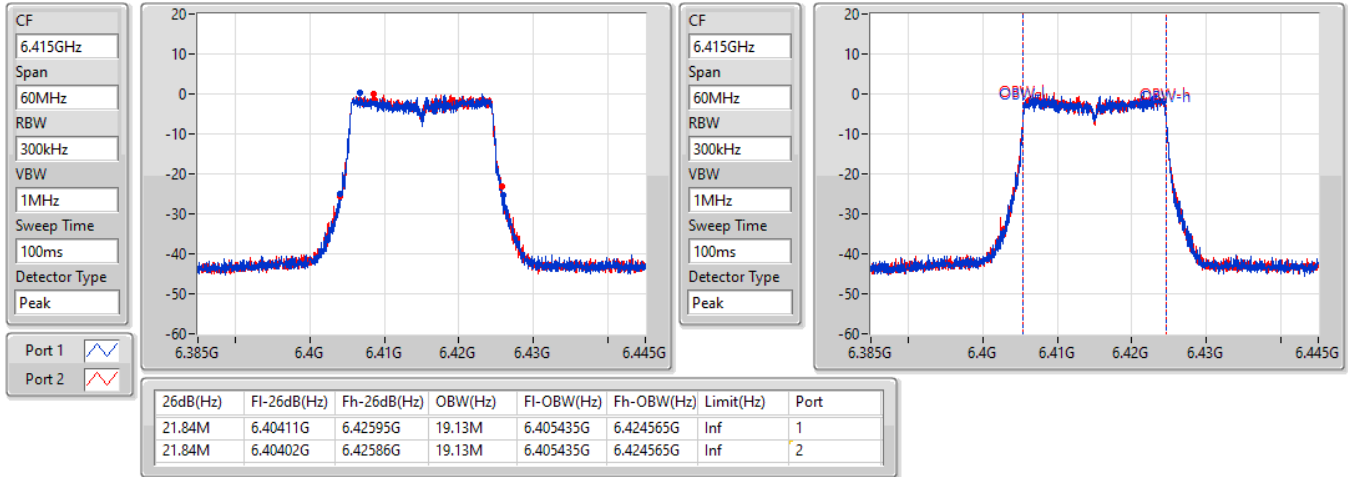


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6435MHz

07/09/2022

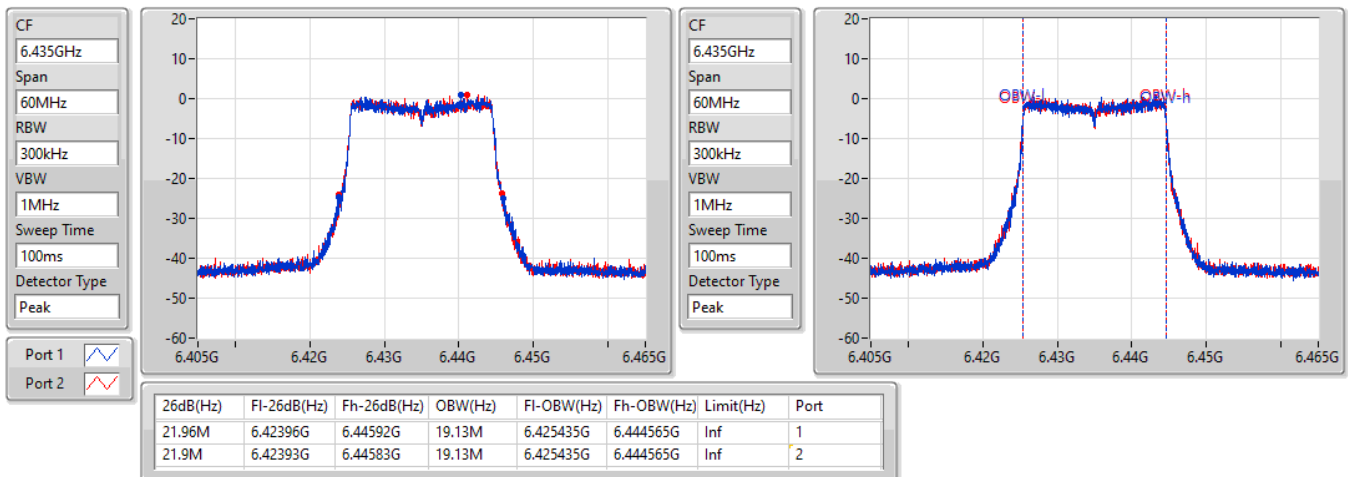


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6475MHz

07/09/2022

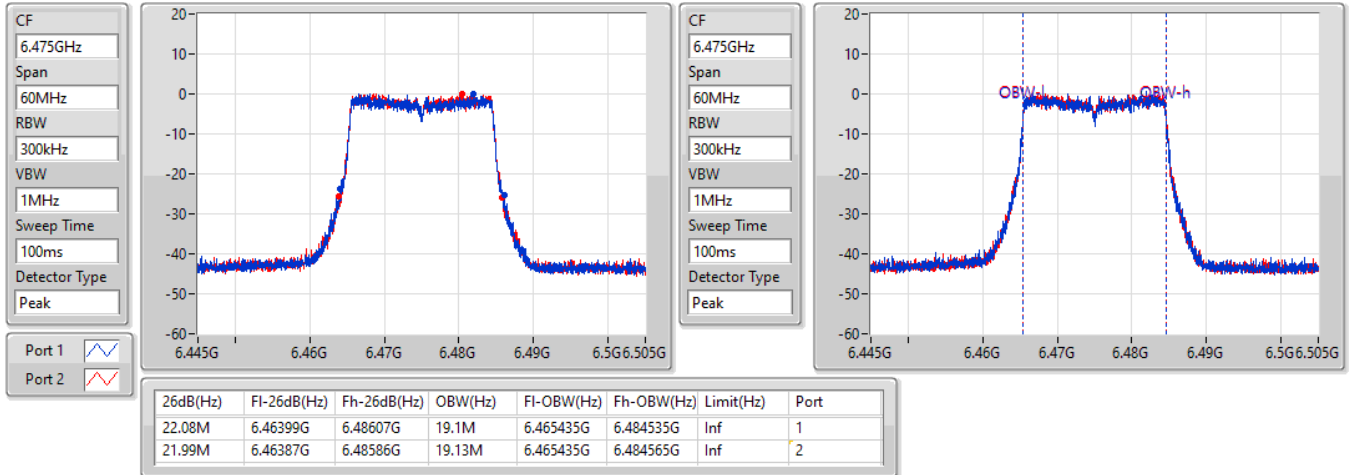


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6515MHz

07/09/2022

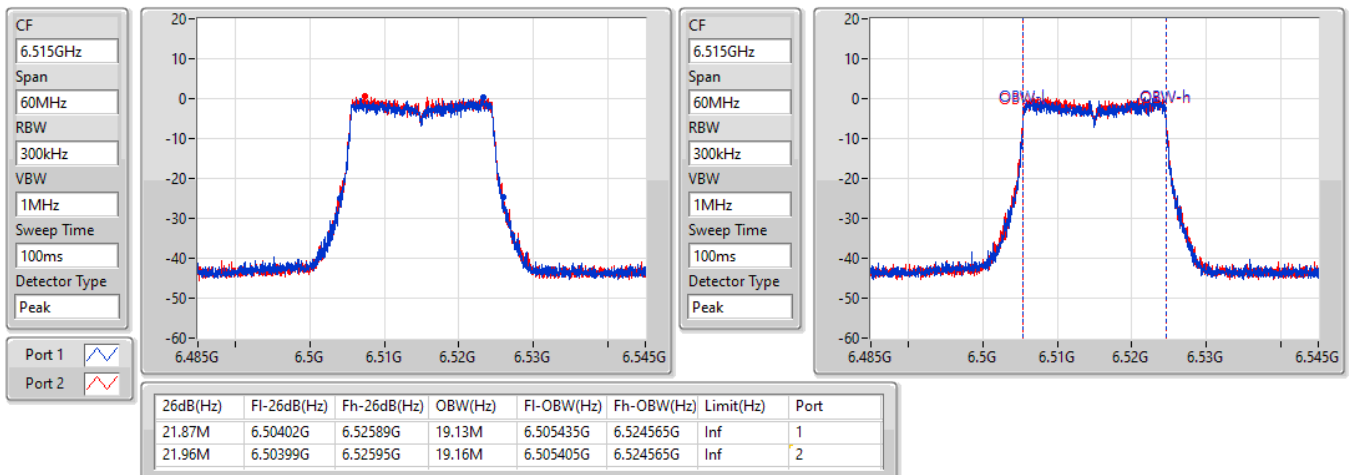


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6535MHz

07/09/2022

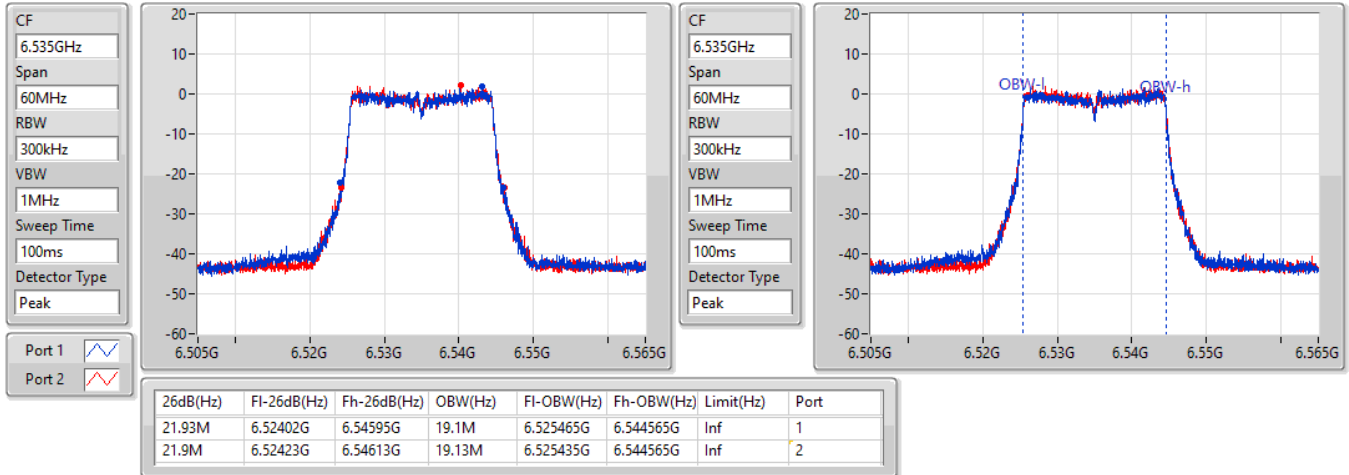


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6695MHz

07/09/2022

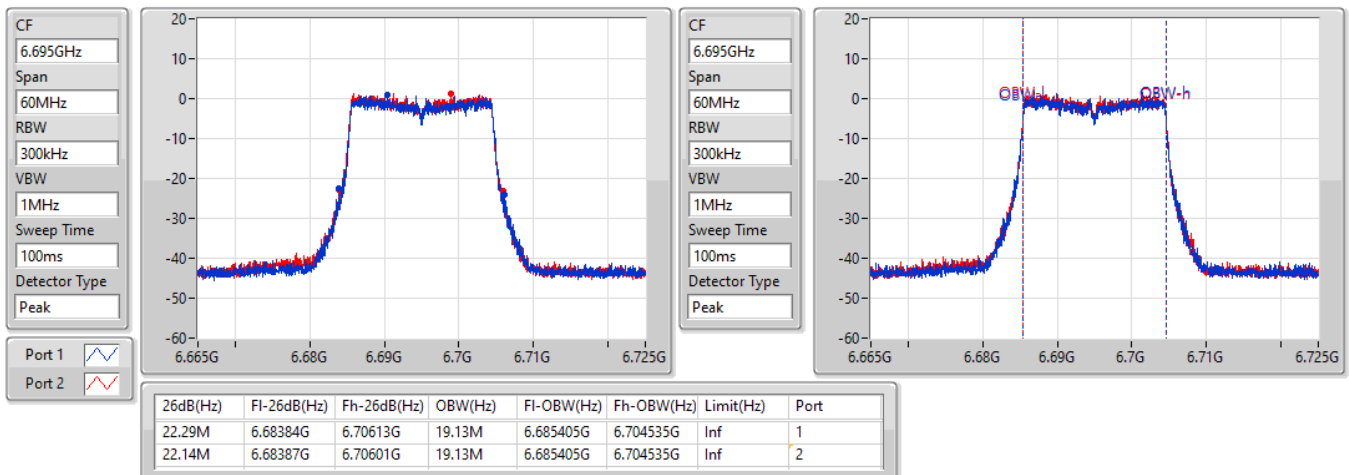


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6855MHz

07/09/2022

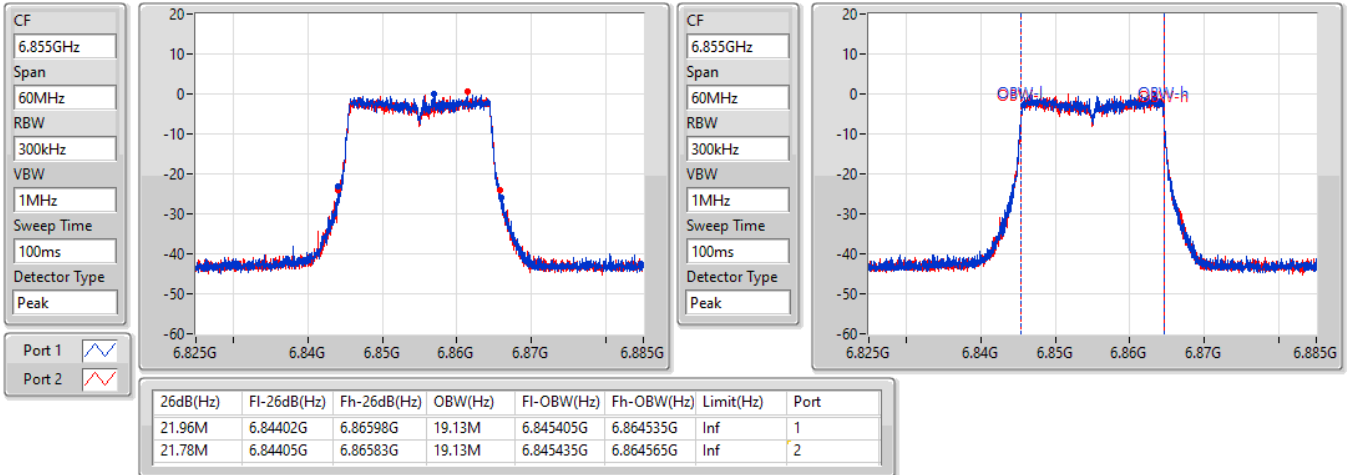


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6875MHz

07/09/2022

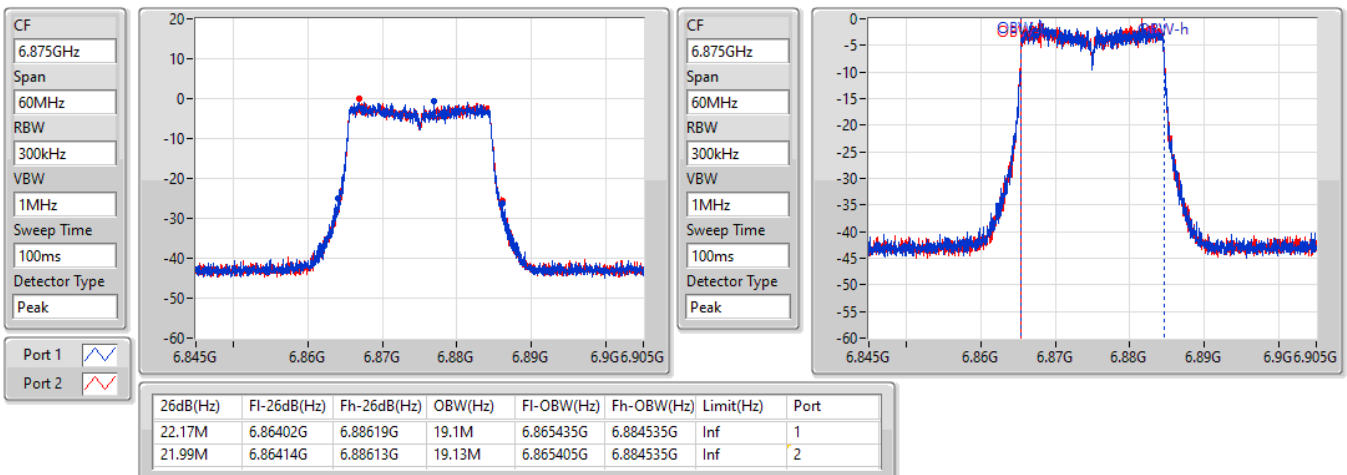


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6895MHz

07/09/2022

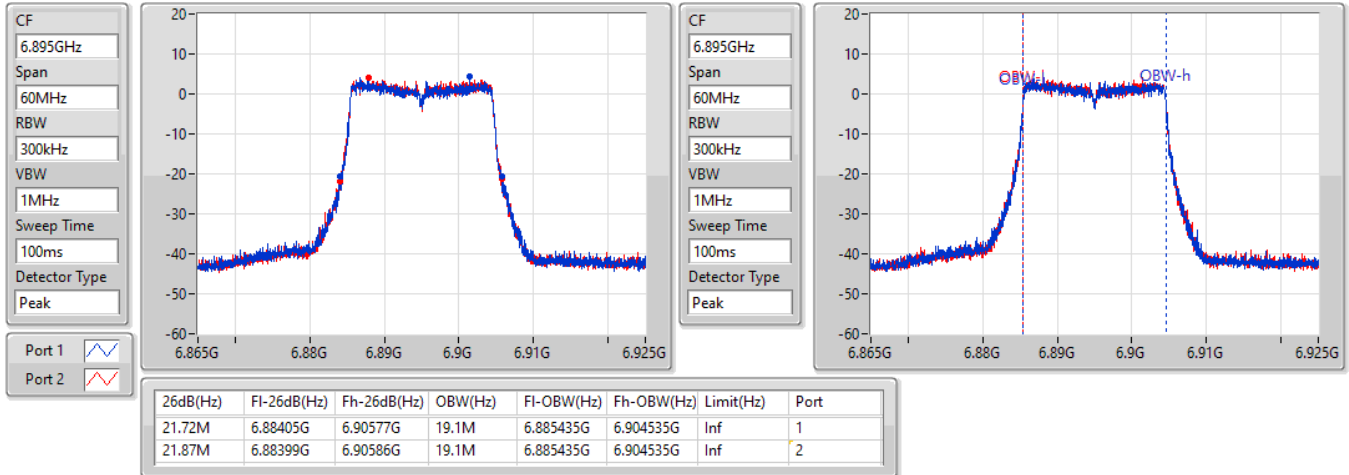


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6995MHz

07/09/2022

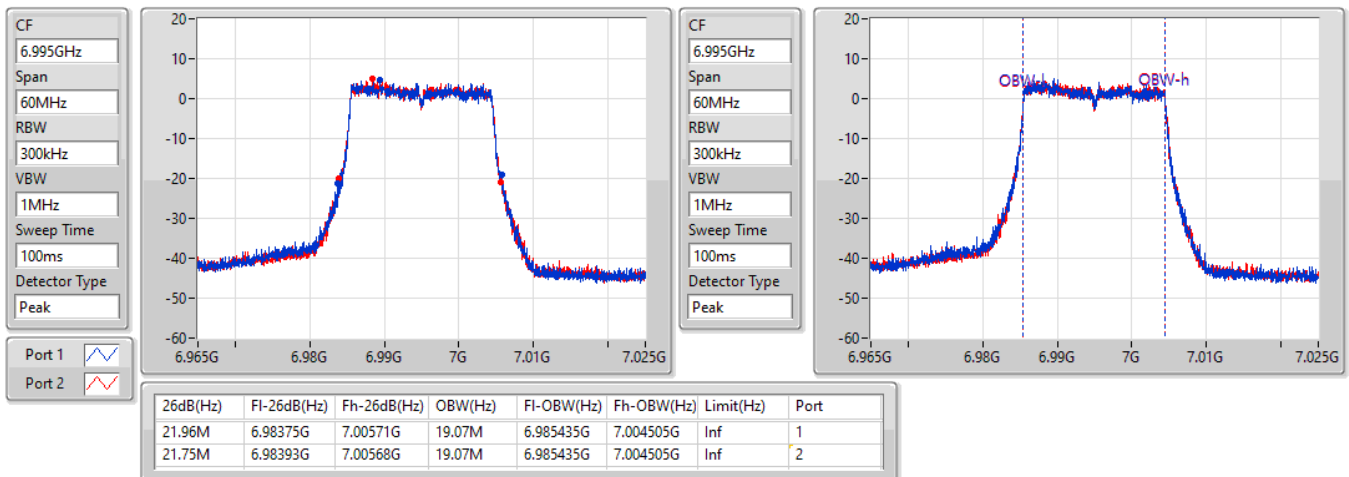


802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
7095MHz

07/09/2022

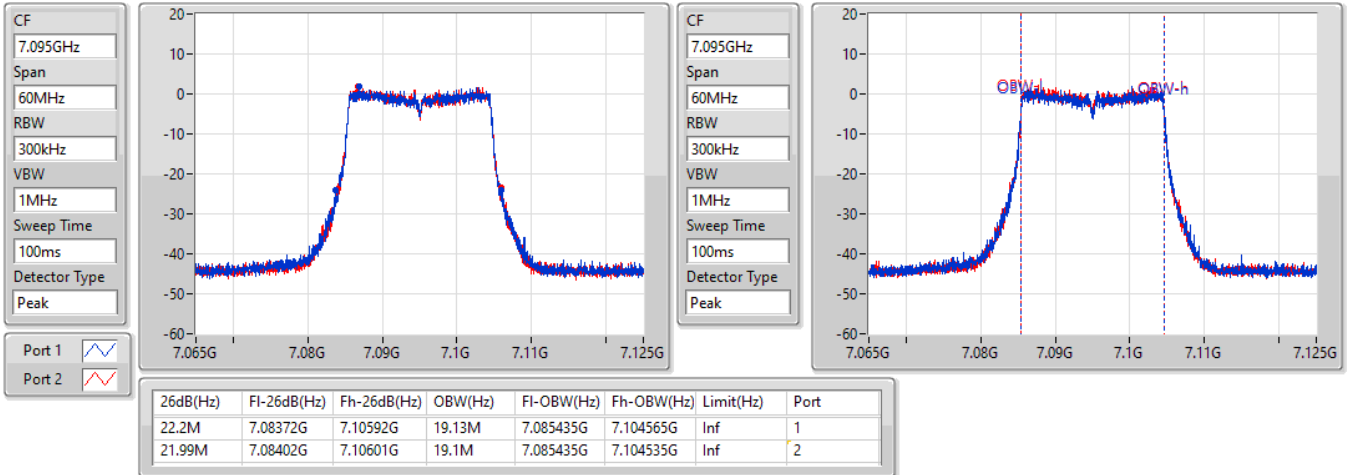
802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
7115MHz

07/09/2022

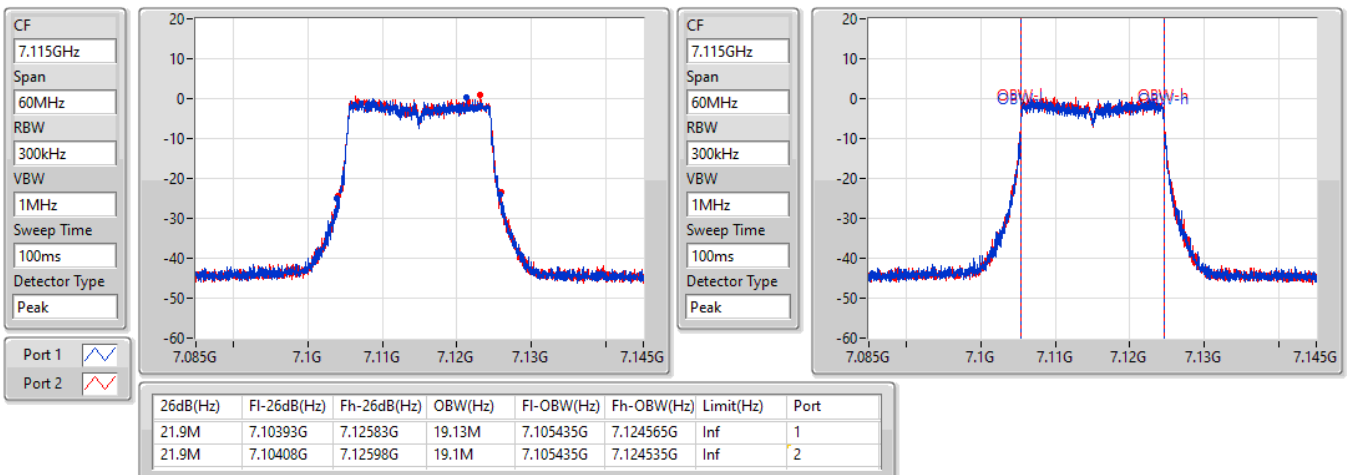


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5965MHz

07/09/2022

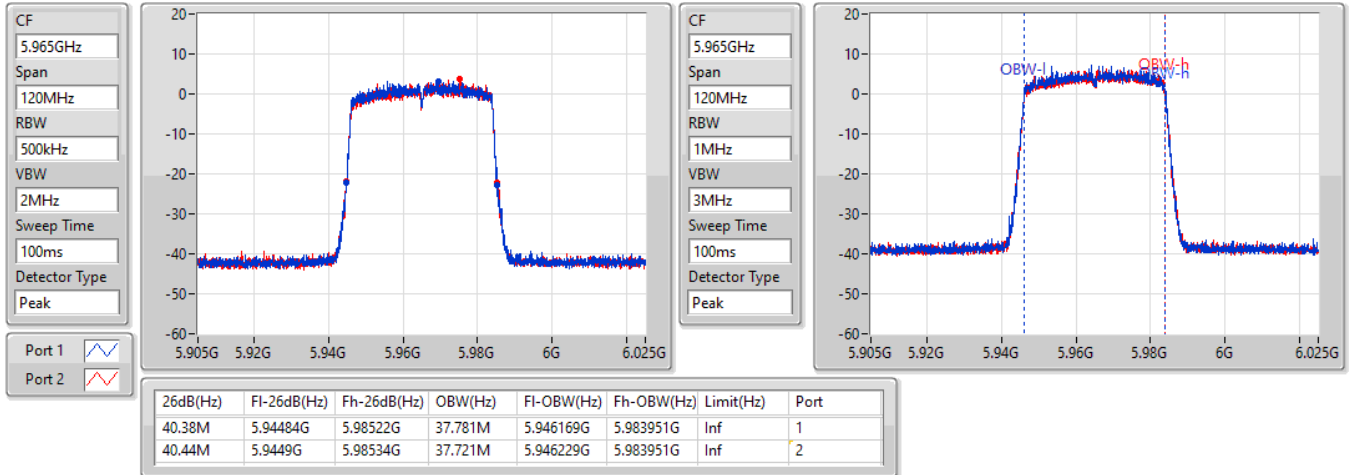


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6165MHz

07/09/2022

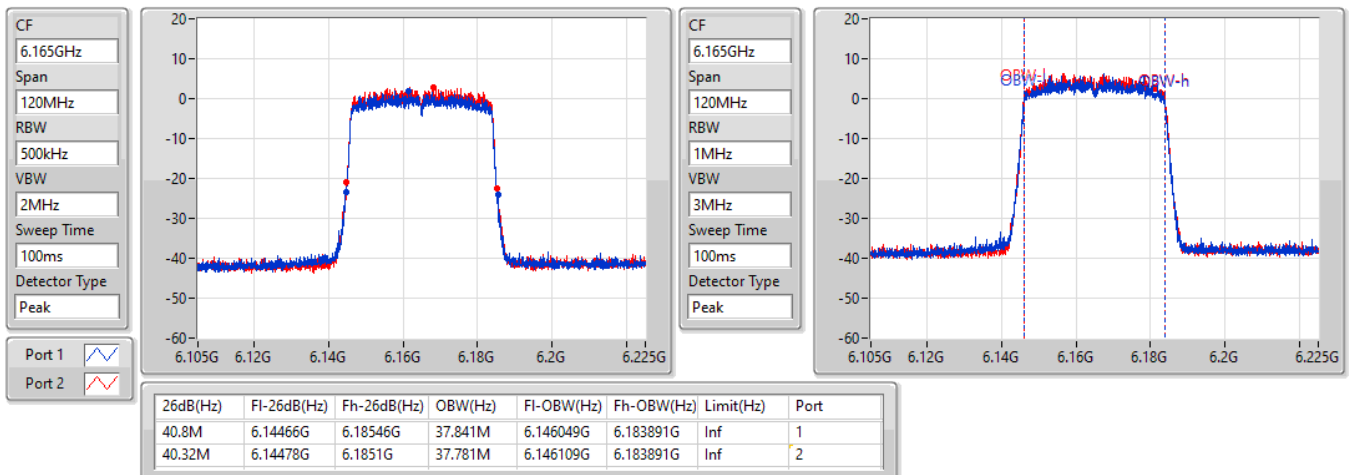


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6405MHz

07/09/2022

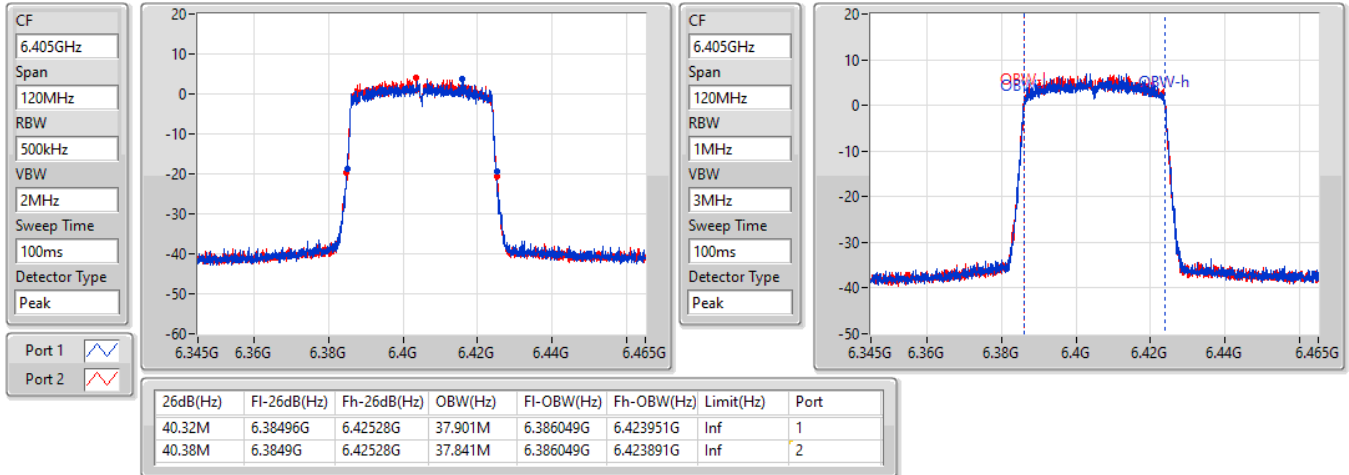


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6445MHz

07/09/2022

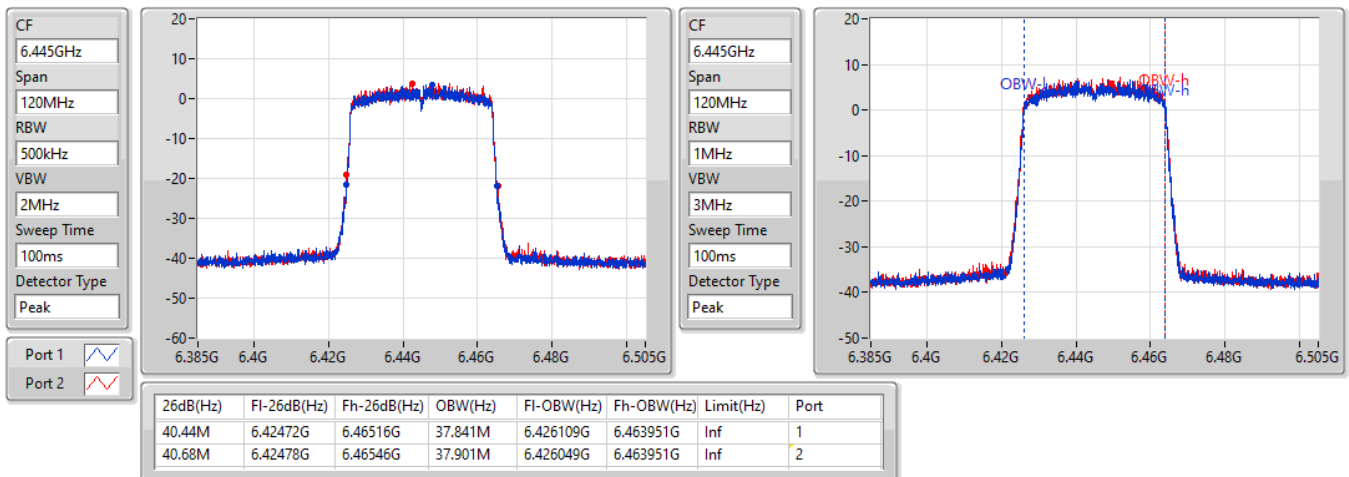


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6485MHz

07/09/2022

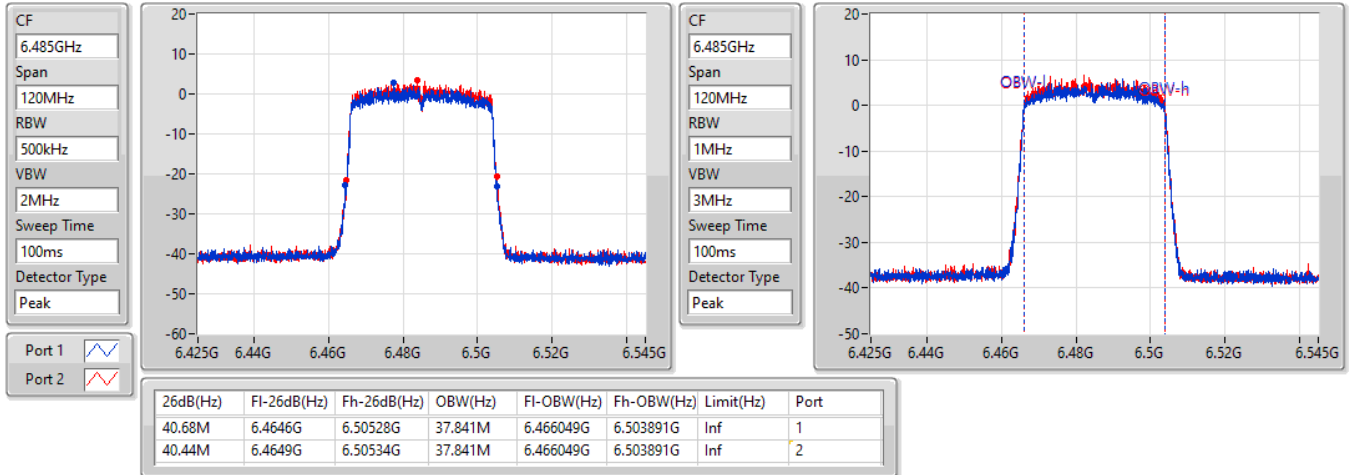


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6525MHz

07/09/2022

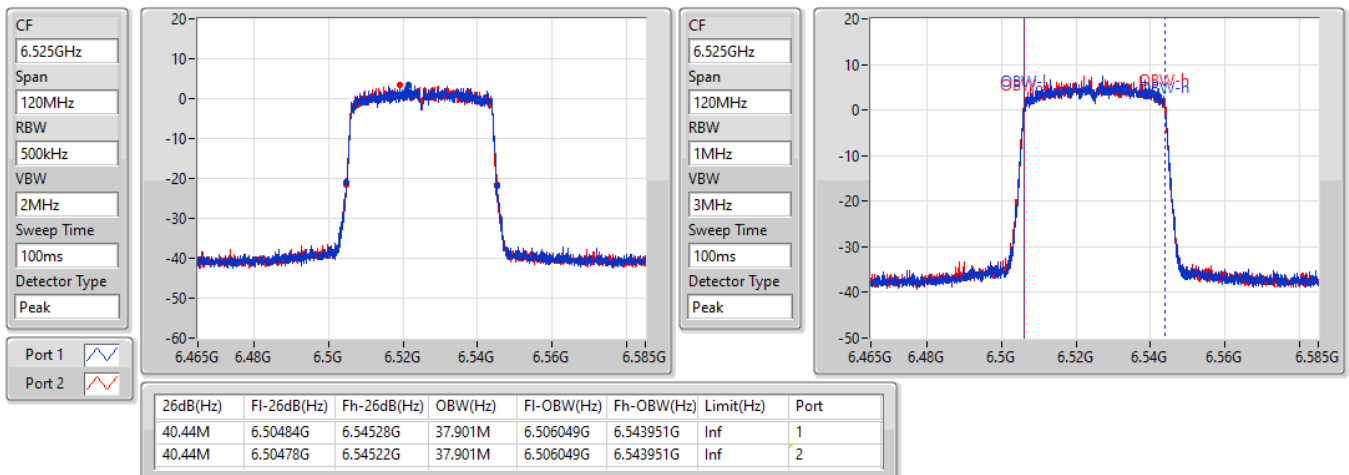


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6565MHz

07/09/2022

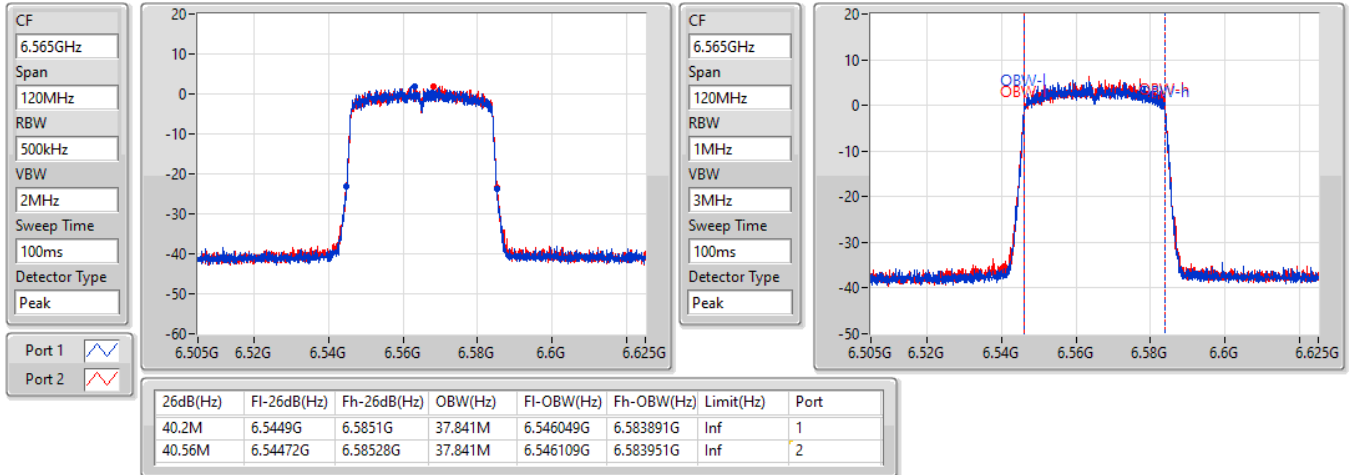


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6685MHz

07/09/2022

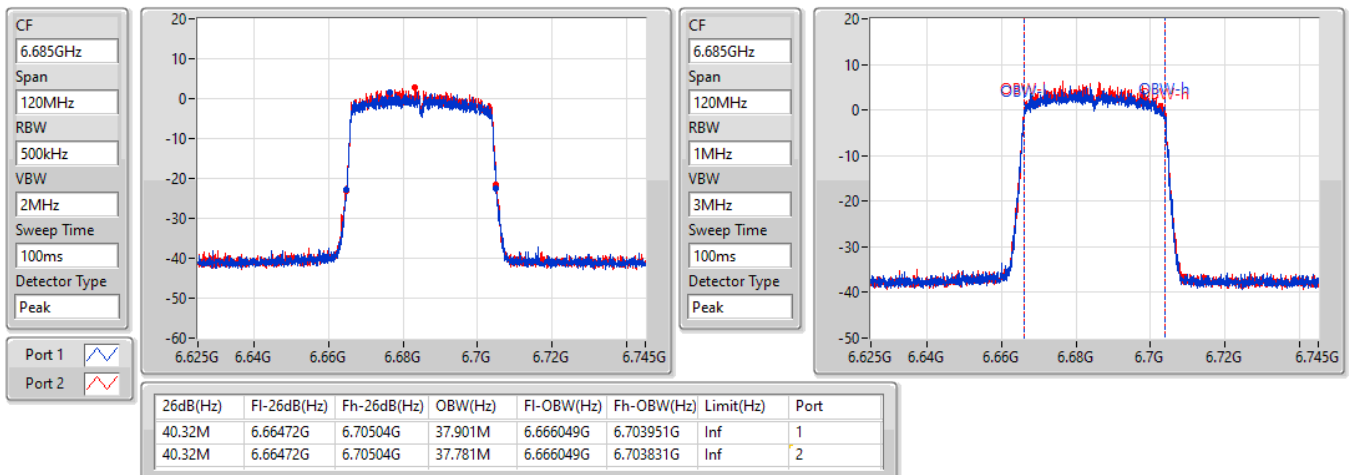


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6845MHz

07/09/2022

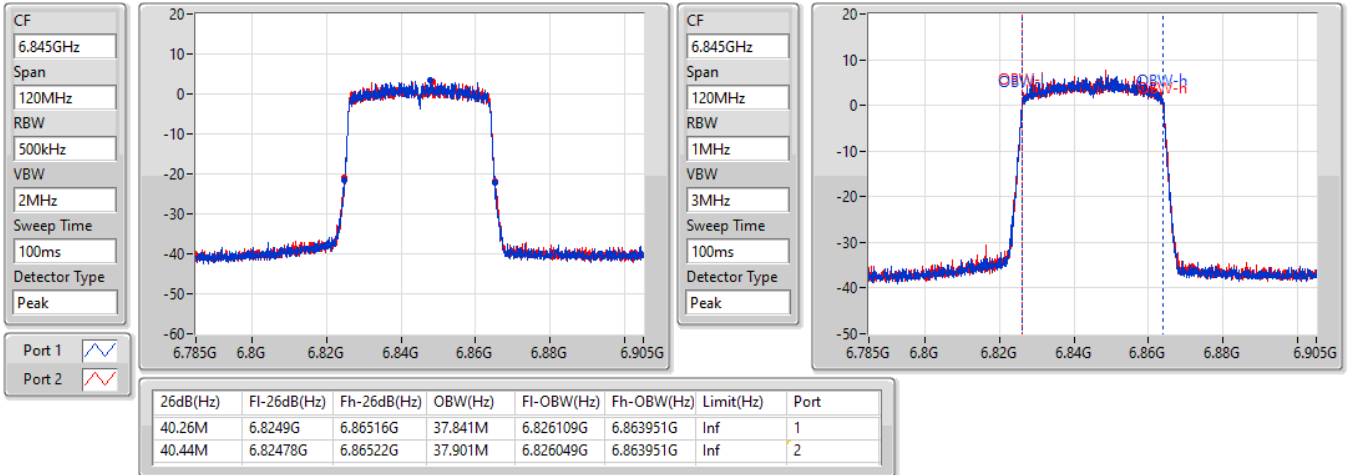


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6885MHz

07/09/2022

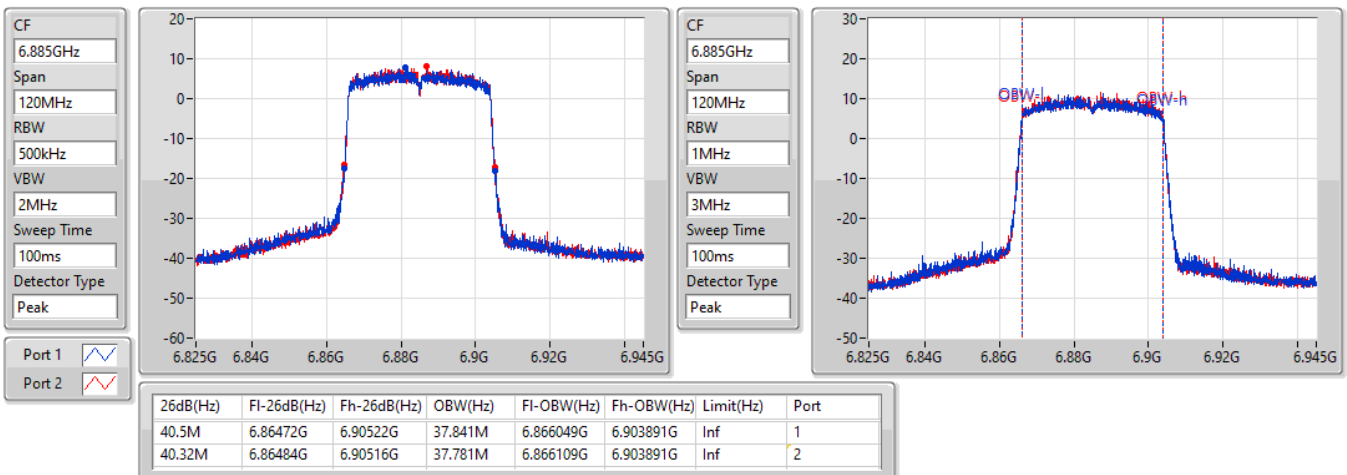


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6925MHz

07/09/2022

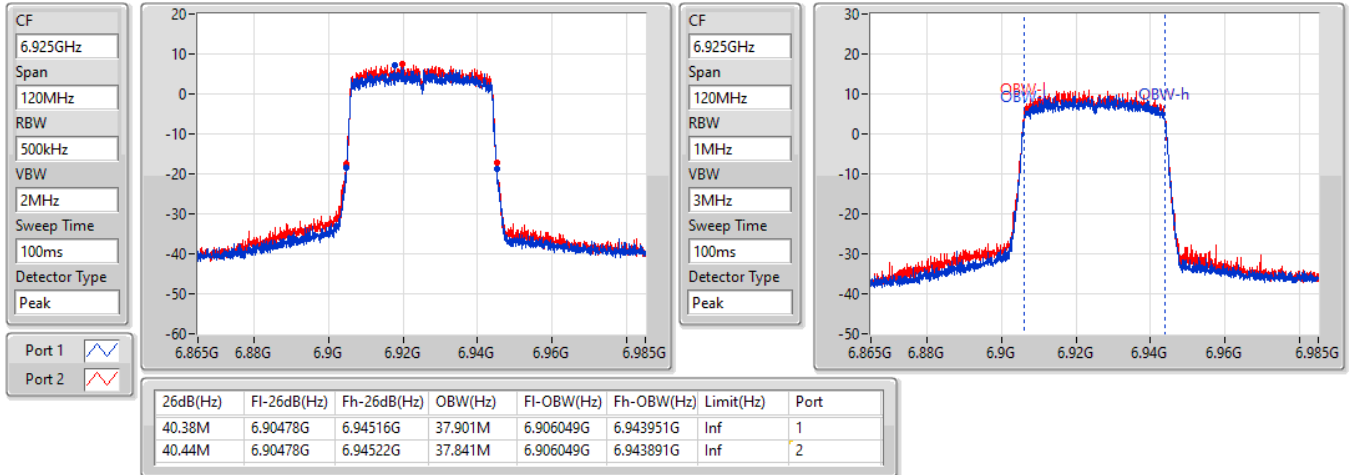


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


7005MHz

07/09/2022

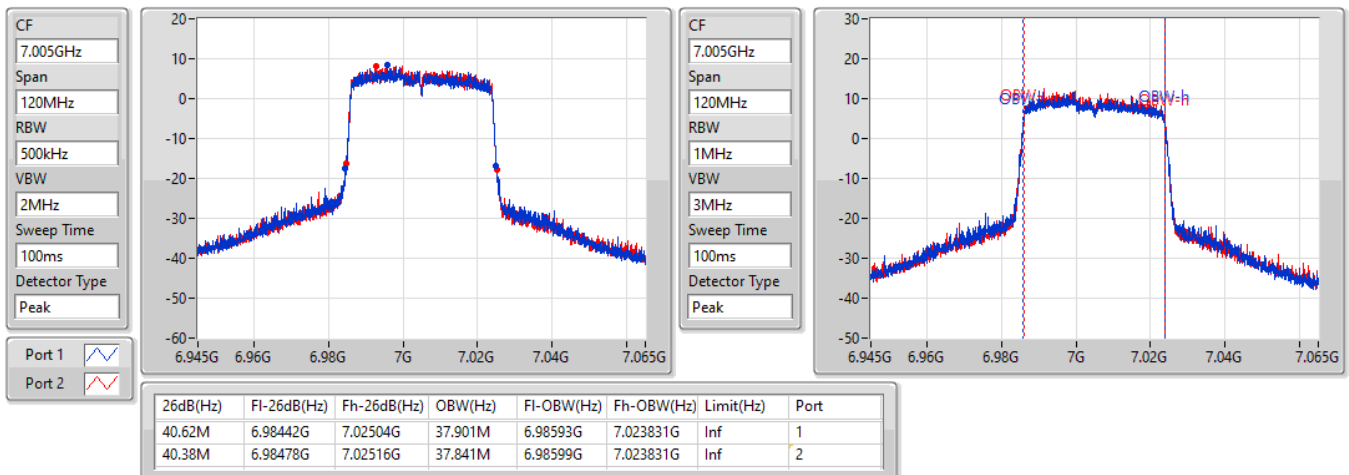


802.11ax HEW40_Nss1,(MCS0)_2TX
EBW
7085MHz

07/09/2022

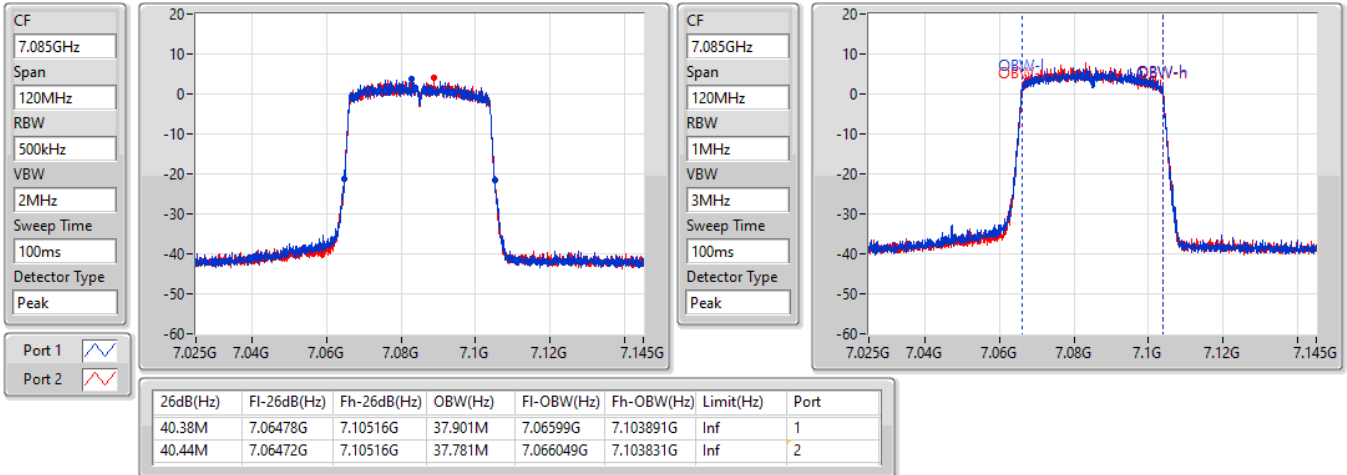
802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
5985MHz

07/09/2022

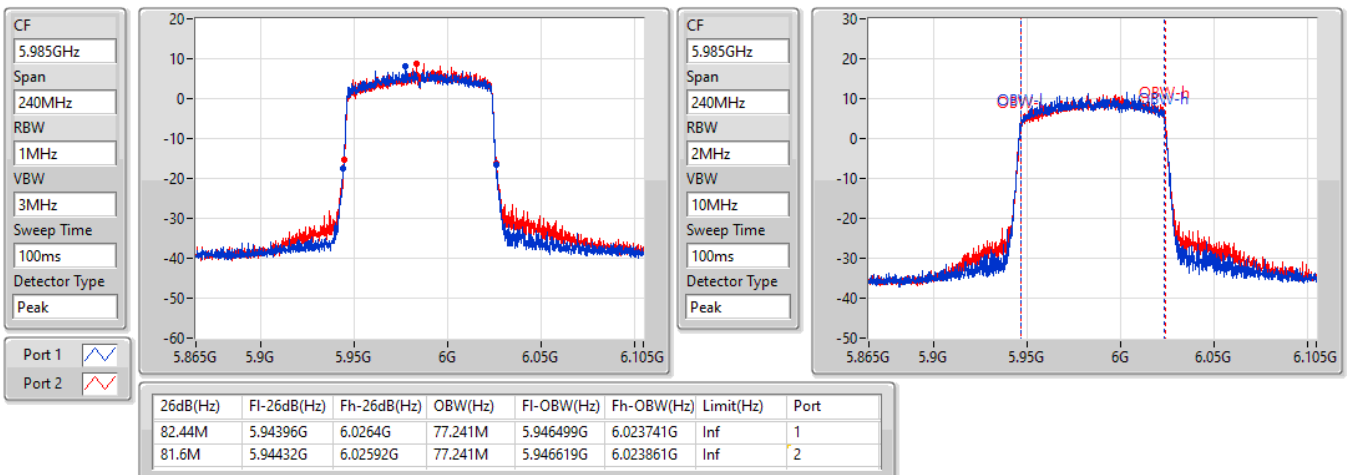


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6145MHz

07/09/2022

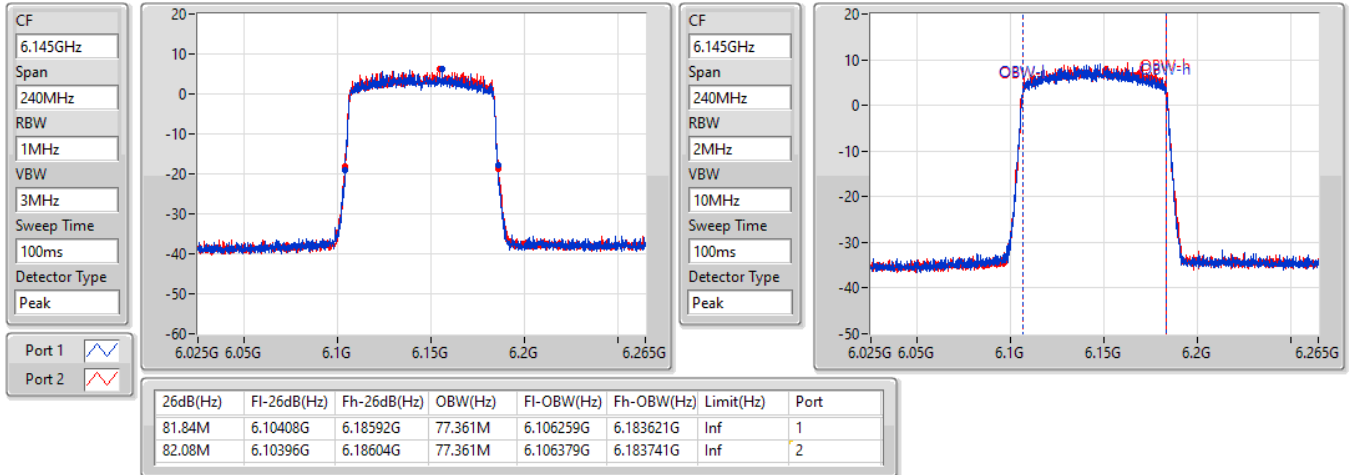


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6385MHz

07/09/2022

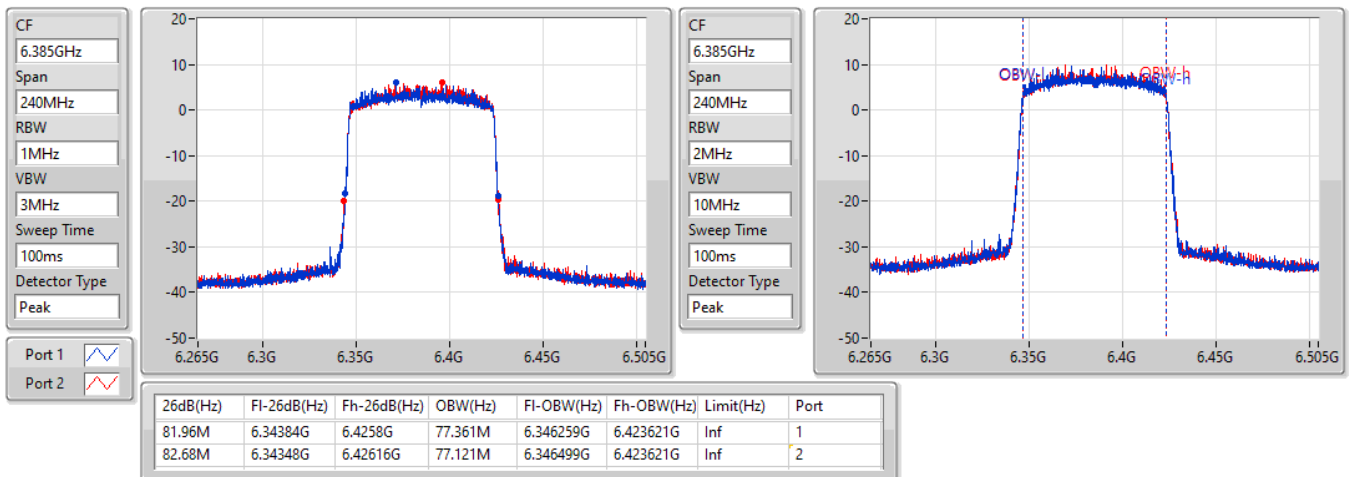


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6465MHz

07/09/2022

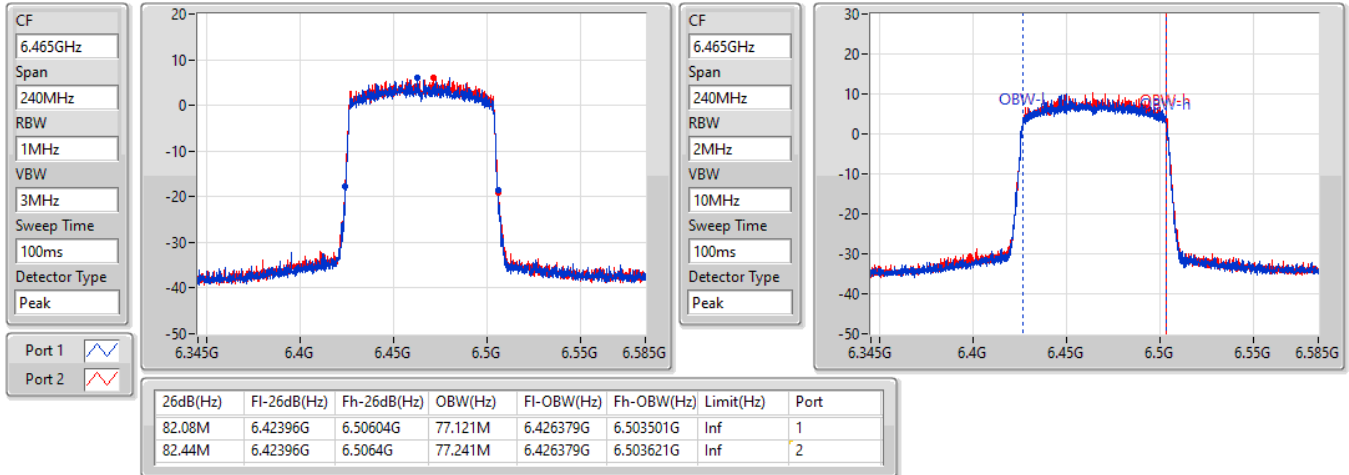


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6545MHz

07/09/2022

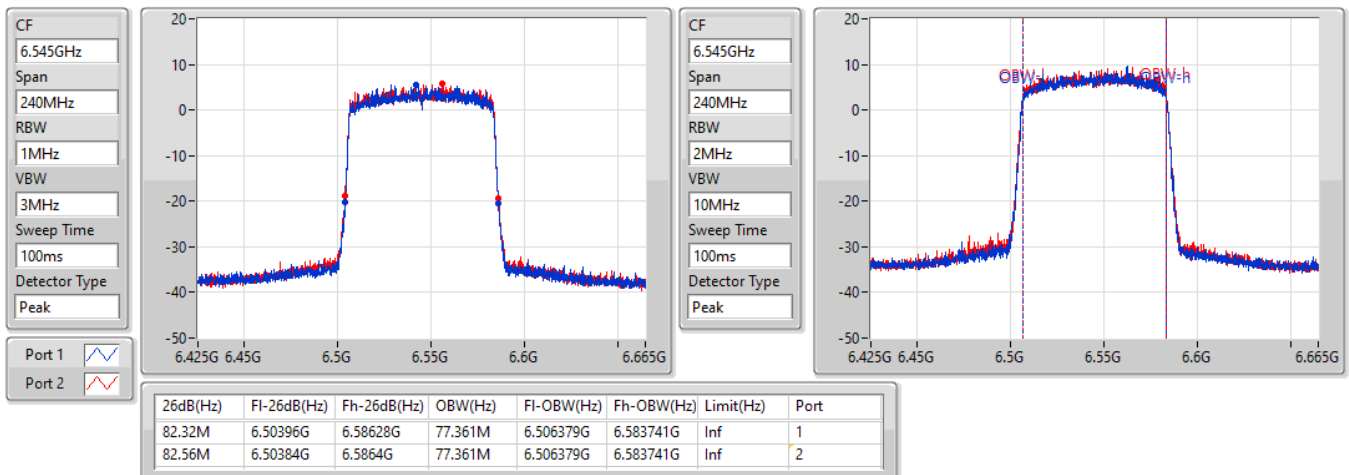


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6625MHz

07/09/2022

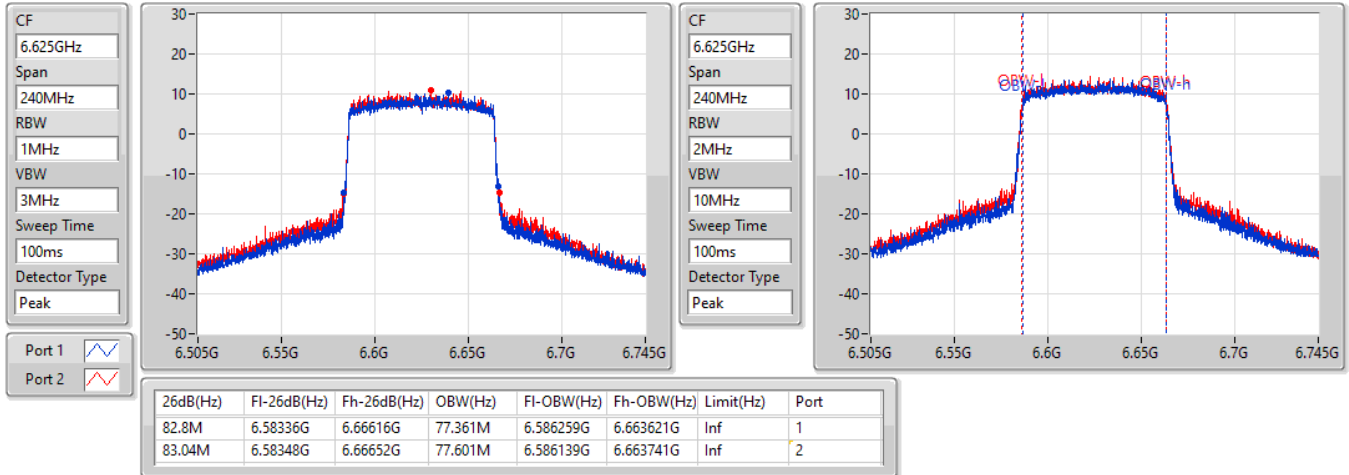


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6705MHz

07/09/2022

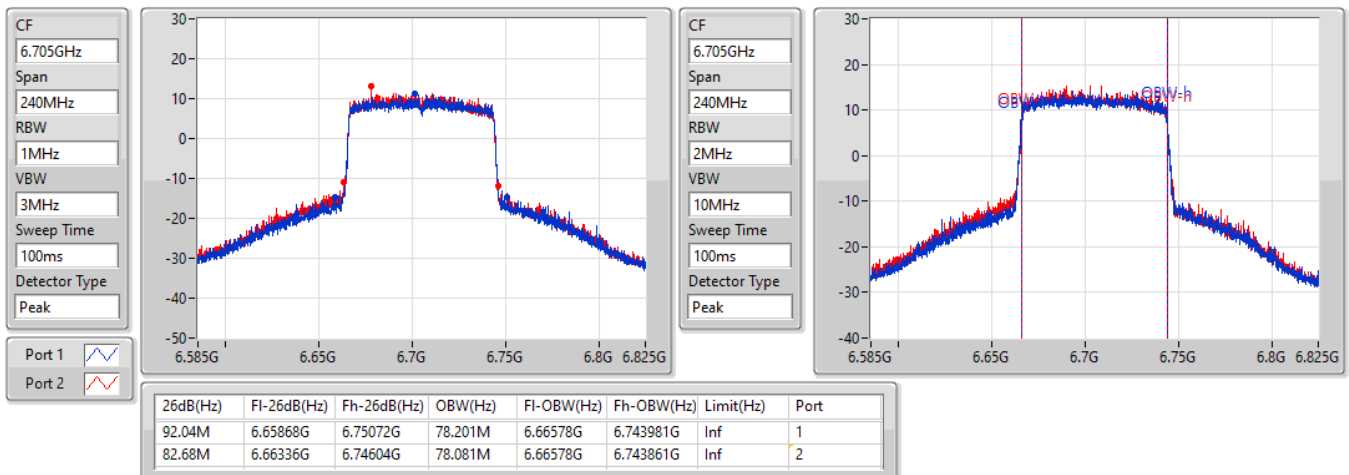


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6785MHz

07/09/2022

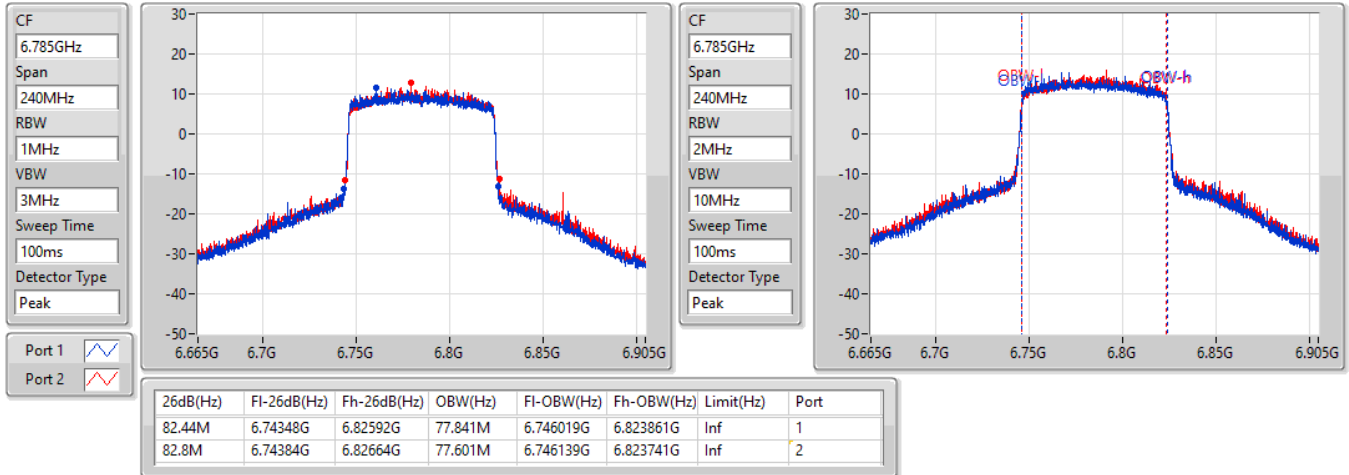


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6865MHz

07/09/2022

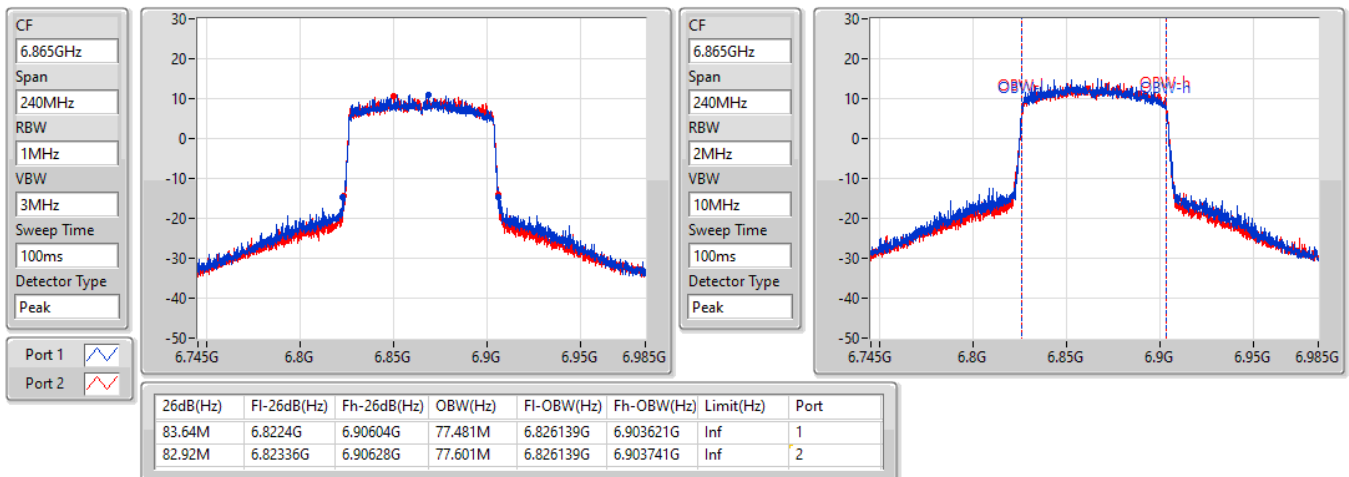


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6945MHz

07/09/2022

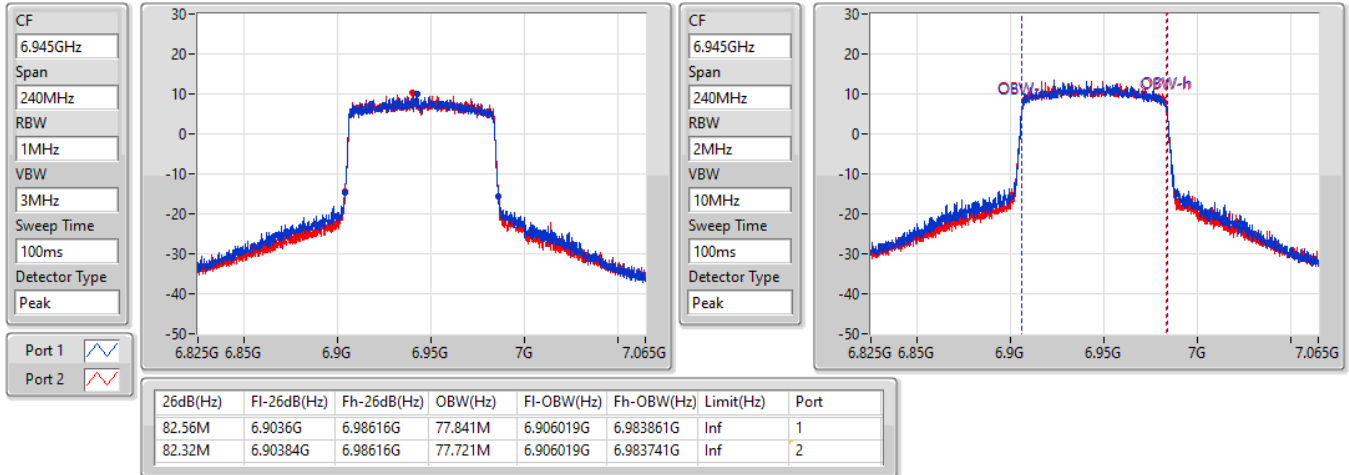


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

7025MHz

07/09/2022

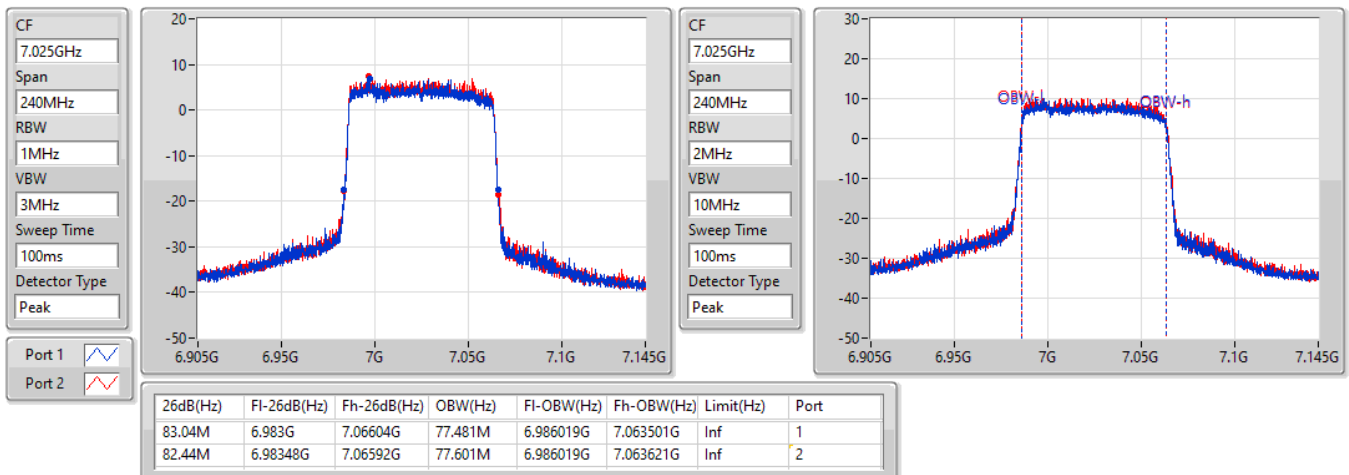


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6025MHz

07/09/2022

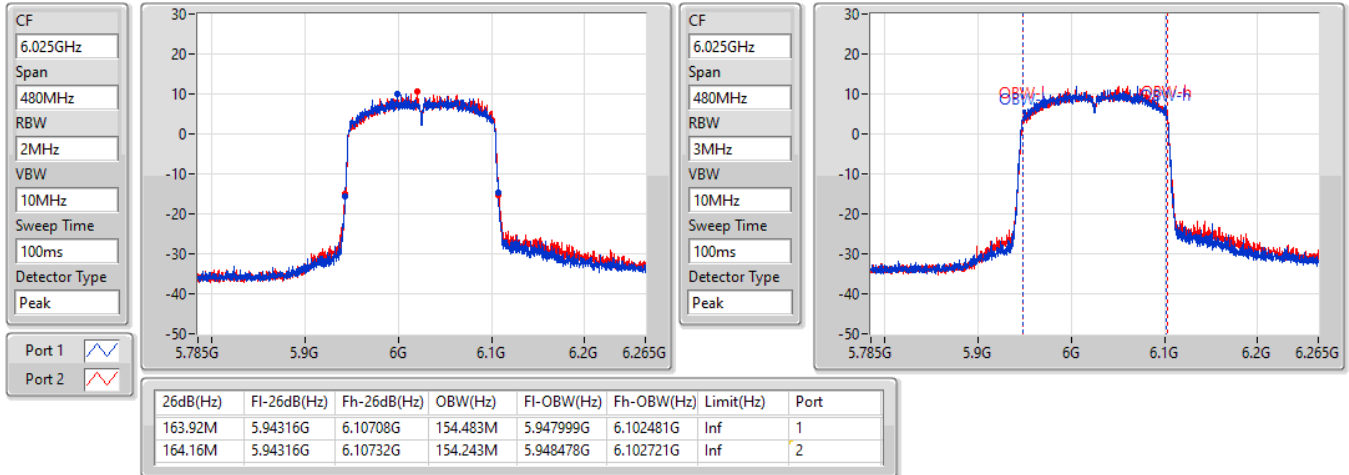


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6185MHz

07/09/2022

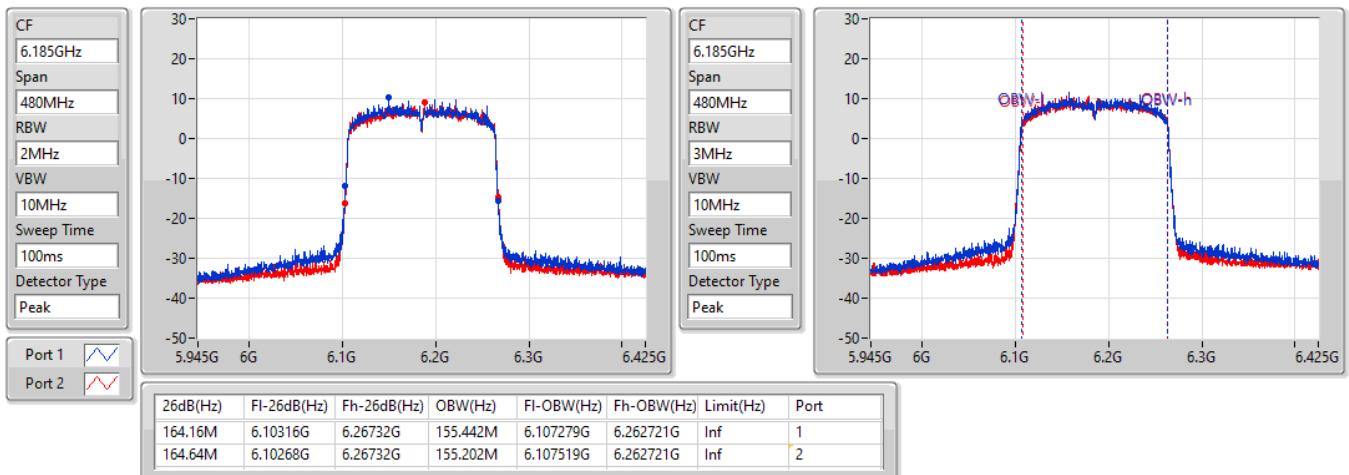


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6345MHz

07/09/2022

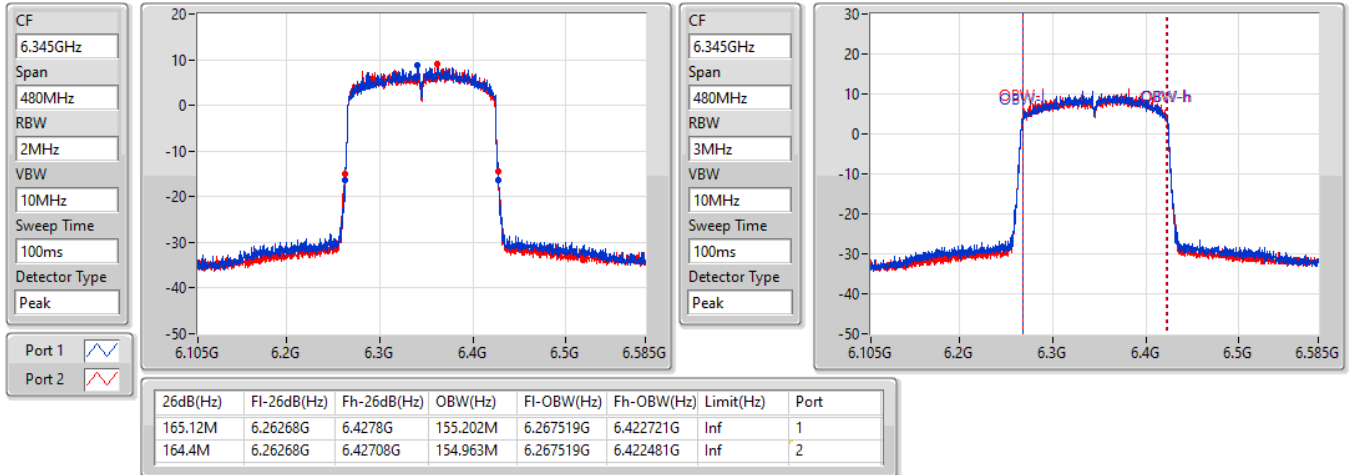


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6505MHz

07/09/2022

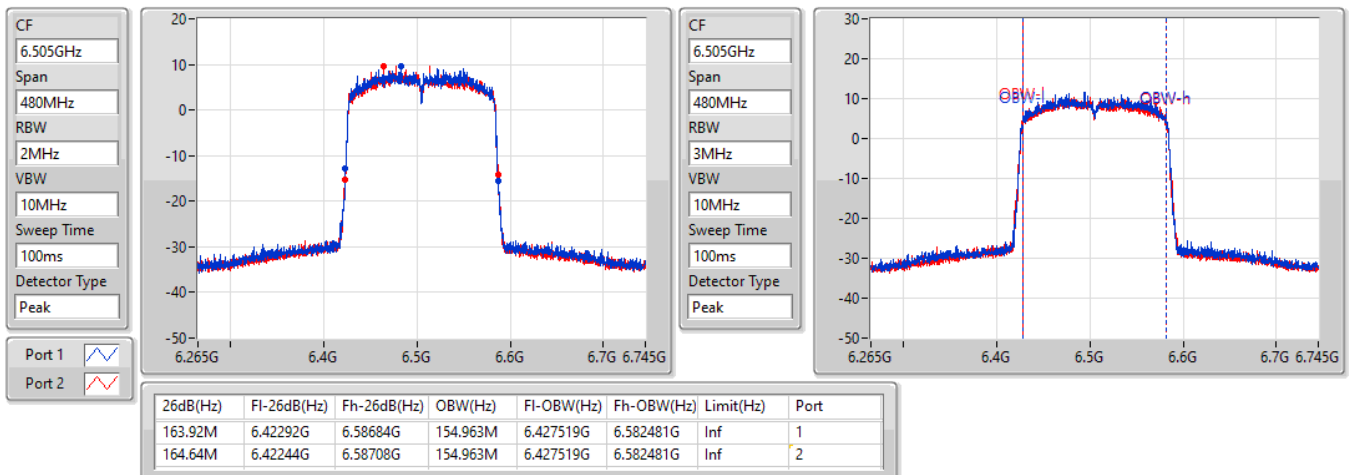


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6665MHz

07/09/2022

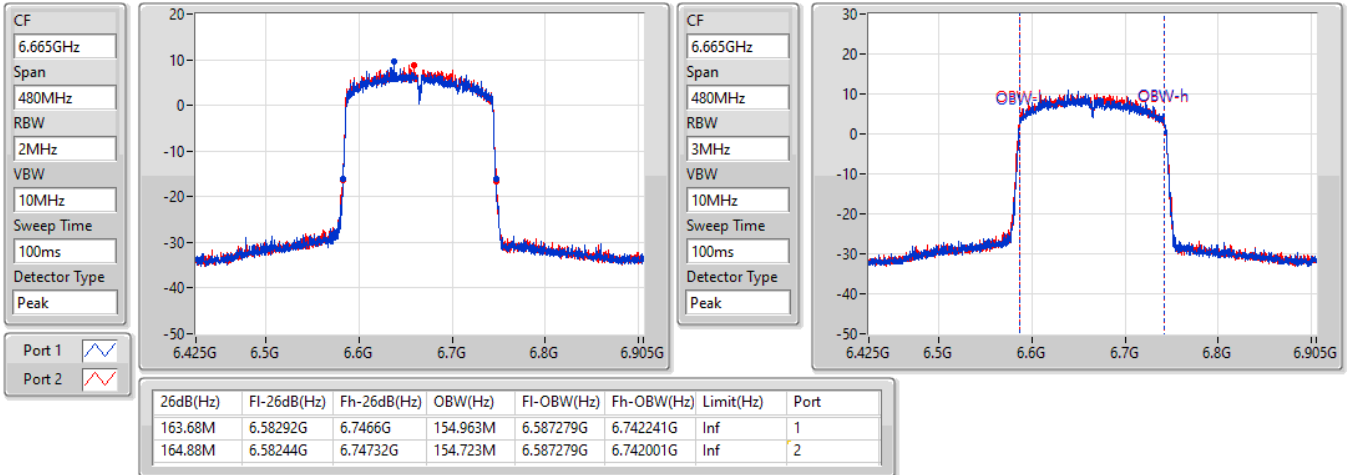


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6825MHz

07/09/2022

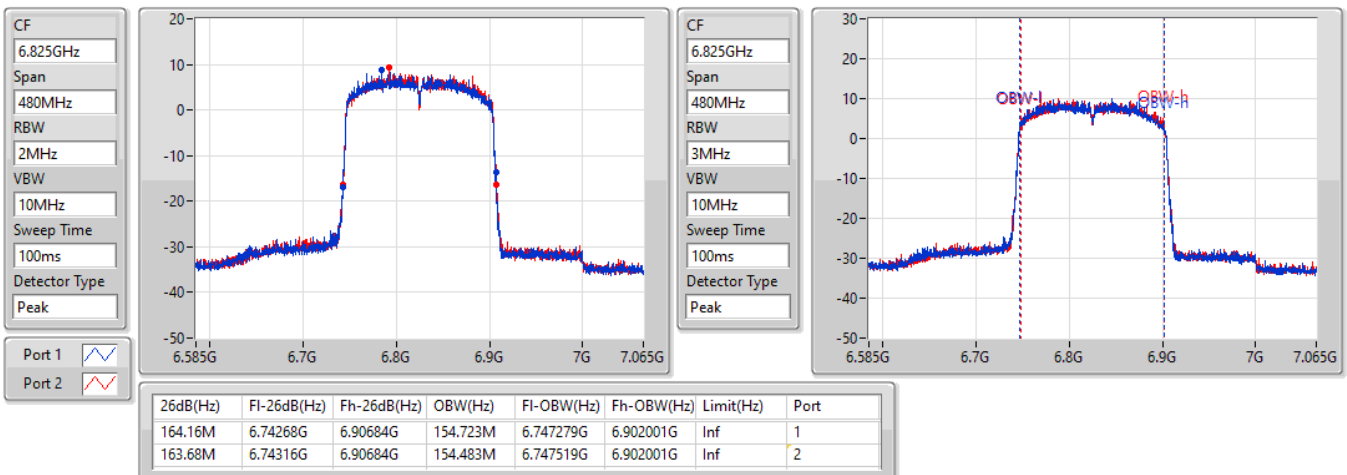


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6985MHz

07/09/2022

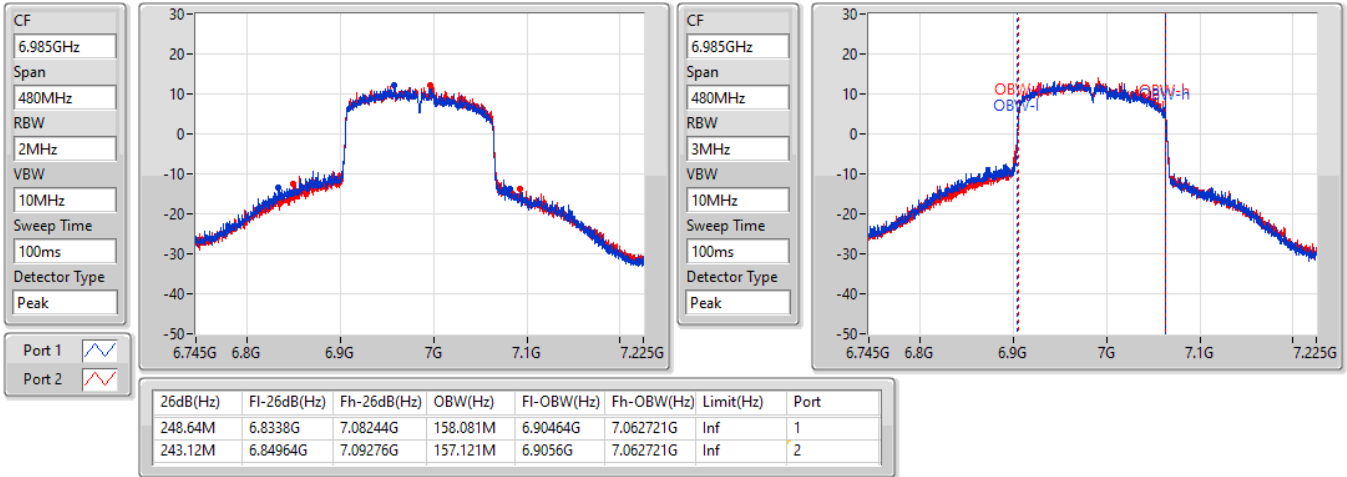

**Summary**

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	15.34	0.03420
802.11ax HEW20_Nss1,(MCS0)_2TX	15.05	0.03199
802.11ax HEW40_Nss1,(MCS0)_2TX	19.32	0.08551
802.11ax HEW80_Nss1,(MCS0)_2TX	21.43	0.13900
802.11ax HEW160_Nss1,(MCS0)_2TX	23.92	0.24660
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	15.60	0.03631
802.11ax HEW20_Nss1,(MCS0)_2TX	15.22	0.03327
802.11ax HEW40_Nss1,(MCS0)_2TX	18.44	0.06982
802.11ax HEW80_Nss1,(MCS0)_2TX	19.67	0.09268
802.11ax HEW160_Nss1,(MCS0)_2TX	22.54	0.17947
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	15.30	0.03388
802.11ax HEW20_Nss1,(MCS0)_2TX	17.88	0.06138
802.11ax HEW40_Nss1,(MCS0)_2TX	18.81	0.07603
802.11ax HEW80_Nss1,(MCS0)_2TX	21.21	0.13213
802.11ax HEW160_Nss1,(MCS0)_2TX	23.67	0.23281
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	15.36	0.03436
802.11ax HEW20_Nss1,(MCS0)_2TX	17.62	0.05781
802.11ax HEW40_Nss1,(MCS0)_2TX	21.05	0.12735
802.11ax HEW80_Nss1,(MCS0)_2TX	25.42	0.34834
802.11ax HEW160_Nss1,(MCS0)_2TX	25.06	0.32063

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-
5935MHz	Pass	13.91	30.00
5955MHz	Pass	15.31	30.00
6175MHz	Pass	15.34	30.00
6415MHz	Pass	14.81	30.00
6435MHz	Pass	15.60	30.00
6475MHz	Pass	14.59	30.00
6515MHz	Pass	14.69	30.00
6535MHz	Pass	15.19	30.00
6695MHz	Pass	15.06	30.00
6855MHz	Pass	15.30	30.00
6875MHz	Pass	14.80	30.00
6895MHz	Pass	15.06	30.00
6995MHz	Pass	14.34	30.00
7095MHz	Pass	14.74	30.00
7115MHz	Pass	15.36	30.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-
5935MHz	Pass	12.20	30.00
5955MHz	Pass	14.85	30.00
6175MHz	Pass	15.05	30.00
6415MHz	Pass	15.03	30.00
6435MHz	Pass	15.22	30.00
6475MHz	Pass	13.96	30.00
6515MHz	Pass	14.76	30.00
6535MHz	Pass	13.89	30.00
6695MHz	Pass	17.88	30.00
6855MHz	Pass	15.85	30.00
6875MHz	Pass	14.45	30.00
6895MHz	Pass	14.12	30.00
6995MHz	Pass	17.62	30.00
7095MHz	Pass	16.14	30.00
7115MHz	Pass	14.26	30.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	18.20	30.00
6165MHz	Pass	17.92	30.00
6405MHz	Pass	19.32	30.00
6445MHz	Pass	18.44	30.00
6485MHz	Pass	16.94	30.00
6525MHz	Pass	18.21	30.00
6565MHz	Pass	16.68	30.00
6685MHz	Pass	18.06	30.00
6845MHz	Pass	18.81	30.00
6885MHz	Pass	18.44	30.00
6925MHz	Pass	18.24	30.00
7005MHz	Pass	21.05	30.00
7085MHz	Pass	17.79	30.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	21.43	30.00
6145MHz	Pass	20.98	30.00
6385MHz	Pass	20.83	30.00
6465MHz	Pass	19.67	30.00
6545MHz	Pass	19.23	30.00
6625MHz	Pass	20.33	30.00
6705MHz	Pass	20.60	30.00
6785MHz	Pass	21.21	30.00



Average Power_Non-Beamforming

Appendix C.1

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
6865MHz	Pass	20.75	30.00
6945MHz	Pass	19.96	30.00
7025MHz	Pass	25.42	30.00
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	23.72	30.00
6185MHz	Pass	18.80	30.00
6345MHz	Pass	23.92	30.00
6505MHz	Pass	22.54	30.00
6665MHz	Pass	23.67	30.00
6825MHz	Pass	17.36	30.00
6985MHz	Pass	25.06	30.00

DG = Directional Gain; Port X = Port X output power

**Summary**

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	17.97	0.06266
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	22.14	0.16368
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	24.32	0.27040
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	26.88	0.48753
6.425-6.525GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	18.11	0.06471
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	21.31	0.13521
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	22.60	0.18197
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	25.41	0.34754
6.525-6.875GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	20.84	0.12134
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	21.66	0.14655
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	24.07	0.25527
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	26.49	0.44566
6.875-7.125GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	20.49	0.11194
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	23.88	0.24434
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	28.24	0.66681
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	27.95	0.62373

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-
5935MHz	Pass	15.07	30.00
5955MHz	Pass	17.81	30.00
6175MHz	Pass	17.96	30.00
6415MHz	Pass	17.97	30.00
6435MHz	Pass	18.11	30.00
6475MHz	Pass	16.91	30.00
6515MHz	Pass	17.59	30.00
6535MHz	Pass	16.80	30.00
6695MHz	Pass	20.84	30.00
6855MHz	Pass	18.81	30.00
6875MHz	Pass	17.34	30.00
6895MHz	Pass	16.97	30.00
6995MHz	Pass	20.49	30.00
7095MHz	Pass	18.96	30.00
7115MHz	Pass	17.13	30.00
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	21.14	30.00
6165MHz	Pass	20.77	30.00
6405MHz	Pass	22.14	30.00
6445MHz	Pass	21.31	30.00
6485MHz	Pass	19.78	30.00
6525MHz	Pass	21.12	30.00
6565MHz	Pass	19.60	30.00
6685MHz	Pass	20.97	30.00
6845MHz	Pass	21.66	30.00
6885MHz	Pass	21.29	30.00
6925MHz	Pass	21.06	30.00
7005MHz	Pass	23.88	30.00
7085MHz	Pass	20.68	30.00
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	24.32	30.00
6145MHz	Pass	23.89	30.00
6385MHz	Pass	23.65	30.00
6465MHz	Pass	22.60	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	22.12	30.00
6625MHz	Pass	23.23	30.00
6705MHz	Pass	23.54	30.00
6785MHz	Pass	24.07	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	23.60	30.00
6945MHz	Pass	22.87	30.00
7025MHz	Pass	28.24	30.00
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	26.67	30.00
6185MHz	Pass	21.68	30.00
6345MHz	Pass	26.88	30.00
6505MHz	Pass	25.41	30.00
6665MHz	Pass	26.49	30.00
6825MHz	Pass	20.22	30.00
6985MHz	Pass	27.95	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.93
802.11ax HEW20_Nss1,(MCS0)_2TX	4.84
802.11ax HEW40_Nss1,(MCS0)_2TX	4.93
802.11ax HEW80_Nss1,(MCS0)_2TX	4.85
802.11ax HEW160_Nss1,(MCS0)_2TX	4.95
6.425-6.525GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.94
802.11ax HEW20_Nss1,(MCS0)_2TX	4.75
802.11ax HEW40_Nss1,(MCS0)_2TX	4.84
802.11ax HEW80_Nss1,(MCS0)_2TX	4.52
802.11ax HEW160_Nss1,(MCS0)_2TX	4.78
6.525-6.875GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.85
802.11ax HEW20_Nss1,(MCS0)_2TX	4.95
802.11ax HEW40_Nss1,(MCS0)_2TX	4.98
802.11ax HEW80_Nss1,(MCS0)_2TX	4.97
802.11ax HEW160_Nss1,(MCS0)_2TX	4.90
6.875-7.125GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.96
802.11ax HEW20_Nss1,(MCS0)_2TX	4.99
802.11ax HEW40_Nss1,(MCS0)_2TX	4.97
802.11ax HEW80_Nss1,(MCS0)_2TX	4.68
802.11ax HEW160_Nss1,(MCS0)_2TX	2.51

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-
5935MHz	Pass	4.46	5.00
5955MHz	Pass	4.93	5.00
6175MHz	Pass	4.87	5.00
6415MHz	Pass	4.64	5.00
6435MHz	Pass	4.91	5.00
6475MHz	Pass	4.94	5.00
6515MHz	Pass	4.79	5.00
6535MHz	Pass	4.60	5.00
6695MHz	Pass	4.85	5.00
6855MHz	Pass	4.56	5.00
6875MHz Straddle	Pass	4.75	5.00
6895MHz	Pass	4.96	5.00
6995MHz	Pass	4.59	5.00
7095MHz	Pass	4.77	5.00
7115MHz	Pass	4.90	5.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-
5935MHz	Pass	1.79	5.00
5955MHz	Pass	4.50	5.00
6175MHz	Pass	4.60	5.00
6415MHz	Pass	4.84	5.00
6435MHz	Pass	4.69	5.00
6475MHz	Pass	4.36	5.00
6515MHz	Pass	4.75	5.00
6535MHz	Pass	4.57	5.00
6695MHz	Pass	4.71	5.00
6855MHz	Pass	4.95	5.00
6875MHz Straddle	Pass	4.63	5.00
6895MHz	Pass	4.52	5.00
6995MHz	Pass	4.26	5.00
7095MHz	Pass	4.99	5.00
7115MHz	Pass	3.56	5.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	4.48	5.00
6165MHz	Pass	4.85	5.00
6405MHz	Pass	4.93	5.00
6445MHz	Pass	4.74	5.00
6485MHz	Pass	4.69	5.00
6525MHz Straddle	Pass	4.84	5.00
6565MHz	Pass	4.77	5.00
6685MHz	Pass	4.56	5.00
6845MHz	Pass	4.98	5.00
6885MHz Straddle	Pass	4.59	5.00
6925MHz	Pass	4.97	5.00
7005MHz	Pass	4.69	5.00
7085MHz	Pass	4.27	5.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	4.85	5.00
6145MHz	Pass	4.46	5.00
6385MHz	Pass	4.65	5.00
6465MHz	Pass	4.52	5.00
6545MHz Straddle	Pass	4.49	5.00
6625MHz	Pass	4.76	5.00
6705MHz	Pass	4.66	5.00
6785MHz	Pass	4.97	5.00



Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6865MHz Straddle	Pass	4.57	5.00
6945MHz	Pass	4.68	5.00
7025MHz	Pass	4.59	5.00
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	4.95	5.00
6185MHz	Pass	4.70	5.00
6345MHz	Pass	4.78	5.00
6505MHz Straddle	Pass	4.78	5.00
6665MHz	Pass	4.90	5.00
6825MHz Straddle	Pass	4.83	5.00
6985MHz	Pass	2.51	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	5.96259G	0.08	5.9661G	-33.16	-19.94	-13.22	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.42399G	-9.71	6.4509G	-61.17	-49.71	-11.46	1
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.1676G	-8.73	6.258G	-59.48	-48.73	-10.75	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.3834G	-5.12	6.5078G	-55.38	-45.08	-10.30	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.04338G	-1.61	6.2722G	-48.31	-41.61	-6.70	2
	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.42741G	0.16	6.424G	-32.70	-19.74	-12.96	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.46681G	-9.59	6.4326G	-61.05	-49.59	-11.46	1
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.4832G	-8.66	6.4196G	-58.83	-48.66	-10.17	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.55099G	-5.19	6.4202G	-55.09	-45.19	-9.90	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.47223G	-2.52	6.7514G	-51.06	-42.52	-8.54	1
	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.70249G	1.66	6.6839G	-31.60	-18.44	-13.16	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.88419G	-10.51	6.9208G	-60.29	-50.51	-9.78	2
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.67761G	-9.06	6.615G	-58.92	-49.06	-9.86	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.69621G	1.06	6.581G	-40.41	-38.93	-1.48	2
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.78824G	-3.60	6.5786G	-52.09	-43.60	-8.49	1
	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.88751G	-0.33	6.8839G	-33.23	-20.37	-12.86	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	7.12399G	-9.78	7.0811G	-62.22	-49.78	-12.44	1
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.99981G	-2.42	6.944G	-51.96	-42.42	-9.54	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.9474G	-0.86	6.8218G	-45.82	-40.67	-5.15	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.96022G	0.70	6.8538G	-24.62	-19.68	-4.94	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	5.94249G	0.79	5.9462G	-33.05	-19.22	-13.83	1
5935MHz	Pass	5.94249G	0.75	5.9463G	-33.57	-19.26	-14.31	2
5955MHz	Pass	5.96259G	0.08	5.9661G	-33.16	-19.94	-13.22	1
5955MHz	Pass	5.96269G	-0.54	5.9663G	-34.86	-20.44	-14.42	2
6175MHz	Pass	6.18169G	-1.16	6.1638G	-34.71	-20.56	-14.15	1
6175MHz	Pass	6.16781G	-0.59	6.1636G	-35.69	-20.63	-15.06	2
6415MHz	Pass	6.42189G	-1.11	6.4038G	-35.19	-21.12	-14.07	1
6415MHz	Pass	6.40821G	-1.04	6.4262G	-34.68	-20.74	-13.94	2
6435MHz	Pass	6.42741G	0.16	6.424G	-32.70	-19.74	-12.96	1
6435MHz	Pass	6.44249G	0.42	6.4464G	-34.82	-19.61	-15.21	2
6475MHz	Pass	6.46721G	-0.08	6.4638G	-34.23	-20.09	-14.14	1
6475MHz	Pass	6.46751G	0.71	6.4638G	-33.76	-19.34	-14.42	2
6515MHz	Pass	6.52189G	0.28	6.5038G	-33.87	-19.75	-14.12	1
6515MHz	Pass	6.50781G	0.19	6.5036G	-35.13	-19.81	-15.32	2
6535MHz	Pass	6.52811G	2.17	6.5461G	-31.68	-17.85	-13.83	1
6535MHz	Pass	6.54189G	2.34	6.5462G	-31.89	-17.70	-14.19	2
6695MHz	Pass	6.70249G	1.66	6.6839G	-31.60	-18.44	-13.16	1
6695MHz	Pass	6.68771G	2.12	6.6838G	-32.29	-17.93	-14.36	2
6855MHz	Pass	6.84811G	-0.56	6.8437G	-34.55	-20.65	-13.90	1
6855MHz	Pass	6.86249G	-0.49	6.8439G	-34.02	-20.49	-13.53	2
6875MHz	Pass	6.86721G	-0.63	6.8637G	-34.56	-20.69	-13.87	1
6875MHz	Pass	6.86751G	-0.41	6.8635G	-35.76	-20.56	-15.20	2
6895MHz	Pass	6.88751G	-0.33	6.8839G	-33.23	-20.37	-12.86	1
6895MHz	Pass	6.88761G	-0.32	6.8836G	-35.34	-20.36	-14.98	2
6995MHz	Pass	6.98721G	-0.35	6.9838G	-33.68	-20.50	-13.18	1
6995MHz	Pass	6.98751G	-0.25	6.9839G	-33.71	-20.05	-13.66	2
7095MHz	Pass	7.10249G	-2.22	7.0837G	-36.10	-22.27	-13.83	1
7095MHz	Pass	7.08751G	-1.95	7.0837G	-36.15	-21.98	-14.17	2
7115MHz	Pass	7.10791G	2.63	7.1038G	-30.68	-17.07	-13.61	1
7115MHz	Pass	7.10751G	3.05	7.1038G	-31.01	-16.65	-14.36	2
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	5.94399G	-10.97	5.9843G	-62.71	-50.97	-11.74	1
5935MHz	Pass	5.94409G	-11.33	5.8897G	-62.81	-51.33	-11.48	2
5955MHz	Pass	5.96419G	-9.38	5.9996G	-62.67	-49.38	-13.29	1
5955MHz	Pass	5.96389G	-9.95	5.9988G	-62.47	-49.95	-12.52	2
6175MHz	Pass	6.16671G	-10.08	6.213G	-61.72	-50.08	-11.64	1
6175MHz	Pass	6.18349G	-10.01	6.2249G	-61.75	-50.01	-11.74	2
6415MHz	Pass	6.42399G	-9.71	6.4509G	-61.17	-49.71	-11.46	1
6415MHz	Pass	6.40581G	-9.40	6.449G	-61.24	-49.40	-11.84	2
6435MHz	Pass	6.44319G	-8.98	6.4012G	-61.20	-48.98	-12.22	1
6435MHz	Pass	6.44279G	-9.06	6.4008G	-61.03	-49.06	-11.97	2
6475MHz	Pass	6.46681G	-9.59	6.4326G	-61.05	-49.59	-11.46	1
6475MHz	Pass	6.46691G	-9.16	6.432G	-61.11	-49.16	-11.95	2
6515MHz	Pass	6.52389G	-9.38	6.4799G	-61.18	-49.38	-11.80	1
6515MHz	Pass	6.50661G	-8.84	6.4819G	-61.20	-48.84	-12.36	2
6535MHz	Pass	6.54409G	-8.00	6.5719G	-61.08	-48.00	-13.08	1
6535MHz	Pass	6.52581G	-8.02	6.5703G	-60.65	-48.02	-12.63	2
6695MHz	Pass	6.68581G	-8.73	6.6591G	-60.92	-48.73	-12.19	1
6695MHz	Pass	6.68601G	-8.03	6.6606G	-61.28	-48.03	-13.25	2
6855MHz	Pass	6.84581G	-9.82	6.8955G	-60.76	-49.82	-10.94	1
6855MHz	Pass	6.86419G	-10.04	6.9039G	-60.61	-50.04	-10.57	2
6875MHz	Pass	6.86691G	-10.61	6.9083G	-60.49	-50.61	-9.88	1
6875MHz	Pass	6.88419G	-10.51	6.9208G	-60.29	-50.51	-9.78	2
6895MHz	Pass	6.88591G	-5.85	6.9276G	-59.34	-45.85	-13.49	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.88611G	-5.54	6.9292G	-59.69	-45.54	-14.15	2
6995MHz	Pass	6.98591G	-5.17	6.962G	-59.09	-45.17	-13.92	1
6995MHz	Pass	6.98631G	-5.24	6.962G	-59.03	-45.24	-13.79	2
7095MHz	Pass	7.08581G	-8.31	7.0552G	-61.91	-48.31	-13.60	1
7095MHz	Pass	7.08581G	-8.09	7.0595G	-61.80	-48.09	-13.71	2
7115MHz	Pass	7.12399G	-9.78	7.0811G	-62.22	-49.78	-12.44	1
7115MHz	Pass	7.10571G	-9.35	7.0821G	-62.11	-49.35	-12.76	2
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9662G	-7.22	6.0596G	-60.09	-47.22	-12.87	1
5965MHz	Pass	5.97G	-7.49	6.048G	-59.93	-47.49	-12.44	2
6165MHz	Pass	6.1676G	-8.73	6.258G	-59.48	-48.73	-10.75	1
6165MHz	Pass	6.1626G	-7.78	6.2496G	-59.30	-47.78	-11.52	2
6405MHz	Pass	6.4038G	-7.35	6.466G	-58.82	-47.35	-11.47	1
6405MHz	Pass	6.4012G	-6.92	6.466G	-58.83	-46.92	-11.91	2
6445MHz	Pass	6.4438G	-7.29	6.5068G	-59.08	-47.29	-11.79	1
6445MHz	Pass	6.447G	-7.04	6.5098G	-58.98	-47.04	-11.94	2
6485MHz	Pass	6.4832G	-8.66	6.4196G	-58.83	-48.66	-10.17	1
6485MHz	Pass	6.487G	-7.78	6.4214G	-58.89	-47.78	-11.11	2
6525MHz	Pass	6.5224G	-7.41	6.5858G	-58.68	-47.41	-11.27	1
6525MHz	Pass	6.528G	-7.31	6.5862G	-58.65	-47.31	-11.34	2
6565MHz	Pass	6.5668G	-8.79	6.6252G	-59.00	-48.73	-10.27	1
6565MHz	Pass	6.5634G	-8.65	6.4704G	-59.27	-48.65	-10.62	2
6685MHz	Pass	6.67761G	-9.06	6.615G	-58.92	-49.06	-9.86	1
6685MHz	Pass	6.67881G	-8.33	6.6238G	-58.53	-48.33	-10.20	2
6845MHz	Pass	6.85119G	-7.59	6.9418G	-58.06	-47.59	-10.47	1
6845MHz	Pass	6.8482G	-7.70	6.9372G	-58.10	-47.70	-10.40	2
6885MHz	Pass	6.87901G	-3.01	6.9476G	-56.33	-43.01	-13.32	1
6885MHz	Pass	6.8822G	-2.64	6.8238G	-56.38	-42.64	-13.74	2
6925MHz	Pass	6.926G	-4.22	6.9858G	-56.68	-44.22	-12.46	1
6925MHz	Pass	6.9208G	-3.26	6.9858G	-55.81	-43.26	-12.55	2
7005MHz	Pass	6.99981G	-2.42	6.944G	-51.96	-42.42	-9.54	1
7005MHz	Pass	6.99961G	-2.09	6.944G	-52.35	-42.09	-10.26	2
7085MHz	Pass	7.0812G	-7.53	7.0226G	-60.06	-47.53	-12.53	1
7085MHz	Pass	7.0804G	-7.23	7.024G	-59.87	-47.23	-12.64	2
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9878G	-3.13	6.109G	-55.20	-43.13	-12.07	1
5985MHz	Pass	5.99099G	-2.91	6.1082G	-54.02	-42.91	-11.11	2
6145MHz	Pass	6.1482G	-4.88	6.271G	-55.75	-44.88	-10.87	1
6145MHz	Pass	6.149G	-4.61	6.2686G	-55.49	-44.61	-10.88	2
6385MHz	Pass	6.3834G	-5.12	6.5078G	-55.38	-45.08	-10.30	1
6385MHz	Pass	6.3894G	-4.67	6.5098G	-55.50	-44.67	-10.83	2
6465MHz	Pass	6.4626G	-4.95	6.589G	-55.07	-44.95	-10.12	1
6465MHz	Pass	6.47419G	-4.50	6.589G	-55.03	-44.50	-10.53	2
6545MHz	Pass	6.55099G	-5.19	6.4202G	-55.09	-45.19	-9.90	1
6545MHz	Pass	6.5478G	-5.09	6.4166G	-55.16	-45.09	-10.07	2
6625MHz	Pass	6.63619G	-0.54	6.5014G	-46.67	-40.37	-6.30	1
6625MHz	Pass	6.6262G	-0.20	6.5006G	-44.75	-40.15	-4.60	2
6705MHz	Pass	6.69981G	0.46	6.5682G	-43.73	-39.21	-4.52	1
6705MHz	Pass	6.69621G	1.06	6.581G	-40.41	-38.93	-1.48	2
6785MHz	Pass	6.77941G	0.72	6.6622G	-41.62	-39.03	-2.59	1
6785MHz	Pass	6.7814G	1.27	6.6618G	-41.01	-38.44	-2.57	2
6865MHz	Pass	6.85861G	0.32	6.7394G	-44.93	-39.68	-5.25	1
6865MHz	Pass	6.8694G	0.18	6.7406G	-46.15	-39.82	-6.33	2
6945MHz	Pass	6.9474G	-0.86	6.8218G	-45.82	-40.67	-5.15	1
6945MHz	Pass	6.9426G	-1.15	6.8206G	-46.91	-41.15	-5.76	2
7025MHz	Pass	6.99903G	-3.63	6.901G	-52.25	-43.47	-8.78	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7025MHz	Pass	6.99903G	-3.13	6.901G	-51.80	-43.13	-8.67	2
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.03939G	-2.02	6.2706G	-49.95	-41.98	-7.97	1
6025MHz	Pass	6.04338G	-1.61	6.2722G	-48.31	-41.61	-6.70	2
6185MHz	Pass	6.16662G	-2.29	6.4314G	-49.56	-42.29	-7.27	1
6185MHz	Pass	6.19059G	-2.68	6.4314G	-51.18	-42.60	-8.58	2
6345MHz	Pass	6.36658G	-2.69	6.593G	-51.71	-42.69	-9.02	1
6345MHz	Pass	6.37137G	-2.71	6.5922G	-51.81	-42.71	-9.10	2
6505MHz	Pass	6.47223G	-2.52	6.7514G	-51.06	-42.52	-8.54	1
6505MHz	Pass	6.49621G	-2.72	6.2586G	-52.03	-42.64	-9.39	2
6665MHz	Pass	6.64182G	-3.26	6.945G	-51.80	-43.26	-8.54	1
6665MHz	Pass	6.67139G	-2.90	6.981G	-51.69	-42.90	-8.79	2
6825MHz	Pass	6.78824G	-3.60	6.5786G	-52.09	-43.60	-8.49	1
6825MHz	Pass	6.79063G	-3.21	6.5778G	-52.07	-43.21	-8.86	2
6985MHz	Pass	6.96022G	0.70	6.8538G	-24.62	-19.68	-4.94	1
6985MHz	Pass	6.99059G	0.85	6.8602G	-25.14	-19.30	-5.84	2

802.11a_Nss1,(6Mbps)_2TX

5935MHz_TX

MASK

11/10/2022

CF Freq
5.935GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

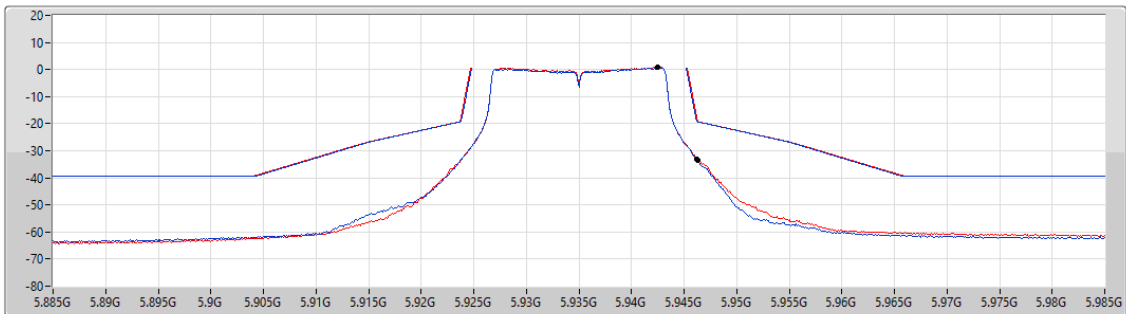

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.94249G	0.79	5.9462G	-33.05	-19.22	-13.83	1
5.94249G	0.75	5.9463G	-33.57	-19.26	-14.31	2

802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

MASK

11/10/2022

CF Freq
5.955GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

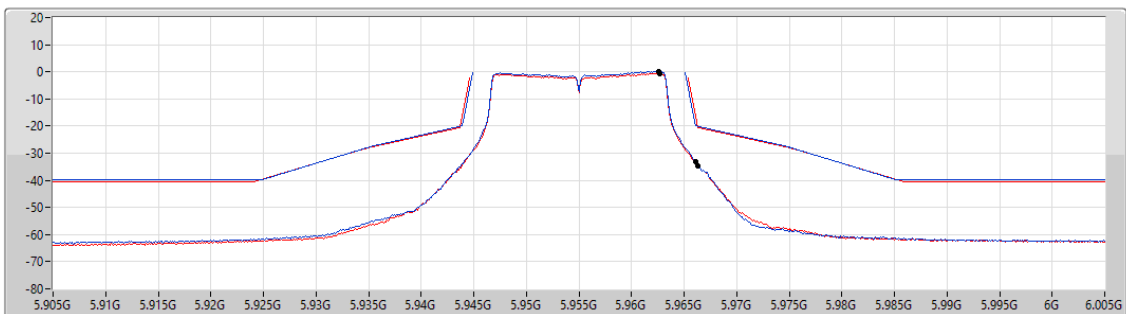


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.96259G	0.08	5.9661G	-33.16	-19.94	-13.22	1
5.96269G	-0.54	5.9663G	-34.86	-20.44	-14.42	2

802.11a_Nss1,(6Mbps)_2TX

6175MHz_TX

MASK

11/10/2022

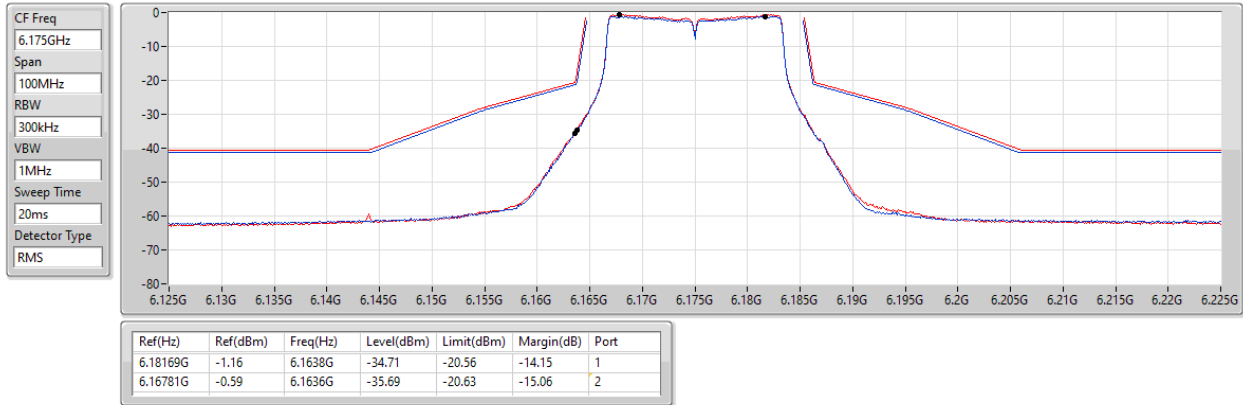


802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

MASK

11/10/2022

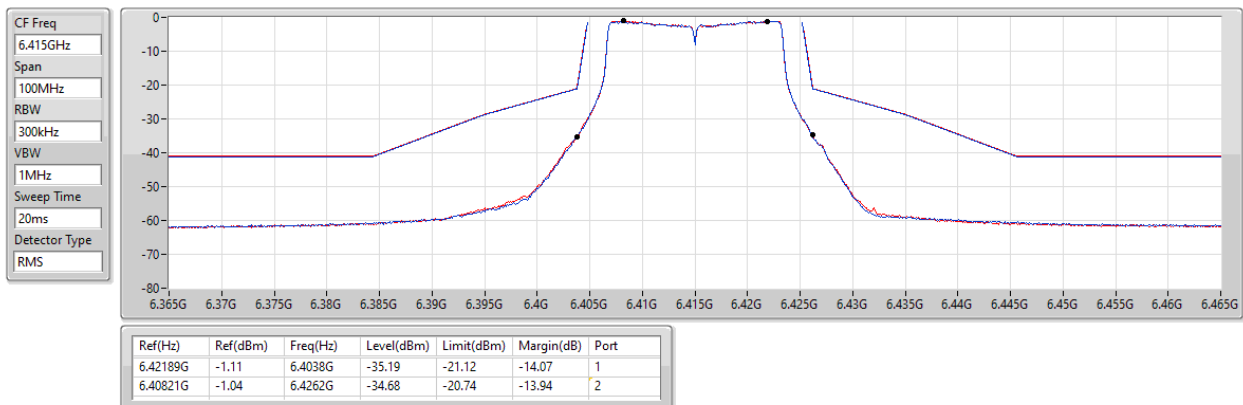

802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

MASK

11/10/2022

CF Freq
6.435GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

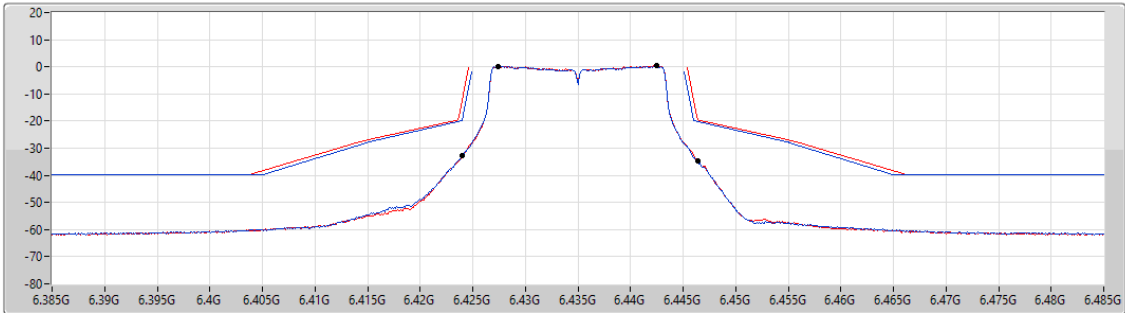

Port 1 

Port 2 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.42741G	0.16	6.424G	-32.70	-19.74	-12.96	1
6.44249G	0.42	6.4464G	-34.82	-19.61	-15.21	2

802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

MASK

11/10/2022

CF Freq
6.475GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

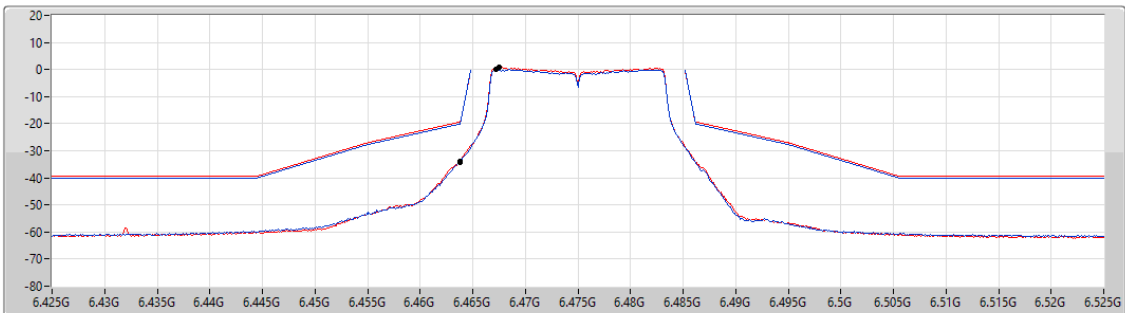

Port 1 

Port 2 


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.46721G	-0.08	6.4638G	-34.23	-20.09	-14.14	1
6.46751G	0.71	6.4638G	-33.76	-19.34	-14.42	2

802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX

MASK

11/10/2022

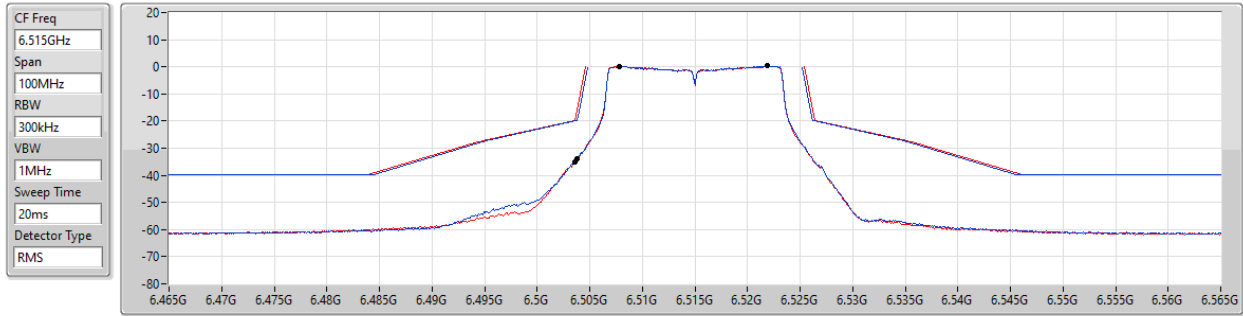


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.52189G	0.28	6.5038G	-33.87	-19.75	-14.12	1
6.50781G	0.19	6.5036G	-35.13	-19.81	-15.32	2

802.11a_Nss1,(6Mbps)_2TX

6535MHz_TX

MASK

11/10/2022

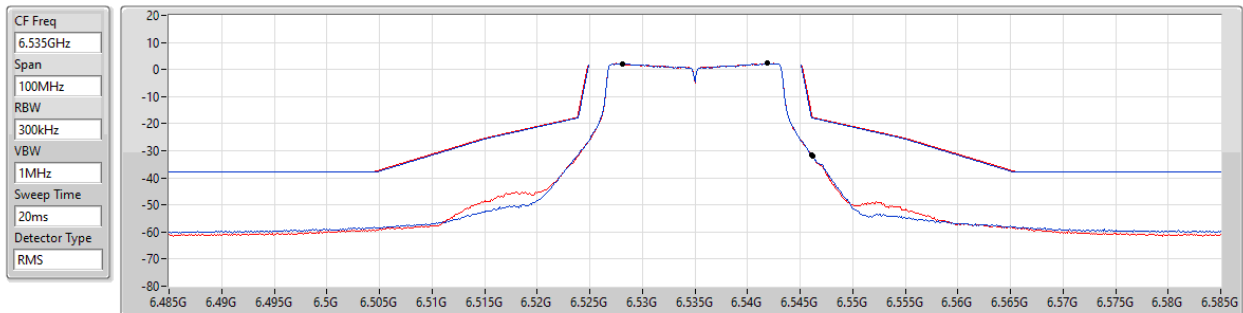

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.52811G	2.17	6.5461G	-31.68	-17.85	-13.83	1
6.54189G	2.34	6.5462G	-31.89	-17.70	-14.19	2

802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

MASK

11/10/2022

CF Freq
6.695GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

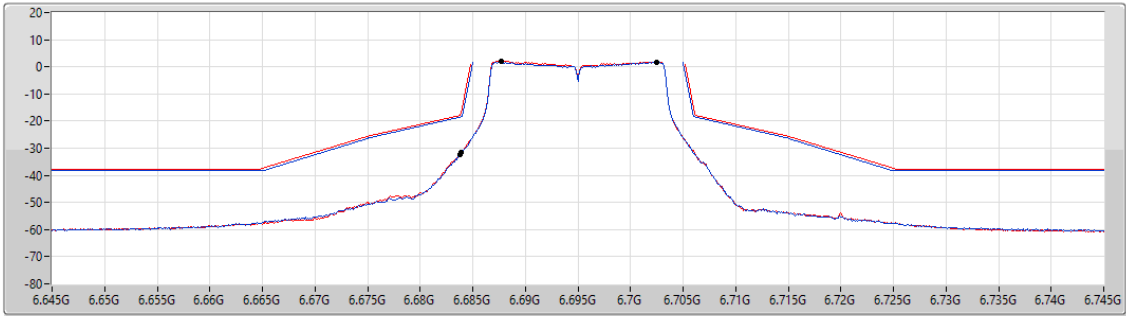

Port 1 

Port 2 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.70249G	1.66	6.6839G	-31.60	-18.44	-13.16	1
6.68771G	2.12	6.6838G	-32.29	-17.93	-14.36	2

802.11a_Nss1,(6Mbps)_2TX

6855MHz_TX

MASK

11/10/2022

CF Freq
6.855GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

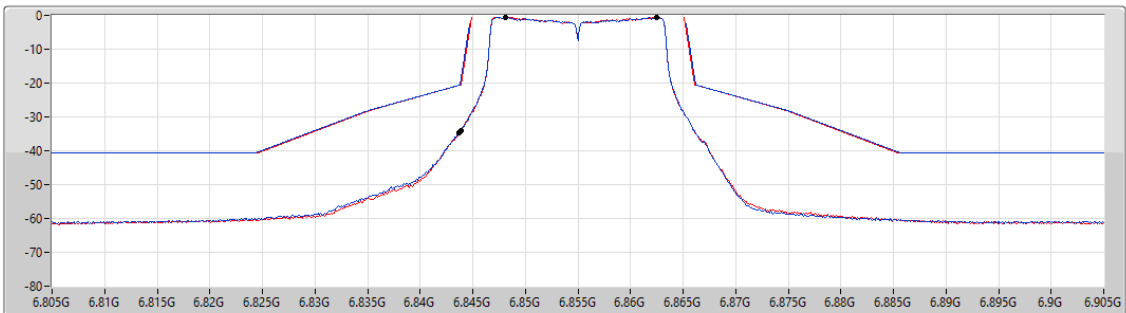

Port 1 

Port 2 


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.84811G	-0.56	6.8437G	-34.55	-20.65	-13.90	1
6.86249G	-0.49	6.8439G	-34.02	-20.49	-13.53	2

802.11a_Nss1,(6Mbps)_2TX

6875MHz_TX

MASK

11/10/2022

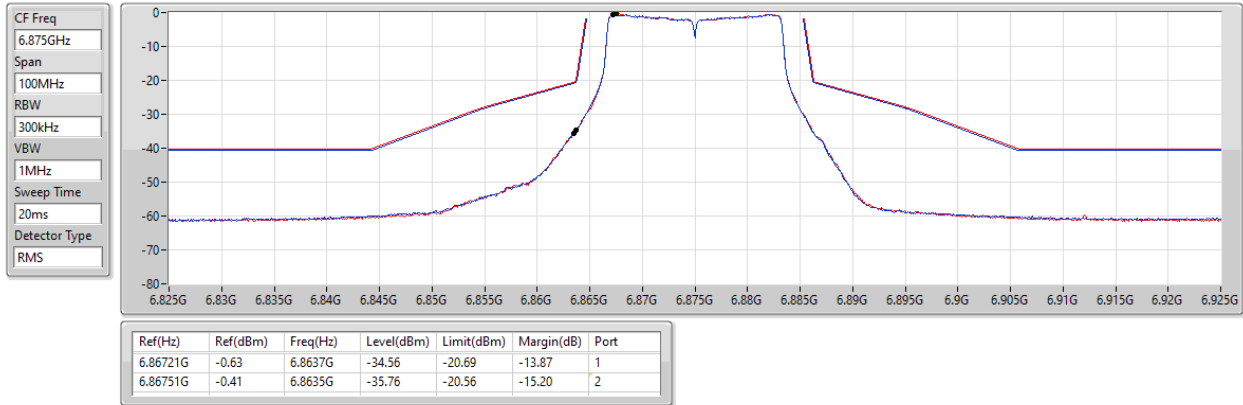


802.11a_Nss1,(6Mbps)_2TX

6895MHz_TX

MASK

11/10/2022

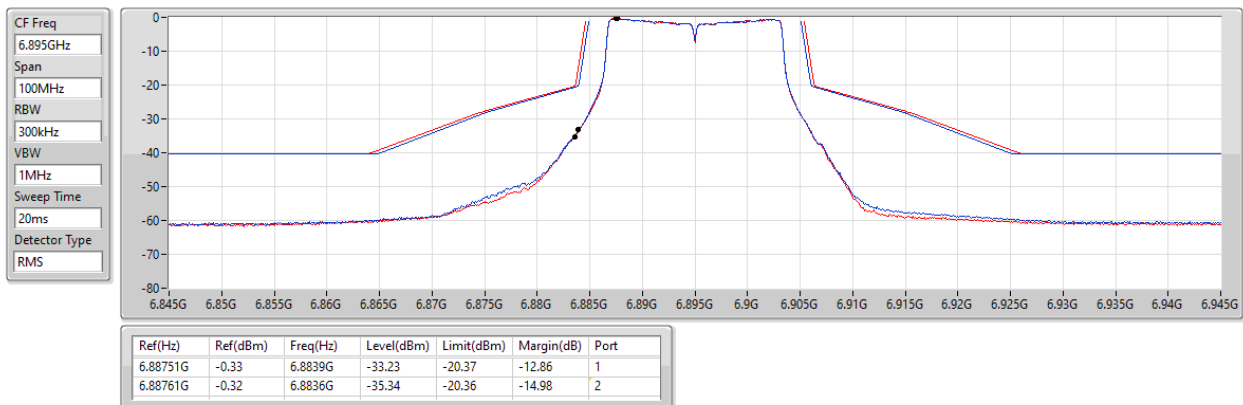


802.11a_Nss1,(6Mbps)_2TX

6995MHz_TX

MASK

11/10/2022

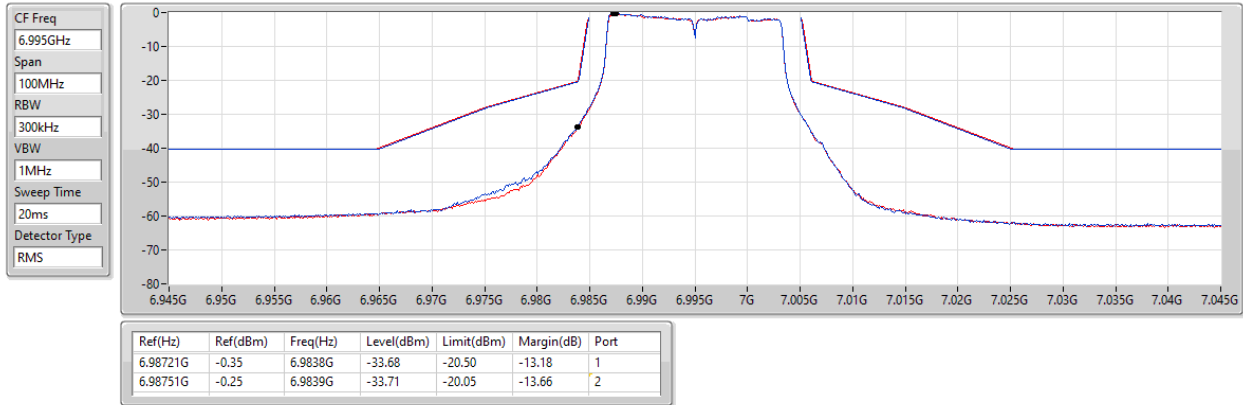


802.11a_Nss1,(6Mbps)_2TX

7095MHz_TX

MASK

11/10/2022

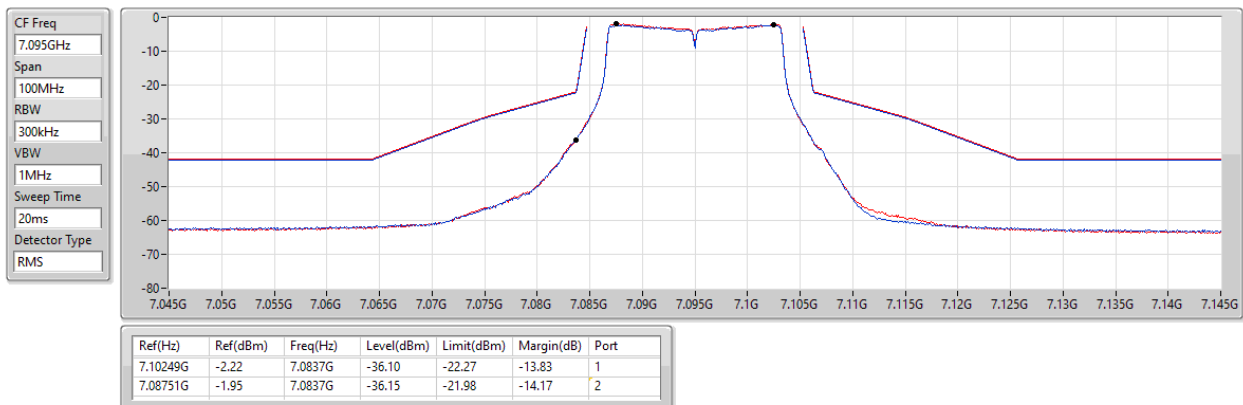

802.11a_Nss1,(6Mbps)_2TX

7115MHz_TX

MASK

11/10/2022

CF Freq
7.115GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

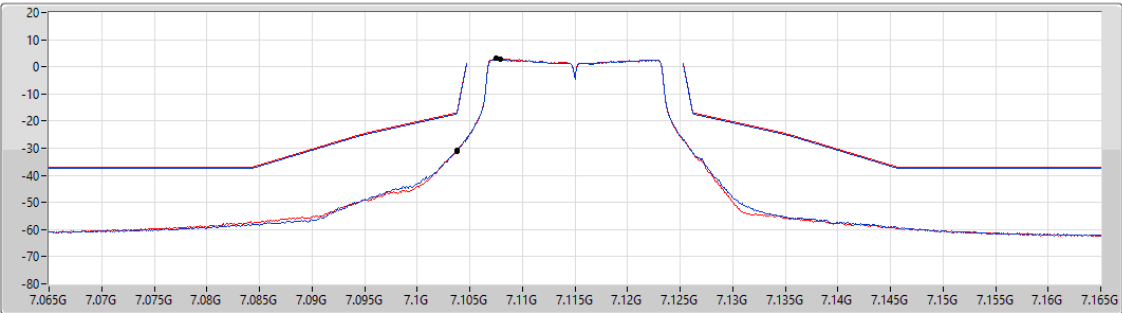

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.10791G	2.63	7.1038G	-30.68	-17.07	-13.61	1
7.10751G	3.05	7.1038G	-31.01	-16.65	-14.36	2

802.11ax HEW20_Nss1,(MCS0)_2TX

5935MHz_TX

MASK

07/09/2022

CF Freq
5.935GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

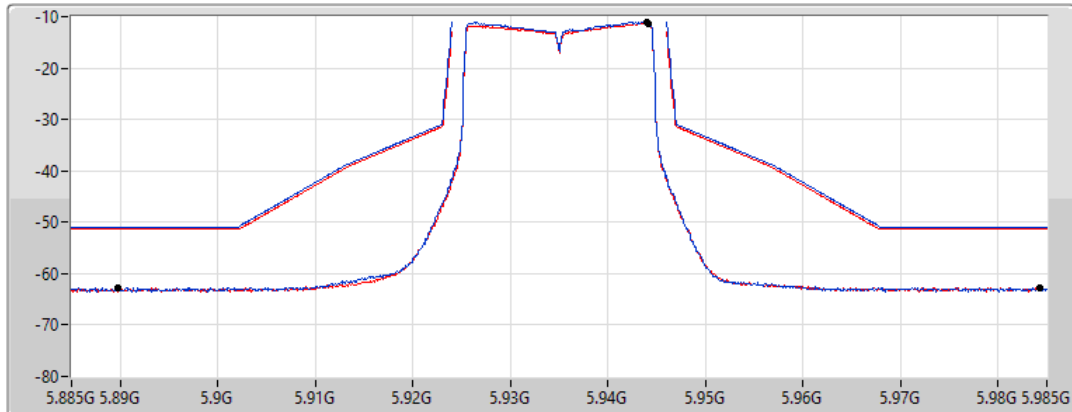

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.94399G	-10.97	5.9843G	-62.71	-50.97	-11.74	1
5.94409G	-11.33	5.8897G	-62.81	-51.33	-11.48	2

802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

07/09/2022

CF Freq
5.955GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

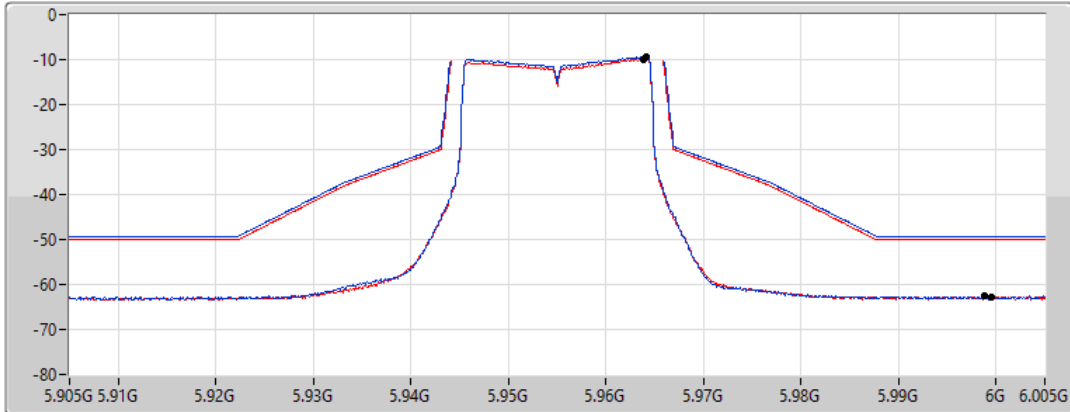

Port 1 

Port 2 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.96419G	-9.38	5.9996G	-62.67	-49.38	-13.29	1
5.96389G	-9.95	5.9988G	-62.47	-49.95	-12.52	2

802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6175MHz_TX

07/09/2022

CF Freq
6.175GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

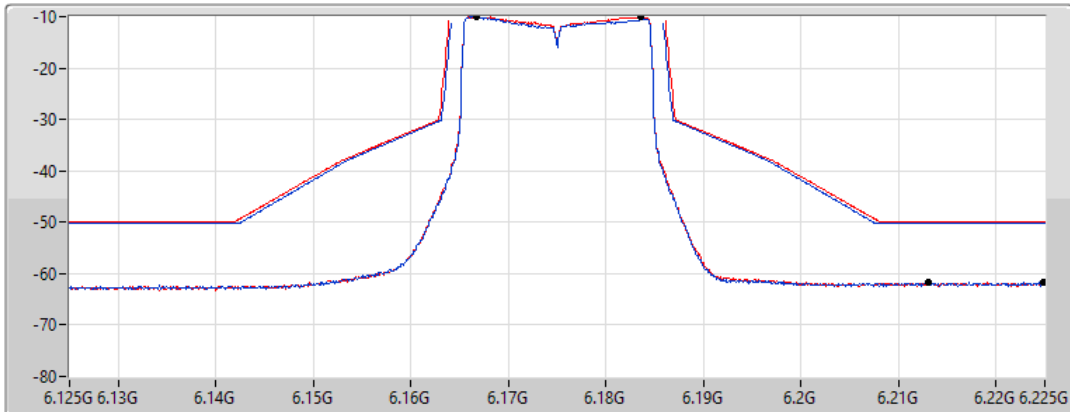

Port 1 

Port 2 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.16671G	-10.08	6.213G	-61.72	-50.08	-11.64	1
6.18349G	-10.01	6.2249G	-61.75	-50.01	-11.74	2


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

07/09/2022

CF Freq
6.415GHz
Span
100MHz
RBW
300kHz
VBW
1MHz
Sweep Time
20ms
Detector Type
RMS

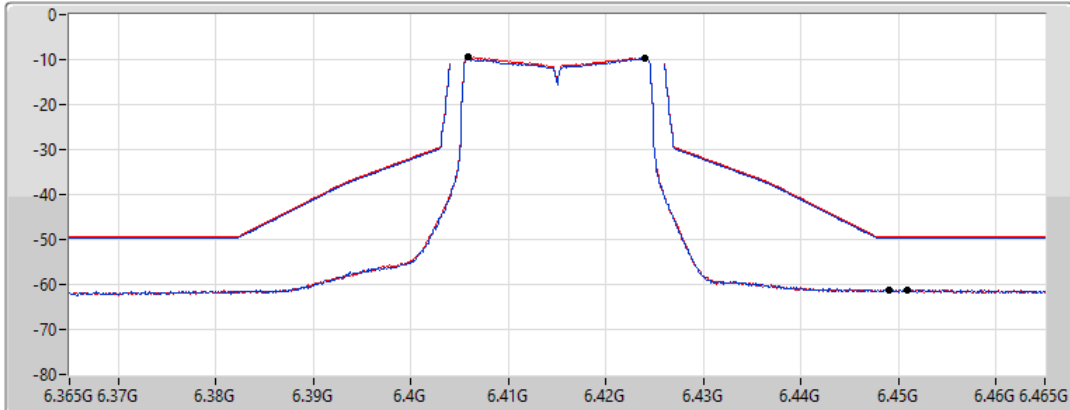

Port 1
Port 2

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.42399G	-9.71	6.4509G	-61.17	-49.71	-11.46	1
6.40581G	-9.40	6.449G	-61.24	-49.40	-11.84	2


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6435MHz_TX

07/09/2022

CF Freq
6.435GHz
Span
100MHz
RBW
300kHz
VBW
1MHz
Sweep Time
20ms
Detector Type
RMS

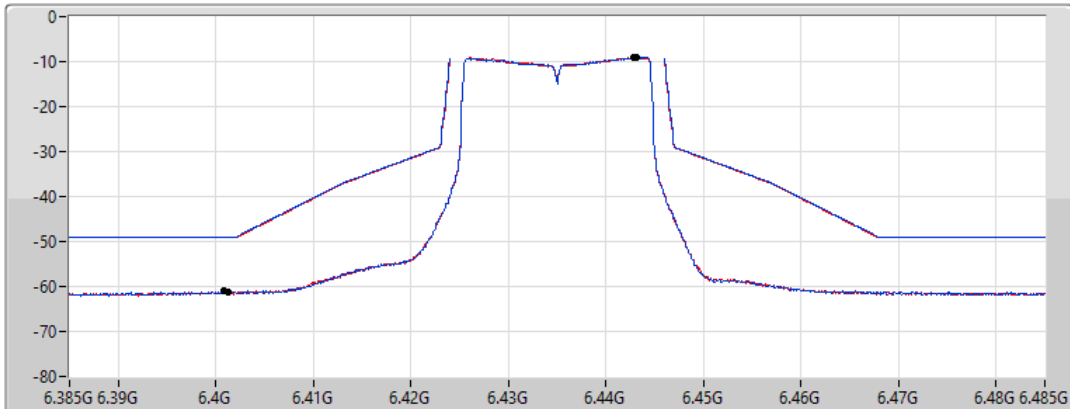

Port 1
Port 2


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.44319G	-8.98	6.4012G	-61.20	-48.98	-12.22	1
6.44279G	-9.06	6.4008G	-61.03	-49.06	-11.97	2

802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6475MHz_TX

07/09/2022

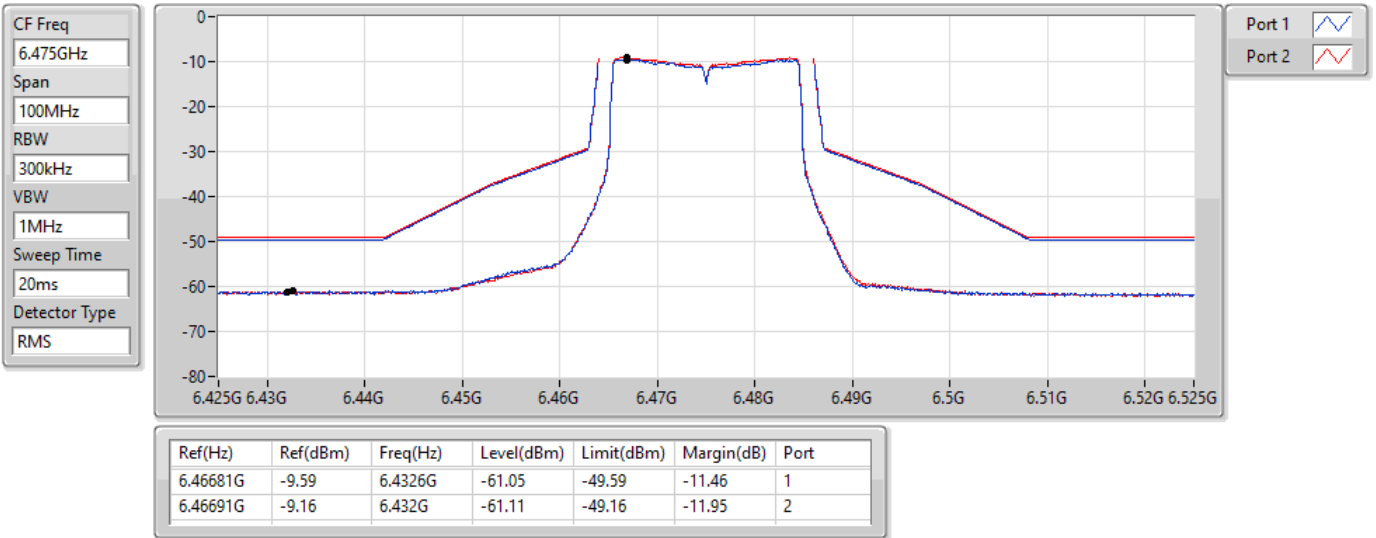


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6515MHz_TX

07/09/2022

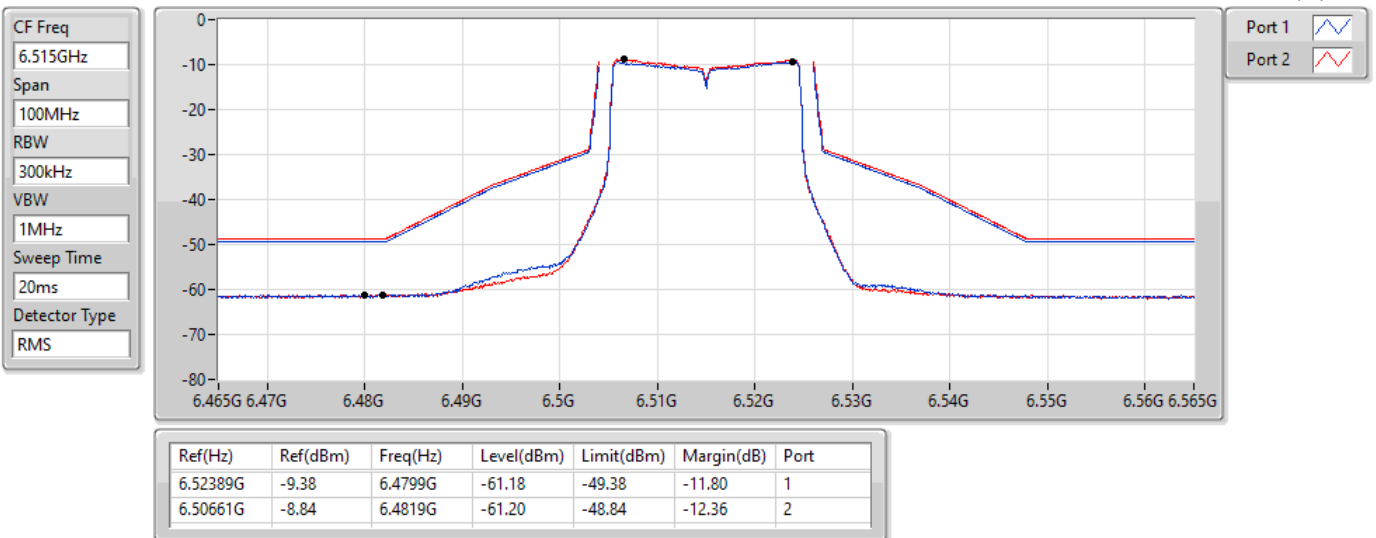


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

07/09/2022

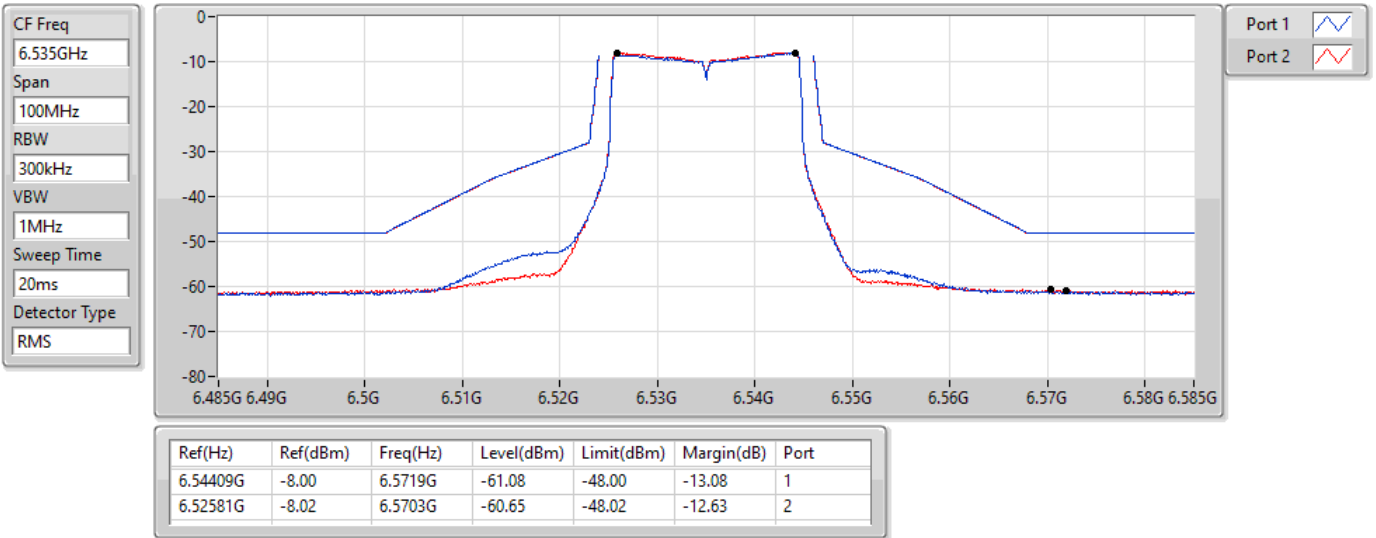


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6695MHz_TX

07/09/2022

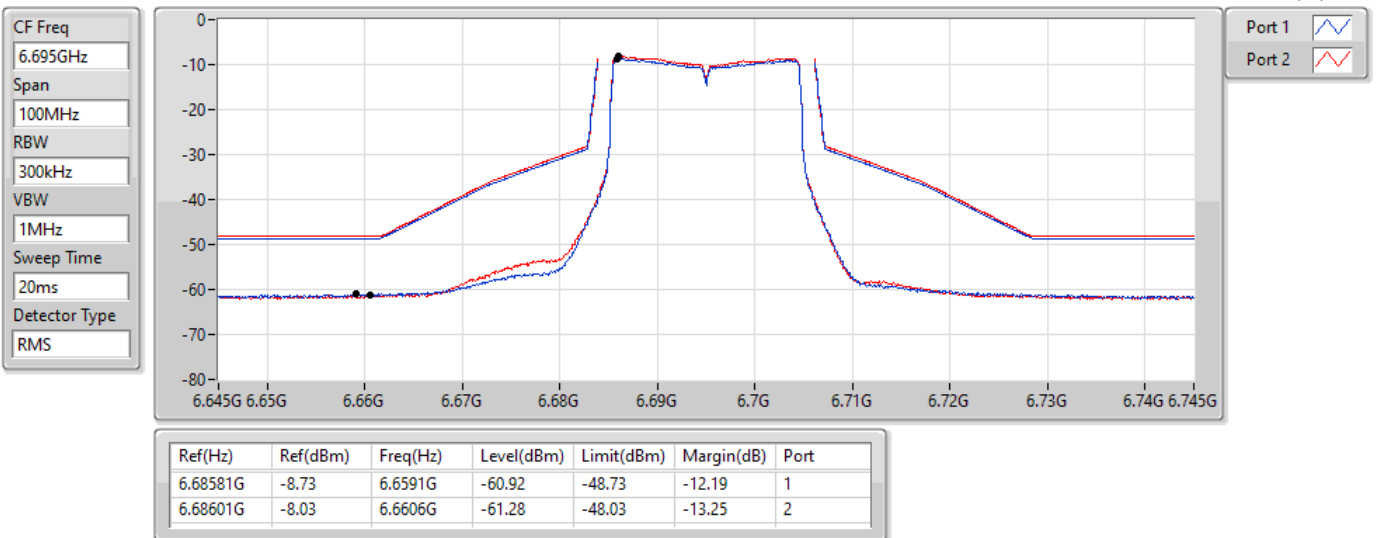


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6855MHz_TX

07/09/2022

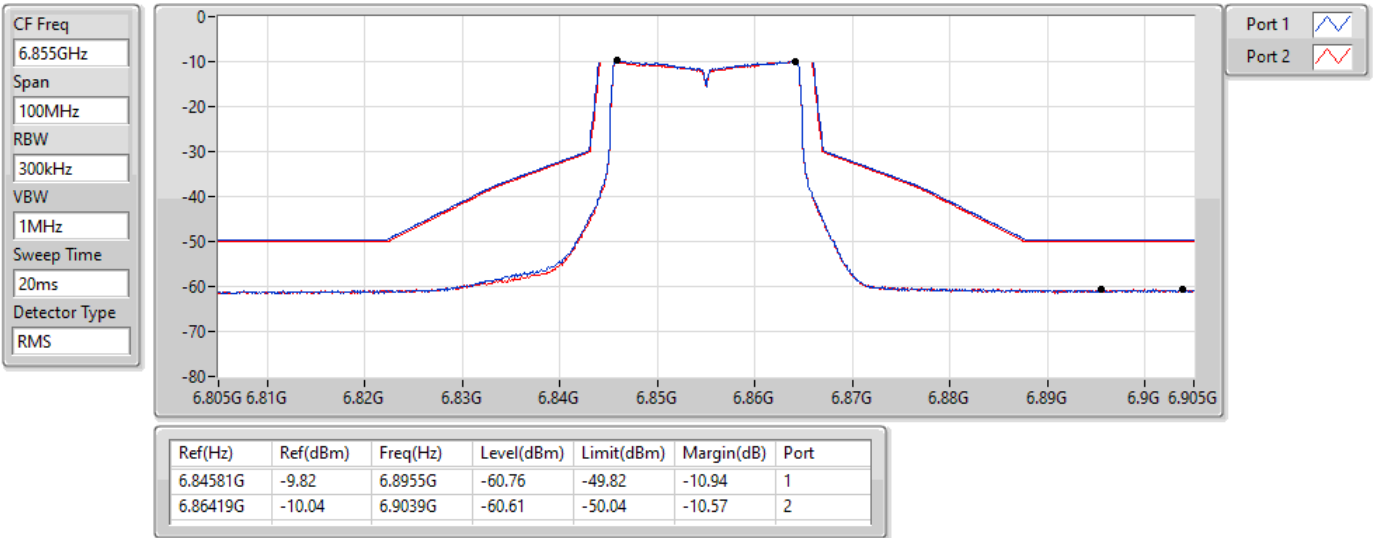


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6875MHz_TX

07/09/2022

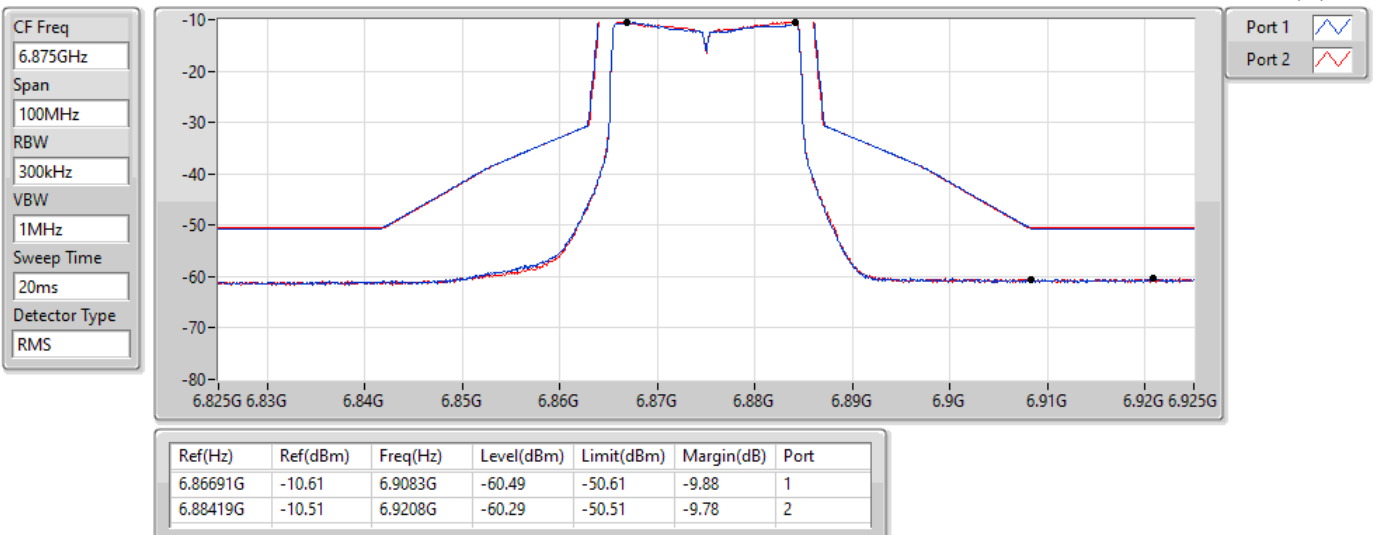


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6895MHz_TX

07/09/2022

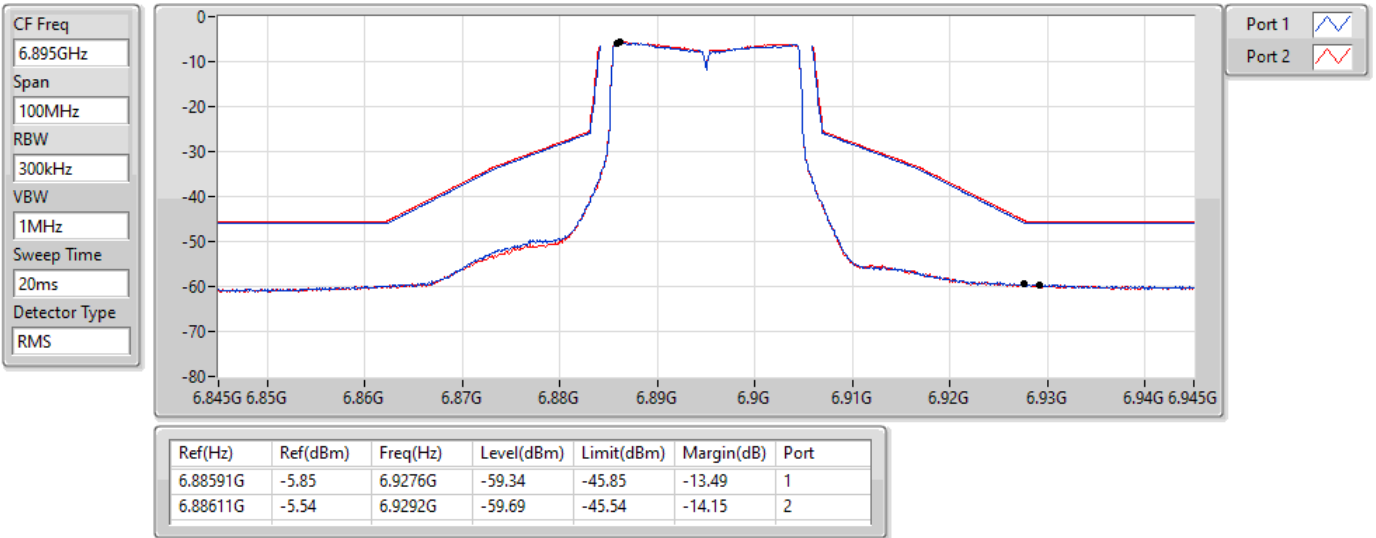


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6995MHz_TX

07/09/2022

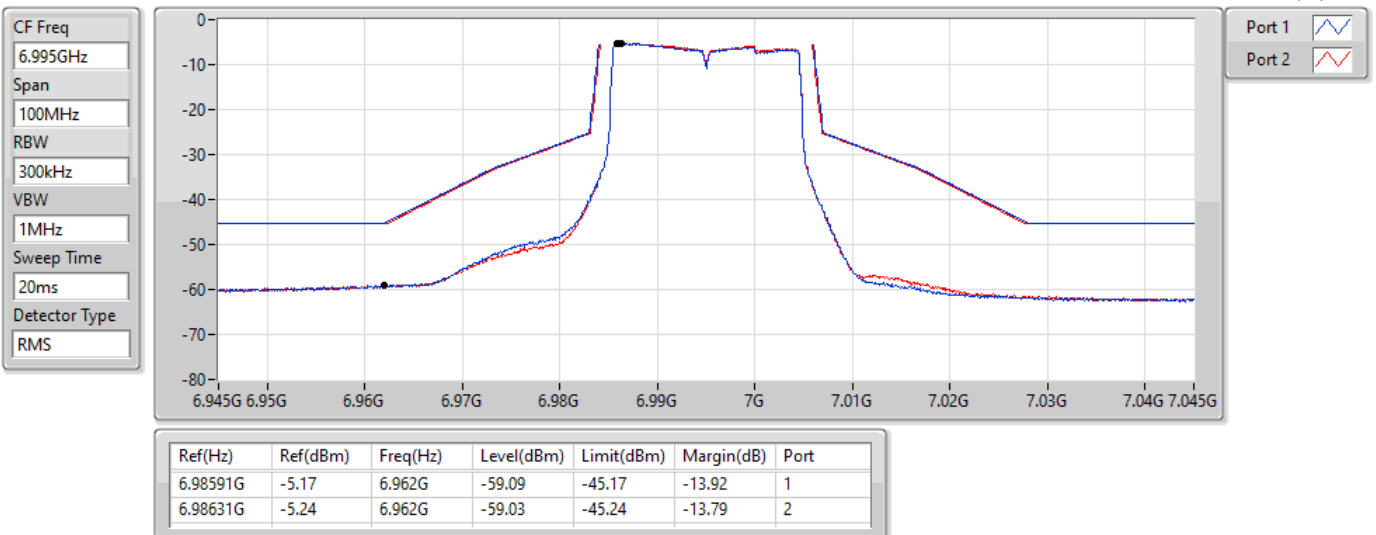


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

7095MHz_TX

07/09/2022

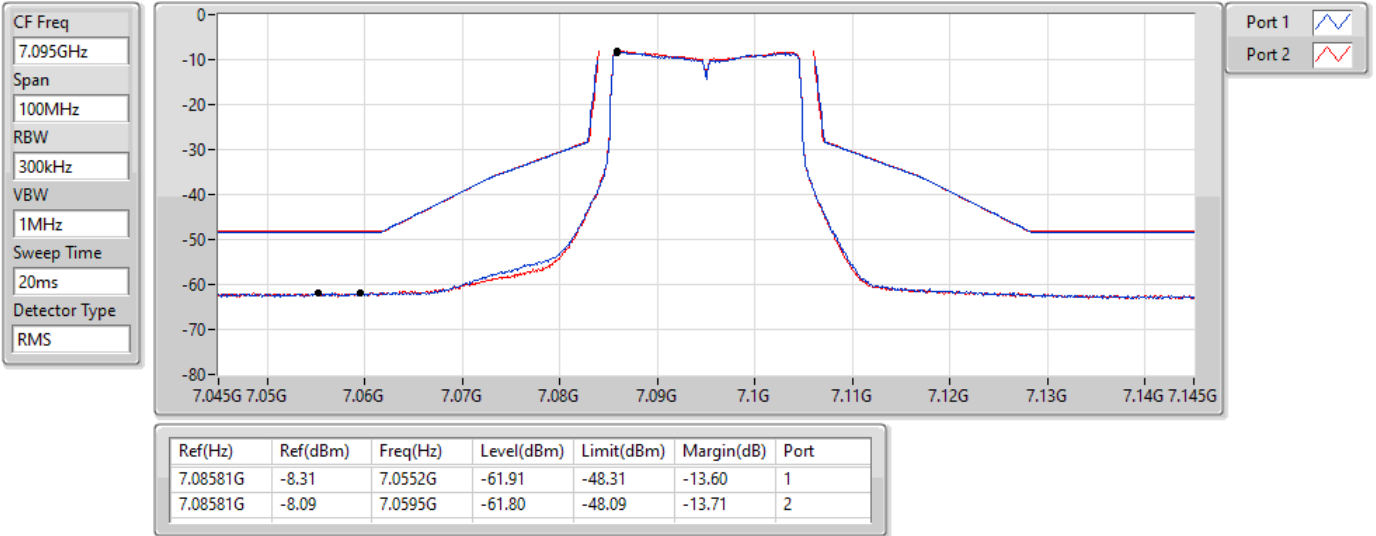


802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

7115MHz_TX

07/09/2022

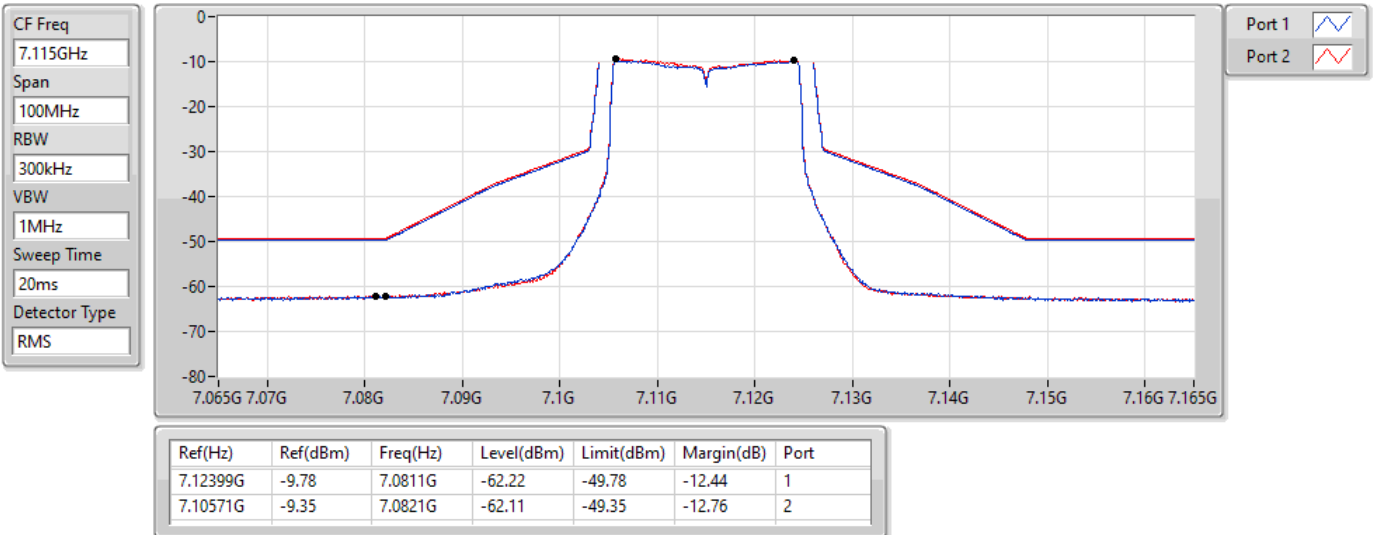


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

07/09/2022

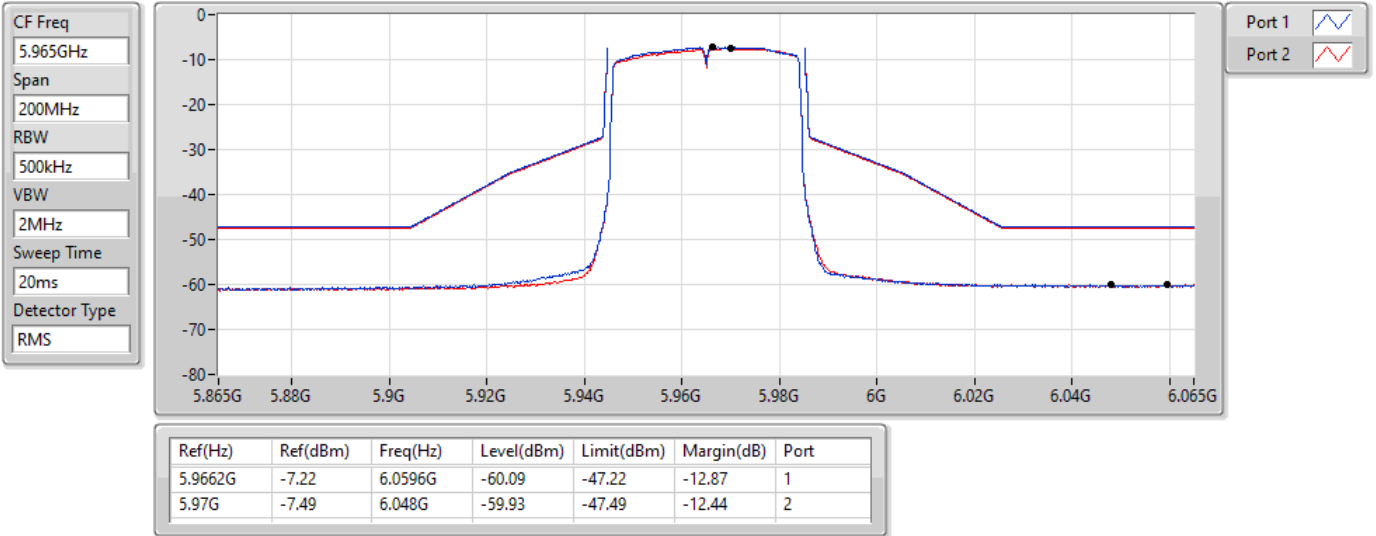


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6165MHz_TX

07/09/2022

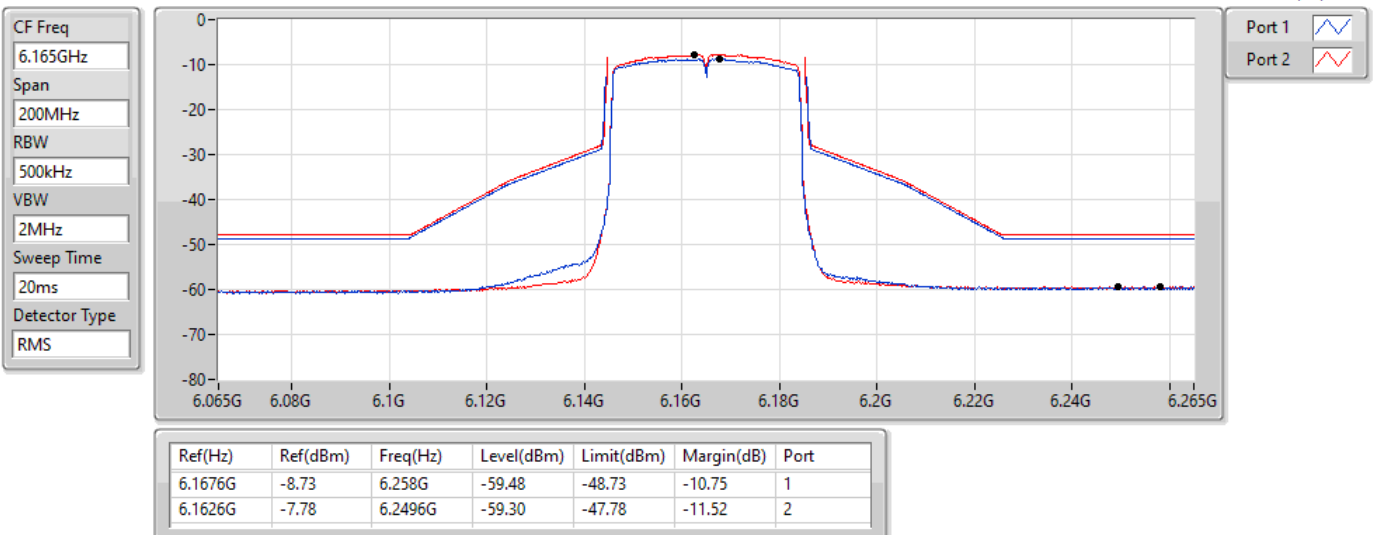


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

07/09/2022

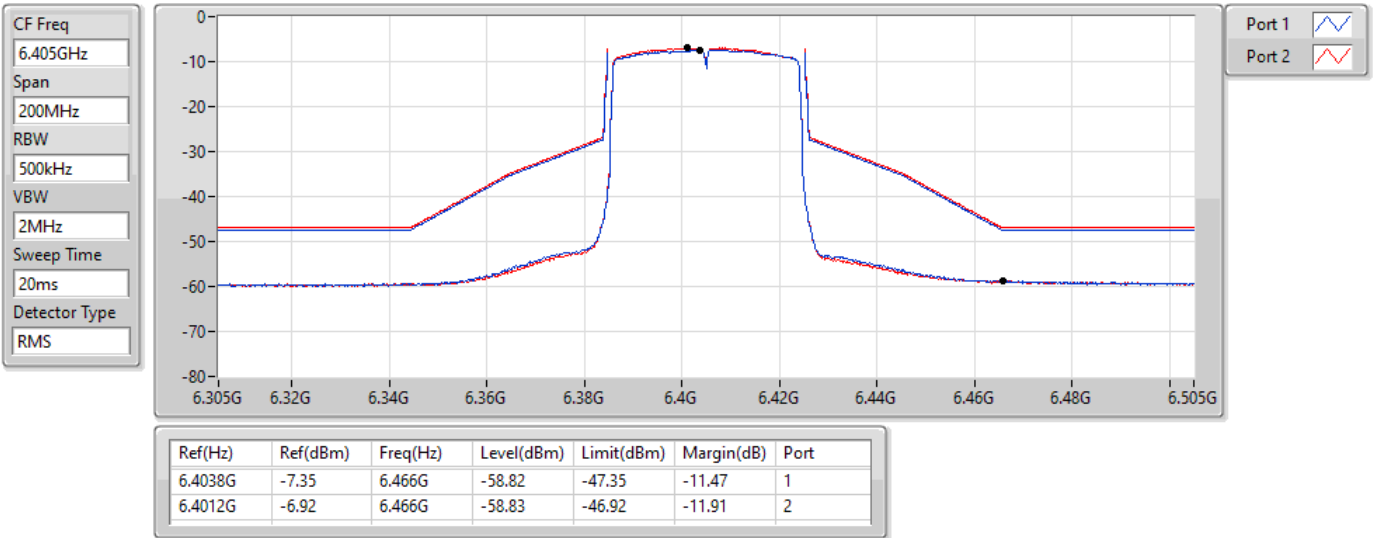


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6445MHz_TX

07/09/2022

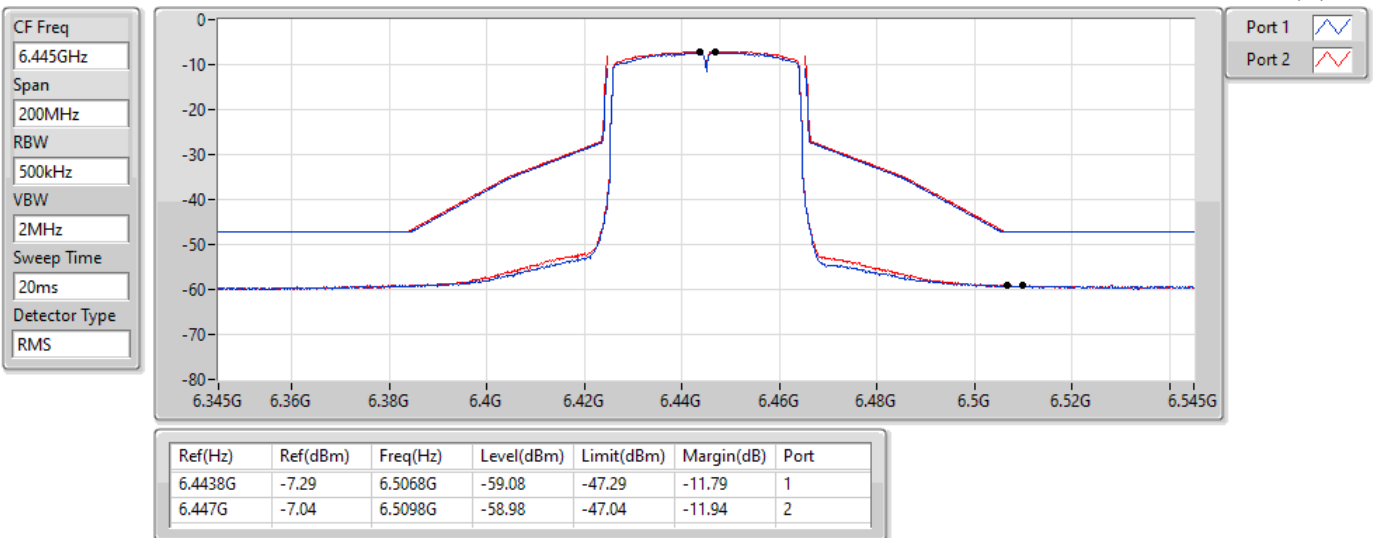


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6485MHz_TX

07/09/2022

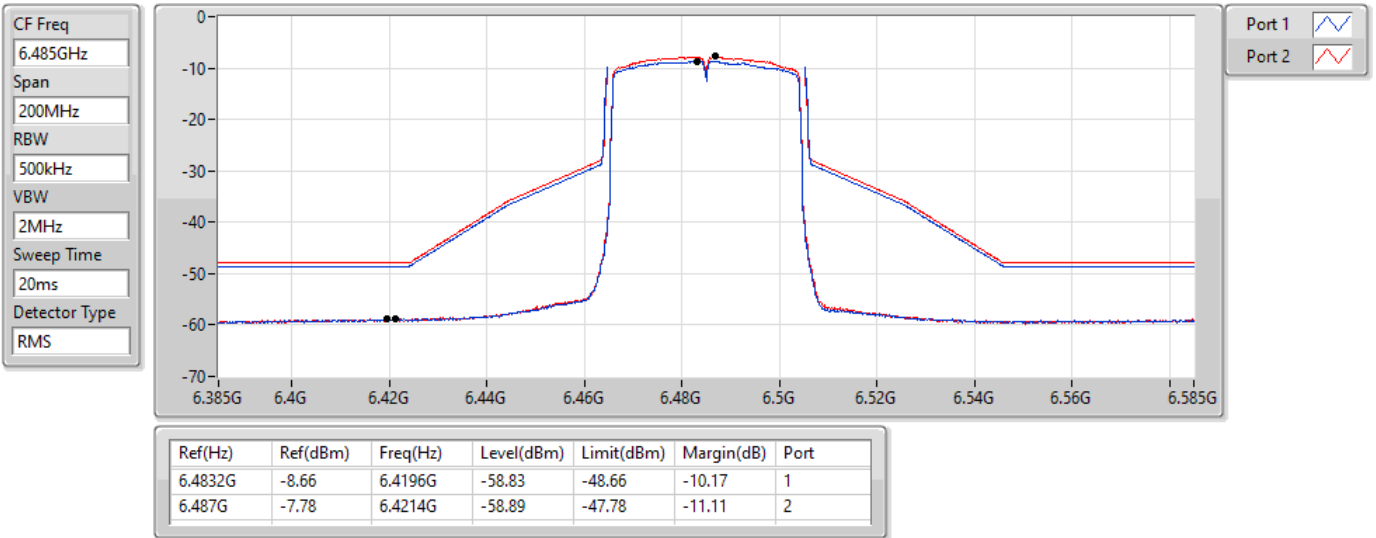


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6525MHz_TX

07/09/2022

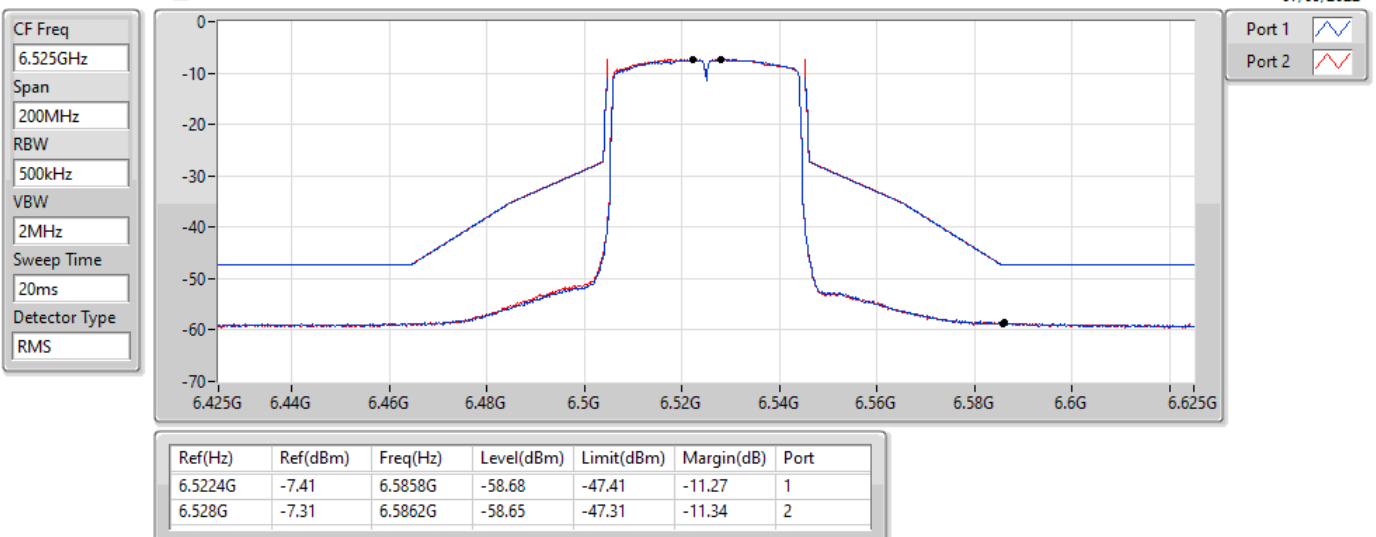


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6565MHz_TX

07/09/2022

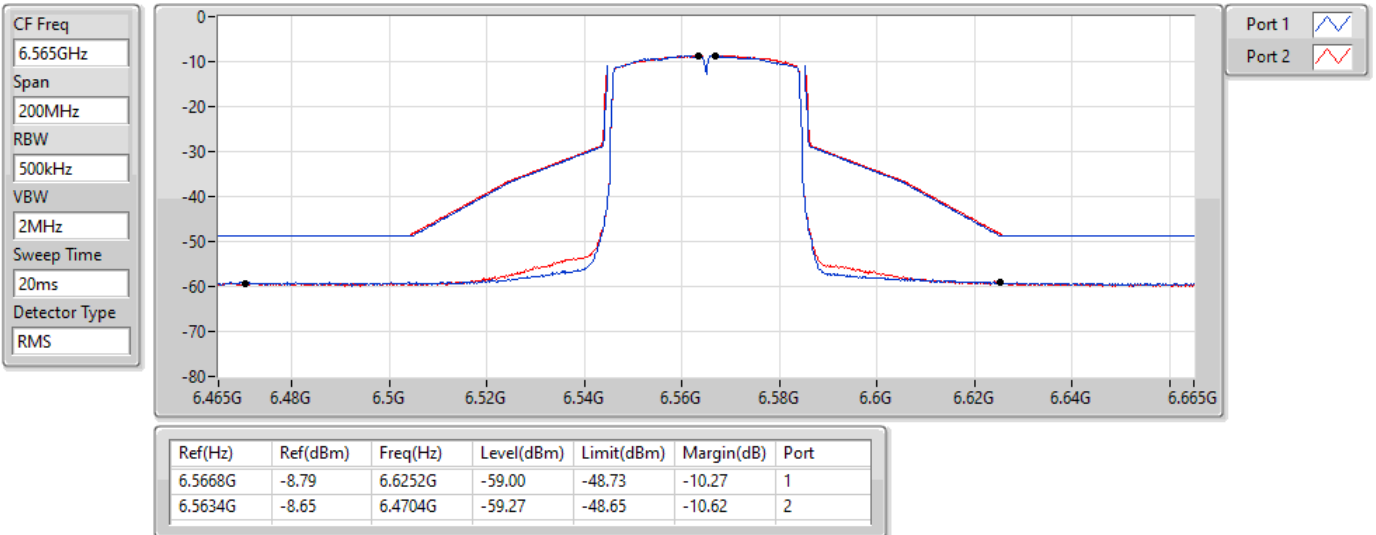


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6685MHz_TX

07/09/2022

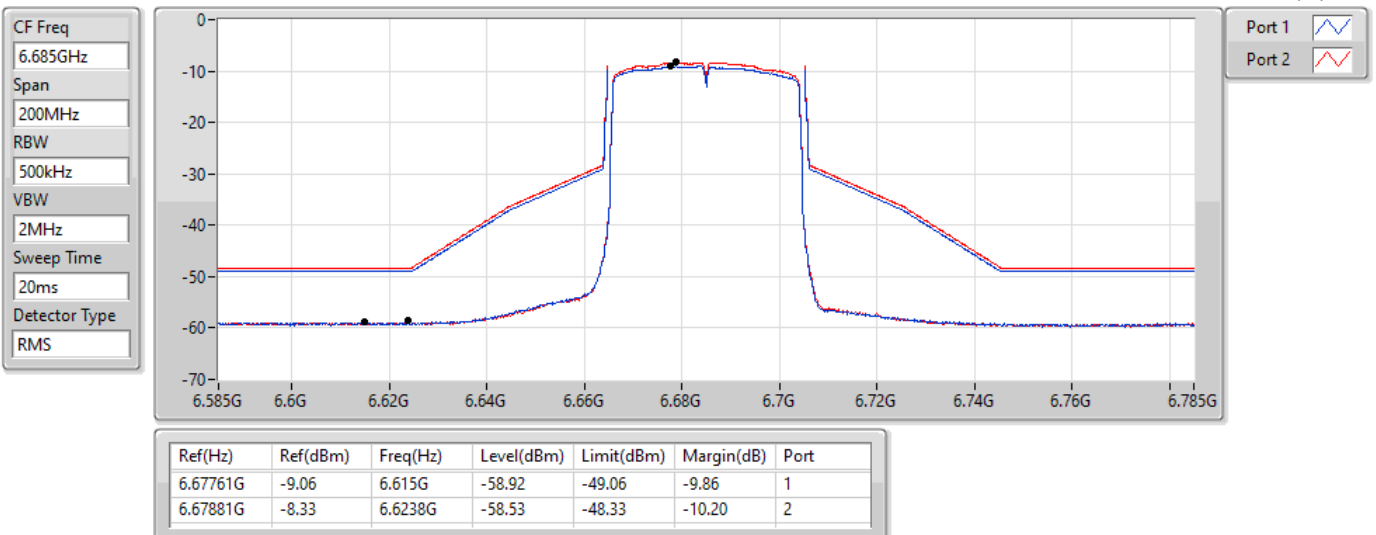


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6845MHz_TX

07/09/2022

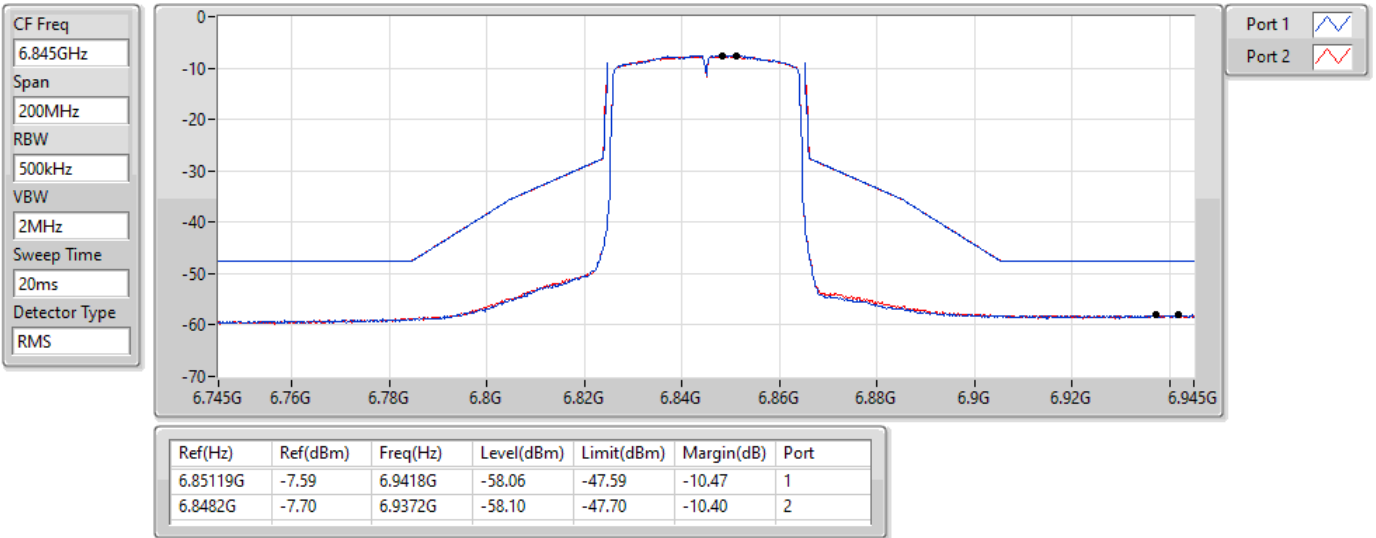


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6885MHz_TX

07/09/2022

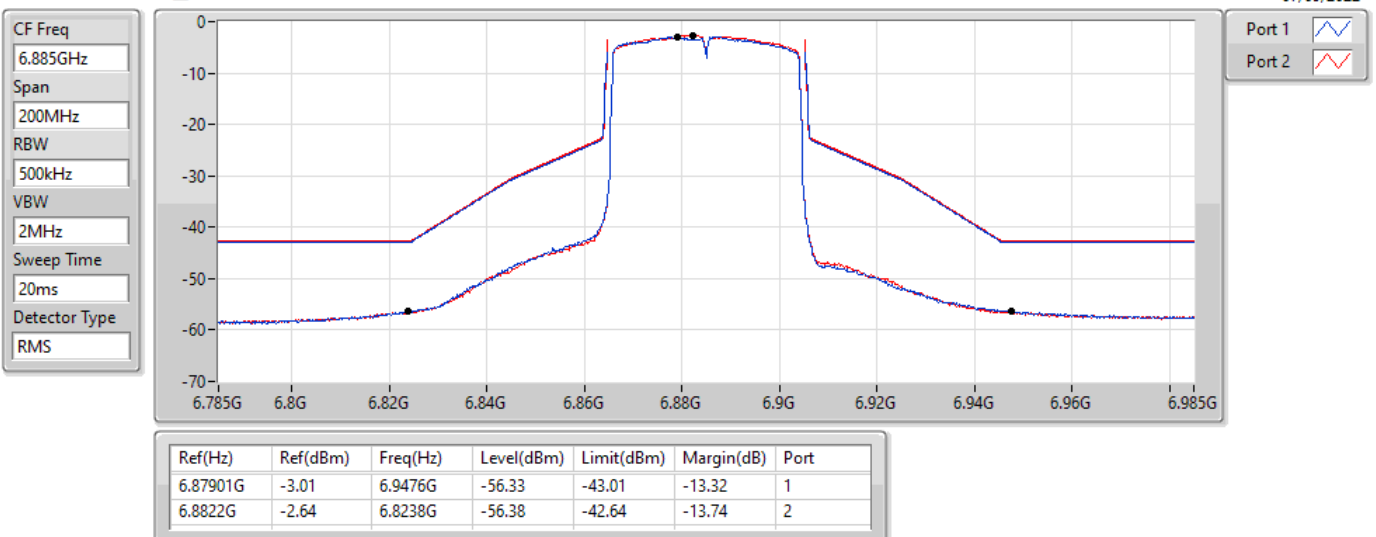


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6925MHz_TX

07/09/2022

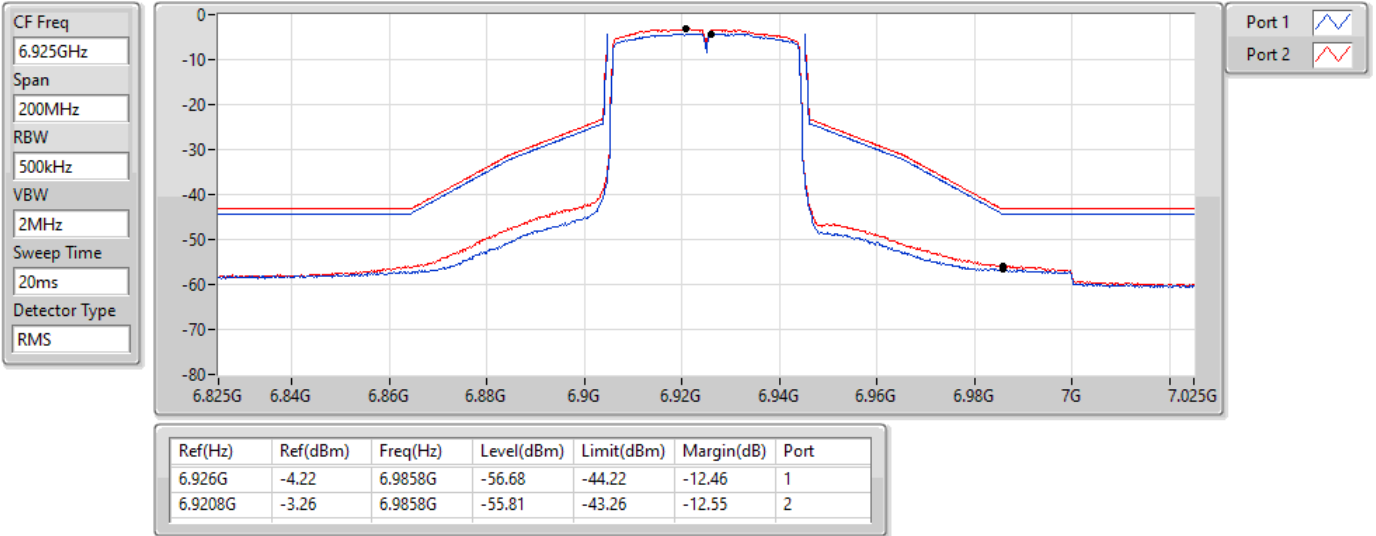


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

7005MHz_TX

07/09/2022

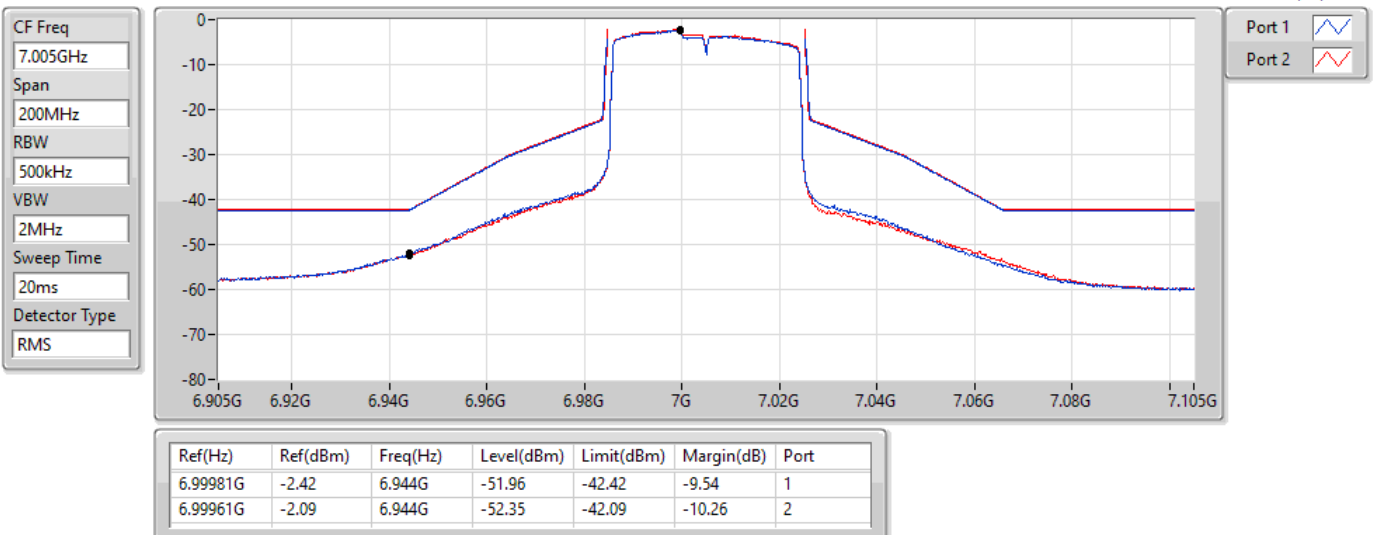


802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

7085MHz_TX

07/09/2022

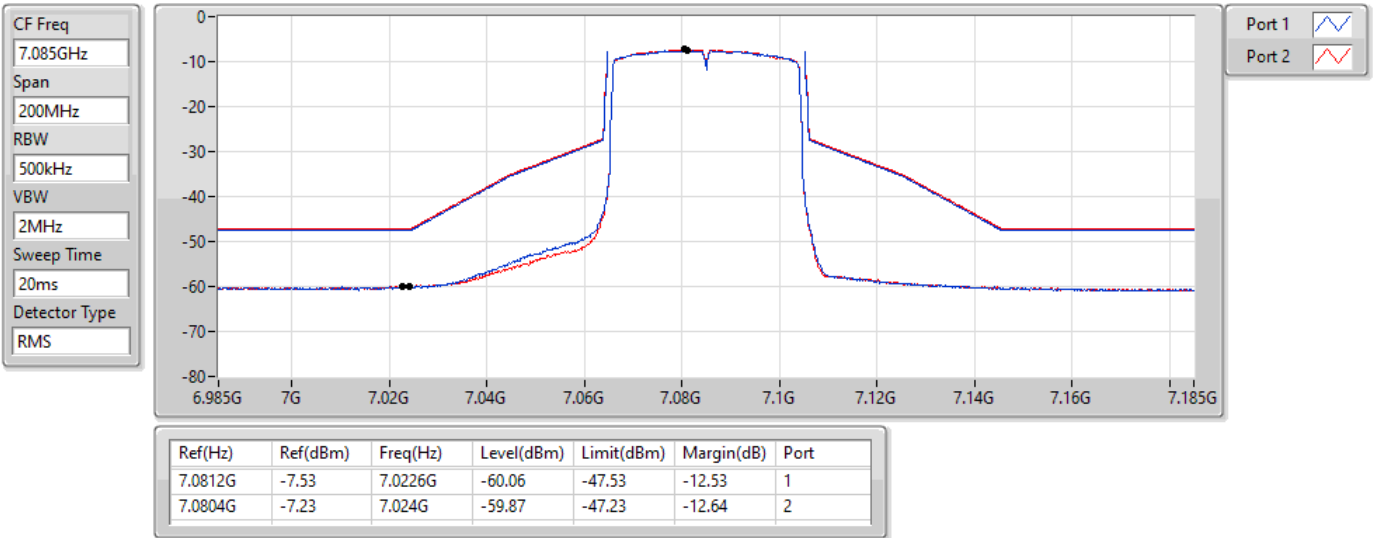


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

5985MHz_TX

07/09/2022

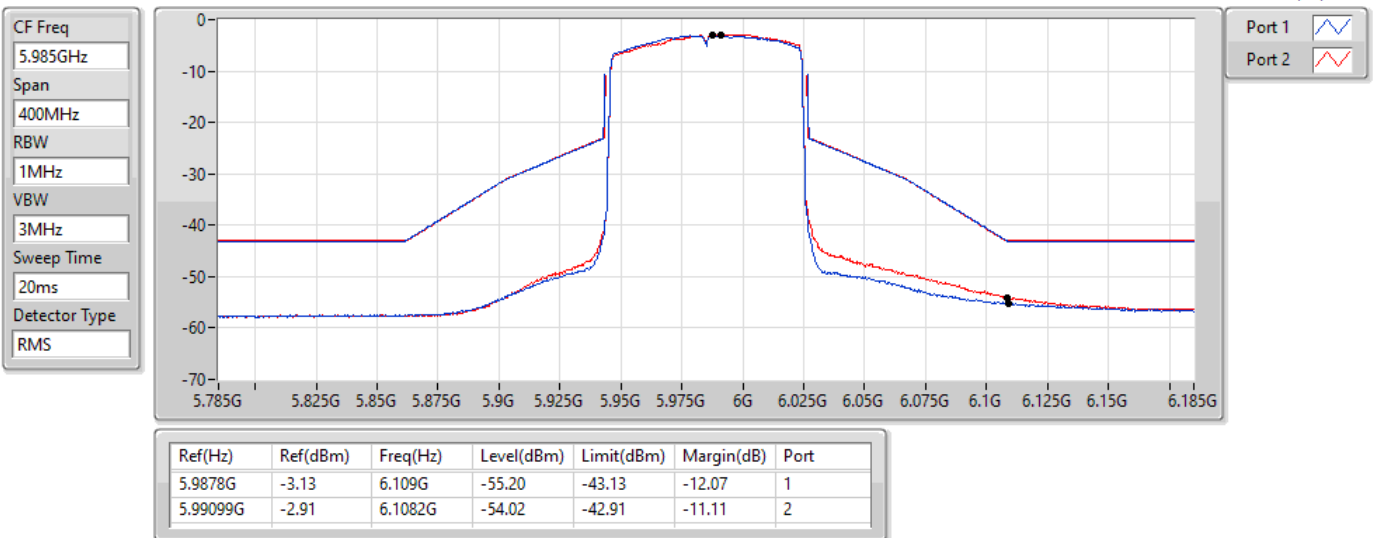


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6145MHz_TX

07/09/2022

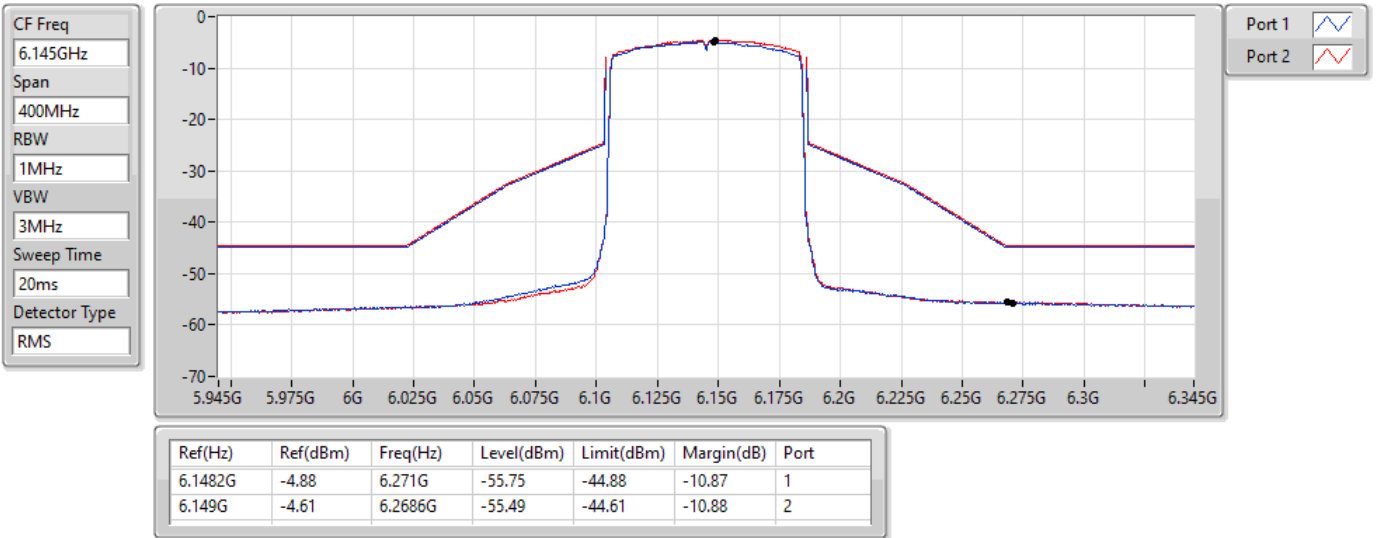


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

07/09/2022

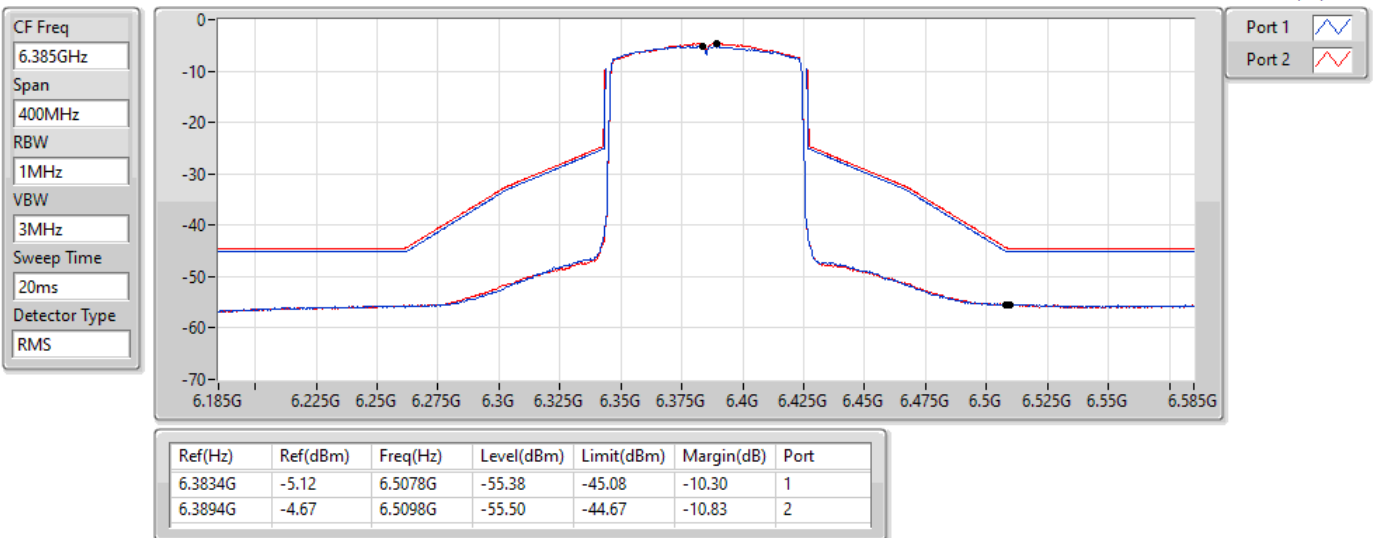


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6465MHz_TX

07/09/2022

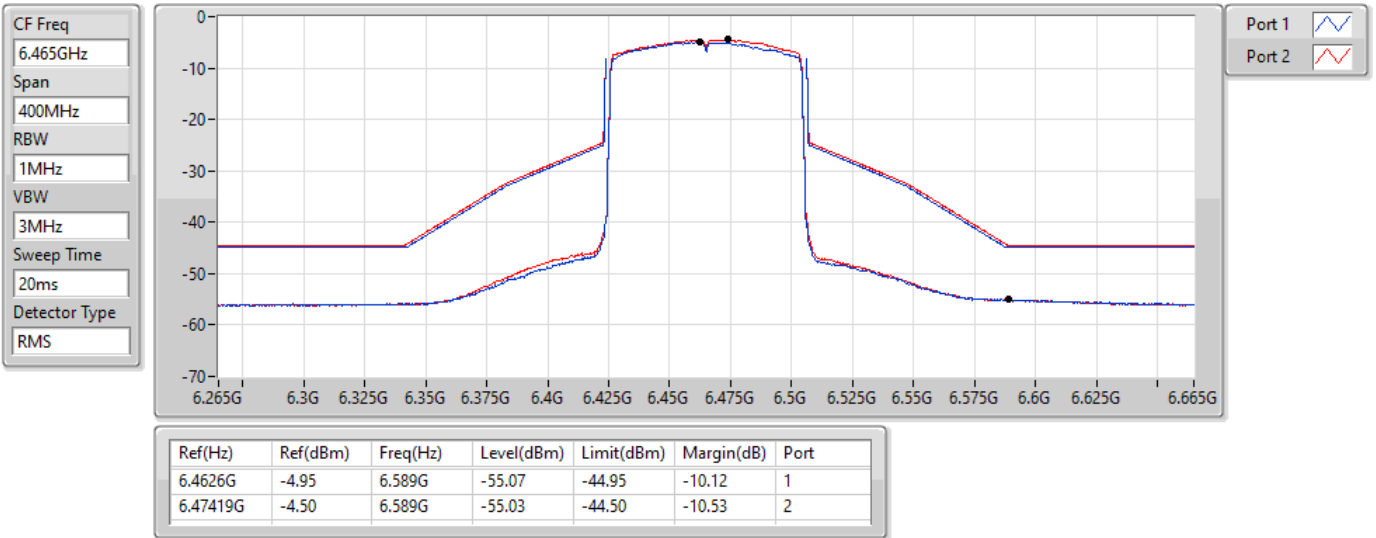


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6545MHz_TX

07/09/2022

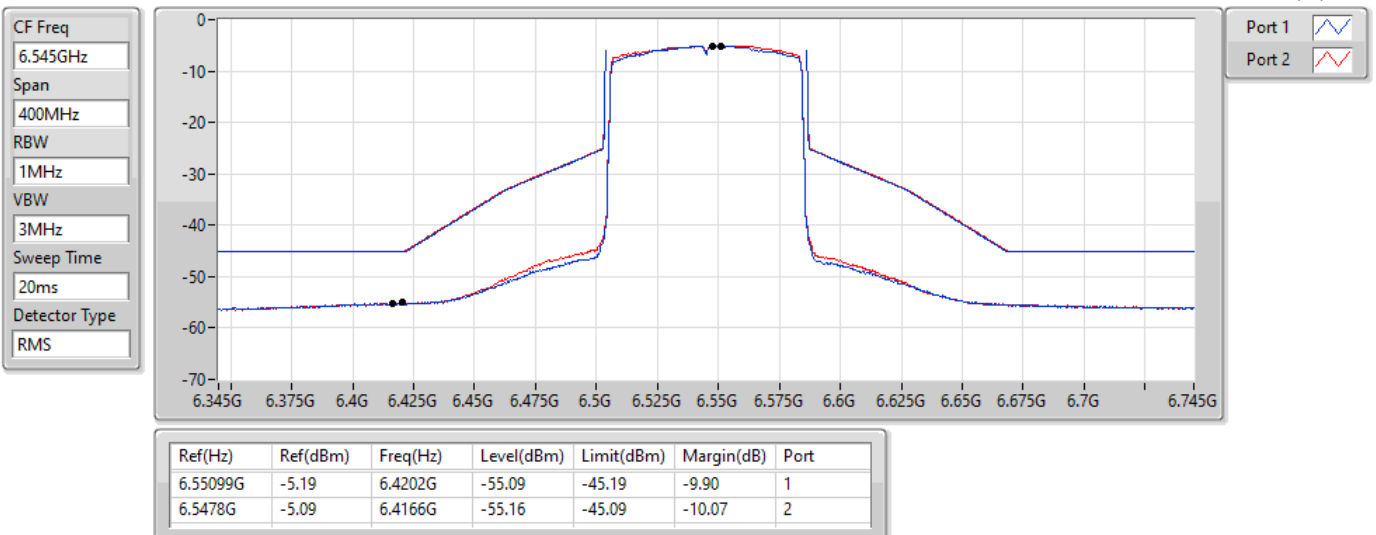

802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6625MHz_TX

07/09/2022

CF Freq
6.625GHz


Span
400MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

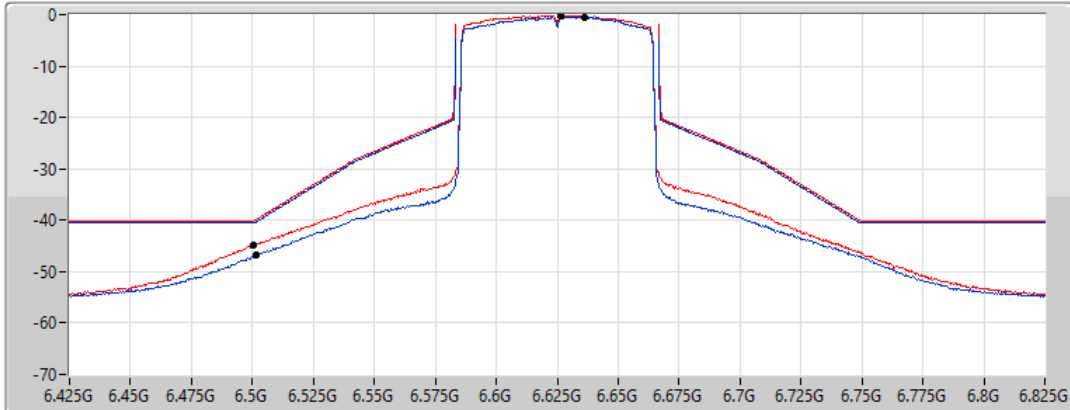

Port 1 

Port 2 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.63619G	-0.54	6.5014G	-46.67	-40.37	-6.30	1
6.6262G	-0.20	6.5006G	-44.75	-40.15	-4.60	2

802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6705MHz_TX

07/09/2022

CF Freq
6.705GHz


Span
400MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

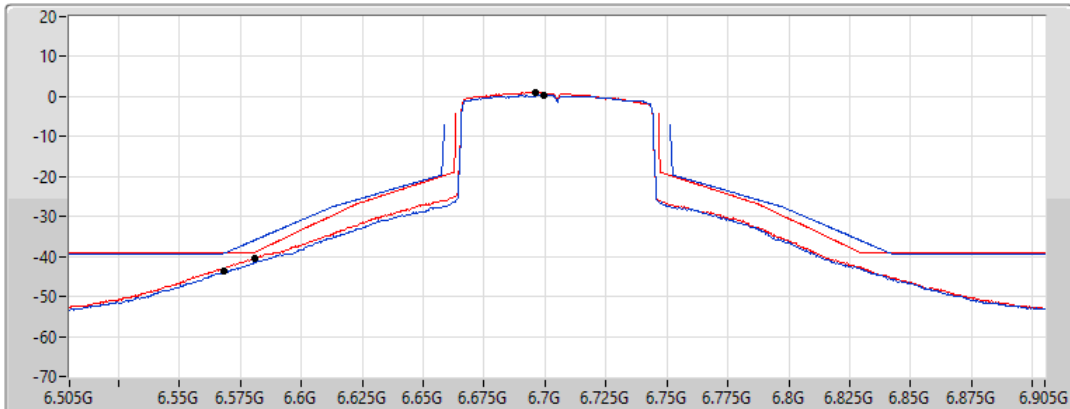

Port 1 

Port 2 


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.69981G	0.46	6.5682G	-43.73	-39.21	-4.52	1
6.69621G	1.06	6.581G	-40.41	-38.93	-1.48	2

802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6785MHz_TX

07/09/2022

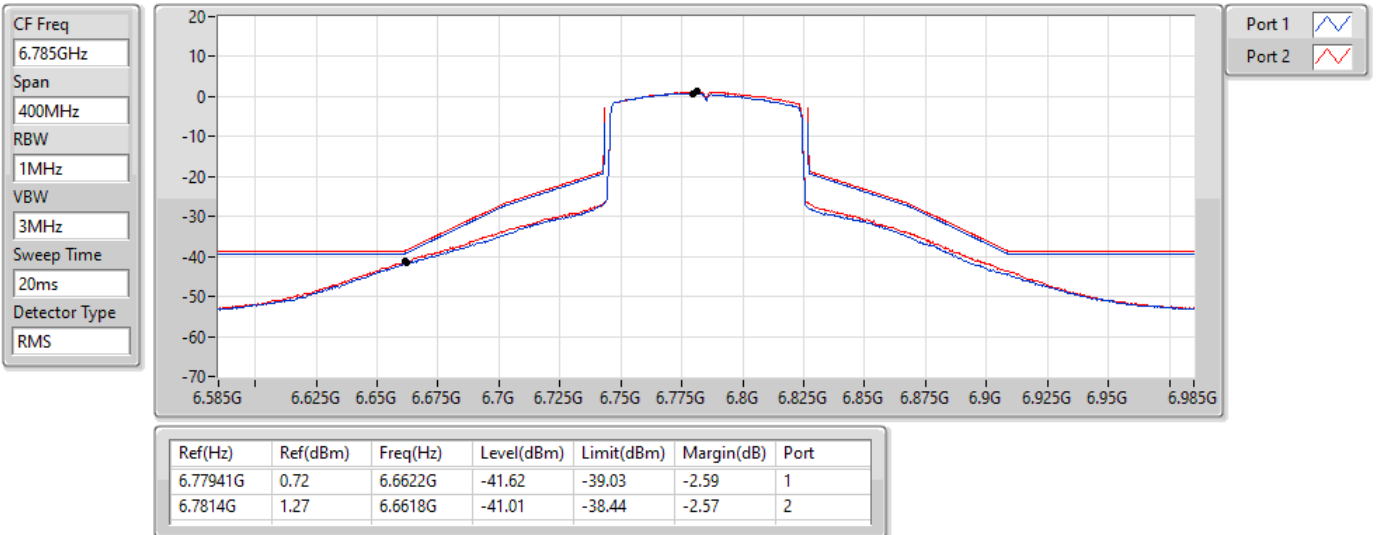


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6865MHz_TX

07/09/2022

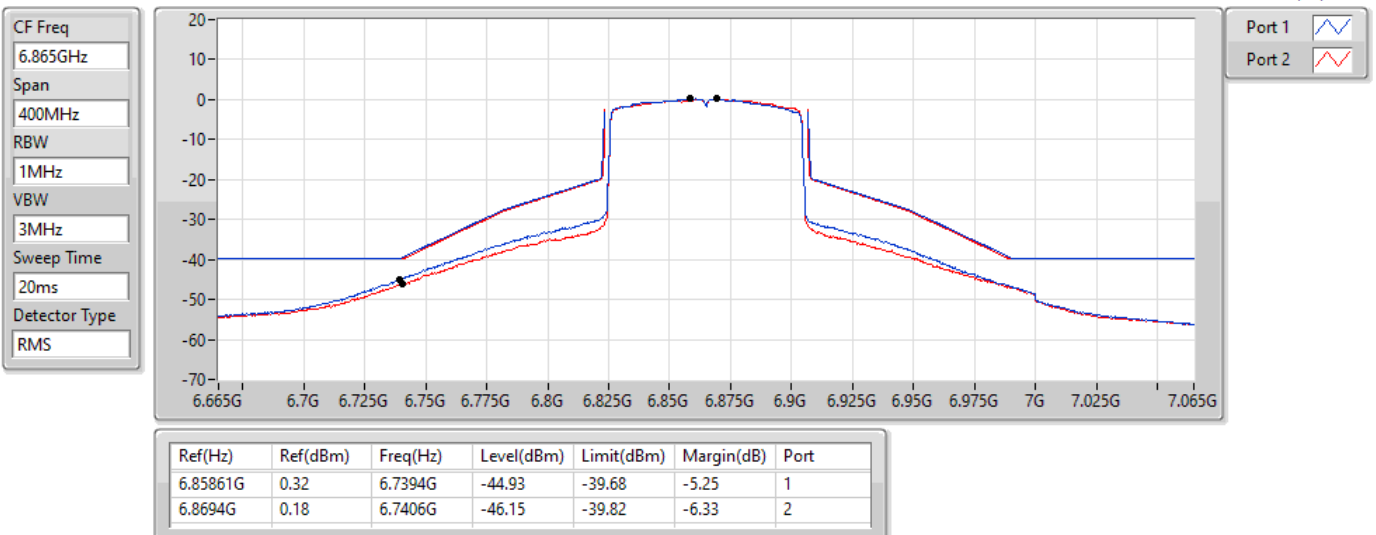


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

6945MHz_TX

07/09/2022

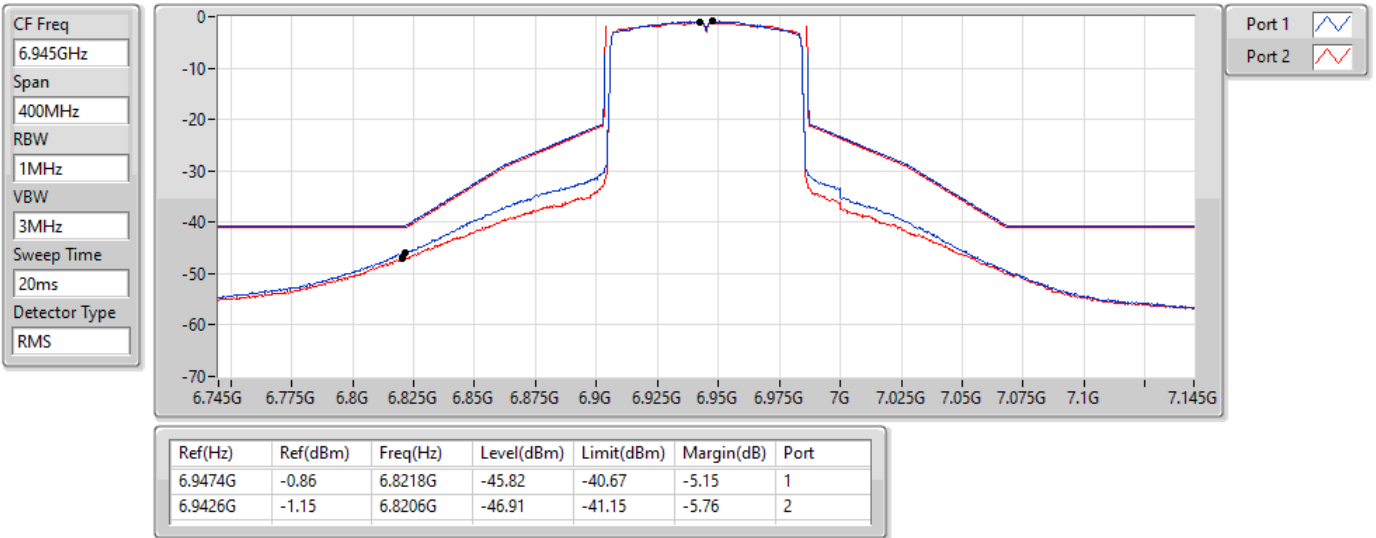


802.11ax HEW80_Nss1,(MCS0)_2TX

MASK

7025MHz_TX

07/09/2022

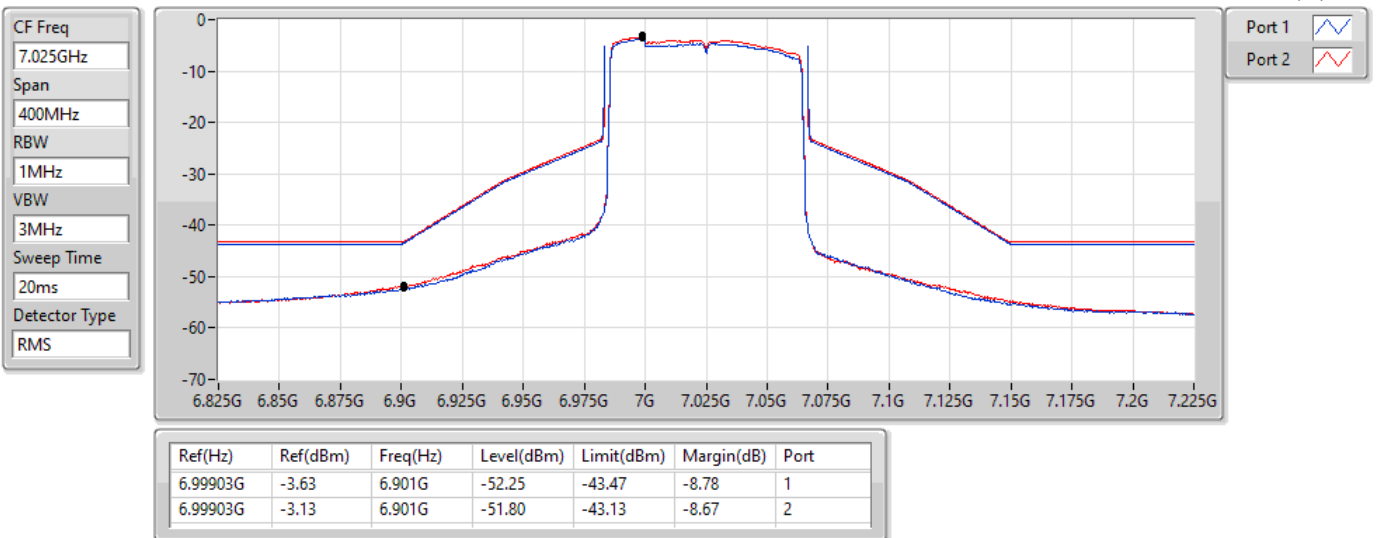


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6025MHz_TX

07/09/2022

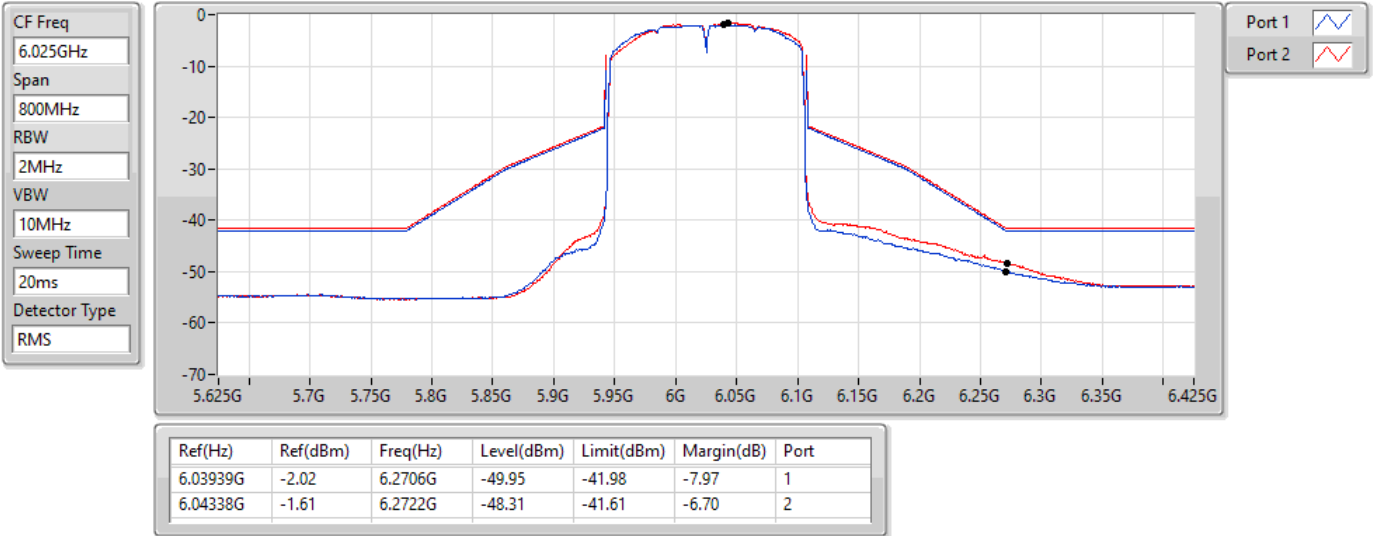


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6185MHz_TX

07/09/2022

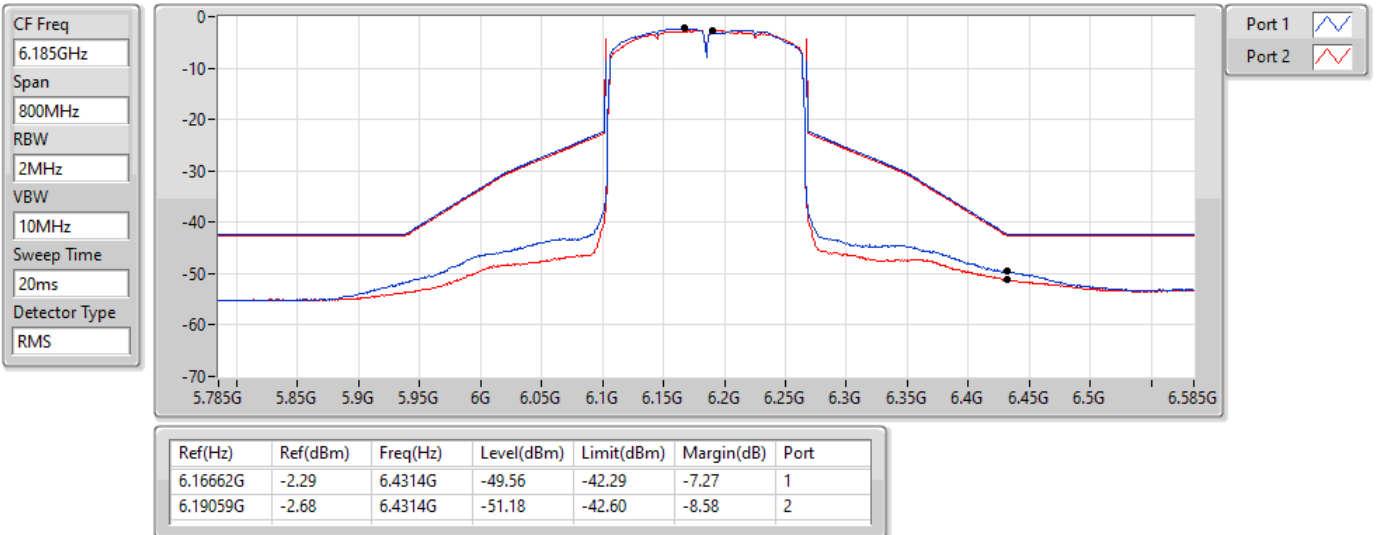


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

07/09/2022

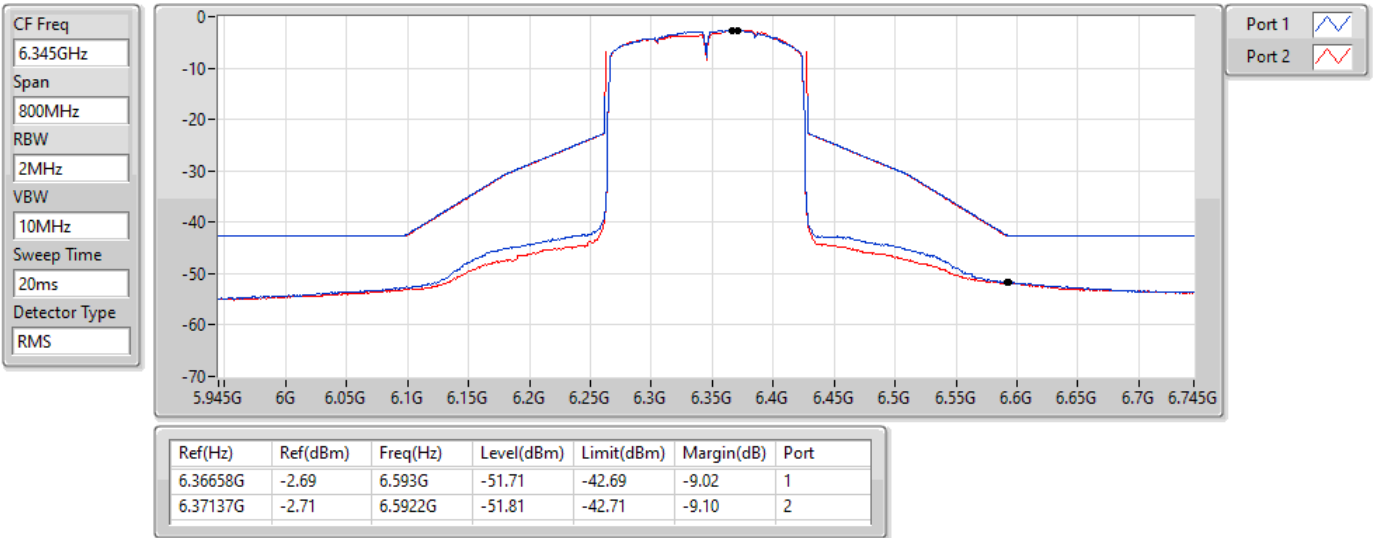


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6505MHz_TX

07/09/2022

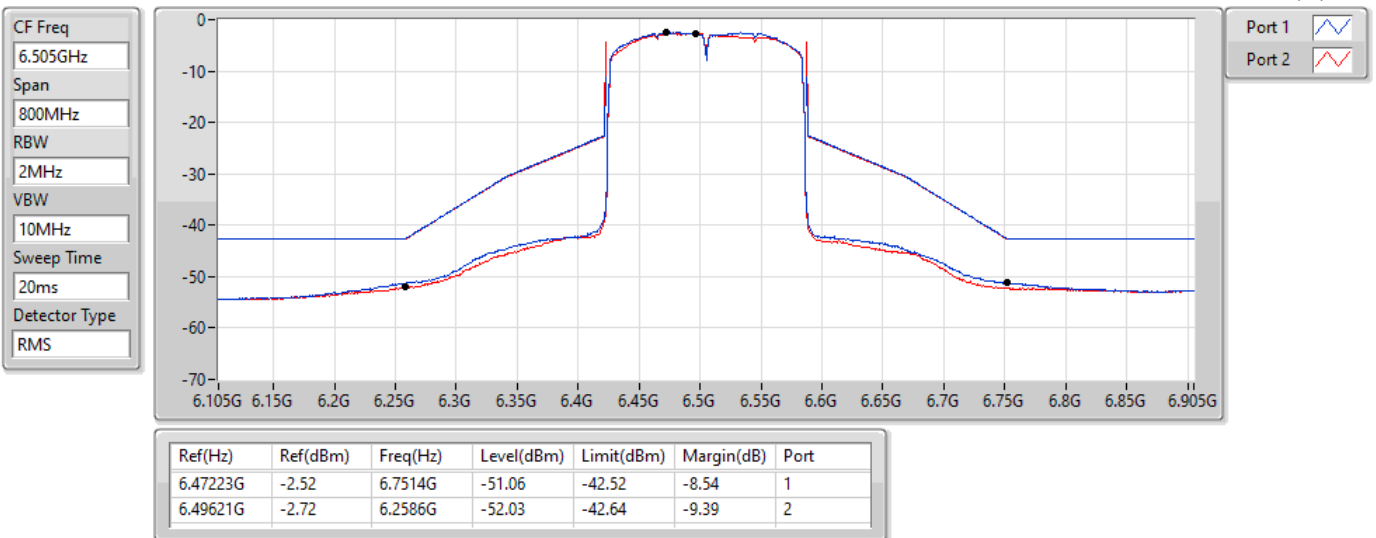


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

07/09/2022

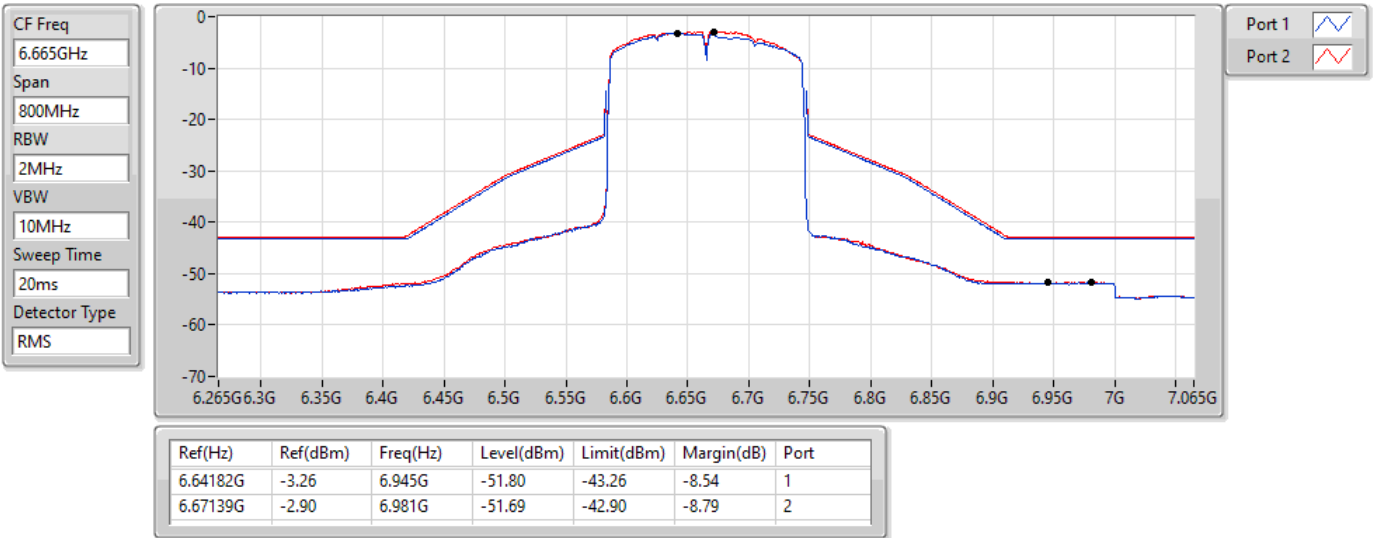


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6825MHz_TX

07/09/2022

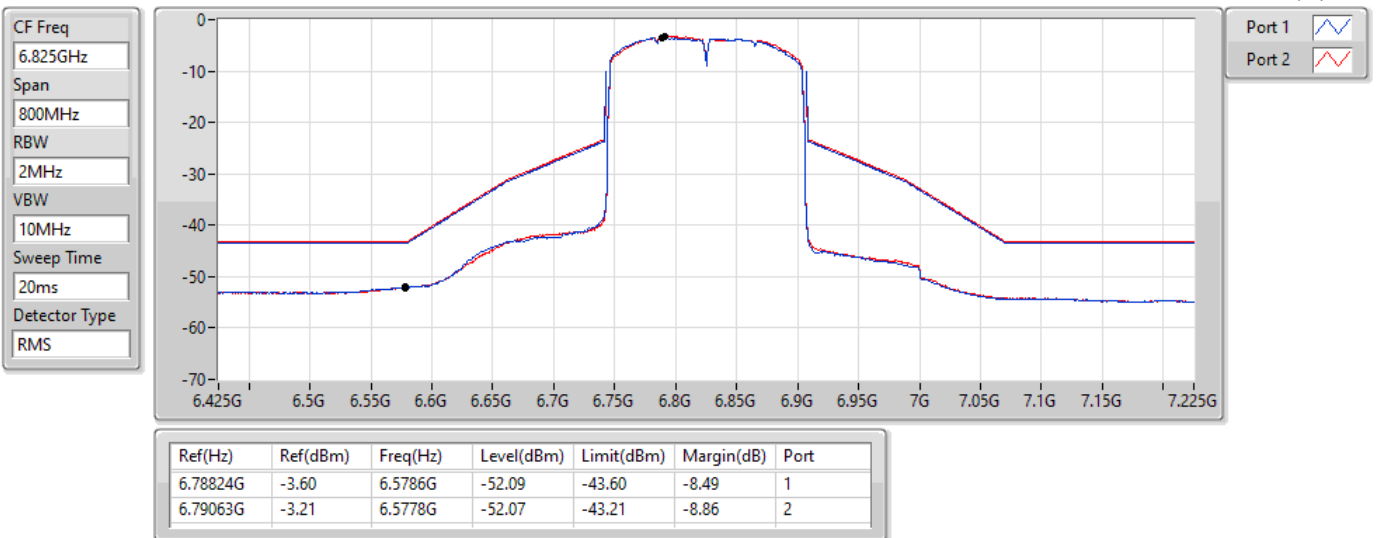


802.11ax HEW160_Nss1,(MCS0)_2TX

MASK

6985MHz_TX

07/09/2022

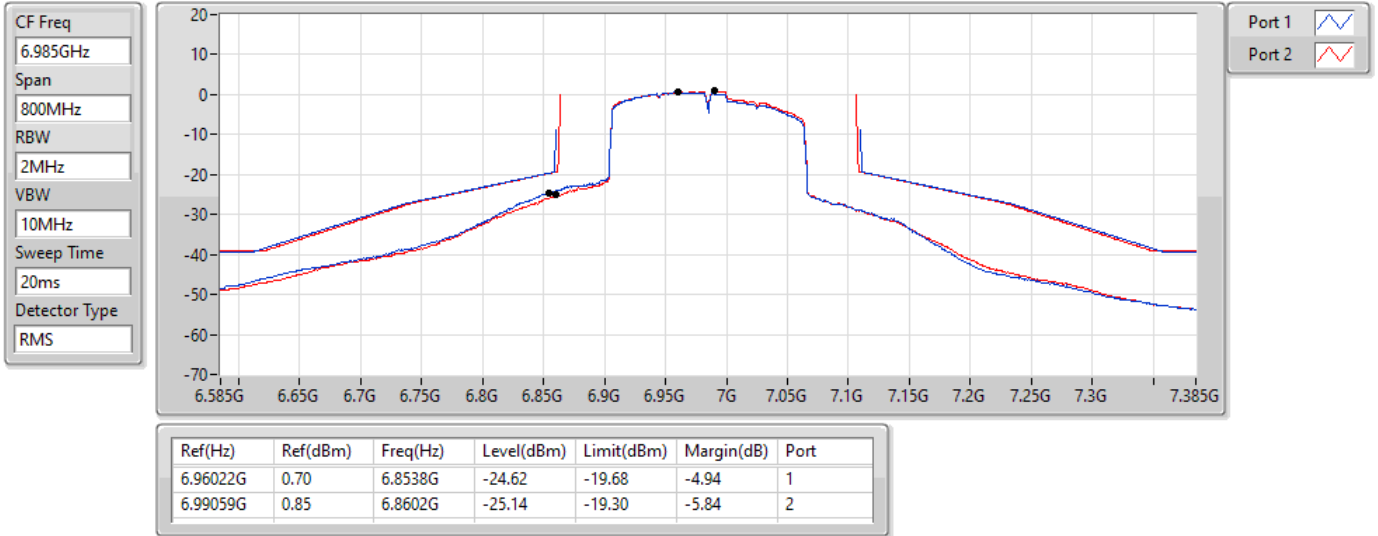



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	QP	30.05M	36.86	40.00	-3.14	3	Horizontal	0	1.00	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	PK	41.64M	36.73	40.00	-3.27	3	Vertical	360	1.00	-
6985MHz	Pass	PK	194.9M	23.65	43.50	-19.85	3	Vertical	360	1.00	-
6985MHz	Pass	PK	258.92M	24.98	46.00	-21.02	3	Vertical	360	1.00	-
6985MHz	Pass	PK	353.98M	29.64	46.00	-16.36	3	Vertical	360	1.00	-
6985MHz	Pass	PK	483.96M	28.80	46.00	-17.20	3	Vertical	360	1.00	-
6985MHz	Pass	QP	30.05M	36.70	40.00	-3.30	3	Vertical	360	2.88	-
6985MHz	Pass	PK	128.94M	28.37	43.50	-15.13	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	175.5M	25.15	43.50	-18.35	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	251.16M	27.94	46.00	-18.06	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	352.04M	30.48	46.00	-15.52	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	522.76M	28.95	46.00	-17.05	3	Horizontal	0	1.00	-
6985MHz	Pass	QP	30.05M	36.86	40.00	-3.14	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	154.16M	25.63	43.50	-17.87	3	Vertical	360	1.00	-
6985MHz	Pass	PK	262.8M	25.42	46.00	-20.58	3	Vertical	360	1.00	-
6985MHz	Pass	PK	369.5M	28.35	46.00	-17.65	3	Vertical	360	1.00	-
6985MHz	Pass	PK	449.04M	28.74	46.00	-17.26	3	Vertical	360	1.00	-
6985MHz	Pass	PK	561.56M	30.94	46.00	-15.06	3	Vertical	360	1.00	-
6985MHz	Pass	QP	55.22M	35.03	40.00	-4.97	3	Vertical	30	1.00	-
6985MHz	Pass	PK	49.4M	36.16	40.00	-3.84	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	140.58M	25.61	43.50	-17.89	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	262.8M	27.31	46.00	-18.69	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	334.58M	30.36	46.00	-15.64	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	462.62M	29.20	46.00	-16.80	3	Horizontal	0	1.00	-
6985MHz	Pass	PK	563.5M	32.35	46.00	-13.65	3	Horizontal	0	1.00	-


802.11ax HEW160_Nss1,(MCS0)_2TX

6985MHz_Adapter

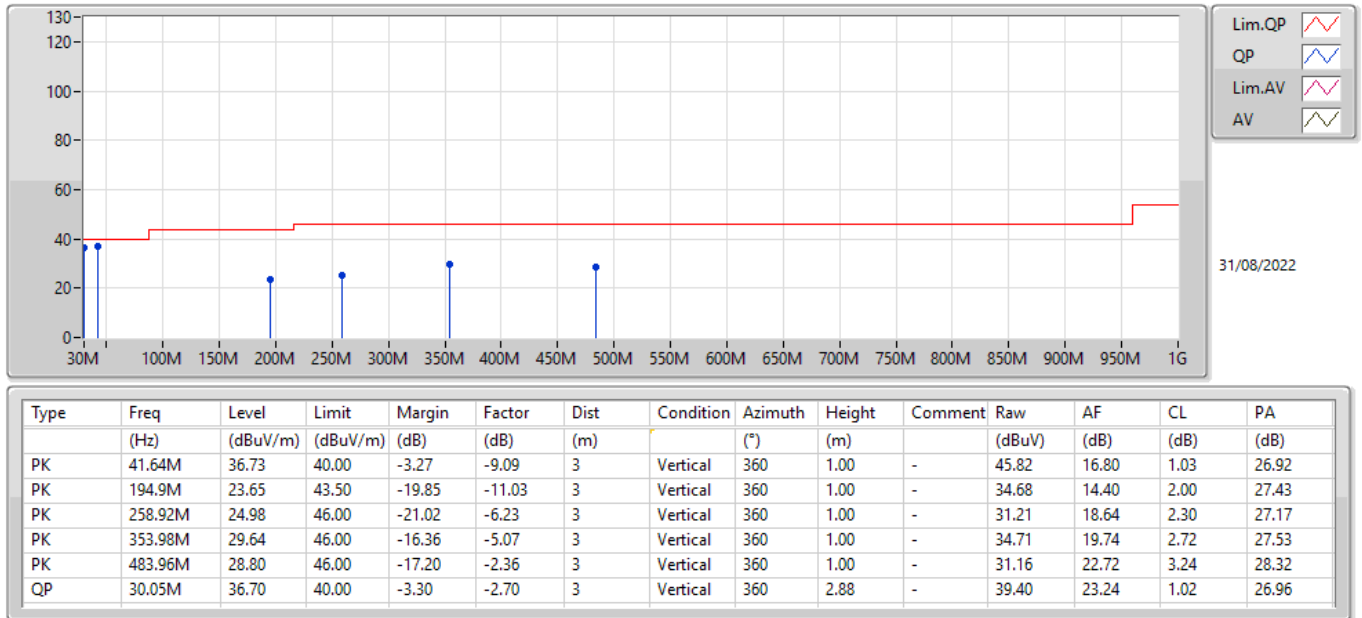


802.11ax HEW160_Nss1,(MCS0)_2TX

6985MHz_Adapter

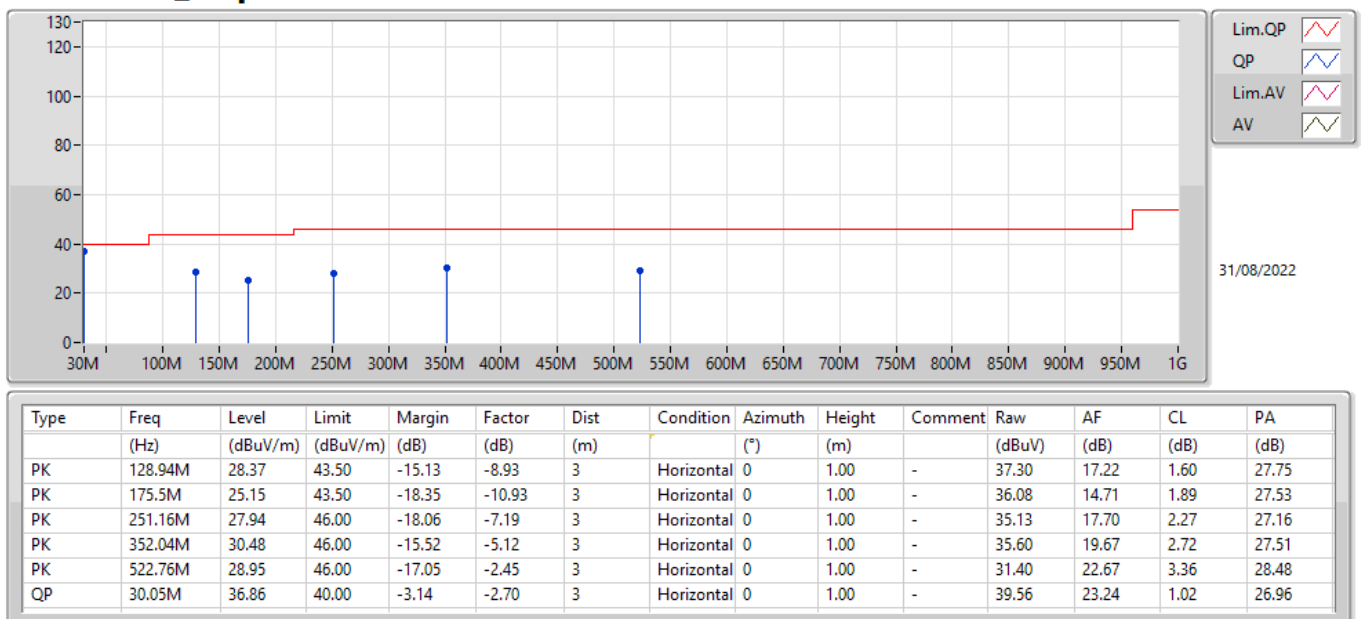

802.11ax HEW160_Nss1,(MCS0)_2TX


6985MHz_PoE

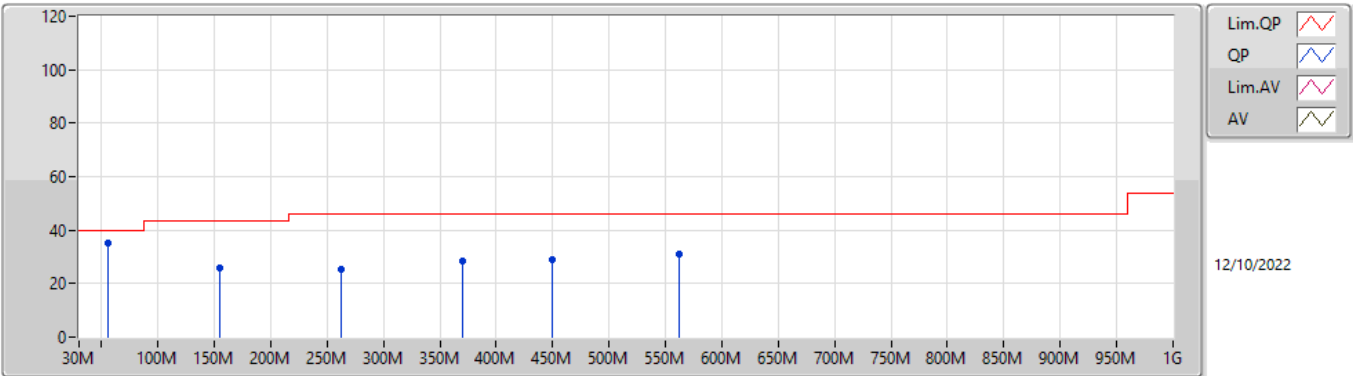

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	154.16M	25.63	43.50	-17.87	-10.49	3	Vertical	360	1.00	-	36.12	15.42	1.75	27.66
PK	262.8M	25.42	46.00	-20.58	-6.13	3	Vertical	360	1.00	-	31.55	18.72	2.32	27.17
PK	369.5M	28.35	46.00	-17.65	-4.84	3	Vertical	360	1.00	-	33.19	20.01	2.78	27.63
PK	449.04M	28.74	46.00	-17.26	-3.30	3	Vertical	360	1.00	-	32.04	21.88	3.08	28.26
PK	561.56M	30.94	46.00	-15.06	-1.18	3	Vertical	360	1.00	-	32.12	23.96	3.45	28.59
QP	55.22M	35.03	40.00	-4.97	-14.67	3	Vertical	30	1.00	-	49.70	11.83	1.08	27.58

802.11ax HEW160_Nss1,(MCS0)_2TX

6985MHz_PoE

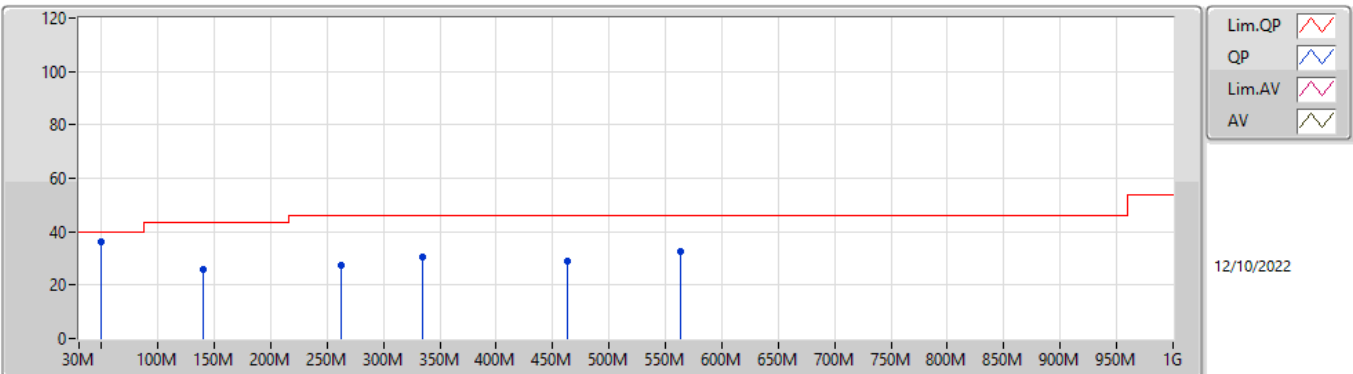

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	49.4M	36.16	40.00	-3.84	-12.59	3	Horizontal	0	1.00	-	48.75	13.76	1.04	27.39
PK	140.58M	25.61	43.50	-17.89	-9.73	3	Horizontal	0	1.00	-	35.34	16.32	1.67	27.72
PK	262.8M	27.31	46.00	-18.69	-6.13	3	Horizontal	0	1.00	-	33.44	18.72	2.32	27.17
PK	334.58M	30.36	46.00	-15.64	-5.81	3	Horizontal	0	1.00	-	36.17	18.94	2.65	27.40
PK	462.62M	29.20	46.00	-16.80	-2.92	3	Horizontal	0	1.00	-	32.12	22.23	3.14	28.29
PK	563.5M	32.35	46.00	-13.65	-1.21	3	Horizontal	0	1.00	-	33.56	23.92	3.46	28.59