Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	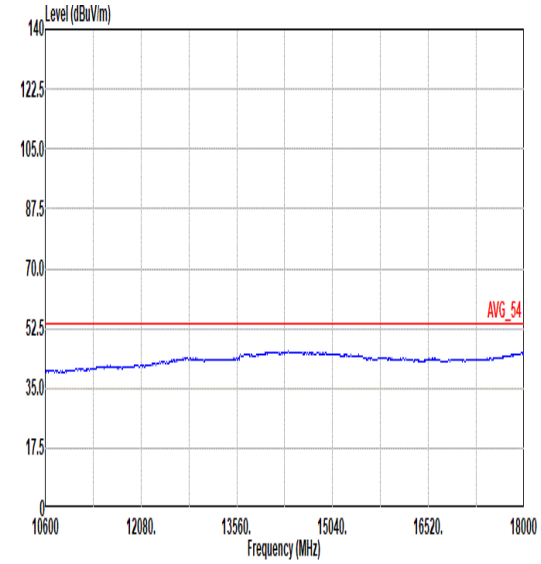 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	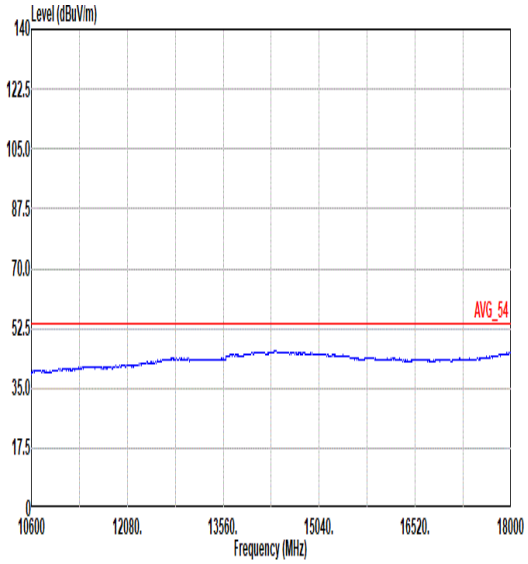 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	6	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	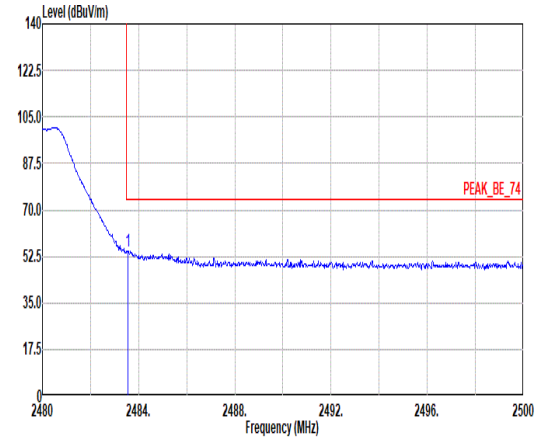 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.54 54.62 74.00 -19.38 41.61 26.70 8.69 32.41 10.03 100 120 PEAK	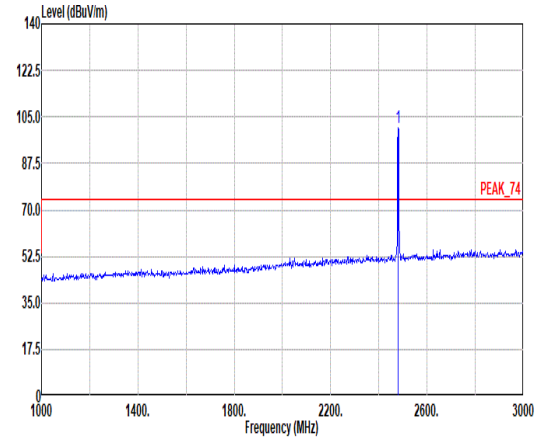 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 101.12 ------ ------ 88.12 26.70 8.68 32.41 10.03 100 120 PEAK
Avg	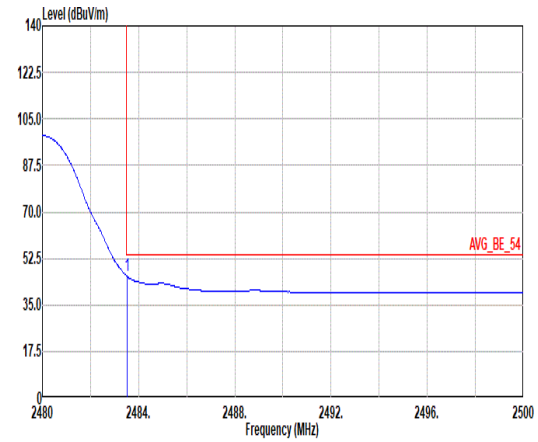 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.52 45.73 54.00 -8.27 32.72 26.70 8.69 32.41 10.03 100 120 AVERAGE	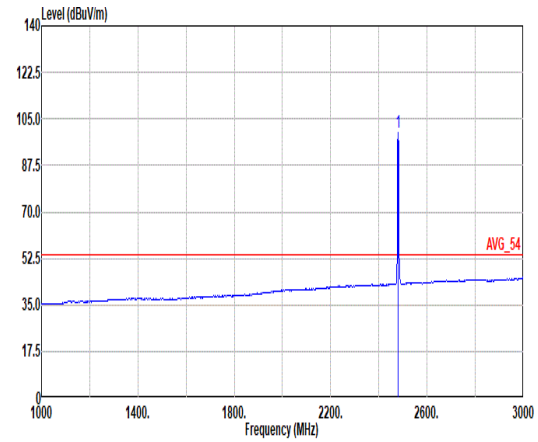 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 99.73 ------ ------ 86.73 26.70 8.68 32.41 10.03 100 120 AVERAGE

Mode	6	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	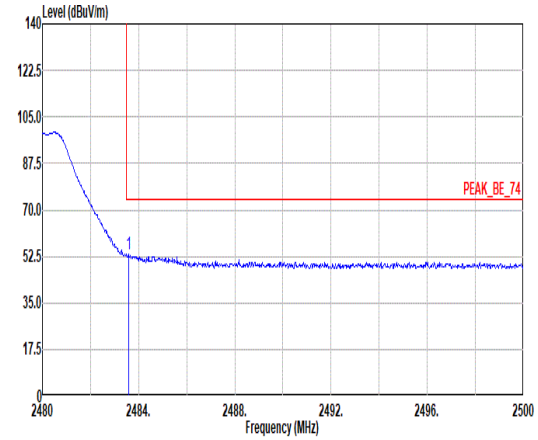 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.58 53.42 74.00 -20.58 40.41 26.70 8.69 32.41 10.03 400 338 PEAK	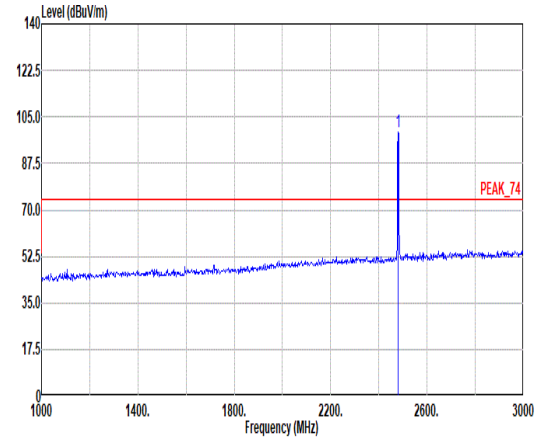 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 99.43 ------ ------ 86.43 26.70 8.68 32.41 10.03 400 338 PEAK
Avg	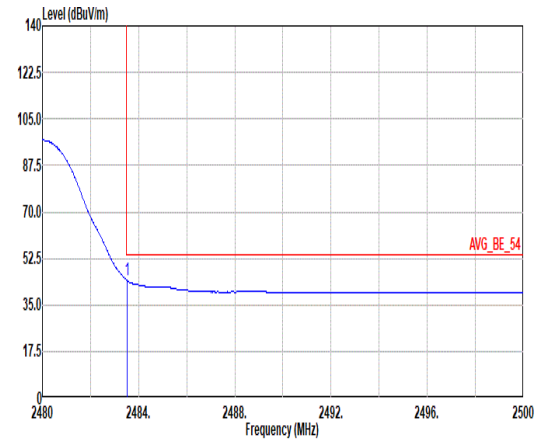 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.52 44.25 54.00 -9.75 31.24 26.70 8.69 32.41 10.03 400 338 AVERAGE	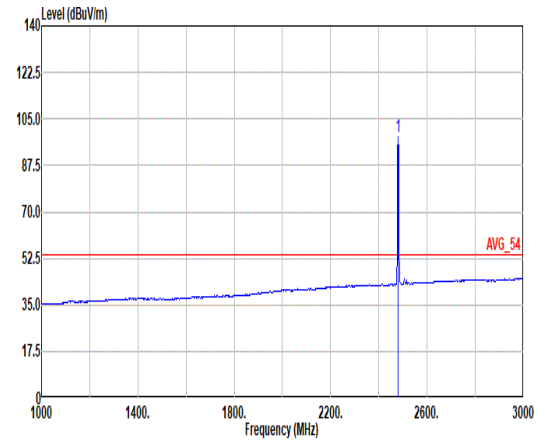 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 98.11 ------ ------ 85.11 26.70 8.68 32.41 10.03 400 338 AVERAGE

Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	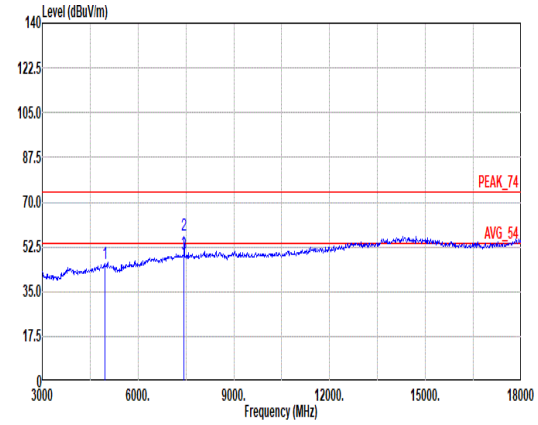 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 46.12 74.00 -27.88 33.77 32.70 12.43 33.47 0.69 -- -- Peak 2 7440.00 56.86 74.00 -17.14 39.38 37.26 15.52 35.93 0.63 110 108 Peak 3 7440.00 49.65 54.00 -4.35 32.17 37.26 15.52 35.93 0.63 110 108 Average	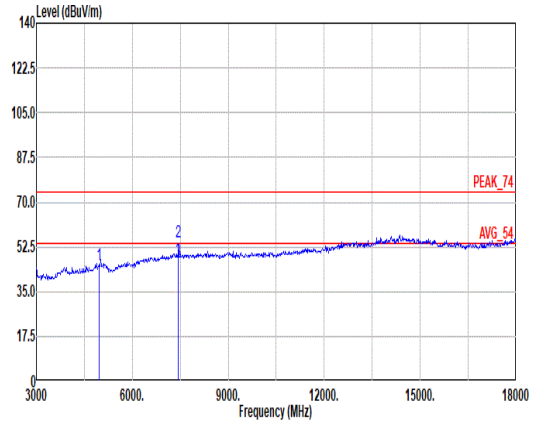 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 45.18 74.00 -28.82 32.83 32.70 12.43 33.47 0.69 -- -- Peak 2 7440.00 54.65 74.00 -19.35 37.17 37.26 15.52 35.93 0.63 220 65 Peak 3 7440.00 47.20 54.00 -6.80 29.72 37.26 15.52 35.93 0.63 220 65 Average

Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	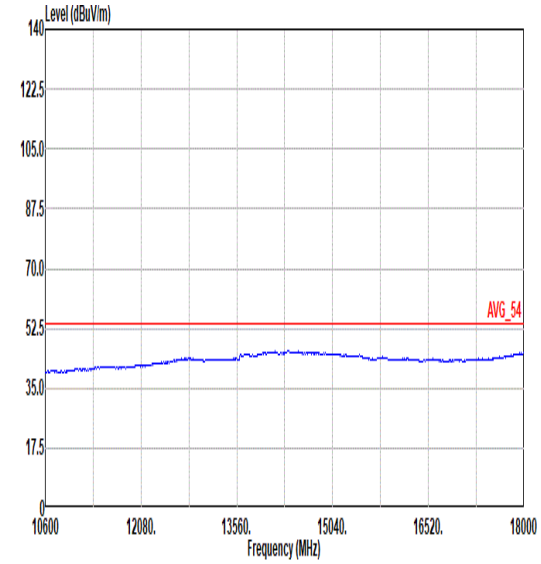 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	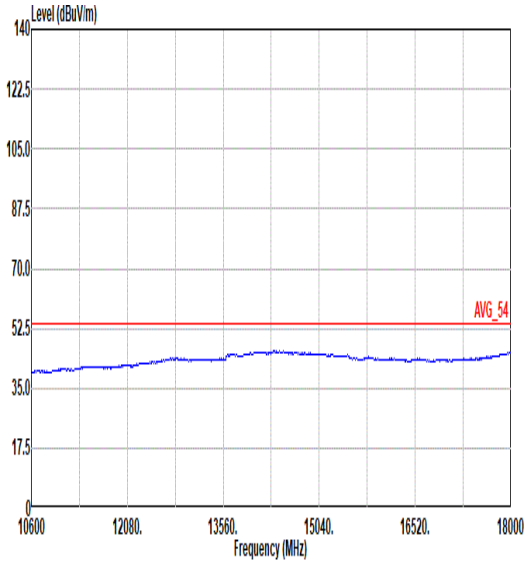 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	7	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	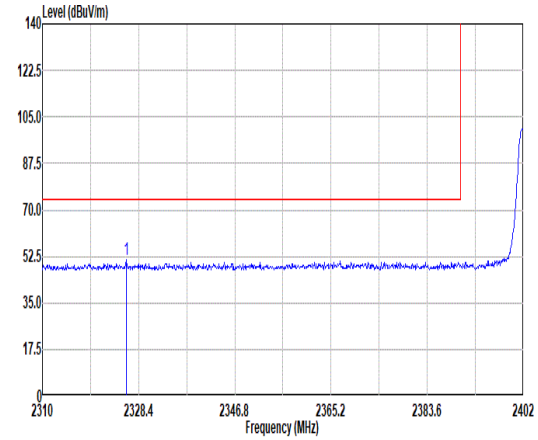 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2326.01 51.21 74.00 -22.79 38.10 27.00 8.40 32.32 10.03 107 116 PEAK	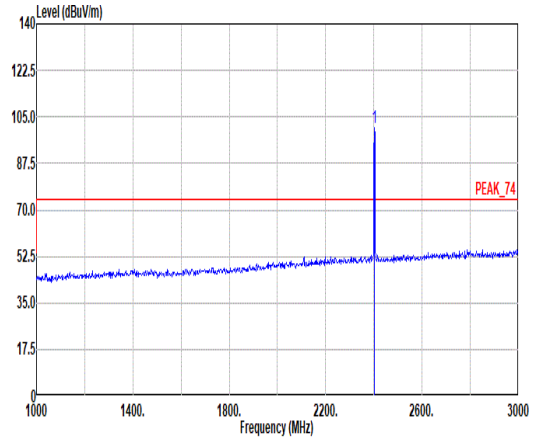 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 100.84 ------ ------ 87.81 26.82 8.54 32.36 10.03 107 116 PEAK
Avg	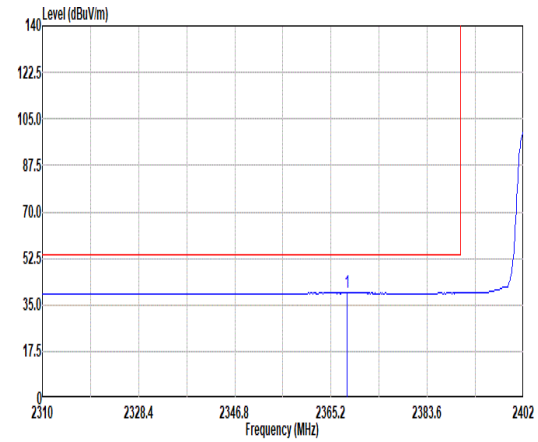 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2368.33 39.45 54.00 -14.55 26.28 27.00 8.48 32.34 10.03 107 116 AVERAGE	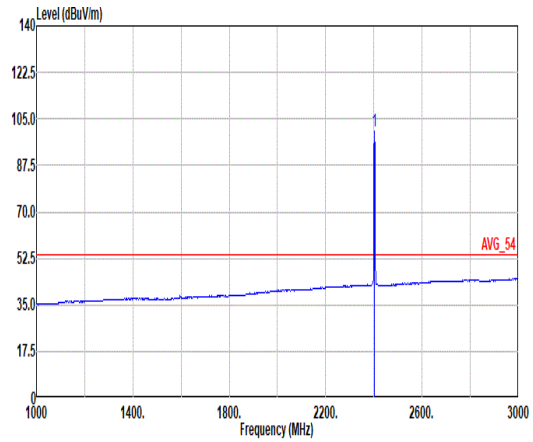 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 100.13 ------ ------ 87.10 26.82 8.54 32.36 10.03 107 116 AVERAGE

Mode	7	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	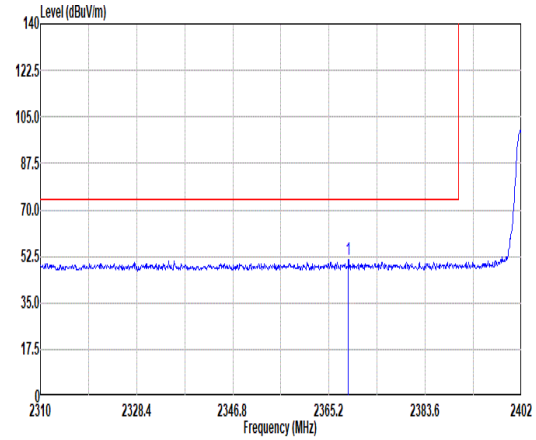 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2368.88 51.24 74.00 -22.76 38.07 27.00 8.48 32.34 10.03 385 338 PEAK	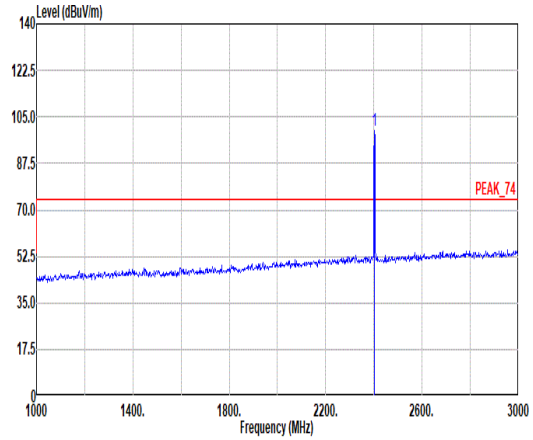 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 99.95 ------ ------ 86.92 26.82 8.54 32.36 10.03 385 338 PEAK
Avg	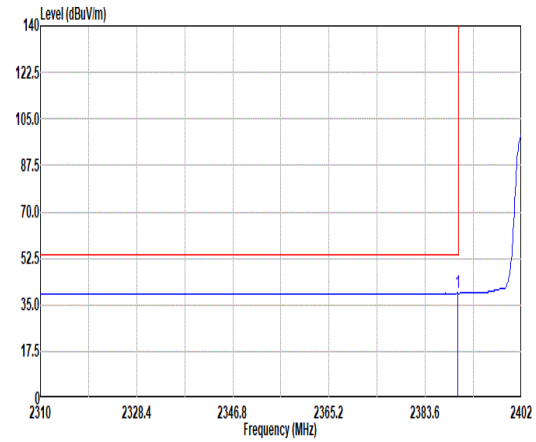 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2389.76 39.37 54.00 -14.63 26.47 26.70 8.52 32.35 10.03 385 338 AVERAGE	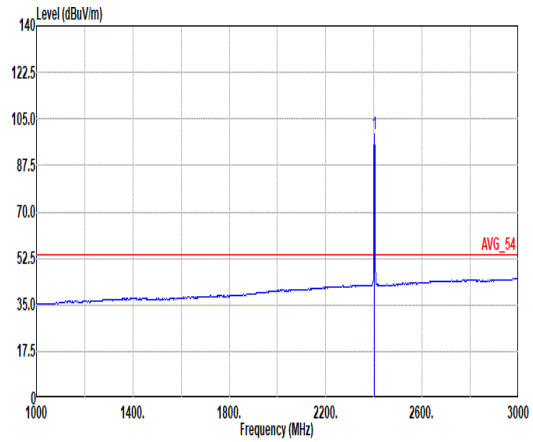 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 99.26 ------ ------ 86.23 26.82 8.54 32.36 10.03 385 338 AVERAGE

Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	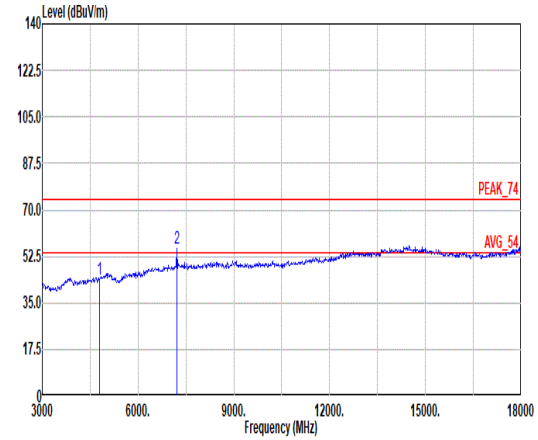 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4804.00 43.79 74.00 -30.21 31.86 32.40 12.31 33.50 0.72 -- -- Peak 2 7206.00 55.48 74.00 -18.52 38.55 36.82 15.24 35.77 0.64 -- -- Peak	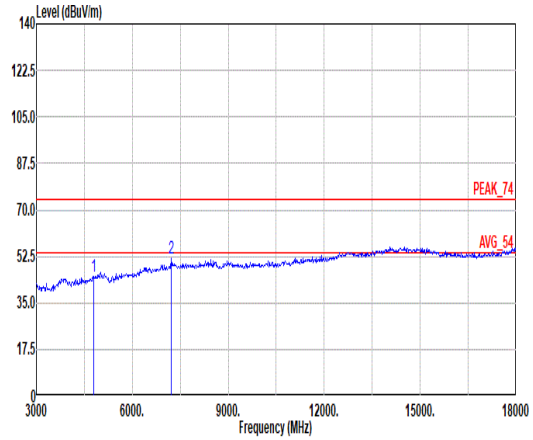 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4804.00 44.73 74.00 -29.27 32.80 32.40 12.31 33.50 0.72 -- -- Peak 2 7206.00 51.93 74.00 -22.07 35.00 36.82 15.24 35.77 0.64 -- -- Peak

Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	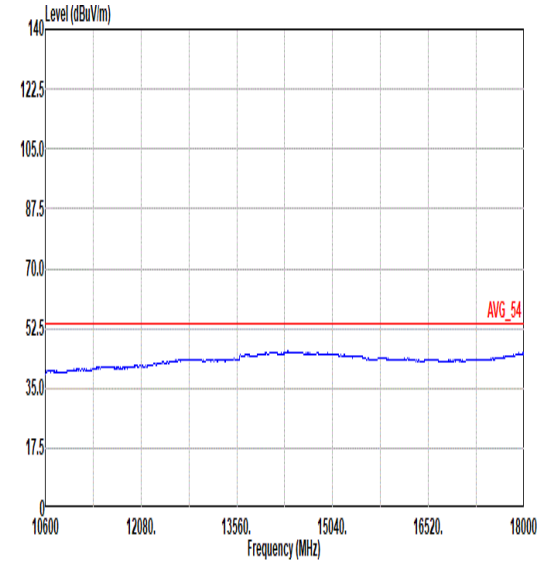 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	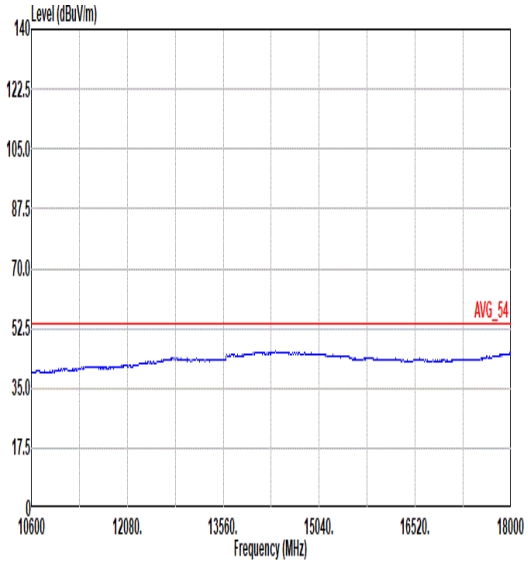 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	8	
	Band Edge - L	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	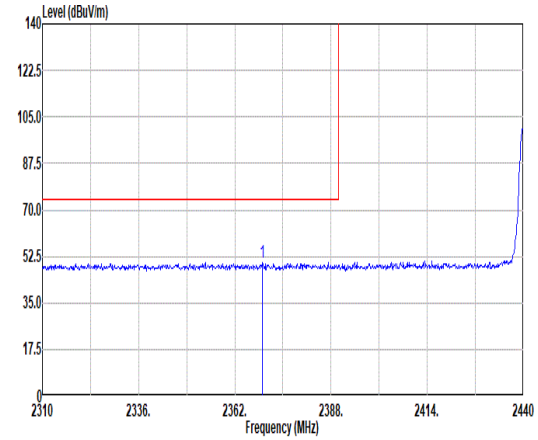 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2369.41 50.23 74.00 -23.77 37.06 27.00 8.48 32.34 10.03 139 114 PEAK	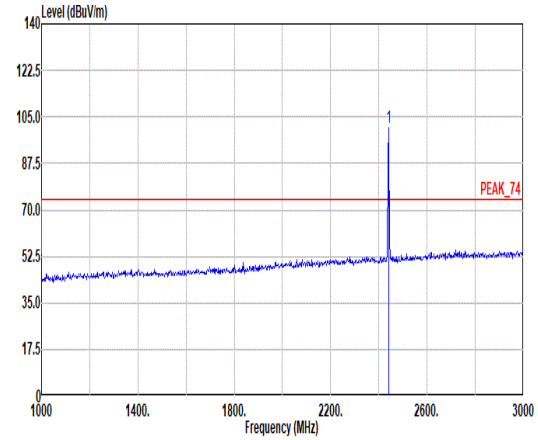 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 100.70 ------ ------ 87.74 26.70 8.61 32.38 10.03 139 114 PEAK
Avg	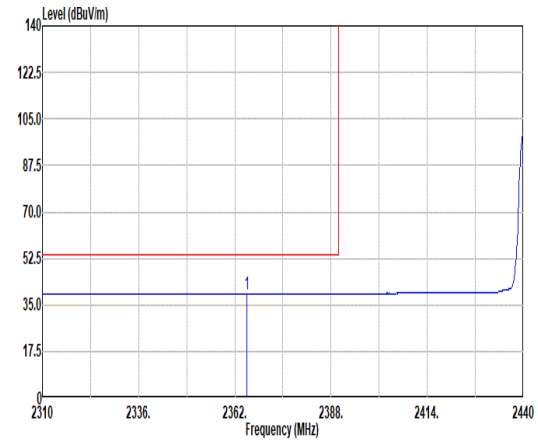 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2365.25 39.29 54.00 -14.71 26.12 27.00 8.48 32.34 10.03 139 114 AVERAGE	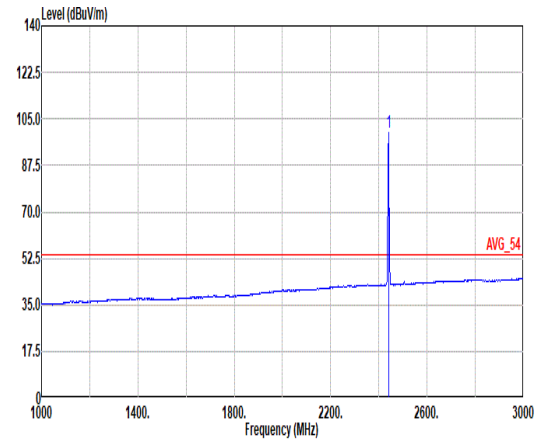 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 100.03 ------ ------ 87.07 26.70 8.61 32.38 10.03 139 114 AVERAGE

Mode	8	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	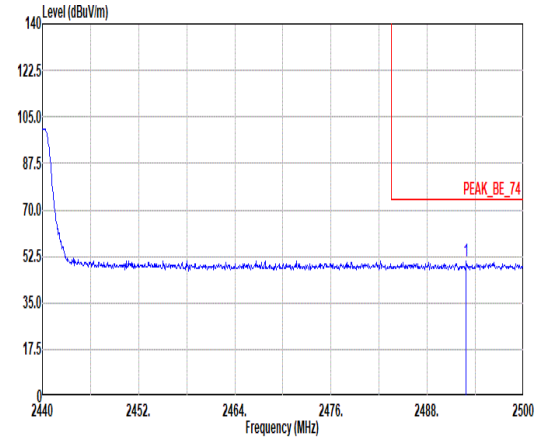 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2492.86 50.61 74.00 -23.39 37.59 26.70 8.71 32.42 10.03 139 114 PEAK	Blank
Avg	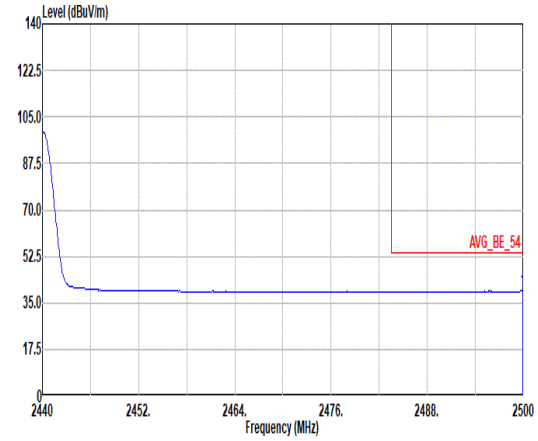 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2499.88 39.43 54.00 -14.57 26.40 26.70 8.72 32.42 10.03 139 114 AVERAGE	Blank

Mode	8	
	Band Edge - L	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	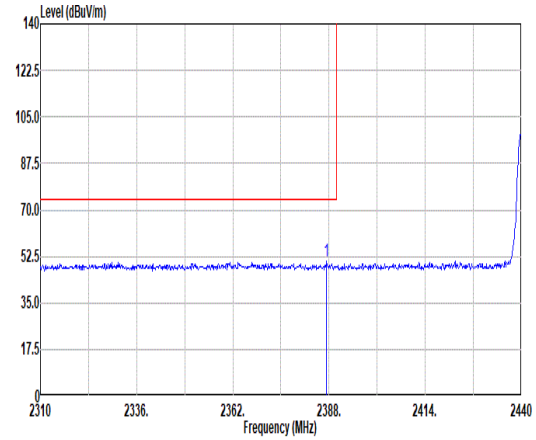 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2387.35 50.50 74.00 -23.50 37.57 26.73 8.52 32.35 10.03 370 335 PEAK	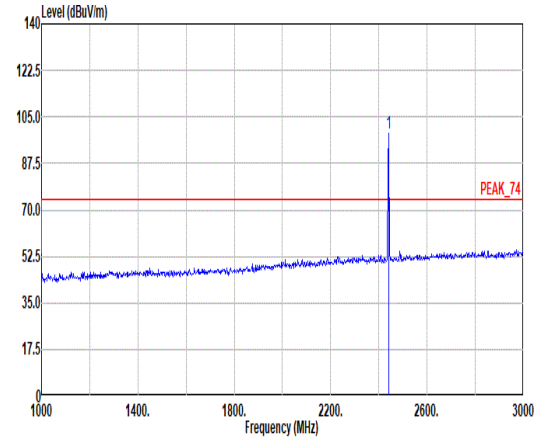 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 98.55 ------ ------ 85.59 26.70 8.61 32.38 10.03 370 335 PEAK
Avg	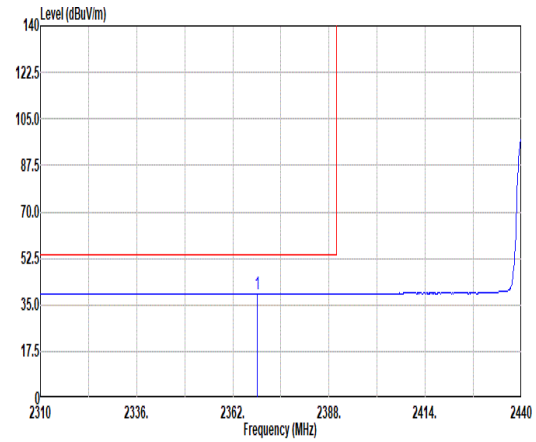 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2368.63 39.27 54.00 -14.73 26.10 27.00 8.48 32.34 10.03 370 335 AVERAGE	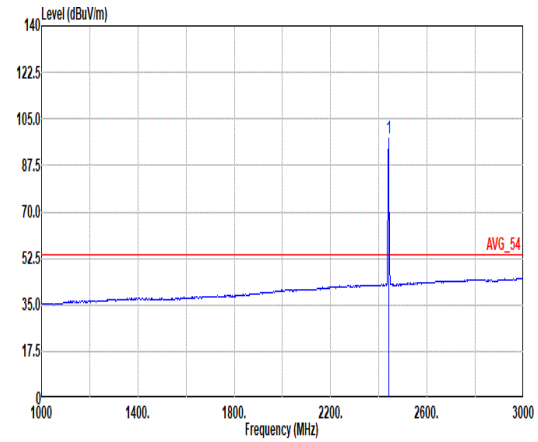 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 97.92 ------ ------ 84.96 26.70 8.61 32.38 10.03 370 335 AVERAGE

Mode	8	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	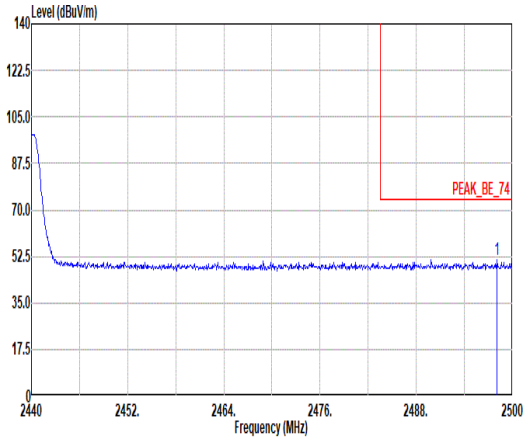 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2498.08 51.26 74.00 -22.74 38.23 26.70 8.72 32.42 10.03 370 335 PEAK	Blank
Avg	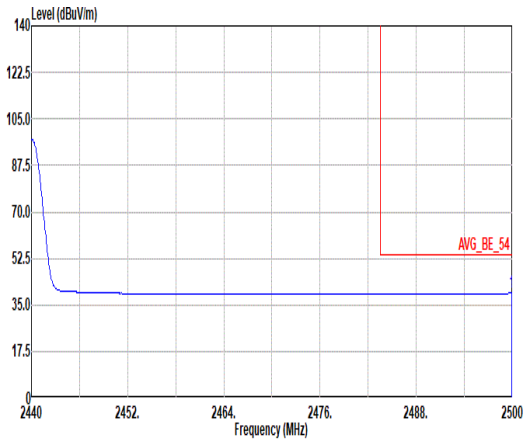 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2499.88 39.47 54.00 -14.53 26.44 26.70 8.72 32.42 10.03 370 335 AVERAGE	Blank

Mode	8	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	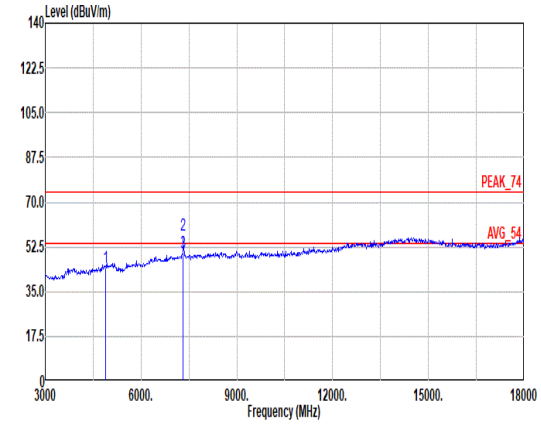 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 44.56 74.00 -29.44 32.54 32.45 12.36 33.49 0.70 -- -- Peak 2 7320.00 56.97 74.00 -17.03 39.61 37.20 15.37 35.85 0.64 109 108 Peak 3 7320.00 50.31 54.00 -3.69 32.95 37.20 15.37 35.85 0.64 109 108 Average	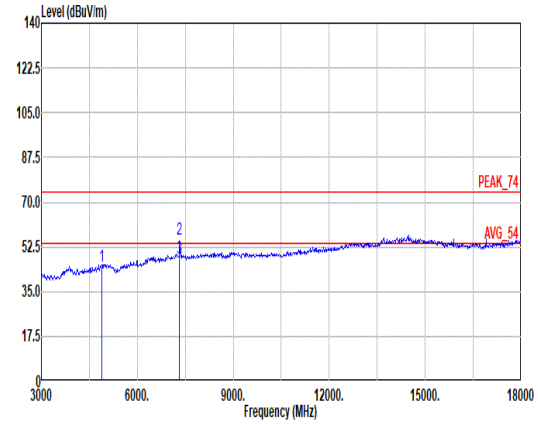 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 44.69 74.00 -29.31 32.67 32.45 12.36 33.49 0.70 -- -- Peak 2 7320.00 55.43 74.00 -18.57 38.07 37.20 15.37 35.85 0.64 374 186 Peak 3 7320.00 47.91 54.00 -6.09 30.55 37.20 15.37 35.85 0.64 374 186 Average

Mode	8	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	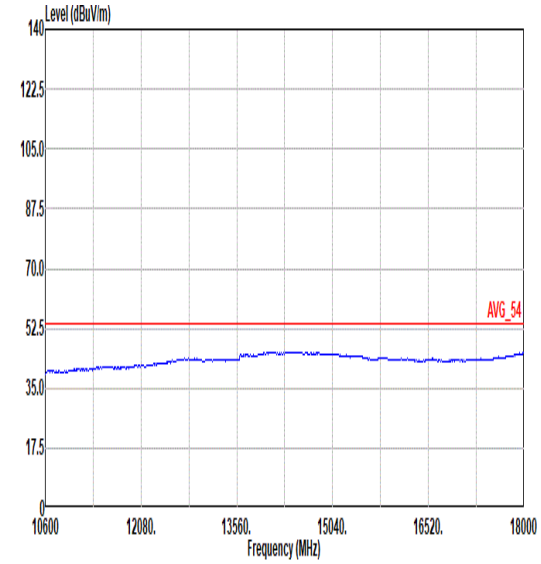 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	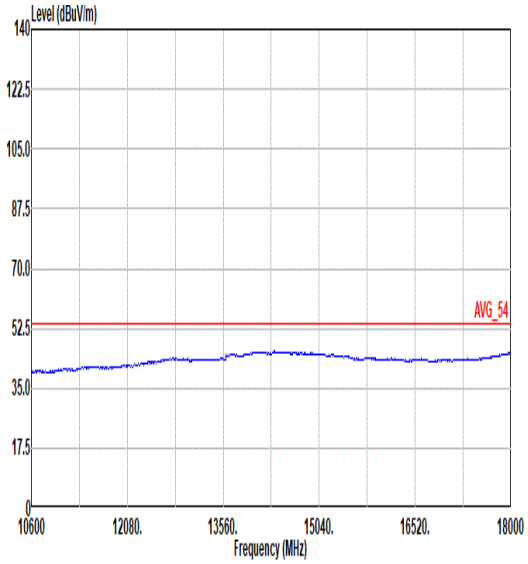 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	9	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	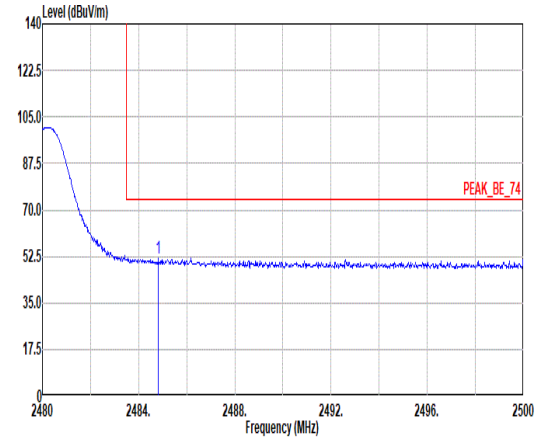 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.82 51.67 74.00 -22.33 38.66 26.70 8.69 32.41 10.03 155 118 PEAK	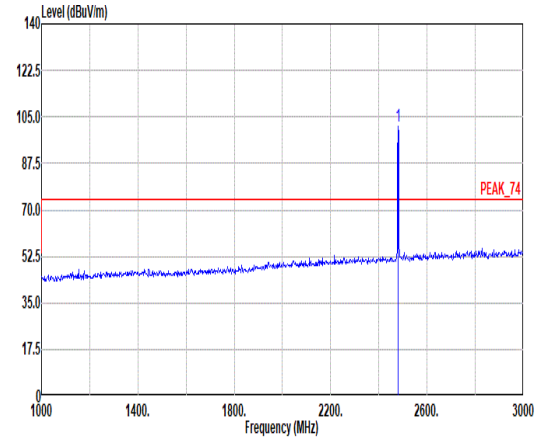 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 101.18 ------ ------ 88.18 26.70 8.68 32.41 10.03 155 118 PEAK
Avg	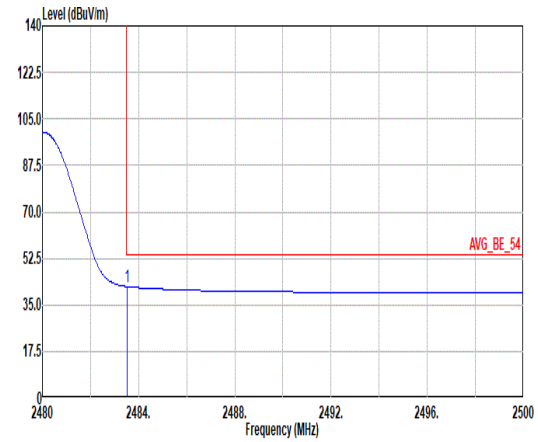 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.52 41.86 54.00 -12.14 28.85 26.70 8.69 32.41 10.03 155 118 AVERAGE	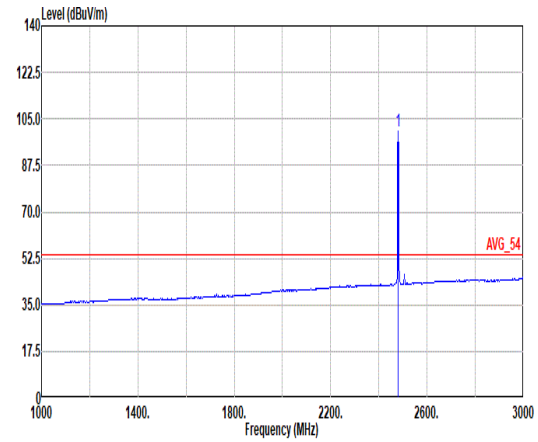 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 100.52 ------ ------ 87.52 26.70 8.68 32.41 10.03 155 118 AVERAGE

Mode	9	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	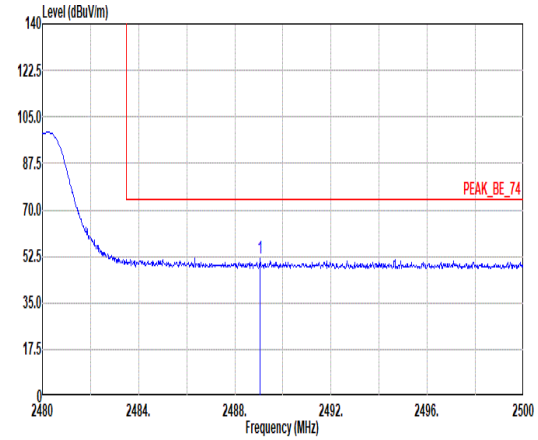 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 2489.06 51.59 74.00 -22.41 38.57 26.70 8.70 32.41 10.03 400 337 PEAK	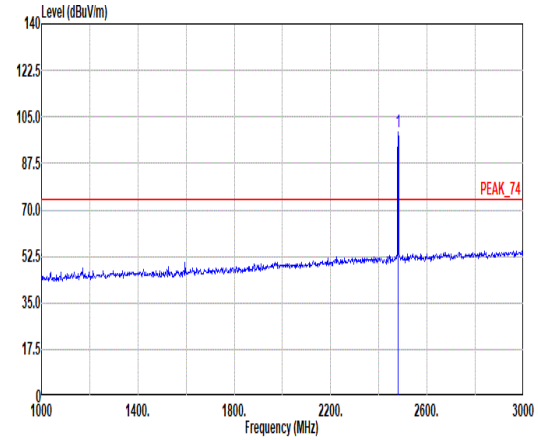 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 2480.00 99.45 ------ ------ 86.45 26.70 8.68 32.41 10.03 400 337 PEAK
Avg	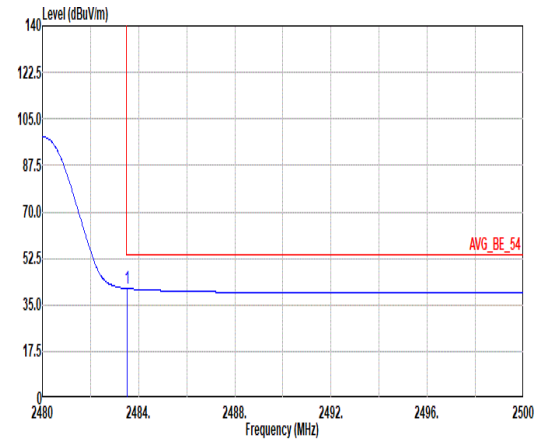 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 2483.52 41.09 54.00 -12.91 28.08 26.70 8.69 32.41 10.03 400 337 AVERAGE	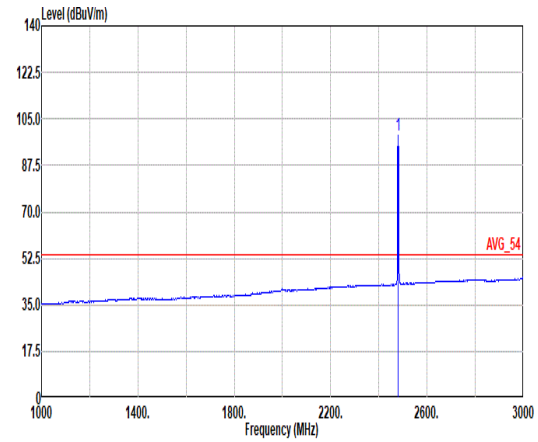 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 2480.00 98.82 ------ ------ 85.82 26.70 8.68 32.41 10.03 400 337 AVERAGE

Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	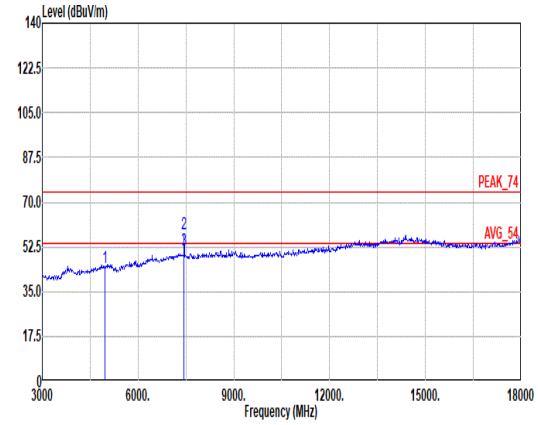 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 44.60 74.00 -29.40 32.25 32.70 12.43 33.47 0.69 -- -- Peak 2 7440.00 57.37 74.00 -16.63 39.89 37.26 15.52 35.93 0.63 106 109 Peak 3 7440.00 50.98 54.00 -3.02 33.50 37.26 15.52 35.93 0.63 106 109 Average	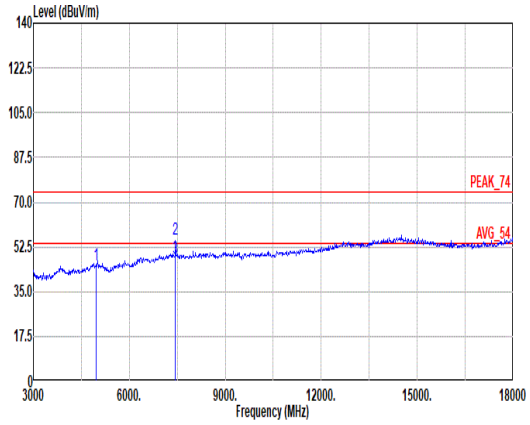 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 45.51 74.00 -28.49 33.16 32.70 12.43 33.47 0.69 -- -- Peak 2 7440.00 55.68 74.00 -18.32 38.20 37.26 15.52 35.93 0.63 220 65 Peak 3 7440.00 48.25 54.00 -5.75 30.77 37.26 15.52 35.93 0.63 220 65 Average

Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	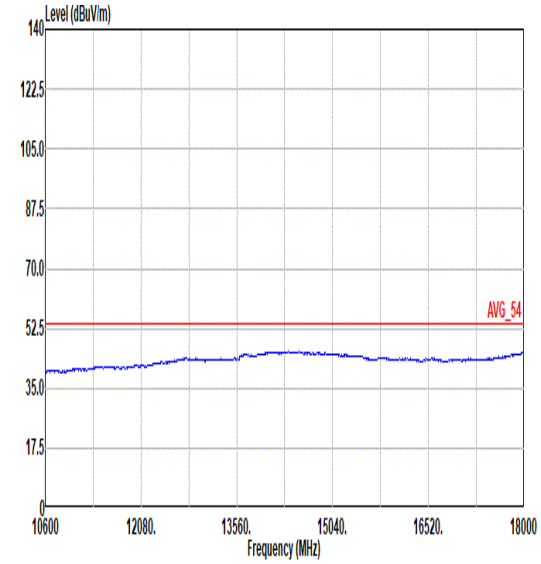 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	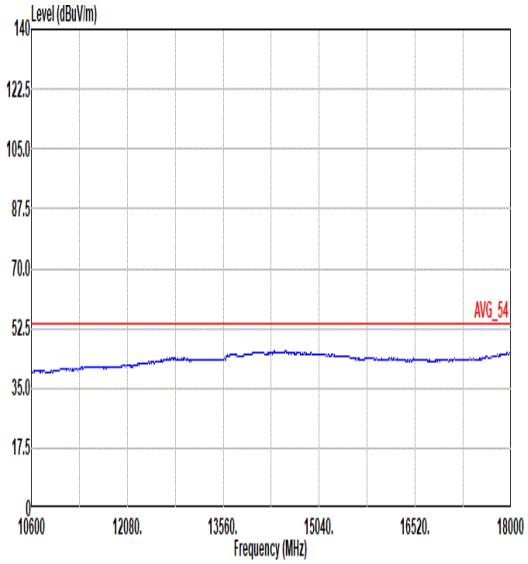 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	10	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	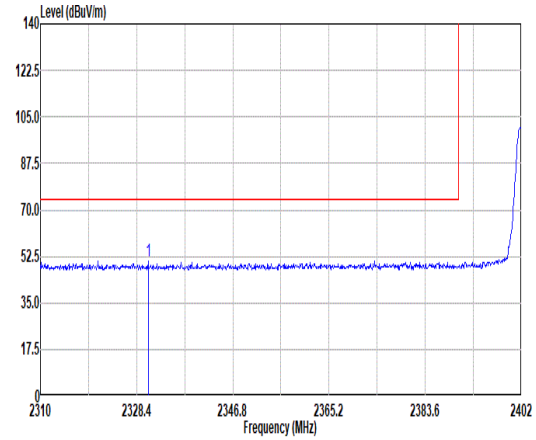 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2330.61 50.82 74.00 -23.18 37.71 26.99 8.41 32.32 10.03 106 116 PEAK	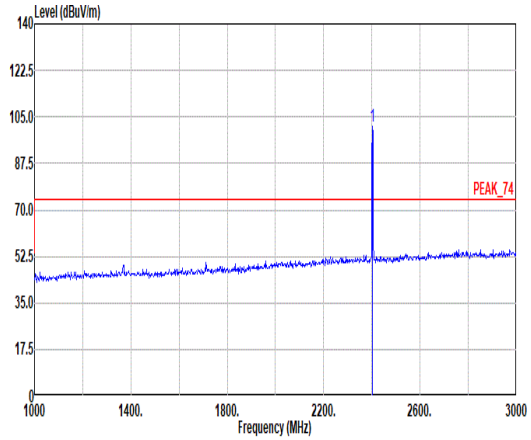 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 101.22 ------ ------ 88.19 26.82 8.54 32.36 10.03 106 116 PEAK
Avg	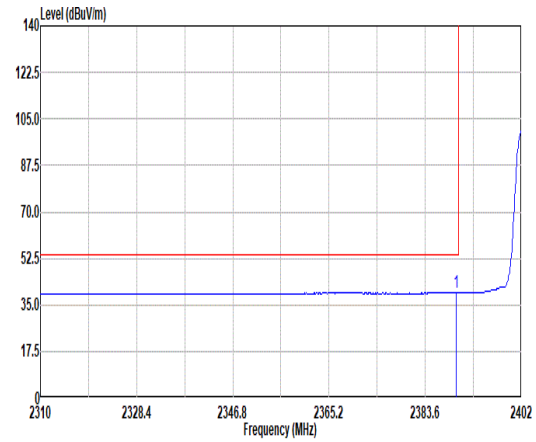 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2389.49 39.49 54.00 -14.51 26.58 26.71 8.52 32.35 10.03 106 116 AVERAGE	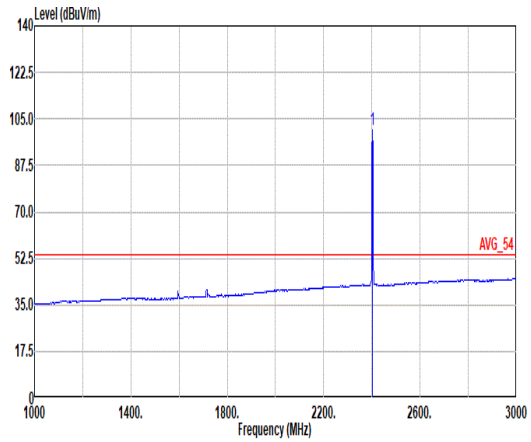 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 100.66 ------ ------ 87.63 26.82 8.54 32.36 10.03 106 116 AVERAGE

Mode	10	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	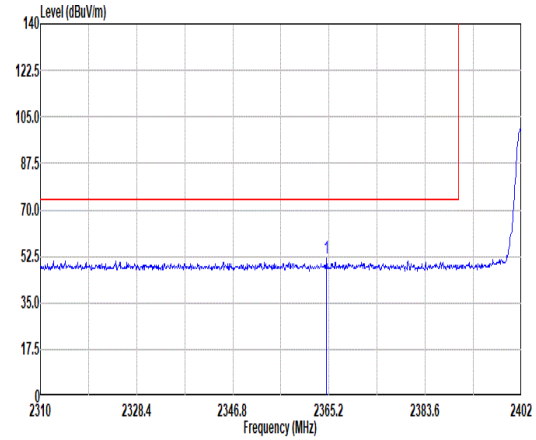 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2364.74 51.56 74.00 -22.44 38.40 27.00 8.47 32.34 10.03 383 337 PEAK	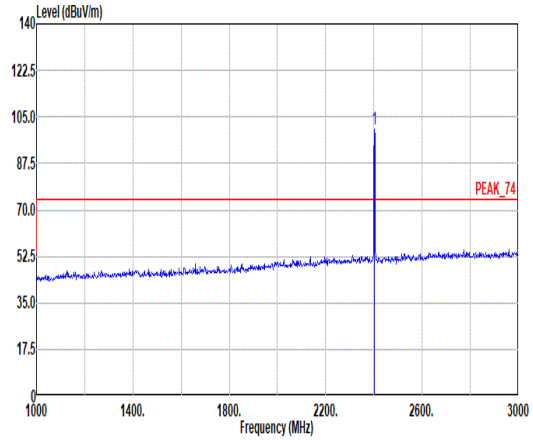 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 100.42 ------ ------ 87.39 26.82 8.54 32.36 10.03 383 337 PEAK
Avg	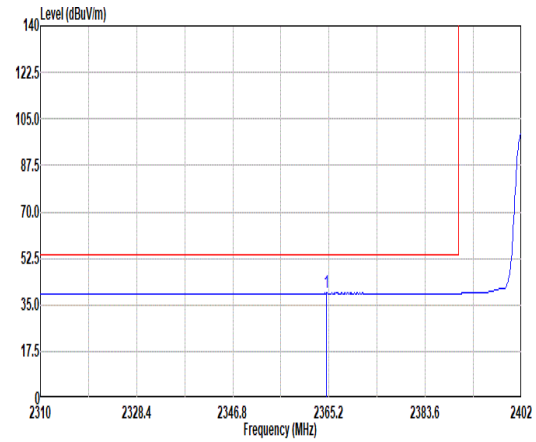 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2364.74 39.38 54.00 -14.62 26.22 27.00 8.47 32.34 10.03 383 337 AVERAGE	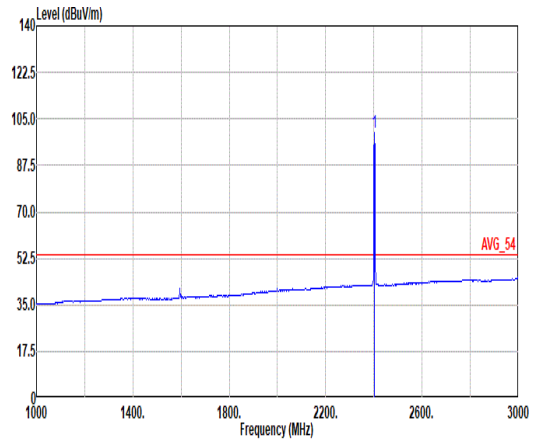 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2402.00 99.86 ------ ------ 86.83 26.82 8.54 32.36 10.03 383 337 AVERAGE

Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	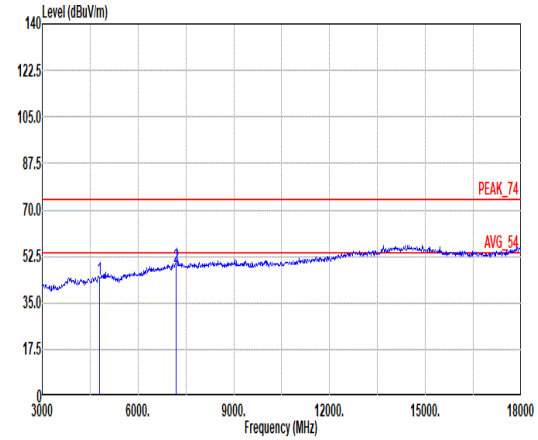 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4800.00 44.01 74.00 -29.99 32.08 32.40 12.31 33.50 0.72 -- -- Peak 2 7200.00 48.69 74.00 -25.31 31.79 36.80 15.23 35.77 0.64 -- -- Peak	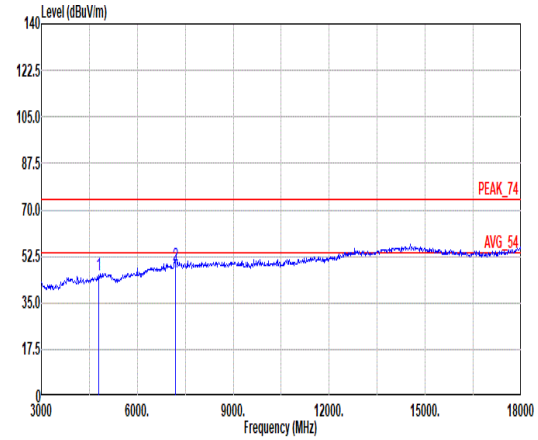 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4800.00 45.20 74.00 -28.80 33.27 32.40 12.31 33.50 0.72 -- -- Peak 2 7200.00 48.95 74.00 -25.05 32.05 36.80 15.23 35.77 0.64 -- -- Peak

Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	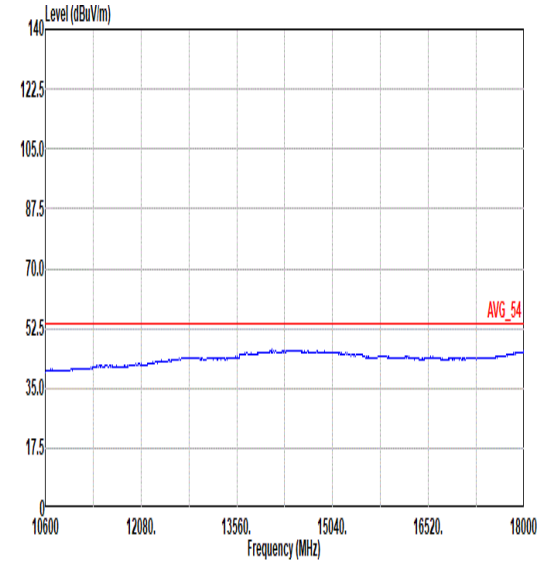 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	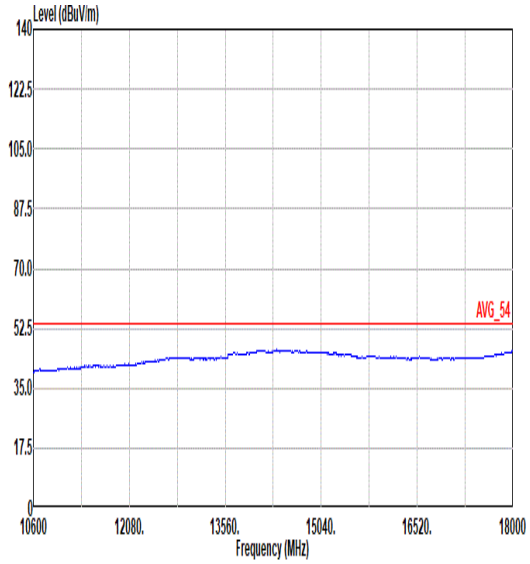 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	11	
	Band Edge - L	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	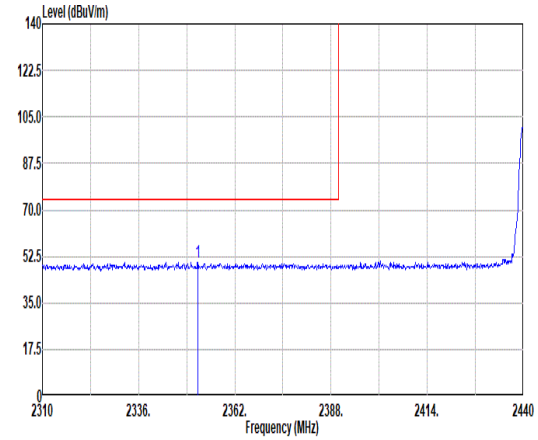 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2351.99 50.33 74.00 -23.67 37.26 26.92 8.45 32.33 10.03 113 113 PEAK	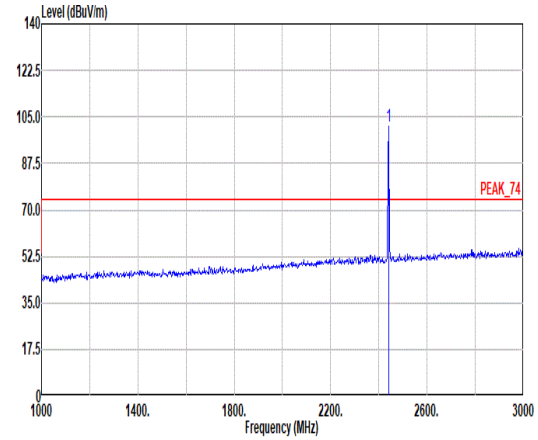 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 101.35 ------ ------ 88.39 26.70 8.61 32.38 10.03 113 113 PEAK
Avg	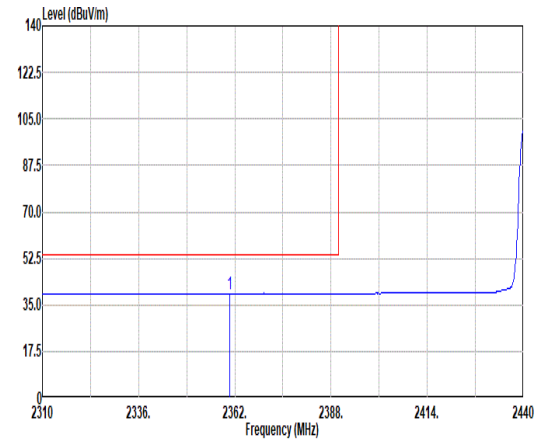 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2360.70 39.36 54.00 -14.64 26.20 27.00 8.47 32.34 10.03 113 113 AVERAGE	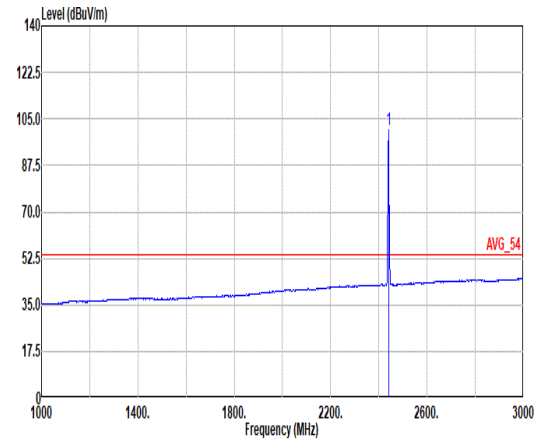 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 100.81 ------ ------ 87.85 26.70 8.61 32.38 10.03 113 113 AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	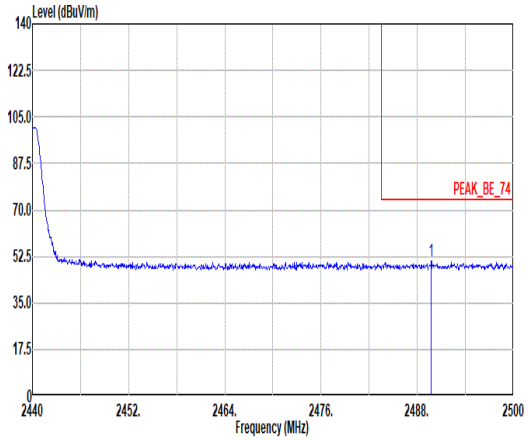 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2489.74 50.97 74.00 -23.03 37.95 26.70 8.70 32.41 10.03 113 113 PEAK	Blank
Avg	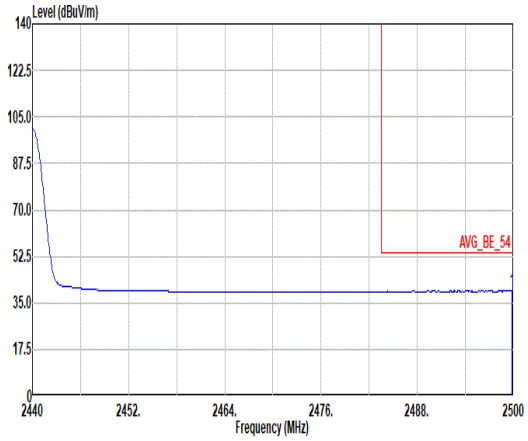 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2499.82 39.43 54.00 -14.57 26.40 26.70 8.72 32.42 10.03 113 113 AVERAGE	Blank

Mode	11	
	Band Edge - L	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	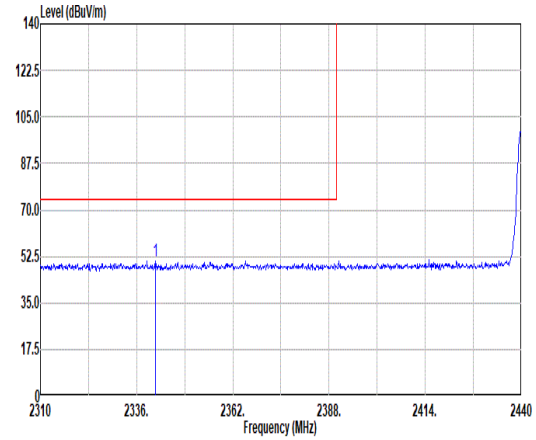 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2341.07 50.73 74.00 -23.27 37.69 26.90 8.43 32.32 10.03 372 335 PEAK	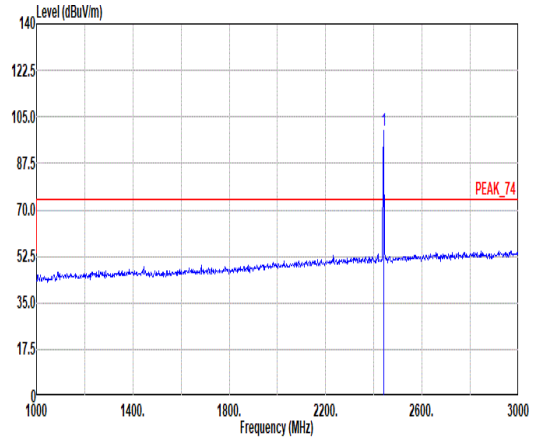 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 99.71 ------ ------ 86.75 26.70 8.61 32.38 10.03 372 335 PEAK
Avg	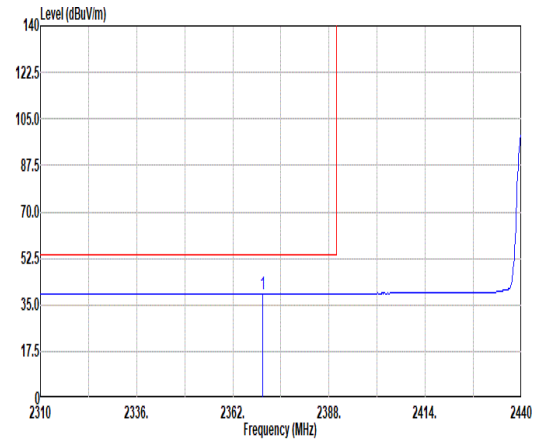 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2370.06 39.34 54.00 -14.66 26.17 27.00 8.48 32.34 10.03 372 335 AVERAGE	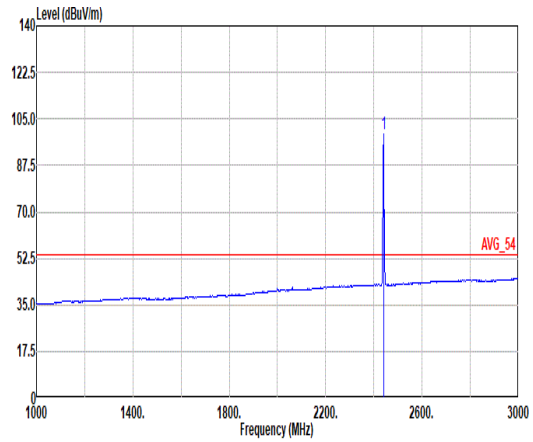 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2440.00 99.16 ------ ------ 86.20 26.70 8.61 32.38 10.03 372 335 AVERAGE

Mode	11	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	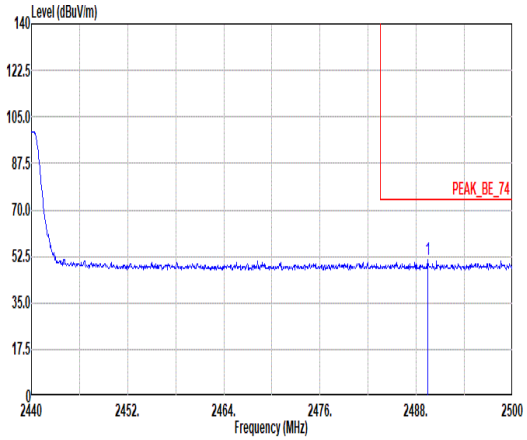 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2489.44 51.04 74.00 -22.96 38.02 26.70 8.70 32.41 10.03 372 335 PEAK	Blank
Avg	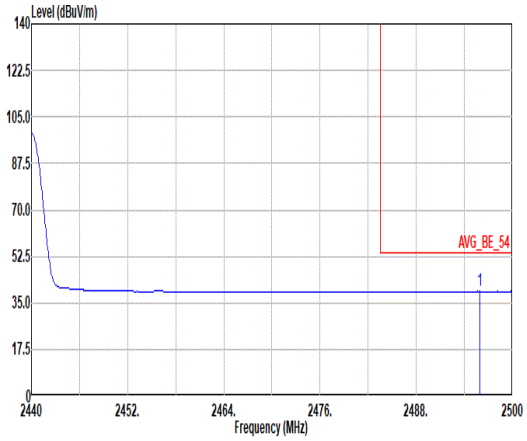 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2495.92 39.37 54.00 -14.63 26.35 26.70 8.71 32.42 10.03 372 335 AVERAGE	Blank

Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	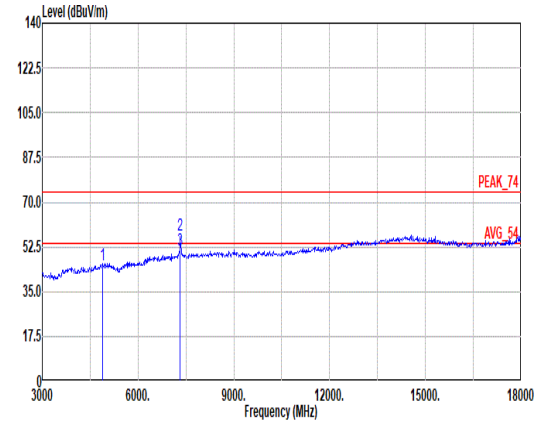 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 45.50 74.00 -28.50 33.46 32.46 12.37 33.49 0.70 -- -- Peak 2 7320.00 56.86 74.00 -17.14 39.50 37.20 15.37 35.85 0.64 110 107 Peak 3 7320.00 51.26 54.00 -2.74 33.90 37.20 15.37 35.85 0.64 110 107 Average	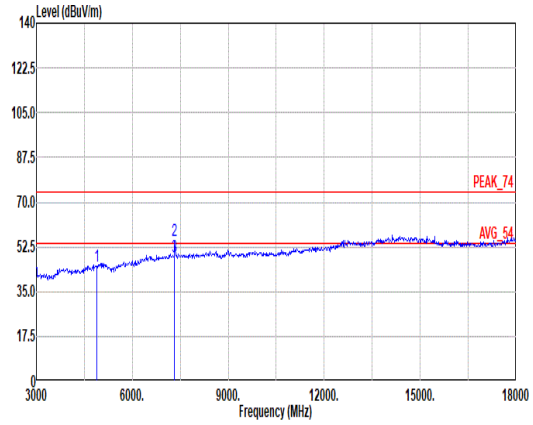 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4880.00 44.87 74.00 -29.13 32.83 32.46 12.37 33.49 0.70 -- -- Peak 2 7320.00 54.90 74.00 -19.10 37.54 37.20 15.37 35.85 0.64 360 180 Peak 3 7320.00 48.66 54.00 -5.34 31.30 37.20 15.37 35.85 0.64 360 180 Average

Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH19_2440MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	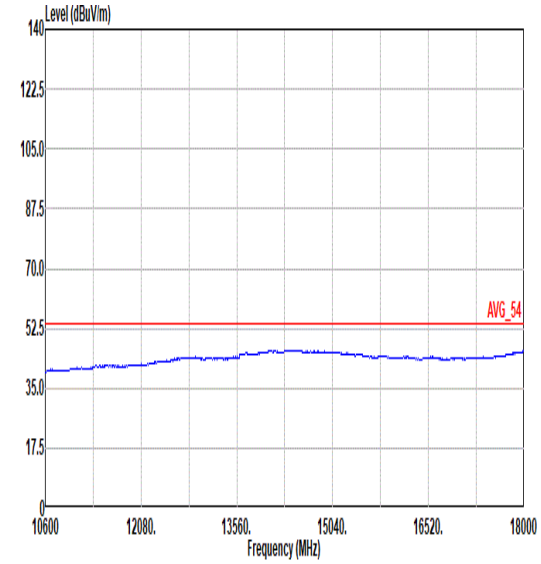 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	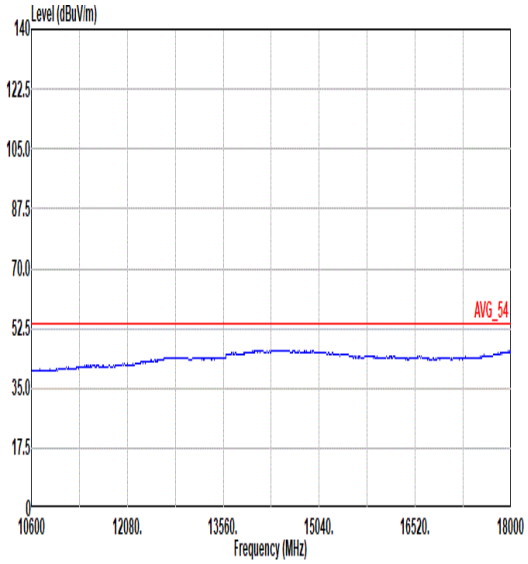 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	12	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	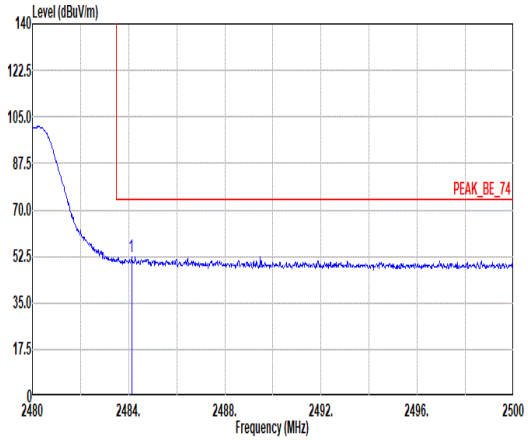 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.12 52.20 74.00 -21.80 39.19 26.70 8.69 32.41 10.03 100 115 PEAK	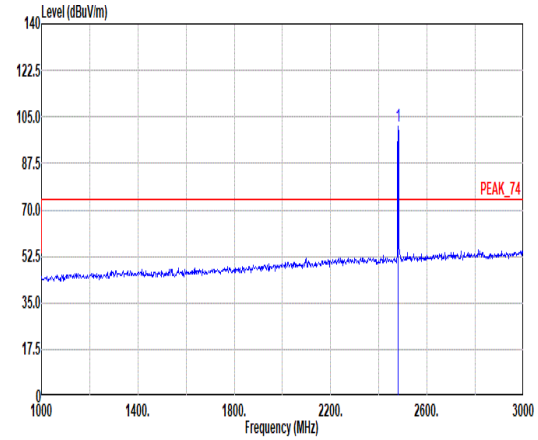 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 101.51 ------ ------ 88.51 26.70 8.68 32.41 10.03 100 115 PEAK
Avg	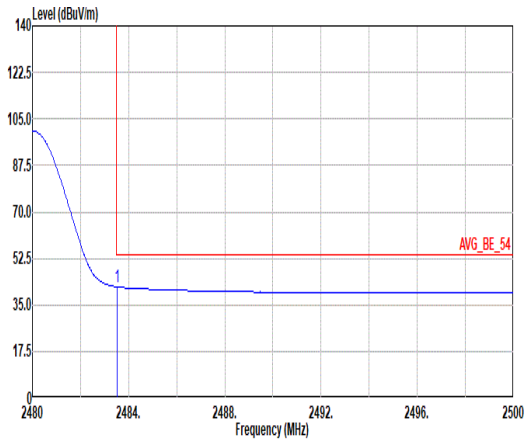 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.52 41.78 54.00 -12.22 28.77 26.70 8.69 32.41 10.03 100 115 AVERAGE	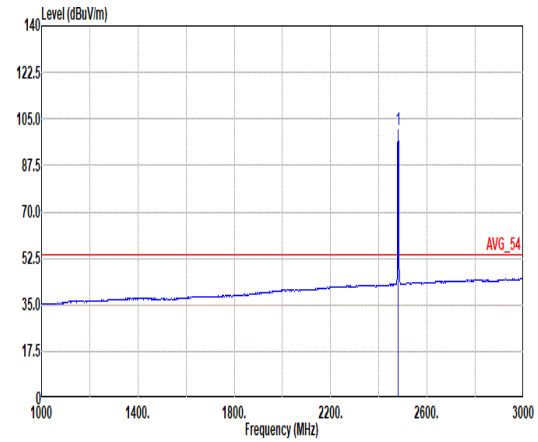 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 100.98 ------ ------ 87.98 26.70 8.68 32.41 10.03 100 115 AVERAGE

Mode	12	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Vertical	Fundamental
Peak	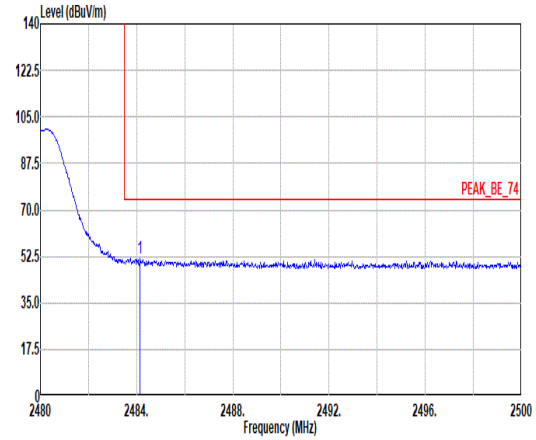 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2484.14 51.75 74.00 -22.25 38.74 26.70 8.69 32.41 10.03 400 336 PEAK	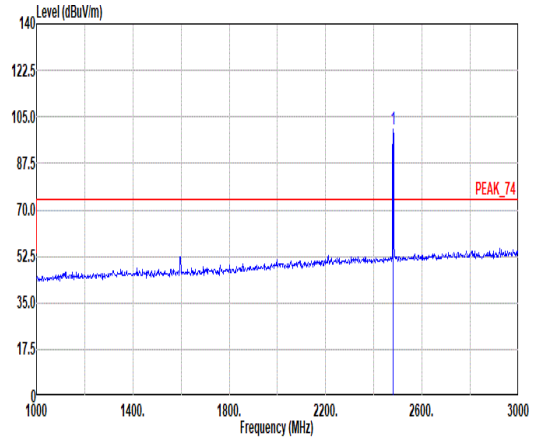 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 100.52 ------ ------ 87.52 26.70 8.68 32.41 10.03 400 336 PEAK
Avg	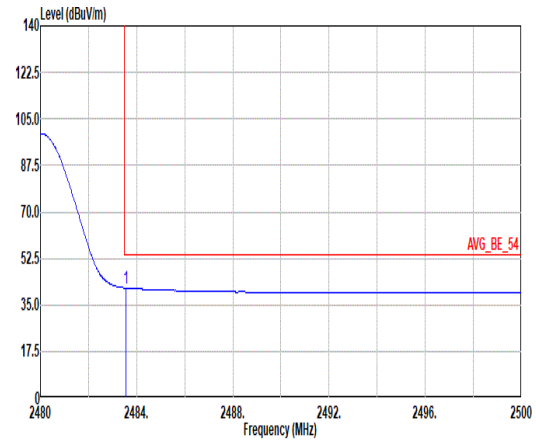 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.56 41.39 54.00 -12.61 28.38 26.70 8.69 32.41 10.03 400 336 AVERAGE	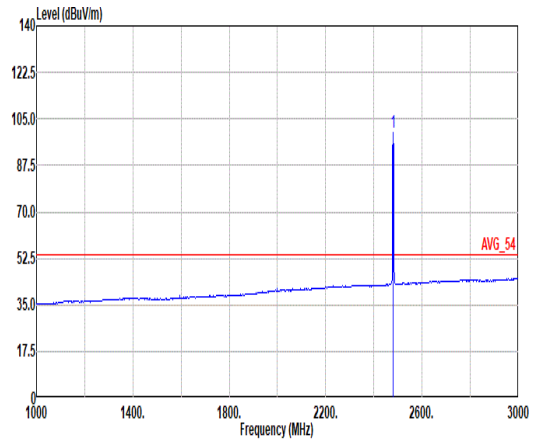 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 99.94 ------ ------ 86.94 26.70 8.68 32.41 10.03 400 336 AVERAGE

Mode	12	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	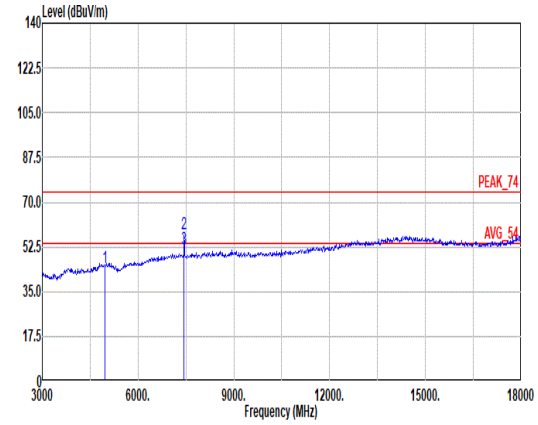 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 44.32 74.00 -29.68 31.98 32.70 12.42 33.47 0.69 -- -- Peak 2 7440.00 57.61 74.00 -16.39 40.13 37.26 15.52 35.93 0.63 115 108 Peak 3 7440.00 51.65 54.00 -2.35 34.17 37.26 15.52 35.93 0.63 115 108 Average	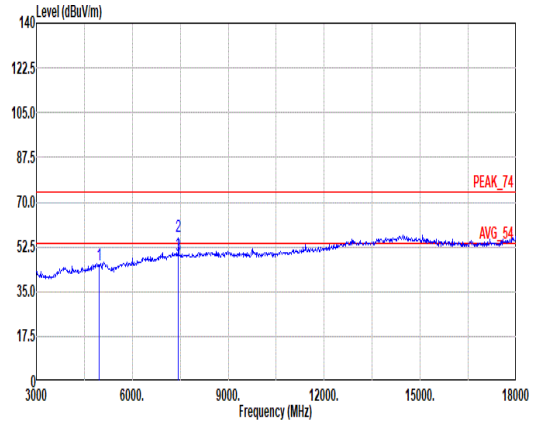 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 45.23 74.00 -28.77 32.89 32.70 12.42 33.47 0.69 -- -- Peak 2 7440.00 56.27 74.00 -17.73 38.79 37.26 15.52 35.93 0.63 363 183 Peak 3 7440.00 49.31 54.00 -4.69 31.83 37.26 15.52 35.93 0.63 363 183 Average

Mode	12	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	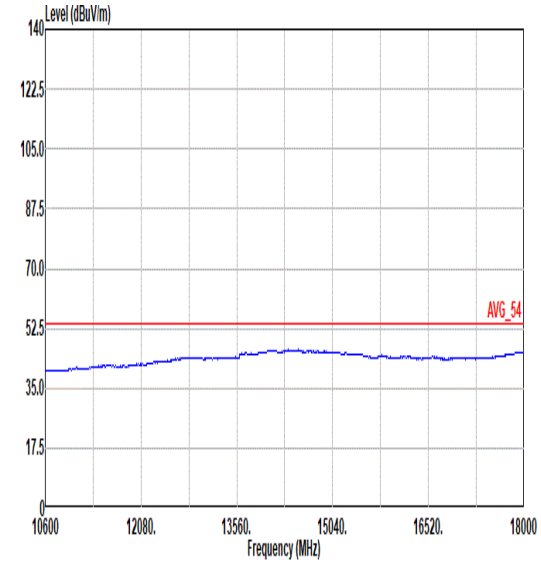 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL	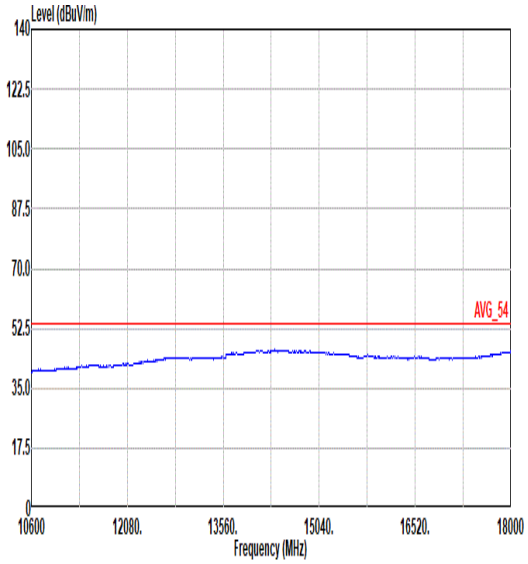 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL

Mode	13	
	SHF	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak	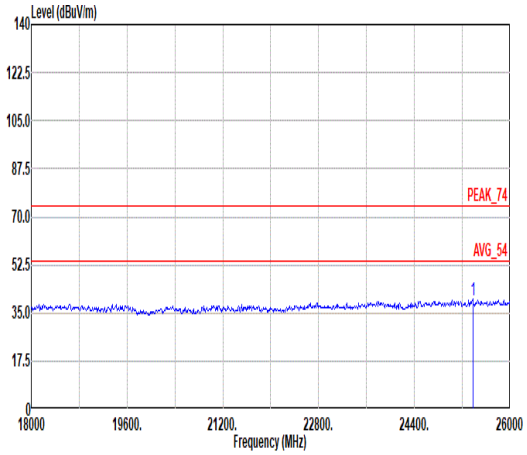 Site : 03CH22-HY Condition: PEAK_74 1m SHF_1223_240624 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 25385.20 39.61 74.00 -34.39 40.51 39.12 29.56 60.04 -9.54 -- -- PEAK	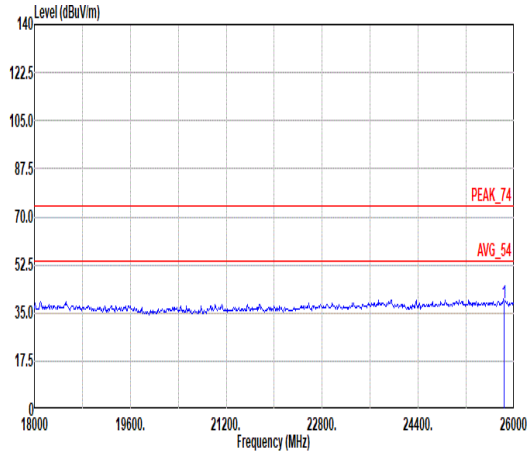 Site : 03CH22-HY Condition: PEAK_74 1m SHF_1223_240624 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 25828.62 38.53 74.00 -35.47 39.34 39.09 29.84 60.20 -9.54 -- -- PEAK

Mode	14	
	LF	
	2400-2483.5_Bluetooth-LE_GSFK _CH39_2480MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
QP/ Peak	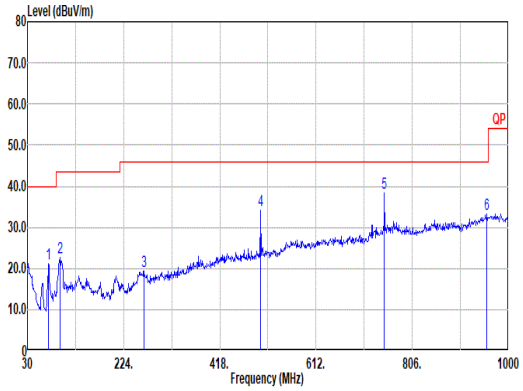 Site : 03CH22-HY Condition: QP 3m Bilog_63304_231015 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 72.68 21.05 40.00 -18.95 39.43 12.82 1.47 32.70 0.03 -- -- Peak 2 95.96 22.76 43.50 -20.74 38.16 15.56 1.70 32.70 0.04 -- -- Peak 3 264.74 19.39 46.00 -26.61 29.11 20.02 2.84 32.62 0.04 -- -- Peak 4 500.45 34.01 46.00 -11.99 38.73 23.98 3.88 32.80 0.22 -- -- Peak 5 749.74 38.21 46.00 -7.79 37.70 28.23 4.77 32.62 0.13 -- -- Peak 6 956.35 33.17 46.00 -12.83 27.82 31.06 5.36 31.28 0.21 -- -- Peak	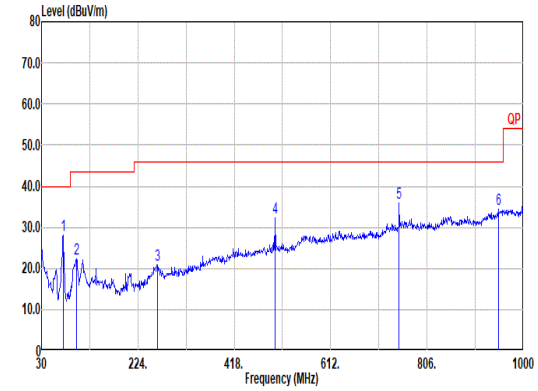 Site : 03CH22-HY Condition: QP 3m Bilog_63304_231015 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 73.65 27.99 40.00 -12.01 46.20 12.98 1.48 32.70 0.03 -- -- Peak 2 99.84 22.38 43.50 -21.12 37.33 15.99 1.75 32.71 0.02 -- -- Peak 3 263.77 20.71 46.00 -25.29 30.28 20.17 2.84 32.62 0.04 -- -- Peak 4 500.45 32.38 46.00 -13.62 37.10 23.98 3.88 32.80 0.22 -- -- Peak 5 749.74 35.84 46.00 -10.16 35.33 28.23 4.77 32.62 0.13 -- -- Peak 6 949.56 34.27 46.00 -11.73 29.19 30.88 5.34 31.34 0.20 -- -- Peak

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 125kbps	100.00	-	-	10Hz
Bluetooth - LE for 500kbps	100.00	-	-	10Hz
Bluetooth - LE for 1Mbps	100.00	-	-	10Hz
Bluetooth - LE for 2Mbps	100.00	-	-	10Hz

Bluetooth - LE for 125kbps

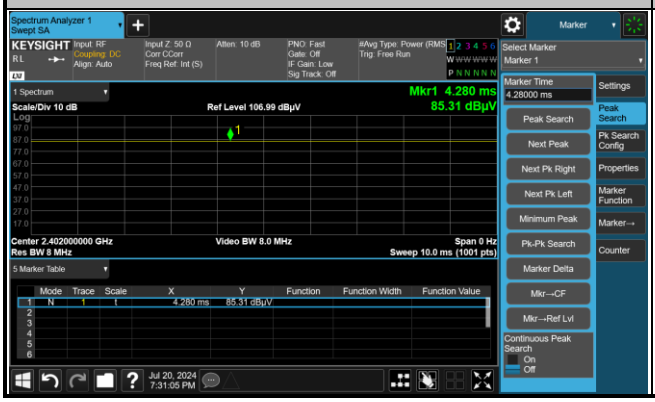

Bluetooth - LE for 500kbps

Bluetooth - LE for 1Mbps

Bluetooth - LE for 2Mbps