

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2512-0093

2. Customer

- Name (FCC) : EMSONIC / Name (ISED): EMSONIC
- Address (FCC) : 54-8, Cheomdangieop 3-ro, Sandong-eup, Gumi-si, Gyeongsangbuk-do, South Korea
Address (ISED) : 54-8, Cheomdangieop 3-ro, Sandong-eup, Gumi-si, Gyeongsangbuk-do, 39171,
Korea (Republic Of)

3. Use of Report : FCC & ISED Original Certification

4. Product Name / Model Name : PORTABLE BLUETOOTH SPEAKER / LUMIO

FCC ID : 2A78WLUMIO

IC : 28870-LUMIO

5. FCC Regulation(s): Part 15.247

ISED Standard(s): RSS-247 Issue 4, RSS-Gen Issue 5

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2020

6. Date of Test : 2025.07.23 ~ 2025.08.12

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : Jaehun Yun 	Name : JaeJin Lee 

2025 . 12 . 04 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2512-0093	Dec. 04, 2025	Initial issue	Jaehun Yun	JaeJin Lee

Table of Contents

1. General Information	4
1.1. Description of EUT	4
1.2. Support Equipemnt	4
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Information about the FHSS characteristics	6
1.7. Conclusion of worst-case and operation mode	7
1.8. Test Equipment List.....	8
2. Antenna Requirement.....	9
3. Summary of Test Results	10
4. Maximum Peak Conducted Output Power	11
4.1. Test Setup	11
4.2. Limit.....	11
4.3. Test Procedure.....	11
4.4. Test Results	12
5. 20 dB BW & Occupied BW	18
5.1. Test Setup	18
5.2. Limit.....	18
5.3. Test Procedure.....	18
5.4. Test Results	18
6. Carrier Frequency Separation	24
6.1. Test Setup	24
6.2. Limit.....	24
6.3. Test Procedure.....	24
6.4. Test Results	24
7. Number of Hopping Channels	26
7.1. Test Setup	26
7.2. Limit.....	26
7.3. Test Procedure.....	26
7.4. Test Results	26
8. Time of Occupancy.....	29
8.1. Test Setup	29
8.2. Limit.....	29
8.3. Test Procedure.....	29
8.4. Test Results	29
9. Unwanted Emissions	31
9.1. Test Setup	31
9.2. Limit.....	31
9.3. Test Procedures.....	33
9.3.1. Test Procedures for Unwanted Emissions(Radiated)	33
9.3.2. Test Procedures for Unwanted Emissions(Conducted).....	34
9.4. Test Results	35
9.4.1. Unwanted Emissions(Radiated)	35
9.4.2. Unwanted Emissions(Conducted)	38
10. AC Power-Line Conducted Emissions.....	62
10.1. Test Setup	62
10.2. Limit.....	62
10.3. Test Procedure.....	62
10.4. Test Results	63
APPENDIX I.....	65
APPENDIX II.....	66

1. General Information

1.1. Description of EUT

Equipment Class	Spread Spectrum Transmitter (DSS)
Product Name	PORTABLE BLUETOOTH SPEAKER
Model Name	LUMIO
Add Model Name	-
Firmware Version Identification Number	SW V1.0
EUT Serial Number	No Specified
Power Supply	DC : 3.7 V
Frequency Range	2 402 MHz ~ 2 480 MHz
Max. RF Output Power	8.56 dBm (0.007 W)
Modulation Technique (Data rate)	GFSK(1 Mbps), $\pi/4$ -DQPSK(2 Mbps), 8DPSK(3 Mbps)
Number of Channels	79
Antenna Specification	Antenna Type: PCB Pattern Antenna Gain : -0.68 dBi (PK)

1.2. Support Equipemnt

- NA

1.3. Testing Laboratory

Dt&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948.

- FCC & ISSED MRA Designation No. : KR0034

- FCC Test Firm Registration No. : 704742

- ISSED#: 5740A

www.dtnet.net

Telephone : + 82-31-321-2664

FAX : + 82-31-321-1664

1.4. Testing Environment

Ambient Condition

▪ Temperature +20 °C ~ +23 °C

▪ Relative Humidity 40 % ~ 44 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.10-2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	4.9 dB (The confidence level is about 95 %, $k = 2$)

1.6. Information about the FHSS characteristics

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following :

A) The hopping sequence is pseudorandom

Note 1 : Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 42, 54, 72, 09, 01, 11, 33, 41, 34, 42, 65, 73, 53, 69, 06, 22, 04, 20,
36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 41, 58, 44, 60, 76, 13, 03, 11, 35, 43,
37, 45, 69, 77, 52, 71, 08, 24, 06, 24, 48, 56, 45, 46, 70, 01, 72, 06, 25, 33, 12, 28,
49, 60, 45, 58, 74, 13, 05, 18, 37, 49 etc

The System receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

B) All channels are used equally on average

C) The receiver input bandwidth equals the transmit bandwidth

D) The receiver hops in sequence with the transmit signal

- 15.247(g) : In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h) : In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection / hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h) : The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

1.7. Conclusion of worst-case and operation mode

The EUT has three types of modulation (GFSK, $\pi/4$ -DQPSK and 8DPSK).
Therefore all applicable requirements were tested with all the modulations.
And packet type was tested at the worst case(DH5).

EUT Operation test setup

Bluetooth tester was used to control the transmit parameters during test.

Tested frequency information

- Hopping Function : Enable

	Tested Frequency (MHz)
Hopping Band	2 402 ~ 2 480

- Hopping Function : Disable

	Tested Frequency (MHz)
Lowest Channel	2 402
Middle Channel	2 441
Highest Channel	2 480

1.8. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	24/11/26	25/11/26	MY50410399
Spectrum Analyzer	Agilent Technologies	N9020A	24/11/27	25/11/27	MY50410163
Multimeter	FLUKE	17B+	24/11/27	25/11/27	36390701WS
DC Power Supply	Agilent Technologies	66332A	25/05/28	26/05/28	US37474125
DC Power Supply	SM techno	SDP30-5D	25/05/29	26/05/29	305DMG304
Signal Generator	Rohde Schwarz	SMBV100A	24/12/10	25/12/10	255571
Signal Generator	ANRITSU	MG3695C	24/11/29	25/11/29	173501
Thermohygrometer	BODYCOM	BJ5478	25/01/13	26/01/13	120612-1
Thermohygrometer	BODYCOM	BJ5478	24/12/05	25/12/05	120612-2
BlueTooth Tester	TESCOM	TC-3000C	24/12/10	25/12/10	3000C000396
Power Splitter	Anritsu	K241B	24/11/26	25/11/26	016681
Loop Antenna	ETS-Lindgren	6502	24/11/08	26/11/08	00060496
Hybrid Antenna	Schwarzbeck	VULB 9160	24/12/13	25/12/13	3362
Horn Antenna	ETS-Lindgren	3117	24/12/11	25/12/11	00140394
Horn Antenna	A.H.Systems Inc.	SAS-574	25/06/12	26/06/12	155
PreAmplifier	Agilent Technologies	8449B	24/12/11	25/12/11	3008A02108
PreAmplifier	tsj	MLA-1840-J02-45	25/05/29	26/05/29	16966-10728
PreAmplifier	H.P	8447D	24/12/11	25/12/11	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	24/12/11	25/12/11	7
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	24/12/11	25/12/11	2
High Pass Filter	Wainwright Instruments	WHKX6-6320-8000-26500-40CC	24/12/11	25/12/11	2
Power Meter	Anritsu	ML2488B	24/11/28	25/11/28	0926003
Power Sensor	Anritsu	MA2472A	24/11/28	25/11/28	030031
EMI Receiver	ROHDE&SCHWARZ	ESCI7	25/01/20	26/01/20	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	24/08/21	25/08/21	101333
LISN	SCHWARZBECK	NSLK 8128 RC	24/10/21	25/10/21	8128 RC-387
Digital Thermo Hygrometer	CAS	TE-303N	25/02/13	26/02/13	220502531
Cable	Junkosha	MWX241	25/01/02	26/01/02	mmW-1
Cable	Junkosha	MWX241	25/01/02	26/01/02	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	25/01/02	26/01/02	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	25/01/02	26/01/02	M-2
Cable	JUNKOSHA	MWX241/B	25/01/02	26/01/02	M-3
Cable	JUNKOSHA	MWX221	25/01/02	26/01/02	M-4
Cable	JUNKOSHA	MWX211	25/01/02	26/01/02	M-5
Cable	JUNKOSHA	J12J101757-00	25/01/02	26/01/02	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	25/01/02	26/01/02	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	25/01/02	26/01/02	M-9
Cable	Dt&C	Cable	25/01/02	26/01/02	RFC-85
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0185
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0190
3m Semi Anechoic Chamber	SYC	3m-SAC	25/06/13(NSA) 25/06/19(VSWR)	26/06/13(NSA) 26/06/19(VSWR)	3m-SAC-1

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

2. Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

Conclusion: Comply

The antenna is permanently attached on the device.

Therefore this E.U.T complies with the requirement of Part 15.203

3. Summary of Test Results

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a) 15.247(b)	RSS-247[6.2.3.1] RSS-247[6.2.3.2]	Maximum Peak Conducted Output Power	For FCC =< 0.125 W(conducted) For ISSED =< 0.125 W(conducted) =< 4 Watt(e.i.r.p)	Conducted	C
15.247(a)	RSS-247[6.2.3.1]	20 dB Bandwidth	NA		C
		Carrier Frequency Separation	>= 25 kHz or >= Two thirds of the 20 dB BW, whichever is greater.		C
		Number of Hopping Channels	>= 15 hops		C
		Time of Occupancy	<= 0.4 seconds		C Note 2
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d)	RSS-247[6.6]	Unwanted Emissions (Conducted)	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.	Radiated	C
15.247(d) 15.205 15.209	RSS-247[6.6] RSS-Gen[8.9] RSS-Gen[8.10]	Unwanted Emissions (Radiated)	Part 15.209 Limits (Refer to section 9)		C Note 3
15.207	RSS-Gen[8.8]	AC Power-Line Conducted Emissions	Part 15.207 Limits (Refer to section 10)	AC Line Conducted	C
15.203	-	Antenna Requirement	Part 15.203 (Refer to section 2)	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This test item was performed using the configuration the longest dwell time(DH5) and the minimum number of channels(20). Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.					

4. Maximum Peak Conducted Output Power

4.1. Test Setup

Refer to the APPENDIX I.

4.2. Limit

■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400 MHz - 2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 MHz – 5 805 MHz band : 1 Watt. For all other frequency hopping systems in the 2 400 MHz – 2 483.5 MHz band: 0.125 watts.

■ ISSED Requirements

1. RSS-247[6.2.3.1](a), FHS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.
2. RSS-247[6.2.3.2](a), if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 1.0 W.
3. RSS-247[6.2.3.2](c), the e.i.r.p. shall not exceed 4 W, except as provided in sections 6.5 a) and b).

4.3. Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using ;
Span = Approximately five times the 20 dB bandwidth, centered on a hopping channel.
RBW > 20 dB bandwidth of the emission being measured. **Actual RBW = 2 MHz**
VBW ≥ RBW
Sweep = No faster than coupled (auto) time.
Trace = max hold
Detector function = peak
Use the marker-to-peak function to set the marker to the peak of the emission.

4.4. Test Results

Modulation	Tested Channel	Burst Average Output Power		Peak Output Power		Antenna Gain	e.i.r.p ^{Note3}
		dBm	mW	dBm	mW	(dBi)	(dBm)
<u>GFSK</u>	Lowest	6.67	4.65	6.74	4.72	-0.68	6.06
	Middle	5.45	3.51	5.50	3.55	-0.68	4.82
	Highest	6.69	4.67	6.98	4.99	-0.68	6.30
<u>$\pi/4$-DQPSK</u>	Lowest	6.58	4.55	7.68	5.86	-0.68	7.00
	Middle	5.35	3.43	5.95	3.94	-0.68	5.27
	Highest	6.48	4.45	7.62	5.78	-0.68	6.94
<u>8DPSK</u>	Lowest	6.54	4.51	7.30	5.37	-0.68	6.62
	Middle	5.31	3.40	6.10	4.07	-0.68	5.42
	Highest	6.45	4.42	8.56	7.18	-0.68	7.88

Note 1: The average output power was tested using an average power meter for reference only.

Note 2: See next pages for actual measured spectrum plots.


Note 3: $e.i.r.p = P_{cond} + G_{EUT}$

P_{cond} = measured power at feedpoint of the EUT antenna, in dBm (Peak Conducted Output Power)

G_{EUT} = gain of the EUT radiating element (antenna), in dBi


Peak Output Power

Lowest Channel & Modulation : GFSK

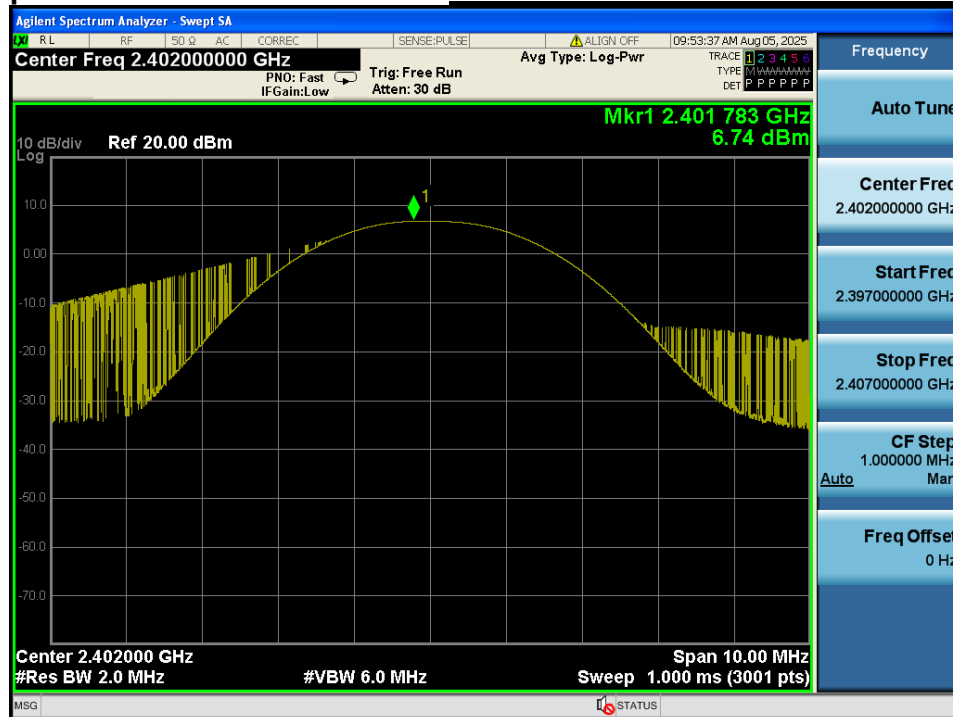


Peak Output Power

Middle Channel & Modulation : GFSK

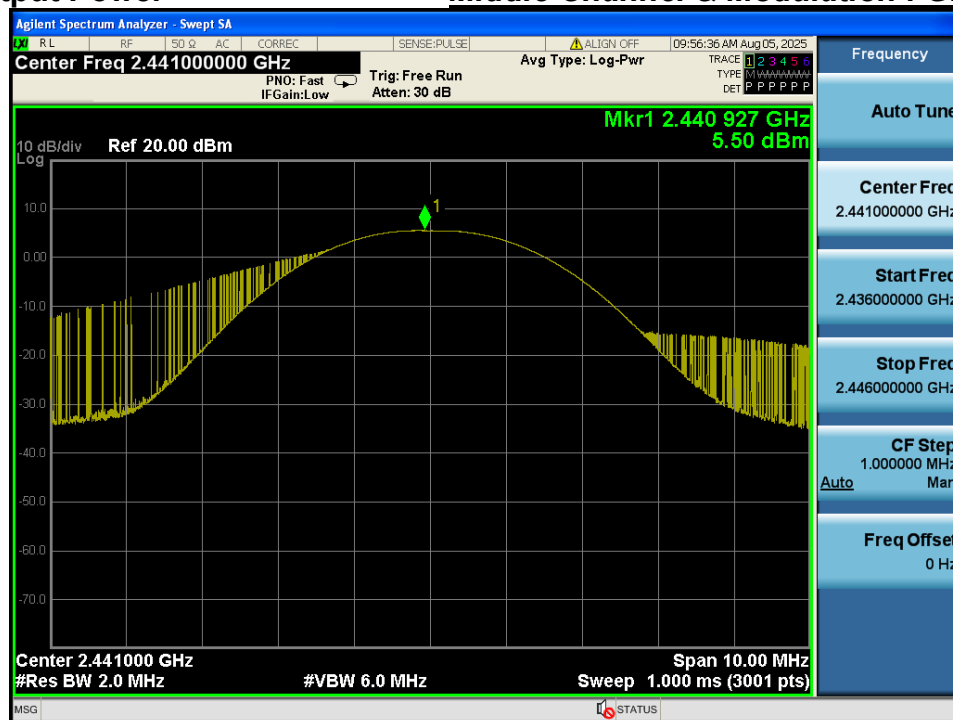


Peak Output Power

Highest Channel & Modulation : GFSK

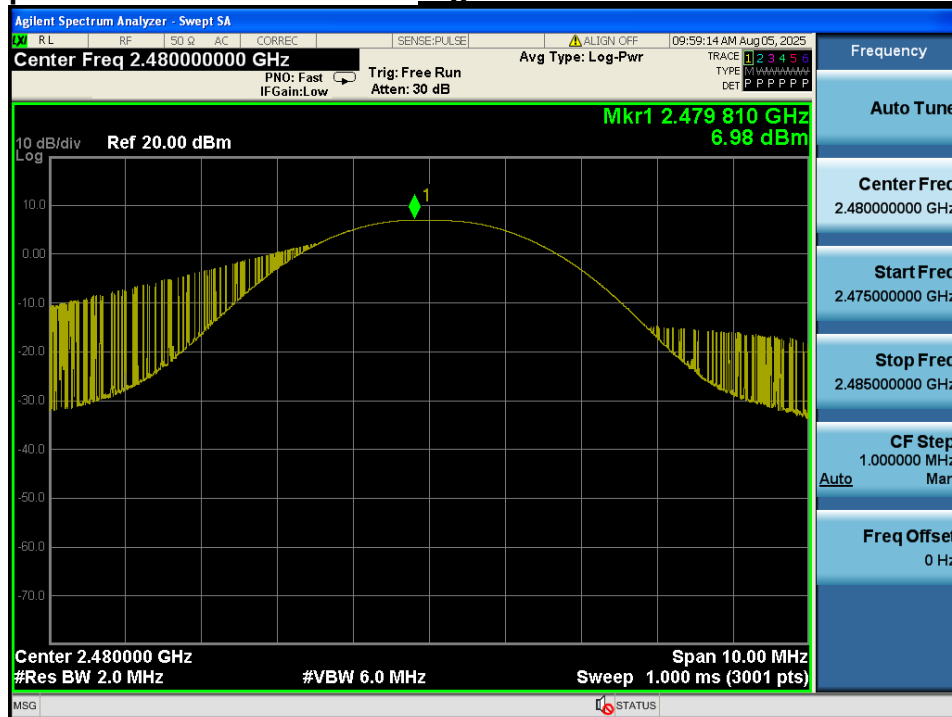


Peak Output Power

Lowest Channel & Modulation : $\pi/4$ -DQPSK

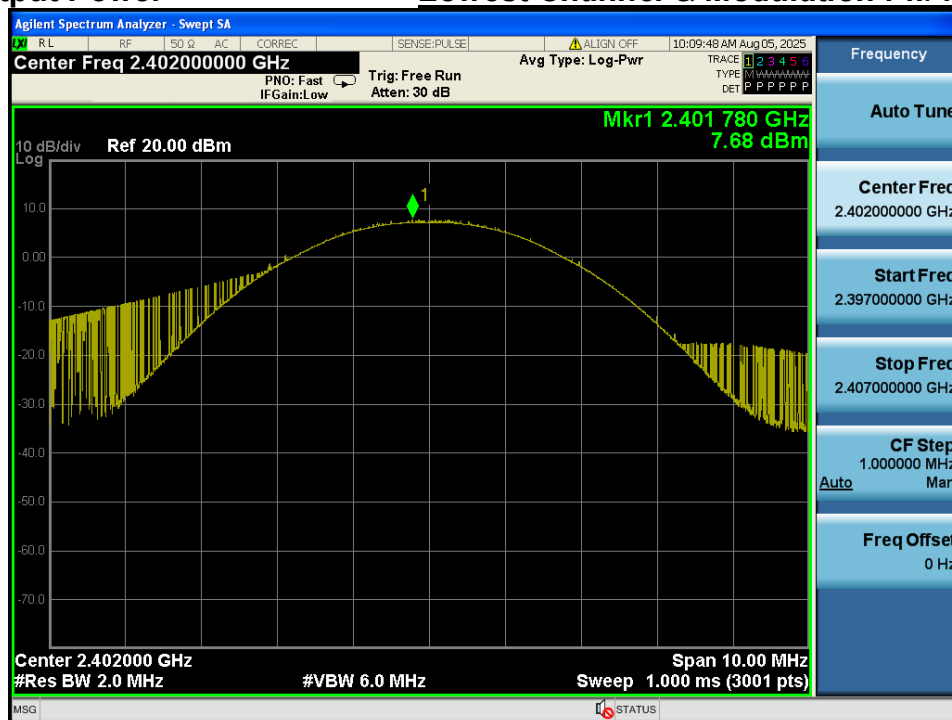


Peak Output Power

Middle Channel & Modulation : $\pi/4$ -DQPSK

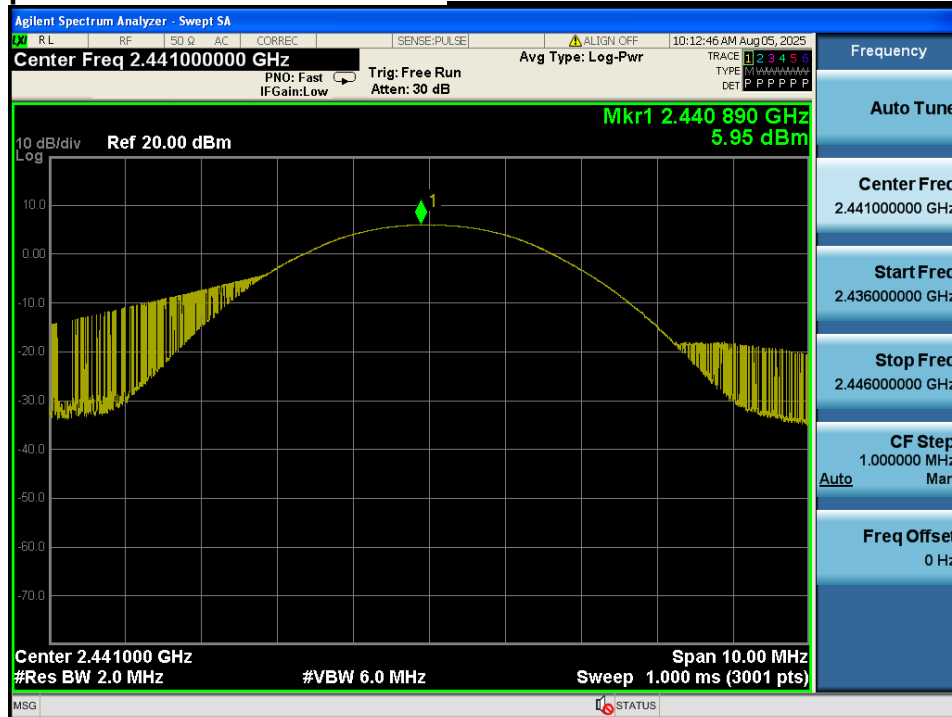


Peak Output Power

Highest Channel & Modulation : $\pi/4$ -DQPSK

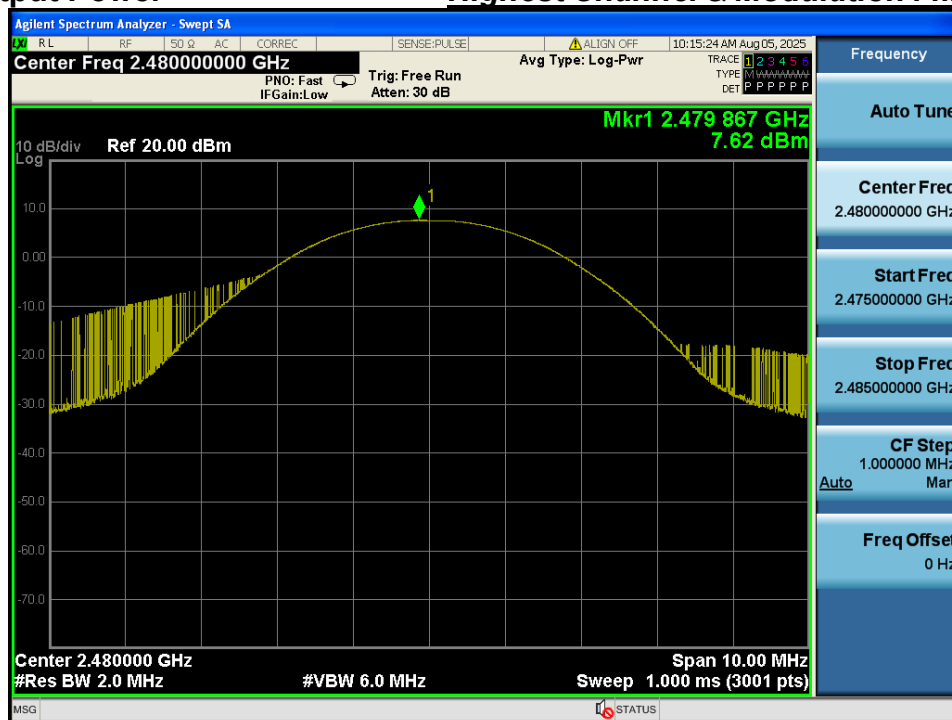


Peak Output Power

Lowest Channel & Modulation : 8DPSK

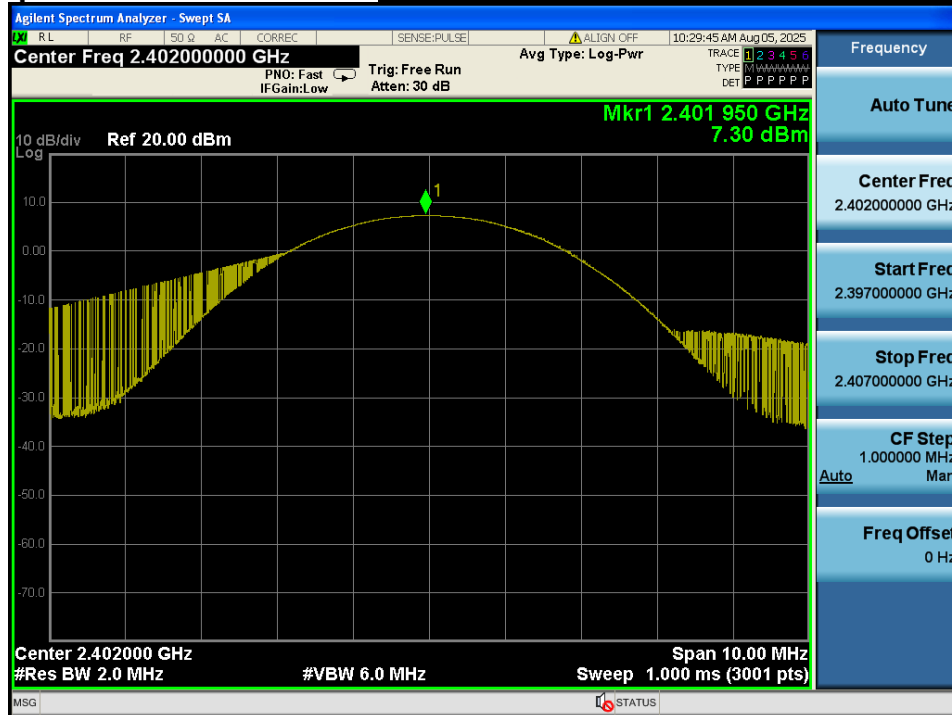


Peak Output Power

Middle Channel & Modulation : 8DPSK

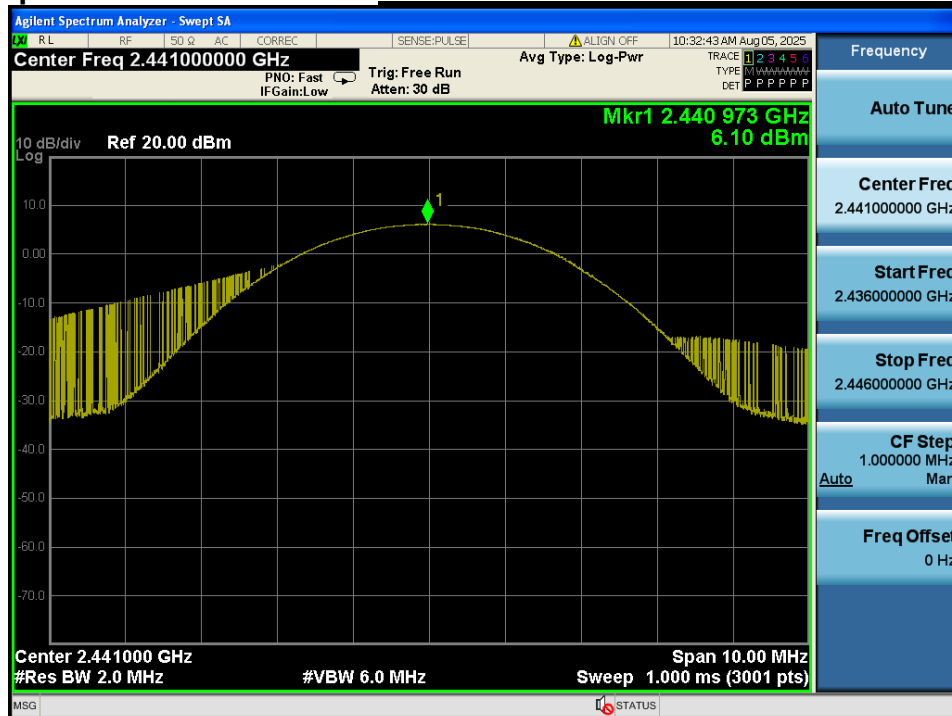

Peak Output Power

Highest Channel & Modulation : 8DPSK

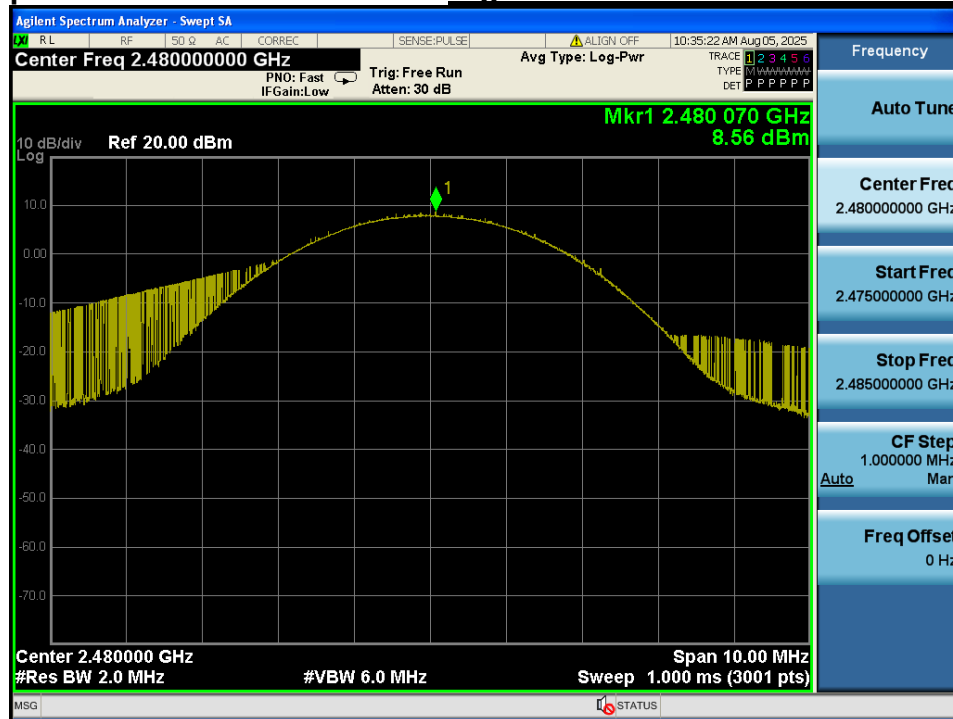

5. 20 dB BW & Occupied BW

5.1. Test Setup

Refer to the APPENDIX I.

5.2. Limit

Limit : Not Applicable

5.3. Test Procedure


1. The 20 dB bandwidth was measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:
RBW = 1 % to 5 % of the 20 dB BW & Occupied BW
VBW $\geq 3 \times$ RBW
Span = between 1.5 times and 5.0 times the 20 dB bandwidth & Occupied BW
Sweep = auto
Detector function = peak
Trace = max hold

5.4. Test Results

Modulation	Tested Channel	20 dB BW (MHz)	Occupied BW (MHz)
<u>GFSK</u>	Lowest	0.887	0.857
	Middle	0.888	0.851
	Highest	0.887	0.859
<u>$\pi/4$-DQPSK</u>	Lowest	1.330	1.216
	Middle	1.336	1.221
	Highest	1.326	1.193
<u>8DPSK</u>	Lowest	1.319	1.222
	Middle	1.316	1.219
	Highest	1.335	1.207


20 dB BW & Occupied BW

Lowest Channel & Modulation : GFSK

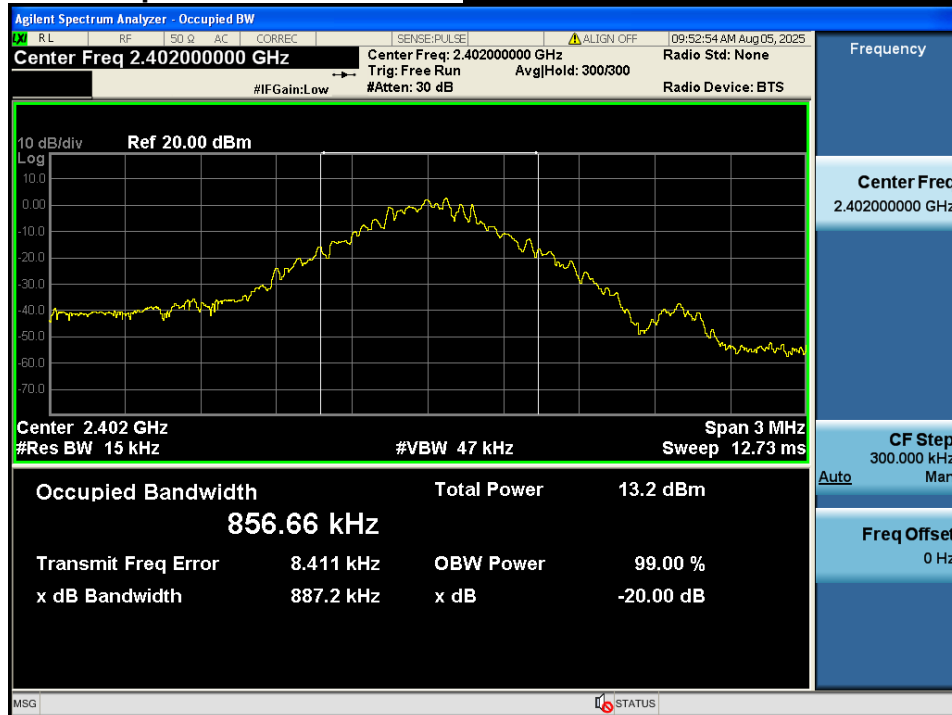


20 dB BW & Occupied BW


Middle Channel & Modulation : GFSK

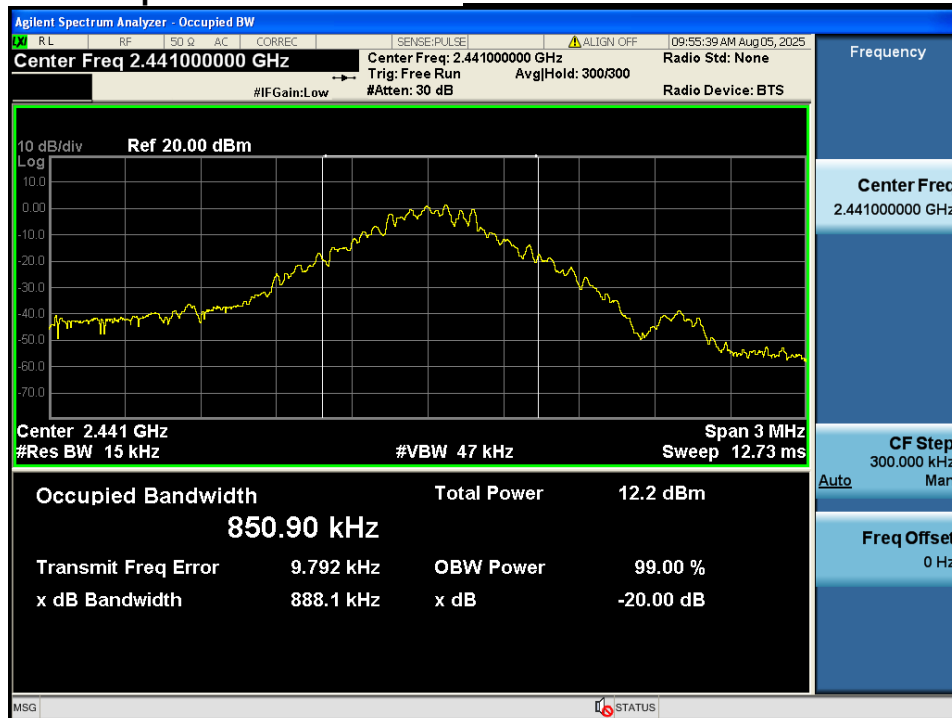


20 dB BW & Occupied BW

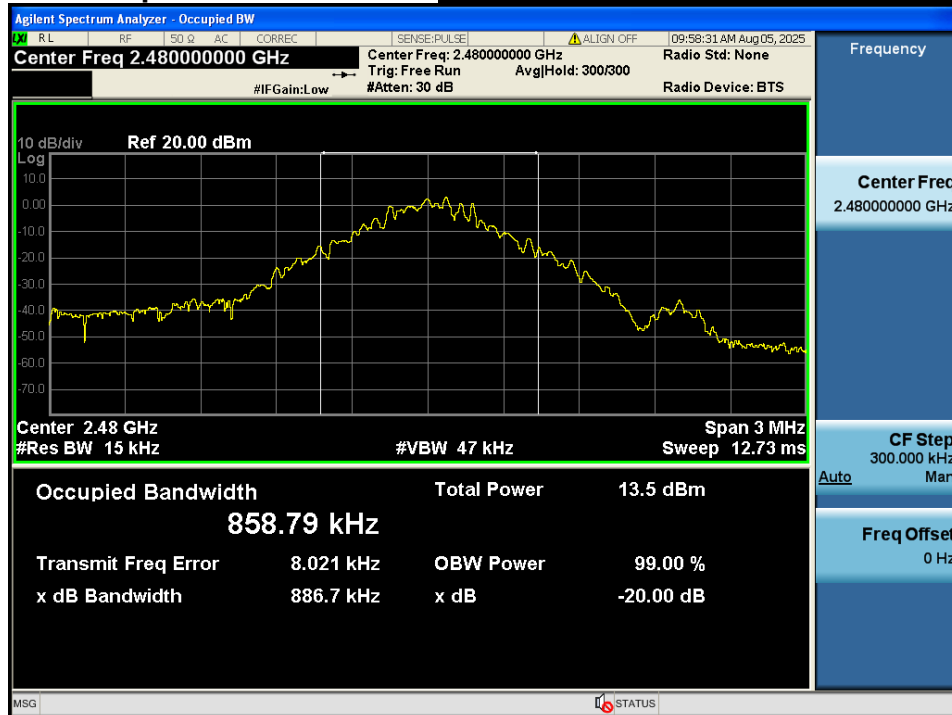Highest Channel & Modulation : GFSK


20 dB BW & Occupied BW

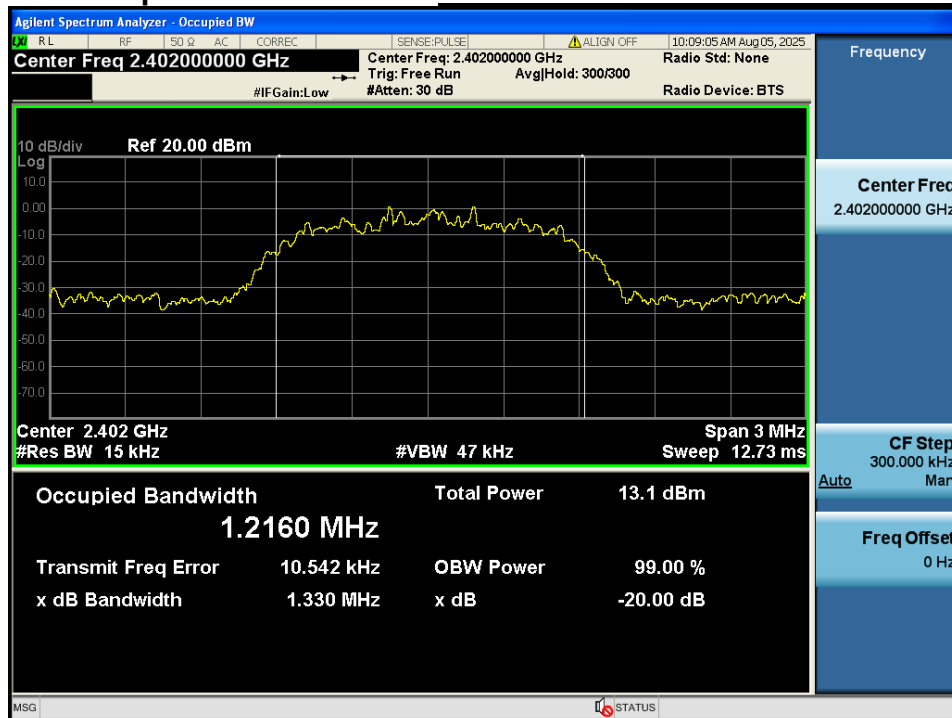Lowest Channel & Modulation : $\pi/4$ -DQPSK

20 dB BW & Occupied BW

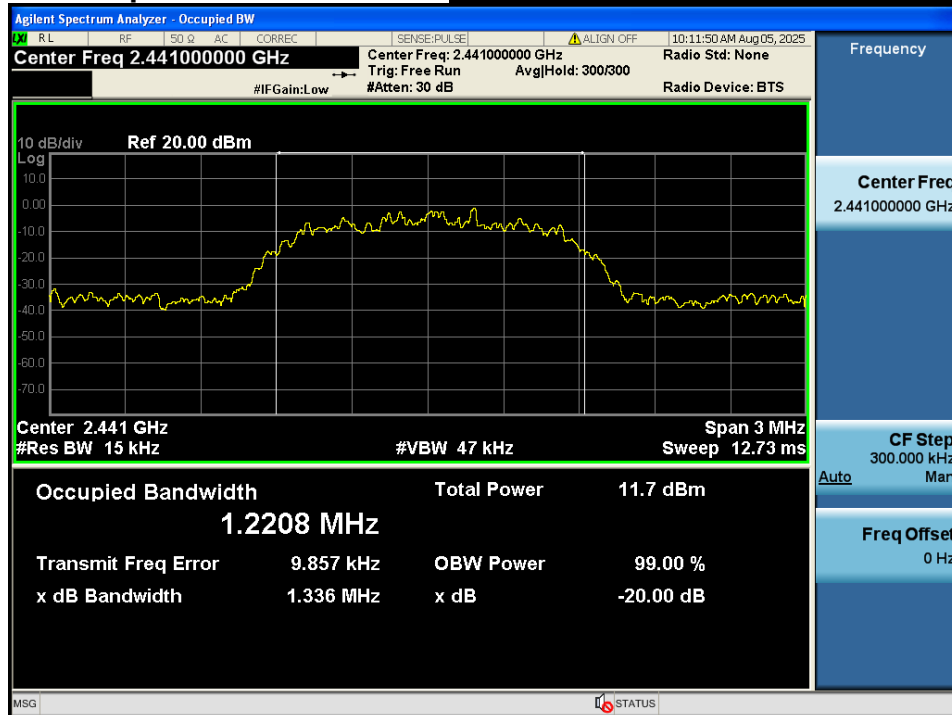
Middle Channel & Modulation : $\pi/4$ -DQPSK

20 dB BW & Occupied BW

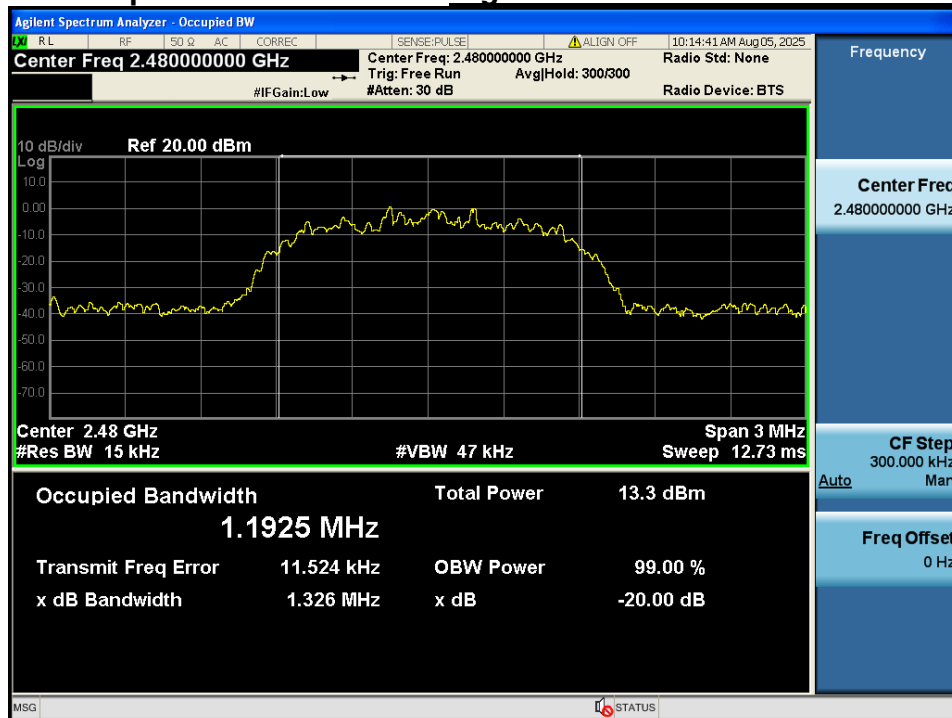Highest Channel & Modulation : $\pi/4$ -DQPSK


20 dB BW & Occupied BW

Lowest Channel & Modulation : 8DPSK

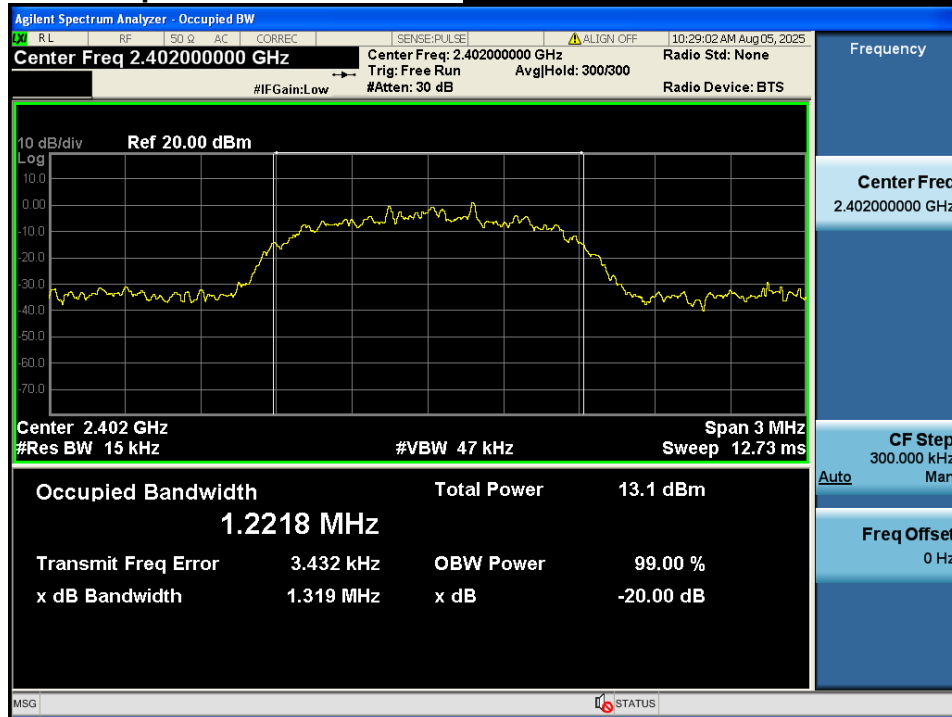


20 dB BW & Occupied BW

Middle Channel & Modulation : 8DPSK

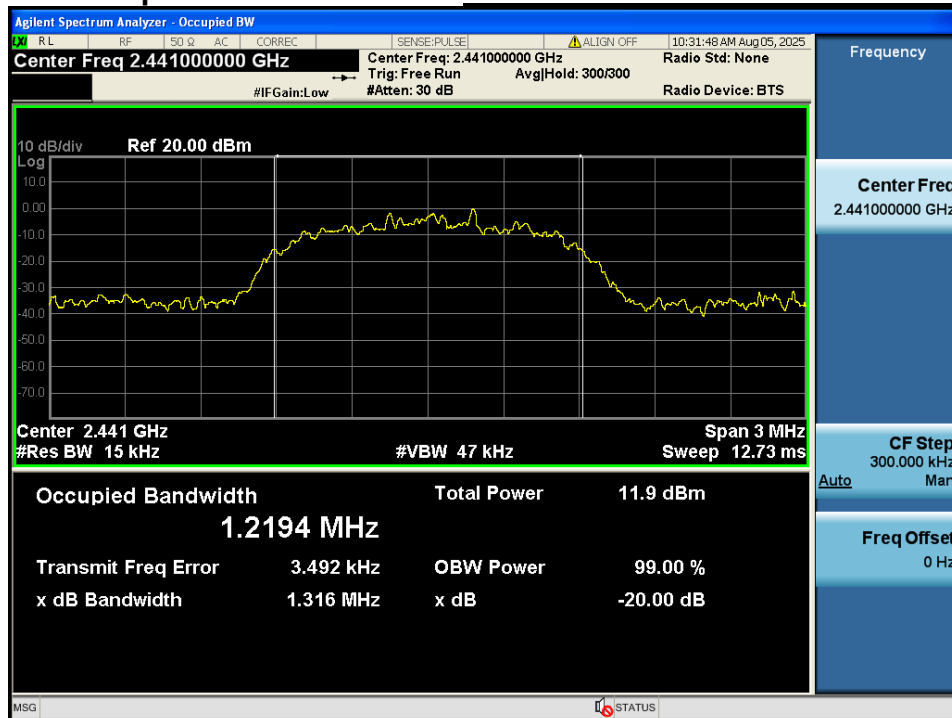

20 dB BW & Occupied BW

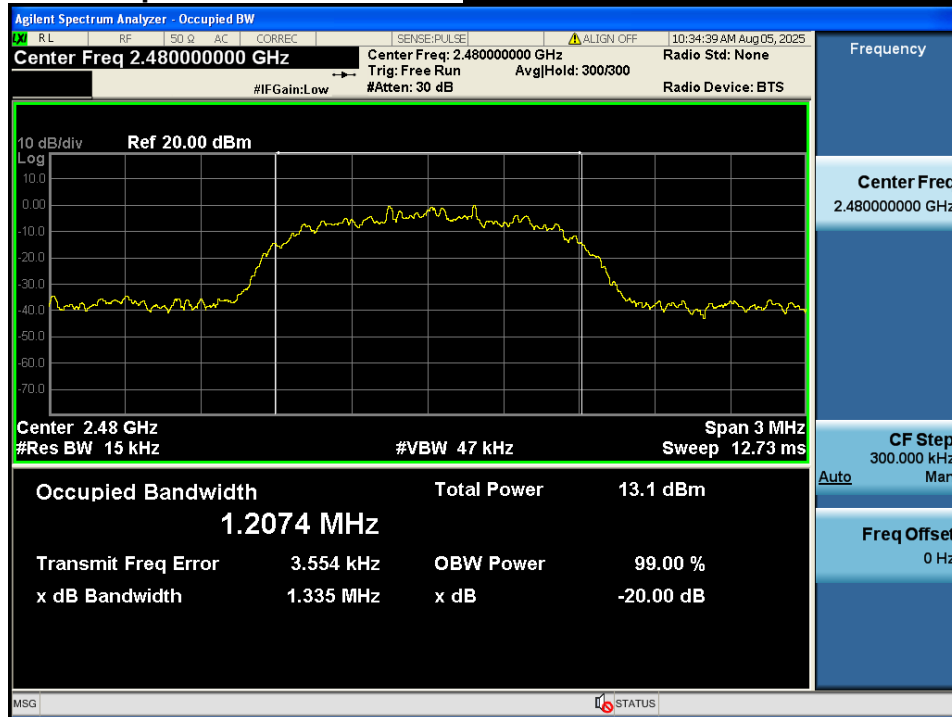Highest Channel & Modulation : 8DPSK

6. Carrier Frequency Separation

6.1. Test Setup

Refer to the APPENDIX I.

6.2. Limit

Limit : ≥ 25 kHz or $\geq$ Two-Thirds of the 20 dB BW whichever is greater.

6.3. Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = Wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = No faster than coupled (auto) time.

Detector function = peak

Trace = max hold

Allow the trace to stabilize.


6.4. Test Results

Hopping Mode	Modulation	Peak of reference channel(MHz)	Peak of adjacent Channel(MHz)	Test Result (MHz)
Enable	GFSK	2 441.070	2 442.070	1.000

Note 1 : See next pages for actual measured spectrum

Carrier Frequency Separation (FH)

Hopping mode : Enable&GFSK

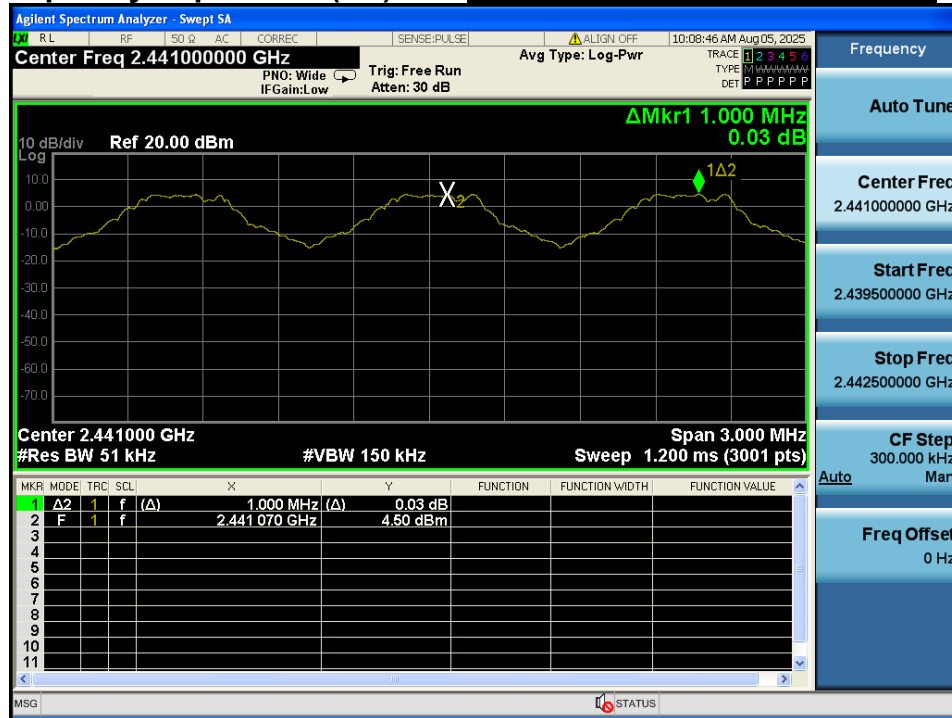

7. Number of Hopping Channels

7.1. Test Setup

Refer to the APPENDIX I.

7.2. Limit

Limit : ≥ 15 hops

7.3. Test Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 2 400 MHz ~ 2 483.5 MHz were examined.

The spectrum analyzer is set to :

Span for FH mode = 50 MHz Start Frequency = 2 391.5 MHz, Stop Frequency = 2 441.5 MHz

Start Frequency = 2 441.5 MHz, Stop Frequency = 2 491.5 MHz

Span for AFH mode = 30 MHz Start Frequency = 2 426.0 MHz, Stop Frequency = 2 456.0 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = No faster than coupled (auto) time.

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

7.4. Test Results

FH mode

Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	79


AFH mode

Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	20

Note 1 : See next pages for actual measured spectrum plots.


Number of Hopping Channels 1(FH)

Hopping mode : Enable & GFSK

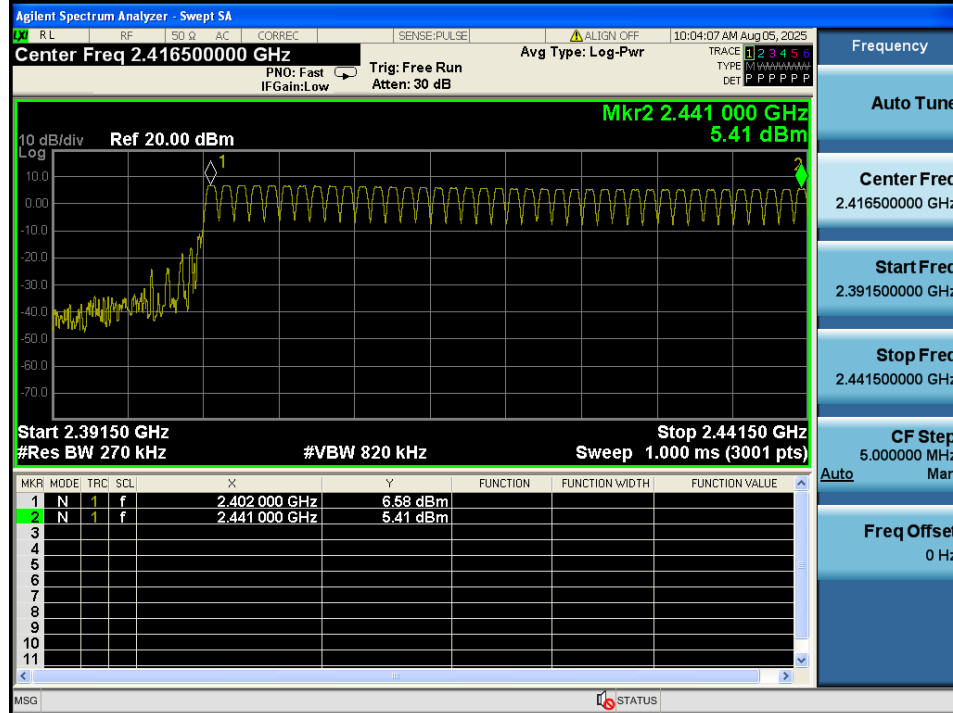


Number of Hopping Channels 2(FH)

Hopping mode : Enable & GFSK

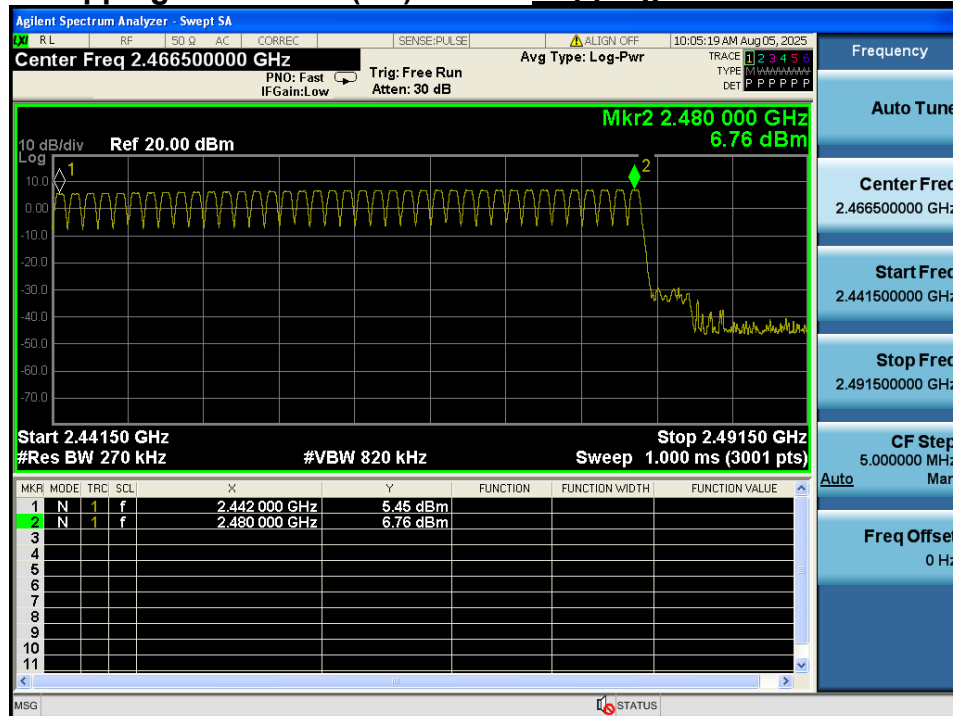

Number of Hopping Channels 1(AFH)

Hopping mode : Enable &GFSK

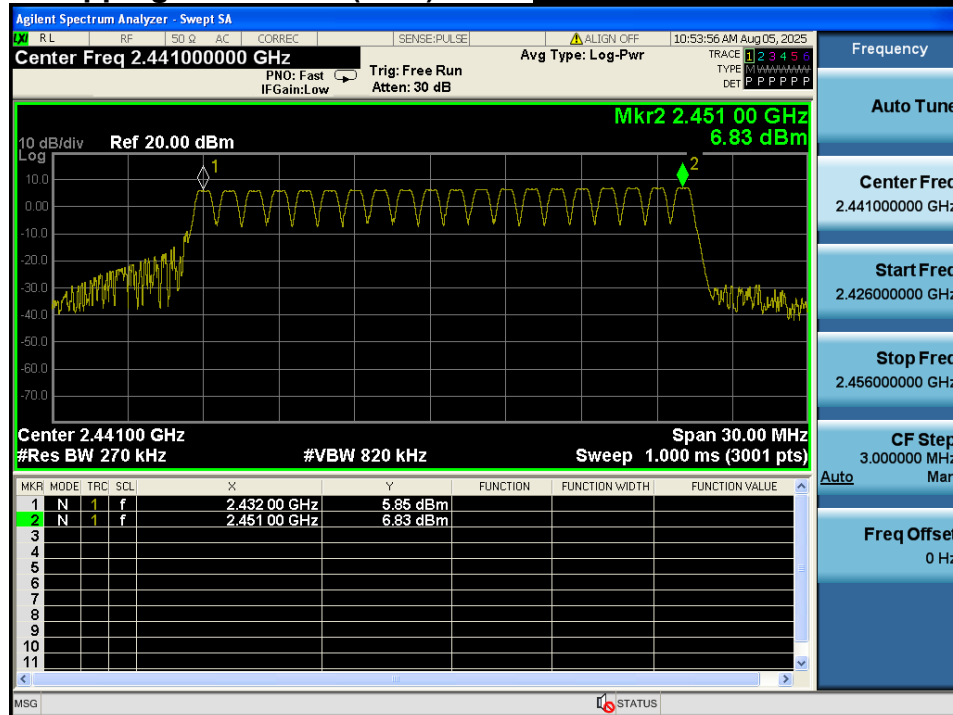

8. Time of Occupancy

8.1. Test Setup

Refer to the APPENDIX I.

8.2. Limit

The maximum permissible time of occupancy is 400 ms within a period of 400 ms multiplied by the number of hopping channels employed.

8.3. Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

1st Step

The spectrum analyzer is set to :

Center frequency = 2 441 MHz

Span = zero

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel, **Actual: 1 MHz**

Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = $1/\text{hopping rate}$) should achieve this. **Actual: 4 ms**

Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed. The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel.

VBW $\geq$ RBW

Detector function = peak

Trace = Clear-write, single sweep.

Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.

2nd Step

To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops.

SA Sweep time setting: **800 ms**

8.4. Test Results


AFH mode

Hopping mode	Packet Type	Dwell Time per Hop (ms)	SA Sweep time(ms)	Number of Hops a channel	Regulatory observation period(ms)	Time of Occupancy (ms)
Enable	DH 5	2.88	800	12	8s	345.6


Note: Regulatory observation period = $20(\text{number of hopping channels}) \times 400 \text{ ms}$

Time of Occupancy = Dwell time per Hop $\times ((\text{Number of Hops a channel} / \text{SA sweep time}) \times \text{Regulatory observation period})$

Hopping mode : Enable&DH5

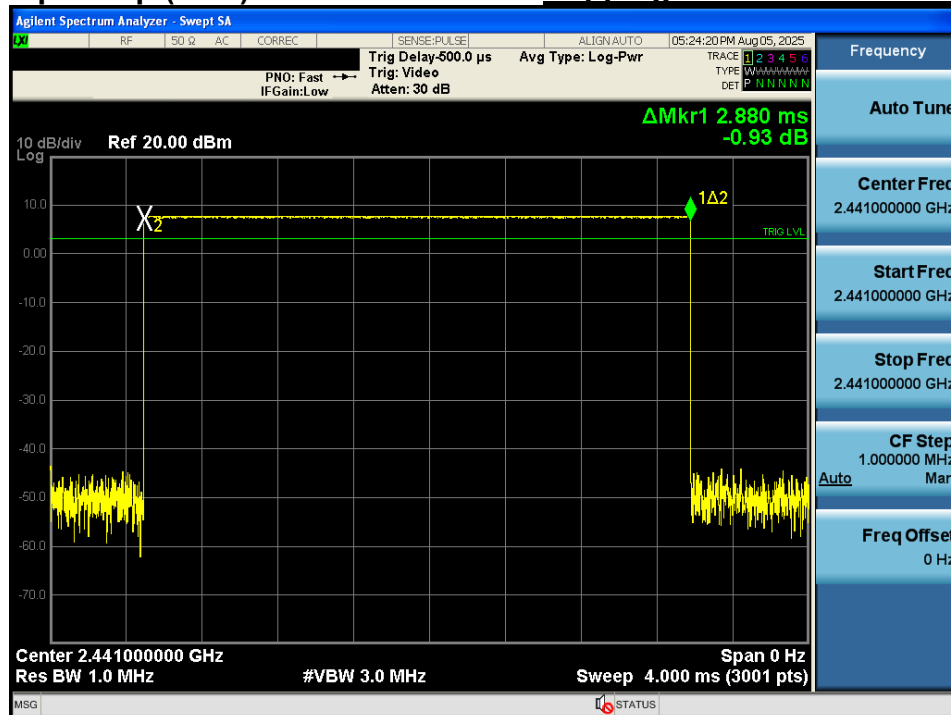

Hopping mode : Enable&DH5

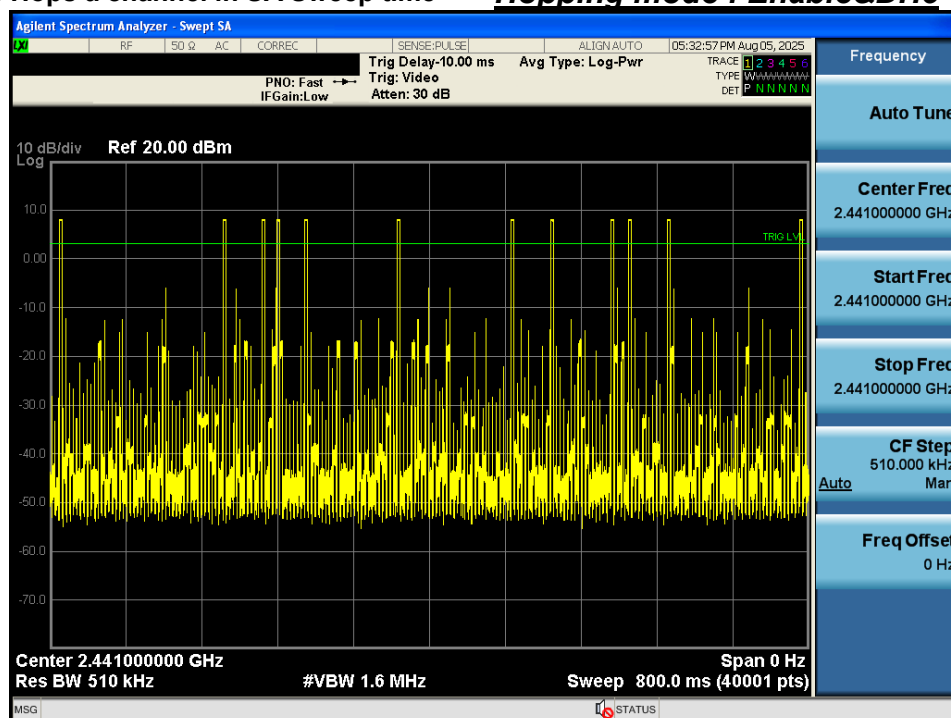

9. Unwanted Emissions

9.1. Test Setup

Refer to the APPENDIX I.

9.2. Limit

Part 15.247(d), Part 15.205, Part 15.209 & RSS-247[6.6], RSS-Gen[8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209 & RSS-Gen[8.9]: General requirement

Frequency (MHz)	FCC Limit (uV/m)	ISED Limit (uA/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	6.37/F (F in kHz)	300
0.490 – 1.705	24 000 / F (kHz)	63.7/F (F in kHz)	30
1.705 – 30.0	30	0.08	30

Frequency (MHz)	FCC Limit (uV/m)	ISED Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	100	3
88 ~ 216	150 **	150	3
216 ~ 960	200 **	200	3
Above 960	500	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 240	3 345.8 ~ 3 358		
			3 600 ~ 4 400		

- RSS-Gen[8.10]: Restricted frequency bands

MHz	MHz	MHz	MHz	MHz	GHz
0.090 ~ 0.110	8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 345.8 ~ 3 358	9.0 ~ 9.2
0.495 ~ 0.505	8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 427	3 500 ~ 4 400	9.3 ~ 9.5
2.173 5 ~ 2.190 5	8.414 25 ~ 8.414 75	108 ~ 138	1 435 ~ 1 626.5	4 500 ~ 5 150	10.6 ~ 12.7
3.020 ~ 3.026	12.29 ~ 12.293	149.9 ~ 150.05	1 645.5 ~ 1 646.5	5 350 ~ 5 460	13.25 ~ 13.4
4.125 ~ 4.128	12.519 75 ~ 12.520 25	156.524 75 ~	1 660 ~ 1 710	7 250 ~ 7 750	14.47 ~ 14.5
4.177 25 ~ 4.177 75	12.576 75 ~ 12.577 25	156.525 25	1 718.8 ~ 1 722.2	8 025 ~ 8 500	15.35 ~ 16.2
4.207 25 ~ 4.207 75	13.36 ~ 13.41	156.7 ~ 156.9	2 200 ~ 2 300		17.7 ~ 21.4
5.677 ~ 5.683	16.42 ~ 16.423	162.01 25 ~ 167.17	2 310 ~ 2 390		22.01 ~ 23.12
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 483.5 ~ 2 500		23.6 ~ 24.0
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 655 ~ 2 900		31.2 ~ 31.8
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	3 260 ~ 3 267		36.43 ~ 36.5
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 332 ~ 3 339		Above 38.6

9.3. Test Procedures

9.3.1. Test Procedures for Unwanted Emissions(Radiated)

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz

RBW = As specified in table, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak^{Note1} or Quasi Peak,
Trace mode = Max Hold until the trace stabilize

Frequency	RBW
9 kHz - 150 kHz	200 Hz - 300 Hz
0.15 MHz - 30 MHz	9 kHz - 10 kHz
30 MHz - 1 000 MHz	100 kHz - 120 kHz

Note1: Measurements were performed using the peak detector.

The data measured using the peak detector of a spectrum analyzer will represent the worst-case results.

- Frequencies above 1 000 MHz

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

The Average result was determined from the peak value of the emission.

The measured peak value in dBuV/m is corrected by $20\log(\text{maximum dwell time in 100 ms} / 100)$.

Maximum dwell time per 1 MHz = dwell time per 100 ms per channel $\times$ (channel separation correction + overlapping channel correction) where:

- Channel separation correction = $[1 / \text{channel separation (MHz)}]$ for channel separation < 1 MHz, and = **1 for channel separation ≥ 1 MHz**, as determined using the procedures of 7.8.2. If the average measurements are performed on the Nth harmonic, the channel separation value is N times the separation at the fundamental frequency.
- Overlapping channel correction = **0 when the 20 dB channel bandwidth $<$ channel separation** and = **1 for when the 20 dB channel bandwidth $>$ channel separation**.

Duty cycle correction factor

Modulation	Fundamental	Channel separation correction	Overlapping channel correction	Dwell time per 100ms per channel	Maximum dwell time per 1 MHz	Duty cycle correction factor(dB)
GFSK	Fundamental	1	0	2.88×2	5.76	-24.79
GFSK	N th harmonic	1	0	2.88×2	5.76	-24.79
$\pi/4$ -DQPSK, 8DPSK	Fundamental	1	1	2.88×2	11.52	-18.77
$\pi/4$ -DQPSK, 8DPSK	N th harmonic	1	0	2.88×2	5.76	-24.79

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

9.3.2. Test Procedures for Unwanted Emissions(Conducted)

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

9.4. Test Results

9.4.1. Unwanted Emissions(Radiated)

▪ Test Notes.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
- Information of Distance Correction Factor
For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.
In this case, the distance correction factor is applied to the result.
- Calculation of distance factor
At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$
At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$
When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.
- Sample Calculation.
Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + HL + AL – AG
Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss,
AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

9 kHz ~ 25 GHz Data (Modulation : GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 389.96	H	X	PK	55.50	3.72	N/A	N/A	59.22	74.00	14.78
2 389.96	H	X	AV	55.50	3.72	-24.79	N/A	34.43	54.00	19.57
4 803.70	H	X	PK	60.69	9.43	N/A	N/A	70.12	74.00	3.88
4 803.70	H	X	AV	60.69	9.43	-24.79	N/A	45.33	54.00	8.67
7 205.59	V	Y	PK	46.67	11.76	N/A	N/A	58.43	74.00	15.57
7 205.59	V	Y	AV	46.67	11.76	-24.79	N/A	33.64	54.00	20.36

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 881.64	H	X	PK	58.60	10.10	N/A	N/A	68.70	74.00	5.30
4 881.64	H	X	AV	58.60	10.10	-24.79	N/A	43.91	54.00	10.09
7 322.57	V	Y	PK	44.92	11.75	N/A	N/A	56.67	74.00	17.33
7 322.57	V	Y	AV	44.92	11.75	-24.79	N/A	31.88	54.00	22.12

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.51	H	X	PK	67.34	3.97	N/A	N/A	71.31	74.00	2.69
2 483.51	H	X	AV	67.34	3.97	-24.79	N/A	46.52	54.00	7.48
4 959.65	H	X	PK	55.69	10.09	N/A	N/A	65.78	74.00	8.22
4 959.65	H	X	AV	55.69	10.09	-24.79	N/A	40.99	54.00	13.01
7 440.16	V	Y	PK	43.20	11.91	N/A	N/A	55.11	74.00	18.89
7 440.16	V	Y	AV	43.20	11.91	-24.79	N/A	30.32	54.00	23.68

9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ -DQPSK)

• Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 389.92	H	X	PK	53.91	3.72	N/A	N/A	57.63	74.00	16.37
2 389.92	H	X	AV	53.91	3.72	-18.77	N/A	38.86	54.00	15.14
4 803.78	H	X	PK	61.21	9.43	N/A	N/A	70.64	74.00	3.36
4 803.78	H	X	AV	61.21	9.43	-24.79	N/A	45.85	54.00	8.15
7 205.89	V	Y	PK	47.29	11.76	N/A	N/A	59.05	74.00	14.95
7 205.89	V	Y	AV	47.29	11.76	-24.79	N/A	34.26	54.00	19.74

• Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 881.64	H	X	PK	59.15	10.10	N/A	N/A	69.25	74.00	4.75
4 881.64	H	X	AV	59.15	10.10	-24.79	N/A	44.46	54.00	9.54
7 323.48	V	Y	PK	45.16	11.75	N/A	N/A	56.91	74.00	17.09
7 323.48	V	Y	AV	45.16	11.75	-24.79	N/A	32.12	54.00	21.88

• Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.52	H	X	PK	66.30	3.97	N/A	N/A	70.27	74.00	3.73
2 483.52	H	X	AV	66.30	3.97	-18.77	N/A	51.50	54.00	2.50
4 959.79	H	X	PK	56.35	10.09	N/A	N/A	66.44	74.00	7.56
4 959.79	H	X	AV	56.35	10.09	-24.79	N/A	41.65	54.00	12.35
7 439.84	V	Y	PK	42.75	11.91	N/A	N/A	54.66	74.00	19.34
7 439.84	V	Y	AV	42.75	11.91	-24.79	N/A	29.87	54.00	24.13

9 kHz ~ 25 GHz Data (Modulation : 8DPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 389.88	H	X	PK	56.13	3.72	N/A	N/A	59.85	74.00	14.15
2 389.88	H	X	AV	56.13	3.72	-18.77	N/A	41.08	54.00	12.92
4 803.90	H	X	PK	61.55	9.43	N/A	N/A	70.98	74.00	3.02
4 803.90	H	X	AV	61.55	9.43	-24.79	N/A	46.19	54.00	7.81
7 205.74	V	Y	PK	48.11	11.76	N/A	N/A	59.87	74.00	14.13
7 205.74	V	Y	AV	48.11	11.76	-24.79	N/A	35.08	54.00	18.92

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 882.02	H	X	PK	59.59	10.11	N/A	N/A	69.70	74.00	4.30
4 882.02	H	X	AV	59.59	10.11	-24.79	N/A	44.91	54.00	9.09
7 322.99	V	Y	PK	45.95	11.75	N/A	N/A	57.70	74.00	16.30
7 322.99	V	Y	AV	45.95	11.75	-24.79	N/A	32.91	54.00	21.09

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.51	H	X	PK	66.95	3.97	N/A	N/A	70.92	74.00	3.08
2 483.51	H	X	AV	66.95	3.97	-18.77	N/A	52.15	54.00	1.85
4 959.98	H	X	PK	56.81	10.09	N/A	N/A	66.90	74.00	7.10
4 959.98	H	X	AV	56.81	10.09	-24.79	N/A	42.11	54.00	11.89
7 439.64	V	Y	PK	44.05	11.91	N/A	N/A	55.96	74.00	18.04
7 439.64	V	Y	AV	44.05	11.91	-24.79	N/A	31.17	54.00	22.83

9.4.2. Unwanted Emissions(Conducted)


Low Band-edge

Lowest Channel & Modulation : GFSK





Low Band-edge

Hopping mode & Modulation : GFSK

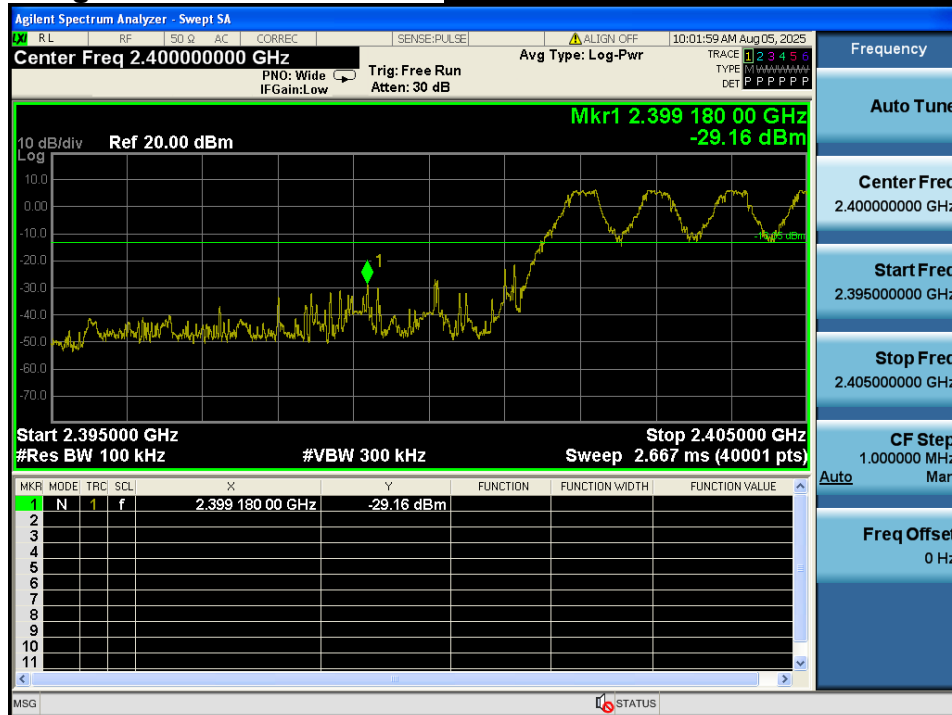


Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

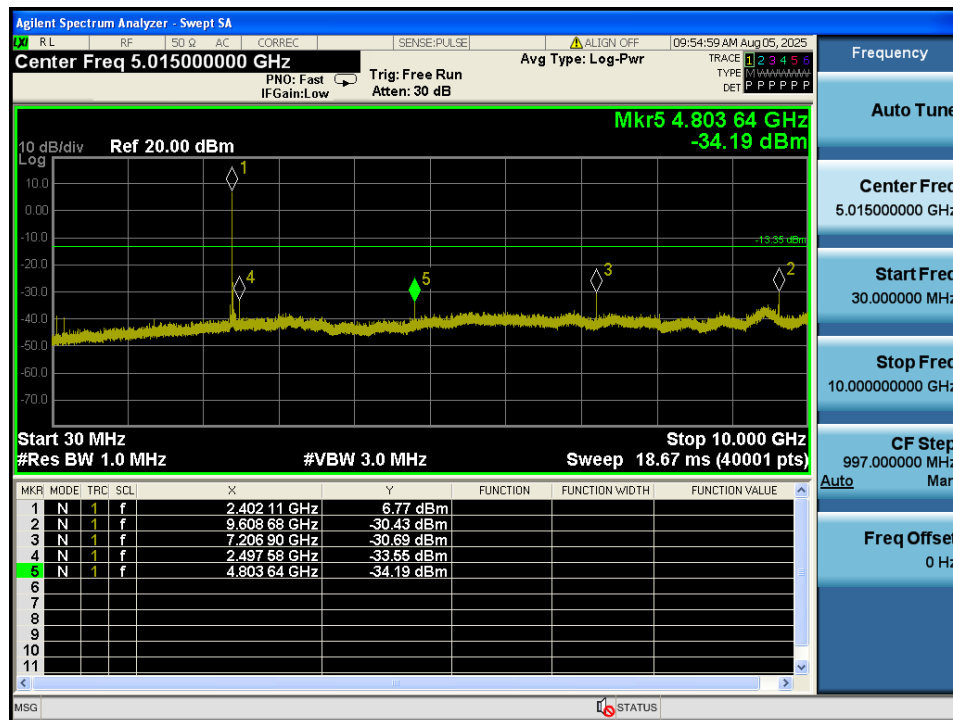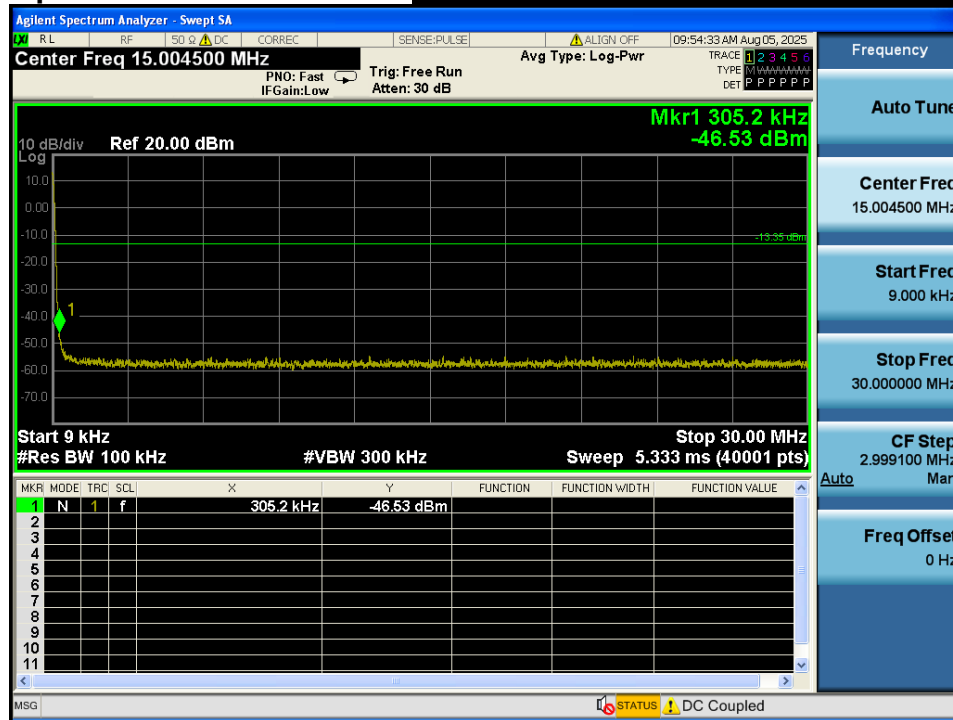


Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

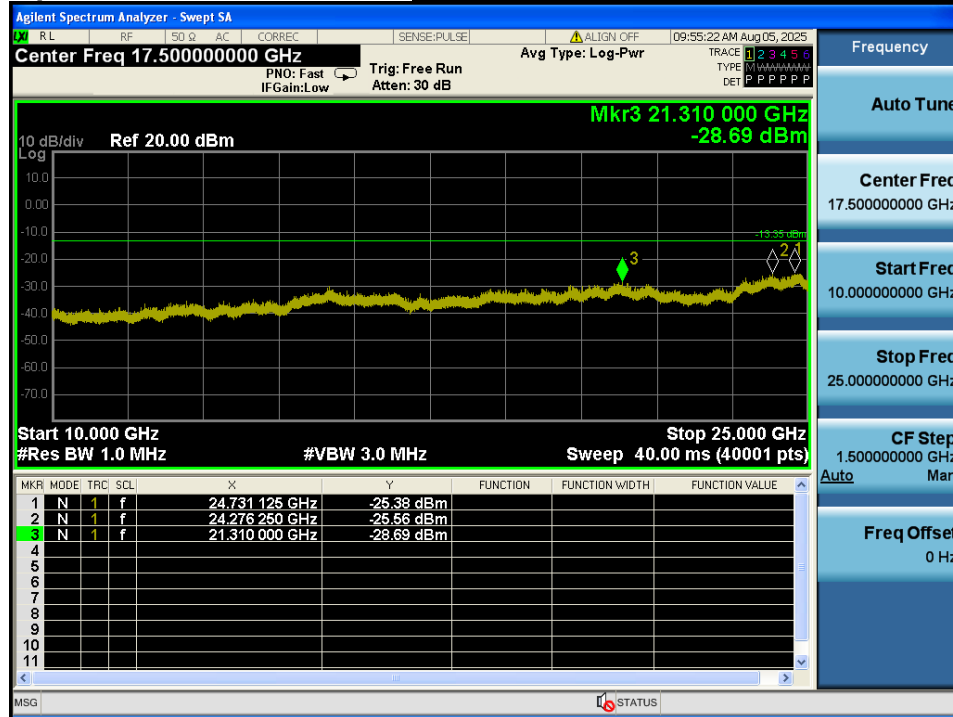


Reference for limit

Middle Channel & Modulation : GFSK

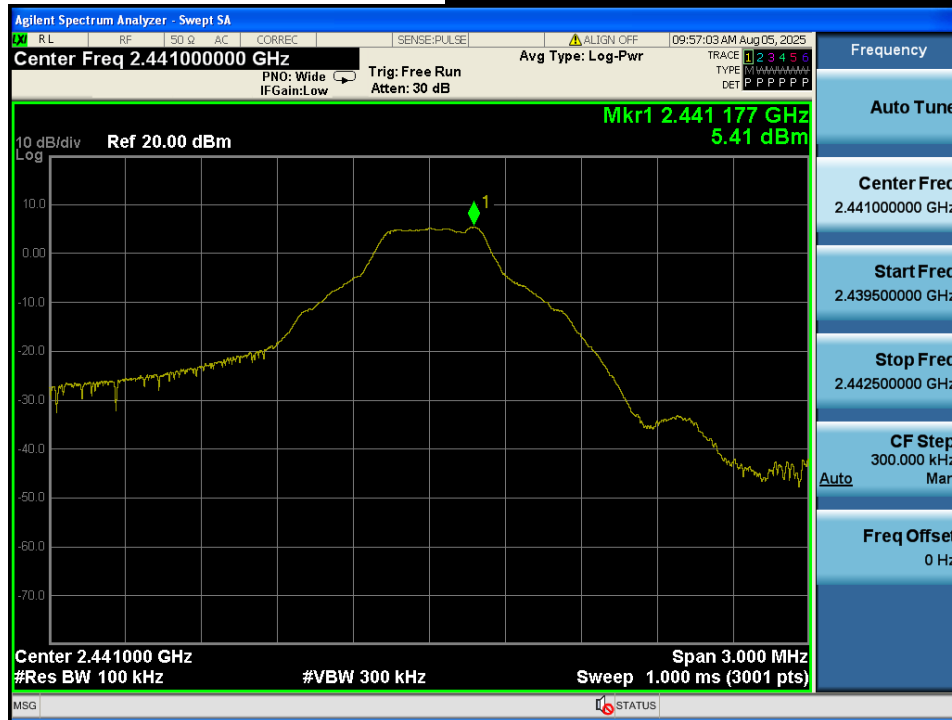



Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

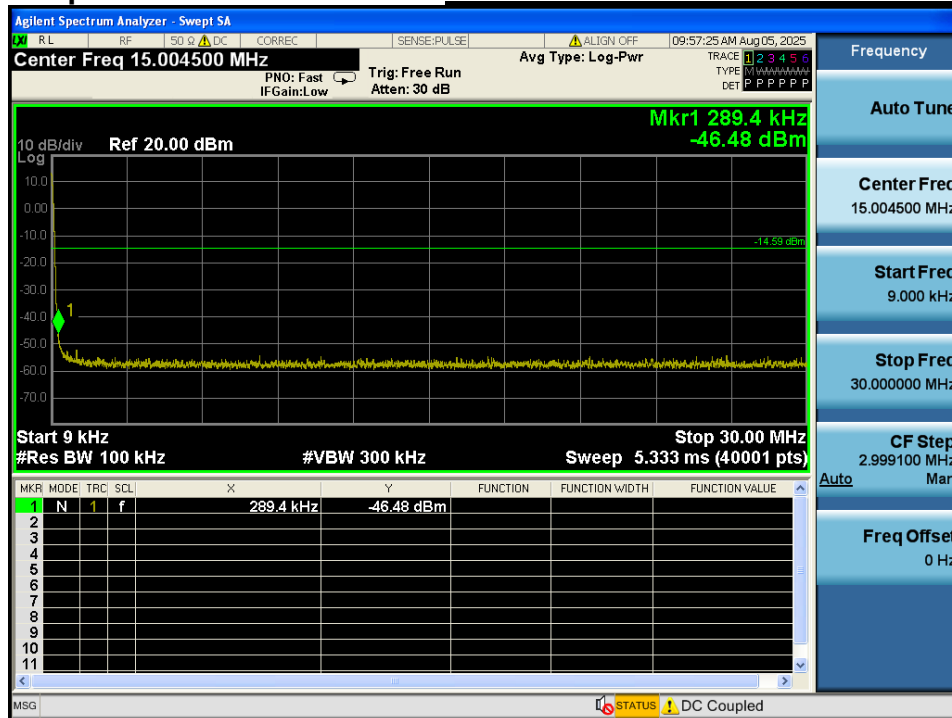


Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

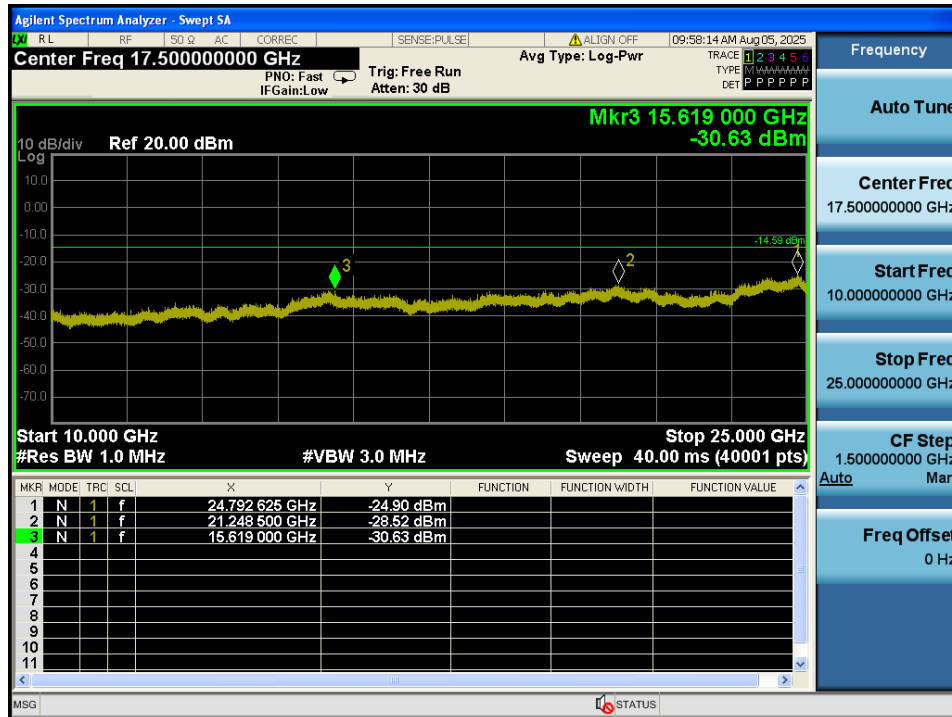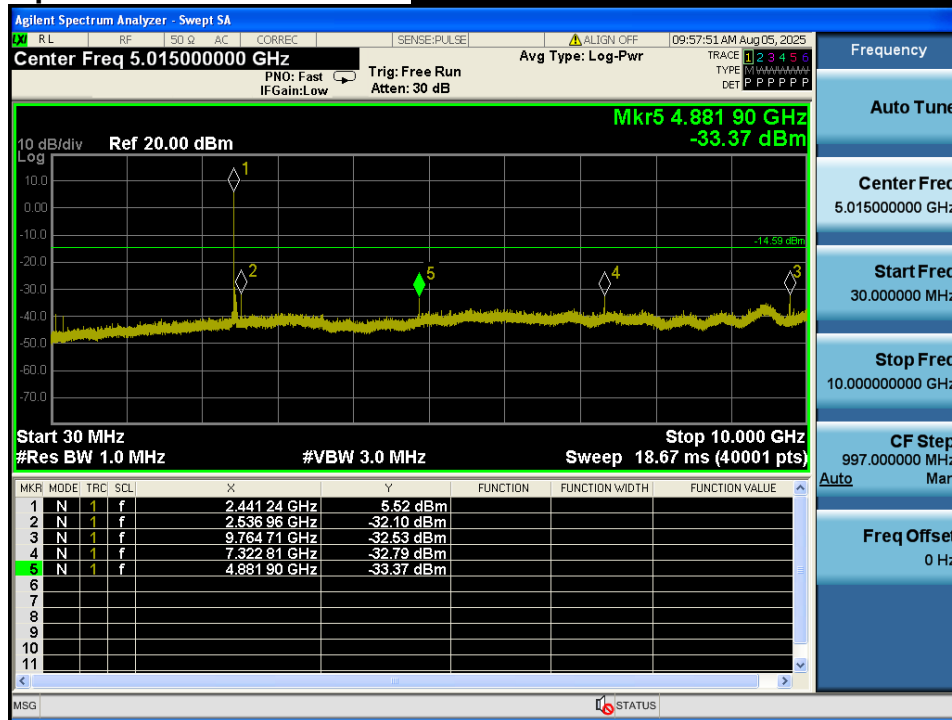


High Band-edge



Highest Channel & Modulation : GFSK

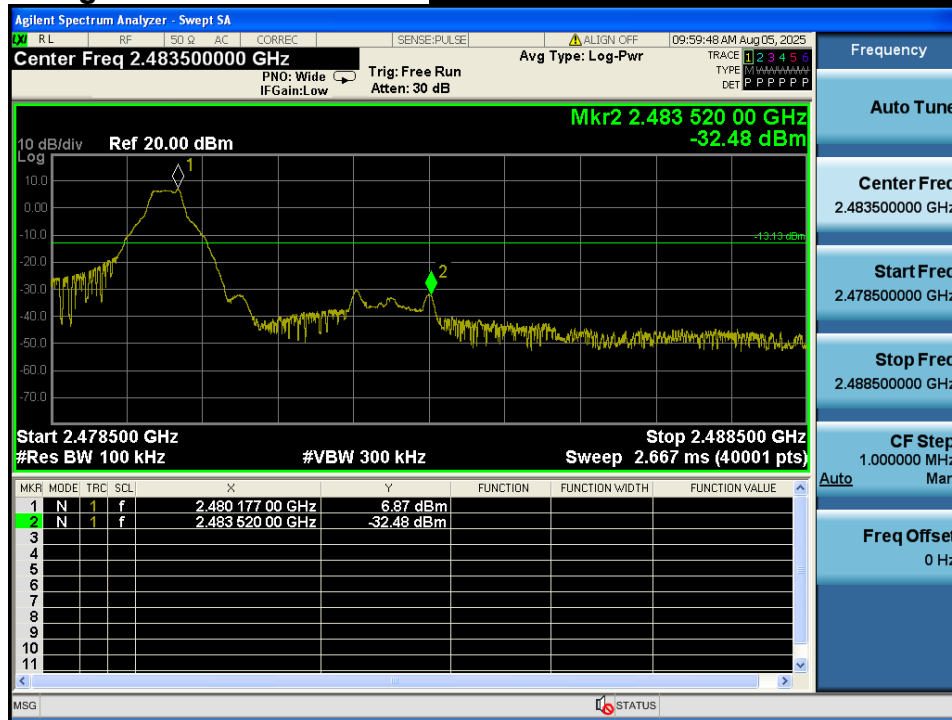


High Band-edge

Hopping mode & Modulation : GFSK

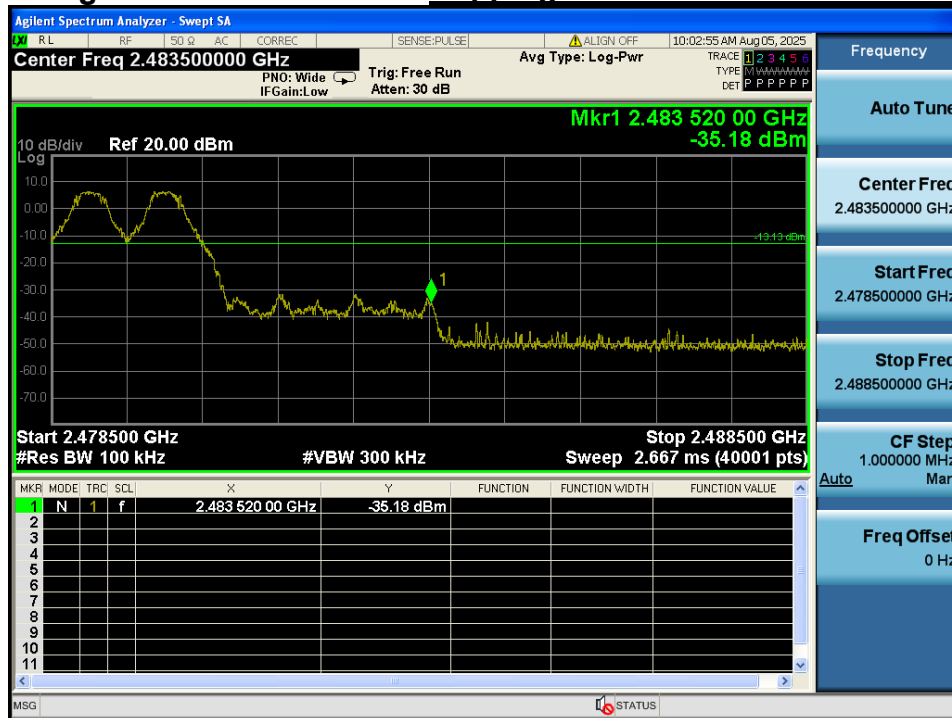

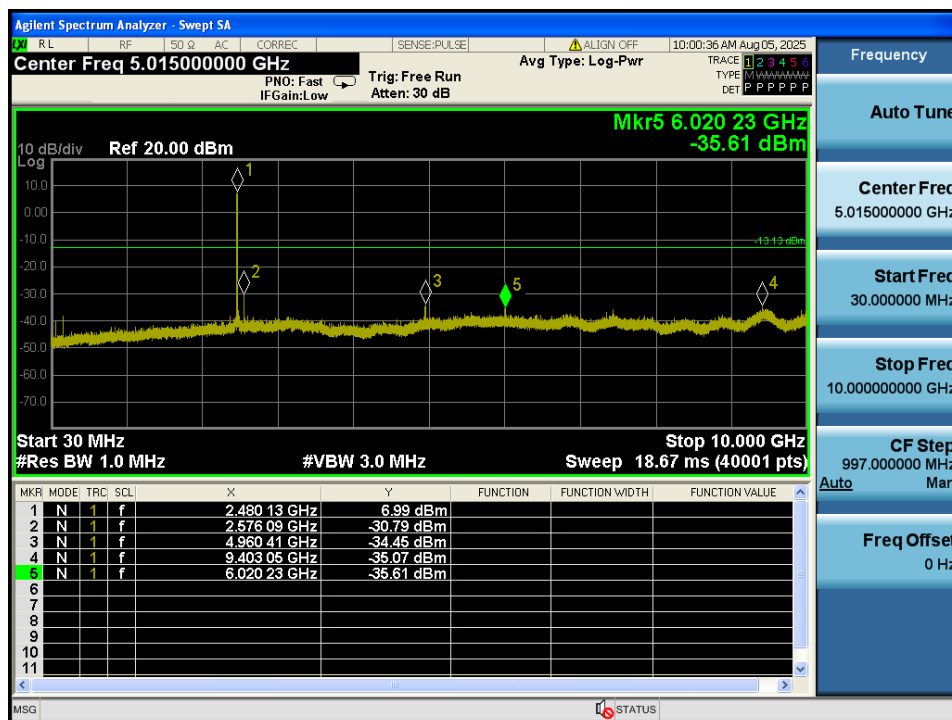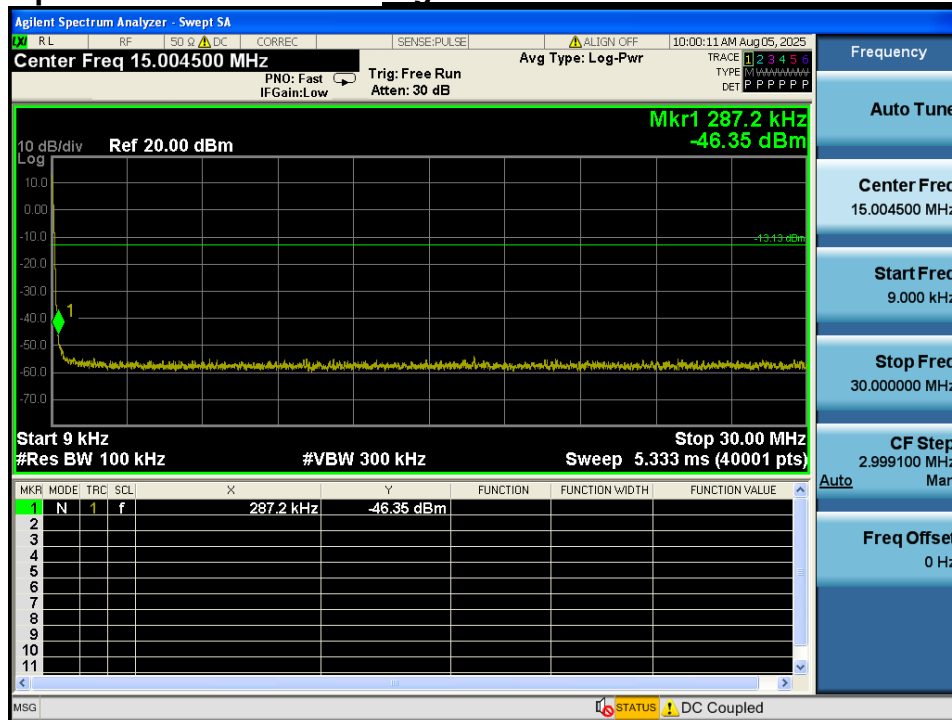Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

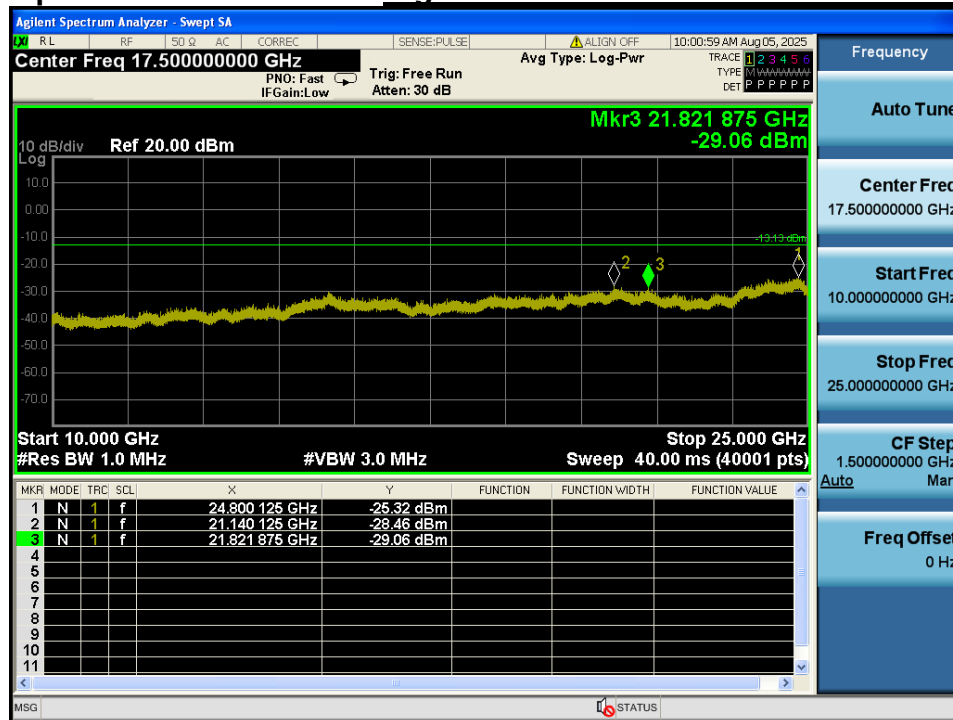Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**


Low Band-edge

Lowest Channel & Modulation : $\pi/4$ -DQPSK





Low Band-edge

Hopping mode & Modulation : $\pi/4$ -DQPSK

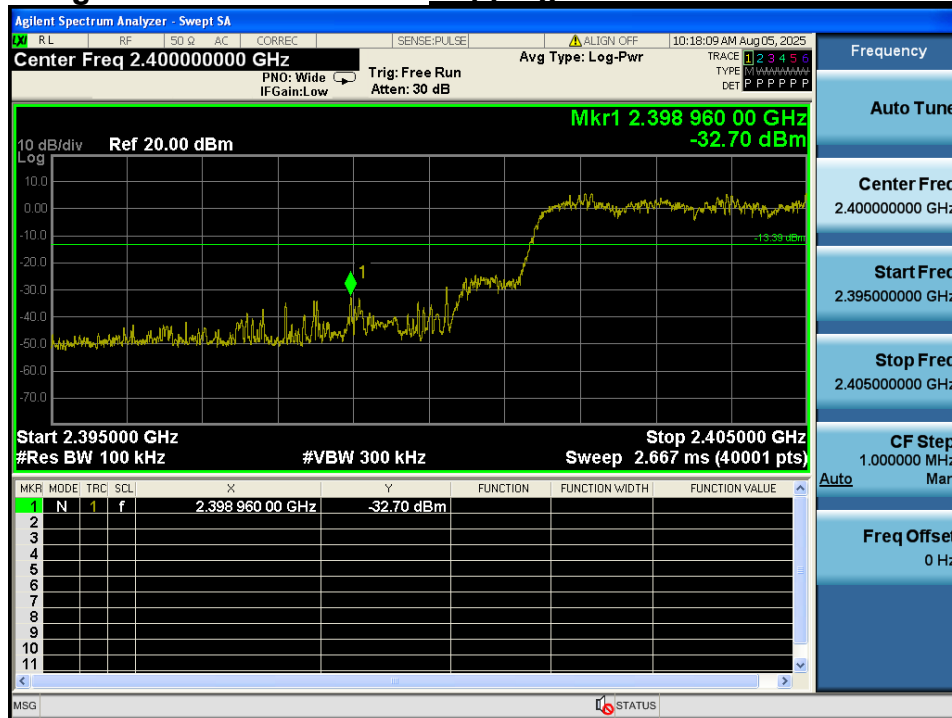

Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ -DQPSK

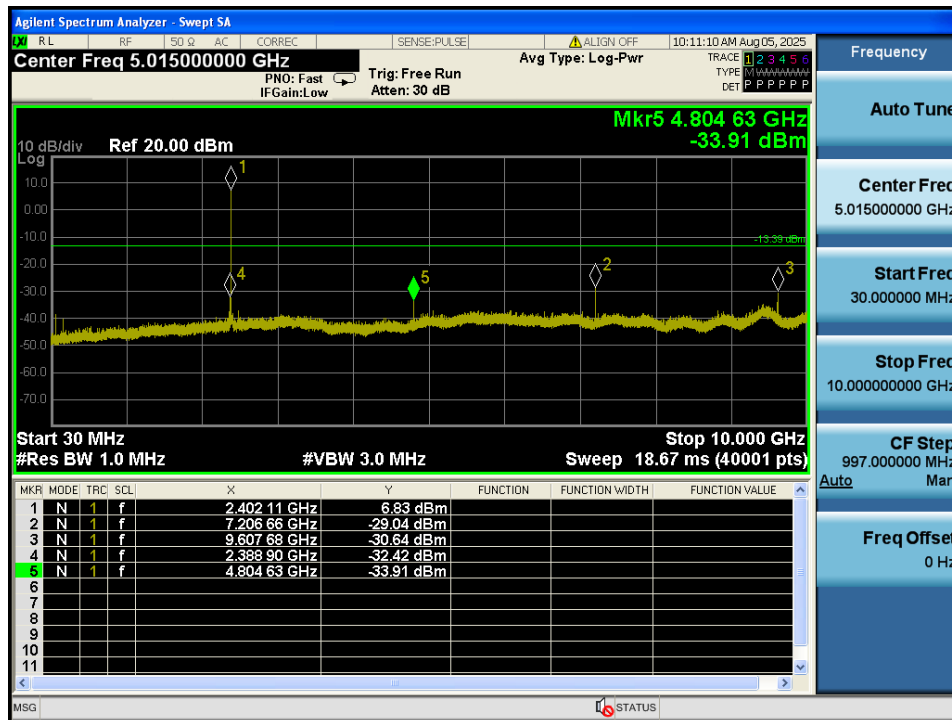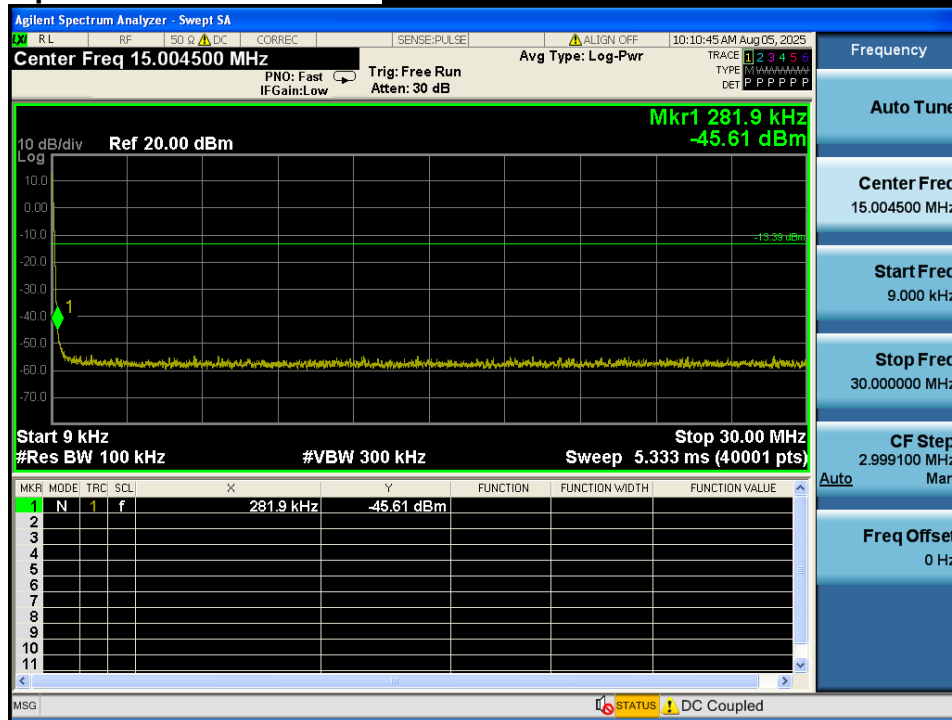


Reference for limit

Middle Channel & Modulation : $\pi/4$ -DQPSK





Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ -DQPSK

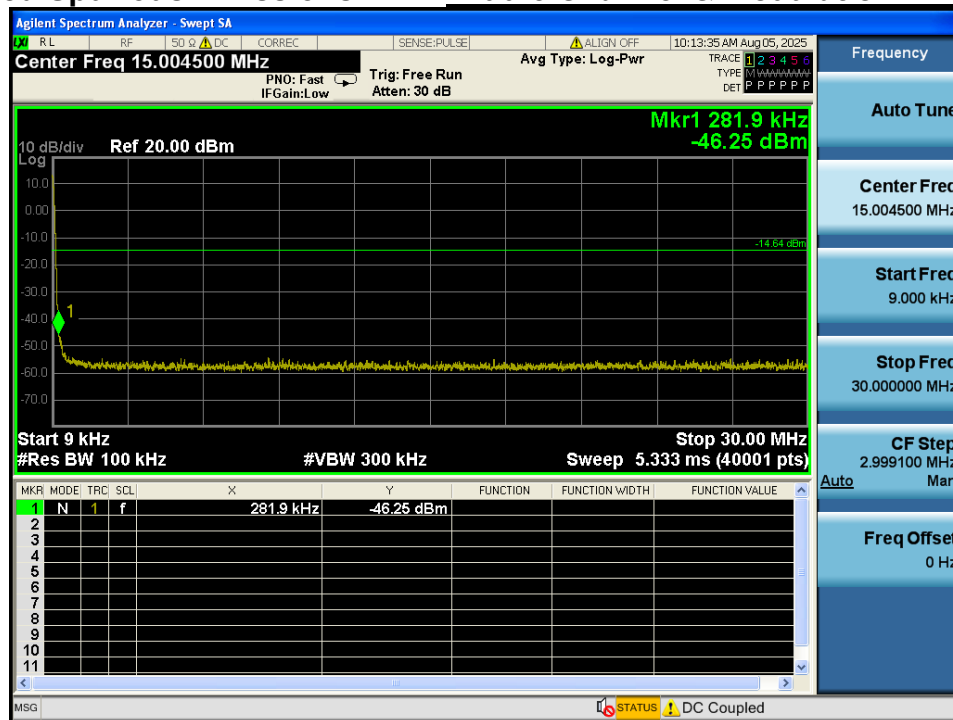


Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ -DQPSK

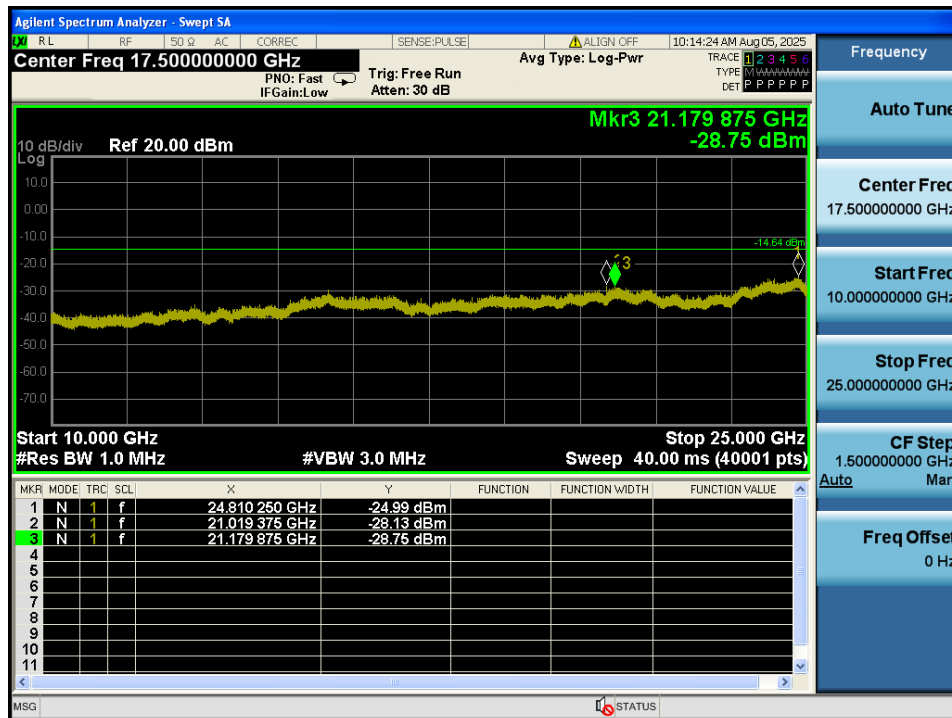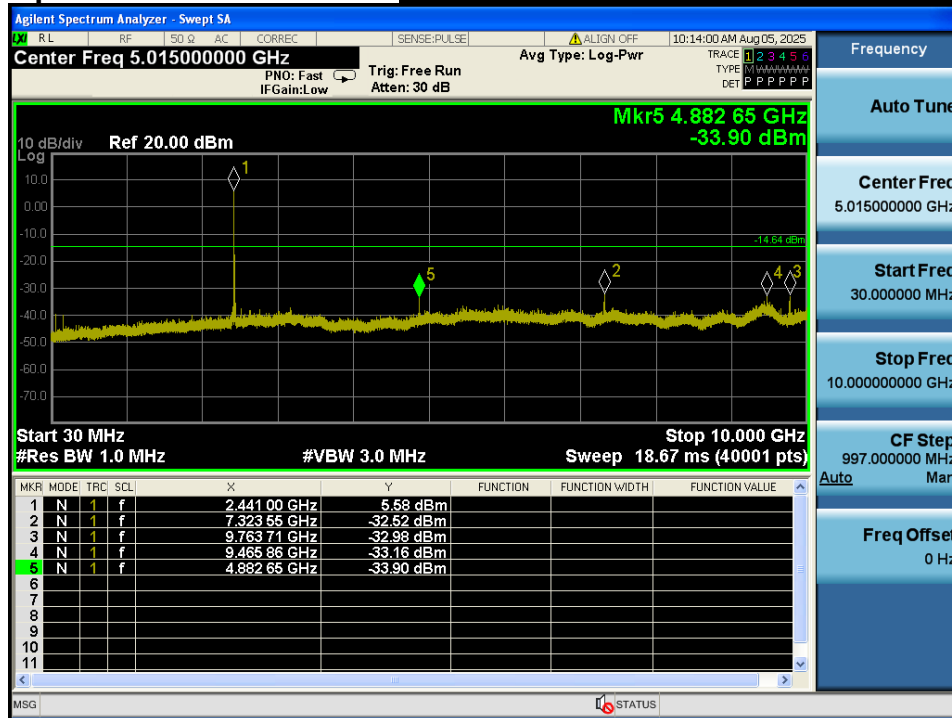


High Band-edge

Highest Channel & Modulation : $\pi/4$ -DQPSK

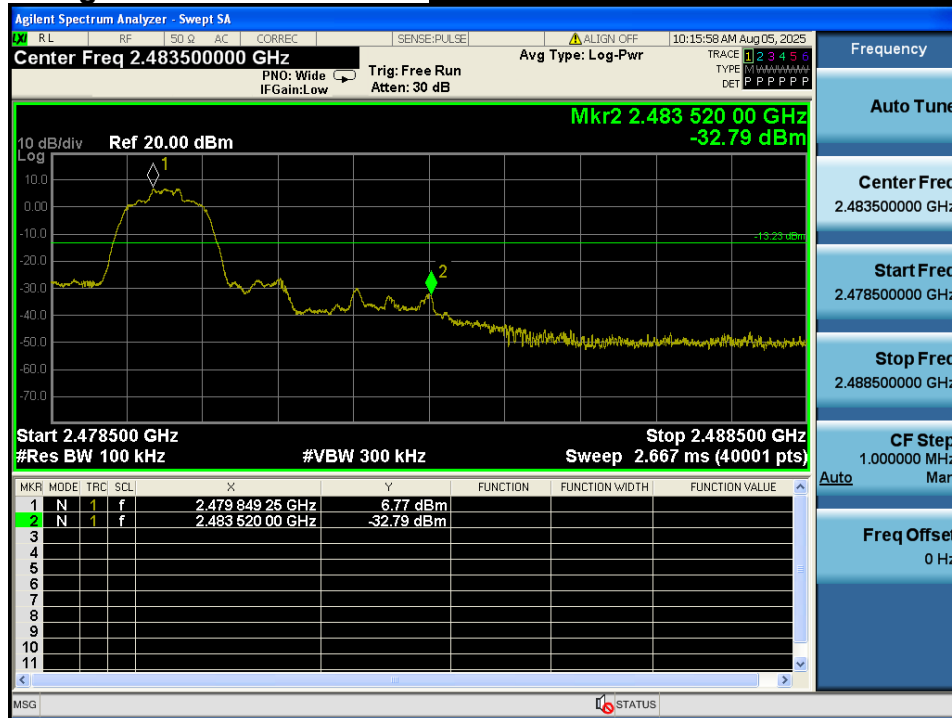



High Band-edge

Hopping mode & Modulation : $\pi/4$ -DQPSK

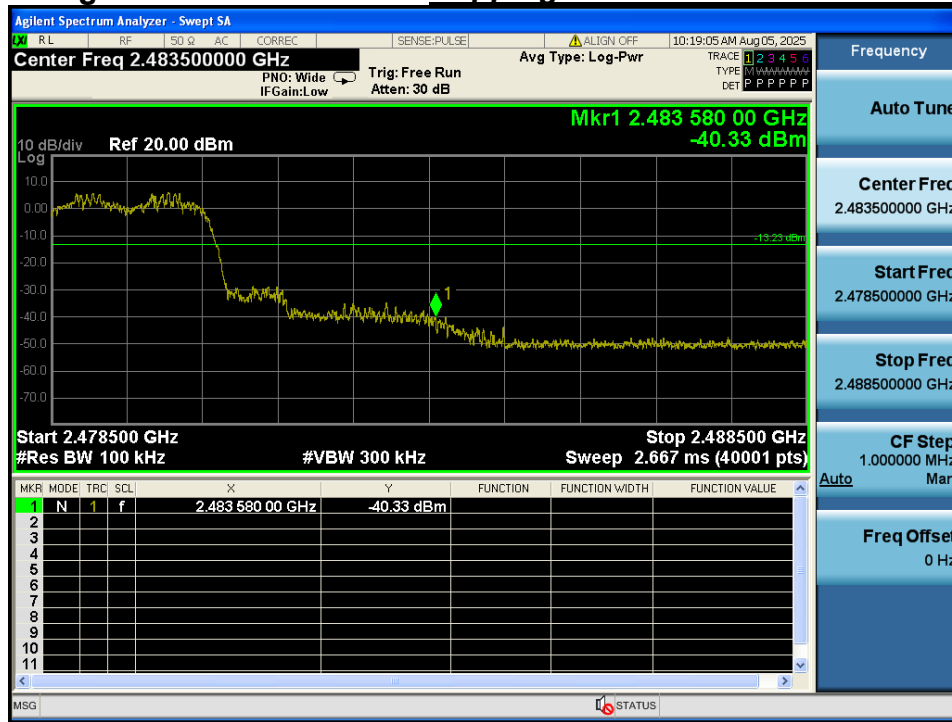

Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ -DQPSK

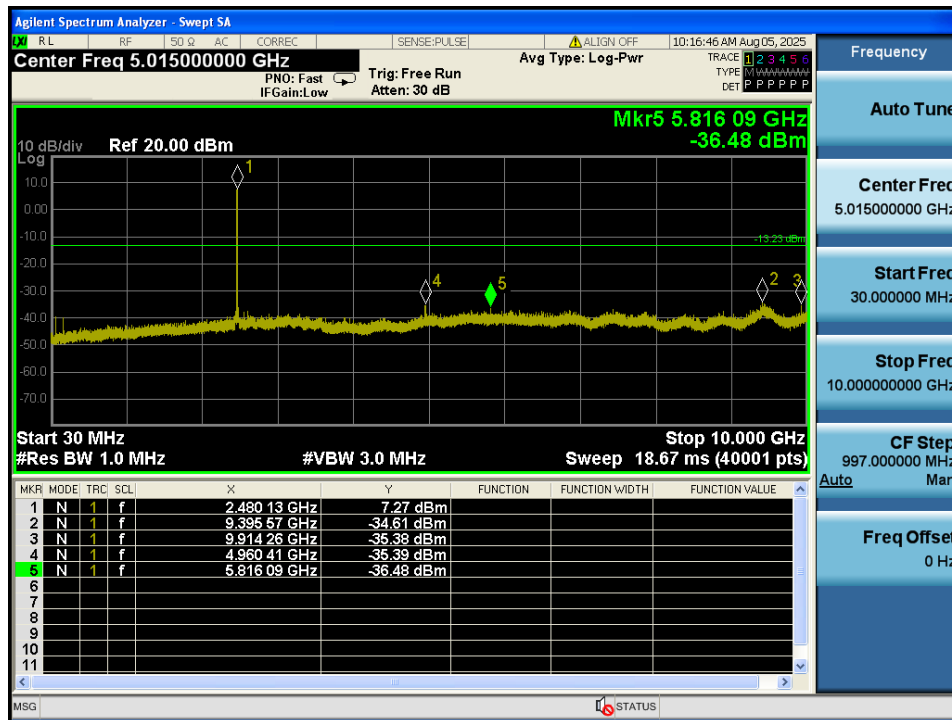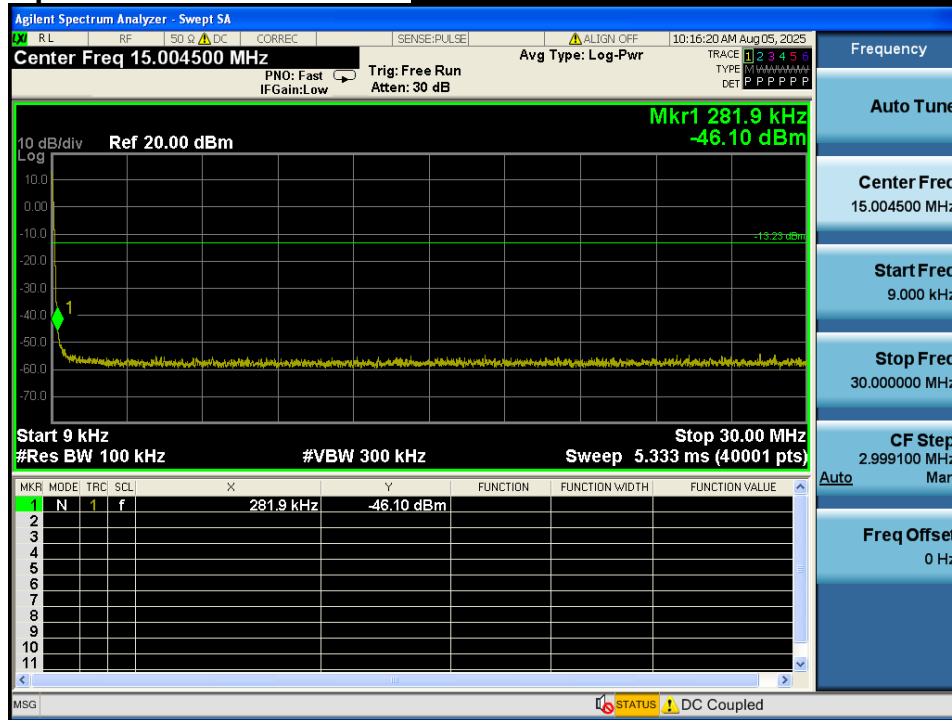

Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ -DQPSK




Low Band-edge

Lowest Channel & Modulation : 8DPSK





Low Band-edge

Hopping mode & Modulation : 8DPSK

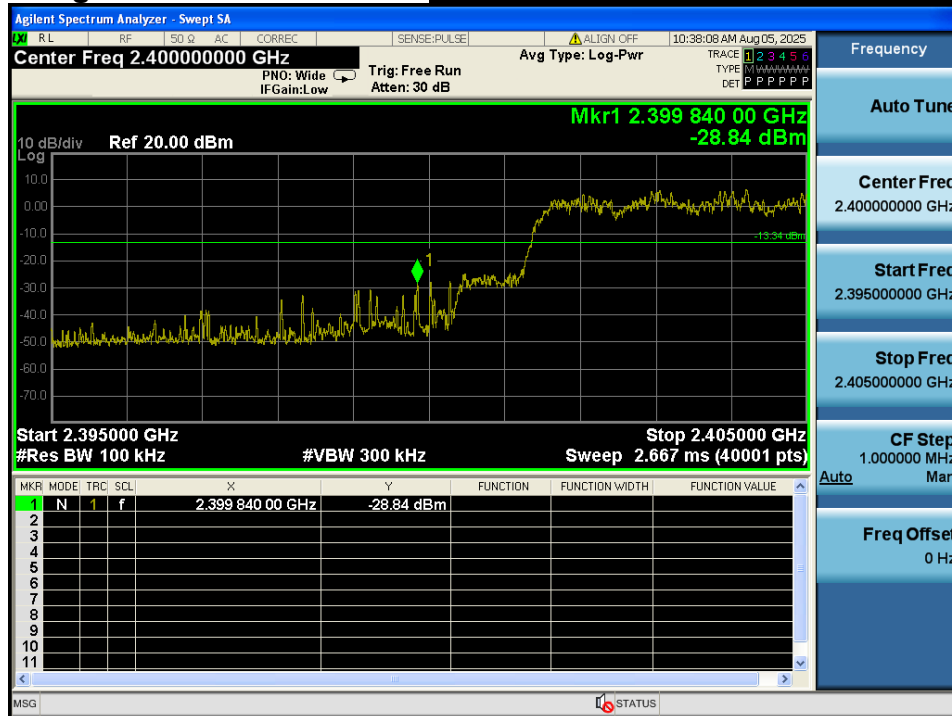


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

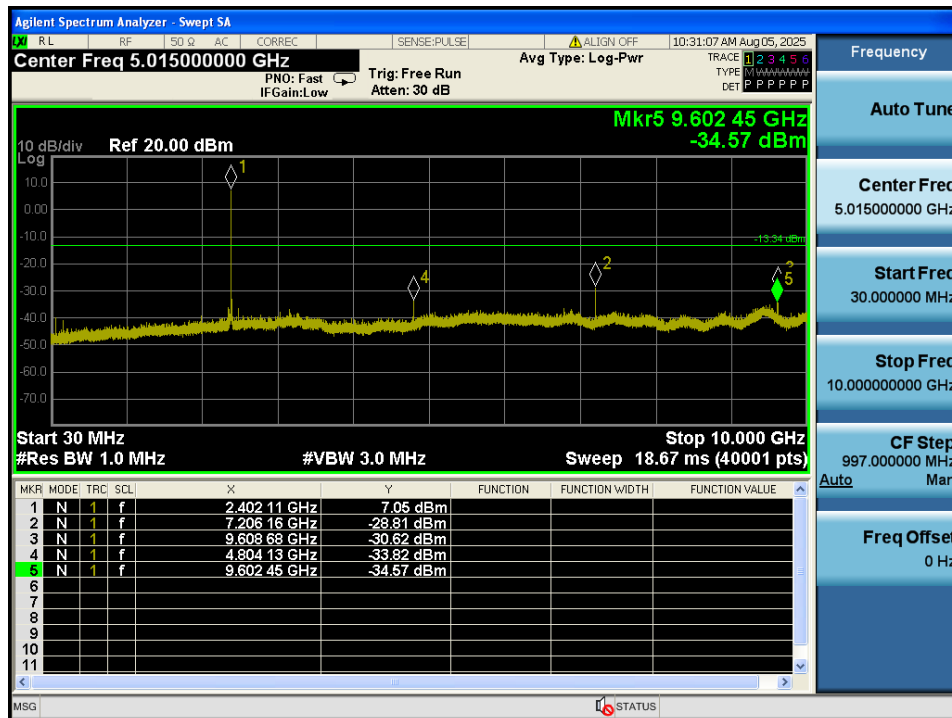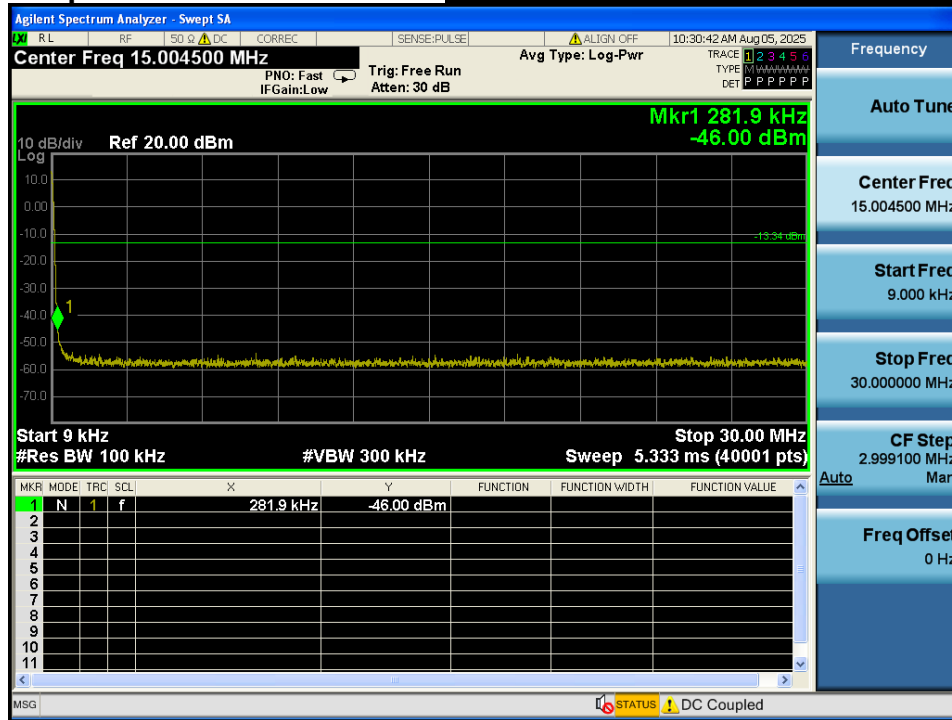


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

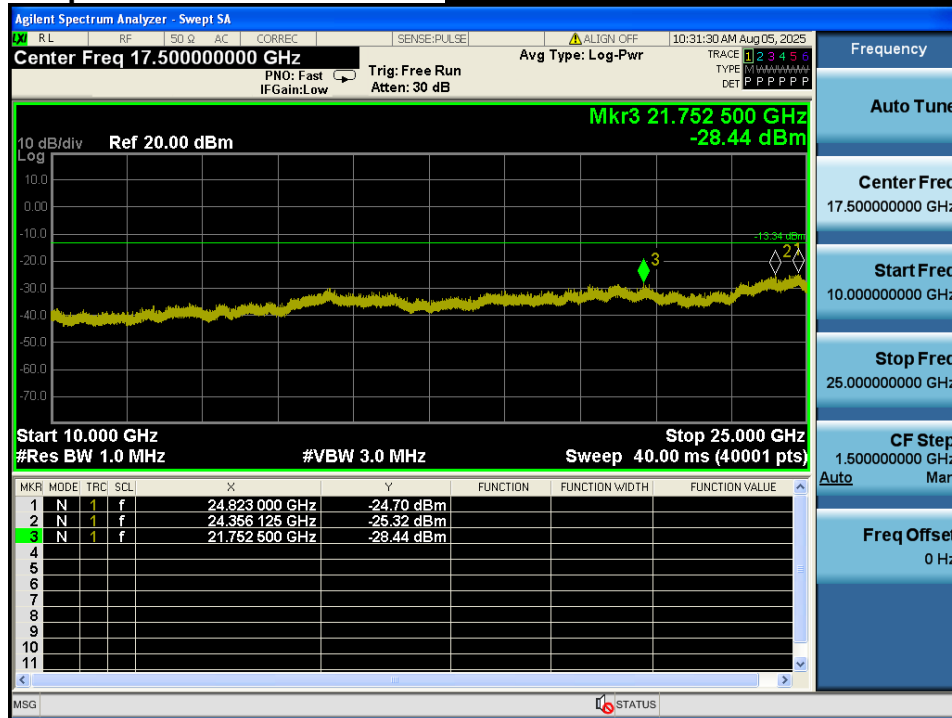


Reference for limit

Middle Channel & Modulation : 8DPSK

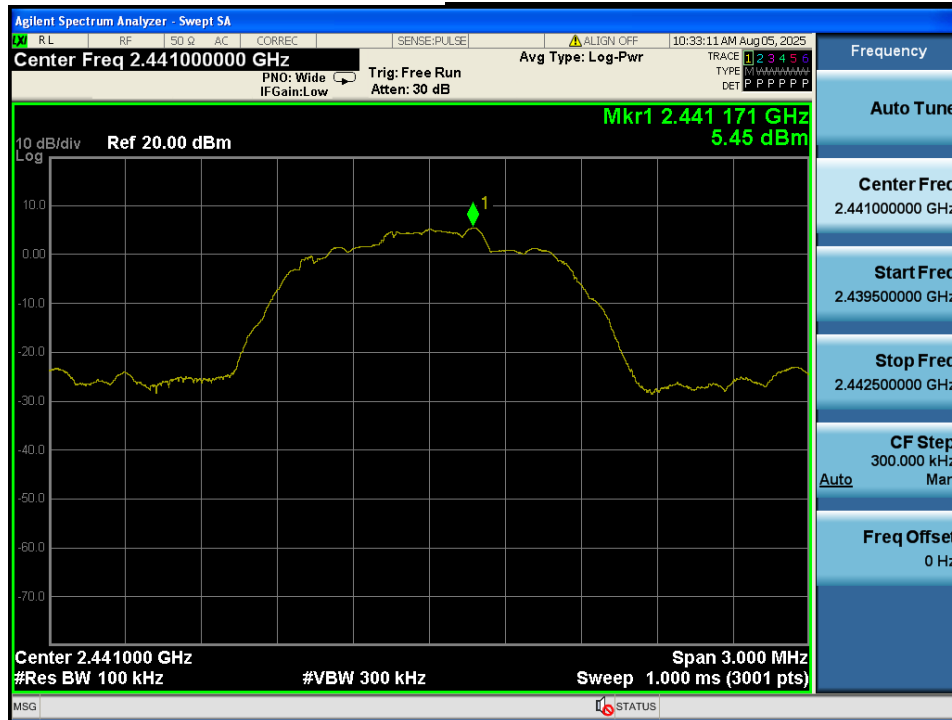



Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

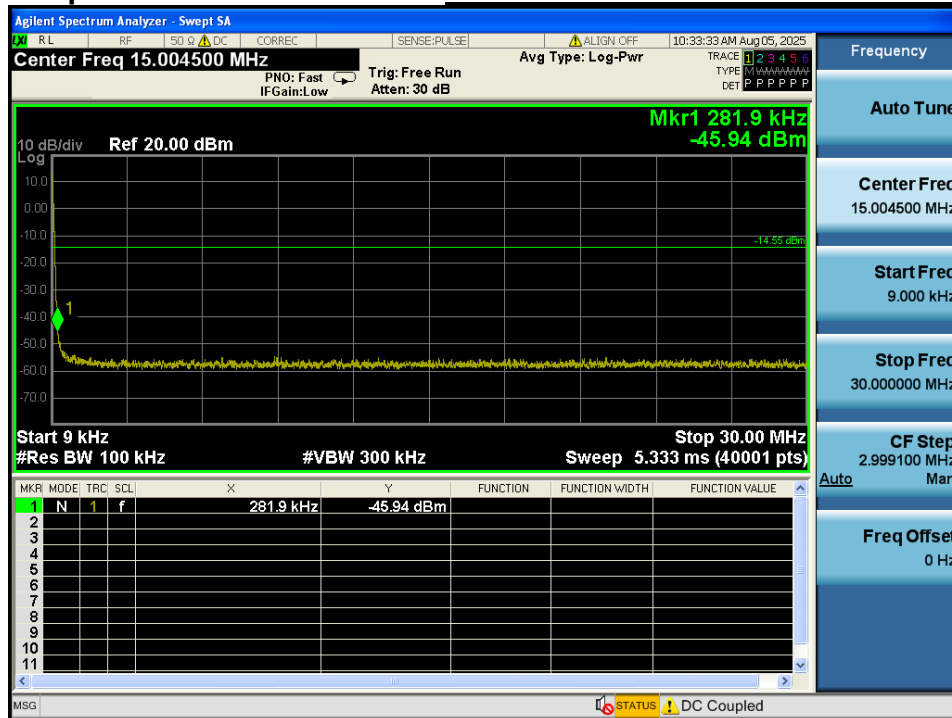


Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

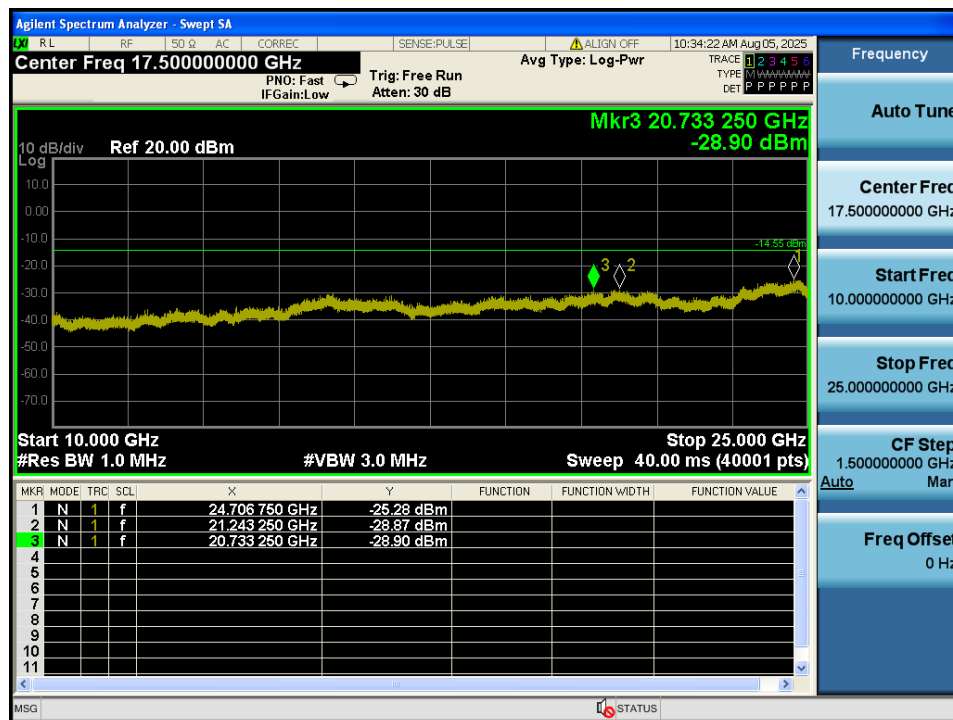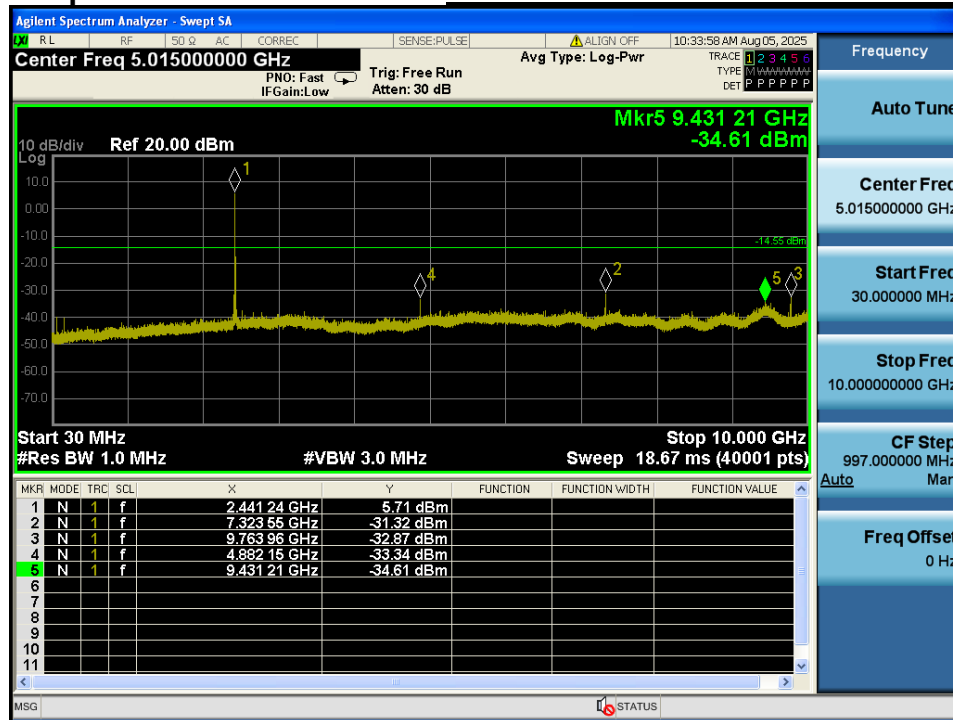


High Band-edge

Highest Channel & Modulation : 8DPSK

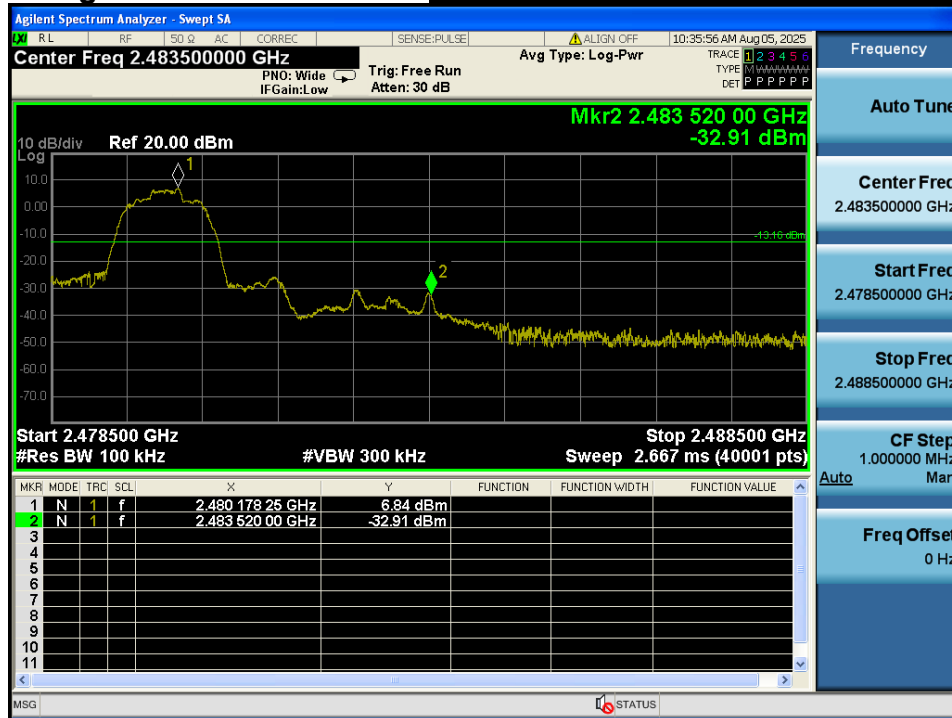



High Band-edge

Hopping mode & Modulation : 8DPSK

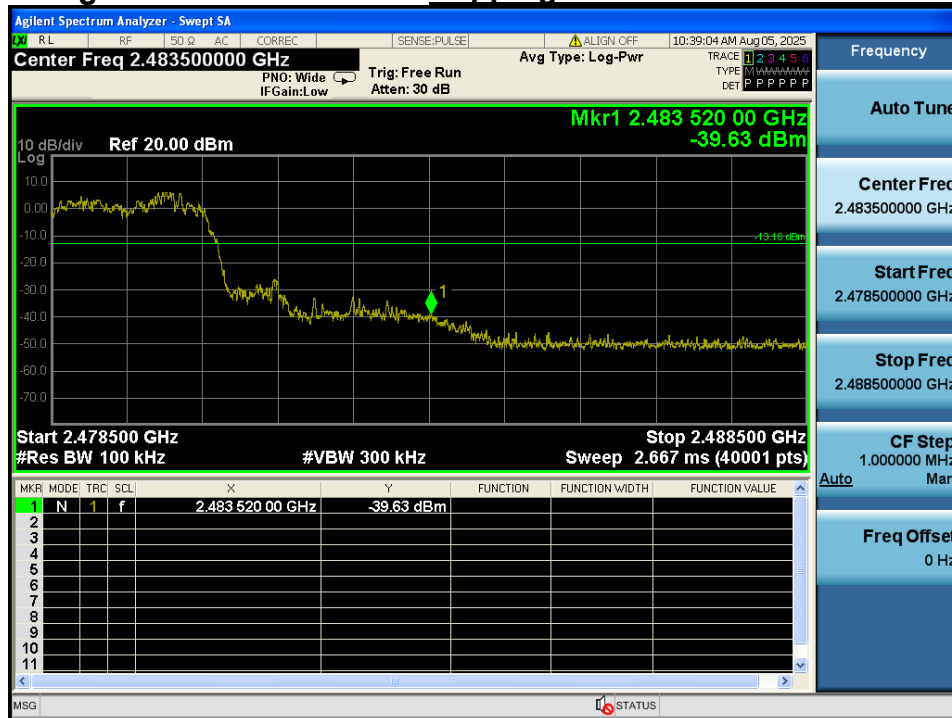

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

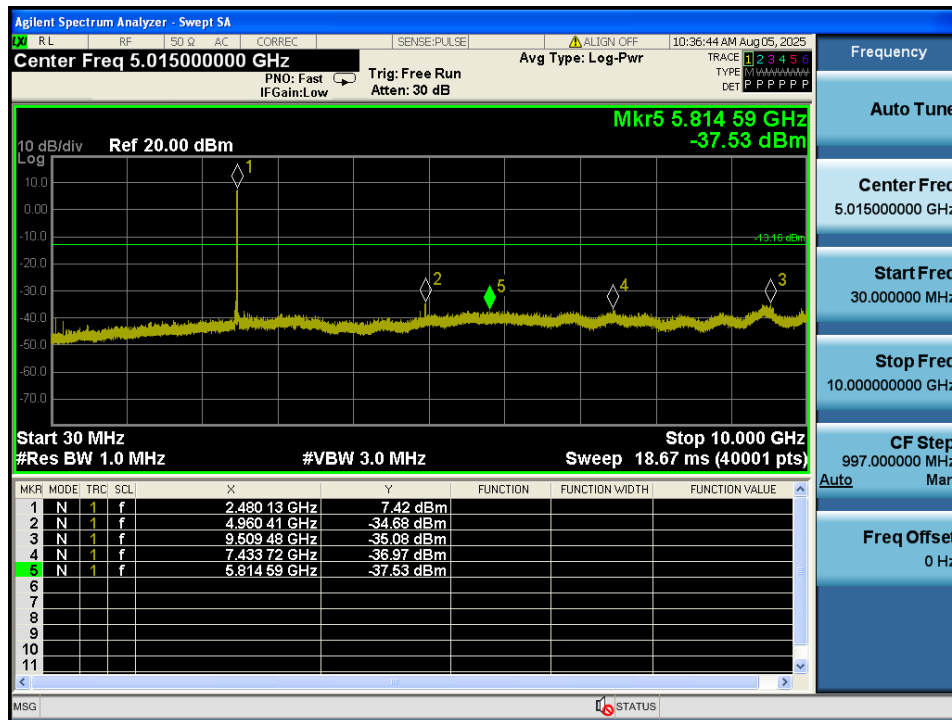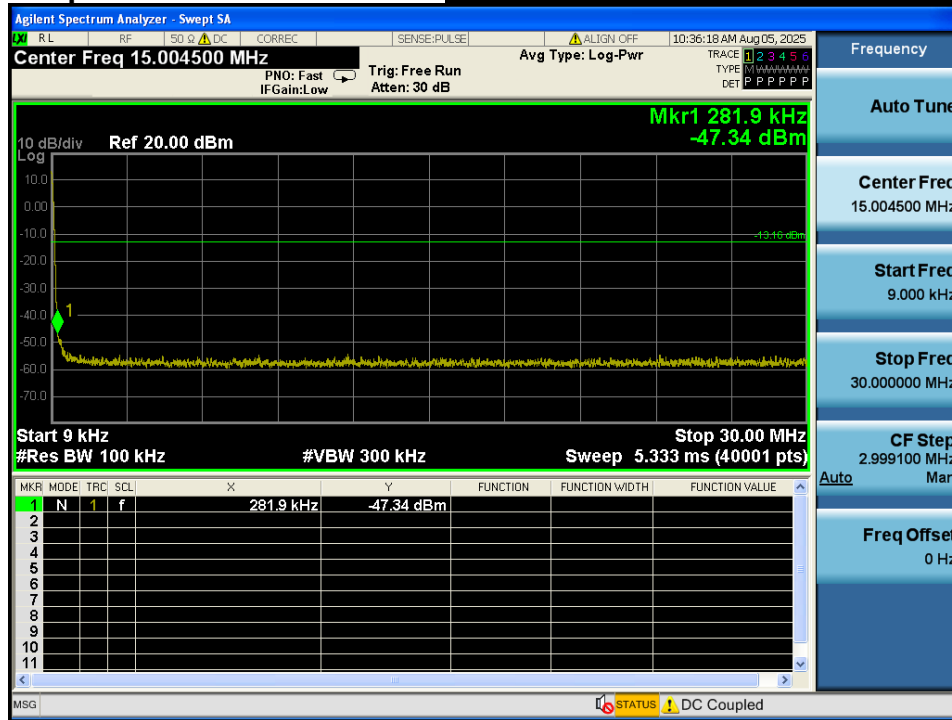

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK



10. AC Power-Line Conducted Emissions

10.1. Test Setup

See test photographs for the actual connections between EUT and support equipment.

10.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.50	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

10.3. Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10-2020.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

10.4. Test Results

AC Power-Line Conducted Emissions (Graph) = Modulation : GFSK

Results of Conducted Emission

Date 2025-08-12


Order No.
Model No. Sonolight
Serial No.
Test Condition BT

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 41 %
Operator J.H.Yun

Memo 1M_2402

LIMIT : FCC P15.207 AV
FCC P15.207 QP

Lisn Factor
1. NSLK 8128 RC-387_N_24.10.21
2. NSLK 8128 RC-387_L1_24.10.21
Cable Loss
1. C1_LISN TO RECEIVER_2024-12-11
Pulse Limiter
1. PULSE LIMITER_ESH3-Z2_101333_2025.07.10

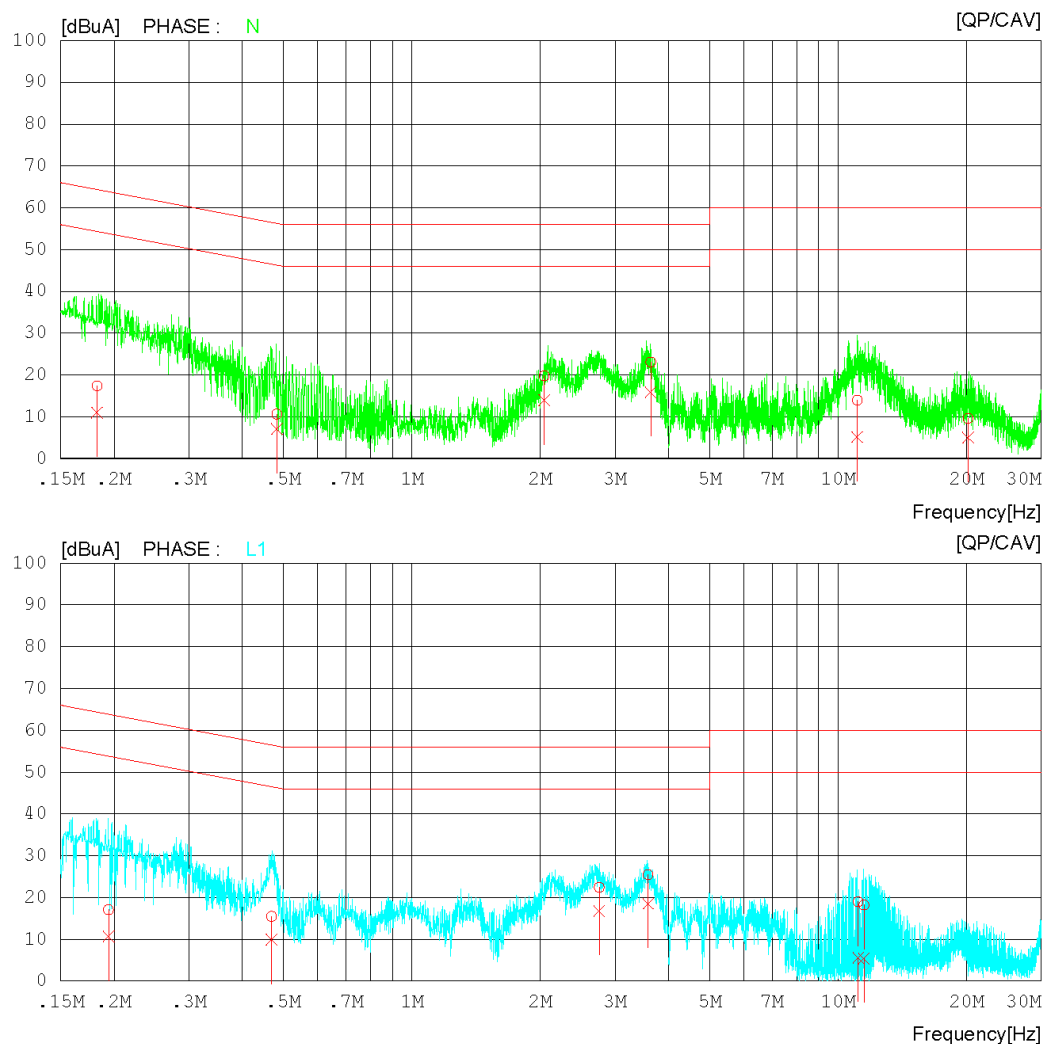

AC Power-Line Conducted Emissions (List) = Modulation : GFSKResults of Conducted Emission

Date 2025-08-12

Order No.		Reference No.	
Model No.	Sonolight	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 'C / 41 %
Test Condition	BT	Operator	J.H.Yun

Memo 1M_2402

LIMIT : FCC P15.207 AV
FCC P15.207 QP

Lisn Factor

1. NSLK 8128 RC-387_N_24.10.21

2. NSLK 8128 RC-387_L1_24.10.21

Cable Loss

1. C1_LISN TO RECEIVER_2024-12-11

Pulse Lmitter


1. PULSE LIMITER_ESH3-Z2_101333_2025.07.10

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuA]	CAV [dBuA]		QP [dBuA]	CAV [dBuA]	QP [dBuA]	CAV [dBuA]	QP [dBuA]	CAV [dBuA]	
1	0.18255	7.35	0.97	10.01	17.36	10.98	64.37	54.37	47.01	43.39	N
2	0.48221	0.57	-2.97	10.05	10.62	7.08	56.30	46.30	45.68	39.22	N
3	2.04560	9.72	3.89	10.08	19.80	13.97	56.00	46.00	36.20	32.03	N
4	3.63440	12.92	5.75	10.17	23.09	15.92	56.00	46.00	32.91	30.08	N
5	11.09700	3.60	-5.25	10.41	14.01	5.16	60.00	50.00	45.99	44.84	N
6	20.20840	-0.98	-5.55	10.58	9.60	5.03	60.00	50.00	50.40	44.97	N
7	0.19417	7.09	0.64	10.01	17.10	10.65	63.86	53.86	46.76	43.21	L1
8	0.46866	5.45	-0.11	10.05	15.50	9.94	56.54	46.54	41.04	36.60	L1
9	2.75040	12.22	6.58	10.20	22.42	16.78	56.00	46.00	33.58	29.22	L1
10	3.58720	15.28	8.35	10.21	25.49	18.56	56.00	46.00	30.51	27.44	L1
11	11.15980	8.51	-4.82	10.49	19.00	5.67	60.00	50.00	41.00	44.33	L1
12	11.50340	7.69	-5.03	10.50	18.19	5.47	60.00	50.00	41.81	44.53	L1


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

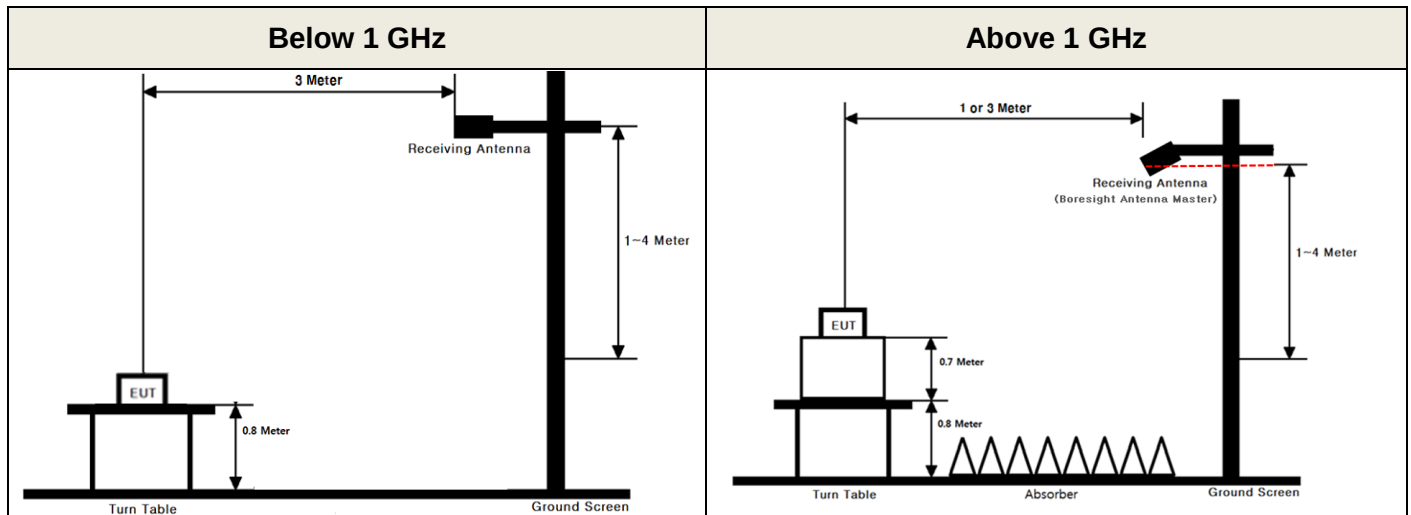

▪ Conducted Measurement

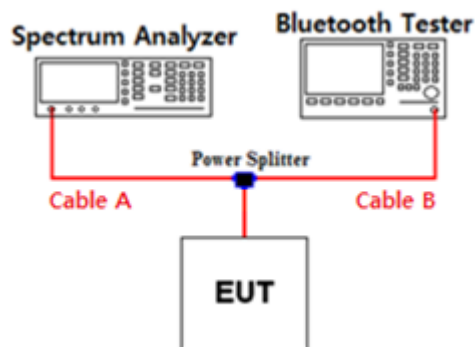

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.59	15	8.69
1	6.75	20	9.25
2.402 & 2.441 & 2.480	6.78	25	9.46
5	6.83	-	-
10	7.38	-	-


Note 1: The path loss from EUT to Spectrum analyzer was measured and used for test.
 Path loss (S/A's correction factor) = Cable A + Power Splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & X & Hor

Detector Mode : PK

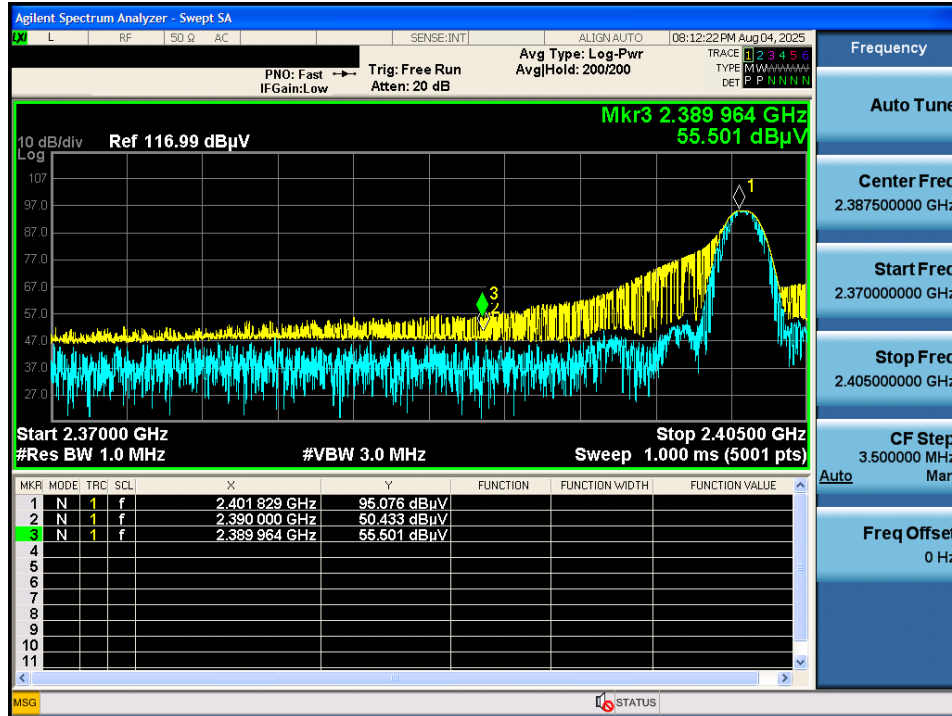


GFSK & Highest & X & Hor

Detector Mode : PK

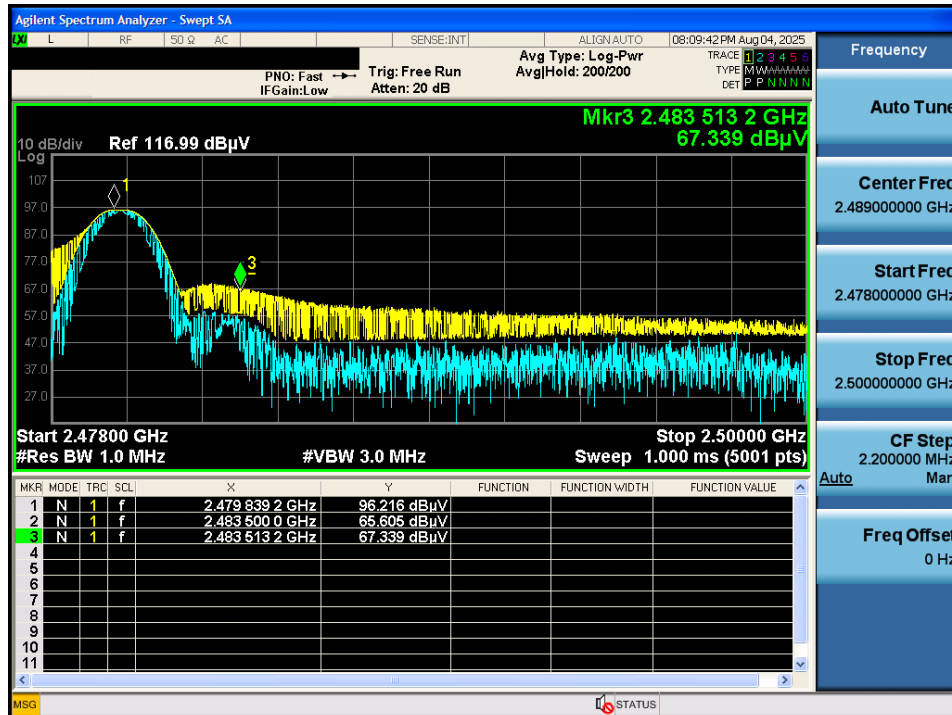


$\pi/4$ -DQPSK & Lowest & X & Hor

Detector Mode : PK

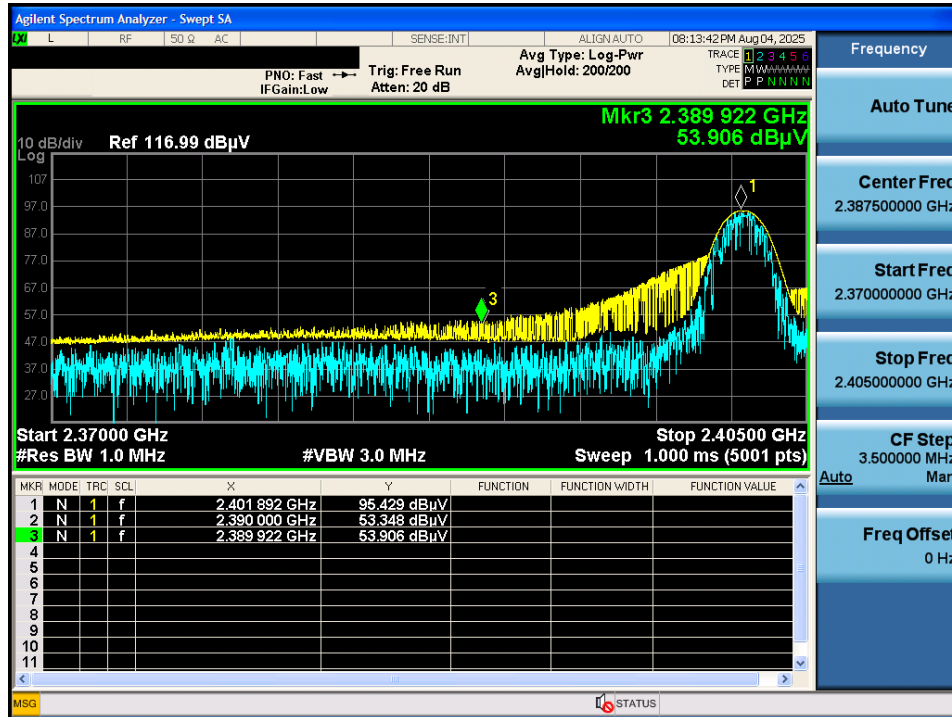


$\pi/4$ -DQPSK & Highest & X & Hor

Detector Mode : PK

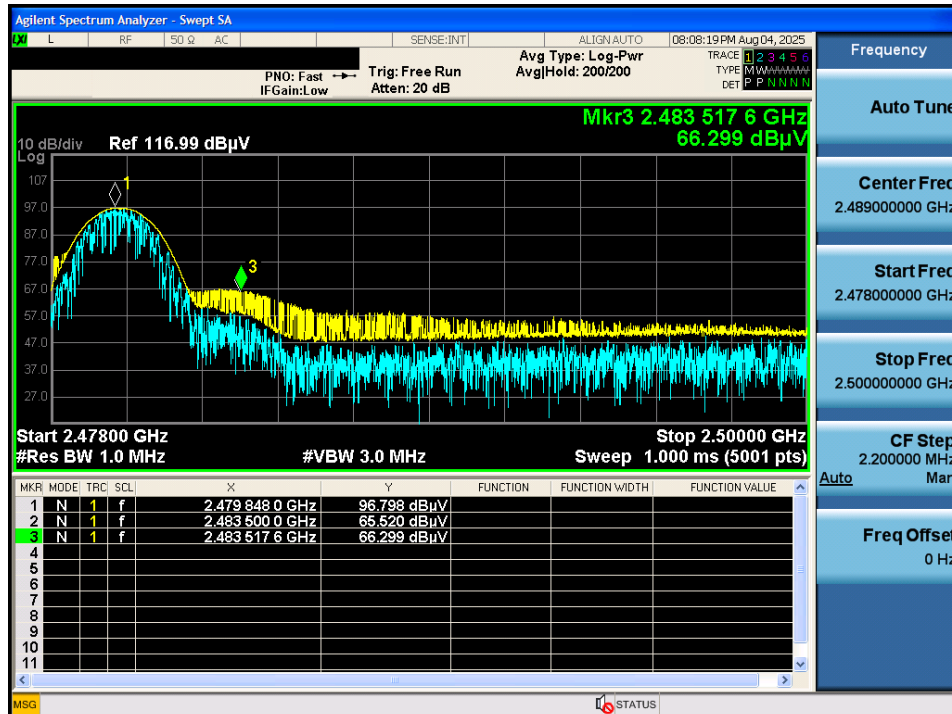


8DPSK & Lowest & X & Hor

Detector Mode : PK

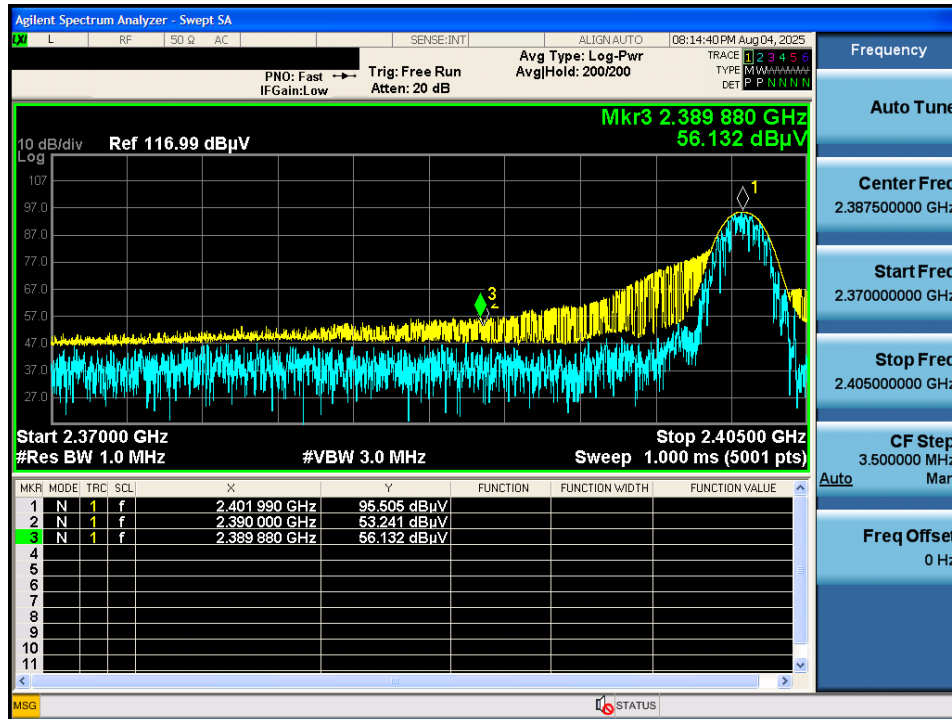


8DPSK & Highest & X & Hor

Detector Mode : PK

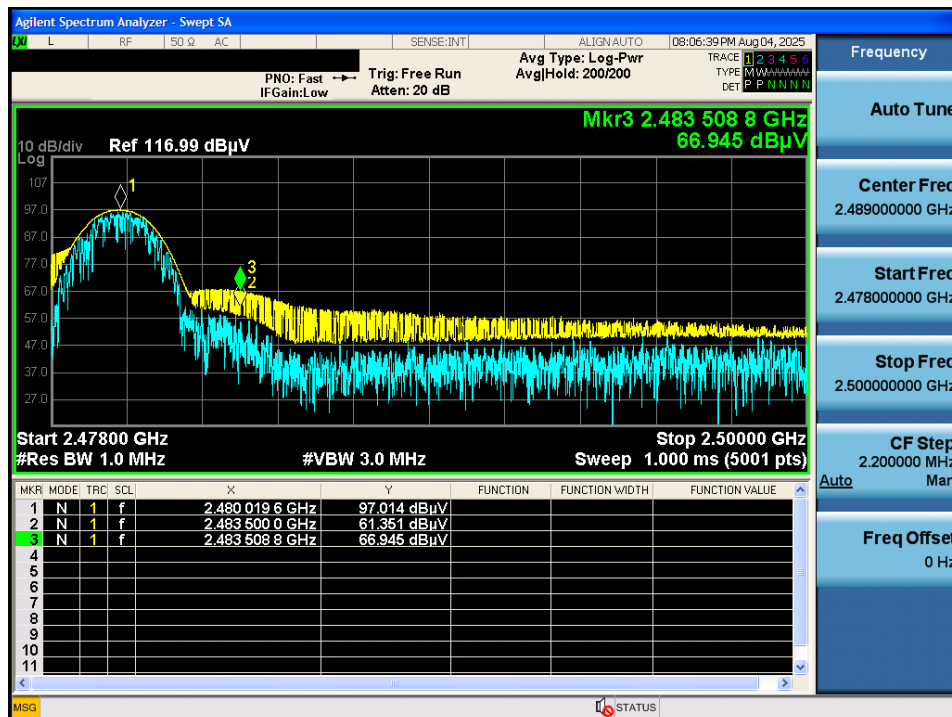


GFSK & Lowest & X & Hor

Detector Mode : PK

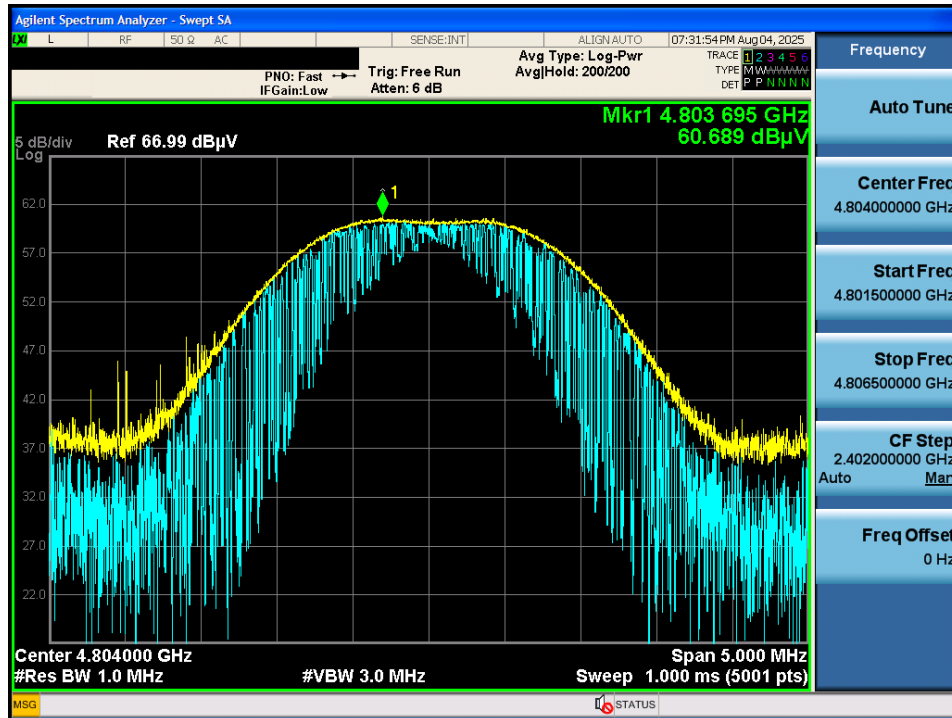


$\pi/4$ -DQPSK & Lowest & X & Hor

Detector Mode : PK

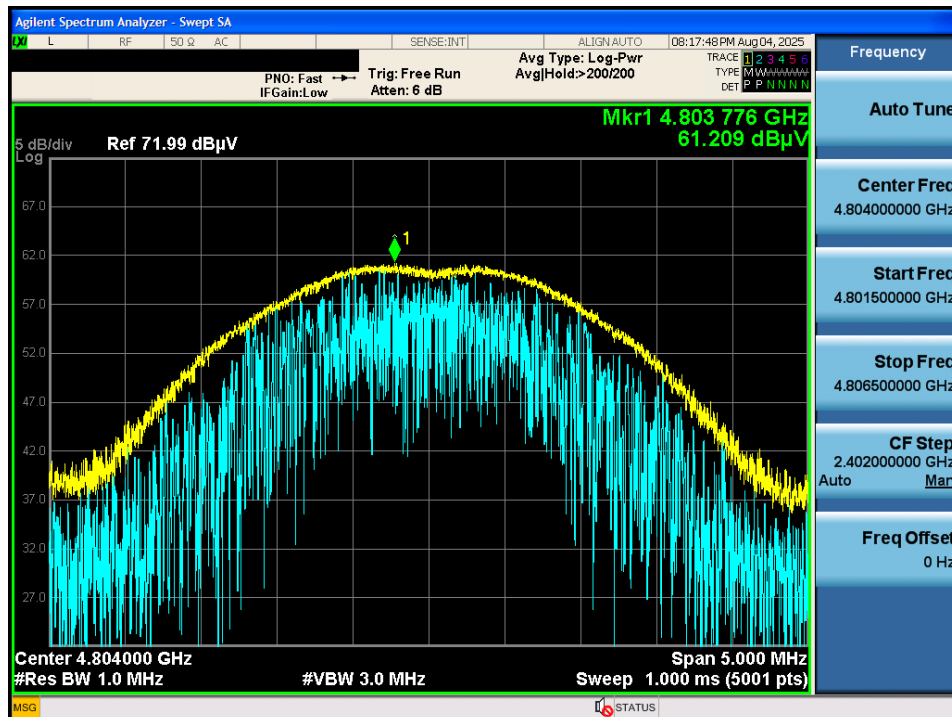

8DPSK & Lowest & X & Hor

Detector Mode : PK

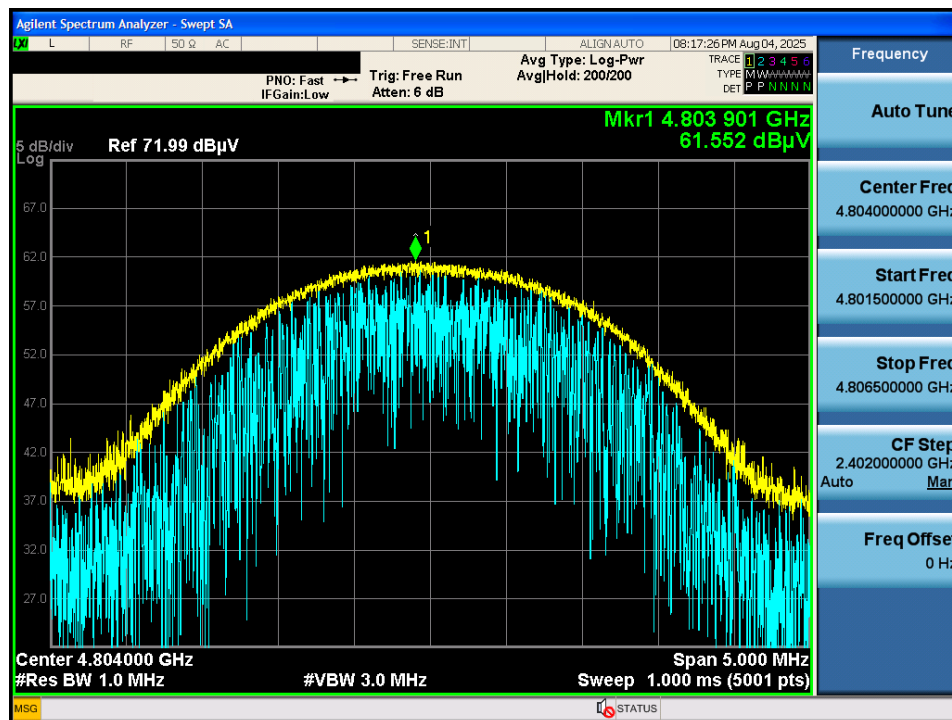

- END -