

# ANTENNA INFORMATION

|                                                           |                          |        |  |
|-----------------------------------------------------------|--------------------------|--------|--|
| OEM                                                       | GIGABYTE                 |        |  |
| ODM                                                       | COMPAL                   |        |  |
| Platform model name                                       | GA8H<br>GA83H            |        |  |
| Intel platform (ex: Yes, No or NA)                        | GA8H : Yes<br>GA83H : No |        |  |
| Platform type (ex: regular NB, convertible PC, AIO...etc) | Regular NB               |        |  |
| SAR minimum separation (mm)                               | FCC (1g)                 | 5 mm   |  |
|                                                           | ISED (1g)                | 5 mm   |  |
|                                                           | ISED (10g)               | 1.8 mm |  |

|                      |                 |                                                                        |  |
|----------------------|-----------------|------------------------------------------------------------------------|--|
| Antenna manufacturer | Company name    | High-tek                                                               |  |
|                      | Address         | No. 16, Lane 50, Section 3, Nangang Road, Nangang District, Taiwan 115 |  |
| Test location        | Company name    | COMPAL                                                                 |  |
|                      | Address         | No. 581, Ruiguang Road, Neihu District, Taipei City, Taiwan            |  |
| Test Personnel       | Name(Full name) | WENG,ZHEN-WEI                                                          |  |
|                      | E-mail          | Austin_Weng@compal.com                                                 |  |
|                      | Tel/Mobile      | 02-8797-8588 # 11902                                                   |  |
| Testing date         |                 | 2025/06/16                                                             |  |

|                                       |      |                           |
|---------------------------------------|------|---------------------------|
| Antenna Part number                   | Main | 0ACCN025006N(DC330032J00) |
|                                       | Aux  | 0ACCN025007N(DC330032J10) |
| Antenna type (ex: PIFA, Dipole...etc) |      | PIFA                      |

| Antenna Peak gain w/ cable loss (dBi)* |                           |                        |                        |                        |                        |                        |                        |                        |                        |                         |
|----------------------------------------|---------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-------------------------|
|                                        | 2.4GHz<br>2400-2483.5 MHz | 5.2GHz<br>5150-5250MHz | 5.3GHz<br>5250-5350MHz | 5.6GHz<br>5470-5725MHz | 5.8GHz<br>5725-5850MHz | 5.9GHz<br>5850-5895MHz | 6.2GHz<br>5925-6425MHz | 6.5GHz<br>6425-6525MHz | 6.7GHz<br>6525-6875MHz | 7.0 GHz<br>6875-7125MHz |
| Main                                   | 2.72                      | 2.51                   | 2.63                   | 2.46                   | 2.29                   | 2.63                   | 3.75                   | 3.27                   | 2.99                   | 3.5                     |
| Aux                                    | 2.87                      | 1.98                   | 2.47                   | 2.98                   | 2.61                   | 2.54                   | 3.71                   | 2.84                   | 3.11                   | 2.75                    |

| Cable Assembly Part Number and Information |             |                  |                    |                |                |
|--------------------------------------------|-------------|------------------|--------------------|----------------|----------------|
|                                            | Cable PN    | Cable length(mm) | Cable diameter(mm) | Impedance(ohm) | Connector type |
| Main                                       | SY 113LL/50 | 161              | 1.13               | 50             | I-PEX MHF      |
| Aux                                        | SY 113LL/50 | 417              | 1.13               | 50             | I-PEX MHF      |

\* 3D Antenna Peak Gain required being test in system basis.

| Cable loss (dB) |                                  |                               |                               |                               |                               |                               |                               |                               |                               |                                |
|-----------------|----------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
|                 | <b>2.4GHz</b><br>2400-2483.5 MHz | <b>5.2GHz</b><br>5150-5250MHz | <b>5.3GHz</b><br>5250-5350MHz | <b>5.6GHz</b><br>5470-5725MHz | <b>5.8GHz</b><br>5725-5850MHz | <b>5.9GHz</b><br>5850-5895MHz | <b>6.2GHz</b><br>5925-6425MHz | <b>6.5GHz</b><br>6425-6525MHz | <b>6.7GHz</b><br>6525-6875MHz | <b>7.0 GHz</b><br>6875-7125MHz |
| Main            | -0.4                             | -0.6                          | -0.6                          | -0.6                          | -0.6                          | -0.6                          | -0.7                          | -0.7                          | -0.7                          | -0.7                           |
| Aux             | -1.0                             | -1.6                          | -1.6                          | -1.6                          | -1.6                          | -1.7                          | -1.7                          | -1.7                          | -1.7                          | -1.8                           |

# Table of Contents

Cover page..... 1

1. Intel Reference Gain and Type..... 3

2. Document Revision History..... 3

3. Test & System Description

    3.1 Measurement Method and System..... 4

    3.2 Test setup..... 4

    3.3 Equipment list..... 5

4. Radiation characteristics of antenna loaded in Host Platform..... 6

Annex A. Photographs

    A.1 Setup Photo..... 16

    A.2 Test sample..... 17

Annex B. Antenna Location

    B.1 Antenna Host Platform Location Information.....19

    B.2 Antenna dimensional information for SAR evaluation..... 20

## 1. Intel Reference Gain and Type

| Antenna Peak gain w/ cable loss (dBi) |                         |                                  |                               |                               |                               |                               |                               |                               |                               |                               |                                |
|---------------------------------------|-------------------------|----------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| Band/Frequency                        |                         | <b>2.4GHz</b><br>2400-2483.5 MHz | <b>5.2GHz</b><br>5150-5250MHz | <b>5.3GHz</b><br>5250-5350MHz | <b>5.6GHz</b><br>5470-5725MHz | <b>5.8GHz</b><br>5725-5850MHz | <b>5.9GHz</b><br>5850-5895MHz | <b>6.2GHz</b><br>5925-6425MHz | <b>6.5GHz</b><br>6425-6525MHz | <b>6.7GHz</b><br>6525-6875MHz | <b>7.0 GHz</b><br>6875-7125MHz |
| Design                                | EU/UK                   | 3.00                             | 5.00                          | 5.00                          | 5.00                          | 5.00                          | 5.00                          | 5.00                          | 5.00                          | 5.00                          | 5.00                           |
| PIFA                                  | For WiFi 6E and earlier | 3.24                             | 3.64                          | 3.73                          | 4.77                          | 4.97                          | 4.72                          | 4.83                          | 4.30                          | 5.37                          | 5.59                           |
|                                       | From WiFi 7             | 2.95                             | 5.11                          | 4.55                          | 5.15                          | 5.13                          | 4.45                          | 5.02                          | 5.02                          | 4.96                          | 4.96                           |
| Dipole                                | For WiFi 6E and earlier | 2.89                             | 2.92                          | 3.19                          | 4.41                          | 4.22                          | 4.22                          | 4.83                          | 4.30                          | 4.49                          | 5.34                           |
|                                       | From WiFi 7             | 2.95                             | 4.03                          | 4.11                          | 5.15                          | 5.13                          | 4.45                          | 5.02                          | 4.71                          | 4.49                          | 4.96                           |
| Monopole                              | From WiFi 7             | 2.83                             | 4.57                          | 4.44                          | 4.95                          | 4.95                          | 4.43                          | 4.87                          | 4.91                          | 4.91                          | 4.79                           |

### 3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

## 2. Document Revision History


| Revision # | Revision Details | Issued Date |
|------------|------------------|-------------|
| Rev. 00    | First Issue      |             |

### 3. Test & System Description

#### 3.1 Measurement Method and System

The radiation pattern of antenna is measured in both horizontal polarization and vertical polarization. The radiation pattern measurements are performed in the three-dimensional anechoic chamber. The chamber provides less than  $-30\text{dB}$  reflectivity from  $400\text{MHz}$  through  $8\text{GHz}$ . The chamber is calibrated using both standard dipole antenna and horn antenna. The Gain here is expressed as dBi that standardizes the isotropic antenna. The Gain measurements and antenna radiation pattern are also performed in the same chamber described previously.

#### 3.2 Test setup

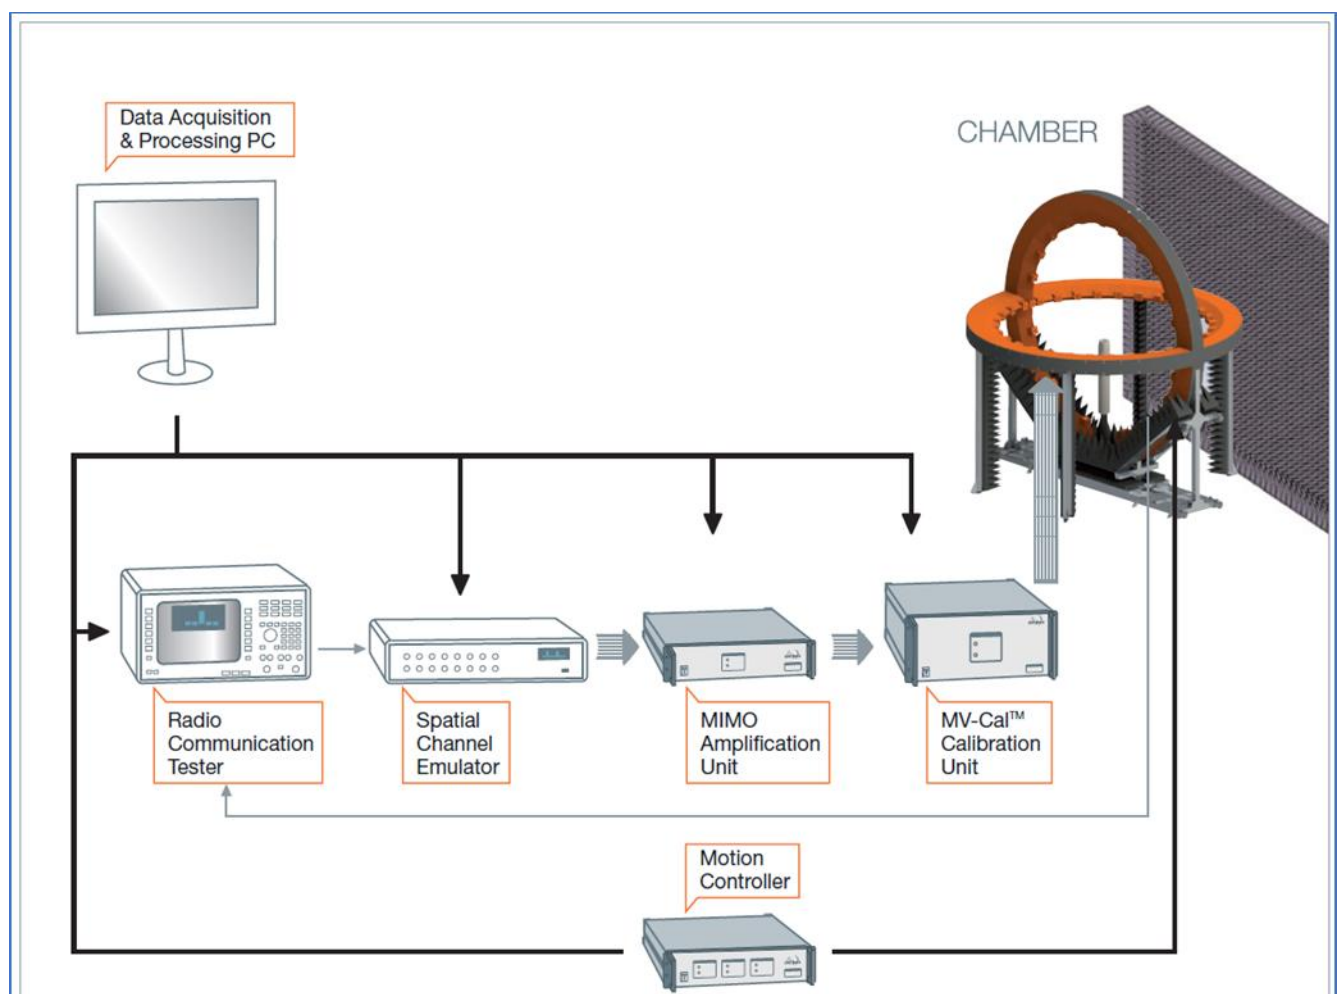

### 3.3 Equipment list

The equipment for the antenna measurement we used is as follows:

A. Network Analyzer, support up to 8GHz, to measure the VSWR and input impedance of antenna.

B. Three-dimensional anechoic chamber to measure antenna gain and radiation pattern(Standard horn antenna was used to calibrate the chamber)

C. Climatic chamber for mechanical tests


| item | Device                | Type/Model         | manufacturer       | Cal. Date | Cal. Due Date |
|------|-----------------------|--------------------|--------------------|-----------|---------------|
| 1.   | Measurement system    | StarMIMO 2.4m HV   | MVG                | 2024/8/22 | 2025/8/22     |
| 2.   | Turntable             | Goniometer         | MVG                | N/A       | N/A           |
| 3.   | Measurement software  | Wave Studio        | MVG                | N/A       | N/A           |
| 4.   | VNA                   | Agilent N5230C     | Agilent (Keysight) | N/A       | N/A           |
| 5.   | Received antenna      | StarMIMO 2.4m HV   | MVG                | 2024/8/22 | 2025/8/22     |
| 6.   | Position controller   | Motion controller  | MVG                | N/A       | N/A           |
| 7.   | Cable 2.2m 9kHz~18GHz | SPS -AO-2.2m, 1801 | AO Tech.           | 2024/8/22 | 2025/8/22     |
| 8.   | Cable 5m 9kHz~18GHz   | SPS-AO-5m, 1805    | AO Tech.           | 2024/8/22 | 2025/8/22     |

#### 4. Radiation characteristics of antenna loaded in Host Platform

##### Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 2400-2483.5        | 2.72                             |

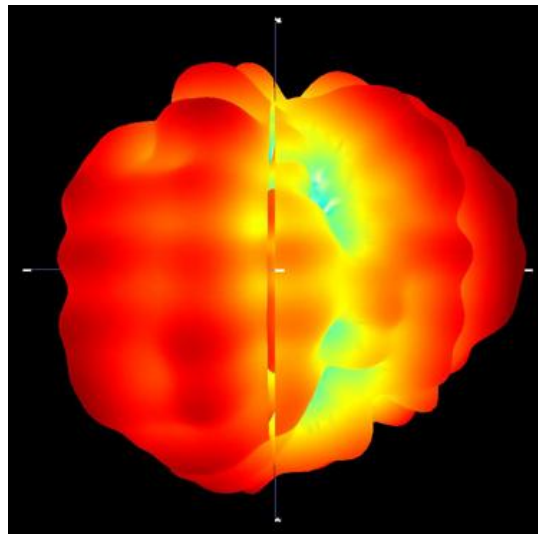


Max Antenna 3D Radiation Pattern 5150-5250 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5150-5250          | 2.51                             |

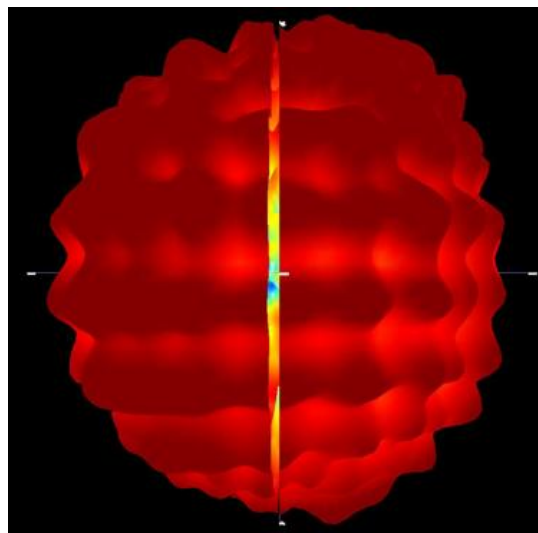


## Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350       | 2.63                          |

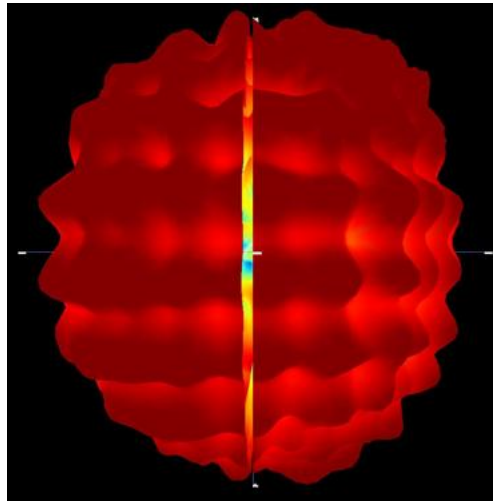


## Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5470-5725       | 2.46                          |

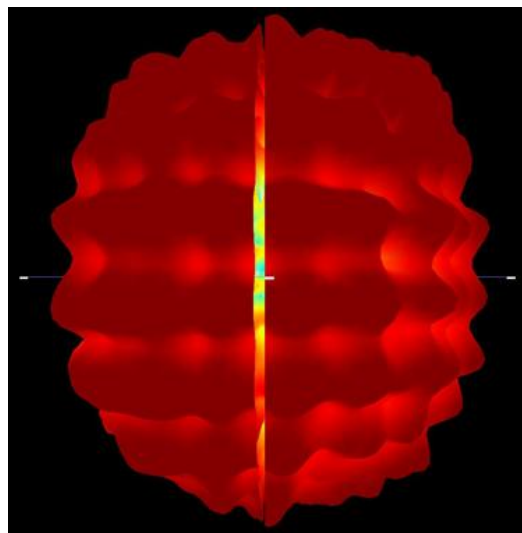


## Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5725-5850       | 2.29                          |

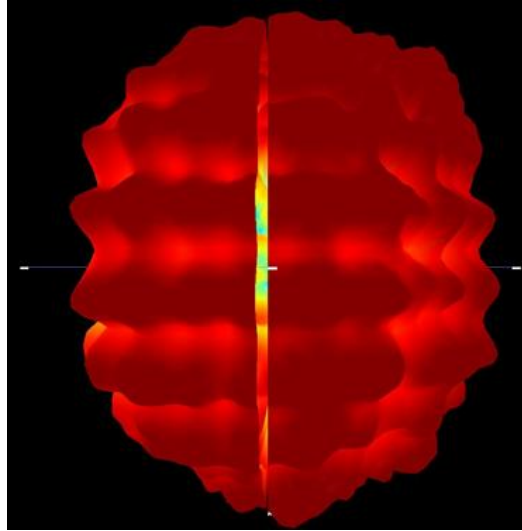


## Max Antenna 3D Radiation Pattern 5850-5895 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5850-5895       | 2.63                          |

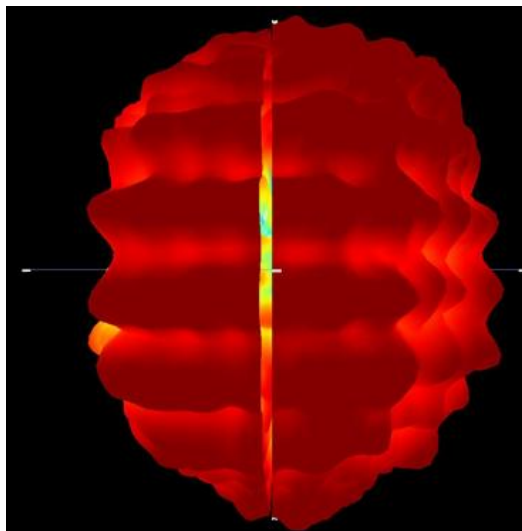


## Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5925-6425       | 3.75                          |

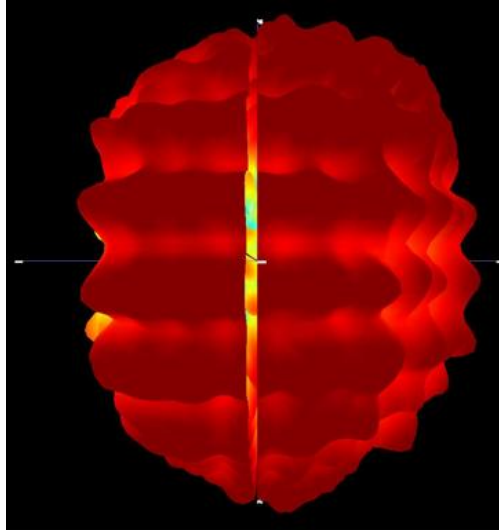


## Max Antenna 3D Radiation Pattern 6425-6525 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6425-6525       | 3.27                          |

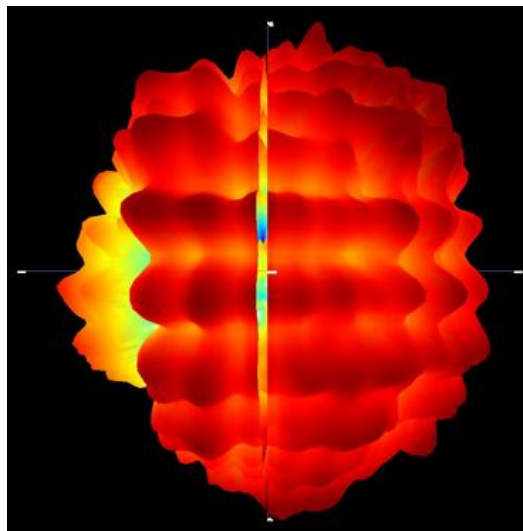


## Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6525-6875       | 2.99                          |

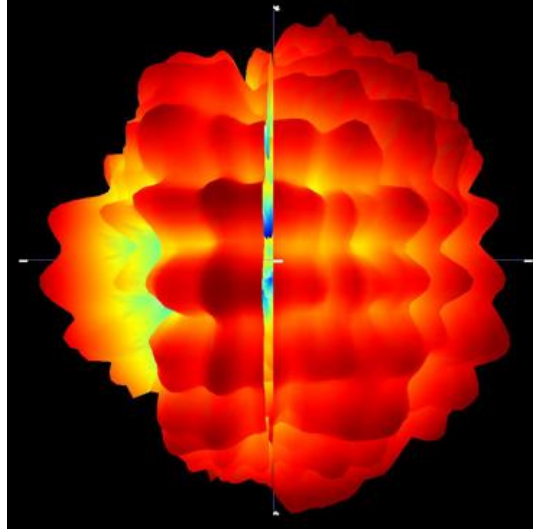


## Max Antenna 3D Radiation Pattern 6875-7125 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6875-7125       | 3.5                           |

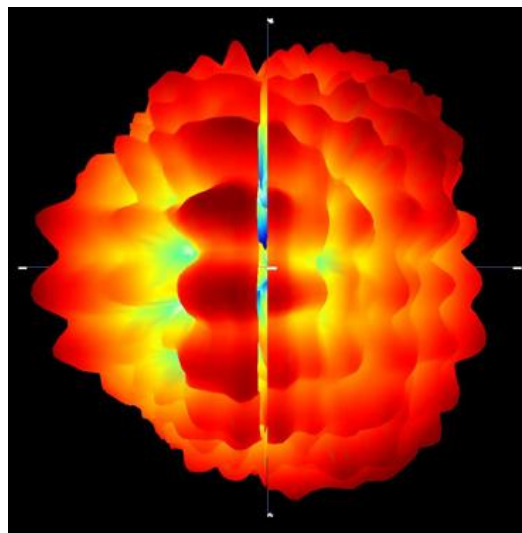


**Auxiliary Antenna****Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz**

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 2400-2483.5        | 2.87                             |

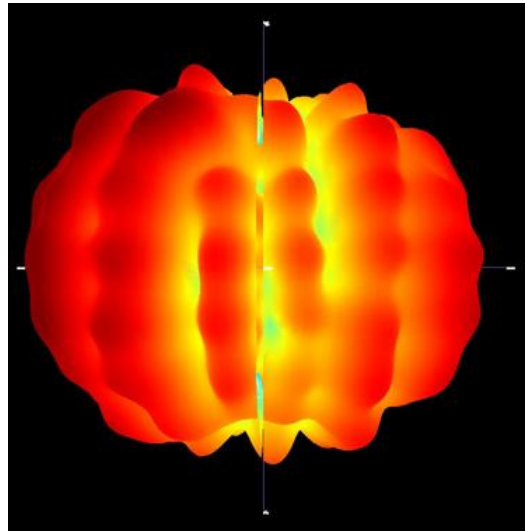
**Max Antenna 3D Radiation Pattern 5150-5250 MHz**

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5150-5250          | 1.98                             |

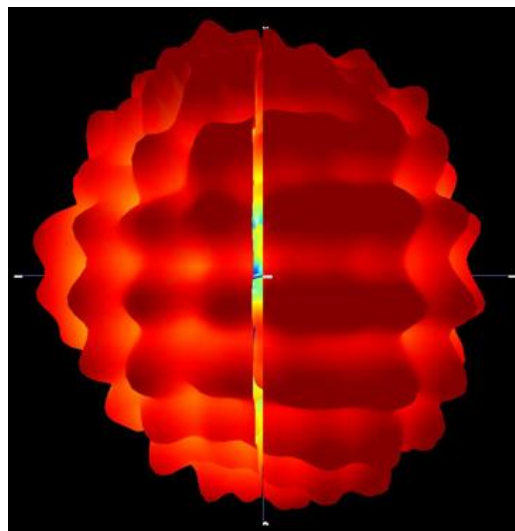


## Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350       | 2.47                          |

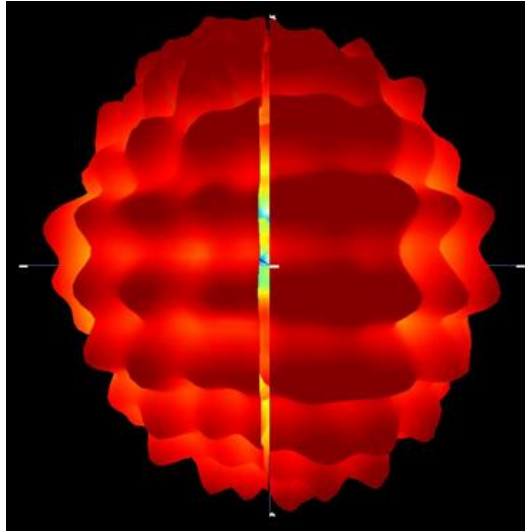


## Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5470-5725       | 2.98                          |

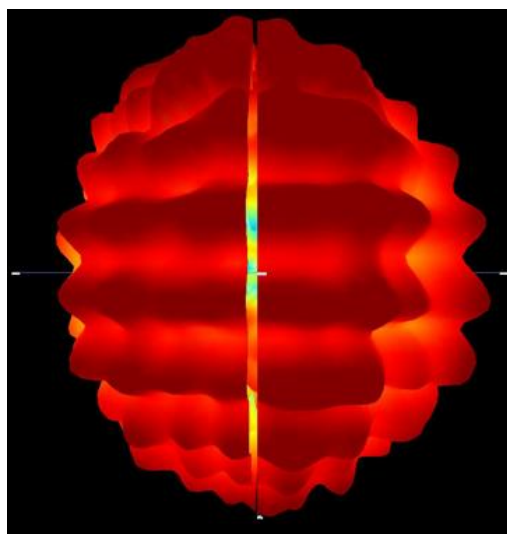


## Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5725-5850       | 2.61                          |

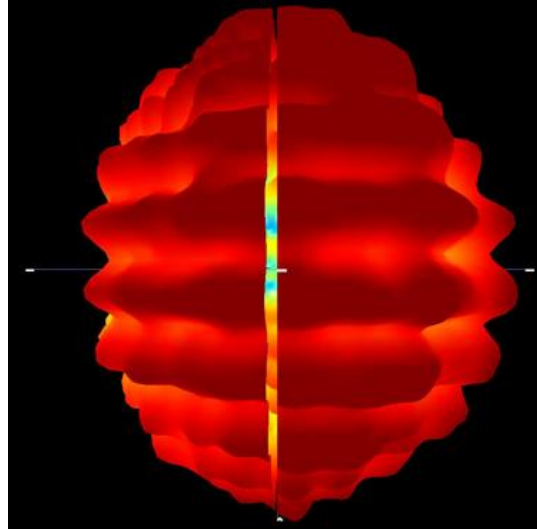


## Max Antenna 3D Radiation Pattern 5850-5895 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5850-5895       | 2.54                          |

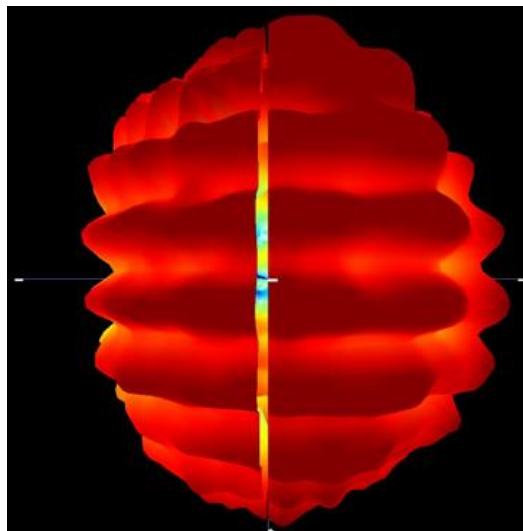


## Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5925-6425       | 3.71                          |

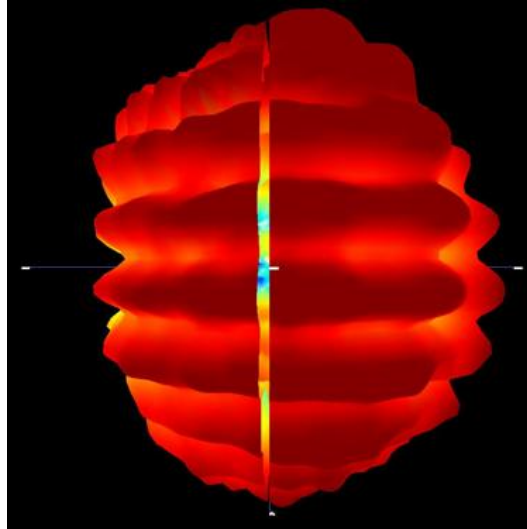


## Max Antenna 3D Radiation Pattern 6425-6525 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6425-6525       | 2.84                          |

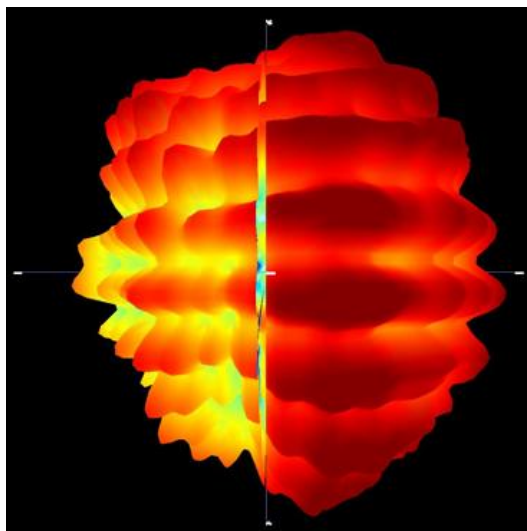

## Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6525-6875       | 3.11                          |

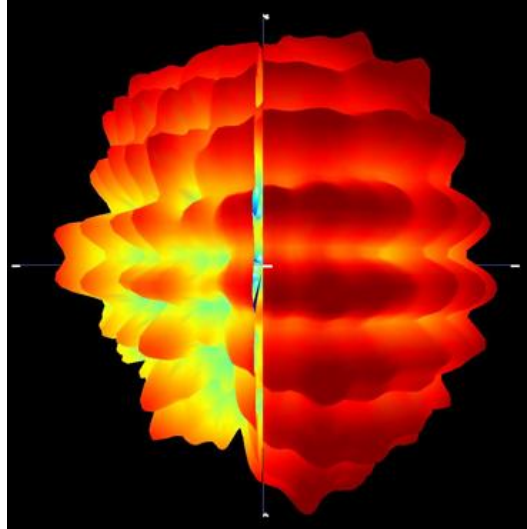

## Max Antenna 3D Radiation Pattern 6875-7125 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6875-7125       | 2.75                          |

