

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBBUI-WTW-P25050503-5
FCC ID: TX2-RTL8922DE
Product: 11be RTL8922DE Combo module
Brand: REALTEK
Model No.: RTL8922DE
Received Date: 2025/5/23
Test Date: 2025/12/28 ~ 2026/5/13
Issued Date: 2026/7/13
Applicant: Realtek Semiconductor Corp.
Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____, **Date:** 2026/7/13
May Chen / Manager

This test report consists of 1561 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Phoenix Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT.....	9
3.3 Channel List.....	10
3.4 Test Mode Applicability and Tested Channel Detail.....	12
3.5 Duty Cycle of Test Signal.....	23
3.6 Test Program Used and Operation Descriptions.....	33
3.7 Connection Diagram of EUT and Peripheral Devices	33
3.8 Configuration of Peripheral Devices and Cable Connections	35
4 Test Instruments	36
4.1 Maximum RF Output Power	36
4.2 Maximum Power Spectral Density	36
4.3 Emission Bandwidth	36
4.4 In-Band Emission Mask.....	36
4.5 Occupied Bandwidth.....	36
4.6 Contention-based Protocol.....	37
4.7 AC Power Conducted Emissions	37
4.8 Unwanted Emissions below 1 GHz	38
4.9 Unwanted Emissions above 1 GHz.....	38
4.10 APC (Automatic Power Control) and Proper Power Adjustment.....	39
5 Limits of Test Items.....	40
5.1 Maximum RF Output Power	40
5.2 Maximum Power Spectral Density	40
5.3 Emission Bandwidth	40
5.4 In-Band Emission Mask.....	41
5.5 Occupied Bandwidth.....	41
5.6 Contention-based Protocol.....	41
5.7 AC Power Conducted Emissions	41
5.8 Unwanted Emissions below 1 GHz	41
5.9 Unwanted Emissions above 1 GHz.....	42
5.10 APC (Automatic Power Control) and Proper Power Adjustment.....	42
6 Test Arrangements.....	43
6.1 Maximum RF Output Power	43
6.1.1 Test Setup	43
6.1.2 Test Procedure	43
6.2 Maximum Power Spectral Density	43
6.2.1 Test Setup	43
6.2.2 Test Procedure	43
6.3 Emission Bandwidth	43
6.3.1 Test Setup	43
6.3.2 Test Procedure	43
6.4 In-Band Emission Mask.....	44
6.4.1 Test Setup	44
6.4.2 Test Procedure	44
6.5 Occupied Bandwidth.....	45
6.5.1 Test Setup	45
6.5.2 Test Procedure	45
6.6 Contention-based Protocol.....	46
6.6.1 Test Setup	46

6.6.2	Test Procedure	46
6.7	AC Power Conducted Emissions	47
6.7.1	Test Setup	47
6.7.2	Test Procedure	47
6.8	Unwanted Emissions below 1 GHz	48
6.8.1	Test Setup	48
6.8.2	Test Procedure	49
6.9	Unwanted Emissions above 1 GHz	50
6.9.1	Test Setup	50
6.9.2	Test Procedure	50
6.10	APC (Automatic Power Control) and Proper Power Adjustment	51
6.10.1	Test Setup	51
6.10.2	Test Procedure	52
7	Test Results of Test Item	53
7.1	Maximum RF Output Power	53
7.2	Maximum Power Spectral Density	77
7.3	Emission Bandwidth	117
7.4	In-Band Emission Mask	145
7.5	Occupied Bandwidth	259
7.6	Contention-based Protocol	287
7.7	AC Power Conducted Emissions	300
7.8	Unwanted Emissions below 1 GHz	304
7.9	Unwanted Emissions above 1 GHz	316
7.10	APC (Automatic Power Control) and Proper Power Adjustment	1557
8	Pictures of Test Arrangements	1560
9	Information of the Testing Laboratories	1561

Release Control Record

Issue No.	Description	Date Issued
RFBBUI-WTW-P25050503-5	Original release.	2026/7/13

1 Certificate

Product: 11be RTL8922DE Combo module
Brand: REALTEK
Test Model: RTL8922DE
Sample Status: Engineering sample
Applicant: Realtek Semiconductor Corp.
Test Date: 2025/12/28 ~ 2026/5/13
Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Measurement procedure: ANSI C63.10-2020
KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(8)(i)(ii)	Maximum RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(8)(i)(ii)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
15.407(a)(11)	Emission Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -14.94 dB at 0.19297 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.3 dB at 132.80 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -1.6 dB at 5925.00 MHz and 7125.00 MHz
15.407(b)(7)	In-Band Emission Mask	Pass	Meet the requirement of limit.
15.407(d)(6)	Contention-based Protocol	Pass	Meet the requirement of limit.
15.407(a)(8)(i)	APC (Automatic Power Control) and Proper Power Adjustment	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX, MHF4, MHF4L not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
Maximum RF Output Power	-	1.1 dB
Maximum Power Spectral Density	-	1.3 dB
Emission Bandwidth	-	1050.00 Hz
Occupied Bandwidth	-	1050.00 Hz
In-Band Emission Mask	9 kHz ~ 40 GHz	2.6 dB
Contention-based Protocol	-	2.7 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.4 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.0 dB
	18 GHz ~ 40 GHz	5.3 dB
APC (Automatic Power Control) and Proper Power Adjustment	-	1.1 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	11be RTL8922DE Combo module
Brand	REALTEK
Test Model	RTL8922DE
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11ax: up to 2401.9 Mbps 802.11be: up to 2882.4 Mbps
Operating Frequency	5.955 GHz ~ 6.415 GHz 6.435 GHz ~ 6.525 GHz 6.535 GHz ~ 6.865 GHz 6.875 GHz ~ 7.115 GHz
Number of Channel	802.11a, 802.11ax (HE20), 802.11be (EHT20): 59 802.11ax (HE40), 802.11be (EHT40): 29 802.11ax (HE80), 802.11be (EHT80): 14 802.11ax (HE160), 802.11be (EHT160): 7
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 996-tone + 484-tone + 242-tone
Output Power	(under control of a low-power indoor AP) 5.955 GHz ~ 6.415 GHz: EIRP: 148.605 mW (21.72 dBm) 6.435 GHz ~ 6.525 GHz: EIRP: 146.556 mW (21.66 dBm) 6.535 GHz ~ 6.865 GHz: EIRP: 140.604 mW (21.48 dBm) 6.875 GHz ~ 7.115 GHz: EIRP: 140.604 mW (21.48 dBm) (under control of a Standard power AP) 5.955 GHz ~ 6.415 GHz: EIRP: 985.214 mW (29.94 dBm) 6.535 GHz ~ 6.855 GHz: EIRP: 982.947 mW (29.93 dBm)
Equipment Class	6CD: 15E 6 GHz Dual client

Note:

1. The EUT has two SKUs, please following table:

SKU No.	Components
1	With Flash
2	Without Flash

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.

3. Simultaneously transmission combination.

1Tx		
Combination	Technology	
	S0 (Chain 1)	S1 (Chain 0)
1	WLAN (5 GHz)_H	Bluetooth + WLAN (5 GHz)_L
2	WLAN (6 GHz)	Bluetooth + WLAN (5 GHz)_H
3	WLAN (5 GHz)_H	Bluetooth + WLAN (6 GHz)
4	WLAN (2.4 GHz)	WLAN (5 GHz)_Full
5	WLAN (2.4 GHz)	WLAN (6 GHz)
6	WLAN (5 GHz)_Full	Bluetooth
7	WLAN (6 GHz)	Bluetooth
2Tx		
1	WLAN (5 GHz)_H + Bluetooth	WLAN (5 GHz)_H + Bluetooth
2	WLAN (5 GHz)_H	WLAN (5 GHz)_H + Bluetooth
3	WLAN (6 GHz) + Bluetooth	WLAN (6 GHz) + Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain NO.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0/1	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835	PIFA	IPEX, MHF4	300
				5	5.15~5.895			
				5	5.925~7.125			
2	Chain0/1	HongBo	260-25096	3.11	2.4~2.4835	Monopole	MHF4L	300
				4.91	5.15~5.895			
				4.73	5.925~7.125			
3	Chain0/1	ARISTOTLE	RFA-27-C38H1-MHF4300	3	2.4~2.4835	Dipole	IPEX, MHF4	300
				5	5.15~5.895			
				5	5.925~7.125			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

6 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX / 1TX Diversity	2RX
802.11ax (HE20)	2TX / 1TX Diversity	2RX
802.11ax (HE40)	2TX / 1TX Diversity	2RX
802.11ax (HE80)	2TX / 1TX Diversity	2RX
802.11ax (HE160)	2TX / 1TX Diversity	2RX
802.11be (EHT20)	2TX / 1TX Diversity	2RX
802.11be (EHT40)	2TX / 1TX Diversity	2RX
802.11be (EHT80)	2TX / 1TX Diversity	2RX
802.11be (EHT160)	2TX / 1TX Diversity	2RX
802.11ax (RU26/52/106/242/484/996/2*996)	2TX / 1TX Diversity	2RX
802.11be (RU26/52/106/242/484/996/2*996 MRU52+26/106+26/484+242/ 996+484/996+484+242)	2TX / 1TX Diversity	2RX

Note: The modulation and bandwidth of 802.11ax and 802.11be modes are similar at 20 MHz (40 MHz, 80 MHz, 160 MHz). Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

U-NII-5:

24 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz	13	6015 MHz
17	6035 MHz	21	6055 MHz	25	6075 MHz	29	6095 MHz
33	6115 MHz	37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz	61	6255 MHz
65	6275 MHz	69	6295 MHz	73	6315 MHz	77	6335 MHz
81	6355 MHz	85	6375 MHz	89	6395 MHz	93	6415 MHz

12 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz	27	6085 MHz
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285 MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

6 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz	55	6225 MHz
71	6305 MHz	87	6385 MHz				

3 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz

U-NII-6: (under control of a low-power indoor access point only):

5 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*111	6505 MHz

U-NII-7:

17 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

5 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz
*183	6865 MHz						

2 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	*175	6825 MHz

U-NII-8: (under control of a low-power indoor access point only)

13 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz
233	7115 MHz						

6 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*187	6885 MHz	195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz				

2 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
207	6985 MHz

Note: * mean these are straddle channels and operating under control by under control of a low-power indoor access point only.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The EUT includes two HW SKU: SKU No.1(with flash), SKU No.2(w/o flash). Pre-scan in these SKUs and find the worst case as a test condition. 2. The PIFA/ monopole / dipole antenna can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition. 3. For 1Tx diversity configuration. Pre-scan in these chains and find the worst case as a representative test condition. 4. For Partial RU and Multi-RU modes across all supported bandwidths, a pre-scan shall be conducted to identify the worst-case condition and shall be utilized as the representative test mode. 5. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.
Worst Case:	1. The EUT worst case of SKU: SKU No.1 2. The antenna sets of the worst case was found when positioned on (X / Y / Z axis) ➤ PIFA antenna: Y axis ➤ Monopole antenna :X axis ➤ Dipole antenna: Y axis 3. For 1Tx diversity configuration the worst chain is: Chain 1

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Maximum RF Output Power	-	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Maximum RF Output Power	-	Indoor client	802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 3 1, 1, 3 1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 2 1, 1, 2 1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	2, 2, 2 2, 2 2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	3, 3, 3 3 3 3, 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	4, 4, 4 4 4 4, 4
		Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	3, 3, 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	4, 4, 4 4

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Maximum Power Spectral Density	-	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 3 1, 1, 3 1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 2 1, 1, 2 1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	2, 2, 2 2, 2 2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	3, 3, 3 3 3 3, 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	4, 4, 4 4 4 4, 4

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Maximum Power Spectral Density	-	Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	3, 3, 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	4, 4, 4 4
Emission Bandwidth	-	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Emission Bandwidth	-	Indoor client	802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 3 1, 1, 3 1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 2 1, 1, 2 1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	2, 2, 2 2, 2 2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	3, 3, 3 3 3 3, 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	4, 4, 4 4 4 4, 4
		Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 2 1, 1, 2
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 3 1, 1, 3

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Emission Bandwidth	-	Standard client	802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	3, 3, 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	4, 4, 4 4
Occupied Bandwidth	-	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 3 1, 1, 3 1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 2 1, 1, 2 1, 1, 2 1, 1, 2

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Occupied Bandwidth	-	Indoor client	802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	2, 2, 2 2, 2 2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	3, 3, 3 3 3 3, 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	4, 4, 4 4 4 4, 4
		Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	3, 3, 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	4, 4, 4 4
AC Power Conducted Emissions	A	Indoor client	802.11be (EHT160)	2Tx NSS2	15	BPSK	MCS0	NA
		Standard client	802.11be (EHT20)	2Tx NSS2	49	BPSK	6Mb/s	NA
Unwanted Emissions below 1 GHz	A, B, C	Indoor client	802.11be (EHT160)	2Tx NSS2	15	BPSK	MCS0	NA
		Standard client	802.11be (EHT20)	2Tx NSS2	49	BPSK	6Mb/s	NA

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
In-Band Emission Mask	-	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 3 1, 1, 3 1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	1, 1, 2 1, 1, 2 1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	2, 2, 2 2, 2 2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	3, 3, 3 3 3 3, 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	4, 4, 4 4 4 4, 4

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
In-Band Emission Mask	-	Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 3 1, 1, 3
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	1, 1, 2 1, 1, 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	2, 2, 2 2, 2, 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	3, 3, 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	4, 4, 4 4
Contention- based Protocol	-	Indoor client	802.11be (EHT20)	-	5, 101, 149, 197	BPSK	6Mb/s	NA
			802.11be (EHT160)	-	15, 111, 143, 207	BPSK	MCS0	NA
Unwanted Emissions above 1 GHz	A, B, C	Indoor client	802.11a	1Tx/ 2Tx	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 99, 107, 115 123, 147, 179 187, 203, 227	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 103, 119 135, 151, 167 183, 199, 215	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 111 143 175, 207	BPSK	MCS0	NA

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Unwanted Emissions above 1 GHz	A, B, C	Indoor client	802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	37, 37, 40 37, 37, 40 37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 97, 105, 113 117, 149, 181 185, 209, 233	BPSK	MCS0	53, 53, 54 53, 53, 54 53, 53, 54 53, 53, 54
			802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1 105 149 233	BPSK	MCS0	1 1 1 2
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1 105 149 233	BPSK	MCS0	1 1 1 2
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7 103 151 215	BPSK	MCS0	2 2 2 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15 111 143 207	BPSK	MCS0	3 3 3 3
			802.11be (EHT160) 996+484+242- tone MRU	1Tx NSS1/ 2Tx NSS2	15 111 143 207	BPSK	MCS0	4 4 4 4
		Standard client	802.11a	1Tx/ 2Tx	1, 49, 93 117, 149, 181	BPSK	6Mb/s	NA
			802.11be (EHT20)	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	NA
			802.11be (EHT40)	1Tx NSS1/ 2Tx NSS2	3, 51, 91 123, 147, 179	BPSK	MCS0	NA
			802.11be (EHT80)	1Tx NSS1/ 2Tx NSS2	7, 55, 87 135, 151, 167	BPSK	MCS0	NA
			802.11be (EHT160)	1Tx NSS1/ 2Tx NSS2	15, 47, 79 143	BPSK	MCS0	NA
			802.11be (EHT20) 26-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	0, 0, 8 0, 0, 8
			802.11be (EHT20) 52-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	37, 37, 40 37, 37, 40
			802.11be (EHT20) 106-tone RU	1Tx NSS1/ 2Tx NSS2	1, 49, 93 117, 149, 181	BPSK	MCS0	53, 53, 54 53, 53, 54

Test Item	EUT Configure Mode	Category	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Unwanted Emissions above 1 GHz	A, B, C	Standard client	802.11be (EHT20) 52+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1 149	BPSK	MCS0	1 1
			802.11be (EHT20) 106+26-tone MRU	1Tx NSS1/ 2Tx NSS2	1 149	BPSK	MCS0	1 1
			802.11be (EHT80) 484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	7 151	BPSK	MCS0	2 2
			802.11be (EHT160) 996+484-tone MRU	1Tx NSS1/ 2Tx NSS2	15 143	BPSK	MCS0	3 3
			802.11be (EHT160) 996+484+242-tone MRU	1Tx NSS1/ 2Tx NSS2	15 143	BPSK	MCS0	4 4
			APC (Automatic Power Control) and Proper Power Adjustment	-	Standard client	802.11be (EHT20)	-	37
EUT Configure Mode:	A	PIFA antenna (Model: RTK-ANT-0022)						
	B	Monopole antenna (Model: 260-25096)						
	C	Dipole antenna (Model: RFA-27-C38H1-MHF4300)						
Note:								
1. EUT was not supported Channel puncturing and bandwidth reduction mechanisms.								
2. For the contention-based protocol test item an antenna gain of -2.28 dBi was used as a representative measurement								

3.5 Duty Cycle of Test Signal

1Tx

802.11a: Duty cycle = $0.96 \text{ ms} / 0.973 \text{ ms} \times 100\% = 98.7\%$

802.11be (EHT20): Duty cycle = $0.957 \text{ ms} / 0.97 \text{ ms} \times 100\% = 98.7\%$

802.11be (EHT40): Duty cycle = $0.95 \text{ ms} / 0.963 \text{ ms} \times 100\% = 98.7\%$

802.11be (EHT80): Duty cycle = $0.989 \text{ ms} / 1.009 \text{ ms} \times 100\% = 98.0\%$

802.11be (EHT160): Duty cycle = $0.983 \text{ ms} / 1.003 \text{ ms} \times 100\% = 98.0\%$

802.11be (EHT20) 26-tone RU: Duty cycle = $0.956 \text{ ms} / 0.97 \text{ ms} \times 100\% = 98.6\%$

802.11be (EHT20) 52-tone RU: Duty cycle = $0.936 \text{ ms} / 0.949 \text{ ms} \times 100\% = 98.6\%$

802.11be (EHT20) 106-tone RU: Duty cycle = $0.943 \text{ ms} / 0.957 \text{ ms} \times 100\% = 98.5\%$


802.11be (EHT20) 52+26-tone MRU: Duty cycle = $0.969 \text{ ms} / 0.983 \text{ ms} \times 100\% = 98.6\%$

802.11be (EHT20) 106+26-tone MRU: Duty cycle = $0.983 \text{ ms} / 1.002 \text{ ms} \times 100\% = 98.1\%$


802.11be (EHT80) 484+242-tone MRU: Duty cycle = $0.983 \text{ ms} / 0.996 \text{ ms} \times 100\% = 98.7\%$

802.11be (EHT160) 996+484-tone MRU: Duty cycle = $0.963 \text{ ms} / 0.976 \text{ ms} \times 100\% = 98.7\%$


802.11be (EHT160) 996+484+242-tone MRU: Duty cycle = $0.983 \text{ ms} / 1.002 \text{ ms} \times 100\% = 98.1\%$

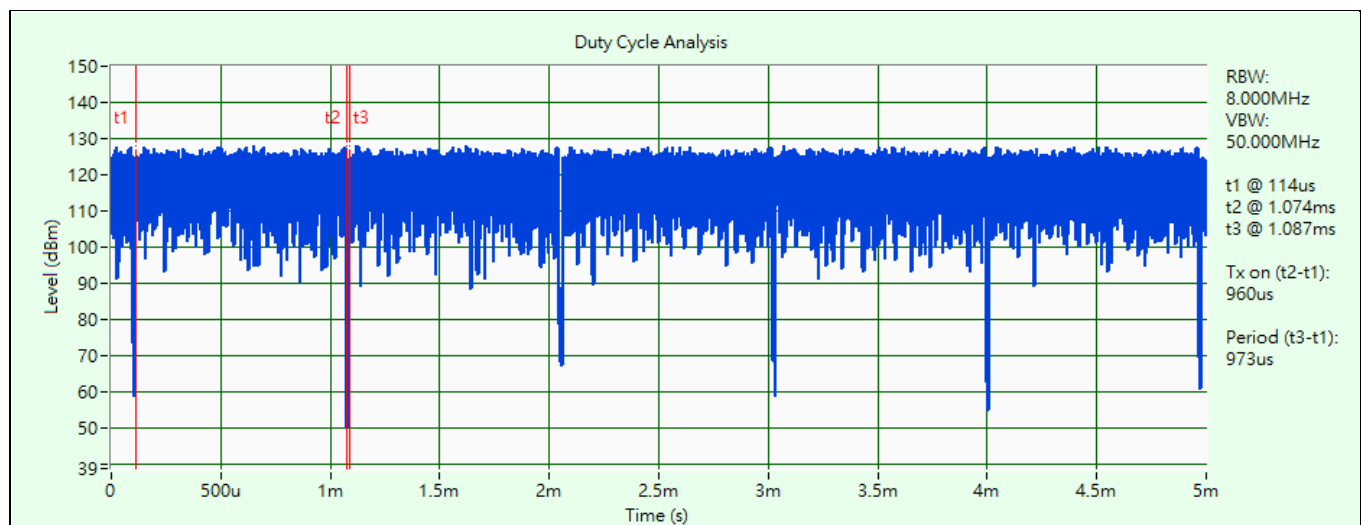


802.11a

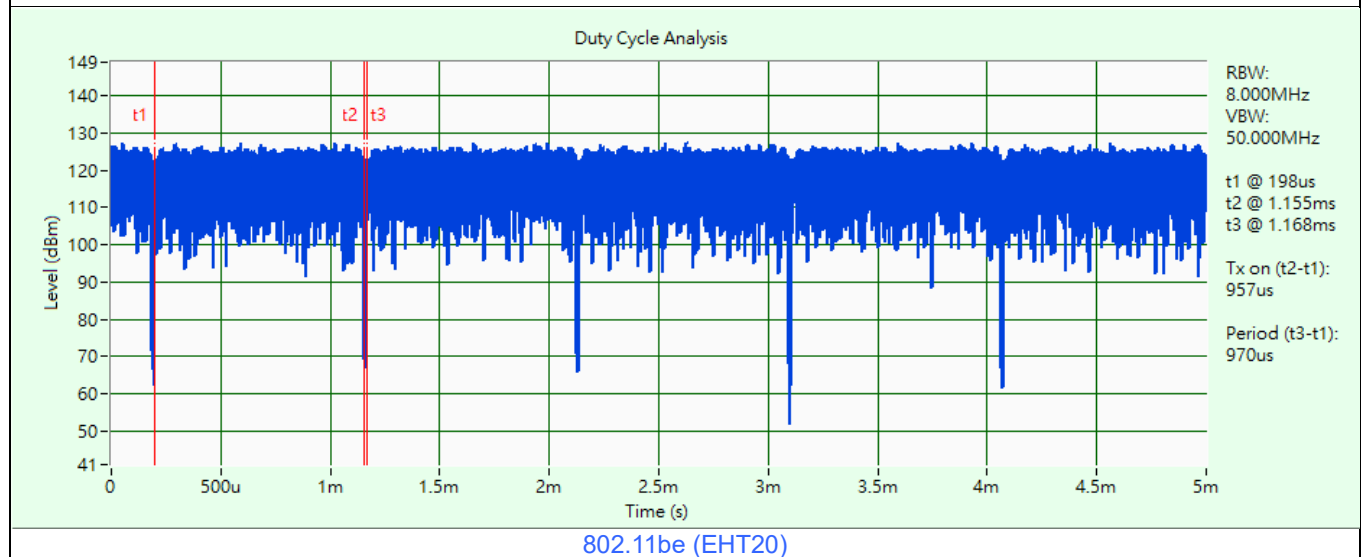


802.11be (EHT20)

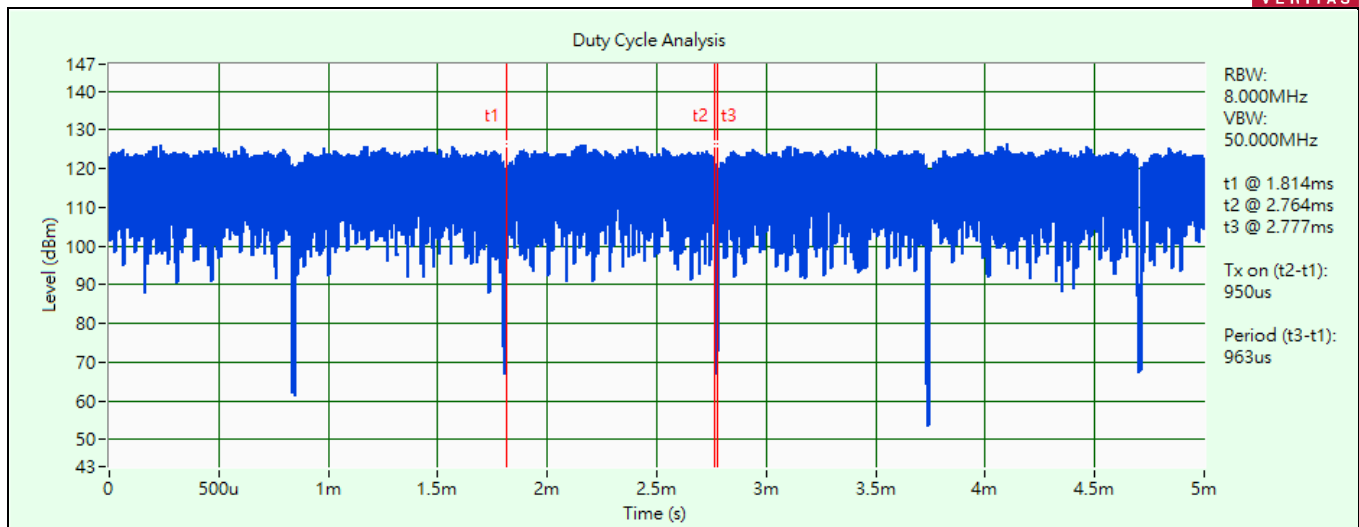


802.11be (EHT40)

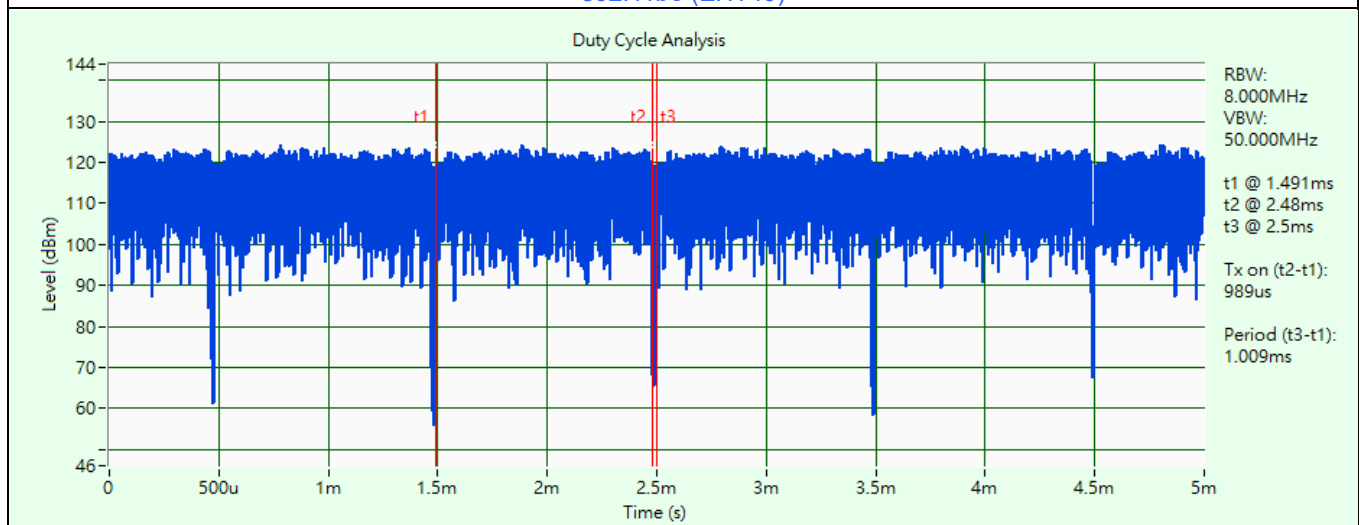


802.11be (EHT80)

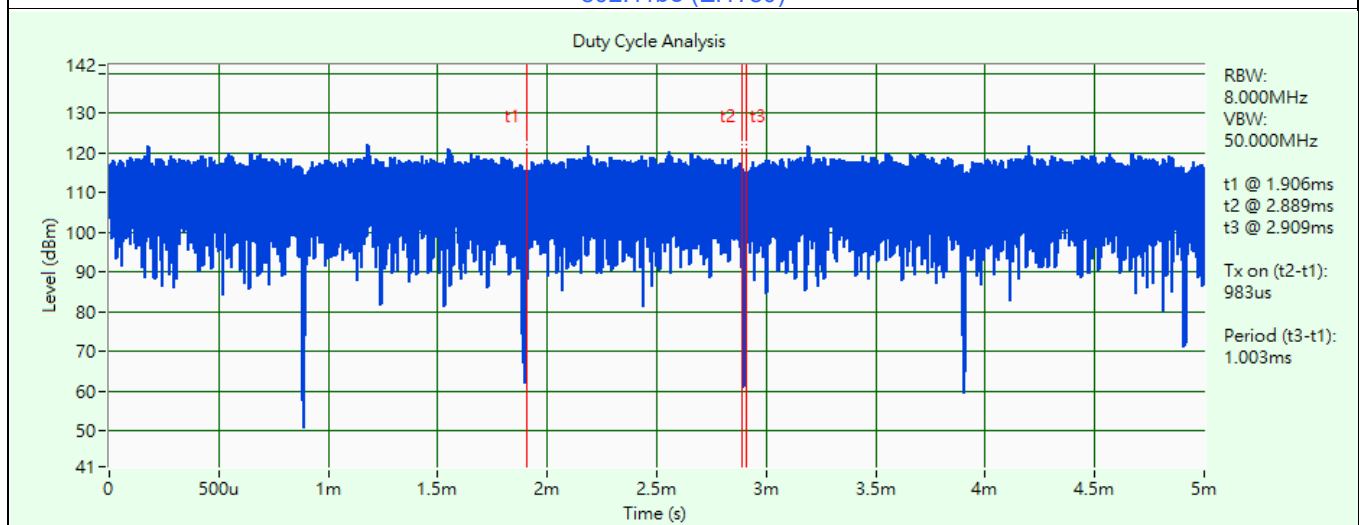


802.11be (EHT160)

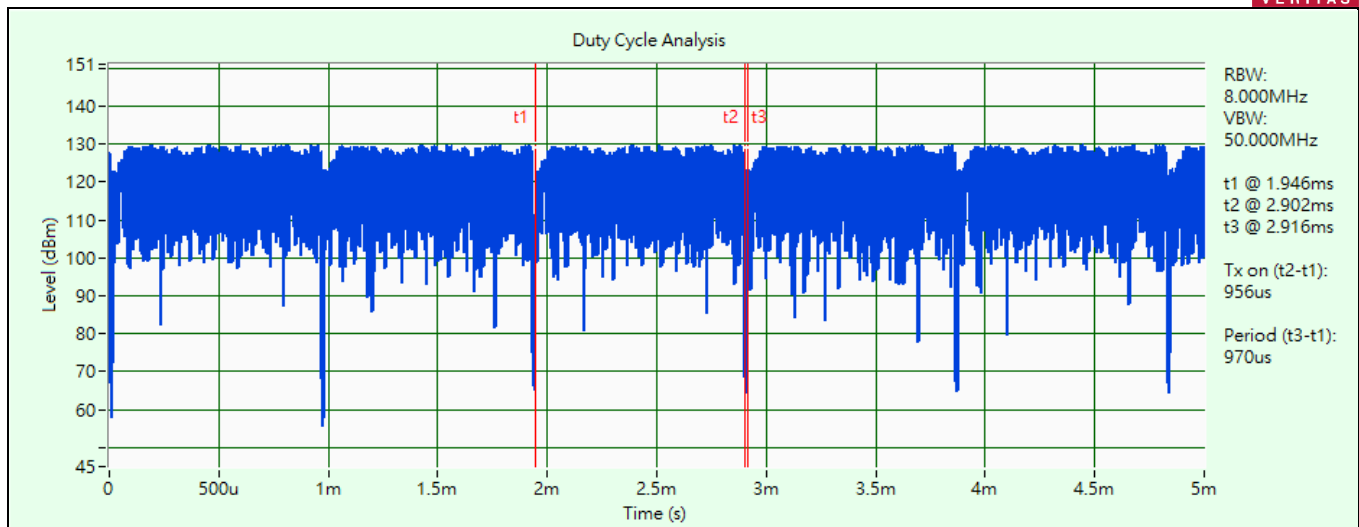


802.11be (EHT20) 26-tone RU

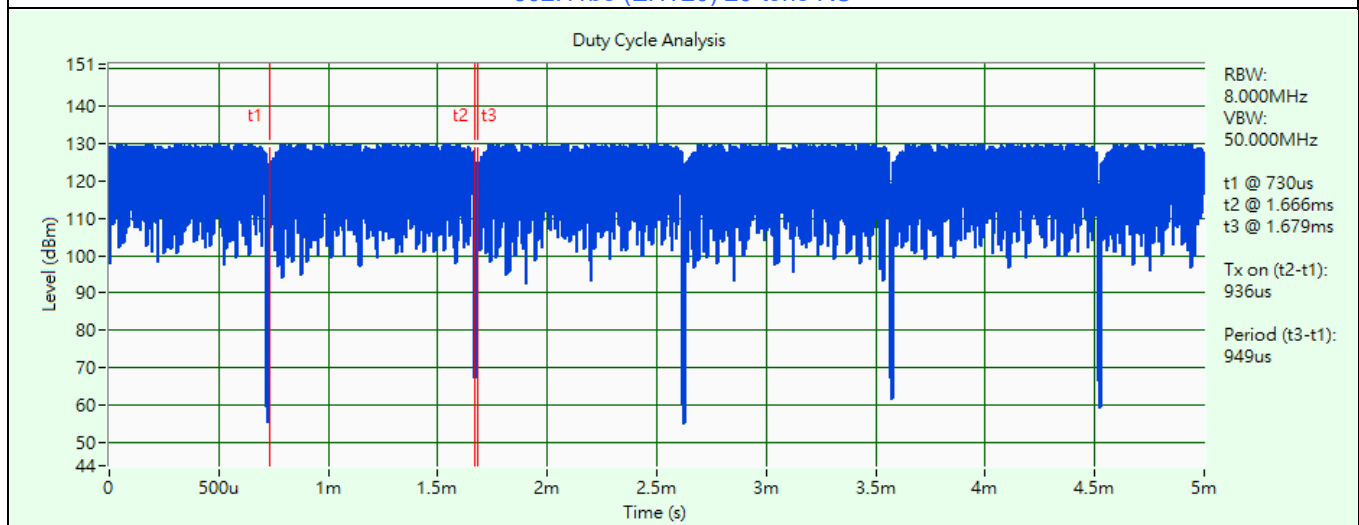


802.11be (EHT20) 52-tone RU

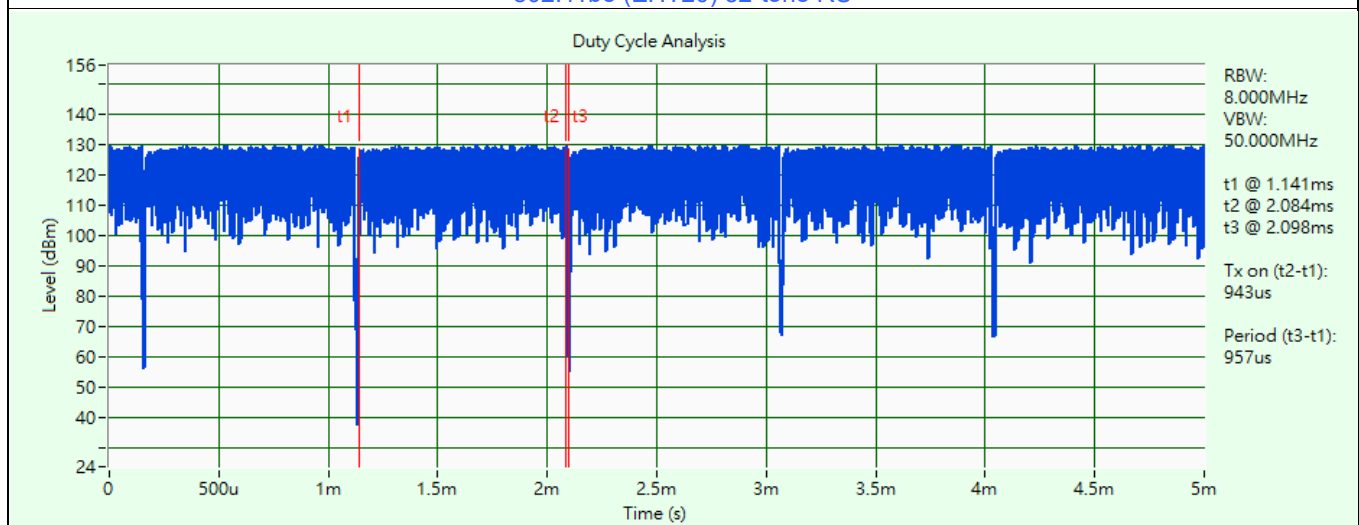


802.11be (EHT20) 106-tone RU

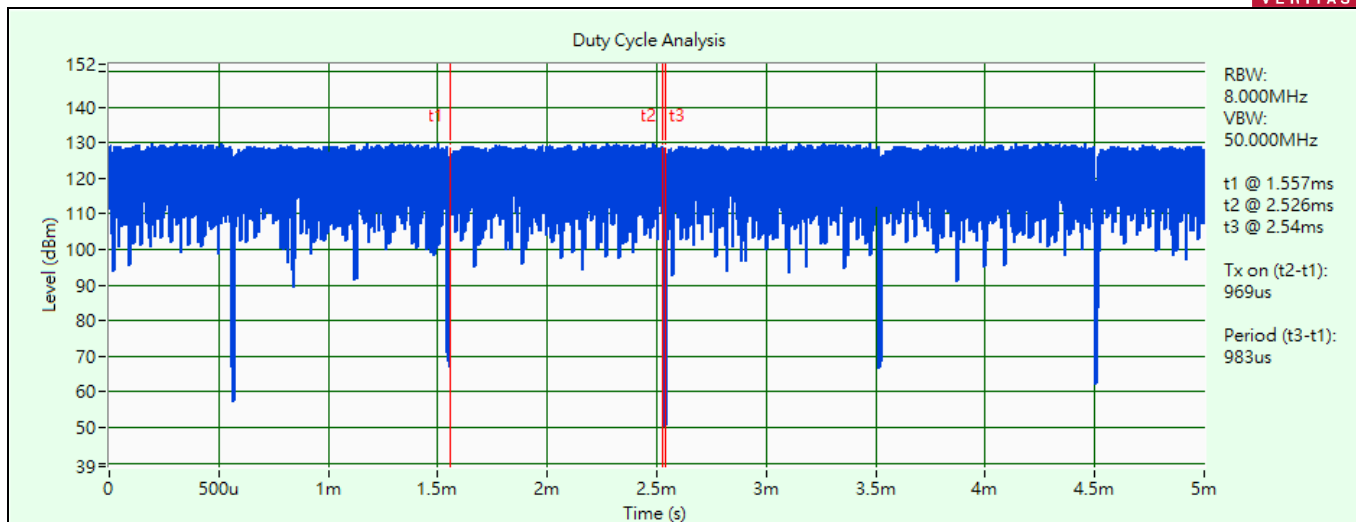


802.11be (EHT20) 52+26-tone MRU

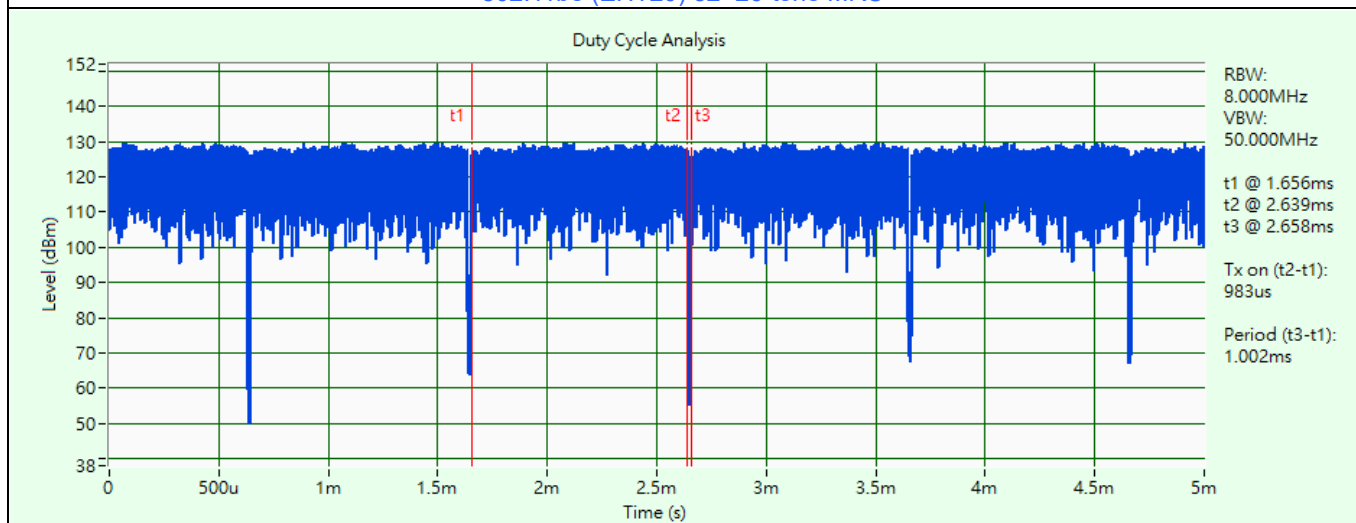


802.11be (EHT20) 106+26-tone MRU

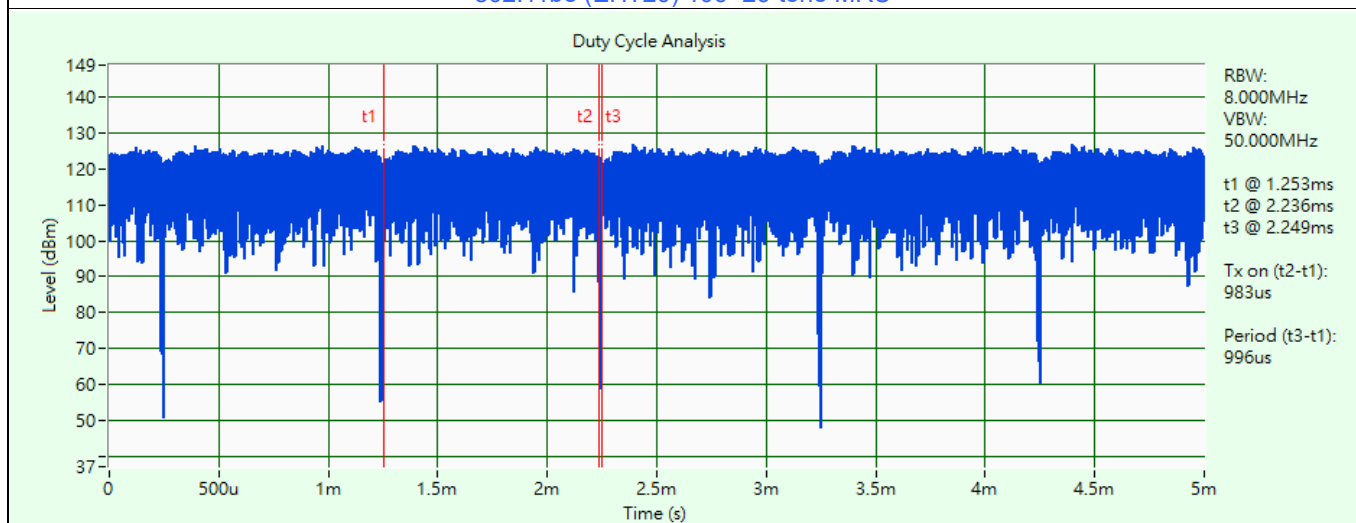

802.11be (EHT80) 484+242-tone MRU

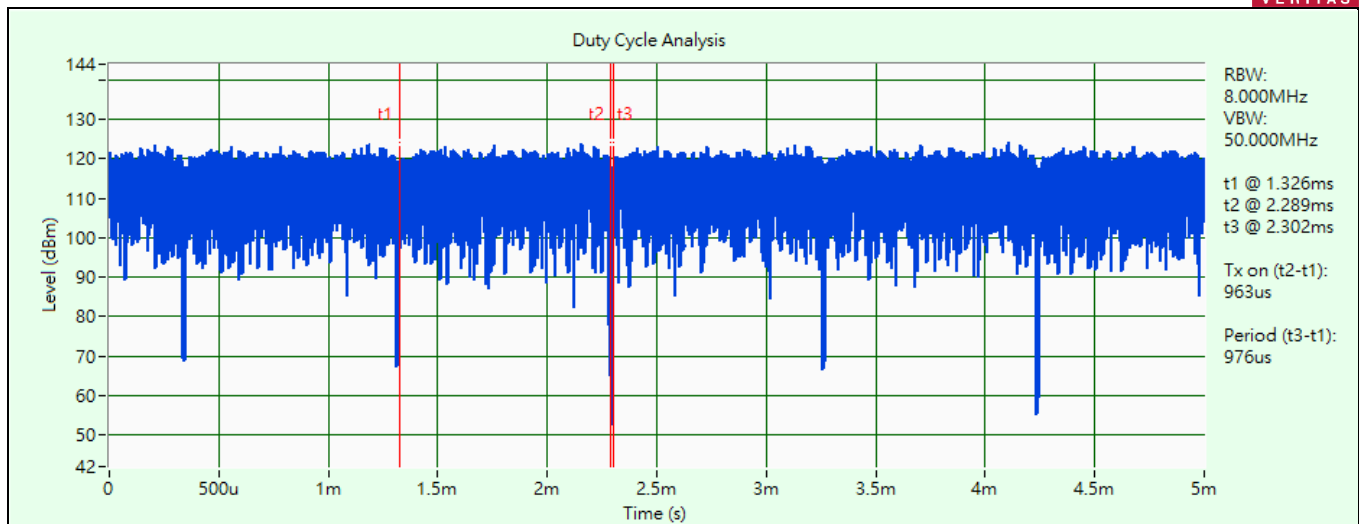

802.11be (EHT160) 996+484-tone MRU

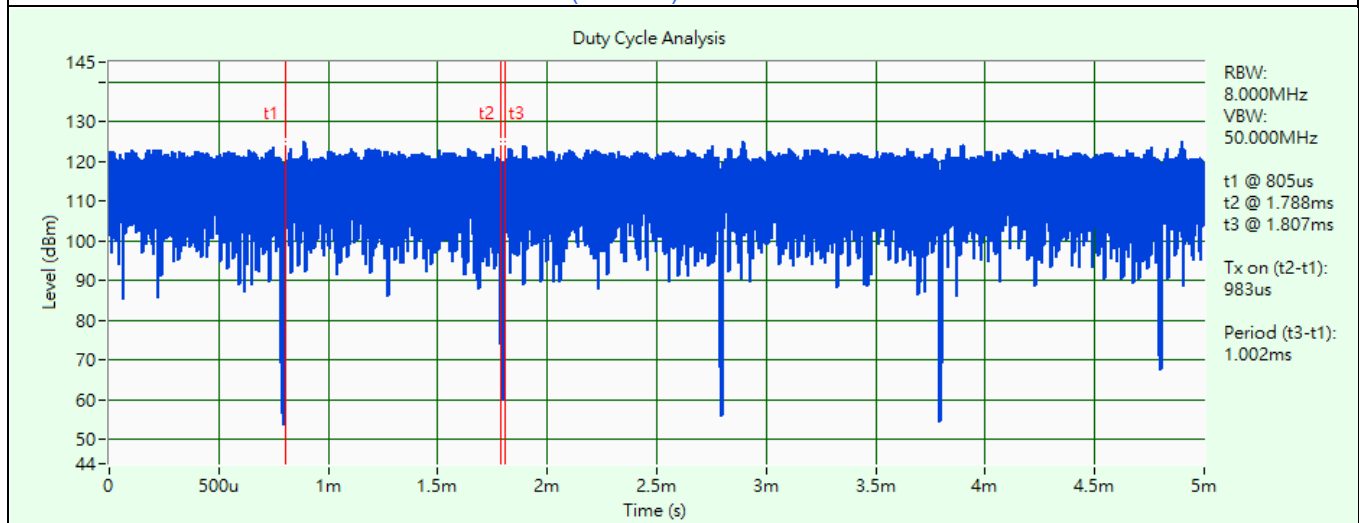

802.11be (EHT160) 996+484+242-tone MRU

2Tx

802.11a: Duty cycle = 0.96 ms / 0.973 ms x 100% = 98.7%

802.11be (EHT20): Duty cycle = 1.808 ms / 1.834 ms x 100% = 98.6%

802.11be (EHT40): Duty cycle = 0.964 ms / 0.978 ms x 100% = 98.6%

802.11be (EHT80): Duty cycle = 1.003 ms / 1.023 ms x 100% = 98.0%

802.11be (EHT160): Duty cycle = 1.008 ms / 1.021 ms x 100% = 98.7%

802.11be (EHT20) 26-tone RU: Duty cycle = 0.963 ms / 0.976 ms x 100% = 98.7%

802.11be (EHT20) 52-tone RU: Duty cycle = 0.952 ms / 0.966 ms x 100% = 98.6%

802.11be (EHT20) 106-tone RU: Duty cycle = 0.969 ms / 0.982 ms x 100% = 98.7%


802.11be (EHT20) 52+26-tone MRU: Duty cycle = 0.988 ms / 0.998 ms x 100% = 99.0%


802.11be (EHT20) 106+26-tone MRU: Duty cycle = 0.996 ms / 1.016 ms x 100% = 98.0%


802.11be (EHT80) 484+242-tone MRU: Duty cycle = 1.003 ms / 1.022 ms x 100% = 98.1%

802.11be (EHT160) 996+484-tone MRU: Duty cycle = 1.844 ms / 1.857 ms x 100% = 99.3%


802.11be (EHT160) 996+484+242-tone MRU: Duty cycle = 1.9 ms / 1.926 ms x 100% = 98.7%

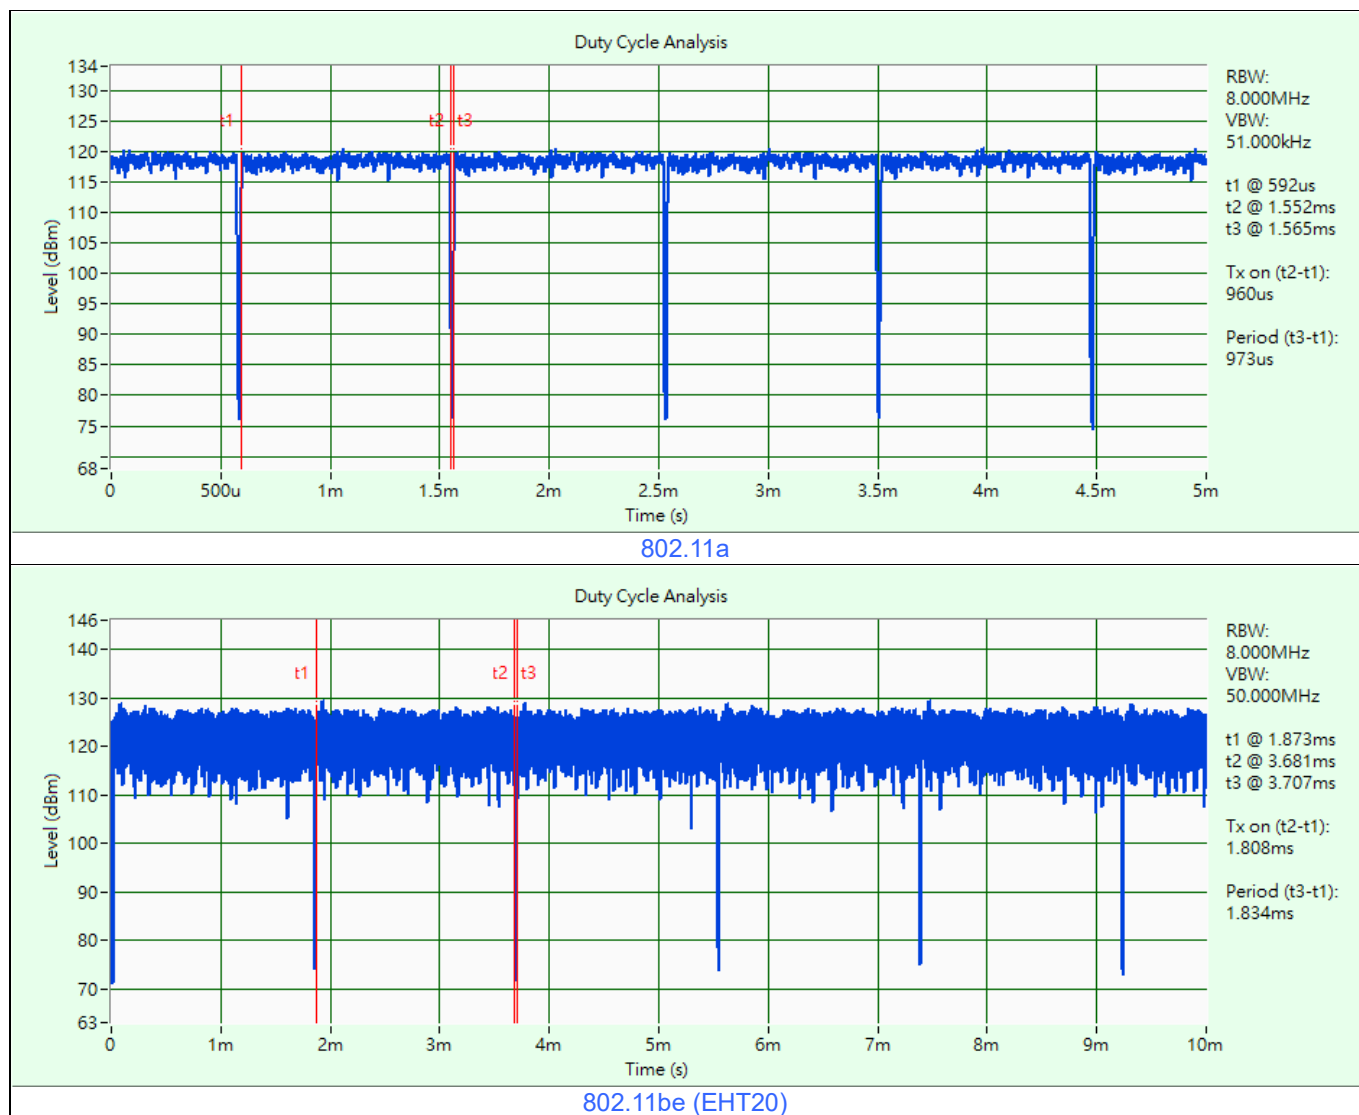

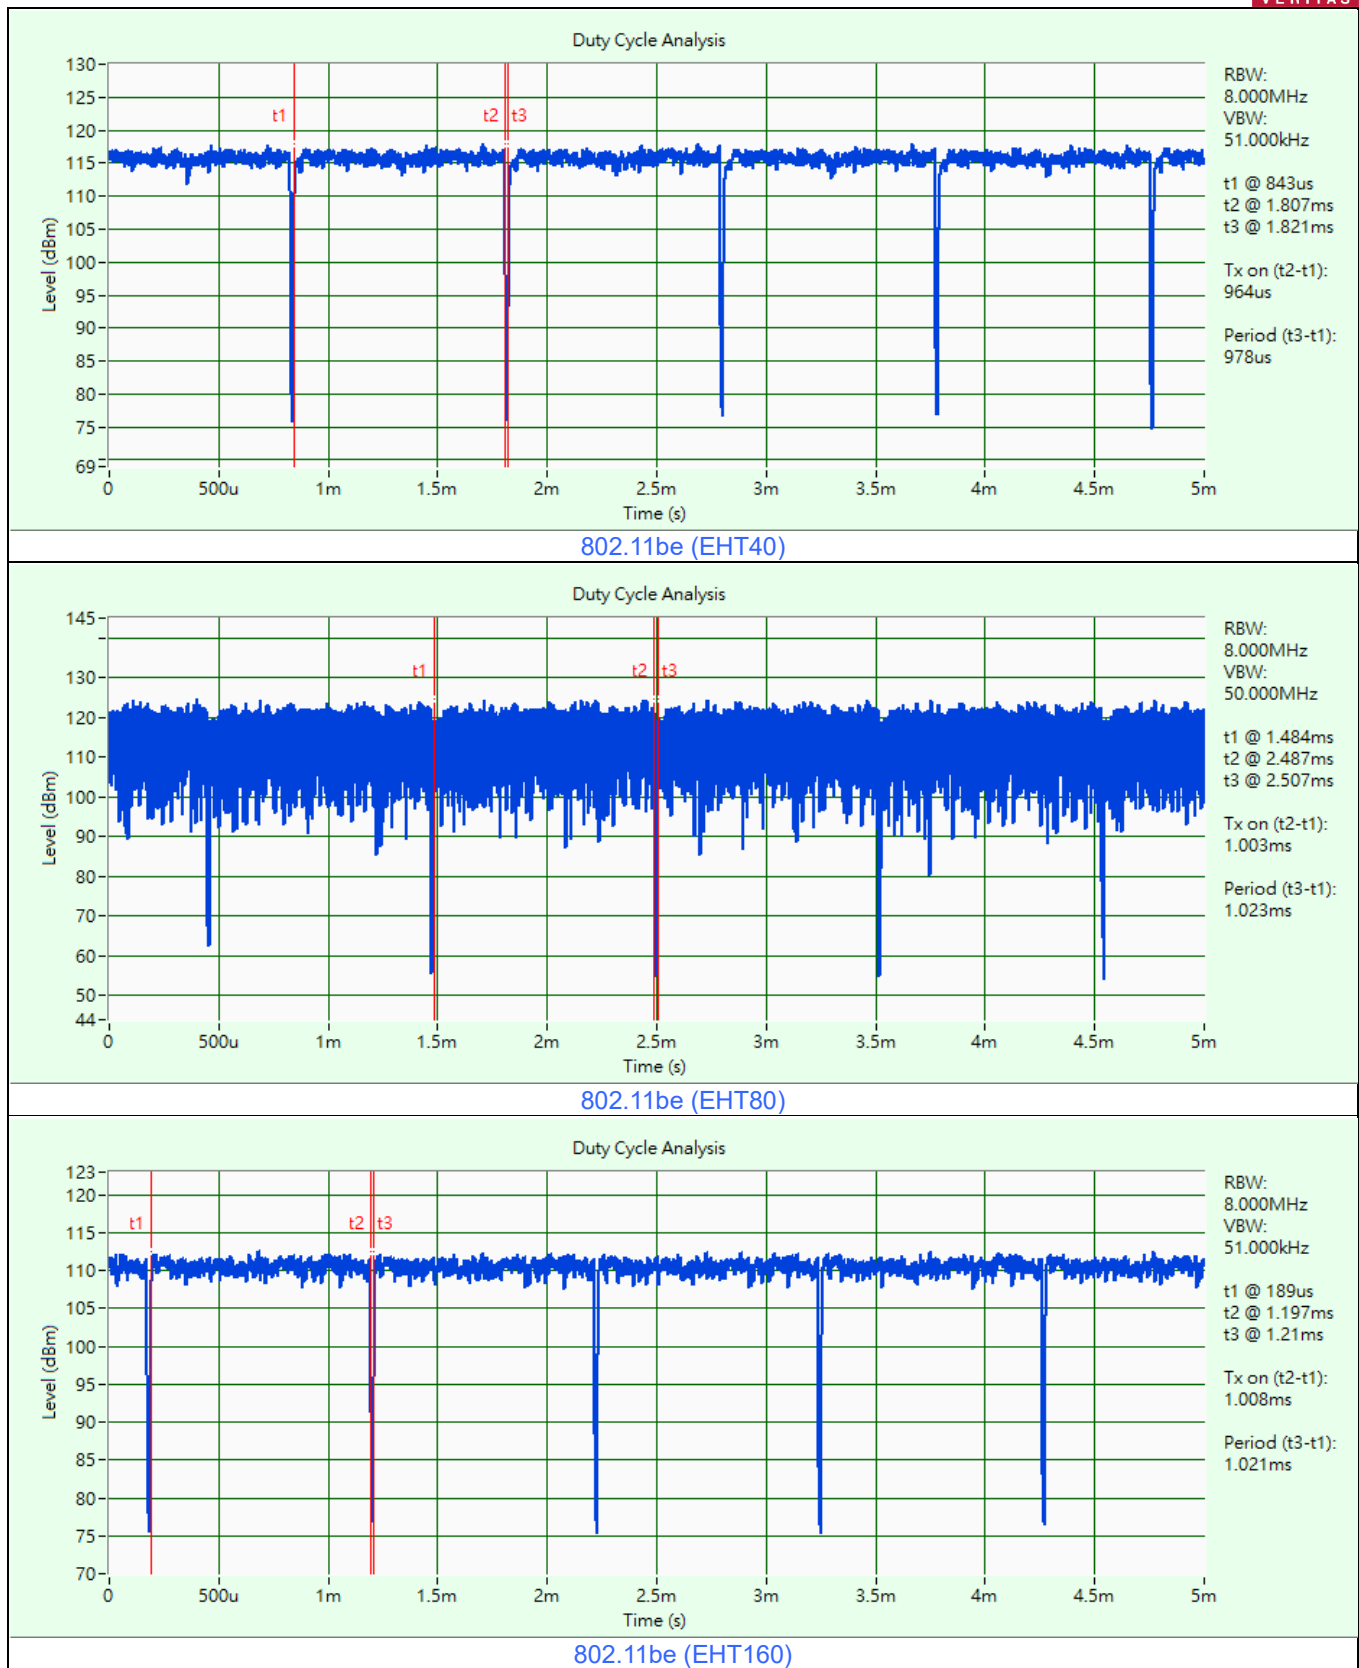


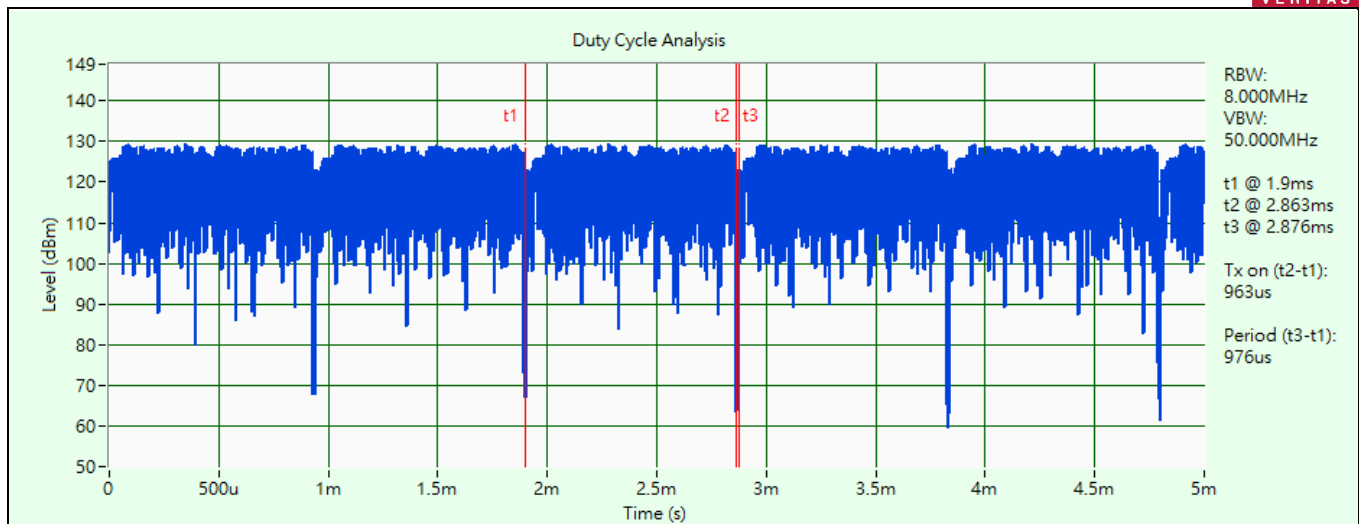


802.11be (EHT20) 26-tone RU

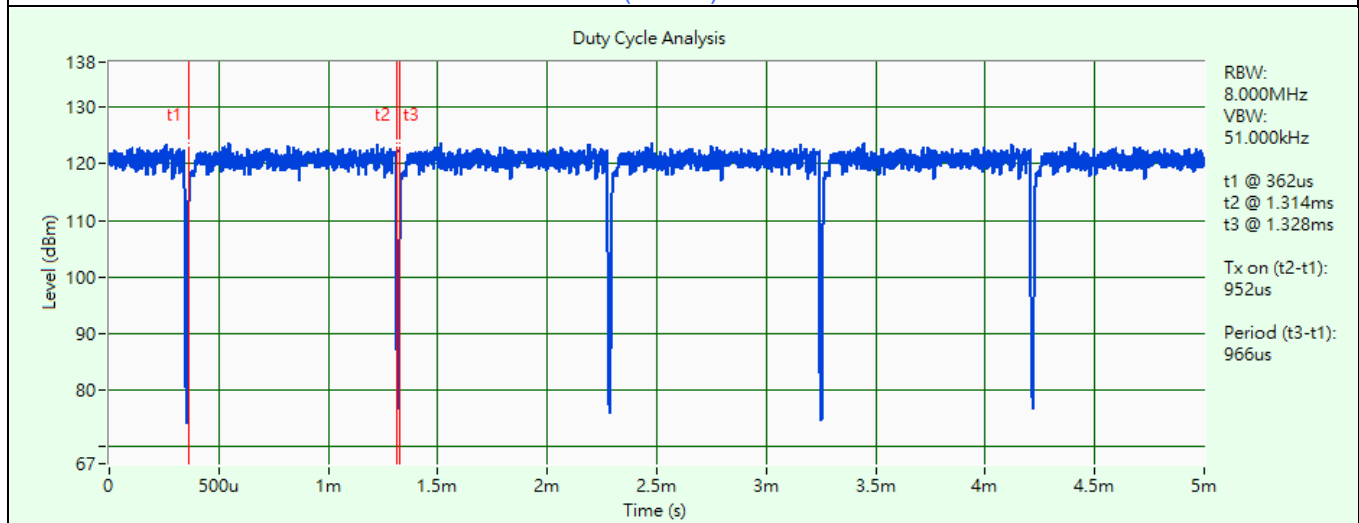


802.11be (EHT20) 52-tone RU

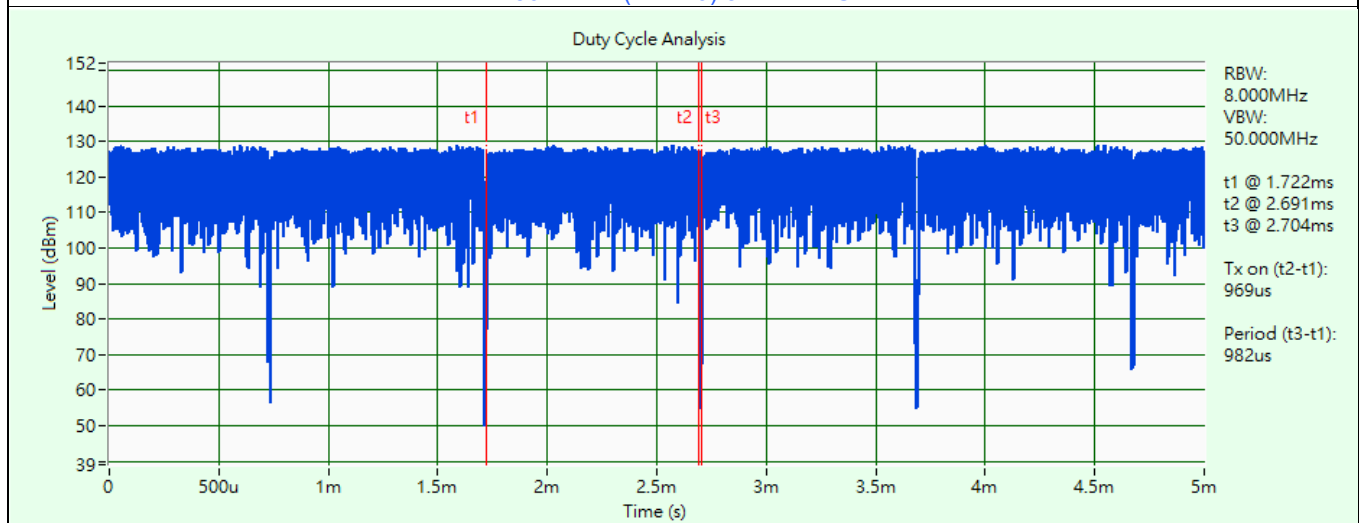


802.11be (EHT20) 106-tone RU

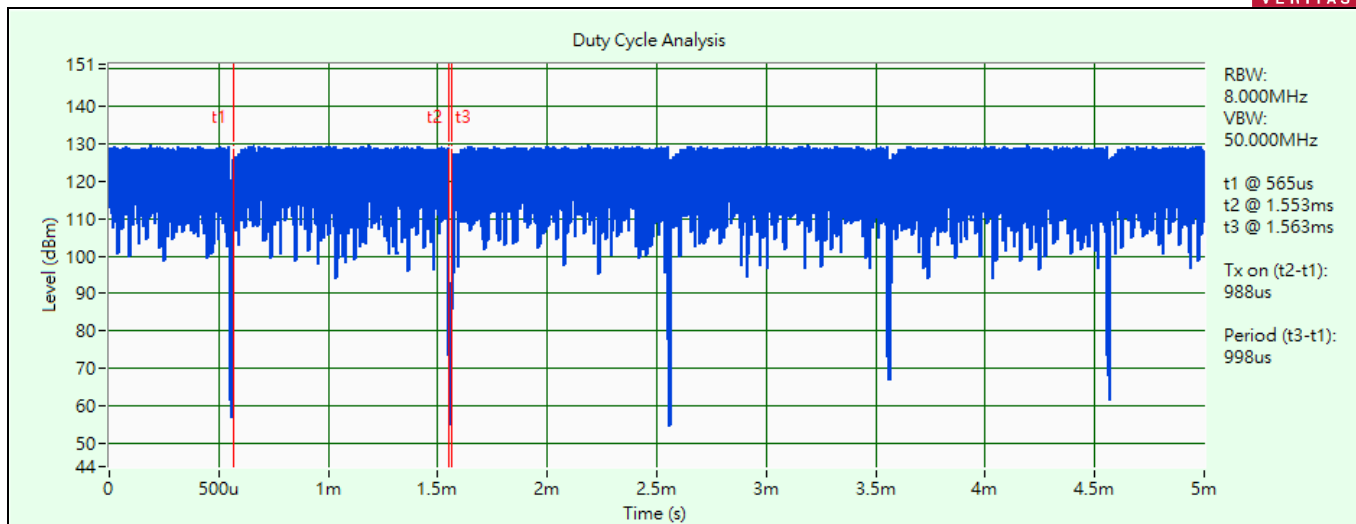


802.11be (EHT20) 52+26-tone MRU

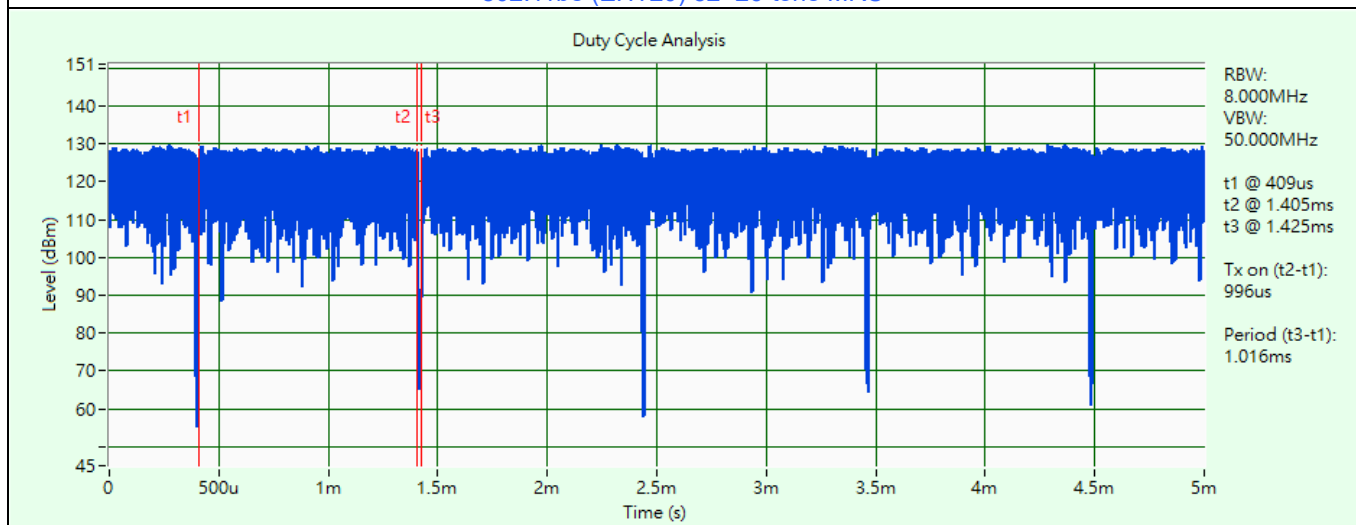


802.11be (EHT20) 106+26-tone MRU

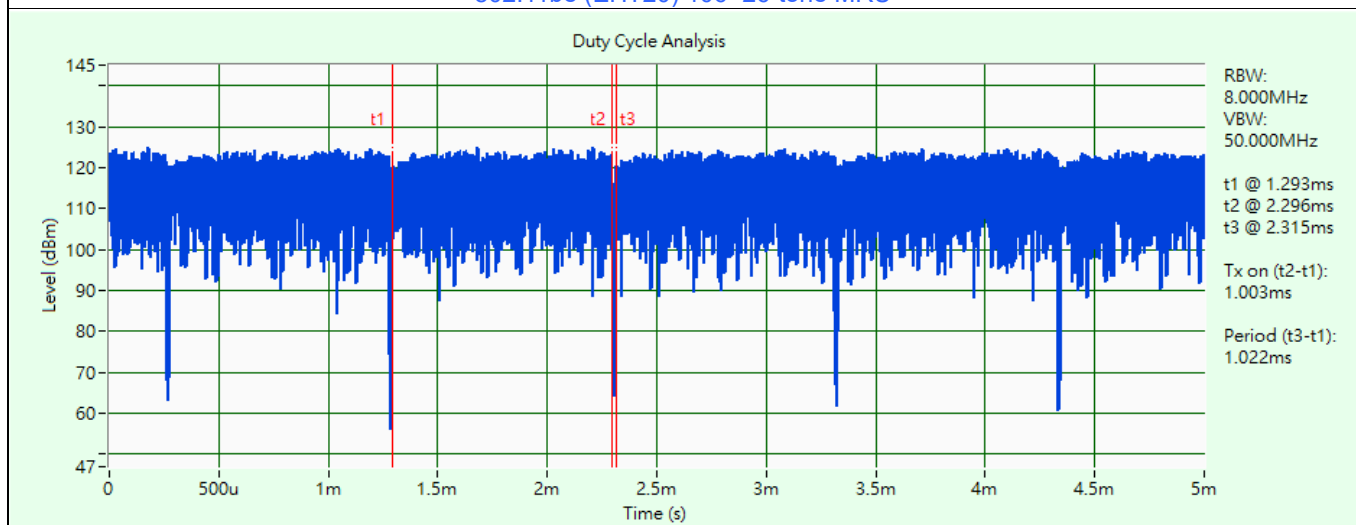

802.11be (EHT80) 484+242-tone MRU

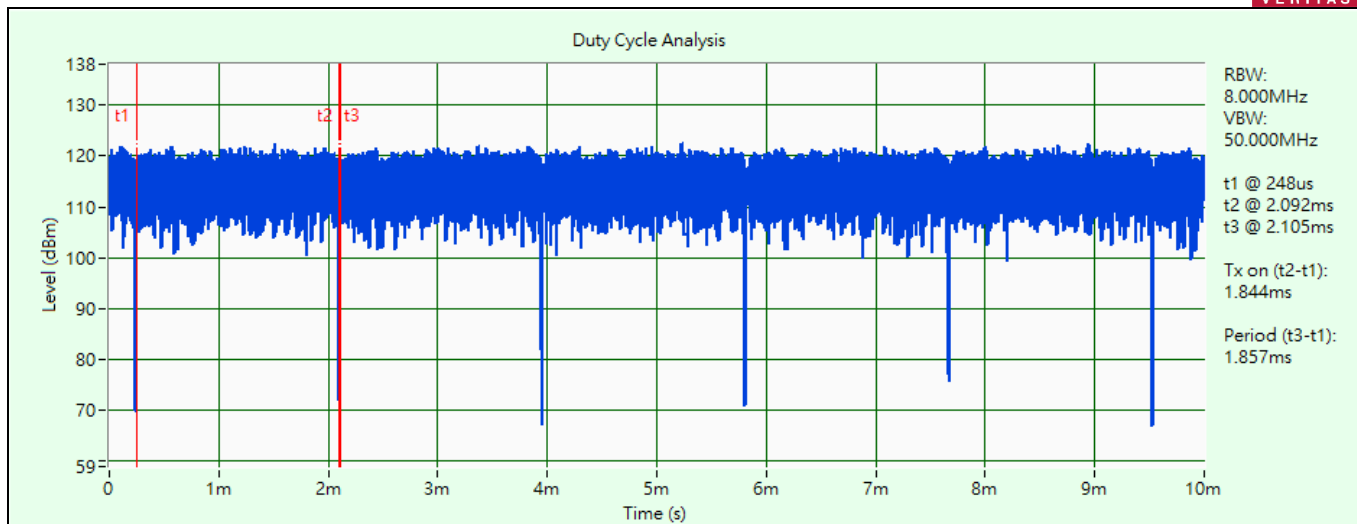

802.11be (EHT160) 996+484-tone MRU

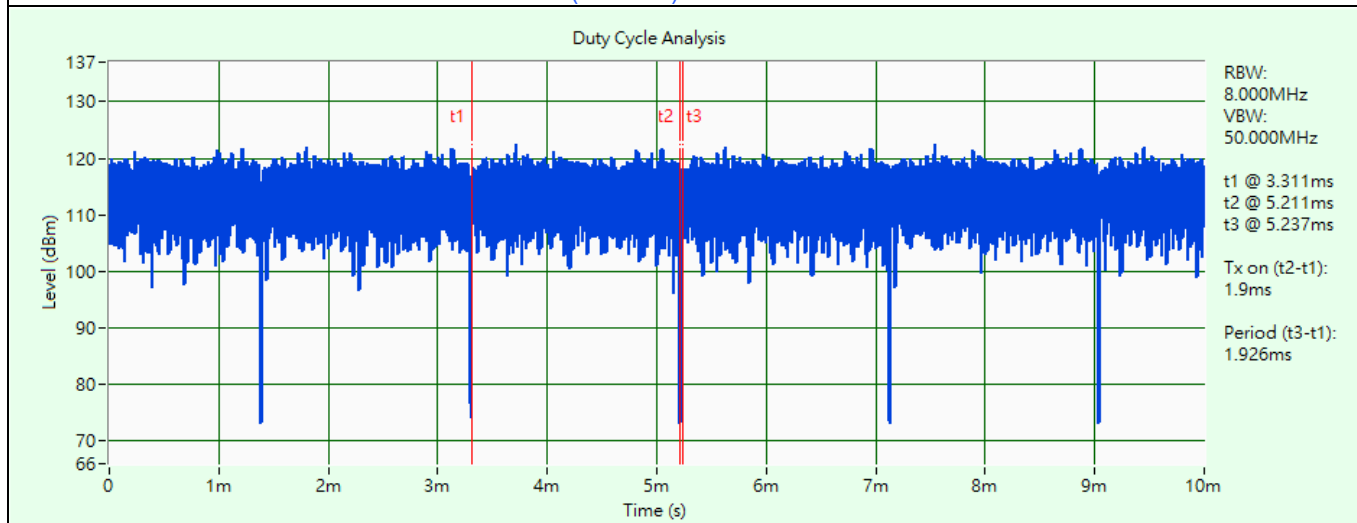

802.11be (EHT160) 996+484+242-tone MRU


3.6 Test Program Used and Operation Descriptions

Controlling software (RTL8922D_PCIE_MP_Package_ALPHA_v1.0.19(205956)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.


3.7 Connection Diagram of EUT and Peripheral Devices

For Unwanted Emissions test:


Mode A:

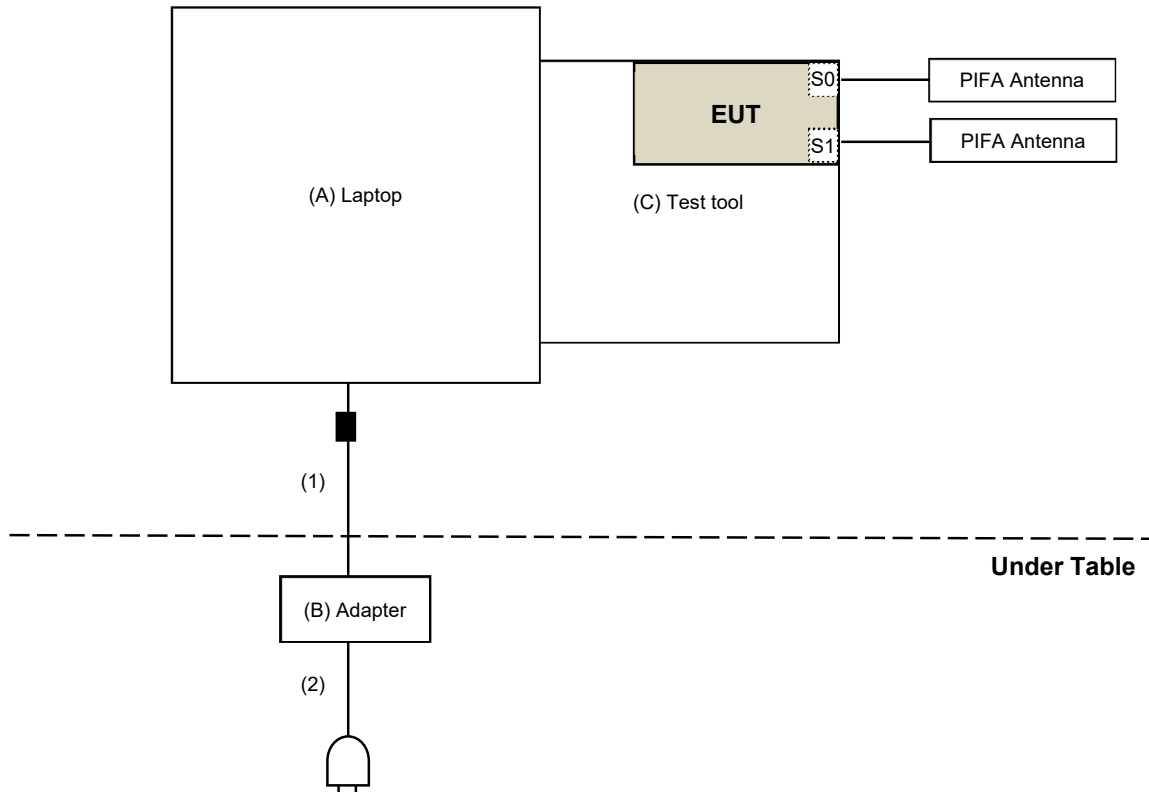


Mode B

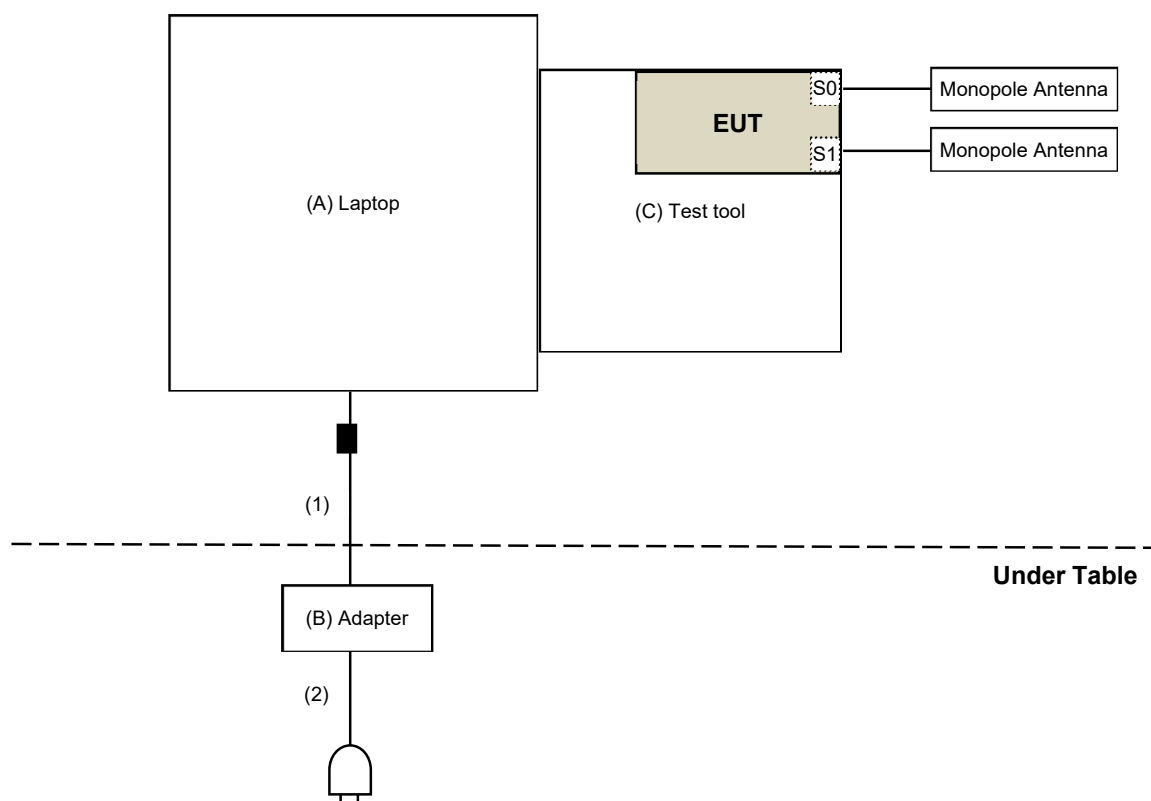

Mode C

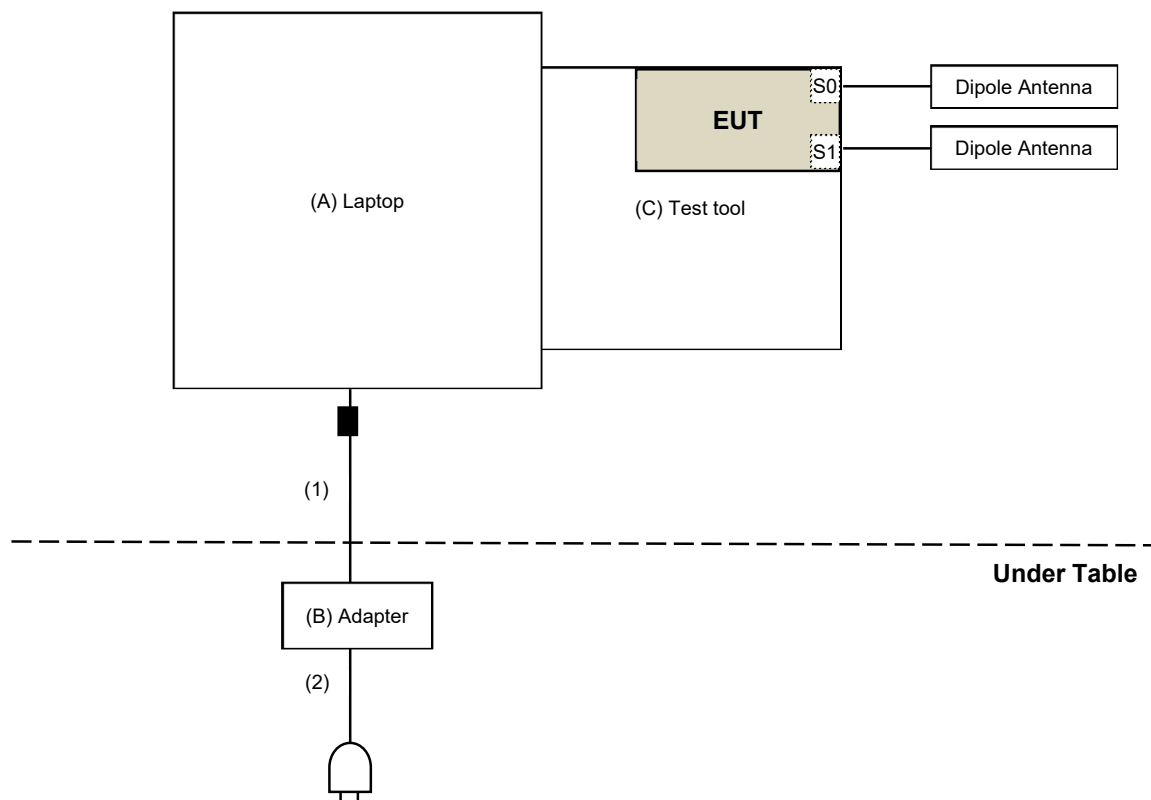

For AC Power Conducted Emission test:

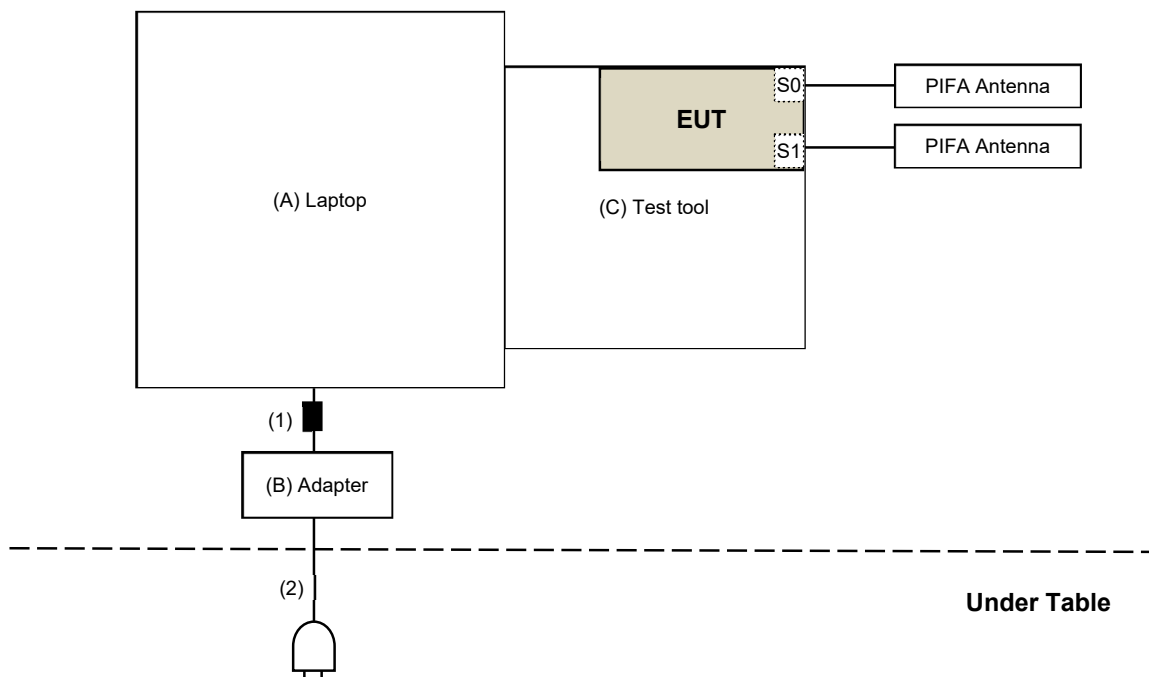

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	E6230	9CGDLX1	N/A	Provided by Lab
B	Adaptor	DELL	AA65NM121	N/A	N/A	Provided by Lab
C	Test tool	REALTEK	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.5	No	1	Provided by Lab
2	AC Cable	1	0.8	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
Pulse Power Sensor Anritsu	MA2411B	1726434	2025/6/3	2026/6/2
RF Power Meter Anritsu	ML2495A	1529002	2025/6/3	2026/6/2

Notes:

1. The test was performed in HC - Oven room 2(Hsinchu).
2. Tested Date: 2026/1/13

4.2 Maximum Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
PXA Signal Analyzer Keysight	N9030A	MY55330160	2025/1/16	2026/1/15
Software	ADT_RF Test Software v8.5.6.4	N/A	N/A	N/A

Notes:

1. The test was performed in HC - Oven room 2(Hsinchu).
2. Tested Date: 2026/1/13

4.3 Emission Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 In-Band Emission Mask

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.6 Contention-based Protocol

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EXA Signal Analyzer Keysight	N9010A	MY56070348	2025/7/14	2026/7/13
Frequency Extender Keysight	N5182BX07	MY59360203	2025/4/14	2026/4/13
MXG Vector Signal Generator Keysight	N5182B	MY59100182	2025/4/14	2026/4/13
Power Splitter/Combiner Mini-Circuits	ZFRSC-123-S+	F698501347_01	2025/10/22	2026/10/21
		F698501347_02	2025/10/22	2026/10/21
Signal & Spectrum Analyzer R&S	FSV3044	101506	2025/6/12	2026/6/11

Notes:

1. The test was performed in HC - Adaptivity room(Hsinchu).
2. Tested Date: 2025/12/28

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2025/10/29	2026/10/28
EMI Test Receiver R&S	ESCS 30	100375	2025/5/21	2026/5/20
Fixed Attenuator STI	STI02-2200-10	005	2026/2/9	2027/2/8
LISN R&S	ESH3-Z5	835239/001	2026/3/30	2027/3/29
		848773/004	2025/10/3	2026/10/2
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2026/2/9	2027/2/8
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in HC - Conduction 1(Hsinchu).
2. Tested Date: 2026/4/14

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-361	2025/9/16	2026/9/15
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Fixed Attenuator Woken	00800N1G01A-05	00800N1G01A-05-003	2026/1/31	2027/1/30
Loop Antenna TESEQ	HLA 6121	63620	2025/10/20	2026/10/19
MXE EMI Receiver Agilent	N9038A	MY50010156	2025/6/5	2026/6/4
Preamplifier EMCI	EMC330N	980852	2026/1/31	2027/1/30
RF Coaxial Cable PEWC	8D	001	2026/1/31	2027/1/30
		966-3-2	2026/1/31	2027/1/30
		966-3-3	2026/1/31	2027/1/30
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in HC - 966 Chamber No. 3(Hsinchu).
2. Tested Date: 2026/3/31 ~ 2026/4/2

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-406	2025/11/9	2026/11/8
	BBHA 9170	9170-739	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY50010156	2025/6/5	2026/6/4
Preamplifier EMCI	EMC12630SE	980384	2026/1/10	2027/1/9
	EMC184045SE	980387	2025/8/7	2026/8/6
PXA Signal Analyzer Keysight	N9030B	MY57141948	2025/5/20	2026/5/19
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2026/1/15	2027/1/14
	EMC102-KM-KM-4000	200214	2026/1/15	2027/1/14
	EMC104-SM-SM-1500	180504	2026/1/17	2027/1/16
	EMC104-SM-SM-2000	180601	2026/1/17	2027/1/16
	EMC104-SM-SM-6000	210201	2026/1/17	2027/1/16
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in HC - 966 Chamber No. 3(Hsinchu).
2. Tested Date: 2026/2/2 ~ 2026/5/8

4.10 APC (Automatic Power Control) and Proper Power Adjustment

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
Pulse Power Sensor Anritsu	MA2411B	1726434	2025/6/3	2026/6/2
RF Power Meter Anritsu	ML2495A	1529002	2025/6/3	2026/6/2
Power Divider MVE	MVE8596	B400028	2025/3/18	2026/3/17
Dual Directional Coupler Pulsar	CS20-18-436/16	1139	2025/8/7	2026/8/6

Notes:

1. The test was performed in HC - Oven room 2(Hsinchu).
2. Tested Date: 2026/3/5

5 Limits of Test Items

5.1 Maximum RF Output Power

Operation Band	Equipment Class	Limit
		Maximum Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6CD: 15E 6 GHz Dual client (under control of a low-power indoor access point)	EIRP 24 dBm
U-NII-5 U-NII-7	6CD: 15E 6 GHz Dual client (under control of a Standard power access point)	EIRP 30 dBm

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Maximum Power Spectral Density

Operation Band	Equipment Class	Limit
		Maximum Power Density
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6CD: 15E 6 GHz Dual client (under control of a low-power indoor access point)	EIRP -1 dBm/MHz
U-NII-5 U-NII-7	6CD: 15E 6 GHz Dual client (under control of a Standard power access point)	EIRP 17 dBm/MHz

5.3 Emission Bandwidth

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 MHz.

5.4 In-Band Emission Mask

Test Item	Frequencies (MHz)	(X) dBc ^{*1}
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center ^{*2}	28
	At one- and one-half times the channel bandwidth away from channel center ^{*3}	40
	More than one- and one-half times the channel bandwidth	40

^{*1} : The power spectral density must be suppressed by “x” dB

^{*2} : At frequencies between one megahertz outside an unlicensed device’s channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

^{*3} : At frequencies between one and one- and one-half times an unlicensed device’s channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 Contention-based Protocol

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or lower. Additionally, indoor low-power devices must detect co-channel energy with 90% or greater certainty.

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

5.10 APC (Automatic Power Control) and Proper Power Adjustment

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP or a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP.


Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point

6 Test Arrangements

6.1 Maximum RF Output Power

6.1.1 Test Setup

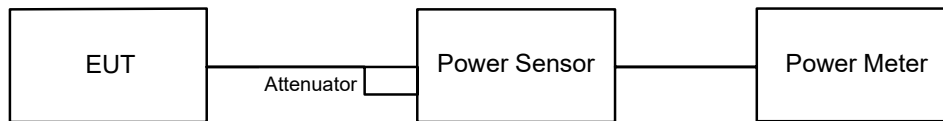


6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Maximum Power Spectral Density

6.2.1 Test Setup

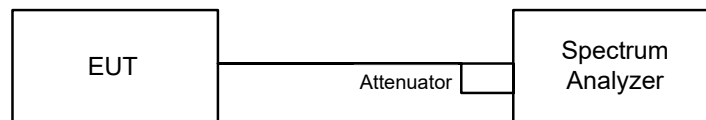

6.2.2 Test Procedure


For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.3 Emission Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6.4 In-Band Emission Mask

6.4.1 Test Setup

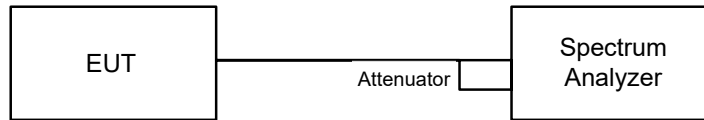


6.4.2 Test Procedure

- a. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- b. Measure the 26 dB EBW using the test procedure 12.5.2 of ANSI C63.10-2020. (This will be used to determine the channel edge.)
- c. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
- d. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- e. Adjust the span to encompass the entire mask as necessary and clear trace.
- f. Trace average at least 100 traces in power averaging (rms) mode.
- g. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5 Occupied Bandwidth

6.5.1 Test Setup

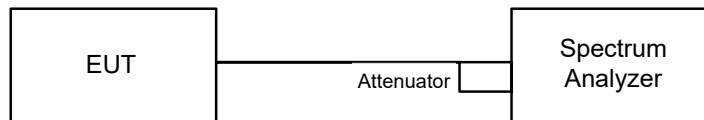


6.5.2 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

6.6 Contention-based Protocol

6.6.1 Test Setup

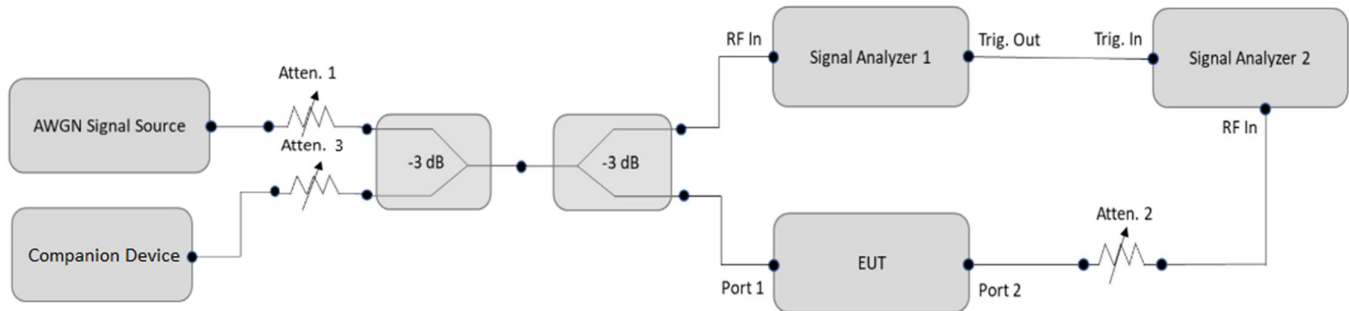

6.6.2 Test Procedure


- Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters (set as following section 4.7.5 EUT operating condition).
- Determine number of times detection threshold test as following table,

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Same as EUT transmission
$BW_{Inc} < BW_{EUT} \leq 2x BW_{Inc}$	Once	Contained within BW_{EUT}
$2x BW_{Inc} < BW_{EUT} \leq 4x BW_{Inc}$	Twice. (Incumbent transmission is contained within BW_{EUT})	Closely to the lower edge and upper edge of the EUT Channel
$BW_{EUT} > 4x BW_{Inc}$	Three times	Closely to the lower edge, in the middle and upper edge of the EUT Channel

- The power measurement of AWGN signal refers to method SA-1 in section 12.4.2.2 of ANSI C63.10-2020.
- Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step c table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- Refer to step c table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step d, choose a different center frequency for the AWGN signal and repeat the process.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

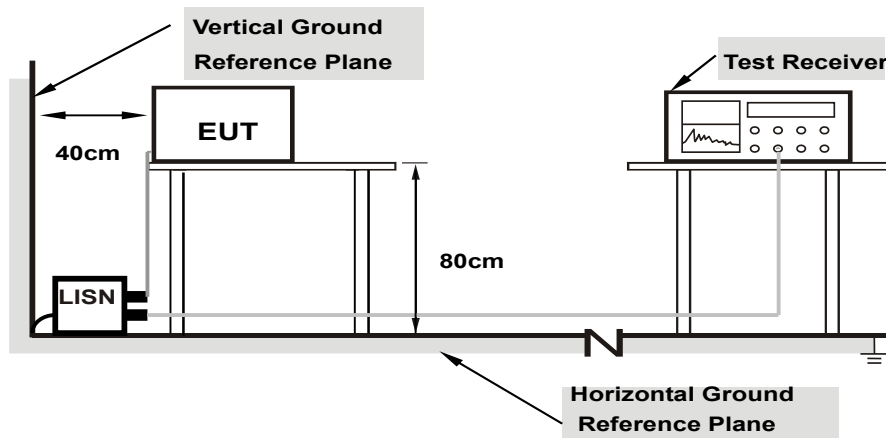

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.8 Unwanted Emissions below 1 GHz

6.8.1 Test Setup

For Radiated emission below 30 MHz

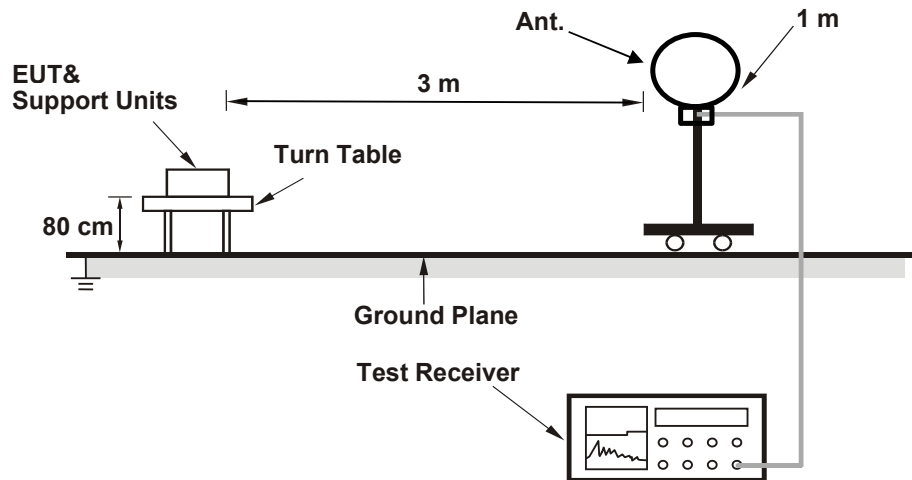

For Radiated emission above 30 MHz

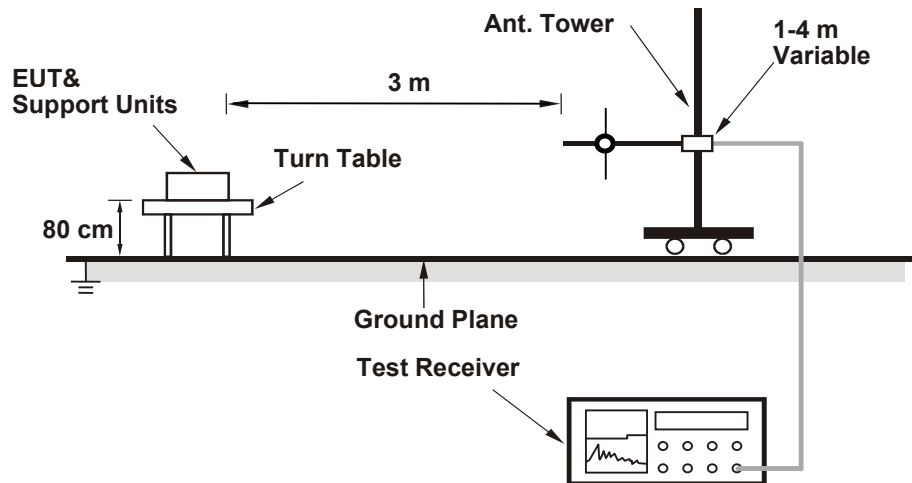

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

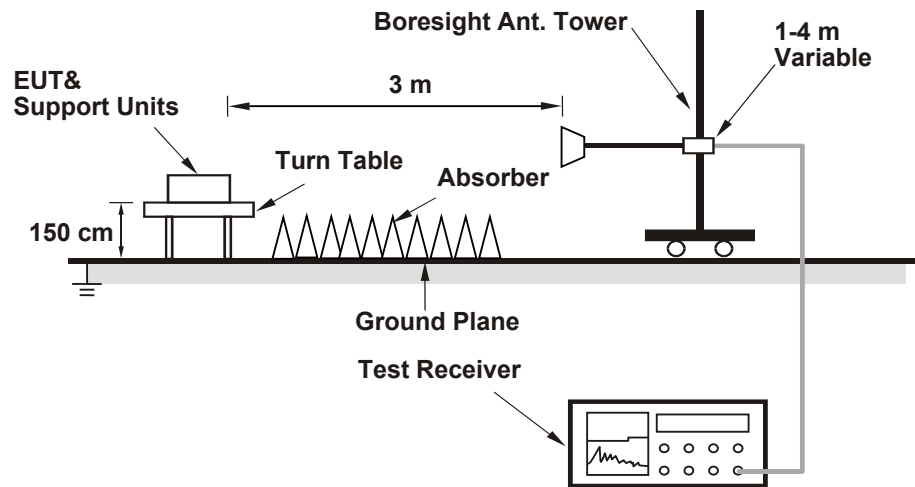

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.


For Integration method:

- For band edge measurement, the integration method is used, the resolution bandwidth of test spectrum analyzer is 100 kHz and the video bandwidth is 300 kHz. Please refer to the following for other instrument settings.
 - Using the detector RMS (power averaging) method, refer to ANSI C63.10 section 12.7.4.4 and 11.12.3.2, the Average value = Average Reading + Duty Cycle Correction Factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
- All modes of operation were investigated and the worst-case emissions are reported.

6.10 APC (Automatic Power Control) and Proper Power Adjustment


6.10.1 Test Setup

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

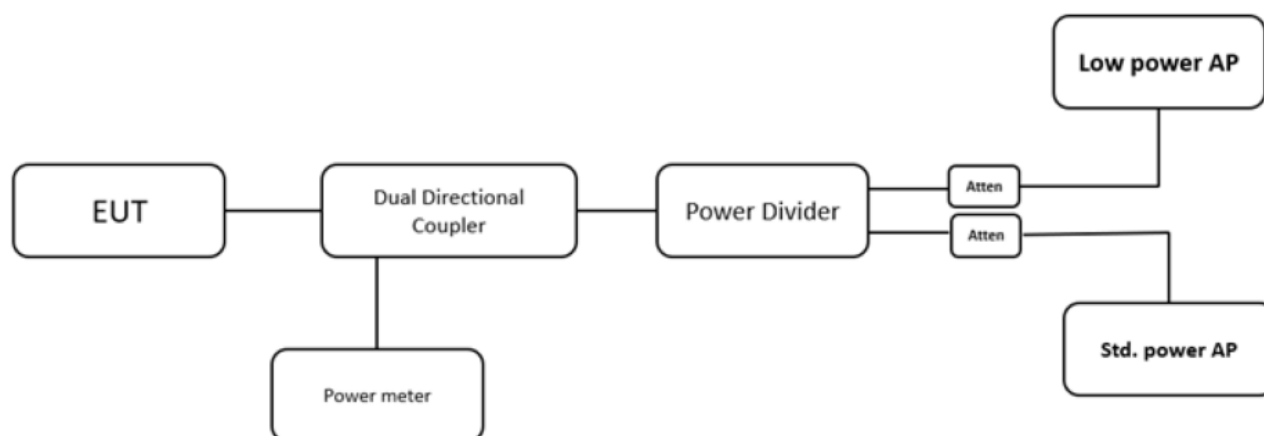

*AP is emulated by a proprietary SoftAP solution with a RTL8922DE module generating Std. Power beacon and Low power AP beacon.

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

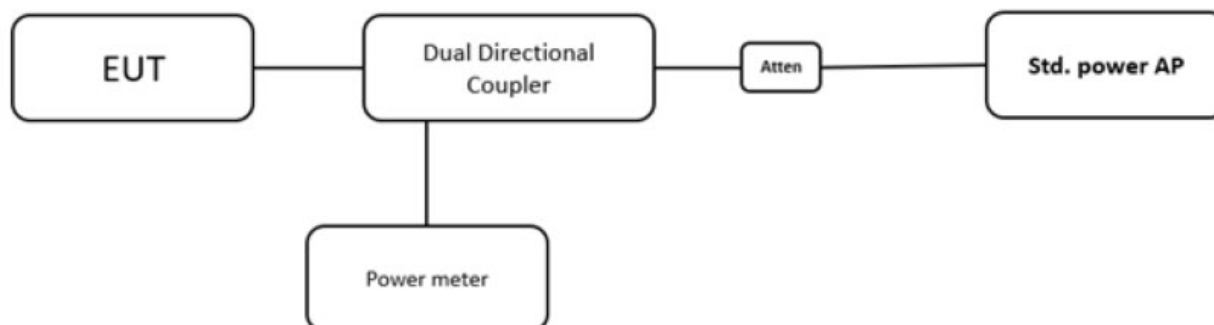

*AP is emulated by a proprietary SoftAP solution with a RTL8922DE module generating Std. Power beacon.

6.10.2 Test Procedure

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

The measurement method references KDB 987594 D02 U-NII 6 GHz EMC Measurement v03, Part II - Measurement Procedure, Clause K.

The detailed test process is as follows:

- a. Connect equipment as shown in figure above.
- b. Adjust Atten 2 to Std. Power AP so as to facilitate error free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP).
- c. Configure the Client and APs so that they associate and start sending data (stream data). It is important that the client is configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std. Power AP.
- d. Verify transmission between Client and Std. Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using power meter.
- e. Gradually increase Atten 2 while at the same time decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation the Client should associate with the Low Power indoor AP. Verify transmission between Client and Low Power AP.
- f. Measure the RF power of the Client device using the same method as in step d. Verify the power is no more than 24 dBm EIRP.

Note – measuring Client RF power reliably from a dual directional coupler measurement port may be tricky. Due to coupling, some energy from the AP will show up on the measurement port. Signal isolation techniques on the measurement analyzer will need to be used.

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

The measurement method references KDB 987594 D02 U-NII 6 GHz EMC Measurement v03, Part II - Measurement Procedure, Clause L.

The detailed test process is as follows:

- a. Connect equipment as shown in figure above.
- b. Adjust Atten 1 to Std. Power AP so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
- c. Configure the Client and AP so that they associate and start sending data (stream data). The AP should be configured such that its registered power is 36 dBm EIRP.
- d. Verify transmission between Client and Std. Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using power meter. Use this power, along with its antenna gain, to calculate the Client EIRP.
- e. The Client EIRP should be minimally 6 dB lower than that of the AP.
- f. Repeat Steps b through e at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

7 Test Results of Test Item

7.1 Maximum RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	4.875	6.88	5.00	15.416	11.88	24	Pass
49	6195	4.656	6.68	5.00	14.724	11.68	24	Pass
93	6415	4.764	6.78	5.00	15.065	11.78	24	Pass
97	6435	4.831	6.84	5.00	15.277	11.84	24	Pass
105	6475	4.898	6.90	5.00	15.489	11.9	24	Pass
113	6515	4.909	6.91	5.00	15.524	11.91	24	Pass
117	6535	4.808	6.82	5.00	15.204	11.82	24	Pass
149	6695	4.898	6.90	5.00	15.489	11.9	24	Pass
181	6855	4.909	6.91	5.00	15.524	11.91	24	Pass
185	6875	4.819	6.83	5.00	15.239	11.83	24	Pass
209	6995	4.677	6.70	5.00	14.79	11.7	24	Pass
233	7115	4.831	6.84	5.00	15.277	11.84	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	5.598	7.48	5.00	17.702	12.48	24	Pass
49	6195	5.598	7.48	5.00	17.702	12.48	24	Pass
93	6415	5.572	7.46	5.00	17.62	12.46	24	Pass
97	6435	5.572	7.46	5.00	17.62	12.46	24	Pass
105	6475	5.521	7.42	5.00	17.459	12.42	24	Pass
113	6515	5.546	7.44	5.00	17.538	12.44	24	Pass
117	6535	5.458	7.37	5.00	17.26	12.37	24	Pass
149	6695	5.495	7.40	5.00	17.377	12.4	24	Pass
181	6855	5.42	7.34	5.00	17.14	12.34	24	Pass
185	6875	5.395	7.32	5.00	17.06	12.32	24	Pass
209	6995	5.37	7.30	5.00	16.981	12.3	24	Pass
233	7115	5.433	7.35	5.00	17.181	12.35	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	11.376	10.56	5.00	35.974	15.56	24	Pass
51	6205	11.22	10.50	5.00	35.481	15.5	24	Pass
91	6405	11.668	10.67	5.00	36.897	15.67	24	Pass
99	6445	11.561	10.63	5.00	36.559	15.63	24	Pass
107	6485	11.324	10.54	5.00	35.81	15.54	24	Pass
115	6525	11.482	10.60	5.00	36.309	15.6	24	Pass
123	6565	11.429	10.58	5.00	36.142	15.58	24	Pass
147	6685	11.455	10.59	5.00	36.224	15.59	24	Pass
179	6845	11.749	10.70	5.00	37.154	15.7	24	Pass
187	6885	11.508	10.61	5.00	36.391	15.61	24	Pass
203	6965	11.272	10.52	5.00	35.645	15.52	24	Pass
227	7085	11.35	10.55	5.00	35.892	15.55	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	24.266	13.85	5.00	76.736	18.85	24	Pass
55	6225	23.014	13.62	5.00	72.777	18.62	24	Pass
87	6385	24.155	13.83	5.00	76.385	18.83	24	Pass
103	6465	23.714	13.75	5.00	74.99	18.75	24	Pass
119	6545	22.961	13.61	5.00	72.609	18.61	24	Pass
135	6625	22.909	13.60	5.00	72.445	18.6	24	Pass
151	6705	23.768	13.76	5.00	75.161	18.76	24	Pass
167	6785	22.961	13.61	5.00	72.609	18.61	24	Pass
183	6865	23.121	13.64	5.00	73.115	18.64	24	Pass
199	6945	22.491	13.52	5.00	71.123	18.52	24	Pass
215	7025	22.751	13.57	5.00	71.945	18.57	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	44.055	16.44	5.00	139.314	21.44	24	Pass
47	6185	43.853	16.42	5.00	138.675	21.42	24	Pass
79	6345	42.756	16.31	5.00	135.206	21.31	24	Pass
111	6505	46.345	16.66	5.00	146.556	21.66	24	Pass
143	6665	43.251	16.36	5.00	136.772	21.36	24	Pass
175	6825	44.463	16.48	5.00	140.604	21.48	24	Pass
207	6985	44.463	16.48	5.00	140.604	21.48	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	0.6871	-1.63	5.00	2.173	3.37	24	Pass
49	6195	0.6397	-1.94	5.00	2.023	3.06	24	Pass
93	6415	0.6966	-1.57	5.00	2.203	3.43	24	Pass
97	6435	0.6653	-1.77	5.00	2.104	3.23	24	Pass
105	6475	0.6622	-1.79	5.00	2.094	3.21	24	Pass
113	6515	0.6653	-1.77	5.00	2.104	3.23	24	Pass
117	6535	0.6823	-1.66	5.00	2.158	3.34	24	Pass
149	6695	0.6934	-1.59	5.00	2.193	3.41	24	Pass
181	6855	0.6457	-1.90	5.00	2.042	3.1	24	Pass
185	6875	0.6397	-1.94	5.00	2.023	3.06	24	Pass
209	6995	0.6776	-1.69	5.00	2.143	3.31	24	Pass
233	7115	0.3963	-4.02	5.00	1.253	0.98	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	1.23	0.90	5.00	3.89	5.9	24	Pass
49	6195	1.227	0.89	5.00	3.88	5.89	24	Pass
93	6415	1.247	0.96	5.00	3.943	5.96	24	Pass
97	6435	1.213	0.84	5.00	3.836	5.84	24	Pass
105	6475	1.191	0.76	5.00	3.766	5.76	24	Pass
113	6515	1.183	0.73	5.00	3.741	5.73	24	Pass
117	6535	1.256	0.99	5.00	3.972	5.99	24	Pass
149	6695	1.135	0.55	5.00	3.589	5.55	24	Pass
181	6855	1.236	0.92	5.00	3.909	5.92	24	Pass
185	6875	1.216	0.85	5.00	3.845	5.85	24	Pass
209	6995	1.164	0.66	5.00	3.681	5.66	24	Pass
233	7115	1.007	0.03	5.00	3.184	5.03	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	2.576	4.11	5.00	8.146	9.11	24	Pass
49	6195	2.553	4.07	5.00	8.073	9.07	24	Pass
93	6415	2.512	4.00	5.00	7.944	9	24	Pass
97	6435	2.57	4.10	5.00	8.127	9.1	24	Pass
105	6475	2.541	4.05	5.00	8.035	9.05	24	Pass
113	6515	2.523	4.02	5.00	7.978	9.02	24	Pass
117	6535	2.594	4.14	5.00	8.203	9.14	24	Pass
149	6695	2.812	4.49	5.00	8.892	9.49	24	Pass
181	6855	2.512	4.00	5.00	7.944	9	24	Pass
185	6875	2.523	4.02	5.00	7.978	9.02	24	Pass
209	6995	2.512	4.00	5.00	7.944	9	24	Pass
233	7115	1.233	0.91	5.00	3.899	5.91	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	1.932	2.86	5.00	6.11	7.86	24	Pass
49	6195	1.923	2.84	5.00	6.081	7.84	24	Pass
93	6415	1.986	2.98	5.00	6.28	7.98	24	Pass
97	6435	1.936	2.87	5.00	6.122	7.87	24	Pass
105	6475	1.919	2.83	5.00	6.068	7.83	24	Pass
113	6515	1.914	2.82	5.00	6.053	7.82	24	Pass
117	6535	1.986	2.98	5.00	6.28	7.98	24	Pass
149	6695	1.892	2.77	5.00	5.983	7.77	24	Pass
181	6855	1.837	2.64	5.00	5.809	7.64	24	Pass
185	6875	1.786	2.52	5.00	5.648	7.52	24	Pass
209	6995	1.95	2.90	5.00	6.166	7.9	24	Pass
233	7115	1.972	2.95	5.00	6.236	7.95	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	3.155	4.99	5.00	9.977	9.99	24	Pass
49	6195	3.09	4.90	5.00	9.771	9.9	24	Pass
93	6415	3.133	4.96	5.00	9.907	9.96	24	Pass
97	6435	3.09	4.90	5.00	9.771	9.9	24	Pass
105	6475	3.126	4.95	5.00	9.885	9.95	24	Pass
113	6515	3.119	4.94	5.00	9.863	9.94	24	Pass
117	6535	3.148	4.98	5.00	9.955	9.98	24	Pass
149	6695	3.09	4.90	5.00	9.771	9.9	24	Pass
181	6855	3.133	4.96	5.00	9.907	9.96	24	Pass
185	6875	3.126	4.95	5.00	9.885	9.95	24	Pass
209	6995	3.155	4.99	5.00	9.977	9.99	24	Pass
233	7115	1.528	1.84	5.00	4.832	6.84	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	16.444	12.16	5.00	52	17.16	24	Pass
55	6225	15.241	11.83	5.00	48.196	16.83	24	Pass
87	6385	16.032	12.05	5.00	50.698	17.05	24	Pass
103	6465	15.922	12.02	5.00	50.35	17.02	24	Pass
119	6545	16.444	12.16	5.00	52	17.16	24	Pass
135	6625	16.032	12.05	5.00	50.698	17.05	24	Pass
151	6705	16.406	12.15	5.00	51.88	17.15	24	Pass
167	6785	15.885	12.01	5.00	50.233	17.01	24	Pass
183	6865	15.959	12.03	5.00	50.467	17.03	24	Pass
199	6945	16.52	12.18	5.00	52.241	17.18	24	Pass
215	7025	16.596	12.20	5.00	52.481	17.2	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	30.903	14.90	5.00	97.724	19.9	24	Pass
47	6185	28.184	14.50	5.00	89.126	19.5	24	Pass
79	6345	29.923	14.76	5.00	94.625	19.76	24	Pass
111	6505	31.55	14.99	5.00	99.77	19.99	24	Pass
143	6665	29.923	14.76	5.00	94.625	19.76	24	Pass
175	6825	30.549	14.85	5.00	96.604	19.85	24	Pass
207	6985	28.642	14.57	5.00	90.574	19.57	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	36.813	15.66	5.00	116.413	20.66	24	Pass
47	6185	34.674	15.40	5.00	109.649	20.4	24	Pass
79	6345	35.975	15.56	5.00	113.763	20.56	24	Pass
111	6505	36.559	15.63	5.00	115.61	20.63	24	Pass
143	6665	36.058	15.57	5.00	114.025	20.57	24	Pass
175	6825	35.481	15.50	5.00	112.201	20.5	24	Pass
207	6985	35.481	15.50	5.00	112.201	20.5	24	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	1.24	1.07	2.61	4.17	5.00	8.254	9.17	24	Pass
49	6195	1.27	1.02	2.604	4.16	5.00	8.235	9.16	24	Pass
93	6415	1.23	1.14	2.628	4.20	5.00	8.31	9.2	24	Pass
97	6435	1.18	1.10	2.6	4.15	5.00	8.222	9.15	24	Pass
105	6475	1.10	1.09	2.574	4.11	5.00	8.14	9.11	24	Pass
113	6515	1.30	1.07	2.628	4.20	5.00	8.31	9.2	24	Pass
117	6535	1.22	1.03	2.592	4.14	5.00	8.197	9.14	24	Pass
149	6695	1.25	1.02	2.598	4.15	5.00	8.216	9.15	24	Pass
181	6855	1.21	1.10	2.61	4.17	5.00	8.254	9.17	24	Pass
185	6875	1.16	1.10	2.594	4.14	5.00	8.203	9.14	24	Pass
209	6995	1.25	1.02	2.598	4.15	5.00	8.216	9.15	24	Pass
233	7115	1.30	1.15	2.652	4.24	5.00	8.386	9.24	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-5, The maximum gain is 5 dBi.
3. For U-NII-6, The maximum gain is 5 dBi.
4. For U-NII-7, The maximum gain is 5 dBi.
5. For U-NII-8, The maximum gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	4.62	4.60	5.781	7.62	5.00	18.281	12.62	24	Pass
49	6195	4.63	4.52	5.735	7.59	5.00	18.136	12.59	24	Pass
93	6415	4.55	4.55	5.702	7.56	5.00	18.031	12.56	24	Pass
97	6435	4.68	4.57	5.802	7.64	5.00	18.348	12.64	24	Pass
105	6475	4.55	4.56	5.709	7.57	5.00	18.053	12.57	24	Pass
113	6515	4.70	4.57	5.815	7.65	5.00	18.389	12.65	24	Pass
117	6535	4.49	4.50	5.63	7.51	5.00	17.804	12.51	24	Pass
149	6695	4.54	4.72	5.809	7.64	5.00	18.37	12.64	24	Pass
181	6855	4.57	4.58	5.735	7.59	5.00	18.136	12.59	24	Pass
185	6875	4.50	4.61	5.709	7.57	5.00	18.053	12.57	24	Pass
209	6995	4.61	4.60	5.775	7.62	5.00	18.262	12.62	24	Pass
233	7115	4.62	4.63	5.801	7.64	5.00	18.344	12.64	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
3	5965	7.72	7.70	11.804	10.72	5.00	37.328	15.72	24	Pass
51	6205	7.75	7.60	11.711	10.69	5.00	37.033	15.69	24	Pass
91	6405	7.74	7.86	12.052	10.81	5.00	38.112	15.81	24	Pass
99	6445	7.80	7.87	12.149	10.85	5.00	38.419	15.85	24	Pass
107	6485	7.80	7.90	12.192	10.86	5.00	38.554	15.86	24	Pass
115	6525	7.78	7.75	11.955	10.78	5.00	37.805	15.78	24	Pass
123	6565	7.80	7.62	11.807	10.72	5.00	37.337	15.72	24	Pass
147	6685	7.90	7.67	12.014	10.80	5.00	37.992	15.8	24	Pass
179	6845	7.80	7.57	11.74	10.70	5.00	37.125	15.7	24	Pass
187	6885	7.77	7.50	11.608	10.65	5.00	36.708	15.65	24	Pass
203	6965	7.61	7.65	11.589	10.64	5.00	36.648	15.64	24	Pass
227	7085	7.71	7.62	11.683	10.68	5.00	36.945	15.68	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
7	5985	10.80	10.90	24.325	13.86	5.00	76.922	18.86	24	Pass
55	6225	10.72	10.78	23.771	13.76	5.00	75.171	18.76	24	Pass
87	6385	10.90	10.91	24.634	13.92	5.00	77.9	18.92	24	Pass
103	6465	10.83	10.80	24.129	13.83	5.00	76.303	18.83	24	Pass
119	6545	10.93	10.80	24.411	13.88	5.00	77.194	18.88	24	Pass
135	6625	10.78	10.83	24.073	13.82	5.00	76.126	18.82	24	Pass
151	6705	10.77	10.69	23.662	13.74	5.00	74.826	18.74	24	Pass
167	6785	10.92	10.76	24.272	13.85	5.00	76.755	18.85	24	Pass
183	6865	10.79	10.75	23.88	13.78	5.00	75.515	18.78	24	Pass
199	6945	10.52	10.72	23.075	13.63	5.00	72.97	18.63	24	Pass
215	7025	10.75	10.66	23.526	13.72	5.00	74.396	18.72	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	13.72	13.70	46.993	16.72	5.00	148.605	21.72	24	Pass
47	6185	13.26	13.40	43.061	16.34	5.00	136.171	21.34	24	Pass
79	6345	13.38	13.34	43.355	16.37	5.00	137.101	21.37	24	Pass
111	6505	13.61	13.67	46.242	16.65	5.00	146.23	21.65	24	Pass
143	6665	13.41	13.46	44.11	16.45	5.00	139.488	21.45	24	Pass
175	6825	13.36	13.34	43.254	16.36	5.00	136.781	21.36	24	Pass
207	6985	13.27	13.25	42.367	16.27	5.00	133.976	21.27	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	-4.26	-4.58	0.7233	-1.41	5.00	2.287	3.59	24	Pass
49	6195	-4.38	-4.56	0.7147	-1.46	5.00	2.26	3.54	24	Pass
93	6415	-4.39	-4.46	0.722	-1.41	5.00	2.283	3.59	24	Pass
97	6435	-4.46	-4.40	0.7212	-1.42	5.00	2.281	3.58	24	Pass
105	6475	-4.30	-4.53	0.7239	-1.40	5.00	2.289	3.6	24	Pass
113	6515	-4.38	-4.51	0.7188	-1.43	5.00	2.273	3.57	24	Pass
117	6535	-4.31	-4.45	0.7296	-1.37	5.00	2.307	3.63	24	Pass
149	6695	-4.42	-4.50	0.7162	-1.45	5.00	2.265	3.55	24	Pass
181	6855	-4.38	-4.61	0.7107	-1.48	5.00	2.247	3.52	24	Pass
185	6875	-4.38	-4.52	0.7179	-1.44	5.00	2.27	3.56	24	Pass
209	6995	-4.31	-4.58	0.719	-1.43	5.00	2.274	3.57	24	Pass
233	7115	-4.40	-4.60	0.7098	-1.49	5.00	2.245	3.51	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	-1.87	-1.73	1.3216	1.21	5.00	4.179	6.21	24	Pass
49	6195	-1.80	-1.99	1.2931	1.12	5.00	4.089	6.12	24	Pass
93	6415	-1.96	-1.82	1.2945	1.12	5.00	4.094	6.12	24	Pass
97	6435	-1.83	-1.85	1.3093	1.17	5.00	4.14	6.17	24	Pass
105	6475	-1.87	-1.96	1.2869	1.10	5.00	4.07	6.1	24	Pass
113	6515	-1.88	-1.97	1.284	1.09	5.00	4.06	6.09	24	Pass
117	6535	-1.69	-1.93	1.3189	1.20	5.00	4.171	6.2	24	Pass
149	6695	-1.91	-1.98	1.278	1.07	5.00	4.041	6.07	24	Pass
181	6855	-1.98	-1.82	1.2915	1.11	5.00	4.084	6.11	24	Pass
185	6875	-1.95	-1.88	1.2869	1.10	5.00	4.07	6.1	24	Pass
209	6995	-1.98	-1.79	1.2961	1.13	5.00	4.099	6.13	24	Pass
233	7115	-2.27	-2.47	1.1592	0.64	5.00	3.666	5.64	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	0.71	0.55	2.313	3.64	5.00	7.314	8.64	24	Pass
49	6195	0.78	0.81	2.402	3.81	5.00	7.596	8.81	24	Pass
93	6415	0.90	0.98	2.483	3.95	5.00	7.852	8.95	24	Pass
97	6435	0.80	0.91	2.435	3.86	5.00	7.7	8.86	24	Pass
105	6475	0.86	0.85	2.435	3.86	5.00	7.7	8.86	24	Pass
113	6515	0.98	0.69	2.425	3.85	5.00	7.669	8.85	24	Pass
117	6535	0.80	0.82	2.41	3.82	5.00	7.621	8.82	24	Pass
149	6695	0.90	0.89	2.458	3.91	5.00	7.773	8.91	24	Pass
181	6855	0.93	0.70	2.414	3.83	5.00	7.634	8.83	24	Pass
185	6875	0.91	0.83	2.444	3.88	5.00	7.729	8.88	24	Pass
209	6995	0.92	0.90	2.466	3.92	5.00	7.798	8.92	24	Pass
233	7115	0.94	0.89	2.469	3.93	5.00	7.808	8.93	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	0.10	0.07	2.04	3.10	5.00	6.451	8.1	24	Pass
49	6195	0.12	0.12	2.056	3.13	5.00	6.502	8.13	24	Pass
93	6415	0.16	0.10	2.061	3.14	5.00	6.517	8.14	24	Pass
97	6435	0.10	0.16	2.061	3.14	5.00	6.517	8.14	24	Pass
105	6475	0.00	0.02	2.005	3.02	5.00	6.34	8.02	24	Pass
113	6515	0.02	0.01	2.007	3.03	5.00	6.347	8.03	24	Pass
117	6535	0.02	0.00	2.005	3.02	5.00	6.34	8.02	24	Pass
149	6695	-0.10	0.08	1.9958	3.00	5.00	6.311	8	24	Pass
181	6855	0.00	0.07	2.016	3.04	5.00	6.375	8.04	24	Pass
185	6875	0.03	0.01	2.009	3.03	5.00	6.353	8.03	24	Pass
209	6995	0.02	0.03	2.012	3.04	5.00	6.363	8.04	24	Pass
233	7115	0.12	0.03	2.035	3.09	5.00	6.435	8.09	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	1.96	1.92	3.126	4.95	5.00	9.885	9.95	24	Pass
49	6195	1.70	1.93	3.039	4.83	5.00	9.61	9.83	24	Pass
93	6415	1.98	1.92	3.134	4.96	5.00	9.911	9.96	24	Pass
97	6435	1.96	1.94	3.134	4.96	5.00	9.911	9.96	24	Pass
105	6475	1.98	1.80	3.091	4.90	5.00	9.775	9.9	24	Pass
113	6515	1.96	1.97	3.144	4.97	5.00	9.942	9.97	24	Pass
117	6535	1.94	1.99	3.144	4.97	5.00	9.942	9.97	24	Pass
149	6695	1.86	1.77	3.038	4.83	5.00	9.607	9.83	24	Pass
181	6855	1.65	1.94	3.025	4.81	5.00	9.566	9.81	24	Pass
185	6875	1.60	1.80	2.959	4.71	5.00	9.357	9.71	24	Pass
209	6995	1.91	1.95	3.119	4.94	5.00	9.863	9.94	24	Pass
233	7115	0.96	1.02	2.512	4.00	5.00	7.944	9	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
7	5985	9.31	9.36	17.161	12.35	5.00	54.268	17.35	24	Pass
55	6225	9.10	9.34	16.718	12.23	5.00	52.867	17.23	24	Pass
87	6385	9.02	9.22	16.336	12.13	5.00	51.659	17.13	24	Pass
103	6465	9.13	9.36	16.814	12.26	5.00	53.171	17.26	24	Pass
119	6545	9.00	9.03	15.942	12.03	5.00	50.413	17.03	24	Pass
135	6625	9.02	9.00	15.923	12.02	5.00	50.353	17.02	24	Pass
151	6705	9.19	9.40	17.008	12.31	5.00	53.784	17.31	24	Pass
167	6785	9.15	9.37	16.872	12.27	5.00	53.354	17.27	24	Pass
183	6865	9.03	9.05	16.034	12.05	5.00	50.704	17.05	24	Pass
199	6945	9.01	9.00	15.905	12.02	5.00	50.296	17.02	24	Pass
215	7025	9.03	9.40	16.708	12.23	5.00	52.835	17.23	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	11.92	11.91	31.084	14.93	5.00	98.296	19.93	24	Pass
47	6185	11.52	11.61	28.678	14.58	5.00	90.688	19.58	24	Pass
79	6345	11.65	11.75	29.584	14.71	5.00	93.553	19.71	24	Pass
111	6505	11.76	11.51	29.155	14.65	5.00	92.196	19.65	24	Pass
143	6665	11.80	11.79	30.236	14.81	5.00	95.615	19.81	24	Pass
175	6825	11.60	11.60	28.909	14.61	5.00	91.418	19.61	24	Pass
207	6985	11.66	11.64	29.244	14.66	5.00	92.478	19.66	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	12.49	12.45	35.321	15.48	5.00	111.695	20.48	24	Pass
47	6185	12.47	12.45	35.24	15.47	5.00	111.439	20.47	24	Pass
79	6345	12.35	12.40	34.557	15.39	5.00	109.279	20.39	24	Pass
111	6505	12.32	12.46	34.681	15.40	5.00	109.671	20.4	24	Pass
143	6665	12.49	12.46	35.362	15.49	5.00	111.824	20.49	24	Pass
175	6825	12.34	12.49	34.881	15.43	5.00	110.303	20.43	24	Pass
207	6985	12.38	12.47	34.959	15.44	5.00	110.55	20.44	24	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-6, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.
4. For U-NII-8, The directional gain is 5 dBi.

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	174.181	22.41	5.00	550.809	27.41	30	Pass
49	6195	174.985	22.43	5.00	553.351	27.43	30	Pass
93	6415	175.792	22.45	5.00	555.903	27.45	30	Pass
117	6535	176.604	22.47	5.00	558.471	27.47	30	Pass
149	6695	154.882	21.90	5.00	489.78	26.9	30	Pass
181	6855	147.231	21.68	5.00	465.585	26.68	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	175.388	22.44	5.00	554.626	27.44	30	Pass
49	6195	174.181	22.41	5.00	550.809	27.41	30	Pass
93	6415	175.792	22.45	5.00	555.903	27.45	30	Pass
117	6535	175.388	22.44	5.00	554.626	27.44	30	Pass
149	6695	146.555	21.66	5.00	463.448	26.66	30	Pass
181	6855	148.252	21.71	5.00	468.814	26.71	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	116.145	20.65	5.00	367.283	25.65	30	Pass
51	6205	157.036	21.96	5.00	496.591	26.96	30	Pass
91	6405	177.011	22.48	5.00	559.758	27.48	30	Pass
123	6565	155.955	21.93	5.00	493.173	26.93	30	Pass
147	6685	144.544	21.60	5.00	457.088	26.6	30	Pass
179	6845	147.571	21.69	5.00	466.66	26.69	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	83.368	19.21	5.00	263.633	24.21	30	Pass
55	6225	174.181	22.41	5.00	550.809	27.41	30	Pass
87	6385	175.388	22.44	5.00	554.626	27.44	30	Pass
135	6625	174.582	22.42	5.00	552.077	27.42	30	Pass
151	6705	167.109	22.23	5.00	528.445	27.23	30	Pass
167	6785	155.597	21.92	5.00	492.041	26.92	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	92.257	19.65	5.00	291.742	24.65	30	Pass
47	6185	171.791	22.35	5.00	543.251	27.35	30	Pass
79	6345	184.502	22.66	5.00	583.447	27.66	30	Pass
143	6665	160.694	22.06	5.00	508.159	27.06	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	21.528	13.33	5.00	68.078	18.33	30	Pass
49	6195	20.091	13.03	5.00	63.533	18.03	30	Pass
93	6415	21.928	13.41	5.00	69.342	18.41	30	Pass
117	6535	21.827	13.39	5.00	69.023	18.39	30	Pass
149	6695	18.197	12.60	5.00	57.544	17.6	30	Pass
181	6855	18.45	12.66	5.00	58.344	17.66	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	40.087	16.03	5.00	126.766	21.03	30	Pass
49	6195	39.811	16.00	5.00	125.893	21	30	Pass
93	6415	42.073	16.24	5.00	133.047	21.24	30	Pass
117	6535	43.551	16.39	5.00	137.72	21.39	30	Pass
149	6695	33.884	15.30	5.00	107.151	20.3	30	Pass
181	6855	33.729	15.28	5.00	106.66	20.28	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	75.336	18.77	5.00	238.233	23.77	30	Pass
49	6195	74.817	18.74	5.00	236.592	23.74	30	Pass
93	6415	79.068	18.98	5.00	250.035	23.98	30	Pass
117	6535	79.25	18.99	5.00	250.611	23.99	30	Pass
149	6695	64.714	18.11	5.00	204.644	23.11	30	Pass
181	6855	63.826	18.05	5.00	201.836	23.05	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	59.02	17.71	5.00	186.638	22.71	30	Pass
49	6195	61.094	17.86	5.00	193.196	22.86	30	Pass
93	6415	62.373	17.95	5.00	197.241	22.95	30	Pass
117	6535	62.951	17.99	5.00	199.069	22.99	30	Pass
149	6695	51.642	17.13	5.00	163.306	22.13	30	Pass
181	6855	52.481	17.20	5.00	165.959	22.2	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	98.401	19.93	5.00	311.171	24.93	30	Pass
49	6195	93.972	19.73	5.00	297.166	24.73	30	Pass
93	6415	99.77	19.99	5.00	315.5	24.99	30	Pass
117	6535	99.083	19.96	5.00	313.328	24.96	30	Pass
149	6695	83.56	19.22	5.00	264.24	24.22	30	Pass
181	6855	83.946	19.24	5.00	265.461	24.24	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	65.013	18.13	5.00	205.589	23.13	30	Pass
55	6225	114.288	20.58	5.00	361.41	25.58	30	Pass
87	6385	113.24	20.54	5.00	358.096	25.54	30	Pass
135	6625	114.288	20.58	5.00	361.41	25.58	30	Pass
151	6705	108.393	20.35	5.00	342.769	25.35	30	Pass
167	6785	101.859	20.08	5.00	322.106	25.08	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	69.984	18.45	5.00	221.309	23.45	30	Pass
47	6185	122.462	20.88	5.00	387.259	25.88	30	Pass
79	6345	125.026	20.97	5.00	395.367	25.97	30	Pass
143	6665	123.595	20.92	5.00	390.842	25.92	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	80.91	19.08	5.00	255.86	24.08	30	Pass
47	6185	124.451	20.95	5.00	393.549	25.95	30	Pass
79	6345	134.896	21.30	5.00	426.579	26.3	30	Pass
143	6665	107.647	20.32	5.00	340.41	25.32	30	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	19.90	19.92	195.899	22.92	5.00	619.487	27.92	30	Pass
49	6195	19.91	19.91	195.898	22.92	5.00	619.484	27.92	30	Pass
93	6415	19.94	19.92	196.803	22.94	5.00	622.346	27.94	30	Pass
117	6535	19.91	19.92	196.124	22.93	5.00	620.199	27.93	30	Pass
149	6695	19.91	19.91	195.898	22.92	5.00	619.484	27.92	30	Pass
181	6855	19.90	19.92	195.899	22.92	5.00	619.487	27.92	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-5, The maximum gain is 5 dBi.
3. For U-NII-7, The maximum gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	21.94	21.90	311.196	24.93	5.00	984.088	29.93	30	Pass
49	6195	21.92	21.93	311.552	24.94	5.00	985.214	29.94	30	Pass
93	6415	21.92	21.91	310.835	24.93	5.00	982.947	29.93	30	Pass
117	6535	21.91	21.90	310.12	24.92	5.00	980.686	29.92	30	Pass
149	6695	21.65	21.68	293.449	24.68	5.00	927.967	29.68	30	Pass
181	6855	20.67	20.65	232.826	23.67	5.00	736.26	28.67	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
3	5965	19.88	19.93	195.676	22.92	5.00	618.782	27.92	30	Pass
51	6205	21.69	21.68	294.802	24.70	5.00	932.246	29.7	30	Pass
91	6405	21.68	21.67	294.124	24.69	5.00	930.102	29.69	30	Pass
123	6565	21.15	21.17	261.235	24.17	5.00	826.098	29.17	30	Pass
147	6685	20.96	20.97	249.764	23.98	5.00	789.823	28.98	30	Pass
179	6845	20.66	20.66	232.825	23.67	5.00	736.257	28.67	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
7	5985	18.37	18.46	138.852	21.43	5.00	439.089	26.43	30	Pass
55	6225	21.65	21.67	293.11	24.67	5.00	926.895	29.67	30	Pass
87	6385	21.93	21.92	311.552	24.94	5.00	985.214	29.94	30	Pass
135	6625	21.92	21.91	310.835	24.93	5.00	982.947	29.93	30	Pass
151	6705	21.18	21.16	261.837	24.18	5.00	828.001	29.18	30	Pass
167	6785	21.19	21.15	261.839	24.18	5.00	828.008	29.18	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	18.41	18.43	139.005	21.43	5.00	439.572	26.43	30	Pass
47	6185	21.93	21.91	311.194	24.93	5.00	984.082	29.93	30	Pass
79	6345	21.91	21.92	310.835	24.93	5.00	982.947	29.93	30	Pass
143	6665	21.17	21.17	261.836	24.18	5.00	827.998	29.18	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	11.94	11.96	31.335	14.96	5.00	99.09	19.96	30	Pass
49	6195	11.74	11.81	30.098	14.79	5.00	95.178	19.79	30	Pass
93	6415	11.70	11.73	29.685	14.73	5.00	93.872	19.73	30	Pass
117	6535	11.92	11.81	30.73	14.88	5.00	97.177	19.88	30	Pass
149	6695	11.76	11.80	30.132	14.79	5.00	95.286	19.79	30	Pass
181	6855	10.60	10.64	23.069	13.63	5.00	72.951	18.63	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	14.40	14.47	55.532	17.45	5.00	175.608	22.45	30	Pass
49	6195	14.24	14.37	53.899	17.32	5.00	170.444	22.32	30	Pass
93	6415	14.42	14.40	55.212	17.42	5.00	174.596	22.42	30	Pass
117	6535	14.41	14.14	53.548	17.29	5.00	169.334	22.29	30	Pass
149	6695	14.37	14.32	54.392	17.36	5.00	172.003	22.36	30	Pass
181	6855	13.02	13.13	40.604	16.09	5.00	128.401	21.09	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	17.38	17.20	107.182	20.30	5.00	338.939	25.3	30	Pass
49	6195	17.28	17.26	106.667	20.28	5.00	337.311	25.28	30	Pass
93	6415	17.44	17.37	110.038	20.42	5.00	347.971	25.42	30	Pass
117	6535	17.34	17.26	107.411	20.31	5.00	339.663	25.31	30	Pass
149	6695	17.26	17.30	106.914	20.29	5.00	338.092	25.29	30	Pass
181	6855	16.10	16.30	83.396	19.21	5.00	263.721	24.21	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	16.42	16.47	88.214	19.46	5.00	278.957	24.46	30	Pass
49	6195	16.35	16.46	87.411	19.42	5.00	276.418	24.42	30	Pass
93	6415	16.40	16.46	87.91	19.44	5.00	277.996	24.44	30	Pass
117	6535	16.43	16.47	88.315	19.46	5.00	279.277	24.46	30	Pass
149	6695	16.32	16.40	86.506	19.37	5.00	273.556	24.37	30	Pass
181	6855	15.03	15.10	64.201	18.08	5.00	203.021	23.08	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
1	5955	18.49	18.43	140.294	21.47	5.00	443.649	26.47	30	Pass
49	6195	18.47	18.49	140.939	21.49	5.00	445.688	26.49	30	Pass
93	6415	18.48	18.49	141.101	21.50	5.00	446.201	26.5	30	Pass
117	6535	18.48	18.38	139.335	21.44	5.00	440.616	26.44	30	Pass
149	6695	18.44	18.34	138.057	21.40	5.00	436.575	26.4	30	Pass
181	6855	17.13	17.10	102.928	20.13	5.00	325.487	25.13	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
7	5985	17.09	17.01	101.402	20.06	5.00	320.661	25.06	30	Pass
55	6225	19.15	19.28	166.947	22.23	5.00	527.933	27.23	30	Pass
87	6385	19.84	19.85	192.988	22.86	5.00	610.282	27.86	30	Pass
135	6625	19.63	19.55	181.99	22.60	5.00	575.503	27.6	30	Pass
151	6705	19.06	19.00	159.971	22.04	5.00	505.873	27.04	30	Pass
167	6785	18.74	18.80	150.675	21.78	5.00	476.476	26.78	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	16.20	16.49	86.253	19.36	5.00	272.756	24.36	30	Pass
47	6185	18.79	18.80	151.541	21.81	5.00	479.215	26.81	30	Pass
79	6345	18.85	18.93	154.899	21.90	5.00	489.834	26.9	30	Pass
143	6665	18.80	18.50	146.652	21.66	5.00	463.754	26.66	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
15	6025	17.10	17.05	101.985	20.09	5.00	322.505	25.09	30	Pass
47	6185	20.13	20.15	206.553	23.15	5.00	653.178	28.15	30	Pass
79	6345	20.49	20.30	219.096	23.41	5.00	692.842	28.41	30	Pass
143	6665	19.56	19.53	180.108	22.56	5.00	569.552	27.56	30	Pass

Notes:

1. For U-NII-5, The directional gain is 5 dBi.
2. For U-NII-7, The directional gain is 5 dBi.

7.2 Maximum Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.20	5.00	-1.2	-1	Pass
49	6195	-6.12	5.00	-1.12	-1	Pass
93	6415	-6.22	5.00	-1.22	-1	Pass
97	6435	-6.21	5.00	-1.21	-1	Pass
105	6475	-6.20	5.00	-1.2	-1	Pass
113	6515	-6.15	5.00	-1.15	-1	Pass
117	6535	-6.16	5.00	-1.16	-1	Pass
149	6695	-6.08	5.00	-1.08	-1	Pass
181	6855	-6.05	5.00	-1.05	-1	Pass
185	6875	-6.07	5.00	-1.07	-1	Pass
209	6995	-6.24	5.00	-1.24	-1	Pass
233	7115	-6.01	5.00	-1.01	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.03	5.00	-1.03	-1	Pass
49	6195	-6.09	5.00	-1.09	-1	Pass
93	6415	-6.06	5.00	-1.06	-1	Pass
97	6435	-6.08	5.00	-1.08	-1	Pass
105	6475	-6.17	5.00	-1.17	-1	Pass
113	6515	-6.09	5.00	-1.09	-1	Pass
117	6535	-6.09	5.00	-1.09	-1	Pass
149	6695	-6.16	5.00	-1.16	-1	Pass
181	6855	-6.11	5.00	-1.11	-1	Pass
185	6875	-6.16	5.00	-1.16	-1	Pass
209	6995	-6.05	5.00	-1.05	-1	Pass
233	7115	-6.03	5.00	-1.03	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
3	5965	-6.20	5.00	-1.2	-1	Pass
51	6205	-6.10	5.00	-1.1	-1	Pass
91	6405	-6.08	5.00	-1.08	-1	Pass
99	6445	-6.08	5.00	-1.08	-1	Pass
107	6485	-6.10	5.00	-1.1	-1	Pass
115	6525	-6.11	5.00	-1.11	-1	Pass
123	6565	-6.04	5.00	-1.04	-1	Pass
147	6685	-6.10	5.00	-1.1	-1	Pass
179	6845	-6.05	5.00	-1.05	-1	Pass
187	6885	-6.05	5.00	-1.05	-1	Pass
203	6965	-6.07	5.00	-1.07	-1	Pass
227	7085	-6.06	5.00	-1.06	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	-6.05	5.00	-1.05	-1	Pass
55	6225	-6.04	5.00	-1.04	-1	Pass
87	6385	-6.08	5.00	-1.08	-1	Pass
103	6465	-6.11	5.00	-1.11	-1	Pass
119	6545	-6.05	5.00	-1.05	-1	Pass
135	6625	-6.02	5.00	-1.02	-1	Pass
151	6705	-6.02	5.00	-1.02	-1	Pass
167	6785	-6.05	5.00	-1.05	-1	Pass
183	6865	-6.01	5.00	-1.01	-1	Pass
199	6945	-6.03	5.00	-1.03	-1	Pass
215	7025	-6.09	5.00	-1.09	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-6.05	5.00	-1.05	-1	Pass
47	6185	-6.08	5.00	-1.08	-1	Pass
79	6345	-6.08	5.00	-1.08	-1	Pass
111	6505	-6.03	5.00	-1.03	-1	Pass
143	6665	-6.07	5.00	-1.07	-1	Pass
175	6825	-6.01	5.00	-1.01	-1	Pass
207	6985	-6.03	5.00	-1.03	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.25	5.00	-1.25	-1	Pass
49	6195	-6.22	5.00	-1.22	-1	Pass
93	6415	-6.28	5.00	-1.28	-1	Pass
97	6435	-6.29	5.00	-1.29	-1	Pass
105	6475	-6.26	5.00	-1.26	-1	Pass
113	6515	-6.21	5.00	-1.21	-1	Pass
117	6535	-6.20	5.00	-1.2	-1	Pass
149	6695	-6.23	5.00	-1.23	-1	Pass
181	6855	-6.13	5.00	-1.13	-1	Pass
185	6875	-6.25	5.00	-1.25	-1	Pass
209	6995	-6.14	5.00	-1.14	-1	Pass
233	7115	-8.69	5.00	-3.69	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.13	5.00	-1.13	-1	Pass
49	6195	-6.12	5.00	-1.12	-1	Pass
93	6415	-6.12	5.00	-1.12	-1	Pass
97	6435	-6.20	5.00	-1.2	-1	Pass
105	6475	-6.20	5.00	-1.2	-1	Pass
113	6515	-6.13	5.00	-1.13	-1	Pass
117	6535	-6.22	5.00	-1.22	-1	Pass
149	6695	-6.19	5.00	-1.19	-1	Pass
181	6855	-6.14	5.00	-1.14	-1	Pass
185	6875	-6.24	5.00	-1.24	-1	Pass
209	6995	-6.19	5.00	-1.19	-1	Pass
233	7115	-6.93	5.00	-1.93	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.14	5.00	-1.14	-1	Pass
49	6195	-6.10	5.00	-1.1	-1	Pass
93	6415	-6.10	5.00	-1.1	-1	Pass
97	6435	-6.12	5.00	-1.12	-1	Pass
105	6475	-6.20	5.00	-1.2	-1	Pass
113	6515	-6.13	5.00	-1.13	-1	Pass
117	6535	-6.19	5.00	-1.19	-1	Pass
149	6695	-6.24	5.00	-1.24	-1	Pass
181	6855	-6.18	5.00	-1.18	-1	Pass
185	6875	-6.18	5.00	-1.18	-1	Pass
209	6995	-6.10	5.00	-1.1	-1	Pass
233	7115	-9.09	5.00	-4.09	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.06	5.00	-1.06	-1	Pass
49	6195	-6.14	5.00	-1.14	-1	Pass
93	6415	-6.09	5.00	-1.09	-1	Pass
97	6435	-6.28	5.00	-1.28	-1	Pass
105	6475	-6.18	5.00	-1.18	-1	Pass
113	6515	-6.12	5.00	-1.12	-1	Pass
117	6535	-6.12	5.00	-1.12	-1	Pass
149	6695	-6.26	5.00	-1.26	-1	Pass
181	6855	-6.17	5.00	-1.17	-1	Pass
185	6875	-6.21	5.00	-1.21	-1	Pass
209	6995	-6.10	5.00	-1.1	-1	Pass
233	7115	-6.06	5.00	-1.06	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	-6.06	5.00	-1.06	-1	Pass
49	6195	-6.10	5.00	-1.1	-1	Pass
93	6415	-6.09	5.00	-1.09	-1	Pass
97	6435	-6.14	5.00	-1.14	-1	Pass
105	6475	-6.29	5.00	-1.29	-1	Pass
113	6515	-6.10	5.00	-1.1	-1	Pass
117	6535	-6.17	5.00	-1.17	-1	Pass
149	6695	-6.17	5.00	-1.17	-1	Pass
181	6855	-6.12	5.00	-1.12	-1	Pass
185	6875	-6.17	5.00	-1.17	-1	Pass
209	6995	-6.12	5.00	-1.12	-1	Pass
233	7115	-6.13	5.00	-1.13	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	-6.07	5.00	-1.07	-1	Pass
55	6225	-6.14	5.00	-1.14	-1	Pass
87	6385	-6.14	5.00	-1.14	-1	Pass
103	6465	-6.22	5.00	-1.22	-1	Pass
119	6545	-6.16	5.00	-1.16	-1	Pass
135	6625	-6.04	5.00	-1.04	-1	Pass
151	6705	-6.04	5.00	-1.04	-1	Pass
167	6785	-6.06	5.00	-1.06	-1	Pass
183	6865	-6.02	5.00	-1.02	-1	Pass
199	6945	-6.06	5.00	-1.06	-1	Pass
215	7025	-6.19	5.00	-1.19	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-6.11	5.00	-1.11	-1	Pass
47	6185	-6.13	5.00	-1.13	-1	Pass
79	6345	-6.10	5.00	-1.1	-1	Pass
111	6505	-6.08	5.00	-1.08	-1	Pass
143	6665	-6.09	5.00	-1.09	-1	Pass
175	6825	-6.07	5.00	-1.07	-1	Pass
207	6985	-6.09	5.00	-1.09	-1	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.


802.11be (EHT160) 996+484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-6.09	5.00	-1.09	-1	Pass
47	6185	-6.09	5.00	-1.09	-1	Pass
79	6345	-6.15	5.00	-1.15	-1	Pass
111	6505	-6.06	5.00	-1.06	-1	Pass
143	6665	-6.08	5.00	-1.08	-1	Pass
175	6825	-6.03	5.00	-1.03	-1	Pass
207	6985	-6.06	5.00	-1.06	-1	Pass







Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-6, The antenna gain is 5 dBi.
3. For U-NII-7, The antenna gain is 5 dBi.
4. For U-NII-8, The antenna gain is 5 dBi.


Spectrum Plot of Maximum Value

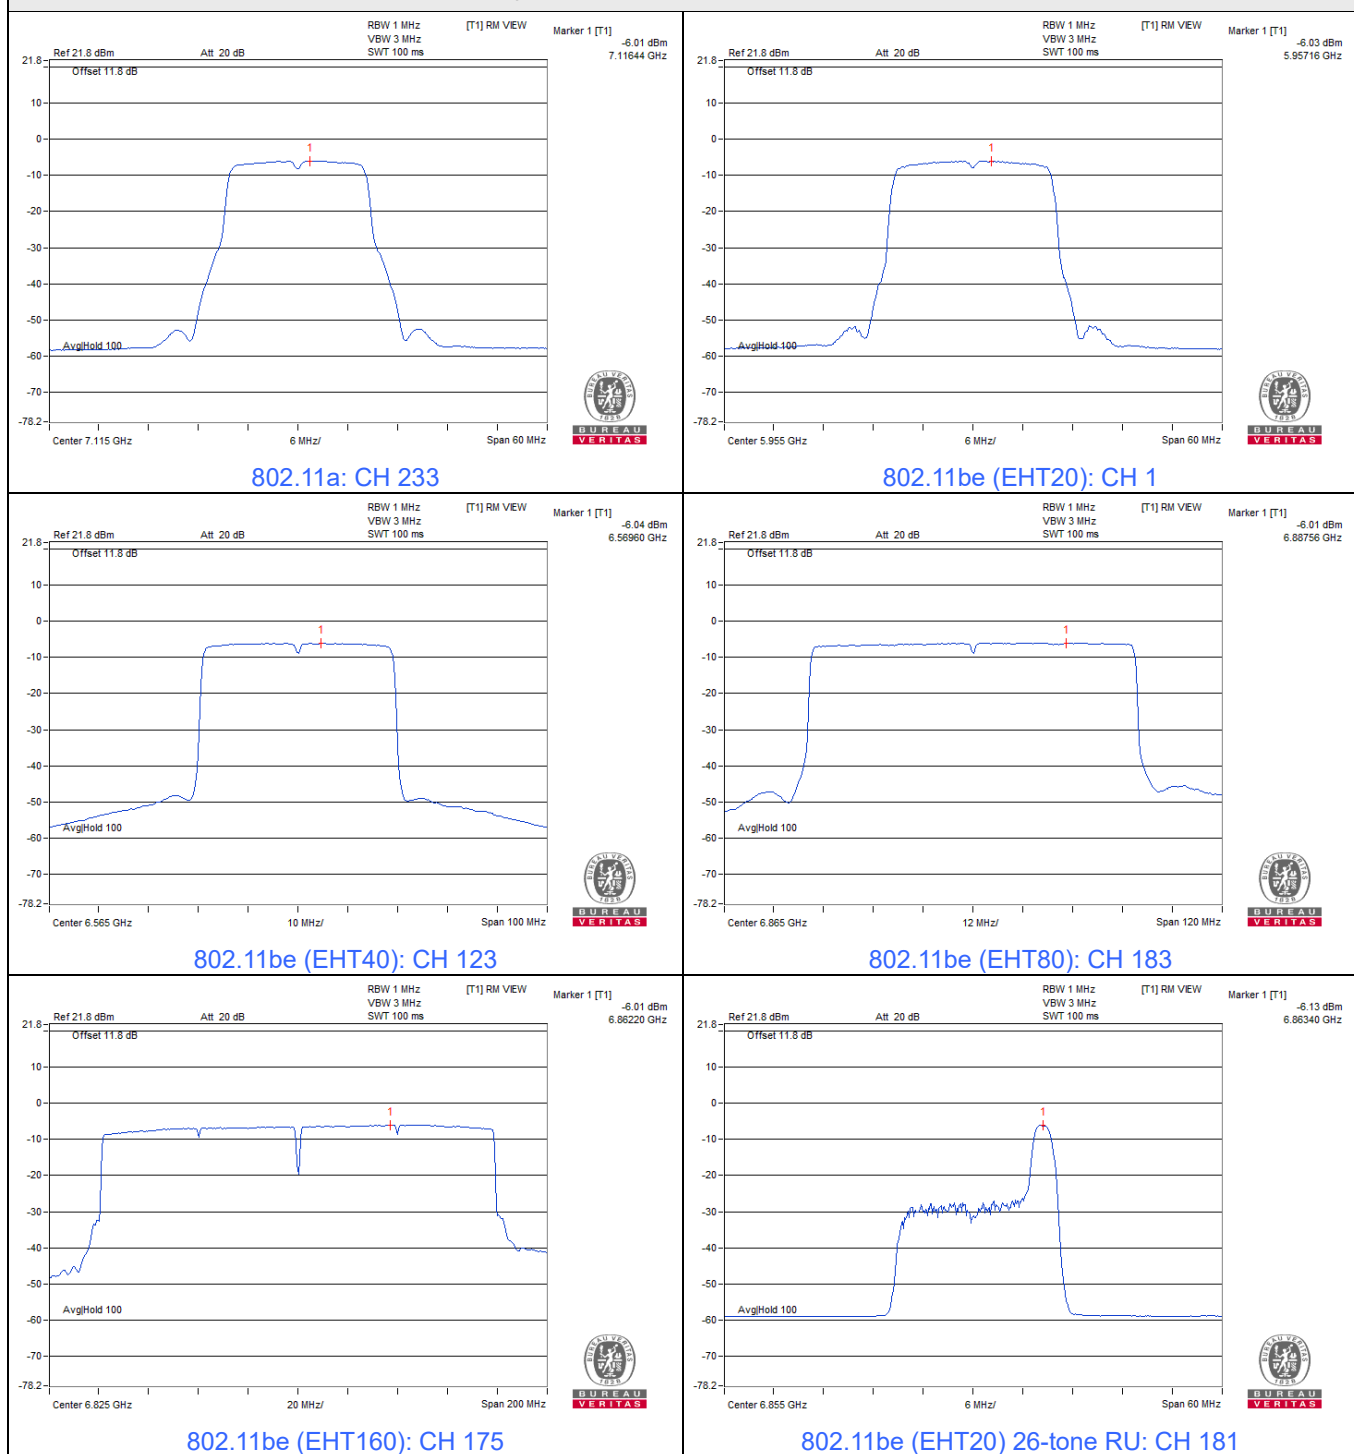

Spectrum Plot of Maximum Value

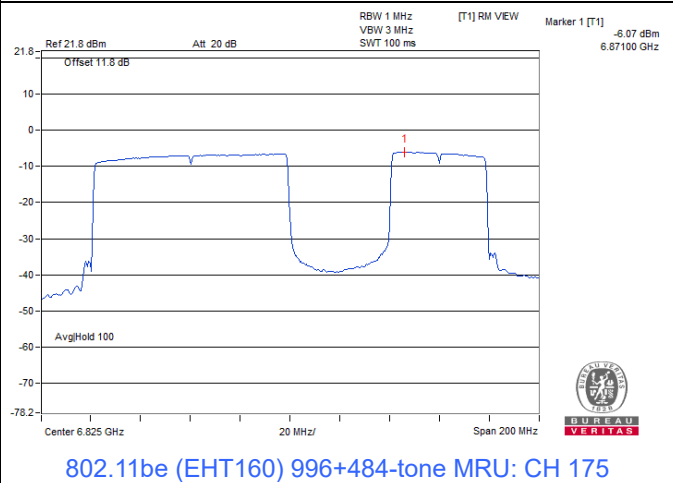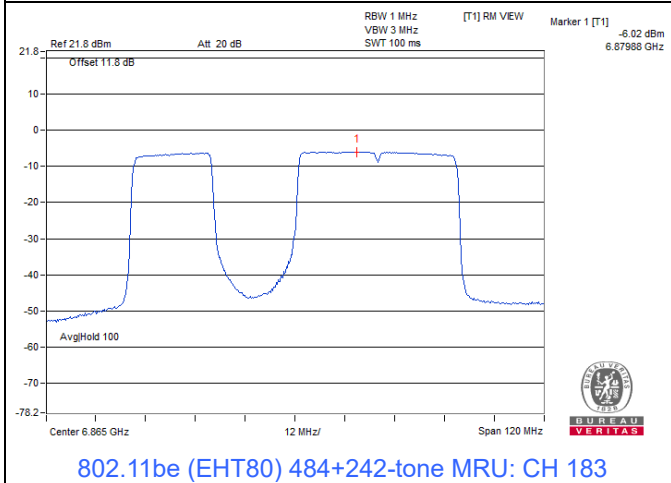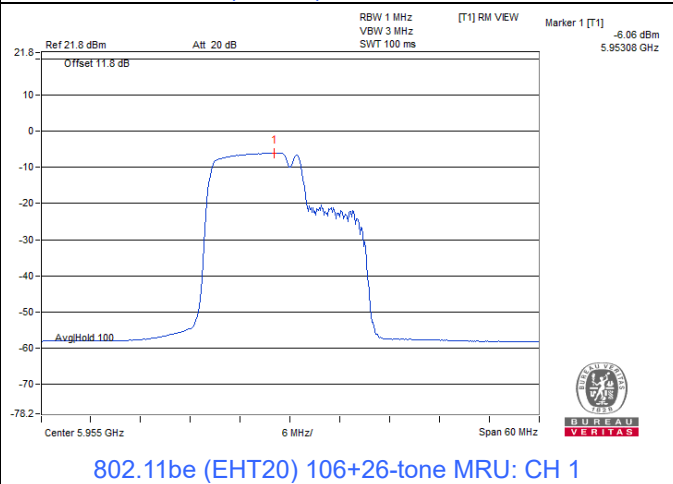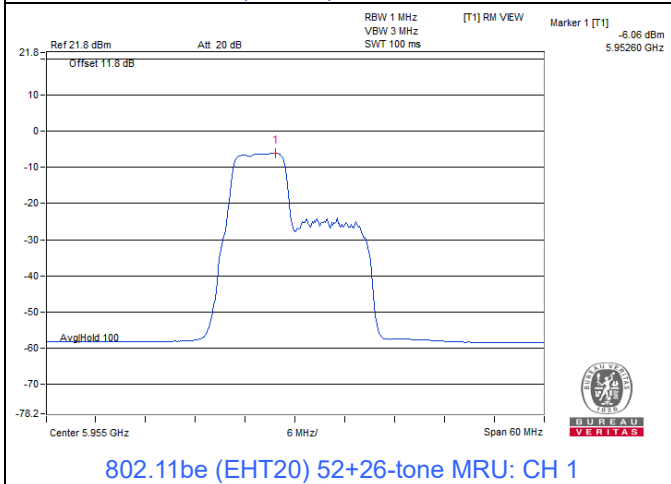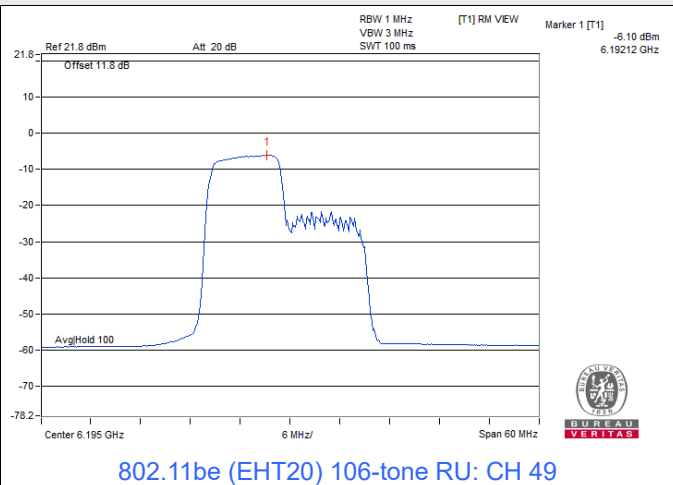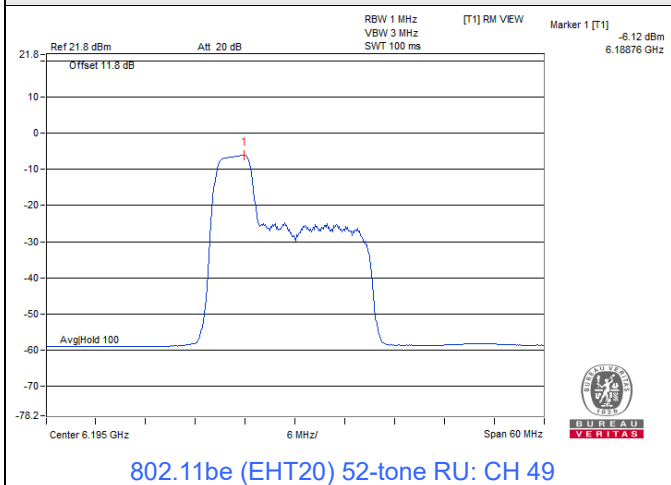

Spectrum Plot of Maximum Value

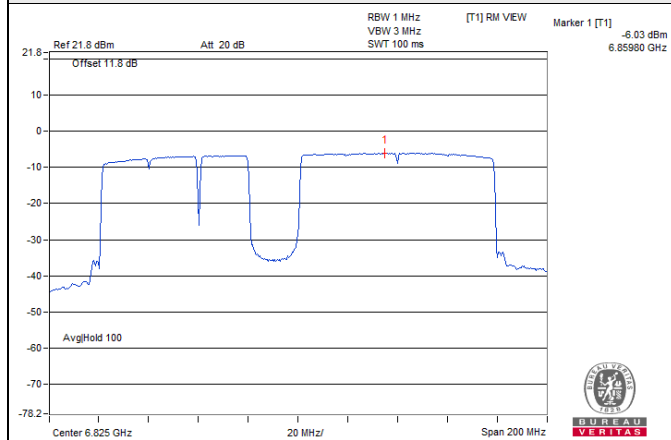

802.11be (EHT160) 996+484+242-tone MRU: CH 175

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-11.92	-12.15	-9.02	8.01	-1.01	-1	Pass
49	6195	-11.83	-12.27	-9.03	8.01	-1.02	-1	Pass
93	6415	-12.11	-12.11	-9.10	8.01	-1.09	-1	Pass
97	6435	-11.99	-12.13	-9.05	8.01	-1.04	-1	Pass
105	6475	-11.94	-12.27	-9.09	8.01	-1.08	-1	Pass
113	6515	-11.80	-12.29	-9.03	8.01	-1.02	-1	Pass
117	6535	-11.86	-12.22	-9.03	8.01	-1.02	-1	Pass
149	6695	-12.19	-12.03	-9.10	8.01	-1.09	-1	Pass
181	6855	-12.01	-12.16	-9.07	8.01	-1.06	-1	Pass
185	6875	-12.13	-12.10	-9.10	8.01	-1.09	-1	Pass
209	6995	-12.13	-12.06	-9.08	8.01	-1.07	-1	Pass
233	7115	-12.11	-12.05	-9.07	8.01	-1.06	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-5, The directional gain is 8.01 dBi.
4. For U-NII-6, The directional gain is 8.01 dBi.
5. For U-NII-7, The directional gain is 8.01 dBi.
6. For U-NII-8, The directional gain is 8.01 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.00	-9.11	-6.04	5.00	-1.04	-1	Pass
49	6195	-8.83	-9.37	-6.08	5.00	-1.08	-1	Pass
93	6415	-9.00	-9.09	-6.03	5.00	-1.03	-1	Pass
97	6435	-8.99	-9.07	-6.02	5.00	-1.02	-1	Pass
105	6475	-9.06	-9.03	-6.03	5.00	-1.03	-1	Pass
113	6515	-9.01	-9.14	-6.06	5.00	-1.06	-1	Pass
117	6535	-8.84	-9.21	-6.01	5.00	-1.01	-1	Pass
149	6695	-9.10	-9.01	-6.04	5.00	-1.04	-1	Pass
181	6855	-9.09	-9.05	-6.06	5.00	-1.06	-1	Pass
185	6875	-9.05	-9.10	-6.06	5.00	-1.06	-1	Pass
209	6995	-9.13	-9.03	-6.07	5.00	-1.07	-1	Pass
233	7115	-9.07	-9.09	-6.07	5.00	-1.07	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
3	5965	-9.04	-9.08	-6.05	5.00	-1.05	-1	Pass
51	6205	-9.18	-9.12	-6.14	5.00	-1.14	-1	Pass
91	6405	-9.15	-8.98	-6.05	5.00	-1.05	-1	Pass
99	6445	-9.15	-9.03	-6.08	5.00	-1.08	-1	Pass
107	6485	-9.19	-9.10	-6.13	5.00	-1.13	-1	Pass
115	6525	-9.06	-9.20	-6.12	5.00	-1.12	-1	Pass
123	6565	-9.05	-9.16	-6.09	5.00	-1.09	-1	Pass
147	6685	-9.05	-9.14	-6.08	5.00	-1.08	-1	Pass
179	6845	-9.13	-9.19	-6.15	5.00	-1.15	-1	Pass
187	6885	-8.94	-9.15	-6.03	5.00	-1.03	-1	Pass
203	6965	-9.11	-9.14	-6.11	5.00	-1.11	-1	Pass
227	7085	-9.06	-9.02	-6.03	5.00	-1.03	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
7	5985	-9.08	-9.10	-6.08	5.00	-1.08	-1	Pass
55	6225	-8.94	-9.10	-6.01	5.00	-1.01	-1	Pass
87	6385	-8.92	-9.17	-6.03	5.00	-1.03	-1	Pass
103	6465	-9.02	-9.02	-6.01	5.00	-1.01	-1	Pass
119	6545	-9.16	-8.99	-6.06	5.00	-1.06	-1	Pass
135	6625	-8.96	-9.25	-6.09	5.00	-1.09	-1	Pass
151	6705	-9.11	-9.00	-6.04	5.00	-1.04	-1	Pass
167	6785	-9.06	-9.02	-6.03	5.00	-1.03	-1	Pass
183	6865	-9.16	-9.05	-6.09	5.00	-1.09	-1	Pass
199	6945	-9.08	-9.03	-6.04	5.00	-1.04	-1	Pass
215	7025	-8.83	-9.29	-6.04	5.00	-1.04	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-8.98	-9.11	-6.03	5.00	-1.03	-1	Pass
47	6185	-9.04	-9.14	-6.08	5.00	-1.08	-1	Pass
79	6345	-9.06	-9.13	-6.08	5.00	-1.08	-1	Pass
111	6505	-9.10	-9.02	-6.05	5.00	-1.05	-1	Pass
143	6665	-9.01	-9.04	-6.01	5.00	-1.01	-1	Pass
175	6825	-9.03	-9.15	-6.08	5.00	-1.08	-1	Pass
207	6985	-8.98	-9.21	-6.08	5.00	-1.08	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.07	-9.07	-6.06	5.00	-1.06	-1	Pass
49	6195	-9.06	-9.18	-6.11	5.00	-1.11	-1	Pass
93	6415	-9.08	-9.14	-6.10	5.00	-1.1	-1	Pass
97	6435	-9.20	-9.10	-6.14	5.00	-1.14	-1	Pass
105	6475	-9.23	-9.24	-6.22	5.00	-1.22	-1	Pass
113	6515	-9.17	-9.13	-6.14	5.00	-1.14	-1	Pass
117	6535	-9.06	-9.28	-6.16	5.00	-1.16	-1	Pass
149	6695	-9.23	-9.18	-6.19	5.00	-1.19	-1	Pass
181	6855	-9.15	-9.15	-6.14	5.00	-1.14	-1	Pass
185	6875	-9.22	-9.22	-6.21	5.00	-1.21	-1	Pass
209	6995	-9.04	-9.16	-6.09	5.00	-1.09	-1	Pass
233	7115	-9.11	-9.09	-6.09	5.00	-1.09	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.08	-9.14	-6.10	5.00	-1.1	-1	Pass
49	6195	-9.18	-9.12	-6.14	5.00	-1.14	-1	Pass
93	6415	-9.28	-9.03	-6.14	5.00	-1.14	-1	Pass
97	6435	-9.14	-9.10	-6.11	5.00	-1.11	-1	Pass
105	6475	-9.25	-9.23	-6.23	5.00	-1.23	-1	Pass
113	6515	-9.13	-9.12	-6.11	5.00	-1.11	-1	Pass
117	6535	-9.14	-9.08	-6.10	5.00	-1.1	-1	Pass
149	6695	-9.20	-9.22	-6.20	5.00	-1.2	-1	Pass
181	6855	-9.30	-9.10	-6.19	5.00	-1.19	-1	Pass
185	6875	-9.20	-9.16	-6.17	5.00	-1.17	-1	Pass
209	6995	-9.14	-9.12	-6.12	5.00	-1.12	-1	Pass
233	7115	-9.62	-9.69	-6.64	5.00	-1.64	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.11	-9.24	-6.16	5.00	-1.16	-1	Pass
49	6195	-9.22	-9.19	-6.19	5.00	-1.19	-1	Pass
93	6415	-9.19	-9.16	-6.16	5.00	-1.16	-1	Pass
97	6435	-9.10	-9.26	-6.17	5.00	-1.17	-1	Pass
105	6475	-9.11	-9.32	-6.20	5.00	-1.2	-1	Pass
113	6515	-9.11	-9.27	-6.18	5.00	-1.18	-1	Pass
117	6535	-9.18	-9.05	-6.10	5.00	-1.1	-1	Pass
149	6695	-9.33	-9.18	-6.24	5.00	-1.24	-1	Pass
181	6855	-9.17	-9.22	-6.18	5.00	-1.18	-1	Pass
185	6875	-9.18	-9.19	-6.17	5.00	-1.17	-1	Pass
209	6995	-9.08	-9.13	-6.09	5.00	-1.09	-1	Pass
233	7115	-9.11	-9.20	-6.14	5.00	-1.14	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.15	-9.16	-6.14	5.00	-1.14	-1	Pass
49	6195	-9.10	-9.12	-6.10	5.00	-1.1	-1	Pass
93	6415	-9.23	-9.25	-6.23	5.00	-1.23	-1	Pass
97	6435	-9.19	-9.12	-6.14	5.00	-1.14	-1	Pass
105	6475	-9.33	-9.08	-6.19	5.00	-1.19	-1	Pass
113	6515	-9.12	-9.13	-6.11	5.00	-1.11	-1	Pass
117	6535	-9.18	-9.17	-6.16	5.00	-1.16	-1	Pass
149	6695	-9.34	-9.06	-6.19	5.00	-1.19	-1	Pass
181	6855	-9.18	-9.13	-6.14	5.00	-1.14	-1	Pass
185	6875	-9.20	-9.25	-6.21	5.00	-1.21	-1	Pass
209	6995	-9.18	-9.19	-6.17	5.00	-1.17	-1	Pass
233	7115	-9.06	-9.18	-6.11	5.00	-1.11	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	-9.12	-9.19	-6.14	5.00	-1.14	-1	Pass
49	6195	-9.17	-9.10	-6.12	5.00	-1.12	-1	Pass
93	6415	-9.21	-9.12	-6.15	5.00	-1.15	-1	Pass
97	6435	-9.04	-9.24	-6.13	5.00	-1.13	-1	Pass
105	6475	-9.07	-9.44	-6.24	5.00	-1.24	-1	Pass
113	6515	-9.21	-9.11	-6.15	5.00	-1.15	-1	Pass
117	6535	-9.23	-9.13	-6.17	5.00	-1.17	-1	Pass
149	6695	-9.13	-9.27	-6.19	5.00	-1.19	-1	Pass
181	6855	-9.17	-9.20	-6.17	5.00	-1.17	-1	Pass
185	6875	-9.19	-9.18	-6.17	5.00	-1.17	-1	Pass
209	6995	-9.03	-9.13	-6.07	5.00	-1.07	-1	Pass
233	7115	-10.35	-10.34	-7.33	5.00	-2.33	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
7	5985	-9.12	-9.09	-6.09	5.00	-1.09	-1	Pass
55	6225	-9.04	-9.11	-6.06	5.00	-1.06	-1	Pass
87	6385	-9.18	-9.17	-6.16	5.00	-1.16	-1	Pass
103	6465	-9.27	-9.13	-6.19	5.00	-1.19	-1	Pass
119	6545	-9.20	-9.07	-6.12	5.00	-1.12	-1	Pass
135	6625	-9.08	-9.23	-6.14	5.00	-1.14	-1	Pass
151	6705	-9.17	-9.20	-6.17	5.00	-1.17	-1	Pass
167	6785	-9.20	-9.17	-6.17	5.00	-1.17	-1	Pass
183	6865	-8.95	-9.22	-6.07	5.00	-1.07	-1	Pass
199	6945	-9.19	-9.15	-6.16	5.00	-1.16	-1	Pass
215	7025	-9.15	-9.13	-6.13	5.00	-1.13	-1	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-9.17	-9.17	-6.16	5.00	-1.16	-1	Pass
47	6185	-9.17	-9.19	-6.17	5.00	-1.17	-1	Pass
79	6345	-9.23	-9.12	-6.16	5.00	-1.16	-1	Pass
111	6505	-9.15	-9.16	-6.14	5.00	-1.14	-1	Pass
143	6665	-9.28	-9.06	-6.16	5.00	-1.16	-1	Pass
175	6825	-9.20	-9.09	-6.13	5.00	-1.13	-1	Pass
207	6985	-9.03	-9.22	-6.11	5.00	-1.11	-1	Pass

Notes:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU







Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-9.15	-9.03	-6.08	5.00	-1.08	-1	Pass
47	6185	-9.17	-9.16	-6.15	5.00	-1.15	-1	Pass
79	6345	-9.03	-9.25	-6.13	5.00	-1.13	-1	Pass
111	6505	-9.20	-9.07	-6.12	5.00	-1.12	-1	Pass
143	6665	-9.04	-9.19	-6.10	5.00	-1.1	-1	Pass
175	6825	-9.20	-9.07	-6.12	5.00	-1.12	-1	Pass
207	6985	-9.15	-9.05	-6.09	5.00	-1.09	-1	Pass

Notes:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-6, The directional gain is 5 dBi.
4. For U-NII-7, The directional gain is 5 dBi.
5. For U-NII-8, The directional gain is 5 dBi.

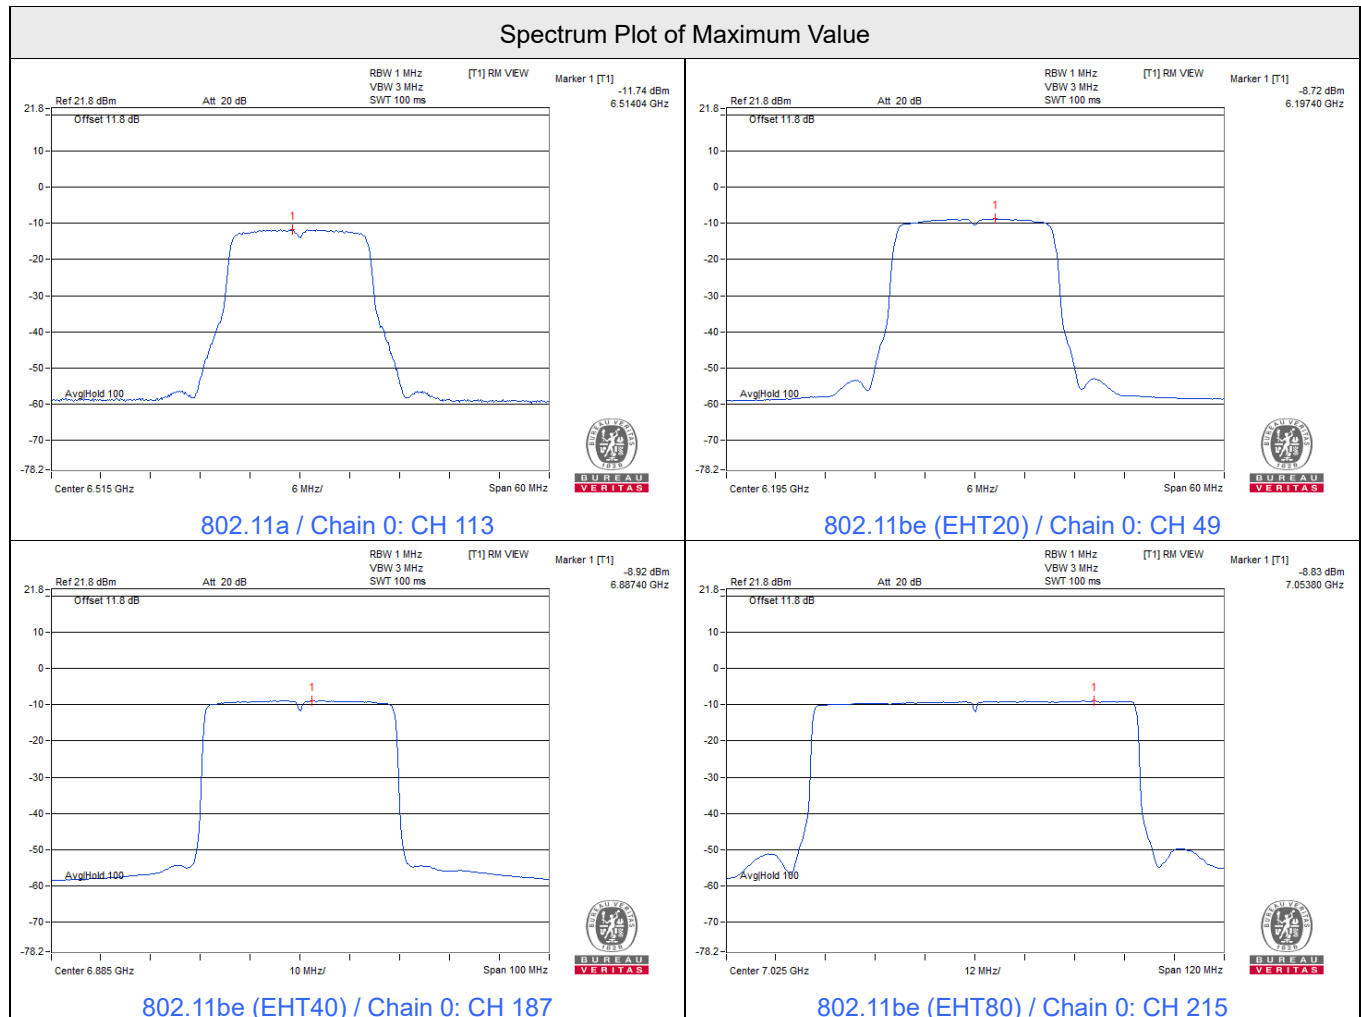


Spectrum Plot of Maximum Value

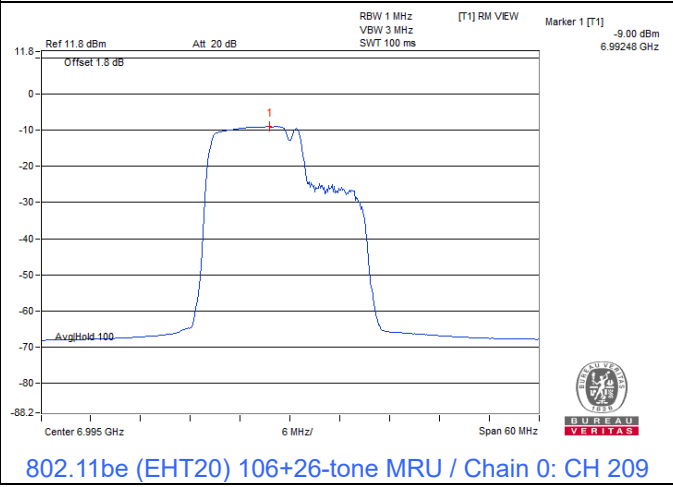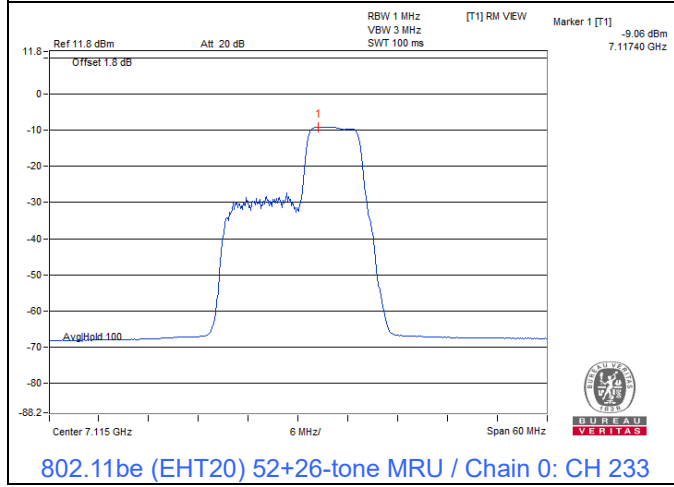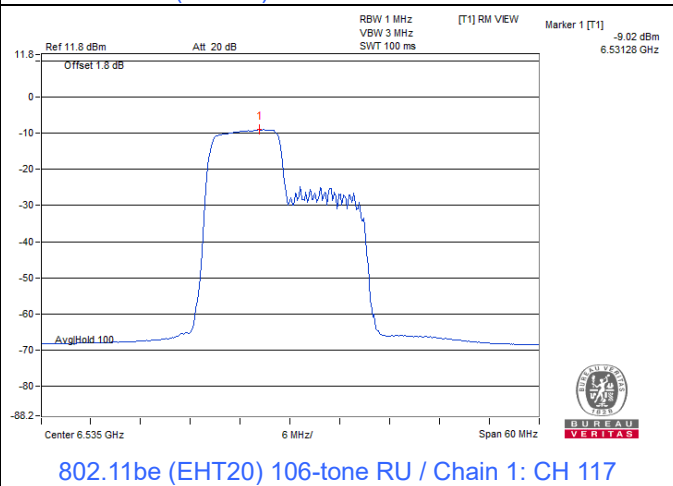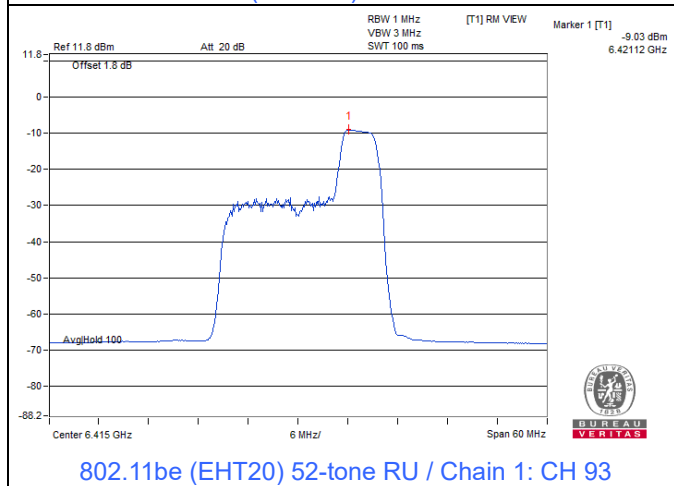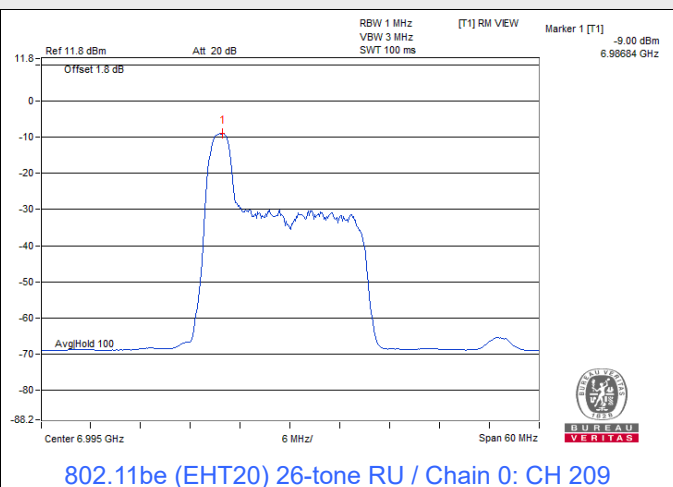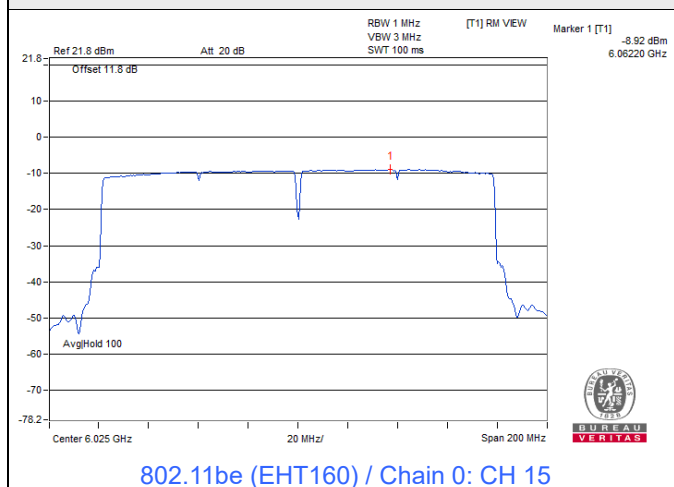


Spectrum Plot of Maximum Value

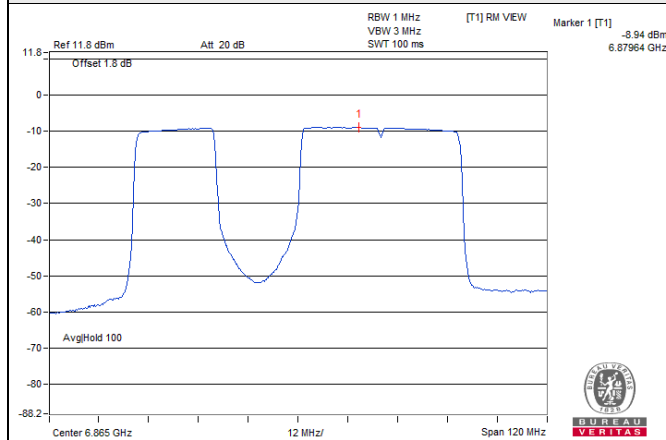

802.11be (EHT80) 484+242-tone MRU / Chain 0: CH 183

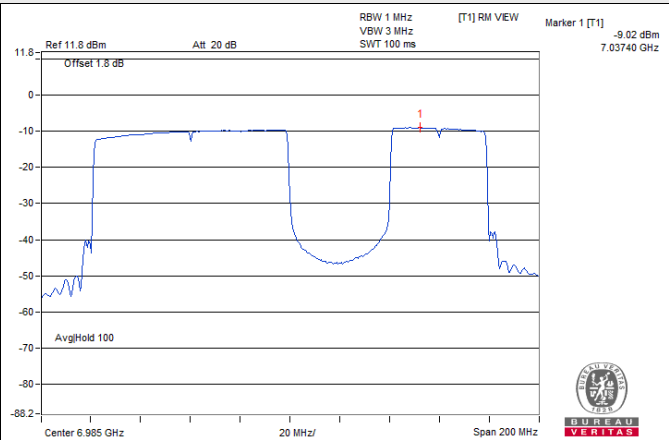

802.11be (EHT160) 996+484-tone MRU / Chain 0: CH 207

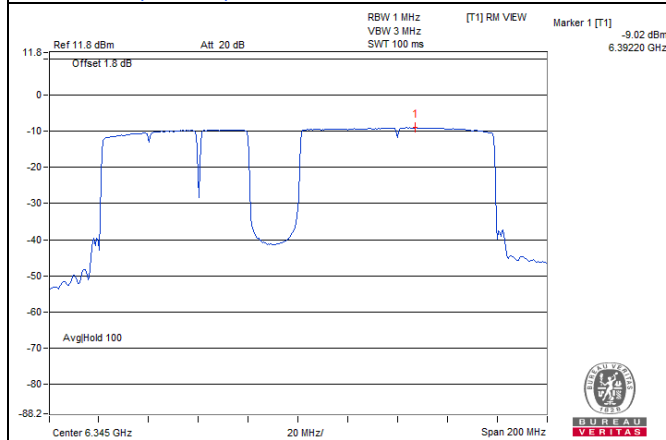

802.11be (EHT160) 996+484+242-tone MRU / Chain 0: CH 79

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

1Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	9.53	5.00	14.53	17	Pass
49	6195	9.49	5.00	14.49	17	Pass
93	6415	9.48	5.00	14.48	17	Pass
117	6535	9.58	5.00	14.58	17	Pass
149	6695	6.92	5.00	11.92	17	Pass
181	6855	6.69	5.00	11.69	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.92	5.00	13.92	17	Pass
49	6195	8.84	5.00	13.84	17	Pass
93	6415	9.00	5.00	14	17	Pass
117	6535	9.12	5.00	14.12	17	Pass
149	6695	6.16	5.00	11.16	17	Pass
181	6855	6.37	5.00	11.37	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
3	5965	2.87	5.00	7.87	17	Pass
51	6205	3.36	5.00	8.36	17	Pass
91	6405	3.93	5.00	8.93	17	Pass
123	6565	3.36	5.00	8.36	17	Pass
147	6685	3.05	5.00	8.05	17	Pass
179	6845	3.07	5.00	8.07	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	-0.16	5.00	4.84	17	Pass
55	6225	2.46	5.00	7.46	17	Pass
87	6385	2.38	5.00	7.38	17	Pass
135	6625	2.46	5.00	7.46	17	Pass
151	6705	2.18	5.00	7.18	17	Pass
167	6785	1.93	5.00	6.93	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-2.59	5.00	2.41	17	Pass
47	6185	-0.05	5.00	4.95	17	Pass
79	6345	0.05	5.00	5.05	17	Pass
143	6665	-0.72	5.00	4.28	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.87	5.00	13.87	17	Pass
49	6195	8.74	5.00	13.74	17	Pass
93	6415	8.98	5.00	13.98	17	Pass
117	6535	9.04	5.00	14.04	17	Pass
149	6695	6.12	5.00	11.12	17	Pass
181	6855	6.29	5.00	11.29	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.78	5.00	13.78	17	Pass
49	6195	8.71	5.00	13.71	17	Pass
93	6415	8.87	5.00	13.87	17	Pass
117	6535	9.11	5.00	14.11	17	Pass
149	6695	6.12	5.00	11.12	17	Pass
181	6855	6.34	5.00	11.34	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.84	5.00	13.84	17	Pass
49	6195	8.73	5.00	13.73	17	Pass
93	6415	8.87	5.00	13.87	17	Pass
117	6535	9.04	5.00	14.04	17	Pass
149	6695	6.11	5.00	11.11	17	Pass
181	6855	6.33	5.00	11.33	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.88	5.00	13.88	17	Pass
49	6195	8.78	5.00	13.78	17	Pass
93	6415	8.98	5.00	13.98	17	Pass
117	6535	9.11	5.00	14.11	17	Pass
149	6695	6.08	5.00	11.08	17	Pass
181	6855	6.34	5.00	11.34	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	8.91	5.00	13.91	17	Pass
49	6195	8.83	5.00	13.83	17	Pass
93	6415	8.90	5.00	13.9	17	Pass
117	6535	9.06	5.00	14.06	17	Pass
149	6695	6.08	5.00	11.08	17	Pass
181	6855	6.32	5.00	11.32	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	-0.27	5.00	4.73	17	Pass
55	6225	2.43	5.00	7.43	17	Pass
87	6385	2.21	5.00	7.21	17	Pass
135	6625	2.45	5.00	7.45	17	Pass
151	6705	2.04	5.00	7.04	17	Pass
167	6785	1.88	5.00	6.88	17	Pass

Notes:

1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-2.61	5.00	2.39	17	Pass
47	6185	-0.12	5.00	4.88	17	Pass
79	6345	-0.18	5.00	4.82	17	Pass
143	6665	-0.77	5.00	4.23	17	Pass

Notes:


1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU







Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	-2.71	5.00	2.29	17	Pass
47	6185	-0.98	5.00	4.02	17	Pass
79	6345	-0.78	5.00	4.22	17	Pass
143	6665	-1.90	5.00	3.1	17	Pass

Notes:






1. For U-NII-5, The antenna gain is 5 dBi.
2. For U-NII-7, The antenna gain is 5 dBi.

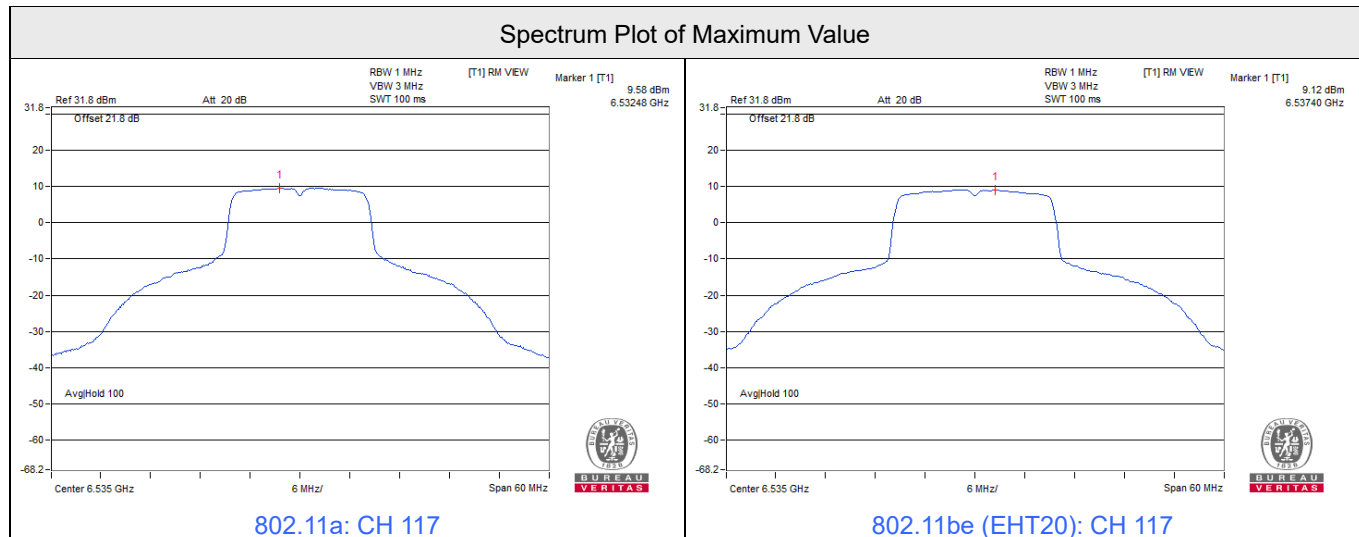

Spectrum Plot of Maximum Value

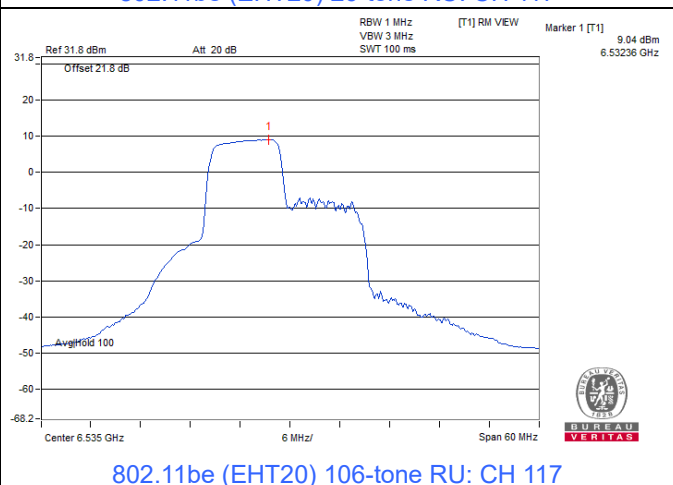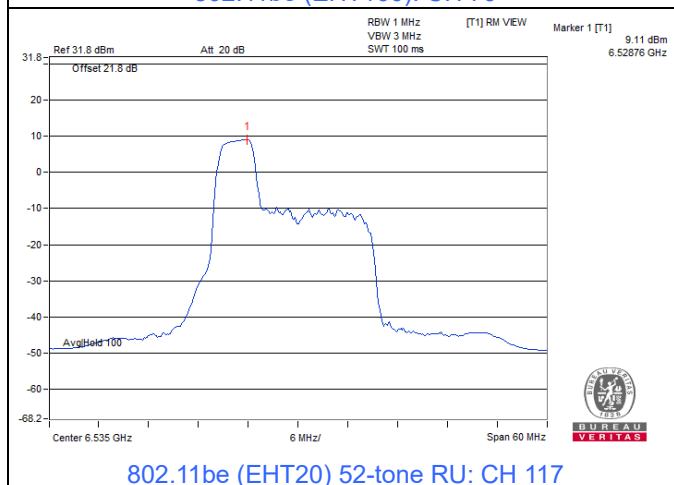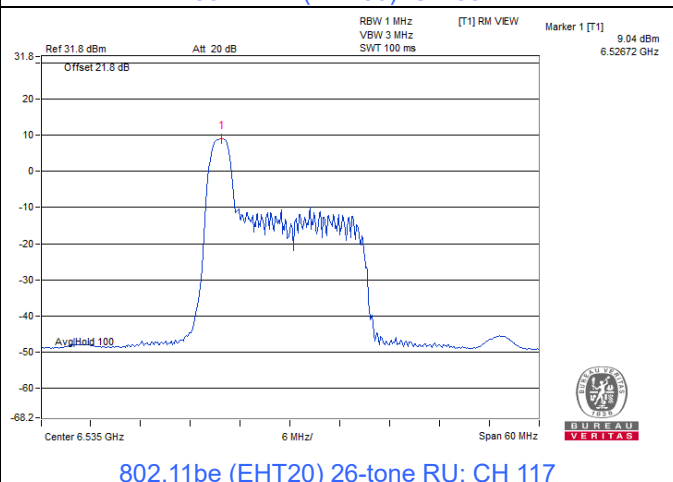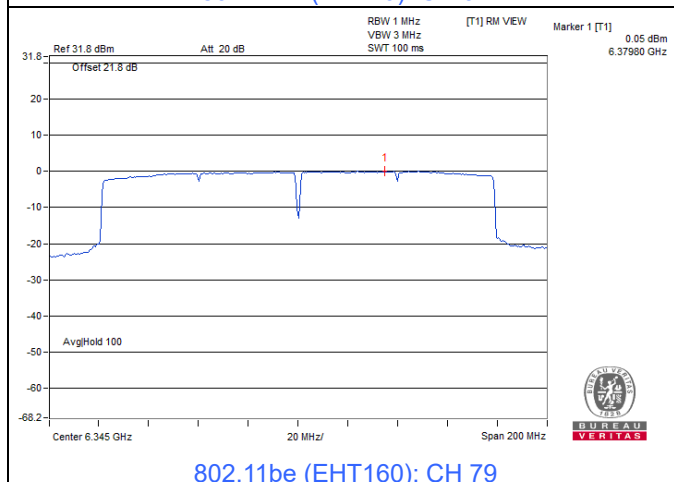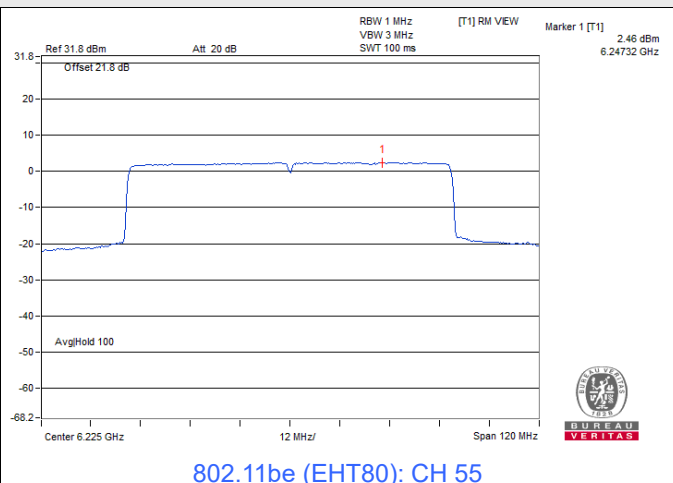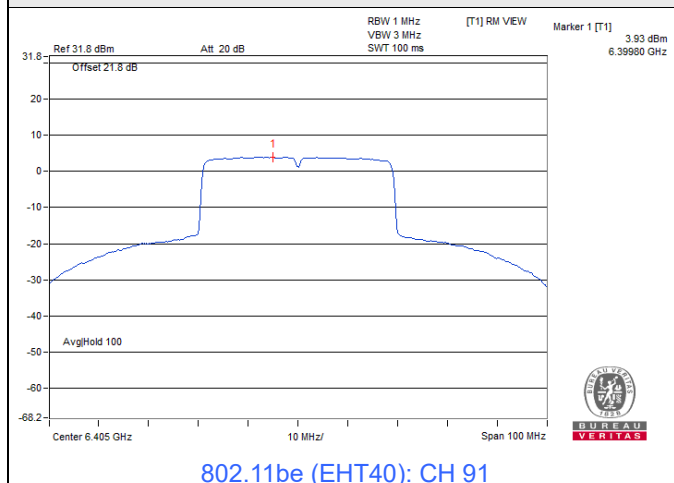

Spectrum Plot of Maximum Value

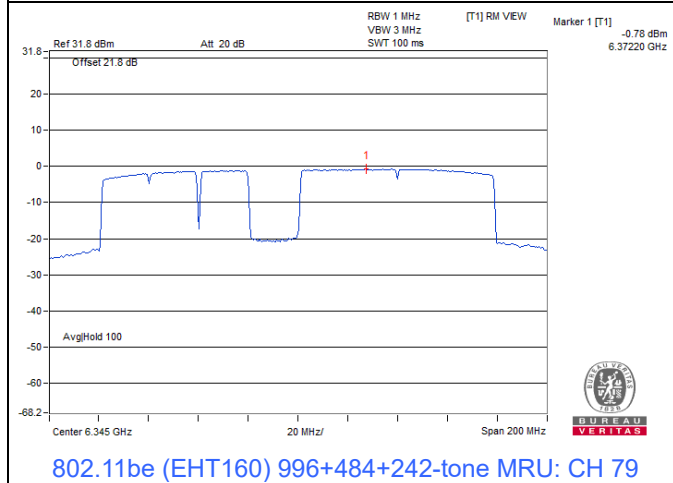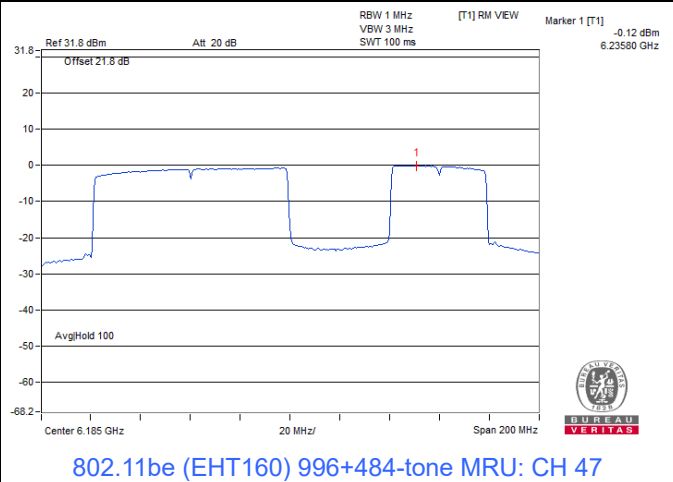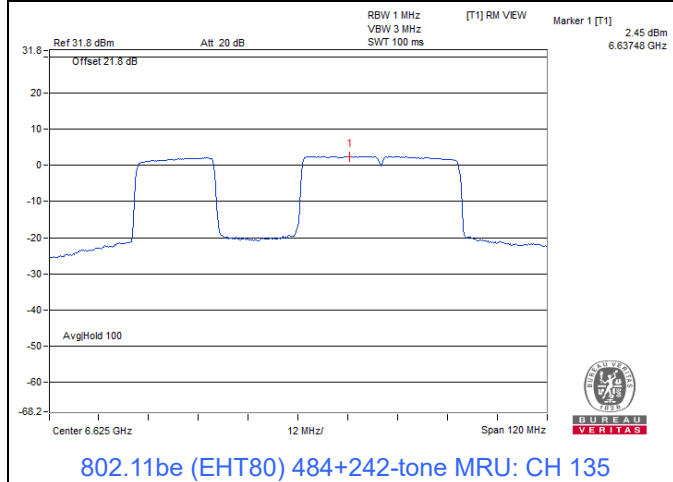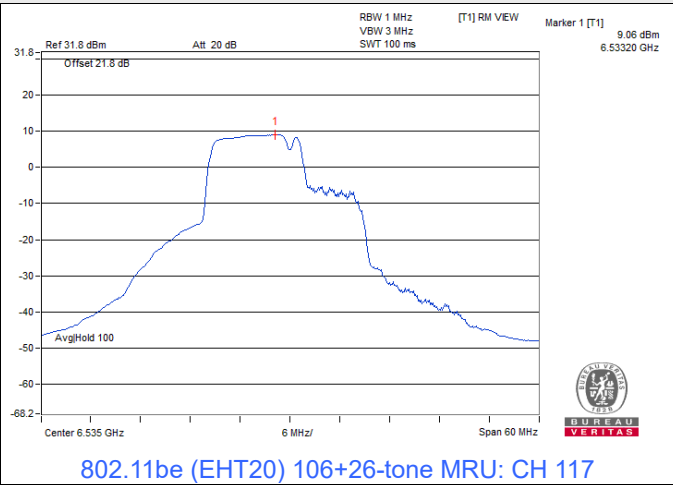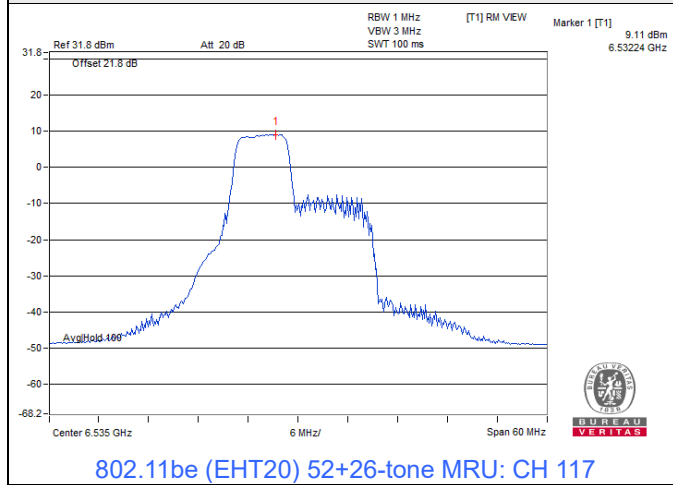

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

2Tx

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	5.94	5.86	8.91	8.01	16.92	17	Pass
49	6195	5.57	6.23	8.92	8.01	16.93	17	Pass
93	6415	5.35	6.50	8.97	8.01	16.98	17	Pass
117	6535	5.64	6.19	8.93	8.01	16.94	17	Pass
149	6695	5.80	5.99	8.91	8.01	16.92	17	Pass
181	6855	5.82	5.93	8.89	8.01	16.9	17	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
- For U-NII-5, The directional gain is 8.01 dBi.
- For U-NII-7, The directional gain is 8.01 dBi.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	6.82	7.82	10.36	5.00	15.36	17	Pass
49	6195	6.87	7.72	10.33	5.00	15.33	17	Pass
93	6415	6.89	7.91	10.44	5.00	15.44	17	Pass
117	6535	6.44	8.06	10.34	5.00	15.34	17	Pass
149	6695	7.05	7.45	10.26	5.00	15.26	17	Pass
181	6855	6.01	6.29	9.16	5.00	14.16	17	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-5, The directional gain is 5 dBi.
- For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
3	5965	2.91	3.01	5.97	5.00	10.97	17	Pass
51	6205	4.33	4.86	7.61	5.00	12.61	17	Pass
91	6405	4.43	4.46	7.46	5.00	12.46	17	Pass
123	6565	4.01	3.84	6.94	5.00	11.94	17	Pass
147	6685	3.76	3.76	6.77	5.00	11.77	17	Pass
179	6845	3.48	3.31	6.41	5.00	11.41	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
7	5985	-1.39	-1.33	1.65	5.00	6.65	17	Pass
55	6225	1.47	0.73	4.13	5.00	9.13	17	Pass
87	6385	0.86	1.96	4.46	5.00	9.46	17	Pass
135	6625	1.70	1.20	4.47	5.00	9.47	17	Pass
151	6705	0.83	0.70	3.78	5.00	8.78	17	Pass
167	6785	0.84	0.59	3.73	5.00	8.73	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-5.07	-4.57	-1.80	5.00	3.2	17	Pass
47	6185	-2.23	-1.25	1.30	5.00	6.3	17	Pass
79	6345	-1.99	-1.00	1.54	5.00	6.54	17	Pass
143	6665	-2.42	-2.41	0.60	5.00	5.6	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	7.34	7.05	10.21	5.00	15.21	17	Pass
49	6195	7.21	7.23	10.23	5.00	15.23	17	Pass
93	6415	7.43	7.16	10.31	5.00	15.31	17	Pass
117	6535	7.26	7.23	10.26	5.00	15.26	17	Pass
149	6695	7.25	7.16	10.22	5.00	15.22	17	Pass
181	6855	6.00	6.13	9.08	5.00	14.08	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	7.26	7.21	10.25	5.00	15.25	17	Pass
49	6195	7.11	7.21	10.17	5.00	15.17	17	Pass
93	6415	7.15	7.23	10.20	5.00	15.2	17	Pass
117	6535	7.27	7.03	10.16	5.00	15.16	17	Pass
149	6695	7.22	7.05	10.15	5.00	15.15	17	Pass
181	6855	5.98	6.03	9.02	5.00	14.02	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	7.20	7.22	10.22	5.00	15.22	17	Pass
49	6195	7.16	7.13	10.16	5.00	15.16	17	Pass
93	6415	7.32	7.25	10.30	5.00	15.3	17	Pass
117	6535	7.30	7.18	10.25	5.00	15.25	17	Pass
149	6695	7.34	7.13	10.25	5.00	15.25	17	Pass
181	6855	6.15	6.13	9.15	5.00	14.15	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	7.34	7.22	10.29	5.00	15.29	17	Pass
49	6195	7.23	7.18	10.22	5.00	15.22	17	Pass
93	6415	7.29	7.36	10.34	5.00	15.34	17	Pass
117	6535	7.10	7.44	10.28	5.00	15.28	17	Pass
149	6695	7.09	7.29	10.20	5.00	15.2	17	Pass
181	6855	6.09	6.13	9.12	5.00	14.12	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
1	5955	7.22	7.22	10.23	5.00	15.23	17	Pass
49	6195	7.14	7.40	10.28	5.00	15.28	17	Pass
93	6415	7.22	7.29	10.27	5.00	15.27	17	Pass
117	6535	7.13	7.35	10.25	5.00	15.25	17	Pass
149	6695	7.28	7.19	10.25	5.00	15.25	17	Pass
181	6855	6.02	6.03	9.04	5.00	14.04	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
7	5985	-1.41	-1.44	1.59	5.00	6.59	17	Pass
55	6225	1.01	1.02	4.03	5.00	9.03	17	Pass
87	6385	1.39	1.39	4.40	5.00	9.4	17	Pass
135	6625	1.33	1.44	4.40	5.00	9.4	17	Pass
151	6705	0.75	0.62	3.70	5.00	8.7	17	Pass
167	6785	0.58	0.62	3.61	5.00	8.61	17	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-4.72	-4.98	-1.84	5.00	3.16	17	Pass
47	6185	-2.41	-2.39	0.61	5.00	5.61	17	Pass
79	6345	-2.67	-2.17	0.60	5.00	5.6	17	Pass
143	6665	-2.60	-2.84	0.29	5.00	5.29	17	Pass

Notes:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

802.11be (EHT160) 996+484+242-tone MRU







Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1					
15	6025	-4.80	-4.89	-1.83	5.00	3.17	17	Pass
47	6185	-1.85	-1.75	1.21	5.00	6.21	17	Pass
79	6345	-1.55	-1.69	1.39	5.00	6.39	17	Pass
143	6665	-2.52	-2.53	0.49	5.00	5.49	17	Pass

Notes:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For U-NII-5, The directional gain is 5 dBi.
3. For U-NII-7, The directional gain is 5 dBi.

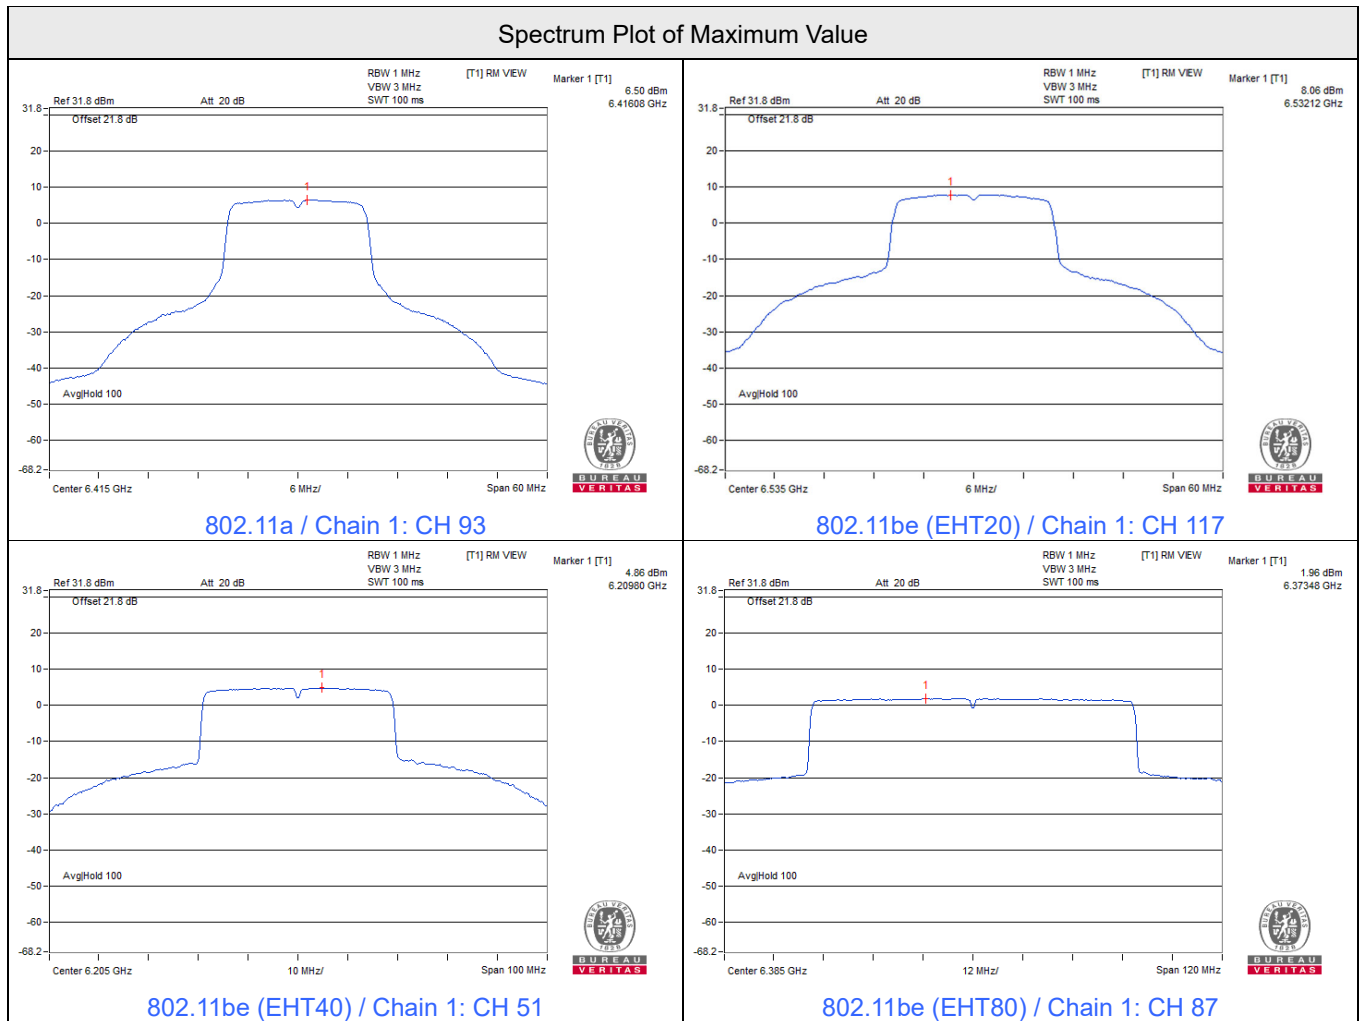


Spectrum Plot of Maximum Value

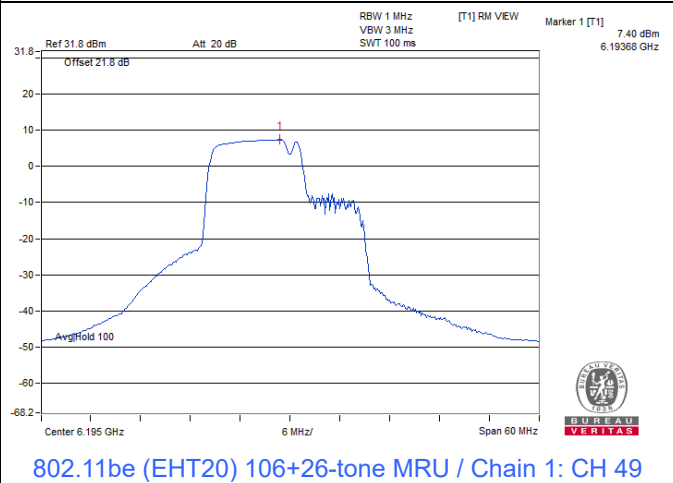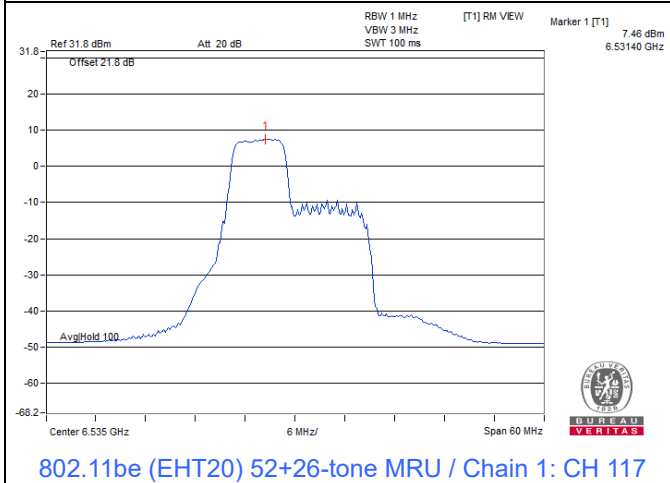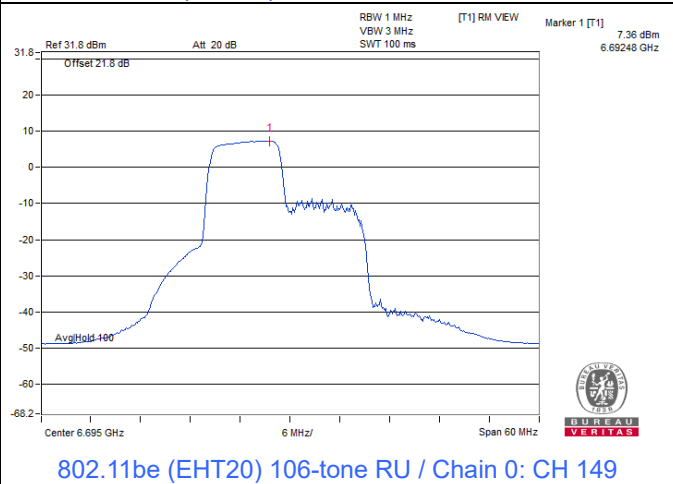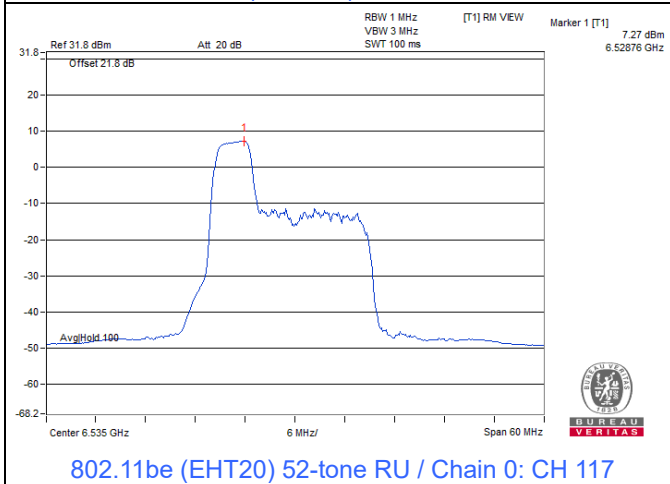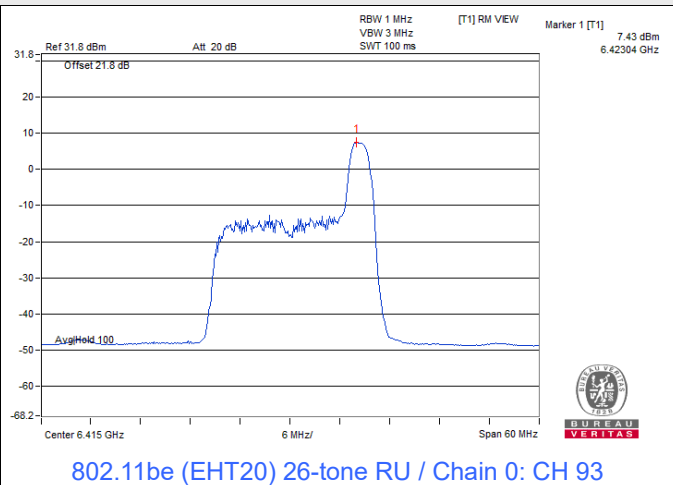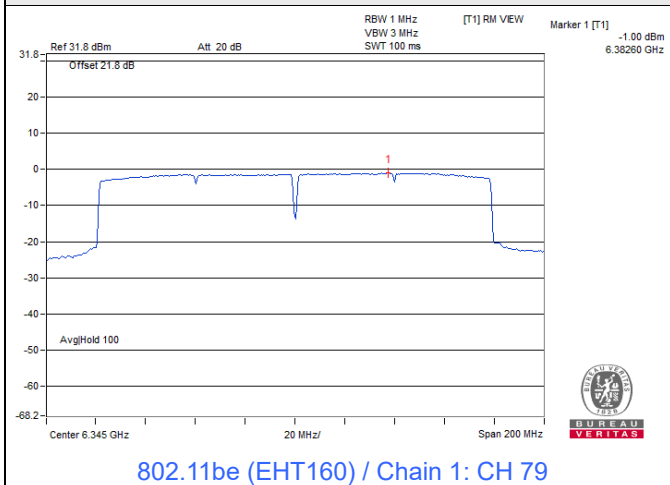


Spectrum Plot of Maximum Value

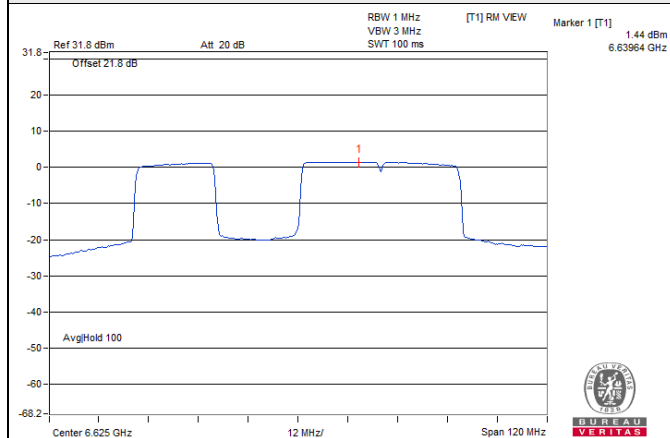

802.11be (EHT80) 484+242-tone MRU / Chain 1: CH 135

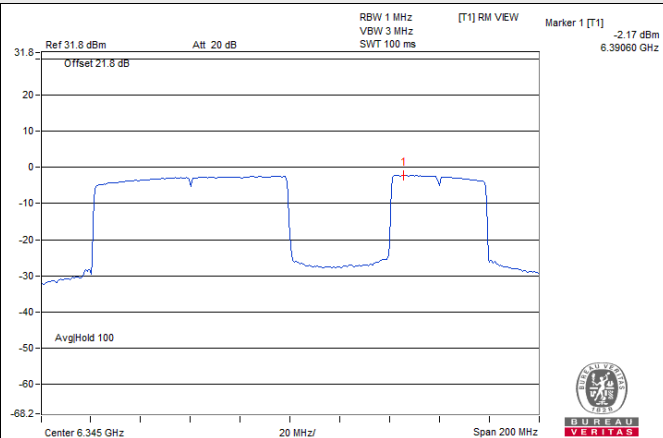

802.11be (EHT160) 996+484-tone MRU / Chain 1: CH 79

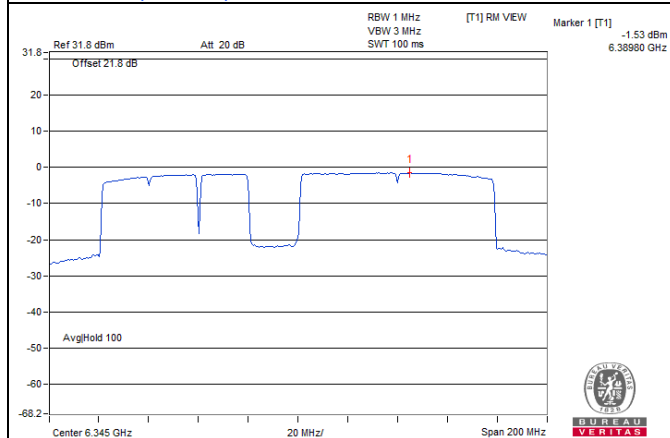

802.11be (EHT160) 996+484+242-tone MRU / Chain 0: CH 79

7.3 Emission Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

1Tx

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	20.17	320	Pass
49	6195	20.42	320	Pass
93	6415	20.6	320	Pass
97	6435	19.94	320	Pass
105	6475	20.44	320	Pass
113	6515	20.64	320	Pass
117	6535	21.41	320	Pass
149	6695	20.92	320	Pass
181	6855	21.42	320	Pass
185	6875	20.62	320	Pass
209	6995	21.13	320	Pass
233	7115	20.41	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	20.63	320	Pass
49	6195	20.78	320	Pass
93	6415	20.99	320	Pass
97	6435	20.61	320	Pass
105	6475	20.85	320	Pass
113	6515	20.8	320	Pass
117	6535	20.89	320	Pass
149	6695	20.88	320	Pass
181	6855	20.57	320	Pass
185	6875	20.77	320	Pass
209	6995	20.78	320	Pass
233	7115	20.85	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
3	5965	40.14	320	Pass
51	6205	40.03	320	Pass
91	6405	39.93	320	Pass
99	6445	40.09	320	Pass
107	6485	40.09	320	Pass
115	6525	40.13	320	Pass
123	6565	40.15	320	Pass
147	6685	39.94	320	Pass
179	6845	40.06	320	Pass
187	6885	40.14	320	Pass
203	6965	39.9	320	Pass
227	7085	39.97	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	80.91	320	Pass
55	6225	81.15	320	Pass
87	6385	81.04	320	Pass
103	6465	81.13	320	Pass
119	6545	81.26	320	Pass
135	6625	81.17	320	Pass
151	6705	81	320	Pass
167	6785	81.17	320	Pass
183	6865	81.38	320	Pass
199	6945	80.89	320	Pass
215	7025	81.18	320	Pass

802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	163.85	320	Pass
47	6185	164.18	320	Pass
79	6345	164.05	320	Pass
111	6505	162.76	320	Pass
143	6665	164.11	320	Pass
175	6825	162.88	320	Pass
207	6985	162.7	320	Pass

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.22	320	Pass
49	6195	19.21	320	Pass
93	6415	19.34	320	Pass
97	6435	19.24	320	Pass
105	6475	19.16	320	Pass
113	6515	19.32	320	Pass
117	6535	19.25	320	Pass
149	6695	19.36	320	Pass
181	6855	19.37	320	Pass
185	6875	19.26	320	Pass
209	6995	19.3	320	Pass
233	7115	19.21	320	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.32	320	Pass
49	6195	19.34	320	Pass
93	6415	19.31	320	Pass
97	6435	19.29	320	Pass
105	6475	19.2	320	Pass
113	6515	19.39	320	Pass
117	6535	19.4	320	Pass
149	6695	19.29	320	Pass
181	6855	19.16	320	Pass
185	6875	19.26	320	Pass
209	6995	19.44	320	Pass
233	7115	19.67	320	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.4	320	Pass
49	6195	19.41	320	Pass
93	6415	19.37	320	Pass
97	6435	19.5	320	Pass
105	6475	19.44	320	Pass
113	6515	19.57	320	Pass
117	6535	19.42	320	Pass
149	6695	19.4	320	Pass
181	6855	19.32	320	Pass
185	6875	19.3	320	Pass
209	6995	19.43	320	Pass
233	7115	19.82	320	Pass

802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.27	320	Pass
49	6195	18.31	320	Pass
93	6415	18.33	320	Pass
97	6435	18.32	320	Pass
105	6475	18.35	320	Pass
113	6515	18.31	320	Pass
117	6535	18.27	320	Pass
149	6695	18.24	320	Pass
181	6855	18.23	320	Pass
185	6875	18.32	320	Pass
209	6995	18.3	320	Pass
233	7115	18.31	320	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.55	320	Pass
49	6195	19.35	320	Pass
93	6415	19.64	320	Pass
97	6435	19.36	320	Pass
105	6475	19.48	320	Pass
113	6515	19.42	320	Pass
117	6535	19.42	320	Pass
149	6695	19.45	320	Pass
181	6855	19.37	320	Pass
185	6875	19.47	320	Pass
209	6995	19.57	320	Pass
233	7115	19.34	320	Pass

802.11be (EHT80) 484+242-tone MRU


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	81.16	320	Pass
55	6225	81	320	Pass
87	6385	81.23	320	Pass
103	6465	80.98	320	Pass
119	6545	81.2	320	Pass
135	6625	80.82	320	Pass
151	6705	81	320	Pass
167	6785	80.89	320	Pass
183	6865	81.41	320	Pass
199	6945	80.84	320	Pass
215	7025	80.96	320	Pass

802.11be (EHT160) 996+484-tone MRU







Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	162.65	320	Pass
47	6185	162.76	320	Pass
79	6345	163.25	320	Pass
111	6505	162.64	320	Pass
143	6665	162.79	320	Pass
175	6825	162.47	320	Pass
207	6985	162.61	320	Pass

802.11be (EHT160) 996+484+242-tone MRU




Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	164.07	320	Pass
47	6185	163.37	320	Pass
79	6345	172.68	320	Pass
111	6505	162.79	320	Pass
143	6665	172.59	320	Pass
175	6825	162.69	320	Pass
207	6985	162.87	320	Pass

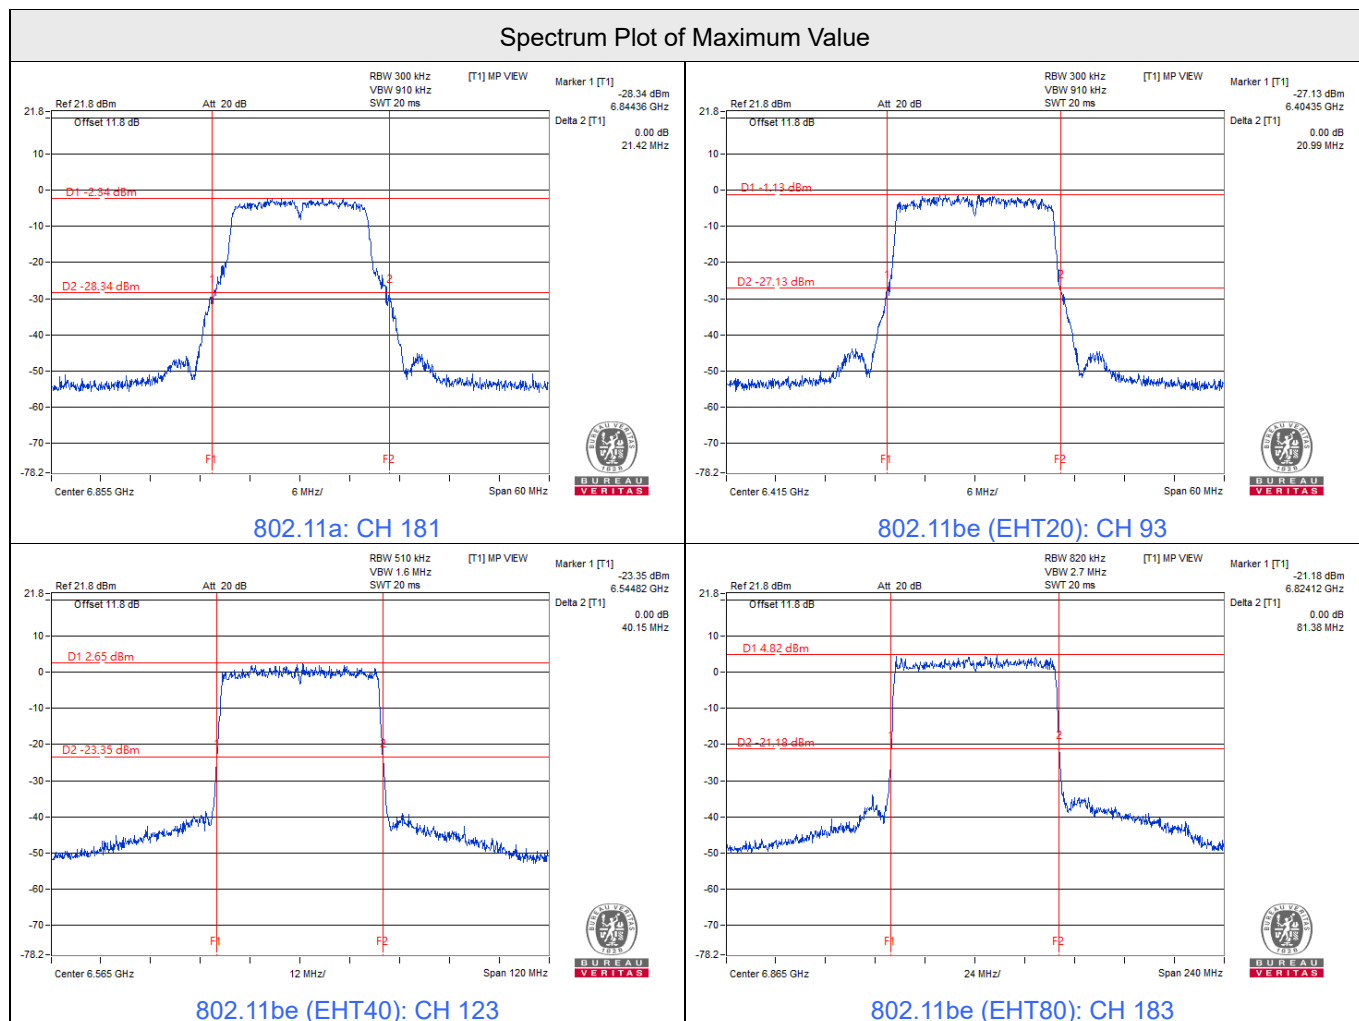

Spectrum Plot of Maximum Value

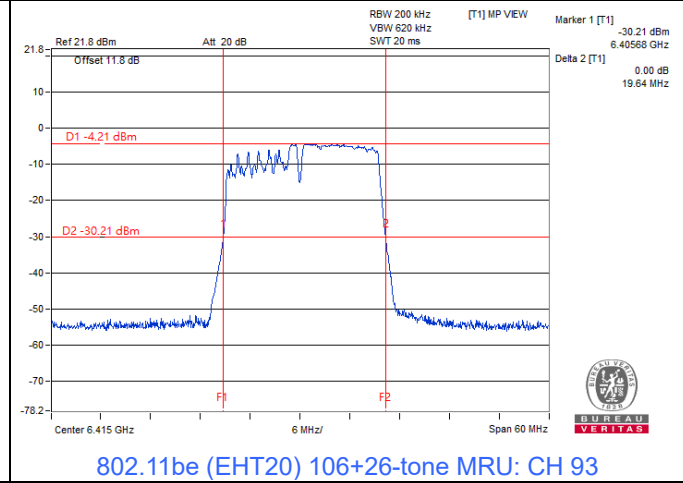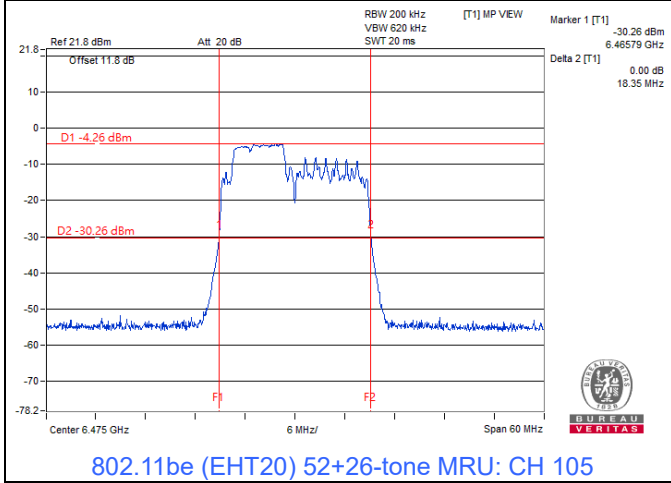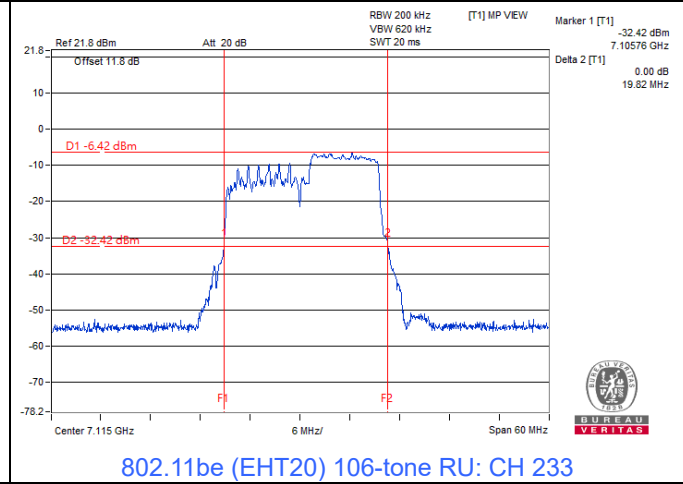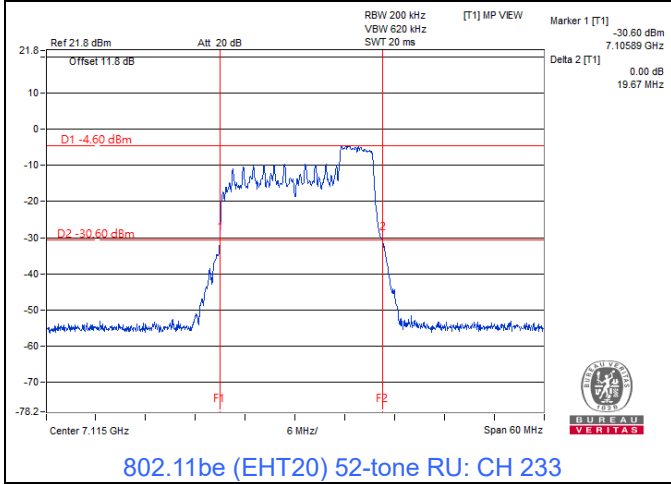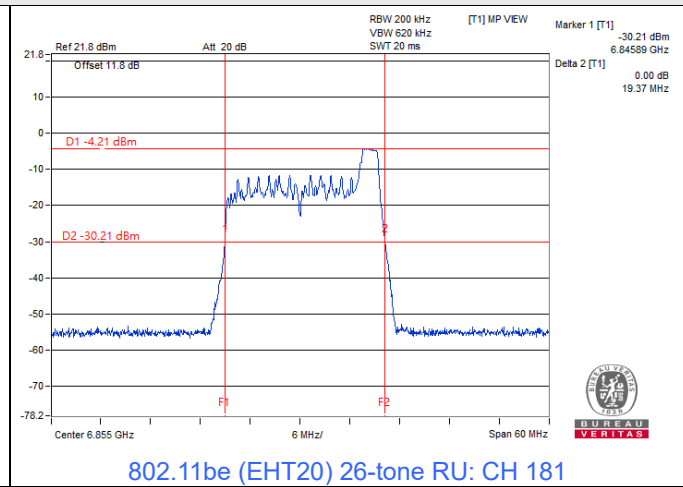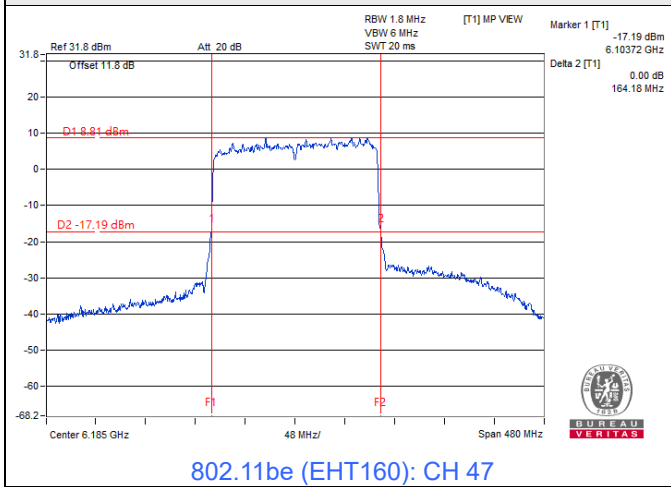

Spectrum Plot of Maximum Value

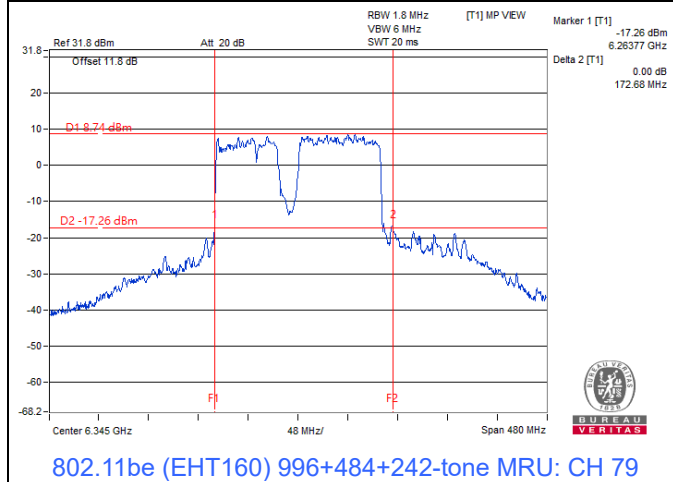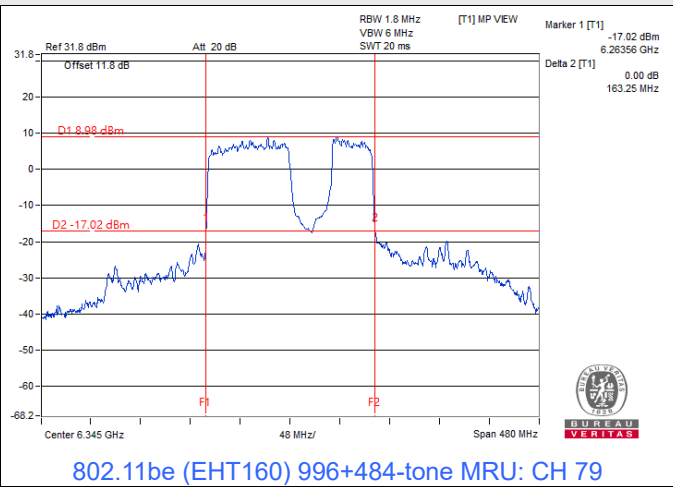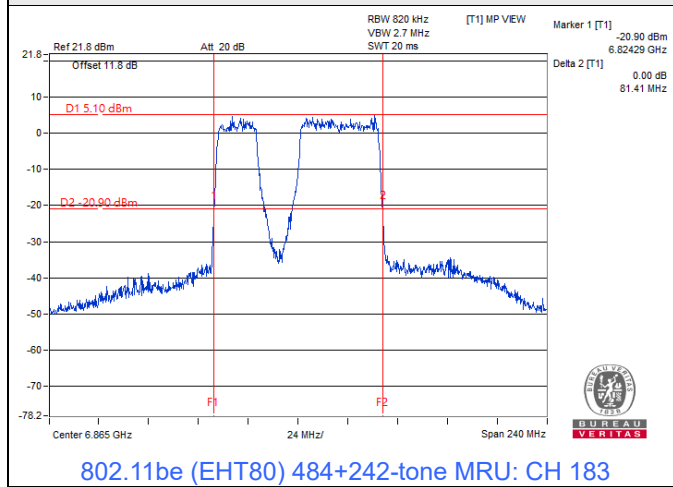

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client

2Tx

802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	20.31	20.55	320	Pass
49	6195	20.73	20.81	320	Pass
93	6415	20.36	19.90	320	Pass
97	6435	20.64	20.45	320	Pass
105	6475	20.85	19.91	320	Pass
113	6515	20.73	20.22	320	Pass
117	6535	20.70	20.54	320	Pass
149	6695	20.76	20.66	320	Pass
181	6855	20.97	19.64	320	Pass
185	6875	19.63	20.07	320	Pass
209	6995	20.58	20.34	320	Pass
233	7115	20.86	19.81	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	20.54	20.86	320	Pass
49	6195	20.62	21.35	320	Pass
93	6415	20.78	20.63	320	Pass
97	6435	20.80	20.70	320	Pass
105	6475	20.83	20.59	320	Pass
113	6515	20.49	21.04	320	Pass
117	6535	20.82	20.83	320	Pass
149	6695	20.82	20.74	320	Pass
181	6855	20.57	20.69	320	Pass
185	6875	20.71	20.96	320	Pass
209	6995	20.58	20.58	320	Pass
233	7115	20.67	20.37	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	5965	39.95	39.86	320	Pass
51	6205	39.95	39.97	320	Pass
91	6405	39.89	39.87	320	Pass
99	6445	40.17	40.05	320	Pass
107	6485	40.07	39.91	320	Pass
115	6525	39.95	40.09	320	Pass
123	6565	40.13	40.17	320	Pass
147	6685	40.18	39.76	320	Pass
179	6845	39.96	40.10	320	Pass
187	6885	40.04	39.96	320	Pass
203	6965	40.04	39.96	320	Pass
227	7085	40.15	40.13	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	81.30	80.78	320	Pass
55	6225	81.33	81.25	320	Pass
87	6385	81.02	81.08	320	Pass
103	6465	81.18	80.88	320	Pass
119	6545	81.24	81.07	320	Pass
135	6625	80.91	81.17	320	Pass
151	6705	80.73	81.04	320	Pass
167	6785	81.06	81.29	320	Pass
183	6865	81.02	80.81	320	Pass
199	6945	80.80	81.24	320	Pass
215	7025	81.03	81.37	320	Pass

802.11be (EHT160)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	163.39	163.13	320	Pass
47	6185	163.18	164.48	320	Pass
79	6345	164.43	164.27	320	Pass
111	6505	163.05	163.01	320	Pass
143	6665	164.12	162.96	320	Pass
175	6825	163.07	162.79	320	Pass
207	6985	164.42	164.01	320	Pass

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.21	19.20	320	Pass
49	6195	19.24	19.20	320	Pass
93	6415	19.37	19.23	320	Pass
97	6435	19.34	19.07	320	Pass
105	6475	19.35	19.28	320	Pass
113	6515	19.18	19.24	320	Pass
117	6535	19.22	19.25	320	Pass
149	6695	19.35	19.27	320	Pass
181	6855	19.26	19.20	320	Pass
185	6875	19.17	19.17	320	Pass
209	6995	19.27	19.37	320	Pass
233	7115	19.35	19.18	320	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.34	19.26	320	Pass
49	6195	19.34	19.23	320	Pass
93	6415	19.45	19.28	320	Pass
97	6435	19.33	19.24	320	Pass
105	6475	19.22	19.23	320	Pass
113	6515	19.40	19.42	320	Pass
117	6535	19.15	19.16	320	Pass
149	6695	19.11	19.27	320	Pass
181	6855	19.34	19.16	320	Pass
185	6875	19.14	19.24	320	Pass
209	6995	19.15	19.27	320	Pass
233	7115	19.80	19.49	320	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.46	19.48	320	Pass
49	6195	19.51	19.41	320	Pass
93	6415	19.40	19.24	320	Pass
97	6435	19.36	19.41	320	Pass
105	6475	19.29	19.34	320	Pass
113	6515	19.43	19.33	320	Pass
117	6535	19.38	19.37	320	Pass
149	6695	19.42	19.29	320	Pass
181	6855	19.51	19.24	320	Pass
185	6875	19.27	19.39	320	Pass
209	6995	19.30	19.42	320	Pass
233	7115	19.50	19.42	320	Pass

802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.23	18.32	320	Pass
49	6195	18.31	18.24	320	Pass
93	6415	18.24	18.34	320	Pass
97	6435	18.28	18.23	320	Pass
105	6475	18.27	18.27	320	Pass
113	6515	18.24	18.28	320	Pass
117	6535	18.30	18.30	320	Pass
149	6695	18.34	18.24	320	Pass
181	6855	18.23	18.29	320	Pass
185	6875	18.19	18.26	320	Pass
209	6995	18.25	18.25	320	Pass
233	7115	18.22	18.30	320	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.34	19.35	320	Pass
49	6195	19.39	19.42	320	Pass
93	6415	19.46	19.22	320	Pass
97	6435	19.52	19.51	320	Pass
105	6475	19.35	19.39	320	Pass
113	6515	19.36	19.26	320	Pass
117	6535	19.35	19.57	320	Pass
149	6695	19.49	19.43	320	Pass
181	6855	19.37	19.31	320	Pass
185	6875	19.49	19.44	320	Pass
209	6995	19.44	19.44	320	Pass
233	7115	19.78	19.67	320	Pass

802.11be (EHT80) 484+242-tone MRU


Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	80.90	80.93	320	Pass
55	6225	81.00	81.07	320	Pass
87	6385	80.89	80.89	320	Pass
103	6465	81.06	81.02	320	Pass
119	6545	81.29	80.94	320	Pass
135	6625	81.02	81.13	320	Pass
151	6705	80.97	81.06	320	Pass
167	6785	81.21	80.85	320	Pass
183	6865	81.06	80.76	320	Pass
199	6945	80.73	80.69	320	Pass
215	7025	80.97	81.06	320	Pass

802.11be (EHT160) 996+484-tone MRU







Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	162.74	162.45	320	Pass
47	6185	162.49	162.67	320	Pass
79	6345	162.87	162.86	320	Pass
111	6505	162.40	162.48	320	Pass
143	6665	162.74	162.83	320	Pass
175	6825	162.07	162.84	320	Pass
207	6985	162.34	162.73	320	Pass

802.11be (EHT160) 996+484+242-tone MRU


Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	162.68	162.51	320	Pass
47	6185	162.70	162.71	320	Pass
79	6345	162.81	162.56	320	Pass
111	6505	162.26	162.41	320	Pass
143	6665	162.38	162.48	320	Pass
175	6825	162.45	162.21	320	Pass
207	6985	162.62	162.49	320	Pass

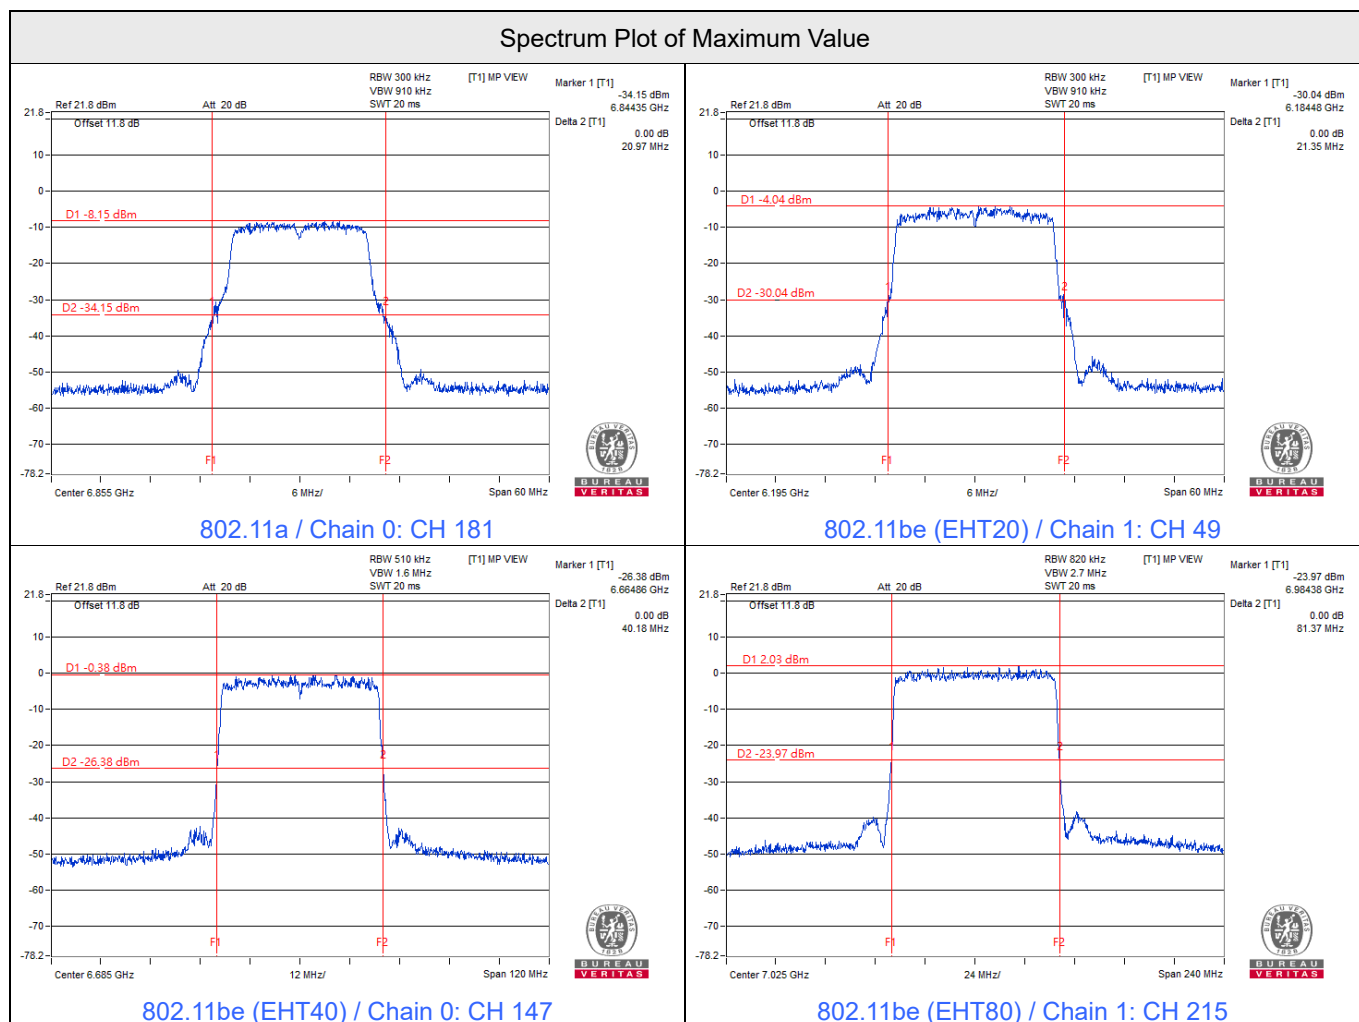


Spectrum Plot of Maximum Value

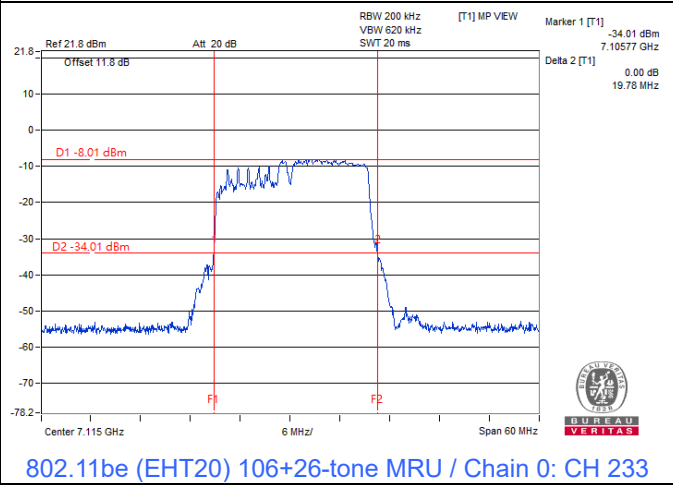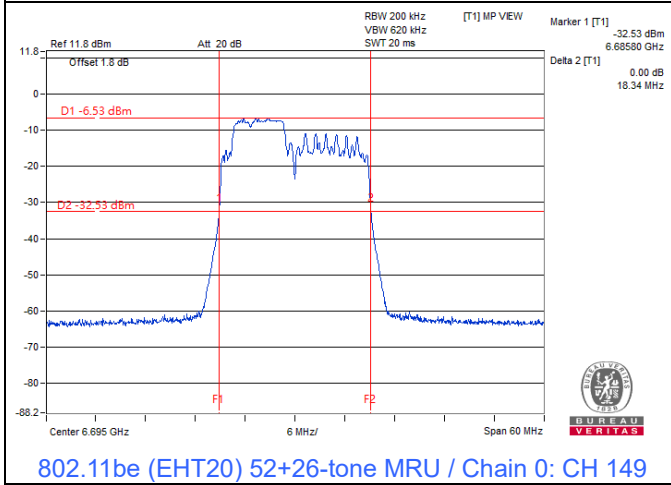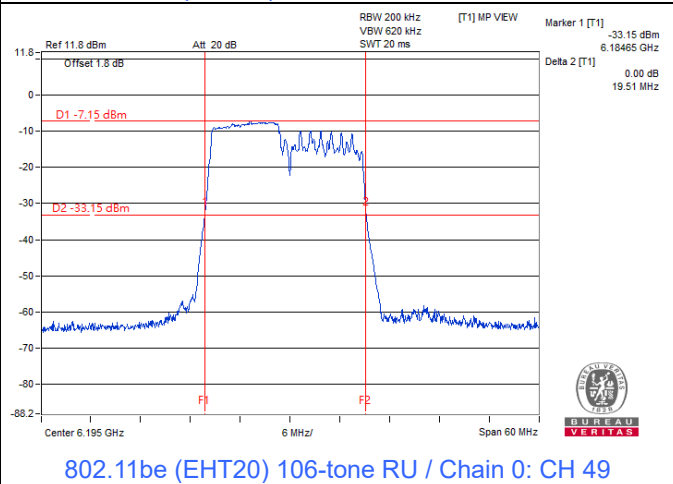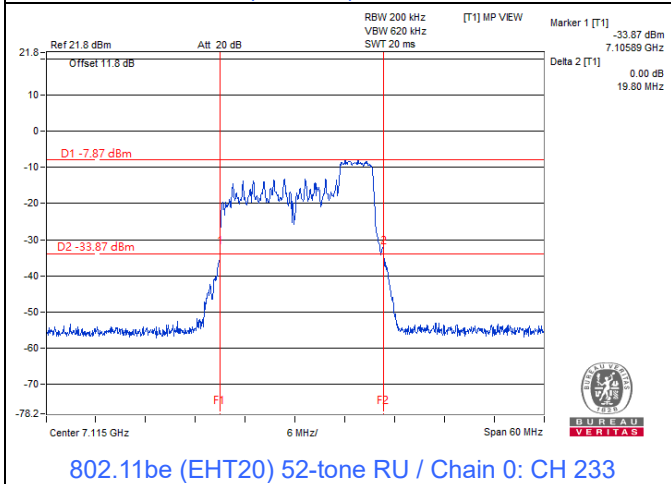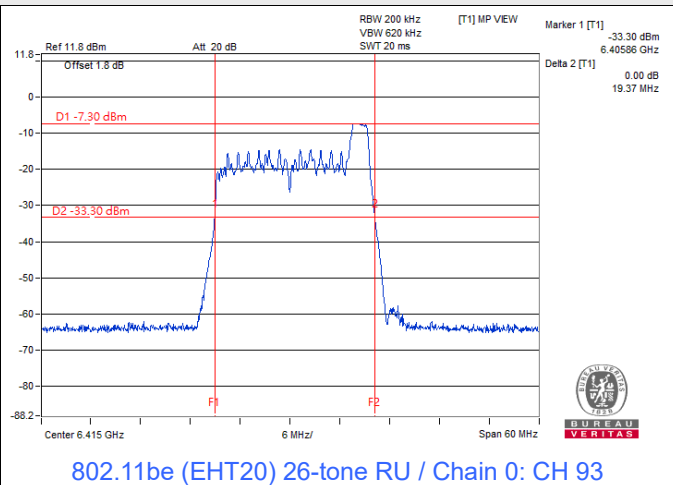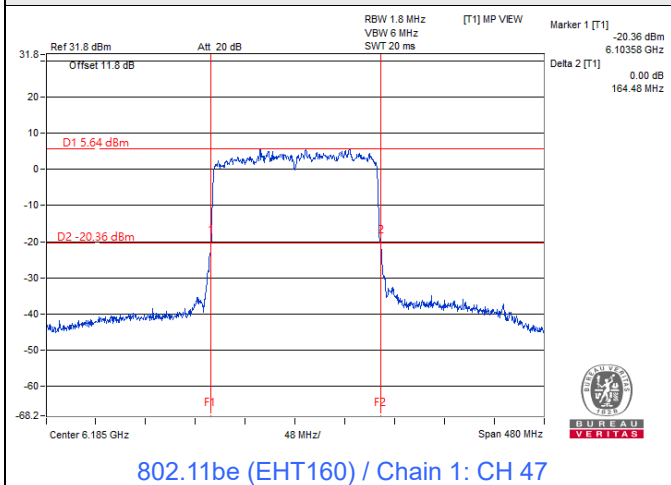


Spectrum Plot of Maximum Value

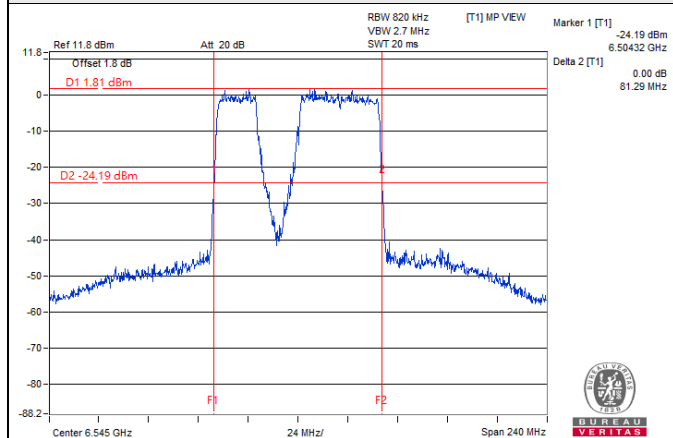

802.11be (EHT80) 484+242-tone MRU / Chain 0: CH 119

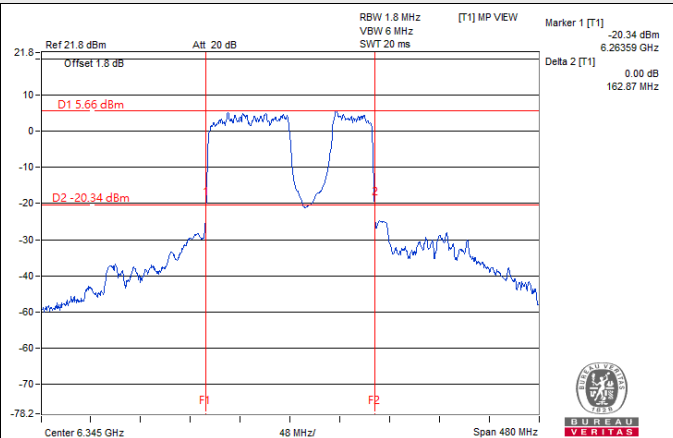

802.11be (EHT160) 996+484-tone MRU / Chain 0: CH 79

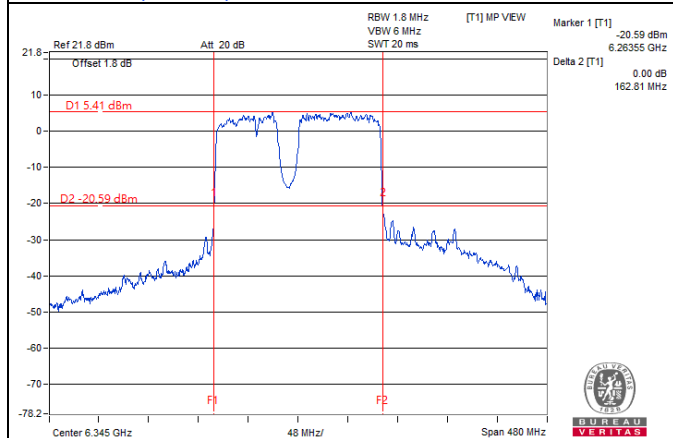

802.11be (EHT160) 996+484+242-tone MRU / Chain 0: CH 79

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

1Tx

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	40.99	320	Pass
49	6195	38.84	320	Pass
93	6415	40.51	320	Pass
117	6535	39.94	320	Pass
149	6695	38.95	320	Pass
181	6855	38.4	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	40.23	320	Pass
49	6195	36.46	320	Pass
93	6415	39.63	320	Pass
117	6535	37.94	320	Pass
149	6695	39.6	320	Pass
181	6855	40.34	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
3	5965	40.08	320	Pass
51	6205	72.76	320	Pass
91	6405	89.12	320	Pass
123	6565	79.78	320	Pass
147	6685	89.46	320	Pass
179	6845	85.5	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	81.31	320	Pass
55	6225	156.37	320	Pass
87	6385	160.21	320	Pass
135	6625	175.01	320	Pass
151	6705	181.11	320	Pass
167	6785	185	320	Pass

802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	165.02	320	Pass
47	6185	289.96	320	Pass
79	6345	307.88	320	Pass
143	6665	319.76	320	Pass

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.37	320	Pass
49	6195	19.26	320	Pass
93	6415	19.23	320	Pass
117	6535	19.31	320	Pass
149	6695	19.21	320	Pass
181	6855	19.26	320	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.37	320	Pass
49	6195	19.24	320	Pass
93	6415	19.84	320	Pass
117	6535	19.24	320	Pass
149	6695	19.3	320	Pass
181	6855	19.43	320	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	19.87	320	Pass
49	6195	20.01	320	Pass
93	6415	22.24	320	Pass
117	6535	19.75	320	Pass
149	6695	19.4	320	Pass
181	6855	19.28	320	Pass

802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	18.27	320	Pass
49	6195	18.29	320	Pass
93	6415	18.41	320	Pass
117	6535	18.31	320	Pass
149	6695	18.33	320	Pass
181	6855	18.34	320	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
1	5955	23.46	320	Pass
49	6195	26.21	320	Pass
93	6415	22.88	320	Pass
117	6535	24.42	320	Pass
149	6695	19.34	320	Pass
181	6855	19.7	320	Pass

802.11be (EHT80) 484+242-tone MRU


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
7	5985	80.89	320	Pass
55	6225	137.15	320	Pass
87	6385	133.56	320	Pass
135	6625	130.67	320	Pass
151	6705	174.53	320	Pass
167	6785	136.83	320	Pass

802.11be (EHT160) 996+484-tone MRU


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	175.04	320	Pass
47	6185	273.09	320	Pass
79	6345	283.01	320	Pass
143	6665	312.02	320	Pass

802.11be (EHT160) 996+484+242-tone MRU


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Maximum Limit (MHz)	Test Result
15	6025	243.21	320	Pass
47	6185	295.51	320	Pass
79	6345	297.28	320	Pass
143	6665	310.81	320	Pass

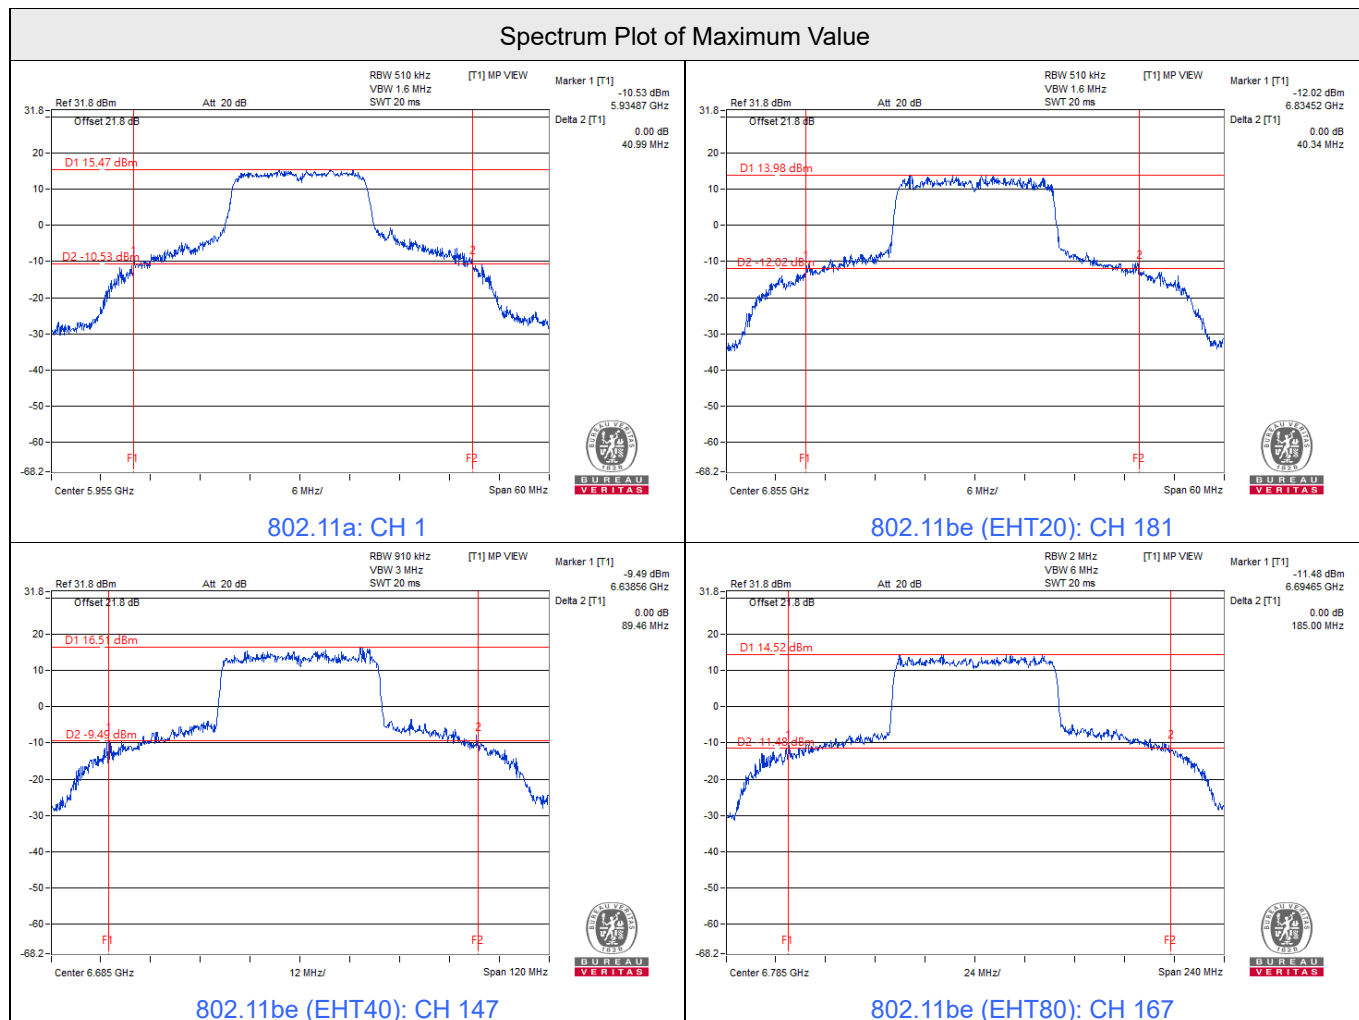


Spectrum Plot of Maximum Value

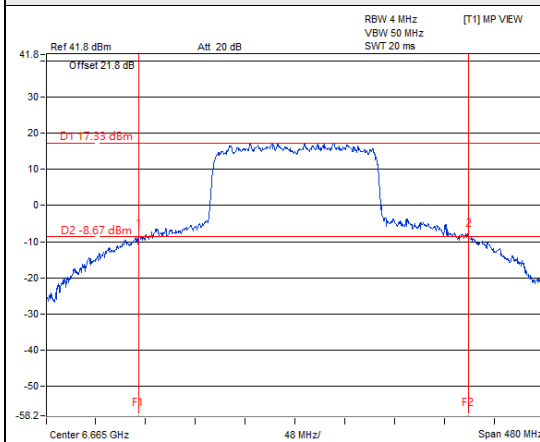


802.11be (EHT160): CH 143

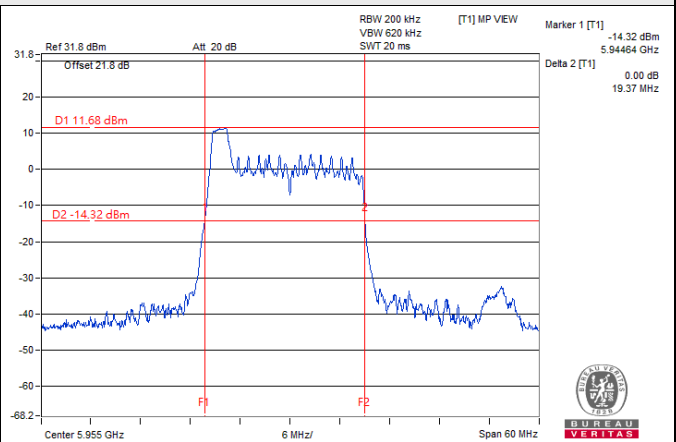


802.11be (EHT20) 26-tone RU: CH 1

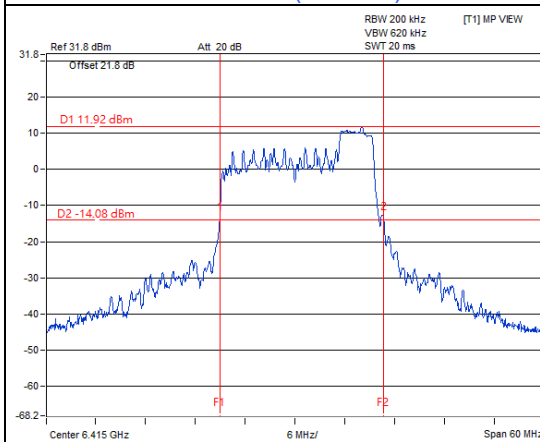


802.11be (EHT20) 52-tone RU: CH 93

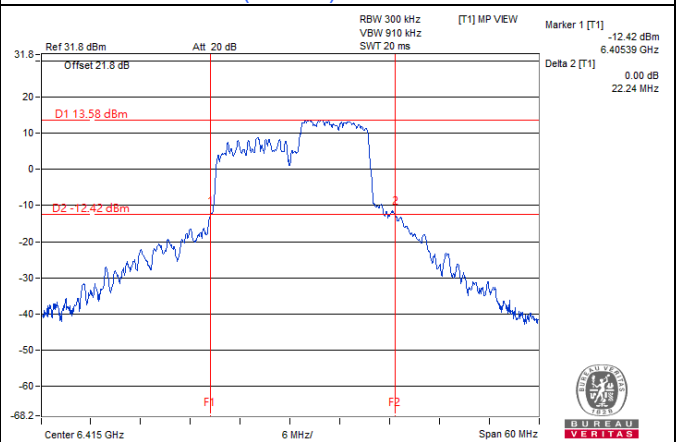

802.11be (EHT20) 106-tone RU: CH 93



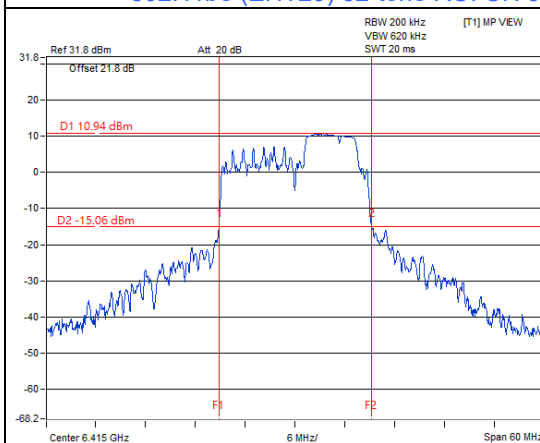


802.11be (EHT20) 52+26-tone MRU: CH 93

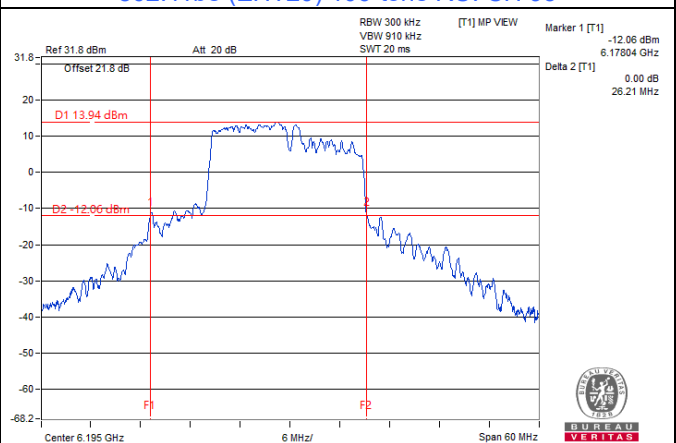

802.11be (EHT20) 106+26-tone MRU: CH 49

Spectrum Plot of Maximum Value

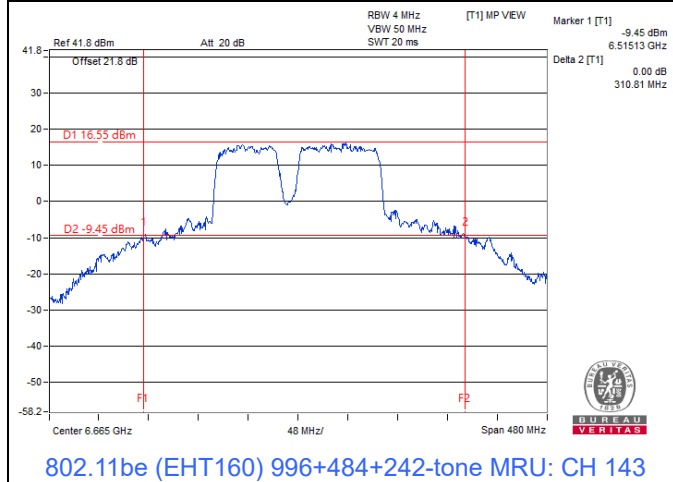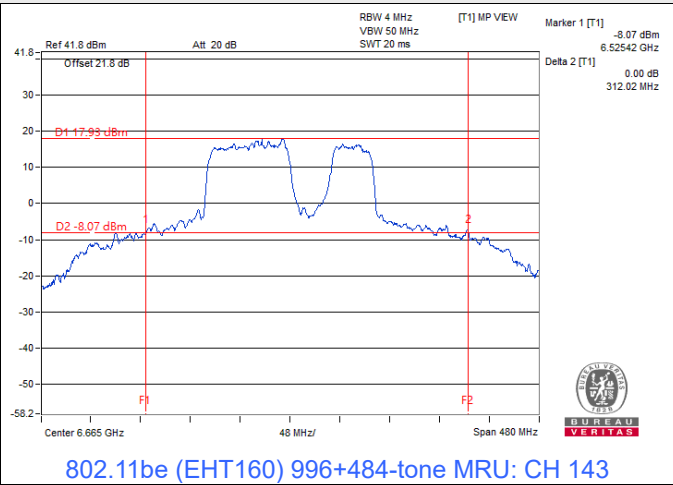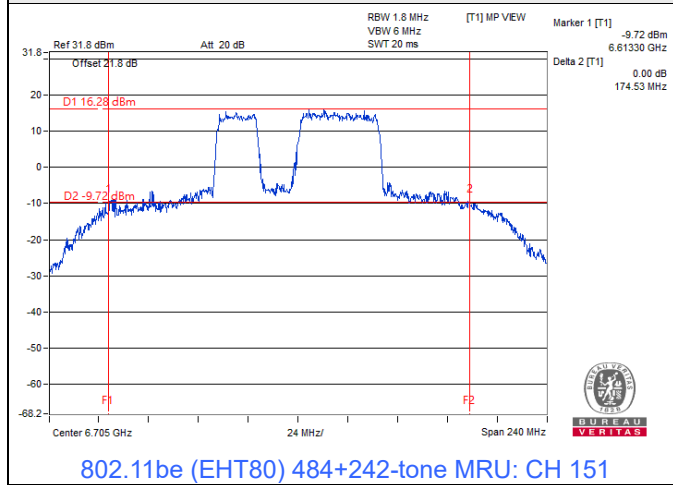

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

Standard client

2Tx

802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	20.60	21.11	320	Pass
49	6195	21.41	21.14	320	Pass
93	6415	25.44	22.21	320	Pass
117	6535	24.78	23.32	320	Pass
149	6695	23.87	22.59	320	Pass
181	6855	25.50	27.42	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	39.41	31.96	320	Pass
49	6195	38.49	36.35	320	Pass
93	6415	34.11	37.28	320	Pass
117	6535	26.61	41.17	320	Pass
149	6695	41.95	41.52	320	Pass
181	6855	35.78	35.14	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	5965	45.25	45.90	320	Pass
51	6205	72.09	77.47	320	Pass
91	6405	74.70	87.11	320	Pass
123	6565	79.28	84.02	320	Pass
147	6685	89.09	81.92	320	Pass
179	6845	74.49	77.83	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	80.91	81.73	320	Pass
55	6225	157.36	147.42	320	Pass
87	6385	165.26	156.46	320	Pass
135	6625	191.16	198.78	320	Pass
151	6705	179.61	158.96	320	Pass
167	6785	153.06	194.18	320	Pass

802.11be (EHT160)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	163.61	164.39	320	Pass
47	6185	280.25	279.77	320	Pass
79	6345	316.48	281.14	320	Pass
143	6665	306.60	268.44	320	Pass

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.13	19.36	320	Pass
49	6195	19.24	19.25	320	Pass
93	6415	19.27	19.28	320	Pass
117	6535	19.33	19.32	320	Pass
149	6695	19.27	19.25	320	Pass
181	6855	19.24	19.25	320	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.36	19.27	320	Pass
49	6195	19.31	19.21	320	Pass
93	6415	19.24	19.22	320	Pass
117	6535	19.29	19.12	320	Pass
149	6695	19.36	19.14	320	Pass
181	6855	19.29	19.22	320	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	19.57	19.48	320	Pass
49	6195	19.44	19.25	320	Pass
93	6415	20.44	19.54	320	Pass
117	6535	19.74	19.47	320	Pass
149	6695	21.17	19.24	320	Pass
181	6855	20.96	19.35	320	Pass

802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	18.31	18.32	320	Pass
49	6195	18.33	18.27	320	Pass
93	6415	18.38	18.47	320	Pass
117	6535	18.34	18.29	320	Pass
149	6695	18.29	18.32	320	Pass
181	6855	18.39	18.43	320	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	5955	21.47	19.48	320	Pass
49	6195	21.66	19.61	320	Pass
93	6415	21.28	21.56	320	Pass
117	6535	23.13	20.06	320	Pass
149	6695	21.70	22.36	320	Pass
181	6855	19.83	20.49	320	Pass

802.11be (EHT80) 484+242-tone MRU


Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
7	5985	81.11	80.82	320	Pass
55	6225	148.11	146.78	320	Pass
87	6385	173.15	176.00	320	Pass
135	6625	157.67	182.21	320	Pass
151	6705	160.67	174.27	320	Pass
167	6785	164.36	178.58	320	Pass

802.11be (EHT160) 996+484-tone MRU







Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	175.95	174.83	320	Pass
47	6185	270.93	309.46	320	Pass
79	6345	251.15	269.93	320	Pass
143	6665	250.59	308.29	320	Pass

802.11be (EHT160) 996+484+242-tone MRU


Channel	Frequency (MHz)	26dB Bandwidth (MHz)		Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1		
15	6025	173.41	172.96	320	Pass
47	6185	307.64	315.76	320	Pass
79	6345	284.32	291.13	320	Pass
143	6665	281.38	283.02	320	Pass

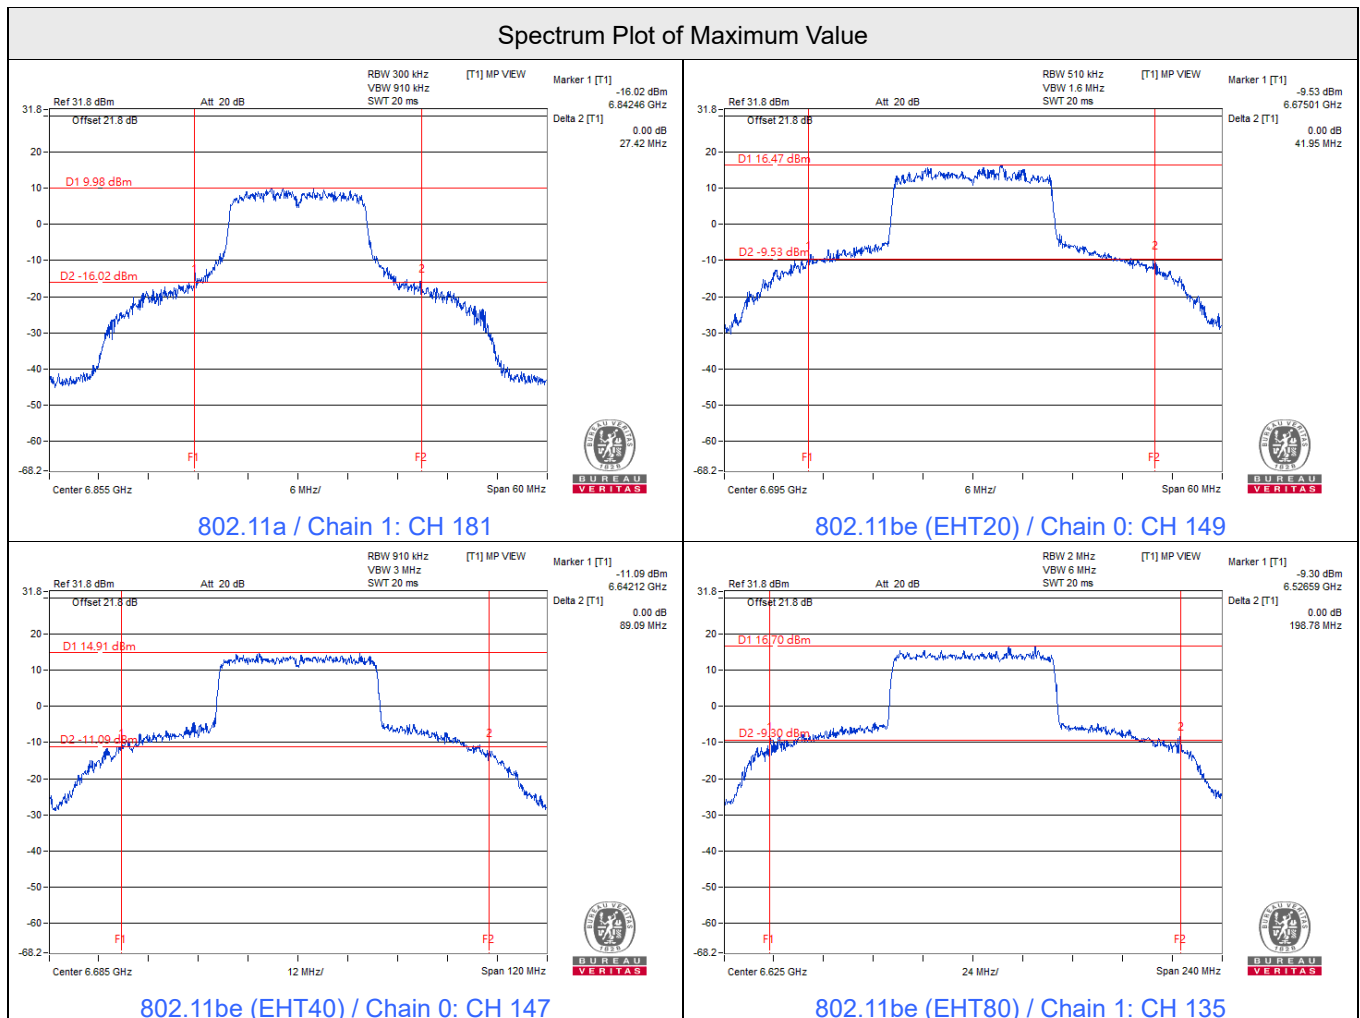


Spectrum Plot of Maximum Value

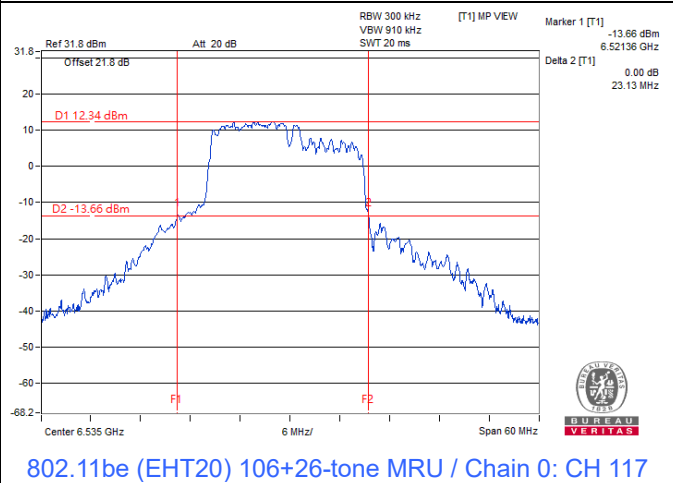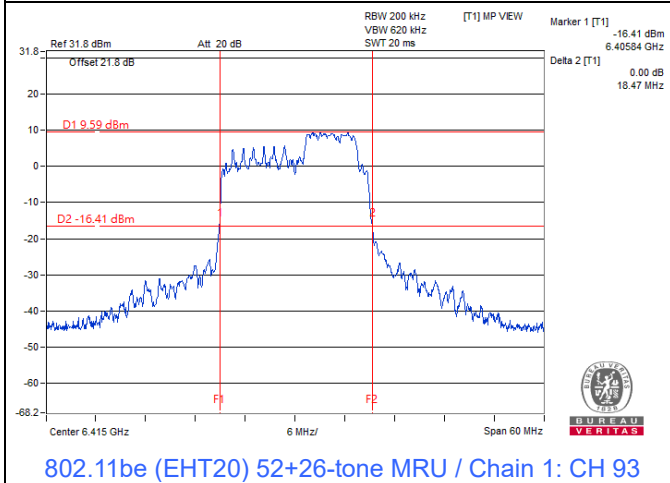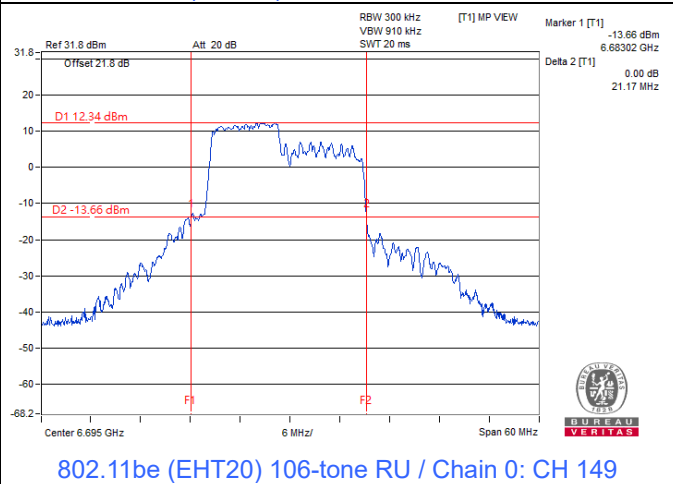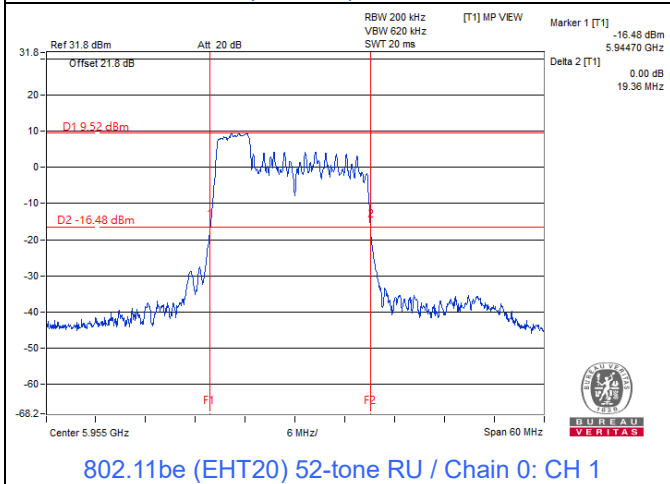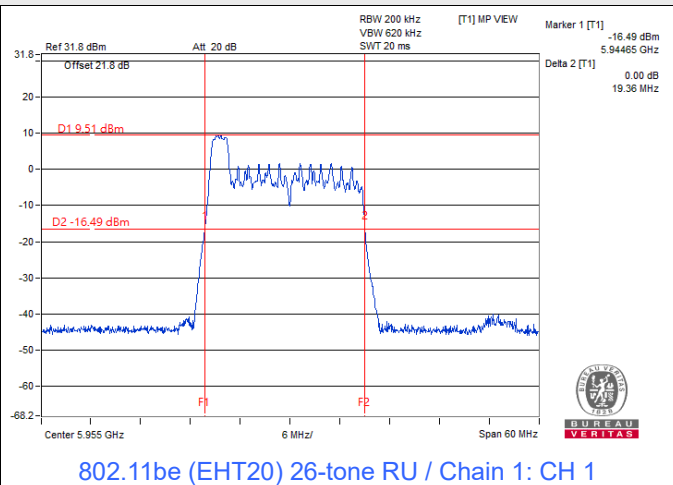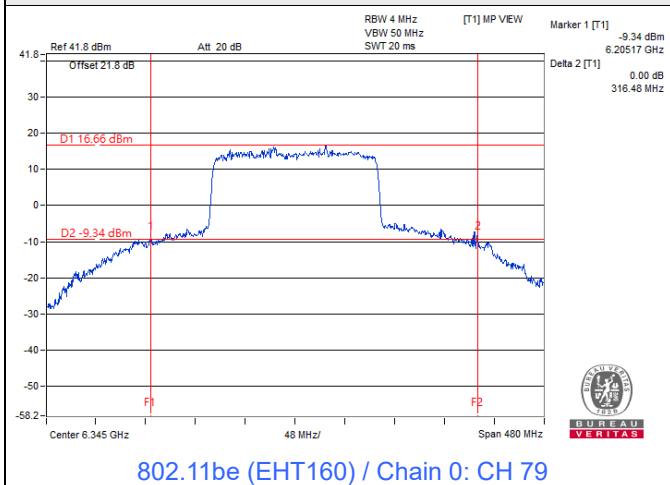


Spectrum Plot of Maximum Value

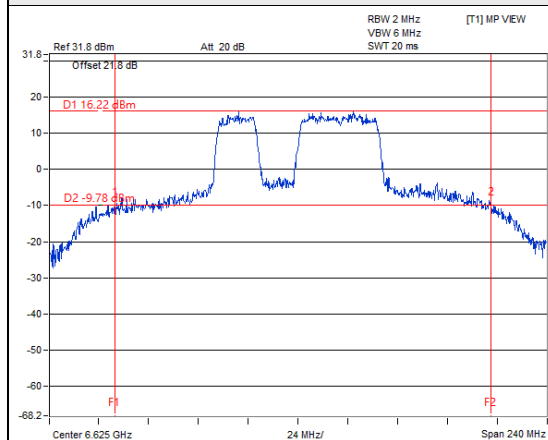

802.11be (EHT80) 484+242-tone MRU / Chain 1: CH 135

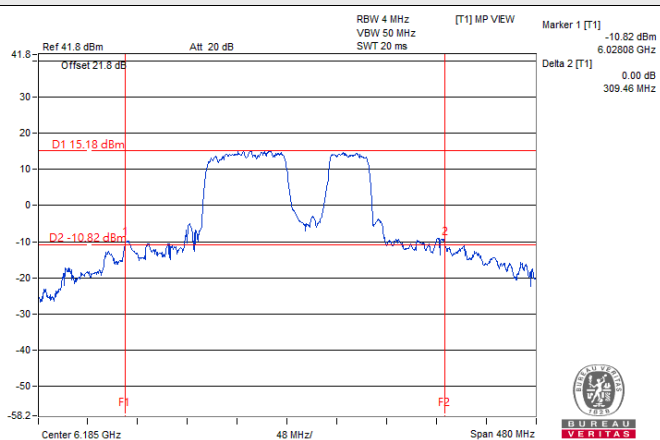

802.11be (EHT160) 996+484-tone MRU / Chain 1: CH 47

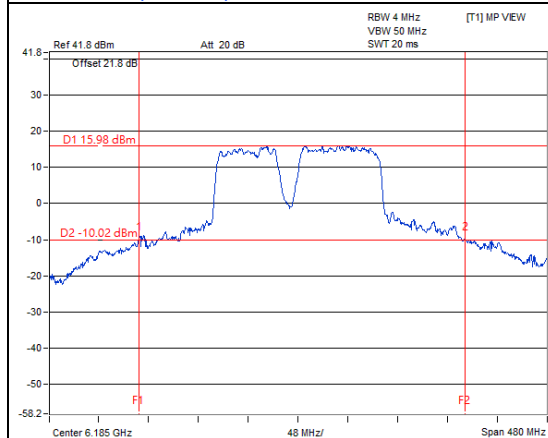

802.11be (EHT160) 996+484+242-tone MRU / Chain 1: CH 47


7.4 In-Band Emission Mask

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

Indoor client


1Tx

802.11a

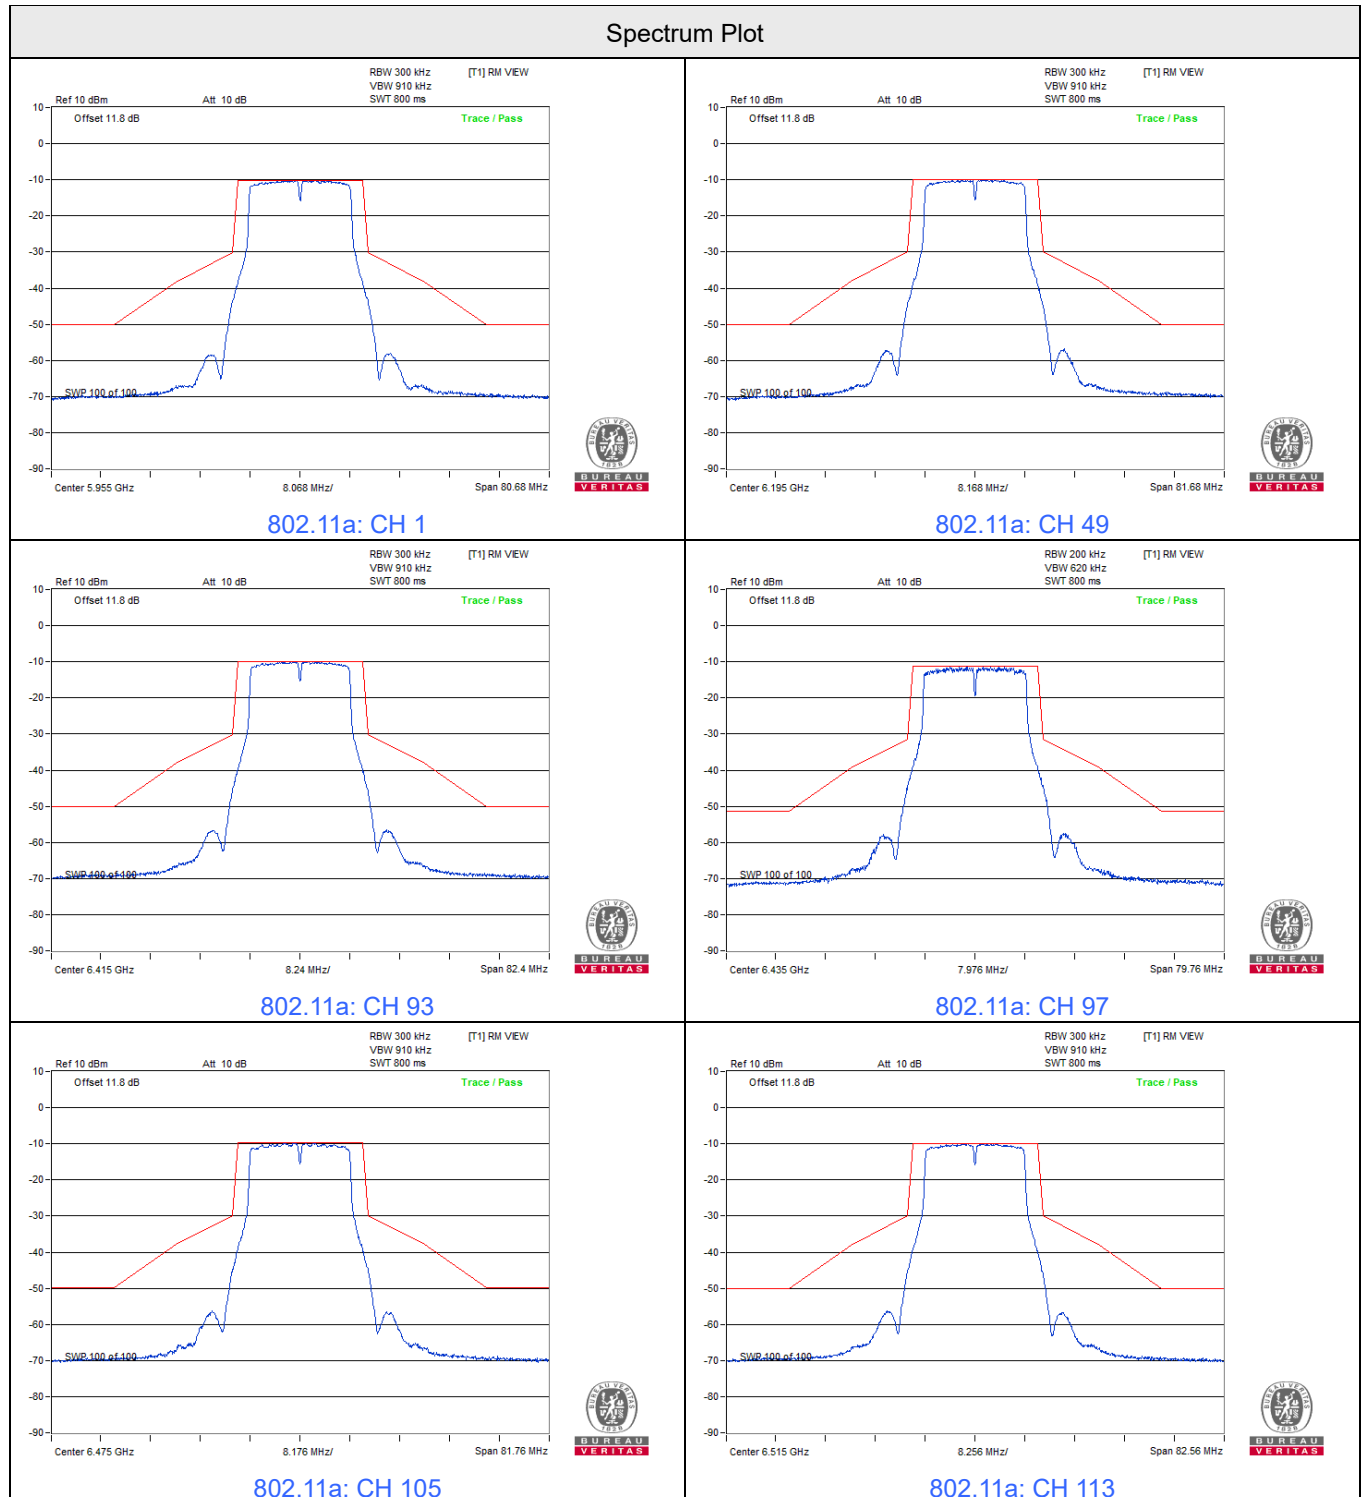





Spectrum Plot

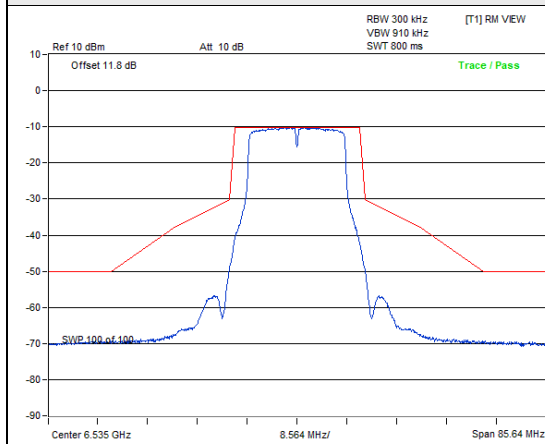


802.11a: CH 117

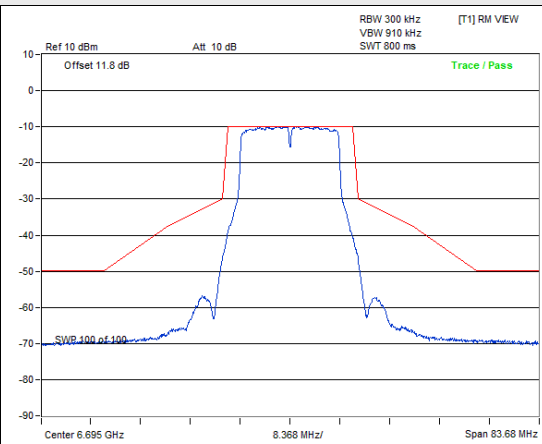


802.11a: CH 149

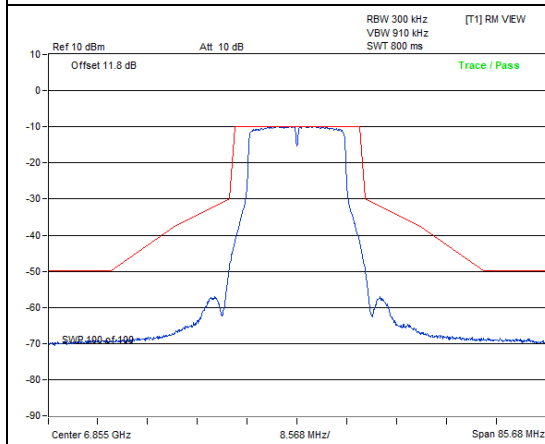


802.11a: CH 181

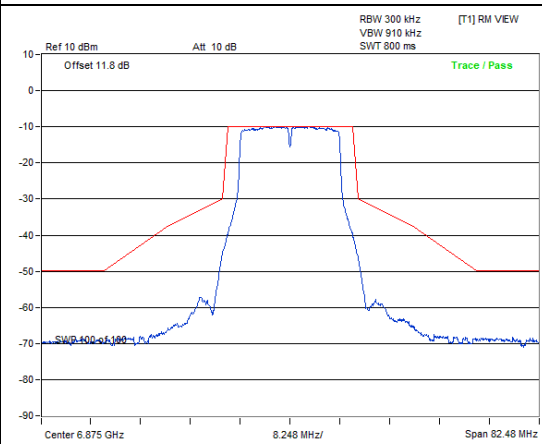

802.11a: CH 185

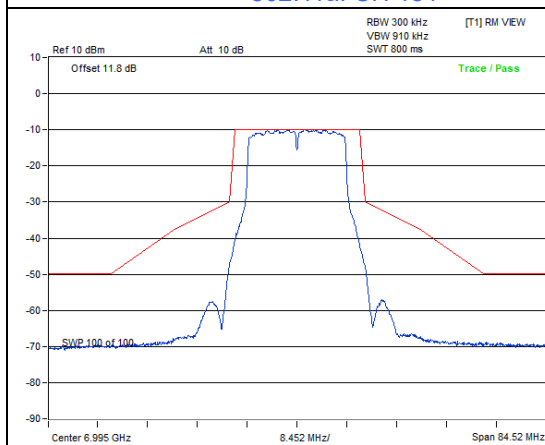


802.11a: CH 209

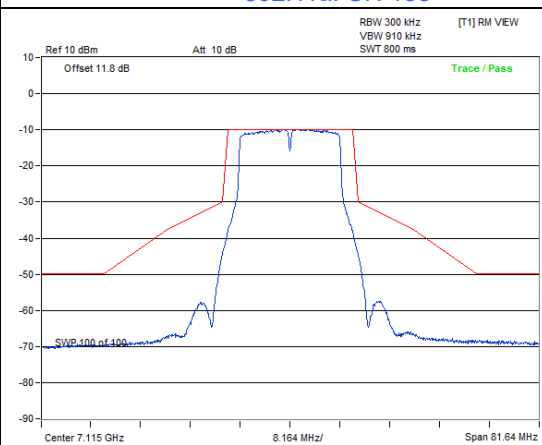


802.11a: CH 233


802.11be (EHT20)

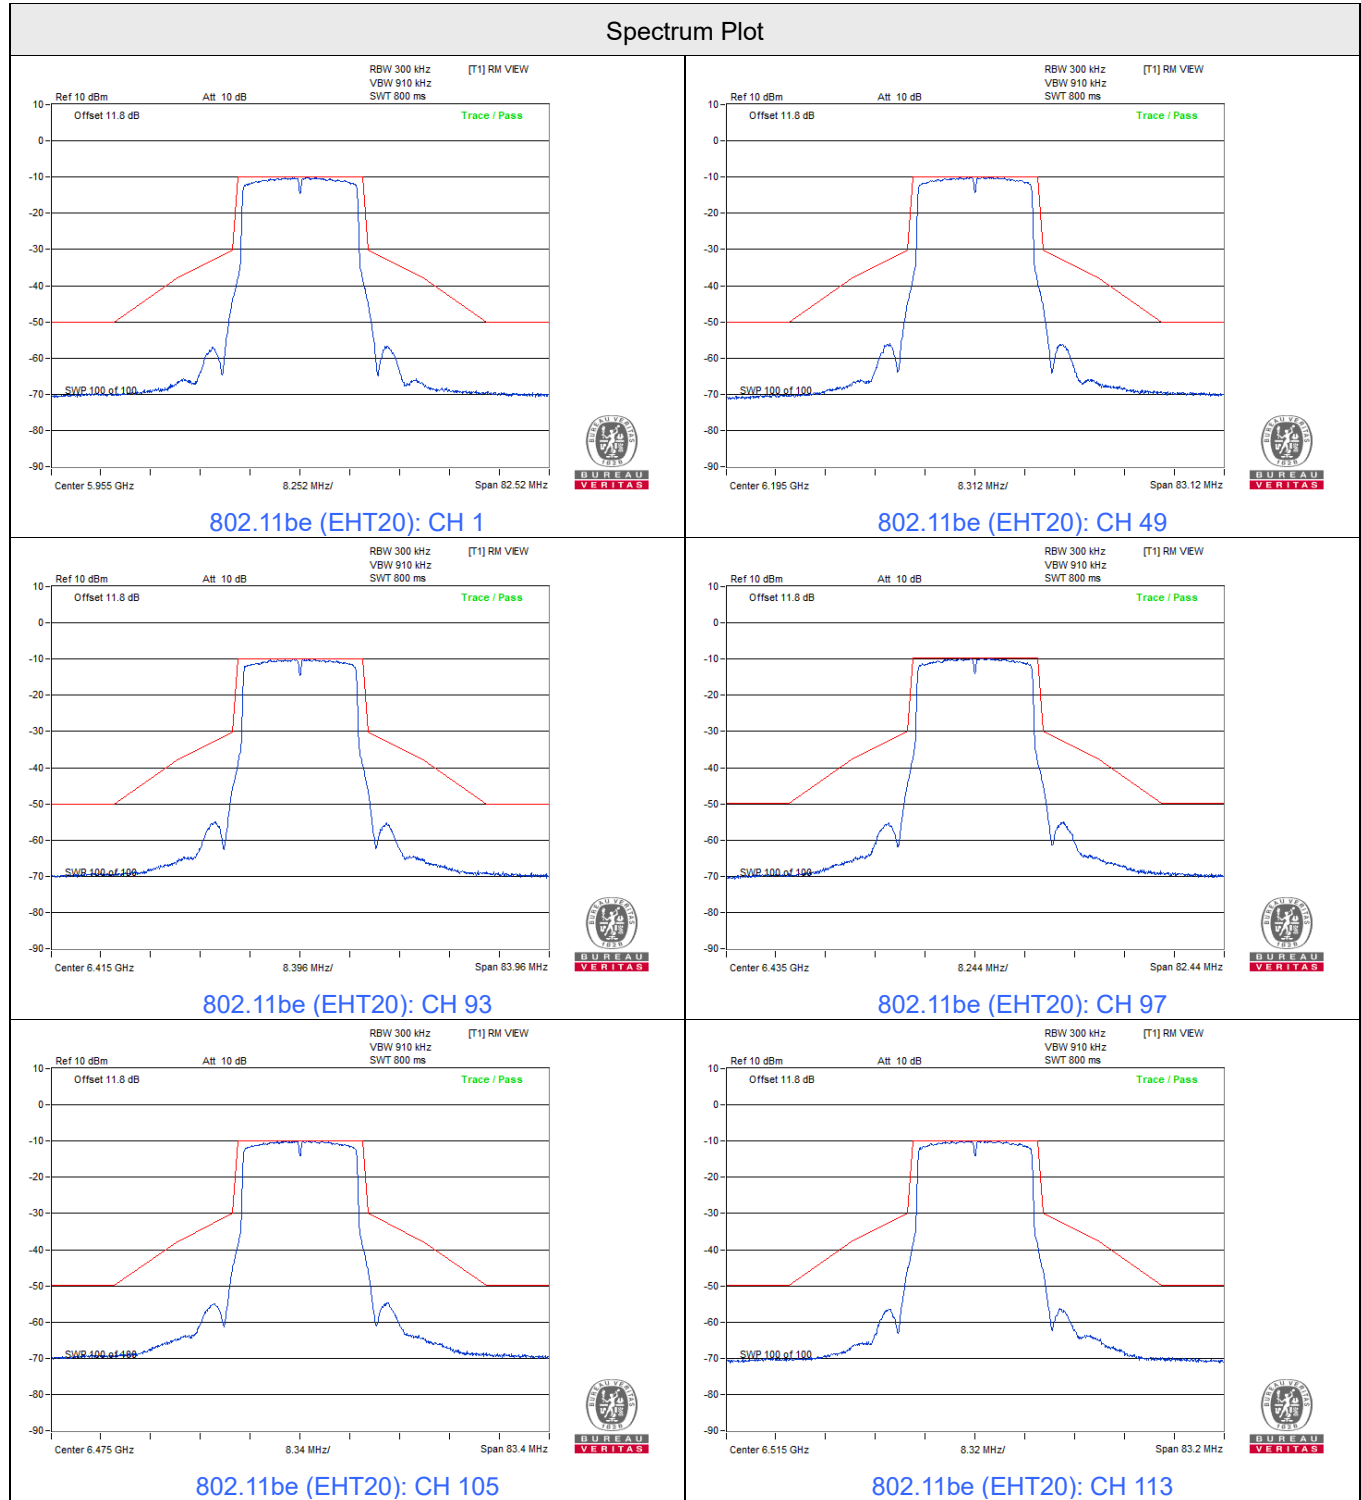


Spectrum Plot

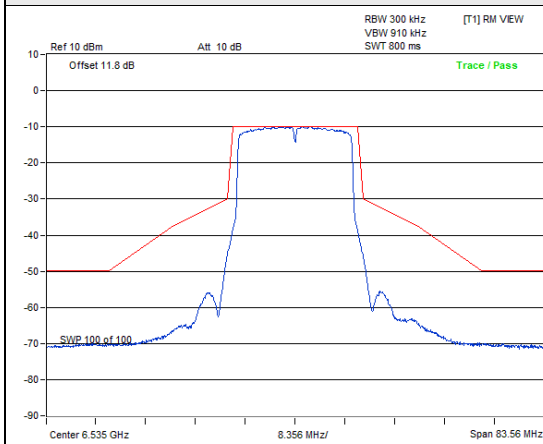


802.11be (EHT20): CH 117

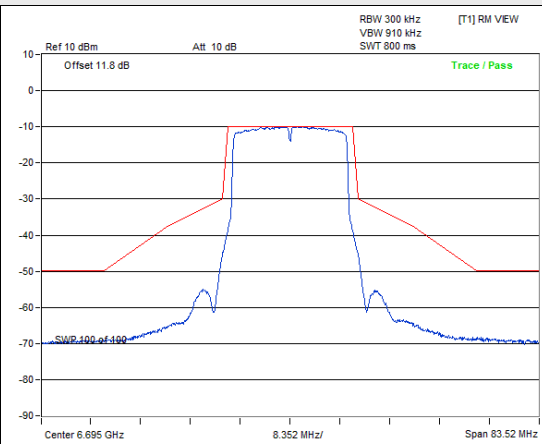


802.11be (EHT20): CH 149

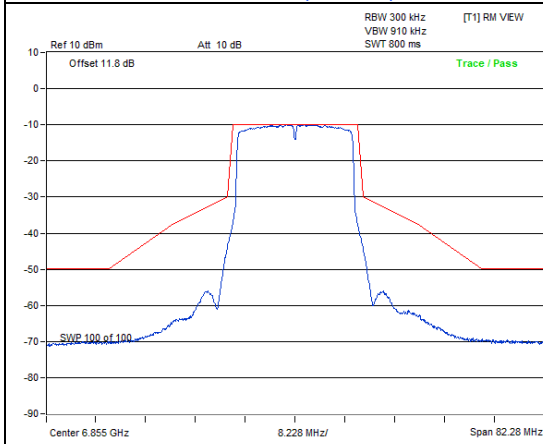


802.11be (EHT20): CH 181

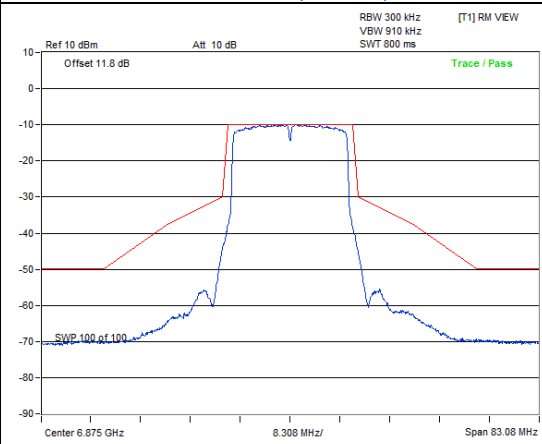

802.11be (EHT20): CH 185

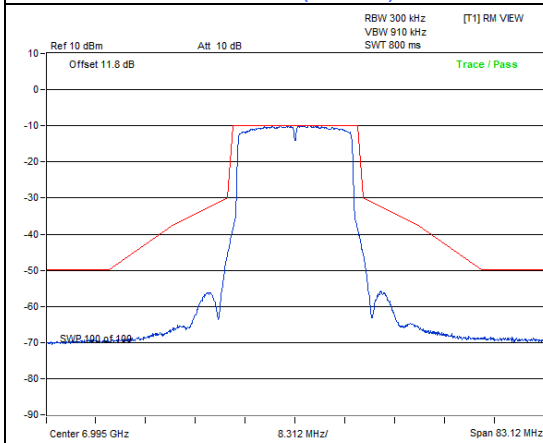


802.11be (EHT20): CH 209

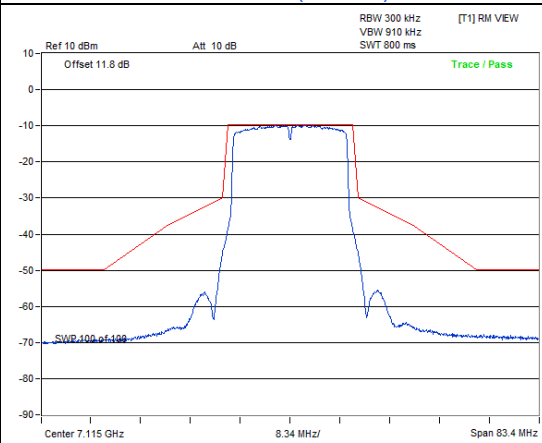


802.11be (EHT20): CH 233

802.11be (EHT40)

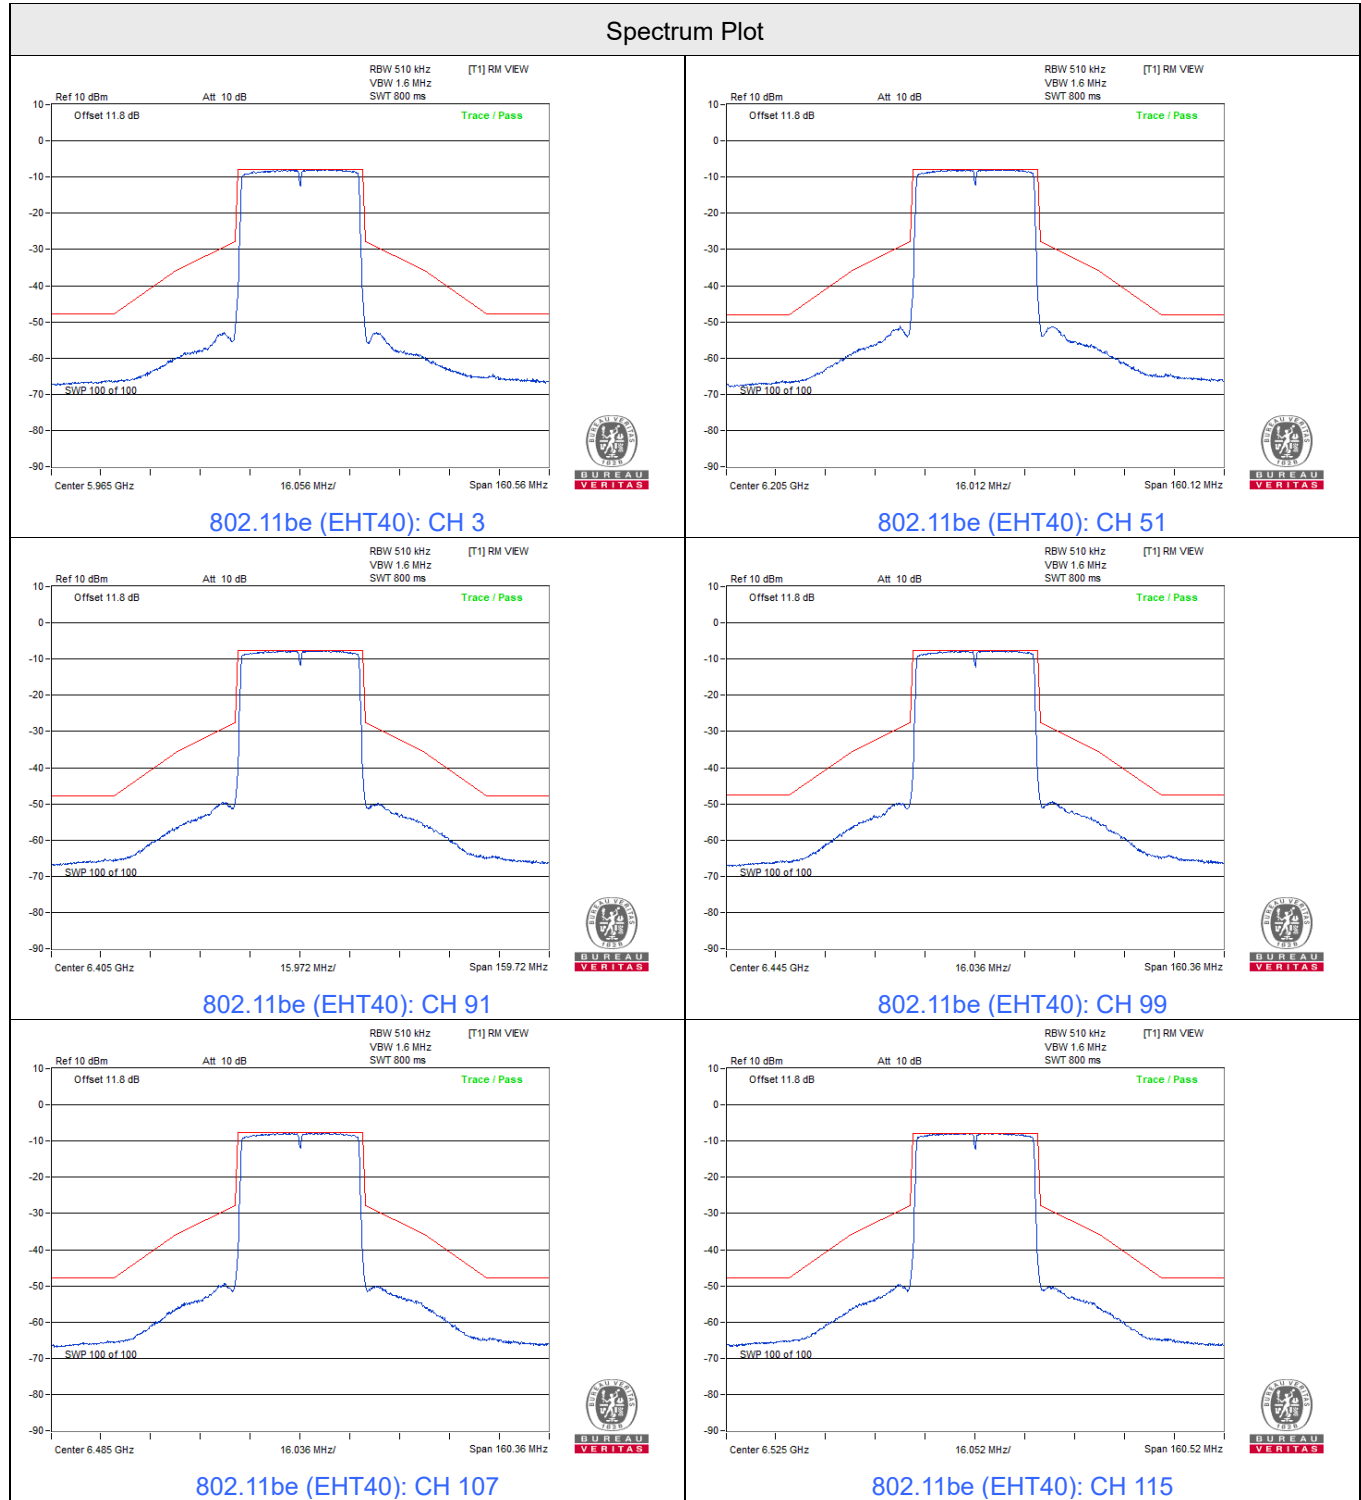


Spectrum Plot

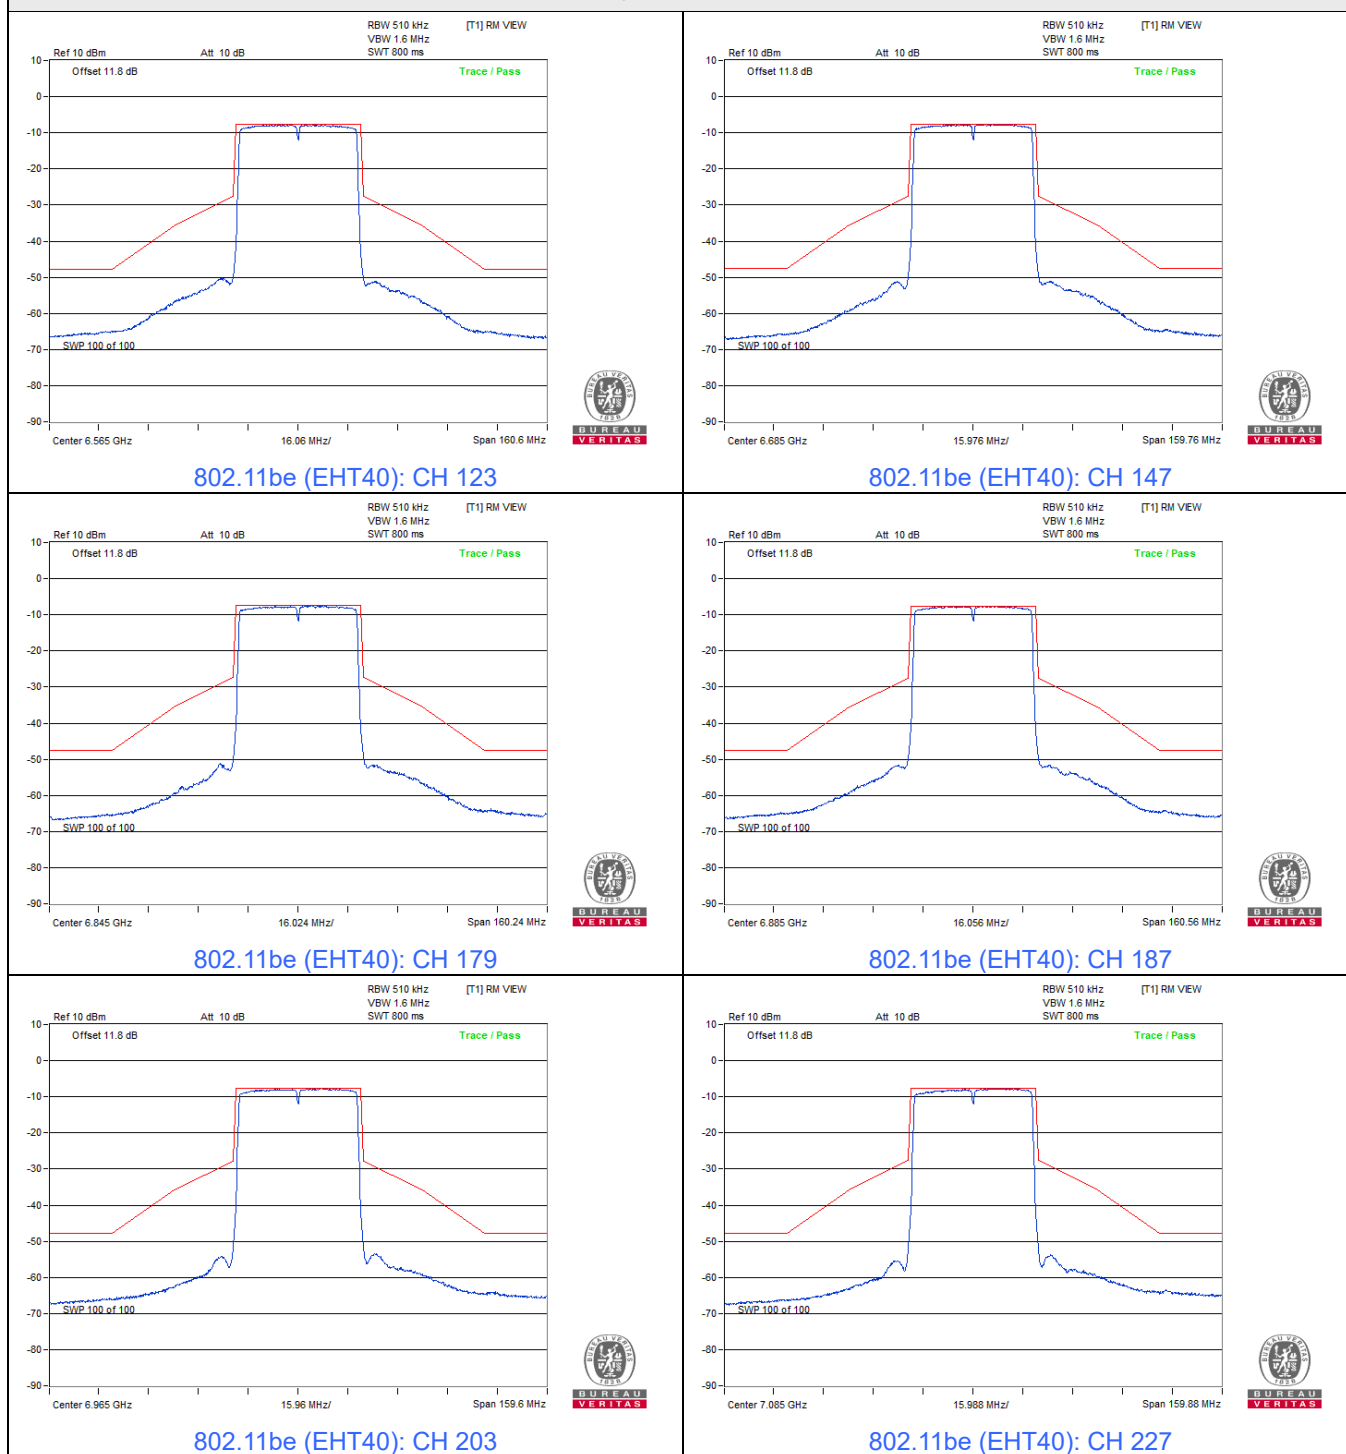

802.11be (EHT80)




Spectrum Plot

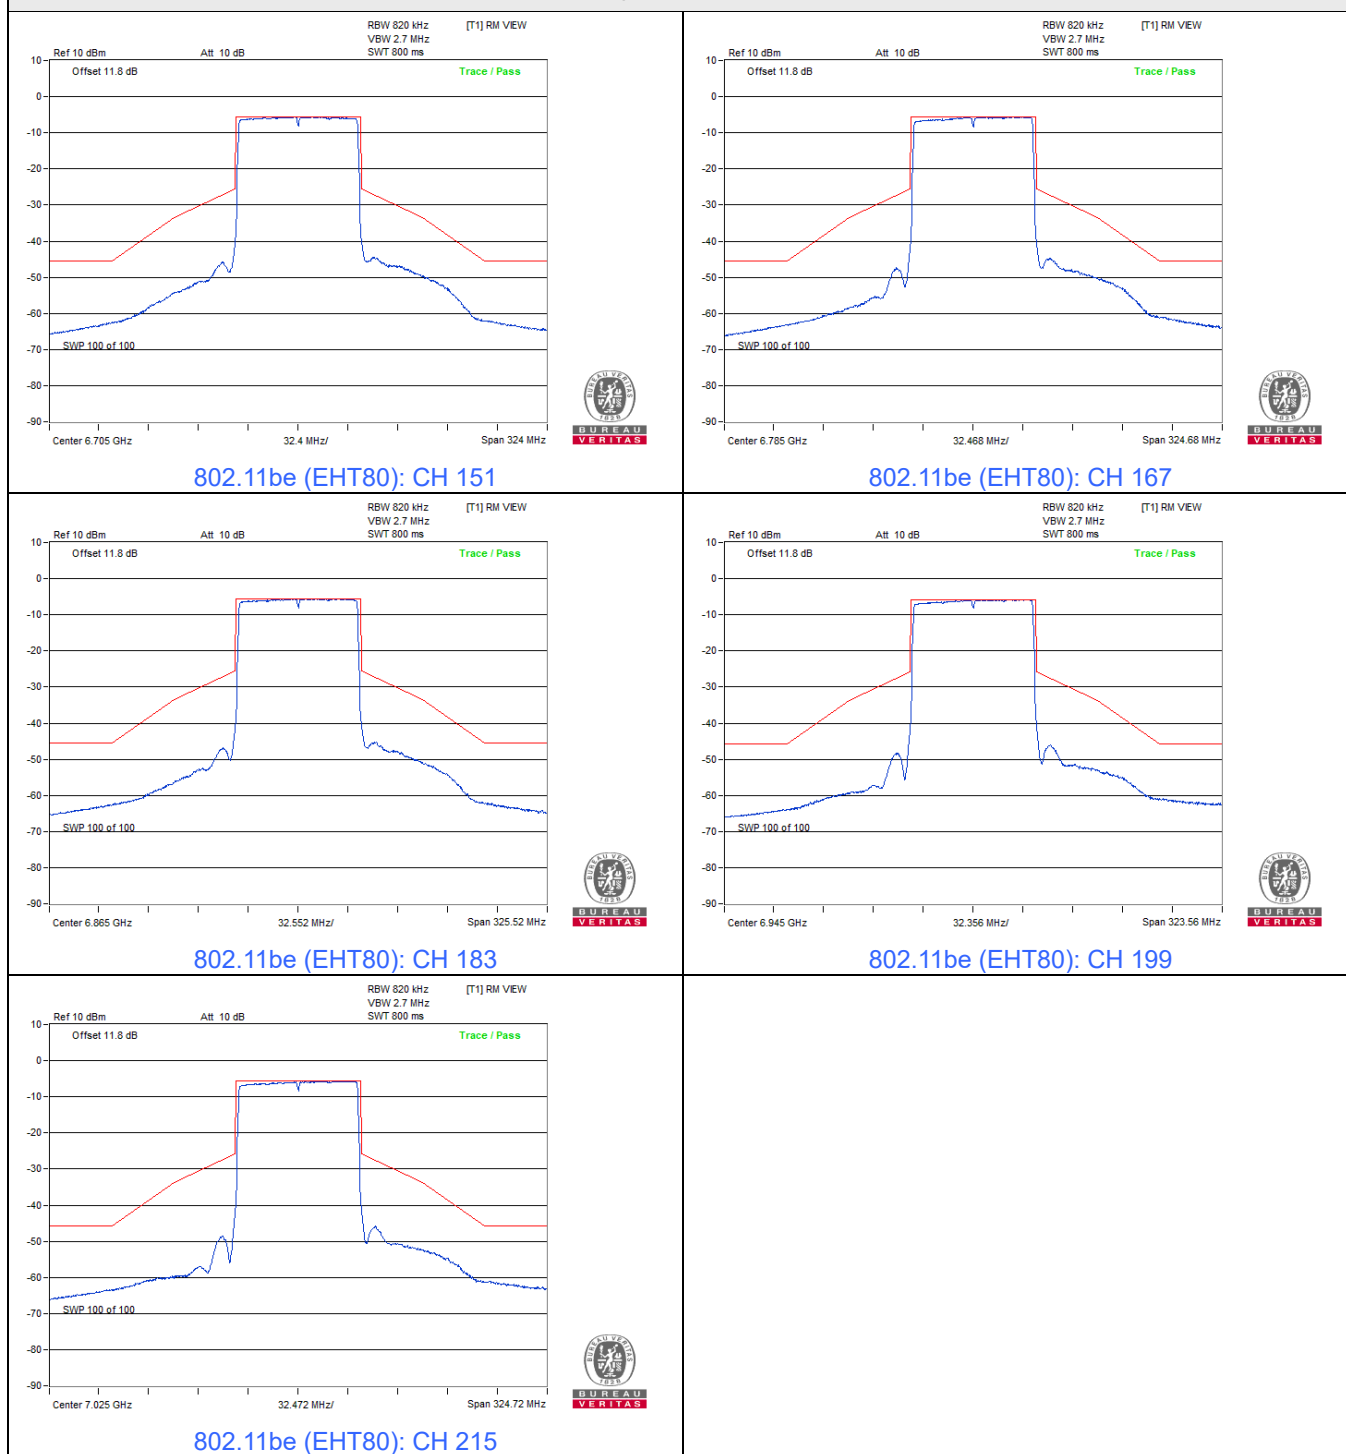

802.11be (EHT160)



Spectrum Plot

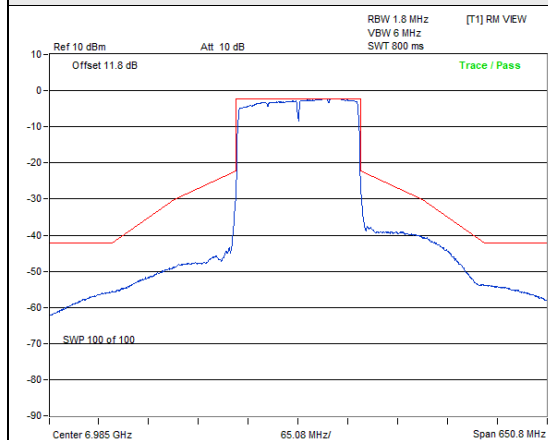







802.11be (EHT160): CH 207



802.11be (EHT20) 26-tone RU




Spectrum Plot

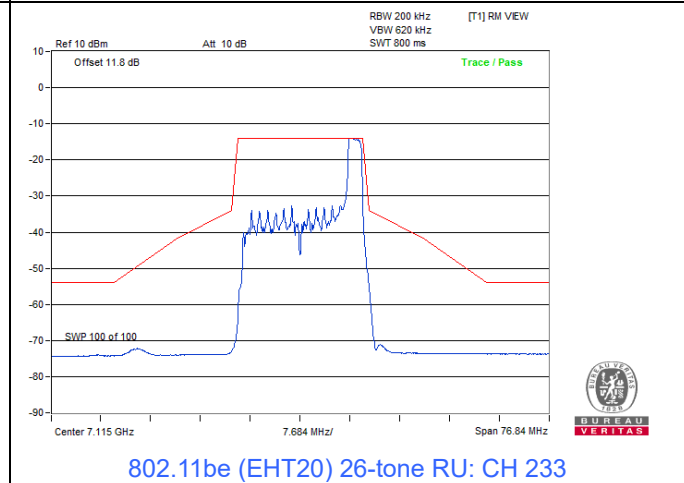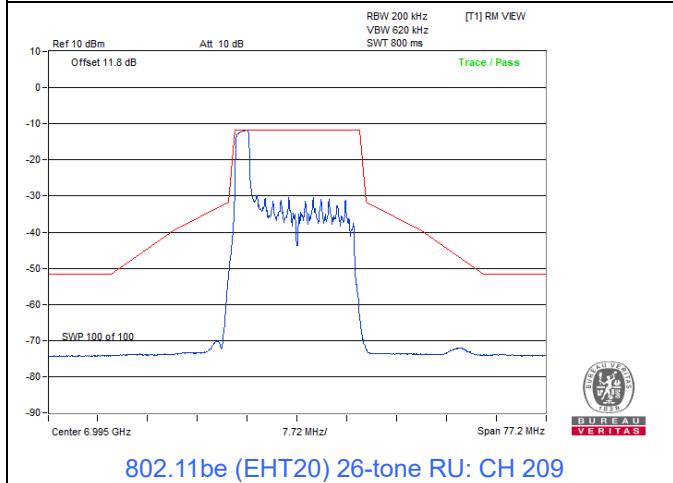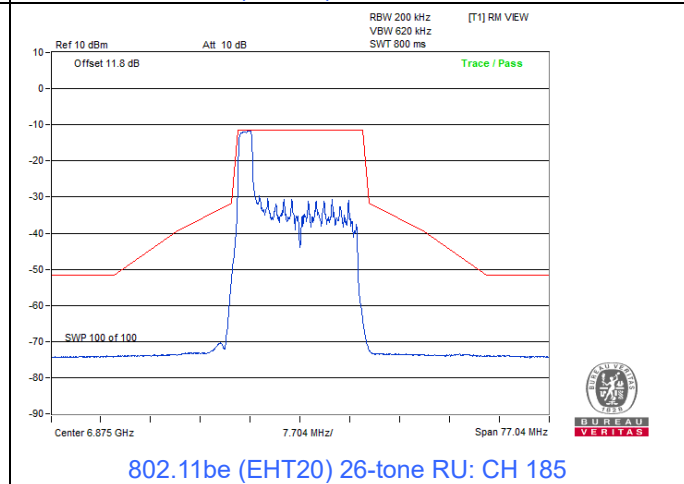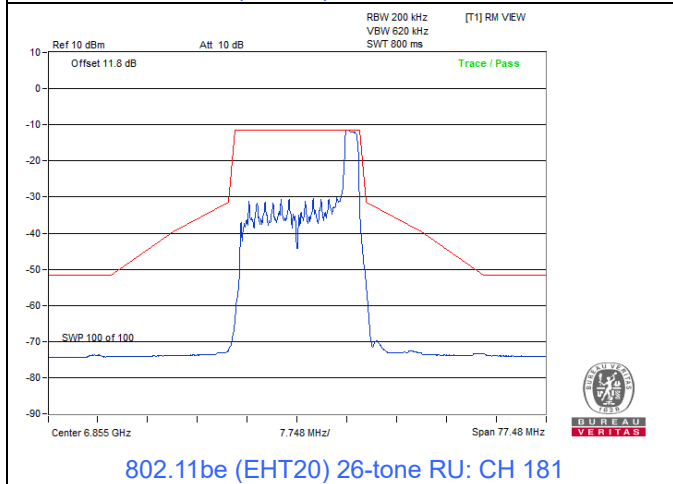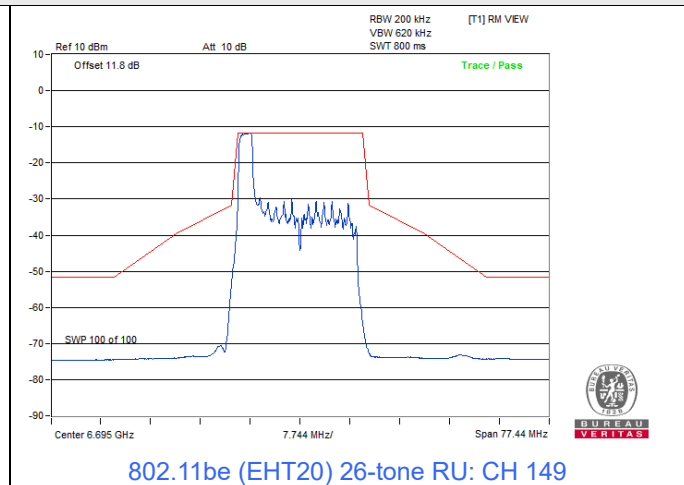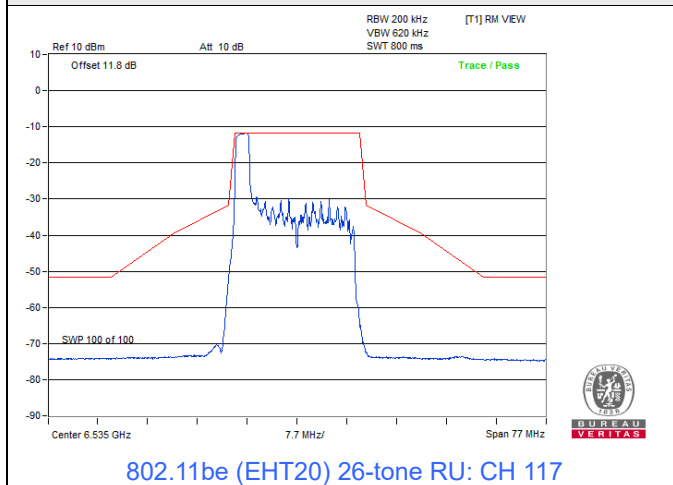


802.11be (EHT20) 52-tone RU


Spectrum Plot

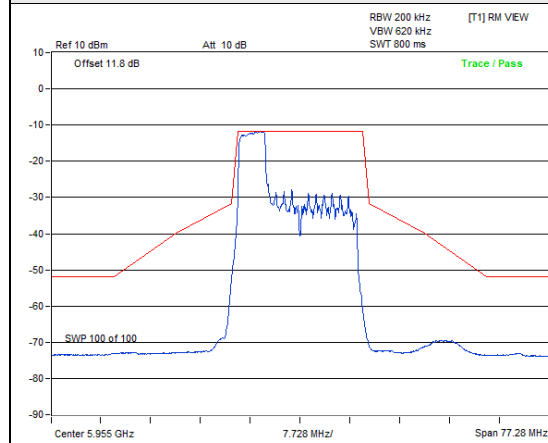


802.11be (EHT20) 52-tone RU: CH 1

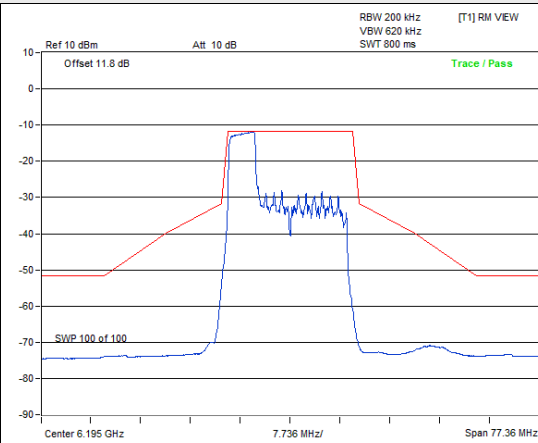


802.11be (EHT20) 52-tone RU: CH 49

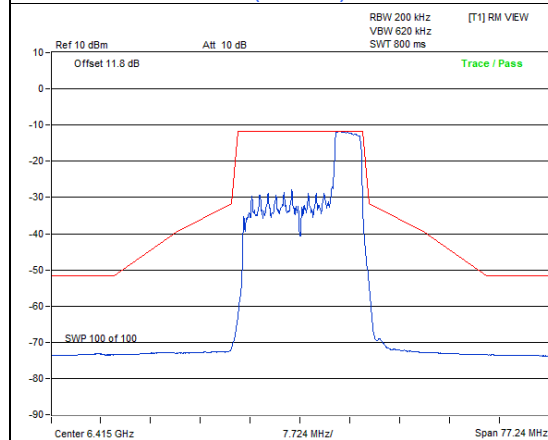


802.11be (EHT20) 52-tone RU: CH 93

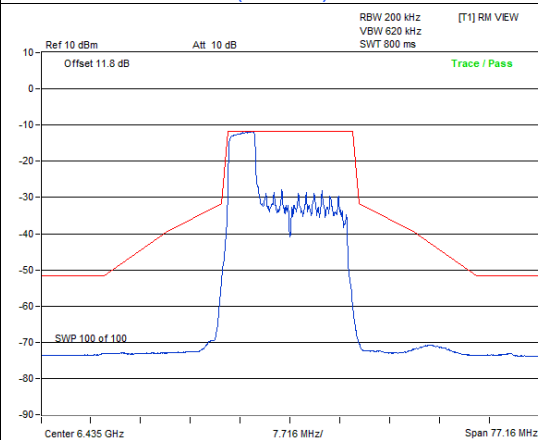

802.11be (EHT20) 52-tone RU: CH 97

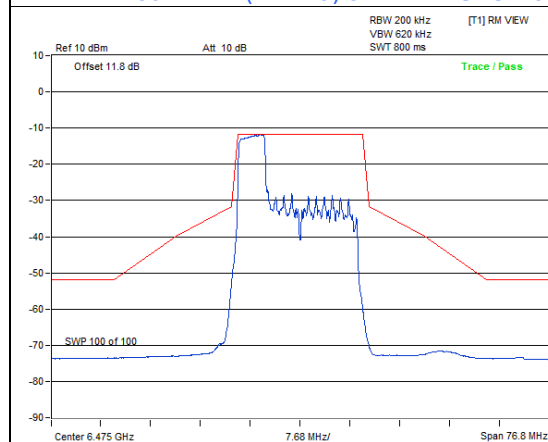

802.11be (EHT20) 52-tone RU: CH 105

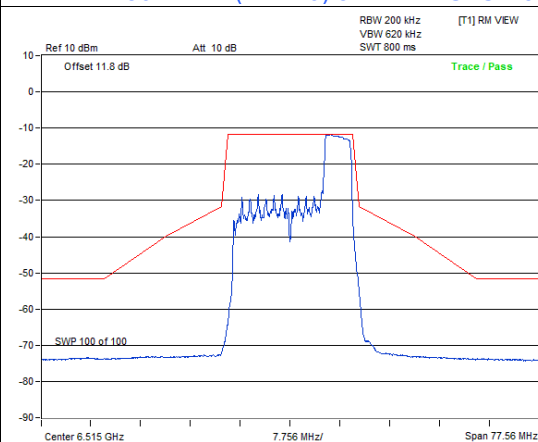


802.11be (EHT20) 52-tone RU: CH 113




BUREAU
VERITAS


Spectrum Plot

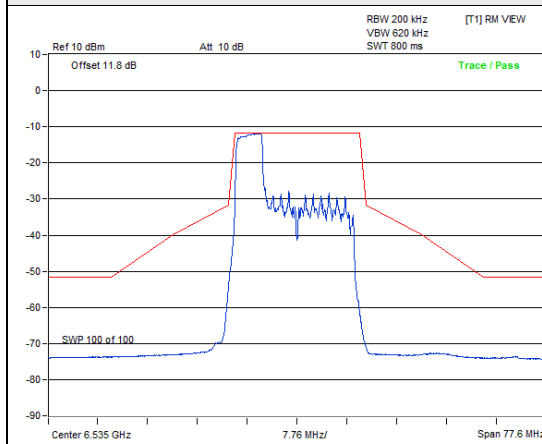


802.11be (EHT20) 52-tone RU: CH 117

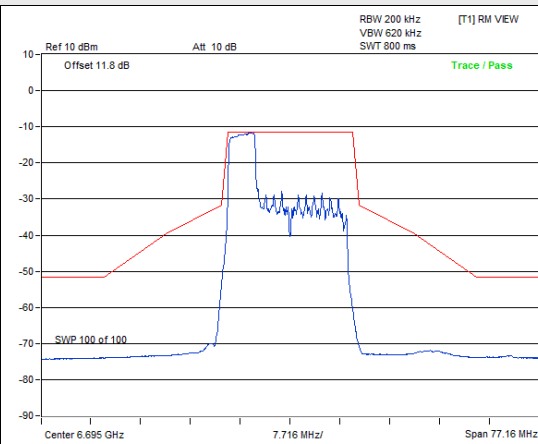


802.11be (EHT20) 52-tone RU: CH 149

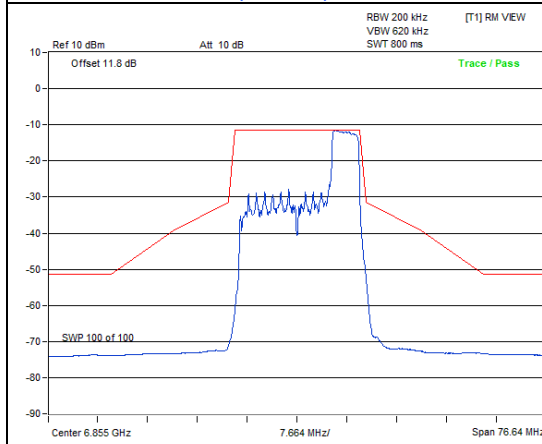


802.11be (EHT20) 52-tone RU: CH 181

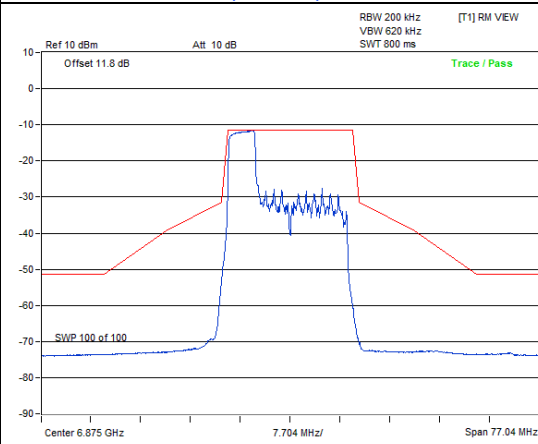

802.11be (EHT20) 52-tone RU: CH 185

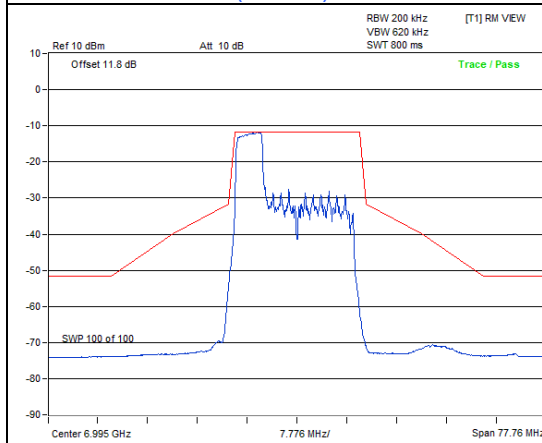


802.11be (EHT20) 52-tone RU: CH 209

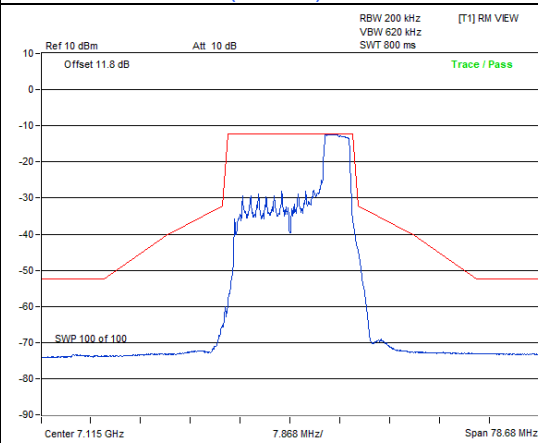


802.11be (EHT20) 52-tone RU: CH 233


802.11be (EHT20) 106-tone RU

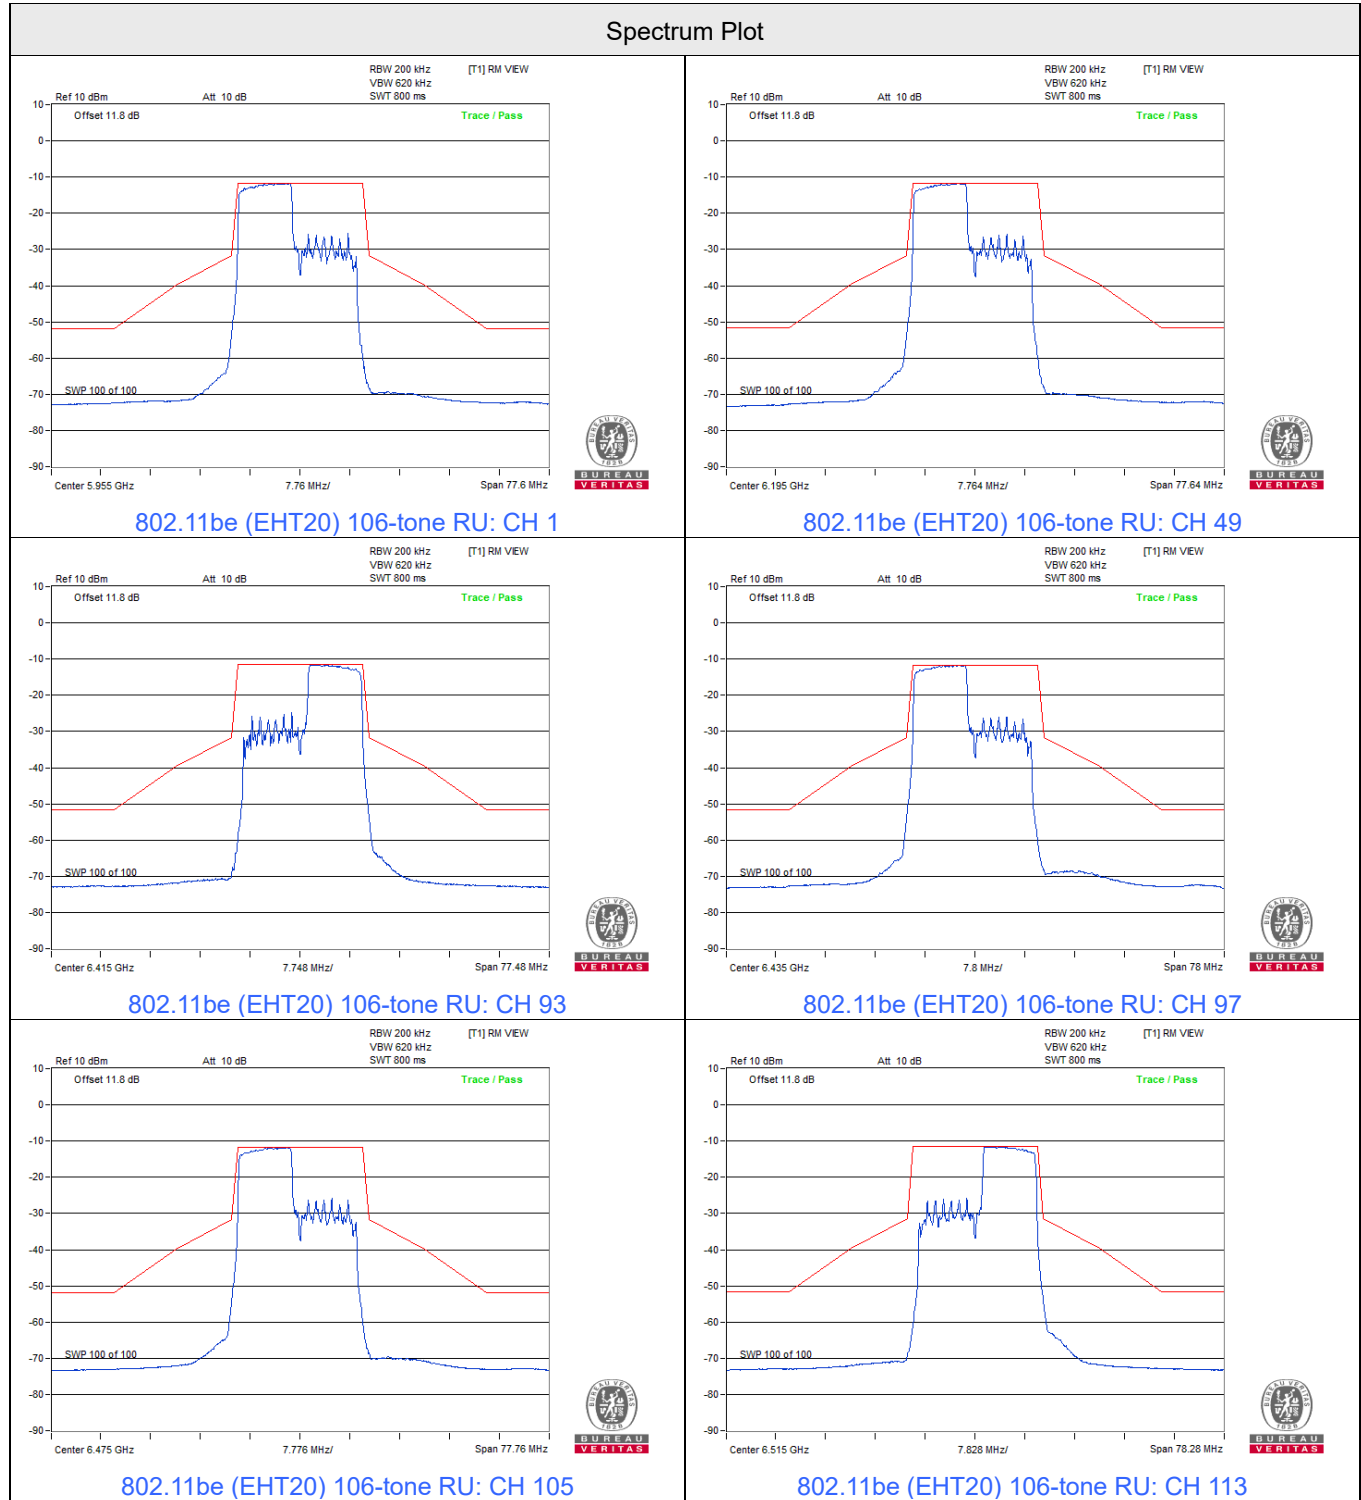


Spectrum Plot

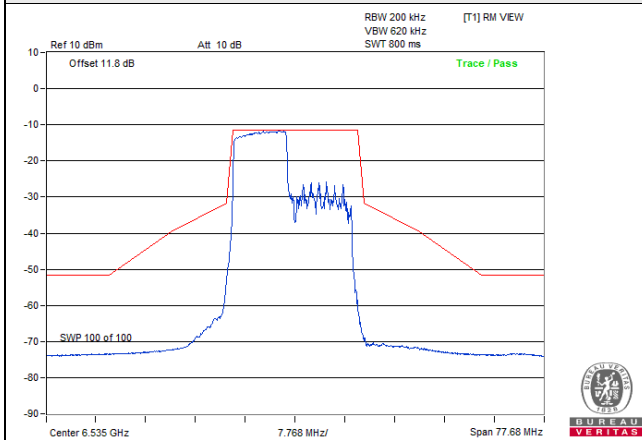


802.11be (EHT20) 106-tone RU: CH 117

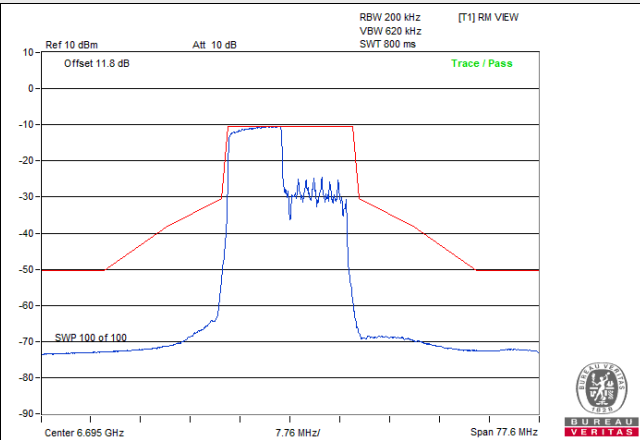


802.11be (EHT20) 106-tone RU: CH 149

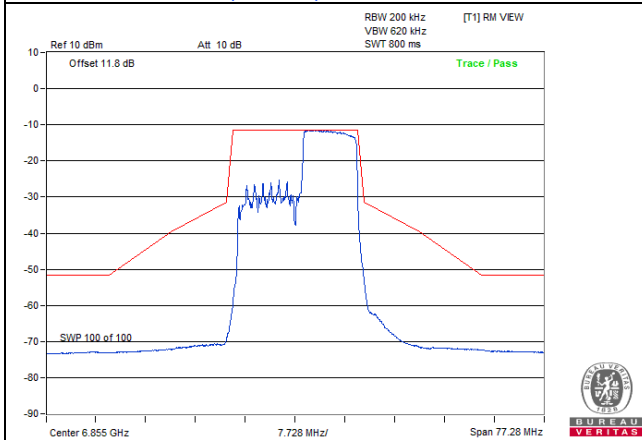


802.11be (EHT20) 106-tone RU: CH 181

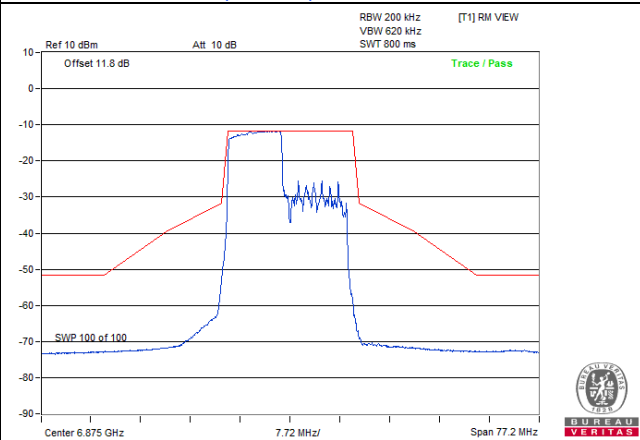

802.11be (EHT20) 106-tone RU: CH 185

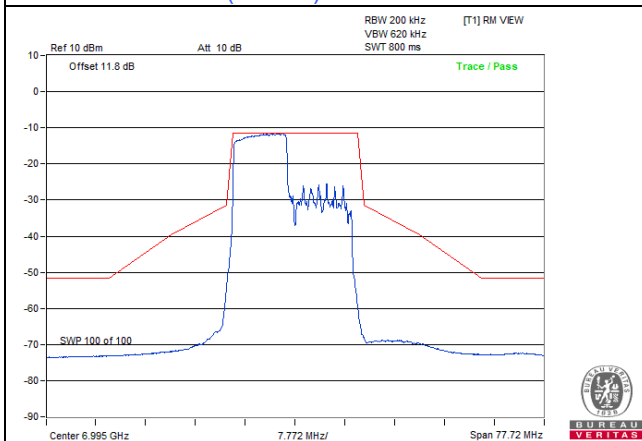


802.11be (EHT20) 106-tone RU: CH 209

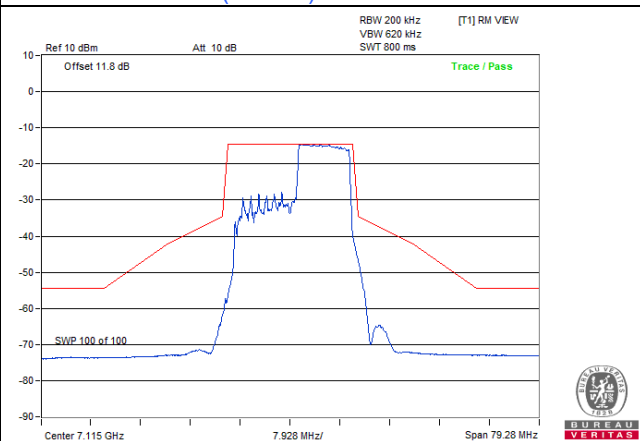


802.11be (EHT20) 106-tone RU: CH 233


802.11be (EHT20) 52+26-tone MRU

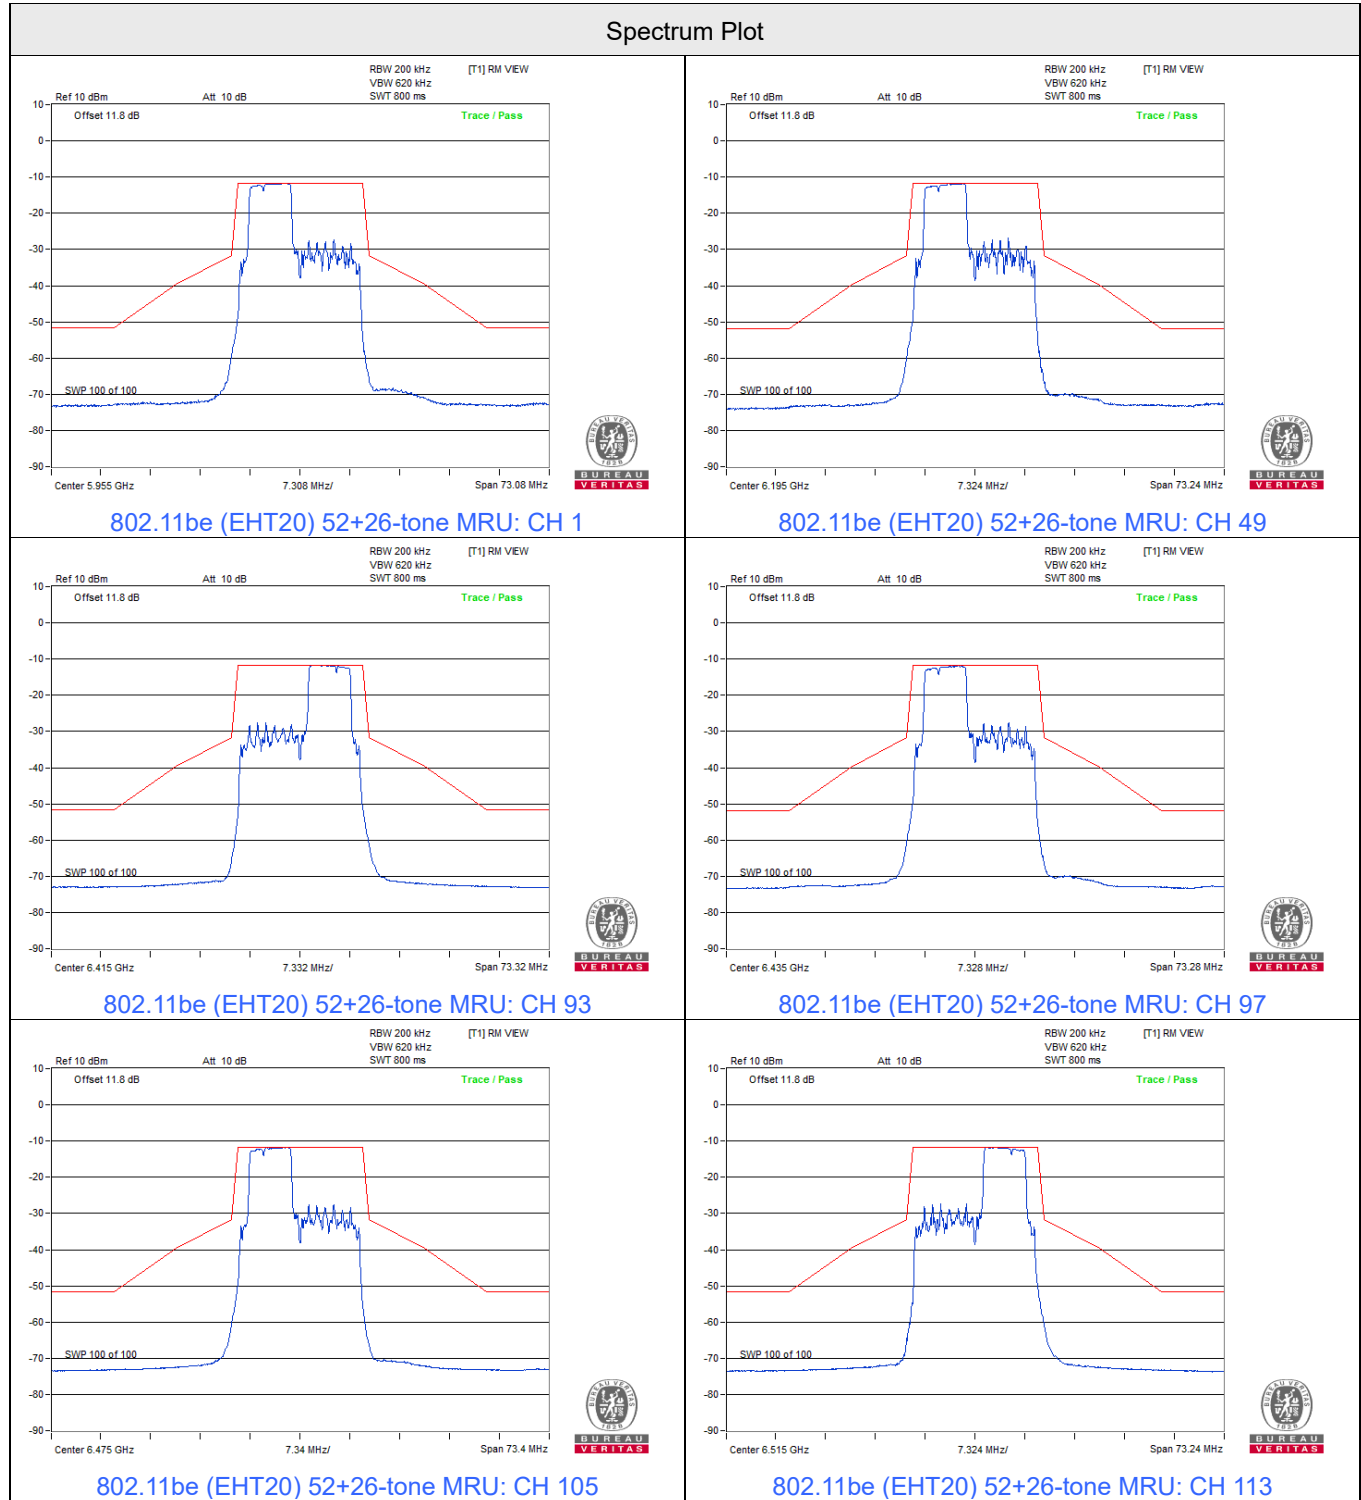


Spectrum Plot

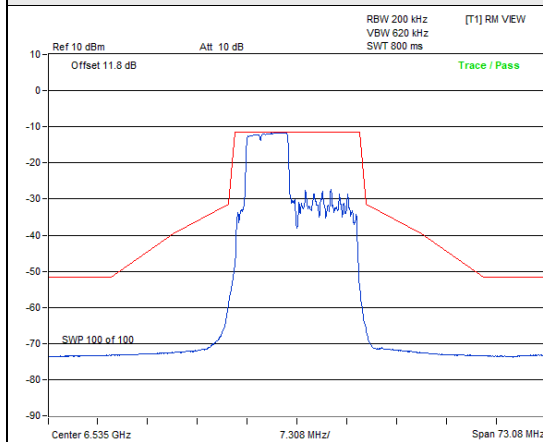


802.11be (EHT20) 52+26-tone MRU: CH 117

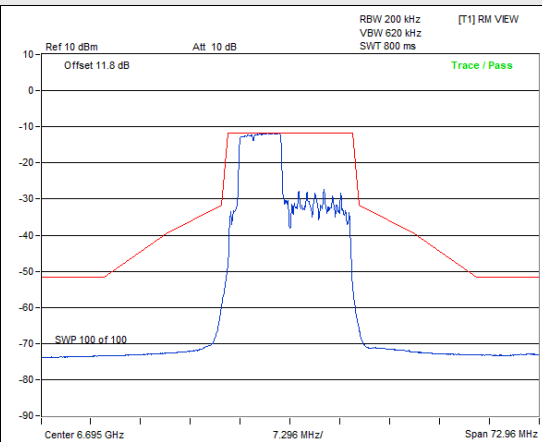


802.11be (EHT20) 52+26-tone MRU: CH 149

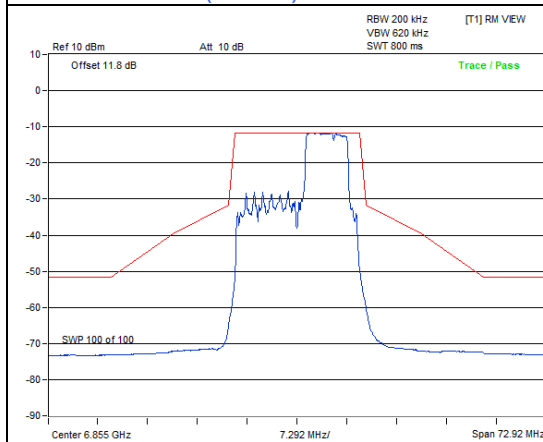


802.11be (EHT20) 52+26-tone MRU: CH 181

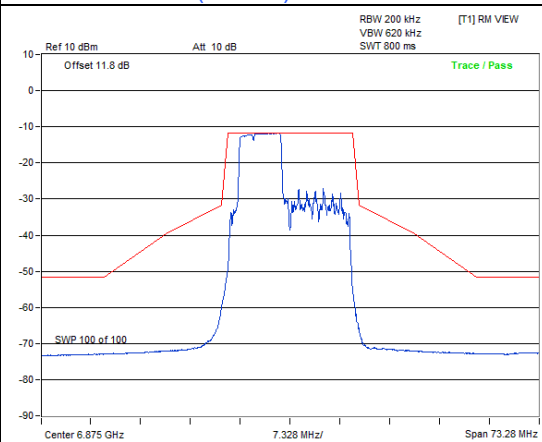

802.11be (EHT20) 52+26-tone MRU: CH 185

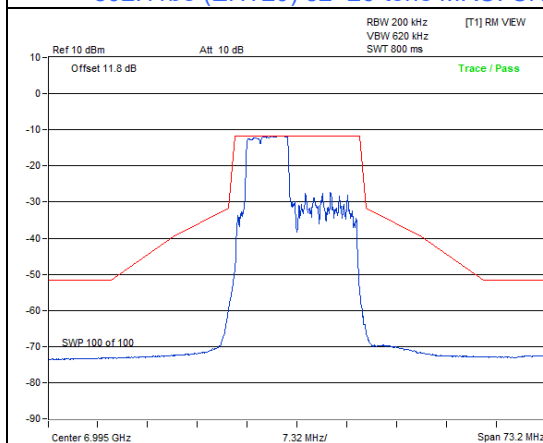


802.11be (EHT20) 52+26-tone MRU: CH 209

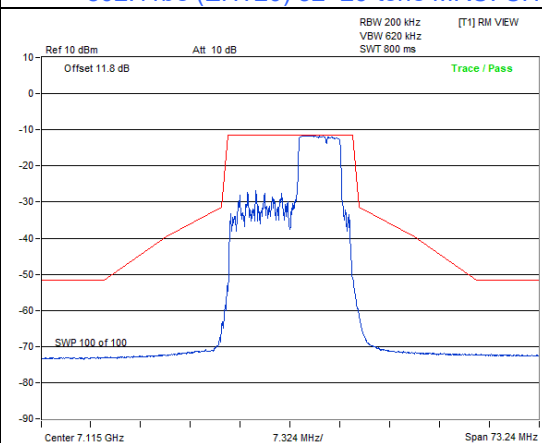

802.11be (EHT20) 52+26-tone MRU: CH 233


802.11be (EHT20) 106+26-tone MRU

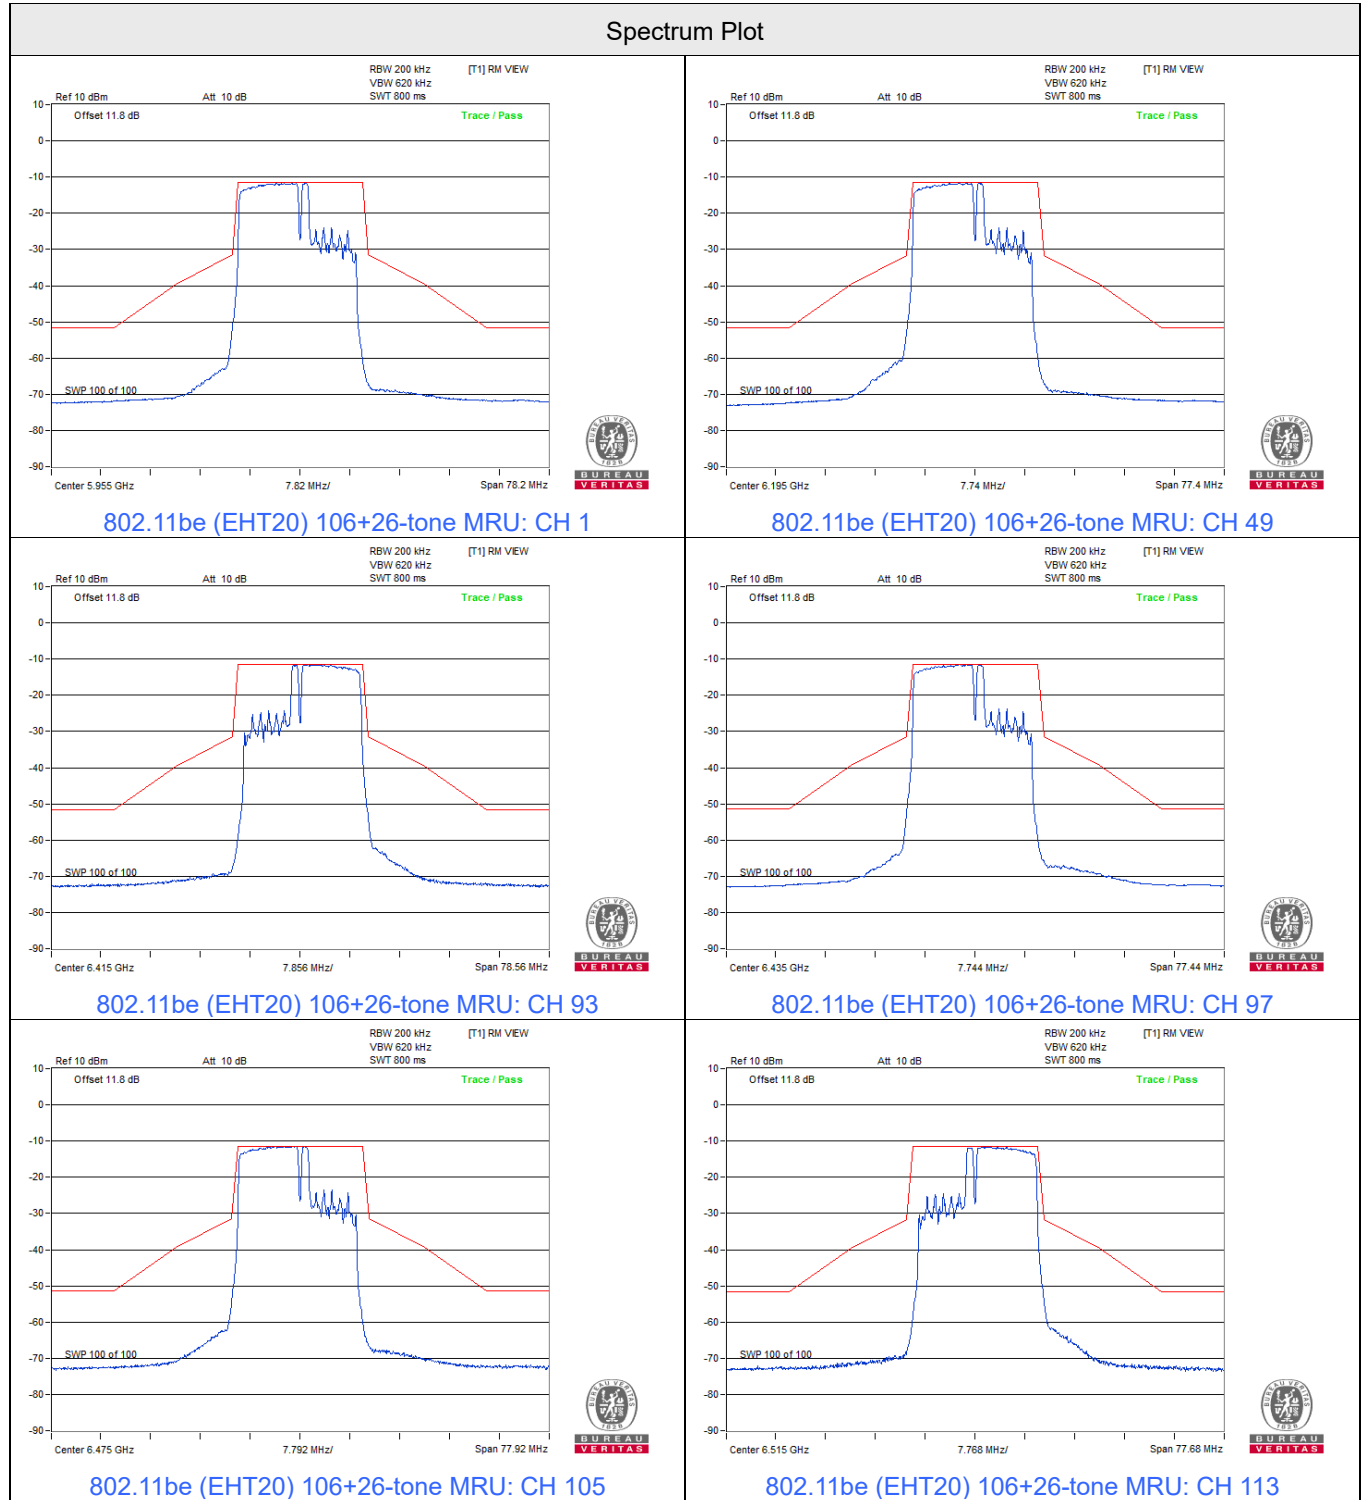




BUREAU
VERITAS


Spectrum Plot

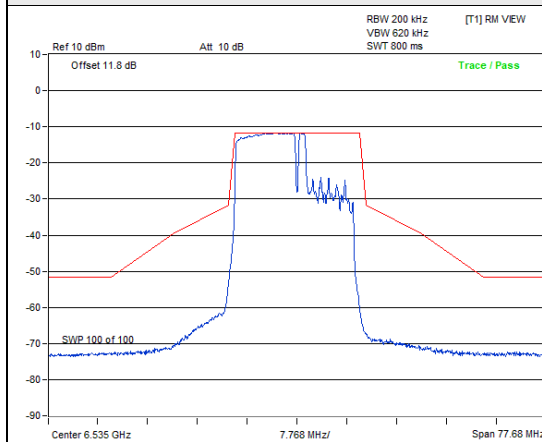


802.11be (EHT20) 106+26-tone MRU: CH 117

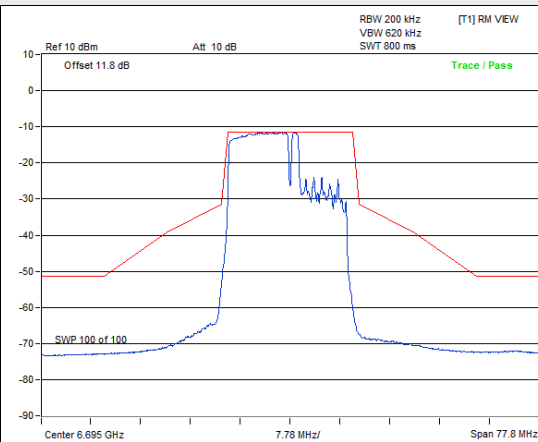


802.11be (EHT20) 106+26-tone MRU: CH 149

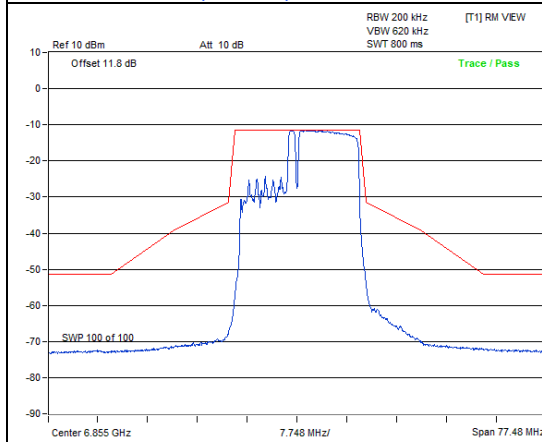


802.11be (EHT20) 106+26-tone MRU: CH 181

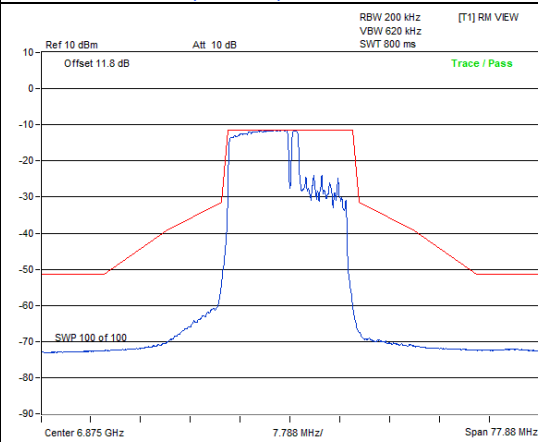

802.11be (EHT20) 106+26-tone MRU: CH 185

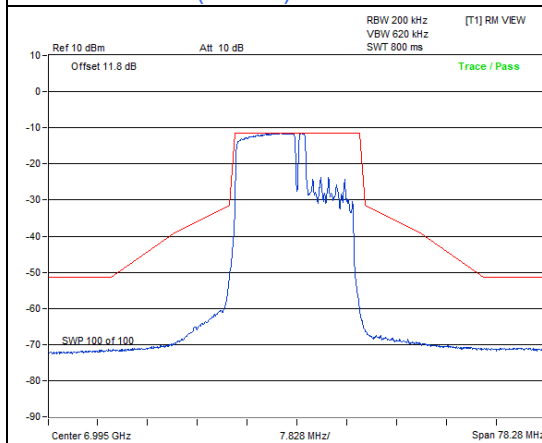


802.11be (EHT20) 106+26-tone MRU: CH 209





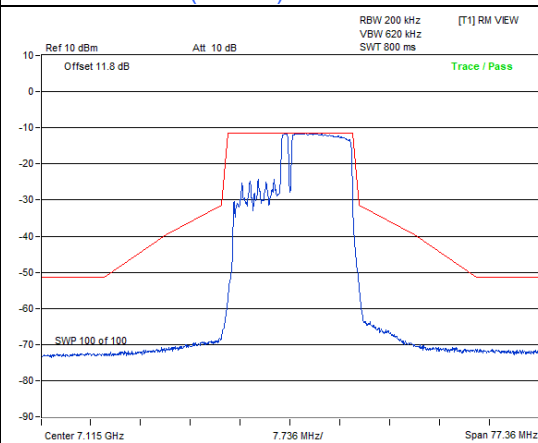


802.11be (EHT20) 106+26-tone MRU: CH 233


802.11be (EHT80) 484+242-tone MRU

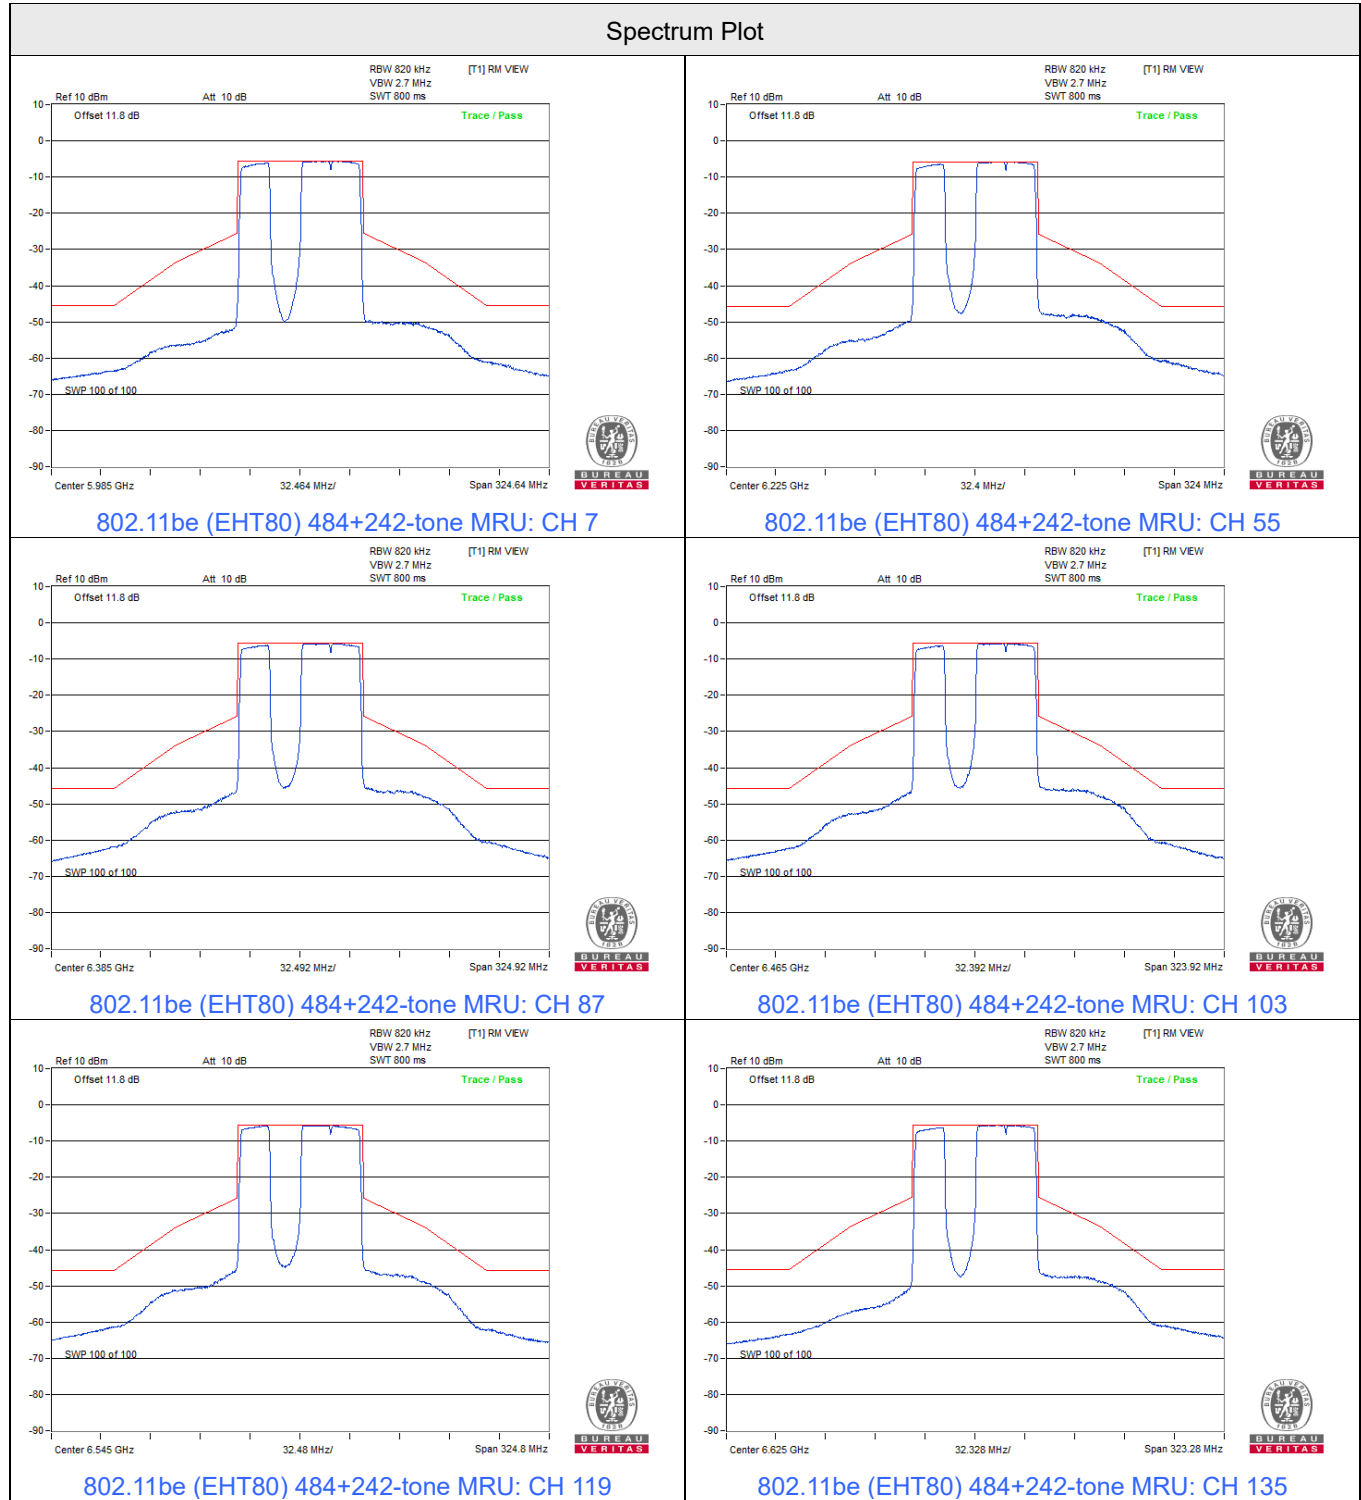


Spectrum Plot

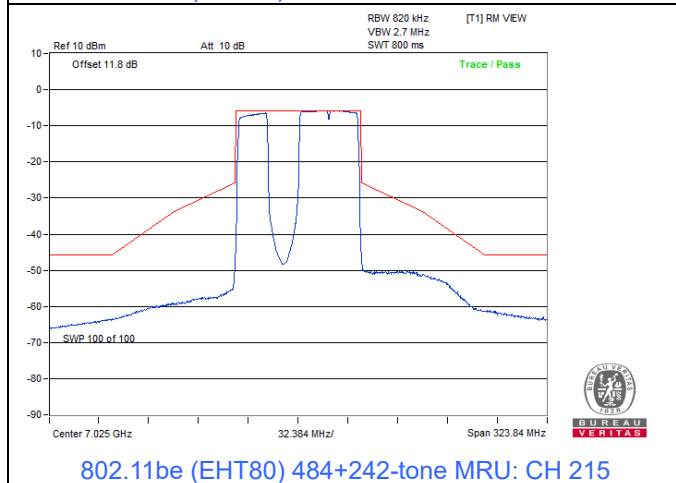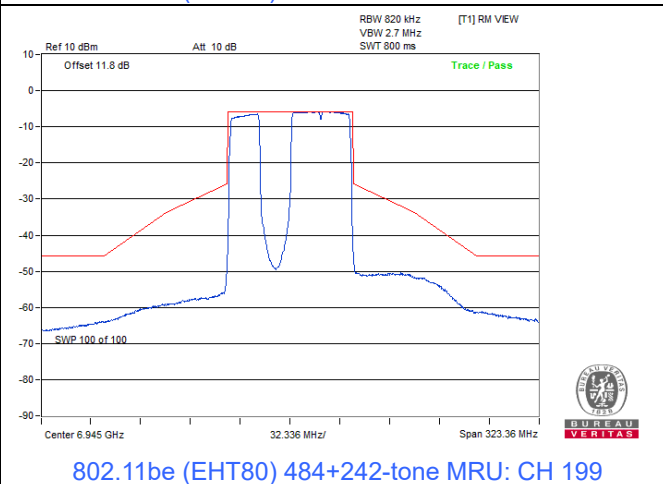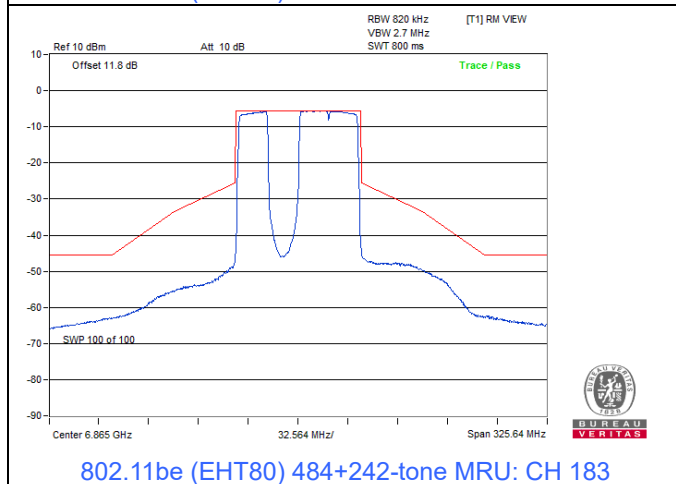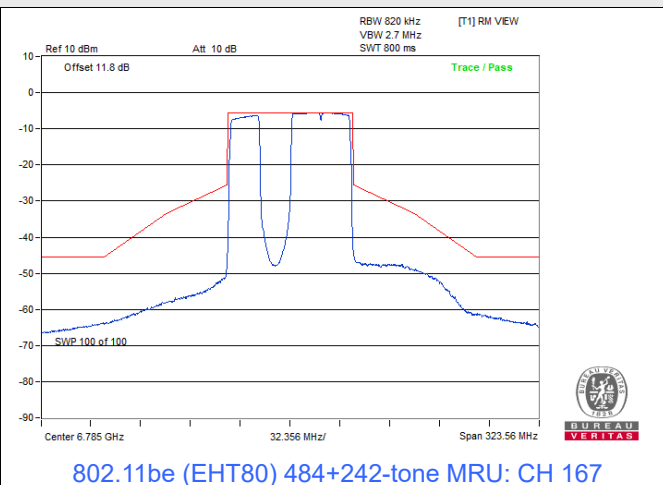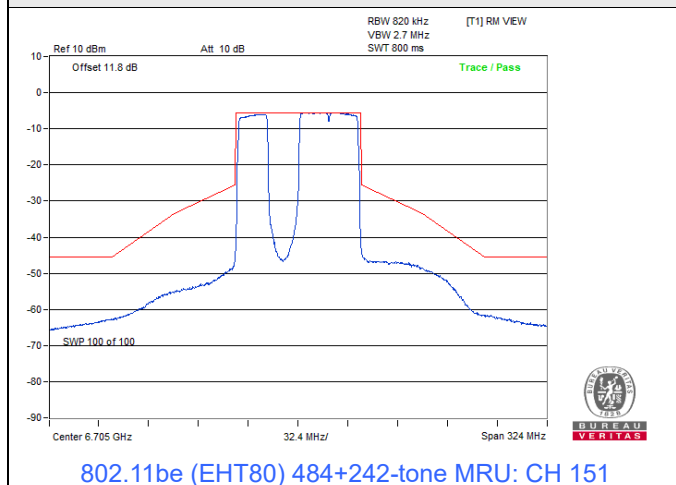

802.11be (EHT160) 996+484-tone MRU

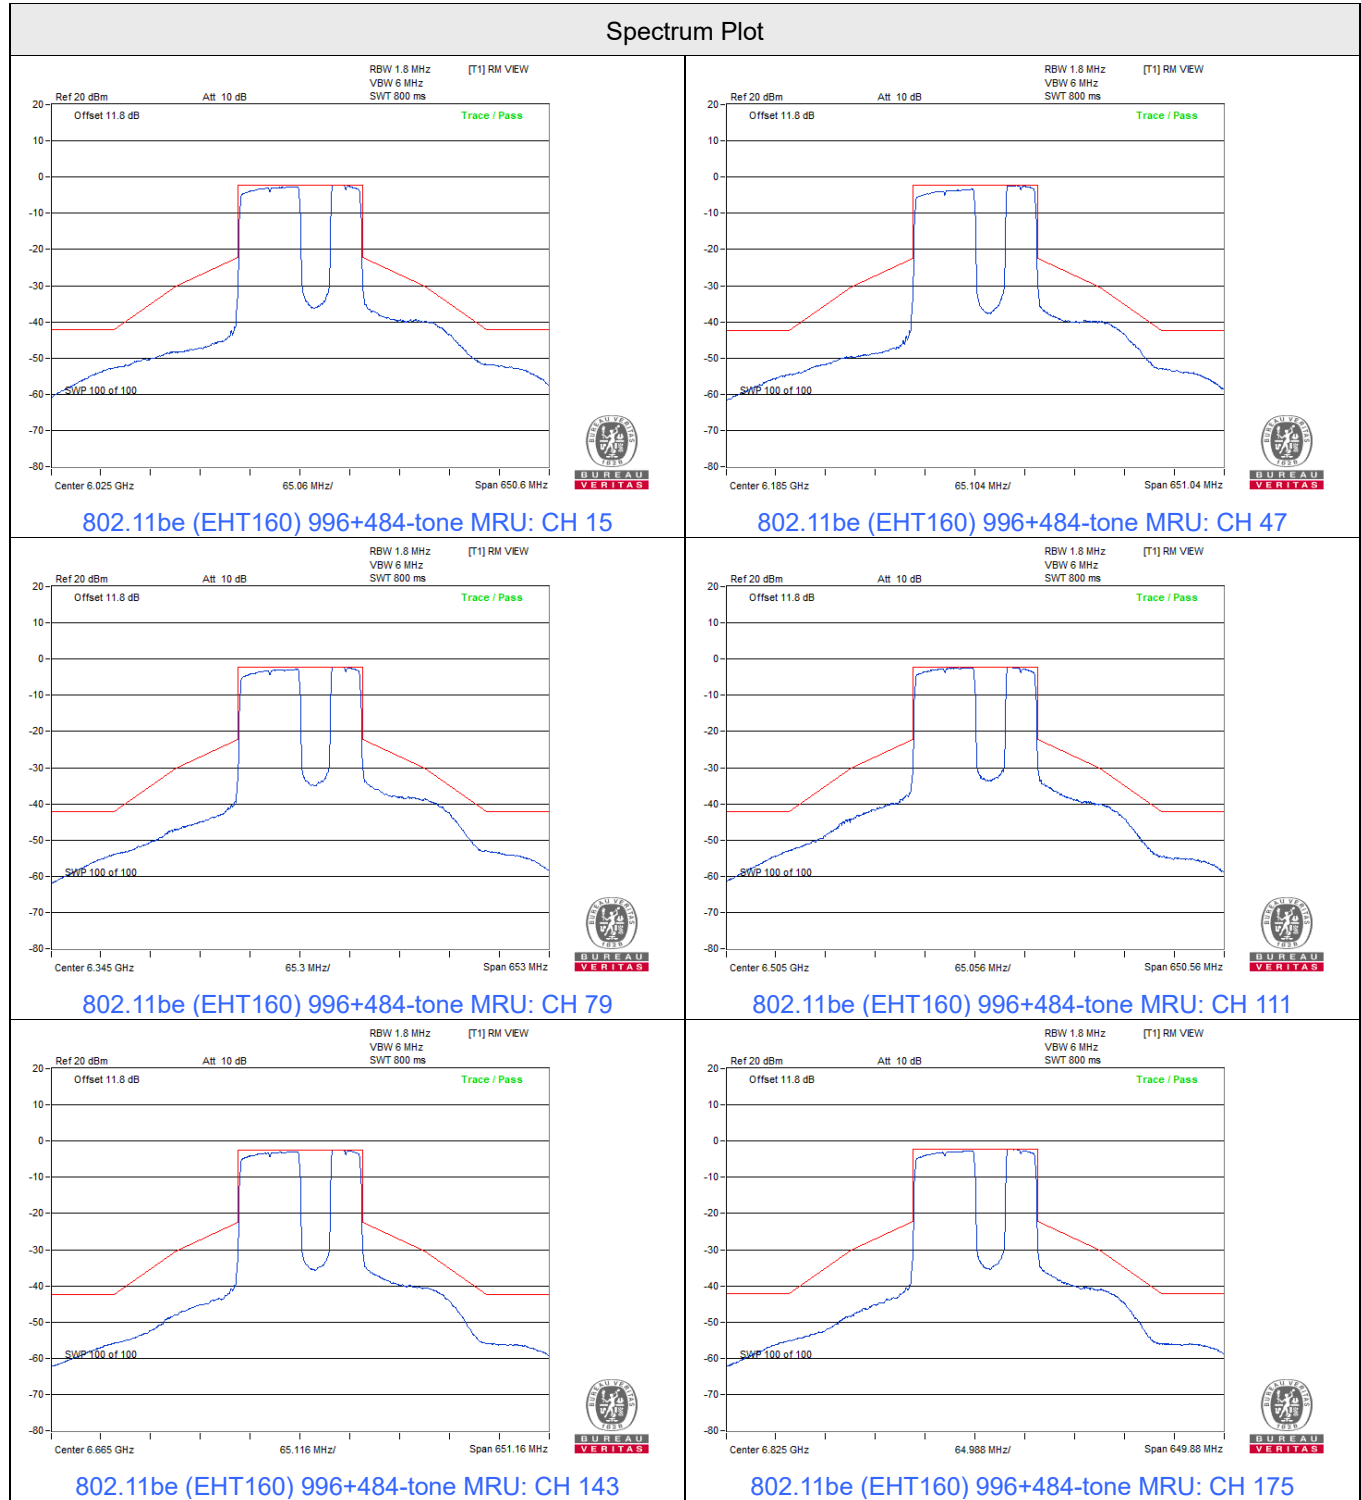

Spectrum Plot

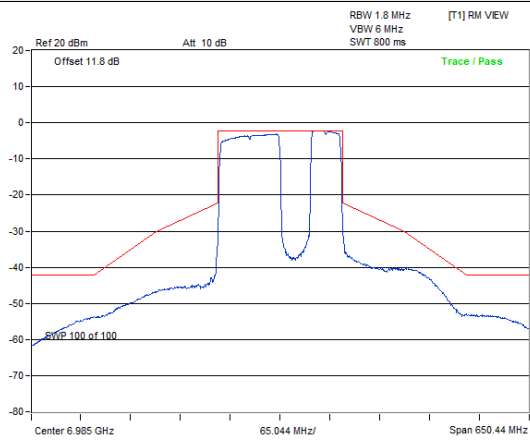


802.11be (EHT160) 996+484-tone MRU: CH 207

802.11be (EHT160) 996+484+242-tone MRU



Spectrum Plot

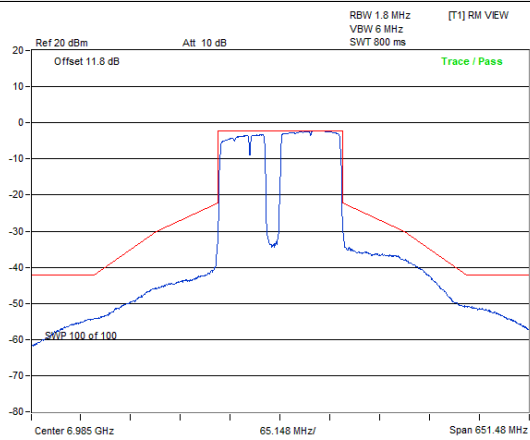


802.11be (EHT160) 996+484+242-tone MRU: CH 207

Input Power:	3.3 Vdc	Environmental Conditions:	27°C, 62% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------


Indoor client

2Tx


802.11a

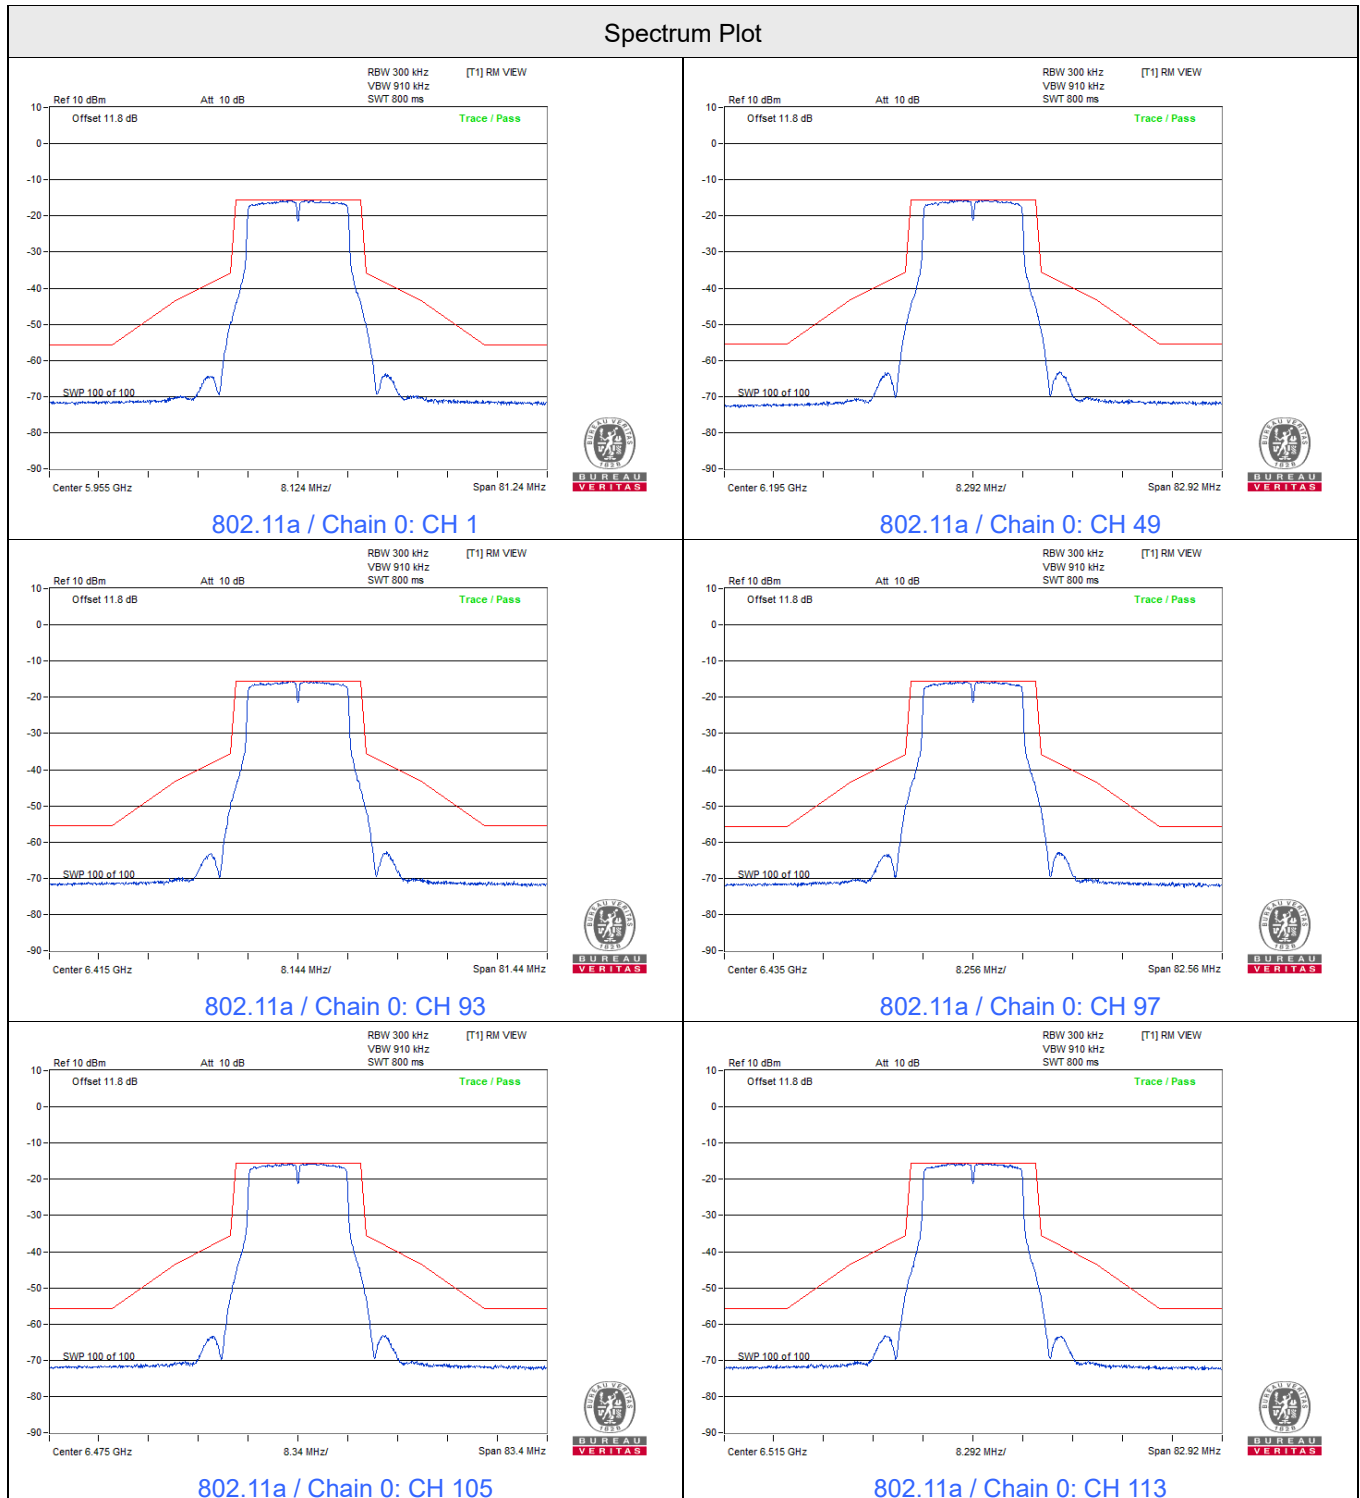


Spectrum Plot

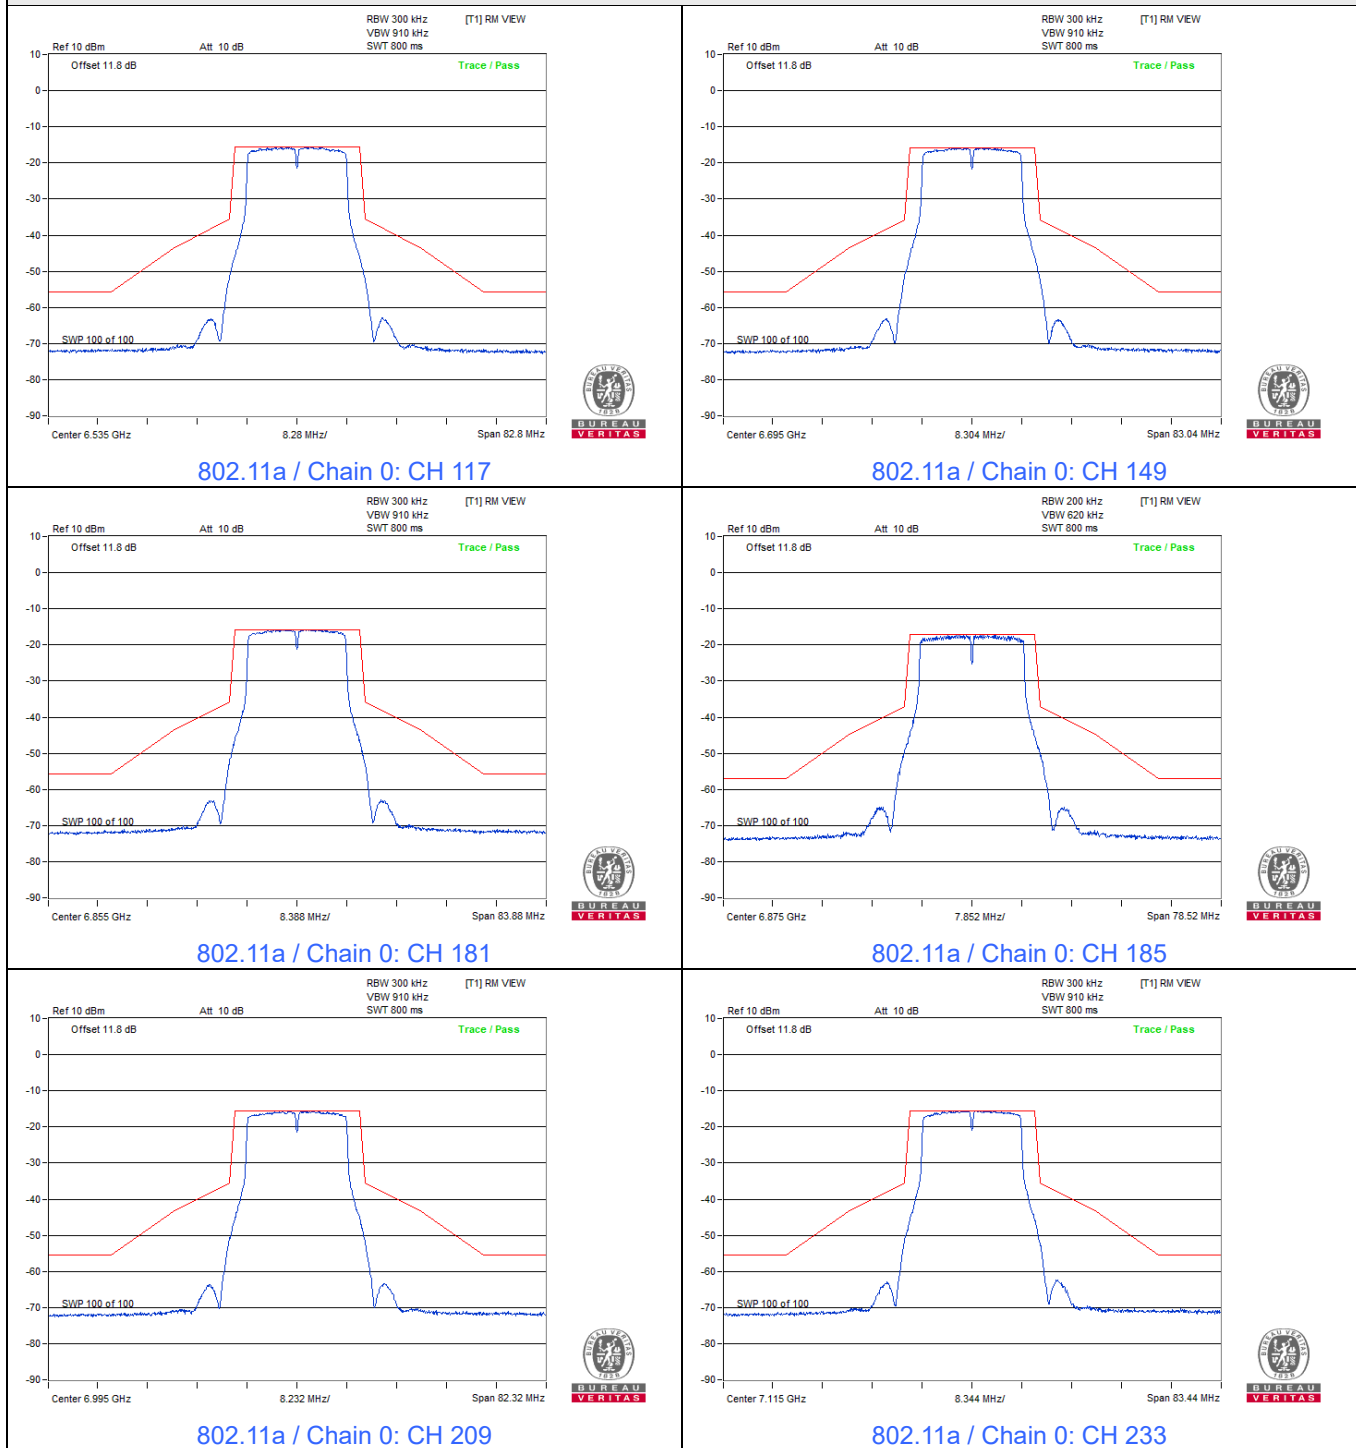


Spectrum Plot

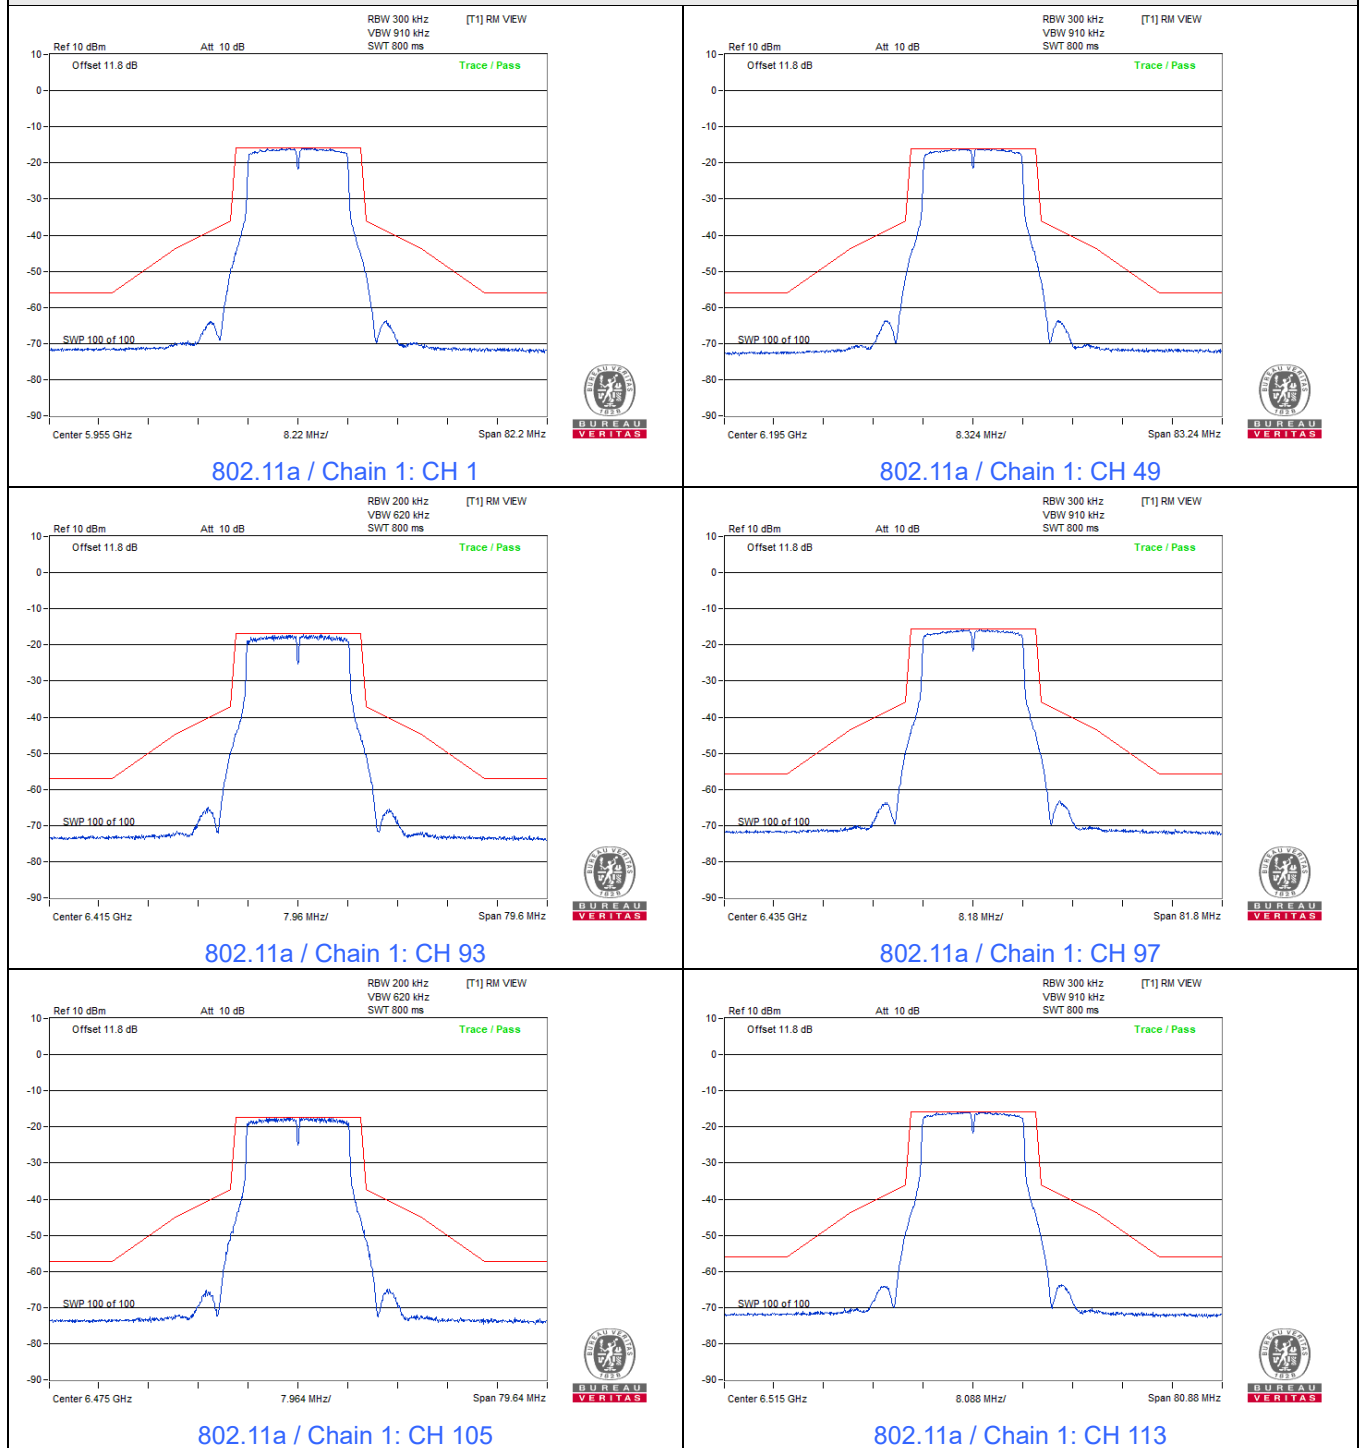


Spectrum Plot

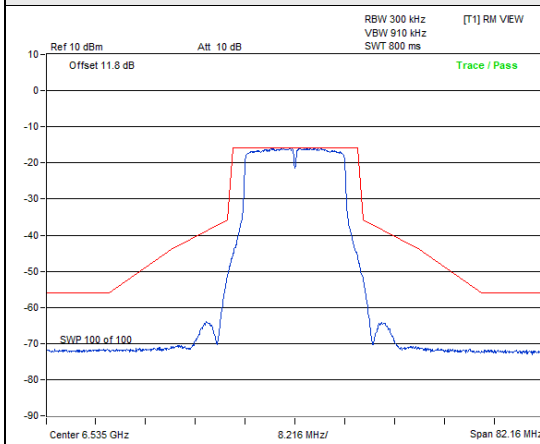


802.11a / Chain 1: CH 117

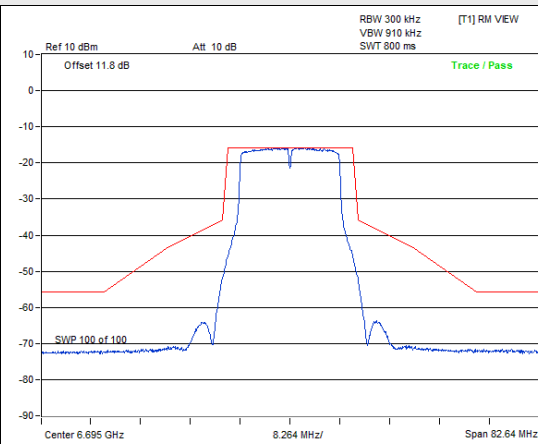


802.11a / Chain 1: CH 149

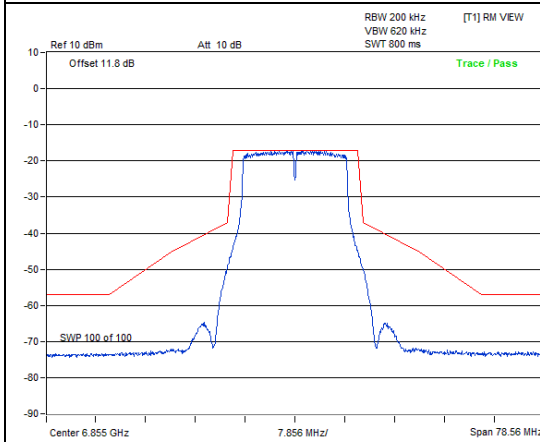


802.11a / Chain 1: CH 181

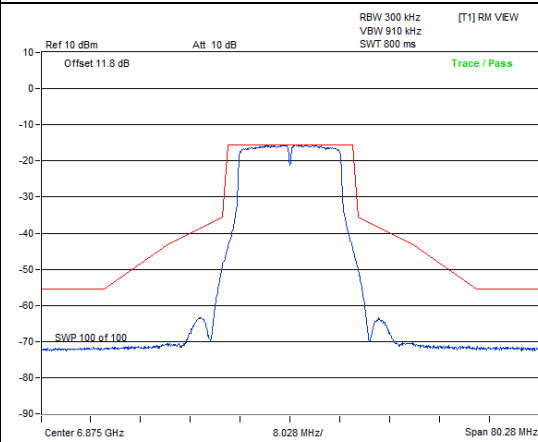

802.11a / Chain 1: CH 185

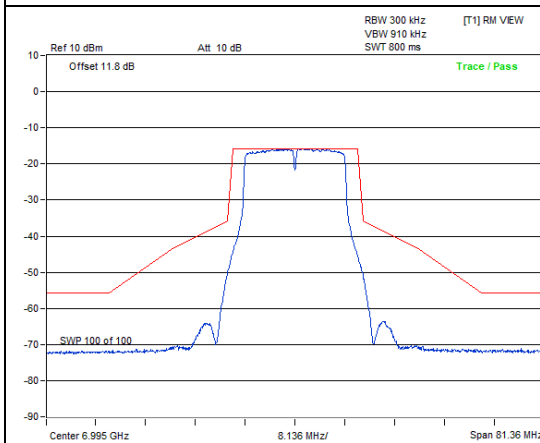


802.11a / Chain 1: CH 209

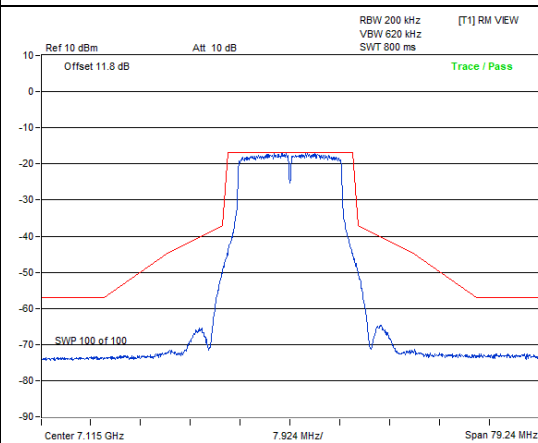


802.11a / Chain 1: CH 233


802.11be (EHT20)

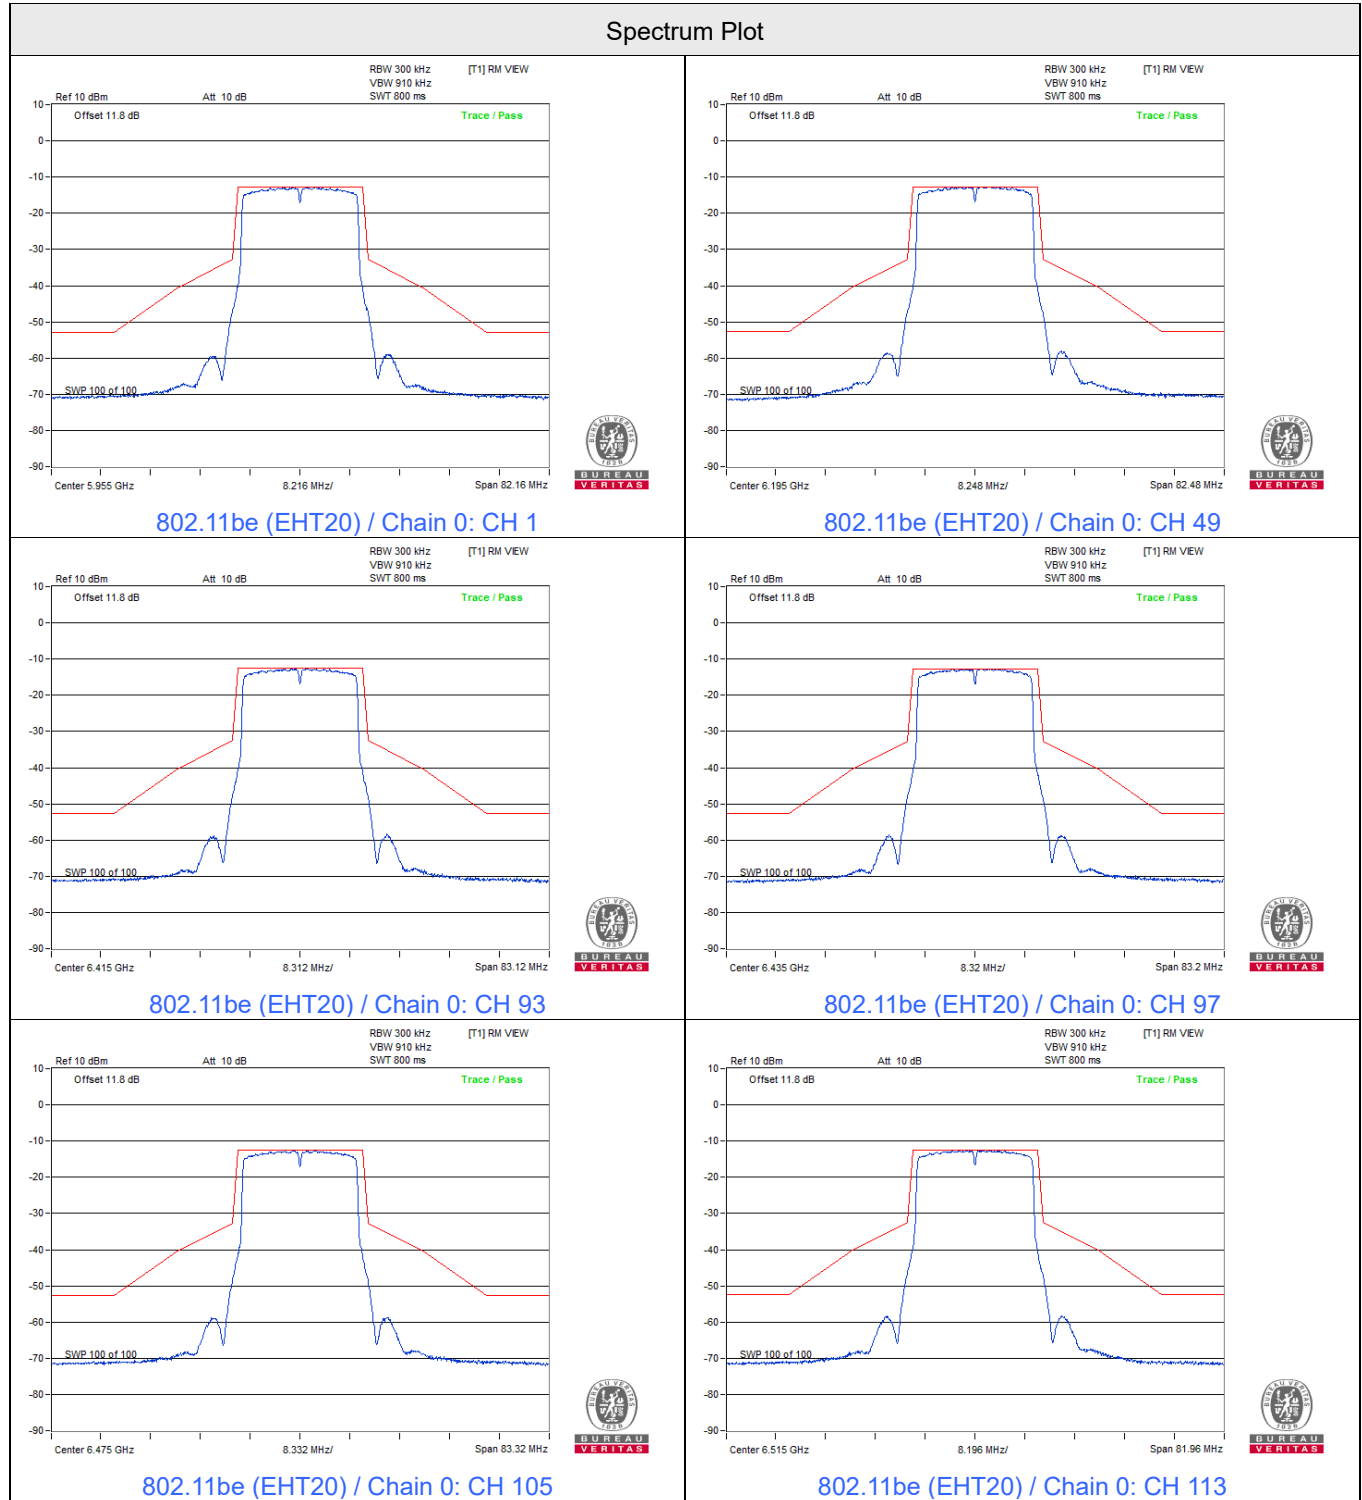


Spectrum Plot

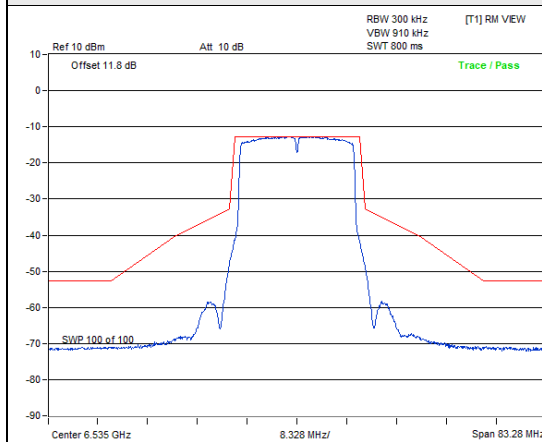


802.11be (EHT20) / Chain 0: CH 117

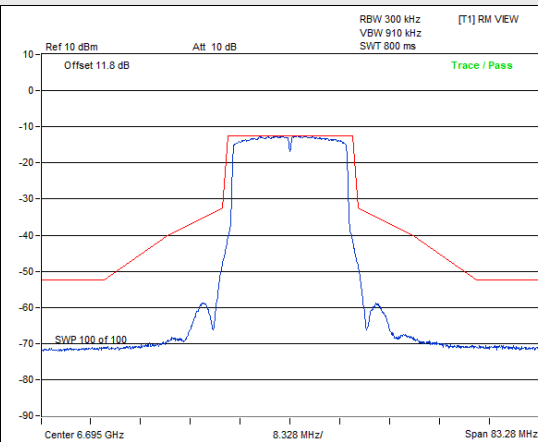


802.11be (EHT20) / Chain 0: CH 149

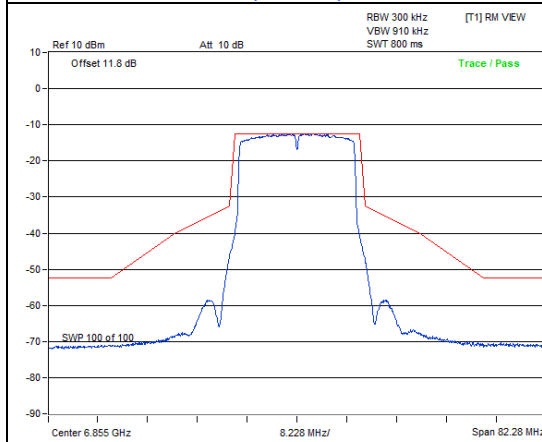


802.11be (EHT20) / Chain 0: CH 181

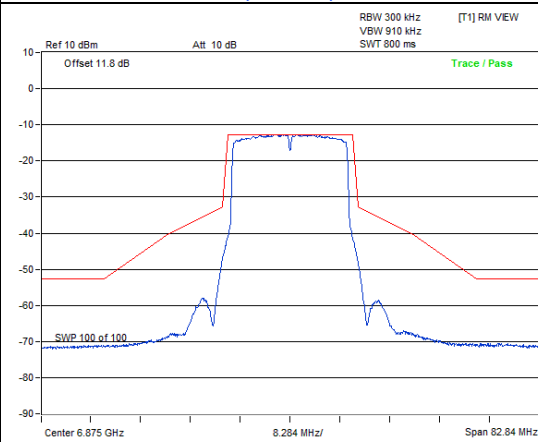

802.11be (EHT20) / Chain 0: CH 185

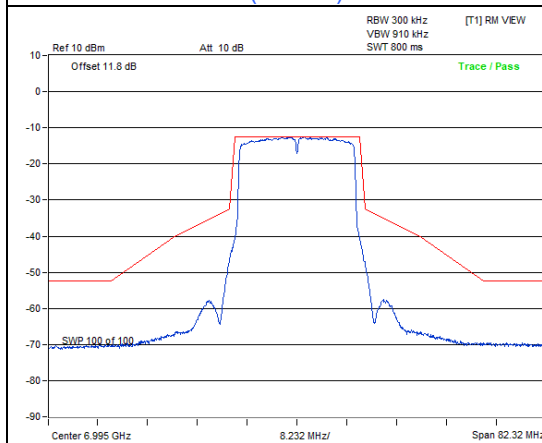


802.11be (EHT20) / Chain 0: CH 209

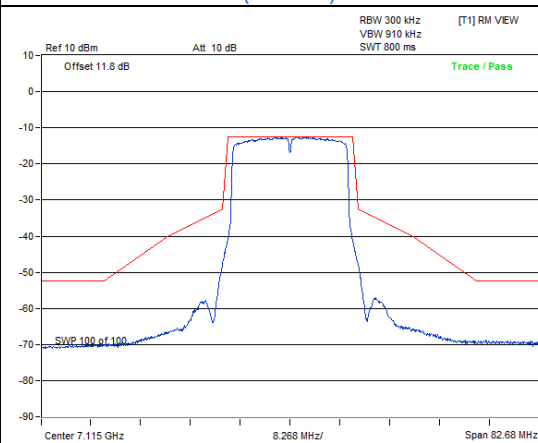


802.11be (EHT20) / Chain 0: CH 233


Spectrum Plot

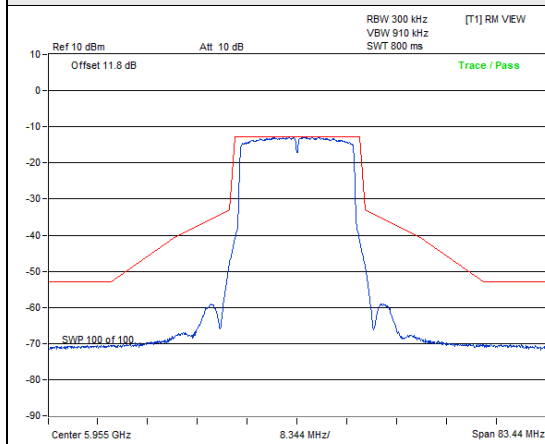


802.11be (EHT20) / Chain 1: CH 1

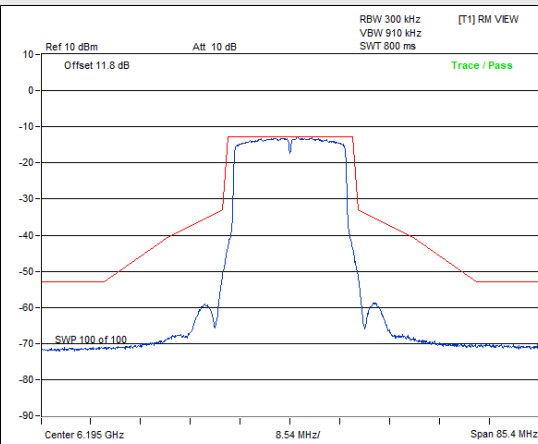


802.11be (EHT20) / Chain 1: CH 49

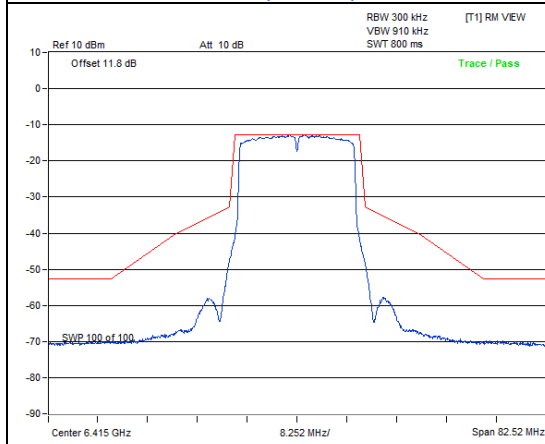


802.11be (EHT20) / Chain 1: CH 93

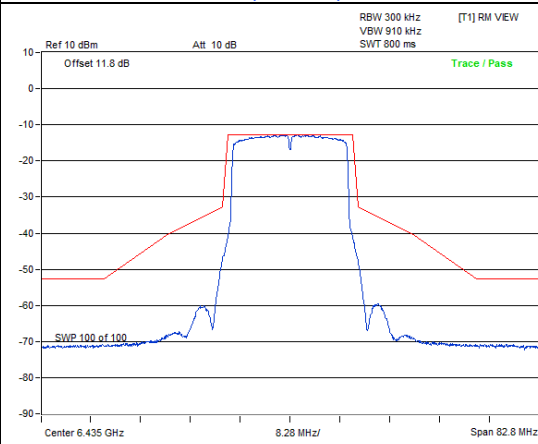

802.11be (EHT20) / Chain 1: CH 97

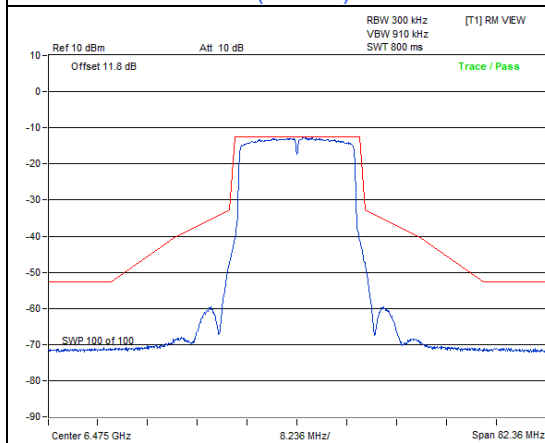


802.11be (EHT20) / Chain 1: CH 105

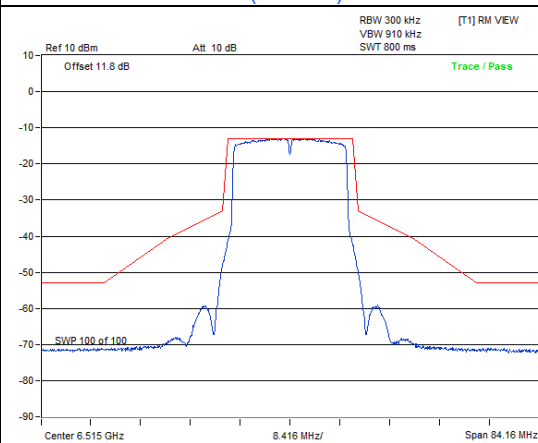


802.11be (EHT20) / Chain 1: CH 113


Spectrum Plot

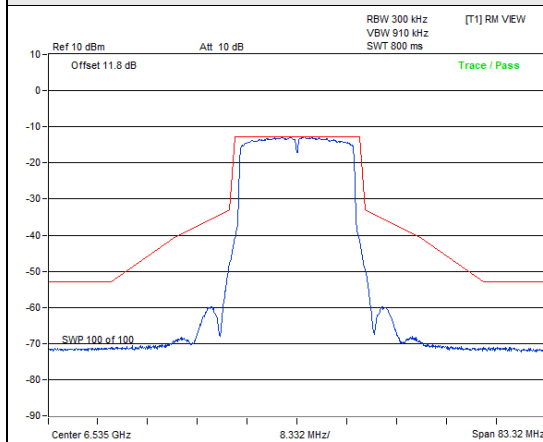


802.11be (EHT20) / Chain 1: CH 117

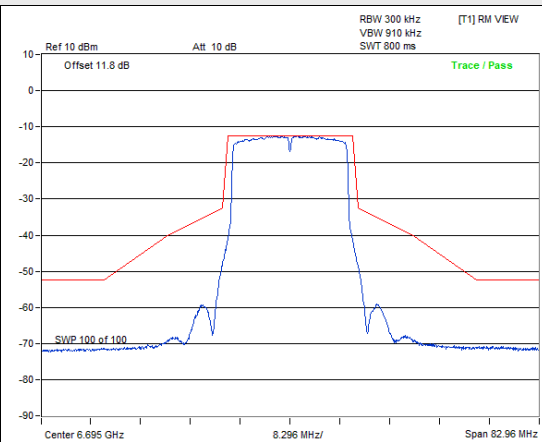


802.11be (EHT20) / Chain 1: CH 149

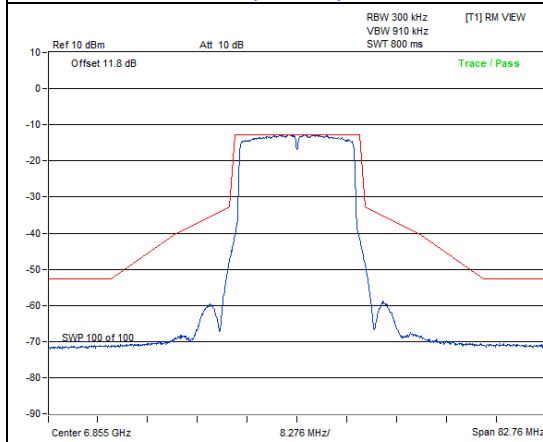


802.11be (EHT20) / Chain 1: CH 181

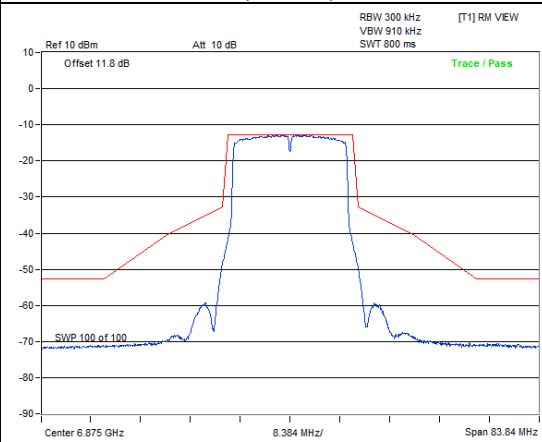

802.11be (EHT20) / Chain 1: CH 185

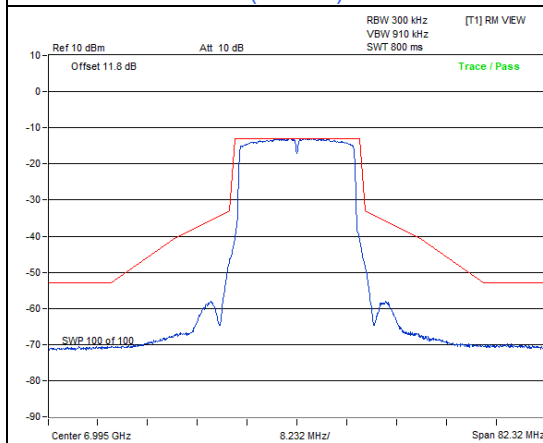


802.11be (EHT20) / Chain 1: CH 209

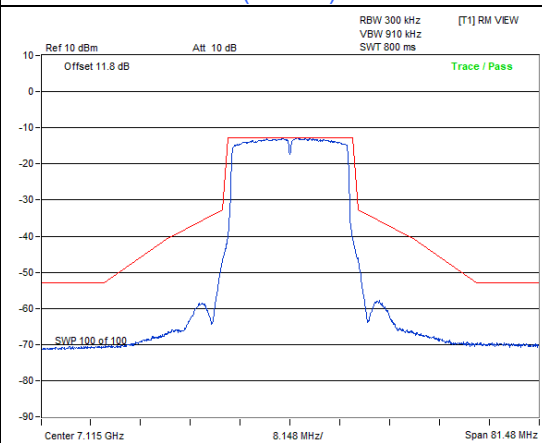


802.11be (EHT20) / Chain 1: CH 233


802.11be (EHT40)

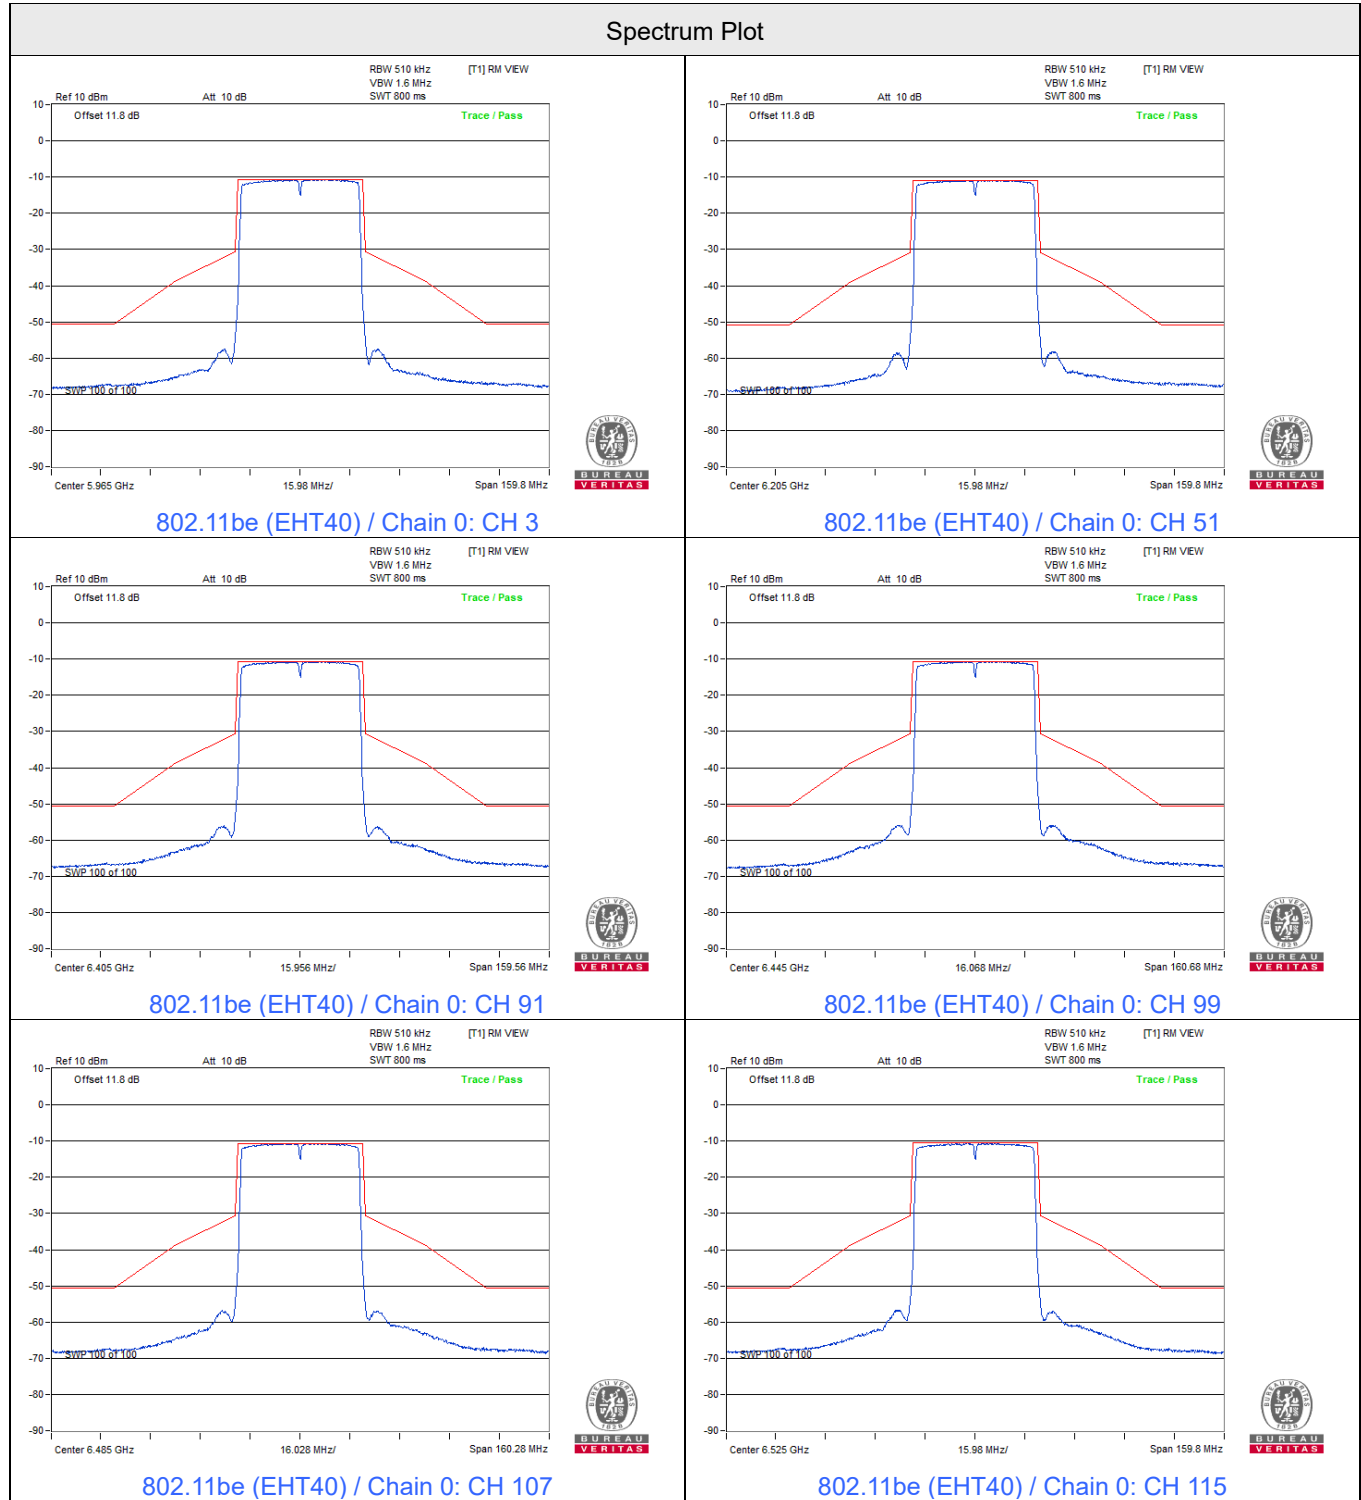


Spectrum Plot

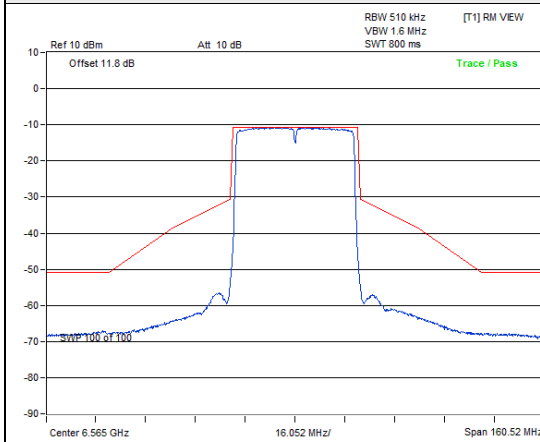


802.11be (EHT40) / Chain 0: CH 123

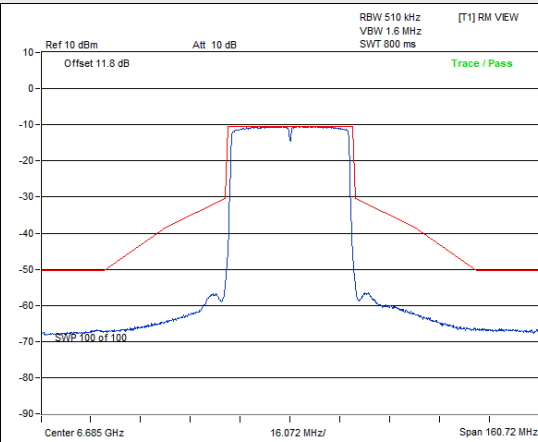


802.11be (EHT40) / Chain 0: CH 147

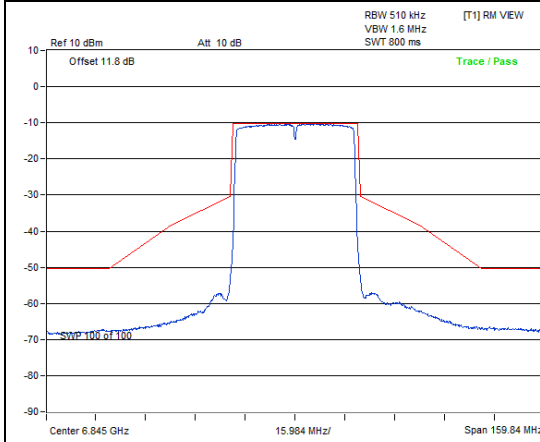


802.11be (EHT40) / Chain 0: CH 179

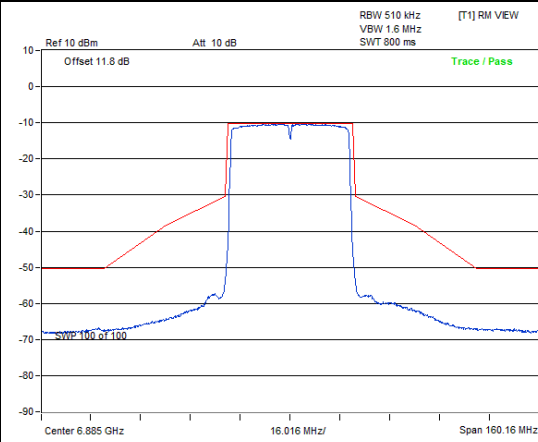

802.11be (EHT40) / Chain 0: CH 187

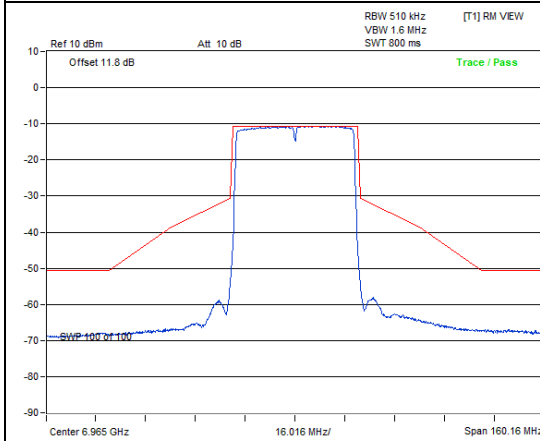


802.11be (EHT40) / Chain 0: CH 203

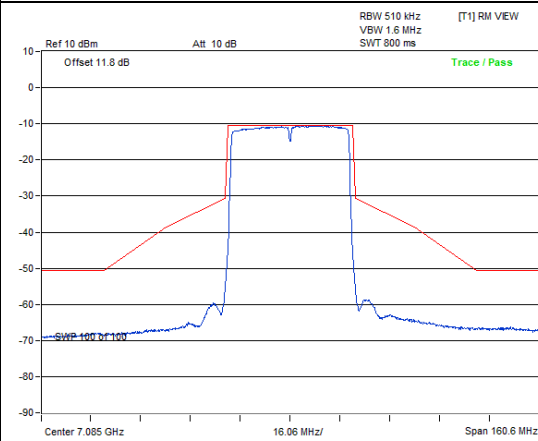


802.11be (EHT40) / Chain 0: CH 227


Spectrum Plot

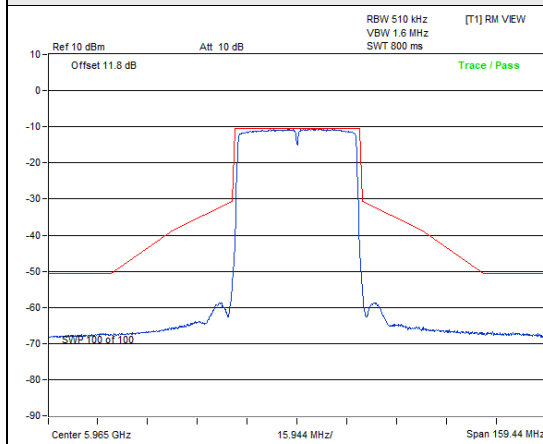


802.11be (EHT40) / Chain 1: CH 3

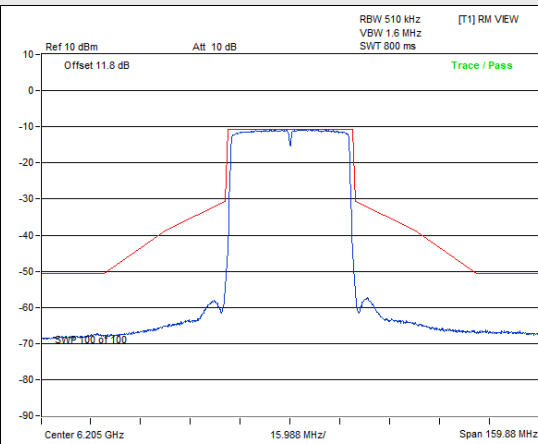


802.11be (EHT40) / Chain 1: CH 51

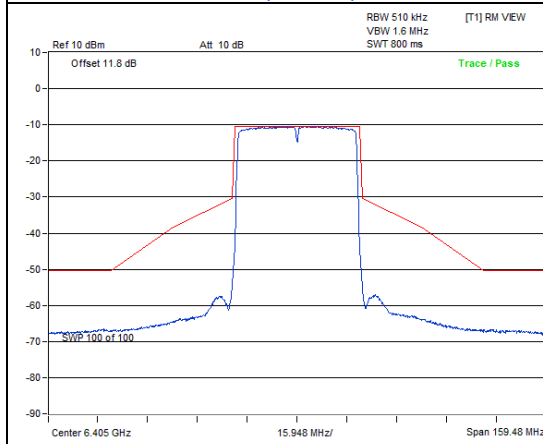


802.11be (EHT40) / Chain 1: CH 91

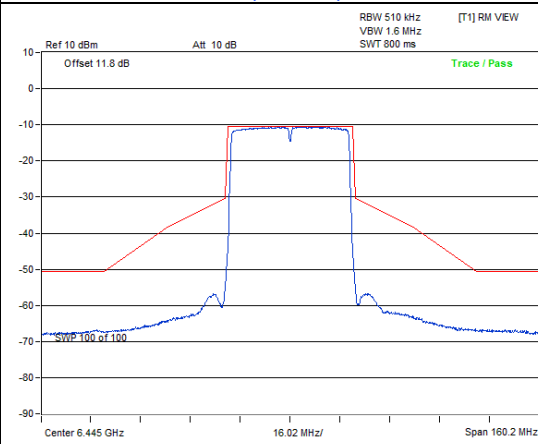

802.11be (EHT40) / Chain 1: CH 99

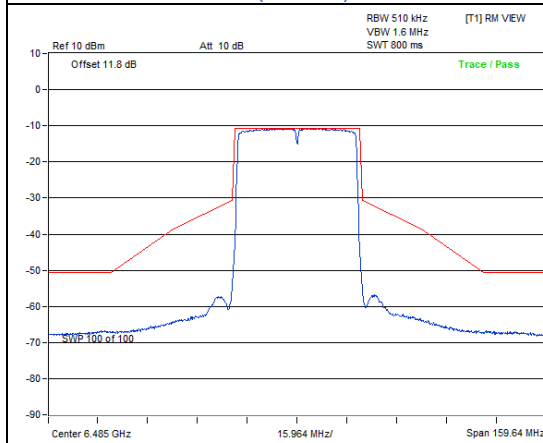


802.11be (EHT40) / Chain 1: CH 107

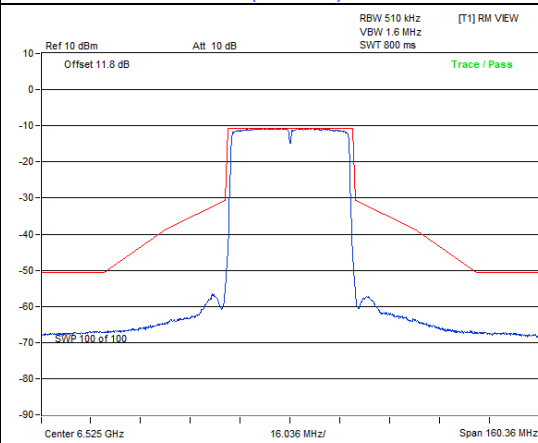


802.11be (EHT40) / Chain 1: CH 115


Spectrum Plot

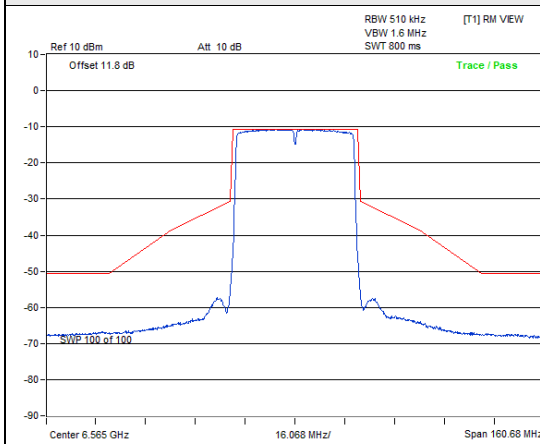


802.11be (EHT40) / Chain 1: CH 123

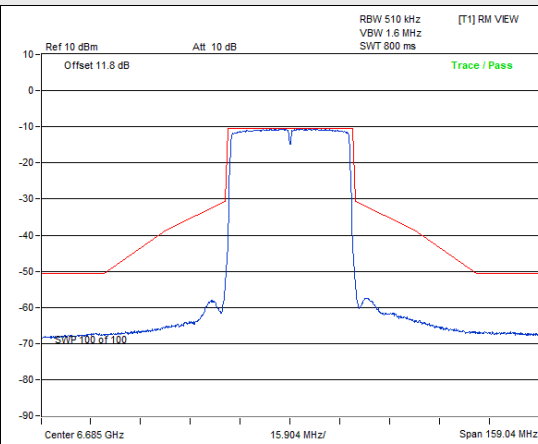


802.11be (EHT40) / Chain 1: CH 147

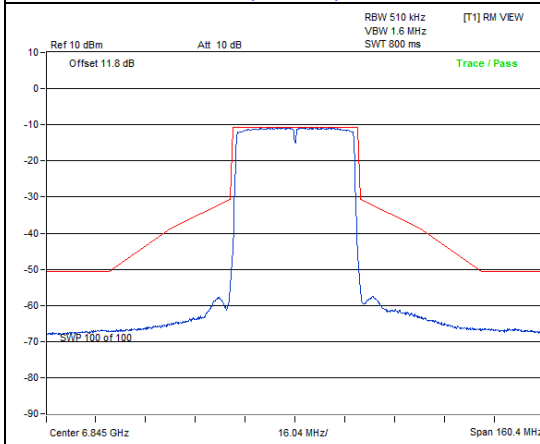


802.11be (EHT40) / Chain 1: CH 179

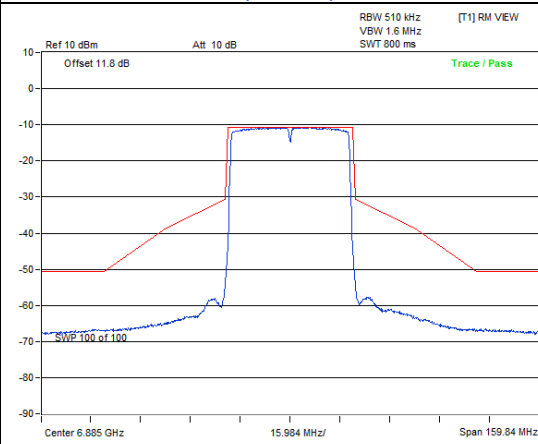

802.11be (EHT40) / Chain 1: CH 187

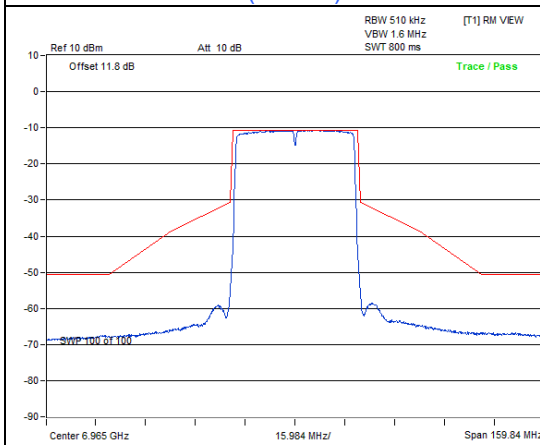

802.11be (EHT40) / Chain 1: CH 203

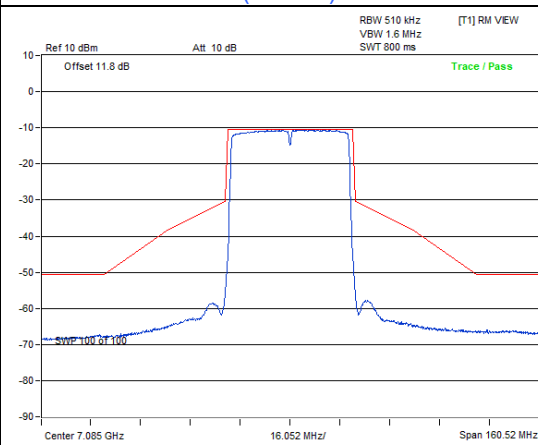


802.11be (EHT40) / Chain 1: CH 227


802.11be (EHT80)




Spectrum Plot

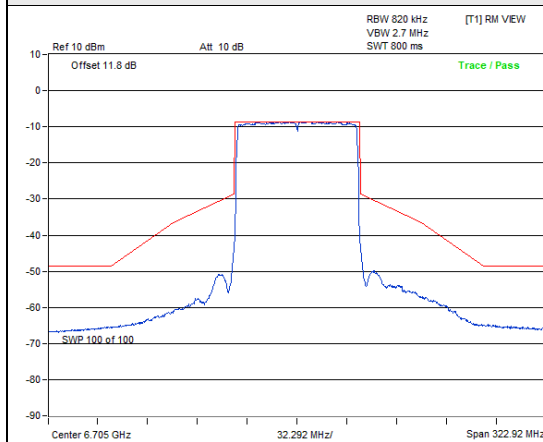


802.11be (EHT80) / Chain 0: CH 151

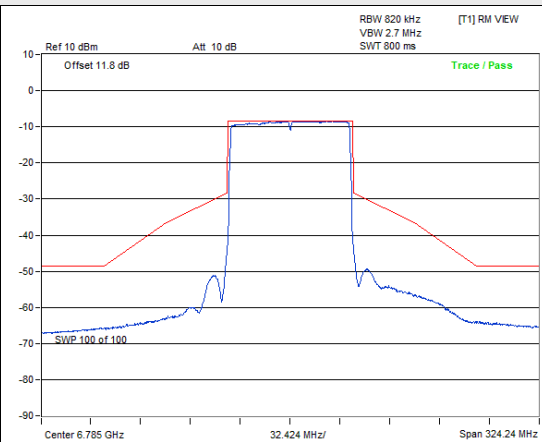


802.11be (EHT80) / Chain 0: CH 167

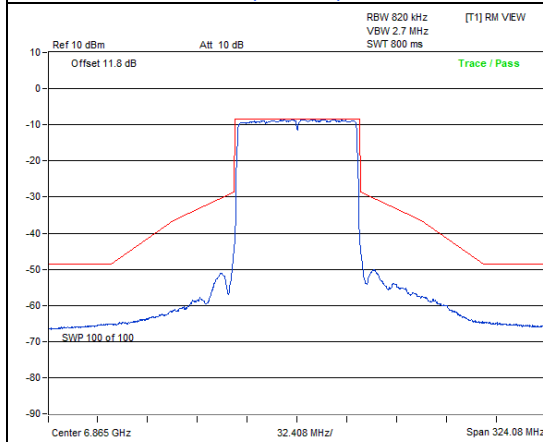


802.11be (EHT80) / Chain 0: CH 183

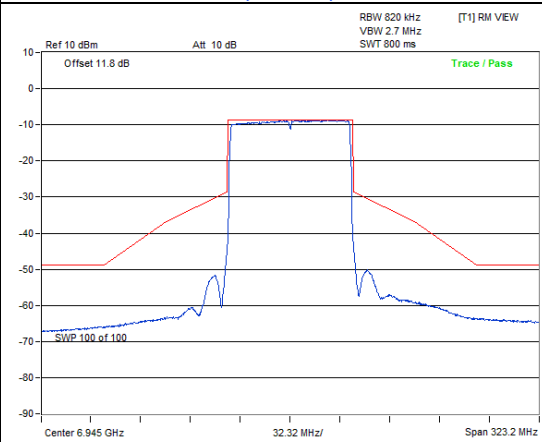

802.11be (EHT80) / Chain 0: CH 199

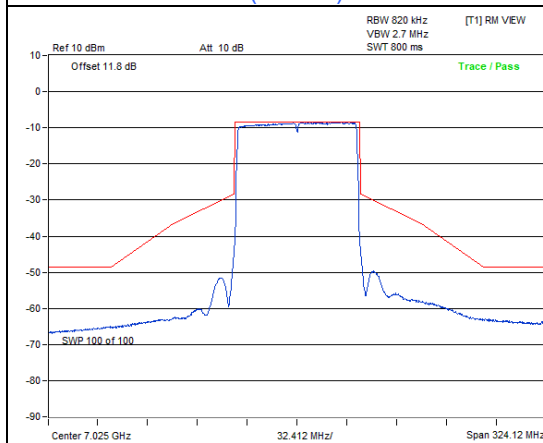


802.11be (EHT80) / Chain 0: CH 215

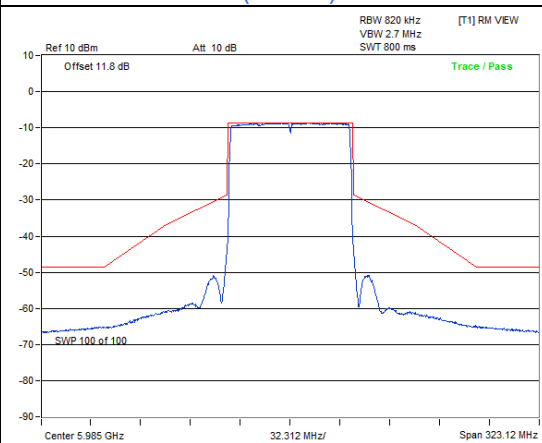


802.11be (EHT80) / Chain 1: CH 7


Spectrum Plot

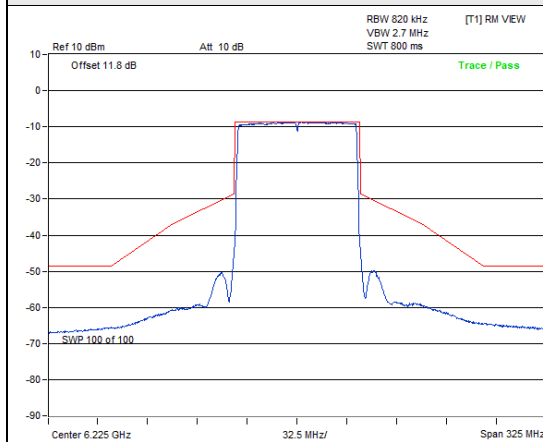


802.11be (EHT80) / Chain 1: CH 55

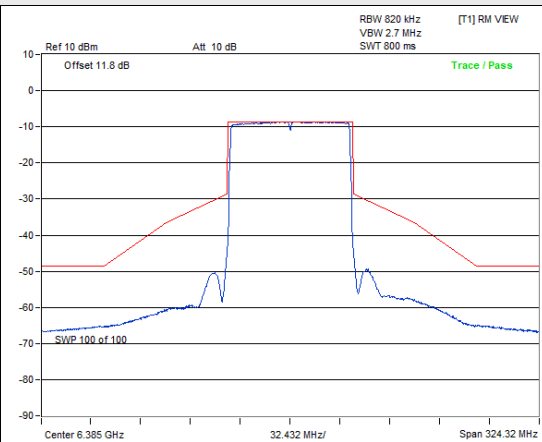


802.11be (EHT80) / Chain 1: CH 87

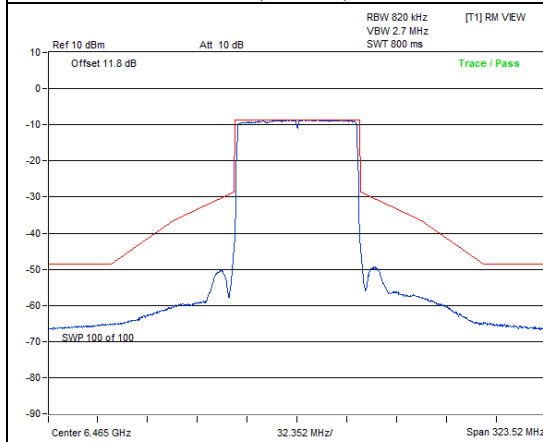


802.11be (EHT80) / Chain 1: CH 103

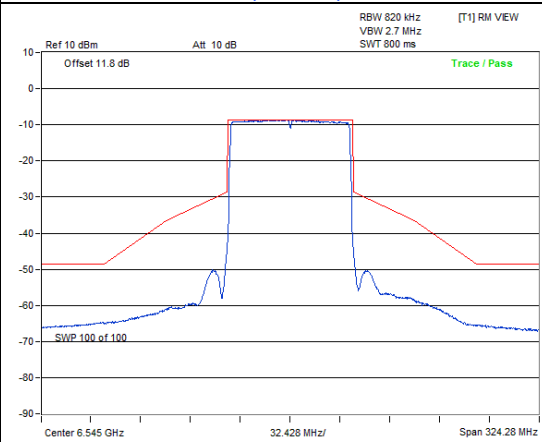

802.11be (EHT80) / Chain 1: CH 119

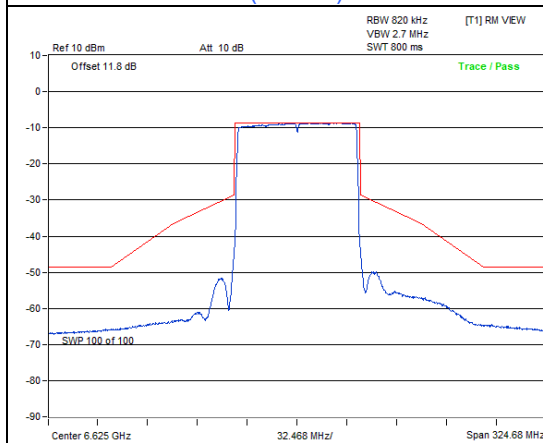


802.11be (EHT80) / Chain 1: CH 135

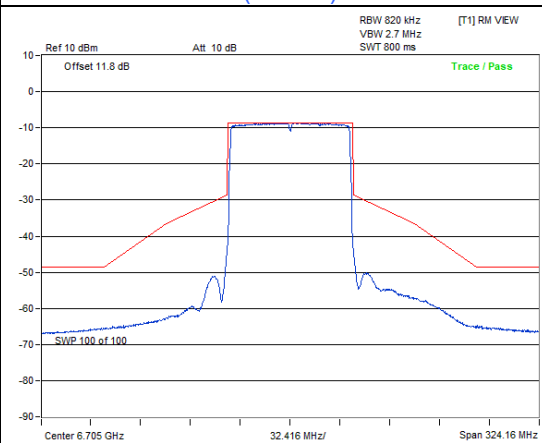


802.11be (EHT80) / Chain 1: CH 151


Spectrum Plot

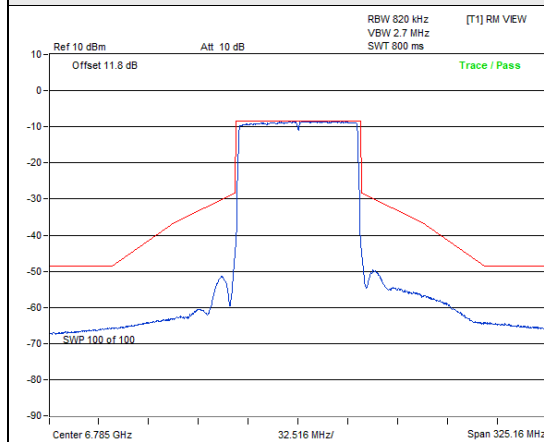


802.11be (EHT80) / Chain 1: CH 167

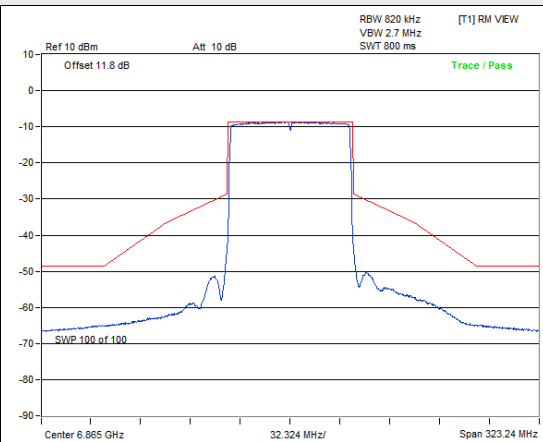

802.11be (EHT80) / Chain 1: CH 183

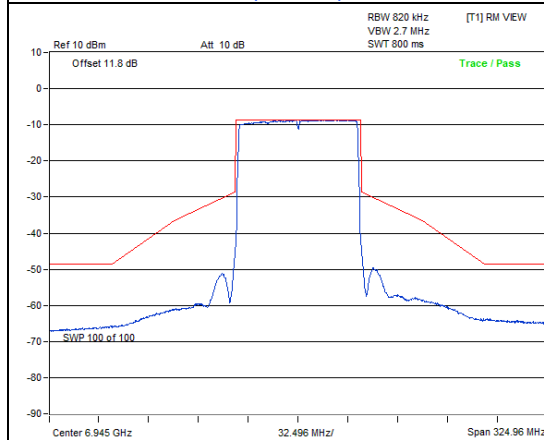


802.11be (EHT80) / Chain 1: CH 199

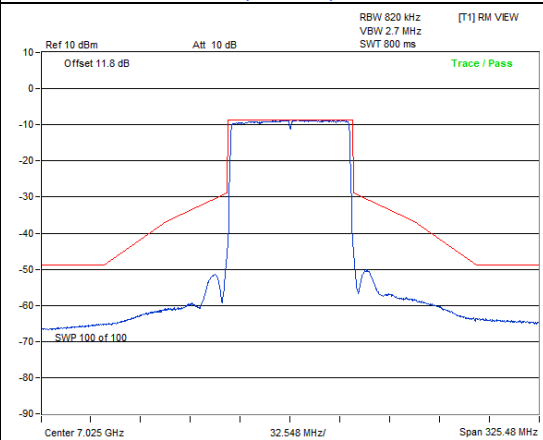


802.11be (EHT80) / Chain 1: CH 215


802.11be (EHT160)

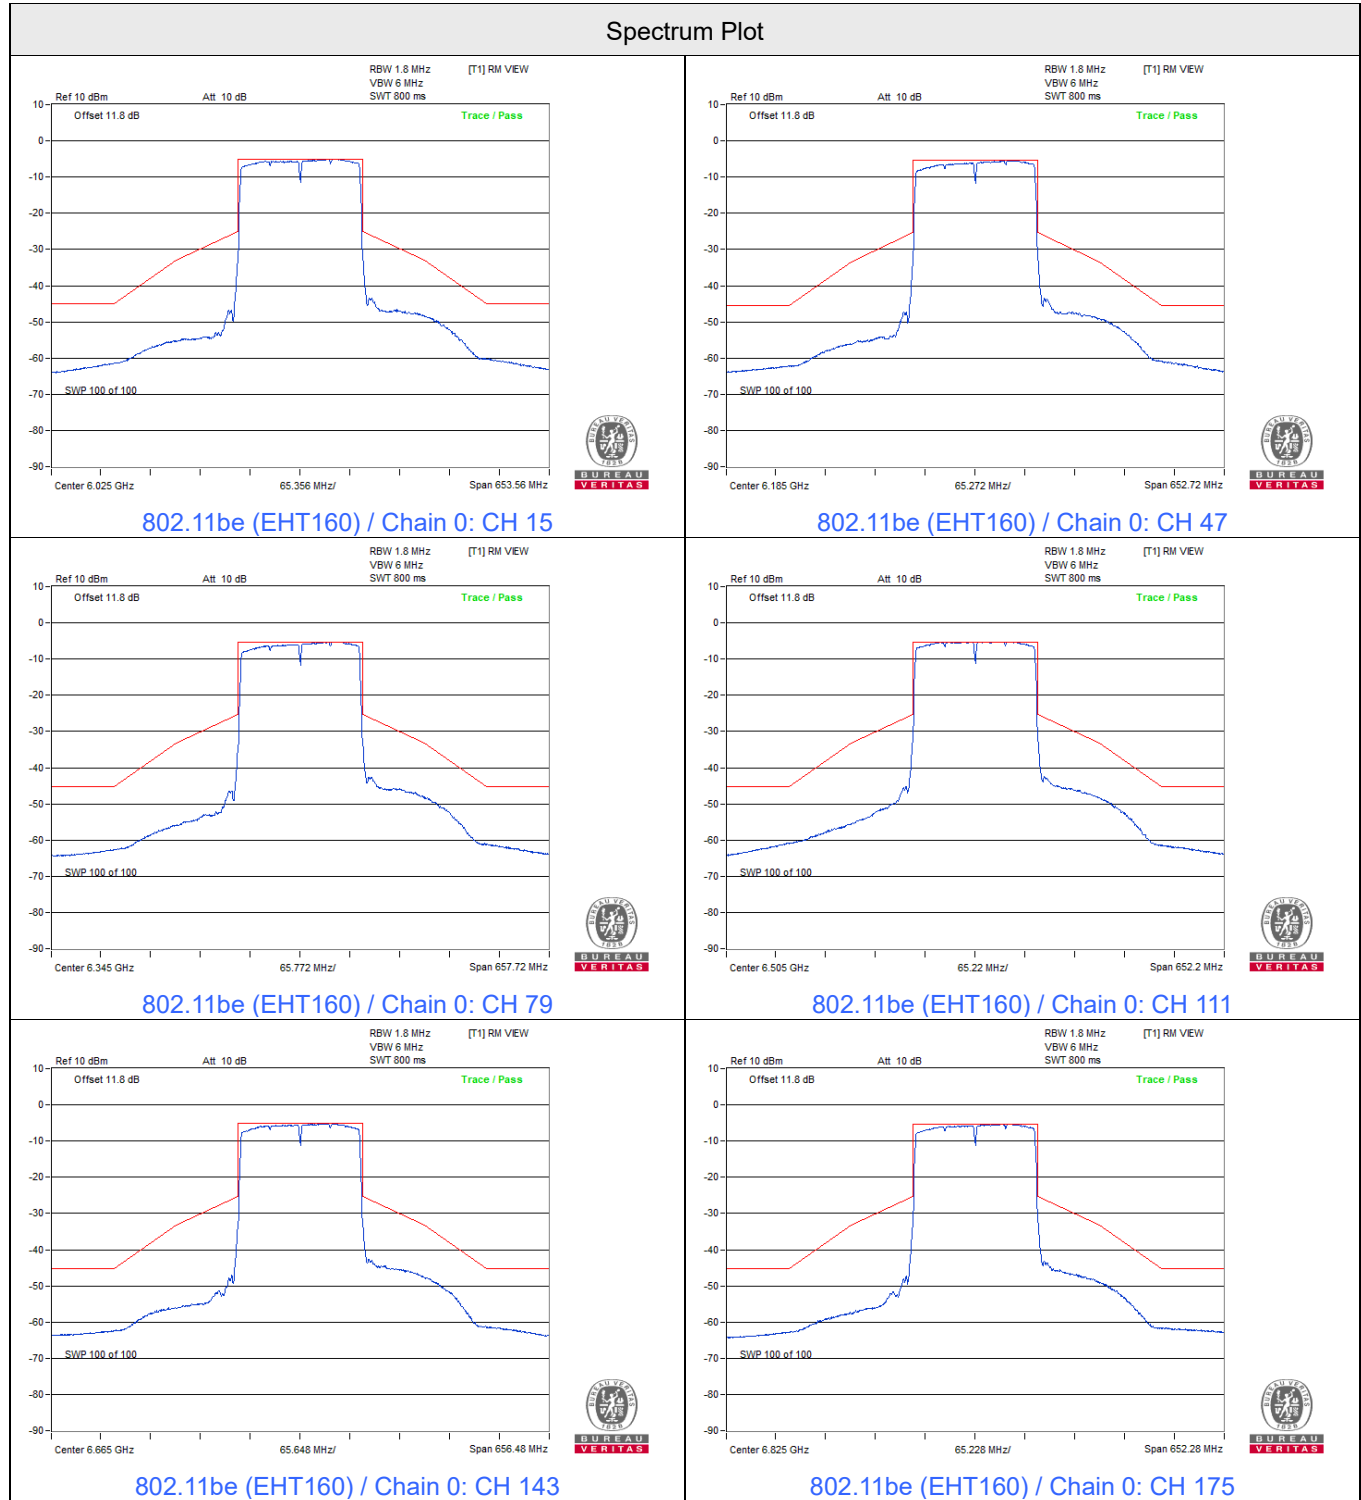


Spectrum Plot

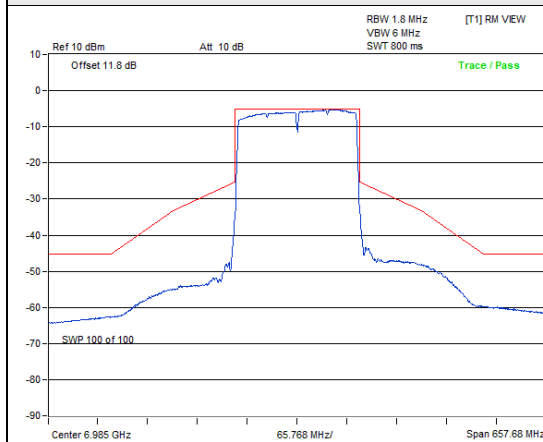


802.11be (EHT160) / Chain 0: CH 207

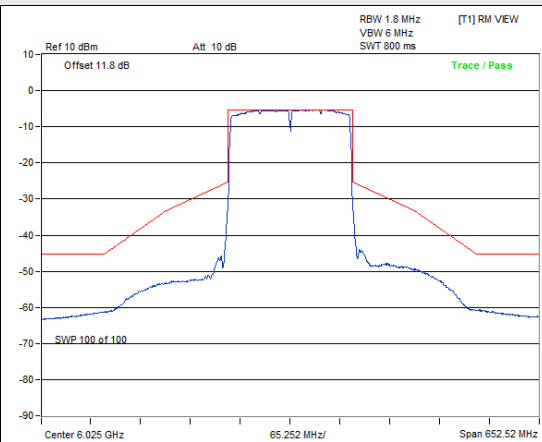


802.11be (EHT160) / Chain 1: CH 15

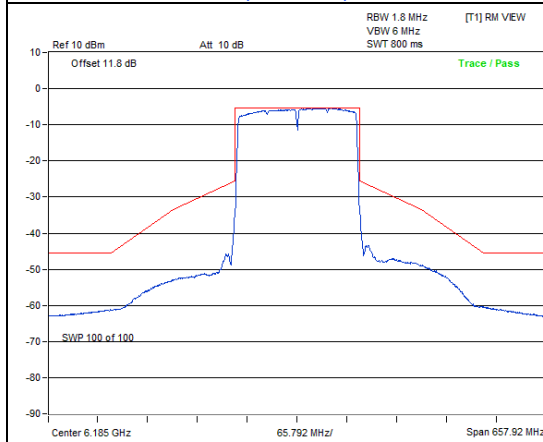


802.11be (EHT160) / Chain 1: CH 47

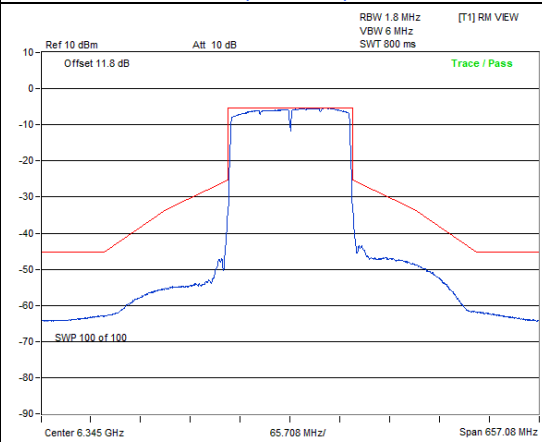

802.11be (EHT160) / Chain 1: CH 79

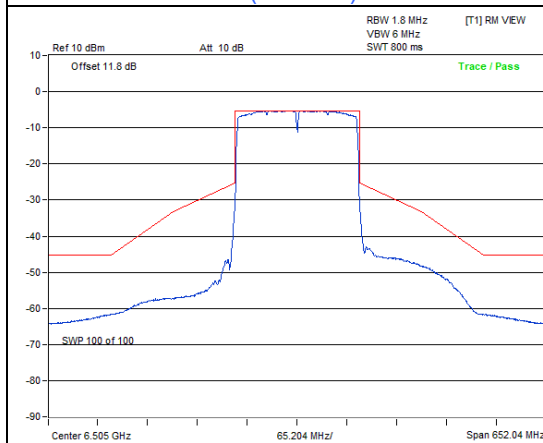


802.11be (EHT160) / Chain 1: CH 111

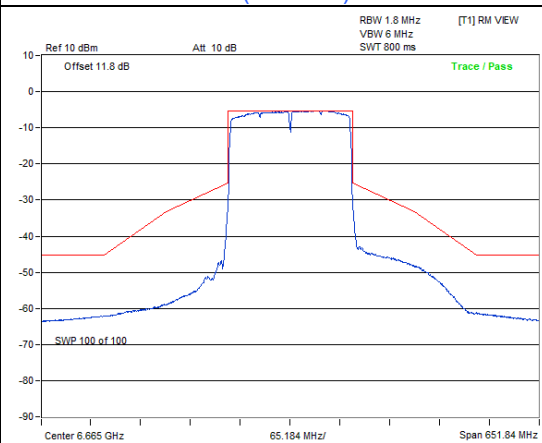


802.11be (EHT160) / Chain 1: CH 143

Spectrum Plot

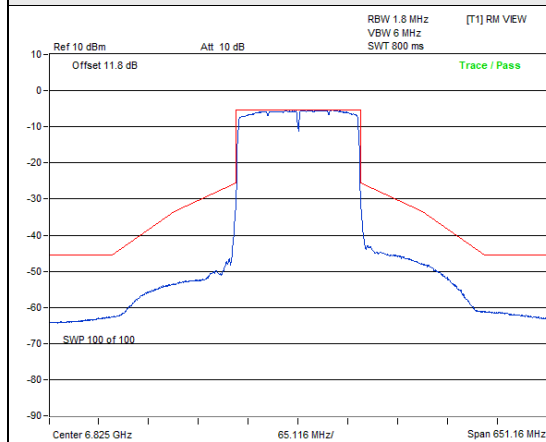


802.11be (EHT160) / Chain 1: CH 175

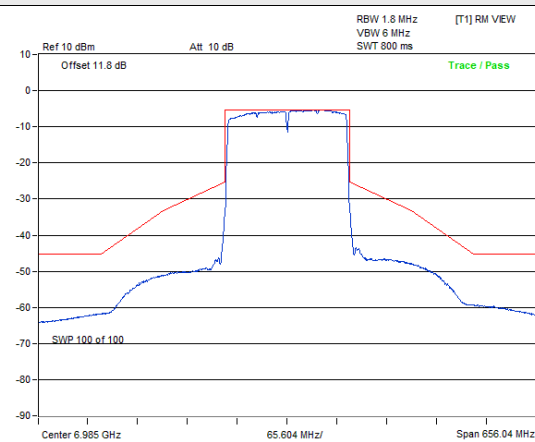


802.11be (EHT160) / Chain 1: CH 207

802.11be (EHT20) 26-tone RU


Spectrum Plot

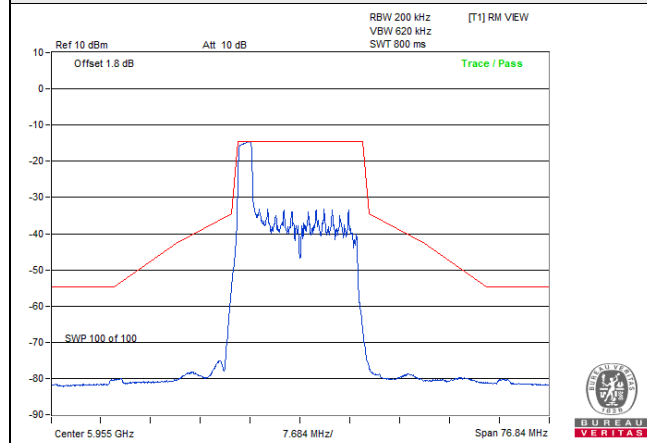


802.11be (EHT20) 26-tone RU / Chain 0: CH 1

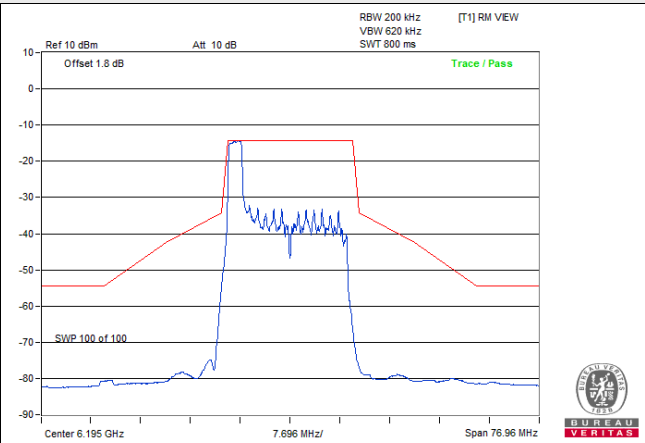


802.11be (EHT20) 26-tone RU / Chain 0: CH 49

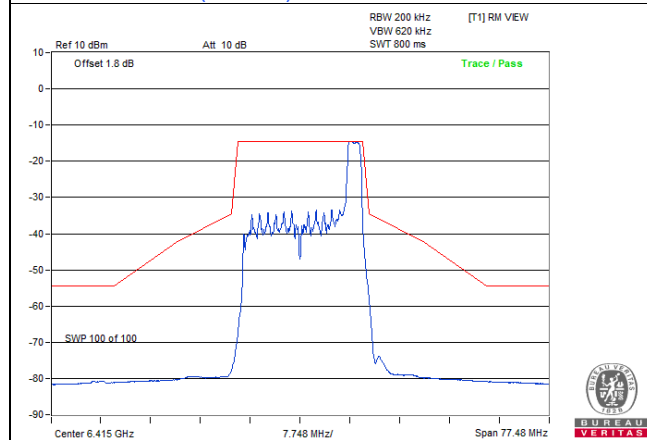


802.11be (EHT20) 26-tone RU / Chain 0: CH 93

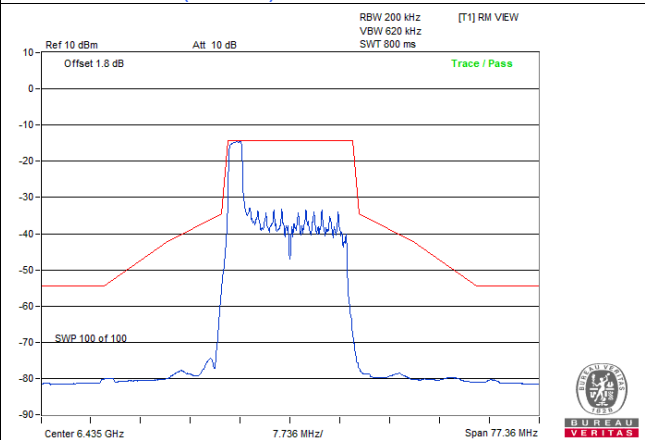

802.11be (EHT20) 26-tone RU / Chain 0: CH 97

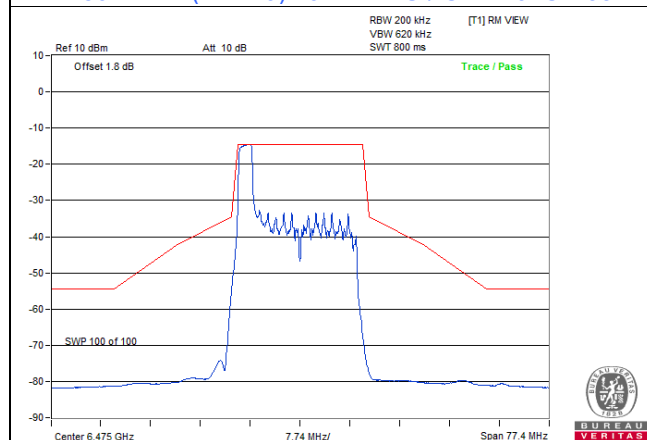


802.11be (EHT20) 26-tone RU / Chain 0: CH 105

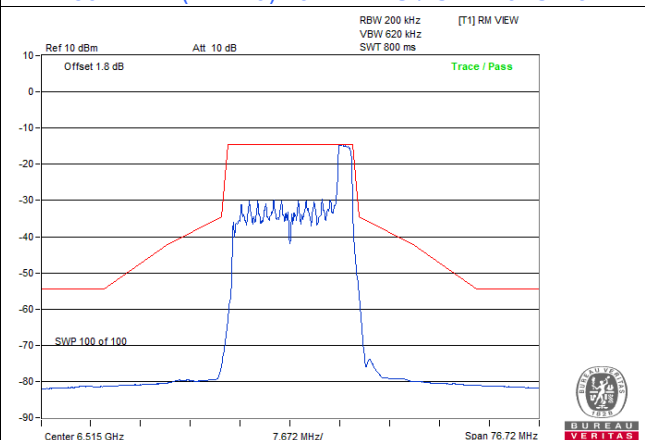


802.11be (EHT20) 26-tone RU / Chain 0: CH 113


Spectrum Plot

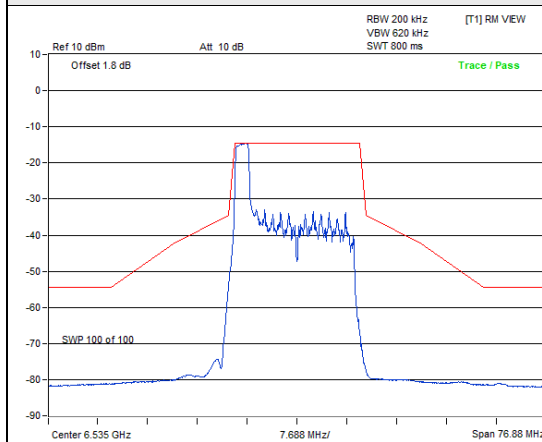


802.11be (EHT20) 26-tone RU / Chain 0: CH 117

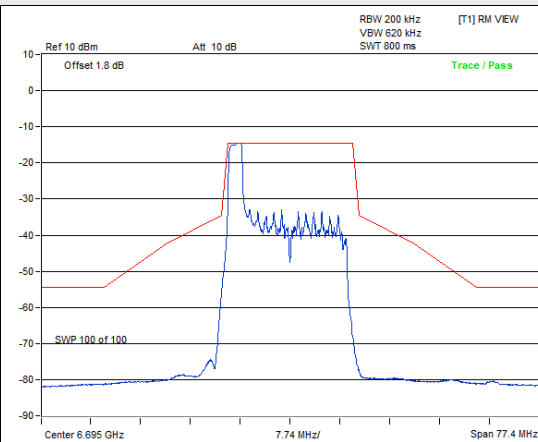


802.11be (EHT20) 26-tone RU / Chain 0: CH 149

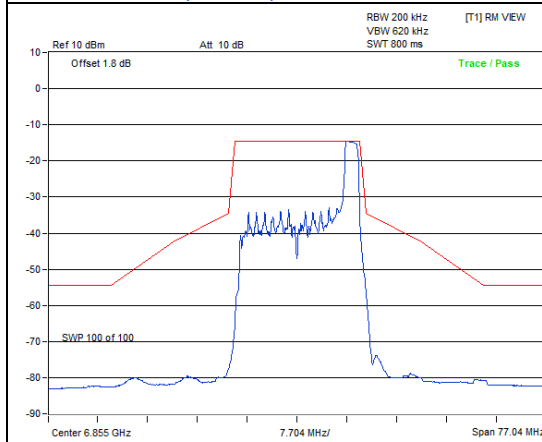


802.11be (EHT20) 26-tone RU / Chain 0: CH 181

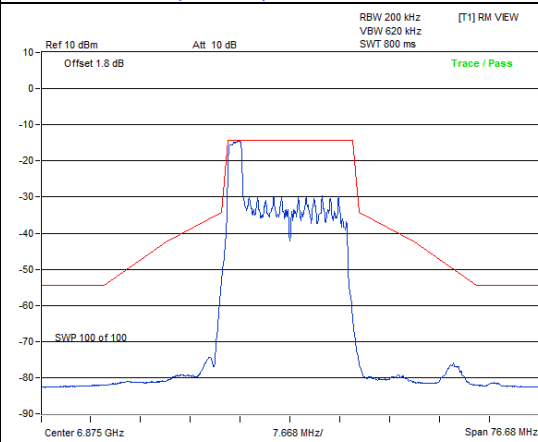

802.11be (EHT20) 26-tone RU / Chain 0: CH 185






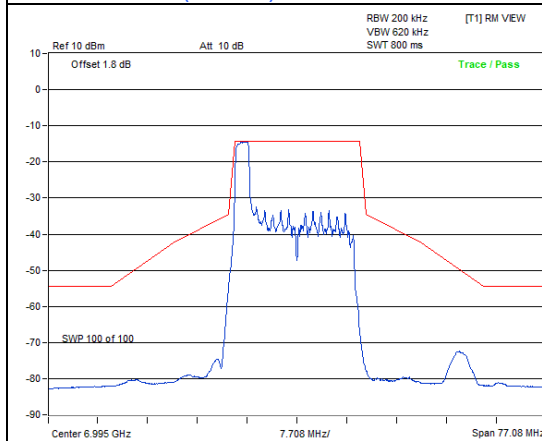


802.11be (EHT20) 26-tone RU / Chain 0: CH 209

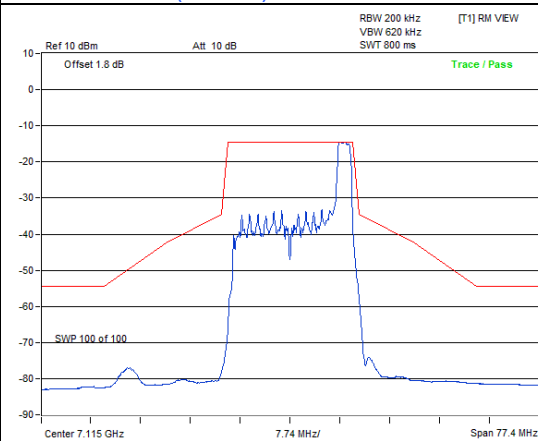


802.11be (EHT20) 26-tone RU / Chain 0: CH 233


Spectrum Plot

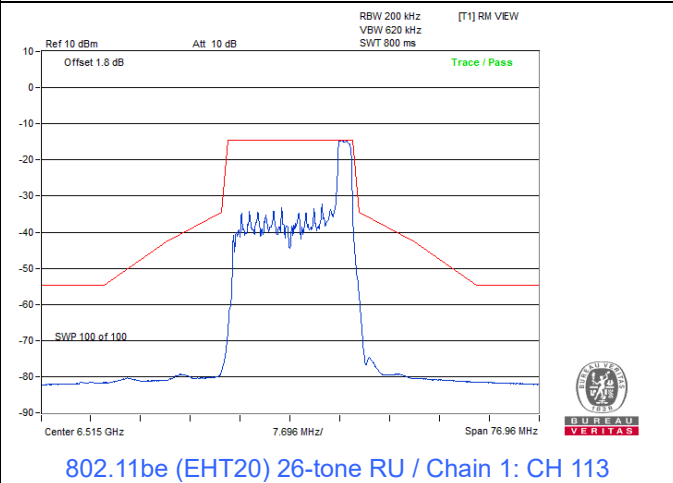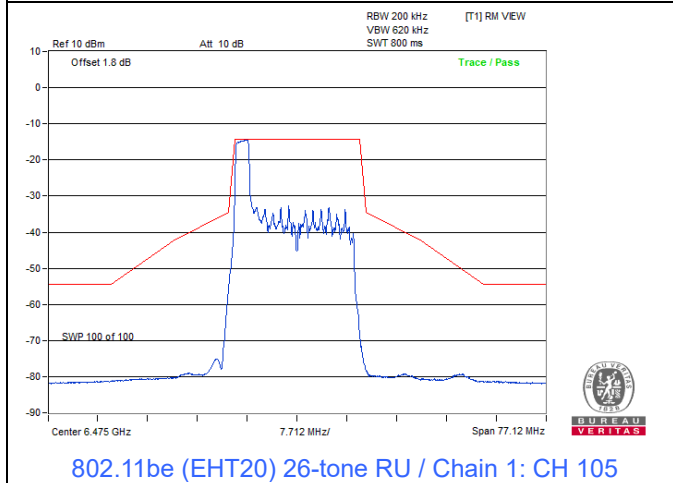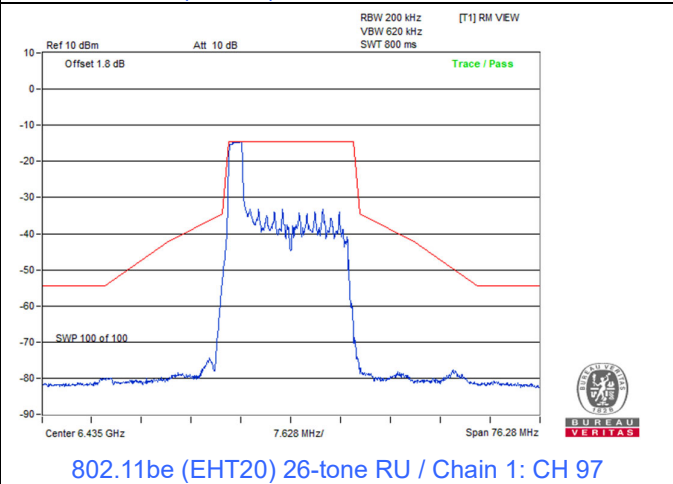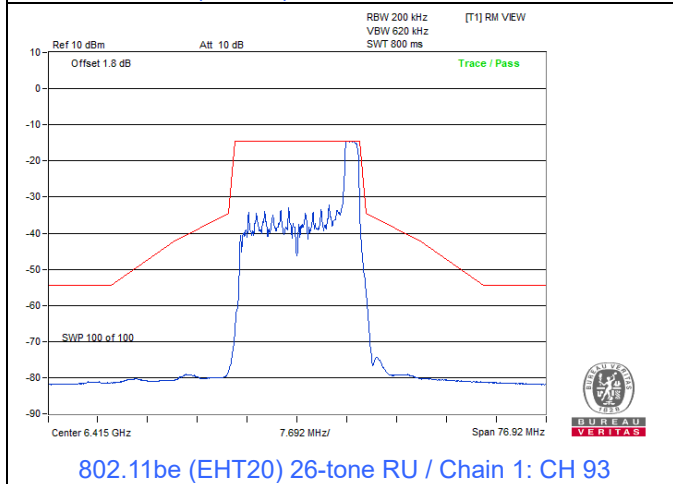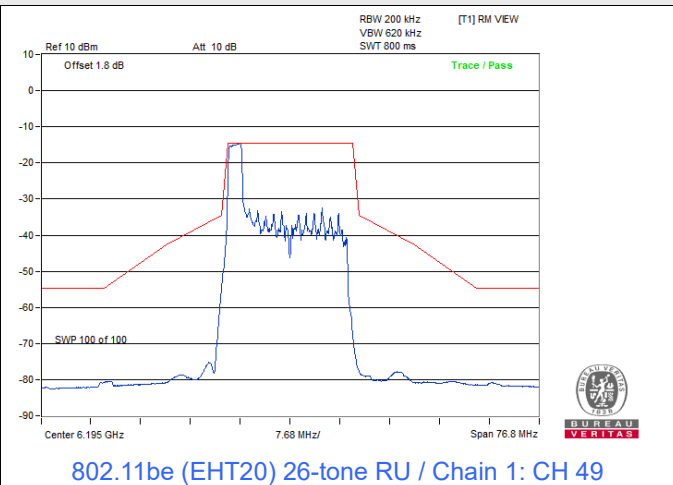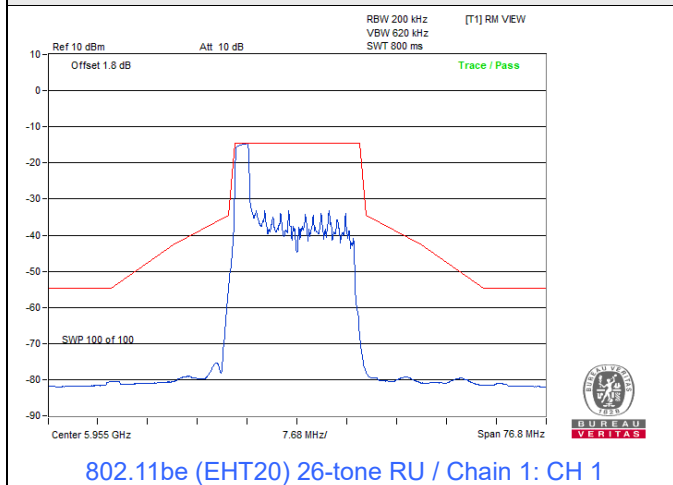


Spectrum Plot

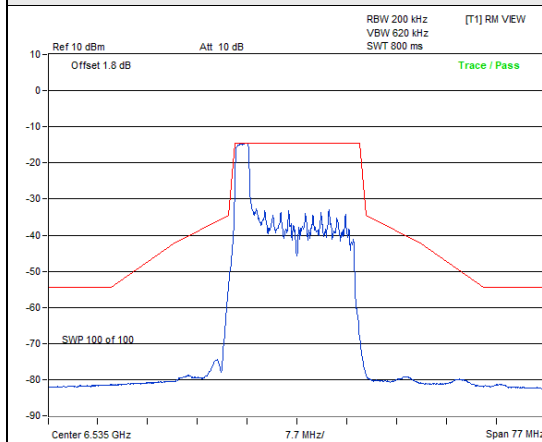


802.11be (EHT20) 26-tone RU / Chain 1: CH 117

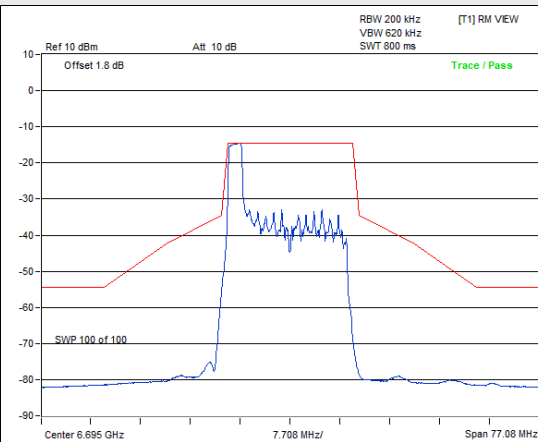


802.11be (EHT20) 26-tone RU / Chain 1: CH 149

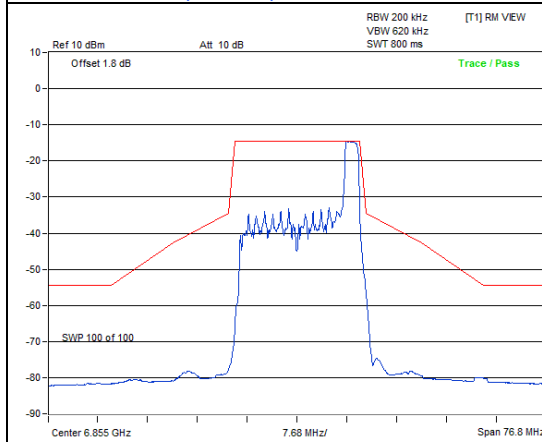


802.11be (EHT20) 26-tone RU / Chain 1: CH 181

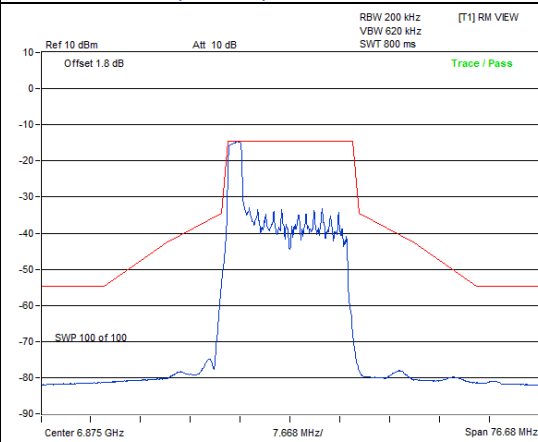

802.11be (EHT20) 26-tone RU / Chain 1: CH 185

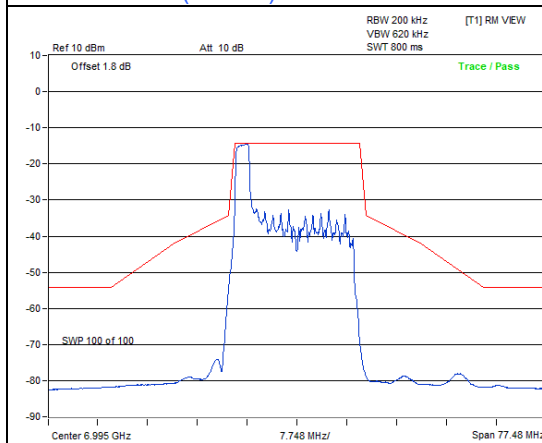


802.11be (EHT20) 26-tone RU / Chain 1: CH 209

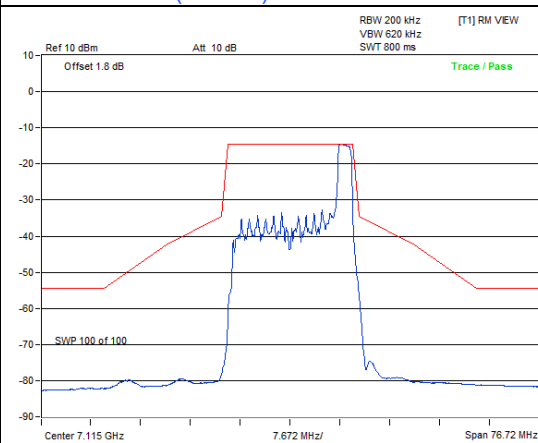


802.11be (EHT20) 26-tone RU / Chain 1: CH 233

802.11be (EHT20) 52-tone RU


Spectrum Plot

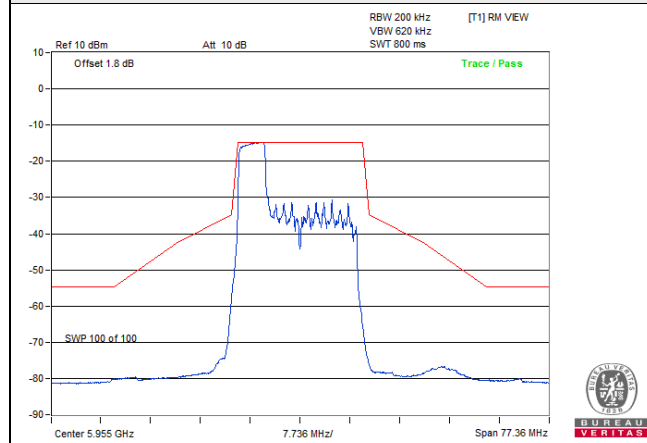


802.11be (EHT20) 52-tone RU / Chain 0: CH 1

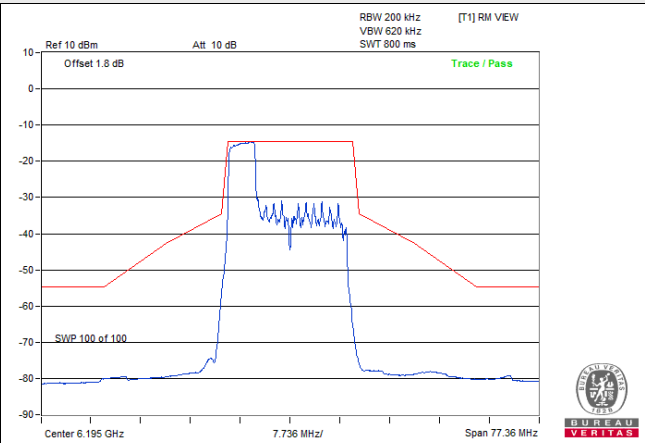


802.11be (EHT20) 52-tone RU / Chain 0: CH 49

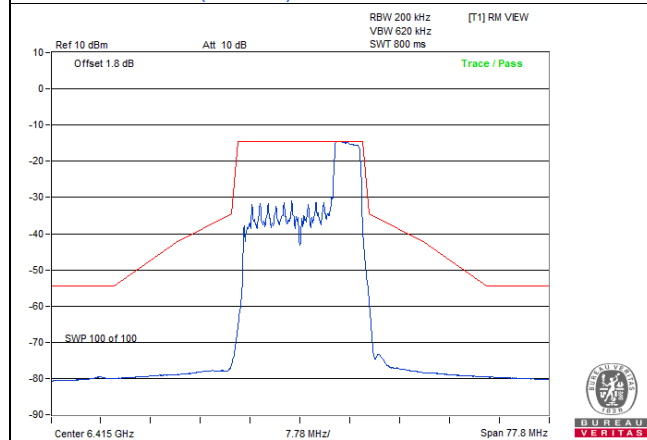


802.11be (EHT20) 52-tone RU / Chain 0: CH 93

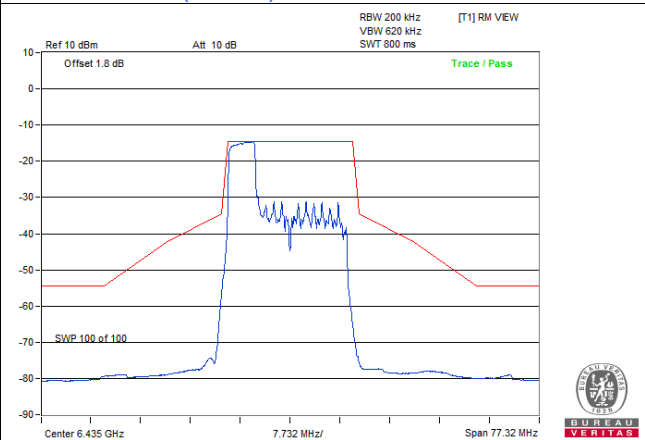

802.11be (EHT20) 52-tone RU / Chain 0: CH 97






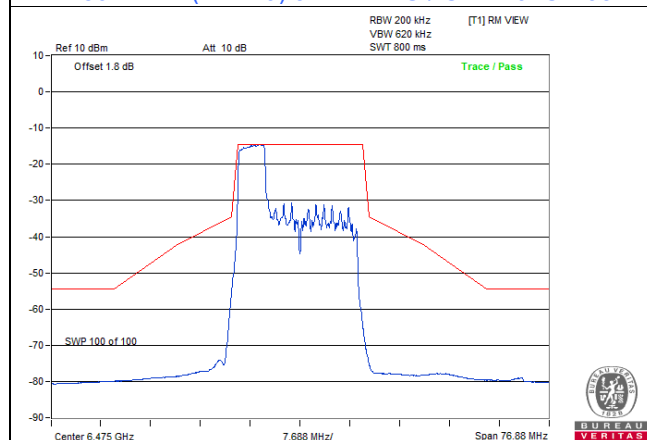


802.11be (EHT20) 52-tone RU / Chain 0: CH 105

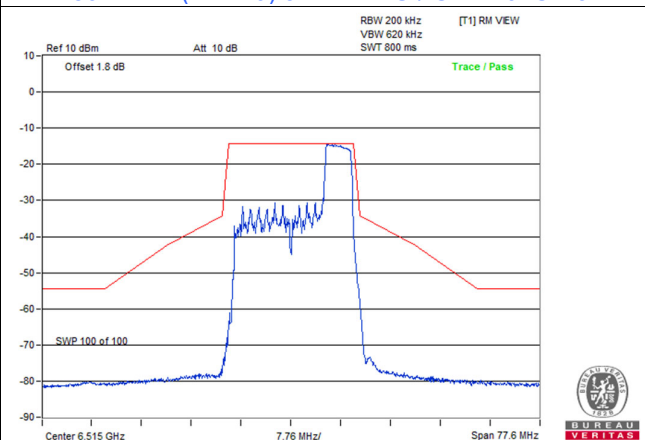


802.11be (EHT20) 52-tone RU / Chain 0: CH 113


Spectrum Plot

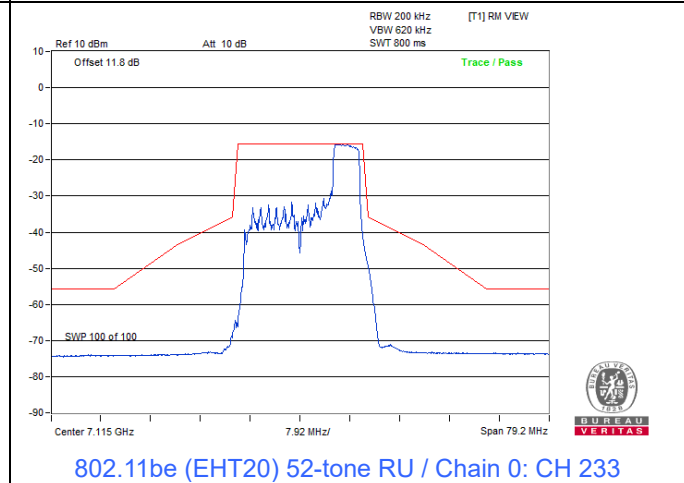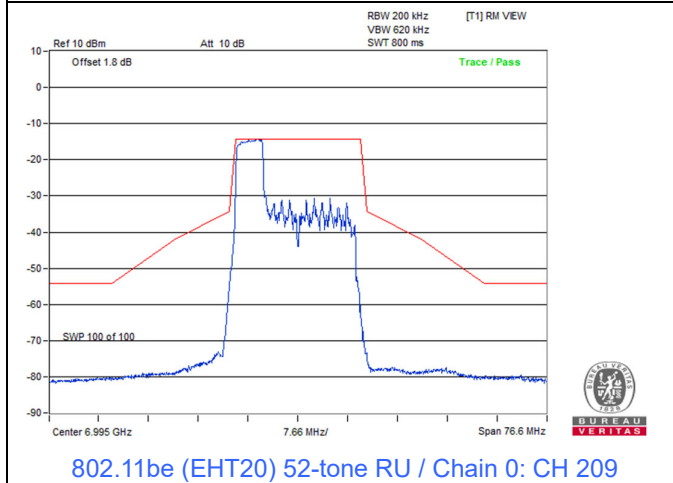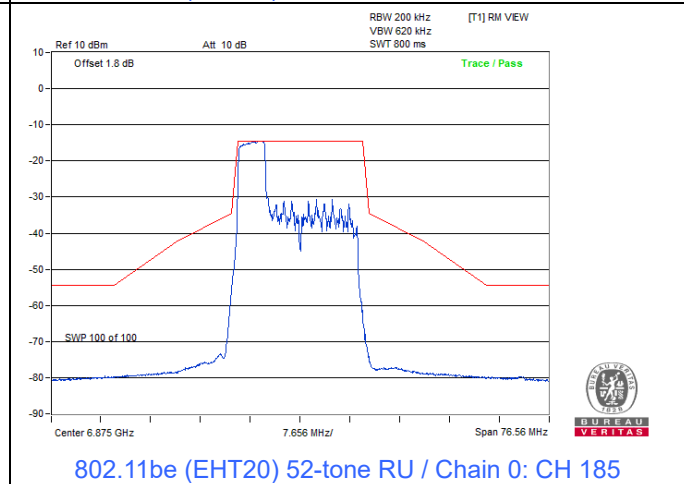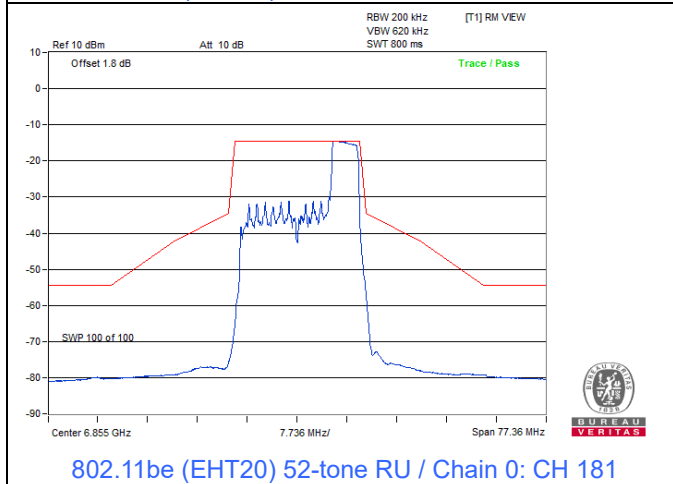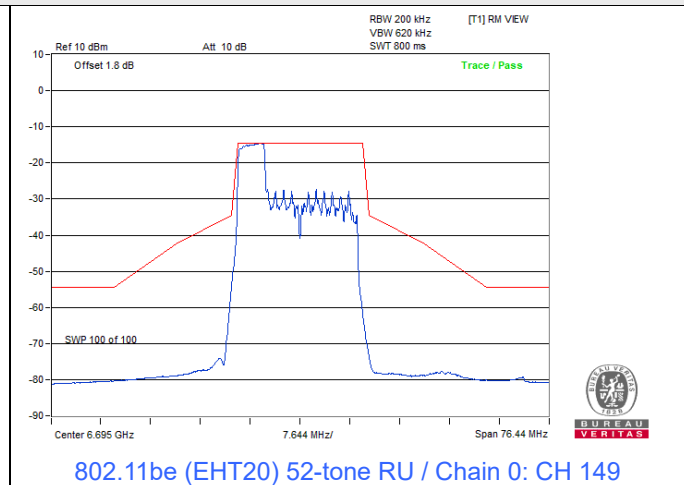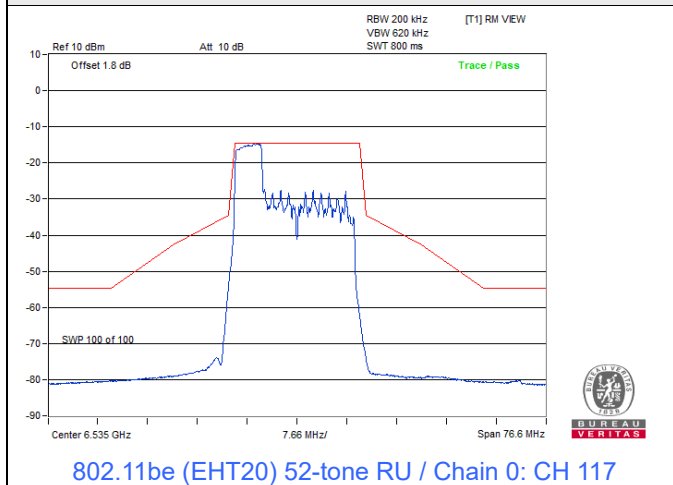


Spectrum Plot

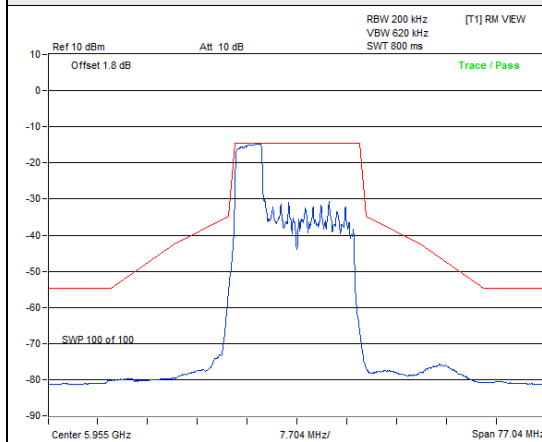


802.11be (EHT20) 52-tone RU / Chain 1: CH 1

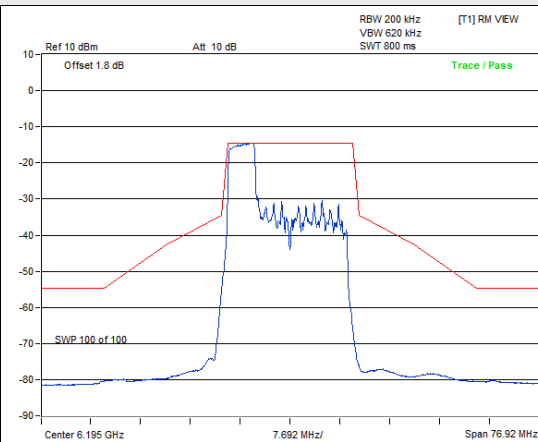


802.11be (EHT20) 52-tone RU / Chain 1: CH 49

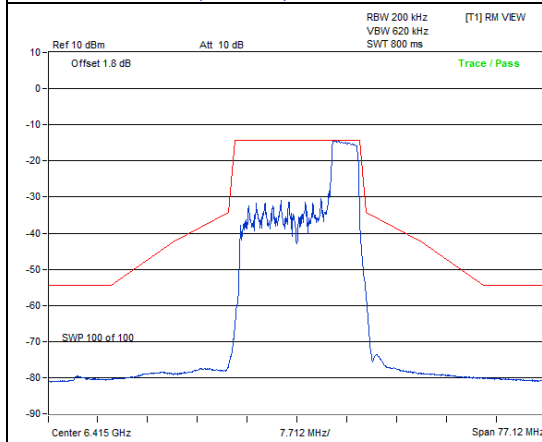


802.11be (EHT20) 52-tone RU / Chain 1: CH 93

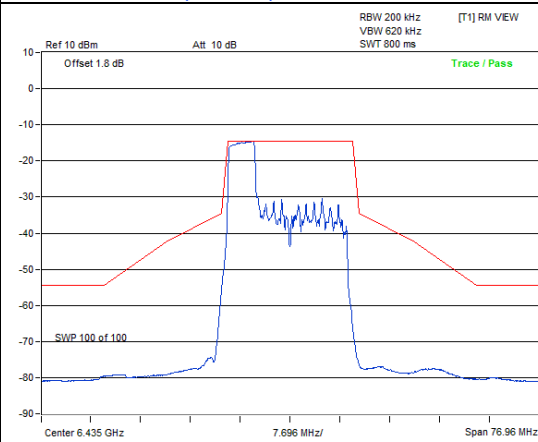

802.11be (EHT20) 52-tone RU / Chain 1: CH 97






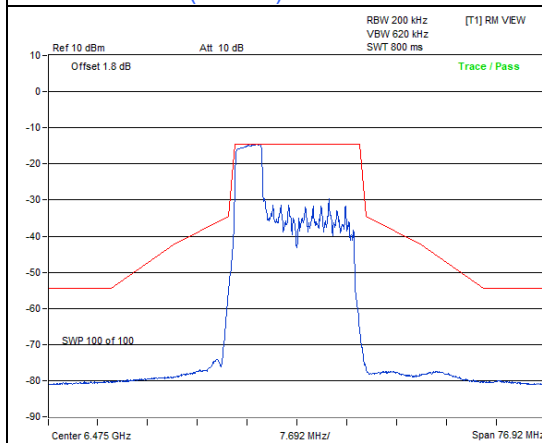


802.11be (EHT20) 52-tone RU / Chain 1: CH 105

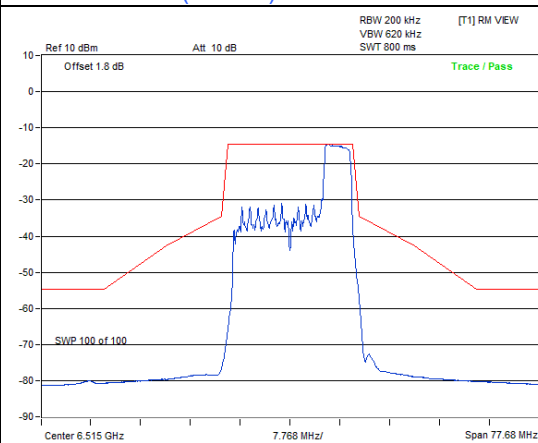


802.11be (EHT20) 52-tone RU / Chain 1: CH 113

Spectrum Plot

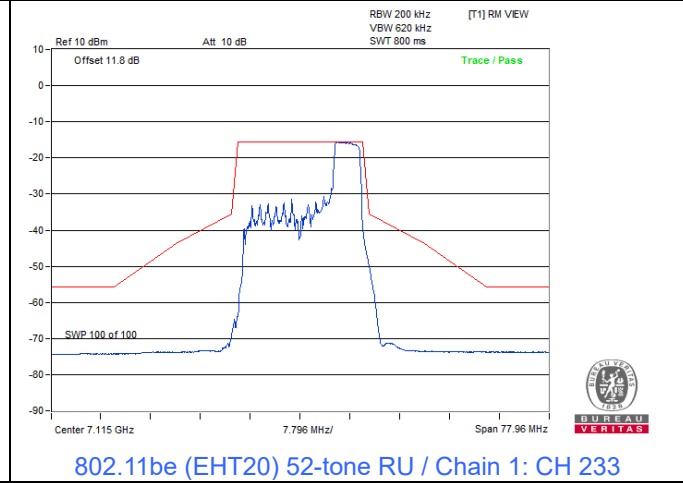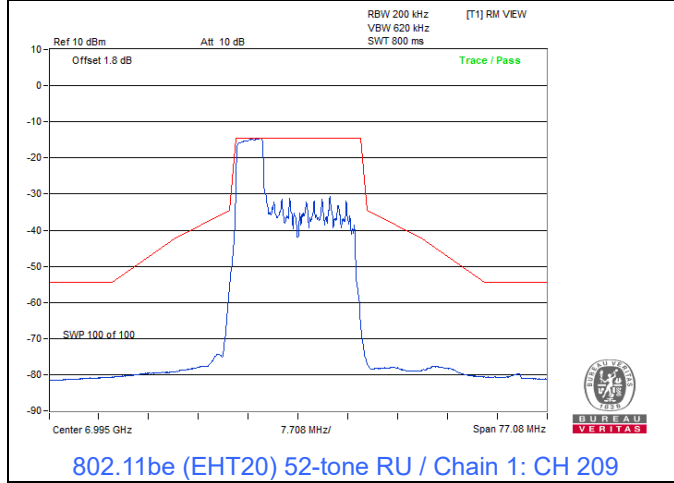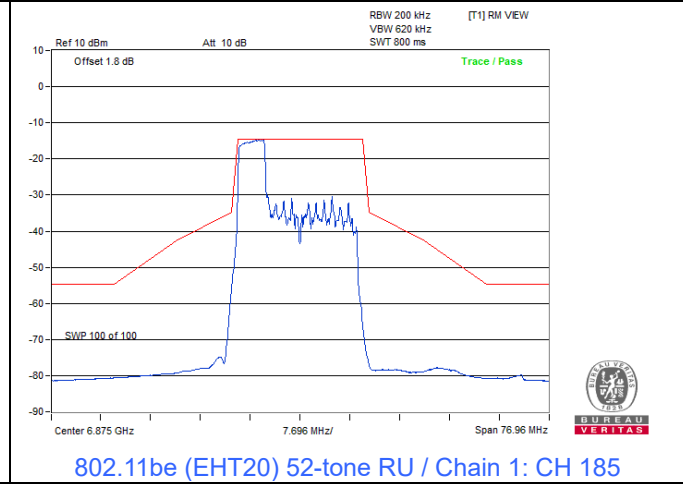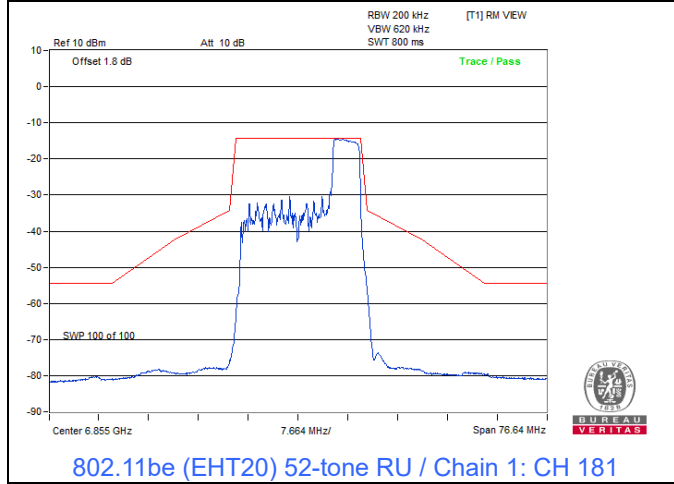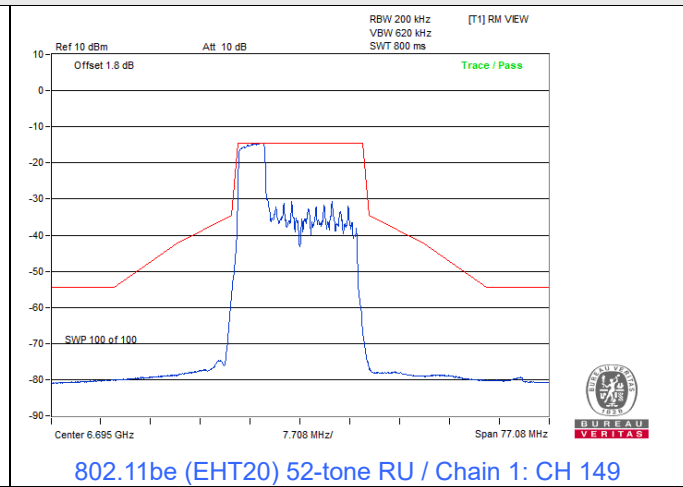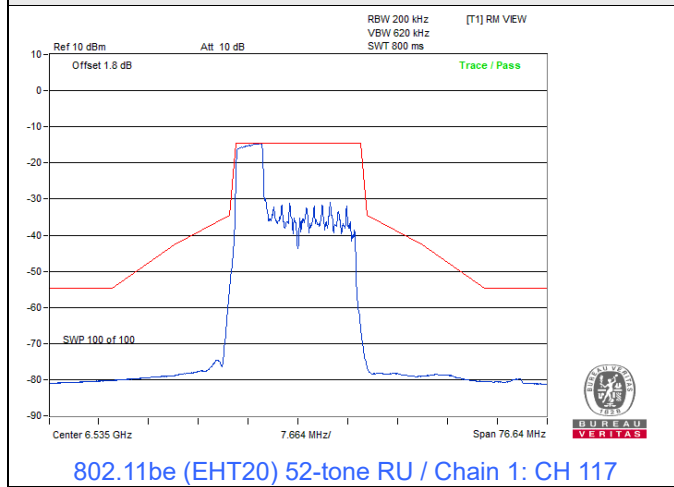


802.11be (EHT20) 106-tone RU


Spectrum Plot

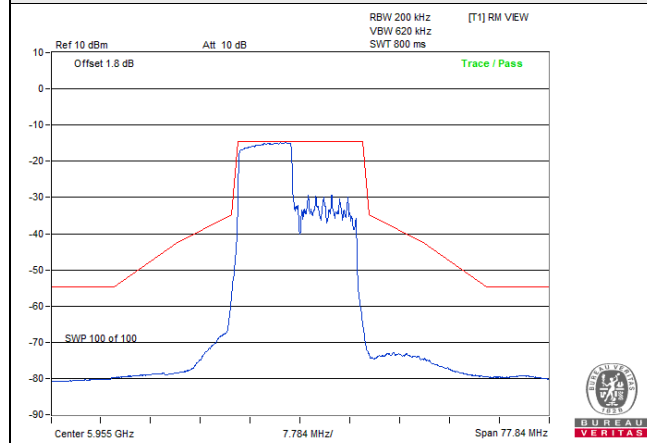


802.11be (EHT20) 106-tone RU / Chain 0: CH 1

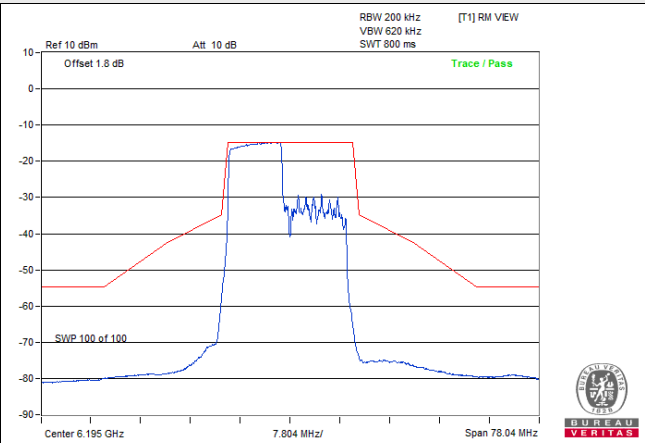


802.11be (EHT20) 106-tone RU / Chain 0: CH 49

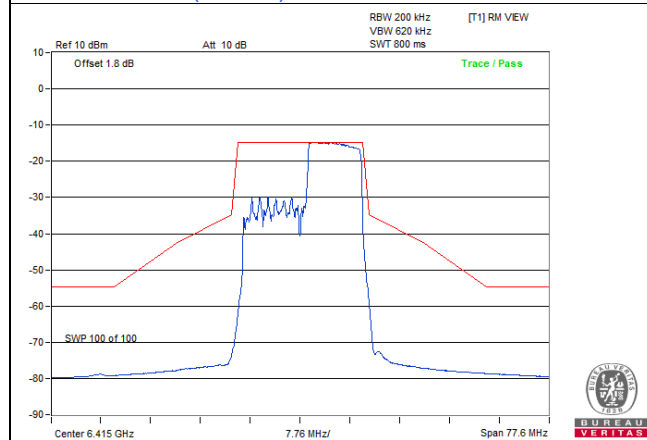


802.11be (EHT20) 106-tone RU / Chain 0: CH 93

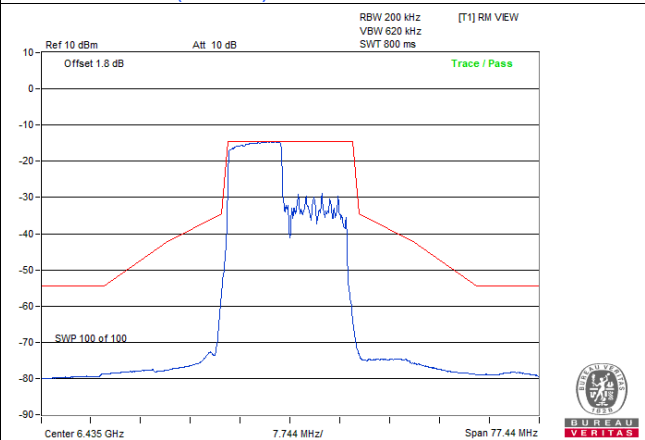

802.11be (EHT20) 106-tone RU / Chain 0: CH 97






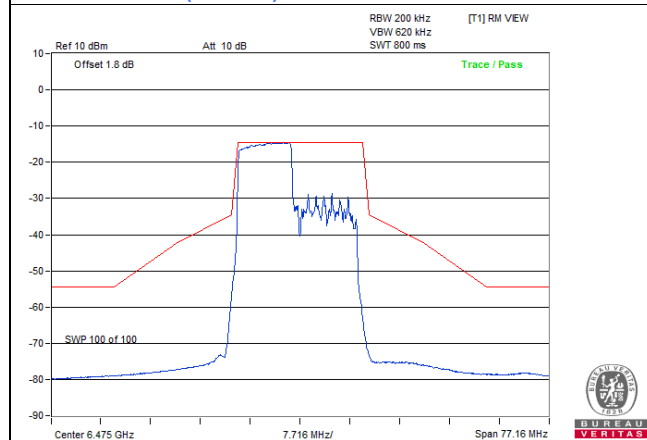


802.11be (EHT20) 106-tone RU / Chain 0: CH 105

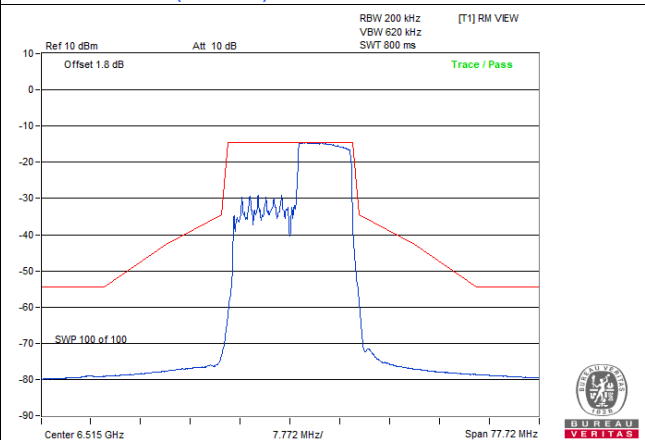


802.11be (EHT20) 106-tone RU / Chain 0: CH 113


Spectrum Plot

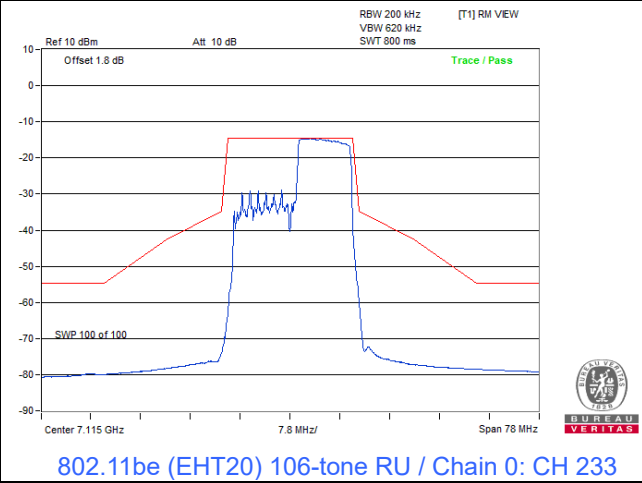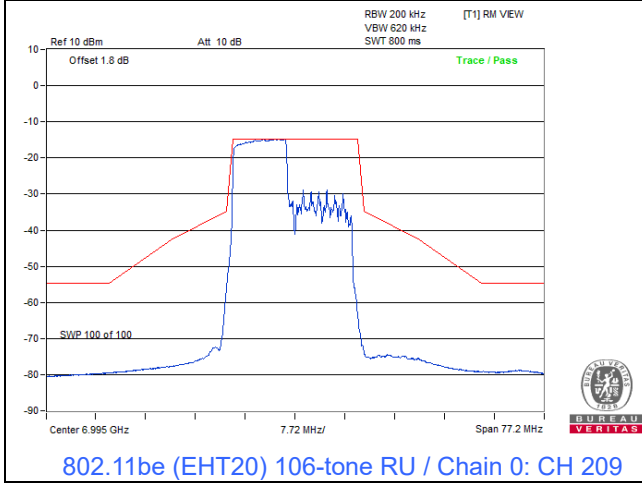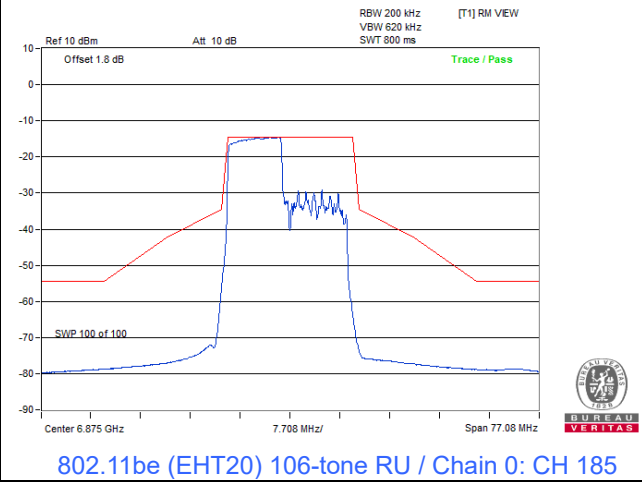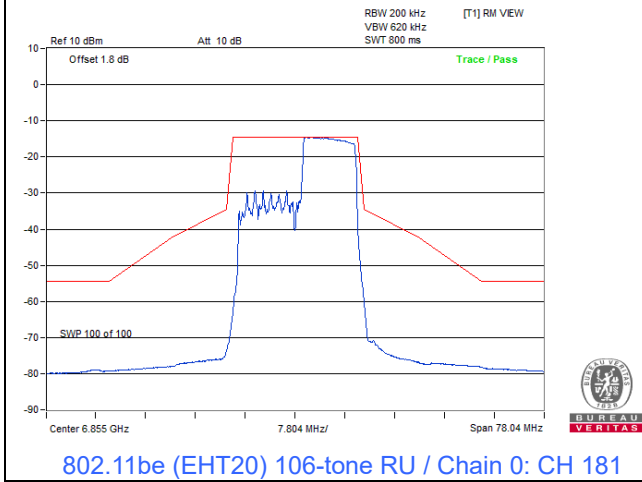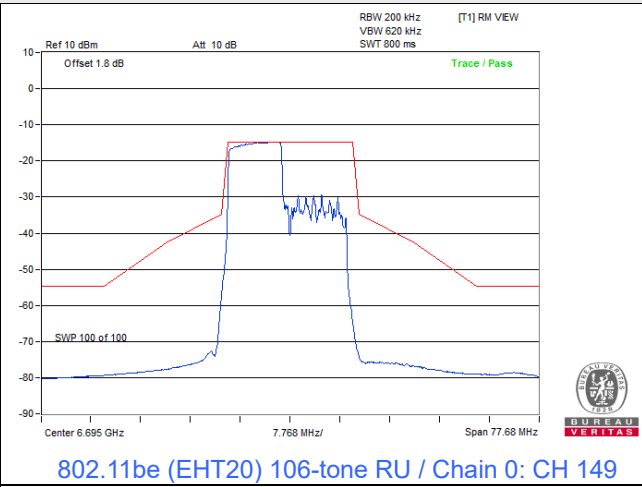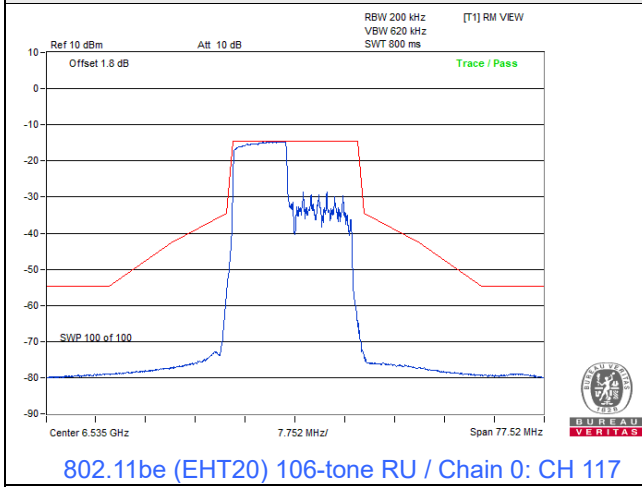


Spectrum Plot

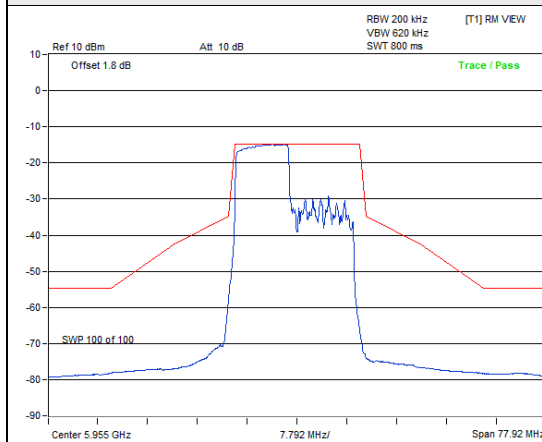


802.11be (EHT20) 106-tone RU / Chain 1: CH 1

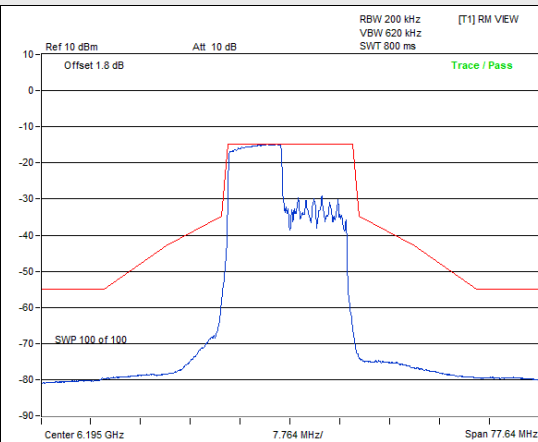


802.11be (EHT20) 106-tone RU / Chain 1: CH 49

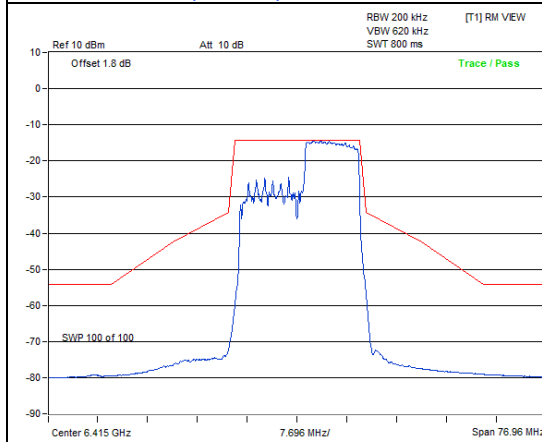


802.11be (EHT20) 106-tone RU / Chain 1: CH 93

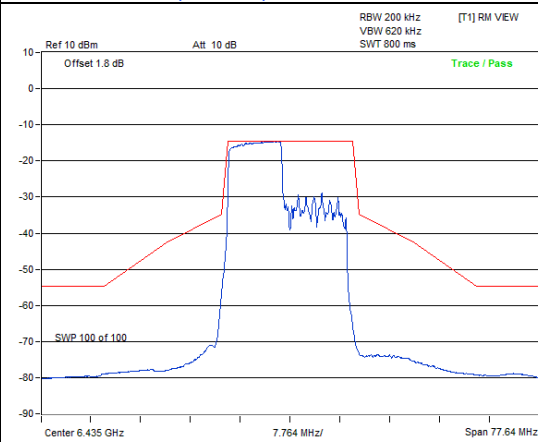

802.11be (EHT20) 106-tone RU / Chain 1: CH 97

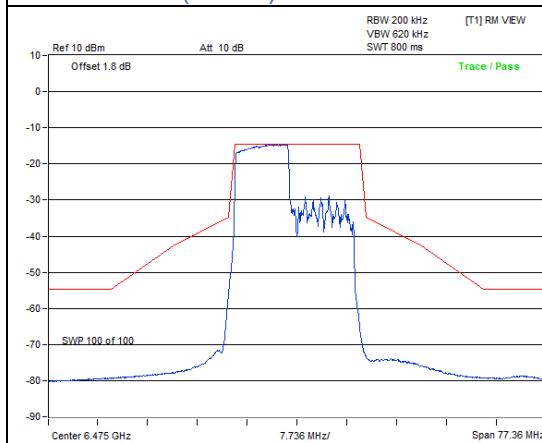


802.11be (EHT20) 106-tone RU / Chain 1: CH 105

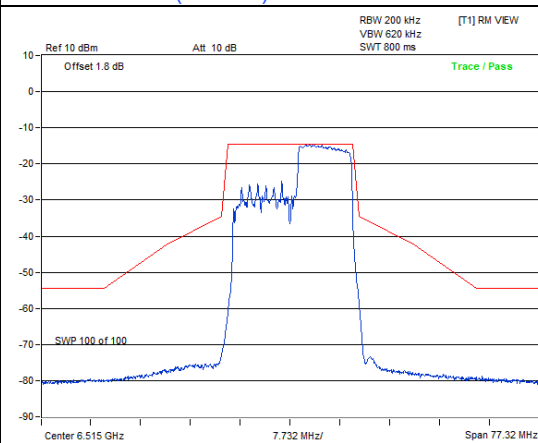


802.11be (EHT20) 106-tone RU / Chain 1: CH 113


Spectrum Plot

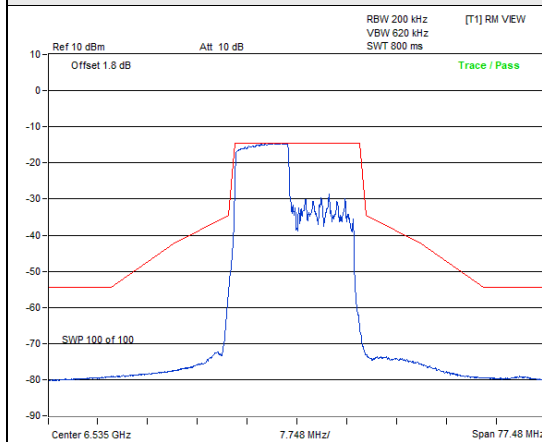


802.11be (EHT20) 106-tone RU / Chain 1: CH 117

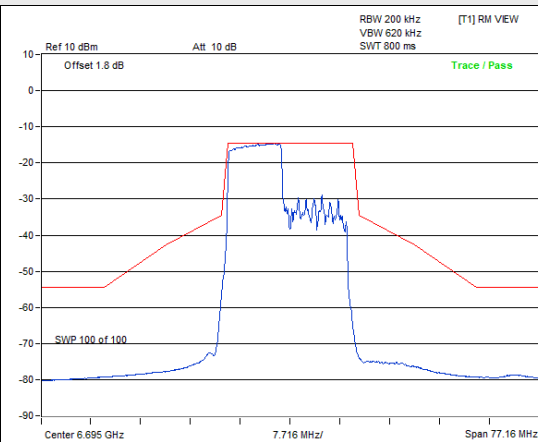


802.11be (EHT20) 106-tone RU / Chain 1: CH 149

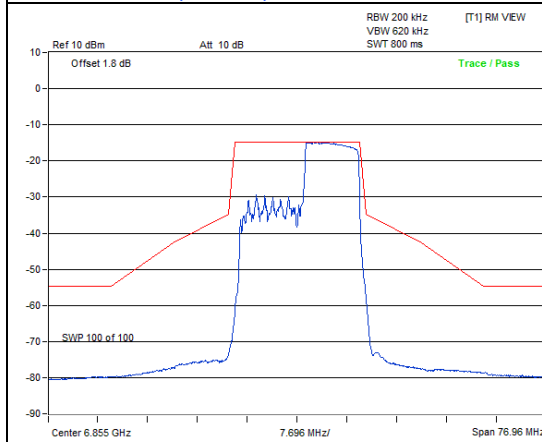


802.11be (EHT20) 106-tone RU / Chain 1: CH 181

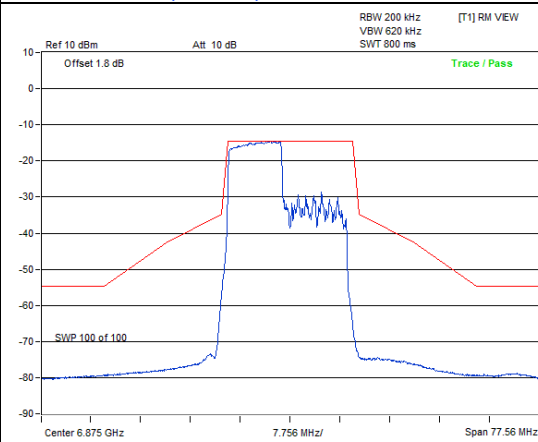

802.11be (EHT20) 106-tone RU / Chain 1: CH 185

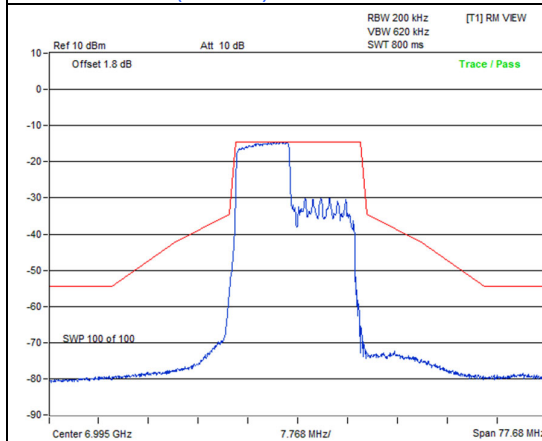







802.11be (EHT20) 106-tone RU / Chain 1: CH 209

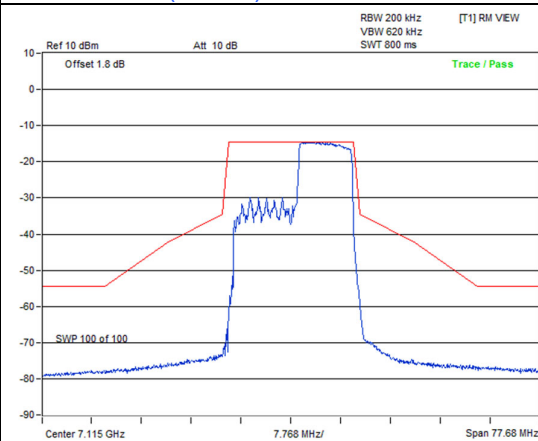


802.11be (EHT20) 106-tone RU / Chain 1: CH 233

802.11be (EHT20) 52+26-tone MRU


Spectrum Plot

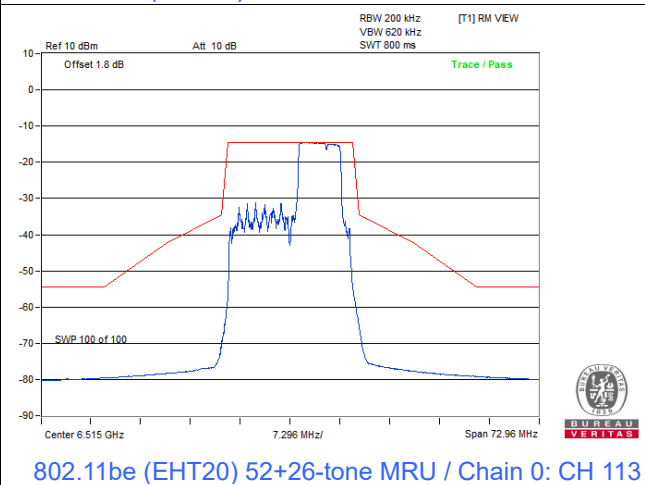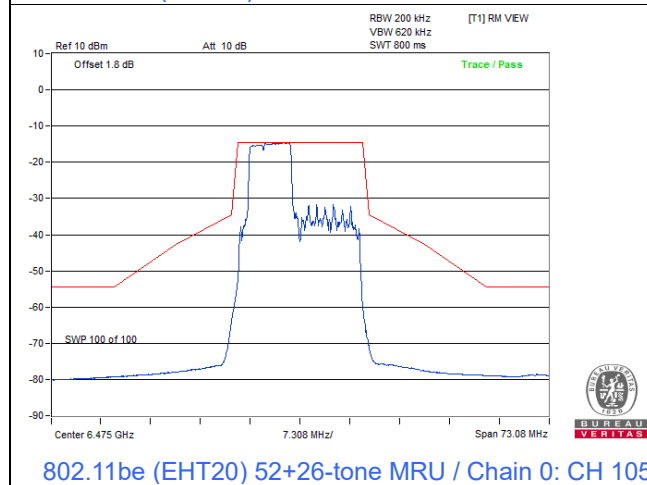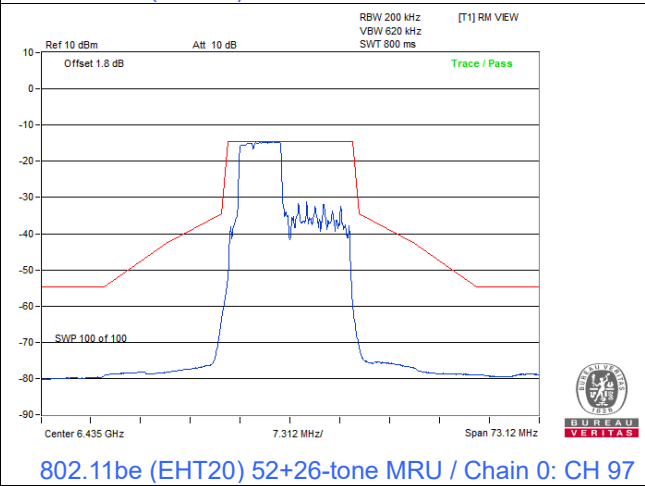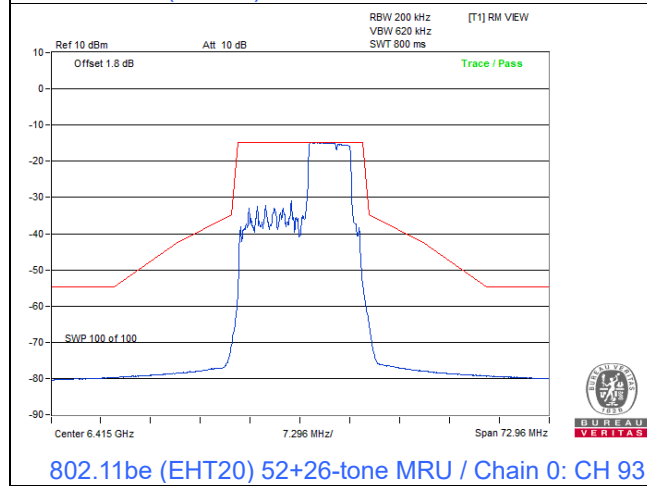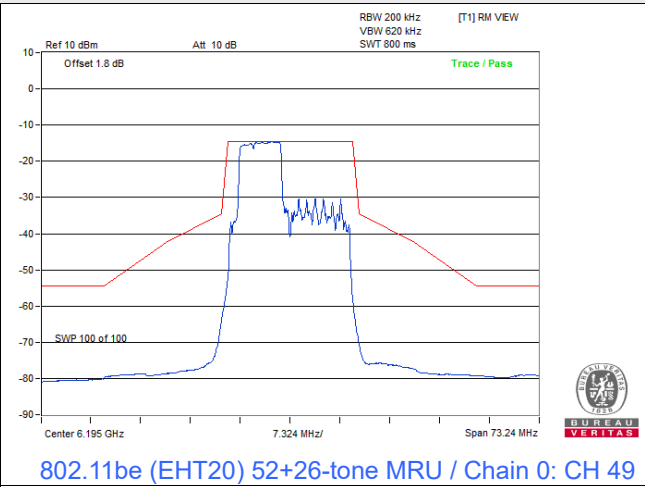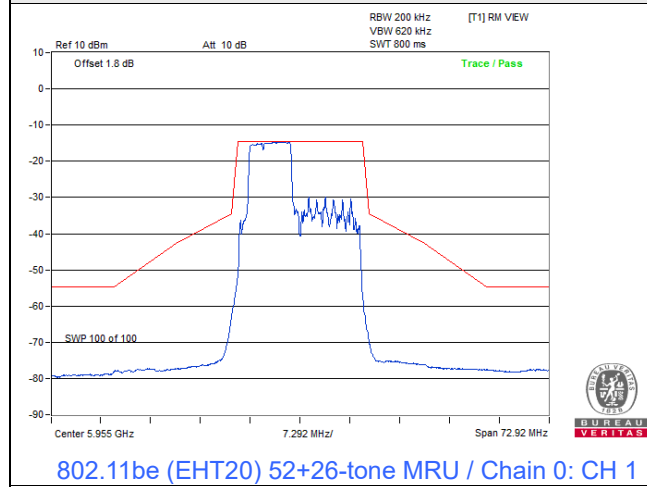


Spectrum Plot

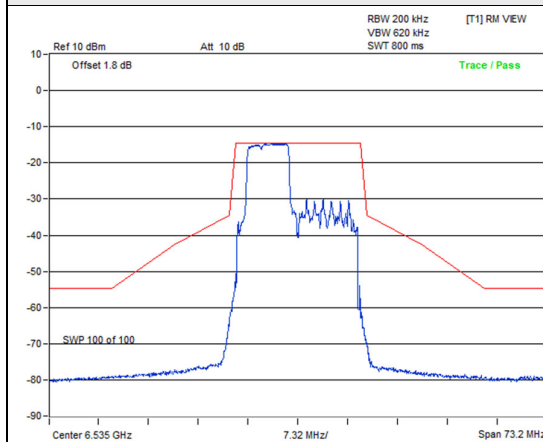


802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 117

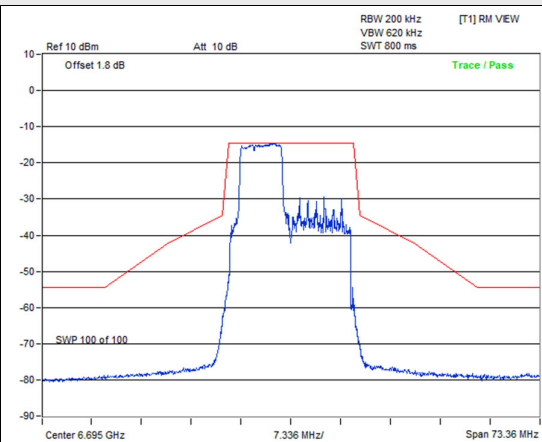


802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 149

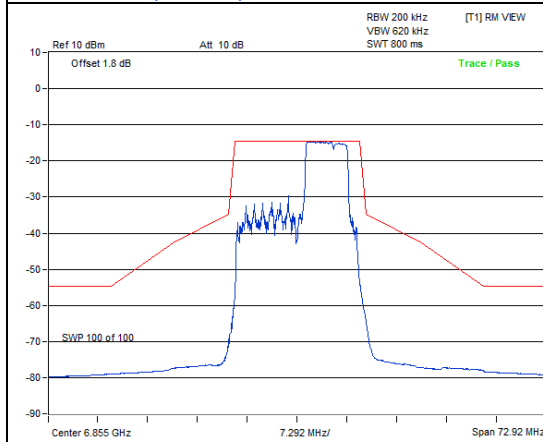


802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 181

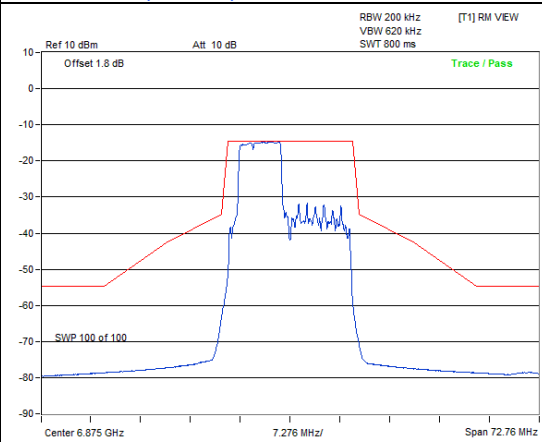

802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 185

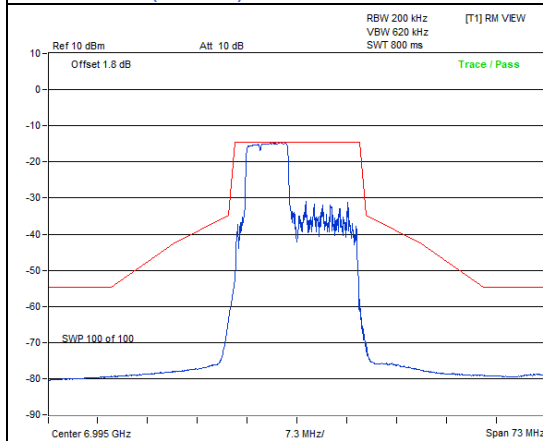


802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 209

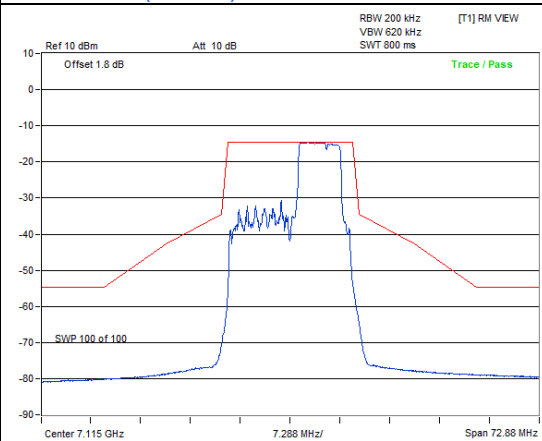


802.11be (EHT20) 52+26-tone MRU / Chain 0: CH 233


Spectrum Plot

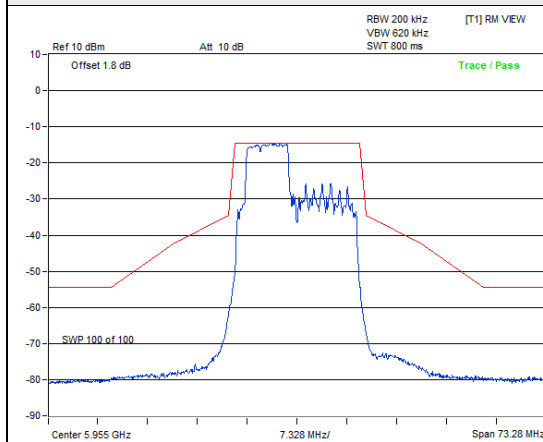


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 1

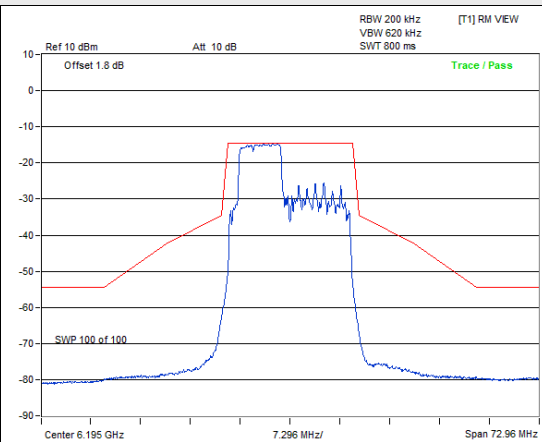


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 49

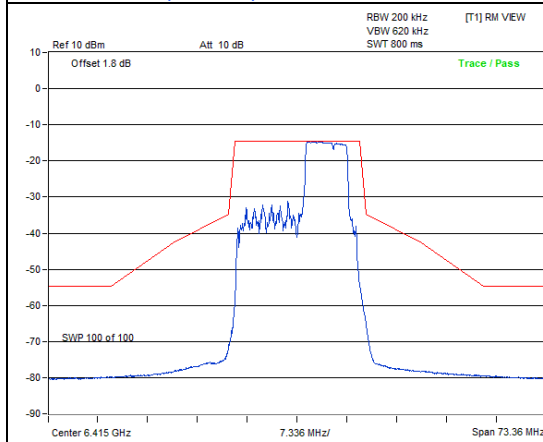


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 93

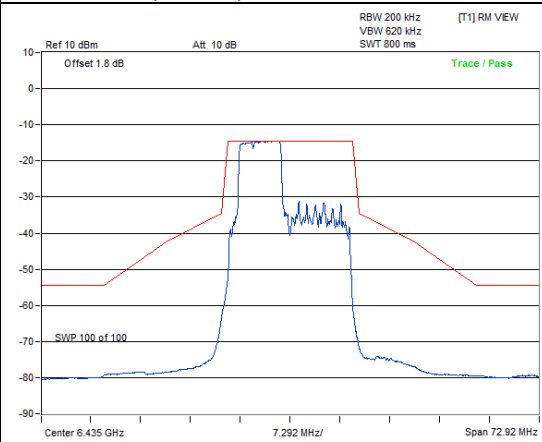

802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 97

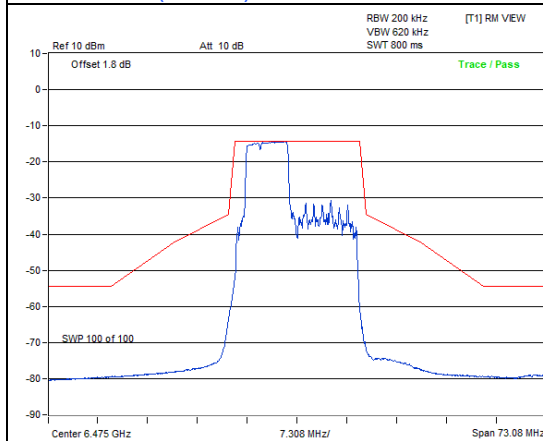


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 105

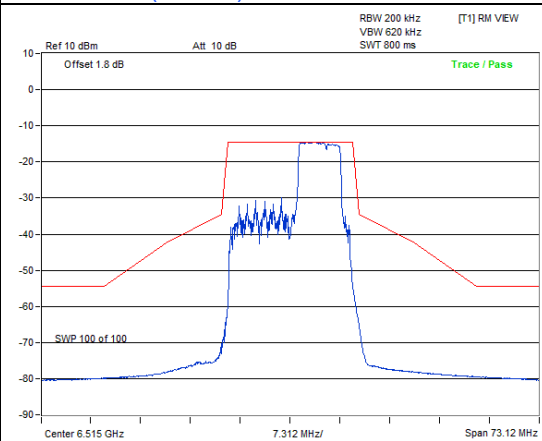


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 113


Spectrum Plot

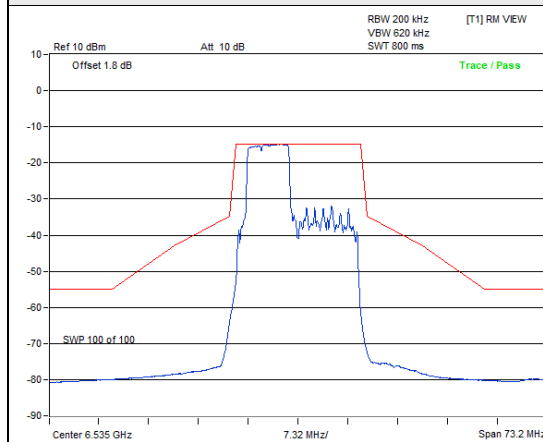


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 117

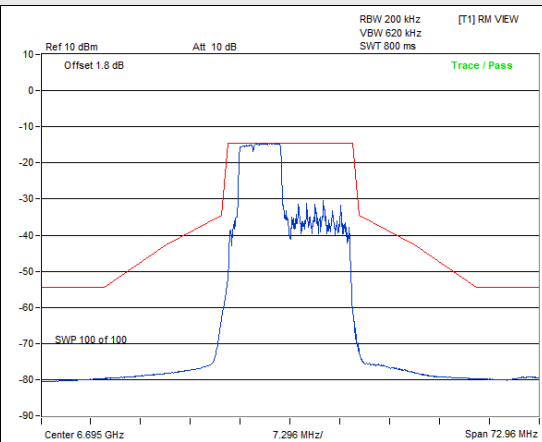


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 149

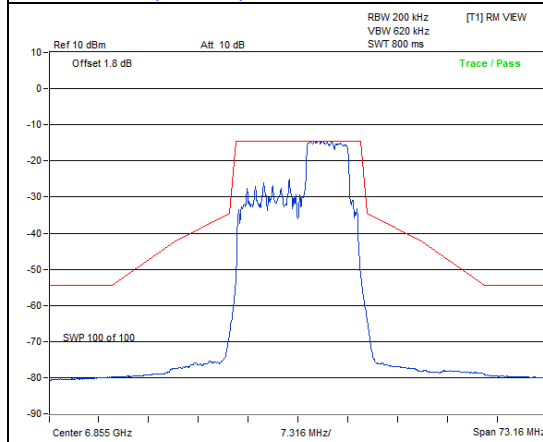


802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 181

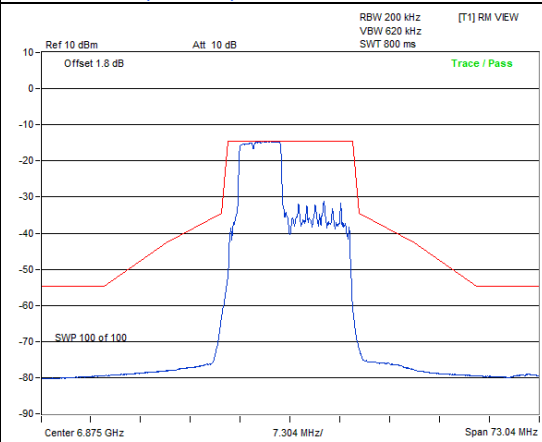

802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 185

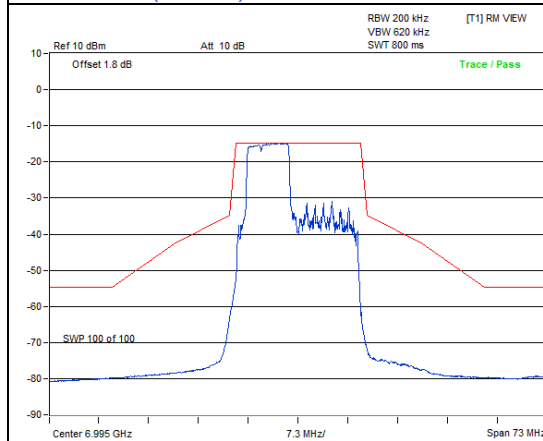

802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 209

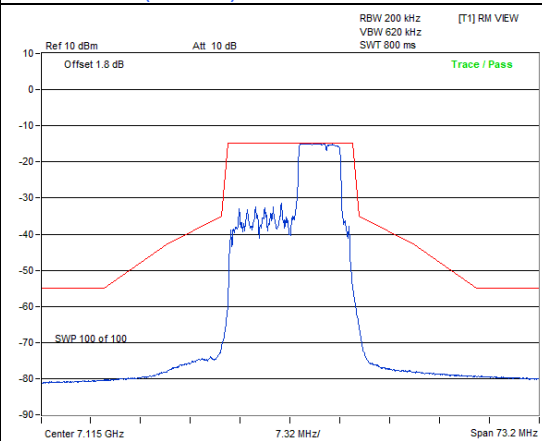

802.11be (EHT20) 52+26-tone MRU / Chain 1: CH 233