



Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
Test BY :Ashton

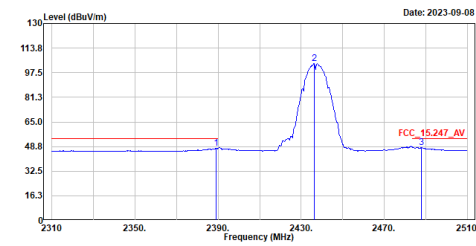

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.200	47.49	54.00	-6.51	16.95	30.54	Average
2	2436.200	103.54	-----	-----	73.04	30.50	Average
3	2488.000	48.32	54.00	-5.68	17.82	30.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
Test BY :Ashton

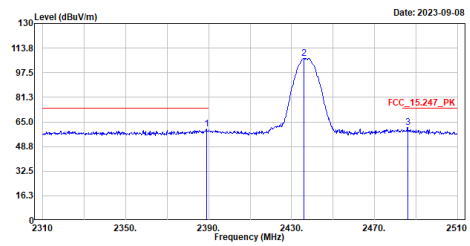

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.000	60.20	74.00	-13.80	29.66	30.54	Peak
2	2435.800	106.85	-----	-----	76.35	30.50	Peak
3	2486.000	61.10	74.00	-12.90	30.61	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz
Test BY :Ashton

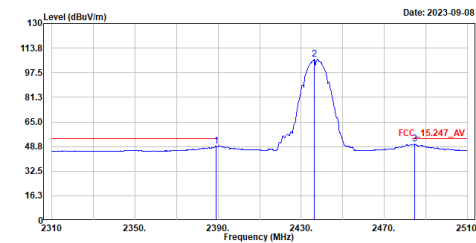

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.200	49.04	54.00	-4.96	18.50	30.54	Average
2	2436.200	106.28	-----	-----	75.78	30.50	Average
3	2484.800	50.42	54.00	-3.58	19.93	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz
Test BY :Ashton

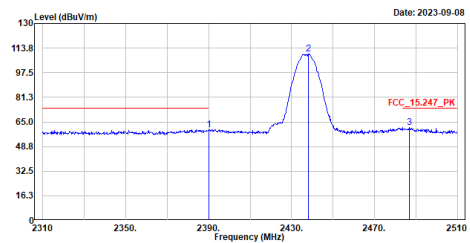

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	59.93	74.00	-14.07	29.39	30.54	Peak
2	2438.200	109.71	-----	-----	79.22	30.49	Peak
3	2486.800	61.23	74.00	-12.77	30.74	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

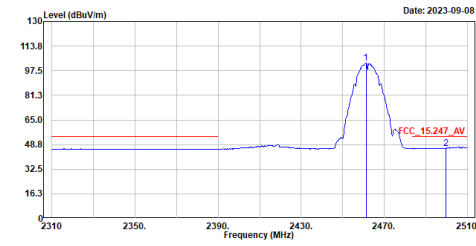


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	102.61	-----	-----	72.13	30.48	Average
2	2499.800	46.35	54.00	-7.65	15.85	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

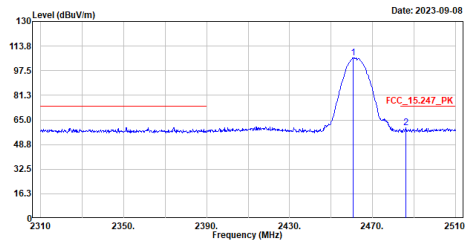


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.800	105.93	-----	-----	75.45	30.48	Peak
2	2496.200	59.60	74.00	-14.40	29.11	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

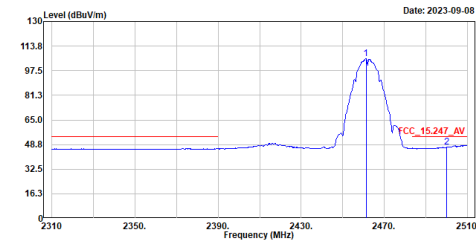


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	105.44	-----	-----	74.96	30.48	Average
2	2500.000	46.88	54.00	-7.12	16.38	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

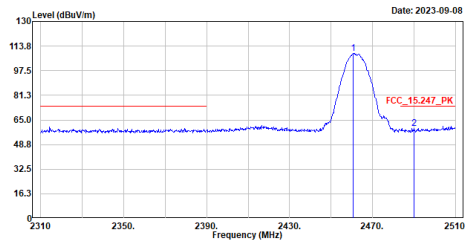


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.800	108.82	-----	-----	78.34	30.48	Peak
2	2490.000	59.52	74.00	-14.48	29.02	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Ashton

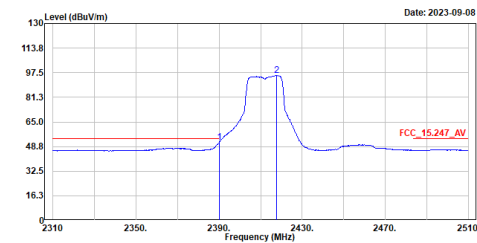

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2398.000	51.65	54.00	-2.35	21.11	30.54	Average
2	2417.600	95.67	-----	-----	65.12	30.55	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Ashton

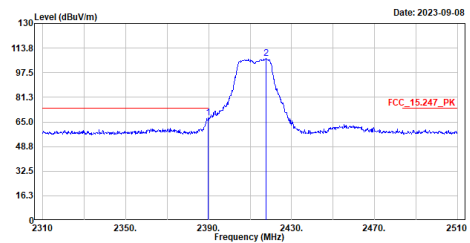

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.800	67.71	74.00	-6.29	37.17	30.54	Peak
2	2417.600	106.75	-----	-----	76.20	30.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Ashton

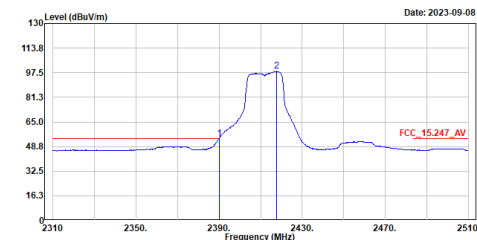

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2398.000	53.96	54.00	-0.04	23.42	30.54	Average
2	2417.800	98.43	-----	-----	67.88	30.55	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Ashton

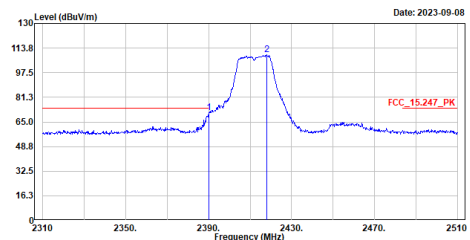

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2398.000	71.29	74.00	-2.71	40.75	30.54	Peak
2	2418.200	109.24	-----	-----	78.69	30.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Ashton

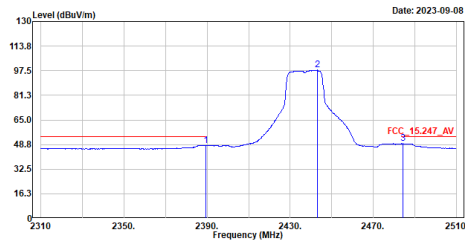

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.400	48.14	54.00	-5.86	17.60	30.54	Average
2	2443.200	97.90	-----	-----	67.43	30.47	Average
3	2484.400	49.33	54.00	-4.67	18.84	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Ashton

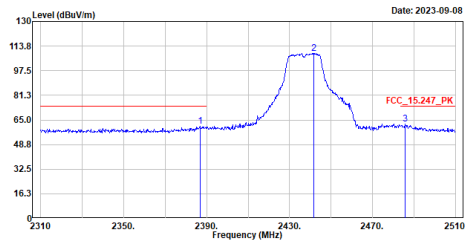

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2386.800	60.86	74.00	-13.14	30.32	30.54	Peak
2	2441.600	109.07	-----	-----	78.60	30.47	Peak
3	2485.800	62.19	74.00	-11.81	31.70	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Ashton

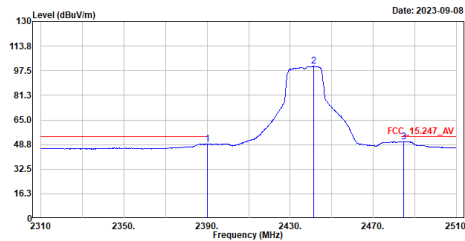

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2390.000	48.99	54.00	-5.01	18.45	30.54	Average
2	2441.400	100.46	-----	-----	69.99	30.47	Average
3	2484.600	50.62	54.00	-3.38	20.13	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Ashton

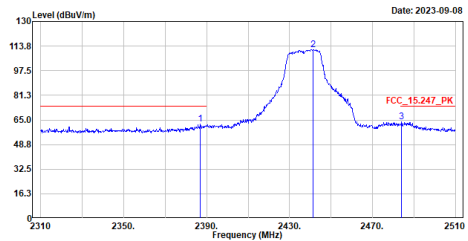

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2387.000	62.27	74.00	-11.73	31.73	30.54	Peak
2	2441.400	111.48	-----	-----	81.01	30.47	Peak
3	2484.000	63.91	74.00	-10.09	33.42	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

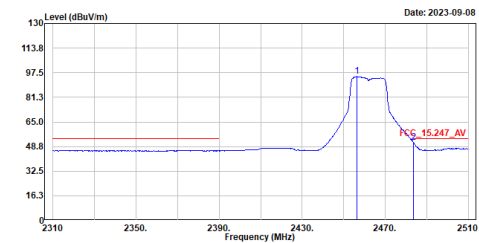

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2456.200	95.13	-----	-----	64.65	30.48	Average
2	2483.600	51.51	54.00	-2.49	21.02	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

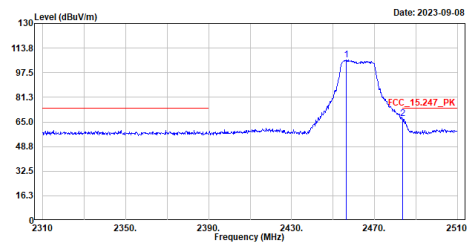

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2456.400	105.96	-----	-----	75.48	30.48	Peak
2	2483.600	67.45	74.00	-6.55	36.96	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

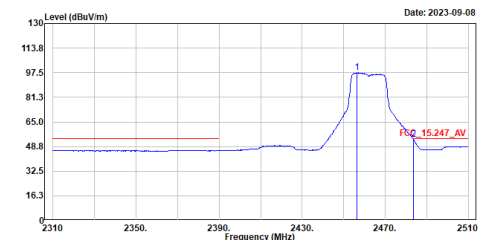

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2456.200	97.41	-----	-----	66.93	30.48	Average
2	2483.600	53.51	54.00	-0.49	23.02	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

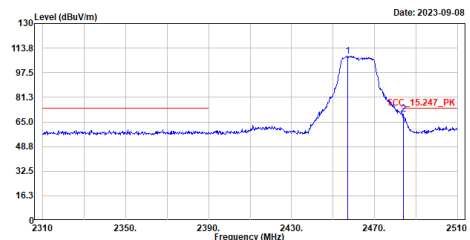

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2457.200	108.45	-----	-----	77.97	30.48	Peak
2	2483.800	70.38	74.00	-3.62	39.89	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Ashton

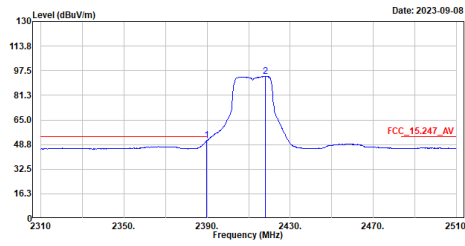


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	51.37	54.00	-2.63	28.83	30.54	Average
2	2418.000	93.81	-----	-----	63.26	30.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Ashton

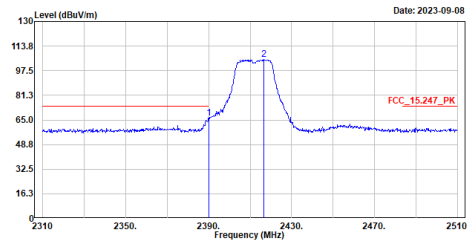


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	66.31	74.00	-7.69	35.77	30.54	Peak
2	2416.600	104.94	-----	-----	74.39	30.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Ashton

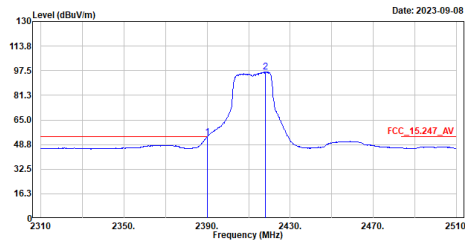


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	53.69	54.00	-0.31	23.15	30.54	Average
2	2418.000	96.67	-----	-----	66.12	30.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Ashton

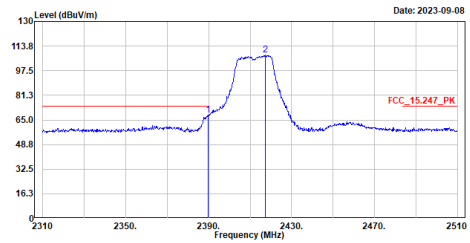


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	68.35	74.00	-5.65	37.81	30.54	Peak
2	2417.200	108.01	-----	-----	77.46	30.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Ashton

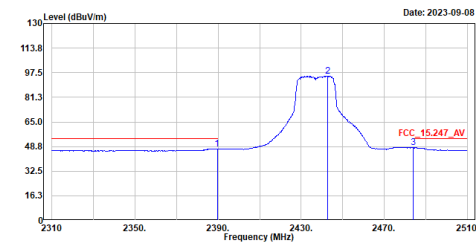


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.600	47.24	54.00	-6.76	16.70	30.54	Average
2	2442.800	95.37	-----	-----	64.90	30.47	Average
3	2484.000	47.97	54.00	-6.03	17.48	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Ashton

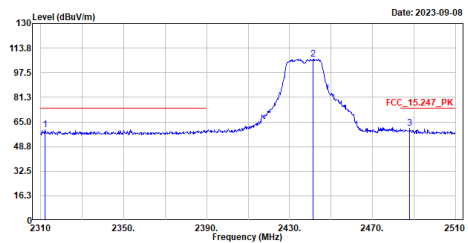


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2312.200	60.02	74.00	-13.98	29.33	30.69	Peak
2	2441.400	106.60	-----	-----	76.13	30.47	Peak
3	2488.000	60.84	74.00	-13.16	30.34	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Ashton

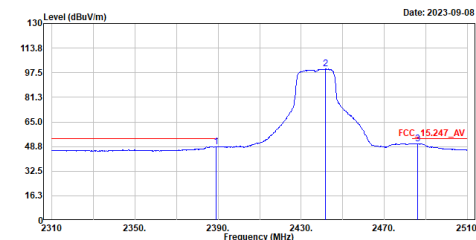


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.000	48.71	54.00	-5.29	18.17	30.54	Average
2	2441.600	99.92	-----	-----	69.45	30.47	Average
3	2486.200	50.69	54.00	-3.31	20.20	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Ashton

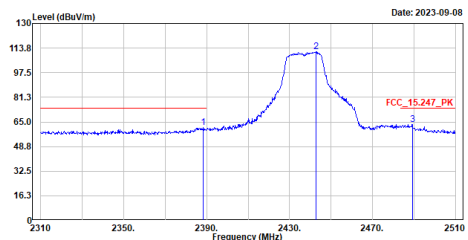


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.200	61.21	74.00	-12.79	30.67	30.54	Peak
2	2442.600	111.42	-----	-----	80.95	30.47	Peak
3	2489.200	63.23	74.00	-10.77	32.73	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Ashton

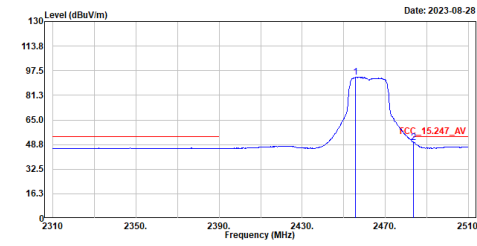


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2455.800	93.29	-----	-----	62.81	30.48	Average
2	2483.600	50.19	54.00	-3.81	19.70	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Ashton

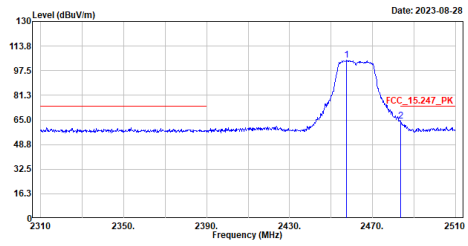


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2457.600	104.25	-----	-----	73.77	30.48	Peak
2	2483.600	64.11	74.00	-9.89	33.62	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Ashton

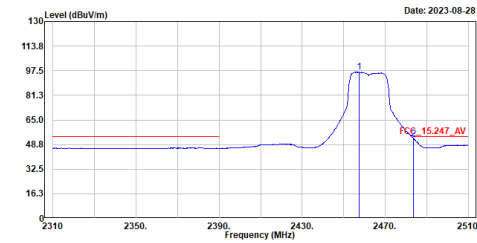


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2457.400	96.63	-----	-----	66.15	30.48	Average
2	2483.600	52.71	54.00	-1.29	22.22	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Ashton

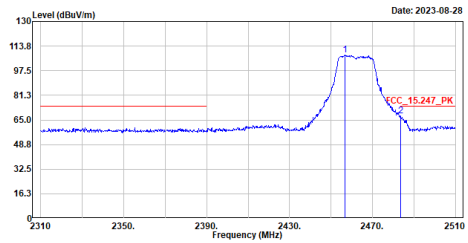


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2456.600	107.92	-----	-----	77.44	30.48	Peak
2	2483.600	67.47	74.00	-6.53	36.98	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Ashton

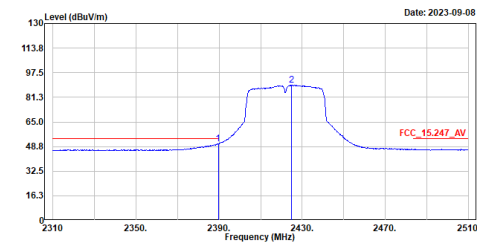

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.600	50.73	54.00	-3.27	20.19	30.54	Average
2	2425.000	89.32	-----	-----	58.76	30.56	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Ashton

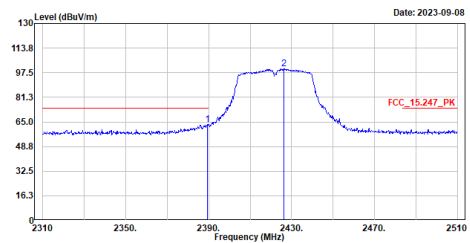

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.400	63.45	74.00	-10.55	32.91	30.54	Peak
2	2426.400	100.07	-----	-----	69.51	30.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Ashton

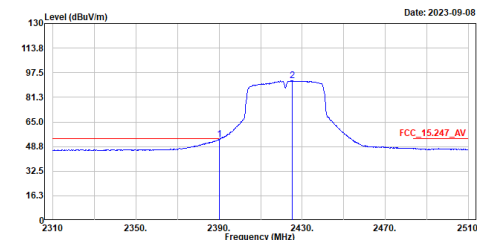

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2390.000	53.43	54.00	-0.57	22.89	30.54	Average
2	2425.200	92.10	-----	-----	61.54	30.56	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Ashton

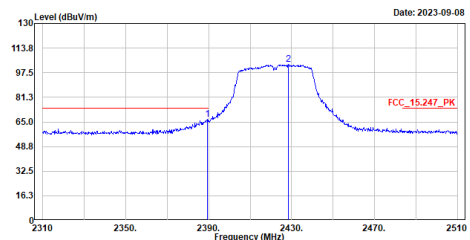

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.400	66.48	74.00	-7.52	35.94	30.54	Peak
2	2428.600	102.81	-----	-----	72.25	30.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Ashton

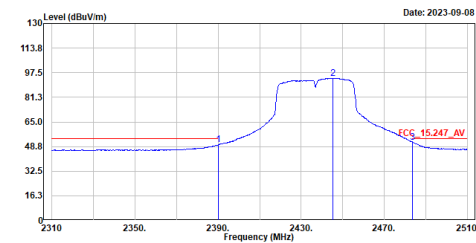


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	49.95	54.00	-4.05	19.41	30.54	Average
2	2445.200	93.89	-----	-----	63.42	30.47	Average
3	2483.600	51.62	54.00	-2.38	21.13	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Ashton

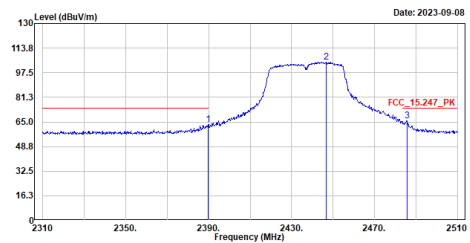


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	63.34	74.00	-10.66	32.80	30.54	Peak
2	2445.200	104.53	-----	-----	74.06	30.47	Peak
3	2485.600	65.96	74.00	-8.04	35.47	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Ashton

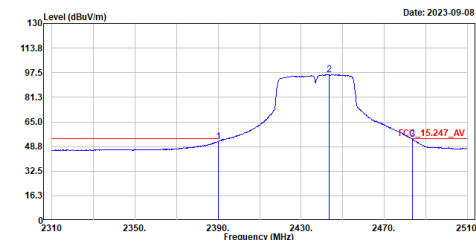


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	52.24	54.00	-1.76	21.70	30.54	Average
2	2443.600	96.32	-----	-----	65.85	30.47	Average
3	2483.600	53.49	54.00	-0.51	23.00	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Ashton

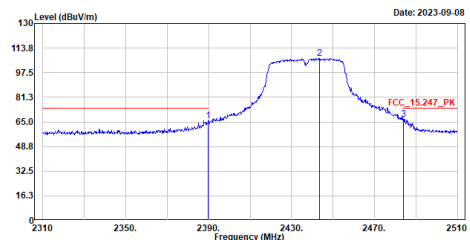


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	65.77	74.00	-8.23	35.23	30.54	Peak
2	2443.600	106.91	-----	-----	76.44	30.47	Peak
3	2484.000	66.92	74.00	-7.08	36.43	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Ashton

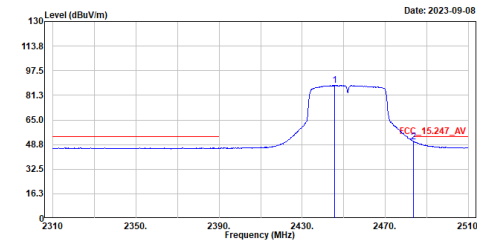


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2445.800	87.77	-----	-----	57.30	30.47	Average
2	2483.500	50.75	54.00	-3.25	20.26	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Ashton

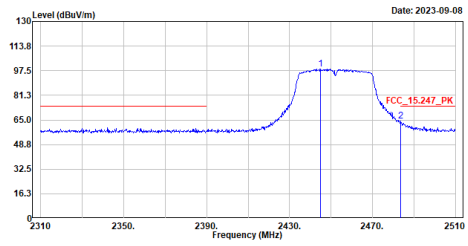


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2445.800	98.71	-----	-----	68.24	30.47	Peak
2	2483.500	64.11	74.00	-9.89	33.62	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Ashton

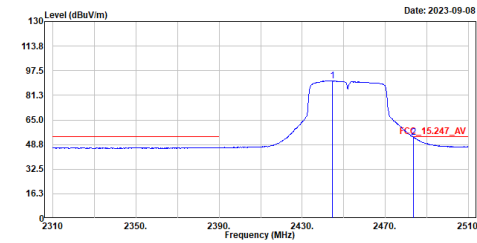


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2445.800	90.91	-----	-----	60.44	30.47	Average
2	2483.500	53.47	54.00	-0.53	22.98	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Ashton

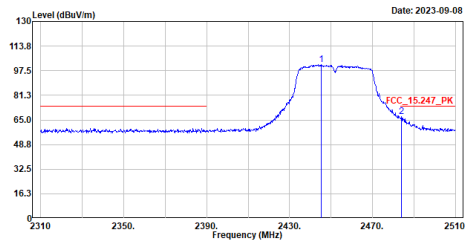

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2445.800	101.56	-----	-----	71.09	30.47	Peak
2	2483.500	67.32	74.00	-6.68	36.83	30.49	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Product : Wireless Access Point
Test Item : Band Edge
Test Mode : Transmit (802.11b)_Radio-1
Test Date : 2023/09/13

Measurement Level	Result
Δ (dB)	
> 20	PASS


Channel 01 (Chain A)

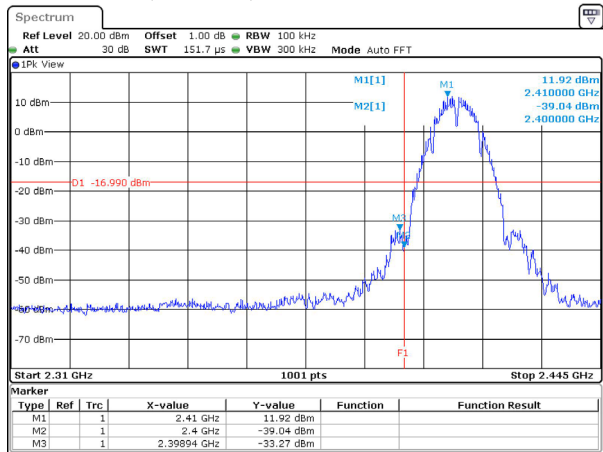


Channel 11 (Chain A)

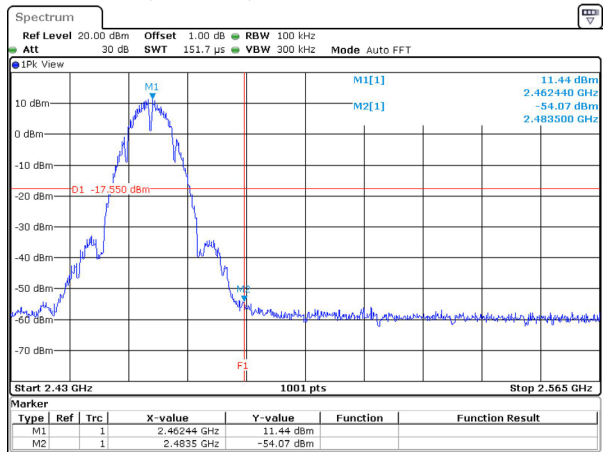

Channel 01 (Chain B)

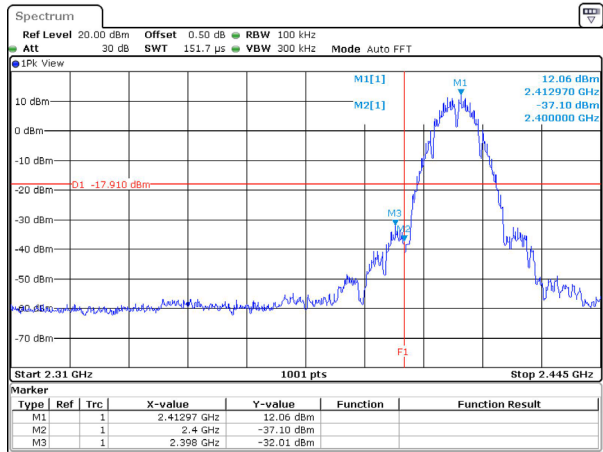


Channel 11 (Chain B)

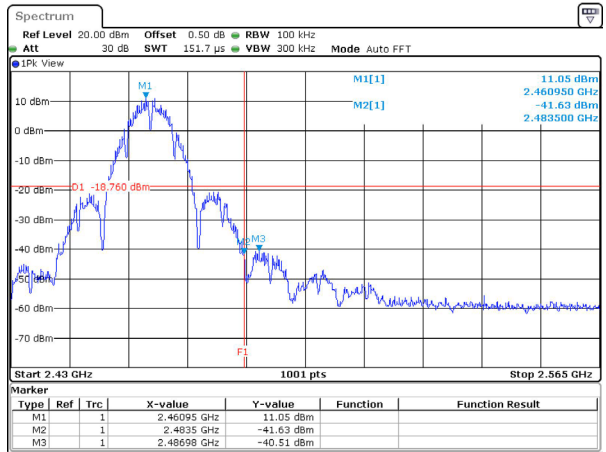


Product : Wireless Access Point
Test Item : Band Edge
Test Mode : Transmit (802.11g)_Radio-1
Test Date : 2023/09/13

Measurement Level	Result
Δ (dB)	
> 20	PASS


Channel 01 (Chain A)

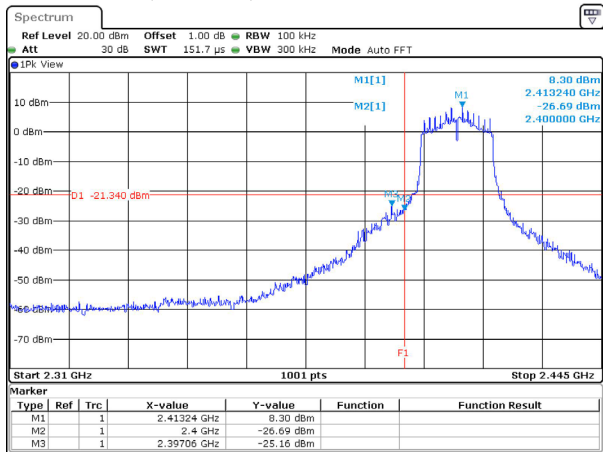


Channel 11 (Chain A)

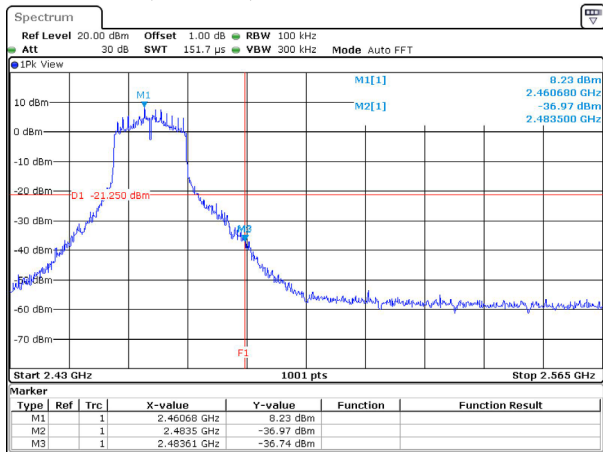

Channel 01 (Chain B)

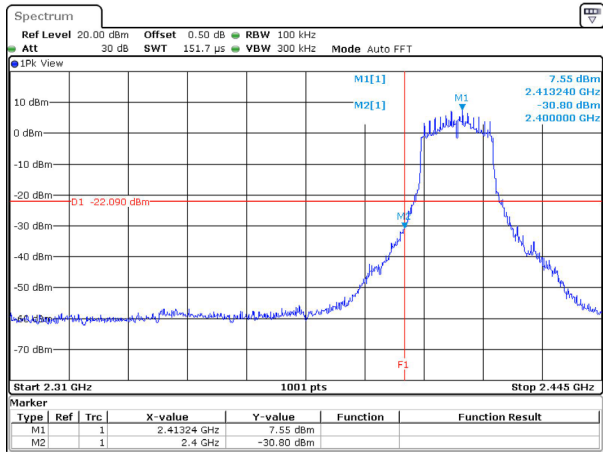


Channel 11 (Chain B)

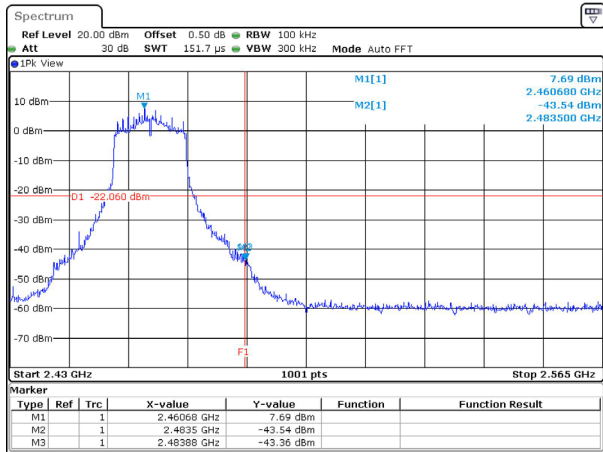

Product : Wireless Access Point
Test Item : Band Edge
Test Mode : Transmit (802.11ax-20 MHz)_Radio-1
Test Date : 2023/09/13


Measurement Level	Result
Δ (dB)	
> 20	PASS

Channel 01 (Chain A)

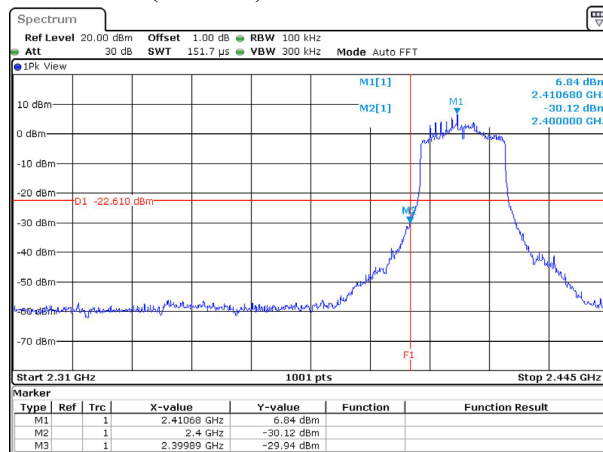


Date: 13.SEP.2023 15:04:05

Channel 11 (Chain A)

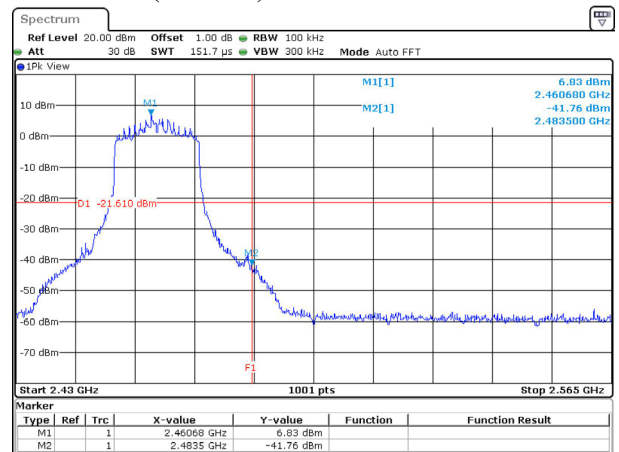


Date: 13.SEP.2023 15:15:19

Channel 01 (Chain B)

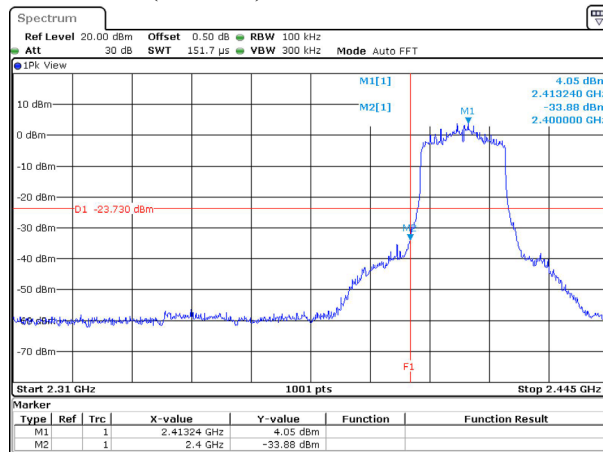

Date: 13.SEP.2023 15:06:05


Channel 11 (Chain B)

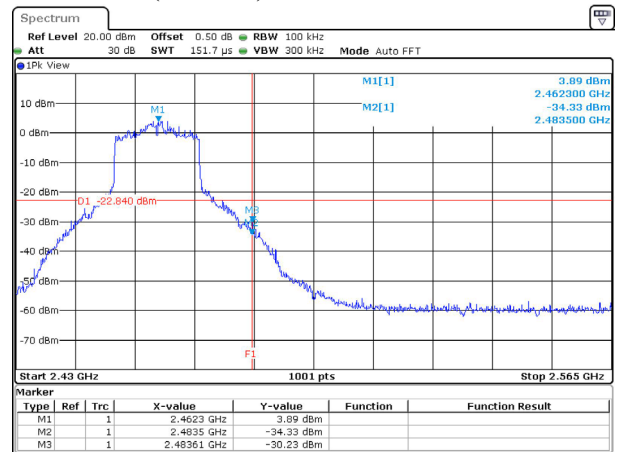

Date: 13.SEP.2023 15:17:38


Measurement Level Δ (dB)	Result
> 20	PASS

Channel 11 (Chain A)

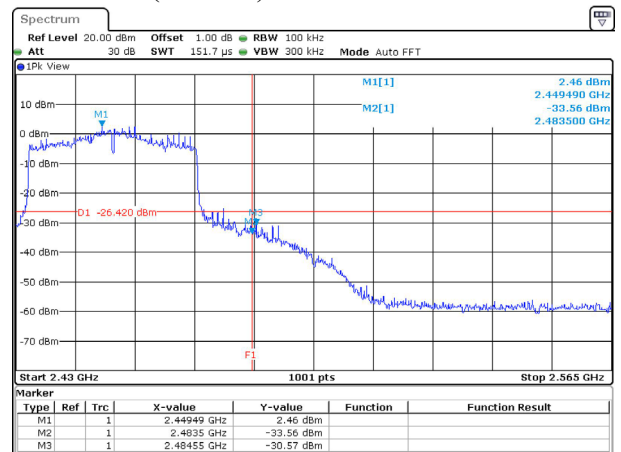

Date: 13.SEP.2023 15:34:01

Channel 11 (Chain B)

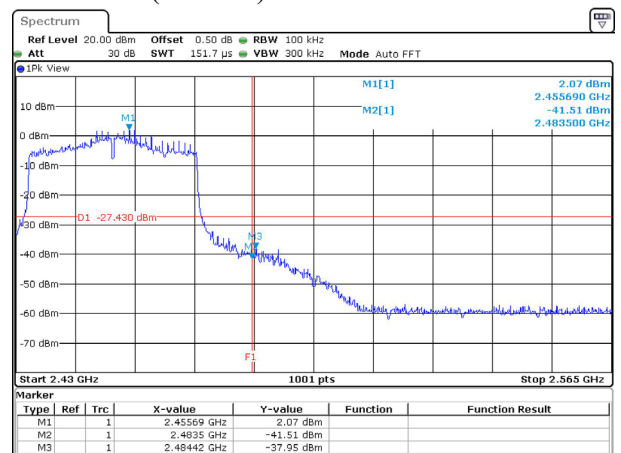


Date: 13.SEP.2023 15:31:55

Product : Wireless Access Point
Test Item : Band Edge
Test Mode : Transmit (802.11b)_Radio-3
Test Date : 2023/09/12


Measurement Level	Result
Δ (dB)	
> 20	PASS

Channel 01

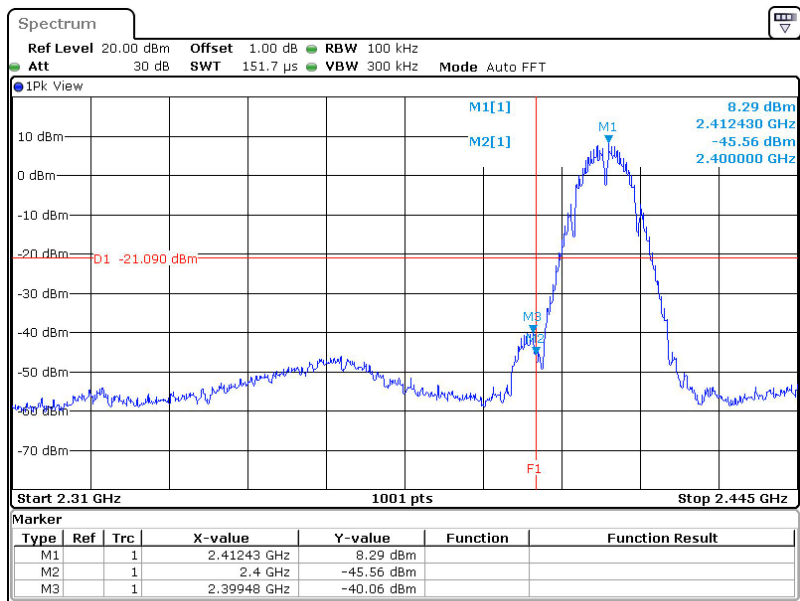

Date: 12.SEP.2023 15:31:42

Channel 11

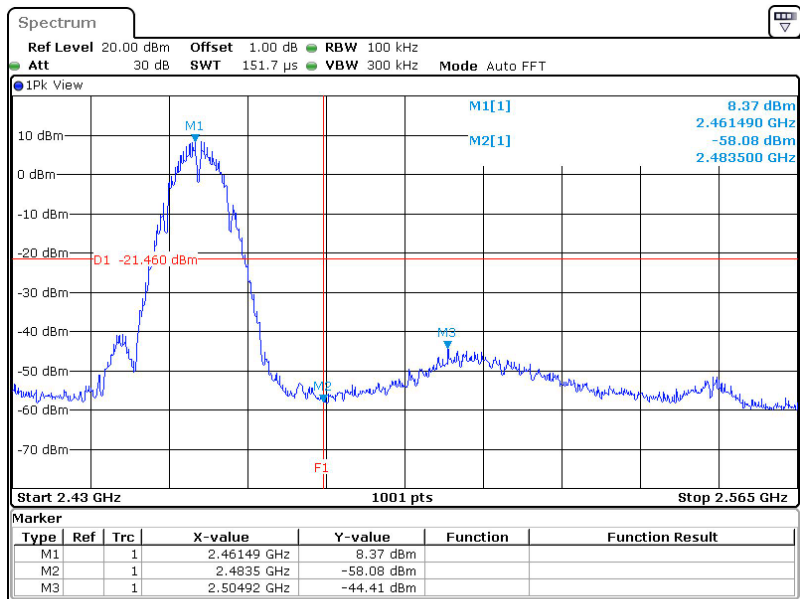


Date: 12.SEP.2023 15:35:39

Product : Wireless Access Point
 Test Item : Band Edge
 Test Mode : Transmit (802.11g)_Radio-3
 Test Date : 2023/09/12


Measurement Level Δ (dB)	Result
> 20	PASS

Channel 01

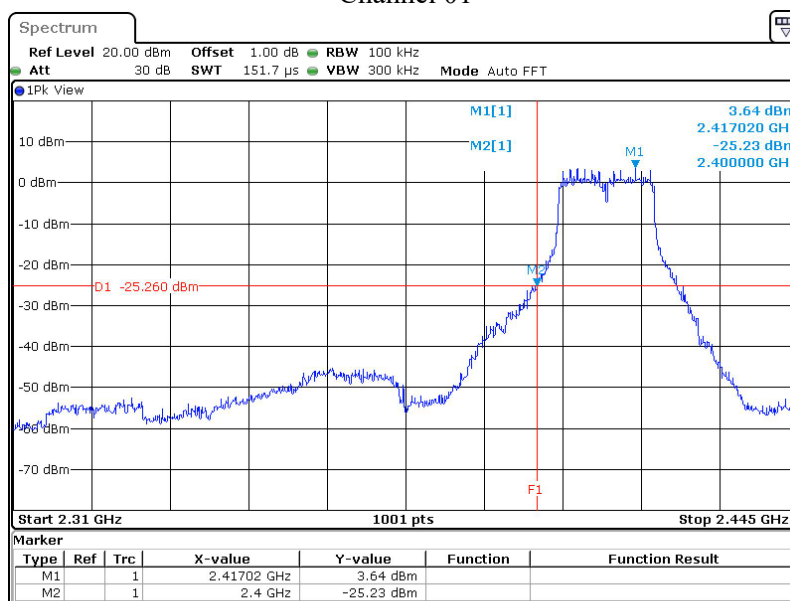

Date: 12.SEP.2023 15:43:11

Channel 11

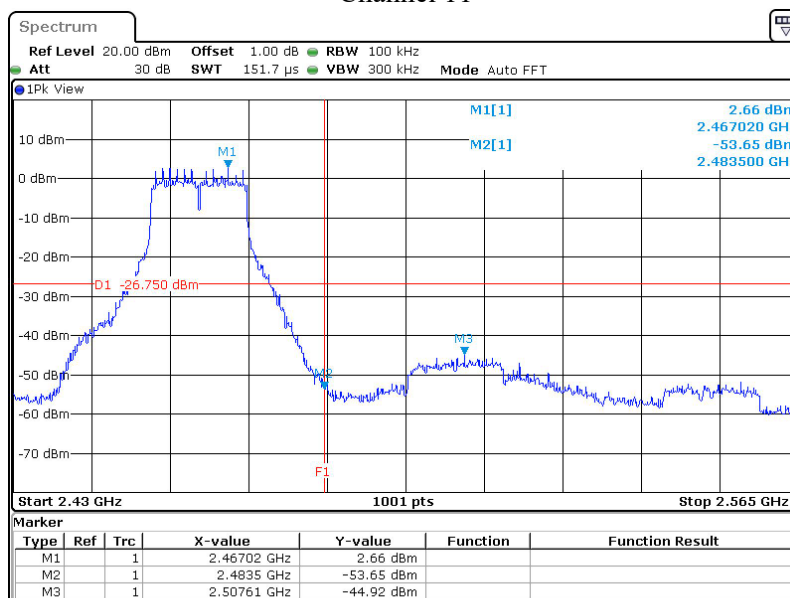

Date: 12.SEP.2023 15:49:30