



FCC RF Test Report

APPLICANT : Datalogic S.r.l.
EQUIPMENT : MOBILE COMPUTER/BARCODE READER
BRAND NAME : DATALOGIC
MODEL NAME : CMFSNR
FCC ID : U4G-CMFSNR
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Dual Client (6CD)
(Standard Power UNII 5/7)
TEST DATE(S) : Feb. 04, 2026 ~ Mar. 27, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1	General Description	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	6
1.6	Testing Location	7
1.7	Test Software	7
1.8	Applicable Standards	7
2	Test Configuration of Equipment Under Test	8
2.1	Carrier Frequency and Channel	8
2.2	Test Mode	10
2.3	Connection Diagram of Test System	11
2.4	Support Unit used in test configuration and system	12
2.5	EUT Operation Test Setup	12
2.6	Measurement Results Explanation Example	12
3	Test Result	13
3.1	26dB & 99% Occupied Bandwidth Measurement	13
3.2	Maximum conducted Output Power and Fundamental Maximum EIRP Measurement	14
3.3	Fundamental Power Spectral Density Measurement	15
3.4	In-Band Emissions (Channel Mask)	17
3.5	Contention Based Protocol	19
3.6	Unwanted Emissions Measurement	26
3.7	AC Conducted Emission Measurement	30
3.8	Antenna Requirements	32
4	List of Measuring Equipment	33
5	Measurement Uncertainty	34
Appendix A. Conducted Test Results		
Appendix B. AC Conducted Emission Test Result		
Appendix C. Radiated Spurious Emission		
Appendix D. Duty Cycle Plots		
Appendix E. Setup Photographs		



History of this test report

Report No.	Version	Description	Issued Date
FR5O1606G	01	Initial issue of report	Apr. 13, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(7)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(7)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(7)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 0.48 dB at 5924.97 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 13.10 dB at 0.634 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Datalogic S.r.l.

Via San Vitalino 13 CALDERARA DI RENO, BO 40012 Italy

1.2 Manufacturer

Datalogic S.r.l.

Via San Vitalino 13 CALDERARA DI RENO, BO 40012 Italy

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MOBILE COMPUTER/BARCODE READER
Brand Name	DATALOGIC
Model Name	CMFSNR
FCC ID	U4G-CMFSNR
IMEI Code	Conducted: HH61424WY003UA for Sample 3 Conduction: 354106690007874/354106690007882 for Sample 3 CBP: MEHBG0106000938 for Sample 3 Radiation: MEHBG06001126 for Sample 3 MEHBG06000885 for Sample 1 MEHBG0106001066 for Sample 2 MEHBG0106001401 for Sample 4 MEHBG0106001318 for Sample 5 MEHBG0106001422 for Sample 6
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are six types of EUT, for the differences please refer the product equality declaration exhibit submitted. According to the difference, we choose sample 3 to full test and the sample 1/2/4/5/6 is verified for the difference.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-7: 6525 MHz ~ 6875 MHz
Maximum EIRP	<MIMO Ant.2+3> <U-NII-5> 802.11a : 21.99 dBm / 0.1581 W 802.11ax HE20 : 21.66 dBm / 0.1466 W 802.11ax HE40 : 22.23 dBm / 0.1671 W 802.11ax HE80 : 21.89 dBm / 0.1545 W 802.11ax HE160 : 22.34 dBm / 0.1714 W <U-NII-7> 802.11a : 21.91 dBm / 0.1552 W 802.11ax HE20 : 20.87 dBm / 0.1222 W 802.11ax HE40 : 21.70 dBm / 0.1479 W 802.11ax HE80 : 21.62 dBm / 0.1452 W 802.11ax HE160 : 21.59 dBm / 0.1442 W
99% Occupied Bandwidth	802.11a : 16.792 MHz 802.11ax HE20 : 18.886 MHz 802.11ax HE40 : 37.658 MHz 802.11ax HE80 : 77.144 MHz 802.11ax HE160 : 158.248 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 2> : LDS Antenna with gain -0.1 dBi <Ant. 3> : LDS Antenna with gain -0.6 dBi <6525 MHz ~ 6875 MHz > <Ant. 2> : LDS Antenna with gain -0.5 dBi <Ant. 3> : LDS Antenna with gain -2.6 dBi
Type of Modulation	802.11a : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Remark:

1. WIFI MIMO only support STBC by manufacturer declared.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal output power.
3. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
4. The EUT does not support channel puncturing mode.
5. CBP test with antenna path of minimum gain (Antenna 3, Minimum gain= -2.6 dBi).

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5>

BW 20M	Channel	2	1	5	9	13	17	21	25	29
	Freq. (MHz)	5935	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3			11		19		27	
	Freq. (MHz)	5965			6005		6045		6085	
BW 80M	Channel	7					23			
	Freq. (MHz)	5985					6065			
BW 160M	Channel	15								
	Freq. (MHz)	6025								

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							



<U-NII- 7>

BW 20M	Channel	-	-	-	-	-	117	121	125
	Freq. (MHz)	-	-	-	-	-	6535	6555	6575
BW 40M	Channel	-		-		-		123	
	Freq. (MHz)	-		-		-		6565	

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	-	-
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	-	-
BW 40M	Channel	163		171		179		-	
	Freq. (MHz)	6765		6805		6845		-	
BW 80M	Channel	167				-			
	Freq. (MHz)	6785				-			

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WCDMA BAND 5+ WLAN Link(6G)+ BT Link+ USB Cable (Charging From Adaptor)
Remark: For Radiated Test Cases, The tests were performance with Adapter, USB Cable	


Ch. #		UNII-5	UNII-7	UNII-5	UNII-7
		20M BW	20M BW	40M BW	40M BW
L	Low	001	117	003	123
M	Middle	049	149	051	147
H	High	093	181	091	179

Ch. #		UNII-5	UNII-7	UNII-5	UNII-7
		80M BW	80M BW	160M BW	160M BW
L	Low	007	135	015	143
M	Middle	055	151	047	-
H	High	087	167	079	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

AC Conducted Emission:

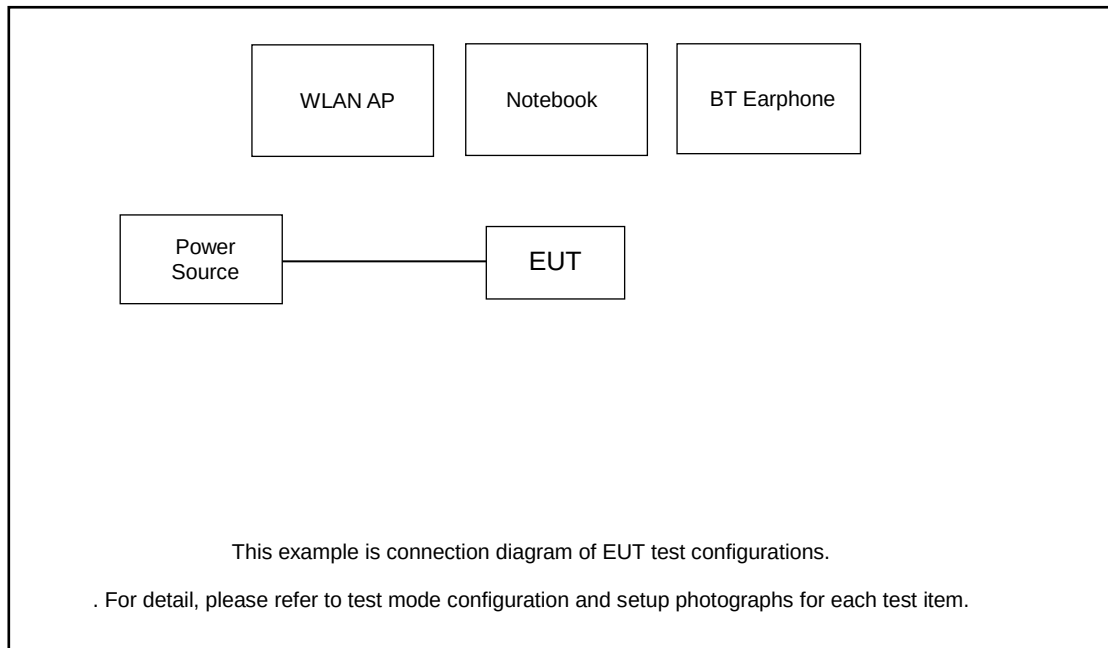

Radiated Emission:

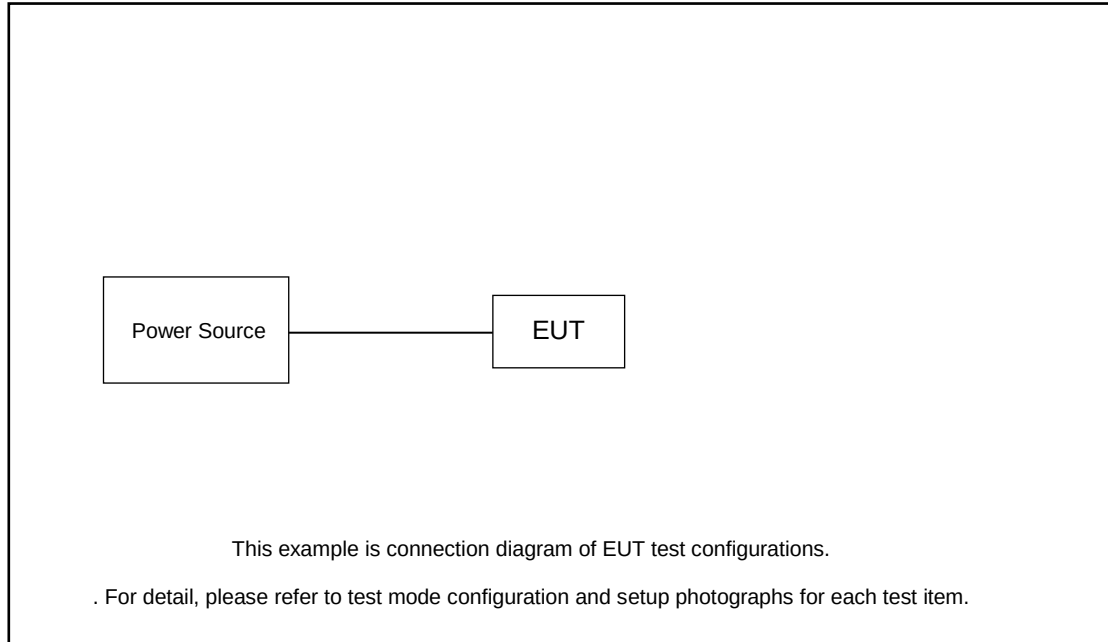

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.84 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.84 + 20 = 24.84 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

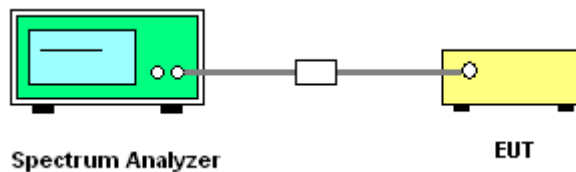

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

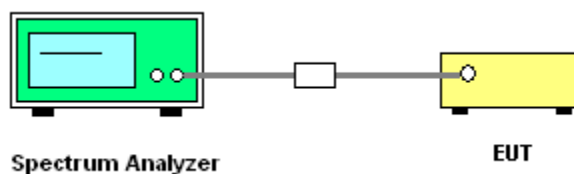

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

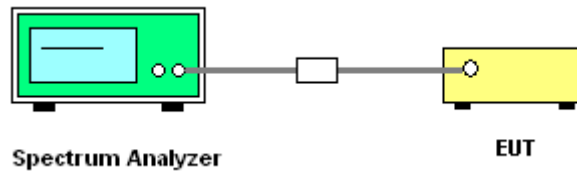

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.

- b. Suppressed by 28 dB at one channel bandwidth from the channel center.
- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- 4. Adjust the span to encompass the entire mask as necessary.
- 5. Clear trace.
- 6. Trace average at least 100 traces in power averaging (rms) mode.
- 7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

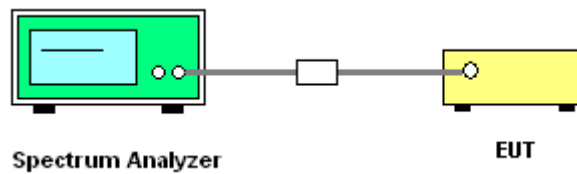

3.4.5 Test Result

Please refer to Appendix A.

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<CFR 15.407>

(d)(6) All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

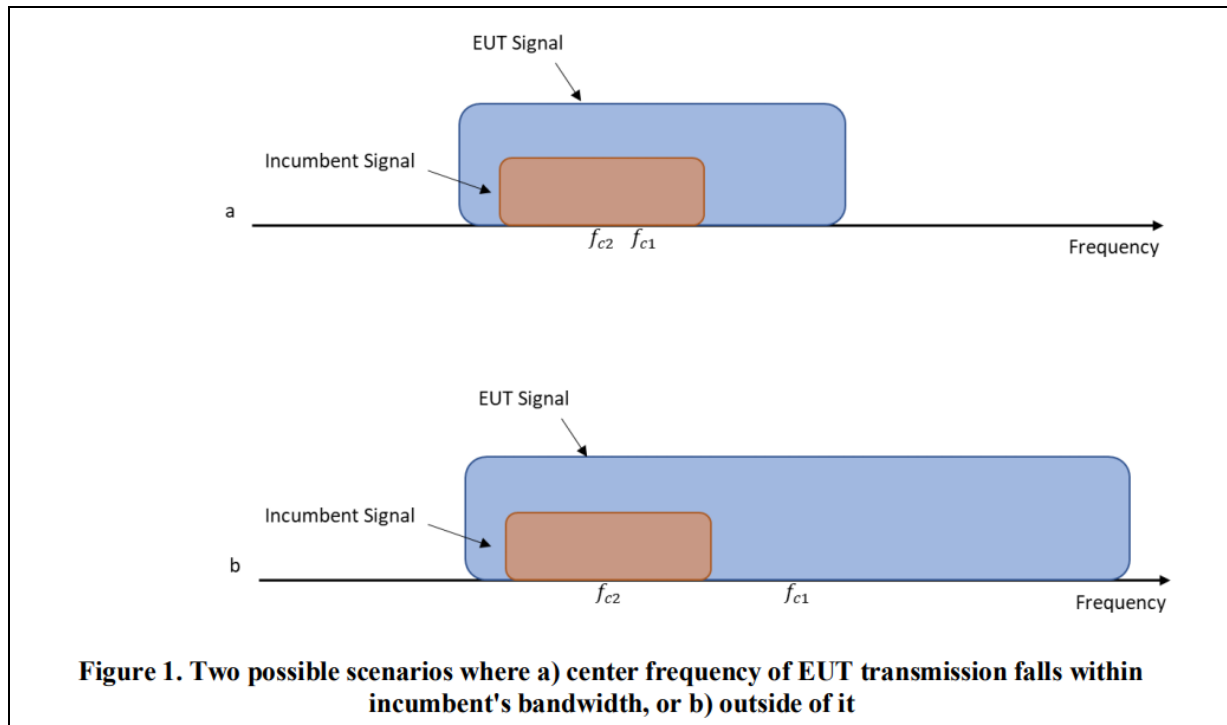

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

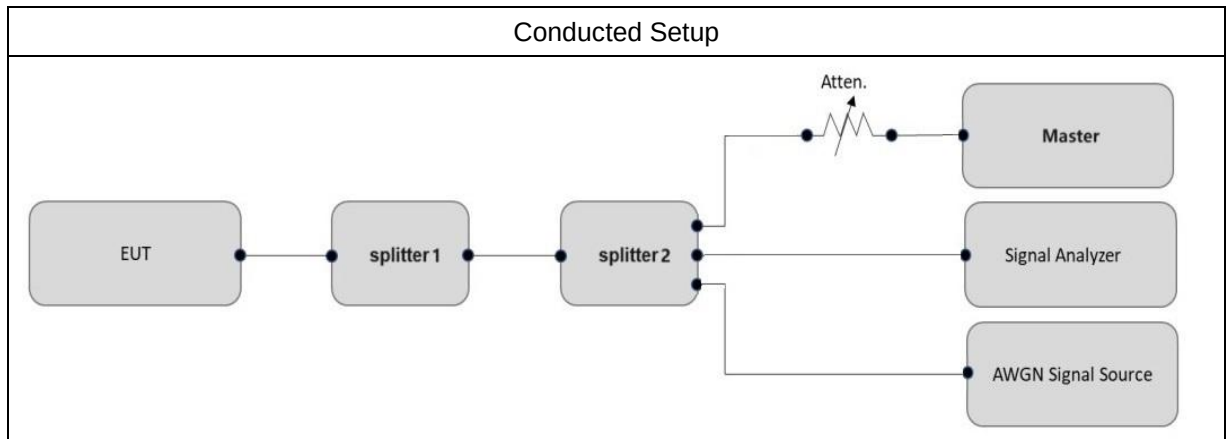

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5182B/5182BX07	9KHz~7.2GHz
Spectrum Analyzer	R&S	FSV40	10kHz~40GHz
Terminal (NB Server)	DELL	P78G	LAN
Combiner (splitter1)	Tojoin	N/A	2G~8GHz
Combiner (splitter2)	MTJ Cooperation	MTJ7144-M	0.5GHz~18GHz
Attenuator	Keysight	8494B	0-110dBm
WLAN AP	ASUS	GT-AXE11000	Dual Band AP



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-71.05	100	-62	-68.45	6.45
				Result: Stop Transmission				
				-72.05	< 90	-62	-69.45	7.45
				Result: Minimal Operation				
				-74.04	0	-62	-71.44	9.44
				Result: Normal Operation				
	6185	160	6110	-72.23	100	-62	-69.63	7.63
				Result: Stop Transmission				
				-73.23	< 90	-62	-70.63	8.63
				Result: Minimal Operation				
				-74.16	0	-62	-71.56	9.56
				Result: Normal Operation				
			6185	-65.66 (worst)	100	-62	-63.06	1.06
				Result: Stop Transmission				
				-66.66	< 90	-62	-64.06	2.06
				Result: Minimal Operation				
				-67.64	0	-62	-65.04	3.04
				Result: Normal Operation				
			6260	-71.34	100	-62	-68.74	6.74
				Result: Stop Transmission				
				-72.34	< 90	-62	-69.74	7.74
				Result: Minimal Operation				
				-73.78	0	-62	-71.18	9.18
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 3, gain = -2.6dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power




Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-74.96	100	-62	-72.36	10.36
					Result: Stop Transmission			
				-75.96	< 90	-62	-73.36	11.36
					Result: Minimal Operation			
				-79.21	0	-62	-76.61	14.61
					Result: Normal Operation			
	6665	160	6590	-74.54	100	-62	-71.94	9.94
					Result: Stop Transmission			
				-75.54	< 90	-62	-72.94	10.94
					Result: Minimal Operation			
				-76.76	0	-62	-74.16	12.16
					Result: Normal Operation			
			6665	-68.80	100	-62	-66.2	4.2
					Result: Stop Transmission			
				-69.80	< 90	-62	-67.2	5.2
					Result: Minimal Operation			
				-70.74	0	-62	-68.14	6.14
					Result: Normal Operation			
			6740	-74.43	100	-62	-71.83	9.83
					Result: Stop Transmission			
				-75.43	< 90	-62	-72.83	10.83
					Result: Minimal Operation			
				-76.35	0	-62	-73.75	11.75
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 3, gain = -2.6dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power

3.5.7 Worst Case Plots of Contention Based Protocol

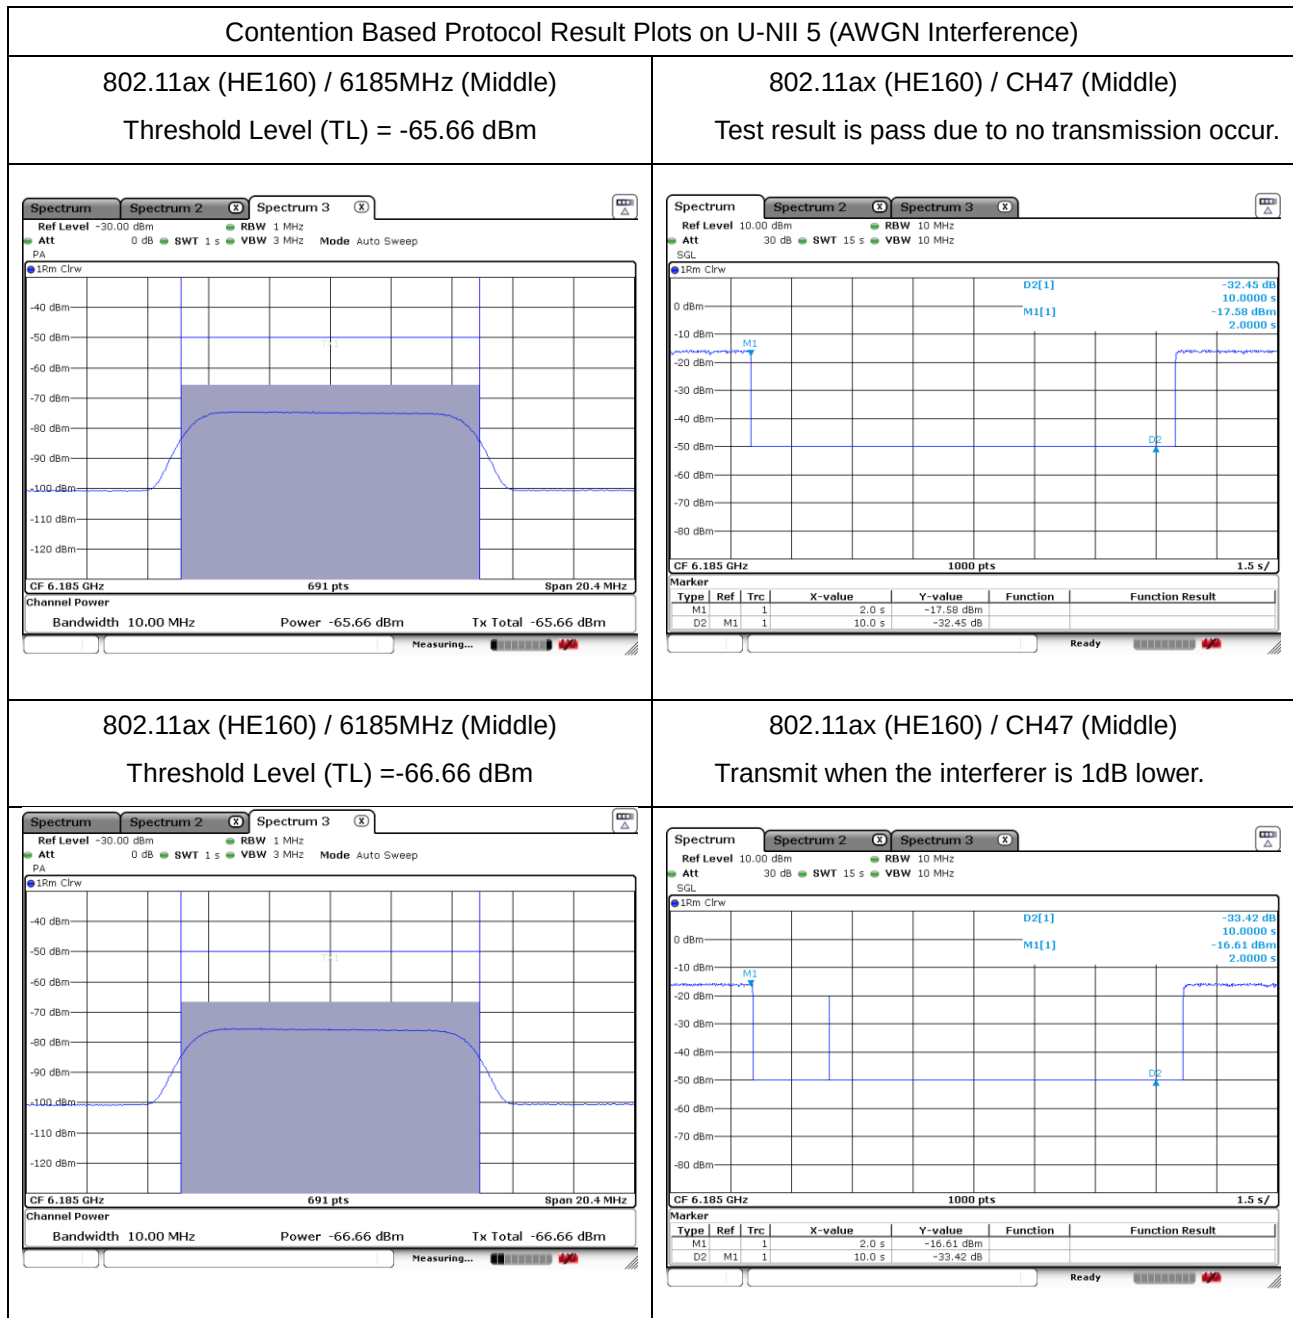


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal

3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 20MHz;
2. When Incumbent Signal inject at middle frequency, the whole 160MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

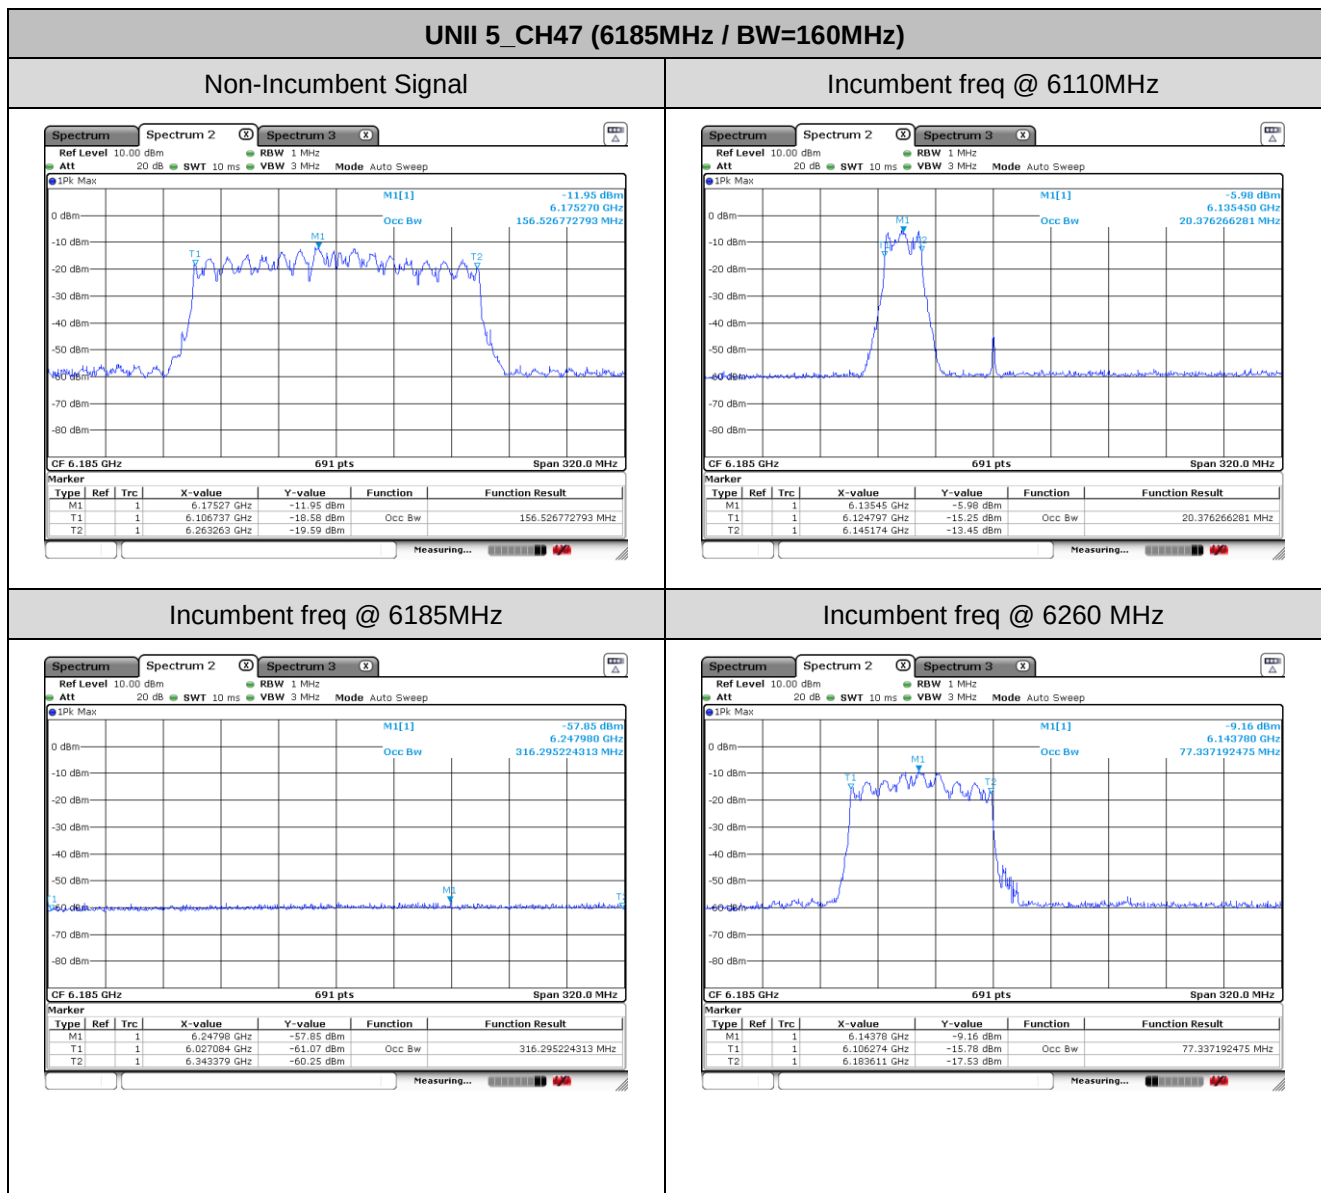

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

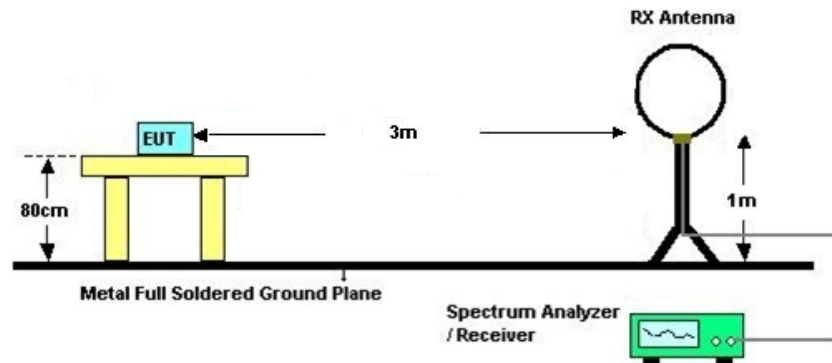

For radiated emissions from 30MHz to 1GHz

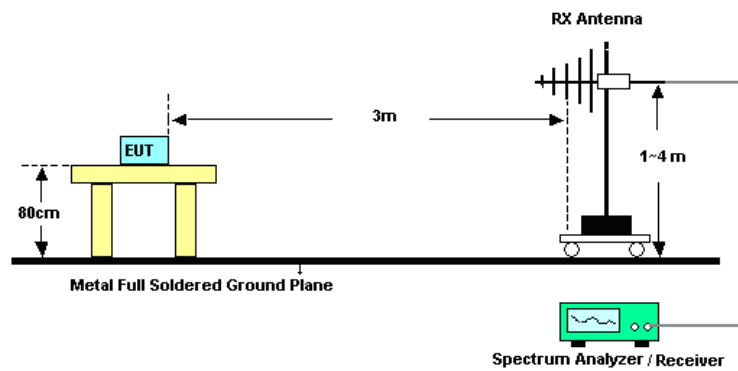

For radiated emissions above 1GHz

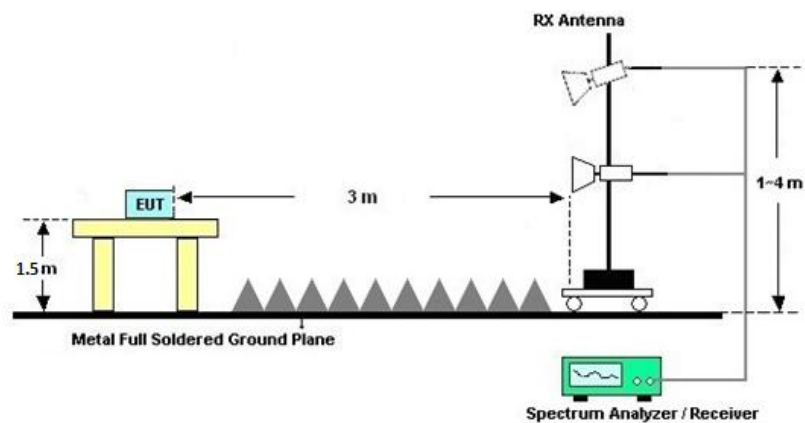



3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

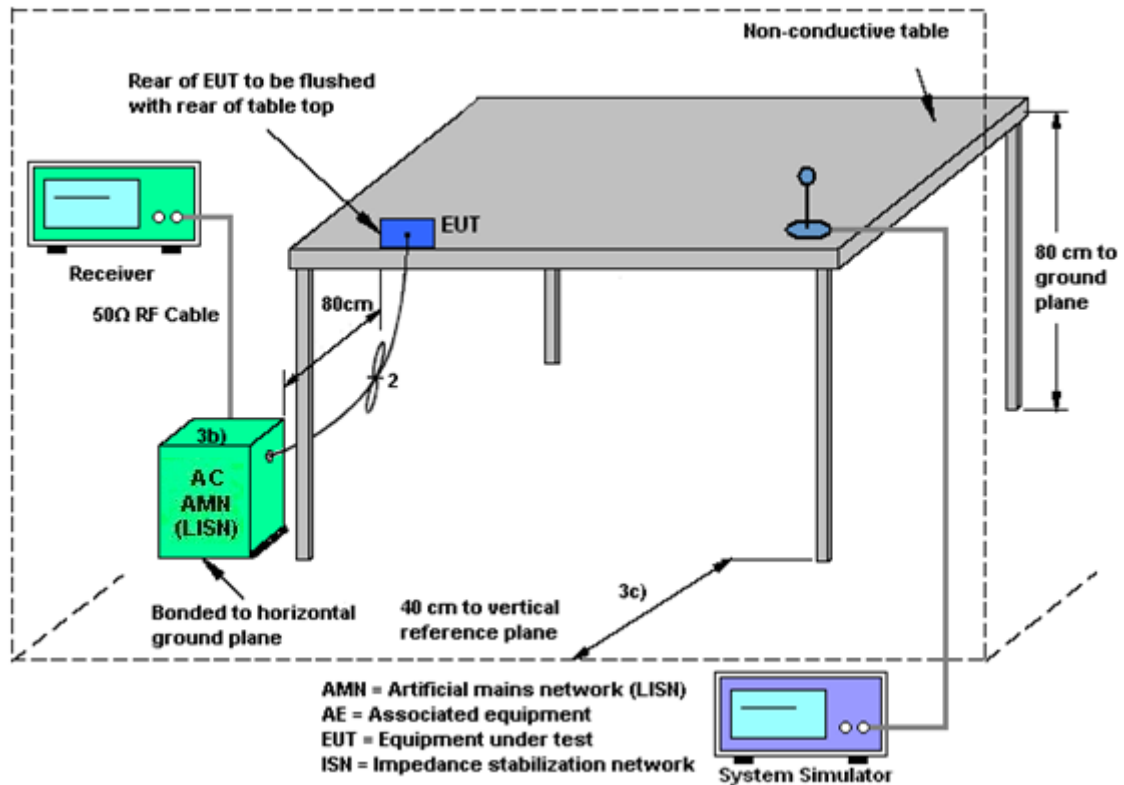

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<STBC Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + Array\ Gain$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

For completely uncorrelated transmissions, directional gain is calculated as,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots)$, as following table

<STBC Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 2 (dBi)	Ant. 3 (dBi)		
U-NII-5	-0.10	-0.60	-0.10	-0.10
U-NII-7	-0.60	-2.60	-0.60	-0.60



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Feb. 04, 2026~ Feb. 27, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Feb. 04, 2026~ Feb. 27, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Feb. 04, 2026~ Feb. 27, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 02, 2025	Feb. 04, 2026~ Feb. 27, 2026	Jul. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max x 30dBm	Jul. 02, 2025	Feb. 22, 2026	Jul. 01, 2026	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2025	Feb. 22, 2026	Oct. 10, 2026	Radiation (03CH05-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Feb. 22, 2026	Aug. 09, 2026	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Feb. 22, 2026	Mar. 23, 2026	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 14, 2025	Feb. 22, 2026	Apr. 13, 2026	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Feb. 22, 2026	Oct. 19, 2026	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 03, 2025	Feb. 22, 2026	Jul. 02, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Feb. 22, 2026	Dec.25 , 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Dec. 25, 2025	Feb. 22, 2026	Dec.24 , 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Dec. 25, 2025	Feb. 22, 2026	Dec.24 , 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 22, 2026	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 22, 2026	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 22, 2026	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2025	Mar. 27, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Mar. 27, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2025	Mar. 27, 2026	Dec. 23, 2026	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Mar. 27, 2026	Apr. 15, 2026	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Aug. 26, 2025	Feb. 22, 2026~ Feb. 23, 2026	Aug. 25, 2026	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 16, 2025	Feb. 22, 2026~ Feb. 23, 2026	Apr. 15, 2026	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Dec. 24, 2025	Feb. 22, 2026~ Feb. 23, 2026	Dec. 23, 2026	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Feb. 22, 2026~ Feb. 23, 2026	NCR	CBP (DFS01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±1.70 dB
Frequency	±0.38 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.44%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.18dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.36dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 2	Ant 3	Ant 2+3	Ant 2+3	Ant 2+3	Ant 2+3	
11a	STBC	2	1	5955	6Mbps	-	18.00	19.24	18.80	22.04	-0.10	21.94	30	Pass
11a	STBC	2	2	5935	6Mbps	-	8.50	9.61	9.82	12.73	-0.10	12.63	30	Pass
11a	STBC	2	49	6195	6Mbps	-	18.00	19.25	18.91	22.09	-0.10	21.99	30	Pass
11a	STBC	2	93	6415	6Mbps	-	18.00	18.65	18.75	21.71	-0.10	21.61	30	Pass
HE20	STBC	2	1	5955	MCS0	Full	18.00	18.56	18.34	21.46	-0.10	21.36	30	Pass
HE20	STBC	2	1	5955	MCS0	RU 26/0	10.00	11.82	11.11	14.49	-0.10	14.39	30	Pass
HE20	STBC	2	1	5955	MCS0	RU 52/37	13.00	14.42	13.44	16.97	-0.10	16.87	30	Pass
HE20	STBC	2	1	5955	MCS0	RU 106/53	16.00	16.92	16.50	19.73	-0.10	19.63	30	Pass
HE20	STBC	2	2	5935	MCS0	Full	-9.00	-8.51	-7.07	-4.72	-0.10	-4.82	30	Pass
HE20	STBC	2	2	5935	MCS0	RU 26/0	-16.50	-13.48	-14.50	-10.95	-0.10	-11.05	30	Pass
HE20	STBC	2	2	5935	MCS0	RU 52/37	-13.50	-11.45	-12.17	-8.78	-0.10	-8.88	30	Pass
HE20	STBC	2	2	5935	MCS0	RU 106/53	-14.00	-12.22	-12.53	-9.36	-0.10	-9.46	30	Pass
HE20	STBC	2	49	6195	MCS0	Full	18.00	18.96	18.52	21.76	-0.10	21.66	30	Pass
HE20	STBC	2	93	6415	MCS0	Full	18.00	18.21	18.13	21.18	-0.10	21.08	30	Pass
HE40	STBC	2	3	5965	MCS0	Full	18.00	19.12	19.05	22.10	-0.10	22.00	30	Pass
HE40	STBC	2	51	6205	MCS0	Full	18.00	19.56	19.07	22.33	-0.10	22.23	30	Pass
HE40	STBC	2	91	6405	MCS0	Full	18.00	18.91	18.63	21.78	-0.10	21.68	30	Pass
HE80	STBC	2	7	5985	MCS0	Full	18.00	18.72	19.06	21.90	-0.10	21.80	30	Pass
HE80	STBC	2	55	6225	MCS0	Full	18.00	19.03	18.92	21.99	-0.10	21.89	30	Pass
HE80	STBC	2	87	6385	MCS0	Full	18.00	18.62	18.72	21.68	-0.10	21.58	30	Pass
HE160	STBC	2	15	6025	MCS0	Full	17.00	18.23	17.86	21.06	-0.10	20.96	30	Pass
HE160	STBC	2	47	6185	MCS0	Full	18.00	19.71	19.13	22.44	-0.10	22.34	30	Pass
HE160	STBC	2	79	6345	MCS0	Full	18.00	18.73	18.89	21.82	-0.10	21.72	30	Pass

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 2	Ant 3	Ant 2+3	Ant 2+3	Ant 2+3	Ant 2+3	
11a	STBC	2	117	6535	6Mbps	-	18.00	18.86	18.87	21.88	-0.50	21.38	30	Pass
11a	STBC	2	149	6695	6Mbps	-	18.00	18.75	18.88	21.83	-0.50	21.33	30	Pass
11a	STBC	2	181	6855	6Mbps	-	18.00	19.23	19.57	22.41	-0.50	21.91	30	Pass
HE20	STBC	2	117	6535	MCS0	Full	18.00	18.29	18.32	21.32	-0.50	20.82	30	Pass
HE20	STBC	2	117	6535	MCS0	RU 26/0	9.50	10.72	10.80	13.77	-0.50	13.27	30	Pass
HE20	STBC	2	117	6535	MCS0	RU 52/37	12.50	13.37	13.21	16.30	-0.50	15.80	30	Pass
HE20	STBC	2	117	6535	MCS0	RU 106/53	16.00	16.42	16.68	19.56	-0.50	19.06	30	Pass
HE20	STBC	2	149	6695	MCS0	Full	18.00	18.16	18.55	21.37	-0.50	20.87	30	Pass
HE20	STBC	2	181	6855	MCS0	Full	18.00	18.34	19.01	21.70	-0.50	21.20	30	Pass
HE40	STBC	2	123	6565	MCS0	Full	18.00	18.87	18.72	21.81	-0.50	21.31	30	Pass
HE40	STBC	2	147	6685	MCS0	Full	18.00	18.77	18.92	21.86	-0.50	21.36	30	Pass
HE40	STBC	2	179	6845	MCS0	Full	18.00	19.05	19.33	22.20	-0.50	21.70	30	Pass
HE80	STBC	2	135	6625	MCS0	Full	18.00	18.66	18.72	21.70	-0.50	21.20	30	Pass
HE80	STBC	2	151	6705	MCS0	Full	18.00	18.59	18.71	21.66	-0.50	21.16	30	Pass
HE80	STBC	2	167	6785	MCS0	Full	18.00	19.28	18.94	22.12	-0.50	21.62	30	Pass
HE160	STBC	2	143	6665	MCS0	Full	18.00	19.04	19.12	22.09	-0.50	21.59	30	Pass



Emission Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
11A	Ant2	5935	20.00	5924.81	5944.81	320	Pass
	Ant3	5935	19.67	5925.19	5944.86	320	Pass
	Ant2	5955	20.57	5944.86	5965.43	320	Pass
	Ant3	5955	19.57	5945.24	5964.81	320	Pass
	Ant2	6195	20.38	6184.43	6204.81	320	Pass
	Ant3	6195	19.67	6185.14	6204.81	320	Pass
	Ant2	6415	20.24	6404.57	6424.81	320	Pass
	Ant3	6415	19.52	6405.19	6424.71	320	Pass
	Ant2	6535	20.33	6524.67	6545.00	320	Pass
	Ant3	6535	19.67	6525.14	6544.81	320	Pass
	Ant2	6695	20.33	6684.71	6705.05	320	Pass
	Ant3	6695	19.57	6685.24	6704.81	320	Pass
	Ant2	6855	22.19	6844.24	6866.43	320	Pass
	Ant3	6855	23.14	6843.19	6866.33	320	Pass
11AX20MIMO	Ant2	5935	20.95	5924.48	5945.43	320	Pass
	Ant3	5935	21.05	5924.43	5945.48	320	Pass
	Ant2	5955	21.05	5944.43	5965.48	320	Pass
	Ant3	5955	21.05	5944.57	5965.62	320	Pass
	Ant2	6195	21.38	6184.38	6205.76	320	Pass
	Ant3	6195	21.19	6184.38	6205.57	320	Pass
	Ant2	6415	21.24	6404.38	6425.62	320	Pass
	Ant3	6415	21.29	6404.33	6425.62	320	Pass
	Ant2	6535	21.52	6524.29	6545.81	320	Pass
	Ant3	6535	21.29	6524.33	6545.62	320	Pass
	Ant2	6695	22.05	6684.43	6706.48	320	Pass
	Ant3	6695	21.24	6684.38	6705.62	320	Pass
	Ant2	6855	21.14	6844.38	6865.52	320	Pass
	Ant3	6855	21.19	6844.33	6865.52	320	Pass
11AX40MIMO	Ant2	5965	40.29	5944.90	5985.19	320	Pass
	Ant3	5965	40.00	5945.00	5985.00	320	Pass
	Ant2	6205	40.19	6184.90	6225.10	320	Pass
	Ant3	6205	40.29	6184.90	6225.19	320	Pass
	Ant2	6405	40.29	6384.81	6425.10	320	Pass






	Ant3	6405	40.19	6385.00	6425.19	320	Pass
	Ant2	6565	40.19	6545.00	6585.19	320	Pass
	Ant3	6565	40.10	6545.00	6585.10	320	Pass
	Ant2	6685	40.38	6664.81	6705.19	320	Pass
	Ant3	6685	40.10	6665.00	6705.10	320	Pass
	Ant2	6845	40.19	6824.90	6865.10	320	Pass
	Ant3	6845	40.38	6824.81	6865.19	320	Pass
11AX80MIMO	Ant2	5985	81.33	5944.43	6025.76	320	Pass
	Ant3	5985	81.33	5944.24	6025.57	320	Pass
	Ant2	6225	81.90	6183.67	6265.57	320	Pass
	Ant3	6225	81.33	6184.43	6265.76	320	Pass
	Ant2	6385	81.14	6344.43	6425.57	320	Pass
	Ant3	6385	81.33	6344.24	6425.57	320	Pass
	Ant2	6625	81.90	6584.24	6666.14	320	Pass
	Ant3	6625	81.14	6584.43	6665.57	320	Pass
	Ant2	6705	81.14	6664.43	6745.57	320	Pass
	Ant3	6705	81.71	6664.24	6745.95	320	Pass
	Ant2	6785	81.33	6744.24	6825.57	320	Pass
	Ant3	6785	81.52	6744.24	6825.76	320	Pass
11AX160MIMO	Ant2	6025	164.19	5942.71	6106.90	320	Pass
	Ant3	6025	164.57	5943.10	6107.67	320	Pass
	Ant2	6185	163.81	6103.10	6266.90	320	Pass
	Ant3	6185	164.95	6102.33	6267.29	320	Pass
	Ant2	6345	163.43	6263.48	6426.90	320	Pass
	Ant3	6345	163.81	6263.10	6426.90	320	Pass
	Ant2	6665	265.14	6545.76	6810.90	320	Pass
	Ant3	6665	163.05	6583.48	6746.52	320	Pass







Test Graphs


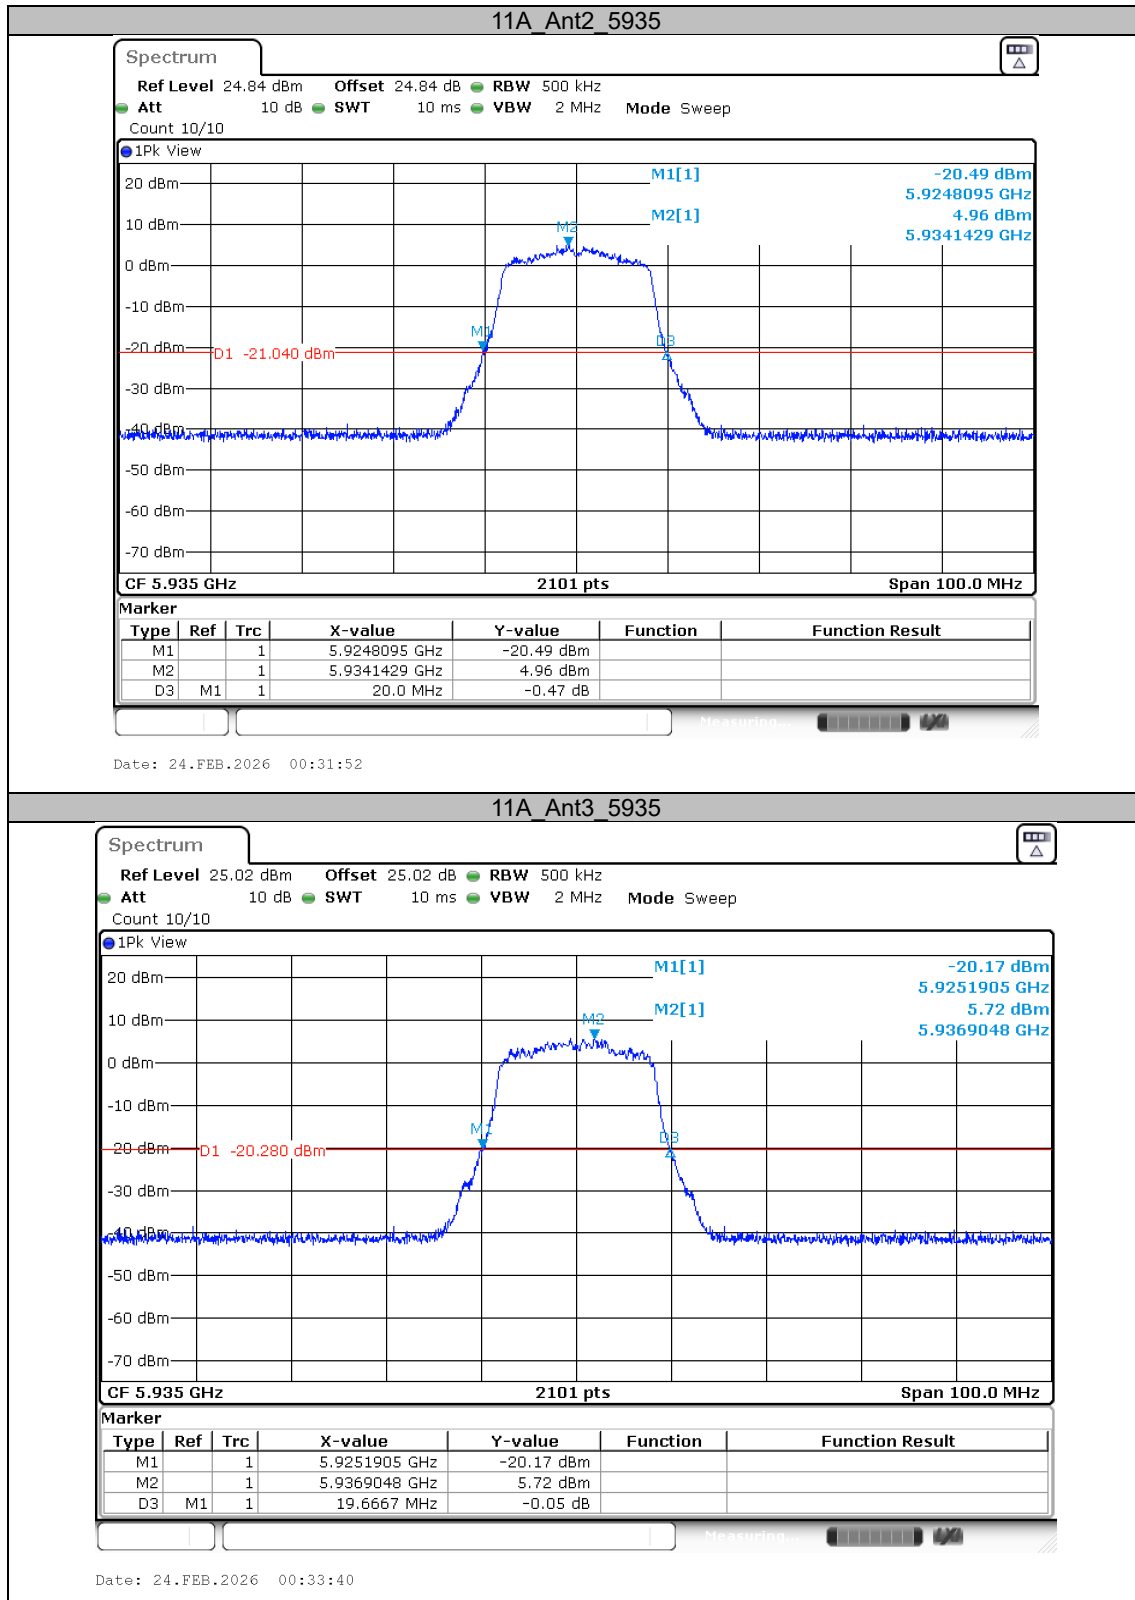



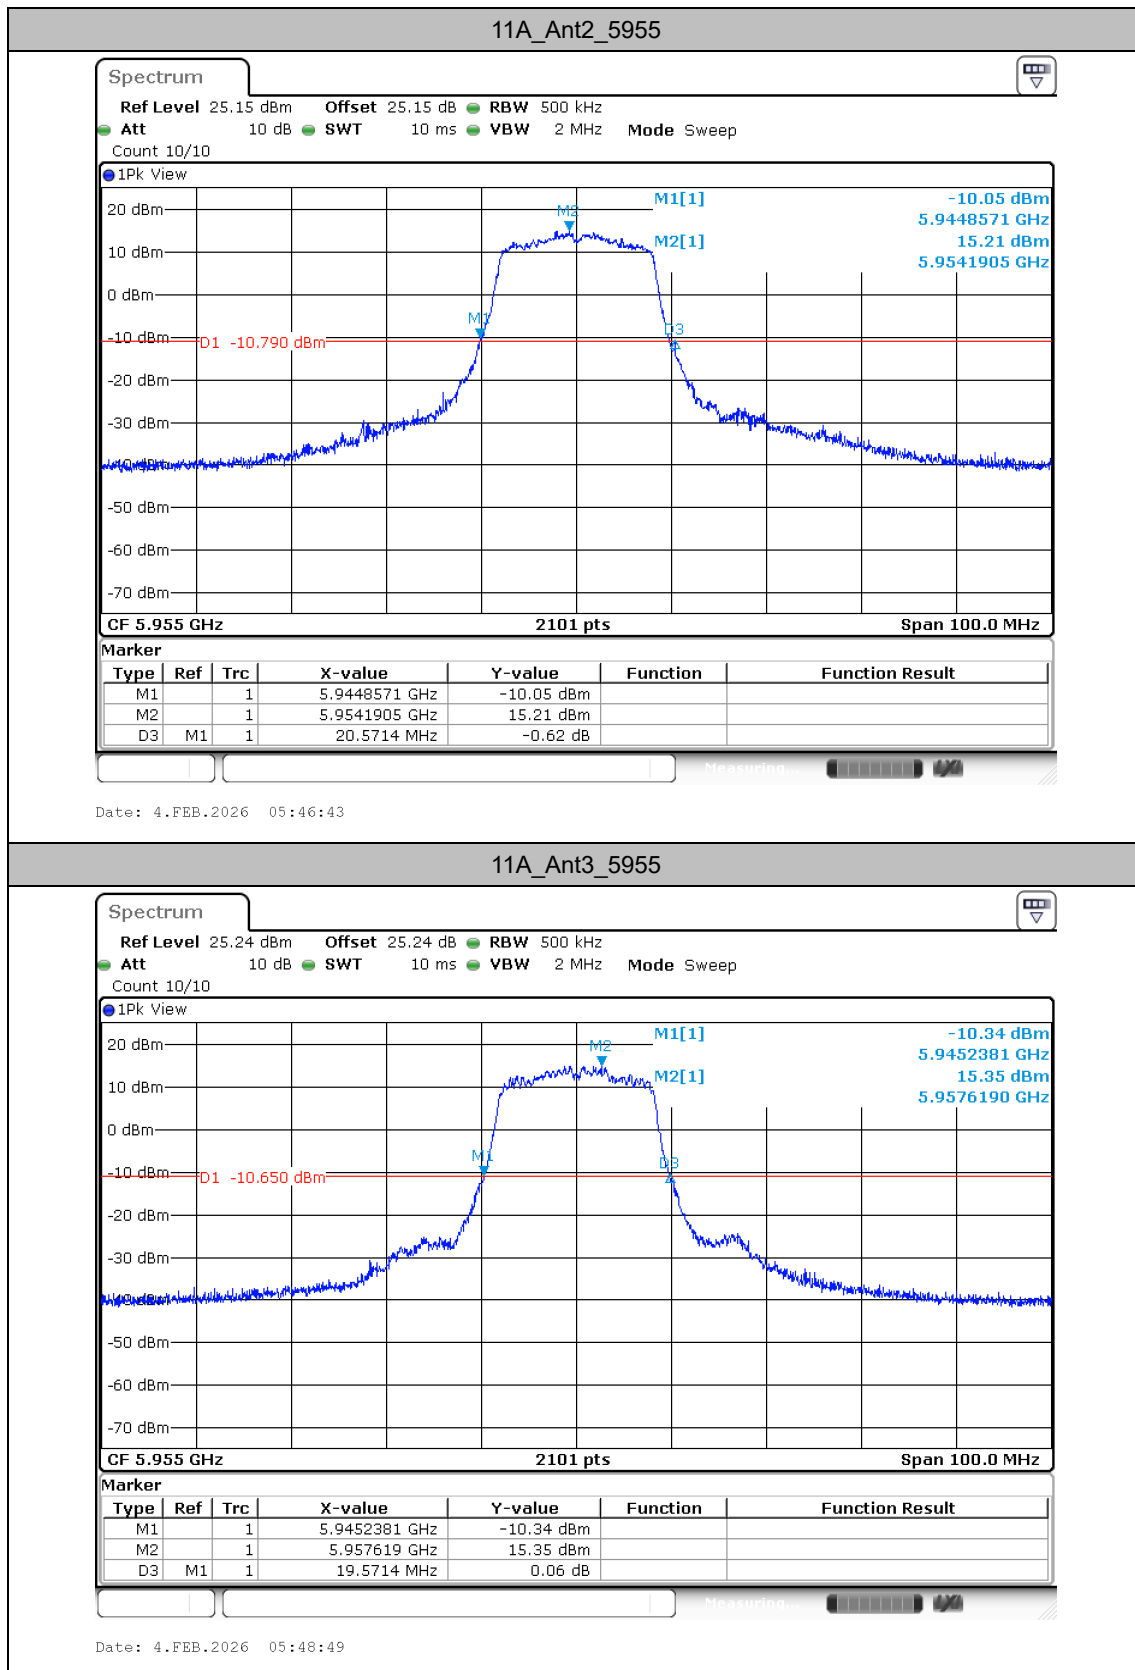


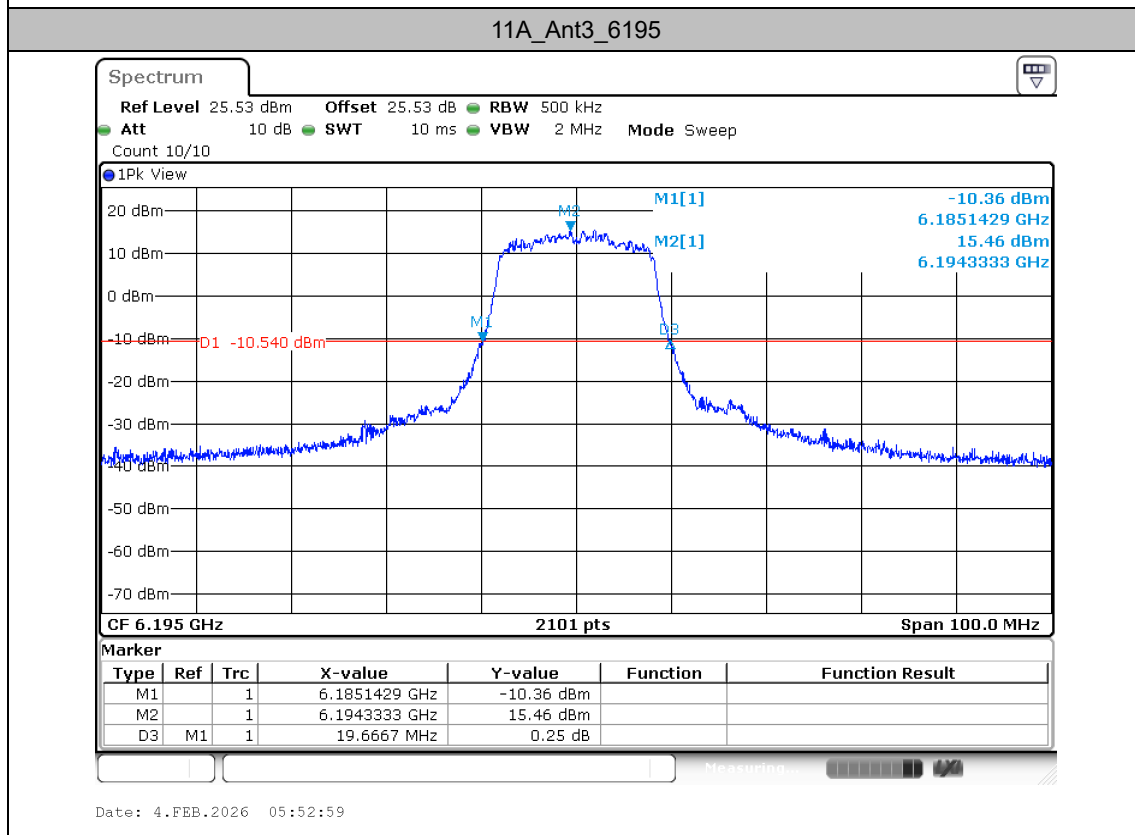
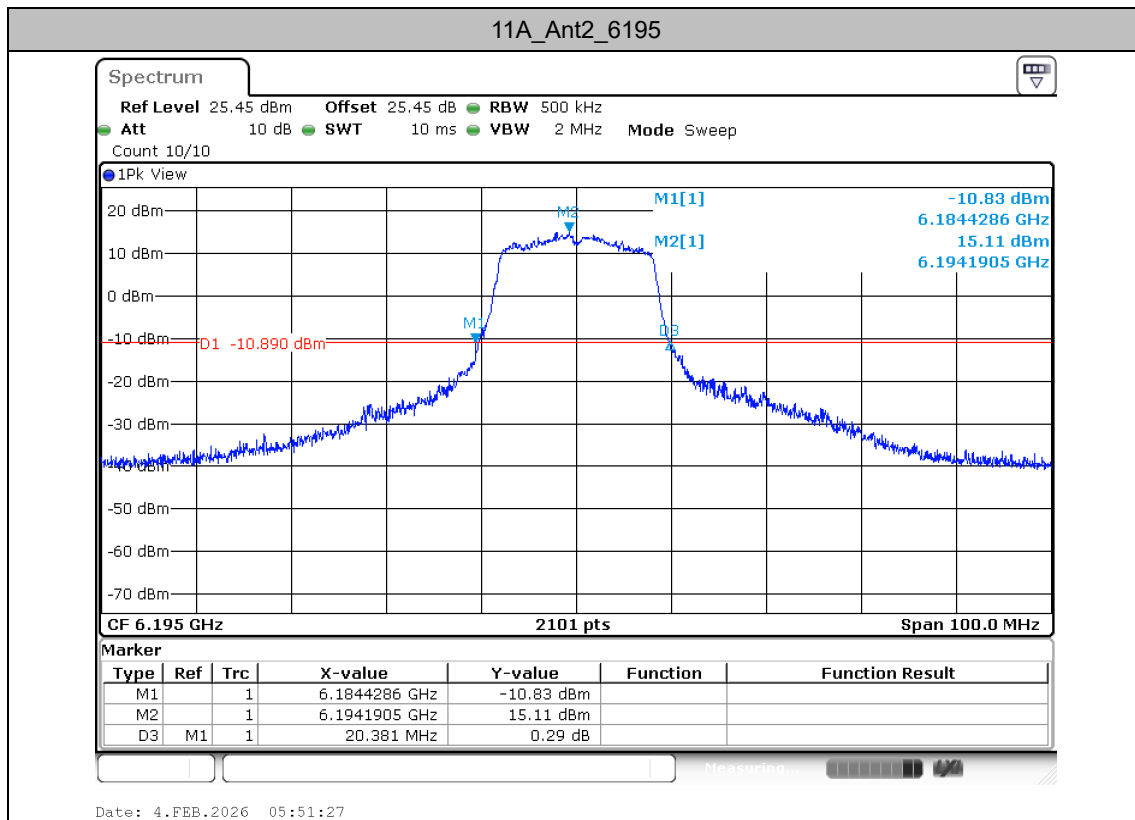


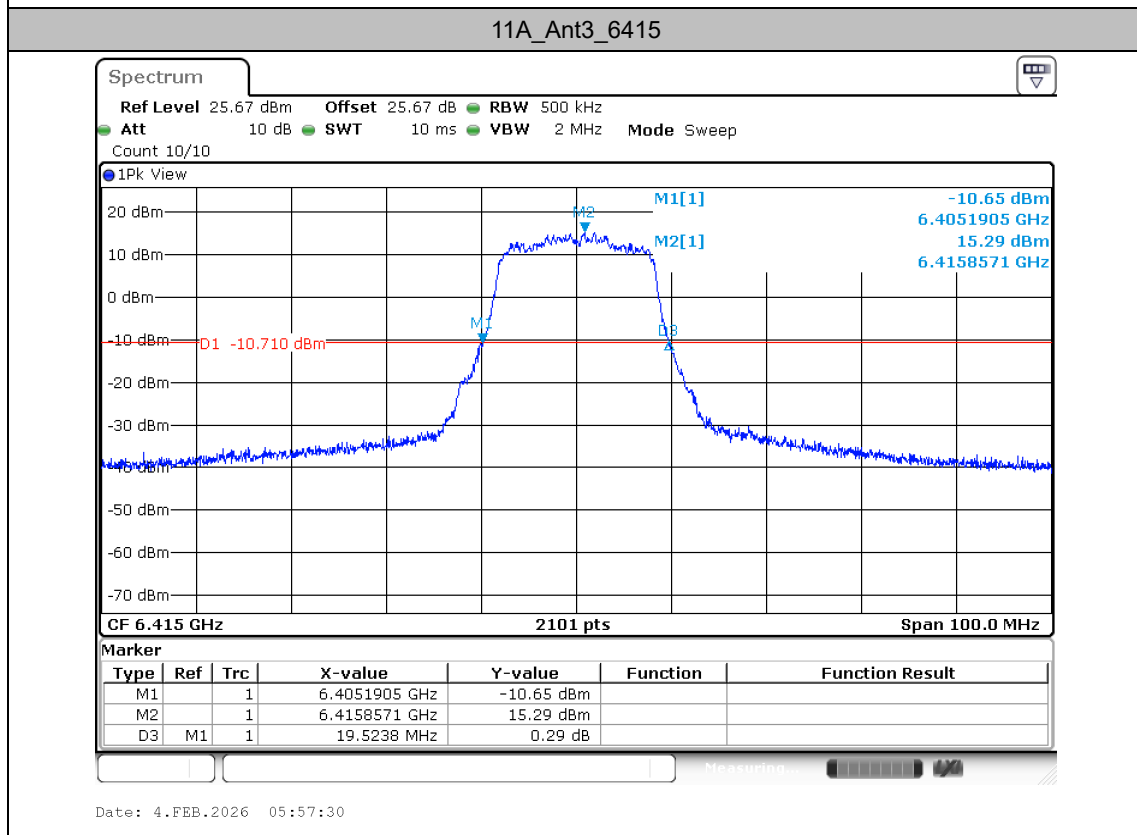
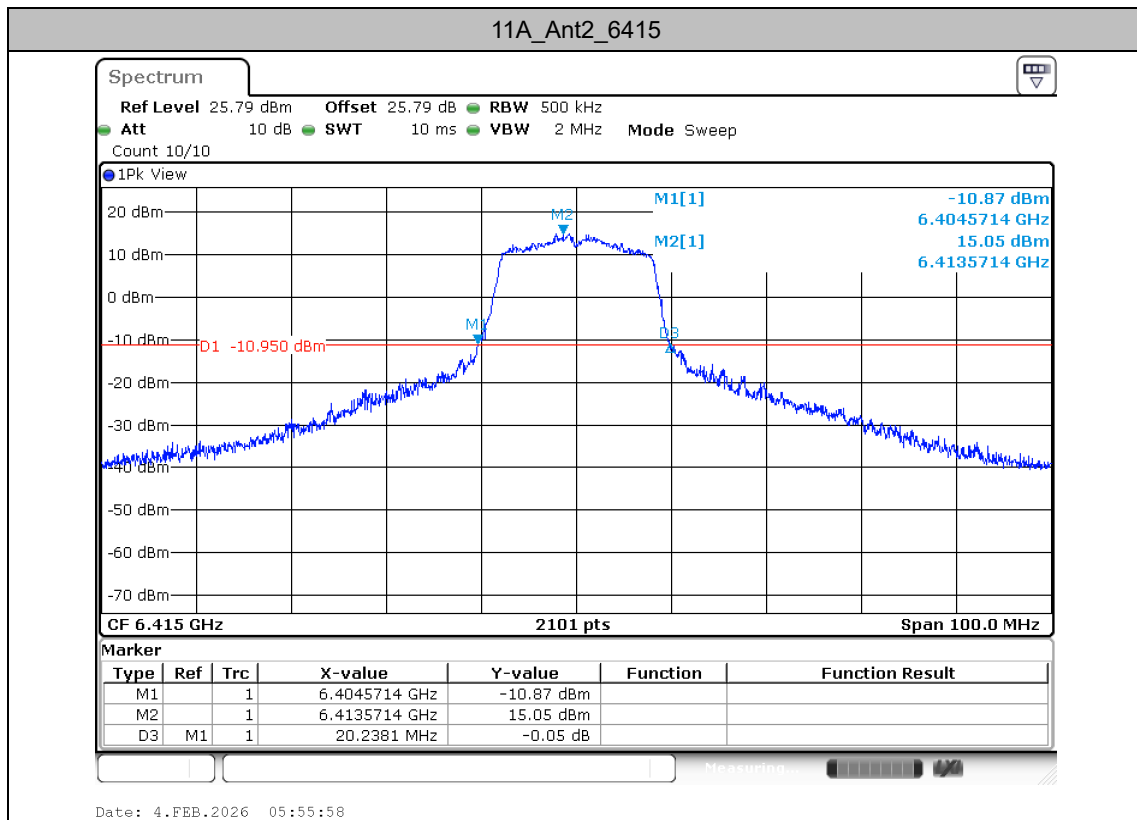


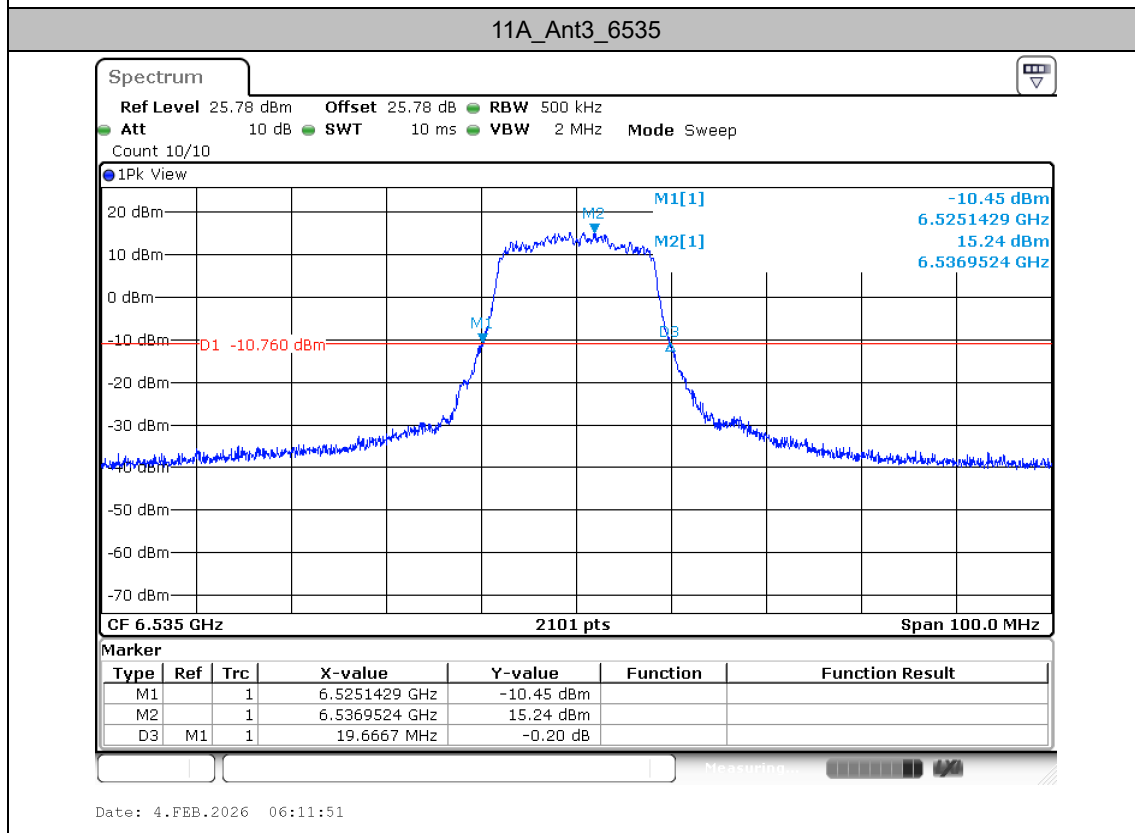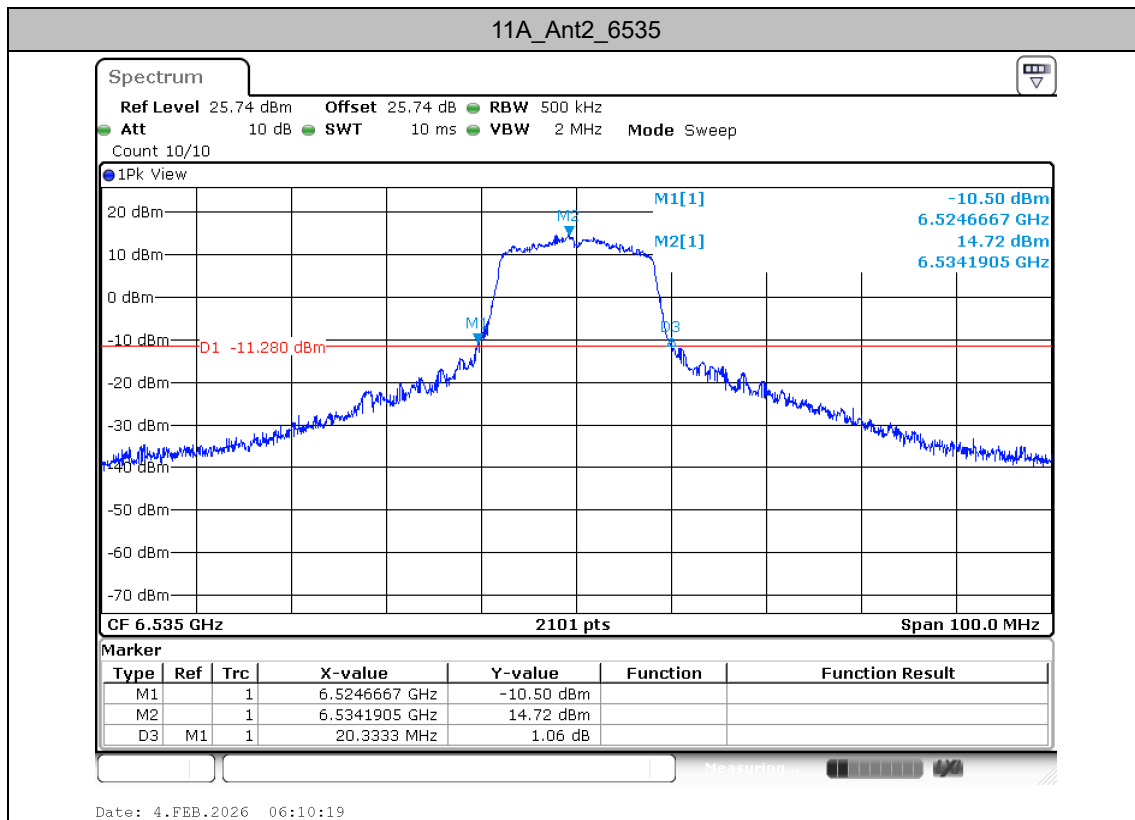


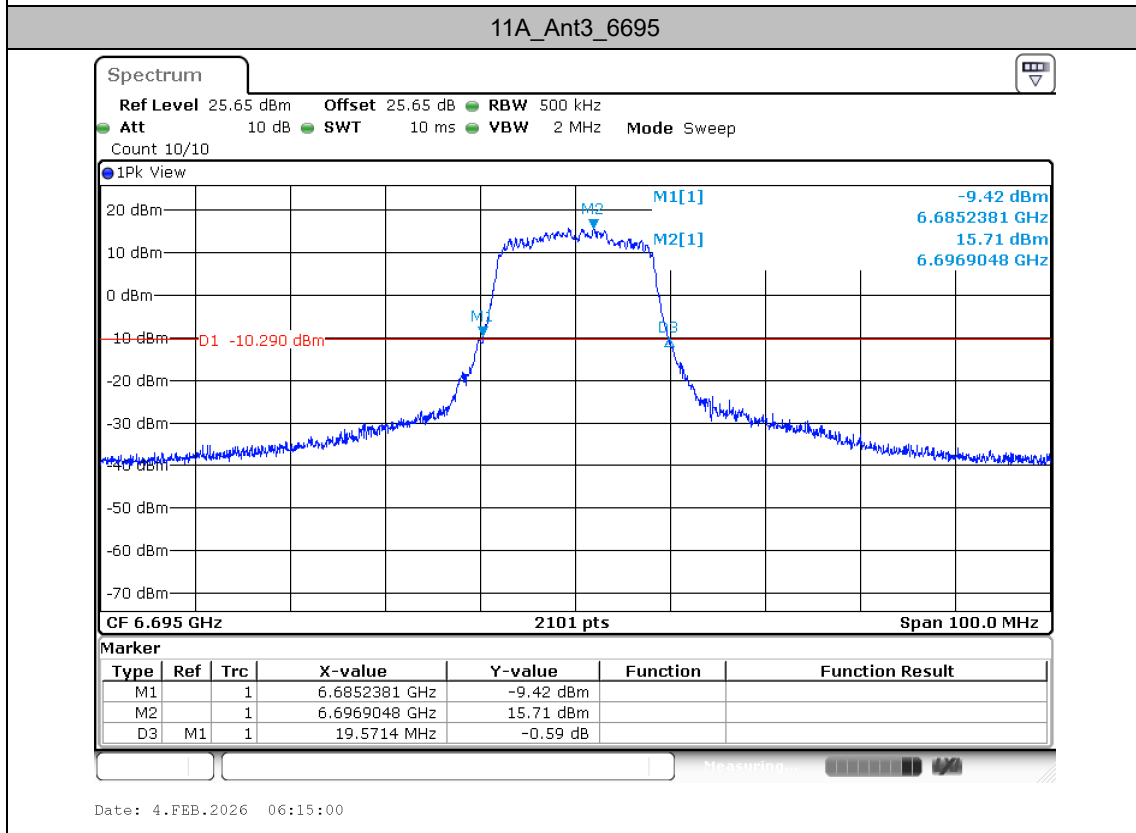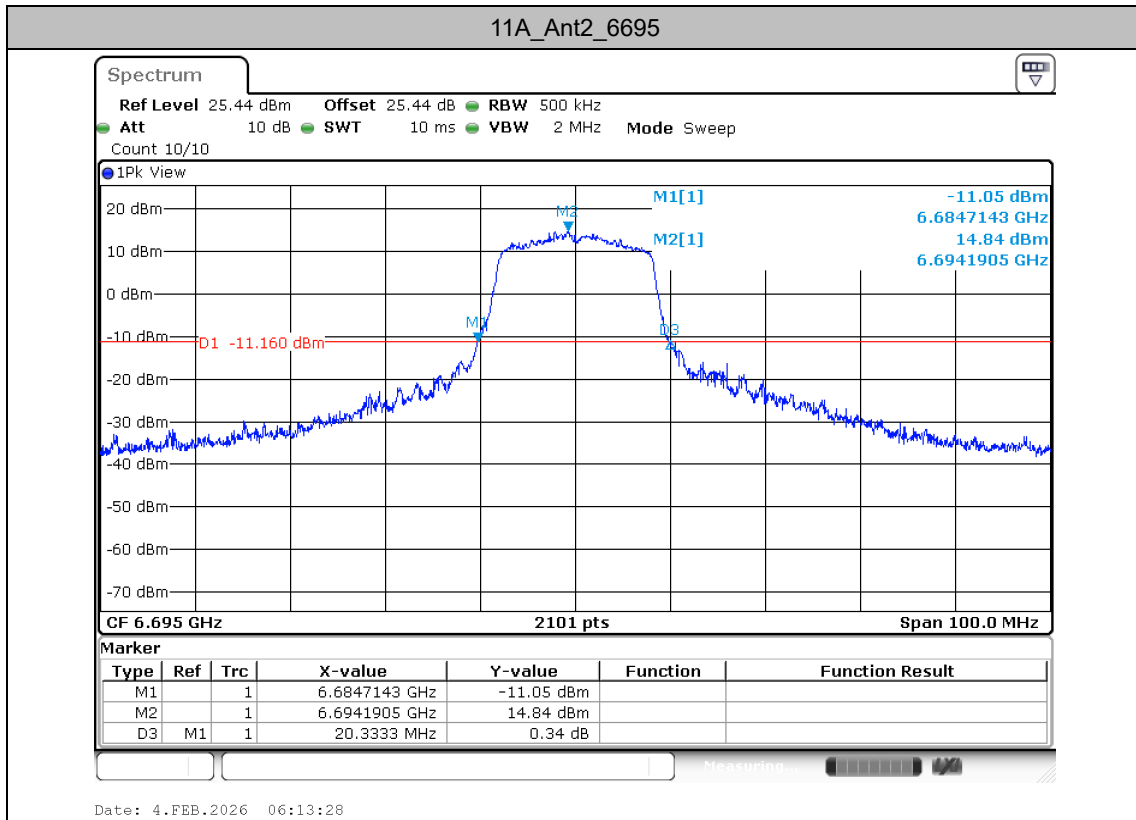


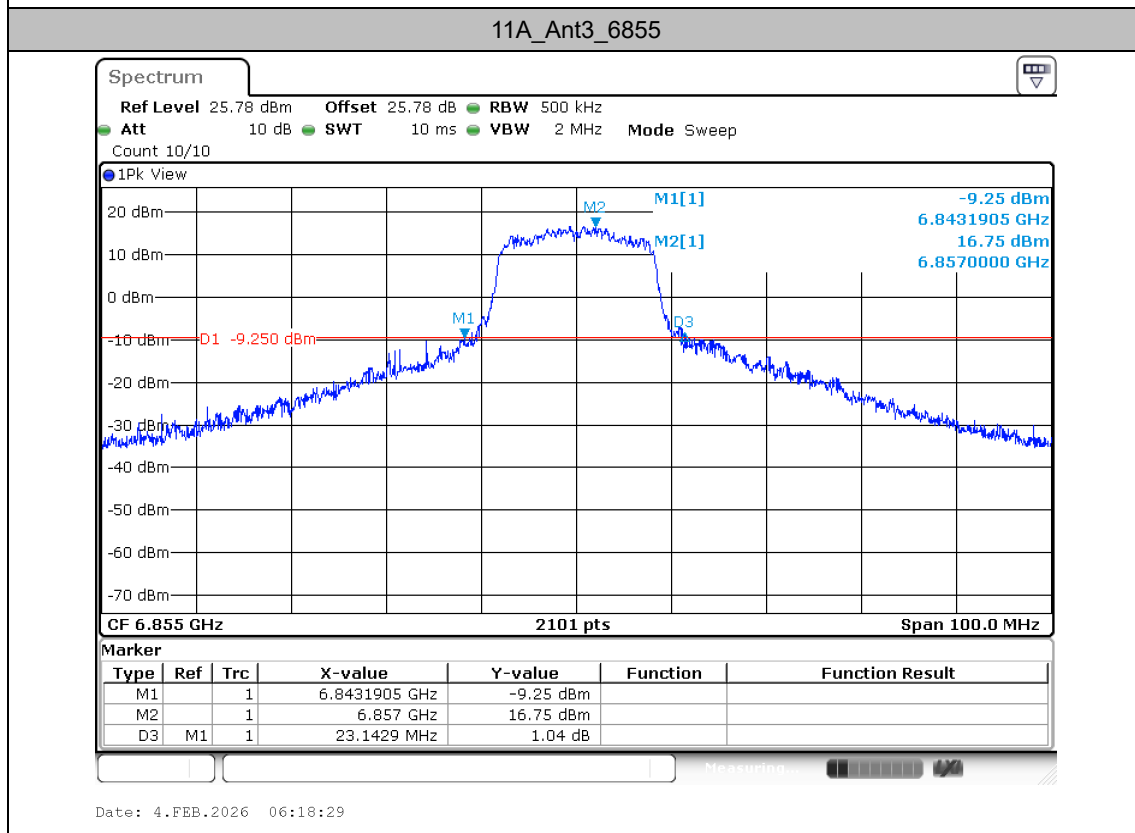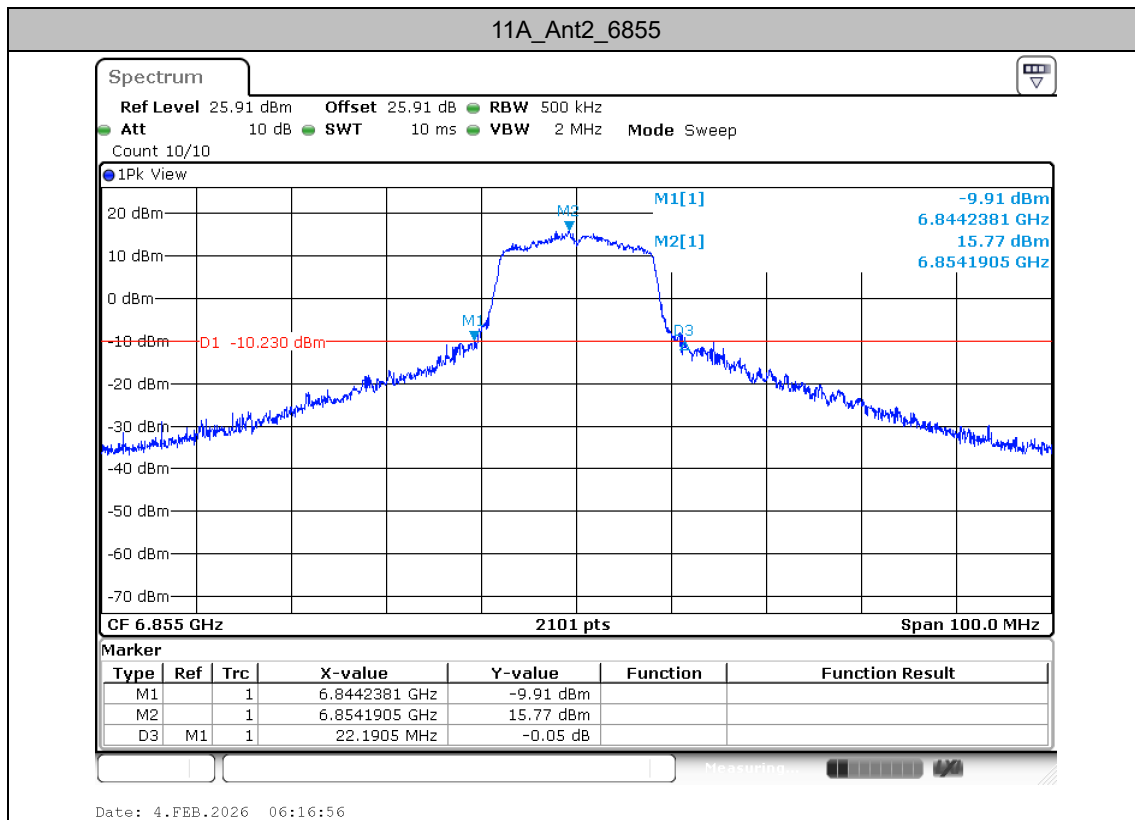


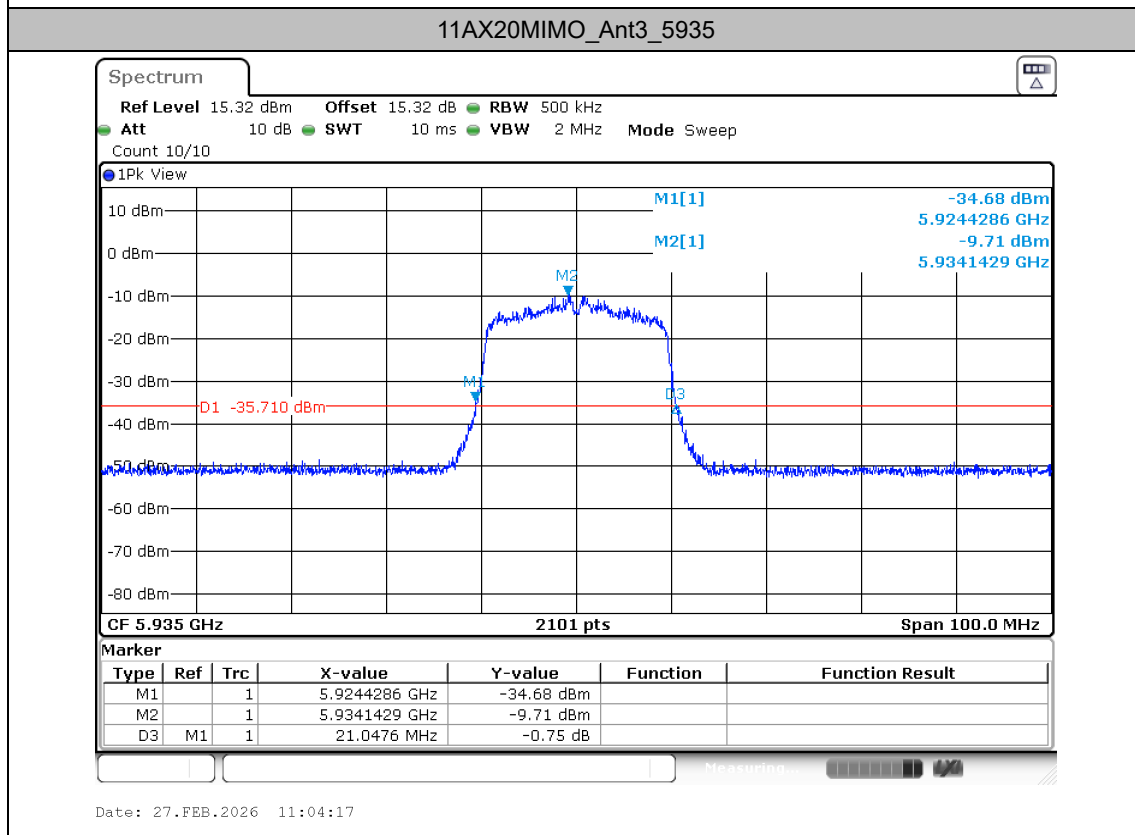
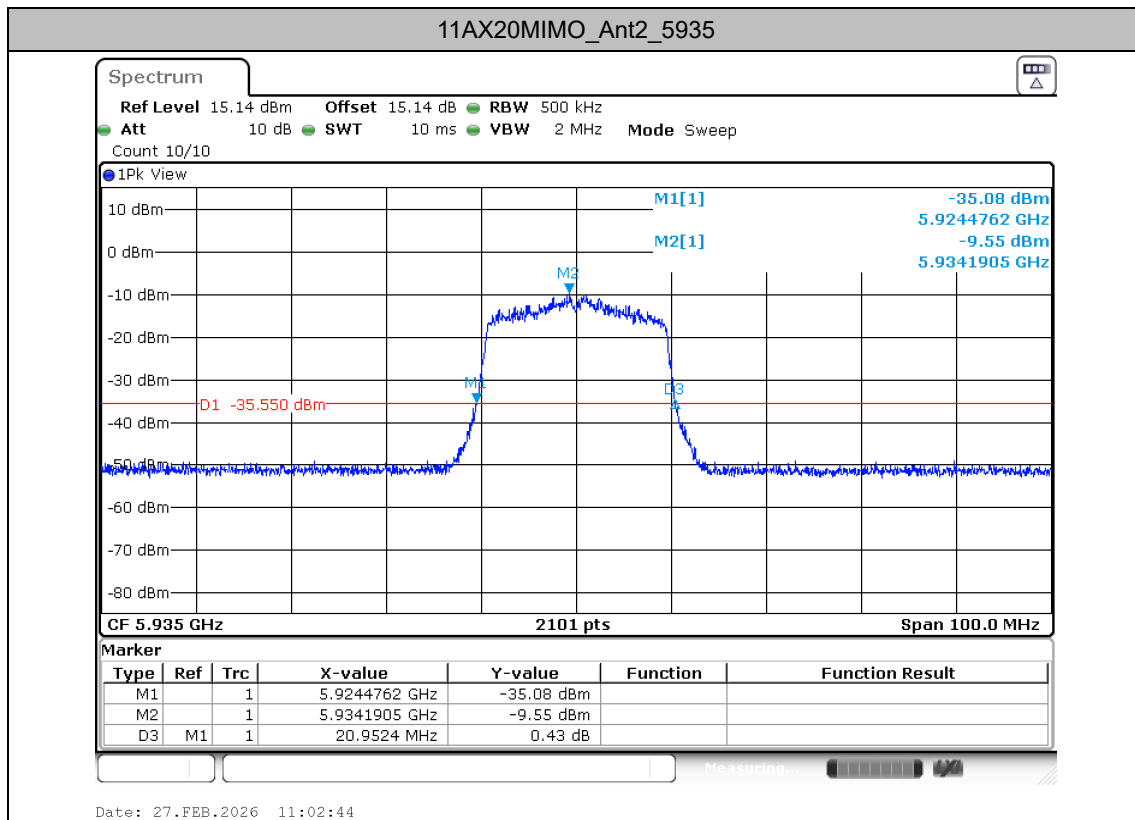


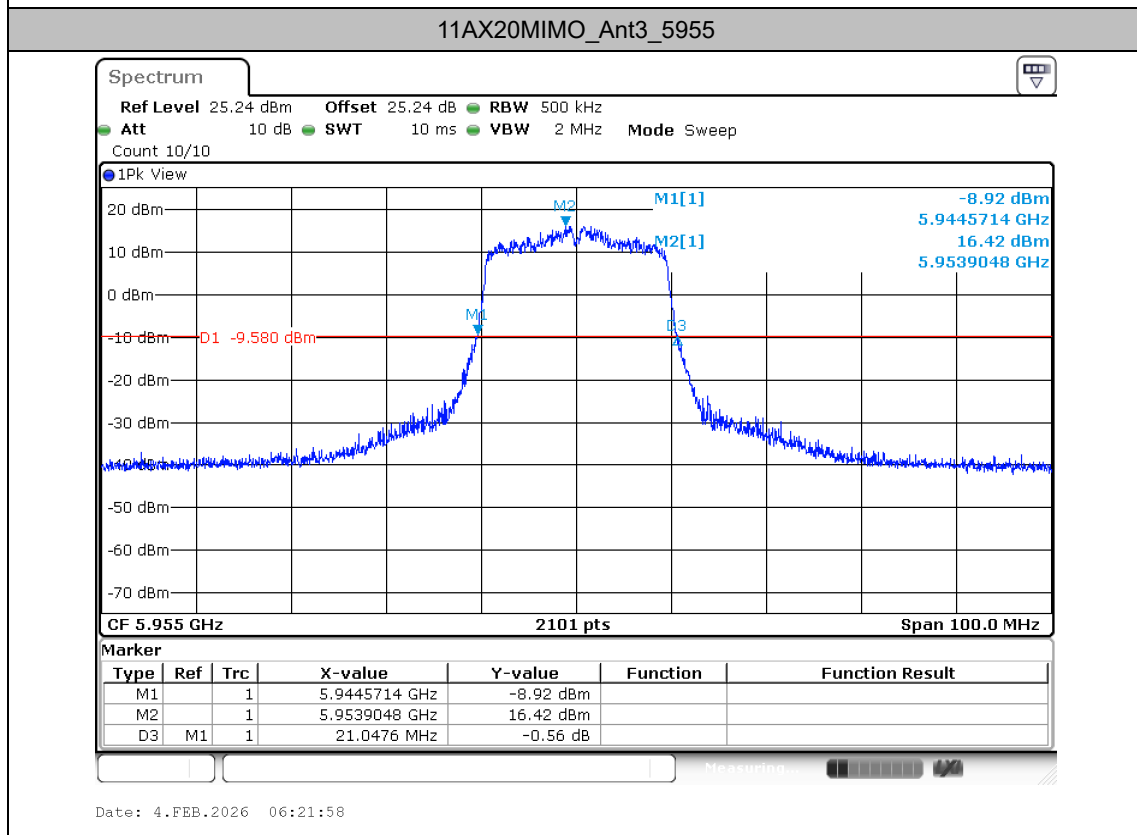
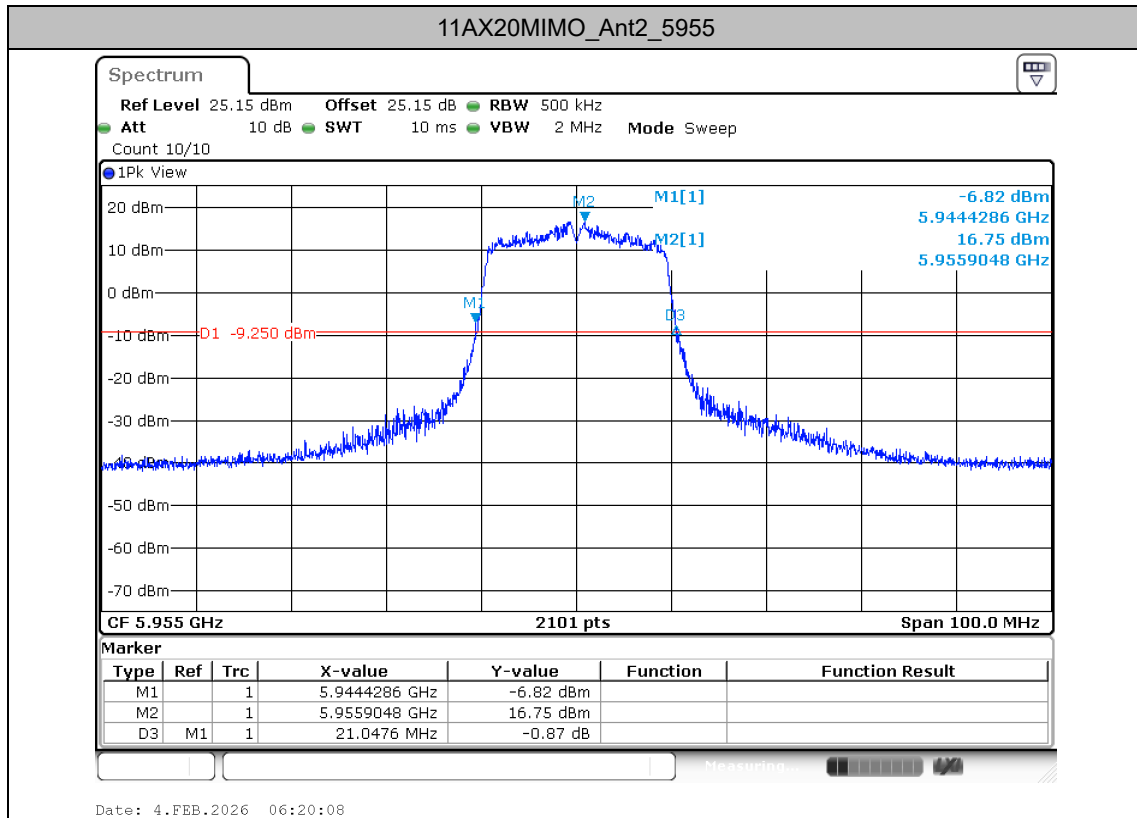



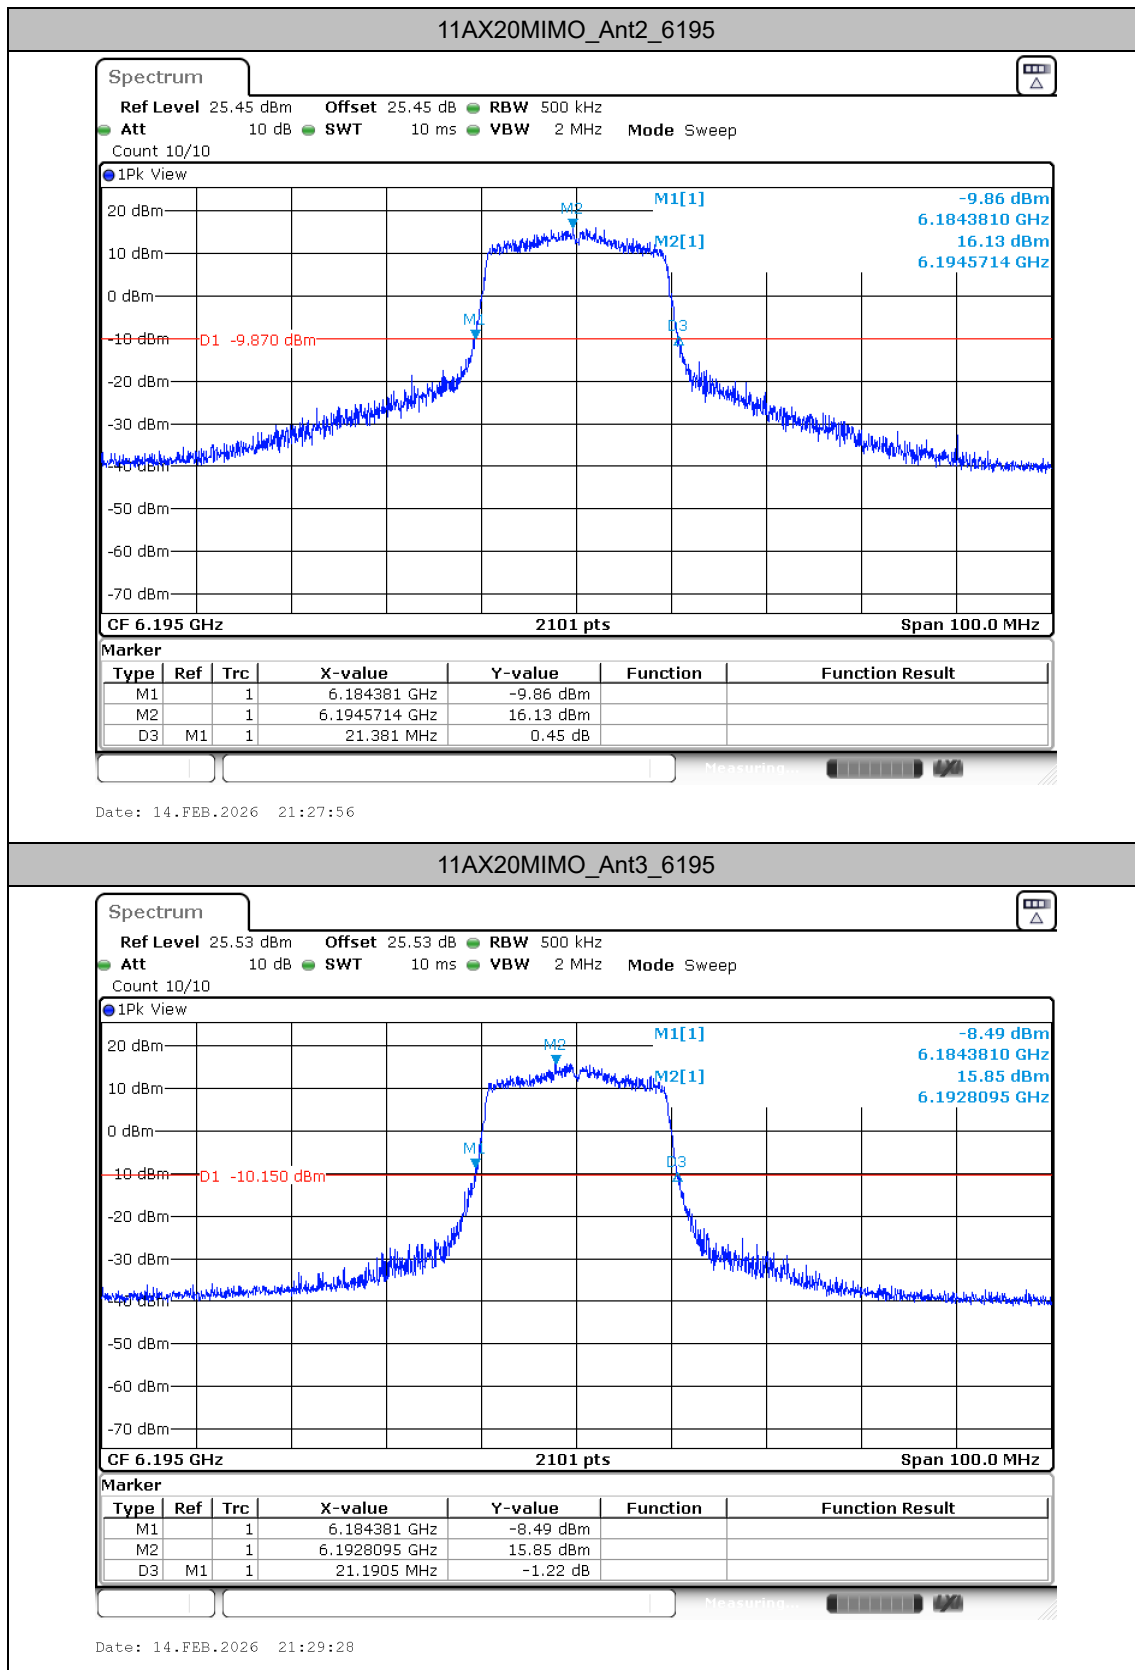



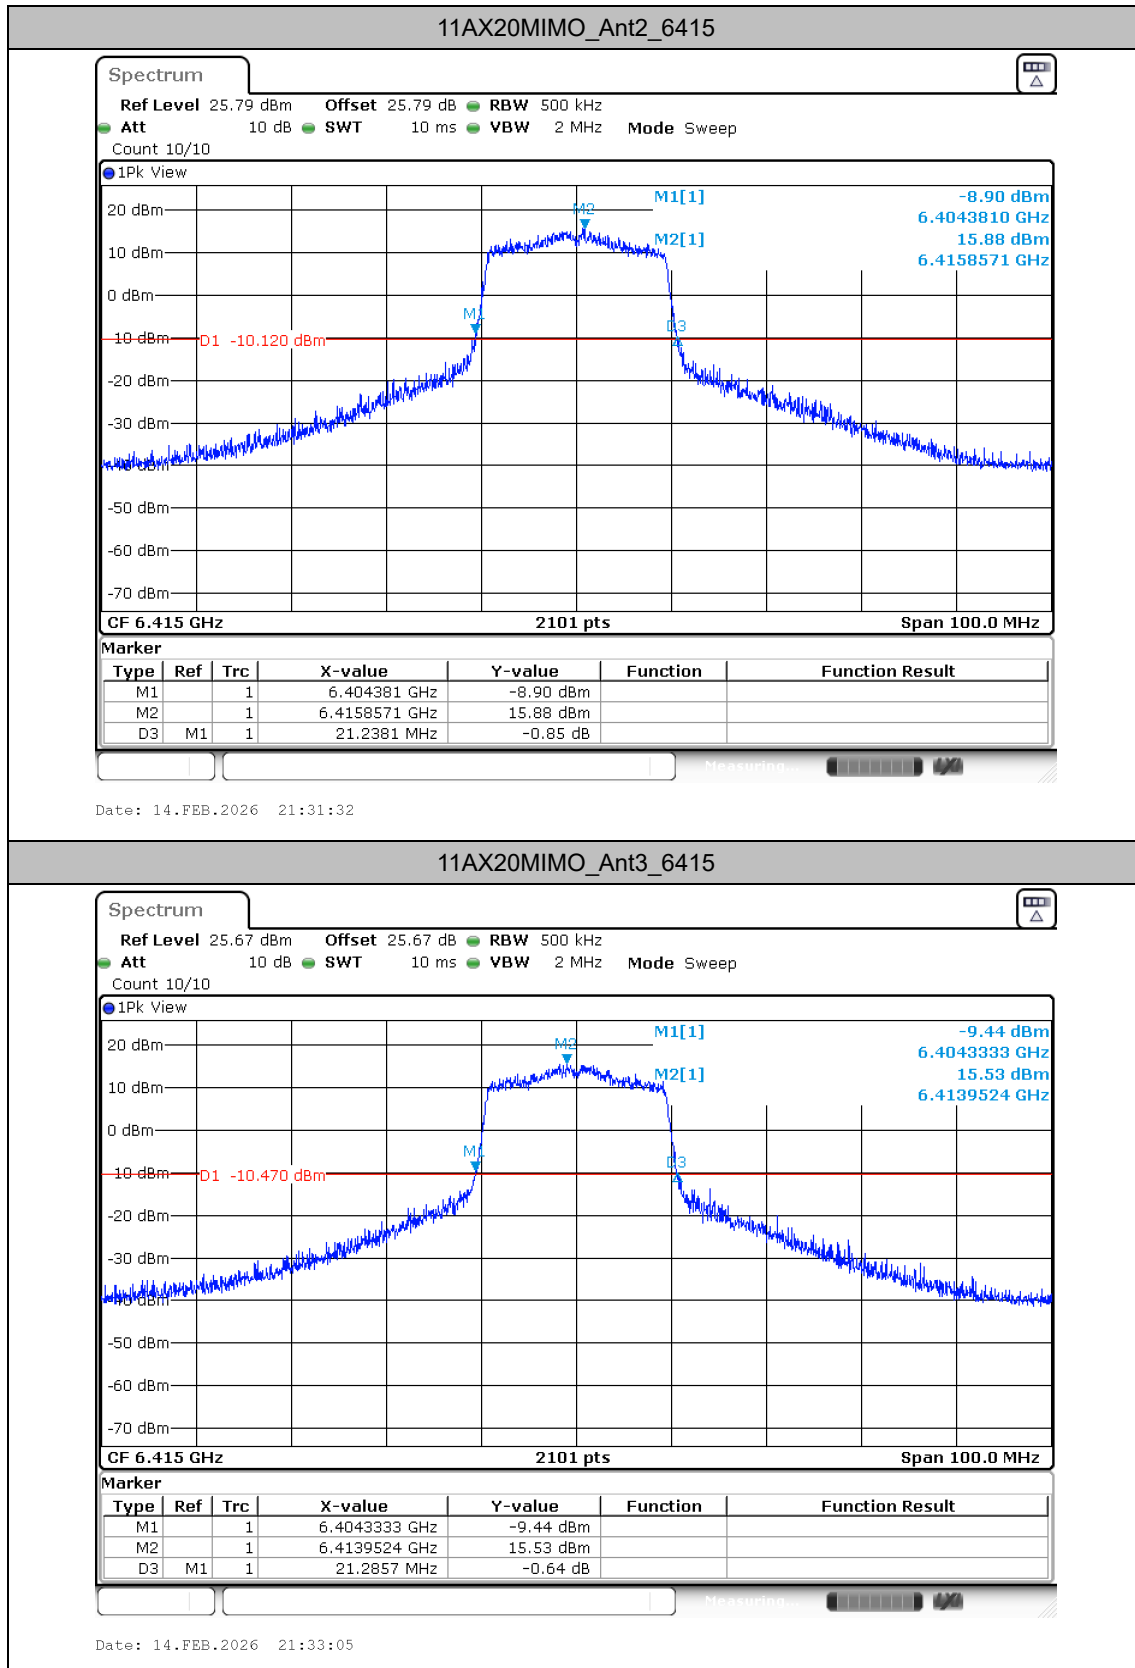


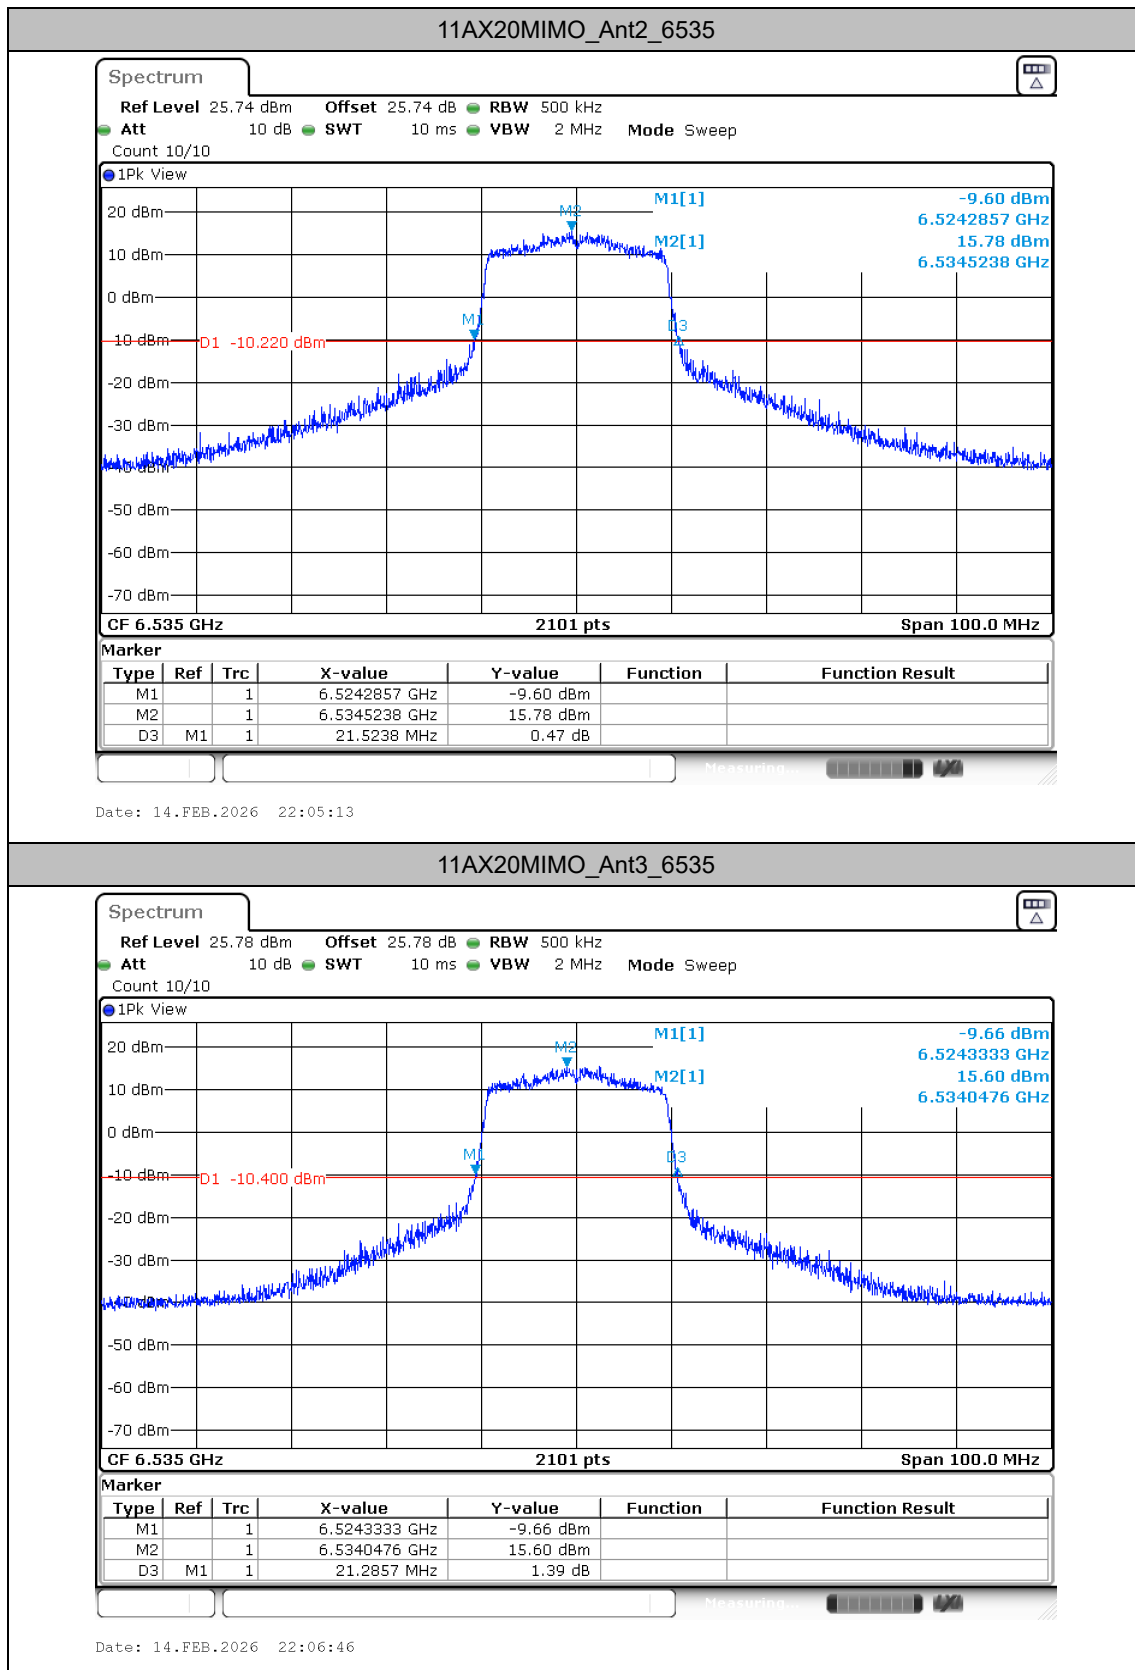


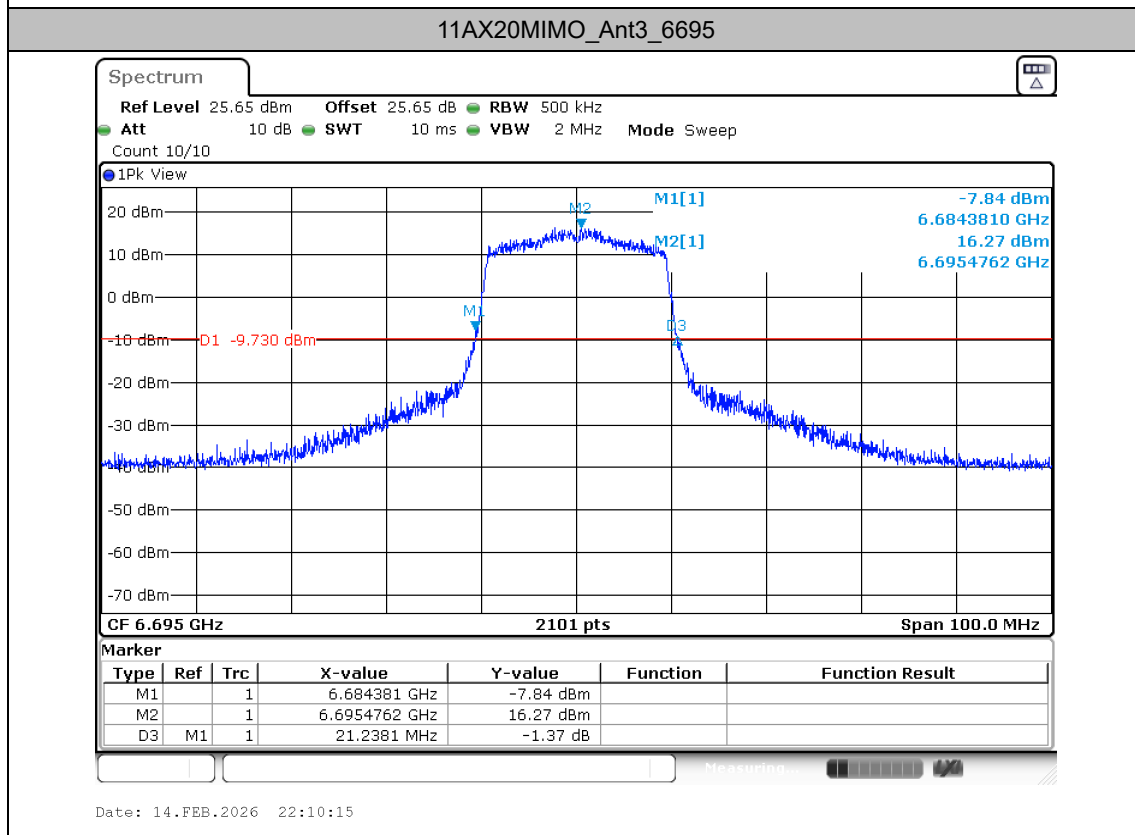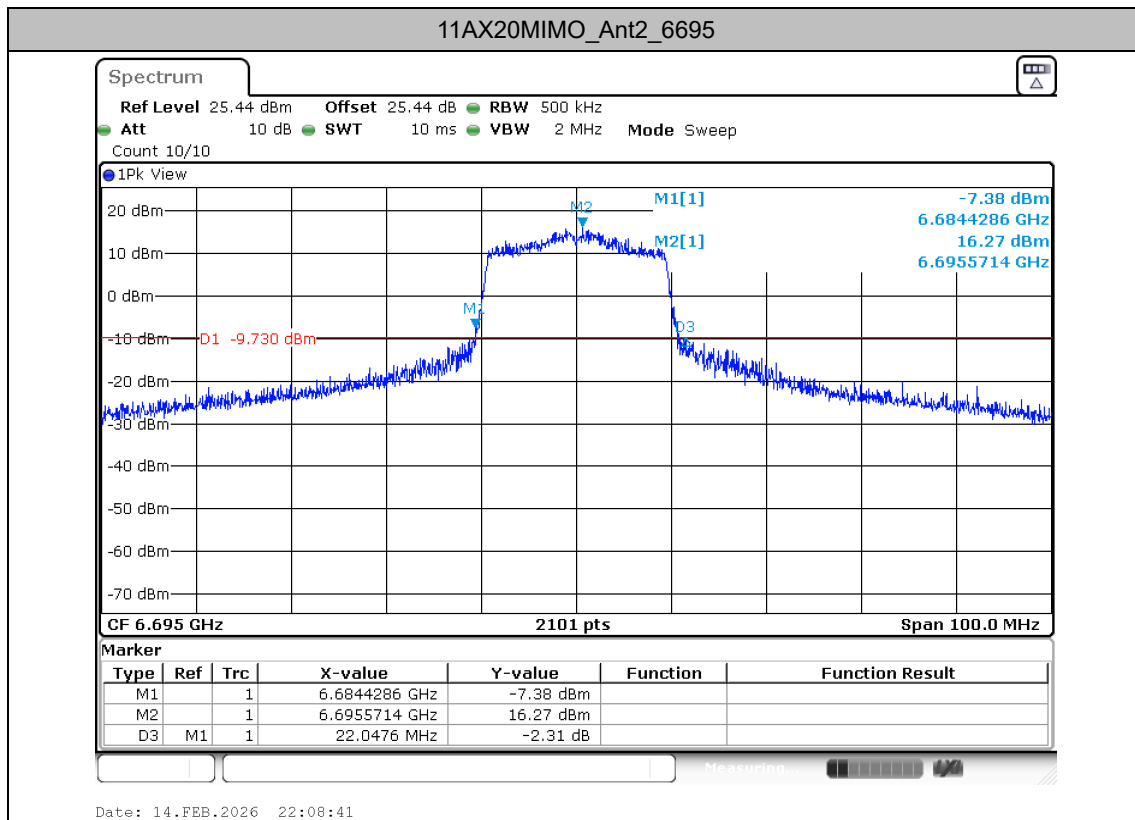


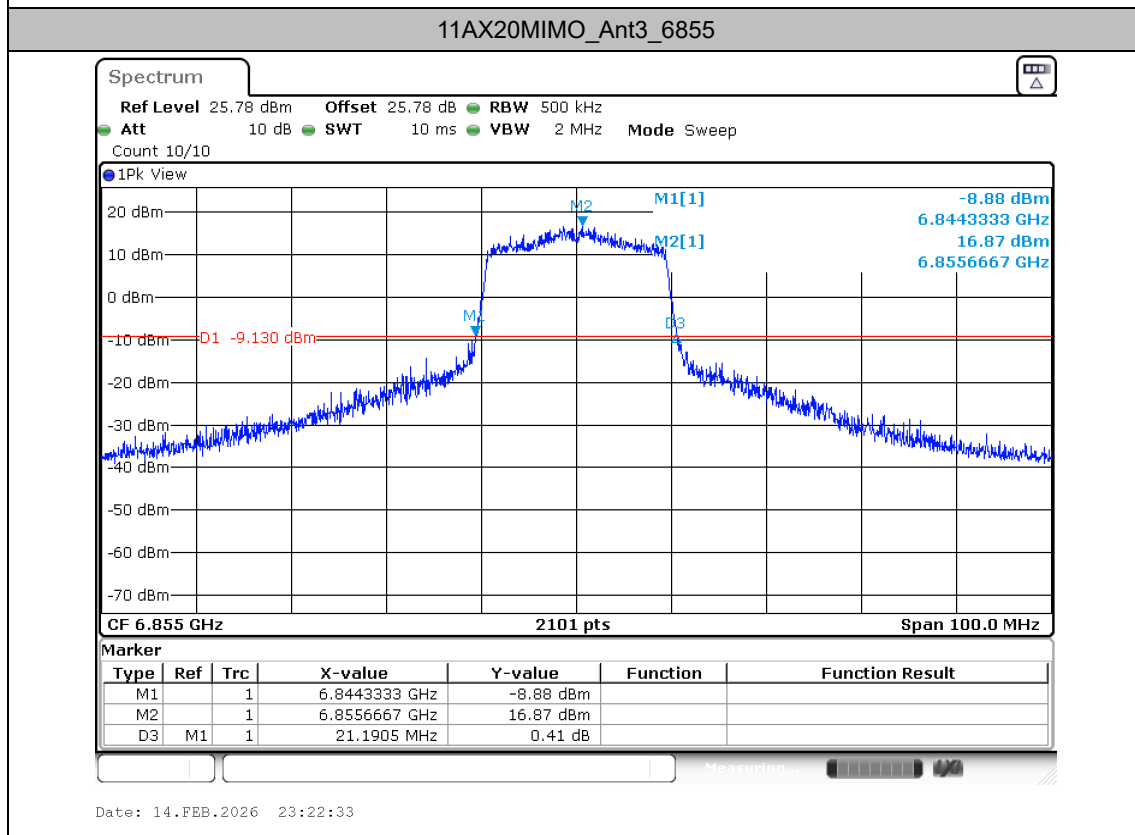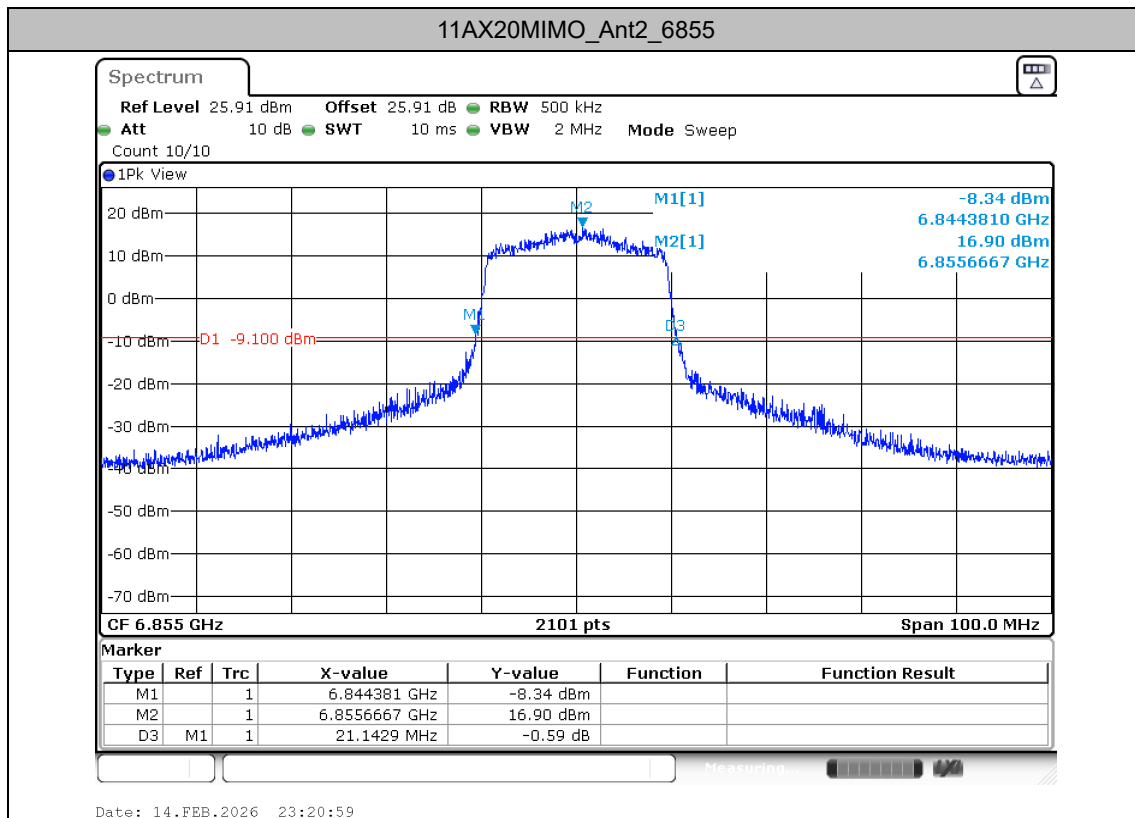


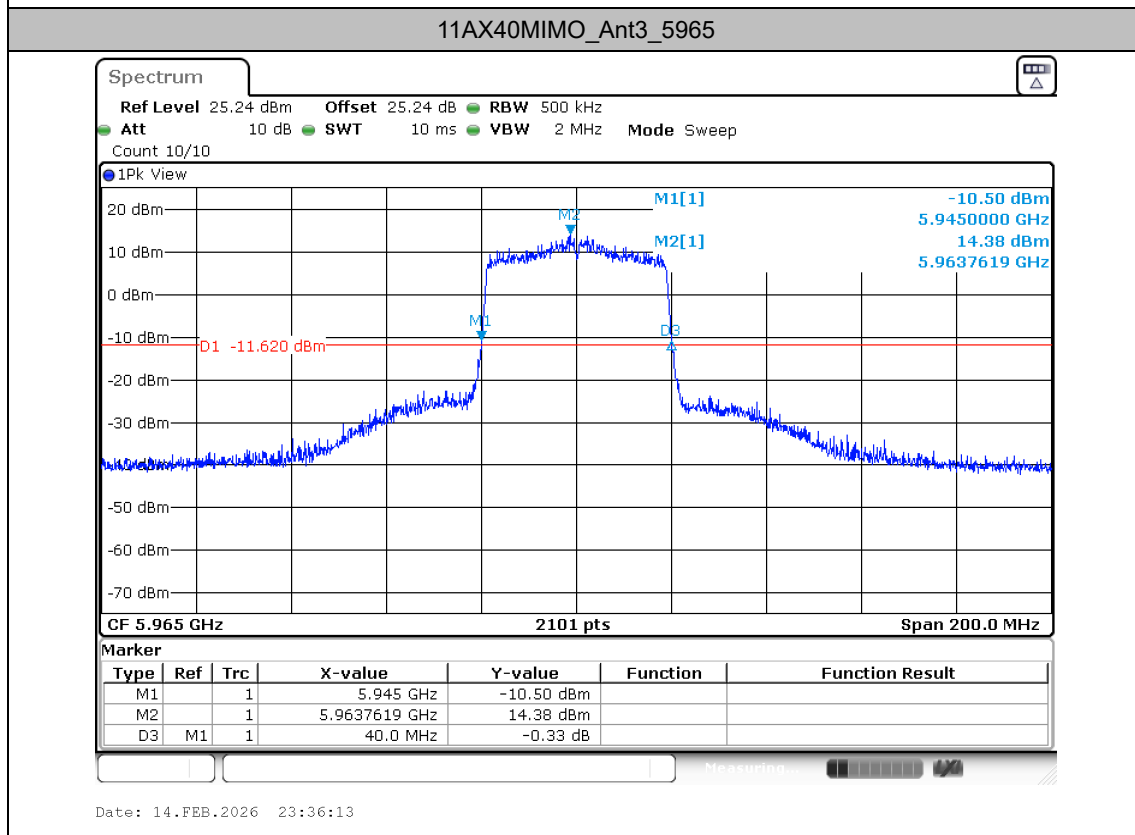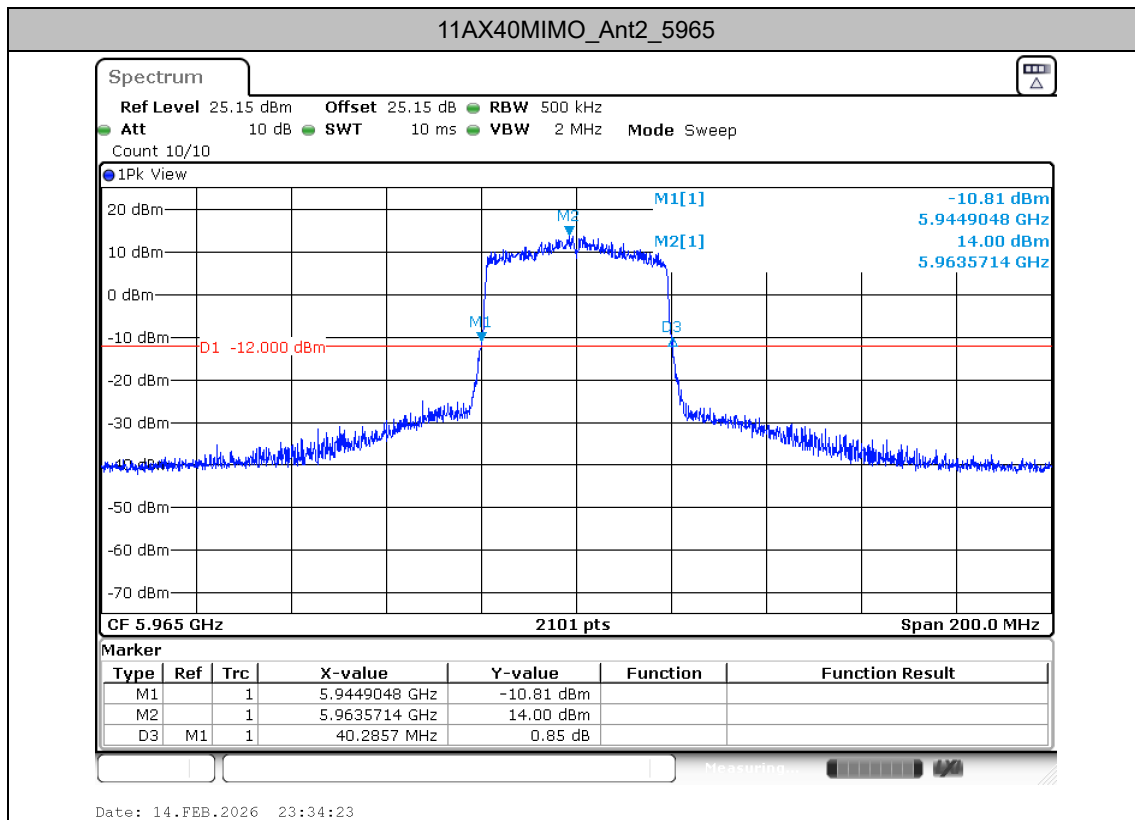


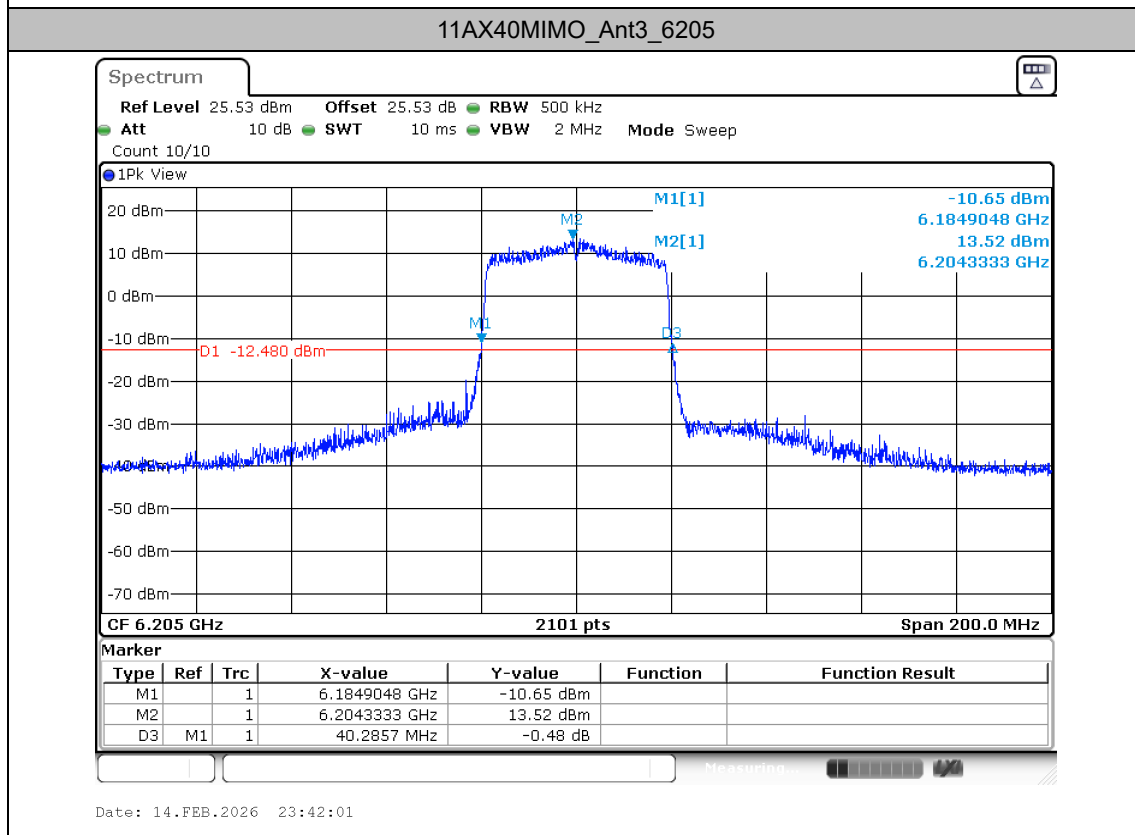
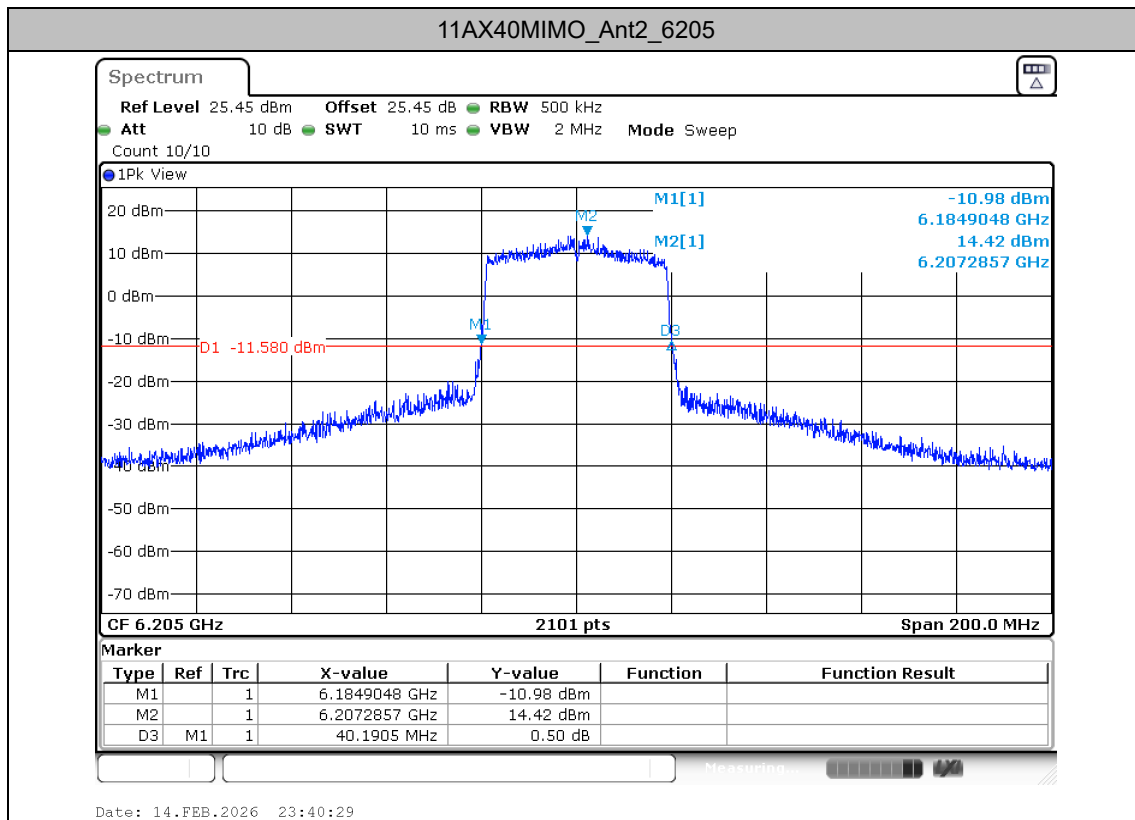



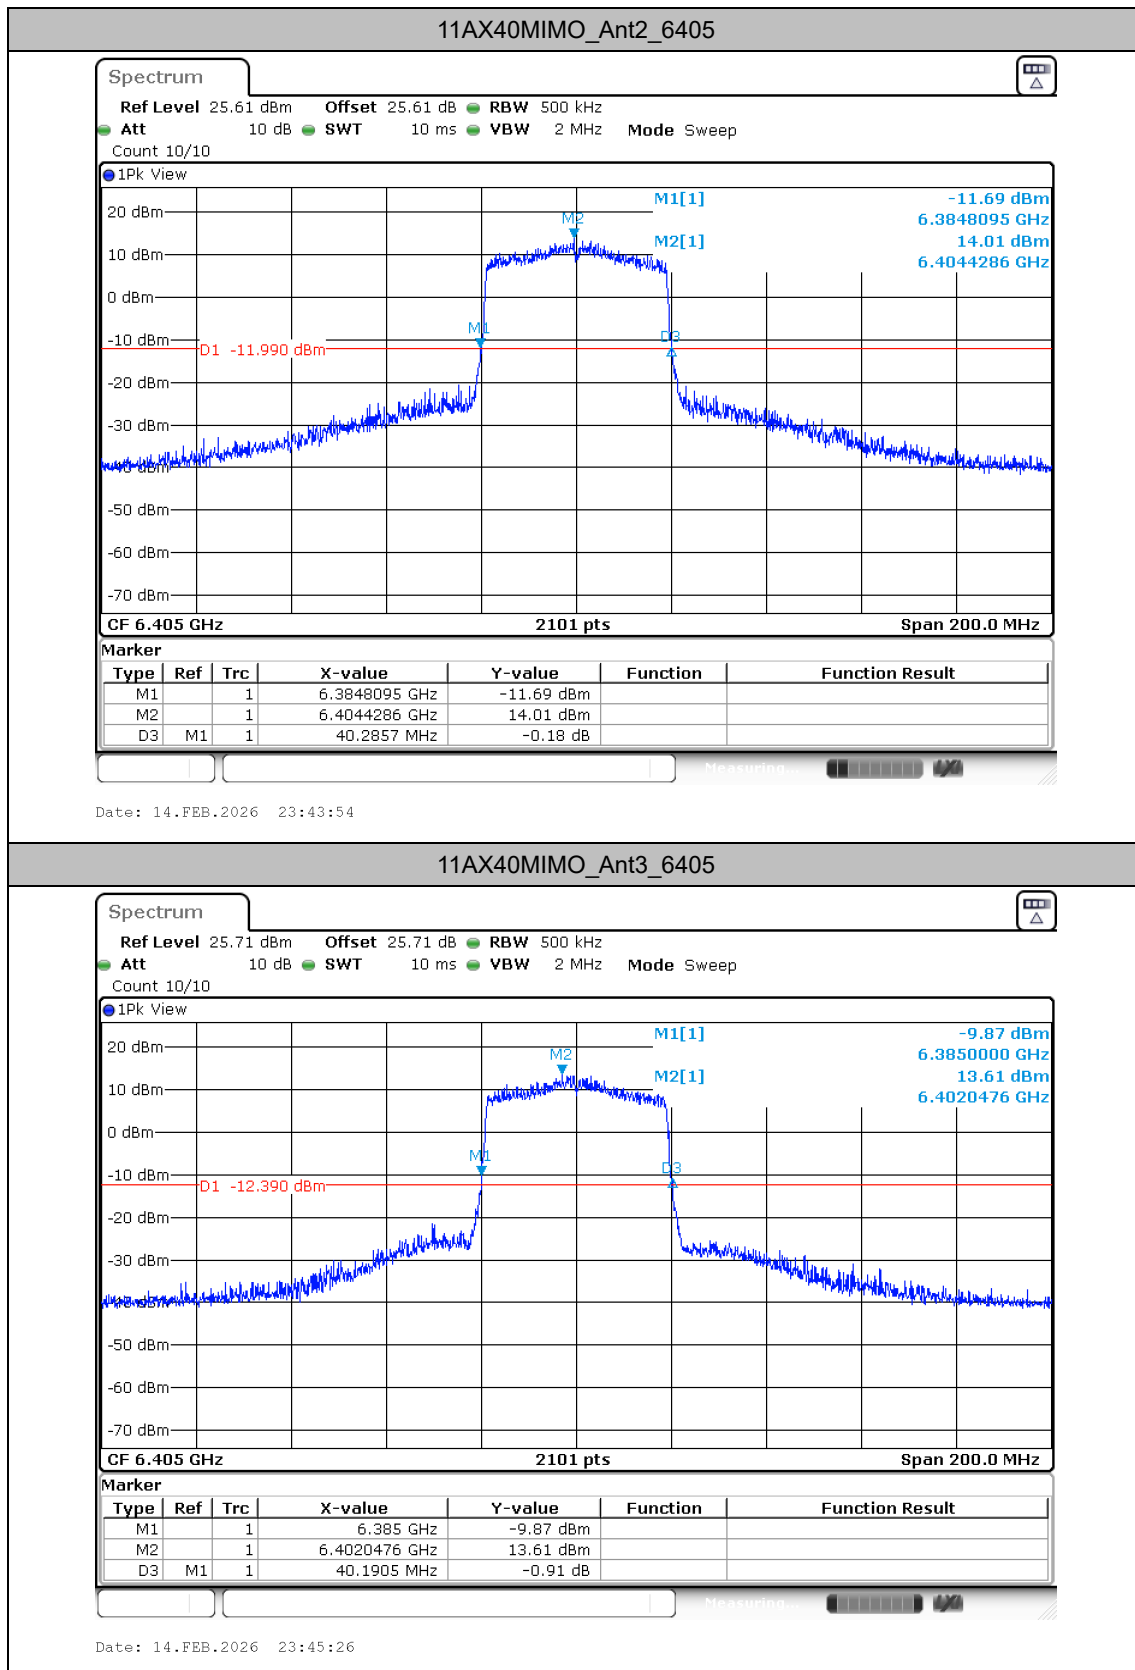


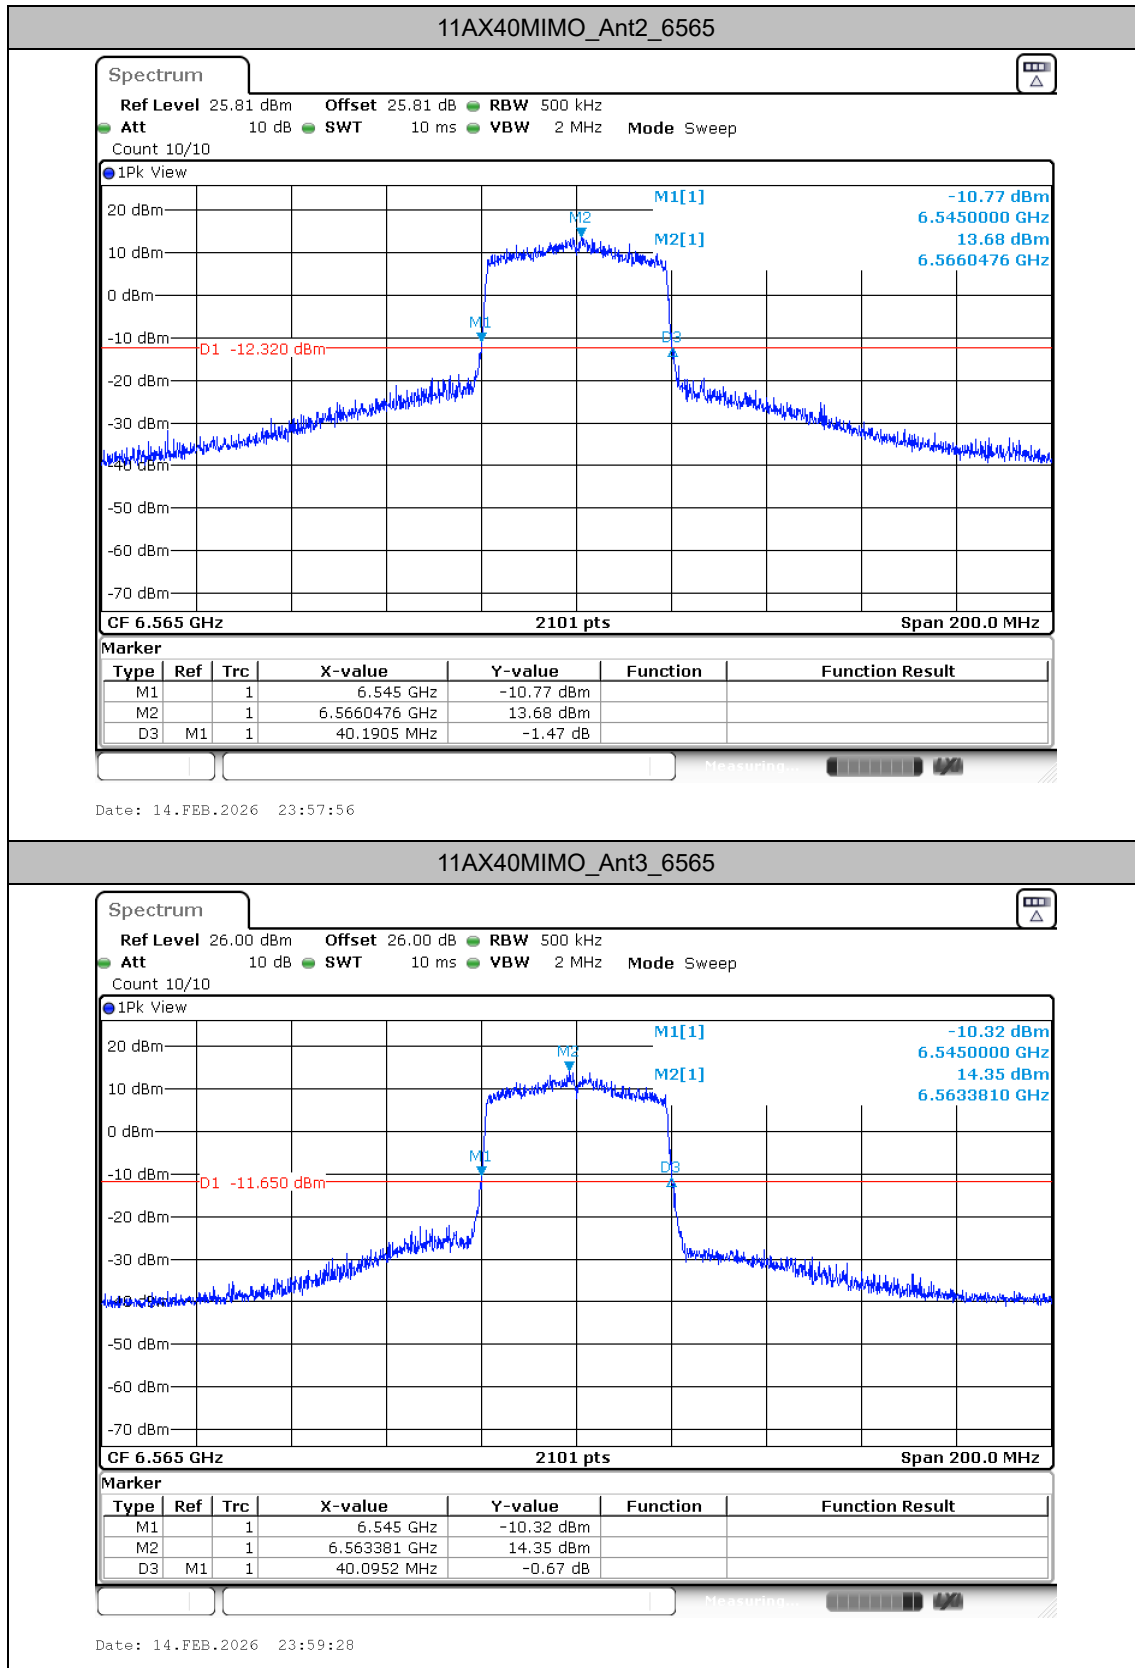


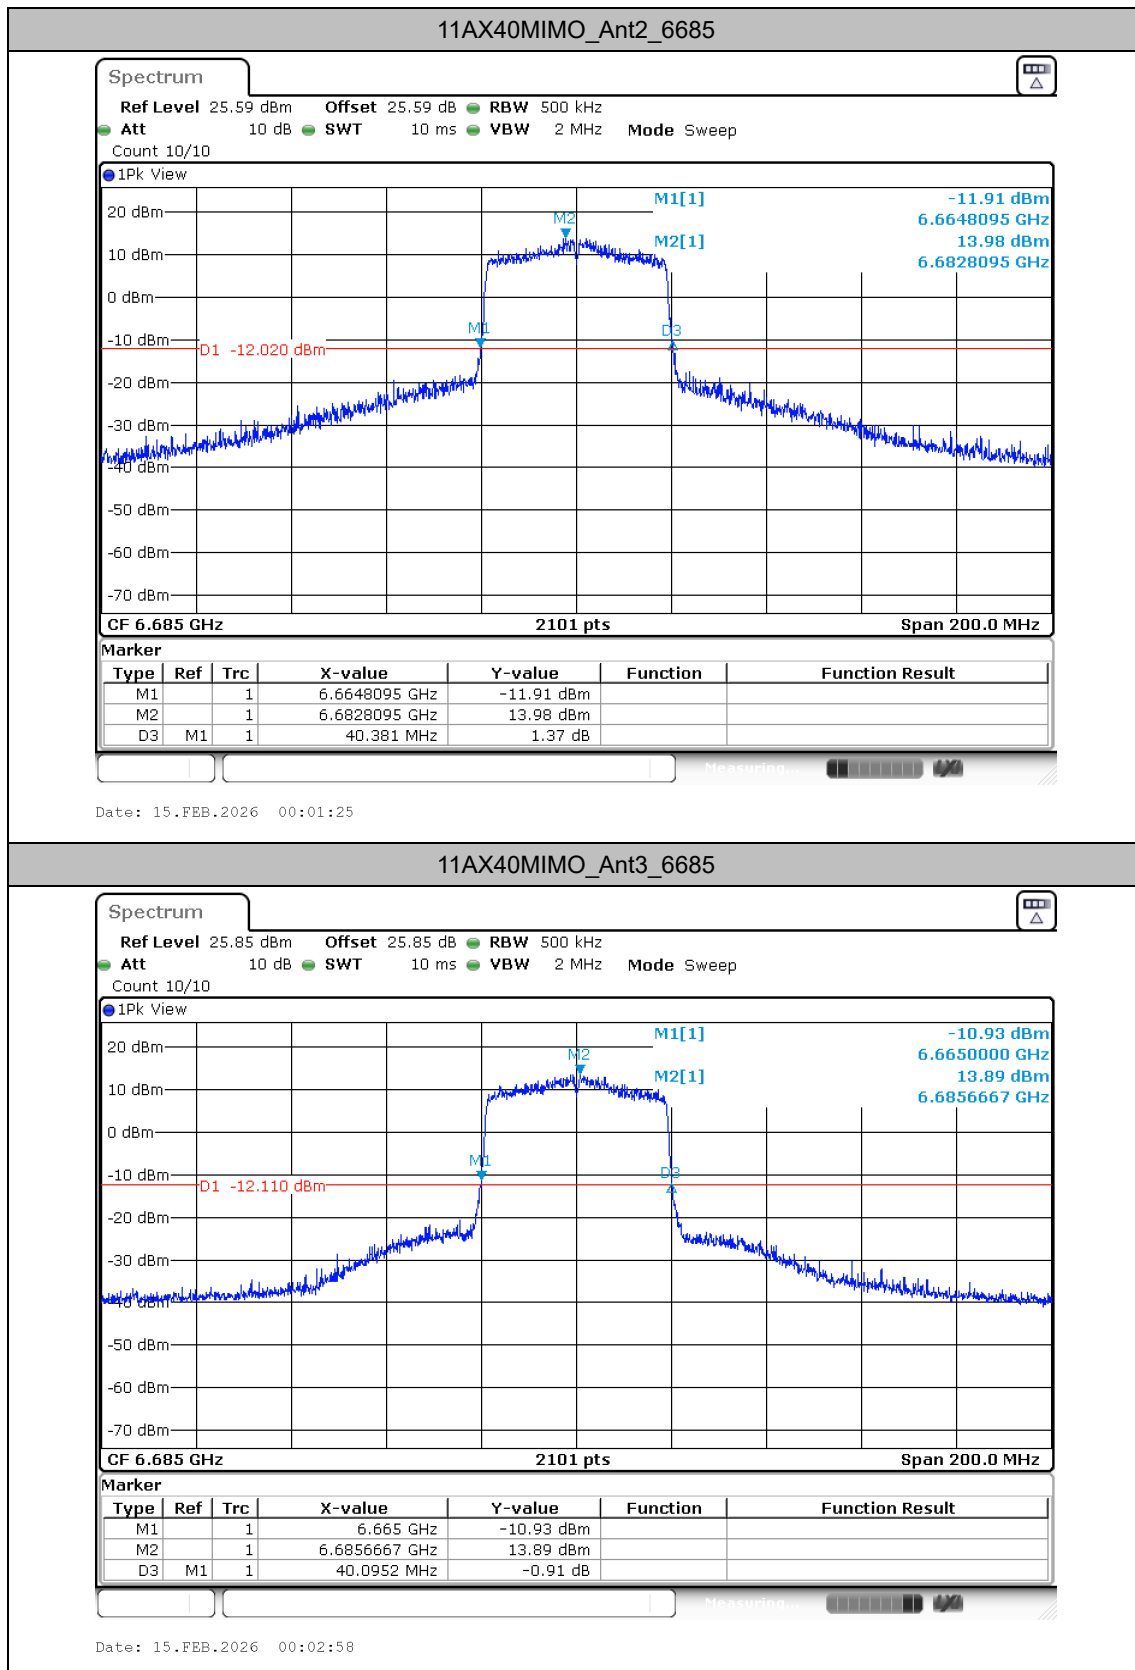



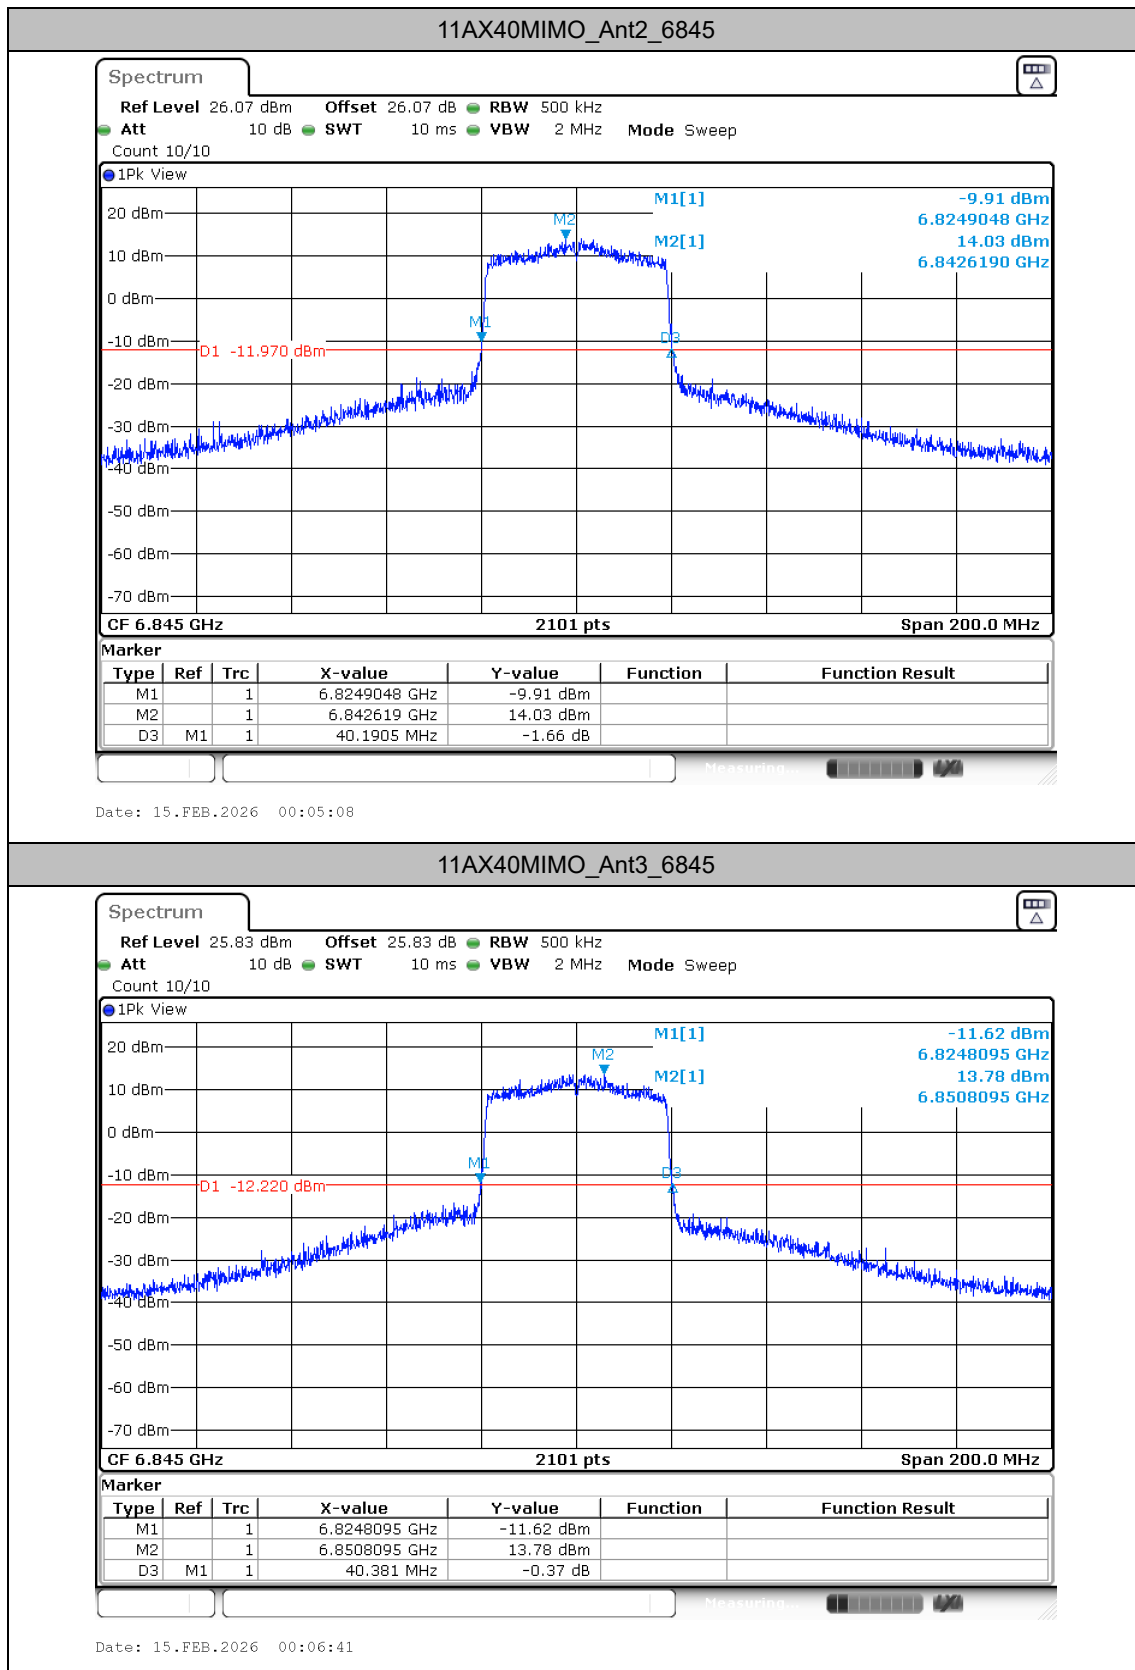


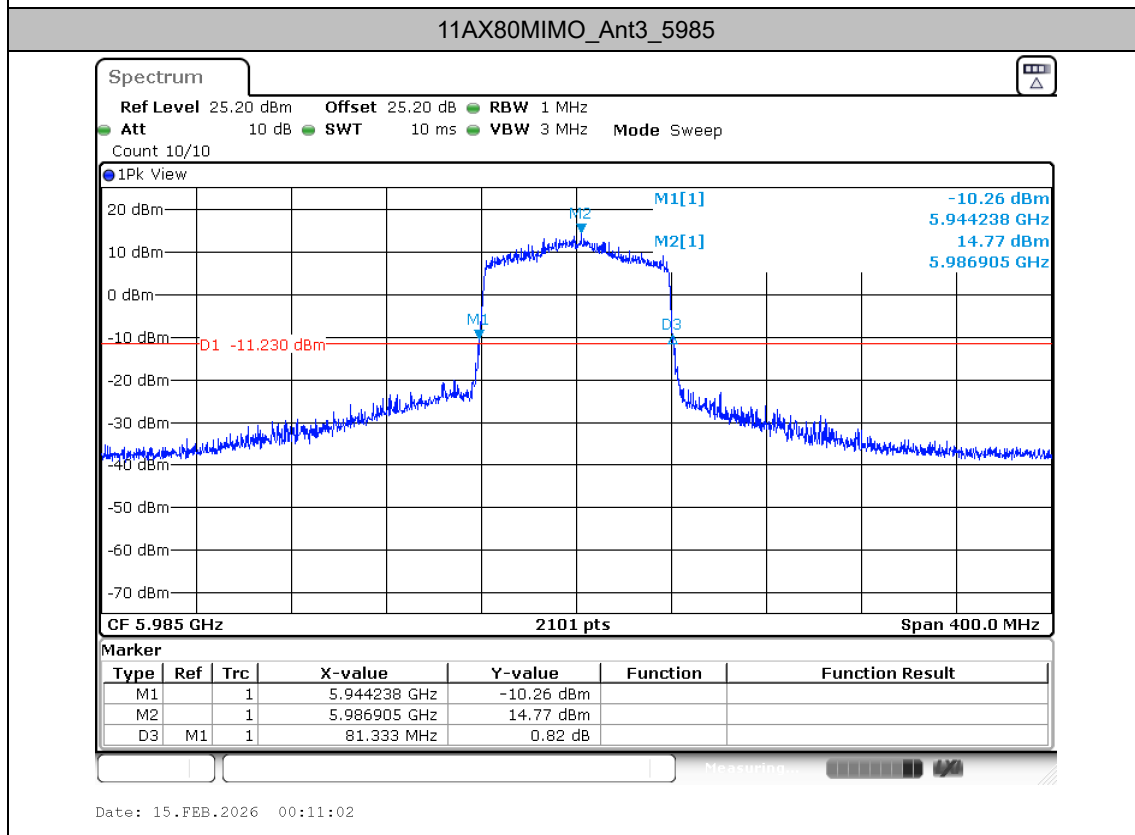
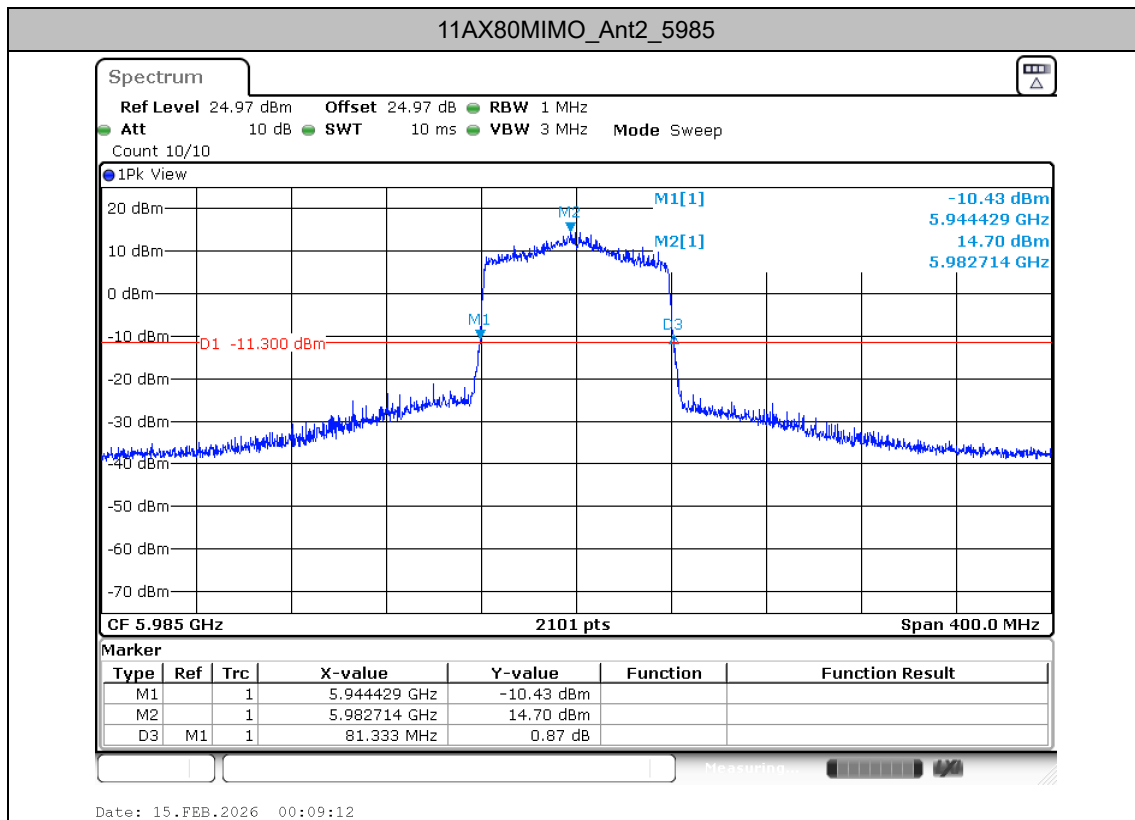


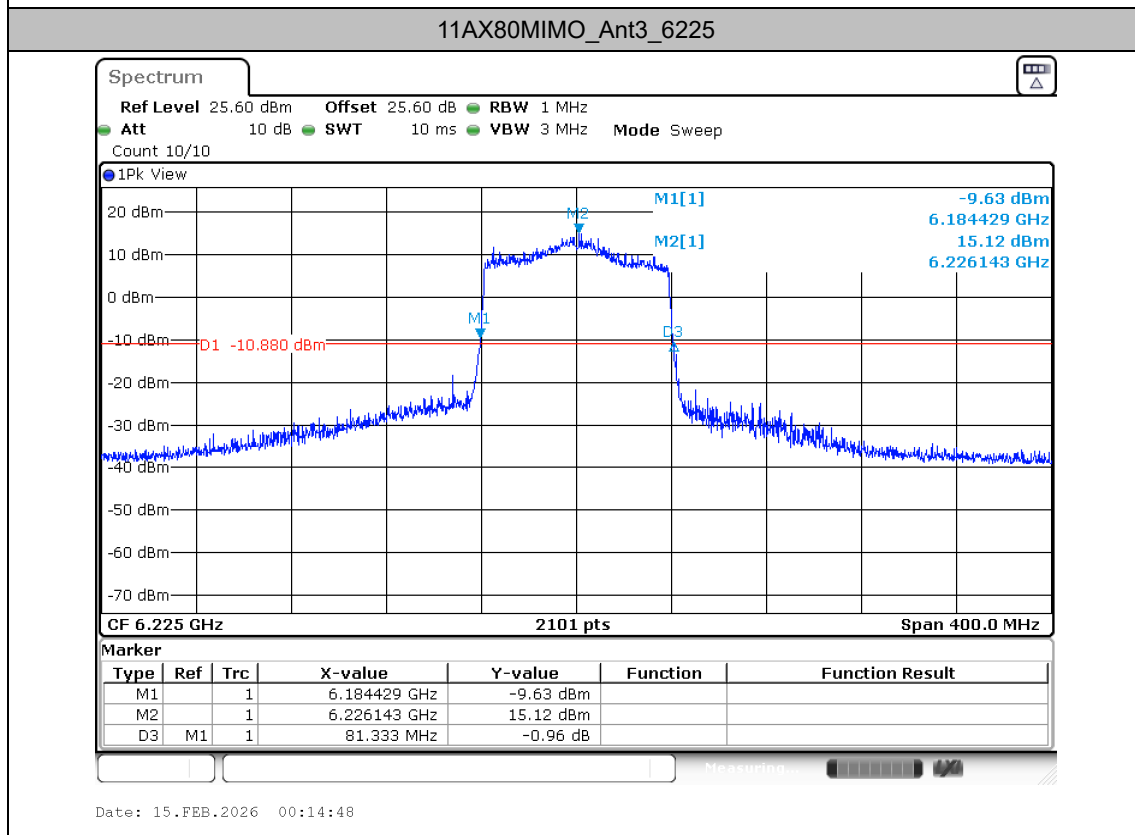
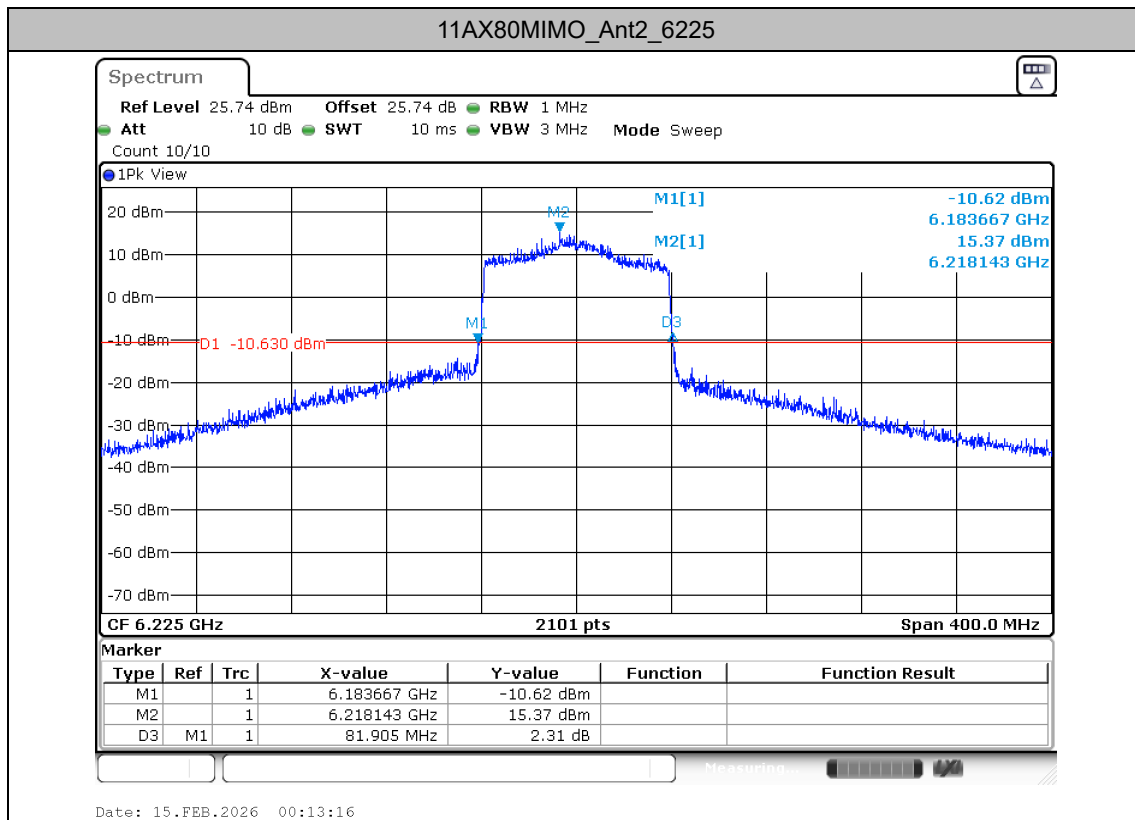



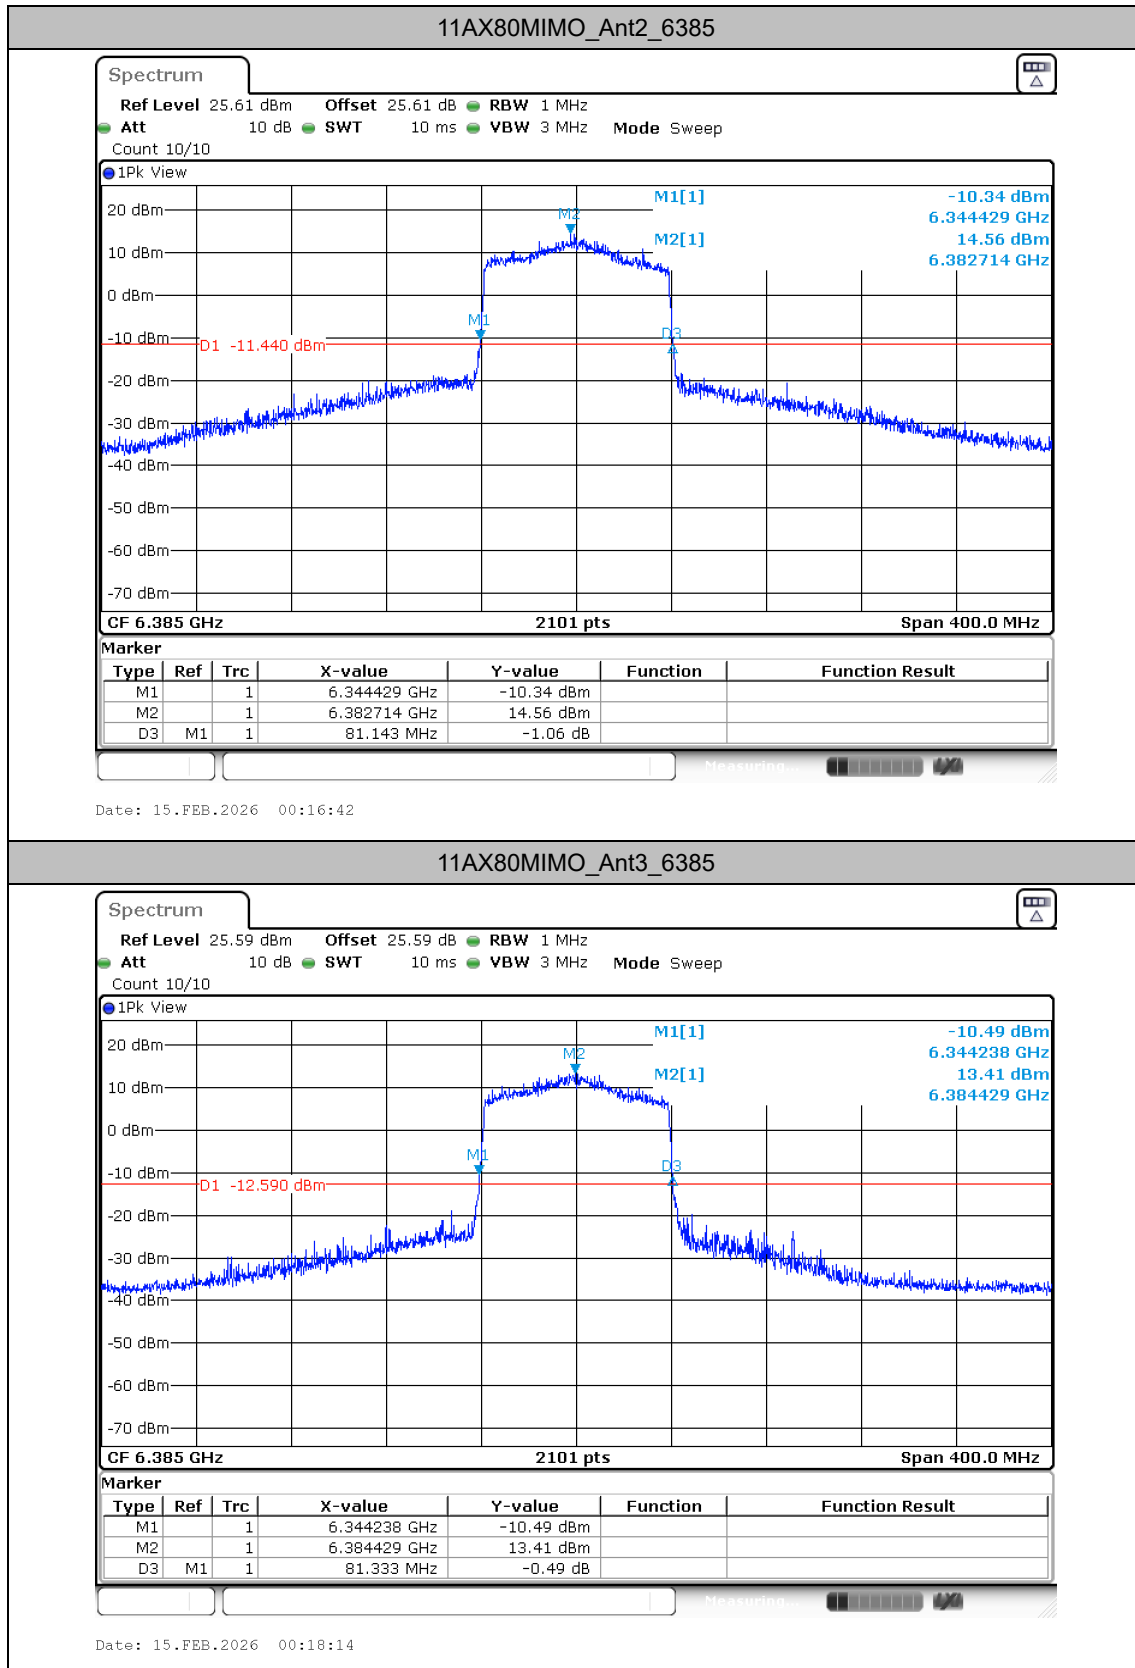



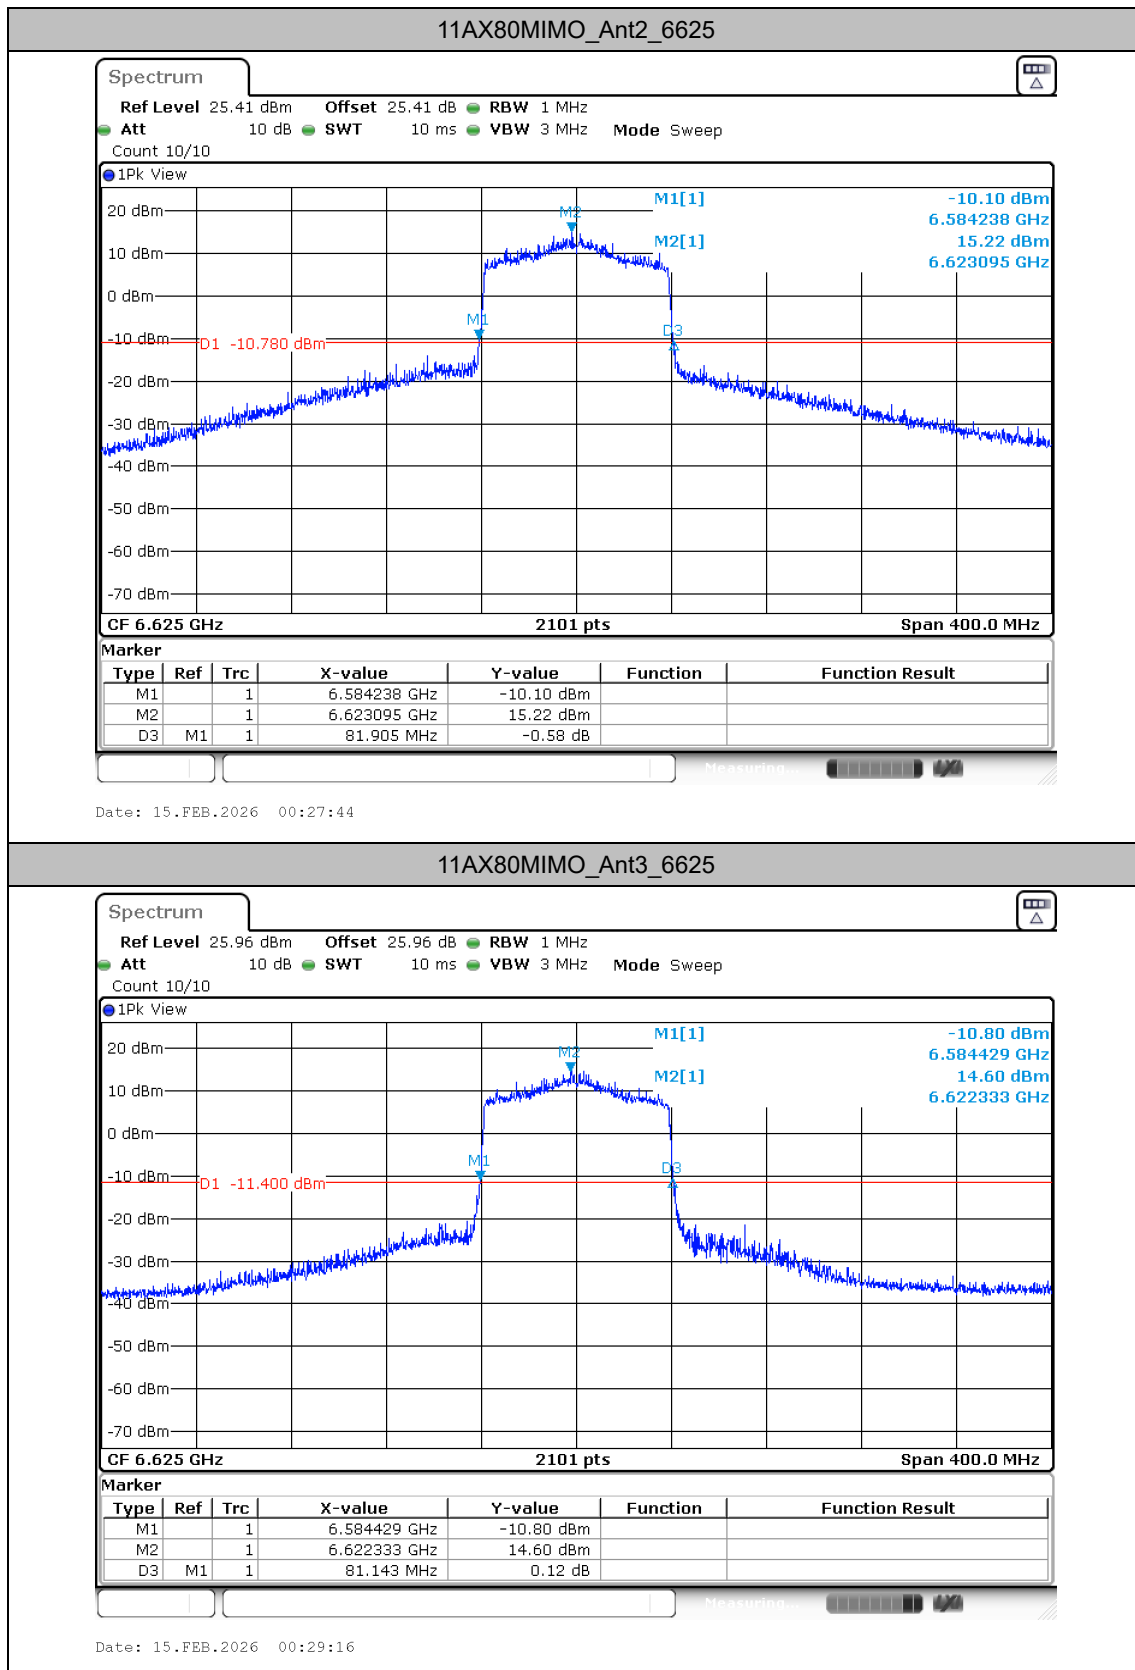


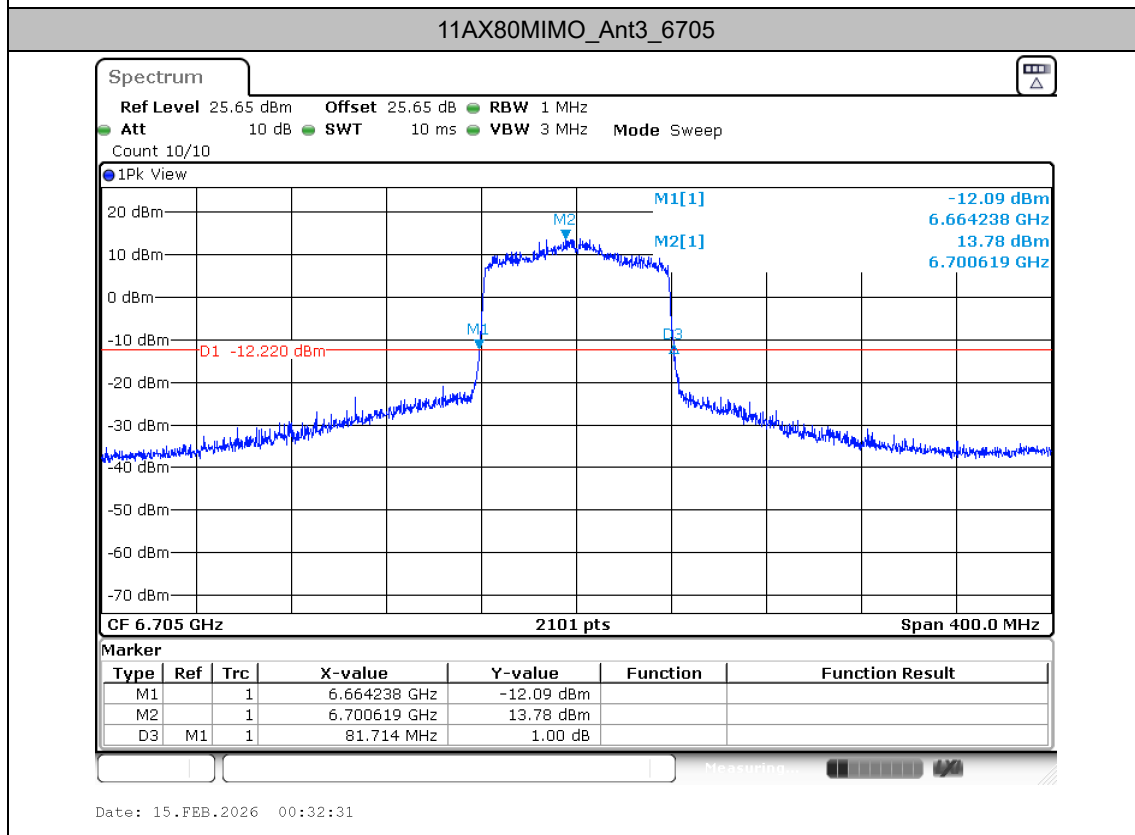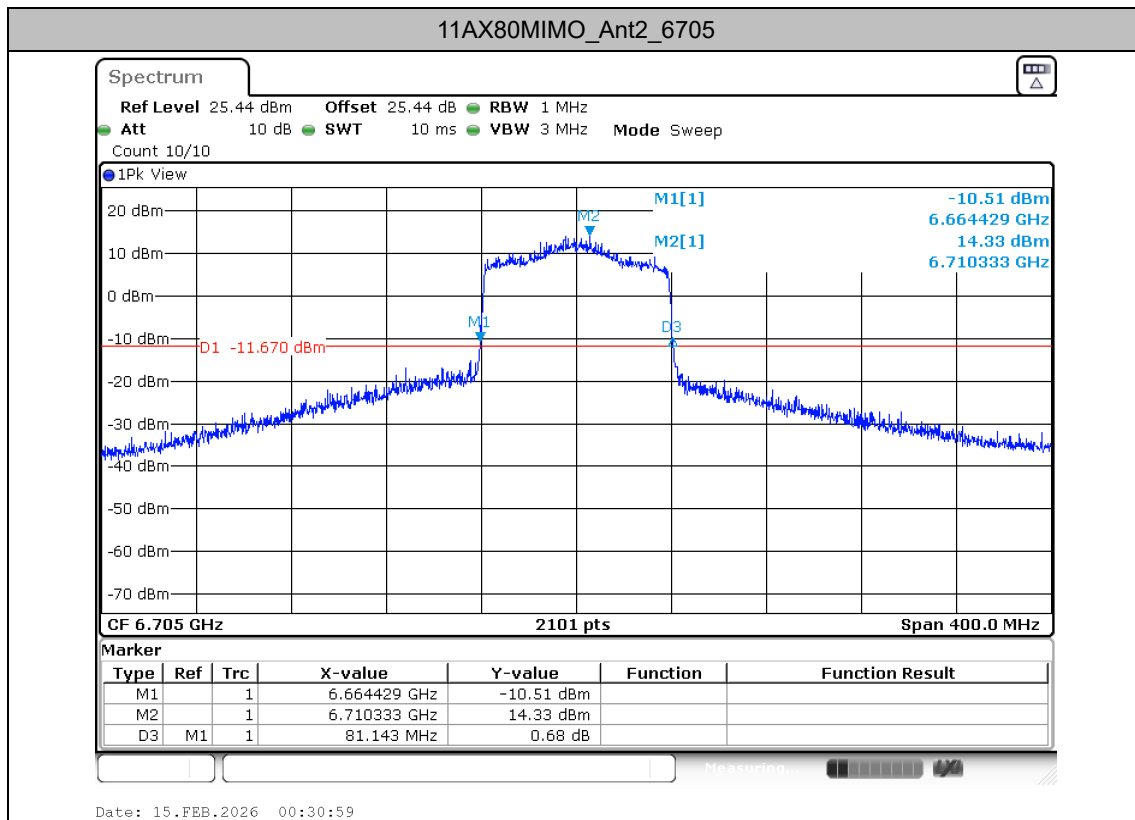


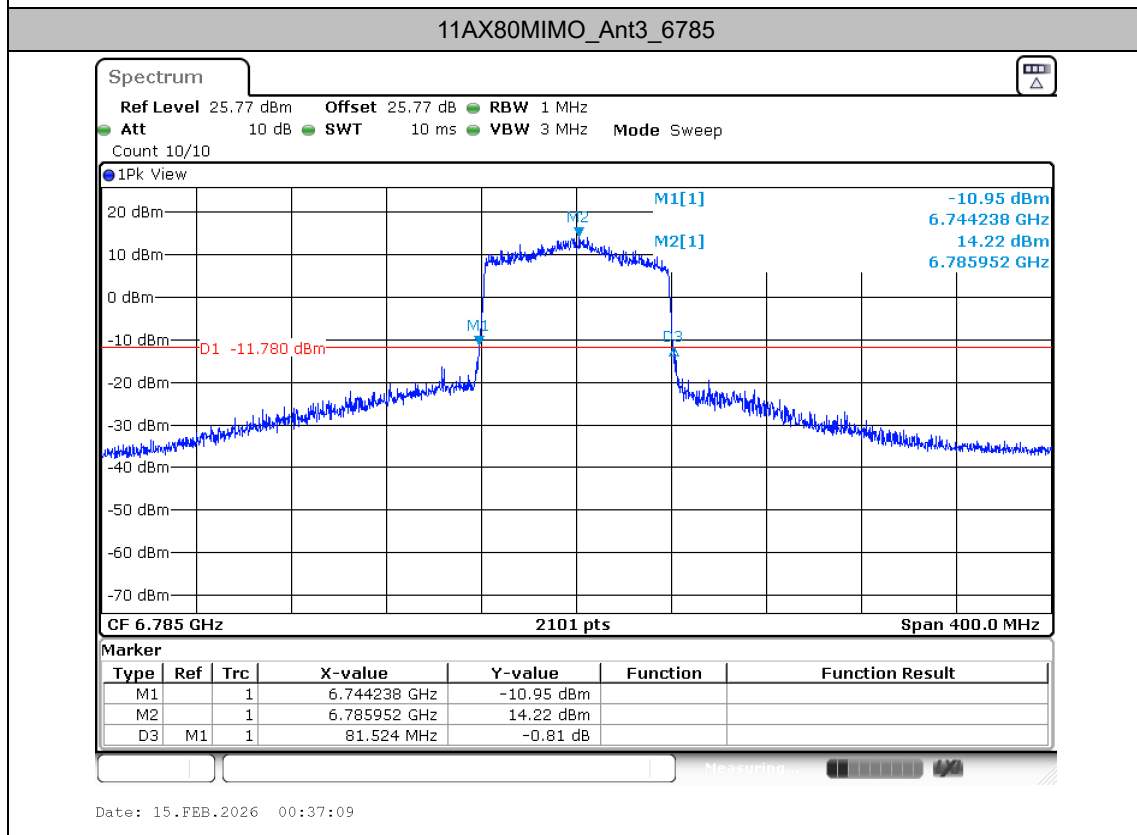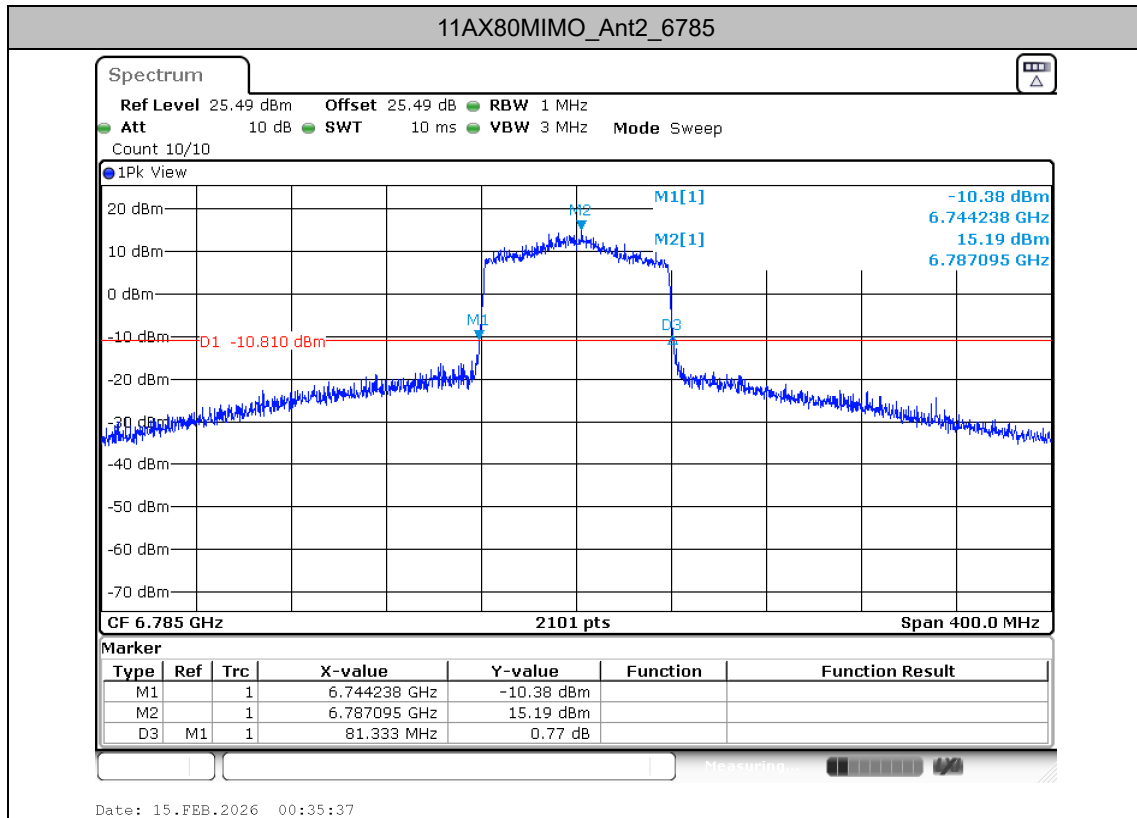

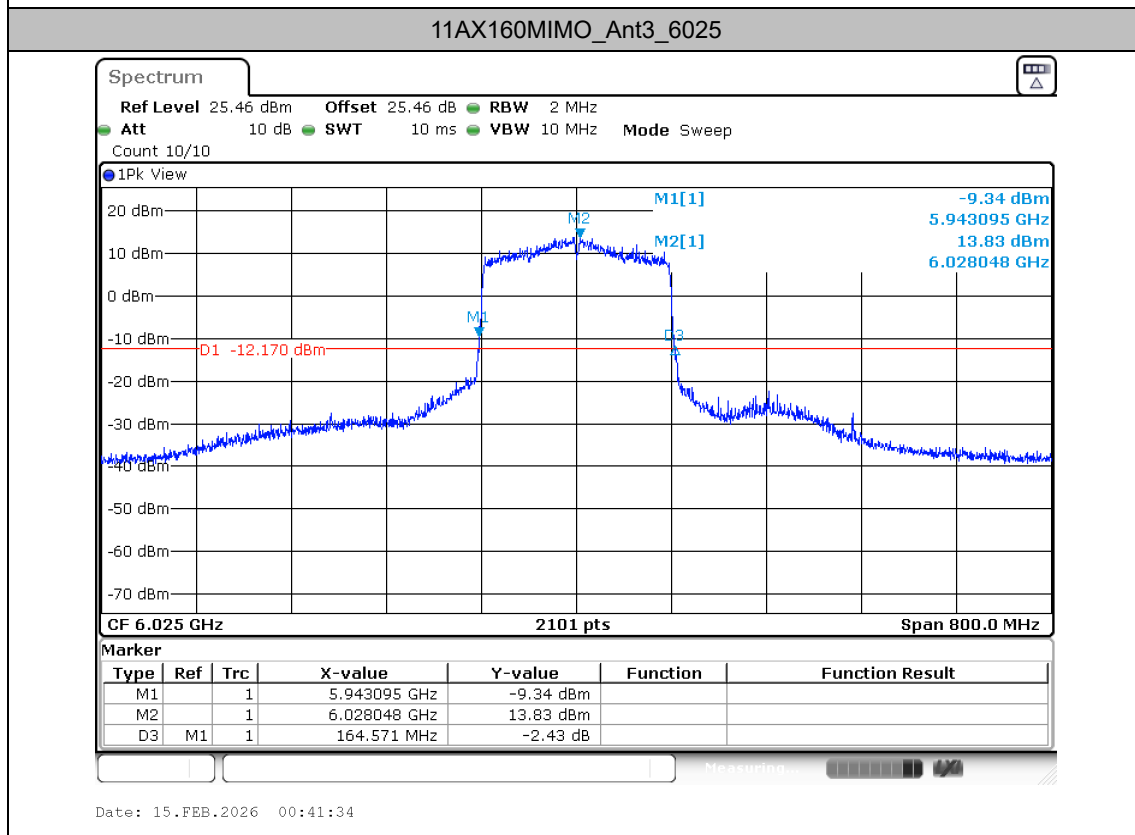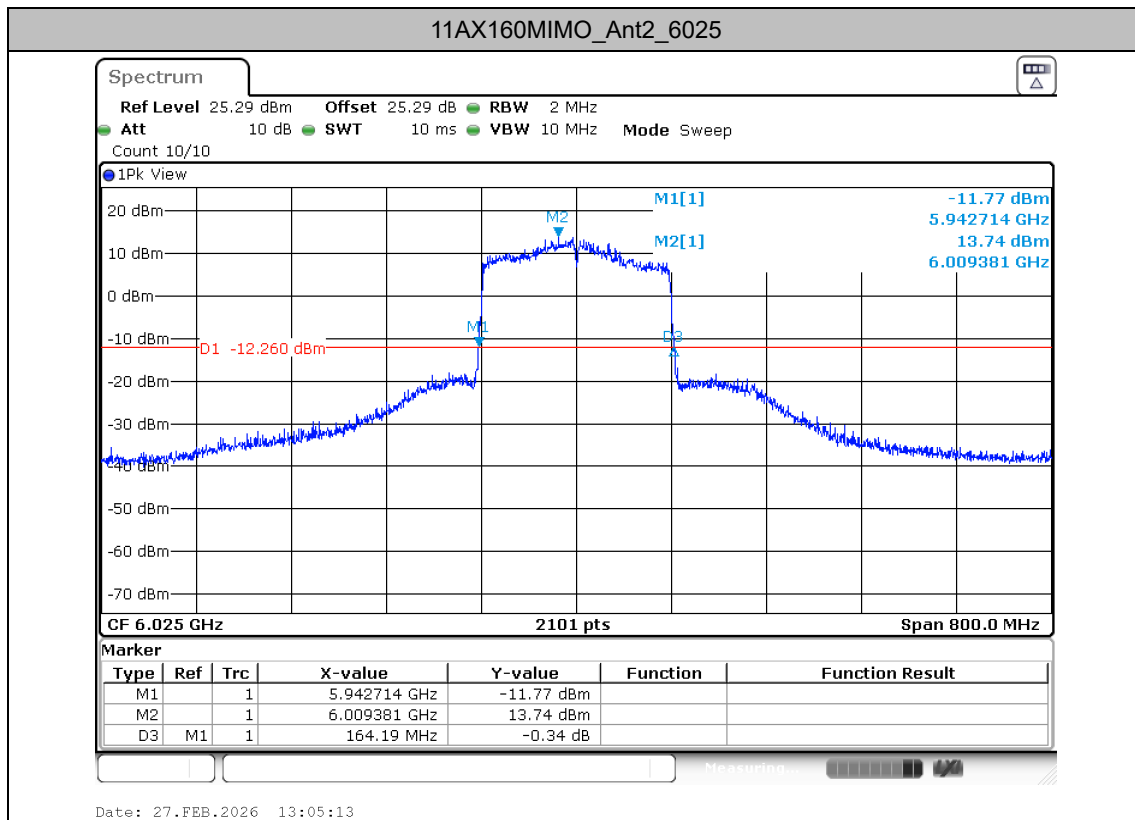

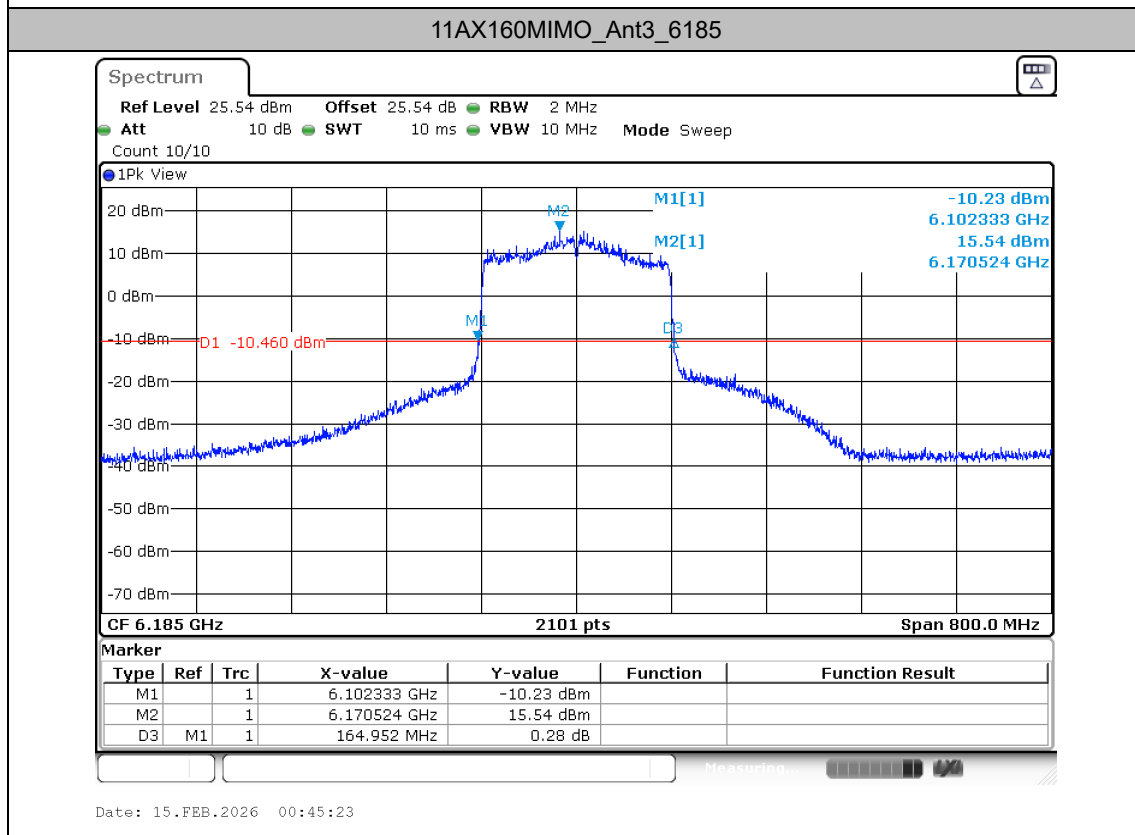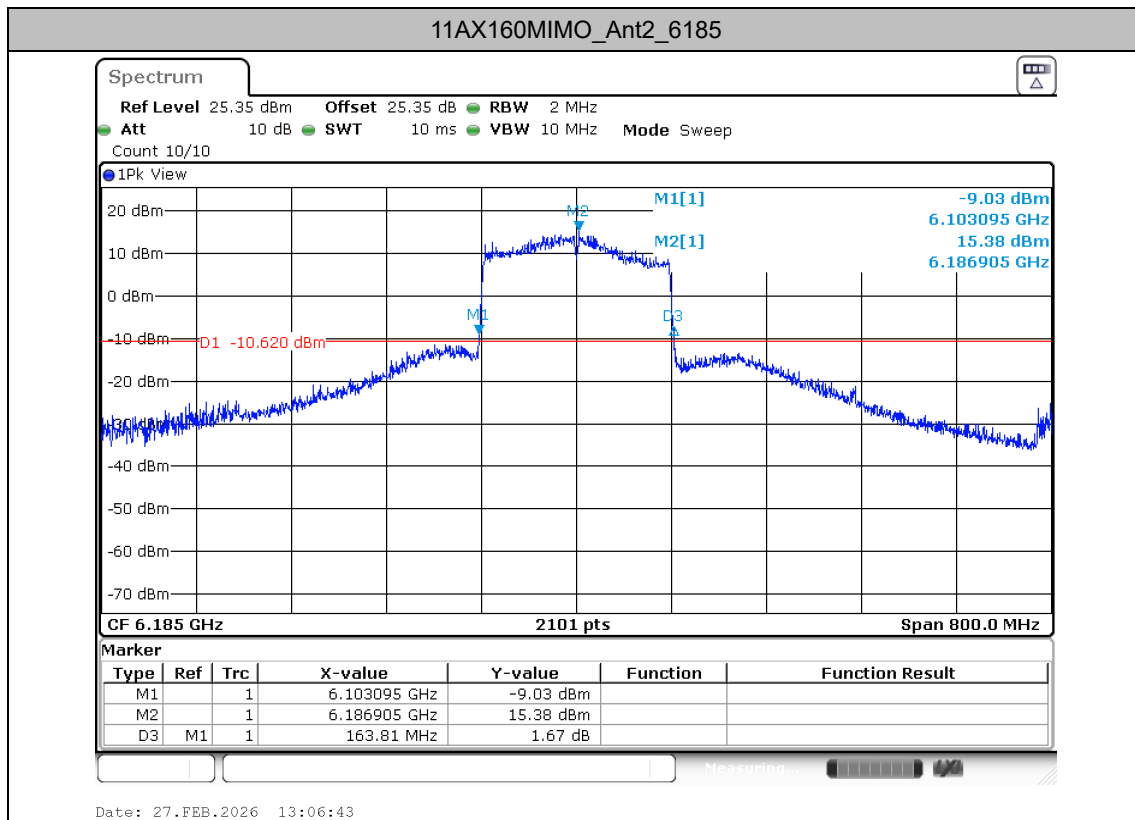

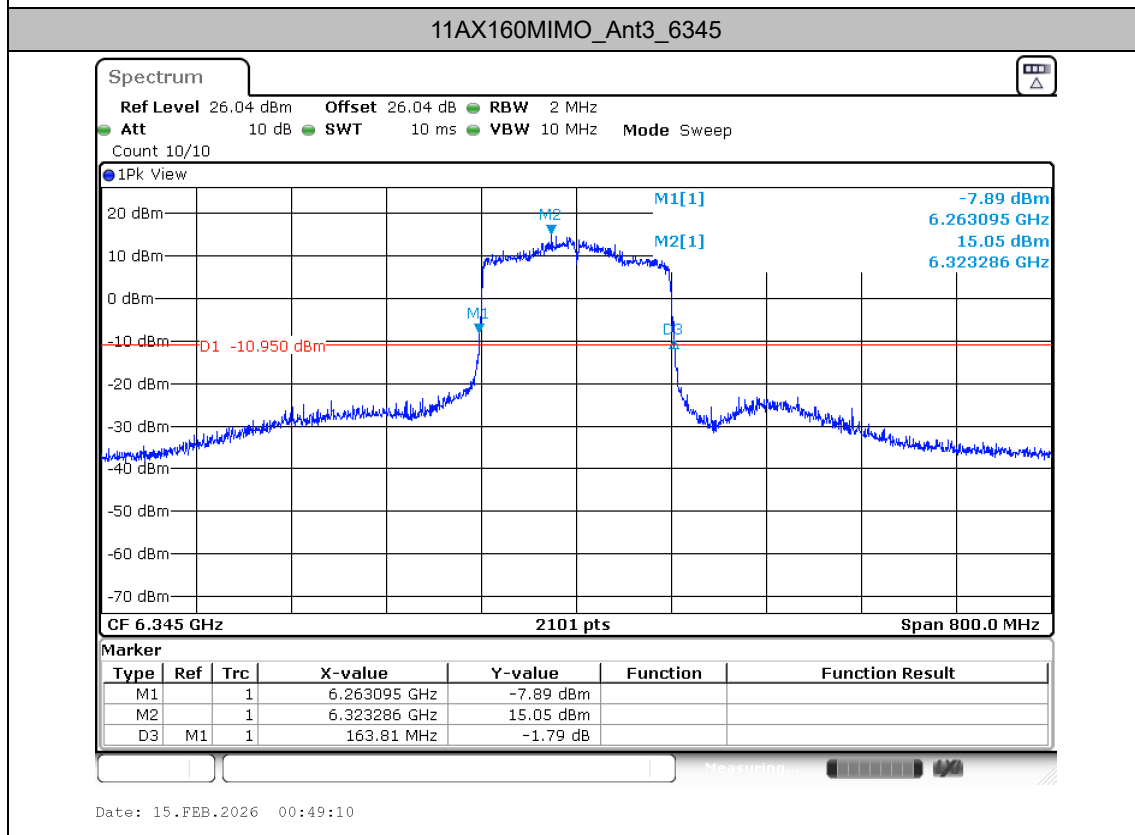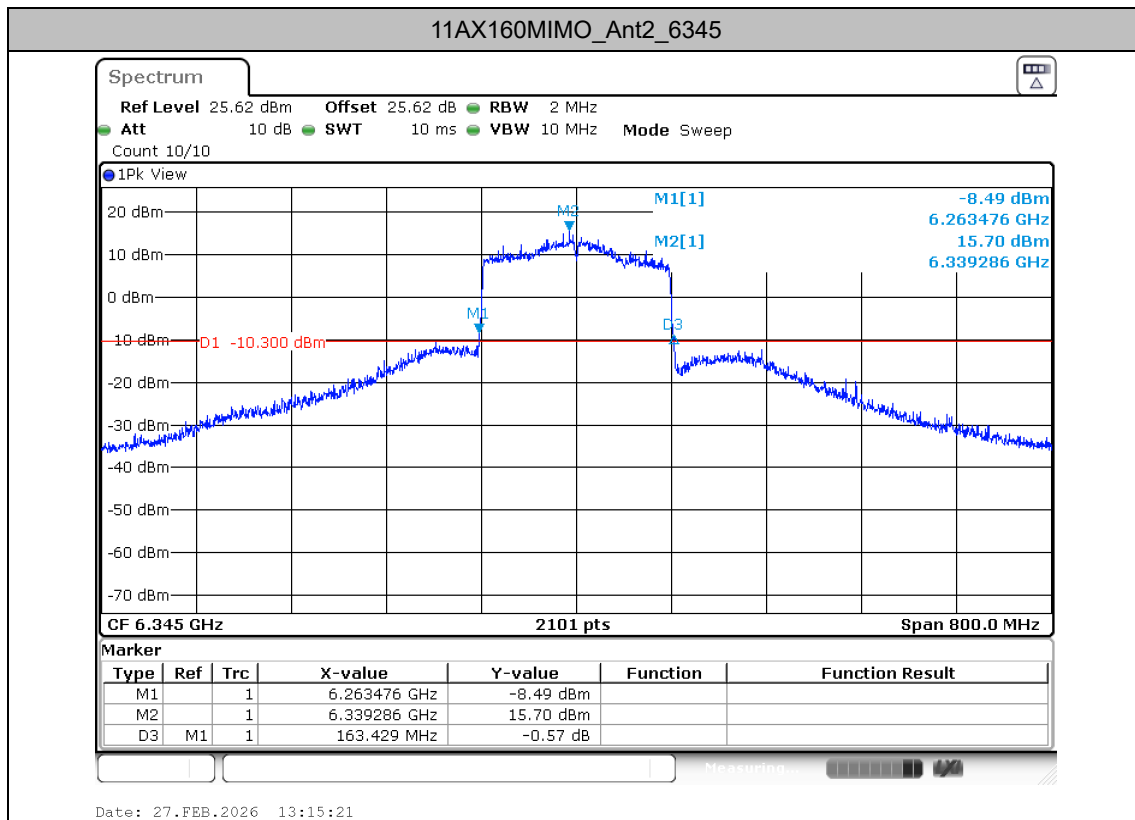

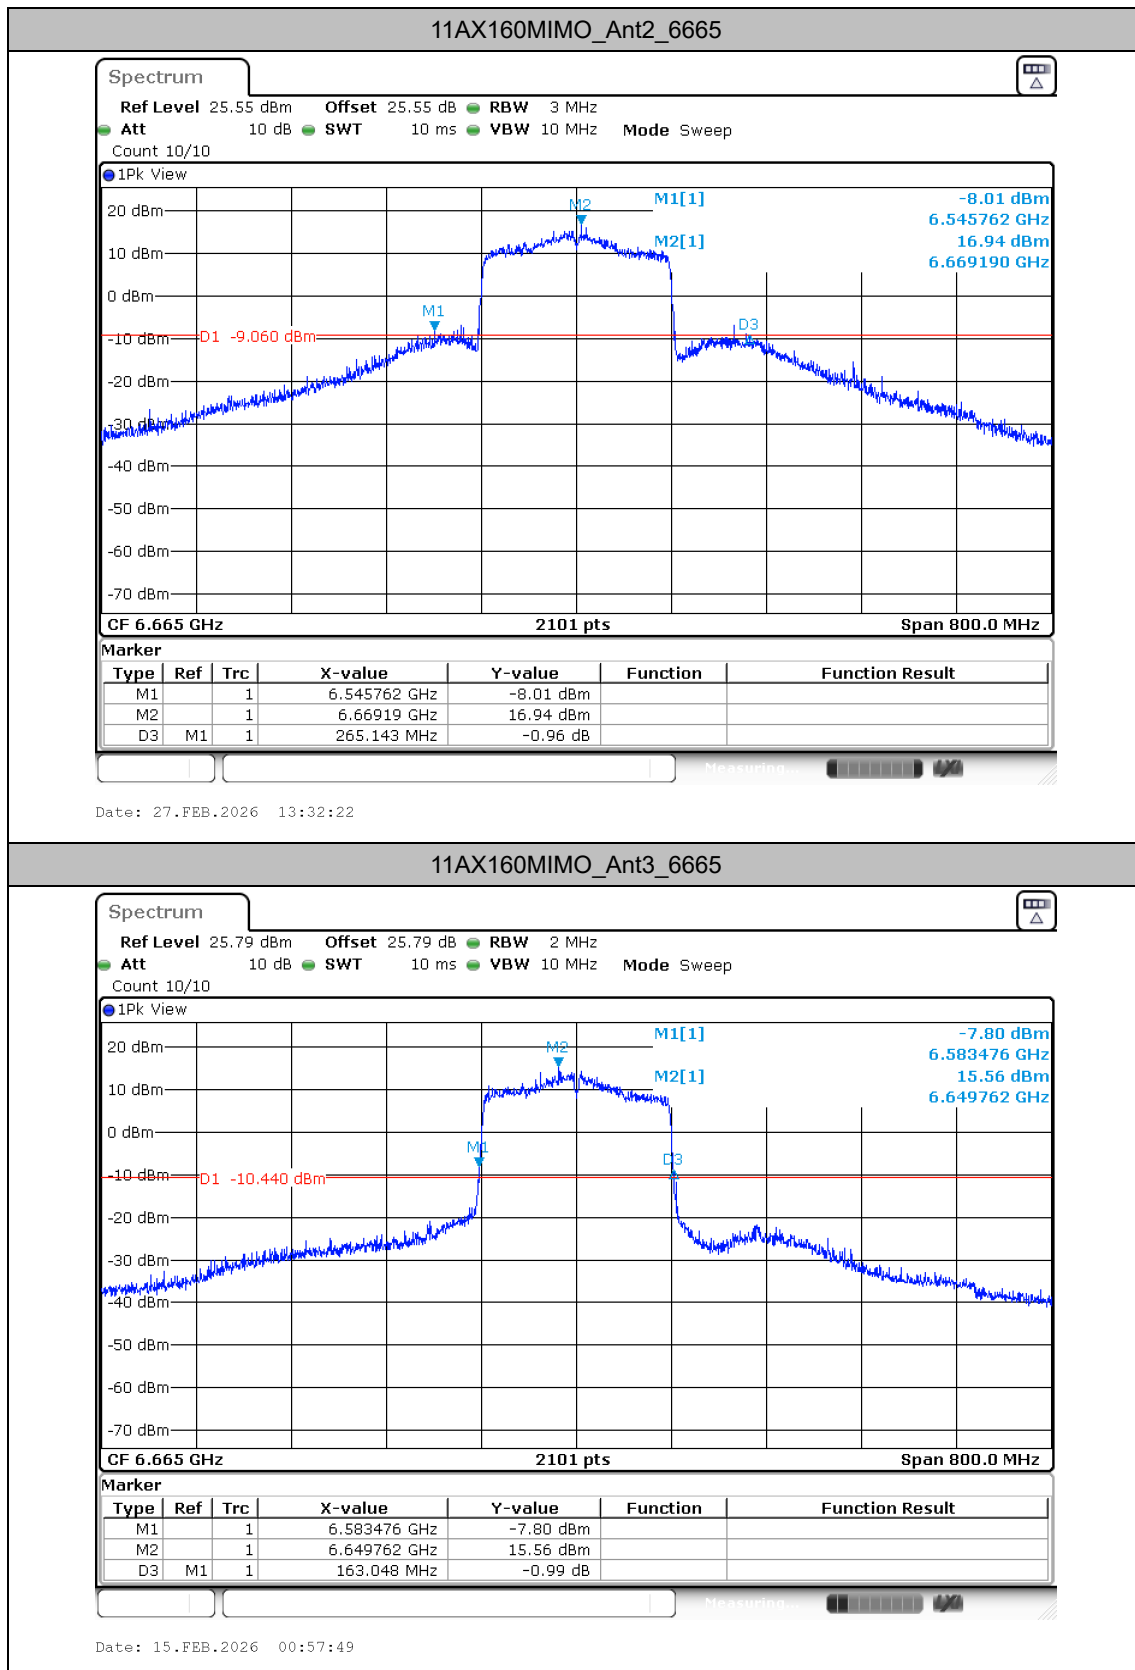



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11A	Ant2	5935	16.545	5926.7182	5943.2627
	Ant3	5935	16.525	5926.7563	5943.2818
	Ant2	5955	16.545	5946.7182	5963.2627
	Ant3	5955	16.506	5946.7563	5963.2627
	Ant2	6195	16.583	6186.6802	6203.2627
	Ant3	6195	16.506	6186.7373	6203.2437
	Ant2	6415	16.602	6406.6802	6423.2818
	Ant3	6415	16.525	6406.7373	6423.2627
	Ant2	6535	16.64	6526.6611	6543.3008
	Ant3	6535	16.525	6526.7373	6543.2627
	Ant2	6695	16.583	6686.6992	6703.2818
	Ant3	6695	16.525	6686.7373	6703.2627
	Ant2	6855	16.792	6846.6040	6863.3960
	Ant3	6855	16.716	6846.6611	6863.3770
11AX20MIMO	Ant2	5935	19	5925.4998	5944.5002
	Ant3	5935	18.962	5925.5188	5944.4812
	Ant2	5955	18.886	5945.5569	5964.4431
	Ant3	5955	18.886	5945.5569	5964.4431
	Ant2	6195	18.981	6185.4998	6204.4812
	Ant3	6195	18.962	6185.5188	6204.4812
	Ant2	6415	18.943	6405.5188	6424.4622
	Ant3	6415	18.981	6405.4998	6424.4812
	Ant2	6535	18.981	6525.4998	6544.4812
	Ant3	6535	18.962	6525.5188	6544.4812
	Ant2	6695	19.02	6685.4998	6704.5193
	Ant3	6695	18.943	6685.5378	6704.4812
	Ant2	6855	18.924	6845.5378	6864.4622
	Ant3	6855	18.943	6845.5378	6864.4812
11AX40MIMO	Ant2	5965	37.696	5946.1518	5983.8482
	Ant3	5965	37.734	5946.1138	5983.8482
	Ant2	6205	37.772	6186.1138	6223.8862
	Ant3	6205	37.734	6186.1138	6223.8482
	Ant2	6405	37.734	6386.0757	6423.8101
	Ant3	6405	37.811	6386.0757	6423.8862



	Ant2	6565	37.811	6546.0757	6583.8862
	Ant3	6565	37.734	6546.1138	6583.8482
	Ant2	6685	37.811	6666.0757	6703.8862
	Ant3	6685	37.658	6666.1518	6703.8101
	Ant2	6845	37.772	6826.1138	6863.8862
	Ant3	6845	37.734	6826.1138	6863.8482
11AX80MIMO	Ant2	5985	76.84	5946.4660	6023.3056
	Ant3	5985	76.763	5946.5421	6023.3056
	Ant2	6225	76.992	6186.3137	6263.3056
	Ant3	6225	76.992	6186.3898	6263.3817
	Ant2	6385	76.992	6346.3898	6423.3817
	Ant3	6385	76.84	6346.4660	6423.3056
	Ant2	6625	76.992	6586.4660	6663.4579
	Ant3	6625	76.84	6586.4660	6663.3056
	Ant2	6705	77.068	6666.3137	6743.3817
	Ant3	6705	76.84	6666.4660	6743.3056
	Ant2	6785	77.144	6746.3137	6823.4579
	Ant3	6785	76.916	6746.3898	6823.3056
11AX160MIMO	Ant2	6025	156.725	5946.2565	6102.9819
	Ant3	6025	156.268	5946.8658	6103.1342
	Ant2	6185	158.248	6105.1904	6263.4388
	Ant3	6185	156.421	6106.5612	6262.9819
	Ant2	6345	158.096	6265.4950	6423.5911
	Ant3	6345	155.964	6266.7135	6422.6773
	Ant2	6665	158.096	6585.9519	6744.0481
	Ant3	6665	156.116	6586.7135	6742.8296



Test Graphs

