


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	1	5955	5955	-62.27	3	0	-65.27	-62	OFF
					-62.77	3	0	-65.77	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
	320	31	5950	5950	-62.12	3	0	-65.12	-62	OFF
					-62.62	3	0	-65.62	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
			6105	6105	-62.26	3	0	-65.26	-62	OFF
					-62.76	3	0	-65.76	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
			6260	6260	-62.27	3	0	-65.27	-62	OFF
					-62.77	3	0	-65.77	-62	Minimal
					-79.6	3	0	-82.6	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	5955	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6105	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
		6260	x	v	v	v	v	v	v	v	v	v	90%	90%	Pass

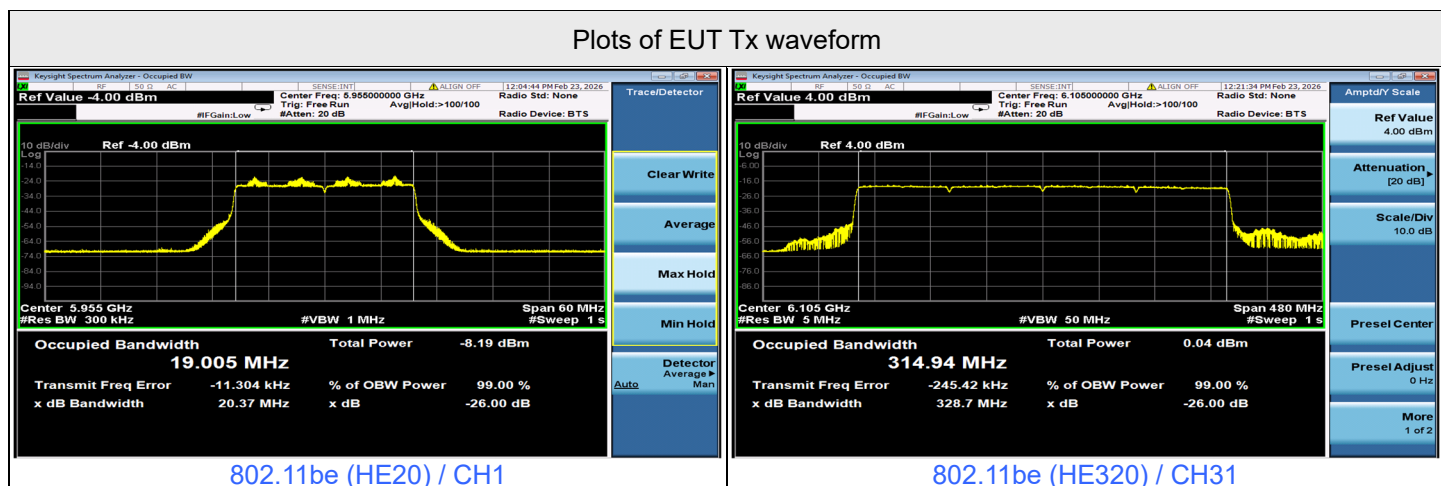


Plots of Injected signal (AWGN) level

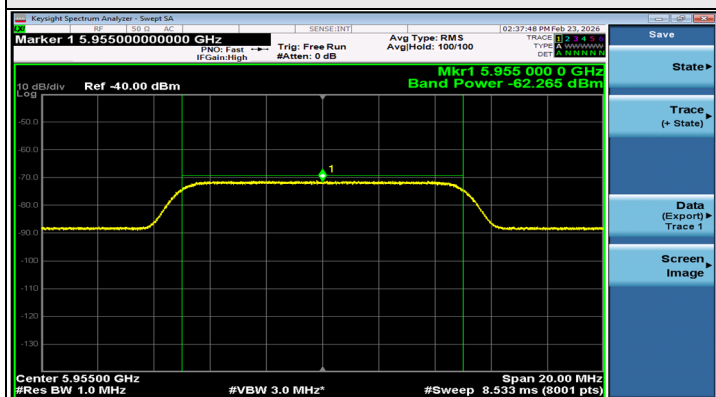

802.11be (HE20) / CH1

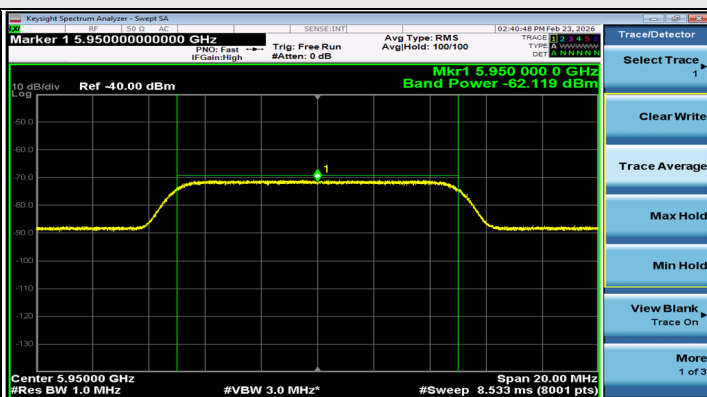

802.11be (HE320) / CH31(Low Edge)

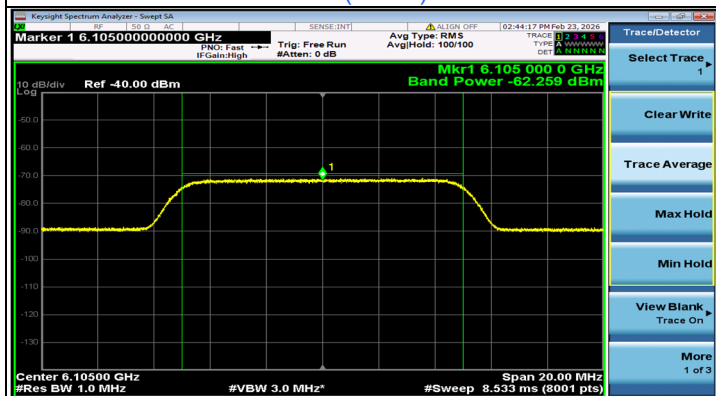


802.11be (HE320) / CH31(Middle)



802.11be (HE320) / CH31(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII5_BW20_CH1_5955MHz_TRS

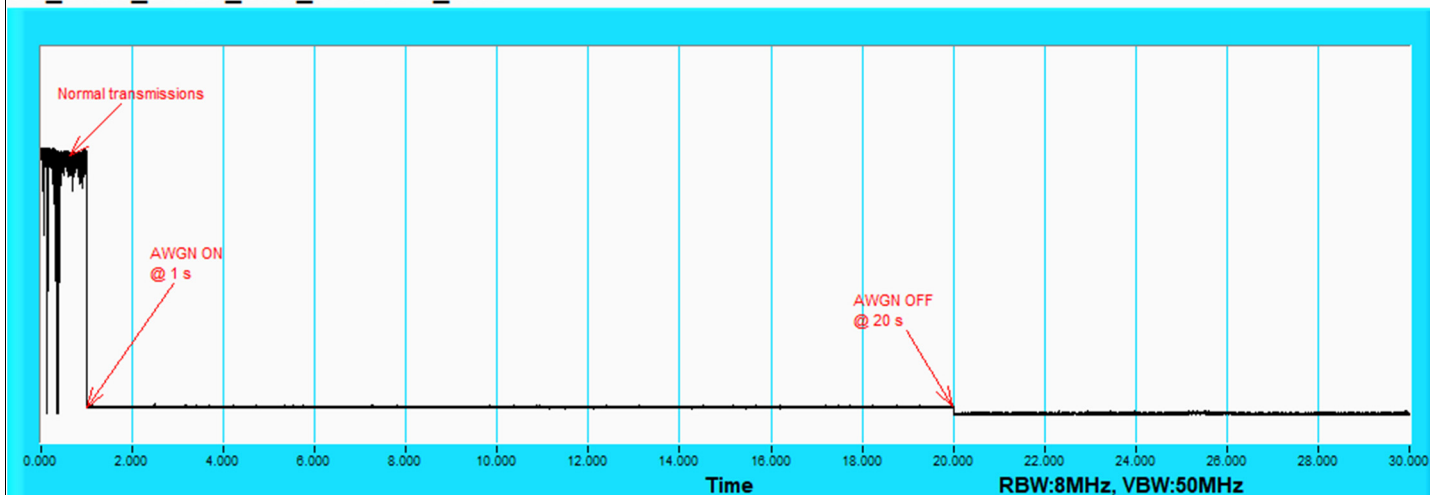

802.11be (HE20) / CH1


Plots of EUT ceased transmission in the time domain

6G_UNII5_BW320_CH31_5950MHz_TRS

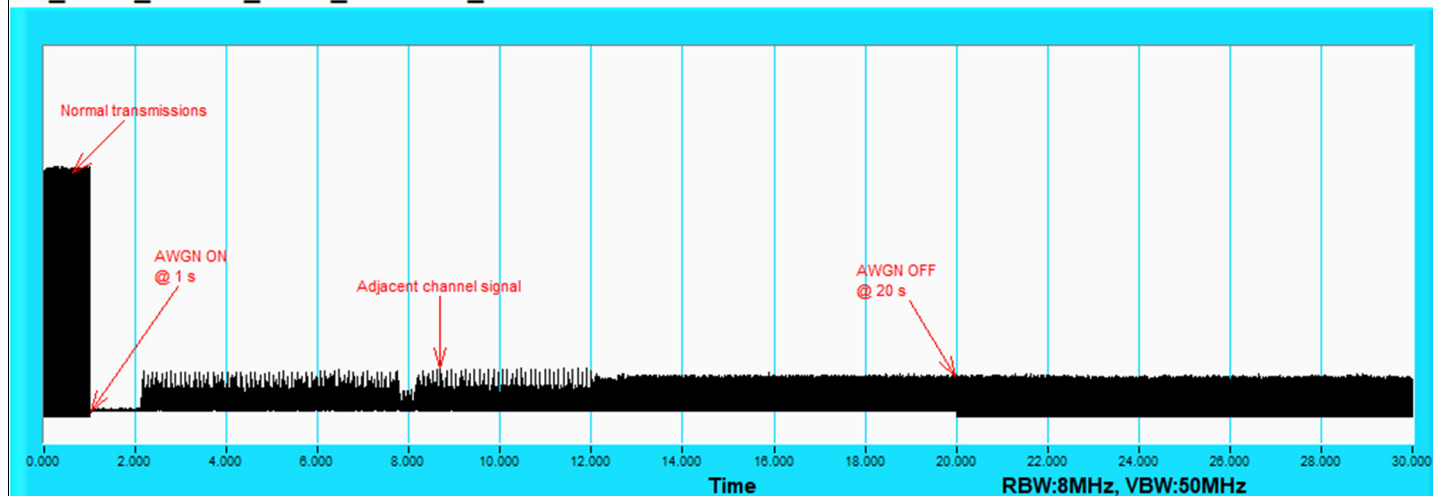


802.11be (HE320) / CH31(Low Edge)

6G_UNII5_BW320_CH31_6105MHz_TRS

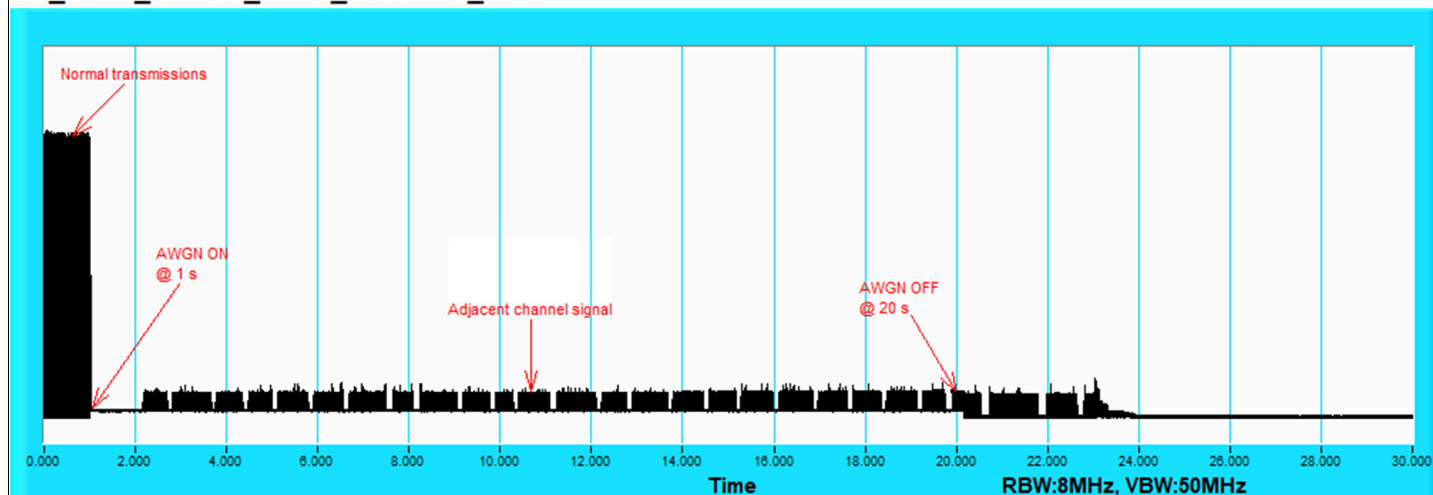

802.11be (HE320) / CH31(Middle)

6G_UNII5_BW320_CH31_6260MHz_TRS

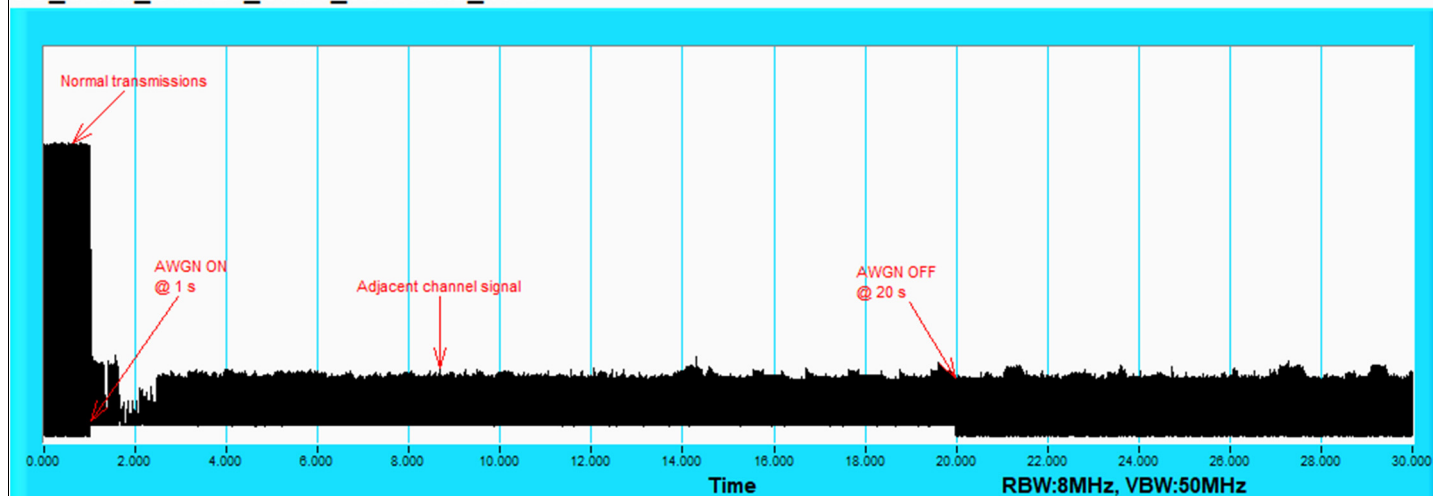

802.11be (HE320) / CH31(High Edge)

For U-NII-6


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	97	6435	6435	-62.24	3	0	-65.24	-62	OFF
					-62.74	3	0	-65.74	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
	320	95	6425	6270	-62.17	3	0	-65.17	-62	OFF
					-62.67	3	0	-65.67	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
		95	6425	6425	-62.22	3	0	-65.22	-62	OFF
					-62.72	3	0	-65.72	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
		95	6425	6580	-62.25	3	0	-65.25	-62	OFF
					-62.75	3	0	-65.75	-62	Minimal
					-79.6	3	0	-82.6	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6435	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
	320	6270	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	x	v	v	v	90%	90%	Pass


Plots of EUT Tx waveform

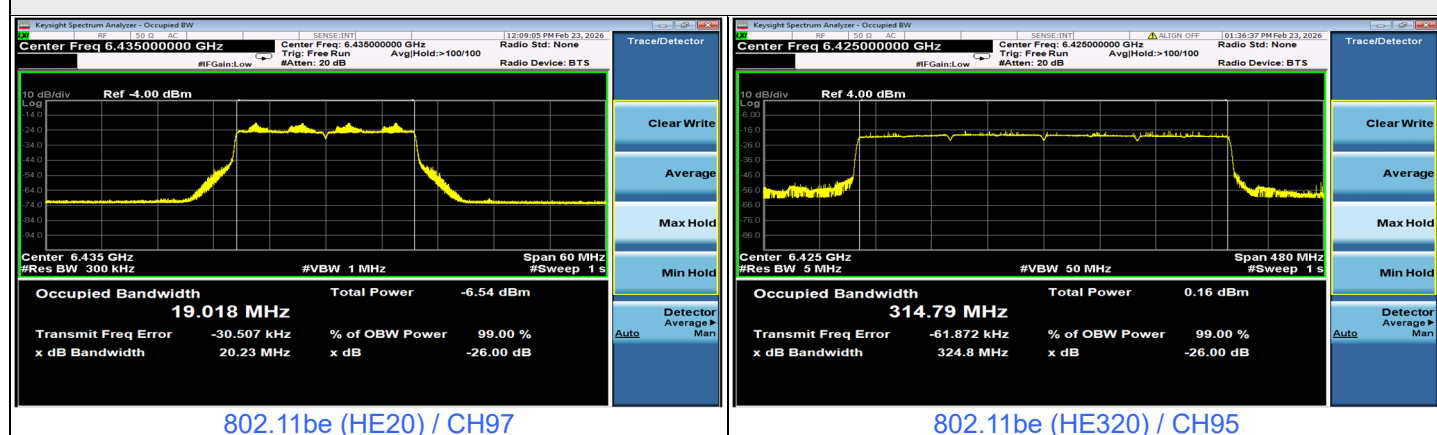


Plots of Injected signal (AWGN) level

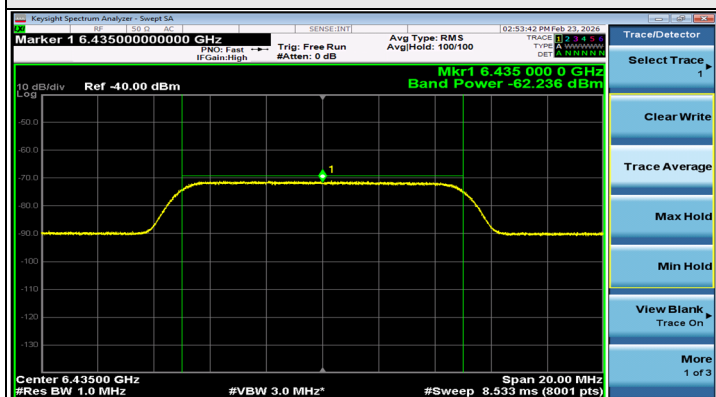


802.11be (HE20) / CH97

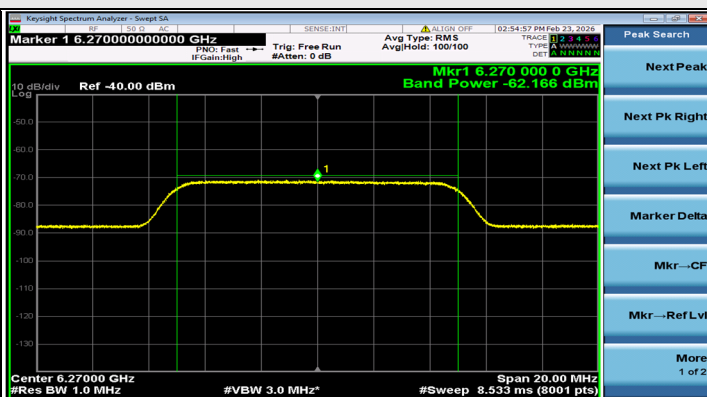

802.11be (HE320) / CH95(Low Edge)

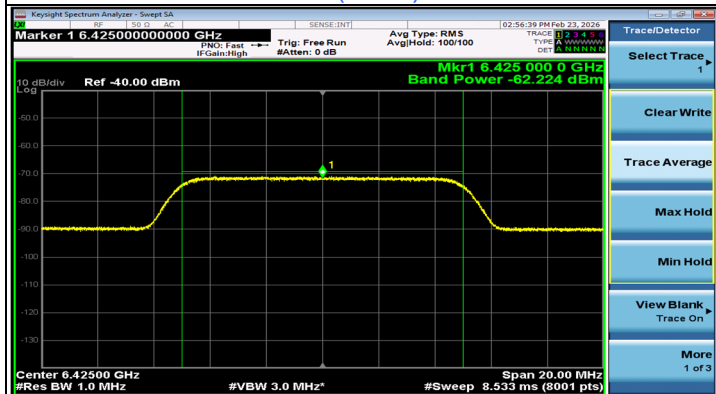


802.11be (HE320) / CH95(Middle)

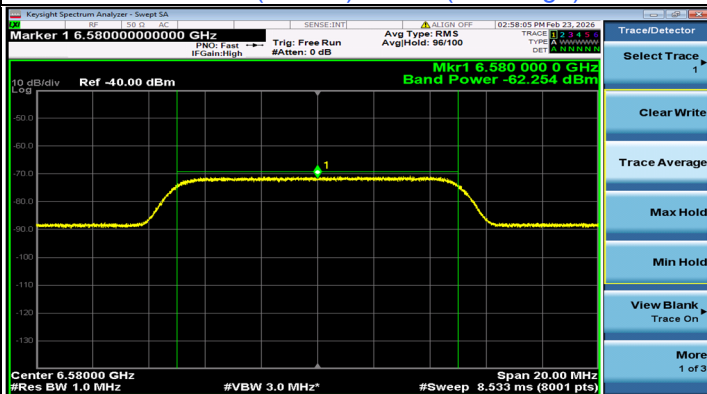

802.11be (HE320) / CH95(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII6_BW20_CH97_6435MHz_TRS

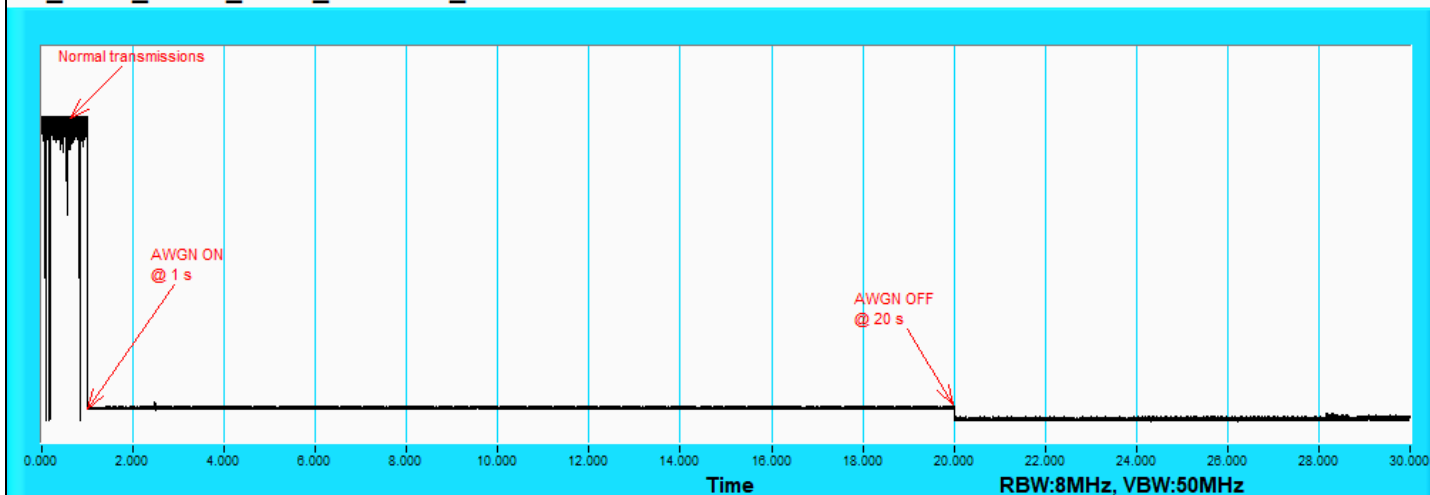

802.11be (HE20) / CH97


Plots of EUT ceased transmission in the time domain

6G_UNII6_BW320_CH95_6270MHz_TRS

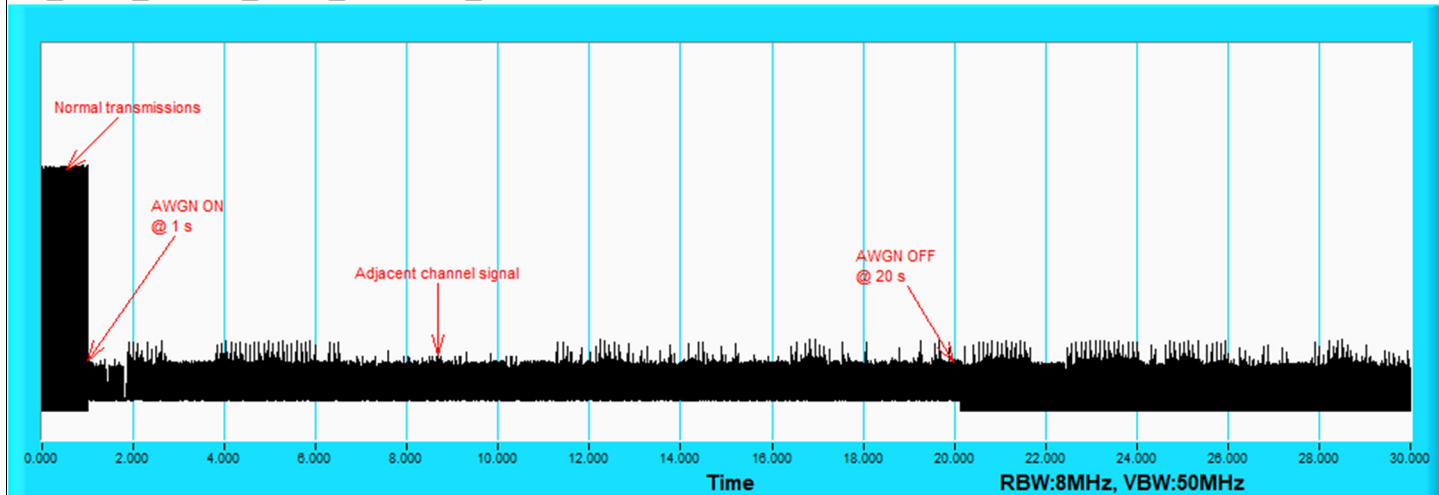


802.11be (HE320) / CH95(Low Edge)

6G_UNII6_BW320_CH95_6425MHz_TRS

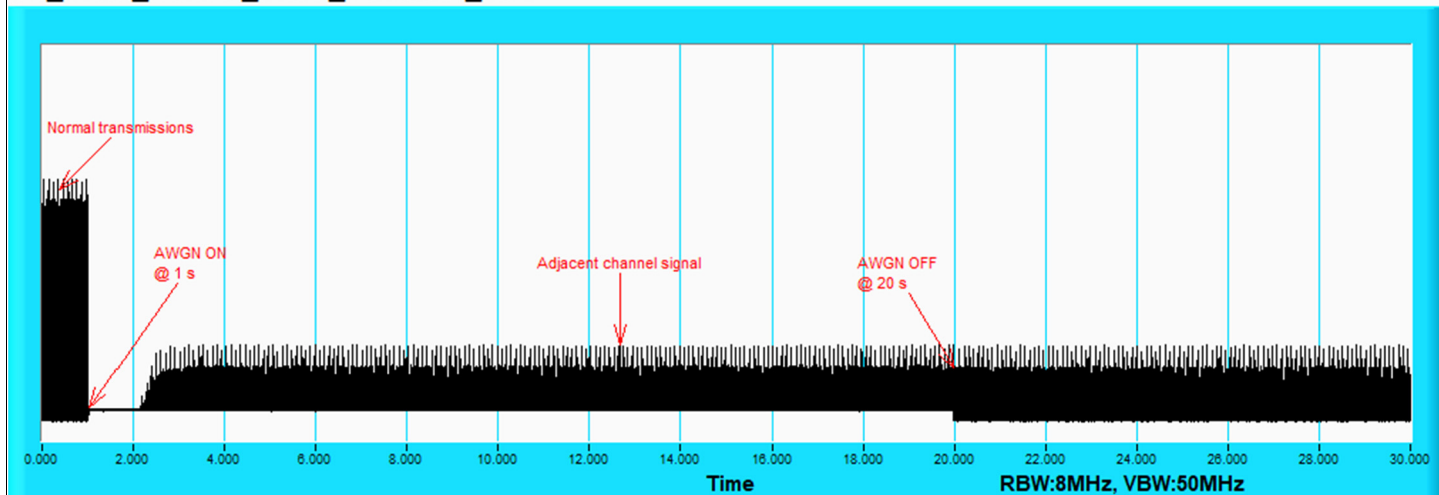

802.11be (HE320) / CH95(Middle)

6G_UNII6_BW320_CH95_6580MHz_TRS

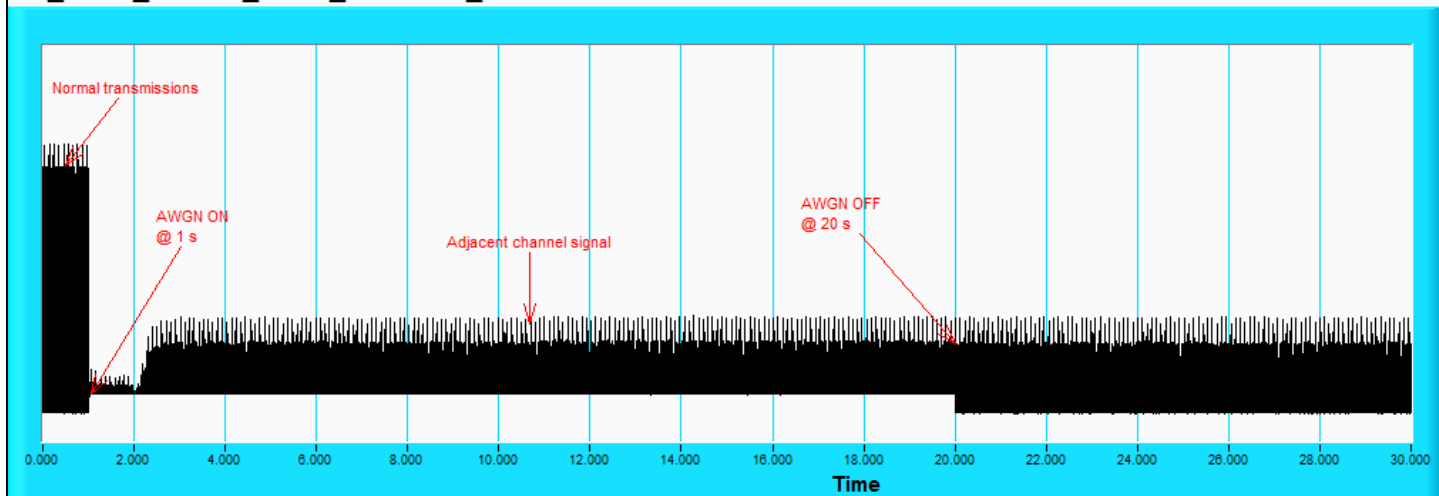

802.11be (HE320) / CH95(High Edge)


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	129	6595	6595	-62.2	3	0	-65.2	-62	OFF
					-62.7	3	0	-65.7	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
	320	127	6430	6430	-62.25	3	0	-65.25	-62	OFF
					-62.75	3	0	-65.75	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
		127	6585	6585	-62.25	3	0	-65.25	-62	OFF
					-62.75	3	0	-65.75	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
		127	6740	6740	-62.24	3	0	-65.24	-62	OFF
					-62.74	3	0	-65.74	-62	Minimal
					-79.6	3	0	-82.6	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6595	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6430	v	v	v	v	x	v	v	v	v	v	90%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

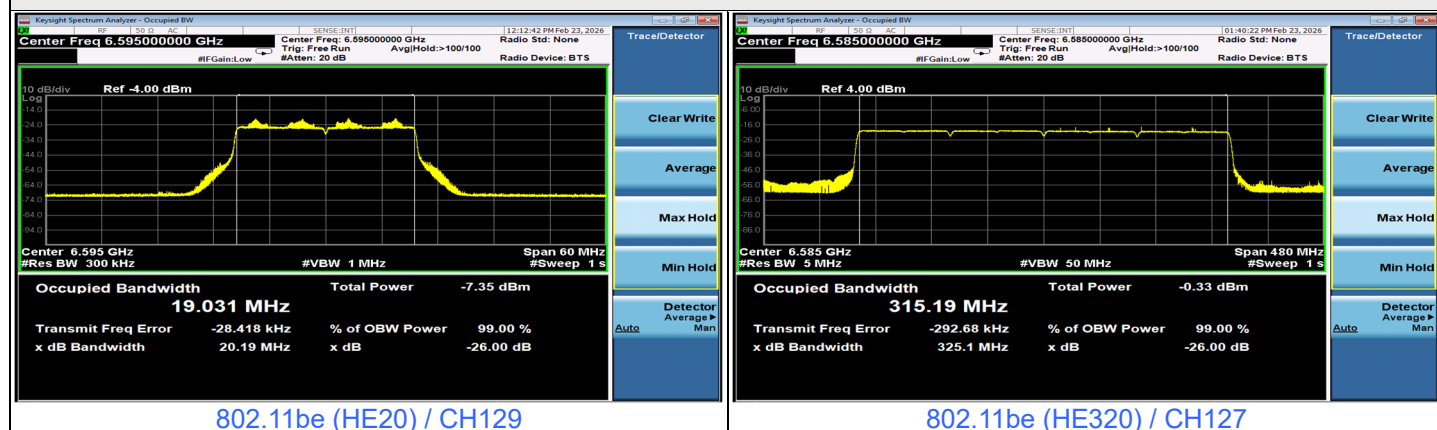


Plots of Injected signal (AWGN) level

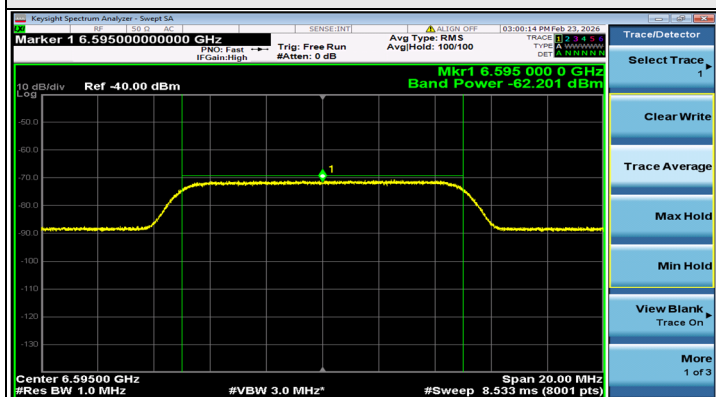


802.11be (HE20) / CH129

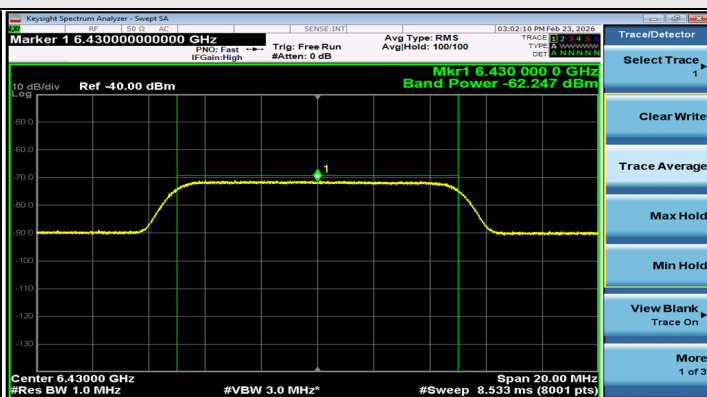

802.11be (HE320) / CH127(Low Edge)

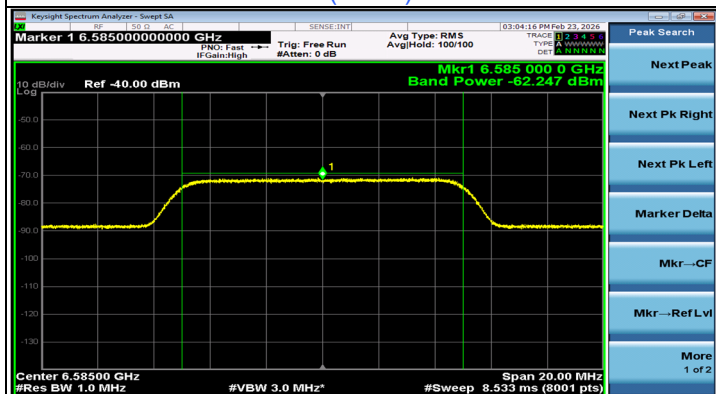


802.11be (HE320) / CH127(Middle)

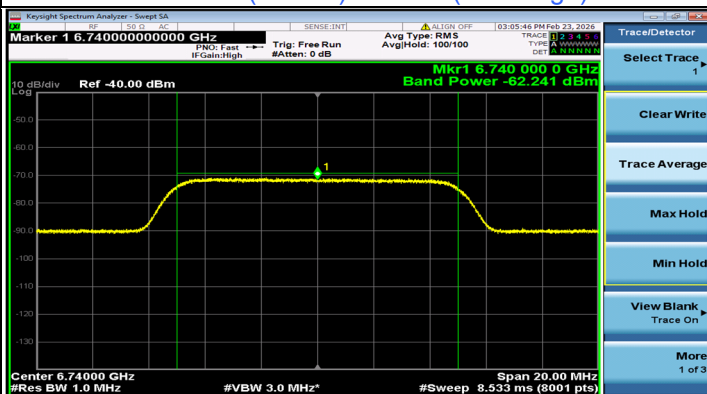

802.11be (HE320) / CH127(High Edge)

Plots of EUT ceased transmission in the time domain

6G_UNII7_BW20_CH129_6595MHz_TRS

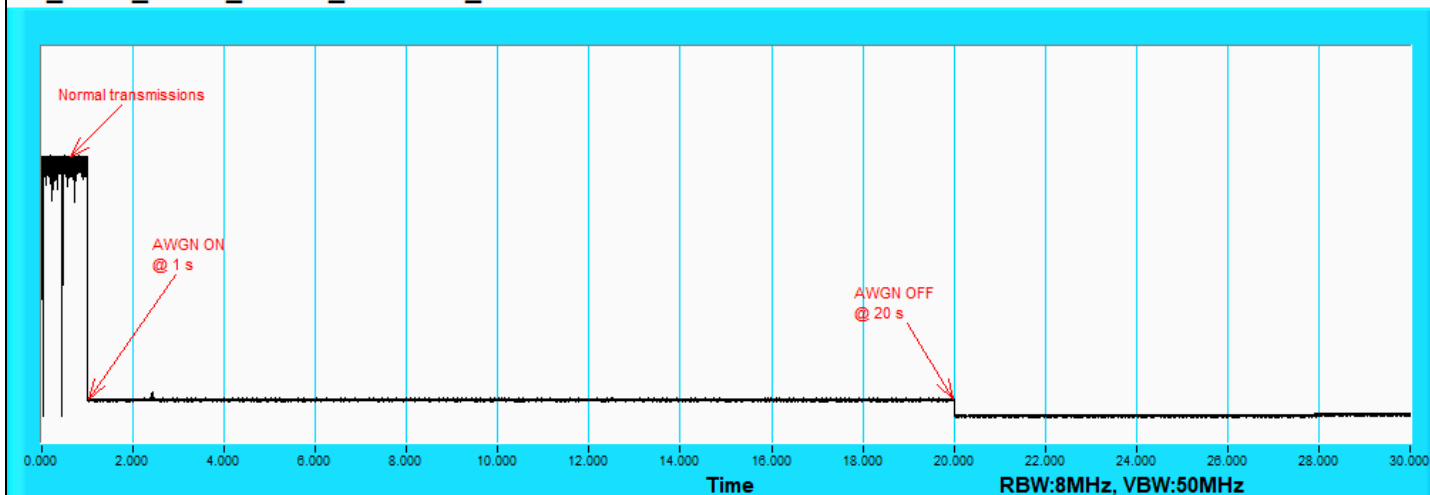

802.11be (HE20) / CH129