

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBAOZ-WTW-P25060017A-3
FCC ID: U4Y-LX-7200
Product: LANCOM LX-7200 2x2x2 Indoor 11be AP
Brand: LANCOM
Model No.: LANCOM LX-7200
Received Date: 2025/12/8
Test Date: 2026/2/4 ~ 2026/3/4
Issued Date: 2026/3/31
Applicant: LANCOM Systems GmbH
Address: Adenauerstraße 20 / B2, 52146 Wuersele, Germany
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by:  , **Date:** 2026/3/31
Wen Yu / Assistant Manager

This test report consists of 179 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by: Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	8
4 Test Instruments	9
4.1 U-NII Detection Bandwidth	9
4.2 Channel Availability Check Time	9
4.3 Channel Closing Transmission and Channel Move Time	9
4.4 Non-Occupancy Period	9
4.5 Statistical Performance Check	9
5 Limits of Test Items.....	10
5.1 Working Modes and Required Test Items	10
5.2 Test Limits and Radar Signal Parameters	11
6 Test Arrangements.....	14
6.1 Test Setup.....	14
6.2 Test Procedure	15
6.2.1 DFS Measurement System	15
6.2.2 Calibration of DFS Detection Threshold Level.....	18
6.2.3 DFS Detection Threshold.....	19
6.2.4 DFS Companion Device	24
7 Test Results of Test Item	25
7.1 U-NII Detection Bandwidth	25
7.2 Channel Availability Check Time	33
7.3 Channel Closing Transmission and Channel Move Time	35
7.4 Non-Occupancy Period	40
7.5 Statistical Performance Check	43
8 Declaration of Conformity by the Manufacturer	80
8.1 Transmit Power Control (TPC)	80
8.2 Statement of Manufacturer	80
9 Pictures of Test Arrangements	81
10 Information of the Testing Laboratories	82
11 Appendix.....	83
11.1 Radar Test Signal	83

Release Control Record

Issue No.	Description	Date Issued
RFBAOZ-WTW-P25060017A-3	Original release.	2026/3/31

1 Certificate

Product: LANCOM LX-7200 2x2x2 Indoor 11be AP

Brand: LANCOM

Test Model: LANCOM LX-7200

Sample Status: Engineering sample

Applicant: LANCOM Systems GmbH

Test Date: 2026/2/4 ~ 2026/3/4

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	LANCOM LX-7200 2x2x2 Indoor 11be AP
Brand	LANCOM
Test Model	LANCOM LX-7200
DFS Firmware/software version	V10
Operational Mode	Master (with TPC function)
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Support Static Preamble Puncturing Feature

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable length (cm)
1 A1-2G4	0	AOT	ANT-LX7200-AL03	2.49	2.4 ~ 2.5	PIFA	ipex(MHF)	15.5
2 A2-2G4	1	AOT	ANT-LX7200-AL03	3.96	2.4 ~ 2.5	PIFA	ipex(MHF)	14
3 A3-BLE	0	AOT	ANT-LX7200-AL03	7	2.4 ~ 2.5	Dipole	ipex(MHF)	6
4 A4-5GV	0	AOT	ANT-LX7200-AL03	4.19	5.15 ~ 5.25	PIFA	ipex(MHF)	11.5
				4.74	5.25 ~ 5.35			
				5.37	5.47 ~ 5.725			
				5.73	5.725 ~ 5.85			
5 A5-5GV	1	AOT	ANT-LX7200-AL03	4.52	5.15 ~ 5.25	PIFA	ipex(MHF)	17.8
				4.73	5.25 ~ 5.35			
				4.33	5.47 ~ 5.725			
				4.55	5.725 ~ 5.85			
6 A6-6GH	0	AOT	ANT-LX7200-AL03	6.6	5.925 ~ 7.125	Dipole	ipex(MHF)	18
7 A7-6GH	1	AOT	ANT-LX7200-AL03	6.7	5.925 ~ 7.125	Dipole	ipex(MHF)	9.5

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The directional antenna gain, please refer to the following table:

Frequency range	Directional Gain (dBi)
2.4~2.5GHz	6.27
5.15~5.25GHz	6.8
5.25~5.35GHz	6.8
5.47~5.725GHz	7.07
5.725~5.85GHz	6.94

3. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX
802.11be (EHT240)	2TX	2RX

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	246.384	23.92	4.74	733.859	28.66
	5470-5725	245.49	23.9	5.37	845.345	29.27
Beamforming	5250-5350	202.817	23.07	6.8	970.743	29.87
	5470-5725	193.908	22.88	7.07	987.633	29.95

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXG Vector Signal Generator Keysight	N5182B	MY53052700	2025/7/19	2026/7/18
Programmable Step Attenuator Agilent	8496H-002	MY42143989	2025/10/22	2026/10/21
Signal & Spectrum Analyzer R&S	FSV3044	101506	2025/6/12	2026/6/11
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in HC - DFS-2 room (Hsinchu).
2. Tested Date: 2026/2/4 ~ 2026/3/4

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

a) the Channel center frequency
 b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth
 c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

$$FL + (0.4 * \text{Chirp Width [in MHz]})$$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

$$FH - (0.4 * \text{Chirp Width [in MHz]})$$

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement

Master Mode

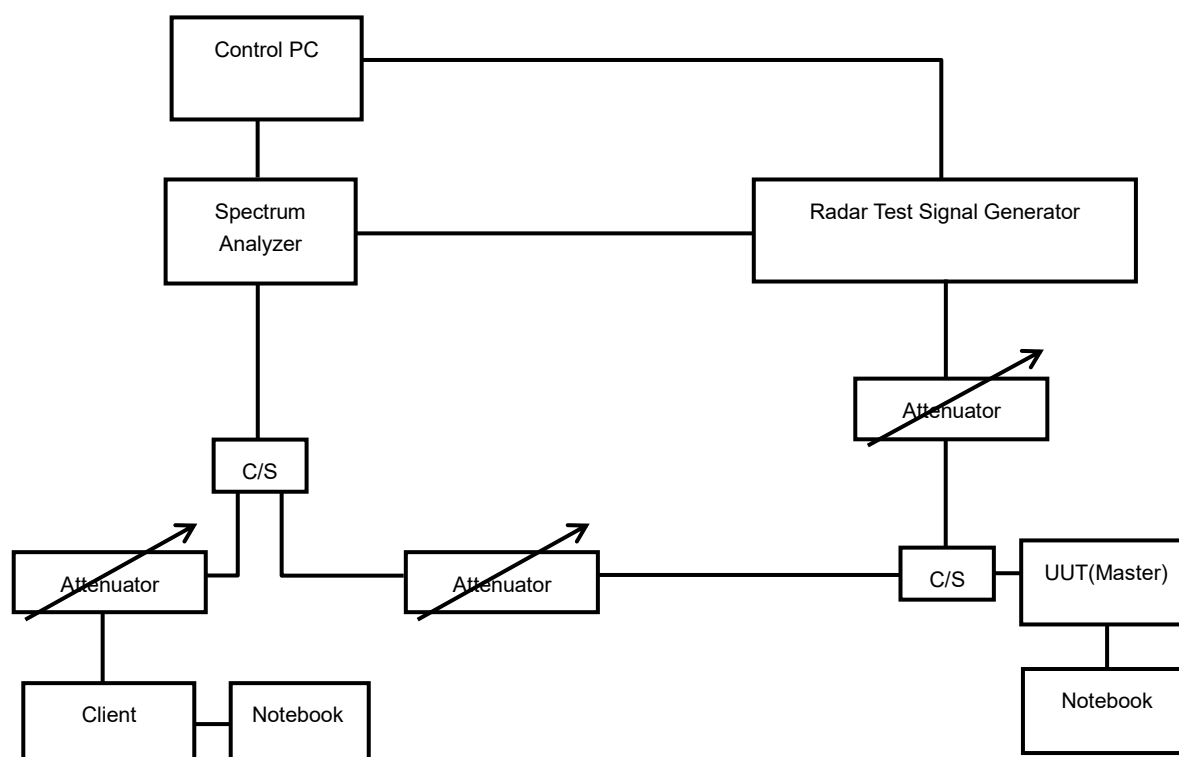


The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

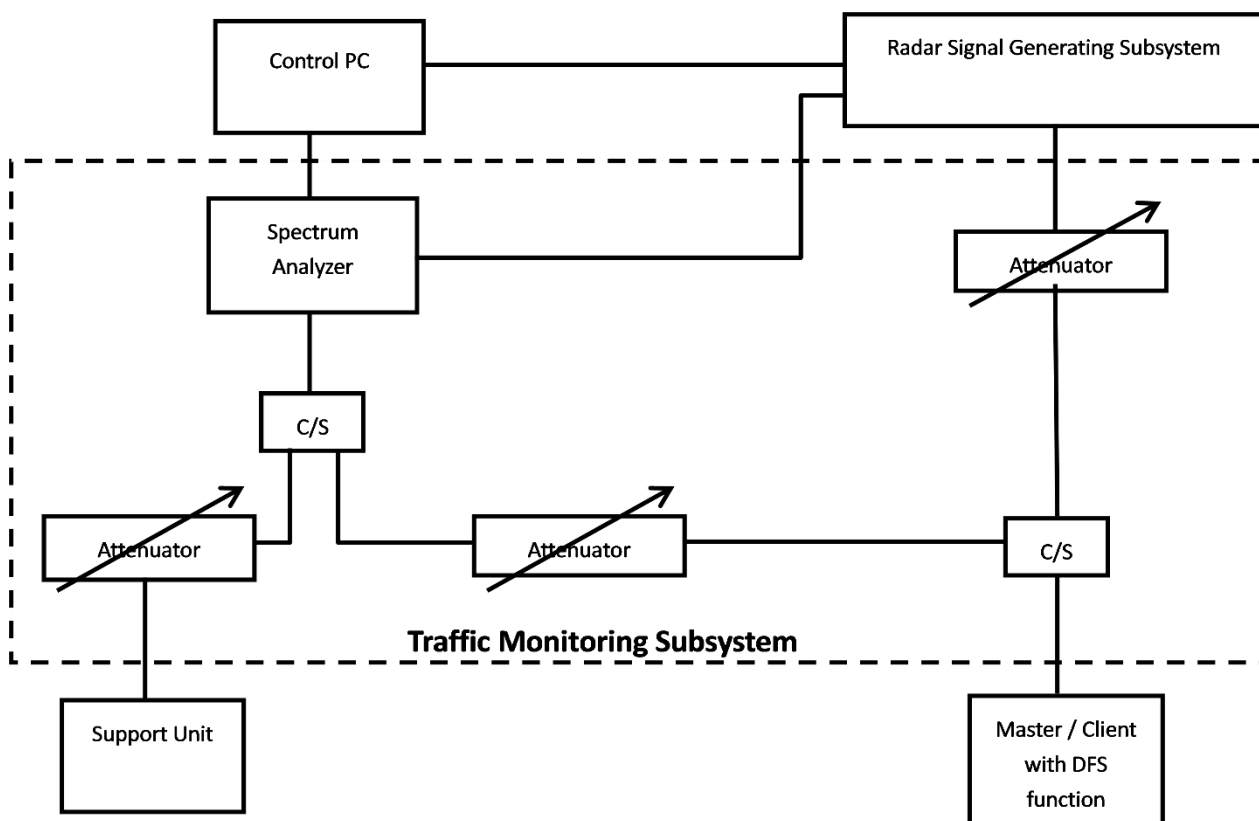


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

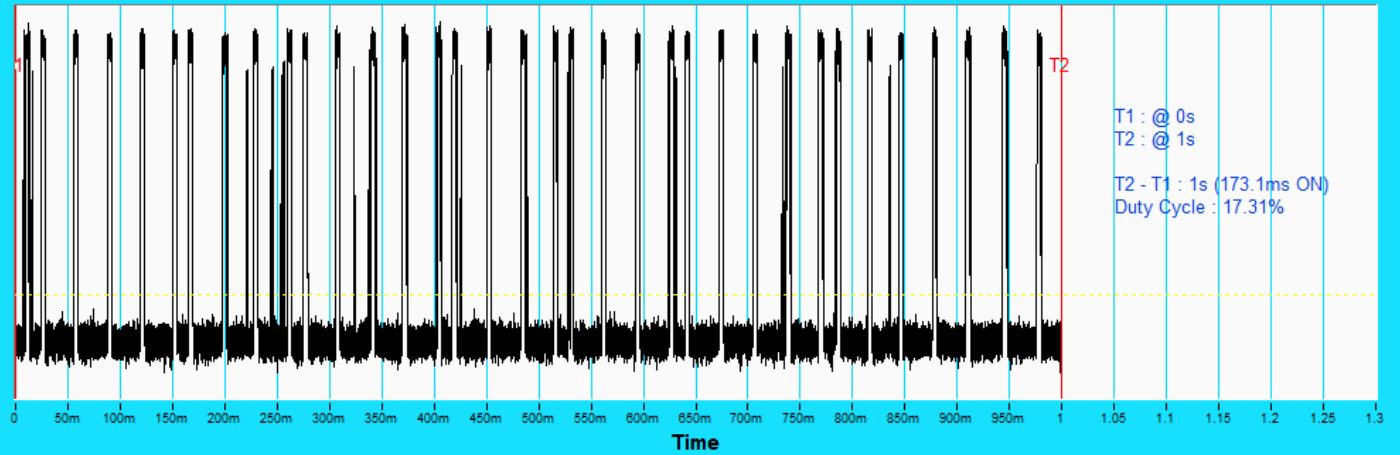


802.11be (EHT20)

Duty Cycle

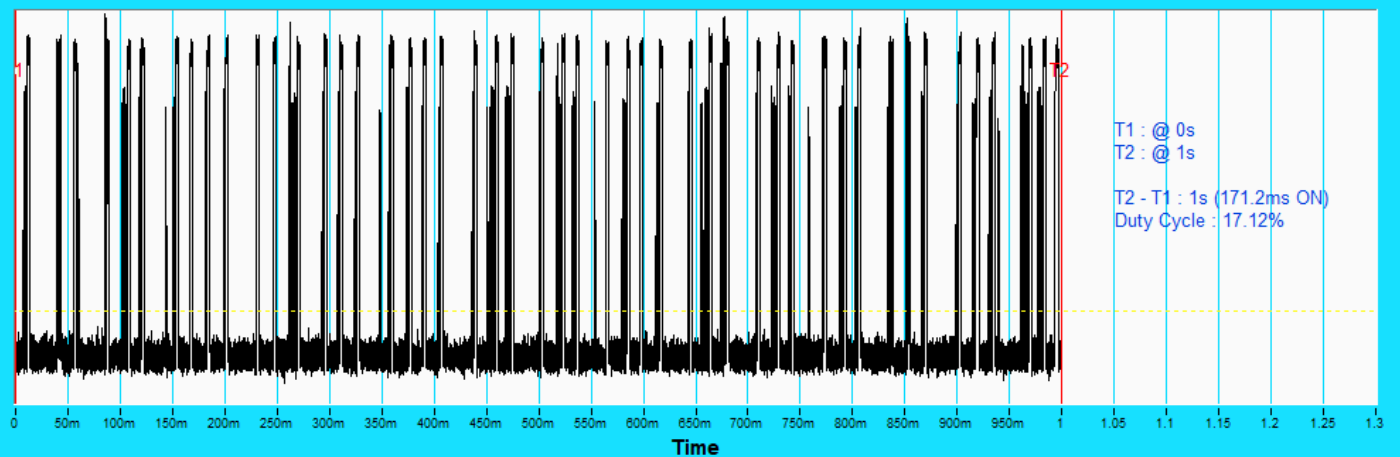

802.11be (EHT40)


Duty Cycle

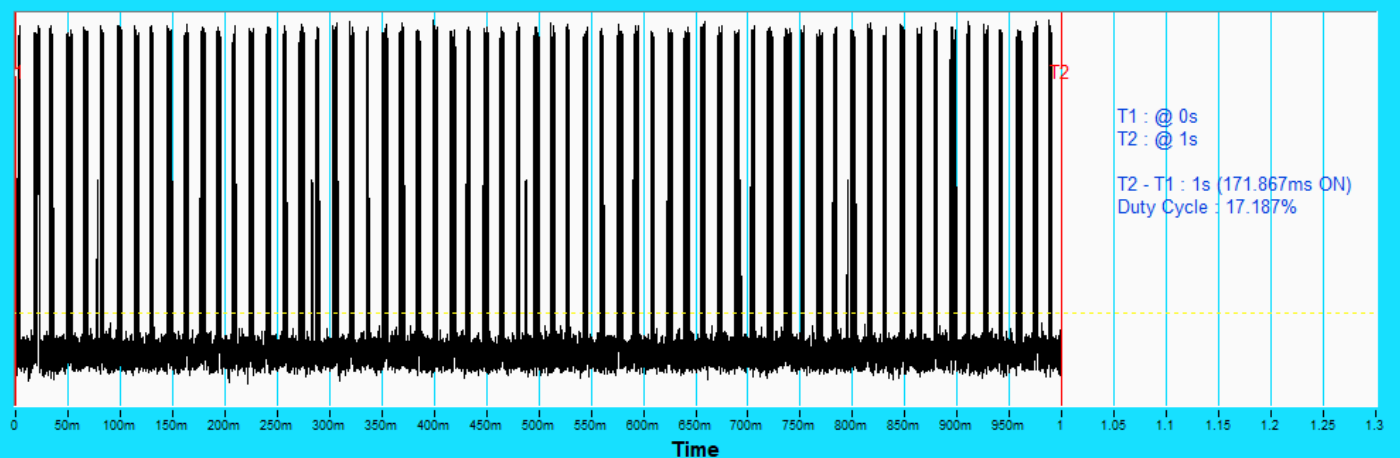

802.11be (EHT80)


Plots of Channel Loading

Duty Cycle

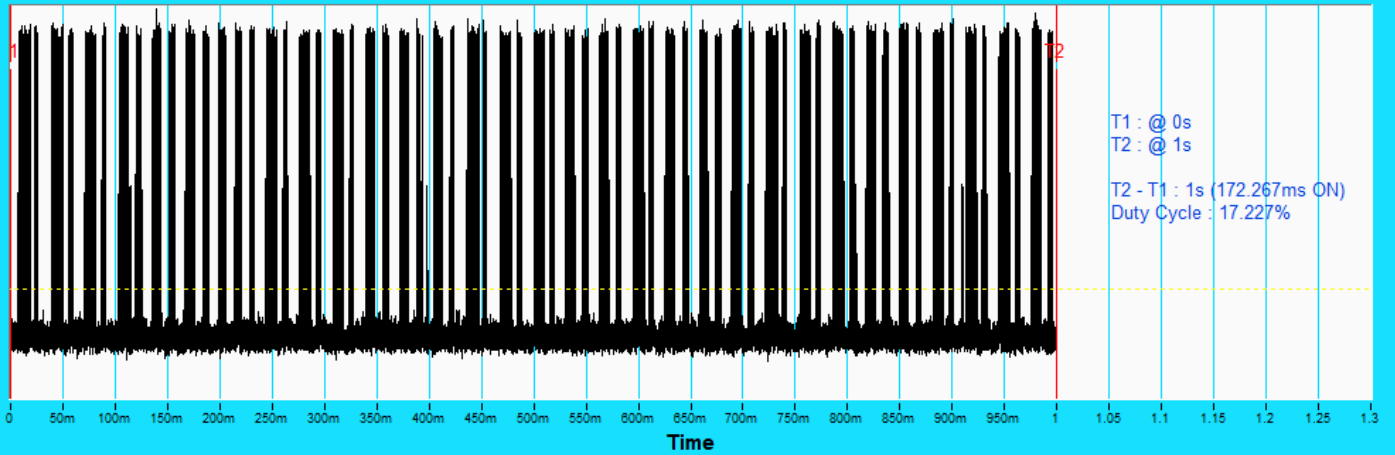

802.11be (EHT160)

Duty Cycle

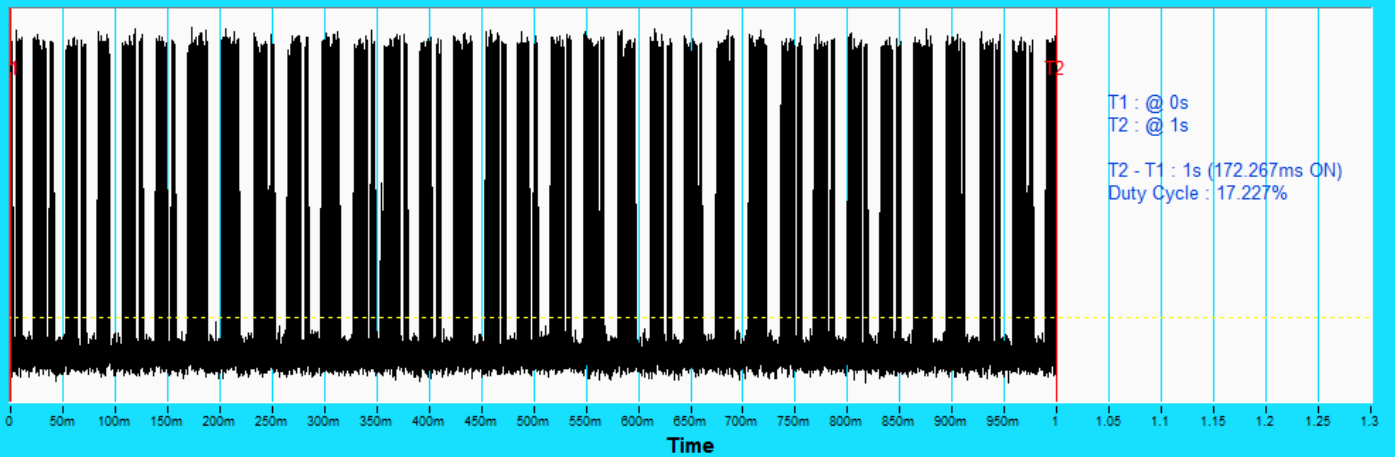


802.11be (EHT240)

6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

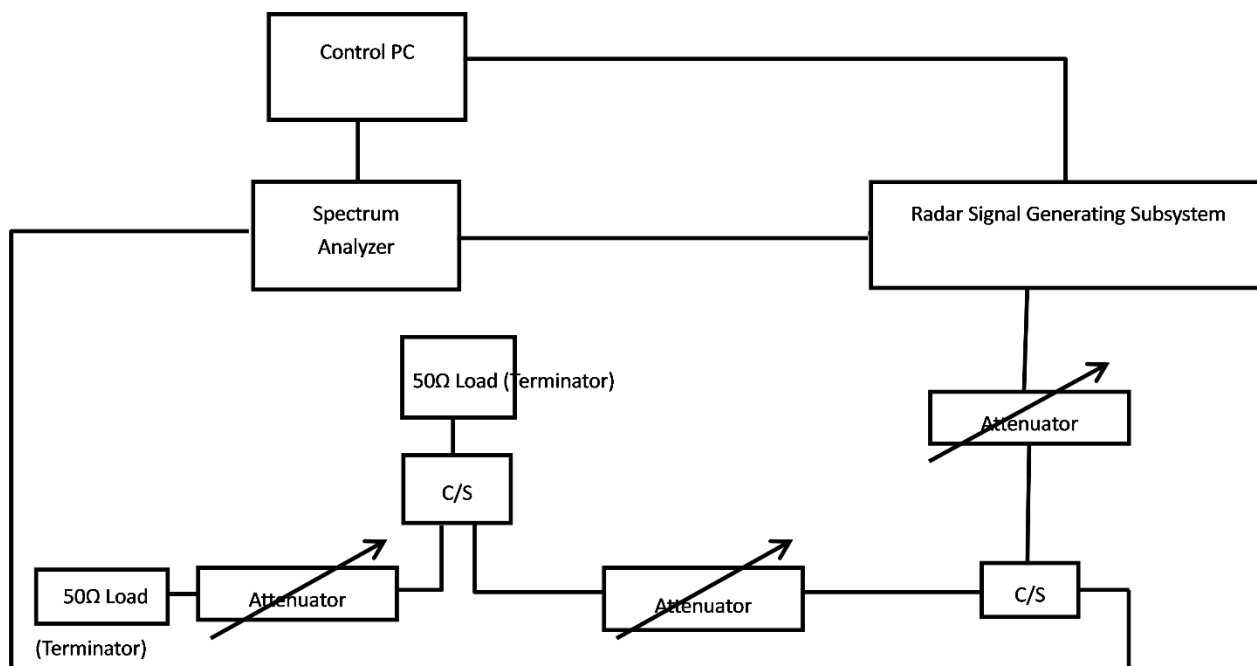

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in Master Mode


The radar test waveforms are injected into the Master.

The antenna net gain is 4.33 dBi.


DFS Detection Threshold = -64 dBm + 4.33 dBi = -59.67 dBm

The calibrated conducted detection threshold level is lower than -59.67 dBm.

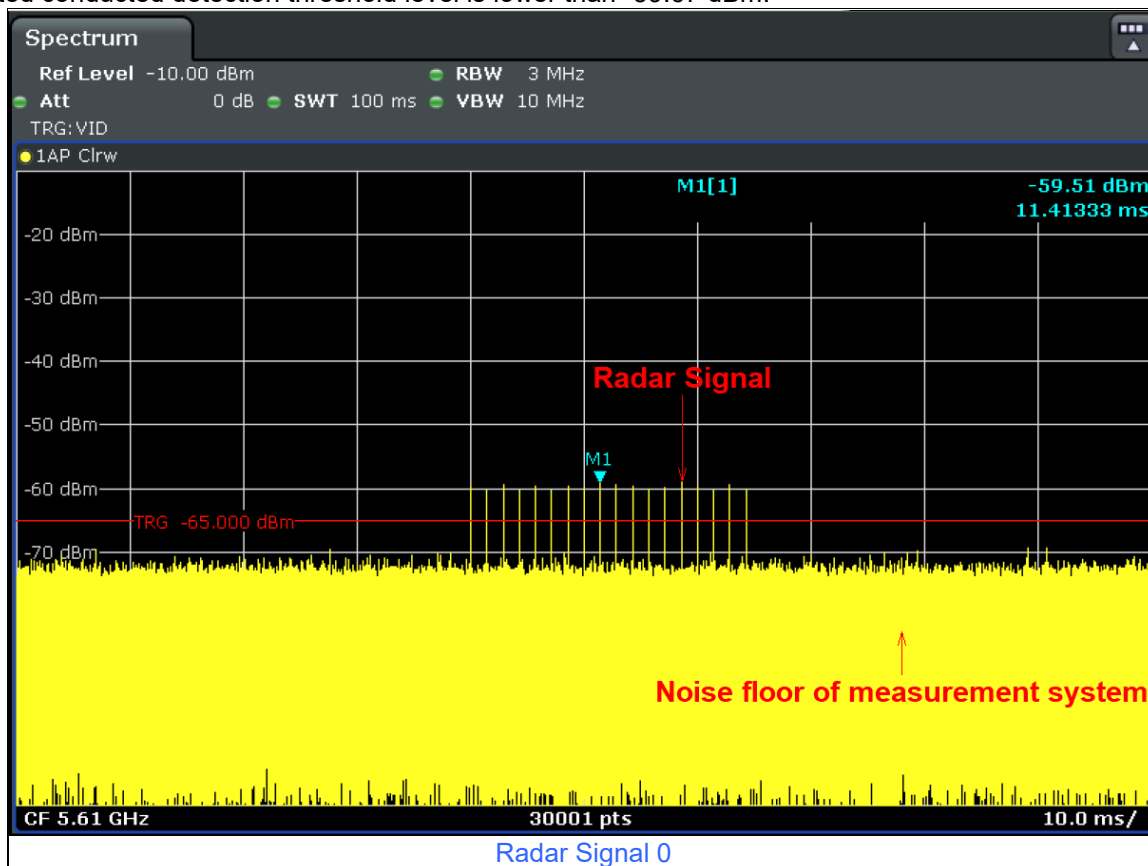


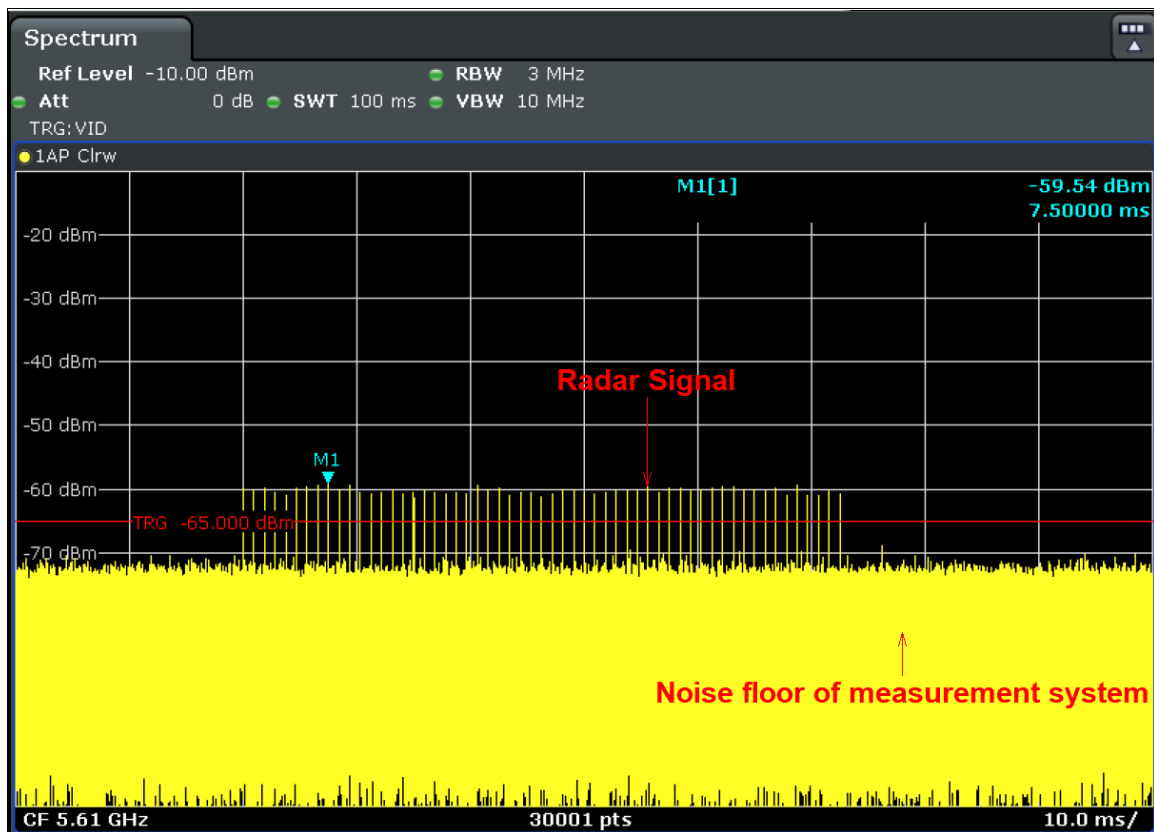


Radar Signal 1 (Test A)

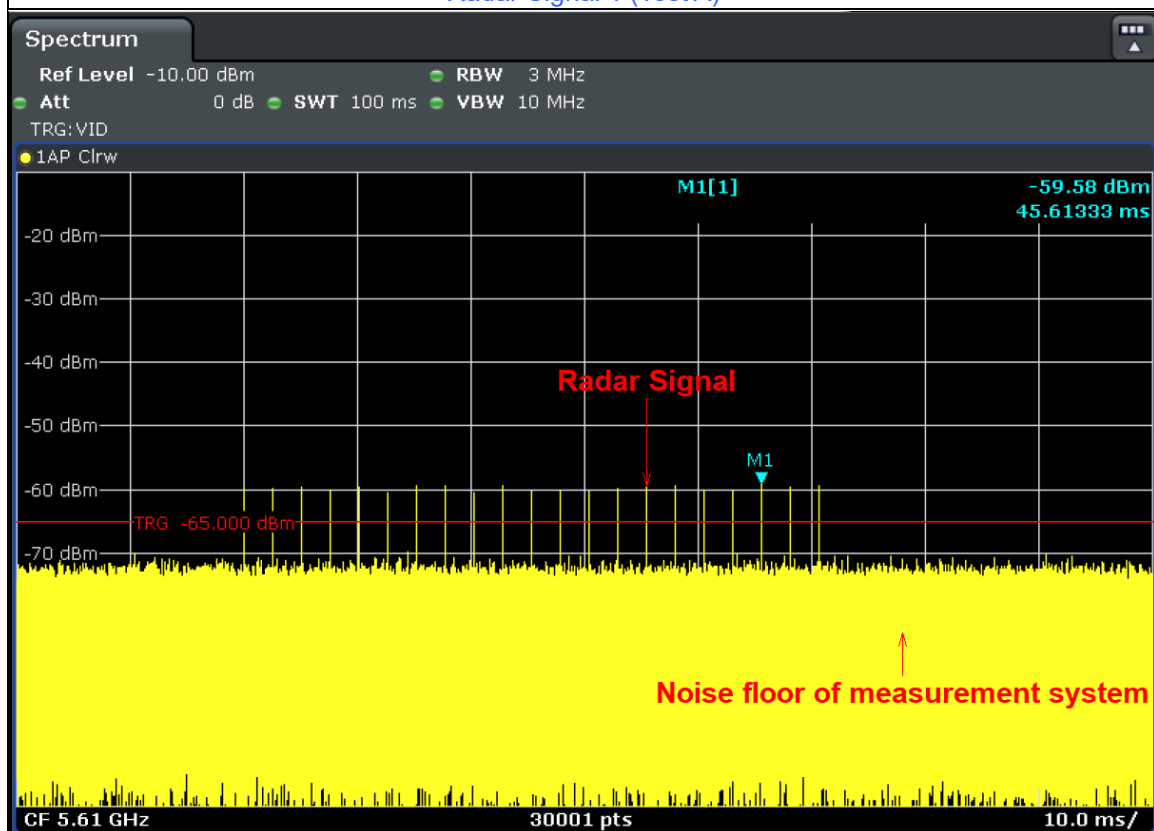


Radar Signal 1 (Test B)

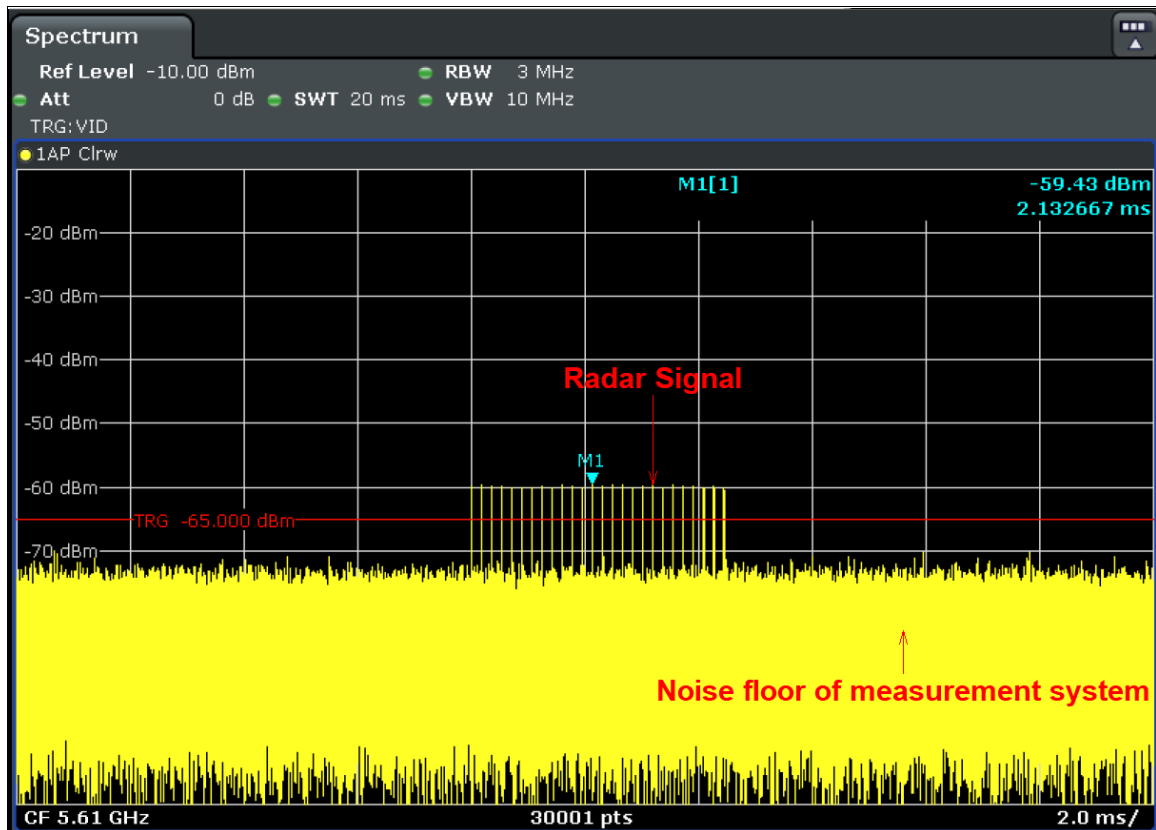


Radar Signal 2

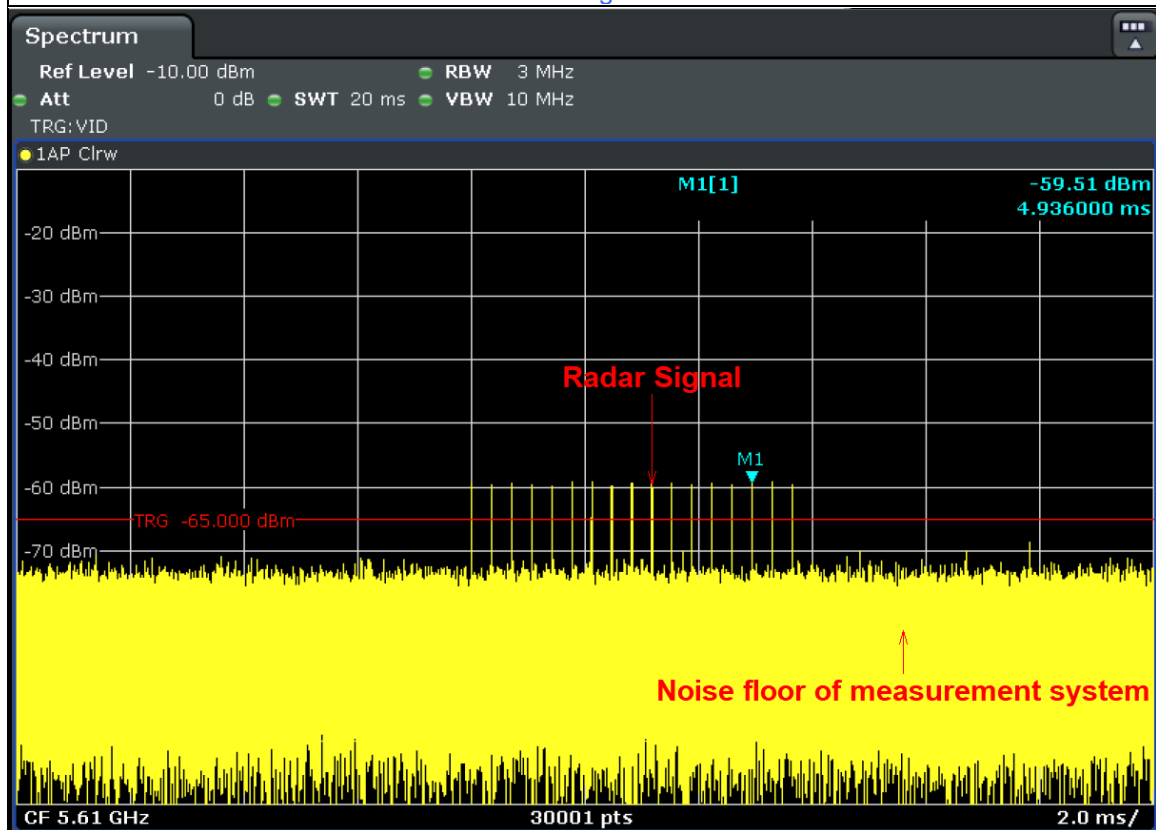


Radar Signal 3

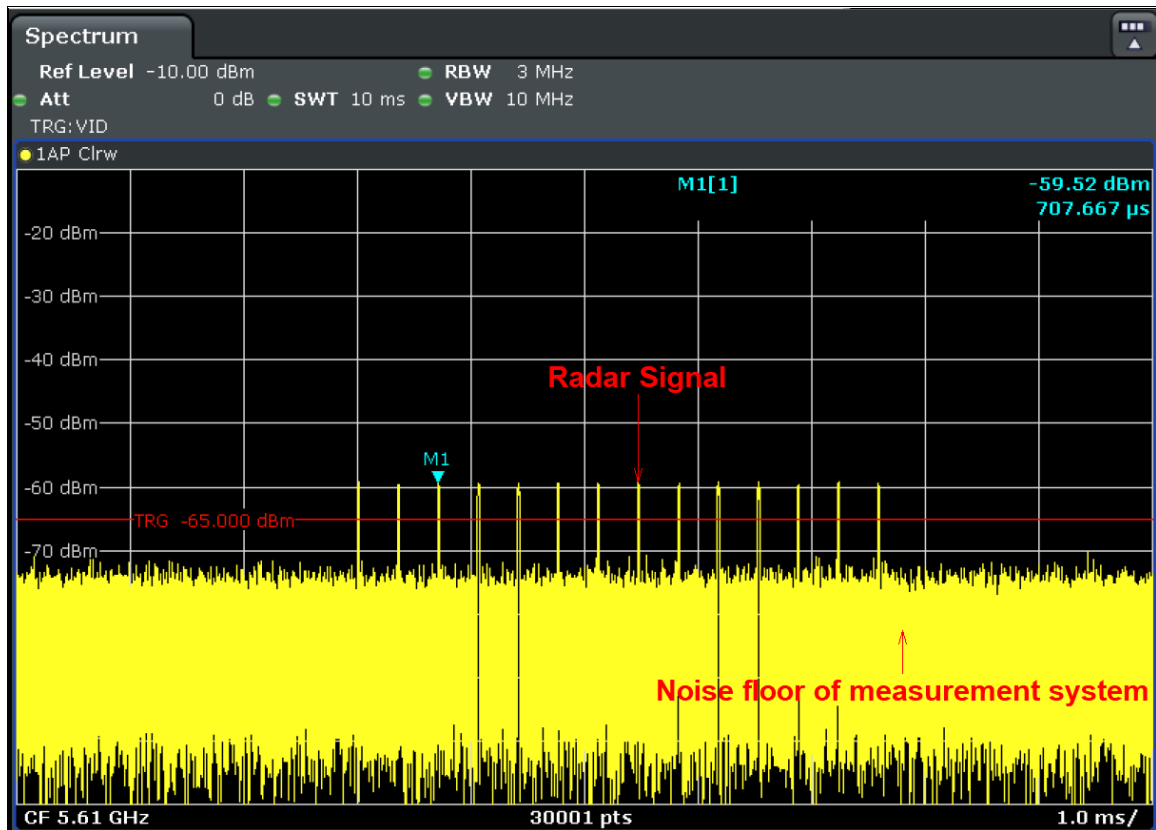


Radar Signal 4

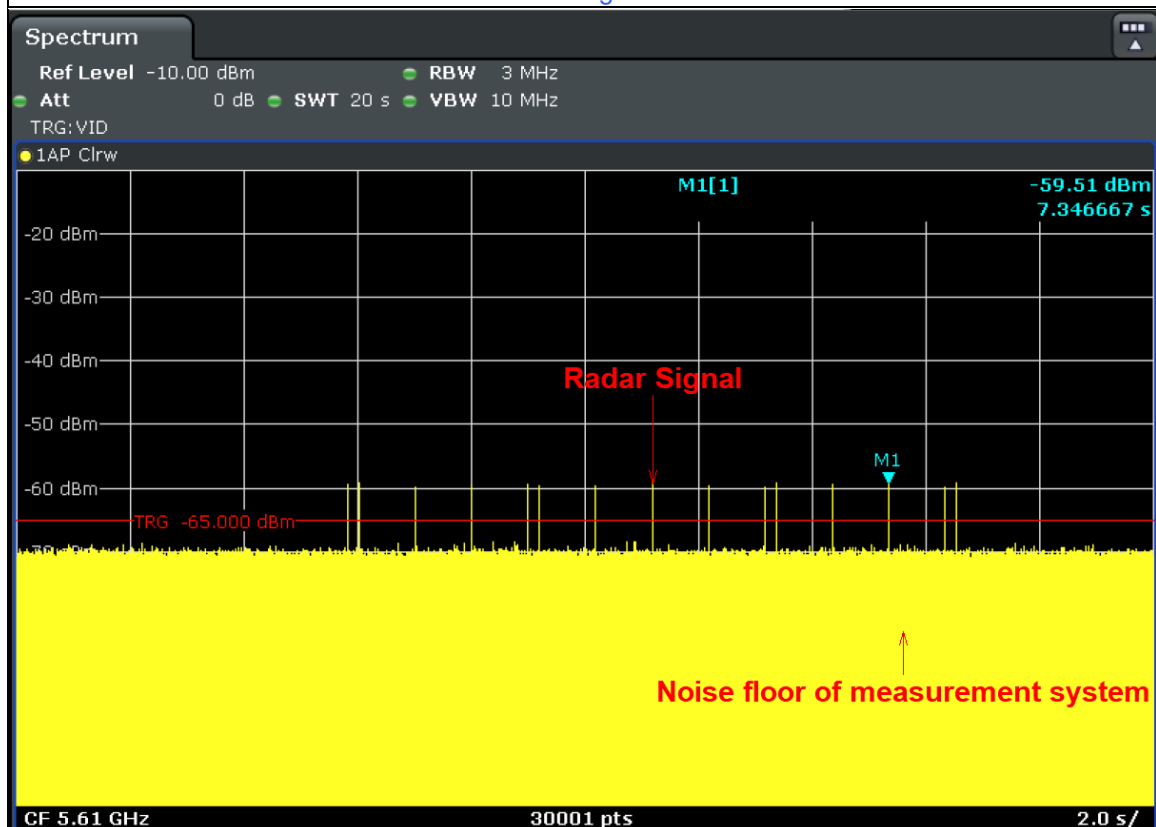

Radar Signal 5

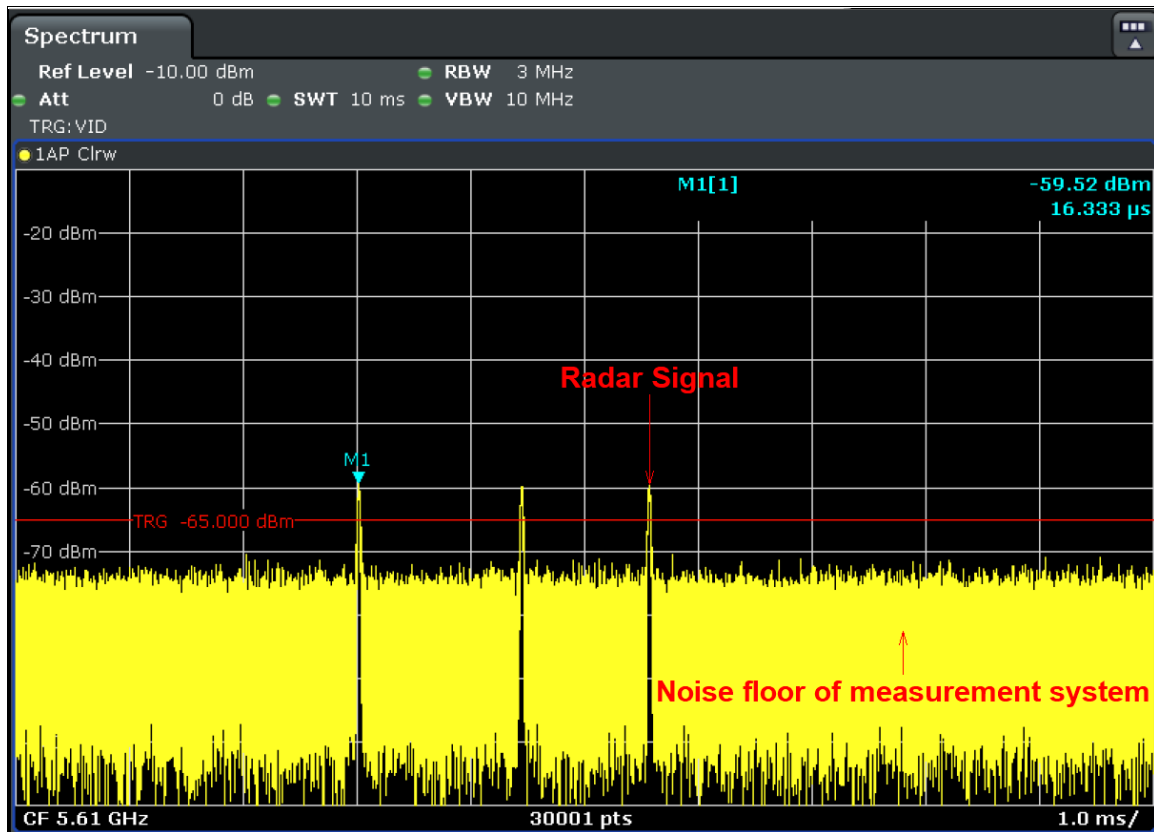

Radar Signal 5 (Single Burst)

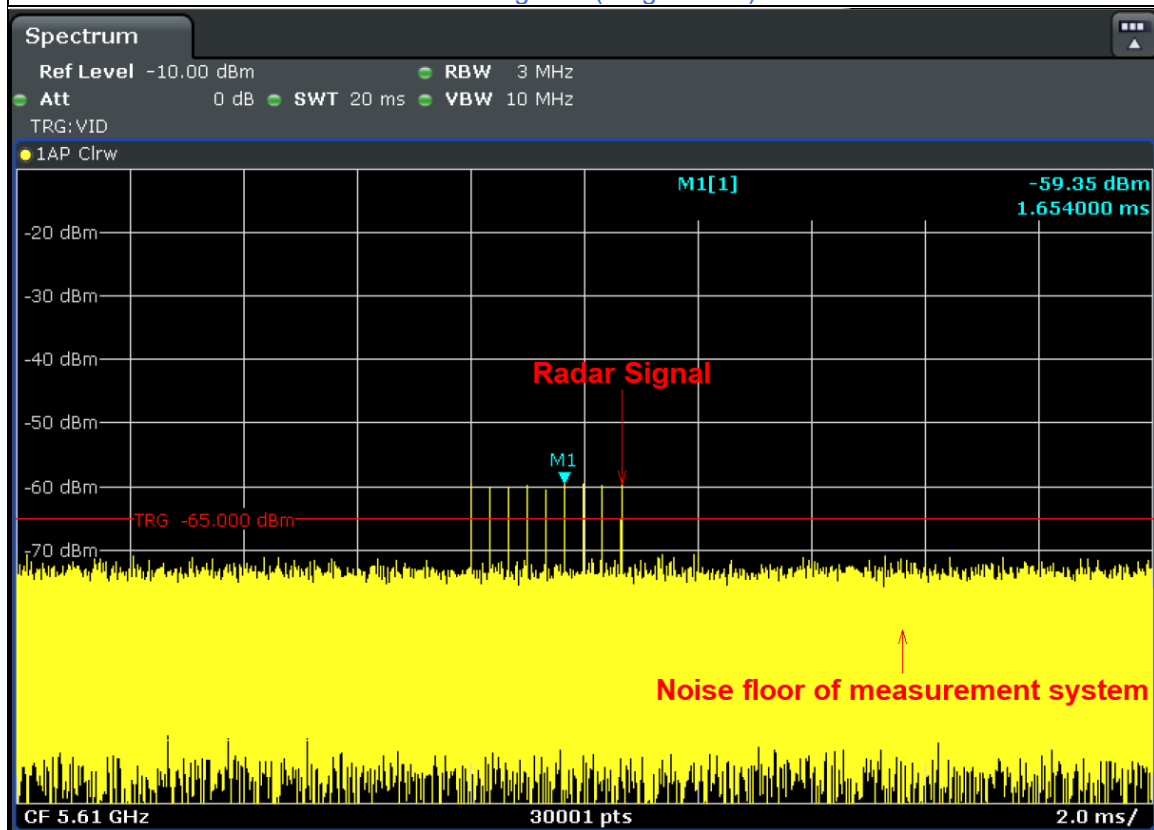

Radar Signal 6

6.2.4 DFS Companion Device

Companion Device Information				
Product	Brand	Model No.	FCC ID	Software/Firmware Version
LANCOM LX-7200 2x2x2 Indoor 11be AP	LANCOM	LANCOM LX- 7200	U4Y-LX-7200	V10


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0													
EUT Frequency: 5500 MHz													
Detection bandwidth limit (100% of EUT 99% Power bandwidth): 19.12 MHz													
Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

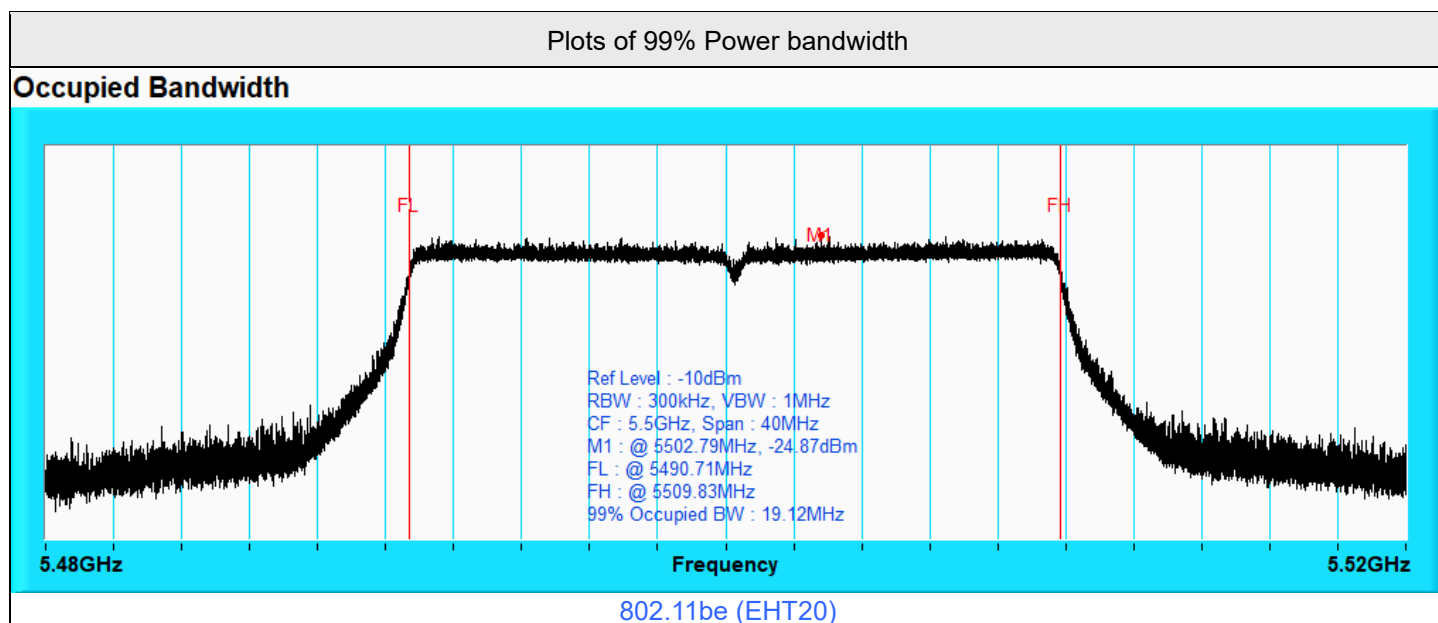

802.11be (EHT40)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5510 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.4 MHz

Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

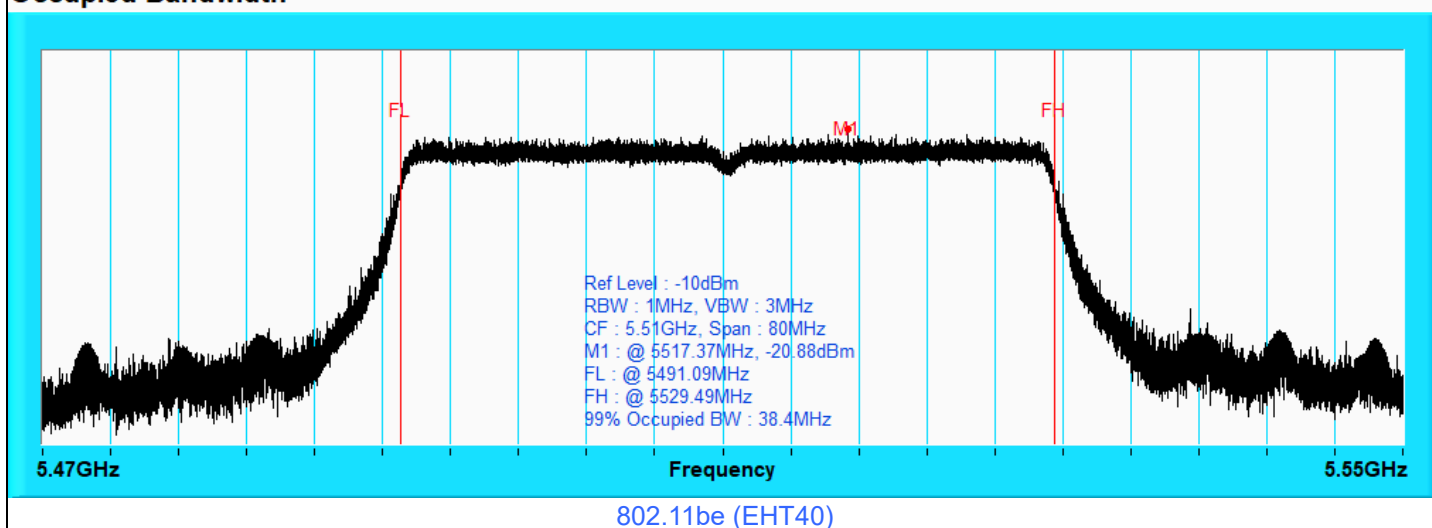

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 78.12 MHz

Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	90%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

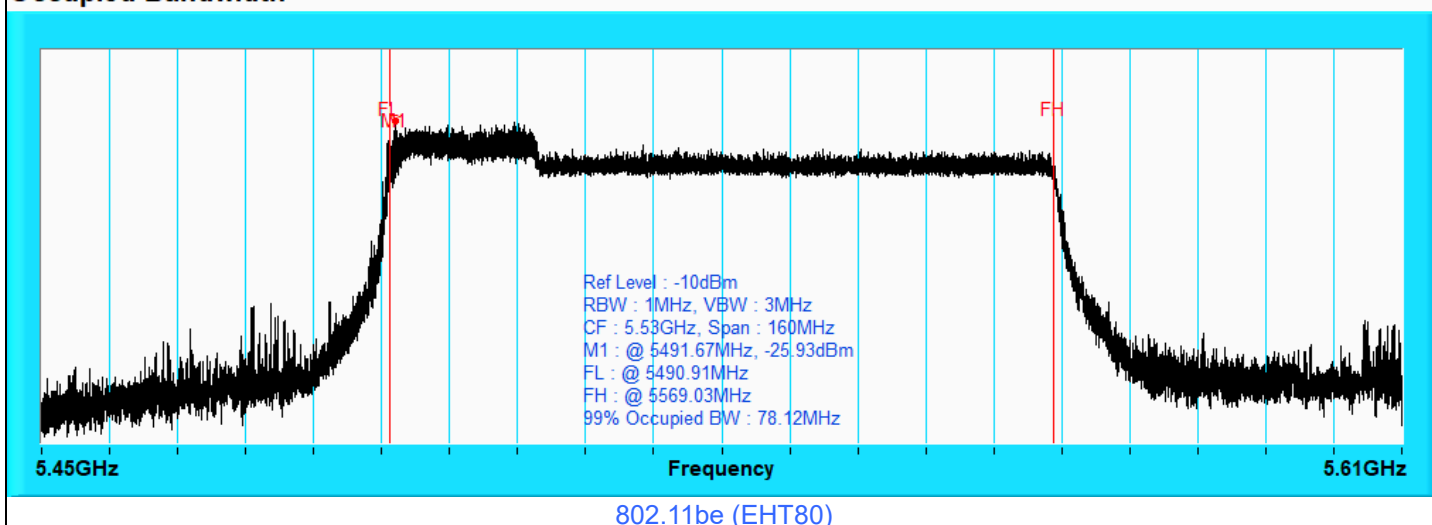

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 157.01 MHz


Detection bandwidth (5329 MHz (FH) – 5250 MHz (FL)): 79 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5329 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

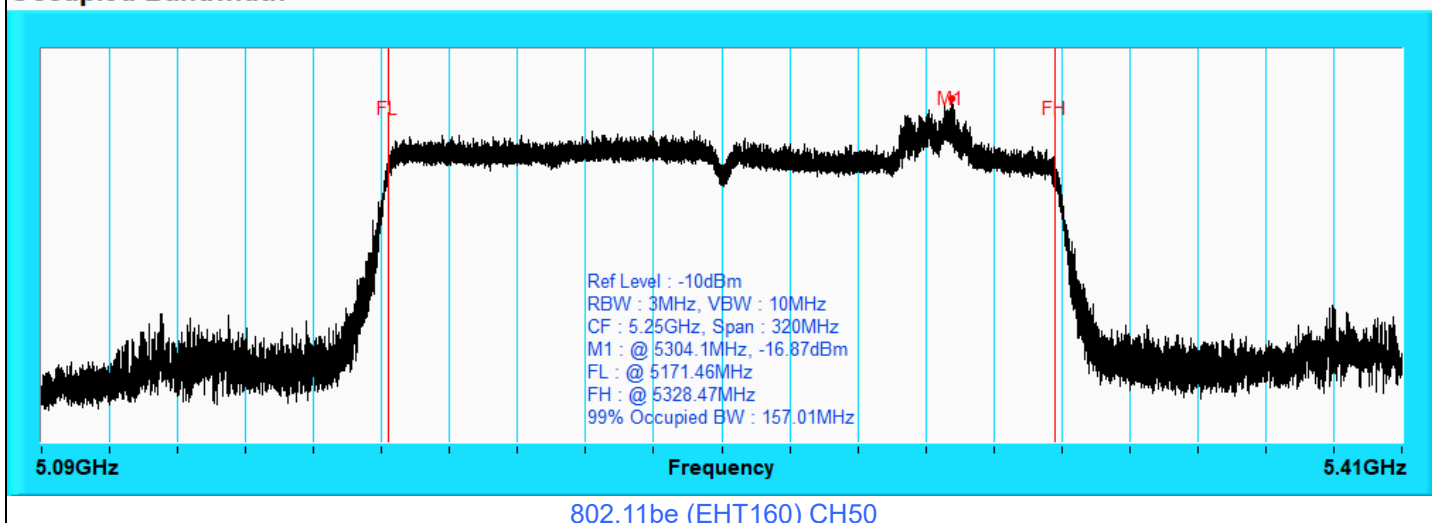

802.11be (EHT160) CH114

Detection Bandwidth Test

Radar Type 0


EUT Frequency: 5570 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 157.9 MHz

Detection bandwidth (5649 MHz (FH) – 5491 MHz (FL)): 158 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5649 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

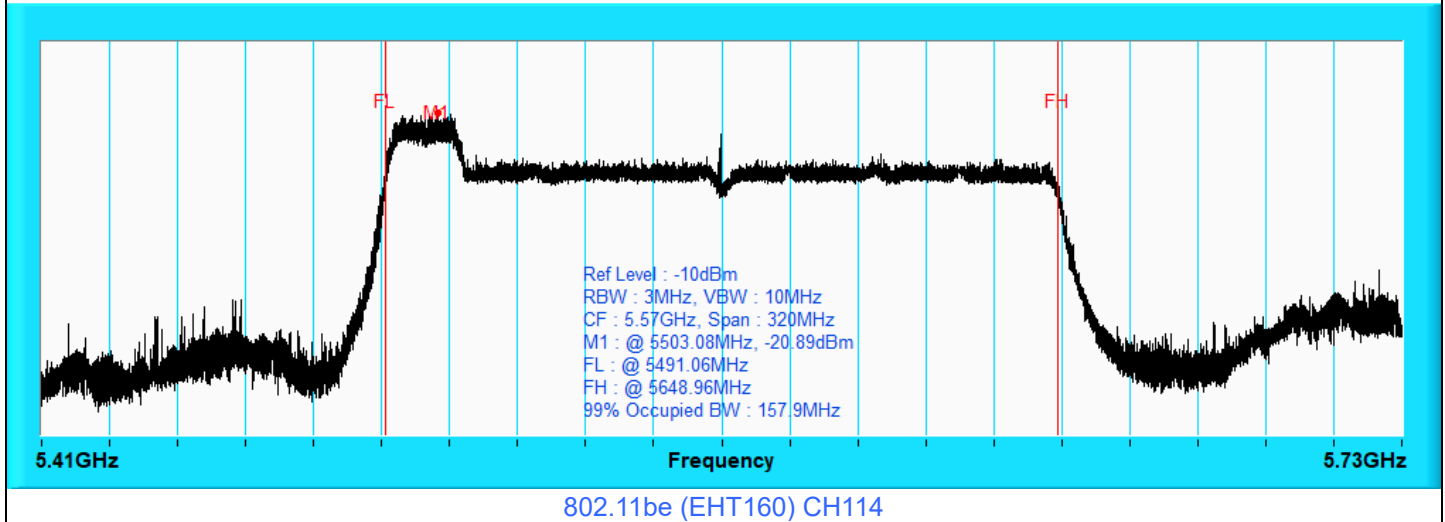Occupied Bandwidth

802.11be (EHT240)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5610 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 237.92 MHz

Detection bandwidth (5725 MHz (FH) – 5491 MHz (FL)): 234 MHz


(240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

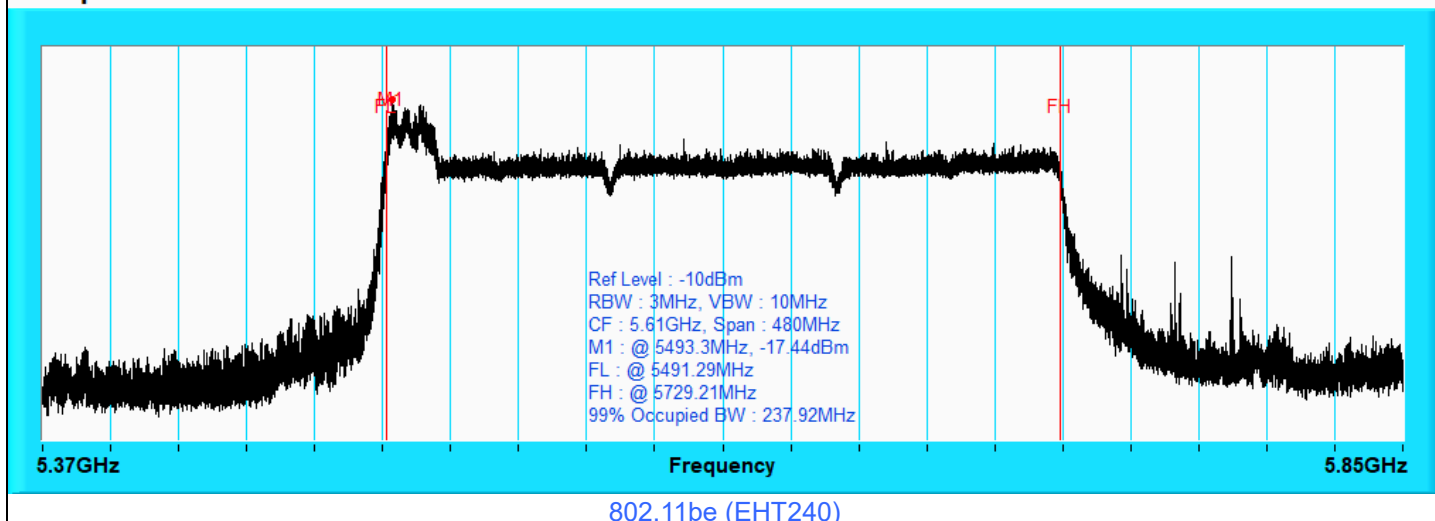


7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final “Channel Availability Check” test.

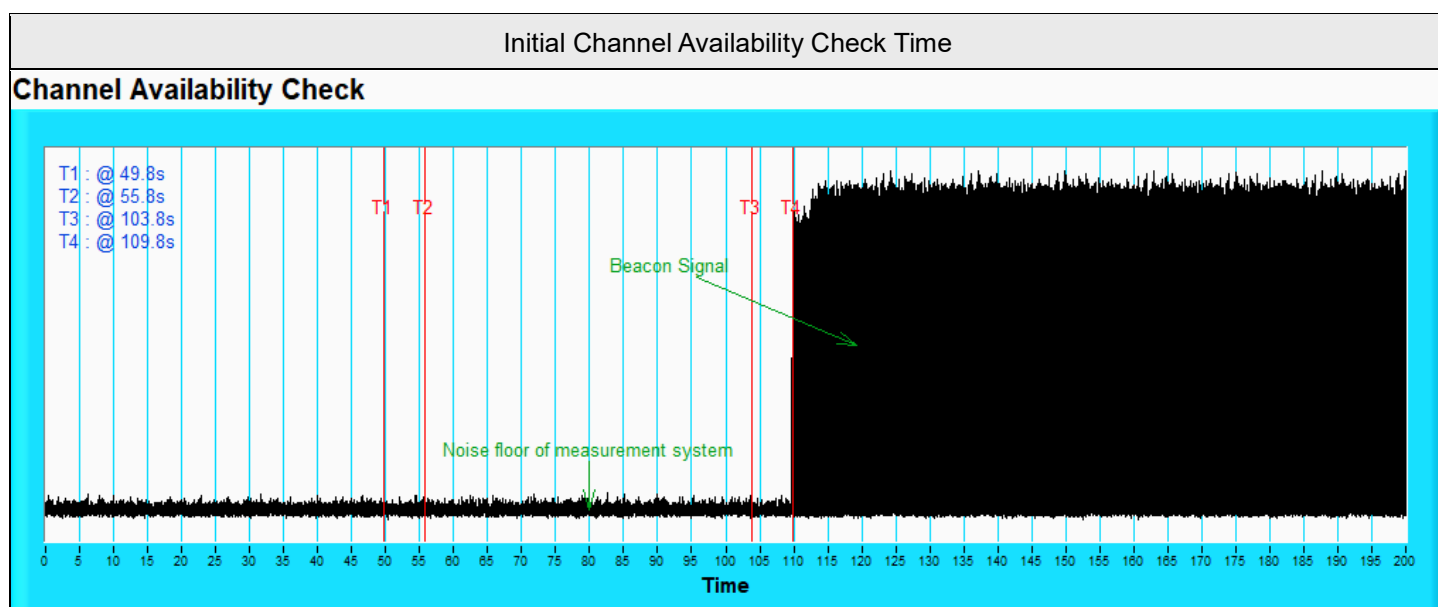


Note: T1 denotes the end of power-up time period is 49.8th second. T4 denotes the end of Channel Availability Check time is 109.8th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

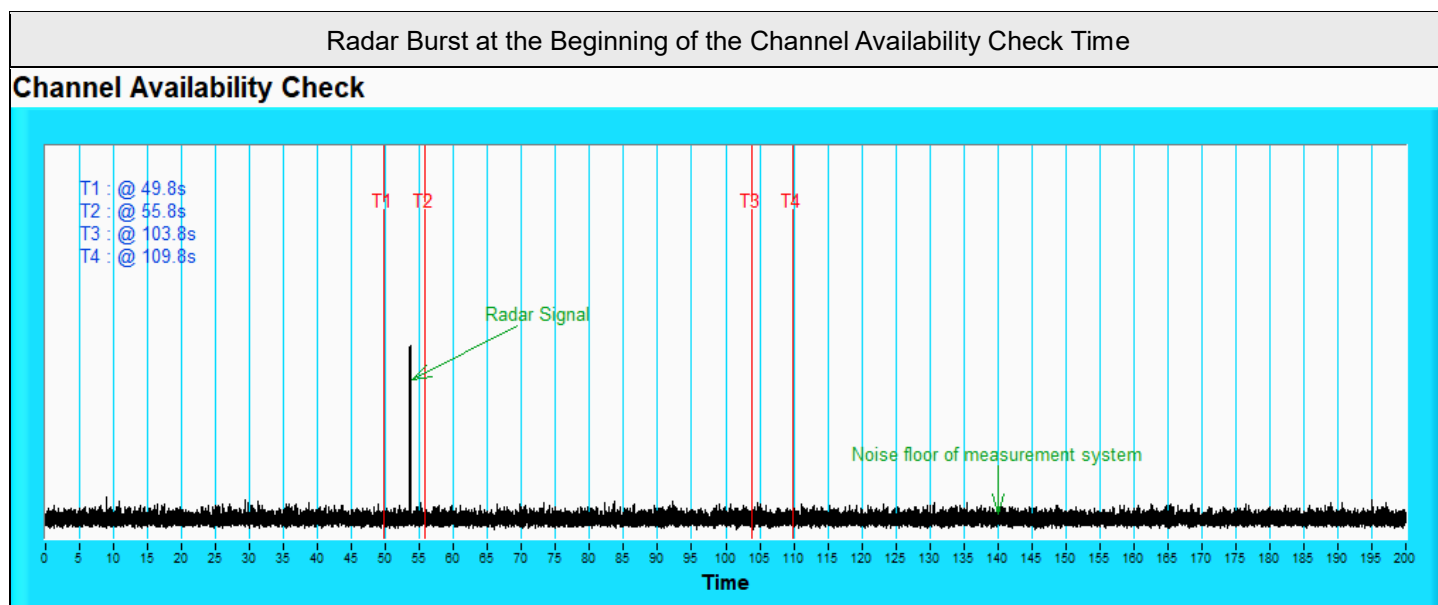

Note: T1 denotes the end of power-up time period is 49.8th second. T2 denotes 55.8th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 109.8th second.

Radar Burst at the End of the Channel Availability Check Time


Channel Availability Check

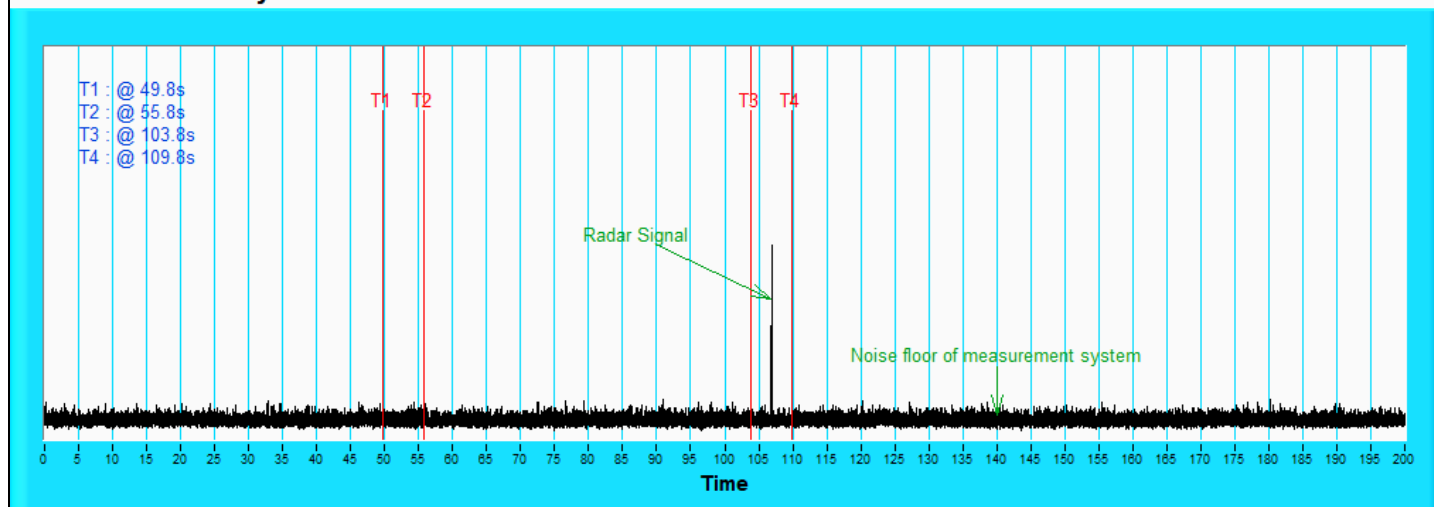


Note: T1 denotes the end of power-up time period is 49.8th second. T3 denotes 103.8th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 109.8th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

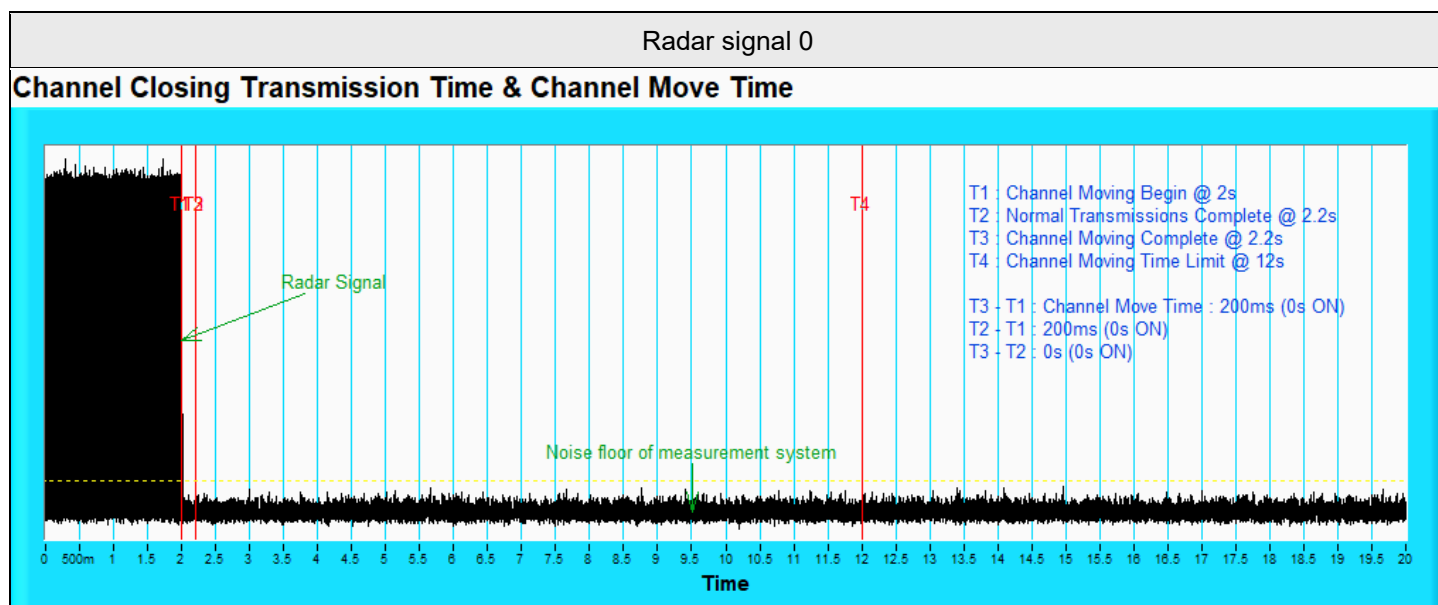


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

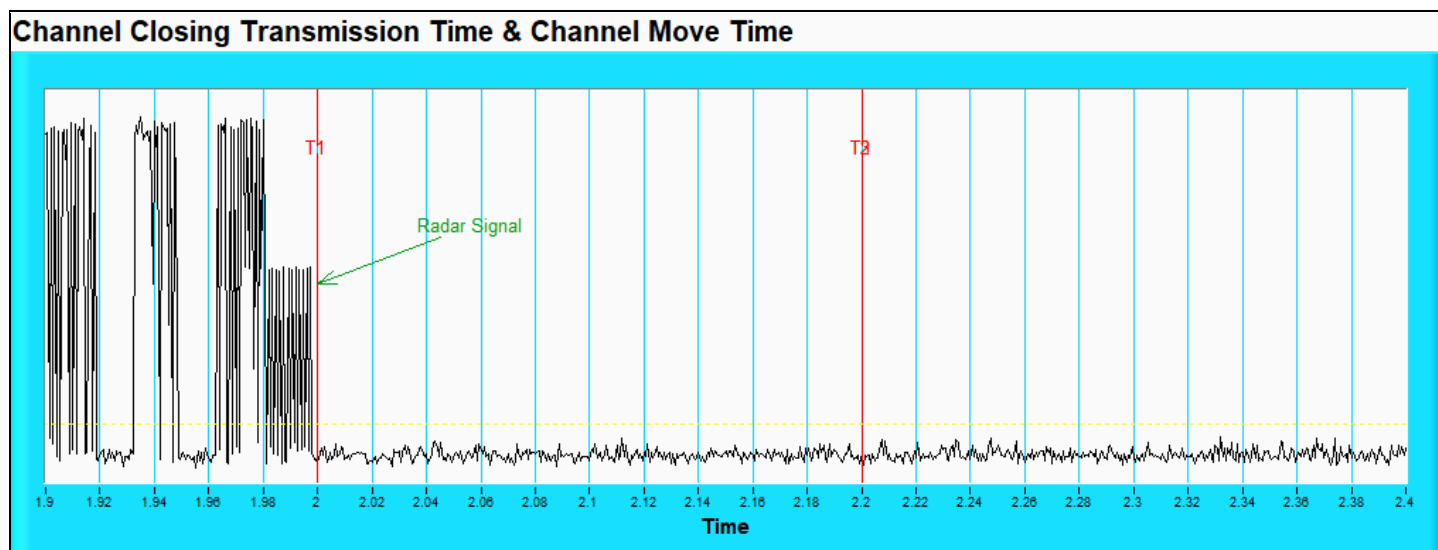

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

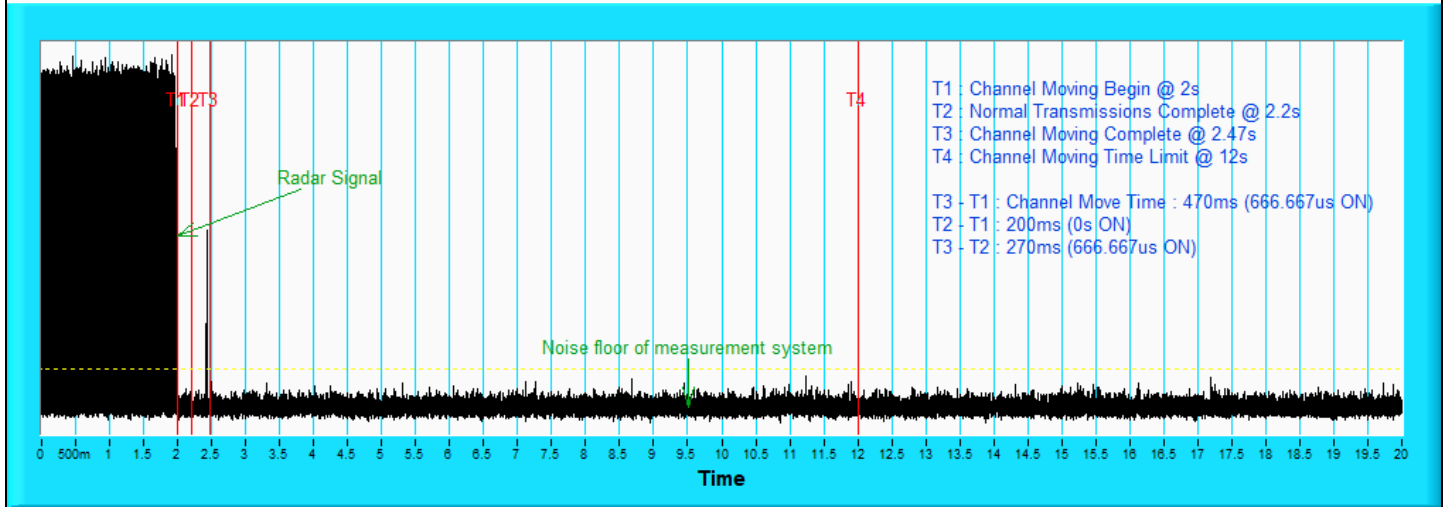

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

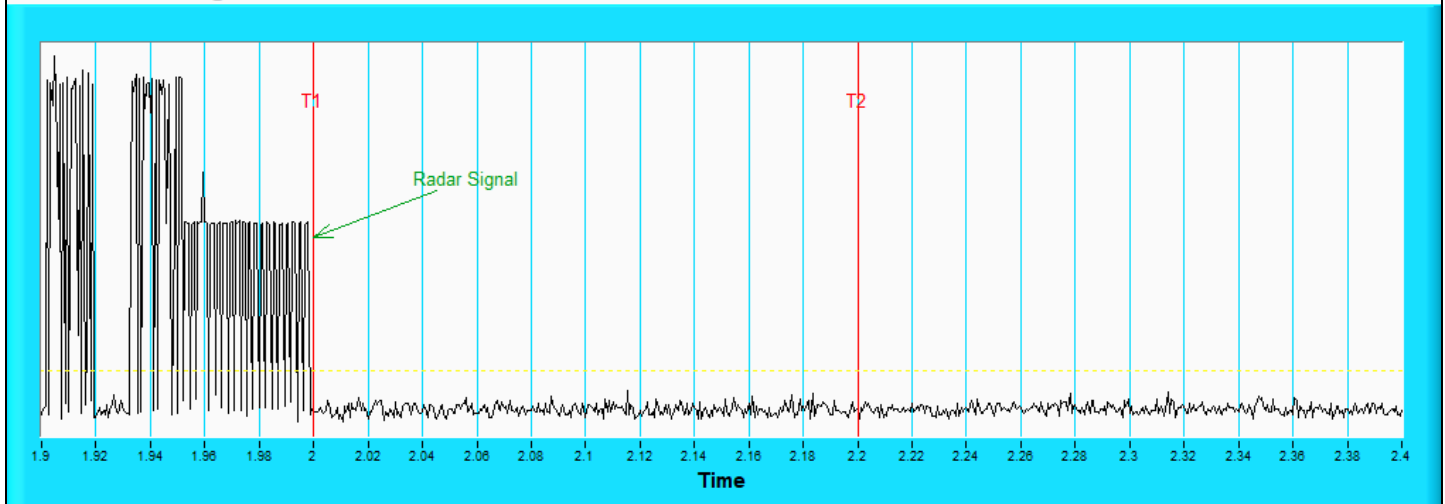

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

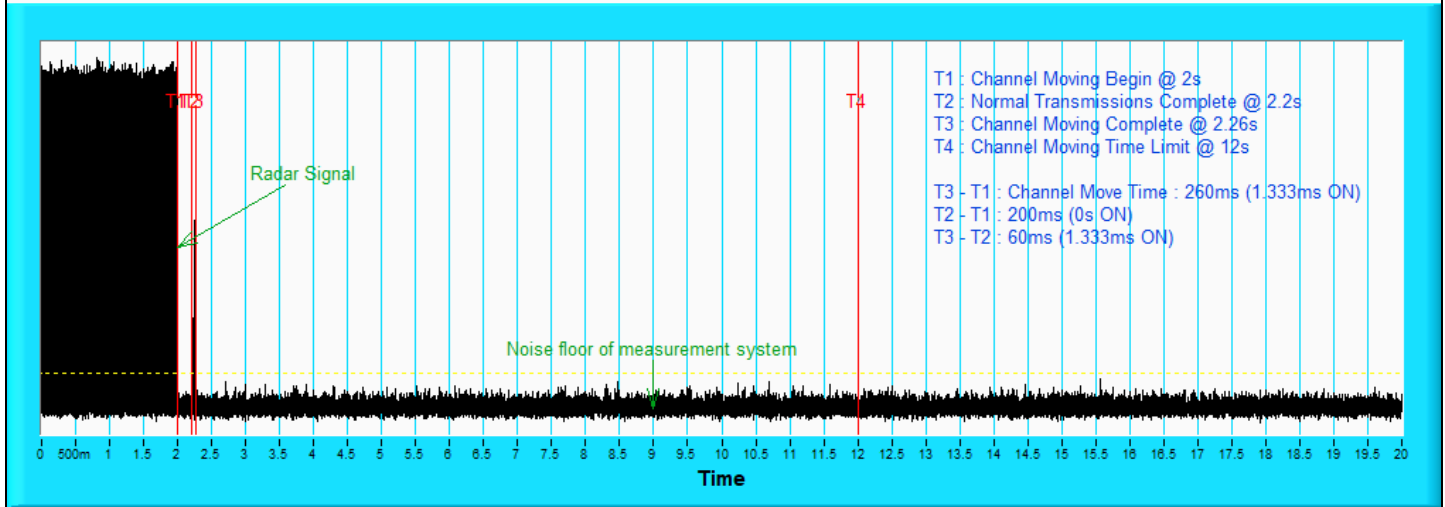

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

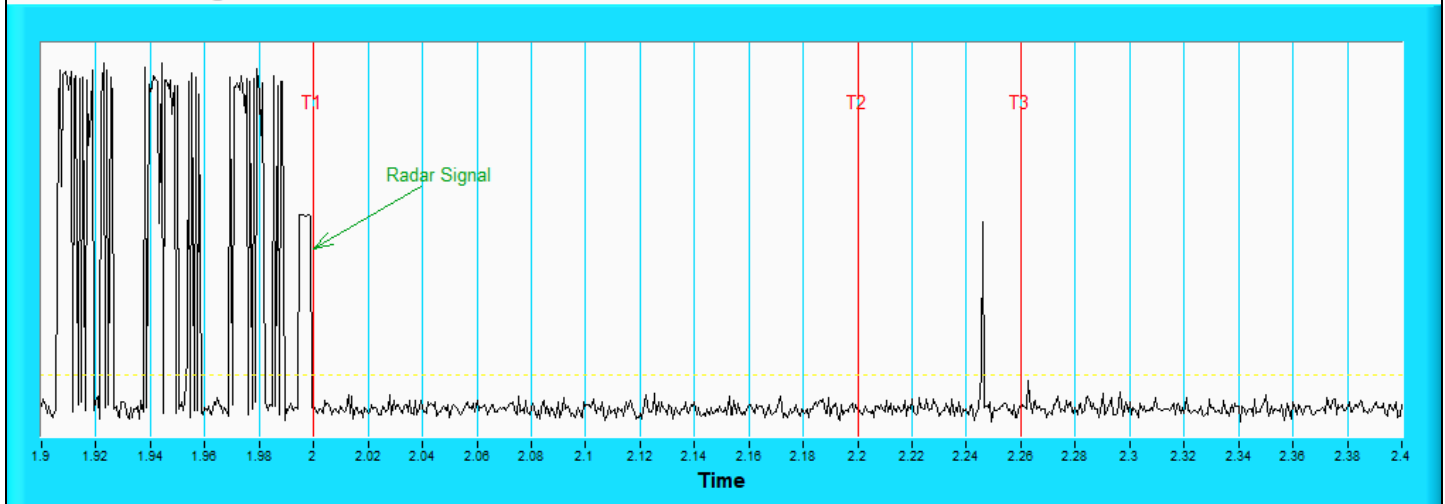

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

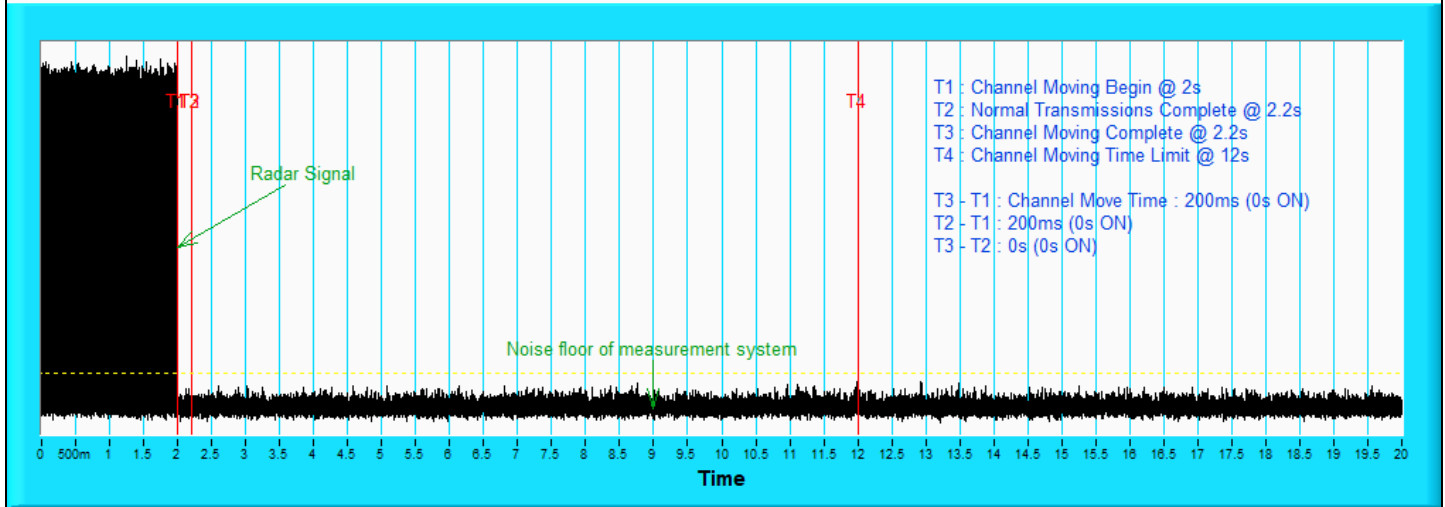

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

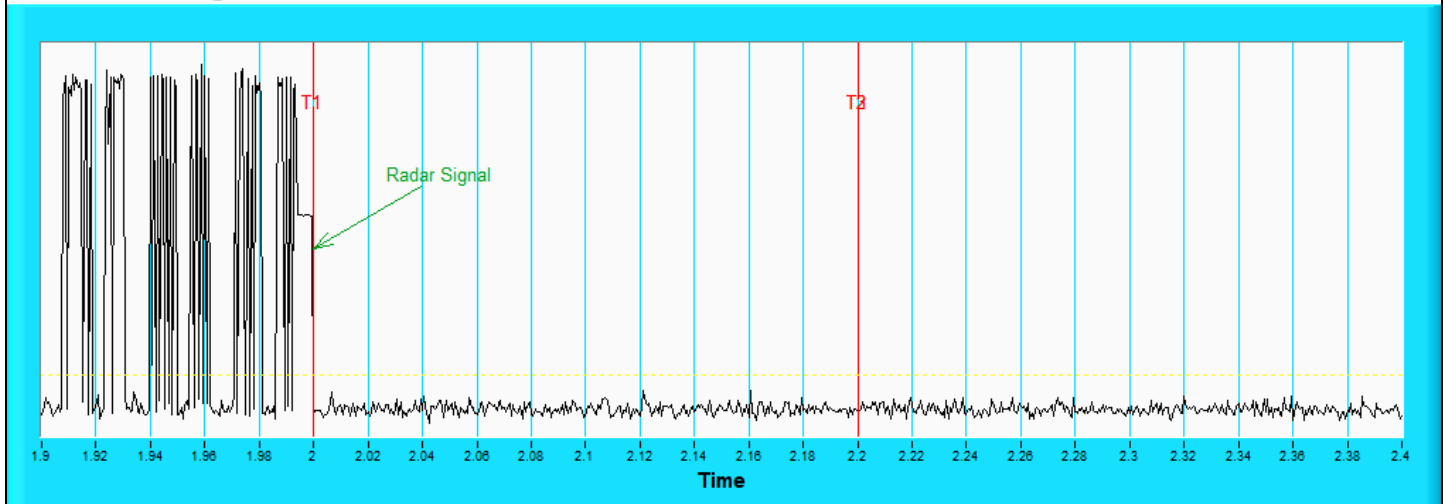

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

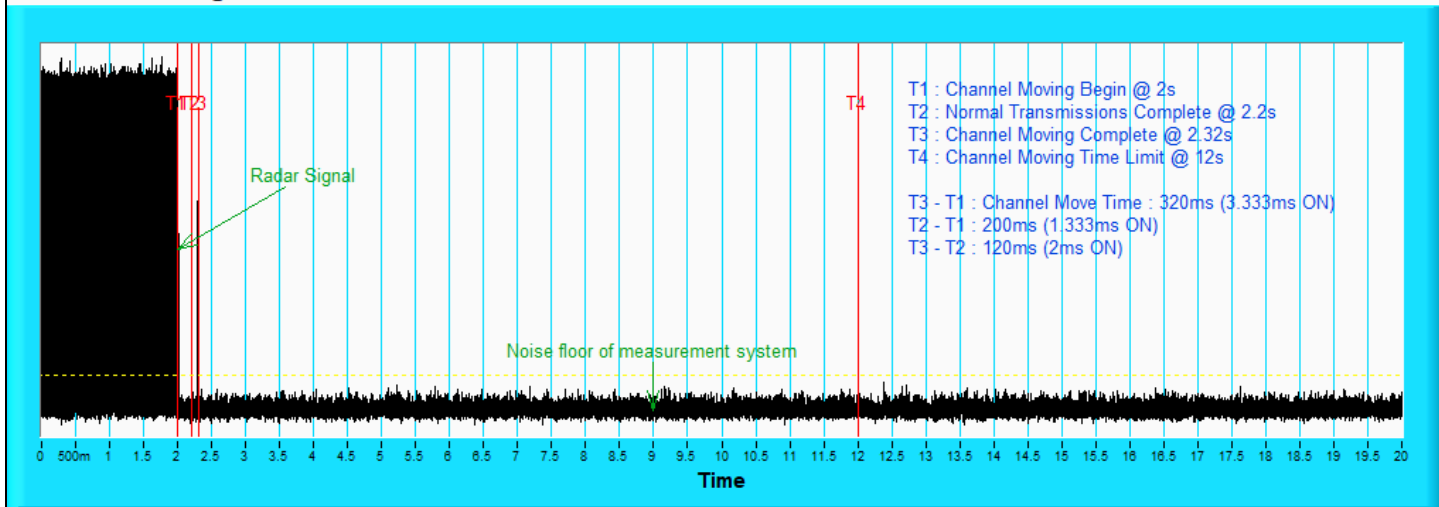

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

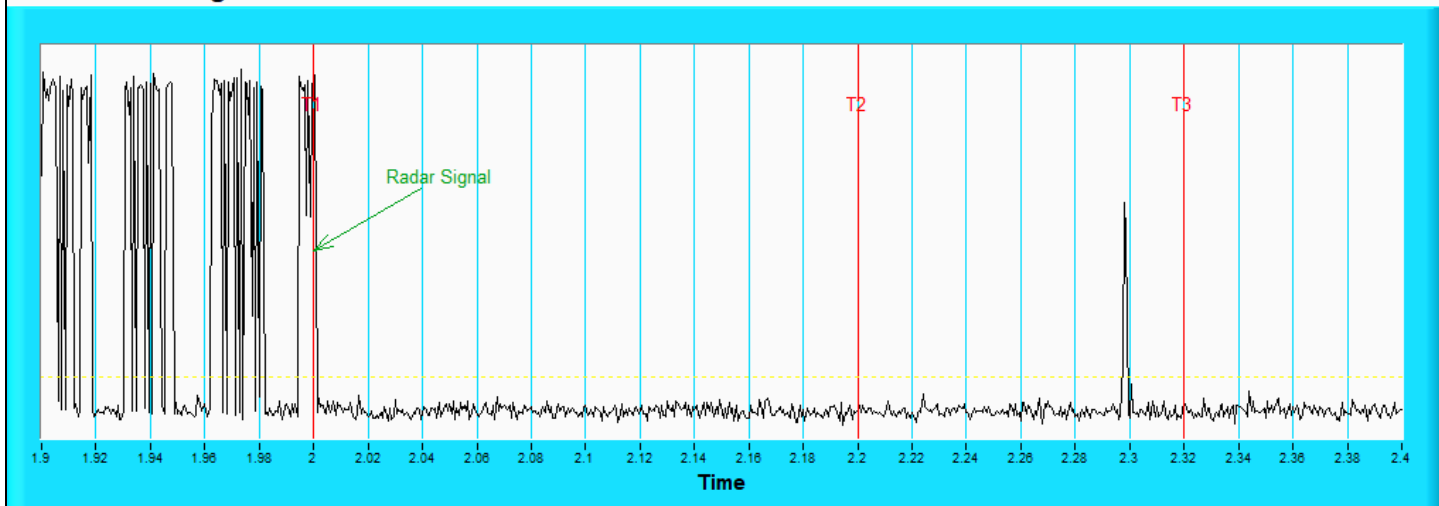


Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

For Associated Test


1) Test results demonstrating an associated client link is established with the master on a test frequency.

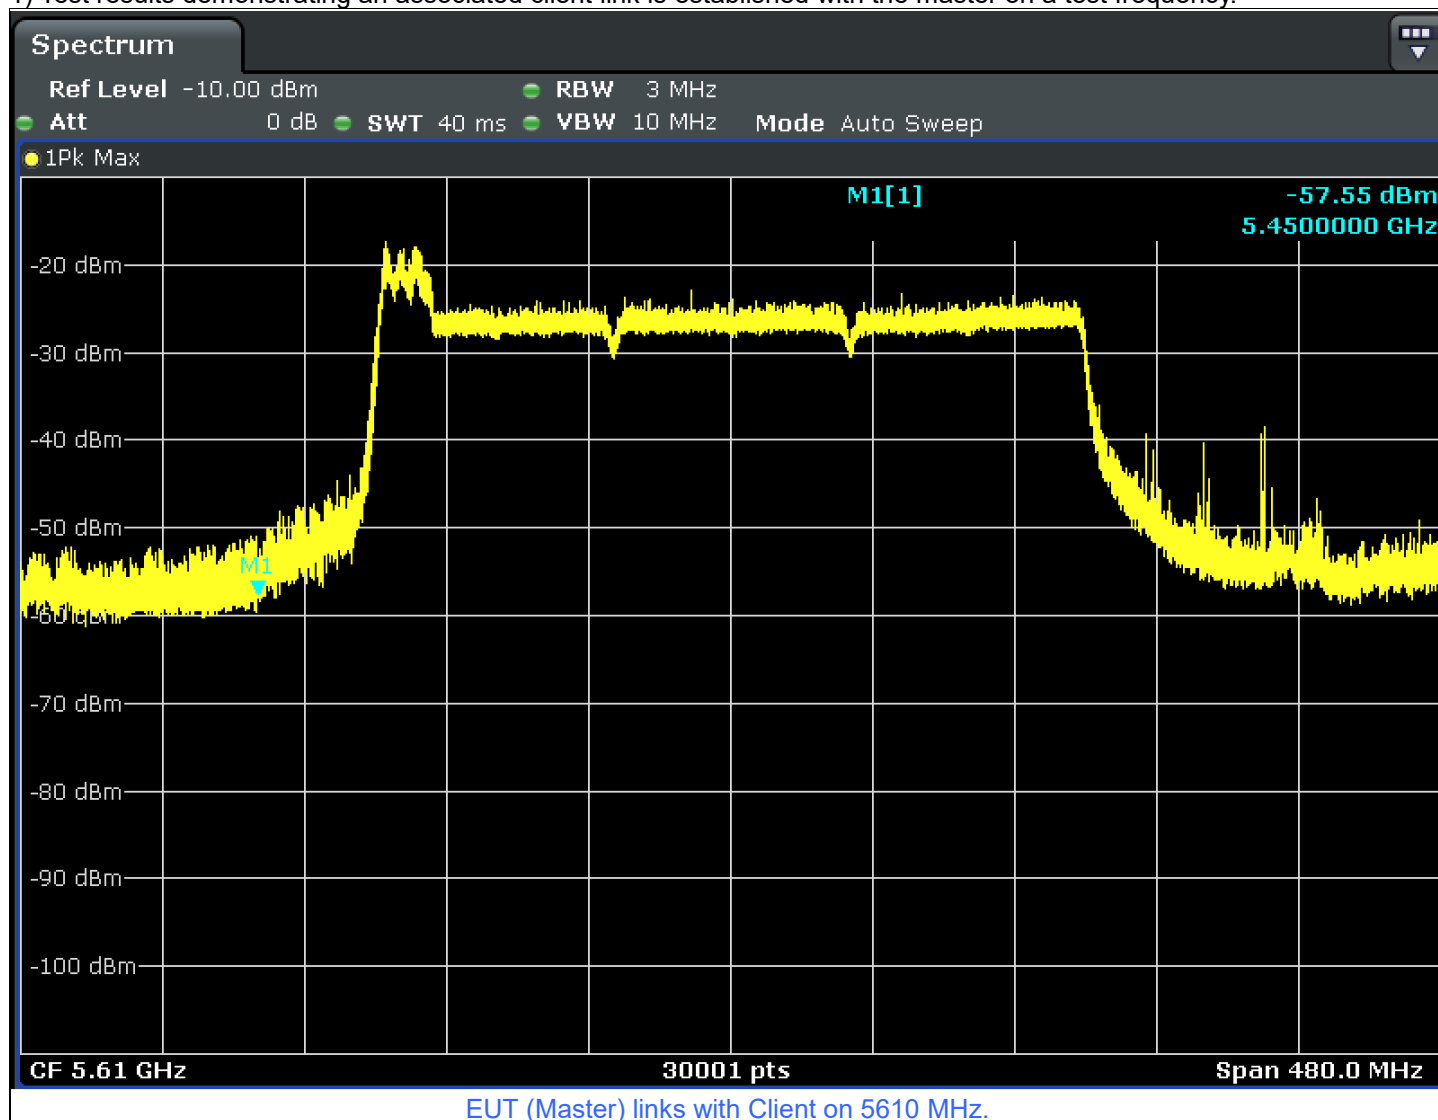


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

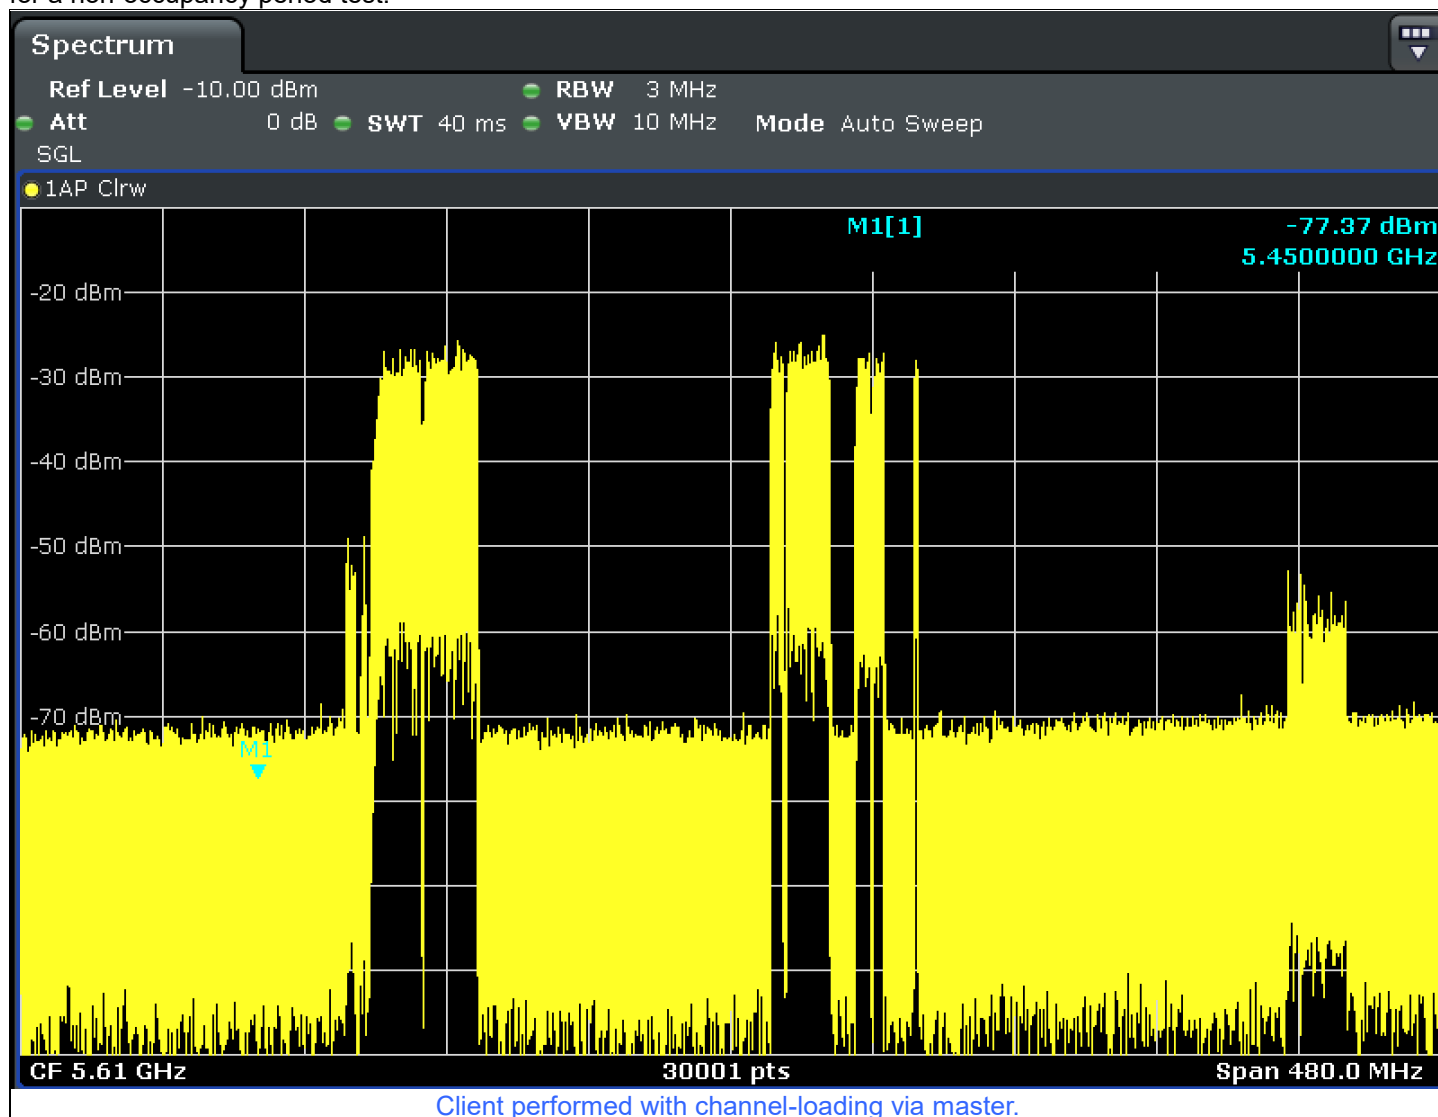

3). The device transmits one type of radar as specified in the DFS Order.

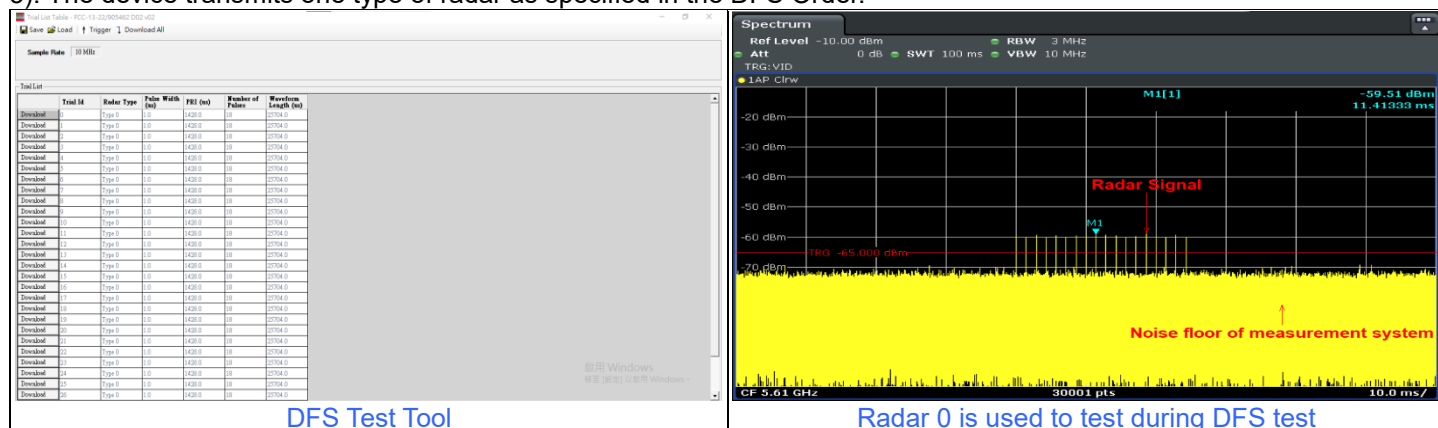

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

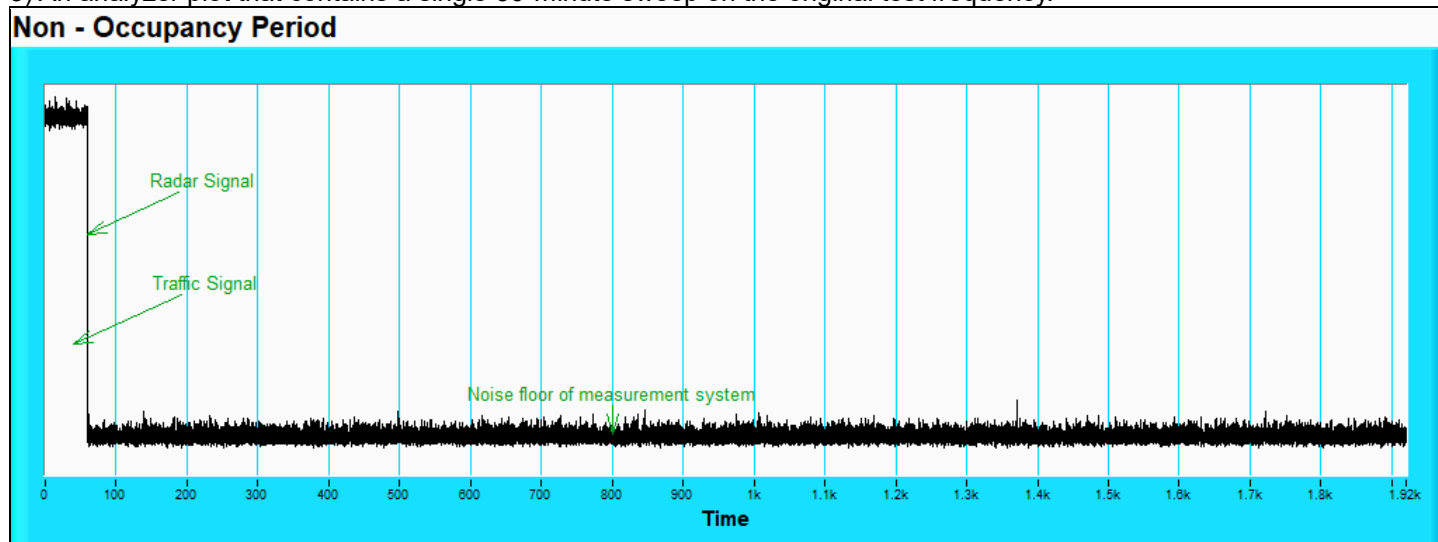

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240)		
1	30	100.0%	96.7%	96.7%	96.7%	96.7%	100.0%	60%	Pass
2	30	100.0%	93.3%	96.7%	100.0%	100.0%	100.0%	60%	Pass
3	30	83.3%	93.3%	96.7%	96.7%	90.0%	90.0%	60%	Pass
4	30	80.0%	76.7%	80.0%	93.3%	86.7%	90.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		90.8%	90.0%	92.5%	96.7%	93.4%	95.0%	80%	Pass
5	30	100.0%	93.3%	100.0%	96.7%	93.3%	80.0%	80%	Pass
6	30	93.3%	86.7%	96.7%	90.0%	90.0%	93.3%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5494	5	1672.2	89	598	Yes
2	5505	23	326.2	18	3066	Yes
3	5500	15	1253.1	67	798	Yes
4	5510	17	1193.3	63	838	Yes
5	5506	9	1474.9	78	678	Yes
6	5501	7	1567.4	83	638	Yes
7	5492	4	1730.1	92	578	Yes
8	5491	16	1222.5	65	818	Yes
9	5498	8	1519.8	81	658	Yes
10	5503	22	1066.1	57	938	Yes
11	5508	6	1618.1	86	618	Yes
12	5504	18	1165.5	62	858	Yes
13	5502	14	1285.3	68	778	Yes
14	5499	10	1432.7	76	698	Yes
15	5496	2	1858.7	99	538	Yes
16	5495	-	416.1	22	2403	Yes
17	5507	-	492.9	27	2029	Yes
18	5509	-	368.2	20	2716	Yes
19	5490	-	386.2	21	2589	Yes
20	5493	-	394.5	21	2535	Yes
21	5497	-	360.1	20	2777	Yes
22	5494	-	494.1	27	2024	Yes
23	5507	-	897.7	48	1114	Yes
24	5500	-	962.5	51	1039	Yes
25	5491	-	380.2	21	2630	Yes
26	5510	-	452.7	24	2209	Yes
27	5501	-	391.8	21	2552	Yes
28	5498	-	1083.4	58	923	Yes
29	5504	-	329.7	18	3033	Yes
30	5506	-	502	27	1992	Yes
						Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5493	24	2	224	Yes
2	5504	29	4.5	219	Yes
3	5506	26	3.2	167	Yes
4	5507	27	3.7	216	Yes
5	5492	23	1.1	179	Yes
6	5490	26	3.1	181	Yes
7	5496	27	3.7	188	Yes
8	5501	26	2.9	155	Yes
9	5491	29	4.8	214	Yes
10	5499	23	1.5	195	Yes
11	5500	29	4.9	201	Yes
12	5497	24	1.8	197	Yes
13	5498	23	1.5	158	Yes
14	5509	29	4.9	222	Yes
15	5494	28	4.2	185	Yes
16	5503	23	1	173	Yes
17	5505	29	4.8	190	Yes
18	5495	29	4.5	200	Yes
19	5502	25	2.3	165	Yes
20	5510	27	3.4	177	Yes
21	5508	23	1	183	Yes
22	5493	28	4	156	Yes
23	5504	23	1.1	213	Yes
24	5496	25	2.7	229	Yes
25	5491	23	1.2	206	Yes
26	5509	29	4.9	203	Yes
27	5490	26	3.3	163	Yes
28	5498	26	3.2	182	Yes
29	5495	24	1.7	166	Yes
30	5507	25	2.6	210	Yes
					Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	16	7	239	Yes
2	5498	18	9.5	335	No
3	5506	17	8.2	411	Yes
4	5493	18	8.7	224	Yes
5	5507	16	6.1	428	No
6	5492	17	8.1	332	Yes
7	5494	17	8.7	491	Yes
8	5496	17	7.9	348	No
9	5502	18	9.8	206	Yes
10	5495	16	6.5	204	Yes
11	5510	18	9.9	438	Yes
12	5501	16	6.8	484	Yes
13	5503	16	6.5	344	Yes
14	5491	18	9.9	465	Yes
15	5505	18	9.2	444	Yes
16	5497	16	6	357	Yes
17	5500	18	9.8	423	Yes
18	5509	18	9.5	225	Yes
19	5508	16	7.3	217	No
20	5504	17	8.4	242	Yes
21	5499	16	6	483	Yes
22	5503	18	9	470	Yes
23	5498	16	6.1	308	No
24	5510	17	7.7	498	Yes
25	5497	16	6.2	477	Yes
26	5508	18	9.9	375	Yes
27	5494	17	8.3	285	Yes
28	5506	17	8.2	433	Yes
29	5502	16	6.7	490	Yes
30	5501	17	7.6	202	Yes
					Detection Rate: 83.3%

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	14	16	355	Yes
2	5491	12	11.3	487	No
3	5492	13	13.5	344	No
4	5505	16	19.4	288	Yes
5	5504	15	17.5	230	Yes
6	5508	14	15.3	432	Yes
7	5497	14	15.9	207	Yes
8	5503	13	14.3	443	Yes
9	5507	14	15.8	439	Yes
10	5502	12	11.5	223	Yes
11	5506	15	17.4	208	Yes
12	5501	16	19	463	Yes
13	5500	14	16	441	No
14	5498	13	13.8	323	Yes
15	5494	16	18.9	297	Yes
16	5510	14	15.5	412	Yes
17	5495	16	19.9	324	Yes
18	5493	13	14.1	271	Yes
19	5496	14	15.2	349	Yes
20	5509	13	13.8	409	Yes
21	5499	15	17.1	373	No
22	5495	13	13.8	254	No
23	5502	16	19.8	274	Yes
24	5498	14	15.3	278	Yes
25	5506	13	14.5	317	Yes
26	5504	12	11.3	260	Yes
27	5503	15	17.3	211	Yes
28	5497	16	19.2	272	No
29	5500	13	14.2	264	Yes
30	5508	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5500	LP_SIGNAL_01	Yes
2	18	5500	LP_SIGNAL_02	Yes
3	13	5500	LP_SIGNAL_03	Yes
4	15	5500	LP_SIGNAL_04	Yes
5	5	5500	LP_SIGNAL_05	Yes
6	13	5500	LP_SIGNAL_06	Yes
7	15	5500	LP_SIGNAL_07	Yes
8	12	5500	LP_SIGNAL_08	Yes
9	20	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	Yes
20	14	5495.6	LP_SIGNAL_20	Yes
21	5	5508	LP_SIGNAL_21	Yes
22	16	5503.6	LP_SIGNAL_22	Yes
23	5	5508	LP_SIGNAL_23	Yes
24	11	5505.6	LP_SIGNAL_24	Yes
25	5	5508	LP_SIGNAL_25	Yes
26	20	5502	LP_SIGNAL_26	Yes
27	14	5504.4	LP_SIGNAL_27	Yes
28	13	5504.8	LP_SIGNAL_28	Yes
29	7	5507.2	LP_SIGNAL_29	Yes
30	11	5505.6	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	No
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	No
				Detection Rate: 93.3%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	5	1672.2	89	598	Yes
2	5491	23	326.2	18	3066	Yes
3	5520	15	1253.1	67	798	Yes
4	5499	17	1193.3	63	838	No
5	5493	9	1474.9	78	678	Yes
6	5521	7	1567.4	83	638	Yes
7	5528	4	1730.1	92	578	Yes
8	5508	16	1222.5	65	818	Yes
9	5515	8	1519.8	81	658	Yes
10	5500	22	1066.1	57	938	Yes
11	5524	6	1618.1	86	618	Yes
12	5517	18	1165.5	62	858	Yes
13	5518	14	1285.3	68	778	Yes
14	5525	10	1432.7	76	698	Yes
15	5492	2	1858.7	99	538	Yes
16	5519	-	416.1	22	2403	Yes
17	5502	-	492.9	27	2029	Yes
18	5495	-	368.2	20	2716	Yes
19	5516	-	386.2	21	2589	Yes
20	5514	-	394.5	21	2535	Yes
21	5513	-	360.1	20	2777	Yes
22	5529	-	494.1	27	2024	Yes
23	5523	-	897.7	48	1114	Yes
24	5501	-	962.5	51	1039	Yes
25	5511	-	380.2	21	2630	Yes
26	5497	-	452.7	24	2209	Yes
27	5527	-	391.8	21	2552	Yes
28	5504	-	1083.4	58	923	Yes
29	5512	-	329.7	18	3033	Yes
30	5509	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5525	24	2	224	Yes
2	5524	29	4.5	219	Yes
3	5497	26	3.2	167	Yes
4	5502	27	3.7	216	Yes
5	5494	23	1.1	179	Yes
6	5515	26	3.1	181	Yes
7	5530	27	3.7	188	No
8	5506	26	2.9	155	Yes
9	5498	29	4.8	214	Yes
10	5490	23	1.5	195	Yes
11	5511	29	4.9	201	Yes
12	5505	24	1.8	197	Yes
13	5503	23	1.5	158	Yes
14	5495	29	4.9	222	Yes
15	5526	28	4.2	185	Yes
16	5509	23	1	173	Yes
17	5500	29	4.8	190	Yes
18	5523	29	4.5	200	Yes
19	5508	25	2.3	165	Yes
20	5491	27	3.4	177	Yes
21	5519	23	1	183	Yes
22	5501	28	4	156	Yes
23	5518	23	1.1	213	Yes
24	5522	25	2.7	229	Yes
25	5516	23	1.2	206	No
26	5492	29	4.9	203	Yes
27	5528	26	3.3	163	Yes
28	5514	26	3.2	182	Yes
29	5527	24	1.7	166	Yes
30	5517	25	2.6	210	Yes
					Detection Rate: 93.3%

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5521	16	7	239	Yes
2	5524	18	9.5	335	Yes
3	5525	17	8.2	411	Yes
4	5514	18	8.7	224	Yes
5	5490	16	6.1	428	Yes
6	5495	17	8.1	332	Yes
7	5526	17	8.7	491	Yes
8	5499	17	7.9	348	Yes
9	5498	18	9.8	206	Yes
10	5509	16	6.5	204	Yes
11	5500	18	9.9	438	Yes
12	5529	16	6.8	484	Yes
13	5501	16	6.5	344	Yes
14	5504	18	9.9	465	Yes
15	5512	18	9.2	444	Yes
16	5497	16	6	357	Yes
17	5510	18	9.8	423	Yes
18	5507	18	9.5	225	Yes
19	5522	16	7.3	217	Yes
20	5518	17	8.4	242	No
21	5508	16	6	483	Yes
22	5530	18	9	470	Yes
23	5505	16	6.1	308	Yes
24	5491	17	7.7	498	Yes
25	5493	16	6.2	477	No
26	5515	18	9.9	375	Yes
27	5503	17	8.3	285	Yes
28	5511	17	8.2	433	Yes
29	5506	16	6.7	490	Yes
30	5496	17	7.6	202	Yes
Detection Rate: 93.3%					

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5526	14	16	355	Yes
2	5527	12	11.3	487	No
3	5504	13	13.5	344	Yes
4	5519	16	19.4	288	Yes
5	5518	15	17.5	230	Yes
6	5510	14	15.3	432	No
7	5491	14	15.9	207	Yes
8	5513	13	14.3	443	Yes
9	5509	14	15.8	439	Yes
10	5502	12	11.5	223	No
11	5499	15	17.4	208	Yes
12	5492	16	19	463	Yes
13	5512	14	16	441	Yes
14	5521	13	13.8	323	Yes
15	5520	16	18.9	297	Yes
16	5507	14	15.5	412	No
17	5501	16	19.9	324	No
18	5500	13	14.1	271	Yes
19	5524	14	15.2	349	Yes
20	5493	13	13.8	409	Yes
21	5515	15	17.1	373	Yes
22	5490	13	13.8	254	Yes
23	5498	16	19.8	274	No
24	5508	14	15.3	278	Yes
25	5514	13	14.5	317	No
26	5503	12	11.3	260	Yes
27	5516	15	17.3	211	Yes
28	5496	16	19.2	272	Yes
29	5505	13	14.2	264	Yes
30	5523	15	18.2	284	Yes
					Detection Rate: 76.7%

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5510	LP_SIGNAL_01	Yes
2	18	5510	LP_SIGNAL_02	Yes
3	13	5510	LP_SIGNAL_03	Yes
4	15	5510	LP_SIGNAL_04	Yes
5	5	5510	LP_SIGNAL_05	Yes
6	13	5510	LP_SIGNAL_06	Yes
7	15	5510	LP_SIGNAL_07	Yes
8	12	5510	LP_SIGNAL_08	Yes
9	20	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	No
20	14	5495.6	LP_SIGNAL_20	Yes
21	5	5528	LP_SIGNAL_21	Yes
22	16	5523.6	LP_SIGNAL_22	Yes
23	5	5528	LP_SIGNAL_23	Yes
24	11	5525.6	LP_SIGNAL_24	Yes
25	5	5528	LP_SIGNAL_25	Yes
26	20	5522	LP_SIGNAL_26	Yes
27	14	5524.4	LP_SIGNAL_27	No
28	13	5524.8	LP_SIGNAL_28	Yes
29	7	5527.2	LP_SIGNAL_29	Yes
30	11	5525.6	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	No
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	No
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	No
27	9	1	333.3	No
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 86.7%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	5	1672.2	89	598	Yes
2	5515	23	326.2	18	3066	Yes
3	5497	15	1253.1	67	798	Yes
4	5536	17	1193.3	63	838	Yes
5	5517	9	1474.9	78	678	Yes
6	5543	7	1567.4	83	638	Yes
7	5526	4	1730.1	92	578	Yes
8	5492	16	1222.5	65	818	Yes
9	5498	8	1519.8	81	658	Yes
10	5527	22	1066.1	57	938	Yes
11	5546	6	1618.1	86	618	Yes
12	5501	18	1165.5	62	858	Yes
13	5529	14	1285.3	68	778	Yes
14	5502	10	1432.7	76	698	Yes
15	5531	2	1858.7	99	538	Yes
16	5558	-	416.1	22	2403	No
17	5512	-	492.9	27	2029	Yes
18	5569	-	368.2	20	2716	Yes
19	5525	-	386.2	21	2589	Yes
20	5509	-	394.5	21	2535	Yes
21	5559	-	360.1	20	2777	Yes
22	5511	-	494.1	27	2024	Yes
23	5534	-	897.7	48	1114	Yes
24	5561	-	962.5	51	1039	Yes
25	5548	-	380.2	21	2630	Yes
26	5564	-	452.7	24	2209	Yes
27	5516	-	391.8	21	2552	Yes
28	5507	-	1083.4	58	923	Yes
29	5518	-	329.7	18	3033	Yes
30	5500	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5513	24	2	224	Yes
2	5519	29	4.5	219	Yes
3	5544	26	3.2	167	Yes
4	5532	27	3.7	216	Yes
5	5494	23	1.1	179	Yes
6	5555	26	3.1	181	Yes
7	5512	27	3.7	188	Yes
8	5567	26	2.9	155	Yes
9	5527	29	4.8	214	Yes
10	5520	23	1.5	195	Yes
11	5561	29	4.9	201	Yes
12	5525	24	1.8	197	Yes
13	5495	23	1.5	158	No
14	5501	29	4.9	222	Yes
15	5509	28	4.2	185	Yes
16	5498	23	1	173	Yes
17	5506	29	4.8	190	Yes
18	5510	29	4.5	200	Yes
19	5499	25	2.3	165	Yes
20	5546	27	3.4	177	Yes
21	5508	23	1	183	Yes
22	5500	28	4	156	Yes
23	5551	23	1.1	213	Yes
24	5570	25	2.7	229	Yes
25	5537	23	1.2	206	Yes
26	5563	29	4.9	203	Yes
27	5515	26	3.3	163	Yes
28	5547	26	3.2	182	Yes
29	5559	24	1.7	166	Yes
30	5518	25	2.6	210	Yes
					Detection Rate: 96.7%

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5567	16	7	239	Yes
2	5491	18	9.5	335	Yes
3	5505	17	8.2	411	Yes
4	5492	18	8.7	224	Yes
5	5494	16	6.1	428	Yes
6	5543	17	8.1	332	Yes
7	5559	17	8.7	491	Yes
8	5569	17	7.9	348	Yes
9	5541	18	9.8	206	Yes
10	5507	16	6.5	204	Yes
11	5564	18	9.9	438	Yes
12	5553	16	6.8	484	Yes
13	5529	16	6.5	344	Yes
14	5513	18	9.9	465	Yes
15	5501	18	9.2	444	Yes
16	5514	16	6	357	Yes
17	5525	18	9.8	423	Yes
18	5499	18	9.5	225	Yes
19	5508	16	7.3	217	Yes
20	5548	17	8.4	242	Yes
21	5503	16	6	483	Yes
22	5542	18	9	470	Yes
23	5521	16	6.1	308	Yes
24	5524	17	7.7	498	Yes
25	5504	16	6.2	477	Yes
26	5531	18	9.9	375	Yes
27	5549	17	8.3	285	Yes
28	5497	17	8.2	433	Yes
29	5557	16	6.7	490	No
30	5519	17	7.6	202	Yes
Detection Rate: 96.7%					

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5503	14	16	355	No
2	5522	12	11.3	487	Yes
3	5492	13	13.5	344	Yes
4	5555	16	19.4	288	No
5	5519	15	17.5	230	Yes
6	5567	14	15.3	432	Yes
7	5506	14	15.9	207	Yes
8	5523	13	14.3	443	Yes
9	5493	14	15.8	439	Yes
10	5494	12	11.5	223	Yes
11	5531	15	17.4	208	Yes
12	5548	16	19	463	Yes
13	5542	14	16	441	Yes
14	5553	13	13.8	323	No
15	5510	16	18.9	297	Yes
16	5505	14	15.5	412	No
17	5501	16	19.9	324	Yes
18	5549	13	14.1	271	Yes
19	5516	14	15.2	349	Yes
20	5560	13	13.8	409	Yes
21	5556	15	17.1	373	Yes
22	5559	13	13.8	254	Yes
23	5520	16	19.8	274	Yes
24	5566	14	15.3	278	Yes
25	5514	13	14.5	317	Yes
26	5515	12	11.3	260	No
27	5502	15	17.3	211	No
28	5524	16	19.2	272	Yes
29	5539	13	14.2	264	Yes
30	5495	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5530	LP_SIGNAL_01	Yes
2	18	5530	LP_SIGNAL_02	Yes
3	13	5530	LP_SIGNAL_03	Yes
4	15	5530	LP_SIGNAL_04	Yes
5	5	5530	LP_SIGNAL_05	Yes
6	13	5530	LP_SIGNAL_06	Yes
7	15	5530	LP_SIGNAL_07	Yes
8	12	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	6	5530	LP_SIGNAL_10	Yes
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	Yes
20	14	5495.6	LP_SIGNAL_20	Yes
21	5	5568	LP_SIGNAL_21	Yes
22	16	5563.6	LP_SIGNAL_22	Yes
23	5	5568	LP_SIGNAL_23	Yes
24	11	5565.6	LP_SIGNAL_24	Yes
25	5	5568	LP_SIGNAL_25	Yes
26	20	5562	LP_SIGNAL_26	Yes
27	14	5564.4	LP_SIGNAL_27	Yes
28	13	5564.8	LP_SIGNAL_28	Yes
29	7	5567.2	LP_SIGNAL_29	Yes
30	11	5565.6	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	No
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 96.7%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5291	5	1672.2	89	598	Yes
2	5293	23	326.2	18	3066	Yes
3	5289	15	1253.1	67	798	Yes
4	5328	17	1193.3	63	838	Yes
5	5297	9	1474.9	78	678	Yes
6	5304	7	1567.4	83	638	Yes
7	5277	4	1730.1	92	578	Yes
8	5273	16	1222.5	65	818	Yes
9	5258	8	1519.8	81	658	Yes
10	5323	22	1066.1	57	938	Yes
11	5313	6	1618.1	86	618	Yes
12	5308	18	1165.5	62	858	Yes
13	5296	14	1285.3	68	778	No
14	5282	10	1432.7	76	698	Yes
15	5327	2	1858.7	99	538	Yes
16	5267	-	416.1	22	2403	Yes
17	5266	-	492.9	27	2029	Yes
18	5290	-	368.2	20	2716	Yes
19	5283	-	386.2	21	2589	Yes
20	5301	-	394.5	21	2535	Yes
21	5284	-	360.1	20	2777	Yes
22	5271	-	494.1	27	2024	Yes
23	5269	-	897.7	48	1114	Yes
24	5312	-	962.5	51	1039	Yes
25	5311	-	380.2	21	2630	Yes
26	5302	-	452.7	24	2209	Yes
27	5324	-	391.8	21	2552	Yes
28	5286	-	1083.4	58	923	Yes
29	5278	-	329.7	18	3033	Yes
30	5259	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5289	24	2	224	Yes
2	5251	29	4.5	219	Yes
3	5287	26	3.2	167	Yes
4	5253	27	3.7	216	Yes
5	5254	23	1.1	179	Yes
6	5281	26	3.1	181	Yes
7	5256	27	3.7	188	Yes
8	5272	26	2.9	155	Yes
9	5296	29	4.8	214	Yes
10	5302	23	1.5	195	Yes
11	5295	29	4.9	201	Yes
12	5261	24	1.8	197	Yes
13	5262	23	1.5	158	Yes
14	5263	29	4.9	222	Yes
15	5326	28	4.2	185	Yes
16	5328	23	1	173	Yes
17	5301	29	4.8	190	Yes
18	5252	29	4.5	200	Yes
19	5319	25	2.3	165	Yes
20	5269	27	3.4	177	Yes
21	5329	23	1	183	Yes
22	5298	28	4	156	Yes
23	5291	23	1.1	213	Yes
24	5325	25	2.7	229	Yes
25	5255	23	1.2	206	Yes
26	5268	29	4.9	203	Yes
27	5290	26	3.3	163	Yes
28	5313	26	3.2	182	Yes
29	5315	24	1.7	166	Yes
30	5297	25	2.6	210	Yes
					Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5260	16	7	239	Yes
2	5252	18	9.5	335	Yes
3	5291	17	8.2	411	Yes
4	5281	18	8.7	224	Yes
5	5254	16	6.1	428	Yes
6	5301	17	8.1	332	Yes
7	5293	17	8.7	491	Yes
8	5257	17	7.9	348	Yes
9	5258	18	9.8	206	No
10	5328	16	6.5	204	Yes
11	5265	18	9.9	438	Yes
12	5296	16	6.8	484	Yes
13	5308	16	6.5	344	Yes
14	5303	18	9.9	465	Yes
15	5264	18	9.2	444	Yes
16	5312	16	6	357	Yes
17	5277	18	9.8	423	Yes
18	5285	18	9.5	225	Yes
19	5268	16	7.3	217	Yes
20	5317	17	8.4	242	Yes
21	5270	16	6	483	Yes
22	5278	18	9	470	Yes
23	5286	16	6.1	308	Yes
24	5251	17	7.7	498	Yes
25	5284	16	6.2	477	Yes
26	5314	18	9.9	375	Yes
27	5255	17	8.3	285	Yes
28	5269	17	8.2	433	Yes
29	5327	16	6.7	490	Yes
30	5256	17	7.6	202	Yes
					Detection Rate: 96.7%

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5325	14	16	355	Yes
2	5255	12	11.3	487	Yes
3	5281	13	13.5	344	Yes
4	5327	16	19.4	288	Yes
5	5294	15	17.5	230	No
6	5305	14	15.3	432	Yes
7	5302	14	15.9	207	Yes
8	5280	13	14.3	443	Yes
9	5258	14	15.8	439	Yes
10	5286	12	11.5	223	Yes
11	5252	15	17.4	208	Yes
12	5323	16	19	463	Yes
13	5306	14	16	441	Yes
14	5315	13	13.8	323	Yes
15	5288	16	18.9	297	Yes
16	5276	14	15.5	412	Yes
17	5266	16	19.9	324	Yes
18	5270	13	14.1	271	Yes
19	5260	14	15.2	349	Yes
20	5292	13	13.8	409	Yes
21	5293	15	17.1	373	Yes
22	5316	13	13.8	254	Yes
23	5261	16	19.8	274	Yes
24	5273	14	15.3	278	Yes
25	5271	13	14.5	317	Yes
26	5309	12	11.3	260	Yes
27	5328	15	17.3	211	No
28	5267	16	19.2	272	Yes
29	5269	13	14.2	264	Yes
30	5303	15	18.2	284	Yes
					Detection Rate: 93.3%

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5250	LP_SIGNAL_01	Yes
2	18	5250	LP_SIGNAL_02	Yes
3	13	5250	LP_SIGNAL_03	Yes
4	15	5250	LP_SIGNAL_04	No
5	5	5250	LP_SIGNAL_05	Yes
6	13	5250	LP_SIGNAL_06	Yes
7	15	5250	LP_SIGNAL_07	Yes
8	12	5250	LP_SIGNAL_08	Yes
9	20	5250	LP_SIGNAL_09	Yes
10	6	5250	LP_SIGNAL_10	Yes
11	20	5258	LP_SIGNAL_11	Yes
12	8	5253.2	LP_SIGNAL_12	Yes
13	7	5252.8	LP_SIGNAL_13	Yes
14	20	5258	LP_SIGNAL_14	Yes
15	17	5256.8	LP_SIGNAL_15	Yes
16	5	5252	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	Yes
18	19	5257.6	LP_SIGNAL_18	Yes
19	10	5254	LP_SIGNAL_19	Yes
20	14	5255.6	LP_SIGNAL_20	Yes
21	5	5327	LP_SIGNAL_21	Yes
22	16	5322.6	LP_SIGNAL_22	Yes
23	5	5327	LP_SIGNAL_23	Yes
24	11	5324.6	LP_SIGNAL_24	Yes
25	5	5327	LP_SIGNAL_25	Yes
26	20	5321	LP_SIGNAL_26	Yes
27	14	5323.4	LP_SIGNAL_27	Yes
28	13	5323.8	LP_SIGNAL_28	Yes
29	7	5326.2	LP_SIGNAL_29	Yes
30	11	5324.6	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	No
18	9	1	333.3	No
19	9	1	333.3	Yes
20	9	1	333.3	No
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 90%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5496	5	1672.2	89	598	Yes
2	5599	23	326.2	18	3066	Yes
3	5572	15	1253.1	67	798	Yes
4	5519	17	1193.3	63	838	No
5	5508	9	1474.9	78	678	Yes
6	5528	7	1567.4	83	638	Yes
7	5497	4	1730.1	92	578	Yes
8	5632	16	1222.5	65	818	Yes
9	5630	8	1519.8	81	658	Yes
10	5619	22	1066.1	57	938	Yes
11	5552	6	1618.1	86	618	Yes
12	5569	18	1165.5	62	858	Yes
13	5554	14	1285.3	68	778	Yes
14	5609	10	1432.7	76	698	Yes
15	5533	2	1858.7	99	538	Yes
16	5643	-	416.1	22	2403	Yes
17	5594	-	492.9	27	2029	Yes
18	5523	-	368.2	20	2716	Yes
19	5546	-	386.2	21	2589	Yes
20	5649	-	394.5	21	2535	Yes
21	5505	-	360.1	20	2777	Yes
22	5499	-	494.1	27	2024	Yes
23	5600	-	897.7	48	1114	Yes
24	5639	-	962.5	51	1039	Yes
25	5585	-	380.2	21	2630	Yes
26	5534	-	452.7	24	2209	Yes
27	5517	-	391.8	21	2552	Yes
28	5573	-	1083.4	58	923	Yes
29	5514	-	329.7	18	3033	Yes
30	5522	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5631	24	2	224	Yes
2	5548	29	4.5	219	Yes
3	5504	26	3.2	167	Yes
4	5591	27	3.7	216	Yes
5	5572	23	1.1	179	Yes
6	5628	26	3.1	181	Yes
7	5523	27	3.7	188	Yes
8	5498	26	2.9	155	Yes
9	5499	29	4.8	214	Yes
10	5525	23	1.5	195	Yes
11	5596	29	4.9	201	Yes
12	5502	24	1.8	197	Yes
13	5503	23	1.5	158	Yes
14	5615	29	4.9	222	Yes
15	5640	28	4.2	185	Yes
16	5533	23	1	173	Yes
17	5581	29	4.8	190	Yes
18	5601	29	4.5	200	Yes
19	5606	25	2.3	165	Yes
20	5550	27	3.4	177	Yes
21	5639	23	1	183	Yes
22	5553	28	4	156	Yes
23	5564	23	1.1	213	Yes
24	5557	25	2.7	229	Yes
25	5531	23	1.2	206	Yes
26	5584	29	4.9	203	Yes
27	5508	26	3.3	163	Yes
28	5629	26	3.2	182	Yes
29	5536	24	1.7	166	Yes
30	5520	25	2.6	210	Yes
					Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5548	16	7	239	Yes
2	5603	18	9.5	335	Yes
3	5516	17	8.2	411	Yes
4	5497	18	8.7	224	Yes
5	5609	16	6.1	428	Yes
6	5495	17	8.1	332	Yes
7	5628	17	8.7	491	Yes
8	5553	17	7.9	348	Yes
9	5646	18	9.8	206	Yes
10	5635	16	6.5	204	Yes
11	5557	18	9.9	438	Yes
12	5600	16	6.8	484	Yes
13	5622	16	6.5	344	Yes
14	5564	18	9.9	465	Yes
15	5558	18	9.2	444	Yes
16	5498	16	6	357	Yes
17	5552	18	9.8	423	Yes
18	5539	18	9.5	225	Yes
19	5565	16	7.3	217	Yes
20	5577	17	8.4	242	Yes
21	5624	16	6	483	Yes
22	5493	18	9	470	Yes
23	5647	16	6.1	308	No
24	5514	17	7.7	498	No
25	5570	16	6.2	477	No
26	5645	18	9.9	375	Yes
27	5517	17	8.3	285	Yes
28	5518	17	8.2	433	Yes
29	5555	16	6.7	490	Yes
30	5505	17	7.6	202	Yes
					Detection Rate: 90%

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5507	14	16	355	Yes
2	5501	12	11.3	487	Yes
3	5555	13	13.5	344	Yes
4	5633	16	19.4	288	Yes
5	5512	15	17.5	230	Yes
6	5519	14	15.3	432	Yes
7	5605	14	15.9	207	Yes
8	5620	13	14.3	443	Yes
9	5577	14	15.8	439	Yes
10	5575	12	11.5	223	Yes
11	5572	15	17.4	208	Yes
12	5599	16	19	463	Yes
13	5561	14	16	441	Yes
14	5492	13	13.8	323	Yes
15	5560	16	18.9	297	Yes
16	5506	14	15.5	412	No
17	5648	16	19.9	324	Yes
18	5628	13	14.1	271	Yes
19	5563	14	15.2	349	Yes
20	5644	13	13.8	409	No
21	5537	15	17.1	373	Yes
22	5642	13	13.8	254	Yes
23	5529	16	19.8	274	Yes
24	5630	14	15.3	278	Yes
25	5526	13	14.5	317	No
26	5516	12	11.3	260	Yes
27	5556	15	17.3	211	Yes
28	5629	16	19.2	272	Yes
29	5515	13	14.2	264	No
30	5626	15	18.2	284	Yes
					Detection Rate: 86.7%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5570	LP_SIGNAL_01	Yes
2	18	5570	LP_SIGNAL_02	Yes
3	13	5570	LP_SIGNAL_03	Yes
4	15	5570	LP_SIGNAL_04	Yes
5	5	5570	LP_SIGNAL_05	Yes
6	13	5570	LP_SIGNAL_06	Yes
7	15	5570	LP_SIGNAL_07	Yes
8	12	5570	LP_SIGNAL_08	Yes
9	20	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5647	LP_SIGNAL_21	No
22	16	5642.6	LP_SIGNAL_22	Yes
23	5	5647	LP_SIGNAL_23	No
24	11	5644.6	LP_SIGNAL_24	Yes
25	5	5647	LP_SIGNAL_25	Yes
26	20	5641	LP_SIGNAL_26	Yes
27	14	5643.4	LP_SIGNAL_27	Yes
28	13	5643.8	LP_SIGNAL_28	Yes
29	7	5646.2	LP_SIGNAL_29	Yes
30	11	5644.6	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	No
13	9	1	333.3	No
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	No
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 90%

802.11be (EHT240) 5610MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5491	5	1672.2	89	598	Yes
2	5638	23	326.2	18	3066	Yes
3	5696	15	1253.1	67	798	Yes
4	5655	17	1193.3	63	838	Yes
5	5568	9	1474.9	78	678	Yes
6	5705	7	1567.4	83	638	Yes
7	5497	4	1730.1	92	578	Yes
8	5499	16	1222.5	65	818	Yes
9	5555	8	1519.8	81	658	Yes
10	5659	22	1066.1	57	938	Yes
11	5501	6	1618.1	86	618	Yes
12	5540	18	1165.5	62	858	Yes
13	5607	14	1285.3	68	778	Yes
14	5495	10	1432.7	76	698	Yes
15	5575	2	1858.7	99	538	Yes
16	5709	-	416.1	22	2403	Yes
17	5507	-	492.9	27	2029	Yes
18	5542	-	368.2	20	2716	Yes
19	5610	-	386.2	21	2589	Yes
20	5581	-	394.5	21	2535	Yes
21	5686	-	360.1	20	2777	Yes
22	5557	-	494.1	27	2024	Yes
23	5562	-	897.7	48	1114	Yes
24	5590	-	962.5	51	1039	Yes
25	5623	-	380.2	21	2630	Yes
26	5516	-	452.7	24	2209	Yes
27	5661	-	391.8	21	2552	Yes
28	5518	-	1083.4	58	923	Yes
29	5574	-	329.7	18	3033	Yes
30	5504	-	502	27	1992	Yes
						Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5630	24	2	224	Yes
2	5530	29	4.5	219	Yes
3	5655	26	3.2	167	Yes
4	5494	27	3.7	216	Yes
5	5548	23	1.1	179	Yes
6	5623	26	3.1	181	Yes
7	5688	27	3.7	188	Yes
8	5704	26	2.9	155	Yes
9	5568	29	4.8	214	Yes
10	5662	23	1.5	195	Yes
11	5493	29	4.9	201	Yes
12	5596	24	1.8	197	Yes
13	5703	23	1.5	158	Yes
14	5504	29	4.9	222	Yes
15	5720	28	4.2	185	Yes
16	5642	23	1	173	Yes
17	5562	29	4.8	190	Yes
18	5580	29	4.5	200	Yes
19	5621	25	2.3	165	Yes
20	5583	27	3.4	177	Yes
21	5633	23	1	183	Yes
22	5535	28	4	156	Yes
23	5567	23	1.1	213	Yes
24	5654	25	2.7	229	Yes
25	5724	23	1.2	206	Yes
26	5685	29	4.9	203	Yes
27	5517	26	3.3	163	Yes
28	5693	26	3.2	182	Yes
29	5710	24	1.7	166	Yes
30	5520	25	2.6	210	Yes
					Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5692	16	7	239	Yes
2	5503	18	9.5	335	Yes
3	5661	17	8.2	411	Yes
4	5657	18	8.7	224	Yes
5	5699	16	6.1	428	Yes
6	5680	17	8.1	332	No
7	5594	17	8.7	491	Yes
8	5653	17	7.9	348	Yes
9	5635	18	9.8	206	Yes
10	5636	16	6.5	204	Yes
11	5645	18	9.9	438	Yes
12	5687	16	6.8	484	Yes
13	5722	16	6.5	344	Yes
14	5533	18	9.9	465	Yes
15	5673	18	9.2	444	Yes
16	5506	16	6	357	Yes
17	5611	18	9.8	423	Yes
18	5616	18	9.5	225	Yes
19	5698	16	7.3	217	Yes
20	5516	17	8.4	242	Yes
21	5511	16	6	483	Yes
22	5724	18	9	470	Yes
23	5674	16	6.1	308	Yes
24	5651	17	7.7	498	Yes
25	5693	16	6.2	477	No
26	5704	18	9.9	375	Yes
27	5517	17	8.3	285	Yes
28	5712	17	8.2	433	Yes
29	5600	16	6.7	490	Yes
30	5592	17	7.6	202	No
					Detection Rate: 90%

802.11be (EHT240) 5610MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5535	14	16	355	No
2	5492	12	11.3	487	Yes
3	5582	13	13.5	344	Yes
4	5616	16	19.4	288	Yes
5	5660	15	17.5	230	Yes
6	5646	14	15.3	432	Yes
7	5607	14	15.9	207	Yes
8	5530	13	14.3	443	Yes
9	5573	14	15.8	439	Yes
10	5552	12	11.5	223	Yes
11	5599	15	17.4	208	Yes
12	5673	16	19	463	Yes
13	5667	14	16	441	Yes
14	5654	13	13.8	323	Yes
15	5679	16	18.9	297	Yes
16	5701	14	15.5	412	Yes
17	5578	16	19.9	324	Yes
18	5509	13	14.1	271	Yes
19	5497	14	15.2	349	No
20	5625	13	13.8	409	Yes
21	5595	15	17.1	373	Yes
22	5553	13	13.8	254	Yes
23	5632	16	19.8	274	Yes
24	5538	14	15.3	278	Yes
25	5511	13	14.5	317	Yes
26	5516	12	11.3	260	Yes
27	5689	15	17.3	211	Yes
28	5549	16	19.2	272	Yes
29	5694	13	14.2	264	Yes
30	5520	15	18.2	284	No
					Detection Rate: 90%

802.11be (EHT240) 5610MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5610	LP_SIGNAL_01	Yes
2	18	5610	LP_SIGNAL_02	Yes
3	13	5610	LP_SIGNAL_03	Yes
4	15	5610	LP_SIGNAL_04	Yes
5	5	5610	LP_SIGNAL_05	Yes
6	13	5610	LP_SIGNAL_06	Yes
7	15	5610	LP_SIGNAL_07	Yes
8	12	5610	LP_SIGNAL_08	Yes
9	20	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	No
13	7	5493.8	LP_SIGNAL_13	No
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	No
16	5	5493	LP_SIGNAL_16	No
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	No
20	14	5496.6	LP_SIGNAL_20	No
21	5	5723	LP_SIGNAL_21	Yes
22	16	5718.6	LP_SIGNAL_22	Yes
23	5	5723	LP_SIGNAL_23	Yes
24	11	5720.6	LP_SIGNAL_24	Yes
25	5	5723	LP_SIGNAL_25	Yes
26	20	5717	LP_SIGNAL_26	Yes
27	14	5719.4	LP_SIGNAL_27	Yes
28	13	5719.8	LP_SIGNAL_28	Yes
29	7	5722.2	LP_SIGNAL_29	Yes
30	11	5720.6	LP_SIGNAL_30	Yes
				Detection Rate: 80%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	No
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	No
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 93.3%

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 987.491 mW, and it has TPC functionality.

The UUT can adjust a transmitter's output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 16
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 8
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 16
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5503.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5502MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5507.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 10
Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5523.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5525.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5522MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5524.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5524.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5527.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5525.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5568MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5563.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5568MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5565.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5568MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5562MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5564.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5564.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5567.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5565.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5250MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5253.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5252.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5256.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5252MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5255.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5322.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 13
Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 8
Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5321MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5326.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5642.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5641MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5646.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT240) 5610MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 9
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5718.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5720.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5717MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5719.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5719.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 10
Chirp Center Frequency: 5722.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 13
Chirp Center Frequency: 5720.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

--- END ---