


Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5785MHz
Test by :Cyril

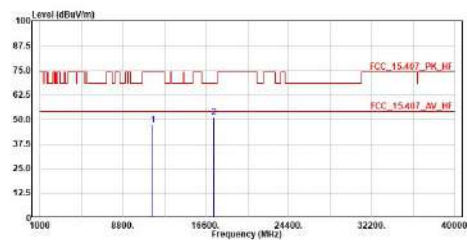


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11570.000	47.17	74.00	-26.83	50.55	-3.38	Peak
2	17355.000	50.78	68.20	-17.42	49.91	0.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5785MHz
Test by :Cyril

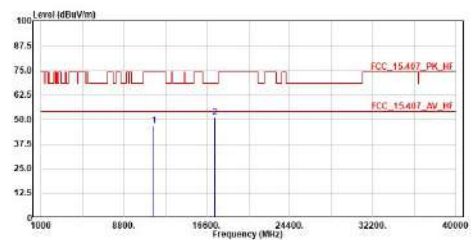


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11570.000	46.87	74.00	-27.13	50.25	-3.38	Peak
2	17355.000	51.04	68.20	-17.16	50.17	0.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5825MHz
Test by :Cyril

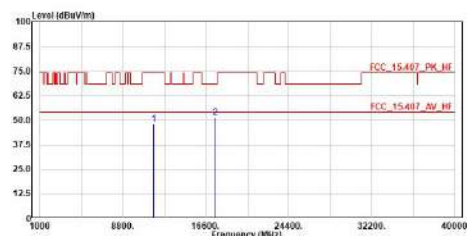


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11650.000	47.83	74.00	-26.17	51.11	-3.28	Peak
2	17475.000	51.46	68.20	-16.74	50.45	1.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5825MHz
Test by :Cyril

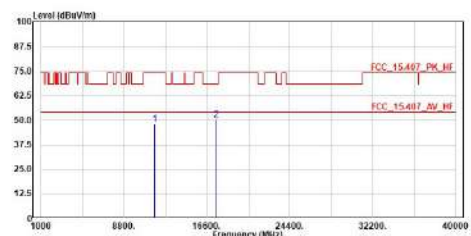


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11650.000	48.00	74.00	-26.00	51.28	-3.28	Peak
2	17475.000	50.35	68.20	-17.85	49.34	1.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5190MHz
Test by :Cyril

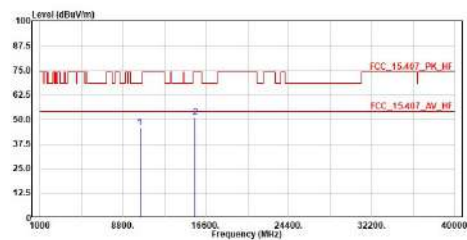


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10380.000	45.82	68.20	-22.38	51.14	-5.32	Peak
2	15570.000	51.10	74.00	-22.90	50.27	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5190MHz
Test by :Cyril

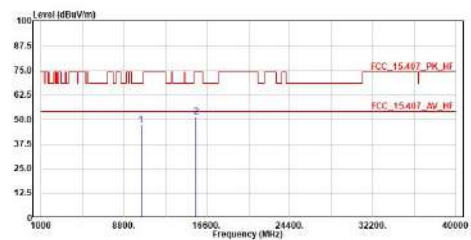


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10380.000	47.13	68.20	-21.07	52.45	-5.32	Peak
2	15570.000	51.24	74.00	-22.76	50.41	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5230MHz
Test by :Cyril

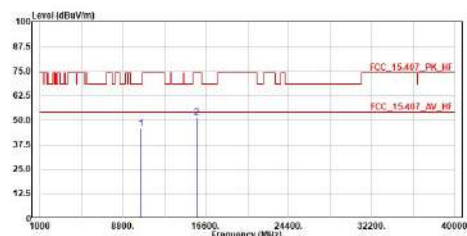


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10460.000	45.76	68.20	-22.44	50.96	-5.20	Peak
2	15690.000	51.44	74.00	-22.56	50.61	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5230MHz
Test by :Cyril

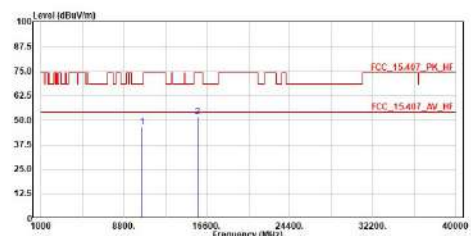


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10460.000	46.47	68.20	-21.73	51.67	-5.20	Peak
2	15690.000	51.52	74.00	-22.48	50.69	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5795MHz
Test by :Cyril

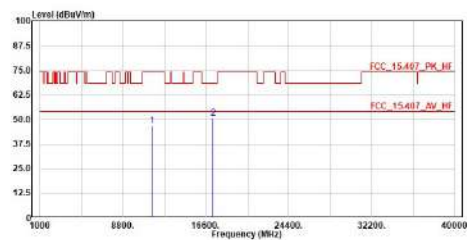


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11510.000	46.86	74.00	-27.14	50.31	-3.45	Peak
2	17265.000	50.75	68.20	-17.45	49.98	0.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5795MHz
Test by :Cyril

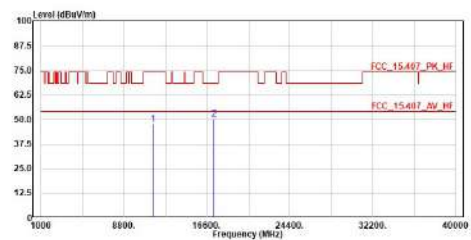


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11510.000	47.38	74.00	-26.62	50.83	-3.45	Peak
2	17265.000	50.28	68.20	-17.92	49.51	0.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5795MHz
Test by :Cyril

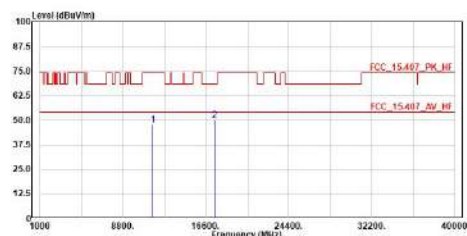


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11590.000	47.52	74.00	-26.48	50.87	-3.35	Peak
2	17385.000	49.68	68.20	-18.52	48.77	0.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5795MHz
Test by :Cyril

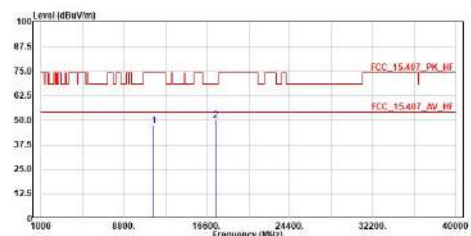


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11590.000	47.22	74.00	-26.78	50.57	-3.35	Peak
2	17385.000	49.81	68.20	-18.39	48.90	0.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5210MHz
Test by :Cyril

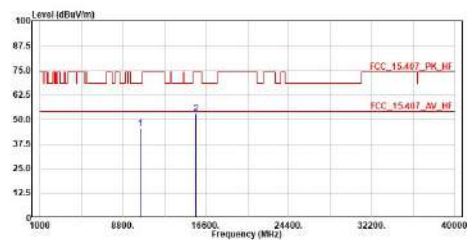


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10420.000	45.41	68.20	-22.79	50.67	-5.26	Peak
2	15630.000	52.87	74.00	-21.13	52.04	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5210MHz
Test by :Cyril

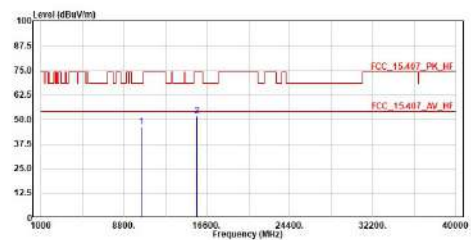


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10420.000	45.89	68.20	-22.31	51.15	-5.26	Peak
2	15630.000	51.78	74.00	-22.22	50.95	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5775MHz
Test by :Cyril

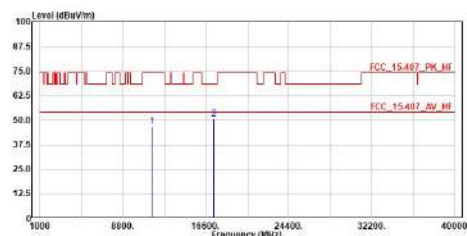


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11550.000	46.87	74.00	-27.13	50.27	-3.40	Peak
2	17325.000	50.67	68.20	-17.53	49.84	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5775MHz
Test by :Cyril

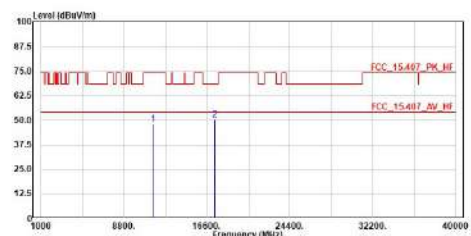


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11550.000	47.76	74.00	-26.24	51.16	-3.40	Peak
2	17325.000	50.23	68.20	-17.97	49.40	0.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

8. Radiated Emission Band Edge

8.1. Test Setup

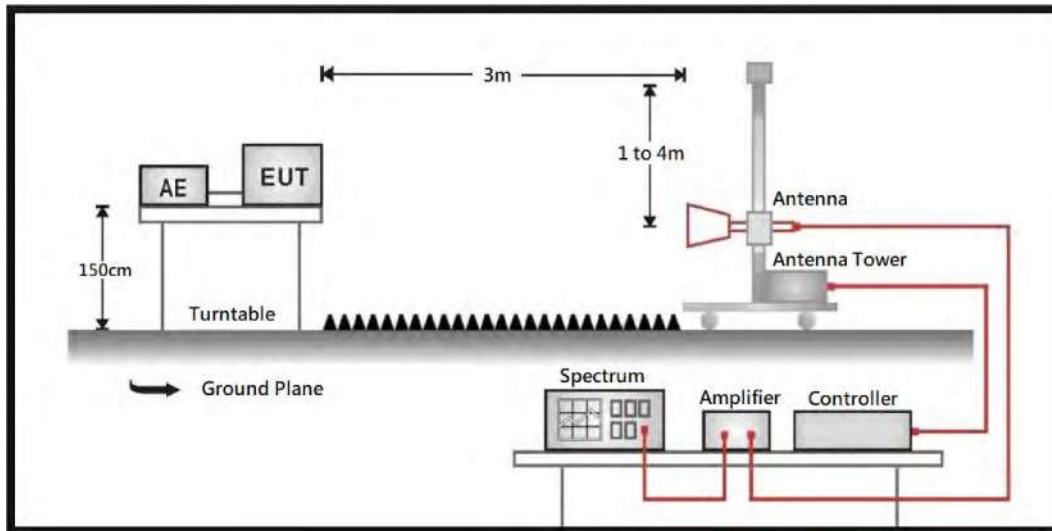

8.2. Test Limit

General Radiated Emission Test Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30 dB below the level of the fundamental or to the general radiated emission limit in paragraph 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:


1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.2
5250 - 5350	-27	68.2
5470 - 5725	-27	68.2

For transmitters operating in the 5.725 ~ 5.85 GHz band

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

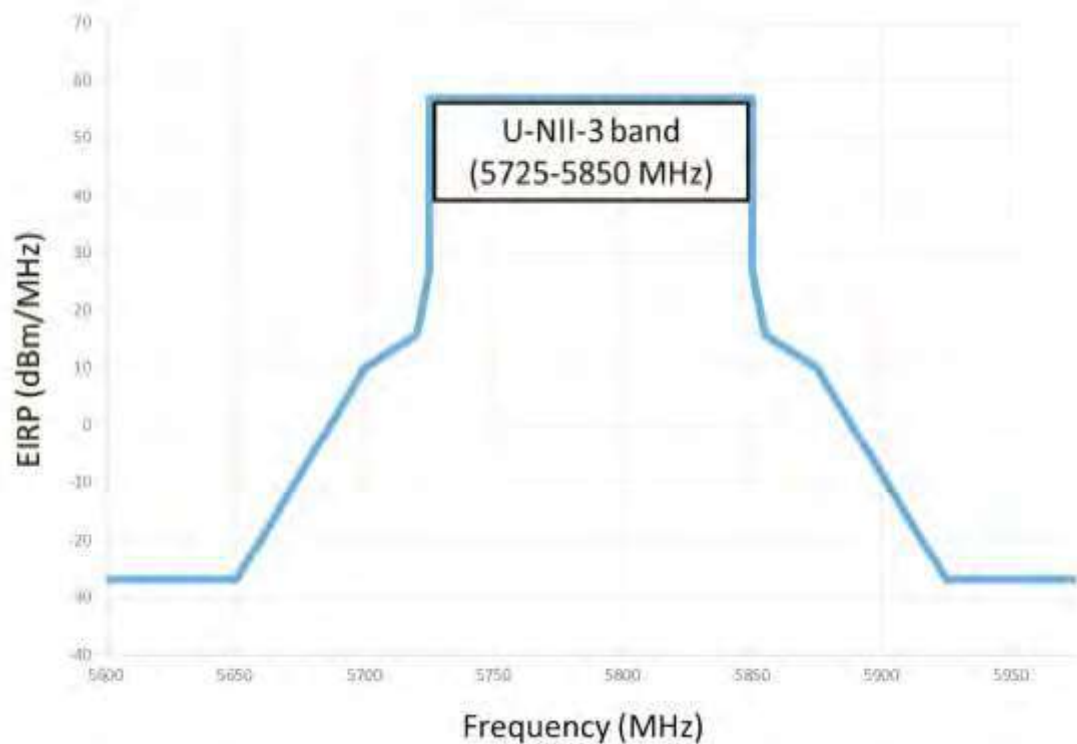

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.
3.
$$\mu\text{V/m} = \frac{1000000\sqrt{30 \times EIRP}}{3}$$
, RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

8.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.


The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

8.4. Test Specification

According to FCC CFR Title 47 Part 15 Subpart E.

8.5. Test Result of Radiated Emission Band Edge

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5180MHz
Test by :Cyril

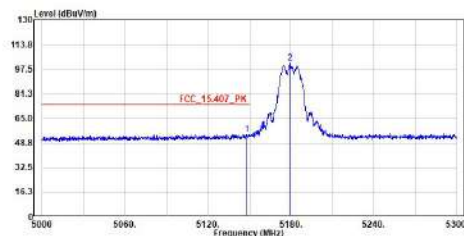


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.900	54.50	74.00	-19.50	30.97	23.53	Peak
2	5179.400	101.33	74.00	27.33	77.78	23.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5180MHz
Test by :Cyril

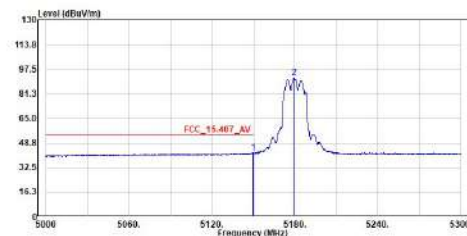


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.550	42.02	74.00	-31.98	18.49	23.53	Average
2	5179.250	91.66	74.00	17.66	68.11	23.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5180MHz
Test by :Cyril

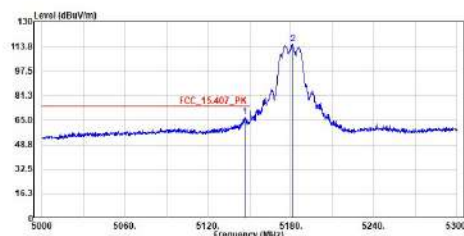


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.700	67.35	74.00	-6.65	43.82	23.53	Peak
2	5181.200	115.23	74.00	41.23	91.68	23.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5180MHz
Test by :Cyril

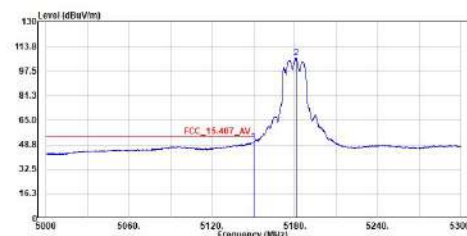


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	50.36	74.00	-23.64	26.83	23.53	Average
2	5180.900	105.94	74.00	31.94	82.39	23.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5280MHz
Test by :Cyril

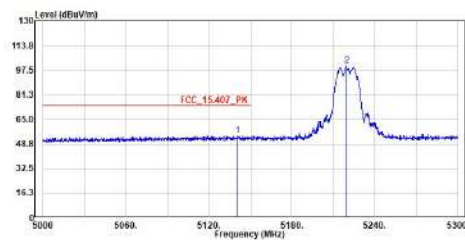


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5140.700	54.24	74.00	-19.76	30.72	23.52	Peak
2	5219.450	100.37	-----	-----	76.81	23.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5280MHz
Test by :Cyril

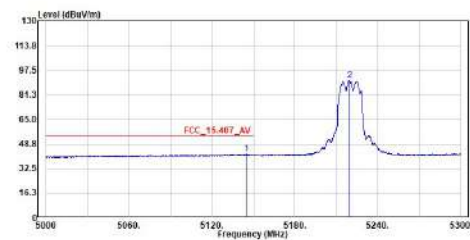


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5144.900	41.95	54.00	-12.05	18.42	23.53	Average
2	5219.450	90.94	-----	-----	67.38	23.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5280MHz
Test by :Cyril

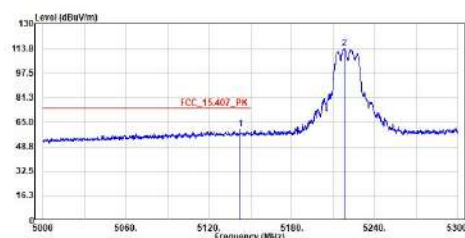


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5142.650	60.10	74.00	-13.90	36.58	23.52	Peak
2	5218.100	113.83	-----	-----	90.27	23.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5280MHz
Test by :Cyril

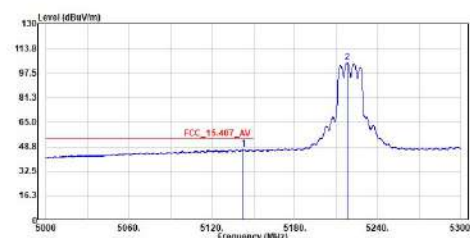


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5142.650	46.89	54.00	-7.11	23.37	23.52	Average
2	5217.950	104.44	-----	-----	80.88	23.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5240MHz
Test by :Cyril

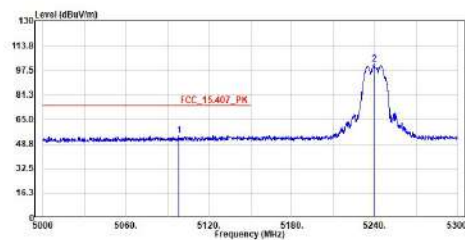


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5098.100	54.32	74.00	-19.68	30.82	23.50	Peak
2	5239.400	101.44	-----	-----	77.87	23.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5240MHz
Test by :Cyril

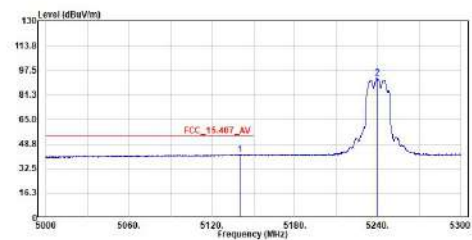


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.250	41.69	54.00	-12.31	18.17	23.52	Average
2	5239.400	92.20	-----	-----	68.63	23.57	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5240MHz
Test by :Cyril

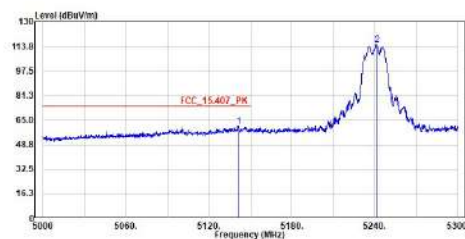


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.450	61.06	74.00	-12.94	37.54	23.52	Peak
2	5241.500	114.84	-----	-----	91.26	23.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5240MHz
Test by :Cyril

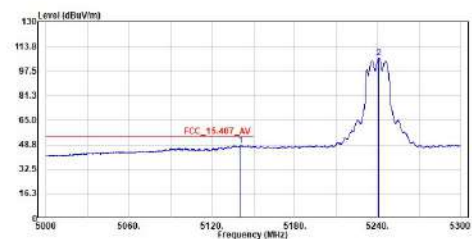


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.700	48.03	54.00	-5.97	24.51	23.52	Average
2	5240.750	105.90	-----	-----	82.32	23.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5745MHz
Test by :Cyril

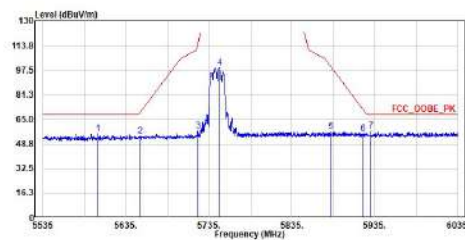


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5681.250	55.23	68.20	-12.97	31.16	24.07	Peak
2	5651.750	54.16	69.50	-15.34	29.92	24.24	Peak
3	5721.750	57.21	114.79	-57.58	32.72	24.49	Peak
4	5747.500	99.04	-----	-----	74.47	24.57	Peak
5	5882.250	56.95	99.84	-42.89	31.91	25.04	Peak
6	5921.000	55.45	71.17	-15.52	30.47	25.18	Peak
7	5939.500	57.23	68.20	-10.97	32.01	25.22	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5745MHz
Test by :Cyril

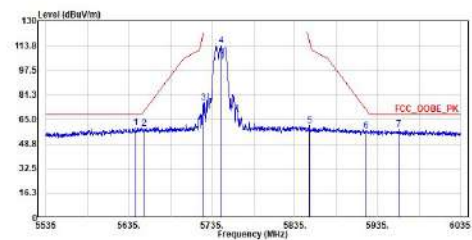


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5643.250	59.42	68.20	-8.78	35.20	24.22	Peak
2	5653.000	58.65	70.43	-11.78	34.40	24.25	Peak
3	5725.000	76.00	122.20	-46.20	51.50	24.50	Peak
4	5745.000	114.04	-----	-----	89.47	24.57	Peak
5	5852.250	60.62	117.07	-56.45	35.89	24.93	Peak
6	5921.000	57.45	71.17	-13.72	33.27	25.18	Peak
7	5960.000	58.36	68.20	-9.84	33.05	25.31	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX 5785MHz
Test by :Cyril

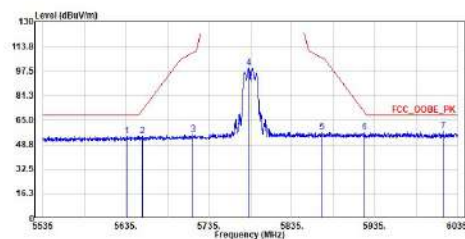


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5636.250	54.34	68.20	-13.86	30.34	24.20	Peak
2	5654.500	54.33	71.54	-17.21	30.08	24.25	Peak
3	5716.000	55.27	109.68	-54.41	30.80	24.47	Peak
4	5782.750	99.37	-----	-----	74.67	24.70	Peak
5	5871.750	56.96	106.11	-49.15	31.95	25.01	Peak
6	5922.000	56.86	70.43	-13.57	31.68	25.18	Peak
7	6017.250	57.82	68.20	-10.38	32.26	25.56	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX 5785MHz
Test by :Cyril

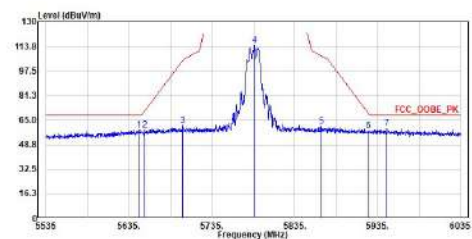


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5646.750	58.49	68.20	-9.71	34.27	24.22	Peak
2	5654.000	58.50	71.17	-12.67	34.25	24.25	Peak
3	5699.500	61.28	104.83	-43.55	36.86	24.42	Peak
4	5786.500	114.21	-----	-----	89.50	24.71	Peak
5	5866.750	60.78	107.51	-46.73	35.78	25.00	Peak
6	5923.000	57.99	69.69	-11.70	32.61	25.18	Peak
7	5945.750	59.18	68.20	-9.02	33.92	25.26	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5825MHz
Test by :Cyril

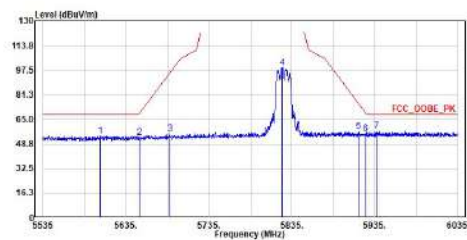


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5684.000	54.19	68.20	-14.01	30.11	24.08	Peak
2	5651.250	53.12	69.13	-16.01	28.88	24.24	Peak
3	5687.750	55.47	96.14	-40.67	31.30	24.37	Peak
4	5823.000	99.09	-----	-----	74.25	24.84	Peak
5	5915.500	57.07	75.24	-18.17	31.92	25.15	Peak
6	5923.750	55.63	69.13	-13.50	30.45	25.18	Peak
7	5937.000	57.37	68.20	-10.83	32.14	25.23	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5825MHz
Test by :Cyril

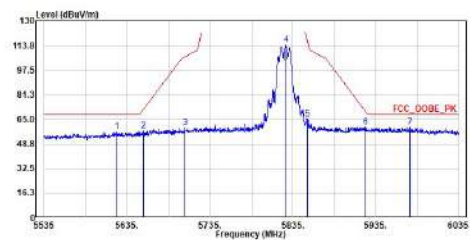


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5623.000	56.81	68.20	-11.39	32.66	24.15	Peak
2	5654.500	57.26	71.54	-14.28	33.01	24.25	Peak
3	5705.000	59.23	106.60	-47.37	34.80	24.43	Peak
4	5825.250	114.26	-----	-----	89.41	24.85	Peak
5	5852.250	85.22	117.07	-31.85	40.29	24.93	Peak
6	5922.000	59.79	70.43	-10.64	34.61	25.18	Peak
7	5975.750	59.99	68.20	-8.21	34.62	25.37	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_C20_TX_5180MHz
Test by :Cyril

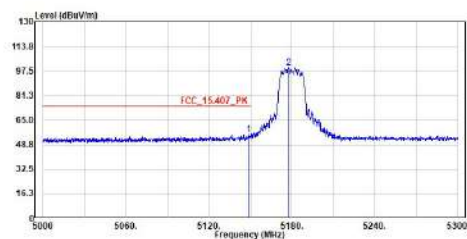


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.000	55.53	74.00	-18.47	32.00	23.53	Peak
2	5177.600	99.63	-----	-----	76.09	23.54	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_C20_TX_5180MHz
Test by :Cyril

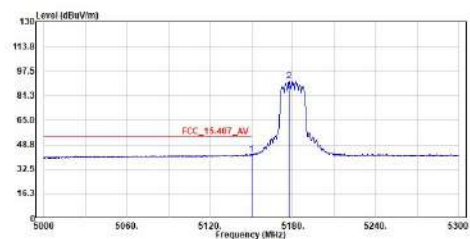


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	42.21	54.00	-11.79	18.68	23.53	Average
2	5177.300	90.53	-----	-----	66.99	23.54	Average

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5180MHz
Test by :Cyril

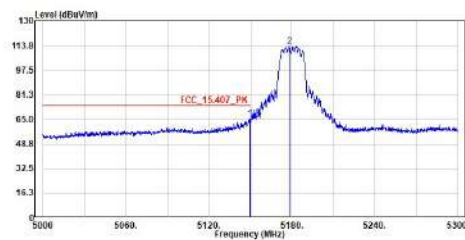


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.550	65.47	74.00	-8.53	41.94	23.53	Peak
2	5178.050	113.20	74.00	39.20	89.66	23.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5180MHz
Test by :Cyril

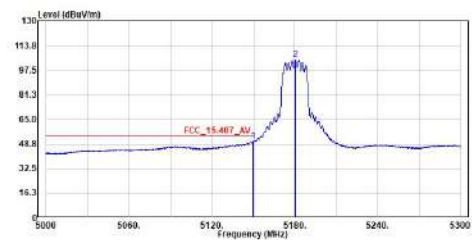


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.700	50.51	74.00	-23.49	26.98	23.53	Average
2	5180.450	104.61	74.00	30.61	81.06	23.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5220MHz
Test by :Cyril

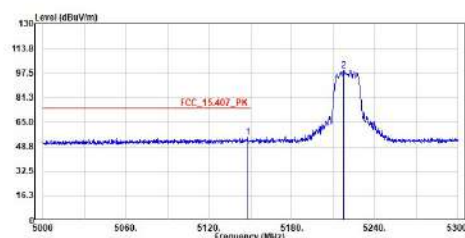


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.900	54.94	74.00	-19.06	31.41	23.53	Peak
2	5217.500	99.14	74.00	25.14	75.58	23.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5220MHz
Test by :Cyril

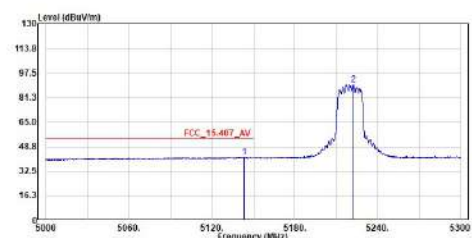


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5143.100	41.80	74.00	-32.20	18.28	23.52	Average
2	5222.300	66.32	74.00	-7.68	66.32	23.57	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5220MHz
Test by :Cyril

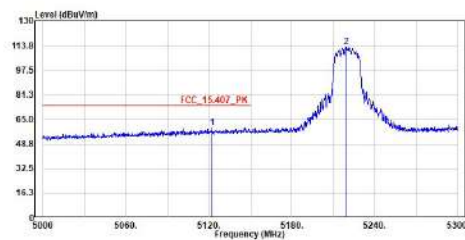


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5122.400	59.22	74.00	-14.78	35.71	23.51	Peak
2	5219.000	112.71	-----	-----	89.15	23.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :aC20_TX_5220MHz
Test by :Cyril

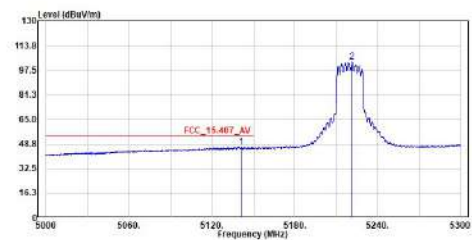


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.158	46.62	54.00	-7.38	23.10	23.52	Average
2	5221.250	102.82	-----	-----	79.25	23.57	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5240MHz
Test by :Cyril

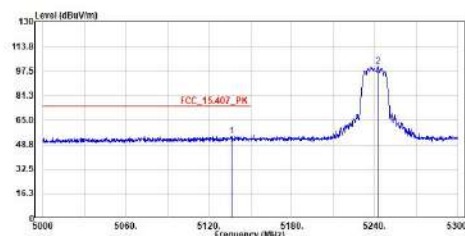


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5136.350	54.50	74.00	-19.50	30.97	23.53	Peak
2	5242.100	100.41	-----	-----	76.83	23.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :aC20_TX_5240MHz
Test by :Cyril

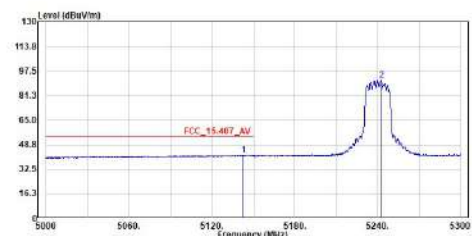


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5142.658	41.83	54.00	-12.17	18.31	23.52	Average
2	5242.000	91.32	-----	-----	67.74	23.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :AC20_TX_5240MHz
Test by :Cyril

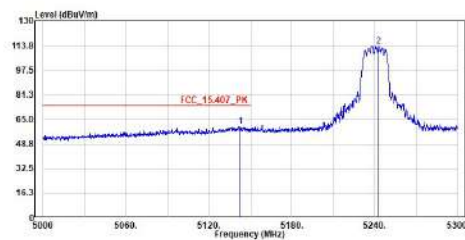


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5142.800	69.52	74.00	-13.48	37.80	23.52	Peak
2	5242.700	113.52	-----	-----	89.94	23.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :AC20_TX_5240MHz
Test by :Cyril

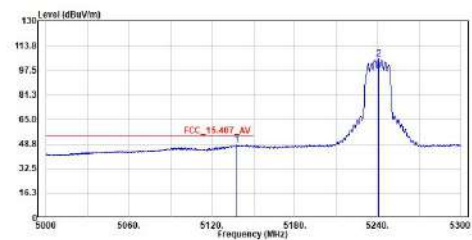


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5138.000	47.93	54.00	-6.07	24.41	23.52	Average
2	5240.450	104.84	-----	-----	81.26	23.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :AC20_TX_5745MHz
Test by :Cyril

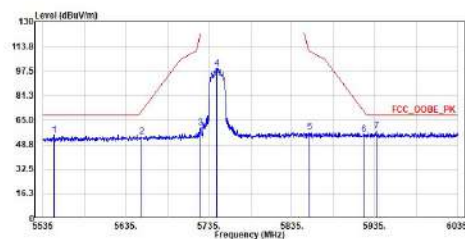


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5548.250	55.01	68.20	-13.19	31.12	23.89	Peak
2	5654.250	54.19	71.35	-17.16	29.94	24.25	Peak
3	5725.000	59.75	122.20	-62.45	35.25	24.50	Peak
4	5744.000	99.00	-----	-----	74.43	24.57	Peak
5	5850.250	56.35	110.45	-53.52	31.08	24.95	Peak
6	5921.500	55.67	70.80	-15.13	30.48	25.18	Peak
7	5955.000	57.67	68.20	-10.53	32.44	25.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :AC20_TX_5745MHz
Test by :Cyril

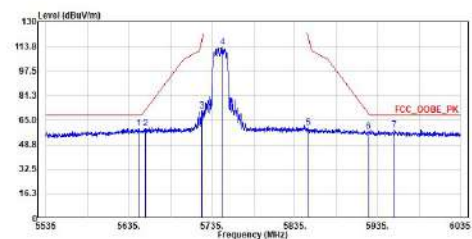


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.000	59.48	68.20	-8.72	35.26	24.22	Peak
2	5654.500	59.17	71.54	-12.37	34.92	24.25	Peak
3	5723.000	71.36	117.64	-46.28	46.87	24.49	Peak
4	5748.000	113.28	-----	-----	88.70	24.58	Peak
5	5850.500	59.84	121.06	-61.22	34.91	24.93	Peak
6	5923.750	57.38	69.13	-11.75	32.20	25.18	Peak
7	5955.000	58.43	68.20	-9.77	33.14	25.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :AC20_TX_5785MHz
Test by :Cyril

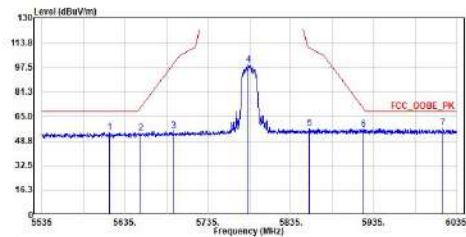


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5616.000	54.42	68.20	-13.78	38.29	24.13	Peak
2	5653.500	53.86	70.80	-16.94	29.61	24.25	Peak
3	5693.250	55.34	100.21	-44.87	30.95	24.39	Peak
4	5783.750	98.90	-----	-----	74.20	24.70	Peak
5	5857.250	56.85	110.17	-53.32	31.69	24.96	Peak
6	5922.000	56.57	70.43	-13.86	31.39	25.18	Peak
7	6018.500	57.20	68.20	-11.00	31.64	25.56	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :AC20_TX_5785MHz
Test by :Cyril

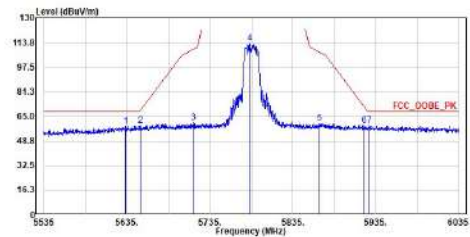


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5633.500	58.32	68.20	-9.88	34.15	24.17	Peak
2	5651.250	58.75	69.13	-10.38	34.51	24.24	Peak
3	5715.000	60.63	109.40	-48.77	36.17	24.46	Peak
4	5783.000	113.11	-----	-----	88.41	24.70	Peak
5	5887.900	60.40	107.44	-47.04	35.40	25.00	Peak
6	5920.750	58.85	71.35	-12.50	33.67	25.18	Peak
7	5927.000	58.88	68.20	-9.32	33.69	25.19	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :AC20_TX_5825MHz
Test by :Cyril

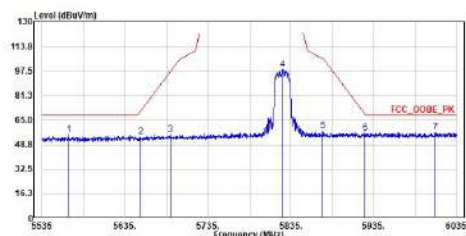


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5567.000	55.52	68.20	-12.68	31.57	23.95	Peak
2	5653.500	53.76	70.80	-17.04	29.51	24.25	Peak
3	5689.500	55.62	97.43	-41.81	31.24	24.38	Peak
4	5824.500	98.42	-----	-----	73.58	24.84	Peak
5	5873.250	57.77	105.89	-47.92	32.76	25.01	Peak
6	5924.000	56.21	68.95	-12.74	31.83	25.18	Peak
7	6009.250	56.91	68.20	-11.29	31.41	25.50	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :AC20_TX_5825MHz
Test by :Cyril

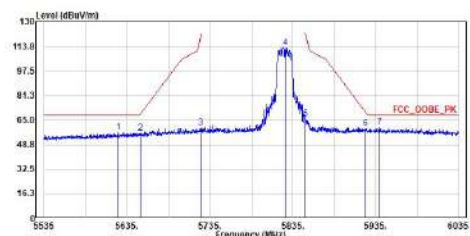


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5624.250	56.82	68.20	-11.28	32.77	24.15	Peak
2	5651.500	56.23	69.32	-13.09	31.99	24.24	Peak
3	5723.500	59.60	118.78	-59.18	35.11	24.49	Peak
4	5825.750	113.02	-----	-----	88.17	24.85	Peak
5	5850.000	65.57	122.20	-56.63	40.64	24.93	Peak
6	5922.750	59.57	68.87	-10.30	34.39	25.18	Peak
7	5939.750	60.47	68.20	-7.73	35.23	25.24	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5190MHz
Test by :Cyril

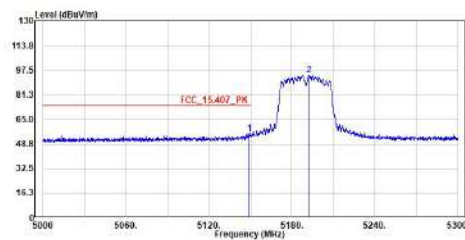


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.400	55.51	74.00	-18.49	31.98	23.53	Peak
2	5192.150	94.36	-----	-----	70.81	23.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5190MHz
Test by :Cyril

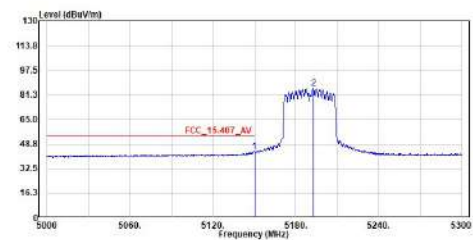


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	45.69	54.00	-10.31	20.16	23.53	Average
2	5192.600	85.47	-----	-----	61.92	23.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5190MHz
Test by :Cyril

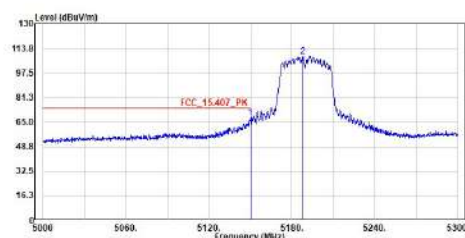


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	67.94	74.00	-6.06	44.41	23.53	Peak
2	5187.950	108.50	-----	-----	84.95	23.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5190MHz
Test by :Cyril

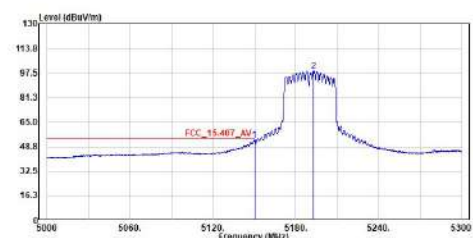


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	52.97	54.00	-1.03	29.44	23.53	Average
2	5192.750	98.75	-----	-----	75.20	23.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5230MHz
Test by :Cyril

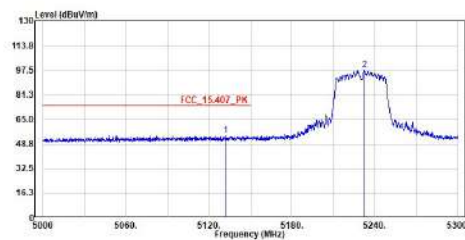


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5131.850	54.51	74.00	-19.49	30.98	23.53	Peak
2	5232.350	97.40	-----	-----	73.82	23.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5230MHz
Test by :Cyril

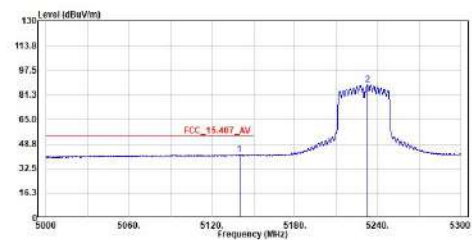


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5139.800	41.61	54.00	-12.39	18.89	23.52	Average
2	5232.200	87.88	-----	-----	64.30	23.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5230MHz
Test by :Cyril

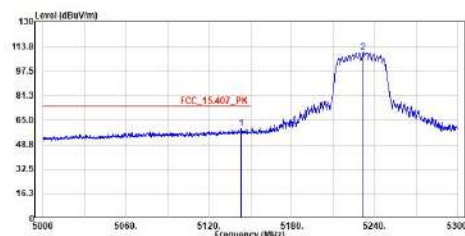


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5143.550	59.57	74.00	-14.43	36.05	23.52	Peak
2	5231.450	109.91	-----	-----	86.33	23.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5230MHz
Test by :Cyril

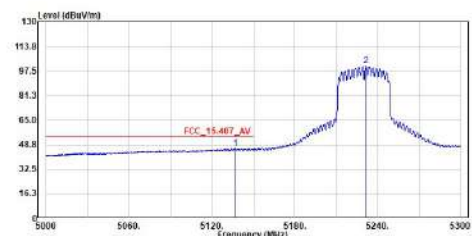


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5136.650	46.31	54.00	-7.69	22.78	23.53	Average
2	5231.450	100.99	-----	-----	77.41	23.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5755MHz
Test by :Cyril

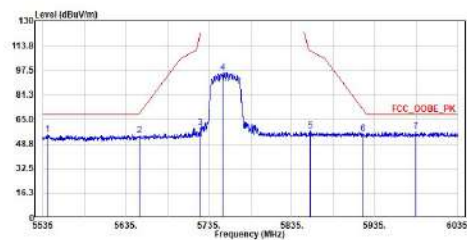


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5540.500	55.06	68.20	-13.14	31.20	23.86	Peak
2	5651.500	54.53	69.32	-14.79	30.29	24.24	Peak
3	5724.750	59.35	121.63	-62.28	34.85	24.50	Peak
4	5751.500	95.70	-----	-----	71.11	24.59	Peak
5	5857.250	57.26	110.17	-52.91	32.30	24.96	Peak
6	5921.000	55.25	71.17	-15.92	30.67	25.18	Peak
7	5984.500	59.86	68.20	-11.34	31.46	25.00	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5755MHz
Test by :Cyril

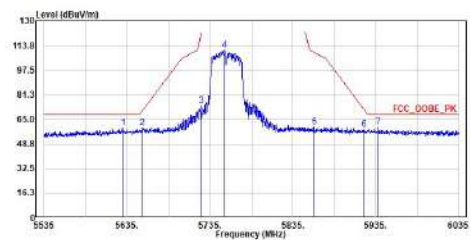


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5630.500	59.33	68.20	-8.87	35.16	24.17	Peak
2	5653.000	59.19	70.43	-11.24	34.94	24.25	Peak
3	5724.750	73.85	121.63	-47.78	49.35	24.50	Peak
4	5752.750	110.62	-----	-----	86.02	24.60	Peak
5	5880.250	59.89	109.35	-49.44	34.93	24.96	Peak
6	5921.000	58.25	71.17	-12.92	33.67	25.18	Peak
7	5938.000	59.75	68.20	-8.45	34.52	25.23	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac40_TX_5795MHz
Test by :Cyril

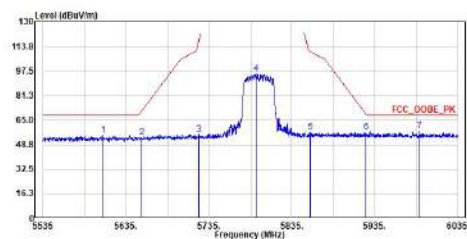


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5607.500	55.13	68.20	-13.07	31.04	24.09	Peak
2	5654.250	53.28	71.35	-18.07	29.83	24.25	Peak
3	5723.000	55.23	117.64	-62.41	30.74	24.49	Peak
4	5791.500	95.50	-----	-----	70.77	24.73	Peak
5	5859.750	57.82	110.31	-52.49	32.07	24.95	Peak
6	5924.000	56.86	68.95	-12.09	31.68	25.18	Peak
7	5988.750	57.82	68.20	-10.38	32.41	25.41	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac40_TX_5795MHz
Test by :Cyril

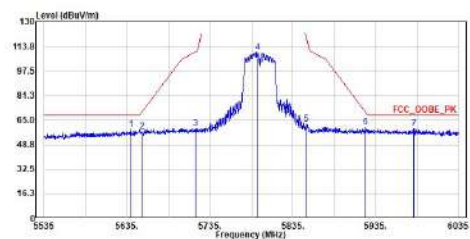


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5639.250	58.72	68.20	-9.48	34.51	24.21	Peak
2	5653.000	57.46	70.43	-12.97	33.21	24.25	Peak
3	5717.500	59.48	110.10	-50.62	35.01	24.47	Peak
4	5792.750	109.83	-----	-----	85.10	24.73	Peak
5	5850.500	62.27	121.06	-58.79	37.54	24.93	Peak
6	5922.750	60.15	69.87	-9.72	34.97	25.18	Peak
7	5980.250	59.16	68.20	-9.04	33.78	25.38	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5210MHz
Test by :Cyril

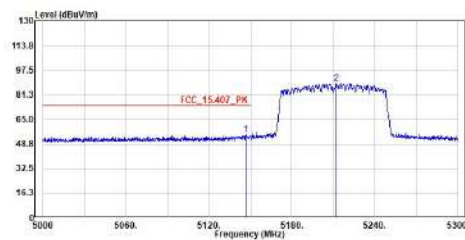


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.700	54.85	74.00	-19.15	31.32	23.53	Peak
2	5212.250	88.76	-----	-----	65.39	23.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5210MHz
Test by :Cyril

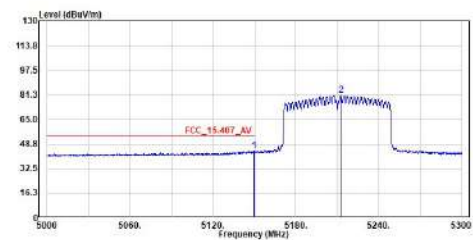


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.700	44.22	54.00	-9.78	20.69	23.53	Average
2	5212.000	80.78	-----	-----	57.21	23.57	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5210MHz
Test by :Cyril

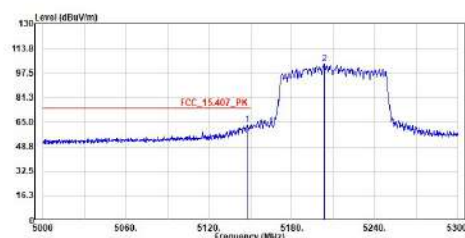


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.450	63.17	74.00	-10.83	39.64	23.53	Peak
2	5203.250	103.28	-----	-----	79.71	23.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5210MHz
Test by :Cyril

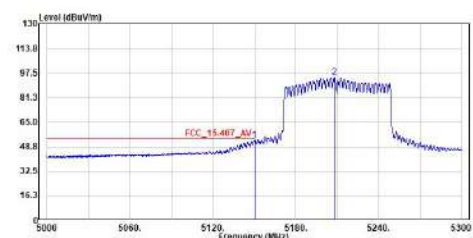


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	52.96	54.00	-1.04	29.43	23.53	Average
2	5207.750	94.51	-----	-----	70.94	23.57	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ac80_TX_5775MHz
Test by :Cyril

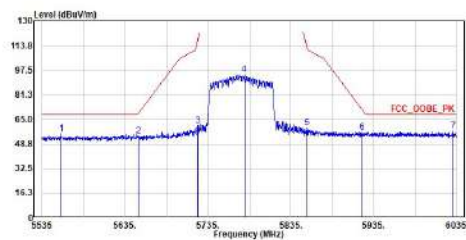


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5558.250	55.24	68.20	-12.96	31.31	23.93	Peak
2	5651.500	53.77	69.32	-15.55	29.53	24.24	Peak
3	5723.000	60.77	117.64	-56.87	36.28	24.49	Peak
4	5778.750	94.67	-----	-----	69.99	24.68	Peak
5	5854.500	59.55	111.94	-52.39	34.60	24.95	Peak
6	5920.500	56.25	73.54	-15.29	31.67	25.18	Peak
7	6039.500	57.28	68.20	-10.92	31.66	25.62	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ac80_TX_5775MHz
Test by :Cyril

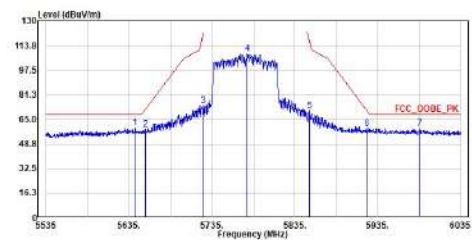

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.500	59.18	68.20	-9.02	34.97	24.21	Peak
2	5654.750	58.42	71.72	-13.30	34.17	24.25	Peak
3	5725.000	74.32	122.20	-47.88	49.82	24.50	Peak
4	5777.500	108.37	-----	-----	83.69	24.68	Peak
5	5852.750	70.43	115.93	-45.50	45.48	24.95	Peak
6	5921.500	58.81	70.80	-11.99	33.63	25.18	Peak
7	5985.500	59.09	68.20	-9.11	33.69	25.40	Peak

Note:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Appendix A

➤ Test Result of Radiated Emissions Co-location


Mode 1: Transmit - power by adapter

1. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: WCDMA function

30 MHz ~ 1 GHz:

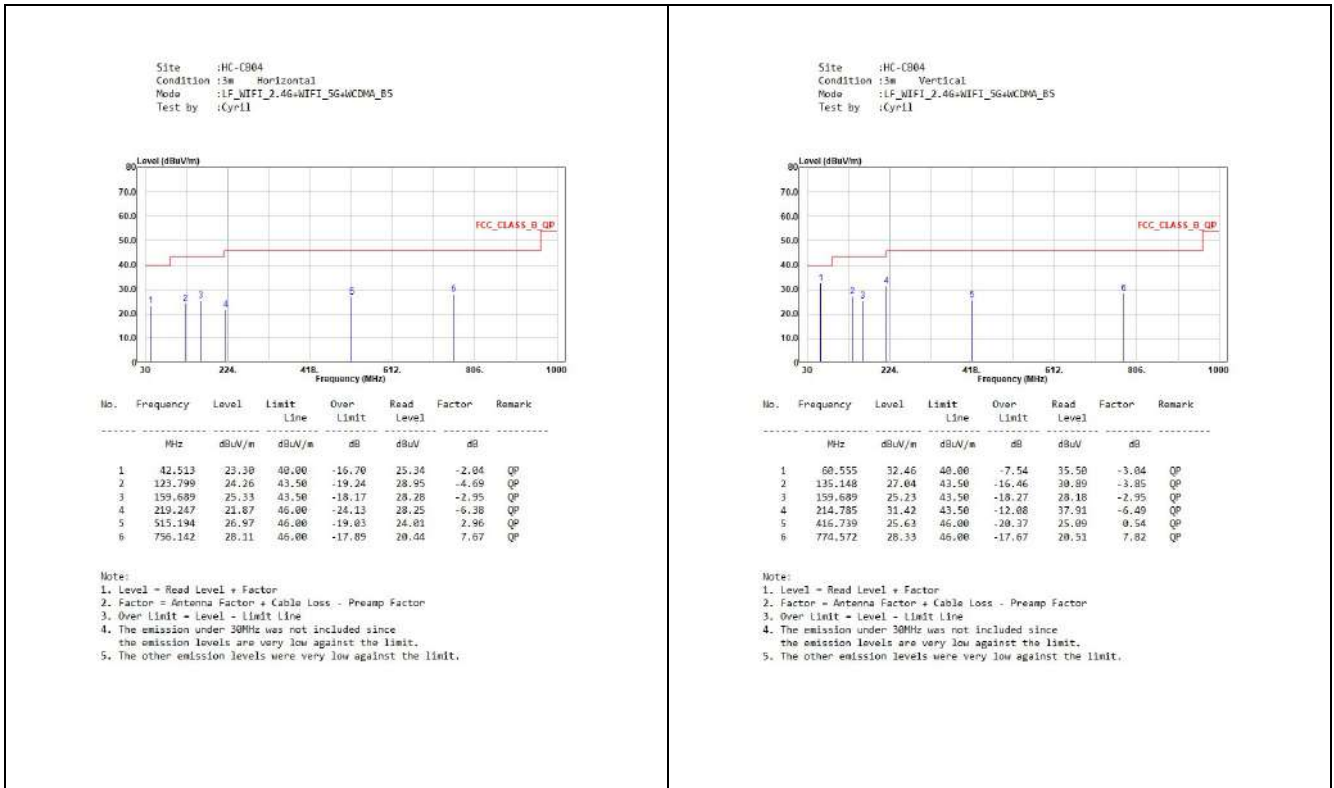


Above 1 GHz:

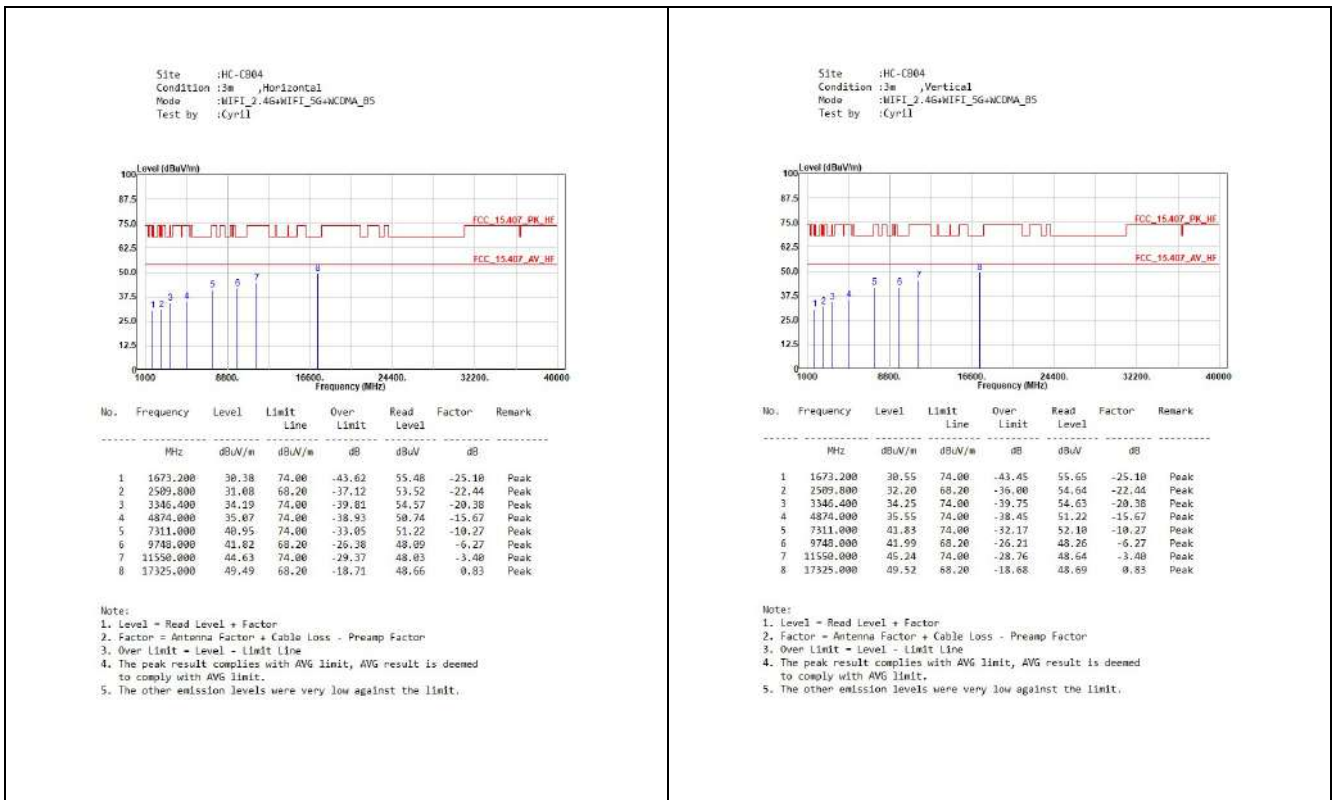


2. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: LTE function

30 MHz ~ 1 GHz:

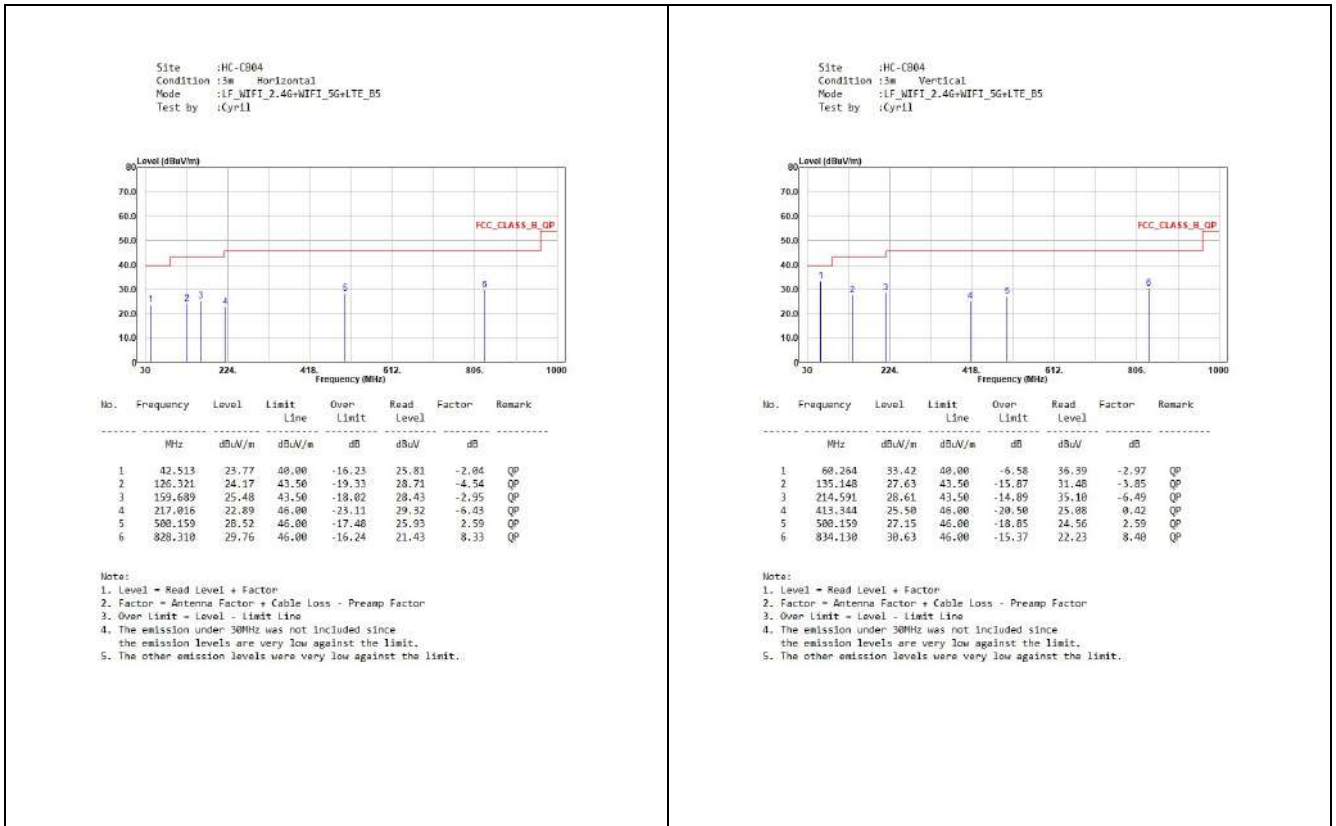

Above 1 GHz:

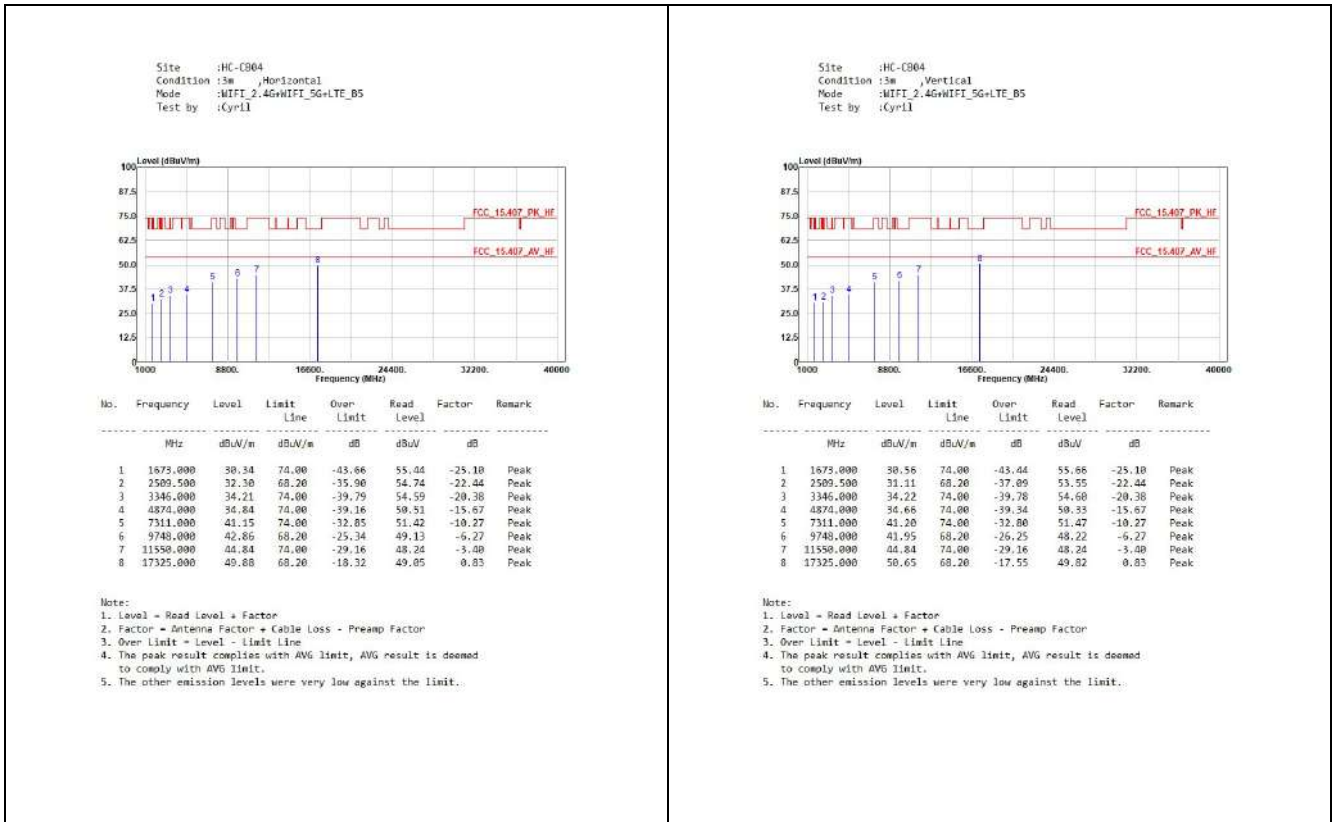


Mode 2: Transmit - power by 802.3at PoE

1. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: WCDMA function

30 MHz ~ 1 GHz:

Site :HC-C004
 Condition :3m Horizontal
 Mode :LF_WIFI_2.4G+WIFI_5G+WCDMA_B5
 Test by :Scott

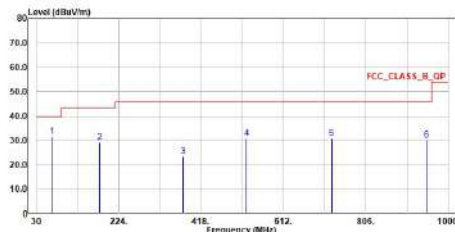


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	66.278	31.83	49.00	-8.17	35.91	-4.08	QP
2	178.410	29.25	43.50	-14.25	33.58	-4.33	QP
3	375.029	23.67	46.00	-22.33	24.11	-0.44	QP
4	525.088	30.89	46.00	-15.11	27.70	3.19	QP
5	725.102	30.79	46.00	-15.21	23.91	6.88	QP
6	948.978	30.10	46.00	-15.90	20.19	9.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C004
 Condition :3m Vertical
 Mode :LF_WIFI_2.4G+WIFI_5G+WCDMA_B5
 Test by :Scott

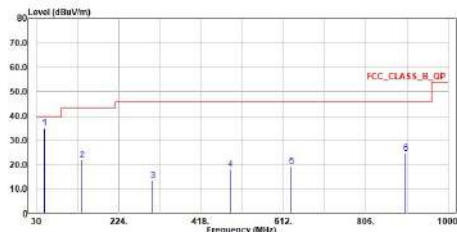


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	49.400	35.11	49.00	-4.89	37.52	-2.41	QP
2	136.991	22.09	43.50	-21.41	25.85	-3.76	QP
3	304.704	13.61	46.00	-32.39	15.92	-2.31	QP
4	486.482	18.19	46.00	-27.81	15.91	2.28	QP
5	631.109	19.38	46.00	-26.62	13.78	5.60	QP
6	899.605	24.71	46.00	-21.29	15.69	9.02	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

2. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: LTE function 30 MHz ~ 1 GHz:

Site :HC-C804
Condition :3m Horizontal
Mode :IF_WiFi_2.4G+WiFi_5G+LTE_B5
Test by :iScott

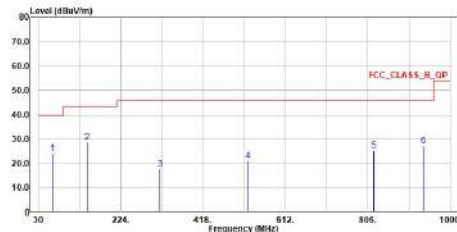


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	83.455	24.30	48.00	-15.70	27.66	-3.36	QP
2	145.236	28.55	43.50	-14.95	31.89	-3.34	QP
3	315.471	17.73	46.00	-28.27	19.68	-1.95	QP
4	522.857	23.01	46.00	-24.99	17.85	3.18	QP
5	820.259	25.49	46.00	-20.51	17.33	8.16	QP
6	936.756	27.02	46.00	-18.98	17.32	9.70	QP

Notes:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C804
Condition :3m Vertical
Mode :IF_WiFi_2.4G+WiFi_5G+LTE_B5
Test by :iScott

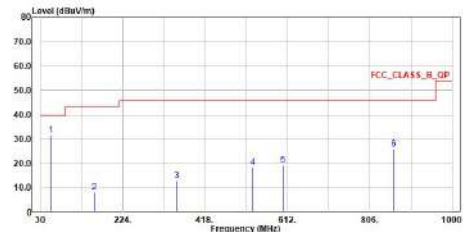

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	53.571	31.58	48.00	-8.42	34.27	-2.69	QP
2	156.876	8.24	43.50	-35.26	11.07	-2.83	QP
3	351.846	13.05	46.00	-32.95	14.24	-1.19	QP
4	530.526	18.44	46.00	-27.56	15.22	3.22	QP
5	600.554	19.45	46.00	-26.55	14.26	5.19	QP
6	860.805	25.87	46.00	-20.13	17.25	8.62	QP

Notes:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

<For EUT 2>


Mode 1: Transmit - power by adapter

1. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: WCDMA function

30 MHz ~ 1 GHz:

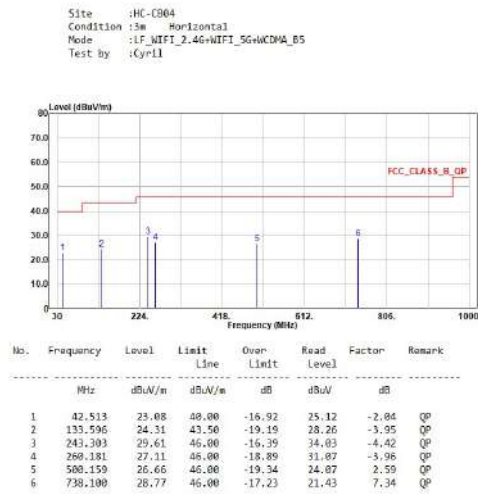


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

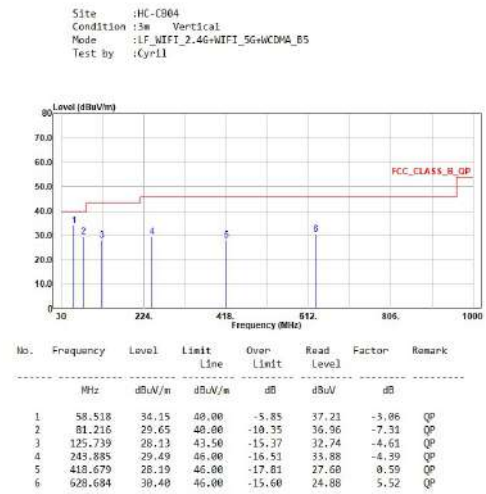


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz:

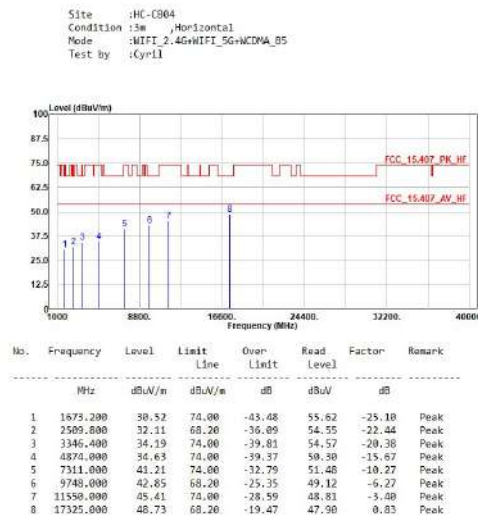


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

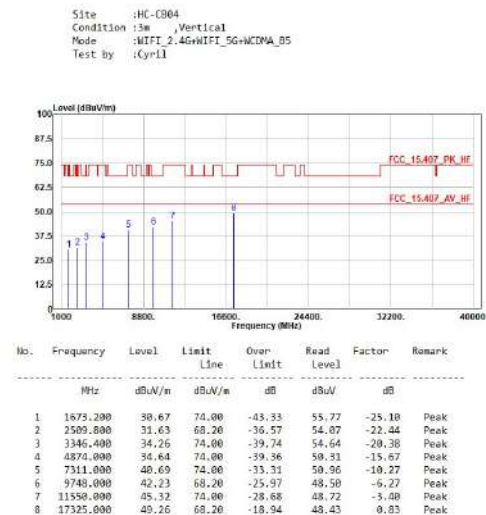


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

2. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: LTE function

30 MHz ~ 1 GHz:

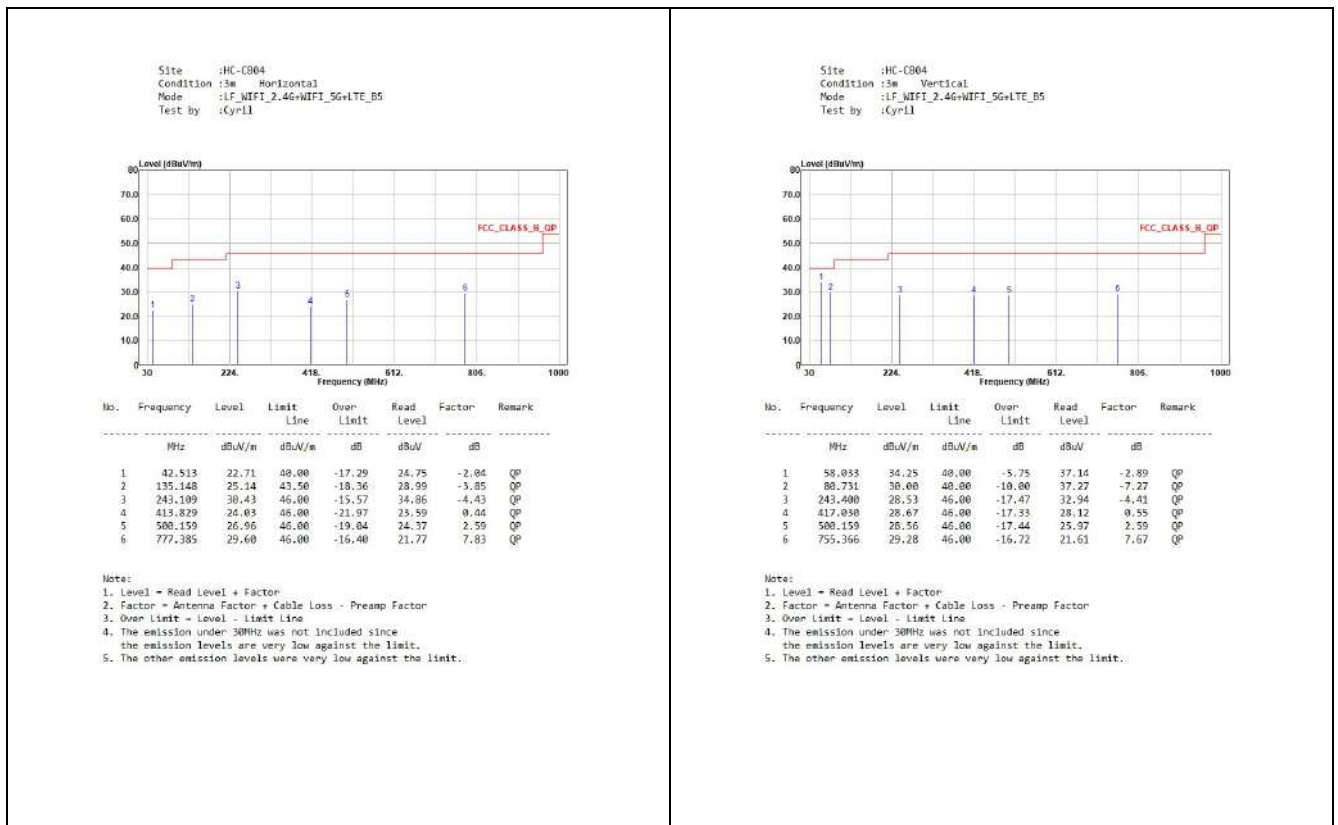

Above 1 GHz:

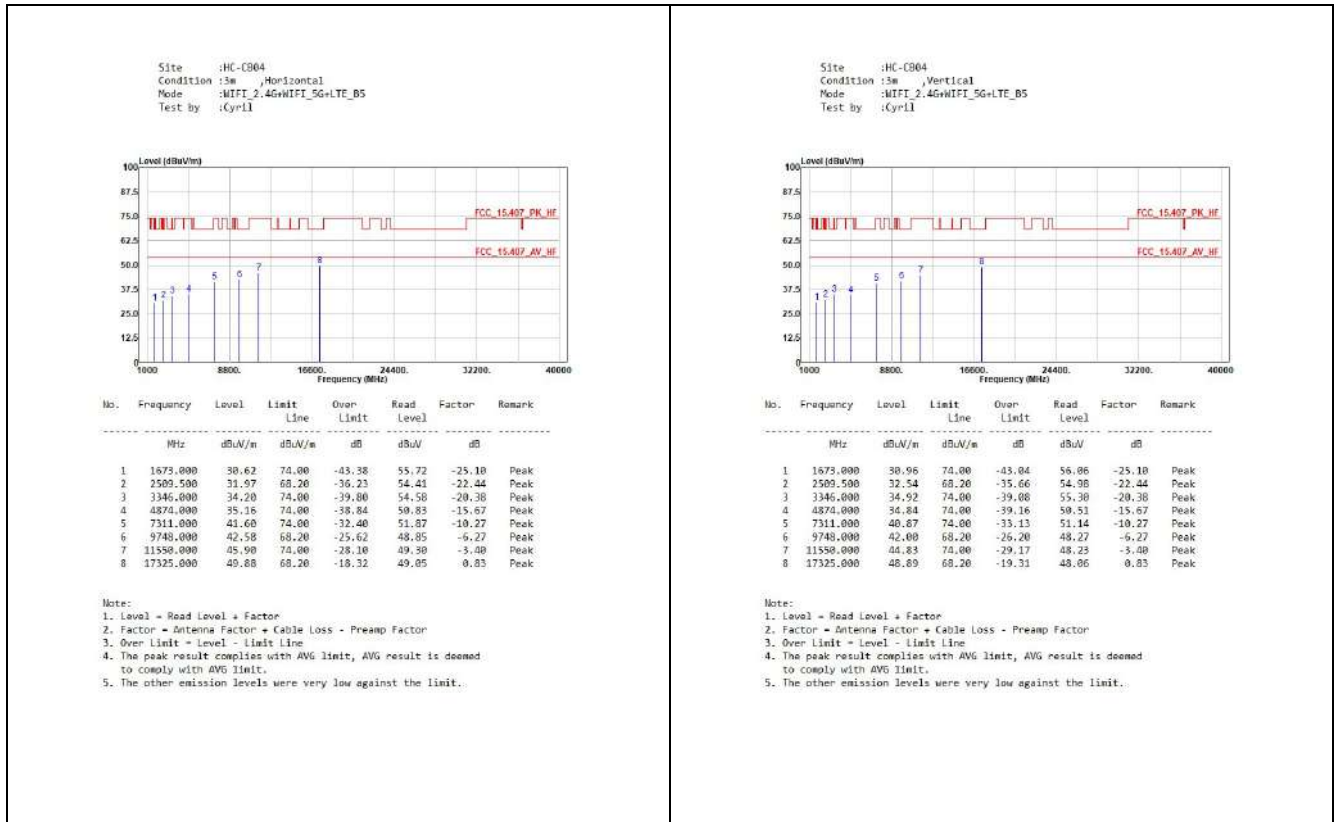


Mode 2: Transmit - power by 802.3at PoE

1. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: WCDMA function

30 MHz ~ 1 GHz:

Site :HC-C004
Condition :3m Horizontal
Mode :LF_WIFI_2.4G+WIFI_5G+WCDMA_B5
Test by :Scott

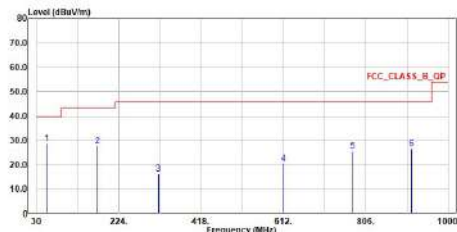


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	53.571	-28.60	49.00	-11.00	31.29	-2.69	QP
2	174.142	-27.72	43.50	-15.78	31.41	-3.69	QP
3	317.120	-16.32	46.00	-29.68	18.24	-1.92	QP
4	612.097	-20.42	46.00	-25.58	15.20	5.22	QP
5	774.863	-25.57	46.00	-20.43	17.75	7.82	QP
6	912.797	-26.47	46.00	-19.53	17.14	9.33	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C004
Condition :3m Vertical
Mode :LF_WIFI_2.4G+WIFI_5G+WCDMA_B5
Test by :Scott

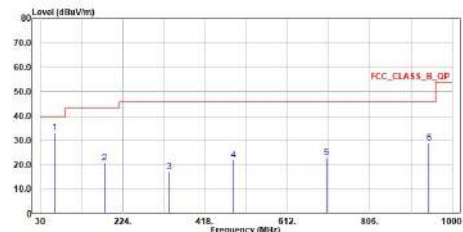


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	62.689	-33.32	49.00	-6.68	36.89	-3.37	QP
2	181.611	-28.96	43.50	-22.54	25.56	-4.60	QP
3	332.834	-17.11	46.00	-28.89	18.54	-1.43	QP
4	484.057	-21.91	46.00	-24.09	19.67	2.24	QP
5	782.986	-23.62	46.00	-22.98	16.45	6.57	QP
6	944.225	-28.94	46.00	-17.06	19.87	9.87	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

2. WiFi 2.4 GHz + WiFi 5 GHz + WWAN module: LTE function 30 MHz ~ 1 GHz:

Site :HC-C804
Condition :3m Horizontal
Mode :IF_WiFi_2.4G+WiFi_5G+LTE_B5
Test by :iScott

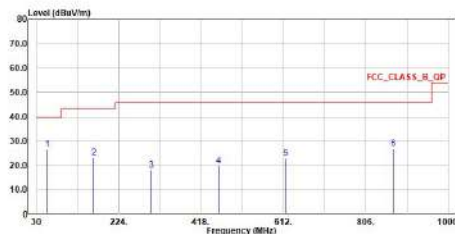


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	55.220	26.47	40.00	-13.53	29.31	-2.84	QP
2	165.121	23.34	43.50	-20.16	26.44	-5.10	QP
3	301.406	18.12	46.00	-27.88	20.51	-2.39	QP
4	439.049	19.88	46.00	-26.12	17.96	1.92	QP
5	616.171	22.97	46.00	-23.03	17.72	5.25	QP
6	869.826	26.84	46.00	-19.16	18.12	8.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C804
Condition :3m Vertical
Mode :IF_WiFi_2.4G+WiFi_5G+LTE_B5
Test by :iScott

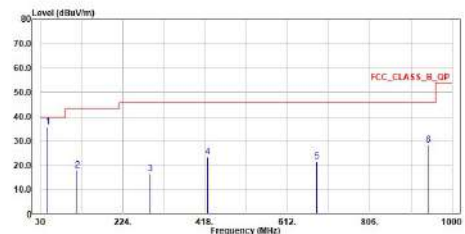

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	47.751	35.92	40.00	-4.08	38.08	-2.16	QP
2	117.203	18.02	43.50	-25.48	23.39	-5.37	QP
3	286.214	16.60	46.00	-29.40	19.11	-2.51	QP
4	429.729	29.52	46.00	-22.48	22.74	0.78	QP
5	681.452	21.67	46.00	-24.13	15.87	6.00	QP
6	942.576	28.36	46.00	-17.64	18.52	9.84	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.