Testing Laboratory 3787

# RADIO TEST REPORT

| | | |
|---|---|---|
| FCC ID | : | UDX-600201010 |
| Equipment | : | Cisco Wireless 9176I Series Wi-Fi 7 Access Point |
| Brand Name | : | CISCO |
| Model Name | : | CW9176I |
| Applicant | : | Cisco Systems, Inc.<br>170 West Tasman Drive, San Jose, CA 95134 USA |
| Manufacturer | : | Cisco Systems, Inc.<br>170 West Tasman Drive, San Jose, CA 95134 USA |
| Standard | : | 47 CFR FCC Part 15.407 |

**The product was received on Mar. 07, 2024, and testing was started from Apr. 08, 2024 and completed on Sep. 03, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.**

**The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.**

**Approved by: Sam Chen**

***Sporton International Inc. Hsinchu Laboratory***
*No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)*

# Table of Contents

**History of this test report** ..... **3**

**Summary of Test Result** ..... **4**

**1 General Description** ..... **5**

1.1 Information ..... 5
1.2 Applicable Standards ..... 19
1.3 Testing Location Information ..... 19
1.4 Measurement Uncertainty ..... 20

**2 Test Configuration of EUT** ..... **21**

2.1 Test Channel Mode ..... 21
2.2 The Worst Case Measurement Configuration ..... 35
2.3 EUT Operation during Test ..... 41
2.4 Accessories ..... 42
2.5 Support Equipment ..... 42
2.6 Test Setup Diagram ..... 44

**3 Transmitter Test Result** ..... **48**

3.1 AC Power-line Conducted Emissions ..... 48
3.2 Emission Bandwidth ..... 50
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) ..... 51
3.4 Peak Power Spectral Density (E.I.R.P.) ..... 54
3.5 Unwanted Emissions ..... 57
3.6 Contention Based Protocol ..... 62

**4 Test Equipment and Calibration Data** ..... **63**

**Appendix A. Test Results of AC Power-line Conducted Emissions**

**Appendix B. Test Results of Emission Bandwidth**

**Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)**

**Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)**

**Appendix E. Test Results of Unwanted Emissions**

**Appendix F. Test Results of Contention-Based Protocol**

**Appendix G. Test Photos**

**Photographs of EUT v01**

# History of this test report

| Report No. | Version | Description | Issued Date |
|---|---|---|---|
| FR430535AE | 01 | Initial issue of report | Nov. 05, 2024 |
| FR430535AE | 02 | Revising the typo in the CBP mode 1 test site. | Nov. 26, 2024 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

# Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---|---|---|---|---|
| 1.1.2 | 15.203 | Antenna Requirement | PASS | - |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | PASS | - |
| 3.2 | 15.407(a) | Emission Bandwidth | PASS | - |
| 3.3 | 15.407(a) | Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) | PASS | - |
| 3.4 | 15.407(a) | Peak Power Spectral Density (E.I.R.P.) | PASS | - |
| 3.5 | 15.407(b) | Unwanted Emissions | PASS | - |
| 3.6 | 15.407(d) | Contention-Based Protocol | PASS | - |

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen**
**Report Producer: Wendy Pan**

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

**For Indoor Access Point:**

| Frequency Range (MHz) | IEEE Std. 802.11 | Ch. Frequency (MHz) | Channel Number |
|---|---|---|---|
| 5925-7125 | ax (HEW20), be (EHT20) | 5955-7115 | 1-233 [59] |
| 5925-7125 | ax (HEW40), be (EHT40) | 5965-7085 | 3-227 [29] |
| 5925-7125 | ax (HEW80), be (EHT80) | 5985-7025 | 7-215 [14] |
| 5925-7125 | ax (HEW160), be (EHT160) | 6025-6985 | 15-207 [7] |
| 5925-7125 | be (EHT320) | 6105-6905 | 31-191 [6] |

**For Radio 3**

| Band | Mode | BWch (MHz) | Nant |
|---|---|---|---|
| 5.925-7.125GHz | 802.11ax HEW20 | 20 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW20-BF | 20 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT20 | 20 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT20-BF | 20 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW40 | 40 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW40-BF | 40 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT40 | 40 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT40-BF | 40 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW80 | 80 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW80-BF | 80 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT80 | 80 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT80-BF | 80 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW160 | 160 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11ax HEW160-BF | 160 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT160 | 160 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT160-BF | 160 | 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT320 | 320 | 1, 2, 4TX/4RX |
| 5.925-7.125GHz | 802.11be EHT320-BF | 320 | 2, 4TX/4RX |

**For Radio 4(Pine Scanning radio)**

| Band | Mode | BWch (MHz) | Nant |
|---|---|---|---|
| 5.925-7.125GHz | 802.11ax HEW20 | 20 | 1TX/2RX |

**For Standard Power Access Point:**

| Frequency Range (MHz) | IEEE Std. 802.11 | Ch. Frequency (MHz) | Channel Number |
|---|---|---|---|
| 5925-6425 | ax (HEW20), be (EHT20) | 5955-6415 | 1-93 [24] |
| 6525-6875 | | 6535-6855 | 117-181 [17] |
| 5925-6425 | ax (HEW40), be (EHT40) | 5965-6405 | 3-91 [12] |
| 6525-6875 | | 6565-6845 | 123-179 [8] |
| 5925-6425 | ax (HEW80), be (EHT80) | 5985-6385 | 7-87 [6] |
| 6525-6875 | | 6625-6785 | 135-167 [3] |
| 5925-6425 | ax (HEW160), be (EHT160) | 6025-6345 | 15-79 [3] |
| 6525-6875 | | 6665 | 143 [1] |

**For Radio 3**

| Band | Mode | BWch (MHz) | Nant |
|---|---|---|---|
| 5.925-6.425GHz | 802.11ax HEW20 | 20 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW20-BF | 20 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT20 | 20 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT20-BF | 20 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW40 | 40 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW40-BF | 40 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT40 | 40 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT40-BF | 40 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW80 | 80 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW80-BF | 80 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT80 | 80 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT80-BF | 80 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW160 | 160 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11ax HEW160-BF | 160 | 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT160 | 160 | 1, 2, 4TX/4RX |
| 5.925-6.425GHz | 802.11be EHT160-BF | 160 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW20 | 20 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW20-BF | 20 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT20 | 20 | 1, 2, 4TX/4RX |

| Band | Mode | BWch (MHz) | Nant |
|---|---|---|---|
| 6.525-6.875GHz | 802.11be EHT20-BF | 20 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW40 | 40 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW40-BF | 40 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT40 | 40 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT40-BF | 40 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW80 | 80 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW80-BF | 80 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT80 | 80 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT80-BF | 80 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW160 | 160 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11ax HEW160-BF | 160 | 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT160 | 160 | 1, 2, 4TX/4RX |
| 6.525-6.875GHz | 802.11be EHT160-BF | 160 | 2, 4TX/4RX |

**For Radio 4(Pine Scanning radio)**

| Band | Mode | BWch (MHz) | Nant |
|---|---|---|---|
| 5.925-6.425GHz | 802.11ax HEW20 | 20 | 1/2RX |
| 6.525-6.875GHz | 802.11ax HEW20 | 20 | 1/2RX |

## MRU (static preamble puncturing)

### For Multi-RU:

### For Indoor Access Point and Standard Power Access Point

| RU-tone | Bandwidth (MHz) | | | 6GHz Test CH | |
|---|---|---|---|---|---|
| | | | | UNII-5 | UNII-8 |
| | 80 | | | CH7 | CH215 |
| 242+242(MCS0) | 242 | | 242 | V | V |
| 242+242(MCS4) | 242 | | 242 | V | V |
| 484+242(MCS0) | 484 | | 242 | V | V |
| 484+242(MCS4) | 484 | | 242 | V | V |

| RU-tone | Bandwidth (MHz) | | | | | | 6GHz Test CH | |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | UNII-5 | UNII-8 |
| | 160 | | | | | | CH15 | CH207 |
| 996+484(MCS0) | 484 | | | 996 | | | V | V |
| 996+484(MCS4) | 484 | | | 996 | | | V | V |
| 996+484+3x242(MCS0) | 484 | 242 | | 242 | | 242 | V | V |
| 996+484+3x242(MCS4) | 484 | 242 | | 242 | | 242 | V | V |
| 484+484(MCS0) | 484 | | | | 484 | | V | V |
| 484+484(MCS4) | 484 | | | | 484 | | V | V |

### For Indoor Access Point only

| RU-tone | Bandwidth (MHz) | | | | | 6GHz Test CH | |
|---|---|---|---|---|---|---|---|
| | | | | | | UNII-5 | UNII-8 |
| | 320 | | | | | CH31 | CH191 |
| 3X996(MCS0) | 996 | 996 | 996 | | | V | -- |
| 3X996(MCS4) | 996 | 996 | 996 | | | V | -- |
| 2X996+484(MCS0) | | 484 | 996 | | 996 | -- | V |
| 2X996+484(MCS4) | | 484 | 996 | | 996 | -- | V |
| 2X996+484(MCS0) | 996 | 996 | | 484 | | V | V |
| 2X996+484(MCS4) | 996 | 996 | | 484 | | V | V |
| 2X996(MCS0) | 996 | | | | 996 | V | V |
| 2X996(MCS4) | 996 | | | | 996 | V | V |

## For Puncturing:

### For Indoor Access Point and Standard Power Access Point

| RU-tone | Configuration | Bandwidth (MHz) | | | 6GHz Test CH | |
|---|---|---|---|---|---|---|
| | | | | | UNII-5 | UNII-8 |
| | | 80 | | | CH7 | CH215 |
| 484+242 | 1 | | 242 | 484 | -- | V |
| | 2 | 242 | | 484 | V | V |
| | 3 | 484 | | 242 | V | V |
| | 4 | 484 | 242 | | V | -- |

| RU-tone | Configuration | Bandwidth (MHz) | | | | | 6GHz Test CH | |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | UNII-5 | UNII-8 |
| | | 160 | | | | | CH15 | CH207 |
| 996+484 | 1 | | | 484 | 996 | | -- | V |
| | 2 | 484 | | | 996 | | V | V |
| | 3 | 996 | | | | 484 | V | V |
| | 4 | 996 | | | 484 | | V | -- |
| 996+484+242 | 1 | | 242 | 484 | 996 | | -- | V |
| | 2 | 242 | | 484 | 996 | | V | V |
| | 3 | 484 | | 242 | 996 | | V | V |
| | 4 | 484 | 242 | | 996 | | V | V |
| | 5 | 996 | | | | 242 | 484 | V | V |
| | 6 | 996 | | | 242 | | 484 | V | V |
| | 7 | 996 | | | 484 | | 242 | V | V |
| | 8 | 996 | | | 484 | 242 | | V | -- |

### For Indoor Access Point only

| RU-tone | Configuration | Bandwidth (MHz) | | | | | | 6GHz Test CH | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | UNII-5 | UNII-8 |
| | | 320 | | | | | | CH31 | CH191 |
| 2×996+484 | 1 | | 484 | 996 | 996 | | | -- | -- |
| | 2 | 484 | | 996 | 996 | | | V | -- |
| | 3 | 996 | | 484 | 996 | | | V | -- |
| | 4 | 996 | 484 | | 996 | | | V | -- |
| | 5 | 996 | 996 | | 484 | | | V | -- |
| | 6 | 996 | 996 | 484 | | | | V | -- |
| | 7 | | 484 | 996 | | 996 | | -- | V |
| | 8 | | 484 | 996 | | 996 | | -- | V |
| | 9 | | 996 | | 484 | 996 | | -- | V |
| | 10 | | 996 | 484 | | 996 | | -- | V |
| | 11 | | 996 | 996 | | | 484 | -- | V |
| | 12 | | 996 | 996 | | 484 | | -- | -- |
| 3×996 | 1 | | 996 | 996 | | 996 | | -- | V |
| | 2 | 996 | | 996 | | 996 | | V | V |
| | 3 | 996 | 996 | | | 996 | | V | V |
| | 4 | 996 | 996 | 996 | | | | V | -- |
| 3×996+484 | 1 | | 484 | 996 | 996 | 996 | | -- | V |
| | 2 | 484 | | 996 | 996 | 996 | | V | V |
| | 3 | 996 | | 484 | 996 | 996 | | V | V |
| | 4 | 996 | 484 | | 996 | 996 | | V | V |
| | 5 | 996 | 996 | | 484 | 996 | | V | V |
| | 6 | 996 | 996 | 484 | | 996 | | V | V |
| | 7 | 996 | 996 | 996 | | | 484 | V | V |
| | 8 | 996 | 996 | 996 | | 484 | | V | -- |

Note:
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, EHT160 and EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

### 1.1.2 Worst case of MRU (static preamble puncturing) evaluation procedure

**For Radio 3 6GHz Radiated EIRP/PSD**

| |
|---|
| 1. Complete test Full RU BE & PSD |
| 2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD. |
| 3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration. |
| 4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing. |
| 5. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing. |
| 6. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested. |
| 7. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method . |

**For Radio 4 ((Pine Scanning radio) 6GHz Conducted EIRP/PSD**

| |
|---|
| 1. Complete test Full RU BE & PSD |
| 2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD. |
| 3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration. |
| 4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing. |
| 5. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 & 4 is the same. If there is a channel where the setting drops due to the test in step 4, the MRU(static preamble puncturing) conducted PSD needs to be retested. |
| 6. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method . |

### 1.1.3 Antenna Information

| Ant. | RF Port | Brand Name | Model Name | Ant. Type | Connector | Gain (dBi) | Modes of Operation |
|---|---|---|---|---|---|---|---|
| 1 | 1 | WNC | 95XEAK15.GAV | PCB | I-PEX | Note 1 | 2.4GHz, 5GHz UNII 1~2A (Radio 1) |
| 2 | 3 | WNC | 95XEAK15.GAW | PCB | I-PEX | | |
| 3 | 2 | WNC | 95XEAK15.GAY | PIFA | I-PEX | | |
| 4 | 4 | WNC | 95XEAK15.GAX | PIFA | I-PEX | | |
| 5 | 2 | WNC | 95XEAK15.GAZ | PCB | I-PEX | | 5GHz UNII 1~3 or UNII 2C~3 only (Radio 2) |
| 6 | 3 | WNC | 95XEAK15.GB1 | PCB | I-PEX | | |
| 7 | 1 | WNC | 95XEAK15.GB2 | PIFA | I-PEX | | |
| 8 | 4 | WNC | 95XEAK15.GB3 | PIFA | I-PEX | | |
| 9 | 1 | WNC | 95XEAK15.GB4 | PCB | I-PEX | | 6GHz UNII 5~8 (Radio 3) |
| 10 | 2 | WNC | 95XEAK15.GB5 | PCB | I-PEX | | |
| 11 | 3 | WNC | 95XEAK15.GB7 | PIFA | I-PEX | | |
| 12 | 4 | WNC | 95XEAK15.GB6 | PIFA | I-PEX | | |
| 13 | 2 | WNC | 95XEAK15.GBB | PIFA | I-PEX | | 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8 (Radio 4(Pine Scanning radio)) |
| 14 | 1 | WNC | 95XEAK15.GBA | PIFA | I-PEX | | |
| 15 | 1 | WNC | 95XEAK15.GB8 | PIFA | I-PEX | | Bluetooth and Zigbee (Radio 5) |
| 16 | 1 | WNC | 95XEAK15.GB9 | PIFA | IPEX | 1.16GHz~1.19GHz: 2.9<br>1.56GHz~1.59GHz: 3.9 | GPS (Radio 6) |
| 17 | 1 | WNC | 95XEAK15.GBF | PIFA | IPEX | 5.7 | UWB (Radio 7) |
| 18 | 2 | WNC | 95XEAK15.GBE | PCB | IPEX | 6 | |
| 19 | 3 | WNC | 95XEAK15.GBE | PCB | IPEX | 7.3 | |
| 20 | 4 | WNC | 95XEAK15.GBE | PCB | IPEX | 5.6 | |

Note 1:

| Ant. | Antenna Gain (dBi) | | | |
|---|---|---|---|---|
| | WLAN 2.4GHz (Radio 1) | WLAN 5GHz UNII 1~2A (Radio 1) | | |
| | | 5.2GHz | 5.3GHz | |
| 1 | 4.98 | 2.42 | 3.3 | |
| 2 | 4.38 | 2.59 | 2.48 | |
| 3 | 3.95 | 4.86 | 5.17 | |
| 4 | 3.56 | 3.03 | 2.66 | |
| Ant. | WLAN 5GHz UNII 1~3 (Radio 2) | | | |
| | 5.2GHz | 5.3GHz | 5.6GHz | 5.785GHz |
| 5 | 2.65 | 3.3 | 2.92 | 2.37 |
| 6 | 2.18 | 2.69 | 3.01 | 2.91 |
| 7 | 3.63 | 3.77 | 3.93 | 3.91 |
| 8 | 4.44 | 3.9 | 3.79 | 3.47 |
| Ant. | WLAN 6GHz UNII 5~8 (Radio 3) | | | |
| | 6.175GHz | 6.475GHz | 6.695GHz | 6.995GHz |
| 9 | 3.45 | 4.72 | 3.33 | 3.43 |
| 10 | 4.22 | 5.11 | 4.08 | 4.61 |
| 11 | 4.83 | 3.79 | 3.71 | 4.53 |
| 12 | 5.01 | 4.66 | 4.66 | 5.6 |

| Ant. | WLAN 2.4GHz/5GHz UNII 1~3/WLAN 6GHz UNII 5~8 (Radio 4(Pine Scanning radio)) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | 2.45GHz | 5.2GHz | 5.3GHz | 5.6GHz | 5.785GHz | 6.175GHz | 6.475GHz | 6.695GHz | 6.995GHz |
| 13 | 2.46 | 2.35 | 2.62 | 4.9 | 3.33 | 5.53 | 4.82 | 4.27 | 3.16 |
| 14 | 2.39 | 4.11 | 4.47 | 5.67 | 4.75 | 6.1 | 4.65 | 4.58 | 6.18 |
| Ant. | Bluetooth/Zigbee (Radio 5) | | | | | | | | |
| 15 | 3.58 | | | | | | | | |

Note 2:

| Item | Directional Gain (dBi) | | |
|---|---|---|---|
| | WLAN 2.4GHz (Radio 1) | WLAN 5GHz UNII 1~2A (Radio 1) | |
| | | 5.2GHz | 5.3GHz |
| 2T1S | 5.13 | 4.86 | 5.17 |
| 2T2S | 4.98 | 4.86 | 5.17 |
| 4T1S | 6.92 | 5.15 | 5.29 |
| 4T2S | 4.98 | 4.86 | 5.17 |
| 4T4S | 4.98 | 4.86 | 5.17 |

| Item | WLAN 5GHz UNII 1~3 (Radio 2) / WLAN 6GHz UNII 5~8 (Radio 3) | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | 5.2GHz | 5.3GHz | 5.6GHz | 5.785GHz | 6.175GHz | 6.475GHz | 6.695GHz | 6.995GHz |
| 2T1S | 3.63 | 3.77 | 3.93 | 3.91 | 4.44 | 3.9 | 3.93 | 3.91 |
| 2T2S | 3.63 | 3.77 | 3.93 | 3.91 | 4.44 | 3.9 | 3.93 | 3.91 |
| 4T1S | 5.24 | 5 | 5.57 | 4.69 | 6.4 | 6.14 | 5.25 | 6.29 |
| 4T2S | 4.44 | 3.9 | 3.93 | 3.91 | 5.01 | 5.11 | 4.66 | 5.6 |
| 4T4S | 4.44 | 3.9 | 3.93 | 3.91 | 5.01 | 5.11 | 4.66 | 5.6 |

Note 3: The above information (excepting Ant. 1~15 antenna gain and directional gain) was declared by manufacturer.

Note 4: Radio 1~3: Maximum Directional Gain following KDB662911 D03.

**For Radio 1**

**For 2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (1TX, 2TX, 4TX/4RX) and**

**For 5GHz (UNII 1~2A) IEEE 802.11a/n/ac/ax/be mode (1TX, 2TX, 4TX/4RX):**

**1TX**

Only Port 1 can be use as transmitting antenna.

**2TX**

Port 1, Port 2 can be use as transmitting antenna.

Port 1, Port 2 could transmitting simultaneously.

**4TX**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

**4RX**

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3, Port 4 could receive simultaneously.
**For Radio 2**
**For 5GHz (UNII 1~3 or UNII 2C~3):**
**For IEEE 802.11a/n/ac/ax/be mode (1TX, 2TX, 4TX/4RX):**
**1TX**
Only Port 1 can be use as transmitting antenna.
**2TX**
Port 1, Port 2 can be use as transmitting antenna.
Port 1, Port 2 could transmitting simultaneously.
**4TX**
Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.
**4RX**
Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.
**For Radio 3**
**For 6GHz (UNII 5~8):**
**For IEEE 802.11ax/be mode (1TX, 2TX, 4TX/4RX):**
**1TX**
Only Port 1 can be use as transmitting antenna.
**2TX**
Port 1, Port 2 can be use as transmitting antenna.
Port 1, Port 2 could transmitting simultaneously.
**4TX**
Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.
**4RX**
Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.
**For Radio 4(Pine Scanning radio)**
**For 2.4GHz:**
**For IEEE 802.11b/g/n/VHT/ax mode (1TX/2RX):**
Only Port 1 can be used as transmitting/receiving functions.
Port 1~2 could receive simultaneously.
**For 5GHz (UNII 1~3):**
**For IEEE 802.11a/n/ac/ax mode (1TX/2RX):**
Only Port 1 can be used as transmitting/receiving functions.
Port 1~2 could receive simultaneously.
**For 6GHz (UNII 5~8):**
**For IEEE 802.11ax mode (1TX/2RX):**
Only Port 1 can be used as transmitting/receiving functions.
Port 1~2 could receive simultaneously.
**For Radio 5:**
**For Bluetooth/Zigbee mode (1TX/1RX)**
Only Port 1 can be used as transmitting/receiving functions.
**For Radio 6:**
**For GPS (1TX/1RX)**
Only Port 1 can be used as transmitting/receiving functions.
**For Radio 7:**
**For UWB (1TX/4RX)**
Mounting on a Wall
Only Port 1 can be used as transmitting functions.
Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

Mounting on a Ceiling
Only Port 2 can be used as transmitting functions.
Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

### 1.1.4 Mode Test Duty Cycle

**For Radio 3**
**For Full RU:**
**For Indoor Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT20_Nss1,(MCS0) | 0.997 | 0.01 | 5.454m | 10 |
| 802.11be EHT40_Nss1,(MCS0) | 0.998 | 0.01 | 5.453m | 10 |
| 802.11be EHT80_Nss1,(MCS0) | 0.998 | 0.01 | 5.454m | 10 |
| 802.11be EHT160_Nss1,(MCS0) | 0.998 | 0.01 | 5.454m | 10 |
| 802.11be EHT320_Nss1,(MCS0) | 0.997 | 0.01 | 5.457m | 10 |
| 802.11be EHT20-BF_Nss1,(MCS0) | 0.885 | 0.53 | 2.988m | 1k |
| 802.11be EHT40-BF_Nss1,(MCS0) | 0.922 | 0.35 | 3.712m | 300 |
| 802.11be EHT80-BF_Nss1,(MCS0) | 0.943 | 0.25 | 3.897m | 300 |
| 802.11be EHT160-BF_Nss1,(MCS0) | 0.958 | 0.19 | 3.897m | 300 |
| 802.11be EHT320-BF_Nss1,(MCS0) | 0.93 | 0.32 | 3.982m | 300 |

**For Standard Power Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT20_Nss1,(MCS0) | 0.997 | 0.01 | 5.454m | 10 |
| 802.11be EHT40_Nss1,(MCS0) | 0.998 | 0.01 | 5.453m | 10 |
| 802.11be EHT80_Nss1,(MCS0) | 0.998 | 0.01 | 5.454m | 10 |
| 802.11be EHT160_Nss1,(MCS0) | 0.998 | 0.01 | 5.454m | 10 |
| 802.11be EHT20-BF_Nss 1,(M0) | 0.953 | 0.21 | 2.992m | 1k |
| 802.11be EHT40-BF_Nss 1,(M0) | 0.962 | 0.17 | 3.716m | 300 |
| 802.11be EHT80-BF_Nss 1,(M0) | 0.953 | 0.21 | 3.904m | 300 |
| 802.11be EHT160-BF_Nss 1,(M0) | 0.954 | 0.2 | 3.9m | 300 |

**For Multi RU:**
**For Indoor Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 | 0.828 | 0.82 | 1.761m | 1k |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 | 0.9 | 0.46 | 2.745m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 | 0.823 | 0.85 | 1.42m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 | 0.891 | 0.5 | 2.76m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 | 0.792 | 1.01 | 1.421m | 1k |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 | 0.854 | 0.69 | 1.433m | 1k |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 | 0.907 | 0.42 | 3.041m | 1k |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 | 0.819 | 0.87 | 1.429m | 1k |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 | 0.936 | 0.29 | 5.174m | 300 |

**For Standard Power Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 | 0.866 | 0.62 | 2.749m | 1k |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 | 0.904 | 0.44 | 2.749m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 | 0.808 | 0.93 | 1.425m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 | 0.897 | 0.47 | 2.764m | 1k |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 | 0.815 | 0.89 | 1.425m | 1k |

**For Puncturing:**
**For Indoor Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 | 0.973 | 0.12 | 5.357m | 300 |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 | 0.97 | 0.13 | 5.357m | 300 |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 | 0.97 | 0.13 | 5.357m | 300 |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 | 0.963 | 0.16 | 3.045m | 1k |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 | 0.963 | 0.16 | 3.045m | 1k |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 | 0.963 | 0.16 | 3.045m | 1k |

**For Standard Power Access Point:**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2 | 0.978 | 0.1 | 5.357m | 300 |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8 | 0.981 | 0.08 | 5.377m | 10 |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4 | 0.982 | 0.08 | 5.377m | 10 |

**For Radio 4(Pine Scanning radio)**

| Mode | DC | DCF (dB) | T (s) | VBW (Hz)_1/T |
|---|---|---|---|---|
| 802.11ax HEW20_Nss 1,(M0) | 0.818 | 0.87 | 5.446m | 300 |

Note:
- DC is Duty Cycle.
- DCF is Duty Cycle Factor.

### 1.1.5 EUT Operational Condition

| | | | | |
|---|---|---|---|---|
| **EUT Power Type** | From PoE | | | |
| **Beamforming Function** | ☒ | With beamforming | ☐ | Without beamforming |
| | The product has beamforming function for 802.11n/VHT/ax/be WLAN 2.4GHz(Radio 1), 802.11n/11ac/11ax/11be WLAN 5GHz (Radio1 and Radio 2) and 802.11ax/11be WLAN 6GHz(Radio 3). | | | |
| **Device Type** | ☒ | Indoor Access Point | ☐ | Subordinate |
| | ☐ | Indoor Client | ☒ | Standard Power Access Point (Bandwidth 320 MHz is not available in this mode.) |
| | ☐ | Dual Client | ☐ | Standard Client |
| | ☐ | Fixed Client | ☐ | Very Low Power |
| **Condition of EUT** | ☒ | Indoor | ☐ | Outdoor |
| **Channel Puncturing Function** | ☒ | Supported Static Puncturing (For Radio 3) | | |
| | ☐ | Supported Dynamic Puncturing | | |
| | ☒ | Unsupported (For Radio 4(Pine Scanning radio)) | | |
| | Note: The EUT doesn't support puncturing for CBP. | | | |
| **Support RU** | ☒ | Full RU (For Radio 3, 4) | ☒ | Partial RU (For Radio 3) |
| **Test Software Version** | For Non-beamforming mode:<br>For Full RU:<br>QSPR v6.00.00110.1<br>For Partial RU:<br>MRU:QRCT v4.0.95.1<br>For Beamforming mode:<br>Dos{6.17601.17514} | | | |
| **Software / Firmware Version for CBP** | For Cisco SW:<br>Test Mode:<br>Mode 1: 17.16.0.44<br>Mode 2: 8.8.1.10<br>For Meraki SW:<br>Test Mode:<br>Mode 3~4: 31-1-202403261455-Gd2b3f478a5de-rel-revenant | | | |

Note: The above information was declared by manufacturer.

### 1.1.6 Table for Radio function

| Radio \ Function | WLAN 2.4GHz | WLAN 5GHz | WLAN 6GHz | Bluetooth | Zigbee | GPS | UWB |
|---|---|---|---|---|---|---|---|
| 1 | V | V (UNII 1~2A) | - | - | - | - | - |
| 2 | - | V (UNII 2C~3/ UNII 1~3) | - | - | - | - | - |
| 3 | - | - | V | - | - | - | - |
| 4 (Pine Scanning radio) | V | V (UNII 1~3) | V | - | - | - | - |
| 5 | - | - | - | V | V | - | - |
| 6 | - | - | - | - | - | V | - |
| 7 | - | - | - | - | - | - | V |

Note1: The above information was declared by manufacturer.
Note2: For WLAN 2.4GHz: The Radio 1 and Radio 4(Pine Scanning radio) can't operate at the same frequency.
For WLAN 5GHz: The Radio 1, 2 and Radio 4(Pine Scanning radio) can't operate at the same frequency.
For WLAN 6GHz: The Radio 3 and Radio 4(Pine Scanning radio) can't operate at the same frequency simultaneously.

### 1.1.7 Table for Multiple Listing

| Equipment Name | Model Name | SW | Frequencies supported by 320MHz |
|---|---|---|---|
| Cisco Wireless 9176I Series Wi-Fi 7 Access Point | CW9176I | Cisco | 6105, 6265, 6425, 6745 MHz |
| | | Meraki | 6105, 6265, 6425, 6585, 6745, 6905 MHz |

Note: The above information was declared by manufacturer.

### 1.1.8 Table for EUT Support Function

| Function | Supports Band |
|---|---|
| AP Router | 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8, Bluetooth, Zigbee, UWB and GPS |
| Mesh | 6GHz UNII 5~8 |

Note: The above information was declared by manufacturer.

### 1.1.9 Table for EUT Operation Function

| Mode | Operation Function |
|---|---|
| 1 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 2 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3)+ Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 3 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 4 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 5 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 6 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 7 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 8 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 9 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 10 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 11 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 12 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 13 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 14 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3)+ Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 15 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 16 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 17 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 18 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 19 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 20 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 21 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 22 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 23 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 24 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |

Note: The above information was declared by manufacturer.

## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15.407
- ANSI C63.10-2013
- FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- FCC KDB 987594 D02 v03
- FCC KDB 662911 D03 v01
- FCC KDB 412172 D01 v01r01
- FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location Information | |
|---|---|
| Test Lab.：Sporton International Inc. Hsinchu Laboratory | |
| Hsinchu | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) |
| (TAF: 3787) | TEL: 886-3-656-9065 FAX: 886-3-656-9085 |
| | Test site Designation No. TW3787 with FCC. |
| | Conformity Assessment Body Identifier (CABID) TW3787 with ISED. |

| Test Condition | Test Site No. | Test Engineer | Test Environment (°C / %) | Test Date |
|---|---|---|---|---|
| RF Conducted (For other tests) | TH01-CB | Jay Lo | 23.7~24.3 / 62~64 | Apr. 26, 2024~Jun. 28, 2024 |
| Radiated below 1GHz | 03CH04-CB | Mark Hsu | 22.7-23.8 / 56-59 | Jun. 06, 2024~Jun. 07, 2024 |
| Radiated above 1GHz and RF Radiated (E.I.R.P. PSD) | 03CH01-CB | Mark Hsu | 22-23 / 55-58 | Apr. 19, 2024~May 21, 2024, Jun. 03, 2024~Jun. 28, 2024 |
| | 03CH02-CB | Mark Hsu | 21.8-22.9 / 55-58 | Apr. 19, 2024~May 21, 2024, Jun. 03, 2024~Jun. 28, 2024 |
| | 03CH03-CB | Mark Hsu | 21.4-22.5 / 55-58 | Apr. 19, 2024~May 21, 2024, Jun. 03, 2024~Jun. 28, 2024 |
| RF Radiated (E.I.R.P. Power) | 03CH01-CB | Mark Hsu | 22-23 / 55-58 | Apr. 19, 2024~May 21, 2024 |
| | 03CH02-CB | Mark Hsu | 21.8-22.9 / 55-58 | Apr. 19, 2024~May 21, 2024 |
| | 03CH03-CB | Mark Hsu | 21.4-22.5 / 55-58 | Apr. 19, 2024~May 21, 2024 |
| AC Conduction | CO02-CB | Gray Lee | 20~21 / 61~62 | Jun. 17, 2024 |
| RF Conducted (Contention-Based Protocol test for CISCO FW) | DF01-CB (Test Mode: Mode 1) | Jack Teng | 23.4~25.1 / 58~62 | Aug. 22, 2024~ Aug. 29, 2024 |
| | DF01-CB (Test Mode: Mode 2) | Mason Chen | 23.9~24.4 / 58~62 | Sep. 02, 2024~ Sep. 03, 2024 |
| RF Conducted (Contention-Based Protocol test for Meraki FW) | DF01-CB (Test Mode: Mode 3~4) | Simmon Cheng | 23.5~24.4 / 62~63 | Jun. 17, 2024~ Jun. 19, 2024 |

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

**Test Date: Date Before May 28, 2024**

| Test Items | Uncertainty | Remark |
|---|---|---|
| Radiated Emission (1GHz ~ 18GHz) | 4.1 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 4.2 dB | Confidence levels of 95% |
| Conducted Emission | 3.1 dB | Confidence levels of 95% |
| Output Power Measurement | 0.8 dB | Confidence levels of 95% |
| Power Density Measurement | 3.1 dB | Confidence levels of 95% |
| Bandwidth Measurement | 2.2% | Confidence levels of 95% |

**Test Date: Date After May 27, 2024**

| Test Items | Uncertainty | Remark |
|---|---|---|
| Conducted Emission (150kHz ~ 30MHz) | 3.4 dB | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz) | 4.1 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.2 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 4.2 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 4.0 dB | Confidence levels of 95% |
| Conducted Emission | 3.1 dB | Confidence levels of 95% |
| Output Power Measurement | 0.8 dB | Confidence levels of 95% |
| Power Density Measurement | 3.1 dB | Confidence levels of 95% |
| Bandwidth Measurement | 2.1 % | Confidence levels of 95% |

# 2 Test Configuration of EUT

## 2.1 Test Channel Mode

**For Radio 3**
**For Full_RU:**
**For Indoor Access Point:**

| Mode |
|---|
| 802.11be EHT20_Nss1,(MCS0)_1TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |
| 802.11be EHT40_Nss1,(MCS0)_1TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6445MHz |
| 6485MHz |
| 6525MHz |
| 6565MHz |
| 6685MHz |
| 6885MHz |
| 6925MHz |
| 7005MHz |
| 7085MHz |
| 802.11be EHT80_Nss1,(MCS0)_1TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6465MHz |
| 6545MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 6865MHz |
| 6945MHz |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0)_1TX |

| |
|---|
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6505MHz |
| 6665MHz |
| 6825MHz |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0)_1TX |
| 6105MHz |
| 6265MHz |
| 6425MHz |
| 6585MHz |
| 6745MHz |
| 6905MHz |
| 802.11be EHT20_Nss1,(MCS0)_2TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |
| 802.11be EHT40_Nss1,(MCS0)_2TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6445MHz |
| 6485MHz |
| 6525MHz |
| 6565MHz |
| 6685MHz |
| 6885MHz |
| 6925MHz |
| 7005MHz |
| 7085MHz |
| 802.11be EHT80_Nss1,(MCS0)_2TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6465MHz |
| 6545MHz |
| 6625MHz |
| 6705MHz |

| |
|---|
| 6785MHz |
| 6865MHz |
| 6945MHz |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0)_2TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6505MHz |
| 6665MHz |
| 6825MHz |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0)_2TX |
| 6105MHz |
| 6265MHz |
| 6425MHz |
| 6585MHz |
| 6745MHz |
| 6905MHz |
| 802.11be EHT20_Nss1,(MCS0)_4TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |
| 802.11be EHT40_Nss1,(MCS0)_4TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6445MHz |
| 6485MHz |
| 6525MHz |
| 6565MHz |
| 6685MHz |
| 6885MHz |
| 6925MHz |
| 7005MHz |
| 7085MHz |
| 802.11be EHT80_Nss1,(MCS0)_4TX |
| 5985MHz |
| 6225MHz |

| |
|---|
| 6385MHz |
| 6465MHz |
| 6545MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 6865MHz |
| 6945MHz |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0)_4TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6505MHz |
| 6665MHz |
| 6825MHz |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0)_4TX |
| 6105MHz |
| 6265MHz |
| 6425MHz |
| 6585MHz |
| 6745MHz |
| 6905MHz |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6445MHz |
| 6485MHz |
| 6525MHz |
| 6565MHz |
| 6685MHz |
| 6885MHz |
| 6925MHz |

| |
|---|
| 7005MHz |
| 7085MHz |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6465MHz |
| 6545MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 6865MHz |
| 6945MHz |
| 7025MHz |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6505MHz |
| 6665MHz |
| 6825MHz |
| 6985MHz |
| 802.11be EHT320-BF_Nss1,(MCS0)_2TX |
| 6105MHz |
| 6265MHz |
| 6425MHz |
| 6585MHz |
| 6745MHz |
| 6905MHz |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6445MHz |
| 6485MHz |

| |
|---|
| 6525MHz |
| 6565MHz |
| 6685MHz |
| 6885MHz |
| 6925MHz |
| 7005MHz |
| 7085MHz |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6465MHz |
| 6545MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 6865MHz |
| 6945MHz |
| 7025MHz |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6505MHz |
| 6665MHz |
| 6825MHz |
| 6985MHz |
| 802.11be EHT320-BF_Nss1,(MCS0)_4TX |
| 6105MHz |
| 6265MHz |
| 6425MHz |
| 6585MHz |
| 6745MHz |
| 6905MHz |

**For Standard Power Access Point:**

| Mode |
|---|
| 802.11be EHT20_Nss1,(MCS0)_1TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |
| 6855MHz |
| 802.11be EHT40_Nss1,(MCS0)_1TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6565MHz |

| |
|---|
| 6685MHz |
| 6845MHz |
| 802.11be EHT80_Nss1,(MCS0)_1TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 802.11be EHT160_Nss1,(MCS0)_1TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6665MHz |
| 802.11be EHT20_Nss1,(MCS0)_2TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |
| 6855MHz |
| 802.11be EHT40_Nss1,(MCS0)_2TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6565MHz |
| 6685MHz |
| 6845MHz |
| 802.11be EHT80_Nss1,(MCS0)_2TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 802.11be EHT160_Nss1,(MCS0)_2TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6665MHz |
| 802.11be EHT20_Nss1,(MCS0)_4TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |
| 6855MHz |
| 802.11be EHT40_Nss1,(MCS0)_4TX |
| 5965MHz |

| |
|---|
| 6205MHz |
| 6405MHz |
| 6565MHz |
| 6685MHz |
| 6845MHz |
| 802.11be EHT80_Nss1,(MCS0)_4TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 802.11be EHT160_Nss1,(MCS0)_4TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6665MHz |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |
| 6855MHz |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6565MHz |
| 6685MHz |
| 6845MHz |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6665MHz |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |

| |
|---|
| 6855MHz |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX |
| 5965MHz |
| 6205MHz |
| 6405MHz |
| 6565MHz |
| 6685MHz |
| 6845MHz |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX |
| 5985MHz |
| 6225MHz |
| 6385MHz |
| 6625MHz |
| 6705MHz |
| 6785MHz |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX |
| 6025MHz |
| 6185MHz |
| 6345MHz |
| 6665MHz |

**For Multi_RU:**
**For Indoor Access Point:**

| Mode |
|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX |
| 7025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_1TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_1TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX |

| |
|---|
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_1TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX |
| 6905MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX |
| 7025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_2TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX |
| 6905MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX |
| 7025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX |
| 6025MHz |

| |
|---|
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_4TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX |
| 6905MHz |

**For Standard Power Access Point:**

| Mode |
|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX |
| 6025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX |
| 6025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU726+RU242+RU242 MRU 1_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX |
| 6025MHz |

**For Puncturing:**
**For Indoor Access Point:**

| Mode |
|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_1TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_1TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_1TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_1TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_1TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_1TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_1TX |
| 6905MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_2TX |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_2TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_2TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_2TX |
| 6905MHz |

| |
|---|
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX |
| 6905MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX |
| 5985MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX |
| 7025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX |
| 6985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX |
| 6985MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX |
| 6105MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX |
| 6905MHz |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX |
| 6905MHz |

**For Standard Power Access Point:**

| Mode |
|---|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_1TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX |
| 6025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_2TX |
| 6025MHz |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX |
| 5985MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX |
| 6025MHz |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX |
| 6025MHz |

**For Radio 4(Pine Scanning radio)**
**For Indoor Access Point:**

| Mode |
|---|
| 802.11ax HEW20_Nss1,(MCS0)_1TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6435MHz |
| 6475MHz |
| 6515MHz |
| 6535MHz |
| 6695MHz |
| 6875MHz |
| 6895MHz |
| 6995MHz |
| 7095MHz |
| 7115MHz |

**For Standard Power Access Point:**

| Mode |
|---|
| 802.11ax HEW20_Nss1,(MCS0)_1TX |
| 5955MHz |
| 6195MHz |
| 6415MHz |
| 6535MHz |
| 6695MHz |
| 6855MHz |

Note:
- The puncturing/MRU PSD < Full RU PSD, thus selected the worst case of each combination to perform the Emission MASK and Unwanted Emissions above 1GHz tests

## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| **Tests Item** | AC power-line conducted emissions |
| **Condition** | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |
| **Operating Mode** | CTX |
| 1 | EUT + Radio 1 WLAN 2.4GHz + PoE 1 |
| 2 | EUT + Radio 1 WLAN 2.4GHz + PoE 2 |
| 3 | EUT + Radio 1 WLAN 2.4GHz + PoE 3 |
| 4 | EUT + Radio 1 WLAN 2.4GHz + PoE 4 |
| 5 | EUT + Radio 1 WLAN 2.4GHz + PoE 5 |
| 6 | EUT + Radio 1 WLAN 2.4GHz + PoE 6 |
| 7 | EUT + Radio 1 WLAN 2.4GHz + PoE 7 |
| 8 | EUT + Radio 1 WLAN 2.4GHz + PoE 8 |
| Mode 4 has been evaluated to be the worst case among Mode 1~8, thus measurement for Mode 9~16 will follow this same test mode. | |
| 9 | EUT + Radio 1 WLAN 5GHz (Low Band) + PoE 4 |
| 10 | EUT + Radio 2 WLAN 5GHz + PoE 4 |
| 11 | EUT + Radio 3 WLAN 6GHz + PoE 4 |
| 12 | EUT + Radio 4(Pine Scanning radio) WLAN 2.4GHz + PoE 4 |
| 13 | EUT + Radio 4(Pine Scanning radio) WLAN 5GHz + PoE 4 |
| 14 | EUT + Radio 4(Pine Scanning radio) WLAN 6GHz + PoE 4 |
| 15 | EUT + Radio 5 Bluetooth + PoE 4 |
| 16 | EUT + Radio 5 Zigbee + PoE 4 |
| For operating mode 10 is the worst case and it was record in this test report. | |

| The Worst Case Mode for Following Conformance Tests | | |
|---|---|---|
| **Tests Item** | Emission Bandwidth | |
| **Test Condition** | Conducted measurement at transmit chains | |
| **Test Mode** | 1 | EUT + Radio 3_Indoor Access Point / Non-beamforming mode |
| | 2 | EUT + Radio 3_Indoor Access Point / Beamforming mode |
| | 3 | EUT + Radio 3_Standard Power Access Point / Non-beamforming mode |
| | 4 | EUT + Radio 3_Standard Power Access Point / Beamforming mode |
| | 5 | EUT + Radio 4(Pine Scanning radio)_Indoor Access Point |
| | 6 | EUT + Radio 4(Pine Scanning radio)_Standard Power Access Point |

| The Worst Case Mode for Following Conformance Tests | | |
|---|---|---|
| **Tests Item** | Contention Based Protocol | |
| **Test Condition** | Conducted measurement at transmit chains | |
| **Test Mode** | 1 | Radio 3 for Cisco SW |
| | 2 | Radio 4(Pine Scanning radio) for Cisco SW |
| | 3 | Radio 3 for Meraki SW |
| | 4 | Radio 4(Pine Scanning radio) for Meraki SW |

| The Worst Case Mode for Following Conformance Tests | | |
|---|---|---|
| **Tests Item** | Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) | |
| **Test Condition** | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. | |
| After evaluating, the worst case was found at as below. Thus, the measurement will follow this same test configuration. | | |
| **Test Mode** | 1 | EUT in Y axis + Radio 3_Indoor Access Point / Non-beamforming mode |
| | 2 | EUT in Y axis + Radio 3_Indoor Access Point / Beamforming mode |
| | 3 | EUT in Y axis + Radio 3_Standard Power Access Point / Non-beamforming mode |
| | 4 | EUT in Y axis + Radio 3_Standard Power Access Point / Beamforming mode |
| **Test Condition** | Conducted measurement at transmit chains | |
| **Test Mode** | 5 | EUT + Radio 4(Pine Scanning radio)_Indoor Access Point |
| | 6 | EUT + Radio 4(Pine Scanning radio)_Standard Power Access Point |

| The Worst Case Mode for Following Conformance Tests | | |
|---|---|---|
| **Tests Item** | Peak Power Spectral Density (E.I.R.P.) | |
| **Test Condition** | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. | |
| After evaluating, the worst case was found at as below. Thus, the measurement will follow this same test configuration. | | |
| **Test Mode** | 1 | EUT in Y axis + Radio 3_Full RU_Indoor Access Point / Non-beamforming mode |
| | 2 | EUT in Y axis + Radio 3_Full RU_Indoor Access Point / Beamforming mode |
| | 3 | EUT in Y axis + Radio 3_Multi_RU_Indoor Access Point |
| | 4 | EUT in Y axis + Radio 3_Puncturing_Indoor Access Point |
| | 5 | EUT in Y axis + Radio 3_Full RU_Standard Power Access Point / Non-beamforming mode |
| | 6 | EUT in Y axis + Radio 3_Full RU_Standard Power Access Point / Beamforming mode |
| | 7 | EUT in Y axis + Radio 3_Multi_RU_Standard Power Access Point |
| | 8 | EUT in Y axis + Radio 3_Puncturing_Standard Power Access Point |
| **Test Condition** | Conducted measurement at transmit chains | |
| **Test Mode** | 9 | EUT + Radio 4(Pine Scanning radio)_Indoor Access Point |
| | 10 | EUT + Radio 4(Pine Scanning radio)_Standard Power Access Point |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| **Tests Item** | Unwanted Emissions |
| **Test Condition** | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| **Operating Mode < 1GHz** | CTX |
| After evaluating, the worst case was found at as below for Unwanted Emissions above 1GHz. Thus, the measurement will follow this same test configuration. | |
| 1 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 1 |
| 2 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 2 |
| 3 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 3 |
| 4 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 4 |
| 5 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 5 |
| 6 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 6 |
| 7 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 7 |
| 8 | EUT in Y axis + Radio 1 WLAN 2.4GHz + PoE 8 |
| Mode 1 has been evaluated to be the worst case among Mode 1~8, thus measurement for Mode 9~16 will follow this same test mode. | |
| 9 | EUT in Y axis + Radio 1 WLAN 5GHz (Low Band) + PoE 1 |
| 10 | EUT in Y axis + Radio 2 WLAN 5GHz + PoE 1 |
| 11 | EUT in Y axis + Radio 3 WLAN 6GHz + PoE 1 |
| 12 | EUT in Y axis + Radio 4(Pine Scanning radio) WLAN 2.4GHz + PoE 1 |
| 13 | EUT in Y axis + Radio 4(Pine Scanning radio) WLAN 5GHz + PoE 1 |
| 14 | EUT in Y axis + Radio 4(Pine Scanning radio) WLAN 6GHz + PoE 1 |
| 15 | EUT in X axis + Radio 5 Bluetooth + PoE 1 |
| 16 | EUT in X axis + Radio 5 Zigbee + PoE 1 |
| For operating mode 1 is the worst case and it was record in this test report. | |

| Operating Mode > 1GHz | CTX |
|---|---|
| For Radio 3:<br>After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.<br>For Radio 4(Pine Scanning radio):<br>After evaluating, the worst case was found at Z axis for bandedge, Y axis for harmonic, so it was selected to perform test and its test result was written in the report. | |
| 1 | EUT in Y axis + Radio 3_Full RU_Indoor Access Point / Non-beamforming mode |
| 2 | EUT in Y axis + Radio 3_Full RU_Indoor Access Point / Beamforming mode |
| 3 | EUT in Y axis + Radio 3_Multi_RU_Indoor Access Point |
| 4 | EUT in Y axis + Radio 3_Puncturing_Indoor Access Point |
| 5 | EUT in Y axis + Radio 3_Full RU_Standard Power Access Point / Non-beamforming mode |
| 6 | EUT in Y axis + Radio 3_Full RU_Standard Power Access Point / Beamforming mode |
| 7 | EUT in Y axis + Radio 3_Multi_RU_Standard Power Access Point |
| 8 | EUT in Y axis + Radio 3_Puncturing_Standard Power Access Point |
| 9 | EUT in Z axis for bandedge / EUT in Y axis for harmonic + Radio 4(Pine Scanning radio)_ Indoor Access Point |
| 10 | EUT in Z axis for bandedge / EUT in Y axis for harmonic + Radio 4(Pine Scanning radio)_ Standard Power Access Point |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| **Tests Item** | Emission MASK |
| **Test Condition** | Conducted measurement at transmit chains |
| 1 | EUT + Radio 3_Full RU_Indoor Access Point / Non-beamforming mode |
| 2 | EUT + Radio 3_Full RU_Indoor Access Point / Beamforming mode |
| 3 | EUT + Radio 3_Multi_RU_Indoor Access Point |
| 4 | EUT + Radio 3_Puncturing_Indoor Access Point |
| 5 | EUT + Radio 3_Full RU_Standard Power Access Point / Non-beamforming mode |
| 6 | EUT + Radio 3_Full RU_Standard Power Access Point / Beamforming mode |
| 7 | EUT + Radio 3_Multi_RU_Standard Power Access Point |
| 8 | EUT + Radio 3_Puncturing_Standard Power Access Point |
| 9 | EUT + Radio 4(Pine Scanning radio)_Indoor Access Point |
| 10 | EUT + Radio 4(Pine Scanning radio)_Standard Power Access Point |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| **Tests Item** | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| **Operating Mode** | |
| 1 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 2 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3)+ Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 3 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 4 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 5 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 6 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 7 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 8 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 9 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 10 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 11 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 12 | Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 13 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 14 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3)+ Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 15 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 16 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 17 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 18 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 2C~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| 19 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + |

| | |
|---|---|
| | Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 20 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 21 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Bluetooth + Radio 7 UWB |
| 22 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 2.4GHz + Radio 5 Zigbee + Radio 7 UWB |
| 23 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 5GHz + Radio 5 Zigbee + Radio 7 UWB |
| 24 | Radio 1 WLAN 5GHz (UNII 1~2A) + Radio 2 WLAN 5GHz (UNII 1~3) + Radio 3 WLAN 6GHz + Radio 4(Pine Scanning radio) WLAN 6GHz + Radio 5 Zigbee + Radio 7 UWB |
| Refer to Sporton Test Report No.: FA430535AA for Co-location RF Exposure Evaluation. | |

Note 1: The PoE is for measurement only, would not be marketed.

Their information as below:

| Power | Brand | Model |
|---|---|---|
| PoE 1 | Microsemi | PD-9001GR/AT/AC |
| PoE 2 | PHIHONG | POE29U-1AT(PL) |
| PoE 3 | DELTA | ADH-65AR B |
| PoE 4 | PHIHONG | POEA33U-1ATE |
| PoE 5 | PHIHONG | POE60U-1BT-X |
| PoE 6 | PHIHONG | POE60U-BTA(X66M-R) |
| PoE 7 | PHIHONG | POE60U-BTA(X664-R) |
| PoE 8 | DELTA | ADH-65AR P |

## 2.3 EUT Operation during Test

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.
The program was executed as follows:
1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

## 2.4 Accessories

Bracket 1*1

Bracket 2*1

## 2.5 Support Equipment

**For AC Conduction:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | PoE 4 | PHIHONG | POEA33U-1ATE | N/A |
| B | PC | ASUS | S300TA | N/A |
| C | Flash disk3.0 | Transcend | JetFlash-703 | N/A |

**For Radiated below 1GHz:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | DELL | E4300 | N/A |
| B | PoE 1 | Microsemi | PD-9001GR/AT/AC | N/A |

**For RF Conducted (Other tests) / Non-beamforming mode:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | DELL | E4300 | N/A |
| B | PoE 5 | PHIHONG | POE60U-1BT-X | N/A |

**For RF Conducted (Other tests) / Beamforming mode:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | DELL | E4300 | N/A |
| B | PoE 5 | PHIHONG | POE60U-1BT-X | N/A |
| C | Notebook | DELL | E4300 | N/A |
| D | Client | CISCO | Alpine | N/A |

**For Radiated (above 1GHz), RF Radiated (Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)) and RF Radiated (Peak Power Spectral Density (E.I.R.P.)) / Non-beamforming mode:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | DELL | E4300 | N/A |
| B | PoE 1 | Microsemi | PD-9001GR/AT/AC | N/A |

**For Radiated (above 1GHz), RF Radiated (Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)) and RF Radiated (Peak Power Spectral Density (E.I.R.P.)) / Beamforming mode:**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | DELL | E4300 | N/A |
| B | PoE 1 | Microsemi | PD-9001GR/AT/AC | N/A |
| C | Notebook | DELL | E4300 | N/A |
| D | Client | CISCO | Alpine | N/A |

**For RF Conducted (Contention Based Protocol test):**
**Test Mode: Mode 1**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | Lenovo | L490 | N/A |
| B | Notebook | DELL | E6230 | N/A |
| C | WLAN AP | Qualcom | RDP433 BL02-1+WJK | N/A |
| D | Controller | Cisco | Katar | N/A |
| E | PoE 1 | Microsemi | PD-9001GR/AT/AC | N/A |

**Test Mode: Mode 2**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | Lenovo | L490 | N/A |
| B | PoE 6 | PHIHONG | POE60U-BTA(X66M-R) | N/A |

**Test Mode: Mode 3**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | Lenovo | L490 | N/A |
| B | Notebook | DELL | E6230 | N/A |
| C | WLAN AP | BUFFALO | WZR-HP-G300NH2 | N/A |
| D | PoE 6 | PHIHONG | POE60U-BTA(X66M-R) | N/A |
| E | WLAN AP | Qualcom | RDP433 BL02-1+WJK | N/A |

**Test Mode: Mode 4**

| Support Equipment | | | | |
|---|---|---|---|---|
| **No.** | **Equipment** | **Brand Name** | **Model Name** | **FCC ID** |
| A | Notebook | Lenovo | L490 | N/A |
| B | WLAN AP | BUFFALO | WZR-HP-G300NH2 | N/A |
| C | PoE 6 | PHIHONG | POE60U-BTA(X66M-R) | N/A |

## 2.6 Test Setup Diagram

**Test Setup Diagram – AC Line Conducted Emission Test**

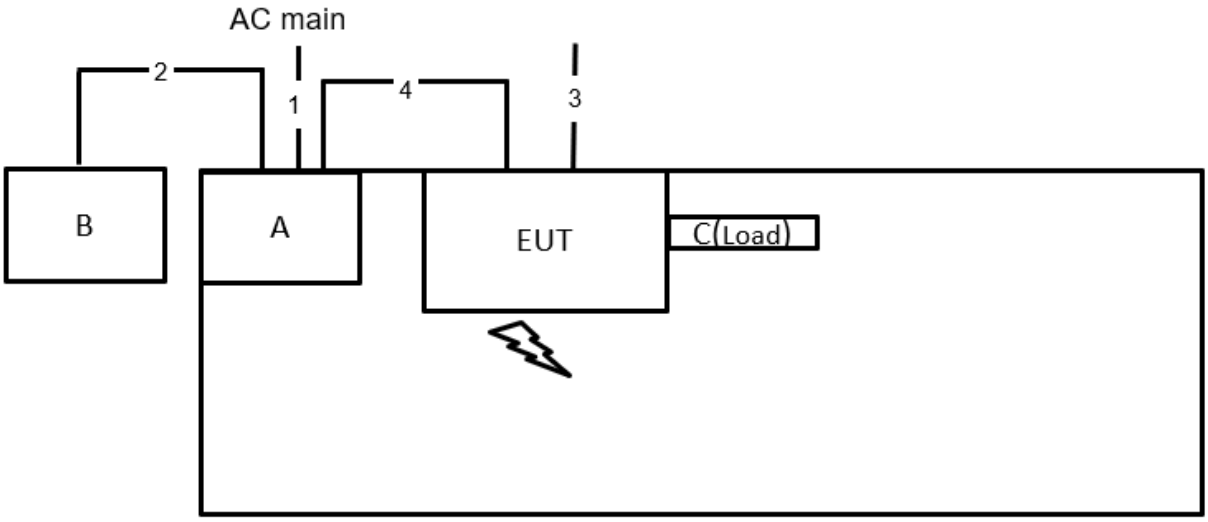


| Item | Connection | Shielded | Length |
|---|---|---|---|
| 1 | Power cable | No | 0.8m |
| 2 | Cat6 RJ-45 Cable | No | 10m |
| 3 | Console cable | No | 1.5m |
| 4 | Cat6 RJ-45 Cable | No | 1.5m |

**Test Setup Diagram - Radiated Test < 1GHz**

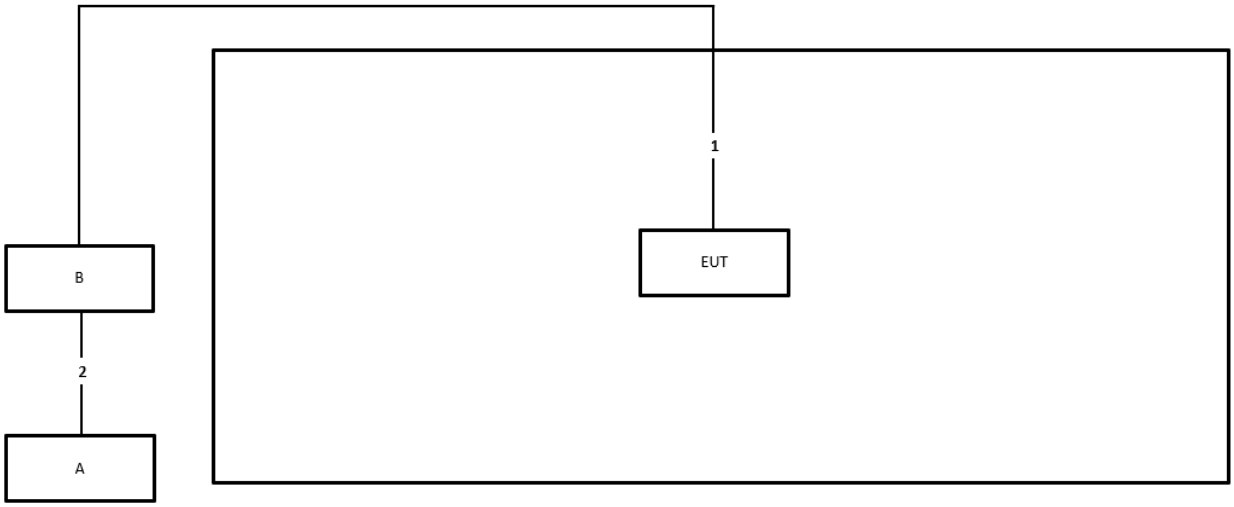


| Item | Connection | Shielded | Length |
|---|---|---|---|
| 1 | RJ-45 cable | No | 10m |
| 2 | RJ-45 cable | No | 1.5m |

**Test Setup Diagram - Radiated Test > 1GHz / Non-beamforming mode**

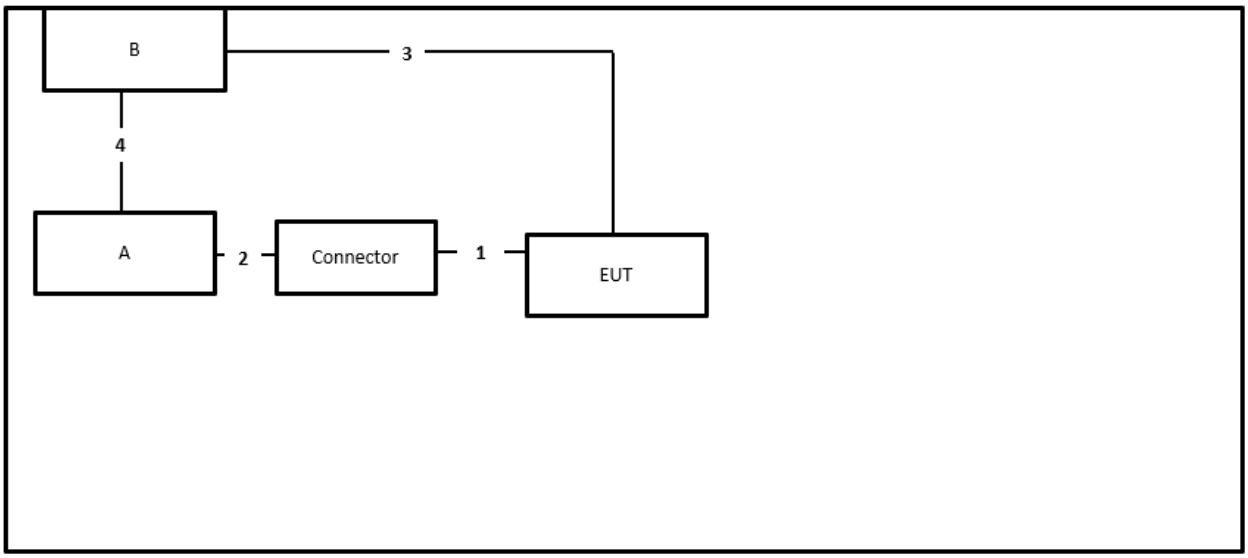


| Item | Connection | Shielded | Length |
|---|---|---|---|
| 1 | Console cable (RS-232 to RJ-45) | No | 1m |
| 2 | Console cable (RS-232 to USB) | No | 1m |
| 3 | RJ-45 cable | No | 1m |
| 4 | RJ-45 cable | No | 1m |

**Test Setup Diagram - Radiated Test > 1GHz / Beamforming mode**

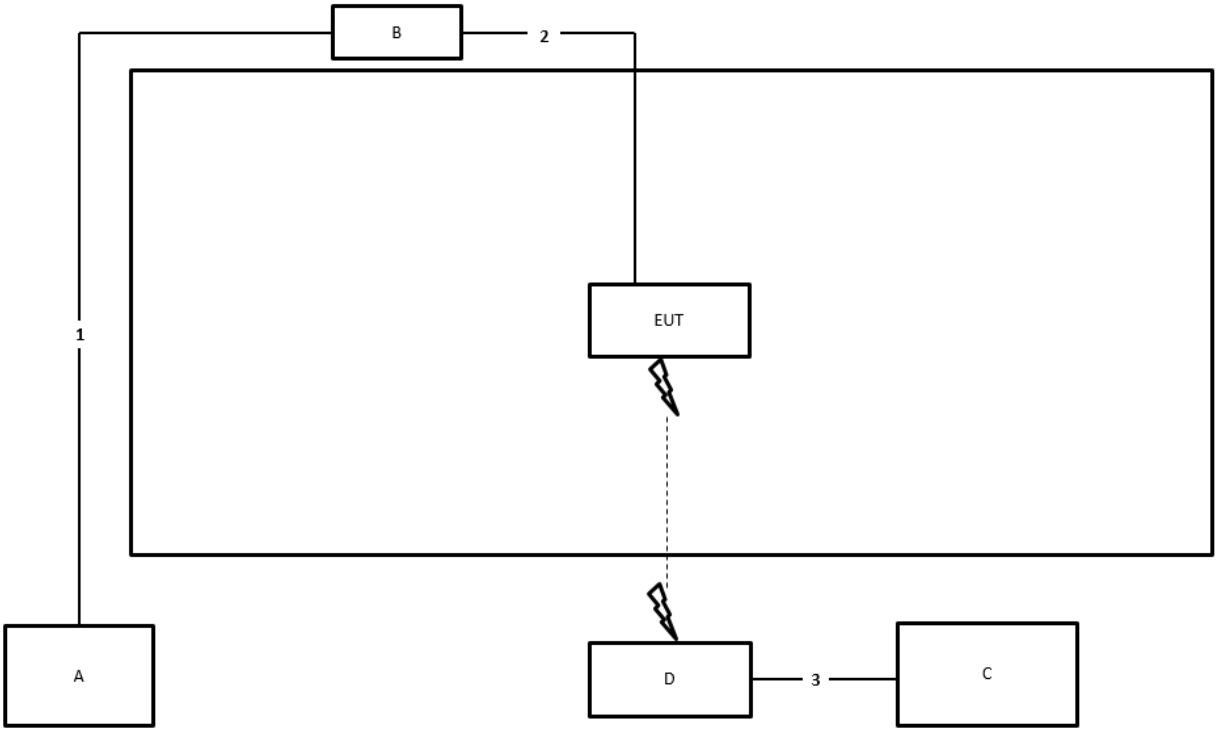


| Item | Connection | Shielded | Length |
|---|---|---|---|
| 1 | RJ-45 cable | No | 1m |
| 2 | RJ-45 cable | No | 10m |
| 3 | RJ-45 cable | No | 10m |

# 3 Transmitter Test Result

## 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|---|---|
| **Frequency Emission (MHz)** | **Quasi-Peak** | **Average** |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |
| Note 1: * Decreases with the logarithm of the frequency. | | |

### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.1.3 Test Procedures

| Test Method |
|---|
| ☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

**AC Power-line Conducted Emissions**

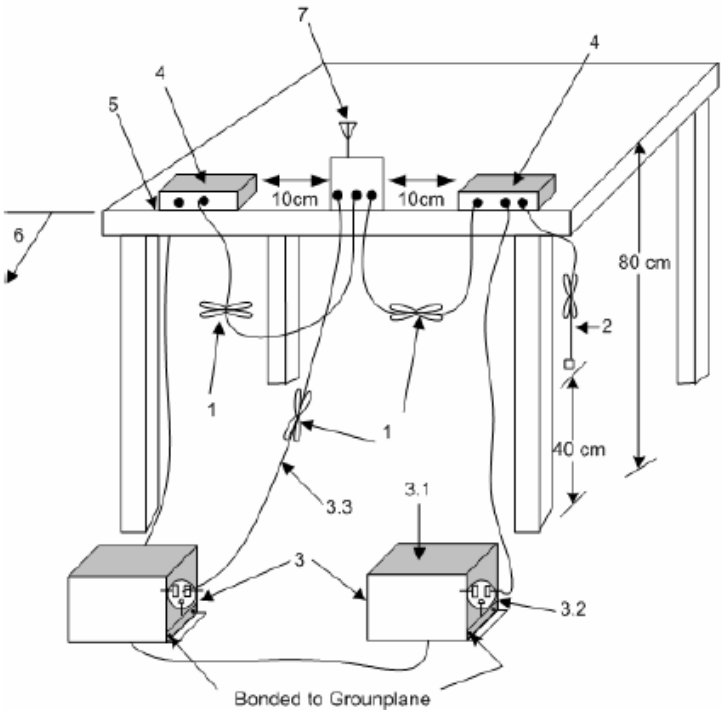


1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
3.1—All other equipment powered from additional LISN(s).
3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
3.3—LISN at least 80 cm from nearest part of EUT chassis.
4—Non-EUT components of EUT system being tested.
5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

a. Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level

b. Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit |
|---|
| **UNII Devices** |
| ☒ For the 5925-6425 GHz band, N/A |
| ☒ For the 6425-6525 GHz band, N/A |
| ☒ For the 6525-6875 GHz band, N/A |
| ☒ For the 6875-7125 GHz band, N/A |
| **RLAN Devices** |
| ☐ For the 5925-6425 GHz band, N/A |
| ☐ For the 6425-6525 GHz band, N/A |
| ☐ For the 6525-6875 GHz band, N/A |
| ☐ For the 6875-7125 GHz band, N/A |

### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method | |
|---|---|
| ▪ For the emission bandwidth shall be measured using one of the options below: | |
| | ☒ According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement. |
| | ☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing. |
| | ☐ Refer as IC RSS-Gen, clause 4.6 for bandwidth testing. |

### 3.2.4 Test Setup

**Emission Bandwidth**

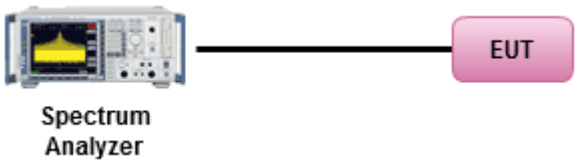


### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

## 3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)

### 3.3.1 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit

| Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit | |
|---|---|
| **UNII Devices** | |
| ☒ | For the 5.925 ~ 6.425 GHz band: |
| | ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
| | ▪ For indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| | ▪ For very low power device : e.i.r.p < 14 dBm. |
| ☒ | For the 6.425 ~ 6.525 GHz band: |
| | ▪ For indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| ☒ | For the 6.525 ~ 6.875 GHz band: |
| | ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
| | ▪ For indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| | ▪ For very low power device : e.i.r.p < 14 dBm. |
| ☒ | For the 6.875 ~ 7.125 GHz band: |
| | ▪ For indoor access point : e.i.r.p < 30 dBm. |
| | ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| **RLAN Devices** | |
| ☐ | For the 5.925 ~ 7.125 GHz band: |
| | ▪ For low-power indoor access-points & indoor subordinate devices < 30 dBm . |
| | ▪ For low-power client devices < 24 dBm. |
| ☐ | For the 5.925 ~ 6.875 GHz band: |
| | ▪ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
| | ▪ For standard client devices < 30 dBm. |

### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method | |
|---|---|
| ▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033. | |
| | Average over on/off periods with duty factor |
| | ☒ For Radio 3: Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100. |
| | ☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed) |
| | Wideband RF power meter and average over on/off periods with duty factor |
| | ☒ For Radio 4(Pine Scanning radio): Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter). |
| ☒ For conducted measurement. For Radio 4(Pine Scanning radio) | |
| | ▪ If the EUT supports multiple transmit chains using options given below:<br>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. |
| | ▪ If multiple transmit chains, EIRP calculation could be following as methods:<br>$P_{total} = P_1 + P_2 + \ldots + P_n$<br>(calculated in linear unit [mW] and transfer to log unit [dBm])<br>$EIRP_{total} = P_{total} + DG$ |
| ☒ For radiated measurement. For Radio 3 | |
| | ▪ Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing” |
| | ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. |
| | ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation. |

### 3.3.4 Test Setup

**For Radio 4(Pine Scanning radio)**

**Conducted Measurement (Power Meter)**

**For Radio 3**

**Radiated Measurement**

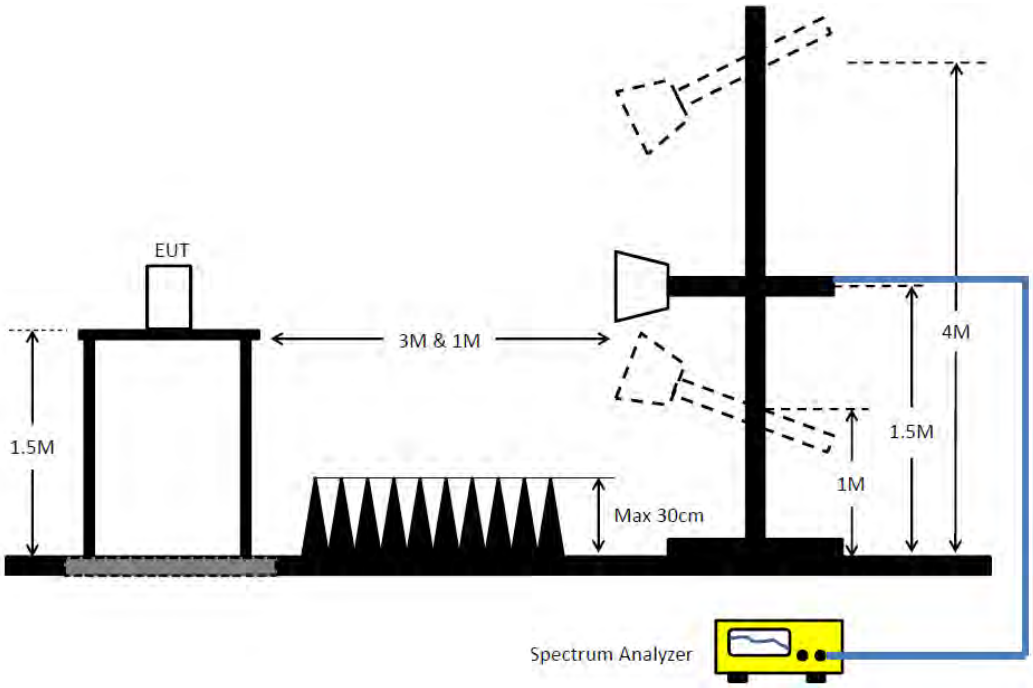


### 3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C

## 3.4 Peak Power Spectral Density (E.I.R.P.)

### 3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

| Peak Power Spectral Density (E.I.R.P.) Limit | |
|---|---|
| **UNII Devices** | |
| ☒ | For the 5.925 ~ 6.425 GHz band: |
| | ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. |
| | ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. |
| | ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| | ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz. |
| ☒ | For the 6.425 ~ 6.525 GHz band: |
| | ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| ☒ | For the 6.525 ~ 6.875 GHz band: |
| | ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. |
| | ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. |
| | ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| | ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz. |
| ☒ | For the 6.875 ~ 7.125 GHz band: |
| | ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. |
| | ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| **RLAN Devices** | |
| ☐ | For the 5.925 ~ 7.125 GHz band: |
| | ▪ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz. |
| | ▪ For low-power client devices < -1 dBm / MHz. |
| ☐ | For the 5.925 ~ 6.875 GHz band: |
| | ▪ For standard-power access points & fixed client devices < 23 dBm / MHz. |
| | ▪ For standard client devices < 17 dBm / MHz. |

### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method | | |
|---|---|---|
| ▪ According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options: | | |
| | ☐ | Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth |
| | [duty cycle ≥ 98% or external video / power trigger] | |
| | ☒ | Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging). |
| | ☐ | Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed) |
| | duty cycle < 98% and average over on/off periods with duty factor | |
| | ☒ | Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). |
| | ☐ | Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed) |
| ☒ | For conducted measurement. For Radio 4(Pine Scanning radio) | |
| | ▪ If the EUT supports multiple transmit chains using options given below: | |
| | | ☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| | | ☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, |
| | | ☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. |
| | ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br>$PPSD_{total} = PPSD_1 + PPSD_2 + \ldots + PPSD_n$<br>(calculated in linear unit [mW] and transfer to log unit [dBm])<br>$EIRP_{total} = PPSD_{total} + DG$ | |
| ☒ | For radiated measurement. For Radio 3 | |
| | ▪ Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing” | |
| | ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. | |

| Test Method | |
|---|---|
| | ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation. |

### 3.4.4 Test Setup

**For Radio 4(Pine Scanning radio)**

**Conducted Measurement**

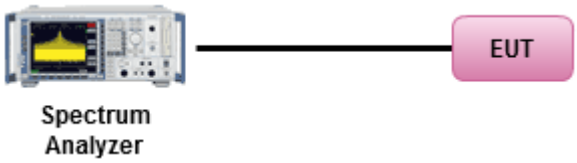


**For Radio 3**

**Radiated Measurement**

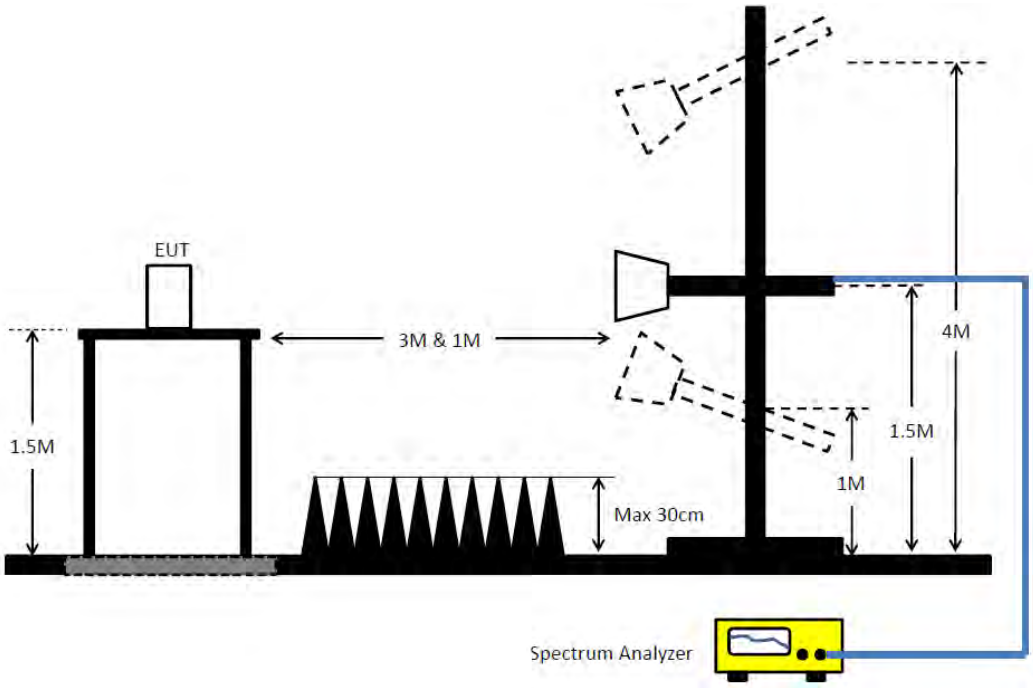


### 3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D

## 3.5 Unwanted Emissions

### 3.5.1 Transmitter Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit | | | |
|---|---|---|---|
| **Frequency Range (MHz)** | **Field Strength (uV/m)** | **Field Strength (dBuV/m)** | **Measure Distance (m)** |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m(20 x log (standard distance/ test distance) = 20log(3/1) = 9.54dB.
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

| Un-restricted band emissions above 1GHz Limit | |
|---|---|
| **Frequency** | **Limit** |
| Any outside the 5.945 – 7.125 GHz emission | e.i.r.p. -27 dBm [68.2 dBuV/m@3m] |
| | Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m(20 x log (standard distance/ test distance) = 20log(3/1) = 9.54dB.<br>EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.<br>Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit. |

| Frequency | Emission MASK Limit |
|---|---|
| 5.945 – 7.125 GHz | Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 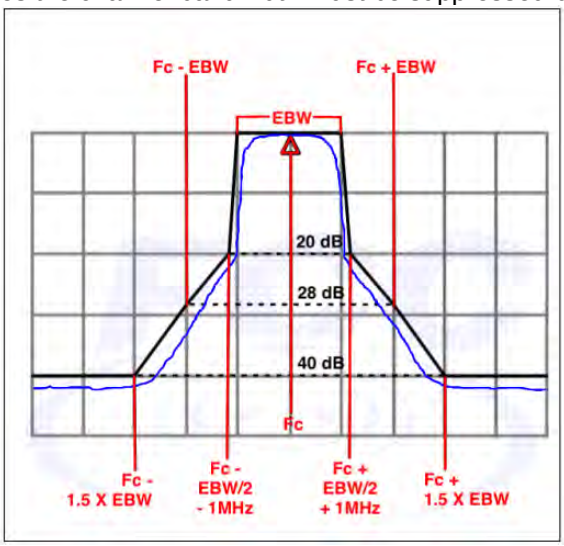  |

### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

| Test Method | | | |
|---|---|---|---|
| ▪ According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK).<br>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). | | | |
| ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. | | | |
| ▪ For the transmitter unwanted emissions shall be measured using following options below: | | | |
| | ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. | | |
| | ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. | | |
| | | ☒ | Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).<br>(For unrestricted band measurement) |
| | | ☐ | Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW). |
| | | ☒ | Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.( For restricted band average measurement) |
| | | ☐ | Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. |
| | | ☒ | Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit. |
| | | ☐ | Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit. |
| | ▪ Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements. | | |
| ▪ For emission MASK shall be measured using following options below: | | | |
| | | ☒ | Refer as FCC KDB 987594 D02, J) In-Band Emissions |
| ▪ For radiated measurement. | | | |
| | ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. | | |
| | ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. | | |
| | ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. | | |
| ▪ The any unwanted emissions level shall not exceed the fundamental emission level. | | | |
| ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. | | | |

### 3.5.4 Test Setup

**Transmitter Radiated Unwanted Emissions**

**9kHz ~30MHz**

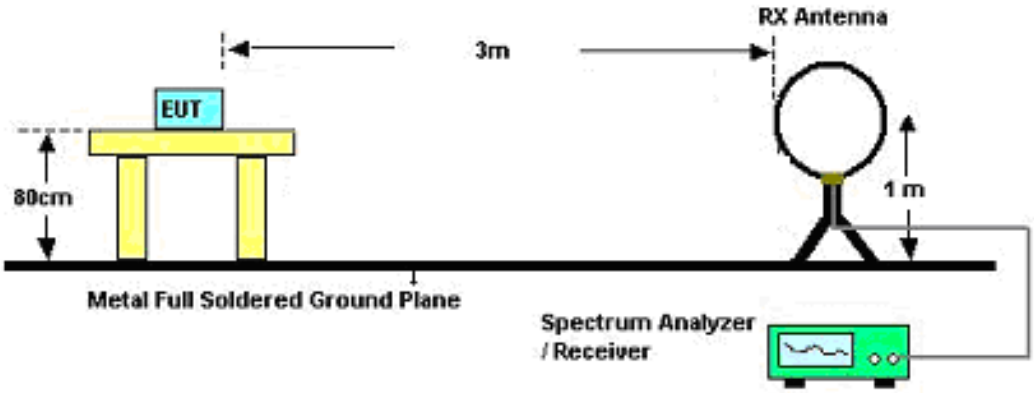


**30MHz~1GHz**

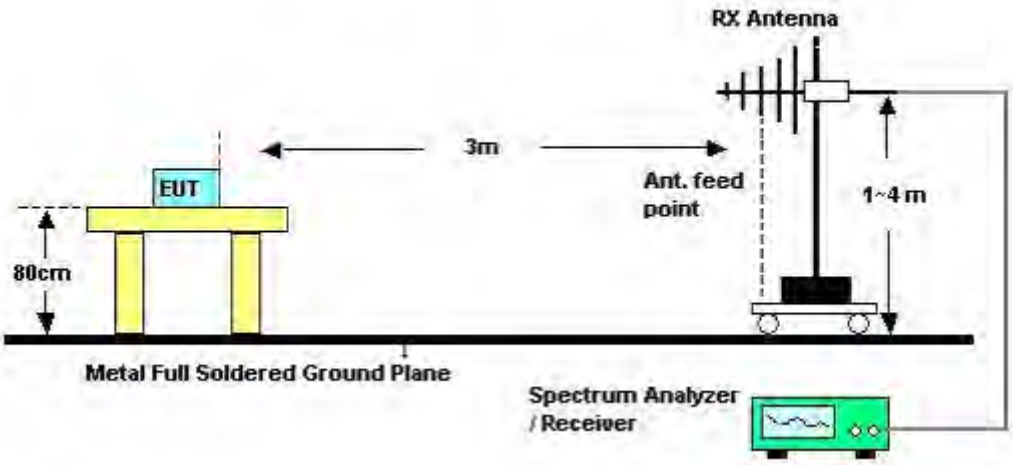

**Above 1GHz**

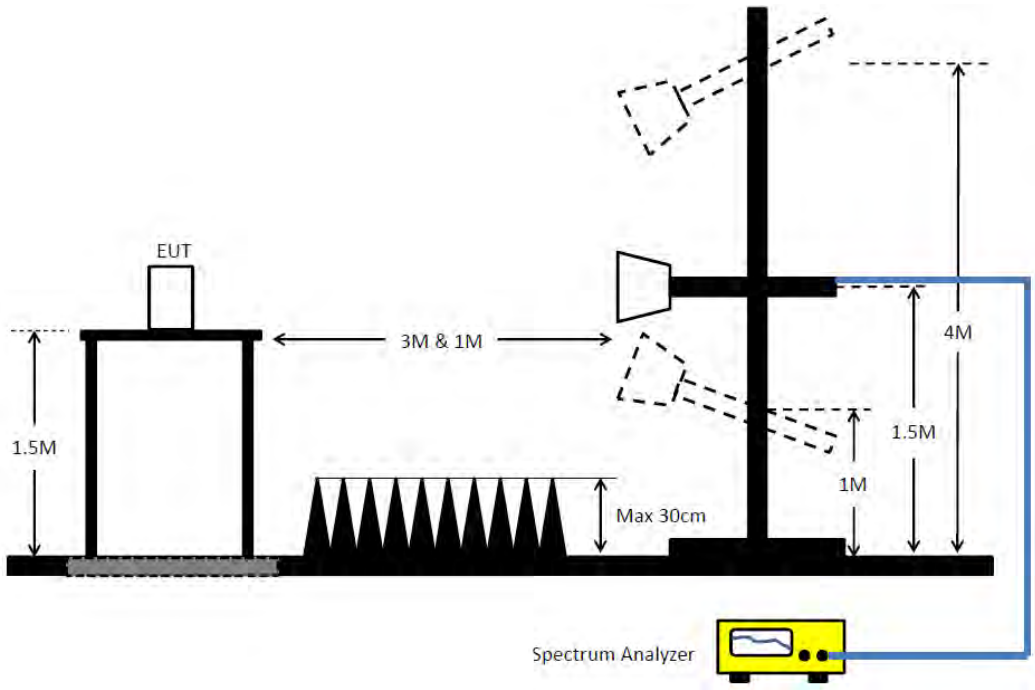


**Emission MASK**

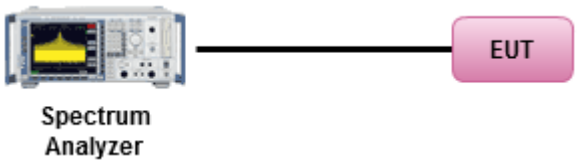


### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

# 3.6 Contention Based Protocol

## 3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.

## 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

## 3.6.3 Test Procedures

| Test Method | |
|---|---|
| ▪ | For Contention Based Protocol shall be measured using following options below: |
| ☒ | Refer as FCC KDB 987594 D02, I) Contention Based Protocol. |

## 3.6.4 Test Setup

**Contention Based Protocol**

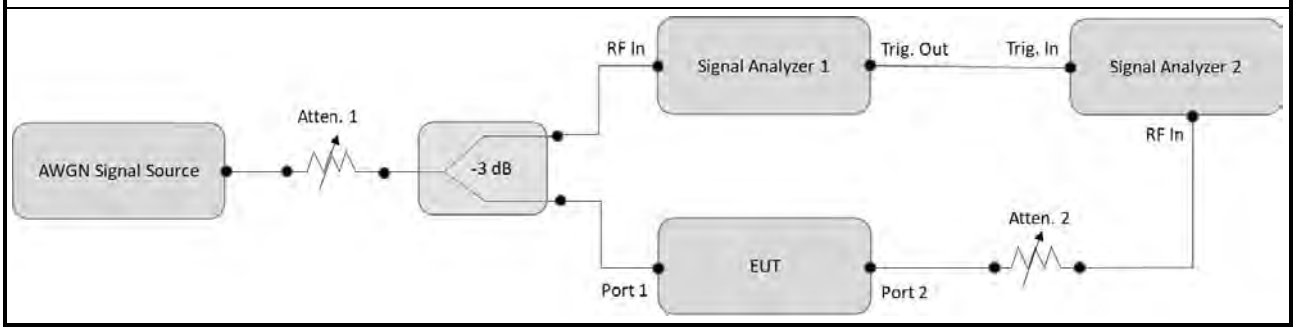


## 3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F

# 4 Test Equipment and Calibration Data

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|---|---|---|---|---|---|---|---|
| LISN | Schwarzbeck | NSLK 8127 | 8127650 | 9kHz ~ 30MHz | Apr. 15, 2024 | Apr. 14, 2025 | Conduction (CO02-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127478 | 9kHz ~ 30MHz | Dec. 29, 2023 | Dec. 28, 2024 | Conduction (CO02-CB) |
| EMI Receiver | Agilent | N9038A | MY52260140 | 9kHz ~ 8.4GHz | May 15, 2024 | May 14, 2025 | Conduction (CO02-CB) |
| COND Cable | Woken | Cable | 2 | 0.15MHz ~ 30MHz | Oct. 17, 2023 | Oct. 16, 2024 | Conduction (CO02-CB) |
| Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conduction (CO02-CB) |
| Pulse Limiter | Schwarzbeck | VTSD 9561F-N | 00378 | 9kHz ~ 30MHz | Oct. 17, 2023 | Oct. 16, 2024 | Conduction (CO02-CB) |
| Spectrum analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | May 29, 2023 | May 28, 2024 | Conducted (TH01-CB) |
| Spectrum analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | May 27, 2024 | May 26, 2025 | Conducted (TH01-CB) |
| Band Rejector | MTJ | 6G Band Rejector | 6G-BRJ-01 | 1 ~ 18GHz | Oct. 03, 2023 | Oct. 02, 2024 | Conducted (TH01-CB) |
| Band Rejector | MTJ | 6G Band Rejector | 6G-BRJ-02 | 1~ 18GHz | Oct. 03, 2023 | Oct. 02, 2024 | Conducted (TH01-CB) |
| Switch | SPTCB | SP-SWI | SWI-01 | 1~26.5 GHz | Oct. 03, 2023 | Oct. 02, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-06 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-07 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-08 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-09 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-10 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-30 | 1 GHz – 18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (TH01-CB) |
| Power Sensor | Agilent | E9327A | US40442088 | 50MHz~18GHz | Mar. 01, 2024 | Feb. 28, 2025 | Conducted (TH01-CB) |
| Power Meter | Agilent | E4416A | GB41291199 | 50MHz~18GHz | Mar. 04, 2024 | Mar. 03, 2025 | Conducted (TH01-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conducted (TH01-CB) |
| Loop Antenna | Teseq | HLA 6121 | 65417 | 9kHz - 30 MHz | Oct. 13, 2023 | Oct. 12, 2024 | Radiation (03CH04-CB) |
| 3m Semi Anechoic Chamber NSA | TDK | SAC-3M | 03CH04-CB | 30 MHz ~ 1 GHz | Aug. 01, 2023 | Jul. 31, 2024 | Radiation (03CH04-CB) |

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|---|---|---|---|---|---|---|---|
| BILOG ANTENNA with 6 dB attenuator | Schaffner & EMCI | CBL6112B & N-6-06 | 22021&AT-N0 607 | 30MHz ~ 1GHz | Oct. 07, 2023 | Oct. 06, 2024 | Radiation (03CH04-CB) |
| Pre-Amplifier | EMCI | EMC330N | 980391 | 20MHz ~ 3GHz | May 22, 2024 | May 21, 2025 | Radiation (03CH04-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100142 | 9kHz~40GHz | Mar. 19, 2024 | Mar. 18, 2025 | Radiation (03CH04-CB) |
| EMI Test Receiver | R&S | ESCS | 826547/017 | 9kHz ~ 2.75GHz | Jun. 13, 2023 | Jun. 12, 2024 | Radiation (03CH04-CB) |
| RF Cable-low | Woken | RG402 | Low Cable-03+67 | 30MHz – 1GHz | Oct. 02, 2023 | Oct. 01, 2024 | Radiation (03CH04-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH04-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH01-CB | 1GHz ~18GHz 3m | May 04, 2024 | May 03, 2025 | Radiation (03CH01-CB) |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | BBHA 9120D-01816 | 1GHz~18GHz | Dec. 20, 2023 | Dec. 19, 2024 | Radiation (03CH01-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA917025 2 | 15GHz ~ 40GHz | Sep. 04, 2023 | Sep. 03, 2024 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02121 | 1GHz ~ 26.5GHz | May 18, 2023 | May 17, 2024 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02121 | 1GHz ~ 26.5GHz | May 17, 2024 | May 16, 2025 | Radiation (03CH01-CB) |
| Pre-Amplifier | SGH | SGH184 | 20221107-3 | 18GHz ~ 40GHz | Nov. 24, 2023 | Nov. 23, 2024 | Radiation (03CH01-CB) |
| Signal Analyzer | R&S | FSV3044 | 101437 | 10kHz ~ 44GHz | Nov. 28, 2023 | Nov. 27, 2024 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-16 | 1 GHz ~ 18 GHz | Nov. 06, 2023 | Nov. 05, 2024 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-16+17 | 1 GHz ~ 18 GHz | Nov. 06, 2023 | Nov. 05, 2024 | Radiation (03CH01-CB) |
| High Cable | Woken | WCA0929M | 40G#5+6 | 1GHz ~ 40 GHz | Jan. 11, 2024 | Jan. 10, 2025 | Radiation (03CH01-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH01-CB) |
| 3m Semi Anechoic Chamber VSWR | RIKEN | SAC-3M | 03CH02-CB | 1GHz ~18GHz | Mar. 24, 2024 | Mar. 23, 2025 | Radiation (03CH02-CB) |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | BBHA 9120 D 1370 | 1GHz~18GHz | Jun. 30, 2023 | Jun. 29, 2024 | Radiation (03CH02-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA917025 2 | 15GHz ~ 40GHz | Sep. 04, 2023 | Sep. 03, 2024 | Radiation (03CH02-CB) |
| Pre-Amplifier | Agilent | 83017A | MY39501305 | 1GHz ~ 26.5GHz | Jun. 30, 2023 | Jun. 29, 2024 | Radiation (03CH02-CB) |
| Pre-Amplifier | SGH | SGH184 | 20221107-3 | 18GHz ~ 40GHz | Nov. 24, 2023 | Nov. 23, 2024 | Radiation (03CH02-CB) |

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|---|---|---|---|---|---|---|---|
| Signal Analyzer | R&S | FSV3044 | 101536 | 10kHz ~ 44GHz | Jul. 24, 2023 | Jul. 23, 2024 | Radiation (03CH02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-18 | 1GHz ~ 18GHz | Oct. 02, 2023 | Oct. 01, 2024 | Radiation (03CH02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-18+19 | 1GHz ~ 18GHz | Oct. 02, 2023 | Oct. 01, 2024 | Radiation (03CH02-CB) |
| High Cable | Woken | WCA0929M | 40G#5+6 | 1GHz ~ 40 GHz | Jan. 11, 2024 | Jan. 10, 2025 | Radiation (03CH02-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH02-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH03-CB | 1GHz ~18GHz 3m | May 04, 2023 | May 03, 2024 | Radiation (03CH03-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH03-CB | 1GHz ~18GHz 3m | May 03, 2024 | May 02, 2025 | Radiation (03CH03-CB) |
| Horn Antenna | ETS·Lindgren | 3115 | 6821 | 750MHz~18GHz | Jan. 24, 2024 | Jan. 23, 2025 | Radiation (03CH03-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Sep. 04, 2023 | Sep. 03, 2024 | Radiation (03CH03-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02097 | 1GHz ~ 26.5GHz | Jun. 30, 2023 | Jun. 29, 2024 | Radiation (03CH03-CB) |
| Pre-Amplifier | SGH | SGH184 | 20221107-3 | 18GHz ~ 40GHz | Nov. 24, 2023 | Nov. 23, 2024 | Radiation (03CH03-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100019 | 9kHz ~ 40GHz | Jun. 12, 2023 | Jun. 11, 2024 | Radiation (03CH03-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100019 | 9kHz ~ 40GHz | Jun. 11, 2024 | Jun. 10, 2025 | Radiation (03CH03-CB) |
| RF Cable-high | Woken | RG402 | High Cable-20+29 | 1GHz ~ 18GHz | Feb. 29, 2024 | Feb. 28, 2025 | Radiation (03CH03-CB) |
| RF Cable-high | Woken | RG402 | High Cable-29 | 1GHz ~ 18GHz | Feb. 29, 2024 | Feb. 28, 2025 | Radiation (03CH03-CB) |
| High Cable | Woken | WCA0929M | 40G#5+6 | 1GHz ~ 40 GHz | Jan. 11, 2024 | Jan. 10, 2025 | Radiation (03CH03-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH03-CB) |
| Spectrum Analyzer | R&S | FSV40 | 101026 | 9kHz~40GHz | Nov. 21, 2023 | Nov. 20, 2024 | Conducted (DF01-CB) |
| Signal generator | R&S | SMB100A | 177785 | 1MHz-40GHz | Sep. 19, 2023 | Sep. 18, 2024 | Conducted (DF01-CB) |
| Vector Signal generator | R&S | SMW200A | 109426 | 100kHz- 7.5GHz | Dec. 21, 2023 | Dec. 20, 2024 | Conducted (DF01-CB) |
| RF Power Divider | MTJ | 4 Way | DF01-DV01 | 1GHz ~ 6GHz | Oct. 02, 2024 | Oct. 01, 2025 | Conducted (DF01-CB) |
| RF Power Divider | MTJ | 2 Way | DF01-DV03 | 1GHz ~ 8GHz | Oct. 03, 2023 | Oct. 02, 2024 | Conducted (DF01-CB) |

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|---|---|---|---|---|---|---|---|
| RF Power Divider | MTJ | 2 Way | DF01-DV02 | 1GHz ~ 8GHz | Oct. 03, 2023 | Oct. 02, 2024 | Conducted (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-52 | 1 GHz –18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-53 | 1 GHz –18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-54 | 1 GHz –18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (DF01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-56 | 1 GHz –18 GHz | Oct. 02, 2023 | Oct. 01, 2024 | Conducted (DF01-CB) |
| 100MS/s Digitizer | N.I | USB-5133 | F65206 | N/A | Mar. 20, 2024 | Mar. 19, 2025 | Conducted (DF01-CB) |

Note: Calibration Interval of instruments listed above is one year.
NCR means Non-Calibration required.

Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Condition |
|---|---|---|---|---|---|---|---|
| Mode 10 | Pass | QP | 154.5k | 61.51 | 65.75 | -4.24 | Neutral |

## Mode 10

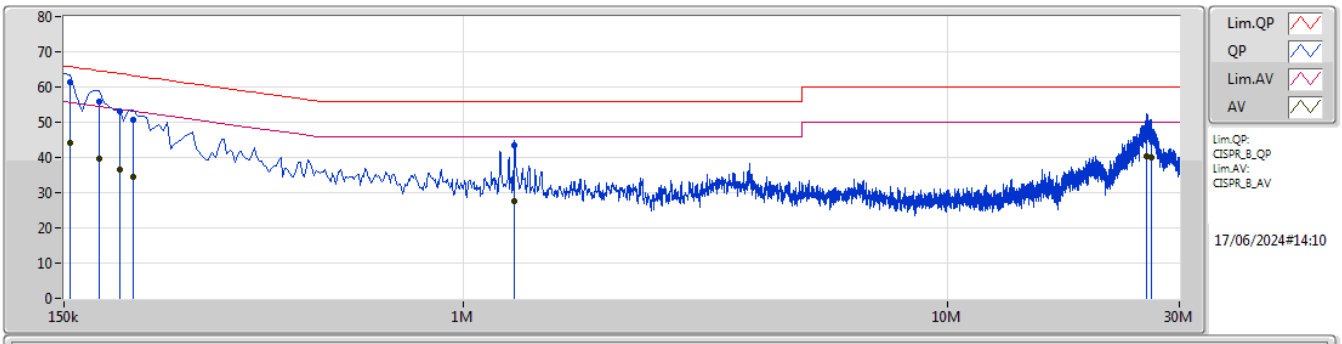


| Type | Freq | Level | Limit | Margin | Factor | Condition | Comment | Raw | LISN | CL | AT |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | (Hz) | (dBuV) | (dBuV) | (dB) | (dB) | | | (dBuV) | (dB) | (dB) | (dB) |
| QP | 154.5k | 61.23 | 65.75 | -4.52 | 10.09 | Line | "Worst" | 51.14 | 0.05 | 0.03 | 10.01 |
| AV | 154.5k | 44.26 | 55.75 | -11.49 | 10.09 | Line | - | 34.17 | 0.05 | 0.03 | 10.01 |
| QP | 177k | 55.83 | 64.62 | -8.79 | 10.08 | Line | - | 45.75 | 0.05 | 0.03 | 10.00 |
| AV | 177k | 39.51 | 54.62 | -15.11 | 10.08 | Line | - | 29.43 | 0.05 | 0.03 | 10.00 |
| QP | 195k | 53.05 | 63.82 | -10.77 | 10.07 | Line | - | 42.98 | 0.05 | 0.03 | 9.99 |
| AV | 195k | 36.58 | 53.82 | -17.24 | 10.07 | Line | - | 26.51 | 0.05 | 0.03 | 9.99 |
| QP | 208.5k | 50.75 | 63.27 | -12.52 | 10.07 | Line | - | 40.68 | 0.05 | 0.03 | 9.99 |
| AV | 208.5k | 34.34 | 53.27 | -18.93 | 10.07 | Line | - | 24.27 | 0.05 | 0.03 | 9.99 |
| QP | 1.275M | 43.31 | 56.00 | -12.69 | 10.11 | Line | - | 33.20 | 0.08 | 0.04 | 9.99 |
| AV | 1.275M | 27.49 | 46.00 | -18.51 | 10.11 | Line | - | 17.38 | 0.08 | 0.04 | 9.99 |
| QP | 25.674M | 46.79 | 60.00 | -13.21 | 10.61 | Line | - | 36.18 | 0.52 | 0.23 | 9.86 |
| AV | 25.674M | 40.44 | 50.00 | -9.56 | 10.61 | Line | - | 29.83 | 0.52 | 0.23 | 9.86 |
| QP | 26.309M | 46.90 | 60.00 | -13.10 | 10.63 | Line | - | 36.27 | 0.53 | 0.24 | 9.86 |
| AV | 26.309M | 40.16 | 50.00 | -9.84 | 10.63 | Line | - | 29.53 | 0.53 | 0.24 | 9.86 |

## Mode 10

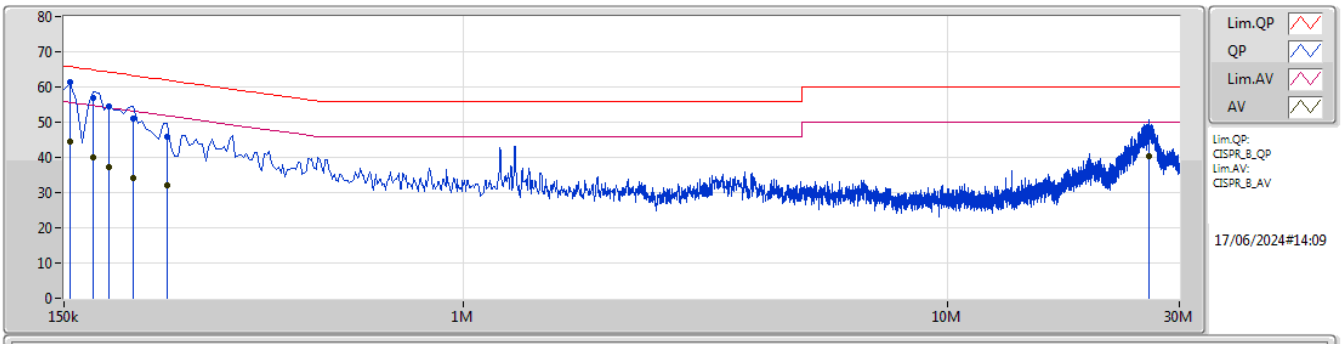


| Type | Freq | Level | Limit | Margin | Factor | Condition | Comment | Raw | LISN | CL | AT |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | (Hz) | (dBuV) | (dBuV) | (dB) | (dB) | | | (dBuV) | (dB) | (dB) | (dB) |
| QP | 154.5k | 61.51 | 65.75 | -4.24 | 10.09 | Neutral | "Worst" | 51.42 | 0.05 | 0.03 | 10.01 |
| AV | 154.5k | 44.52 | 55.75 | -11.23 | 10.09 | Neutral | - | 34.43 | 0.05 | 0.03 | 10.01 |
| QP | 172.5k | 57.06 | 64.83 | -7.77 | 10.08 | Neutral | - | 46.98 | 0.05 | 0.03 | 10.00 |
| AV | 172.5k | 40.05 | 54.83 | -14.78 | 10.08 | Neutral | - | 29.97 | 0.05 | 0.03 | 10.00 |
| QP | 186k | 54.64 | 64.20 | -9.56 | 10.08 | Neutral | - | 44.56 | 0.05 | 0.03 | 10.00 |
| AV | 186k | 37.24 | 54.20 | -16.96 | 10.08 | Neutral | - | 27.16 | 0.05 | 0.03 | 10.00 |
| QP | 208.5k | 50.87 | 63.27 | -12.40 | 10.07 | Neutral | - | 40.80 | 0.05 | 0.03 | 9.99 |
| AV | 208.5k | 34.31 | 53.27 | -18.96 | 10.07 | Neutral | - | 24.24 | 0.05 | 0.03 | 9.99 |
| QP | 244.5k | 46.01 | 61.95 | -15.94 | 10.07 | Neutral | - | 35.94 | 0.05 | 0.03 | 9.99 |
| AV | 244.5k | 32.11 | 51.95 | -19.84 | 10.07 | Neutral | - | 22.04 | 0.05 | 0.03 | 9.99 |
| QP | 25.976M | 46.80 | 60.00 | -13.20 | 10.41 | Neutral | - | 36.39 | 0.31 | 0.24 | 9.86 |
| AV | 25.976M | 40.42 | 50.00 | -9.58 | 10.41 | Neutral | - | 30.01 | 0.31 | 0.24 | 9.86 |

Test Mode: Mode 1
Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---|---|---|---|---|---|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11be EHT20_Nss1,(MCS0)_1TX | 22.385M | 19.04M | 19M0D1D | 21.835M | 19.015M |
| 802.11be EHT20_Nss1,(MCS0)_2TX | 23.265M | 19.09M | 19M1D1D | 22.44M | 19.015M |
| 802.11be EHT20_Nss1,(MCS0)_4TX | 23.595M | 19.065M | 19M1D1D | 22M | 19.015M |
| 802.11be EHT40_Nss1,(MCS0)_1TX | 44.99M | 38.031M | 38M0D1D | 43.01M | 37.931M |
| 802.11be EHT40_Nss1,(MCS0)_2TX | 44M | 38.081M | 38M1D1D | 42.68M | 37.981M |
| 802.11be EHT40_Nss1,(MCS0)_4TX | 45.1M | 38.081M | 38M1D1D | 42.35M | 37.981M |
| 802.11be EHT80_Nss1,(MCS0)_1TX | 96.8M | 77.861M | 77M9D1D | 89.98M | 77.761M |
| 802.11be EHT80_Nss1,(MCS0)_2TX | 90.2M | 77.861M | 77M9D1D | 88M | 77.661M |
| 802.11be EHT80_Nss1,(MCS0)_4TX | 90.2M | 77.861M | 77M9D1D | 86.24M | 77.561M |
| 802.11be EHT160_Nss1,(MCS0)_1TX | 302.28M | 158.521M | 159MD1D | 174.24M | 157.521M |
| 802.11be EHT160_Nss1,(MCS0)_2TX | 175.56M | 156.922M | 157MD1D | 170.28M | 156.322M |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 173.8M | 157.321M | 157MD1D | 168.52M | 156.522M |
| 802.11be EHT320_Nss1,(MCS0)_1TX | 633.6M | 319.04M | 319MD1D | 487.52M | 317.041M |
| 802.11be EHT320_Nss1,(MCS0)_2TX | 341.44M | 316.642M | 317MD1D | 334.4M | 315.842M |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 337.04M | 316.242M | 316MD1D | 332.64M | 315.442M |
| 6.425-6.525GHz | - | - | - | - | - |
| 802.11be EHT20_Nss1,(MCS0)_1TX | 22.935M | 19.04M | 19M0D1D | 22.165M | 19.015M |
| 802.11be EHT20_Nss1,(MCS0)_2TX | 23.21M | 19.065M | 19M1D1D | 21.78M | 18.991M |
| 802.11be EHT20_Nss1,(MCS0)_4TX | 23.705M | 19.065M | 19M1D1D | 21.835M | 19.015M |
| 802.11be EHT40_Nss1,(MCS0)_1TX | 43.67M | 38.031M | 38M0D1D | 42.68M | 37.981M |
| 802.11be EHT40_Nss1,(MCS0)_2TX | 44.22M | 38.081M | 38M1D1D | 43.01M | 37.931M |
| 802.11be EHT40_Nss1,(MCS0)_4TX | 44.11M | 38.081M | 38M1D1D | 42.35M | 37.981M |
| 802.11be EHT80_Nss1,(MCS0)_1TX | 103.62M | 77.961M | 78M0D1D | 88.44M | 77.561M |
| 802.11be EHT80_Nss1,(MCS0)_2TX | 89.54M | 77.761M | 77M8D1D | 85.58M | 77.661M |
| 802.11be EHT80_Nss1,(MCS0)_4TX | 89.98M | 77.861M | 77M9D1D | 86.68M | 77.561M |
| 802.11be EHT160_Nss1,(MCS0)_1TX | 297.88M | 158.121M | 158MD1D | 297.88M | 158.121M |
| 802.11be EHT160_Nss1,(MCS0)_2TX | 169.84M | 156.922M | 157MD1D | 169.84M | 156.922M |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 171.6M | 157.121M | 157MD1D | 169.4M | 156.922M |
| 802.11be EHT320_Nss1,(MCS0)_1TX | 631.84M | 317.841M | 318MD1D | 631.84M | 317.841M |
| 802.11be EHT320_Nss1,(MCS0)_2TX | 337.92M | 316.642M | 317MD1D | 336.16M | 316.242M |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 340.56M | 316.642M | 317MD1D | 333.52M | 315.842M |
| 6.525-6.875GHz | - | - | - | - | - |
| 802.11be EHT20_Nss1,(MCS0)_1TX | 22.55M | 19.065M | 19M1D1D | 22.055M | 19.015M |
| 802.11be EHT20_Nss1,(MCS0)_2TX | 23.87M | 19.04M | 19M0D1D | 22M | 19.015M |
| 802.11be EHT20_Nss1,(MCS0)_4TX | 22.99M | 19.065M | 19M1D1D | 21.835M | 19.015M |
| 802.11be EHT40_Nss1,(MCS0)_1TX | 43.01M | 37.981M | 38M0D1D | 42.9M | 37.931M |
| 802.11be EHT40_Nss1,(MCS0)_2TX | 44.22M | 38.131M | 38M1D1D | 42.57M | 37.981M |
| 802.11be EHT40_Nss1,(MCS0)_4TX | 44.33M | 38.031M | 38M0D1D | 42.79M | 37.981M |
| 802.11be EHT80_Nss1,(MCS0)_1TX | 182.38M | 79.76M | 79M8D1D | 136.18M | 78.261M |
| 802.11be EHT80_Nss1,(MCS0)_2TX | 89.98M | 77.861M | 77M9D1D | 84.7M | 77.761M |
| 802.11be EHT80_Nss1,(MCS0)_4TX | 93.06M | 77.961M | 78M0D1D | 85.58M | 77.561M |
| 802.11be EHT160_Nss1,(MCS0)_1TX | 272.36M | 158.321M | 158MD1D | 267.96M | 157.921M |
| 802.11be EHT160_Nss1,(MCS0)_2TX | 173.36M | 157.321M | 157MD1D | 168.96M | 156.922M |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 172.48M | 157.121M | 157MD1D | 168.96M | 156.922M |
| 802.11be EHT320_Nss1,(MCS0)_1TX | 499.84M | 319.04M | 319MD1D | 333.52M | 315.842M |
| 802.11be EHT320_Nss1,(MCS0)_2TX | 500.72M | 317.441M | 317MD1D | 333.52M | 315.042M |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 337.92M | 316.242M | 316MD1D | 331.76M | 315.042M |
| 6.875-7.125GHz | - | - | - | - | - |
| 802.11be EHT20_Nss1,(MCS0)_1TX | 22.66M | 19.04M | 19M0D1D | 21.89M | 18.991M |
| 802.11be EHT20_Nss1,(MCS0)_2TX | 23.045M | 19.09M | 19M1D1D | 22.11M | 19.04M |
| 802.11be EHT20_Nss1,(MCS0)_4TX | 23.98M | 19.065M | 19M1D1D | 22.055M | 19.015M |
| 802.11be EHT40_Nss1,(MCS0)_1TX | 43.12M | 37.981M | 38M0D1D | 42.79M | 37.931M |
| 802.11be EHT40_Nss1,(MCS0)_2TX | 44.33M | 38.081M | 38M1D1D | 43.34M | 37.981M |

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---|---|---|---|---|---|
| 802.11be EHT40_Nss1,(MCS0)_4TX | 44.66M | 38.081M | 38M1D1D | 43.12M | 37.981M |
| 802.11be EHT80_Nss1,(MCS0)_1TX | 143M | 79.36M | 79M4D1D | 89.98M | 78.061M |
| 802.11be EHT80_Nss1,(MCS0)_2TX | 91.08M | 77.861M | 77M9D1D | 88.22M | 77.761M |
| 802.11be EHT80_Nss1,(MCS0)_4TX | 91.08M | 77.861M | 77M9D1D | 88.66M | 77.761M |
| 802.11be EHT160_Nss1,(MCS0)_1TX | 175.12M | 156.722M | 157MD1D | 175.12M | 156.722M |
| 802.11be EHT160_Nss1,(MCS0)_2TX | 172.48M | 156.722M | 157MD1D | 170.28M | 156.722M |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 169.84M | 156.922M | 157MD1D | 168.08M | 156.722M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---|---|---|---|---|---|---|---|---|---|---|
| 802.11be EHT20_Nss1,(MCS0)_1TX | - | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | Inf | 21.835M | 19.04M | | | | | | |
| 6195MHz | Pass | Inf | 22.385M | 19.015M | | | | | | |
| 6415MHz | Pass | Inf | 22M | 19.04M | | | | | | |
| 6435MHz | Pass | Inf | 22.44M | 19.04M | | | | | | |
| 6475MHz | Pass | Inf | 22.935M | 19.015M | | | | | | |
| 6515MHz | Pass | Inf | 22.165M | 19.015M | | | | | | |
| 6535MHz | Pass | Inf | 22.55M | 19.04M | | | | | | |
| 6695MHz | Pass | Inf | 22.055M | 19.015M | | | | | | |
| 6875MHz | Pass | Inf | 22.11M | 19.065M | | | | | | |
| 6895MHz | Pass | Inf | 22.66M | 18.991M | | | | | | |
| 6995MHz | Pass | Inf | 21.89M | 19.015M | | | | | | |
| 7095MHz | Pass | Inf | 22.11M | 19.015M | | | | | | |
| 7115MHz | Pass | Inf | 22.385M | 19.04M | | | | | | |
| 802.11be EHT40_Nss1,(MCS0)_1TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 43.01M | 37.931M | | | | | | |
| 6205MHz | Pass | Inf | 44.99M | 38.031M | | | | | | |
| 6405MHz | Pass | Inf | 44.22M | 37.931M | | | | | | |
| 6445MHz | Pass | Inf | 43.45M | 37.981M | | | | | | |
| 6485MHz | Pass | Inf | 42.68M | 37.981M | | | | | | |
| 6525MHz | Pass | Inf | 43.67M | 38.031M | | | | | | |
| 6565MHz | Pass | Inf | 43.01M | 37.981M | | | | | | |
| 6685MHz | Pass | Inf | 43.01M | 37.931M | | | | | | |
| 6885MHz | Pass | Inf | 42.9M | 37.931M | | | | | | |
| 6925MHz | Pass | Inf | 42.79M | 37.931M | | | | | | |
| 7005MHz | Pass | Inf | 43.01M | 37.931M | | | | | | |
| 7085MHz | Pass | Inf | 43.12M | 37.981M | | | | | | |
| 802.11be EHT80_Nss1,(MCS0)_1TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 96.8M | 77.761M | | | | | | |
| 6225MHz | Pass | Inf | 89.98M | 77.761M | | | | | | |
| 6385MHz | Pass | Inf | 89.98M | 77.861M | | | | | | |
| 6465MHz | Pass | Inf | 88.44M | 77.561M | | | | | | |
| 6545MHz | Pass | Inf | 103.62M | 77.961M | | | | | | |
| 6625MHz | Pass | Inf | 136.18M | 78.261M | | | | | | |
| 6705MHz | Pass | Inf | 139.04M | 78.361M | | | | | | |
| 6785MHz | Pass | Inf | 177.54M | 79.76M | | | | | | |
| 6865MHz | Pass | Inf | 182.38M | 79.26M | | | | | | |
| 6945MHz | Pass | Inf | 143M | 79.36M | | | | | | |
| 7025MHz | Pass | Inf | 89.98M | 78.061M | | | | | | |
| 802.11be EHT160_Nss1,(MCS0)_1TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 174.24M | 157.521M | | | | | | |
| 6185MHz | Pass | Inf | 302.28M | 158.521M | | | | | | |
| 6345MHz | Pass | Inf | 276.32M | 158.121M | | | | | | |
| 6505MHz | Pass | Inf | 297.88M | 158.121M | | | | | | |
| 6665MHz | Pass | Inf | 272.36M | 157.921M | | | | | | |
| 6825MHz | Pass | Inf | 267.96M | 158.321M | | | | | | |
| 6985MHz | Pass | Inf | 175.12M | 156.722M | | | | | | |
| 802.11be EHT320_Nss1,(MCS0)_1TX | - | - | - | - | - | - | - | - | - | - |
| 6105MHz | Pass | Inf | 487.52M | 317.041M | | | | | | |
| 6265MHz | Pass | Inf | 598.4M | 318.641M | | | | | | |
| 6425MHz | Pass | Inf | 633.6M | 319.04M | | | | | | |
| 6585MHz | Pass | Inf | 631.84M | 317.841M | | | | | | |
| 6745MHz | Pass | Inf | 499.84M | 319.04M | | | | | | |
| 6905MHz | Pass | Inf | 333.52M | 315.842M | | | | | | |
| 802.11be EHT20_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---|---|---|---|---|---|---|---|---|---|---|
| 5955MHz | Pass | Inf | 22.55M | 19.015M | 23.265M | 19.04M | | | | |
| 6195MHz | Pass | Inf | 22.44M | 19.09M | 22.825M | 19.04M | | | | |
| 6415MHz | Pass | Inf | 22.55M | 19.015M | 22.66M | 19.015M | | | | |
| 6435MHz | Pass | Inf | 22.165M | 19.065M | 21.78M | 19.065M | | | | |
| 6475MHz | Pass | Inf | 22.935M | 18.991M | 22.495M | 19.04M | | | | |
| 6515MHz | Pass | Inf | 22.715M | 19.015M | 23.21M | 19.065M | | | | |
| 6535MHz | Pass | Inf | 22.715M | 19.04M | 22M | 19.015M | | | | |
| 6695MHz | Pass | Inf | 23.155M | 19.015M | 23.87M | 19.015M | | | | |
| 6875MHz | Pass | Inf | 22.495M | 19.015M | 22.495M | 19.04M | | | | |
| 6895MHz | Pass | Inf | 22.165M | 19.04M | 22.11M | 19.065M | | | | |
| 6995MHz | Pass | Inf | 22.495M | 19.04M | 23.045M | 19.04M | | | | |
| 7095MHz | Pass | Inf | 22.44M | 19.04M | 22.11M | 19.065M | | | | |
| 7115MHz | Pass | Inf | 22.99M | 19.09M | 22.77M | 19.04M | | | | |
| 802.11be EHT40_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 43.23M | 37.981M | 44M | 38.031M | | | | |
| 6205MHz | Pass | Inf | 42.68M | 38.031M | 43.01M | 37.981M | | | | |
| 6405MHz | Pass | Inf | 42.68M | 38.031M | 42.79M | 38.081M | | | | |
| 6445MHz | Pass | Inf | 43.23M | 37.931M | 43.12M | 38.081M | | | | |
| 6485MHz | Pass | Inf | 44.22M | 37.981M | 43.56M | 38.031M | | | | |
| 6525MHz | Pass | Inf | 44.22M | 38.081M | 43.01M | 37.981M | | | | |
| 6565MHz | Pass | Inf | 43.23M | 38.031M | 44.22M | 38.131M | | | | |
| 6685MHz | Pass | Inf | 42.57M | 38.081M | 43.23M | 38.081M | | | | |
| 6885MHz | Pass | Inf | 43.34M | 38.081M | 43.56M | 37.981M | | | | |
| 6925MHz | Pass | Inf | 44.33M | 38.031M | 43.34M | 37.981M | | | | |
| 7005MHz | Pass | Inf | 43.45M | 38.031M | 43.45M | 38.031M | | | | |
| 7085MHz | Pass | Inf | 44.33M | 38.081M | 43.78M | 37.981M | | | | |
| 802.11be EHT80_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 89.32M | 77.661M | 88M | 77.661M | | | | |
| 6225MHz | Pass | Inf | 89.32M | 77.761M | 88.66M | 77.761M | | | | |
| 6385MHz | Pass | Inf | 88.44M | 77.861M | 90.2M | 77.661M | | | | |
| 6465MHz | Pass | Inf | 85.58M | 77.661M | 87.34M | 77.761M | | | | |
| 6545MHz | Pass | Inf | 89.54M | 77.661M | 88.88M | 77.661M | | | | |
| 6625MHz | Pass | Inf | 88.66M | 77.761M | 86.9M | 77.761M | | | | |
| 6705MHz | Pass | Inf | 87.56M | 77.761M | 89.98M | 77.761M | | | | |
| 6785MHz | Pass | Inf | 84.7M | 77.761M | 89.32M | 77.761M | | | | |
| 6865MHz | Pass | Inf | 89.54M | 77.861M | 89.32M | 77.761M | | | | |
| 6945MHz | Pass | Inf | 90.86M | 77.861M | 88.88M | 77.861M | | | | |
| 7025MHz | Pass | Inf | 88.22M | 77.861M | 91.08M | 77.761M | | | | |
| 802.11be EHT160_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 171.6M | 156.922M | 171.6M | 156.322M | | | | |
| 6185MHz | Pass | Inf | 172.92M | 156.922M | 170.28M | 156.922M | | | | |
| 6345MHz | Pass | Inf | 175.56M | 156.922M | 172.04M | 156.922M | | | | |
| 6505MHz | Pass | Inf | 169.84M | 156.922M | 169.84M | 156.922M | | | | |
| 6665MHz | Pass | Inf | 171.16M | 157.121M | 172.92M | 156.922M | | | | |
| 6825MHz | Pass | Inf | 168.96M | 157.121M | 173.36M | 157.321M | | | | |
| 6985MHz | Pass | Inf | 172.48M | 156.722M | 170.28M | 156.722M | | | | |
| 802.11be EHT320_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 6105MHz | Pass | Inf | 334.4M | 316.242M | 334.4M | 315.842M | | | | |
| 6265MHz | Pass | Inf | 341.44M | 316.642M | 336.16M | 315.842M | | | | |
| 6425MHz | Pass | Inf | 337.92M | 316.642M | 341.44M | 315.842M | | | | |
| 6585MHz | Pass | Inf | 337.92M | 316.642M | 336.16M | 316.242M | | | | |
| 6745MHz | Pass | Inf | 500.72M | 317.441M | 427.68M | 316.642M | | | | |
| 6905MHz | Pass | Inf | 333.52M | 315.042M | 337.92M | 315.442M | | | | |
| 802.11be EHT20_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | Inf | 22.22M | 19.04M | 22.055M | 19.04M | 23.595M | 19.065M | 22M | 19.065M |
| 6195MHz | Pass | Inf | 22.55M | 19.065M | 22.385M | 19.065M | 22.275M | 19.04M | 22.605M | 19.065M |

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---|---|---|---|---|---|---|---|---|---|---|
| 6415MHz | Pass | Inf | 22.825M | 19.04M | 22.495M | 19.04M | 22.55M | 19.015M | 22.495M | 19.04M |
| 6435MHz | Pass | Inf | 23.1M | 19.065M | 22M | 19.015M | 22.33M | 19.04M | 22.935M | 19.015M |
| 6475MHz | Pass | Inf | 22.11M | 19.04M | 21.835M | 19.065M | 22.165M | 19.015M | 22.11M | 19.04M |
| 6515MHz | Pass | Inf | 22.385M | 19.04M | 22.275M | 19.065M | 22.11M | 19.04M | 23.705M | 19.015M |
| 6535MHz | Pass | Inf | 22.77M | 19.04M | 22.22M | 19.04M | 21.835M | 19.04M | 22.22M | 19.04M |
| 6695MHz | Pass | Inf | 22.66M | 19.015M | 22.055M | 19.04M | 22.66M | 19.04M | 22.99M | 19.04M |
| 6875MHz | Pass | Inf | 22.44M | 19.04M | 22.165M | 19.065M | 22.385M | 19.065M | 22.11M | 19.04M |
| 6895MHz | Pass | Inf | 22.055M | 19.04M | 23.045M | 19.015M | 22.165M | 19.04M | 22.33M | 19.065M |
| 6995MHz | Pass | Inf | 22.77M | 19.015M | 22.605M | 19.04M | 22.77M | 19.04M | 22.22M | 19.04M |
| 7095MHz | Pass | Inf | 22.495M | 19.04M | 22.715M | 19.04M | 22.385M | 19.04M | 23.98M | 19.065M |
| 7115MHz | Pass | Inf | 22.165M | 19.065M | 22.605M | 19.065M | 22.55M | 19.04M | 22.88M | 19.065M |
| 802.11be EHT40_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 45.1M | 37.981M | 43.34M | 38.031M | 42.68M | 37.981M | 43.12M | 38.031M |
| 6205MHz | Pass | Inf | 44M | 38.081M | 42.35M | 37.981M | 43.34M | 38.081M | 44.22M | 38.031M |
| 6405MHz | Pass | Inf | 43.45M | 38.081M | 44.44M | 38.031M | 44.11M | 38.031M | 43.67M | 38.031M |
| 6445MHz | Pass | Inf | 43.12M | 38.031M | 44M | 38.081M | 43.67M | 38.031M | 43.89M | 38.031M |
| 6485MHz | Pass | Inf | 42.35M | 38.081M | 42.57M | 38.081M | 43.89M | 38.081M | 44.11M | 38.081M |
| 6525MHz | Pass | Inf | 43.78M | 38.081M | 43.23M | 37.981M | 43.23M | 38.081M | 43.45M | 38.031M |
| 6565MHz | Pass | Inf | 43.45M | 38.031M | 43.89M | 37.981M | 42.79M | 37.981M | 43.23M | 38.031M |
| 6685MHz | Pass | Inf | 43.45M | 38.031M | 43.01M | 37.981M | 43.78M | 37.981M | 43.67M | 38.031M |
| 6885MHz | Pass | Inf | 44.33M | 38.031M | 43.78M | 37.981M | 43.56M | 37.981M | 43.89M | 38.031M |
| 6925MHz | Pass | Inf | 44.22M | 38.031M | 43.12M | 38.031M | 43.56M | 38.081M | 44.66M | 38.081M |
| 7005MHz | Pass | Inf | 43.34M | 38.081M | 43.23M | 38.031M | 43.45M | 38.031M | 43.12M | 38.031M |
| 7085MHz | Pass | Inf | 43.23M | 38.031M | 43.34M | 37.981M | 43.89M | 38.081M | 44.44M | 37.981M |
| 802.11be EHT80_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 87.34M | 77.661M | 86.68M | 77.661M | 88M | 77.561M | 88.22M | 77.561M |
| 6225MHz | Pass | Inf | 90.2M | 77.761M | 88.88M | 77.661M | 88M | 77.861M | 86.68M | 77.661M |
| 6385MHz | Pass | Inf | 89.1M | 77.761M | 86.24M | 77.761M | 86.68M | 77.661M | 88.88M | 77.761M |
| 6465MHz | Pass | Inf | 87.12M | 77.661M | 88.88M | 77.661M | 89.98M | 77.661M | 89.54M | 77.761M |
| 6545MHz | Pass | Inf | 88.22M | 77.561M | 89.32M | 77.661M | 86.68M | 77.861M | 87.56M | 77.561M |
| 6625MHz | Pass | Inf | 86.68M | 77.761M | 89.54M | 77.761M | 85.58M | 77.861M | 89.1M | 77.761M |
| 6705MHz | Pass | Inf | 88.22M | 77.761M | 93.06M | 77.861M | 87.56M | 77.761M | 88.88M | 77.661M |
| 6785MHz | Pass | Inf | 87.34M | 77.661M | 89.32M | 77.661M | 88.22M | 77.661M | 89.76M | 77.561M |
| 6865MHz | Pass | Inf | 87.56M | 77.761M | 89.54M | 77.761M | 87.78M | 77.761M | 87.34M | 77.961M |
| 6945MHz | Pass | Inf | 91.08M | 77.861M | 89.54M | 77.861M | 89.32M | 77.761M | 88.88M | 77.761M |
| 7025MHz | Pass | Inf | 88.66M | 77.861M | 91.08M | 77.761M | 89.98M | 77.761M | 89.32M | 77.761M |
| 802.11be EHT160_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 173.8M | 156.922M | 170.72M | 156.522M | 170.72M | 157.121M | 168.52M | 156.922M |
| 6185MHz | Pass | Inf | 170.72M | 156.922M | 172.92M | 157.321M | 171.16M | 157.121M | 172.04M | 157.121M |
| 6345MHz | Pass | Inf | 173.36M | 157.121M | 168.96M | 156.922M | 168.96M | 157.121M | 169.84M | 157.121M |
| 6505MHz | Pass | Inf | 171.6M | 157.121M | 170.72M | 156.922M | 169.4M | 157.121M | 169.4M | 156.922M |
| 6665MHz | Pass | Inf | 170.72M | 156.922M | 172.48M | 157.121M | 168.96M | 156.922M | 172.48M | 156.922M |
| 6825MHz | Pass | Inf | 172.04M | 156.922M | 171.6M | 156.922M | 170.72M | 157.121M | 170.72M | 156.922M |
| 6985MHz | Pass | Inf | 169.84M | 156.722M | 168.96M | 156.922M | 168.96M | 156.922M | 168.08M | 156.722M |
| 802.11be EHT320_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 6105MHz | Pass | Inf | 336.16M | 315.442M | 333.52M | 315.442M | 334.4M | 315.842M | 333.52M | 315.842M |
| 6265MHz | Pass | Inf | 336.16M | 316.242M | 335.28M | 315.442M | 336.16M | 315.842M | 336.16M | 316.242M |
| 6425MHz | Pass | Inf | 336.16M | 316.242M | 337.04M | 315.842M | 335.28M | 316.242M | 332.64M | 315.842M |
| 6585MHz | Pass | Inf | 336.16M | 316.642M | 333.52M | 315.842M | 340.56M | 315.842M | 335.28M | 315.842M |
| 6745MHz | Pass | Inf | 337.92M | 315.842M | 334.4M | 315.842M | 337.04M | 316.242M | 336.16M | 315.442M |
| 6905MHz | Pass | Inf | 331.76M | 315.842M | 334.4M | 315.442M | 334.4M | 315.442M | 333.52M | 315.042M |

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**5955MHz**

30/04/2024

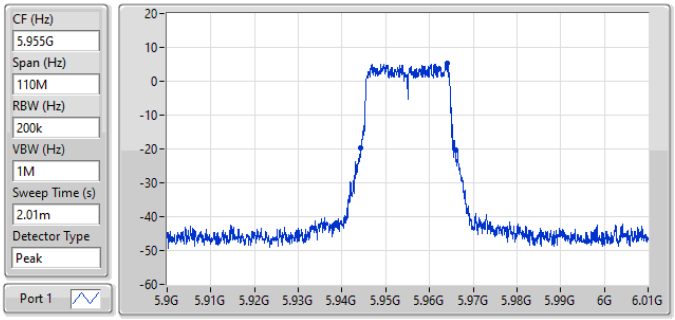


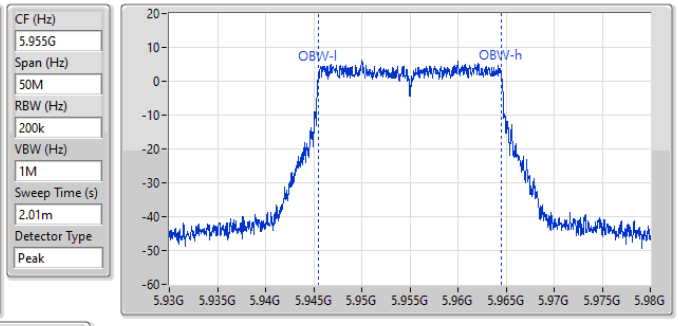


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.835M | 5.94422G | 5.966055G | 19.04M | 5.945505G | 5.964545G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6195MHz**

30/04/2024

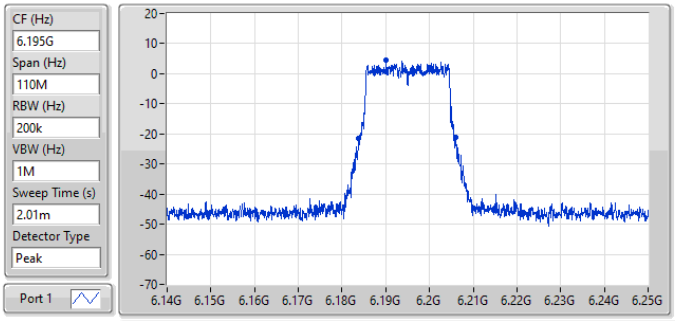


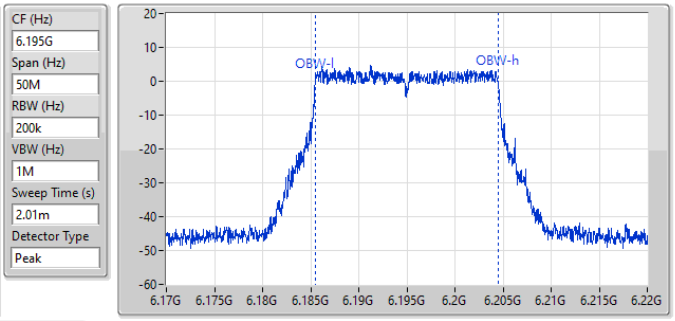


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.385M | 6.183725G | 6.20611G | 19.015M | 6.18548G | 6.204495G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6415MHz**

30/04/2024

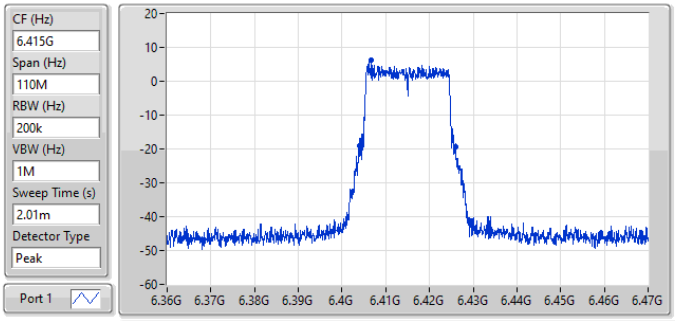


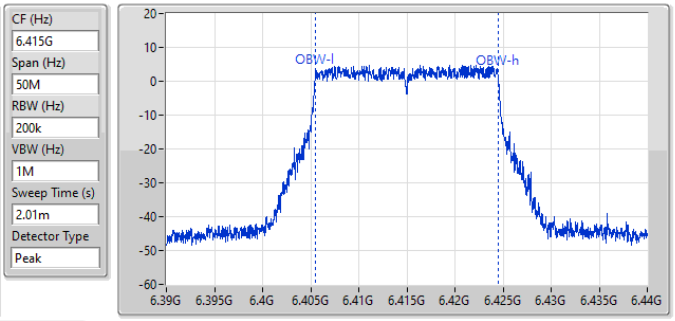


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22M | 6.404055G | 6.426055G | 19.04M | 6.405455G | 6.424495G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6435MHz**

30/04/2024

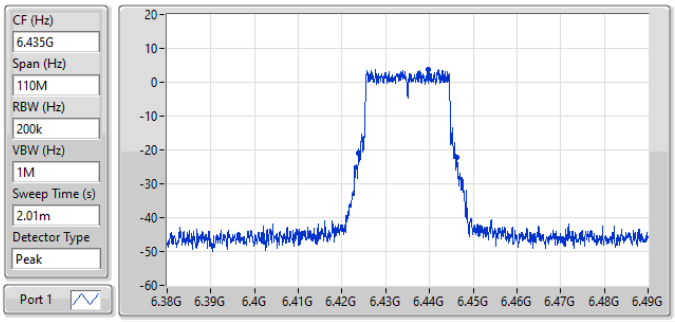


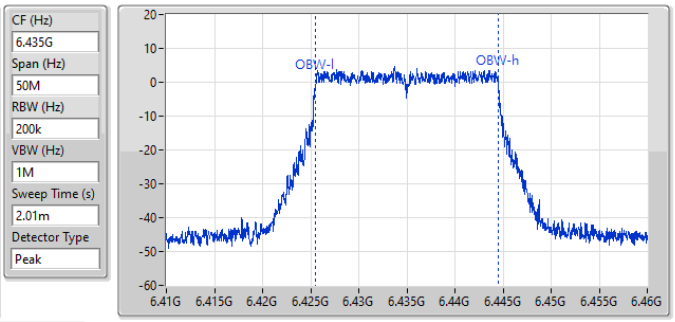


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.44M | 6.423725G | 6.446165G | 19.04M | 6.42548G | 6.44452G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6475MHz**

30/04/2024

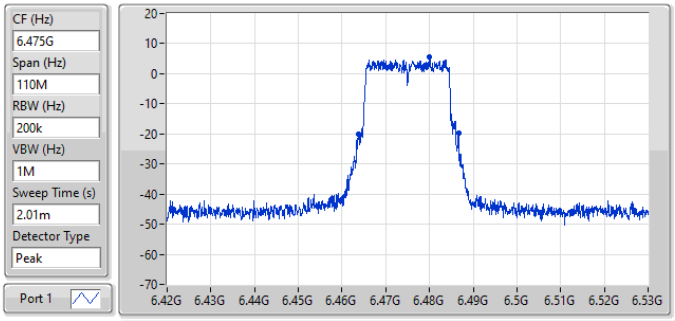


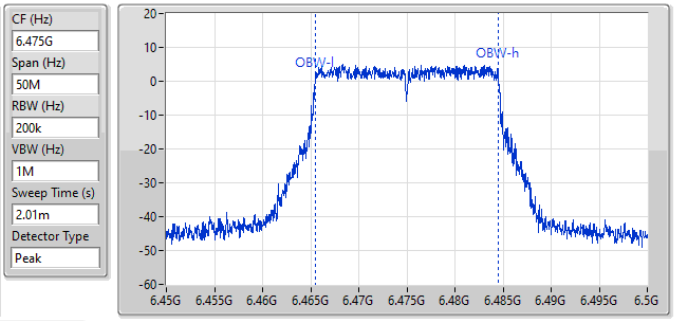


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.935M | 6.463725G | 6.48666G | 19.015M | 6.46548G | 6.484495G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6515MHz**

30/04/2024

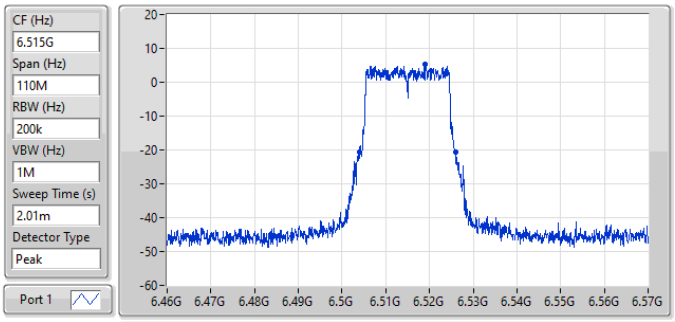


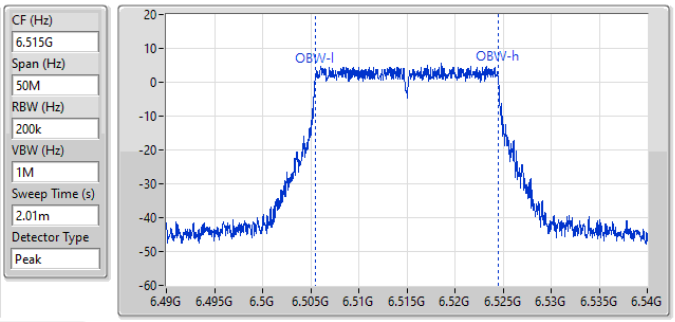


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.165M | 6.503945G | 6.52611G | 19.015M | 6.50548G | 6.524495G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6535MHz**

30/04/2024

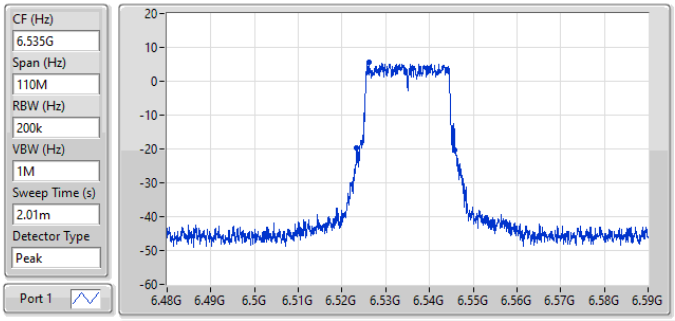


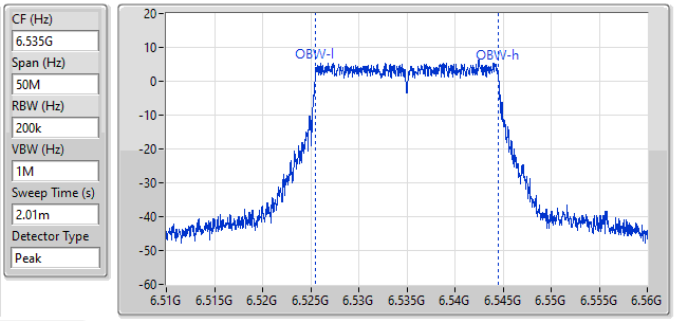


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.55M | 6.52323G | 6.54578G | 19.04M | 6.52548G | 6.54452G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6695MHz**

30/04/2024

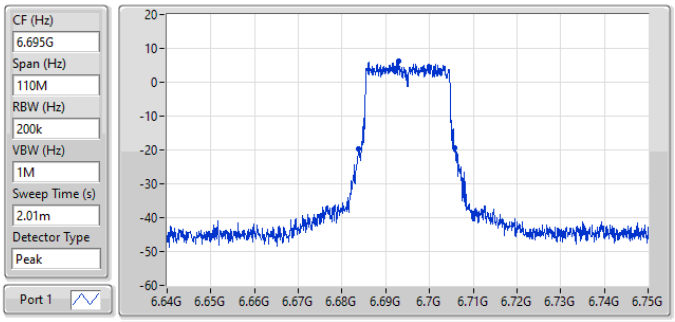


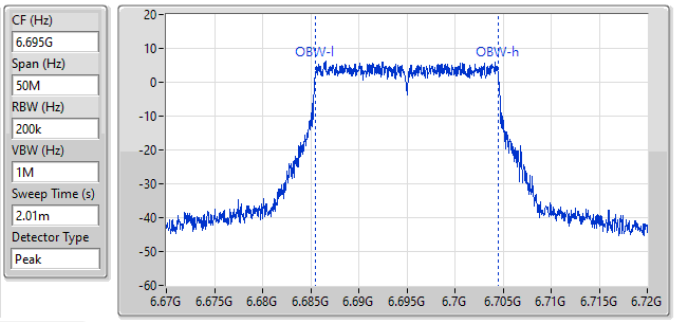


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.055M | 6.68378G | 6.705835G | 19.015M | 6.68548G | 6.704495G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6875MHz**

30/04/2024

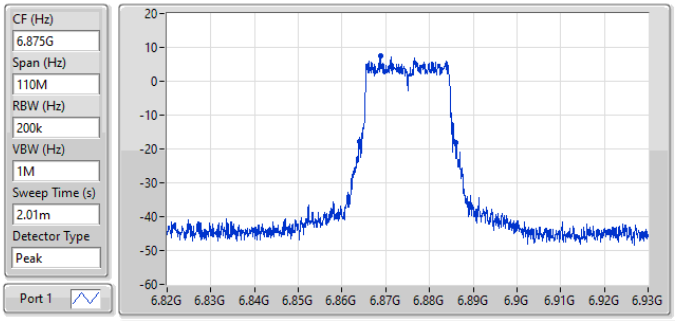


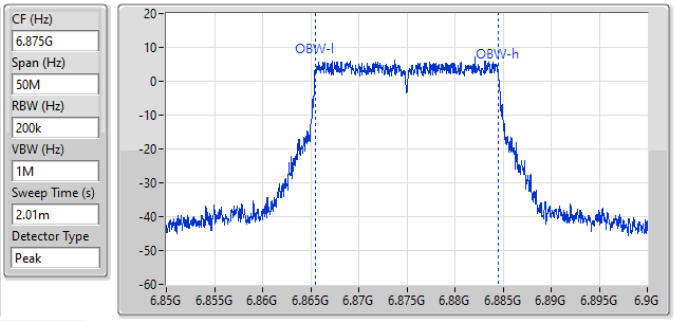


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.11M | 6.864G | 6.88611G | 19.065M | 6.865455G | 6.88452G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6895MHz**

30/04/2024

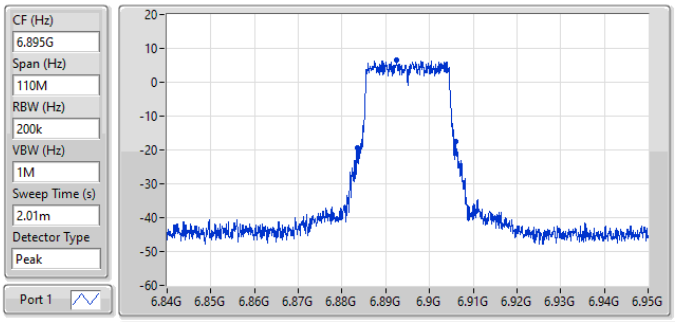


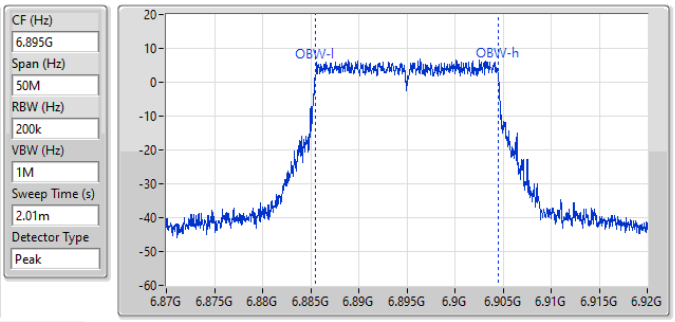


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.66M | 6.88345G | 6.90611G | 18.991M | 6.88548G | 6.90447G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**6995MHz**

30/04/2024

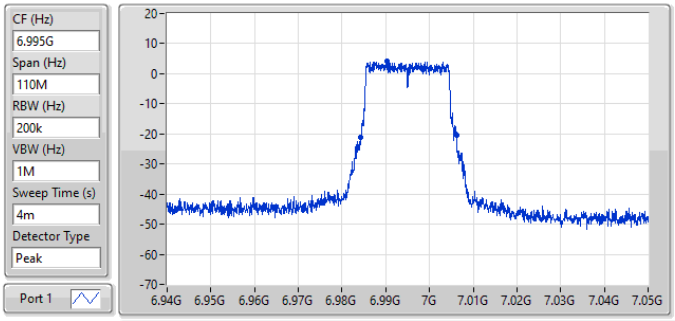


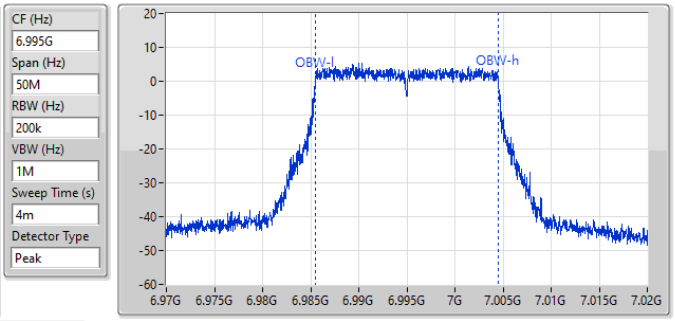


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.89M | 6.984275G | 7.006165G | 19.015M | 6.98548G | 7.004495G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**7095MHz**

30/04/2024

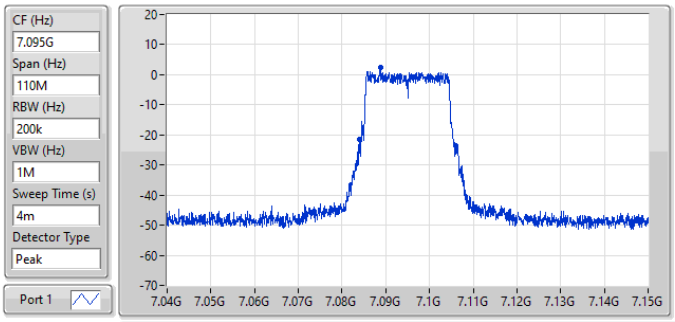


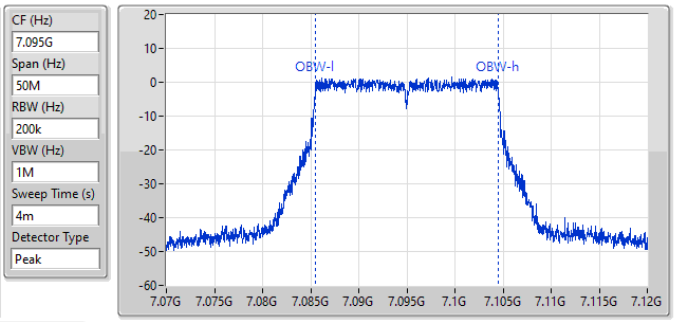


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.11M | 7.08389G | 7.106G | 19.015M | 7.08548G | 7.104495G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_1TX** **EBW**

**7115MHz**

30/04/2024

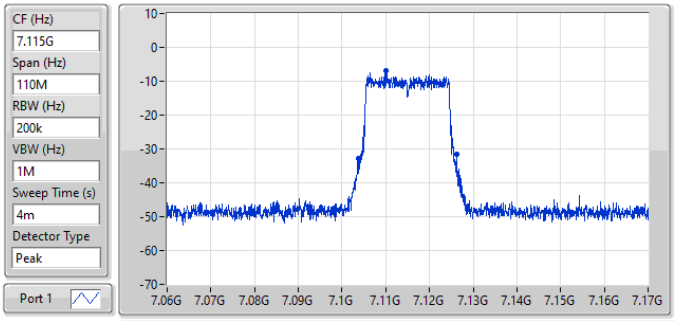


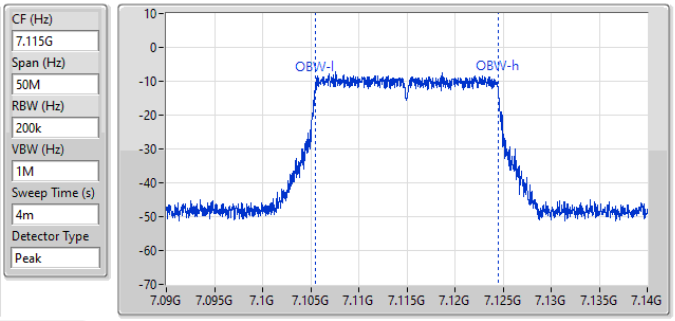


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.385M | 7.103835G | 7.12622G | 19.04M | 7.105455G | 7.124495G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**5965MHz**

30/04/2024

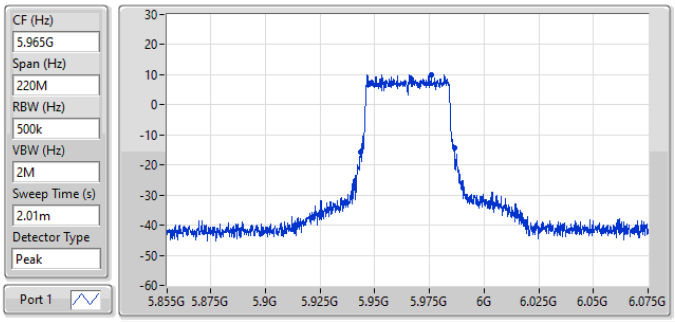


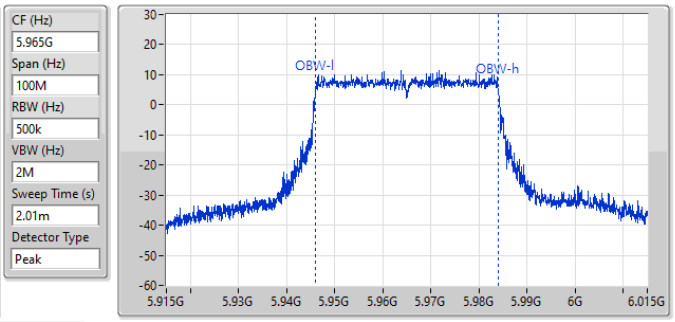


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.01M | 5.94333G | 5.98634G | 37.931M | 5.946059G | 5.983991G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6205MHz**

30/04/2024

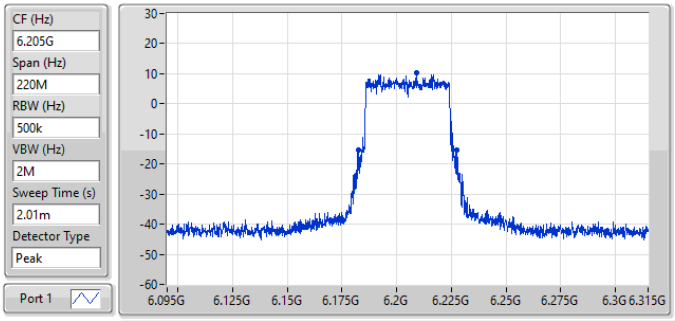


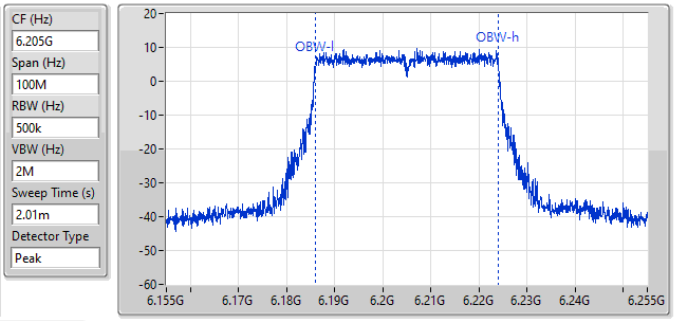


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.99M | 6.18234G | 6.22733G | 38.031M | 6.186009G | 6.22404G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6405MHz**

30/04/2024

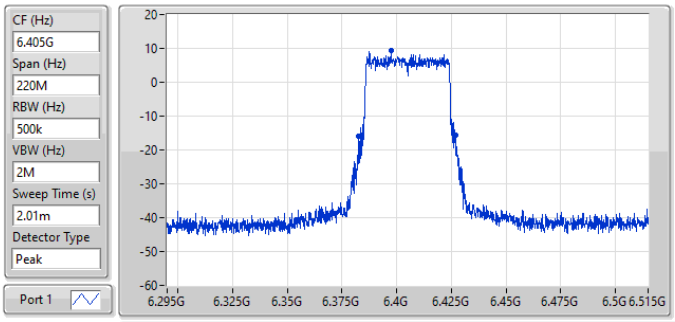


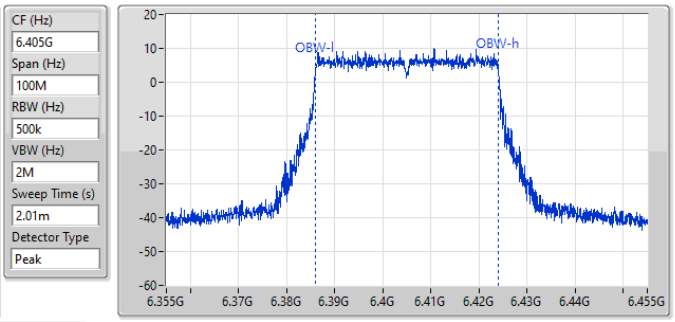


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.22M | 6.38256G | 6.42678G | 37.931M | 6.386059G | 6.423991G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6445MHz**

30/04/2024

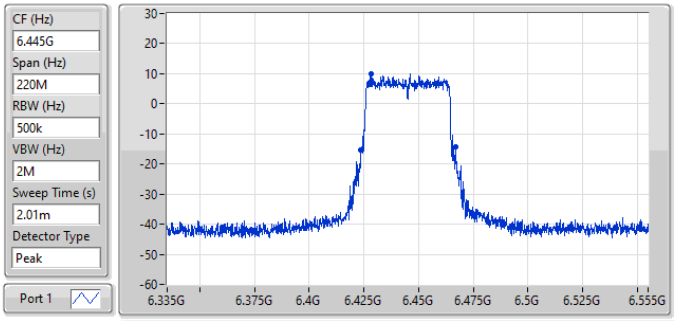


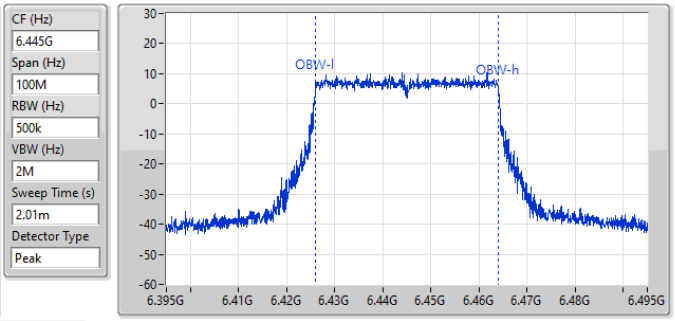


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.42366G | 6.46711G | 37.981M | 6.426009G | 6.463991G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6485MHz**

30/04/2024

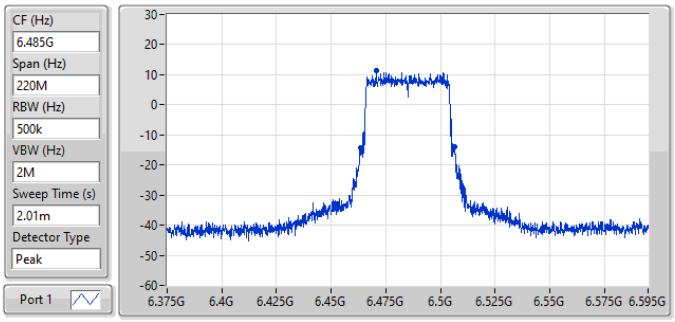


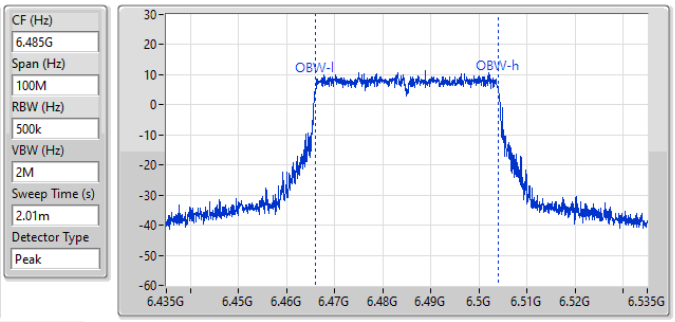


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.68M | 6.46366G | 6.50634G | 37.981M | 6.466009G | 6.503991G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6525MHz**

30/04/2024

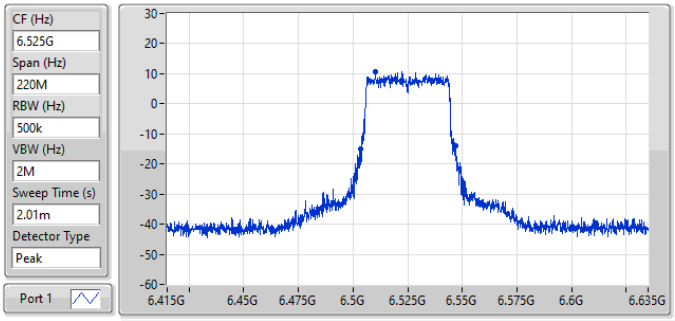


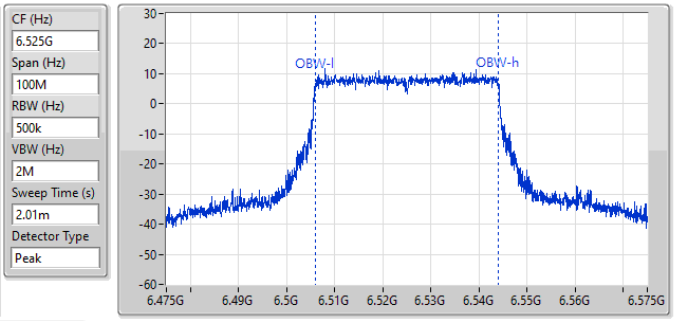


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.67M | 6.50344G | 6.54711G | 38.031M | 6.506009G | 6.54404G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6565MHz**

30/04/2024

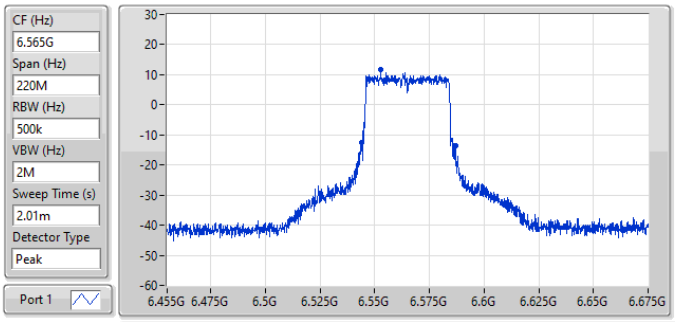


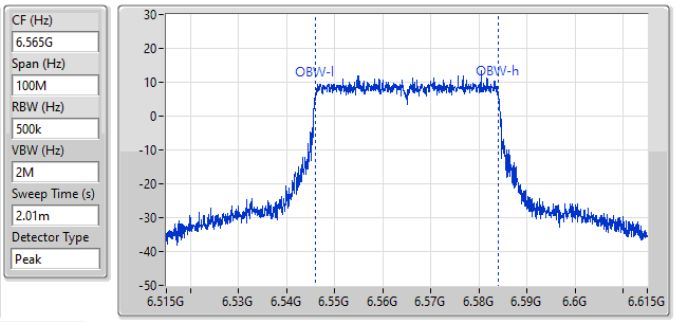


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.01M | 6.54377G | 6.58678G | 37.981M | 6.546009G | 6.583991G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6685MHz**

30/04/2024

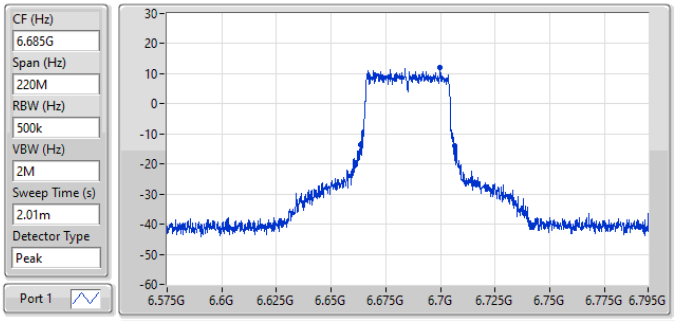


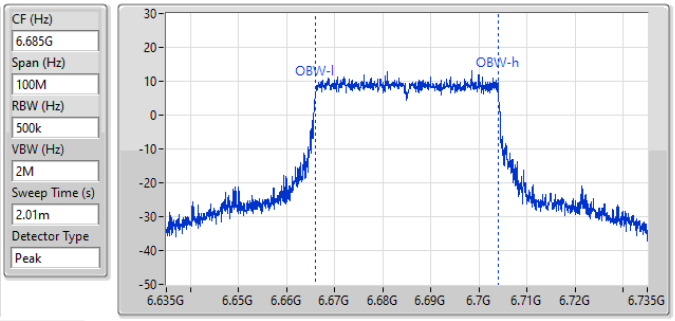


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.01M | 6.66333G | 6.70634G | 37.931M | 6.666059G | 6.703991G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6885MHz**

30/04/2024

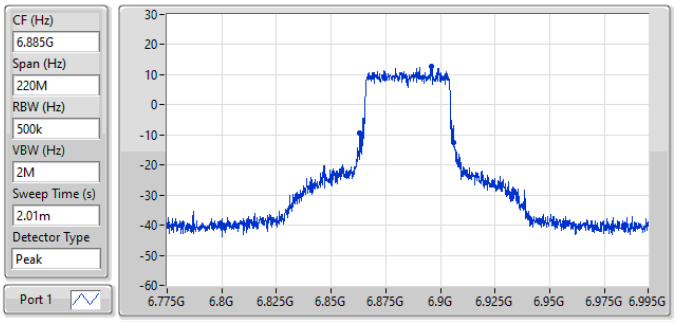


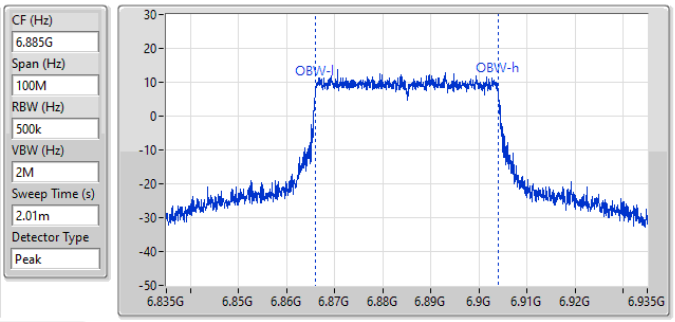


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.9M | 6.86322G | 6.90612G | 37.931M | 6.866009G | 6.903941G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**6925MHz**

30/04/2024

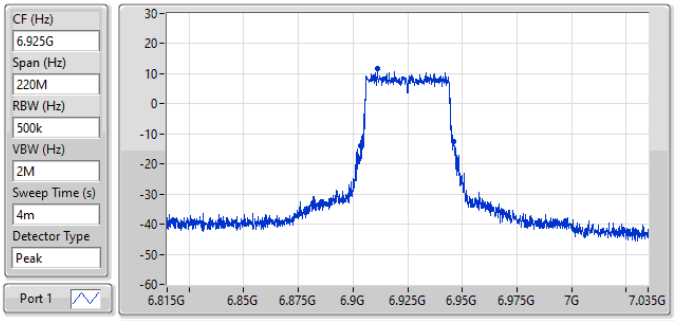


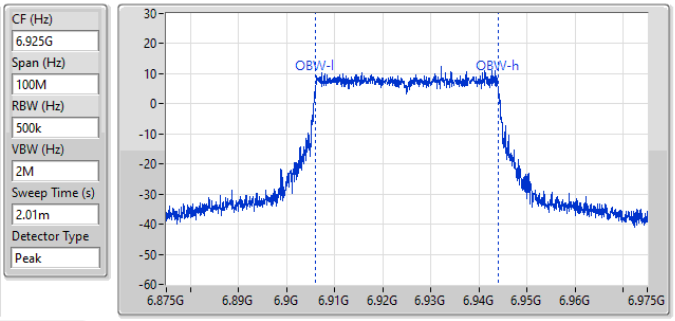


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.79M | 6.90344G | 6.94623G | 37.931M | 6.906009G | 6.943941G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**7005MHz**

30/04/2024

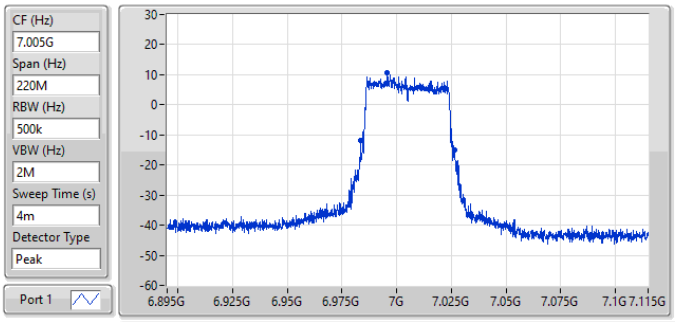


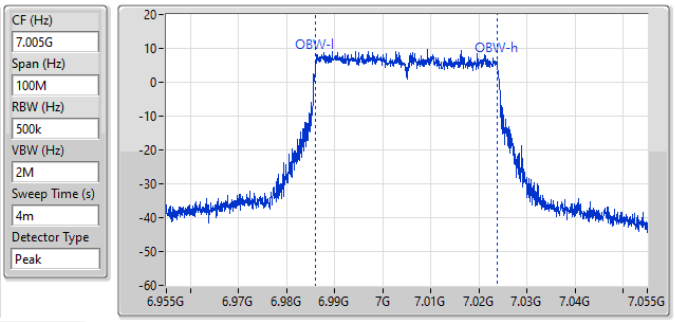


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.01M | 6.98355G | 7.02656G | 37.931M | 6.98596G | 7.023891G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_1TX** **EBW**

**7085MHz**

30/04/2024

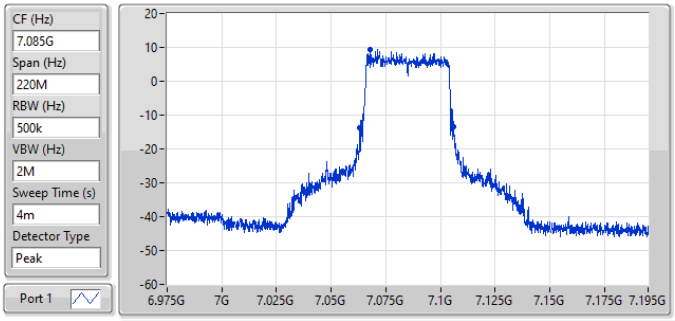


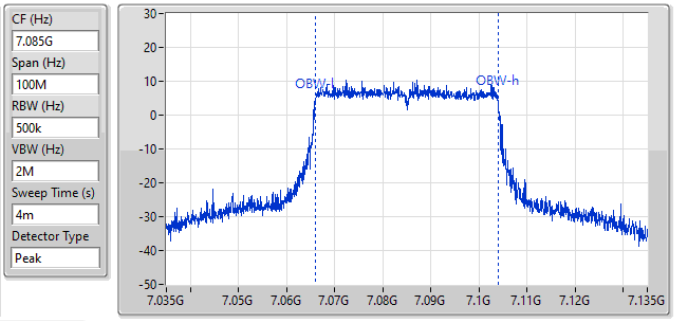


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.12M | 7.06311G | 7.10623G | 37.981M | 7.06596G | 7.103941G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**5985MHz**

30/04/2024

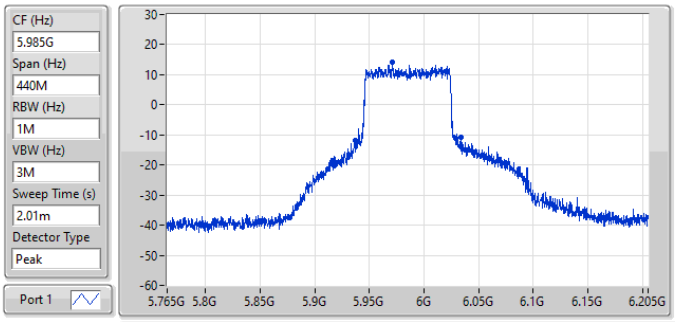


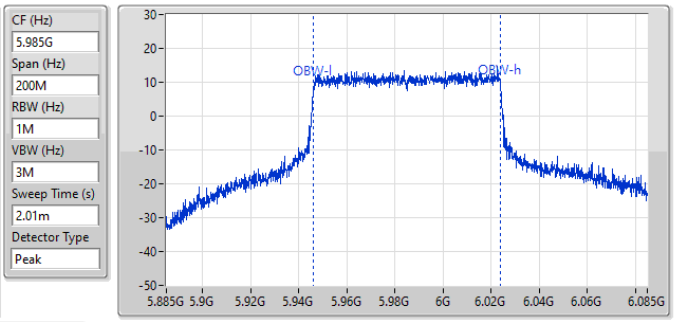


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 96.8M | 5.93682G | 6.03362G | 77.761M | 5.946219G | 6.023981G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6225MHz**

30/04/2024

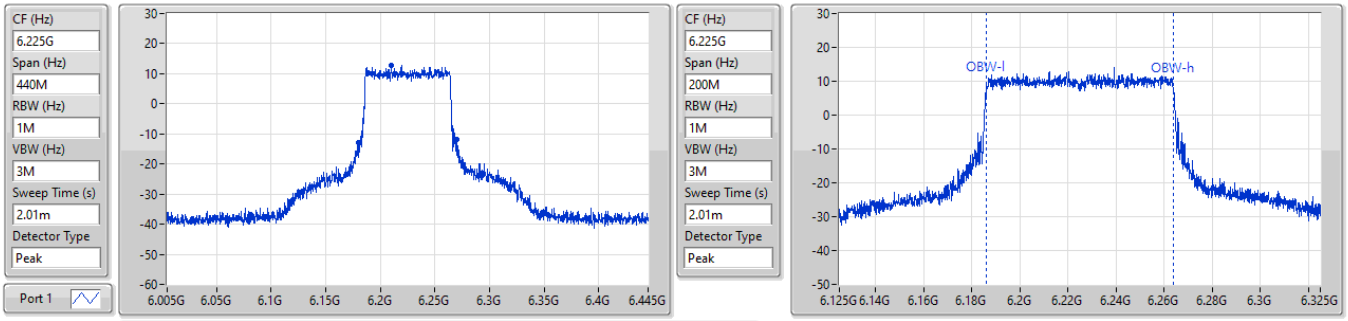


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.98M | 6.17968G | 6.26966G | 77.761M | 6.186119G | 6.263881G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6385MHz**

30/04/2024

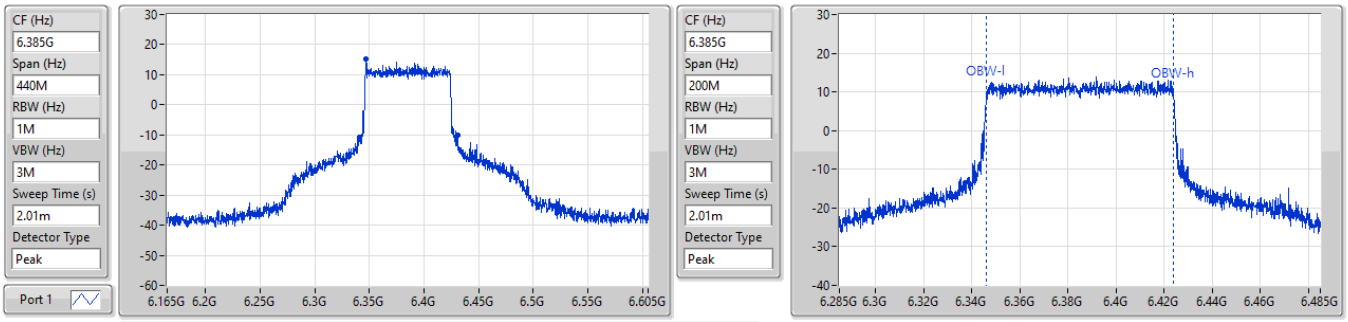


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.98M | 6.34078G | 6.43076G | 77.861M | 6.346119G | 6.423981G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6465MHz**

30/04/2024

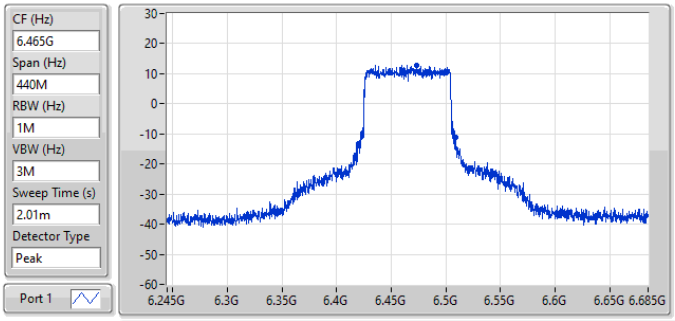


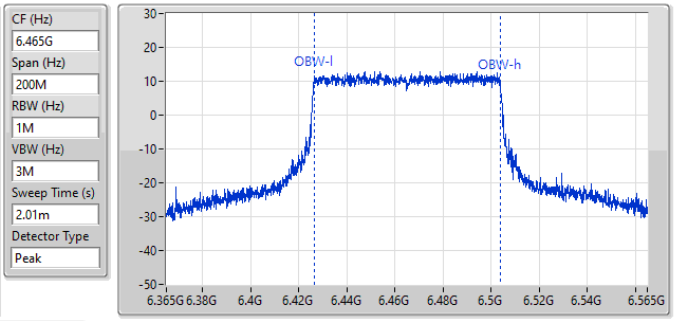


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.44M | 6.42012G | 6.50856G | 77.561M | 6.426319G | 6.503881G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6545MHz**

30/04/2024

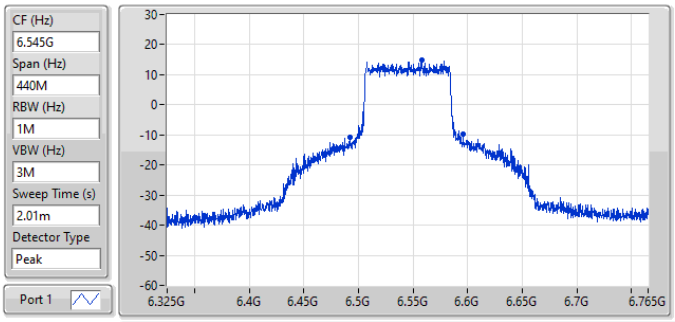


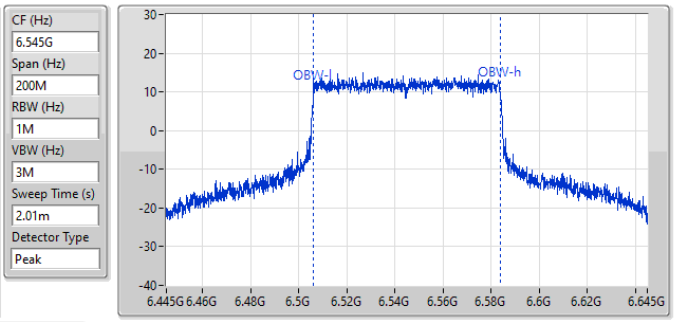


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 103.62M | 6.4922G | 6.59582G | 77.961M | 6.506019G | 6.583981G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6625MHz**

30/04/2024

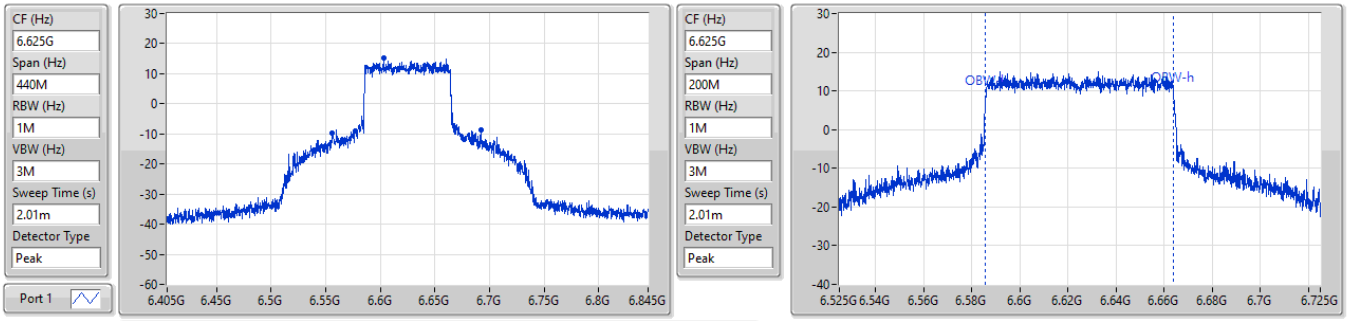


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 136.18M | 6.55592G | 6.6921G | 78.261M | 6.58582G | 6.66408G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6705MHz**

01/05/2024

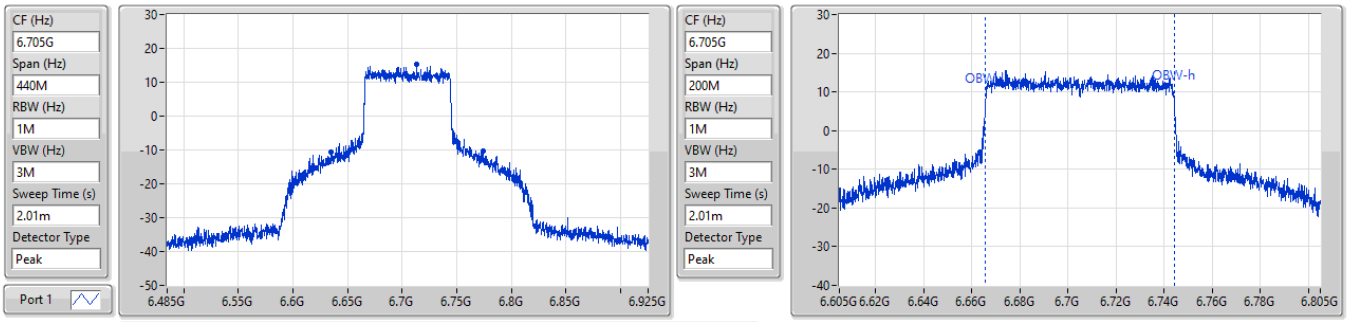


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 139.04M | 6.63526G | 6.7743G | 78.361M | 6.66582G | 6.74418G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6785MHz**

01/05/2024

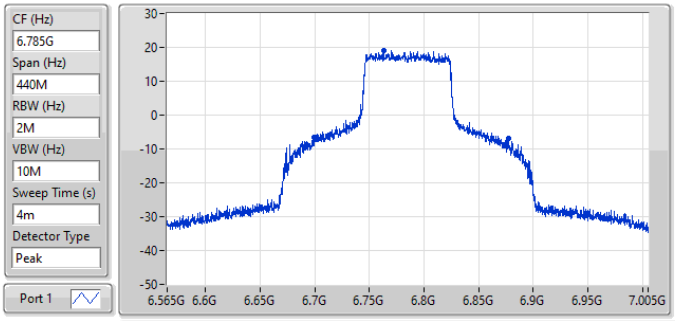


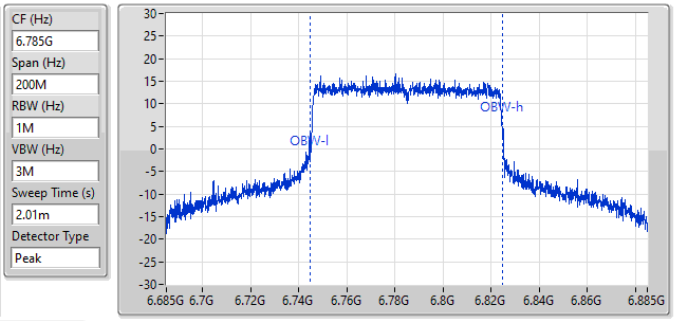


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 177.54M | 6.69986G | 6.8774G | 79.76M | 6.74492G | 6.82468G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6865MHz**

01/05/2024

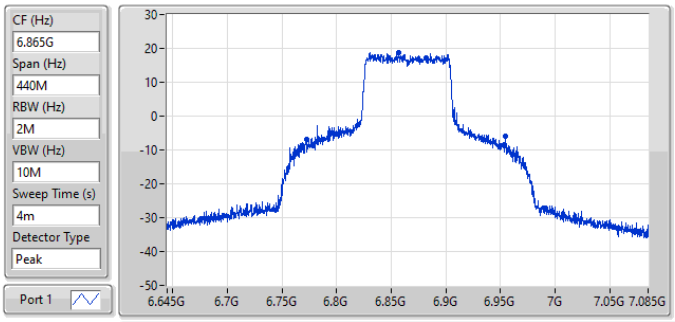


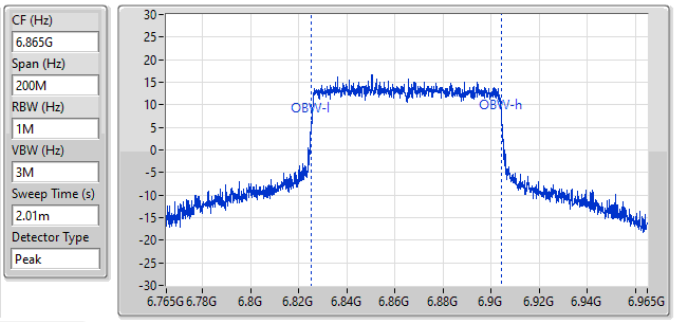


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 182.38M | 6.77238G | 6.95476G | 79.26M | 6.82512G | 6.90438G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**6945MHz**

01/05/2024

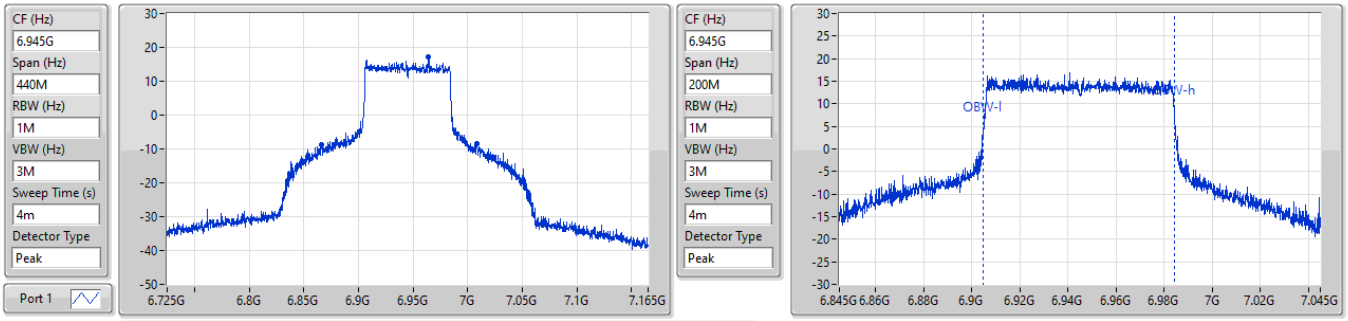


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 143M | 6.8658G | 7.0088G | 79.36M | 6.90492G | 6.98428G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_1TX** **EBW**

**7025MHz**

01/05/2024

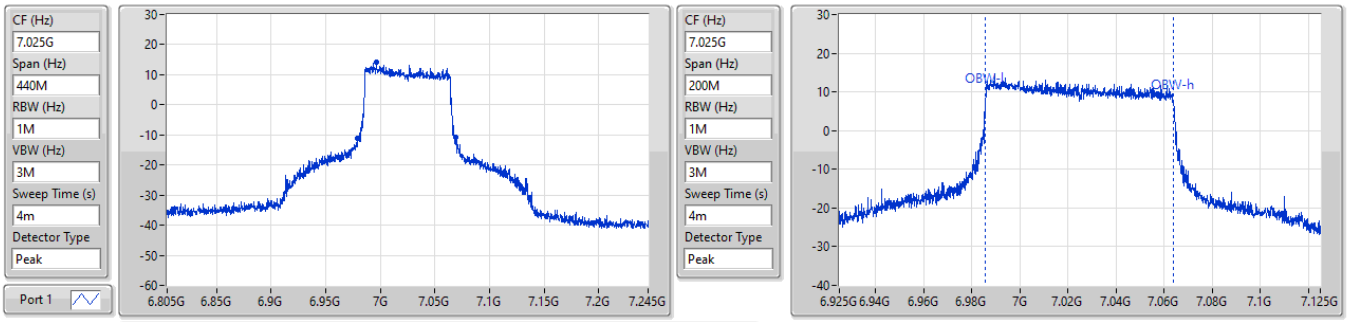


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.98M | 6.97902G | 7.069G | 78.061M | 6.98582G | 7.063881G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6025MHz**

01/05/2024

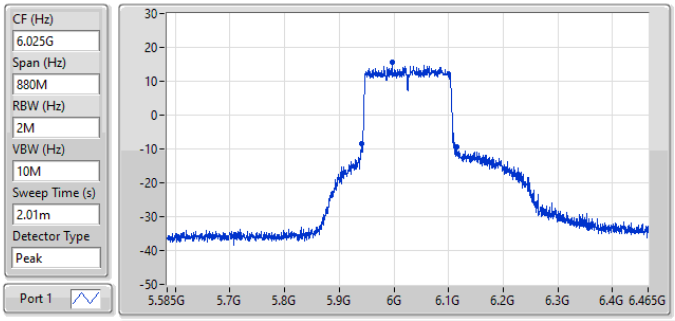


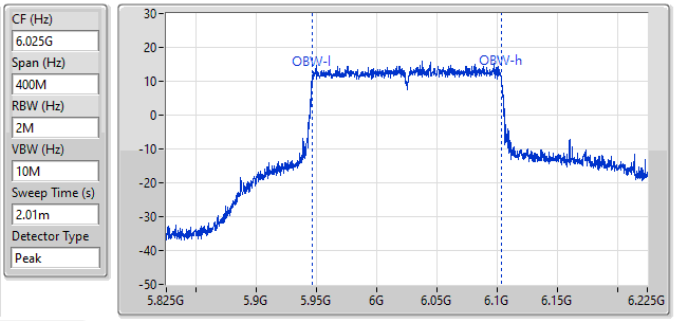


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 174.24M | 5.94008G | 6.11432G | 157.521M | 5.946439G | 6.103961G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6185MHz**

01/05/2024

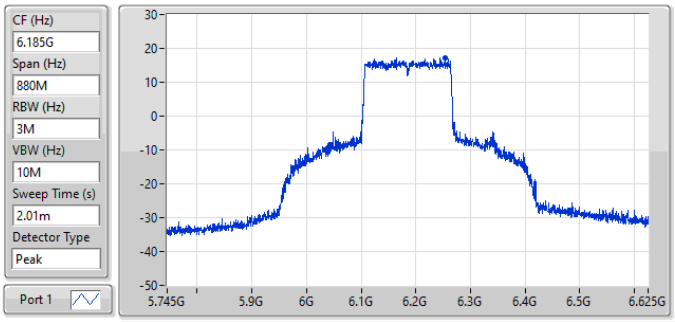


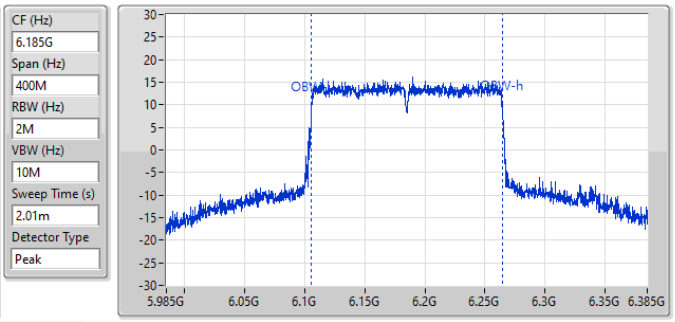


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 302.28M | 6.04244G | 6.34472G | 158.521M | 6.10584G | 6.26436G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6345MHz**

01/05/2024

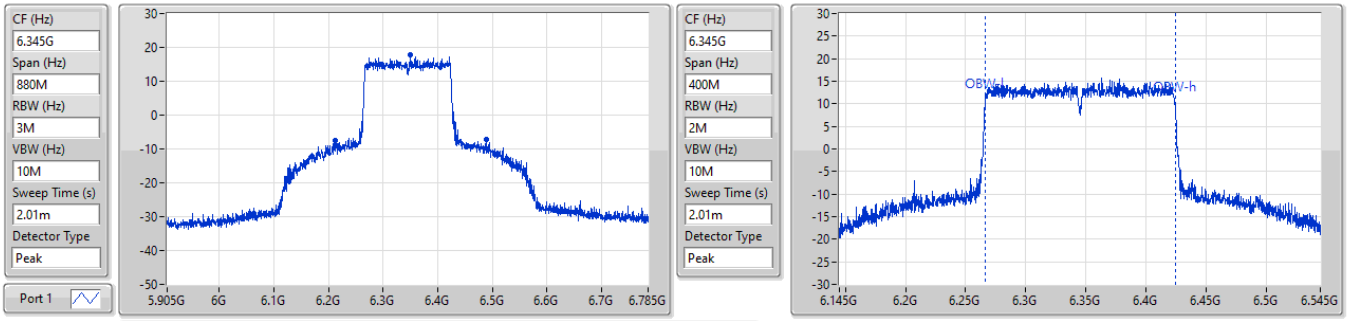


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 276.32M | 6.21212G | 6.48844G | 158.121M | 6.266039G | 6.42416G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6505MHz**

01/05/2024

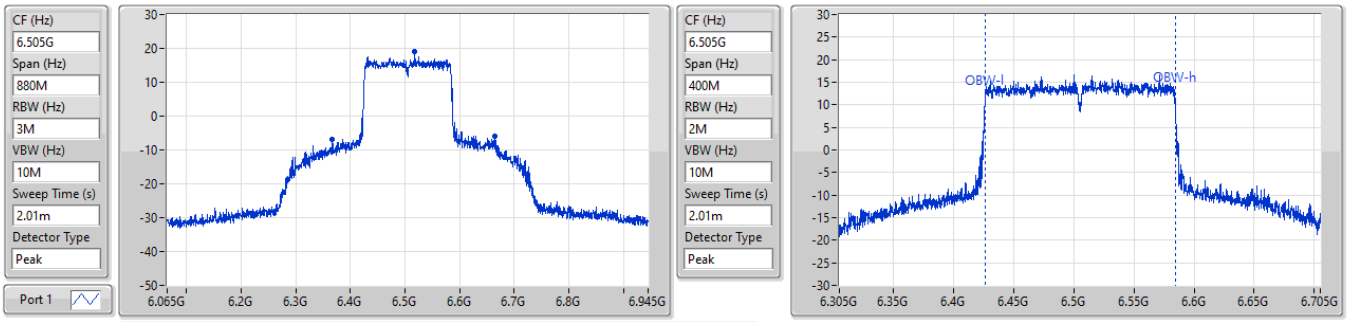


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 297.88M | 6.36728G | 6.66516G | 158.121M | 6.426239G | 6.58436G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6665MHz**

01/05/2024

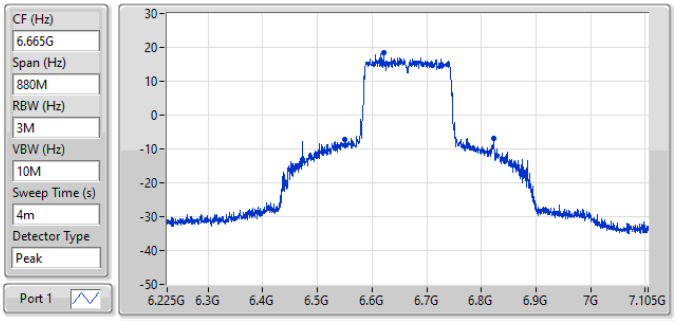


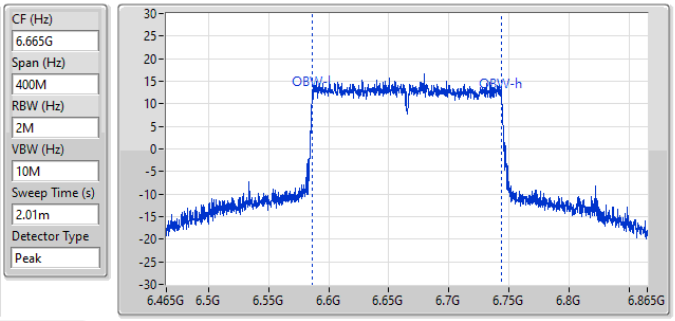


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 272.36M | 6.5506G | 6.82296G | 157.921M | 6.586039G | 6.743961G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6825MHz**

01/05/2024

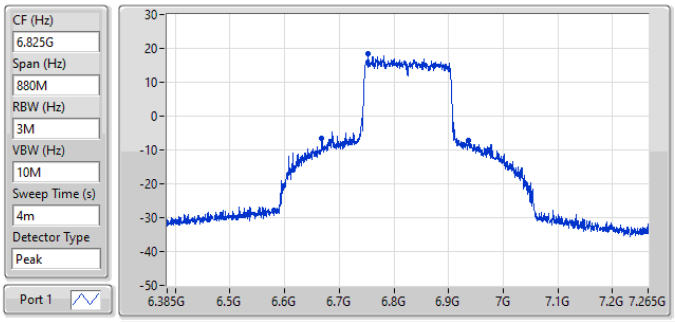


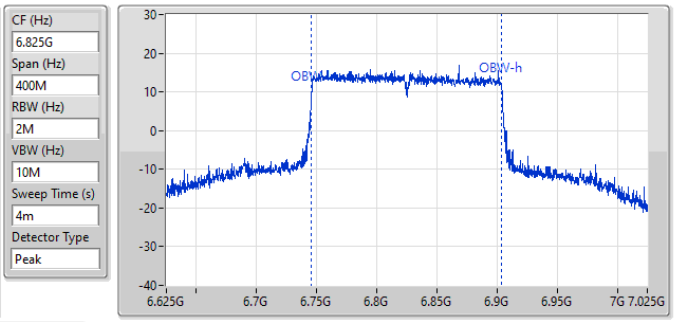


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 267.96M | 6.66792G | 6.93588G | 158.321M | 6.74564G | 6.903961G | Inf | 1 |

**6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_1TX** **EBW**

**6985MHz**

01/05/2024

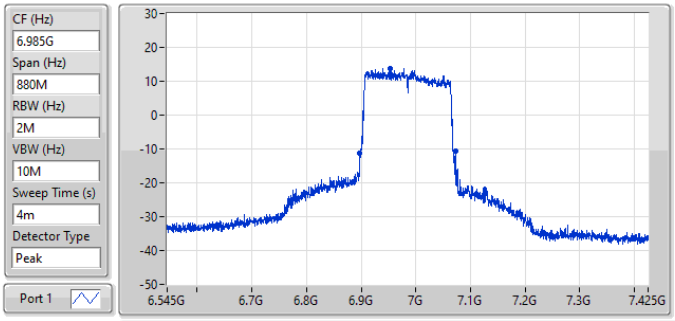


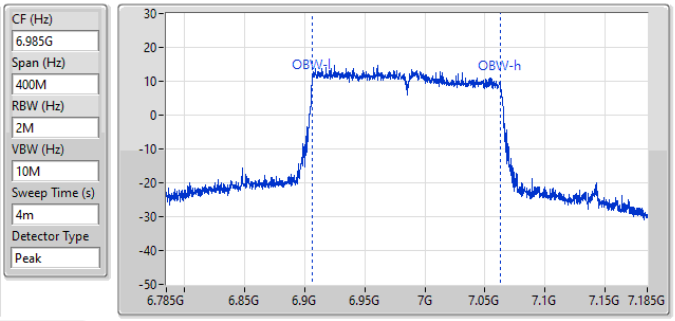


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 175.12M | 6.89744G | 7.07256G | 156.722M | 6.906239G | 7.062961G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6105MHz**

01/05/2024

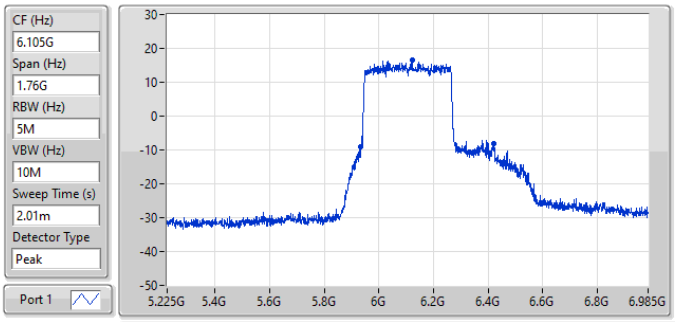


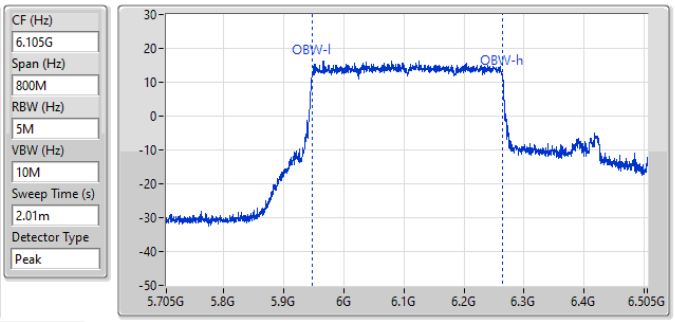


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 487.52M | 5.93428G | 6.4218G | 317.041M | 5.947479G | 6.26452G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6265MHz**

01/05/2024

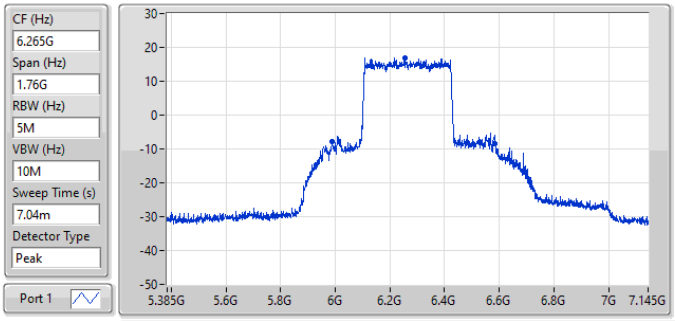


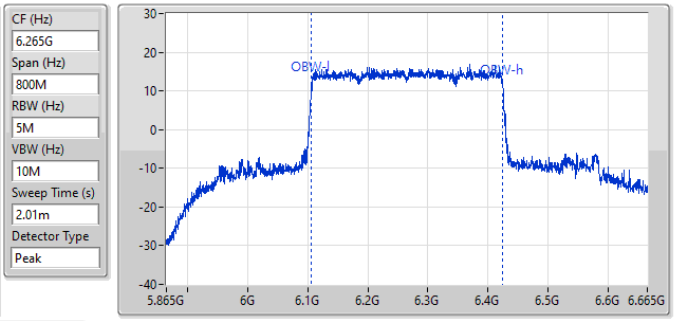


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 598.4M | 5.98692G | 6.58532G | 318.641M | 6.106279G | 6.42492G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6425MHz**

01/05/2024

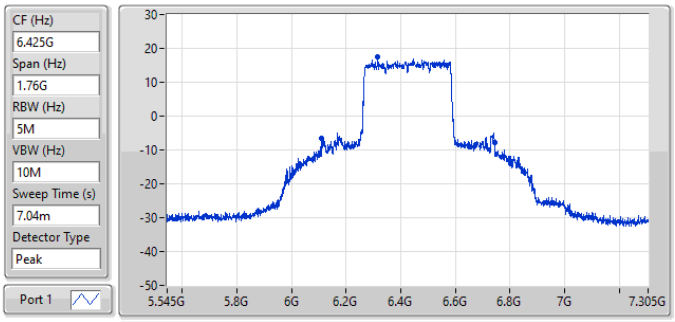


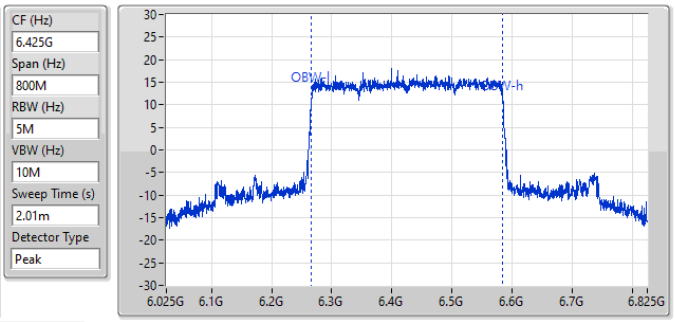


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 633.6M | 6.10996G | 6.74356G | 319.04M | 6.26588G | 6.58492G | Inf | 1 |

**6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6585MHz**

01/05/2024

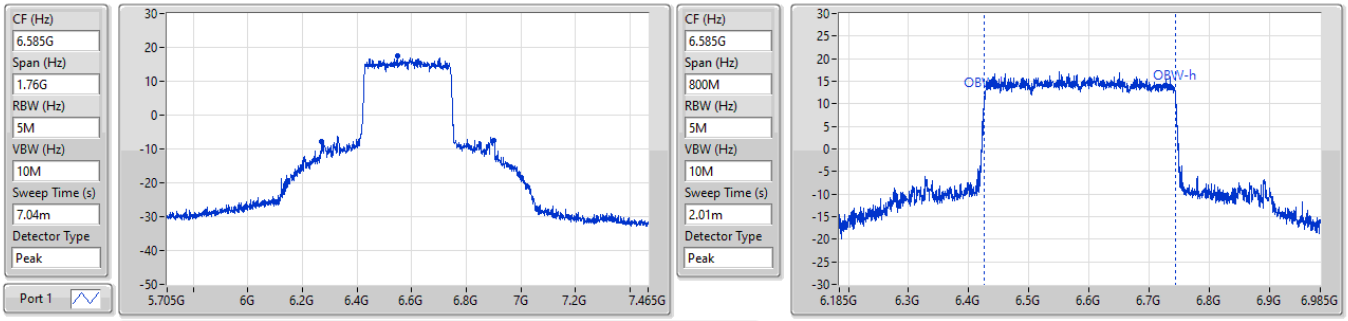


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 631.84M | 6.26996G | 6.9018G | 317.841M | 6.426279G | 6.74412G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6745MHz**

01/05/2024

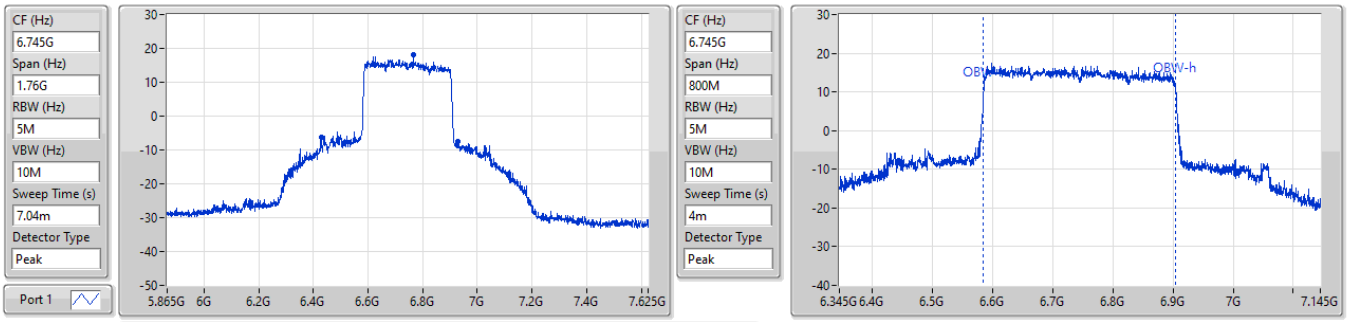


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 499.84M | 6.4282G | 6.92804G | 319.04M | 6.58468G | 6.903721G | Inf | 1 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_1TX** **EBW**

**6905MHz**

01/05/2024

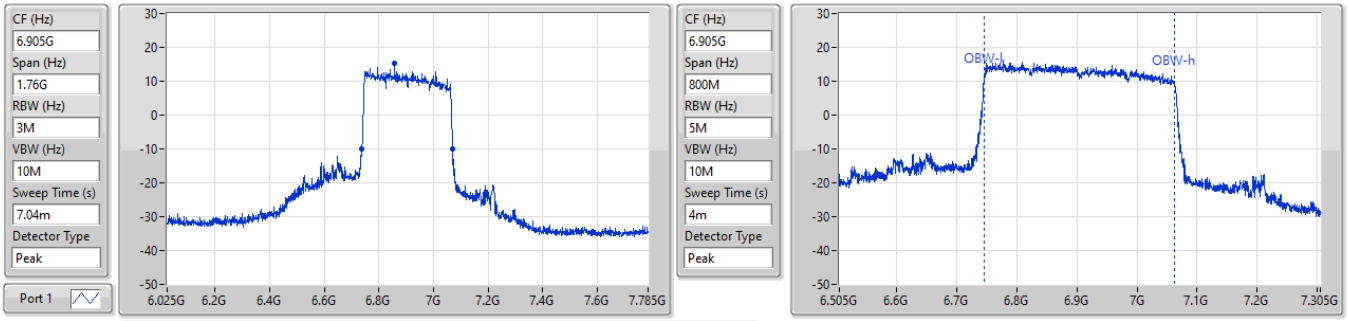


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 333.52M | 6.73516G | 7.06868G | 315.842M | 6.74588G | 7.061722G | Inf | 1 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**5955MHz**

01/05/2024

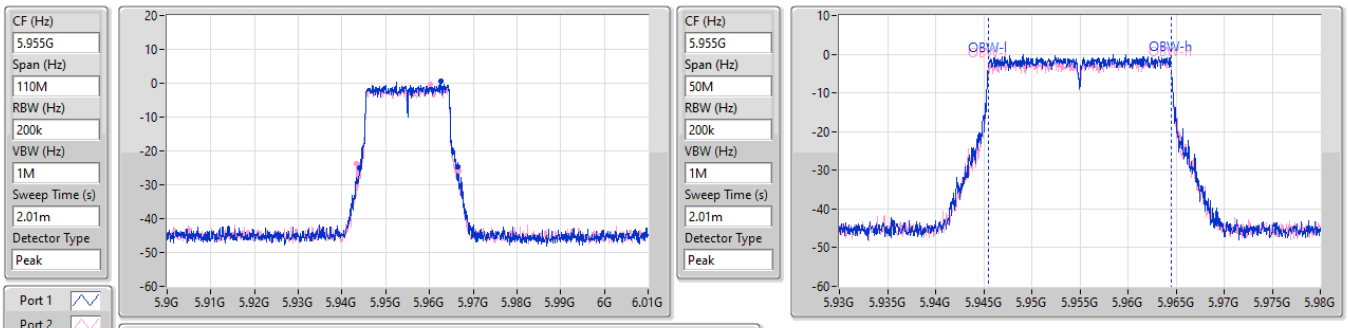


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.55M | 5.943945G | 5.966495G | 19.015M | 5.94548G | 5.964495G | Inf | 1 |
| 23.265M | 5.943395G | 5.96666G | 19.04M | 5.94548G | 5.96452G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6195MHz**

01/05/2024

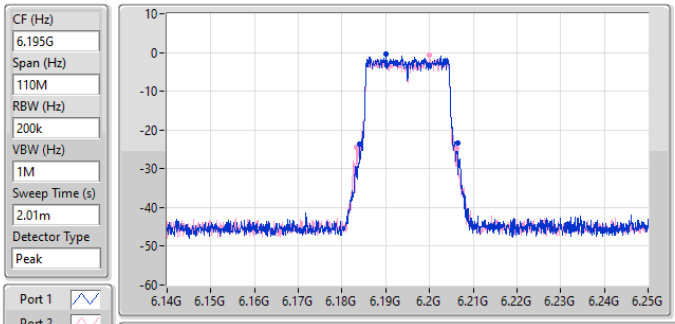


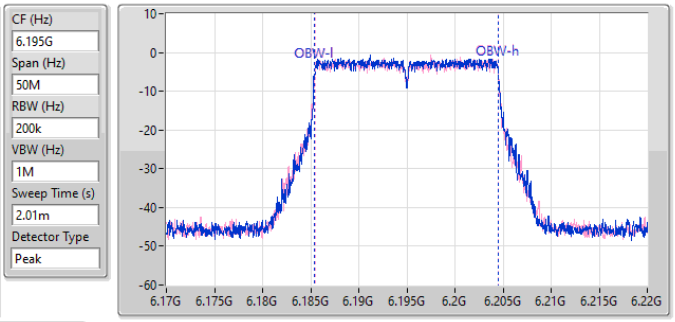


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.44M | 6.183945G | 6.206385G | 19.09M | 6.18543G | 6.20452G | Inf | 1 |
| 22.825M | 6.18334G | 6.206165G | 19.04M | 6.185455G | 6.204495G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6415MHz**

01/05/2024

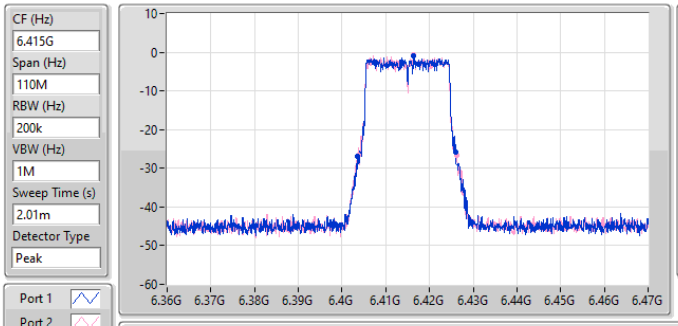


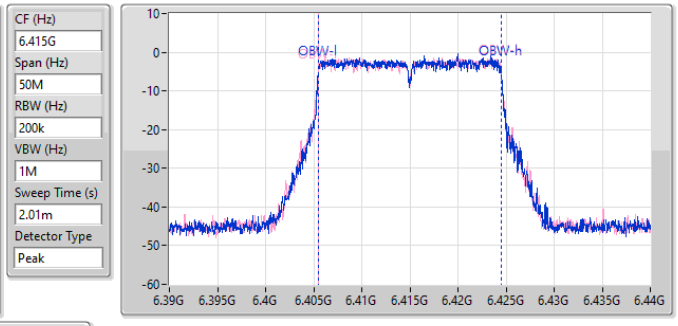


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.55M | 6.403505G | 6.426055G | 19.015M | 6.40548G | 6.424495G | Inf | 1 |
| 22.66M | 6.40367G | 6.42633G | 19.015M | 6.40548G | 6.424495G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6435MHz**

01/05/2024

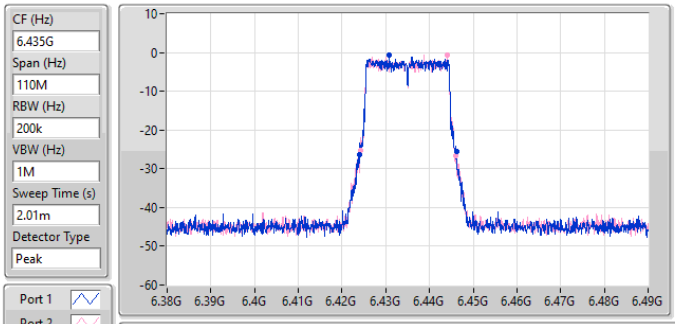


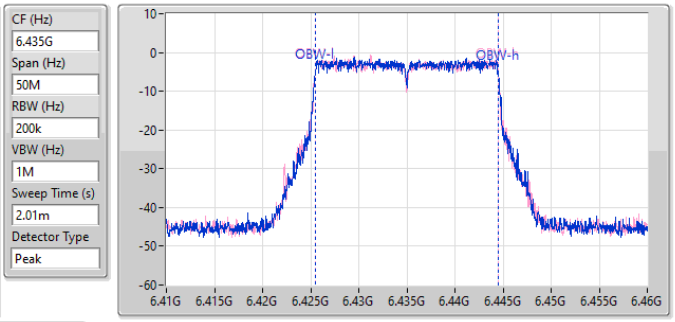


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.165M | 6.424G | 6.446165G | 19.065M | 6.425455G | 6.44452G | Inf | 1 |
| 21.78M | 6.424165G | 6.445945G | 19.065M | 6.425455G | 6.44452G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6475MHz**

01/05/2024

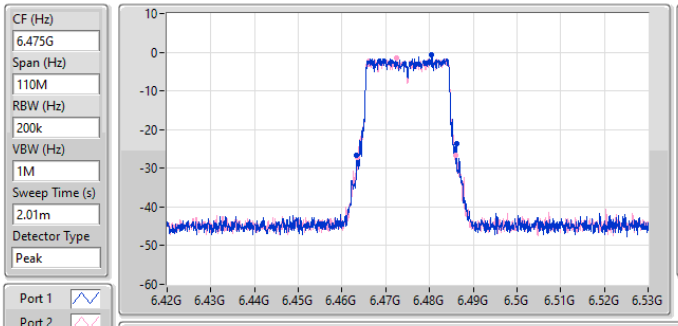


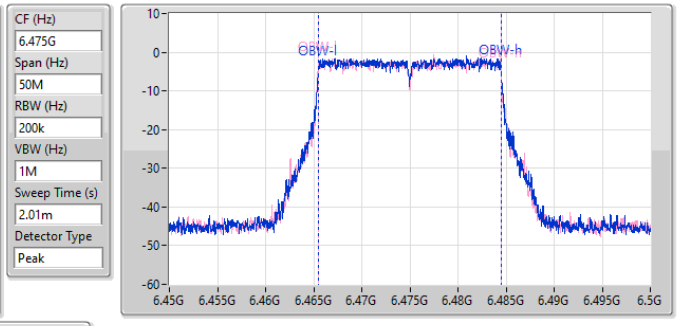


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.935M | 6.463285G | 6.48622G | 18.991M | 6.465505G | 6.484495G | Inf | 1 |
| 22.495M | 6.463615G | 6.48611G | 19.04M | 6.465455G | 6.484495G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6515MHz**

01/05/2024

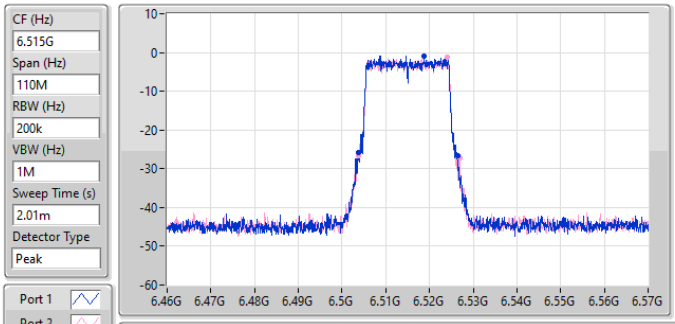


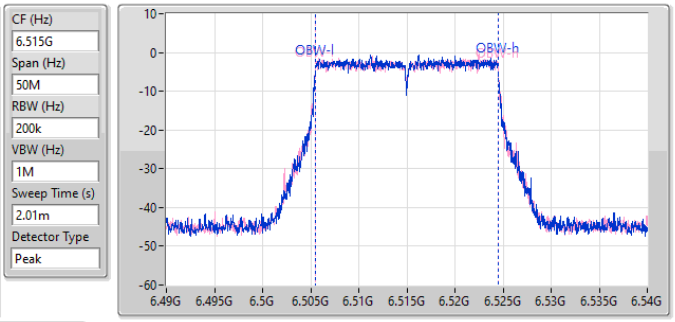


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.715M | 6.503725G | 6.52644G | 19.015M | 6.50548G | 6.524495G | Inf | 1 |
| 23.21M | 6.50367G | 6.52688G | 19.065M | 6.505455G | 6.52452G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6535MHz**

01/05/2024

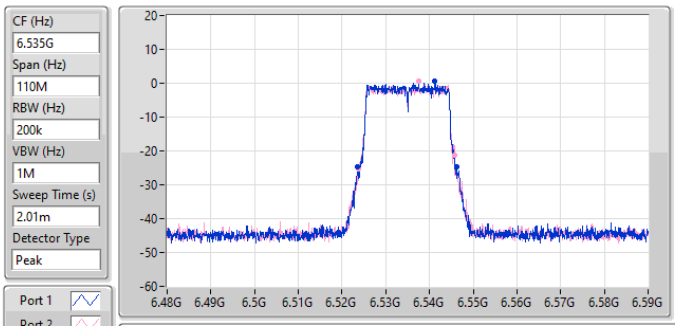


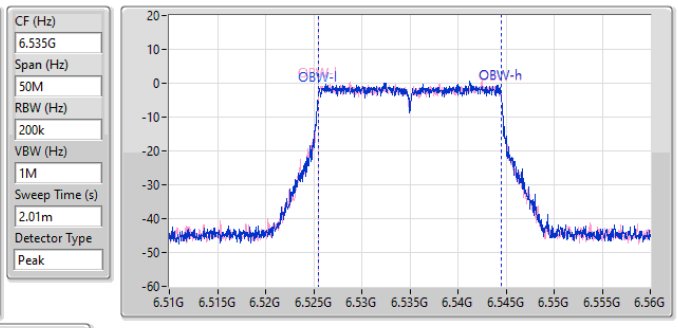


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.715M | 6.523505G | 6.54622G | 19.04M | 6.52548G | 6.54452G | Inf | 1 |
| 22M | 6.52378G | 6.54578G | 19.015M | 6.52548G | 6.544495G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6695MHz**

01/05/2024

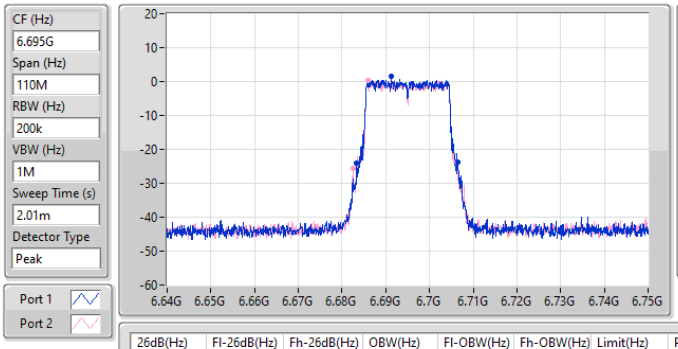


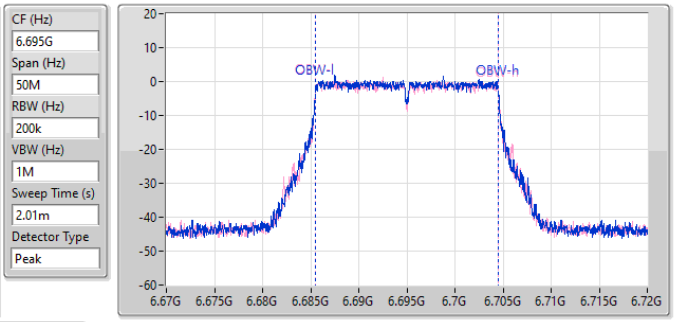


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 23.155M | 6.683285G | 6.70644G | 19.015M | 6.685505G | 6.70452G | Inf | 1 |
| 23.87M | 6.68246G | 6.70633G | 19.015M | 6.685505G | 6.70452G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6875MHz**

01/05/2024

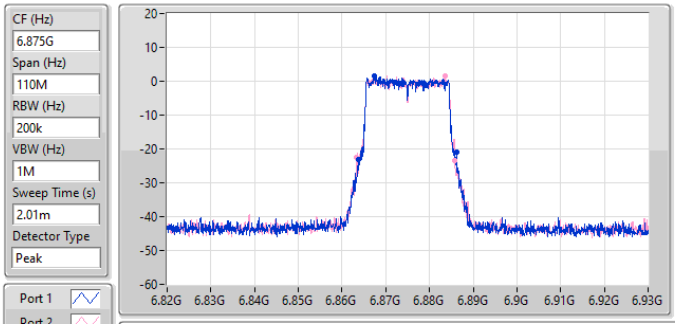


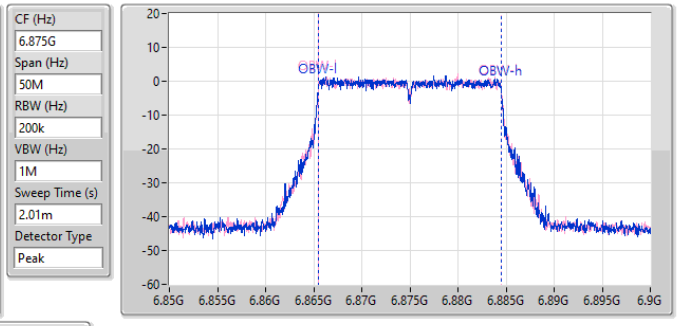


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.495M | 6.86378G | 6.886275G | 19.015M | 6.86548G | 6.884495G | Inf | 1 |
| 22.495M | 6.863285G | 6.88578G | 19.04M | 6.86548G | 6.88452G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6895MHz**

01/05/2024

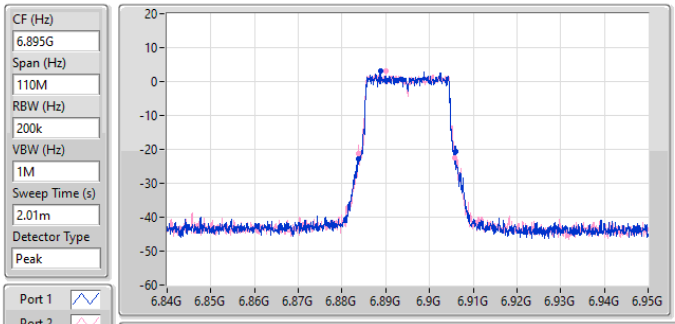


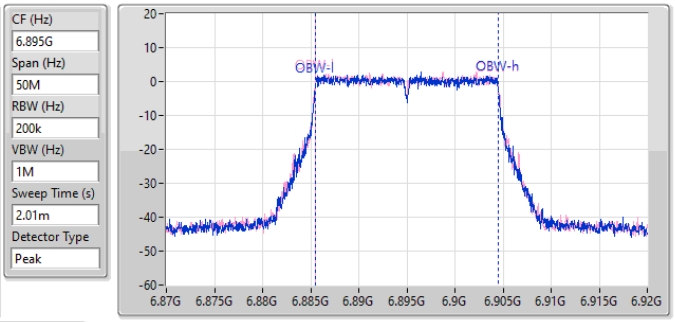


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.165M | 6.88378G | 6.905945G | 19.04M | 6.885455G | 6.904495G | Inf | 1 |
| 22.11M | 6.88367G | 6.90578G | 19.065M | 6.885455G | 6.90452G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**6995MHz**

01/05/2024

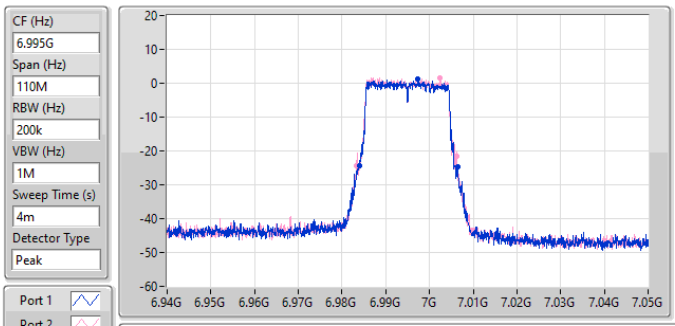


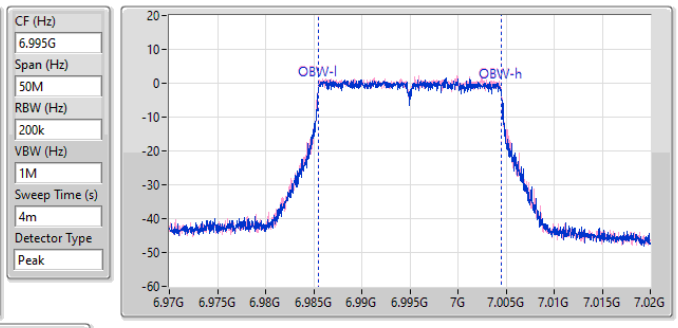


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.495M | 6.98389G | 7.006385G | 19.04M | 6.985455G | 7.004495G | Inf | 1 |
| 23.045M | 6.98323G | 7.006275G | 19.04M | 6.985455G | 7.004495G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**7095MHz**

01/05/2024

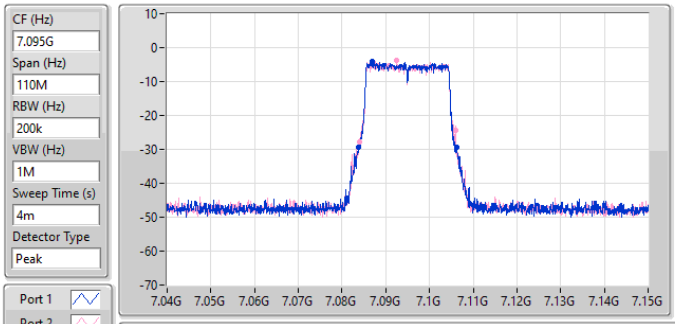


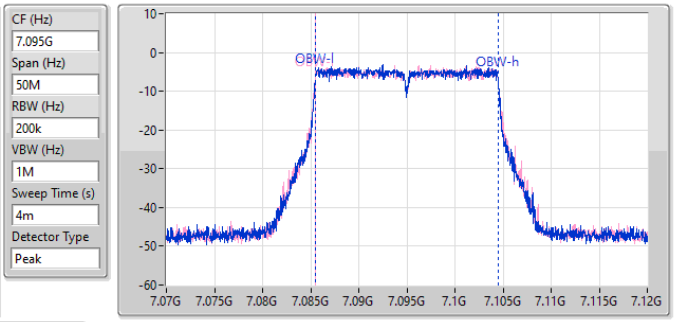


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.44M | 7.08378G | 7.10622G | 19.04M | 7.085455G | 7.104495G | Inf | 1 |
| 22.11M | 7.08389G | 7.106G | 19.065M | 7.085455G | 7.10452G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX** **EBW**

**7115MHz**

01/05/2024

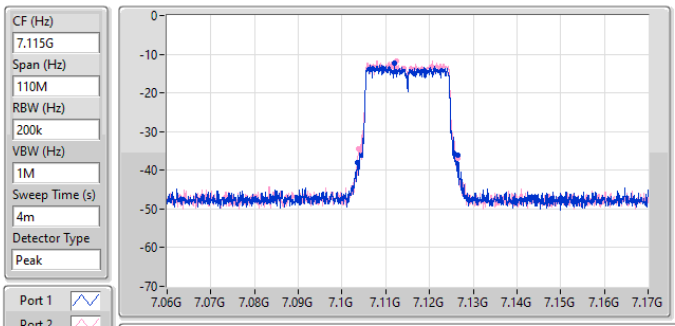


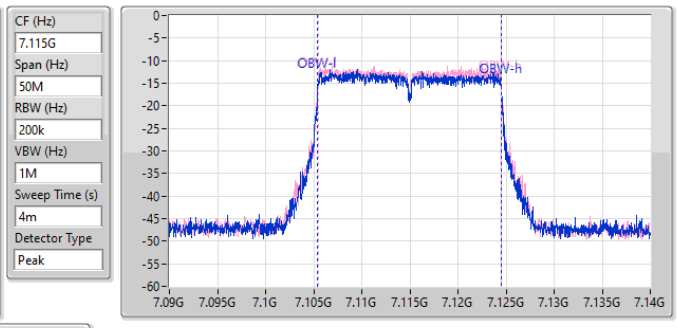


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.99M | 7.10356G | 7.12655G | 19.09M | 7.105405G | 7.124495G | Inf | 1 |
| 22.77M | 7.10367G | 7.12644G | 19.04M | 7.105455G | 7.124495G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**5965MHz**

01/05/2024

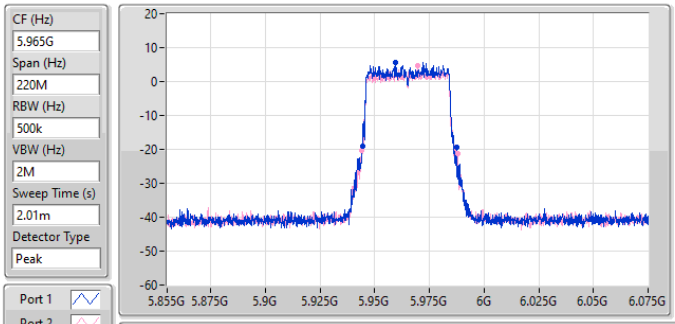


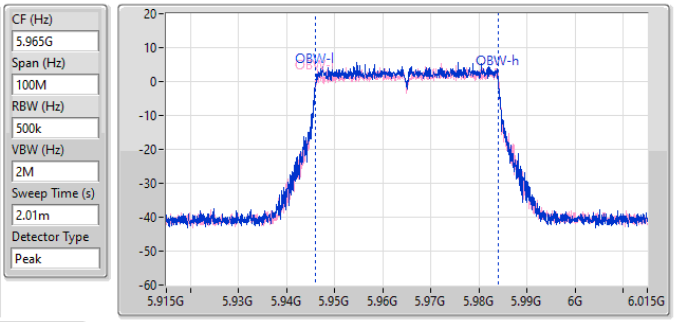


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.23M | 5.94421G | 5.98744G | 37.981M | 5.946009G | 5.983991G | Inf | 1 |
| 44M | 5.94377G | 5.98777G | 38.031M | 5.946059G | 5.98409G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6205MHz**

01/05/2024

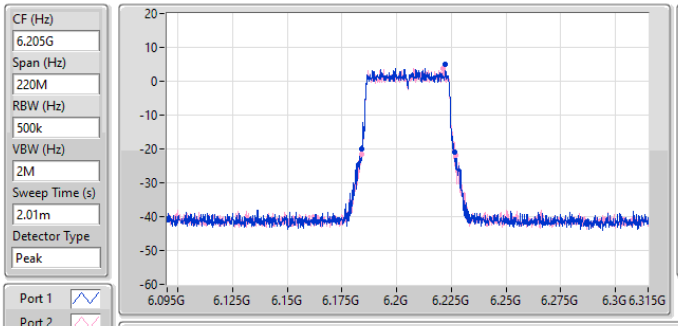


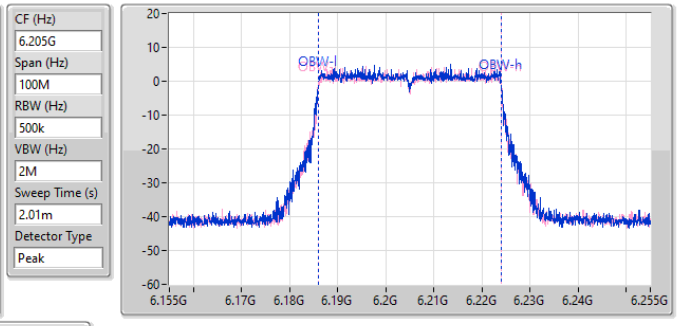


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.68M | 6.18388G | 6.22656G | 38.031M | 6.18596G | 6.223991G | Inf | 1 |
| 43.01M | 6.18399G | 6.227G | 37.981M | 6.186009G | 6.223991G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6405MHz**

01/05/2024

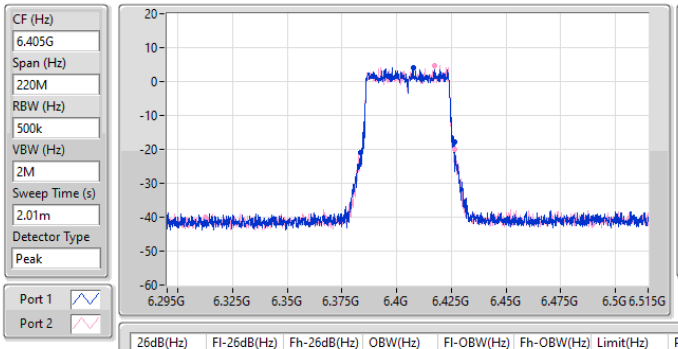


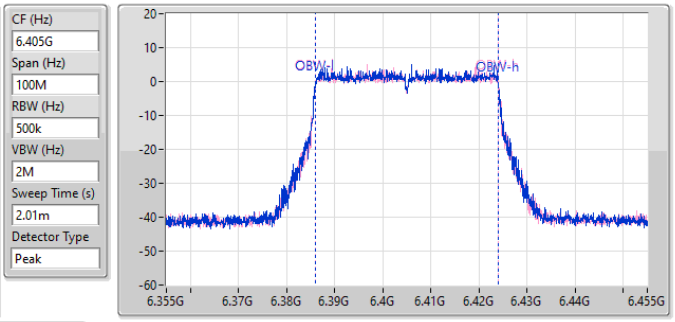


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.68M | 6.38366G | 6.42634G | 38.031M | 6.386009G | 6.42404G | Inf | 1 |
| 42.79M | 6.38366G | 6.42645G | 38.081M | 6.38596G | 6.42404G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6445MHz**

01/05/2024

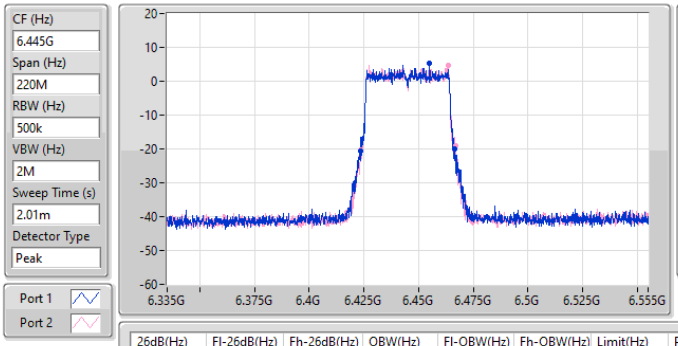


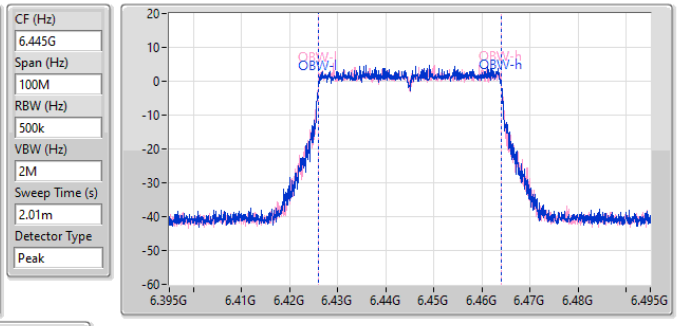


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.23M | 6.42344G | 6.46667G | 37.931M | 6.426059G | 6.463991G | Inf | 1 |
| 43.12M | 6.42366G | 6.46678G | 38.081M | 6.42596G | 6.46404G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6485MHz**

01/05/2024

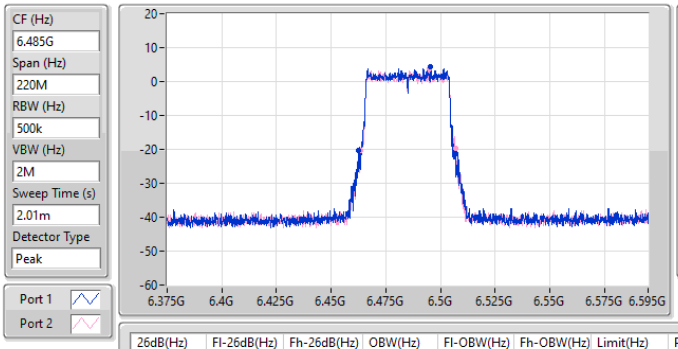


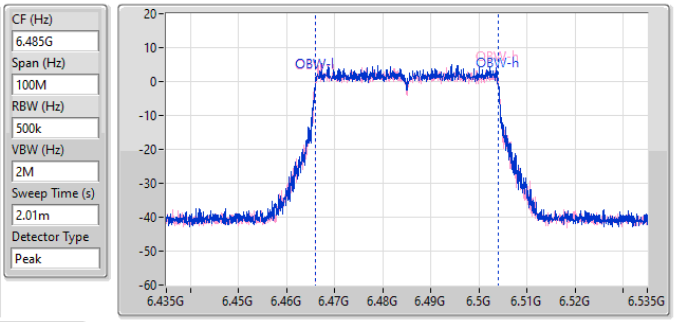


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.22M | 6.46267G | 6.50689G | 37.981M | 6.466009G | 6.503991G | Inf | 1 |
| 43.56M | 6.46344G | 6.507G | 38.031M | 6.46596G | 6.503991G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6525MHz**

01/05/2024

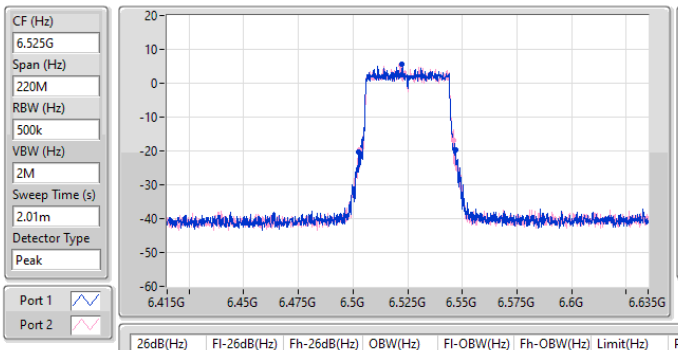


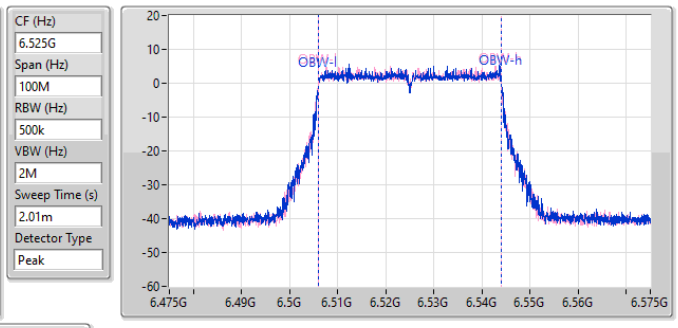


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.22M | 6.50267G | 6.54689G | 38.081M | 6.506009G | 6.54409G | Inf | 1 |
| 43.01M | 6.50311G | 6.54612G | 37.981M | 6.506009G | 6.543991G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6565MHz**

01/05/2024

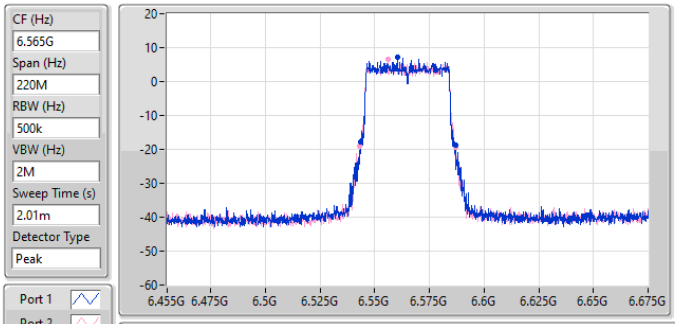


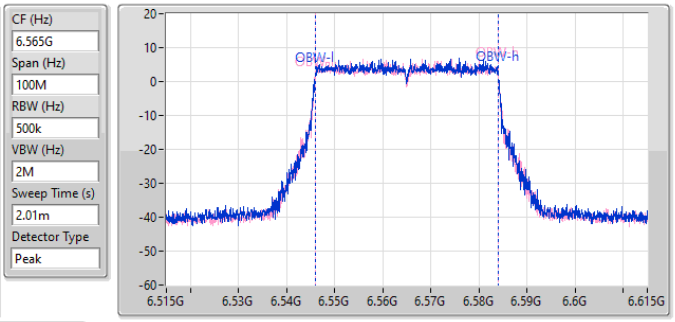


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.23M | 6.54366G | 6.58689G | 38.031M | 6.54596G | 6.583991G | Inf | 1 |
| 44.22M | 6.54289G | 6.58711G | 38.131M | 6.54591G | 6.58404G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6685MHz**

01/05/2024

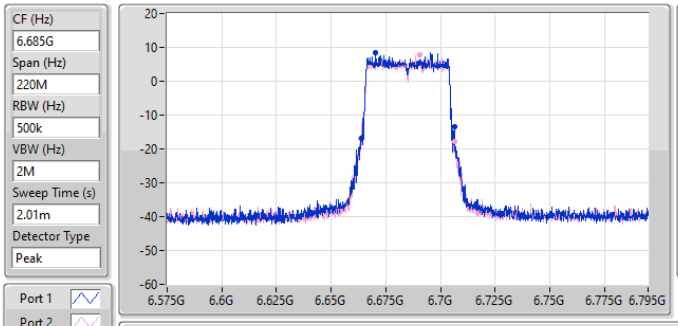


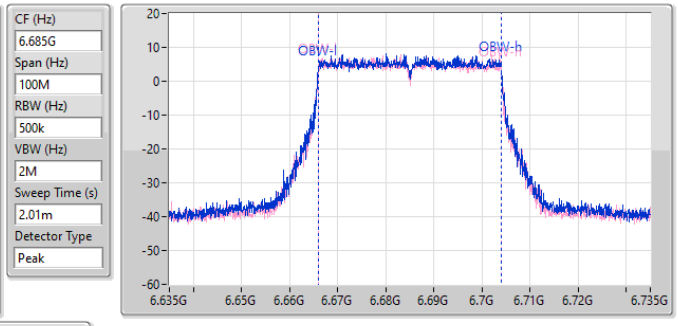


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.57M | 6.66377G | 6.70634G | 38.081M | 6.66596G | 6.70404G | Inf | 1 |
| 43.23M | 6.66344G | 6.70667G | 38.081M | 6.66596G | 6.70404G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6885MHz**

01/05/2024

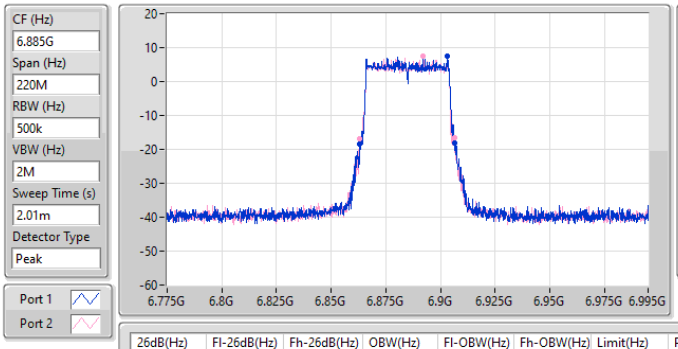


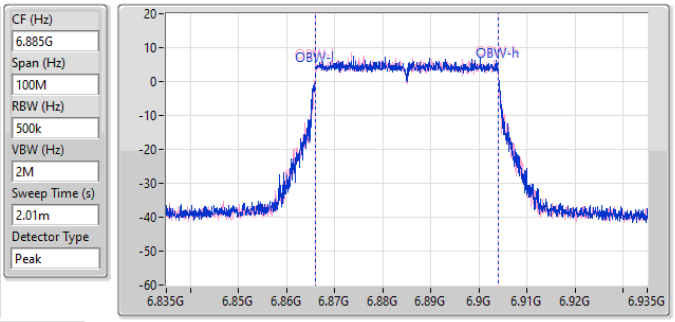


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.34M | 6.863G | 6.90634G | 38.081M | 6.86596G | 6.90404G | Inf | 1 |
| 43.56M | 6.863G | 6.90656G | 37.981M | 6.866009G | 6.903991G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**6925MHz**

01/05/2024

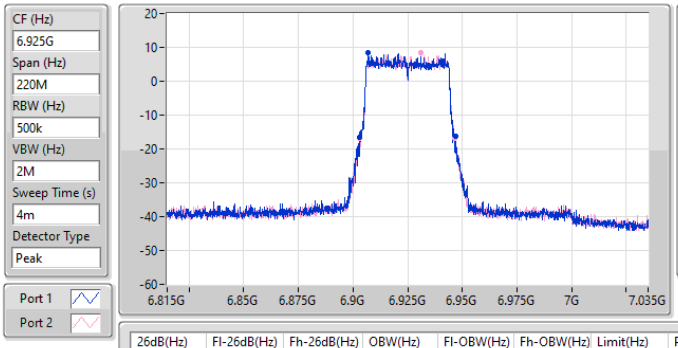


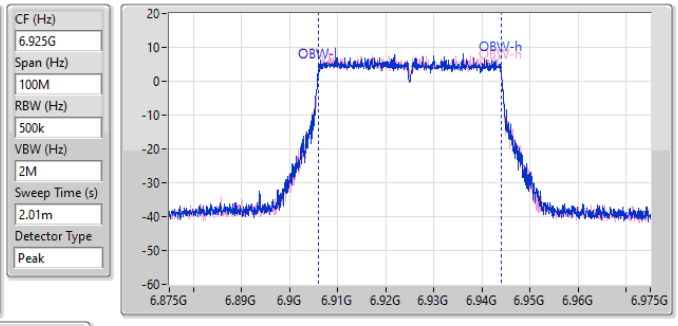


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.33M | 6.90289G | 6.94722G | 38.031M | 6.90596G | 6.943991G | Inf | 1 |
| 43.34M | 6.903G | 6.94634G | 37.981M | 6.906009G | 6.943991G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**7005MHz**

01/05/2024

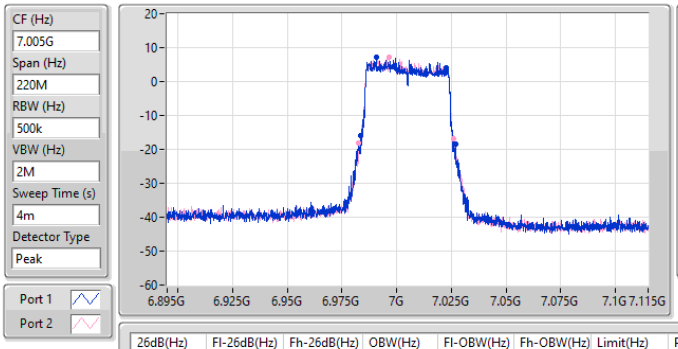


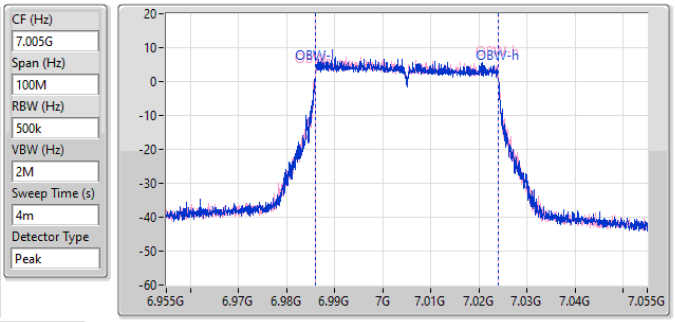


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.98344G | 7.02689G | 38.031M | 6.98591G | 7.023941G | Inf | 1 |
| 43.45M | 6.98267G | 7.02612G | 38.031M | 6.98591G | 7.023941G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX** **EBW**

**7085MHz**

01/05/2024

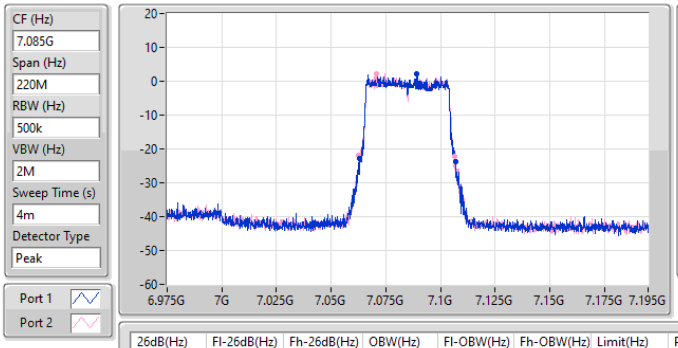


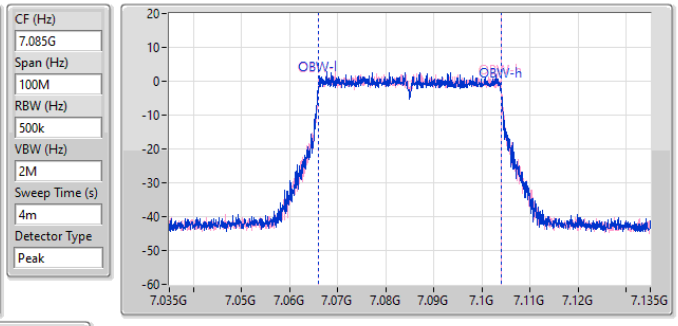


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.33M | 7.06278G | 7.10711G | 38.081M | 7.06591G | 7.103991G | Inf | 1 |
| 43.78M | 7.06267G | 7.10645G | 37.981M | 7.066009G | 7.103991G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**5985MHz**

01/05/2024

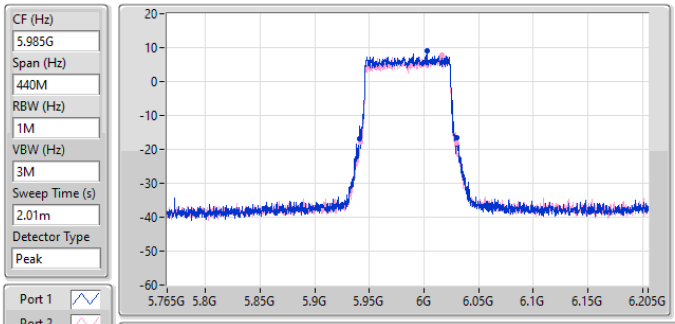


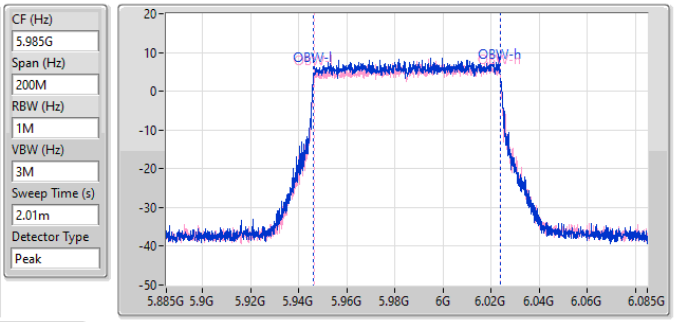


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.32M | 5.94056G | 6.02988G | 77.661M | 5.946219G | 6.023881G | Inf | 1 |
| 88M | 5.94166G | 6.02966G | 77.661M | 5.946319G | 6.023981G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6225MHz**

01/05/2024

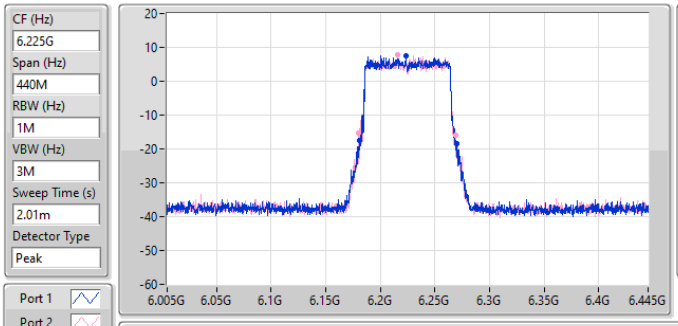


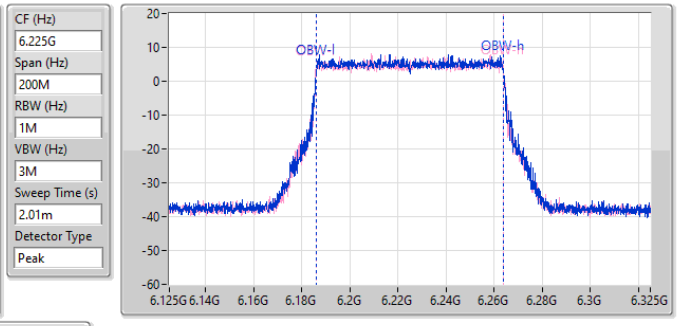


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.32M | 6.18056G | 6.26988G | 77.761M | 6.186219G | 6.263981G | Inf | 1 |
| 88.66M | 6.18034G | 6.269G | 77.761M | 6.186119G | 6.263881G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6385MHz**

01/05/2024

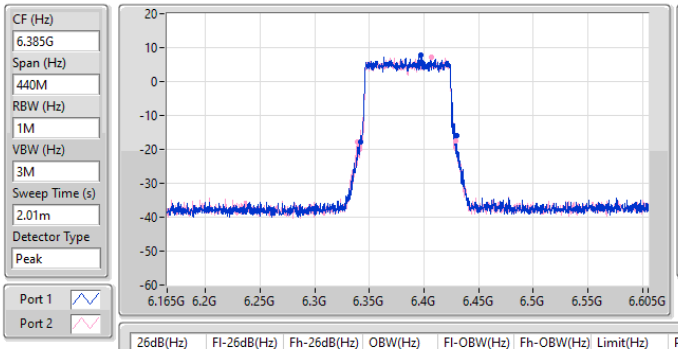


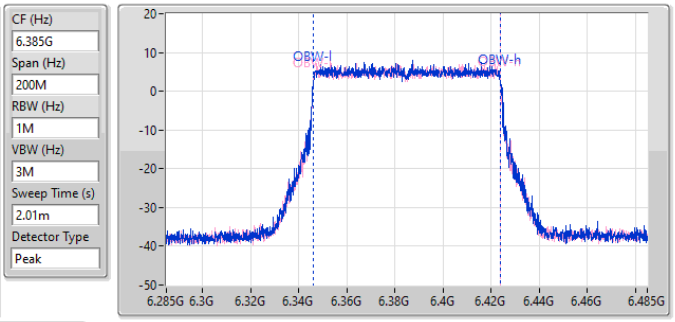


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.44M | 6.34166G | 6.4301G | 77.861M | 6.346119G | 6.423981G | Inf | 1 |
| 90.2M | 6.33902G | 6.42922G | 77.661M | 6.346219G | 6.423881G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6465MHz**

01/05/2024

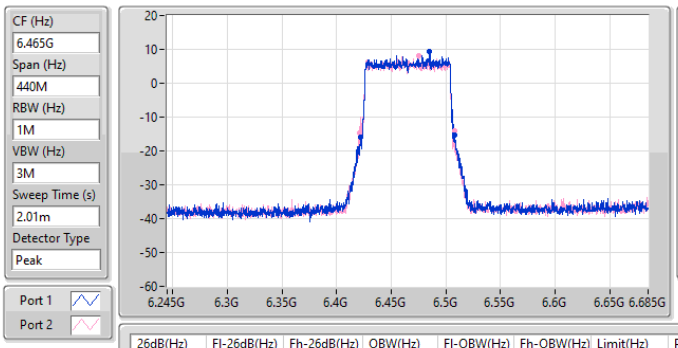


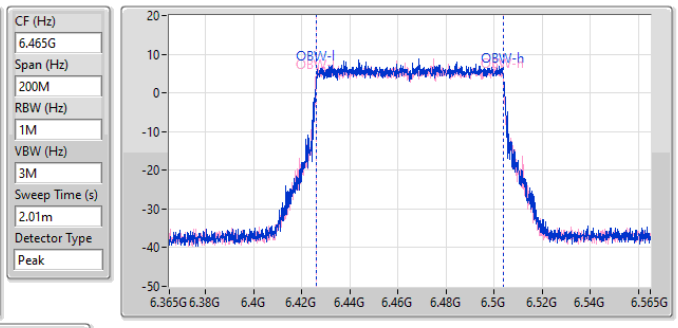


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 85.58M | 6.42232G | 6.5079G | 77.661M | 6.426219G | 6.503881G | Inf | 1 |
| 87.34M | 6.42056G | 6.5079G | 77.761M | 6.426119G | 6.503881G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6545MHz**

01/05/2024

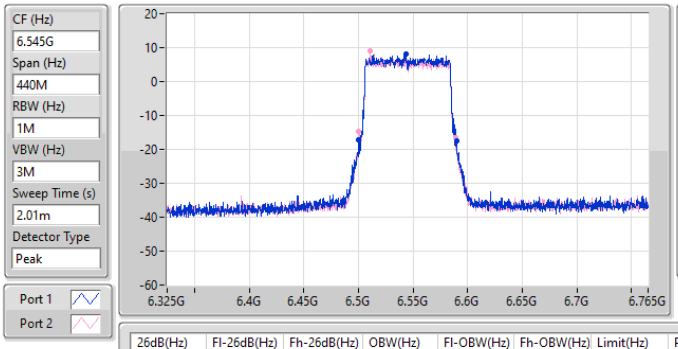


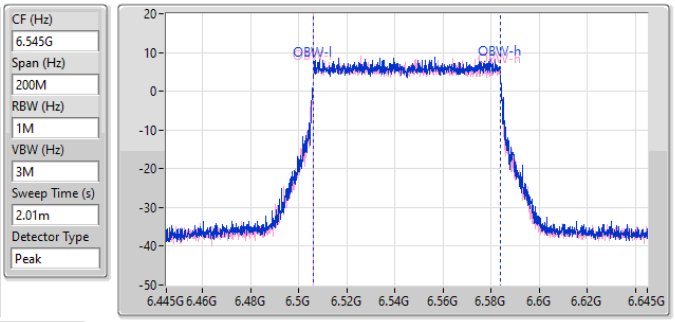


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.54M | 6.50012G | 6.58966G | 77.661M | 6.506219G | 6.583881G | Inf | 1 |
| 88.88M | 6.50012G | 6.589G | 77.661M | 6.506219G | 6.583881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6625MHz**

01/05/2024

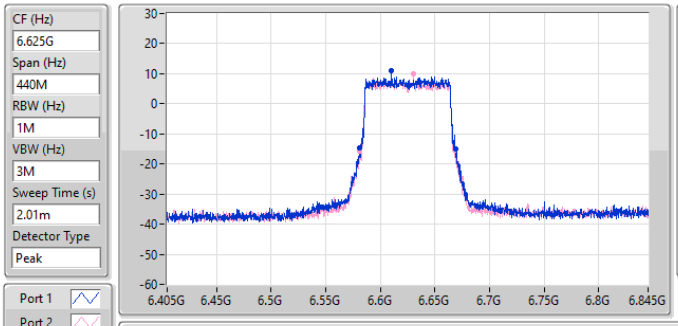


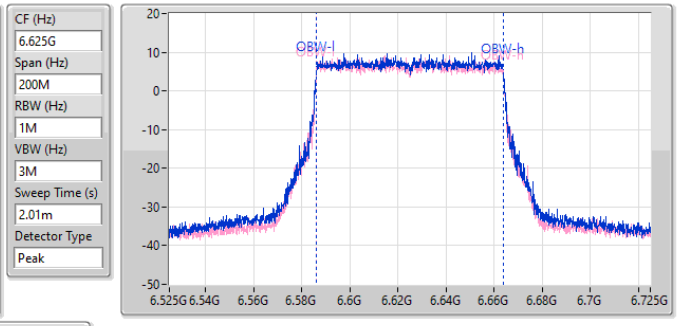


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.66M | 6.58078G | 6.66944G | 77.761M | 6.586119G | 6.663881G | Inf | 1 |
| 86.9M | 6.58078G | 6.66768G | 77.761M | 6.586119G | 6.663881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6705MHz**

01/05/2024

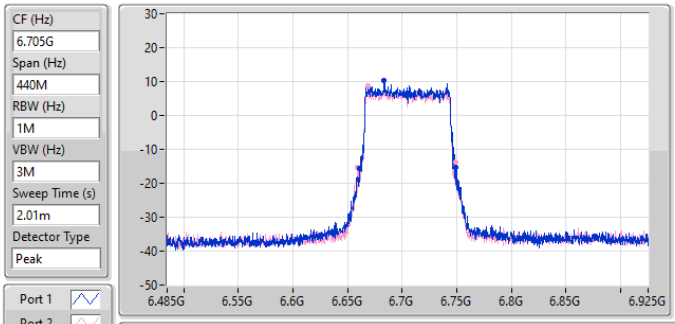


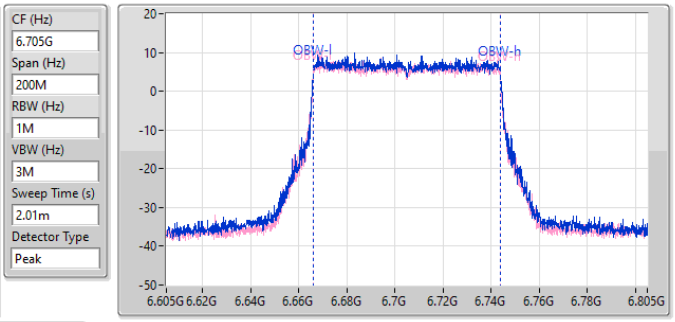


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.56M | 6.66122G | 6.74878G | 77.761M | 6.666119G | 6.743881G | Inf | 1 |
| 89.98M | 6.65946G | 6.74944G | 77.761M | 6.666119G | 6.743881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6785MHz**

01/05/2024

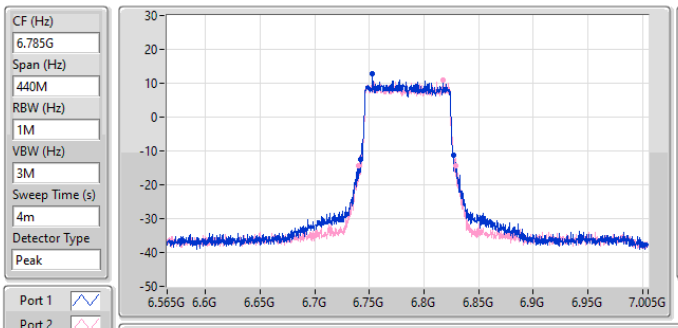


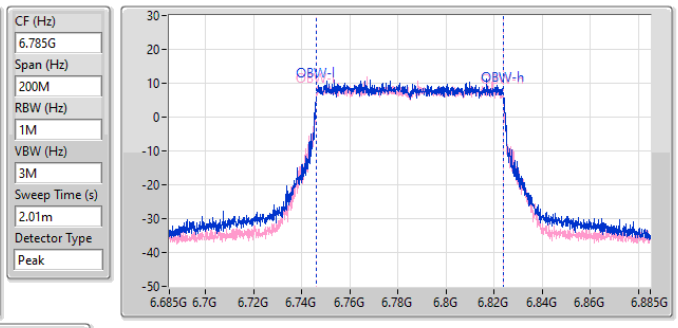


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 84.7M | 6.7421G | 6.8268G | 77.761M | 6.746119G | 6.823881G | Inf | 1 |
| 89.32M | 6.74012G | 6.82944G | 77.761M | 6.746119G | 6.823881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6865MHz**

01/05/2024

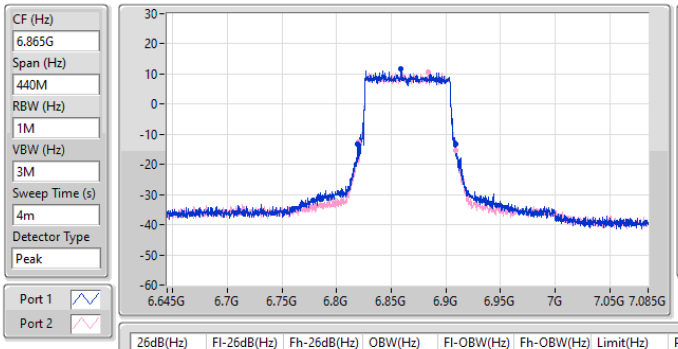


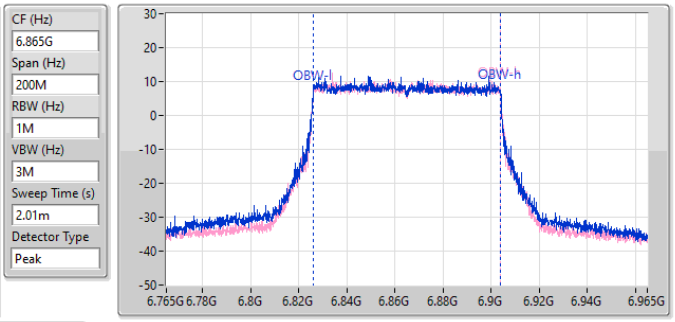


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.54M | 6.81946G | 6.909G | 77.861M | 6.826019G | 6.903881G | Inf | 1 |
| 89.32M | 6.82012G | 6.90944G | 77.761M | 6.826119G | 6.903881G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**6945MHz**

01/05/2024

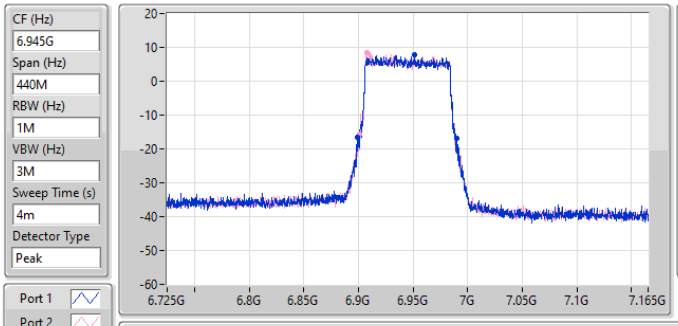


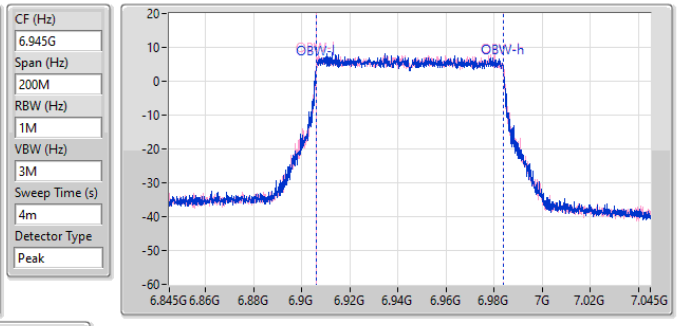


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 90.86M | 6.89924G | 6.9901G | 77.861M | 6.906019G | 6.983881G | Inf | 1 |
| 88.88M | 6.90144G | 6.99032G | 77.861M | 6.906019G | 6.983881G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX** **EBW**

**7025MHz**

01/05/2024

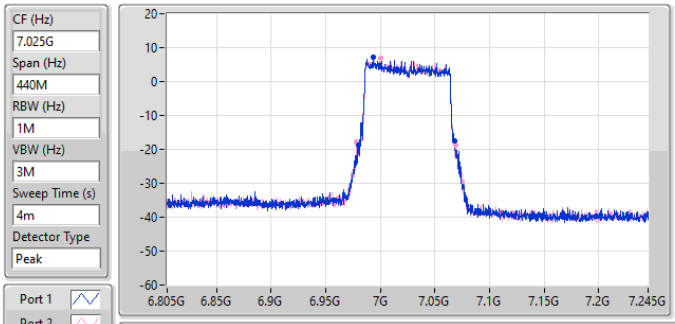


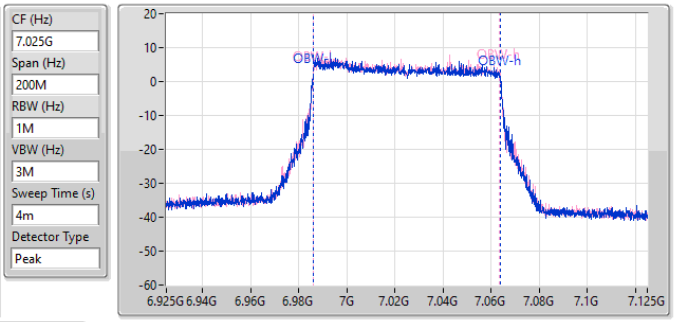


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.22M | 6.97968G | 7.0679G | 77.861M | 6.98592G | 7.063781G | Inf | 1 |
| 91.08M | 6.97814G | 7.06922G | 77.761M | 6.98592G | 7.063681G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6025MHz**

01/05/2024

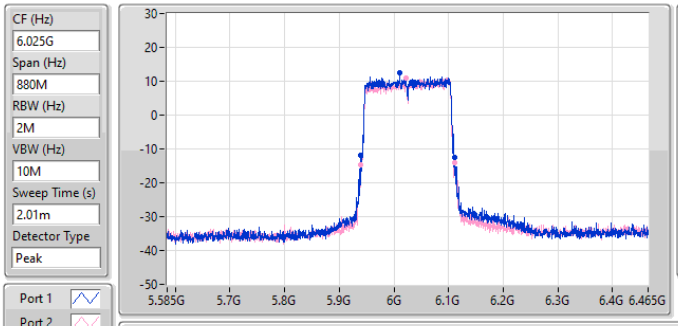


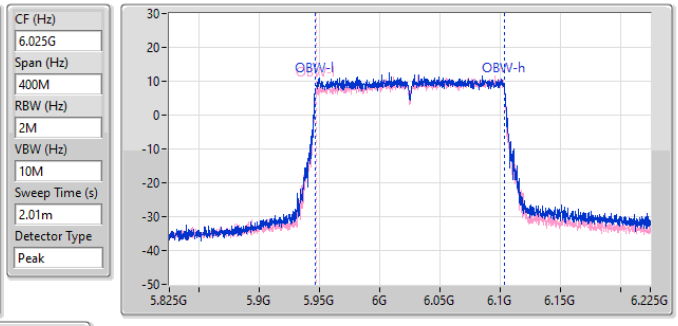


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 171.6M | 5.93876G | 6.11036G | 156.922M | 5.946639G | 6.103561G | Inf | 1 |
| 171.6M | 5.93964G | 6.11124G | 156.322M | 5.947239G | 6.103561G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6185MHz**

01/05/2024

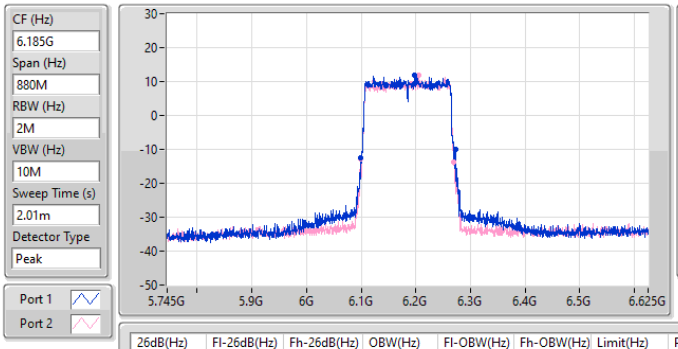


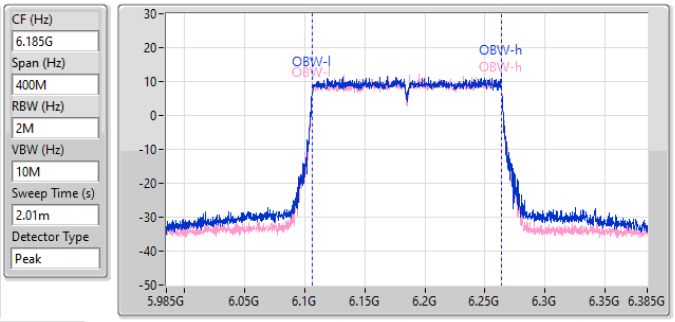


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 172.92M | 6.09964G | 6.27256G | 156.922M | 6.106639G | 6.263561G | Inf | 1 |
| 170.28M | 6.09964G | 6.26992G | 156.922M | 6.106639G | 6.263561G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6345MHz**

01/05/2024

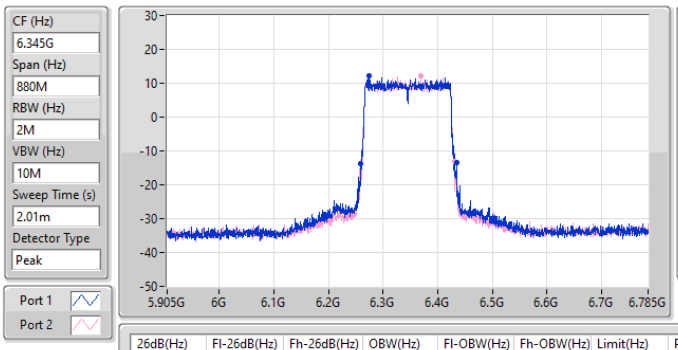


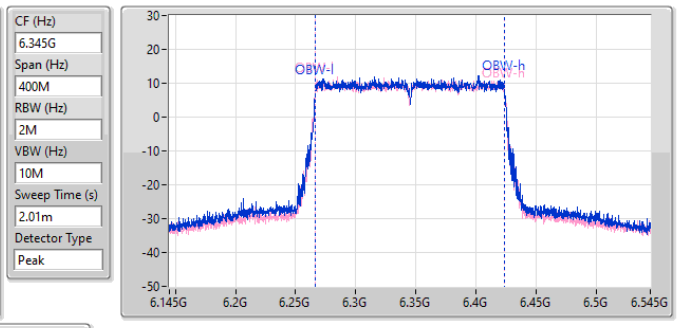


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 175.56M | 6.25964G | 6.4352G | 156.922M | 6.266639G | 6.423561G | Inf | 1 |
| 172.04M | 6.25876G | 6.4308G | 156.922M | 6.266639G | 6.423561G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6505MHz**

01/05/2024

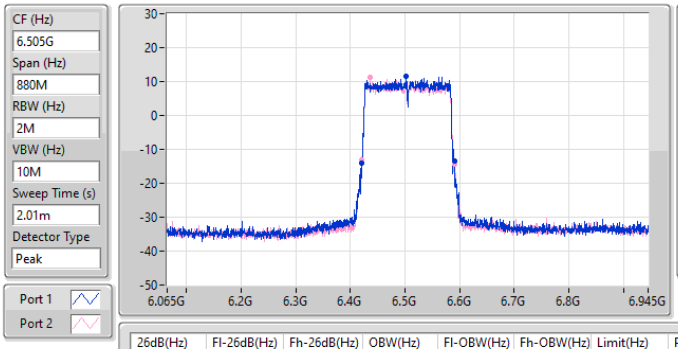


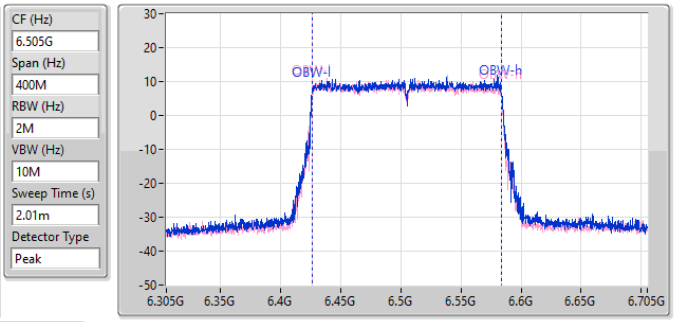


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 169.84M | 6.42096G | 6.5908G | 156.922M | 6.426639G | 6.583561G | Inf | 1 |
| 169.84M | 6.4214G | 6.59124G | 156.922M | 6.426439G | 6.583361G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6665MHz**

01/05/2024

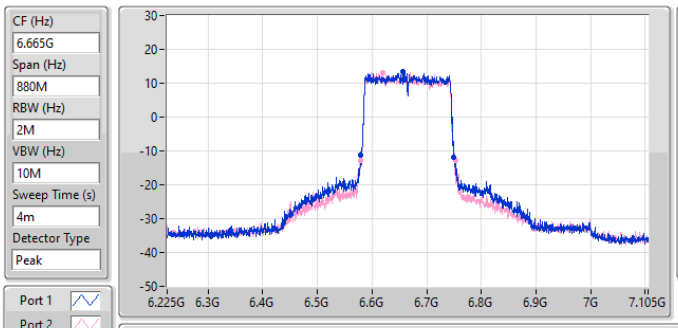


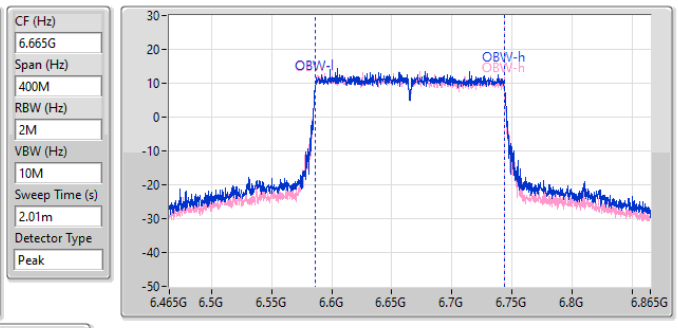


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 171.16M | 6.57876G | 6.74992G | 157.121M | 6.586439G | 6.743561G | Inf | 1 |
| 172.92M | 6.5792G | 6.75212G | 156.922M | 6.586439G | 6.743361G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6825MHz**

01/05/2024

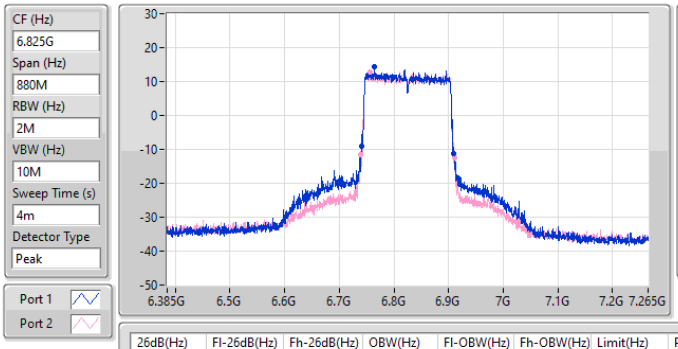


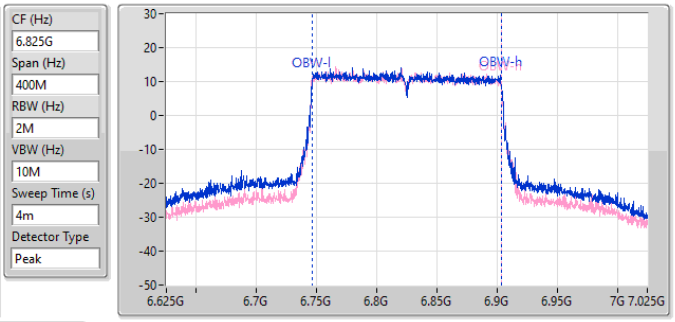


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 168.96M | 6.74008G | 6.90904G | 157.121M | 6.746239G | 6.903361G | Inf | 1 |
| 173.36M | 6.73832G | 6.91168G | 157.321M | 6.746239G | 6.903561G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX** **EBW**

**6985MHz**

01/05/2024

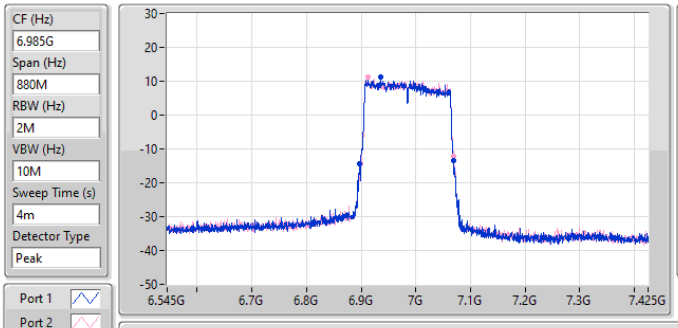


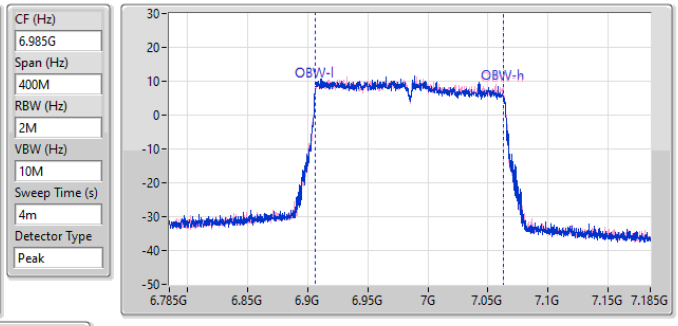


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 172.48M | 6.897G | 7.06948G | 156.722M | 6.906239G | 7.062961G | Inf | 1 |
| 170.28M | 6.8992G | 7.06948G | 156.722M | 6.906439G | 7.063161G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6105MHz**

01/05/2024

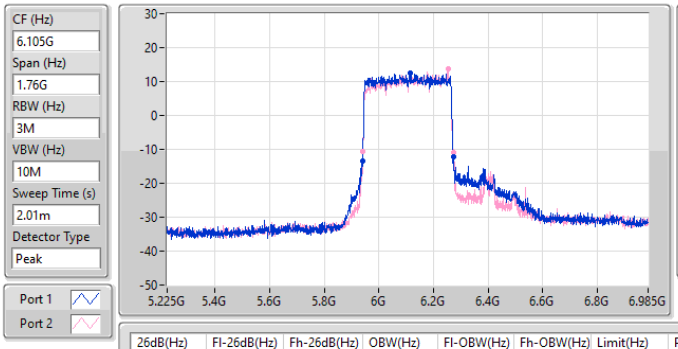


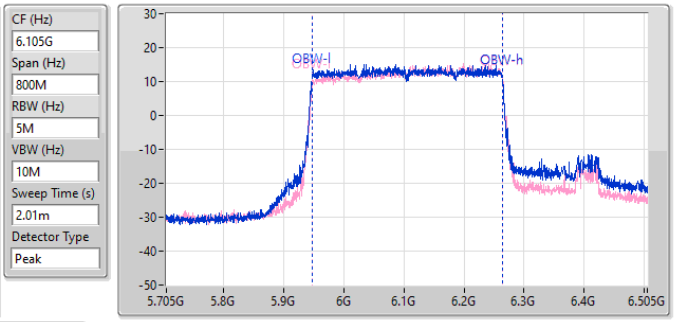


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 334.4M | 5.93868G | 6.27308G | 316.242M | 5.947479G | 6.263721G | Inf | 1 |
| 334.4M | 5.93956G | 6.27396G | 315.842M | 5.948278G | 6.26412G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6265MHz**

01/05/2024

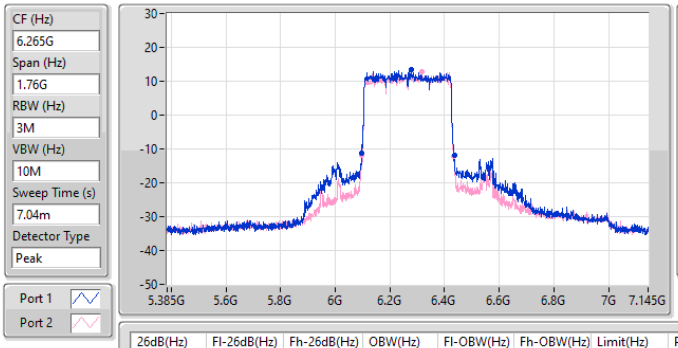


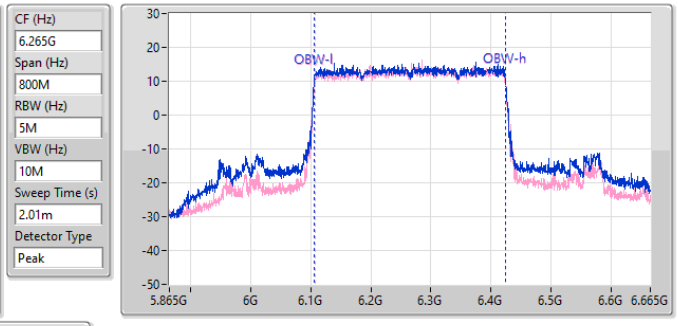


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 341.44M | 6.09604G | 6.43748G | 316.642M | 6.106679G | 6.423321G | Inf | 1 |
| 336.16M | 6.0978G | 6.43396G | 315.842M | 6.107479G | 6.423321G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6425MHz**

01/05/2024

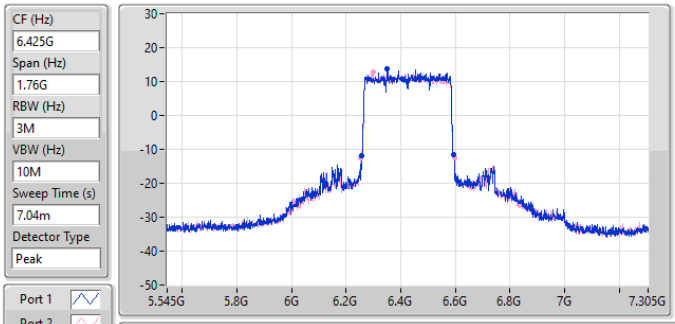


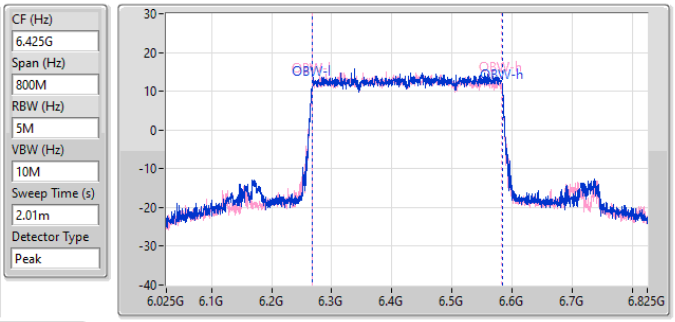


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 337.92M | 6.25692G | 6.59484G | 316.642M | 6.267079G | 6.583721G | Inf | 1 |
| 341.44M | 6.25428G | 6.59572G | 315.842M | 6.267079G | 6.582921G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6585MHz**

01/05/2024

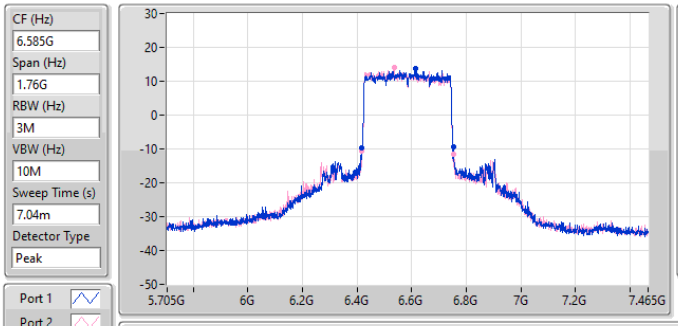


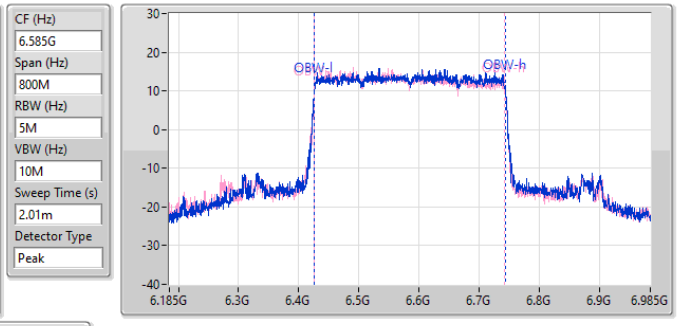


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 337.92M | 6.41516G | 6.75308G | 316.642M | 6.426679G | 6.743321G | Inf | 1 |
| 336.16M | 6.4178G | 6.75396G | 316.242M | 6.426679G | 6.742921G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6745MHz**

01/05/2024

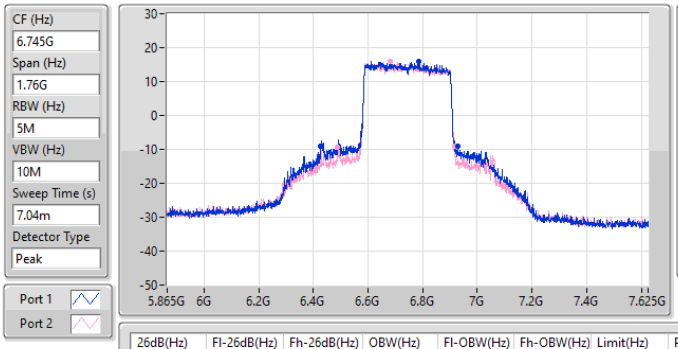


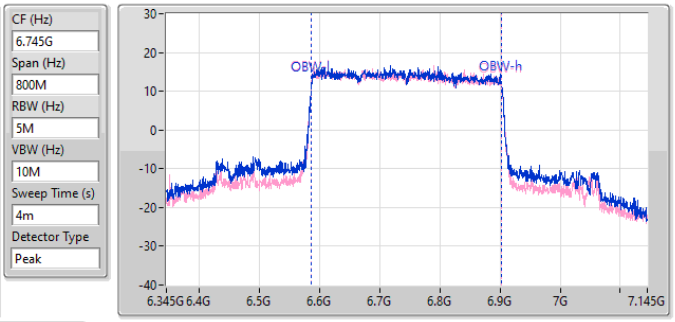


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 500.72M | 6.42644G | 6.92716G | 317.441M | 6.58548G | 6.902921G | Inf | 1 |
| 427.68M | 6.48892G | 6.9166G | 316.642M | 6.586279G | 6.902921G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX** **EBW**

**6905MHz**

01/05/2024

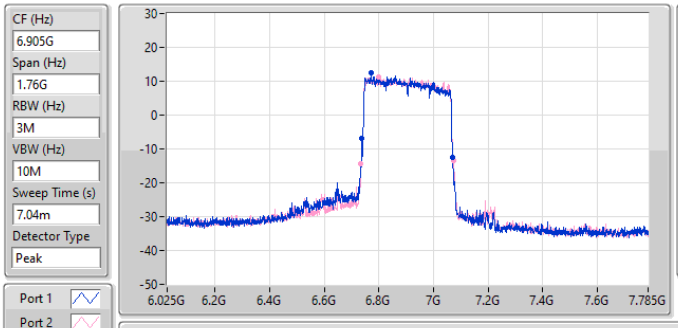


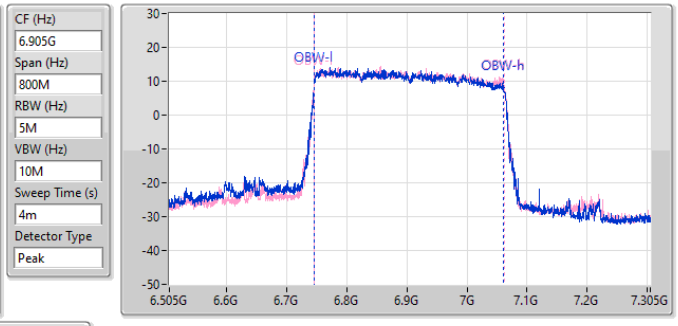


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 333.52M | 6.73692G | 7.07044G | 315.042M | 6.746279G | 7.061322G | Inf | 1 |
| 337.92M | 6.73428G | 7.0722G | 315.442M | 6.746279G | 7.061722G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**5955MHz**

01/05/2024

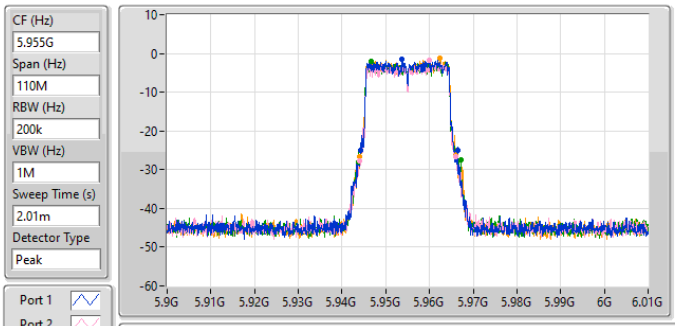


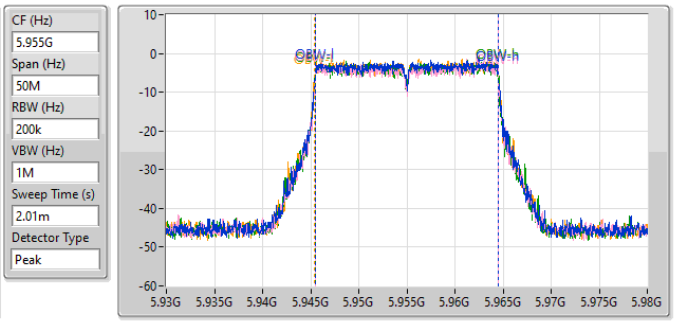


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.22M | 5.94422G | 5.96644G | 19.04M | 5.94548G | 5.96452G | Inf | 1 |
| 22.055M | 5.944055G | 5.96611G | 19.04M | 5.94548G | 5.96452G | Inf | 2 |
| 23.595M | 5.94367G | 5.967265G | 19.065M | 5.945455G | 5.96452G | Inf | 3 |
| 22M | 5.94411G | 5.96611G | 19.065M | 5.94543G | 5.964495G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6195MHz**

01/05/2024

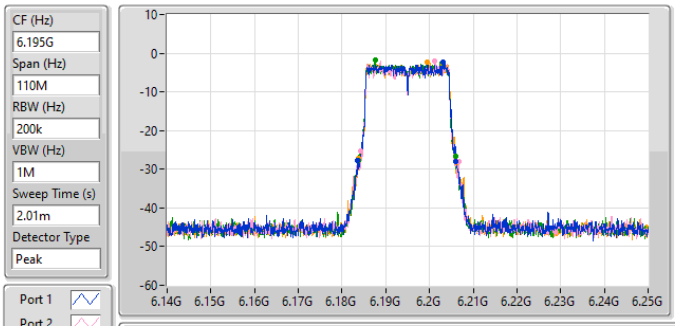


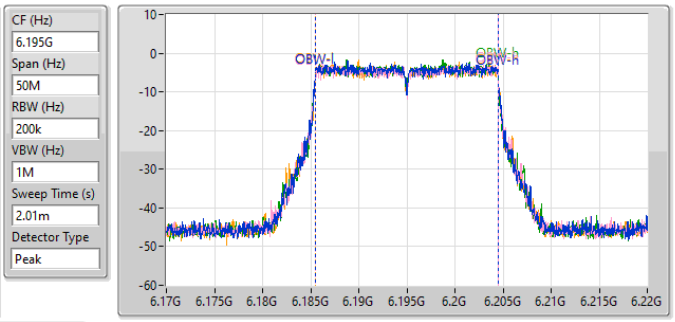


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.55M | 6.18356G | 6.20611G | 19.065M | 6.185455G | 6.20452G | Inf | 1 |
| 22.385M | 6.184275G | 6.20666G | 19.065M | 6.185455G | 6.20452G | Inf | 2 |
| 22.275M | 6.18378G | 6.206055G | 19.04M | 6.185455G | 6.204495G | Inf | 3 |
| 22.605M | 6.183725G | 6.20633G | 19.065M | 6.185455G | 6.20452G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6415MHz**

01/05/2024

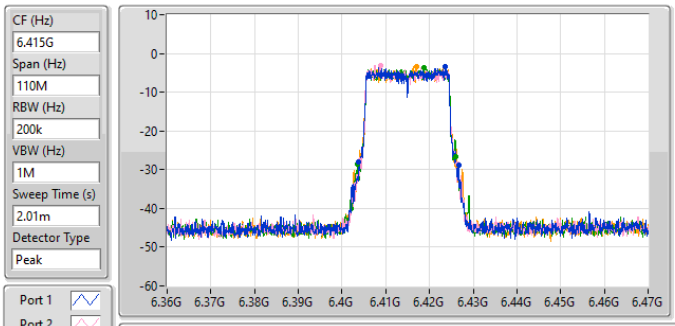


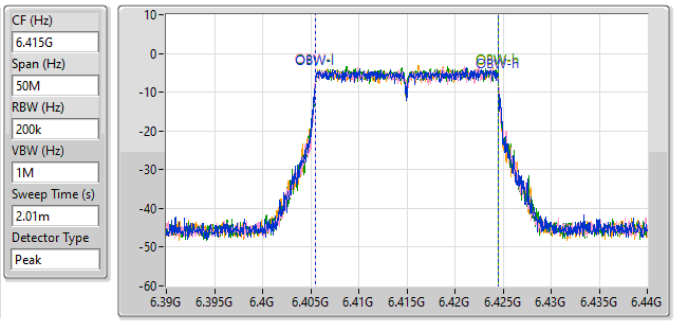


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.825M | 6.403835G | 6.42666G | 19.04M | 6.40548G | 6.42452G | Inf | 1 |
| 22.495M | 6.404G | 6.426495G | 19.04M | 6.40548G | 6.42452G | Inf | 2 |
| 22.55M | 6.40356G | 6.42611G | 19.015M | 6.40548G | 6.424495G | Inf | 3 |
| 22.495M | 6.403835G | 6.42633G | 19.04M | 6.405455G | 6.424495G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6435MHz**

01/05/2024

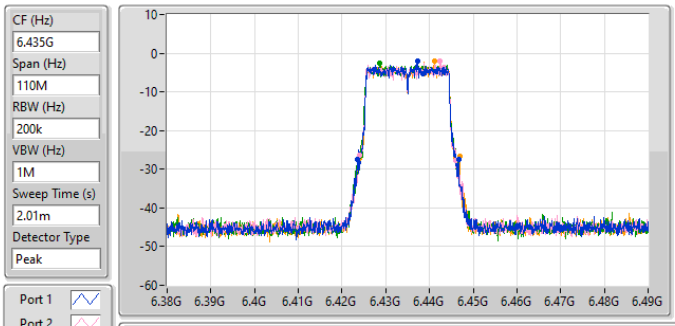


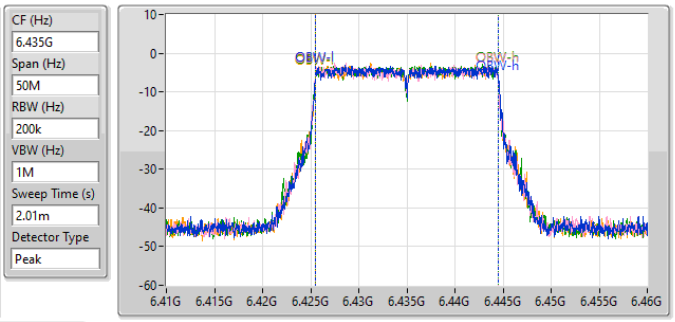


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 23.1M | 6.423505G | 6.446605G | 19.065M | 6.42548G | 6.444545G | Inf | 1 |
| 22M | 6.424055G | 6.446055G | 19.015M | 6.425455G | 6.44447G | Inf | 2 |
| 22.33M | 6.424G | 6.44633G | 19.04M | 6.425455G | 6.444495G | Inf | 3 |
| 22.935M | 6.423945G | 6.44688G | 19.015M | 6.42548G | 6.444495G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6475MHz**

01/05/2024

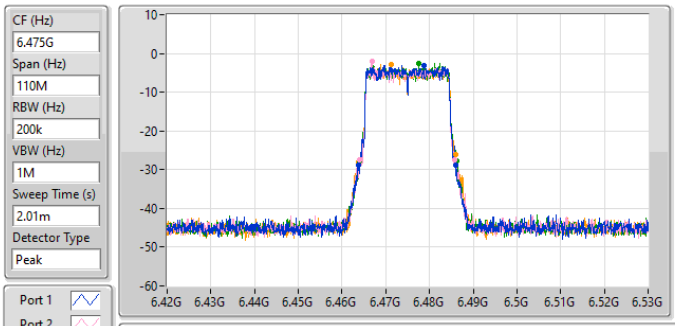


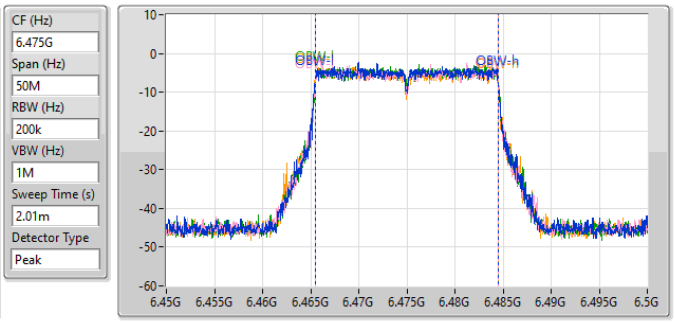


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.11M | 6.46378G | 6.48589G | 19.04M | 6.465455G | 6.484495G | Inf | 1 |
| 21.835M | 6.463945G | 6.48578G | 19.065M | 6.465455G | 6.48452G | Inf | 2 |
| 22.165M | 6.464055G | 6.48622G | 19.015M | 6.46548G | 6.484495G | Inf | 3 |
| 22.11M | 6.46378G | 6.48589G | 19.04M | 6.465455G | 6.484495G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6515MHz**

01/05/2024

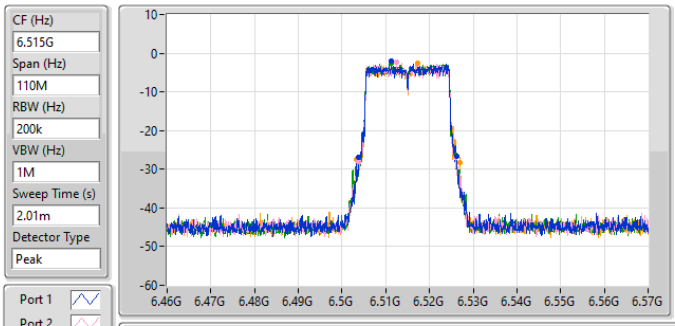


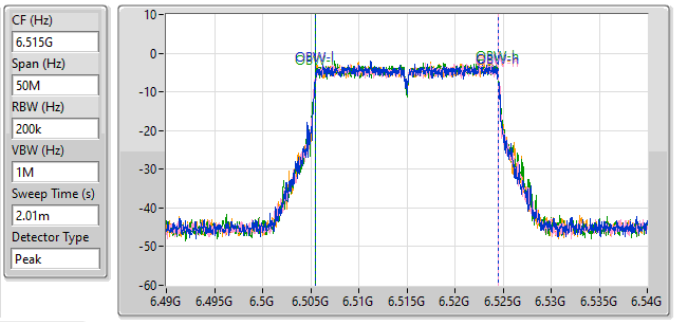


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.385M | 6.50378G | 6.526165G | 19.04M | 6.50548G | 6.52452G | Inf | 1 |
| 22.275M | 6.50367G | 6.525945G | 19.065M | 6.505455G | 6.52452G | Inf | 2 |
| 22.11M | 6.504G | 6.52611G | 19.04M | 6.505455G | 6.524495G | Inf | 3 |
| 23.705M | 6.50334G | 6.527045G | 19.015M | 6.50548G | 6.524495G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6535MHz**

01/05/2024

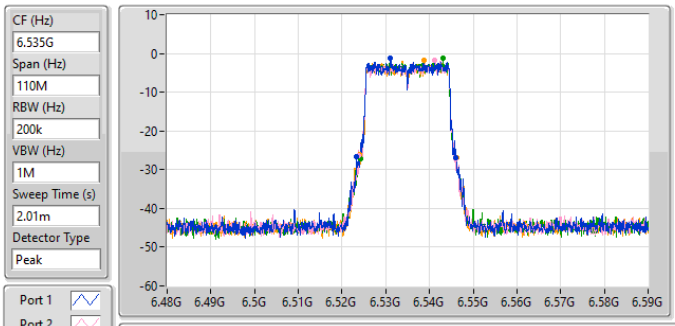


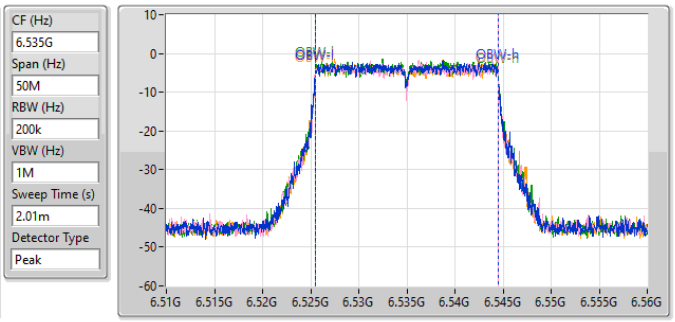


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.77M | 6.52334G | 6.54611G | 19.04M | 6.525455G | 6.544495G | Inf | 1 |
| 22.22M | 6.52378G | 6.546G | 19.04M | 6.525455G | 6.544495G | Inf | 2 |
| 21.835M | 6.524165G | 6.546G | 19.04M | 6.52548G | 6.54452G | Inf | 3 |
| 22.22M | 6.524G | 6.54622G | 19.04M | 6.525455G | 6.544495G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6695MHz**

01/05/2024

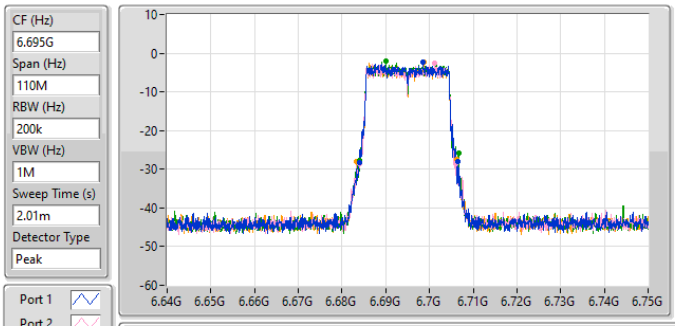


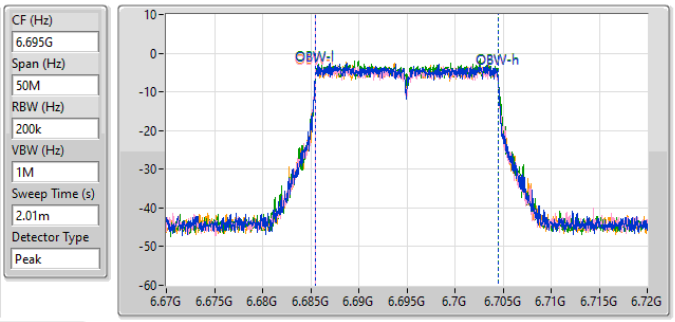


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.66M | 6.68389G | 6.70655G | 19.015M | 6.68548G | 6.704495G | Inf | 1 |
| 22.055M | 6.683945G | 6.706G | 19.04M | 6.685455G | 6.704495G | Inf | 2 |
| 22.66M | 6.684G | 6.70666G | 19.04M | 6.68548G | 6.70452G | Inf | 3 |
| 22.99M | 6.683285G | 6.706275G | 19.04M | 6.685455G | 6.704495G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6875MHz**

01/05/2024

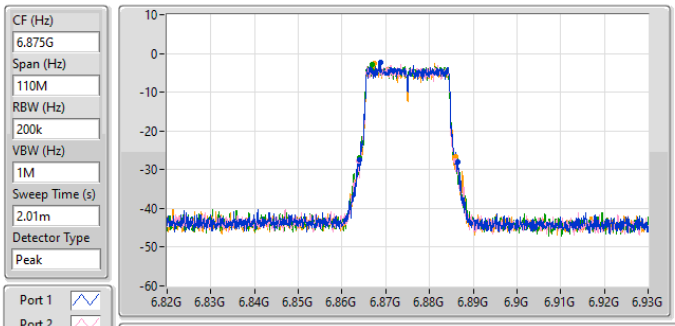


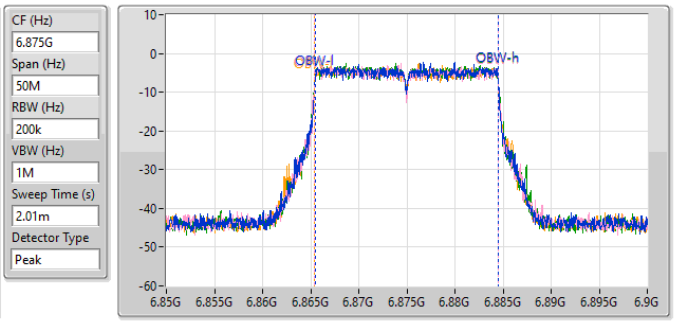


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.44M | 6.863945G | 6.886385G | 19.04M | 6.865455G | 6.884495G | Inf | 1 |
| 22.165M | 6.86378G | 6.885945G | 19.065M | 6.86543G | 6.884495G | Inf | 2 |
| 22.385M | 6.86389G | 6.886275G | 19.065M | 6.86543G | 6.884495G | Inf | 3 |
| 22.11M | 6.864G | 6.88611G | 19.04M | 6.86543G | 6.88447G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6895MHz**

01/05/2024

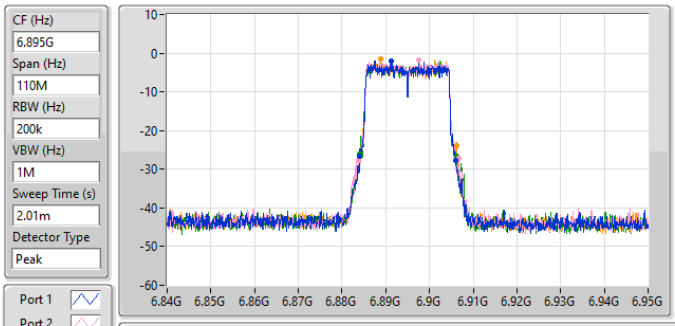


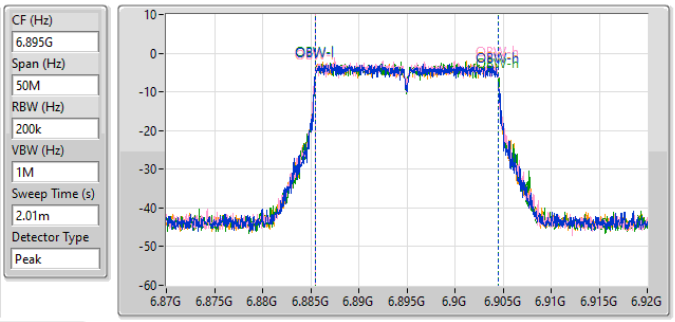


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.055M | 6.884055G | 6.90611G | 19.04M | 6.885455G | 6.904495G | Inf | 1 |
| 23.045M | 6.88367G | 6.906715G | 19.015M | 6.885455G | 6.90447G | Inf | 2 |
| 22.165M | 6.884G | 6.906165G | 19.04M | 6.88548G | 6.90452G | Inf | 3 |
| 22.33M | 6.884G | 6.90633G | 19.065M | 6.885455G | 6.90452G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**6995MHz**

01/05/2024

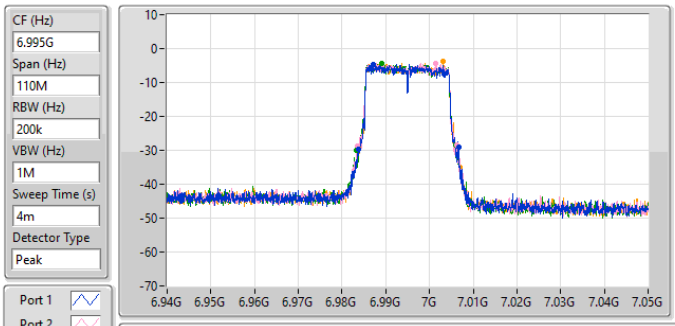


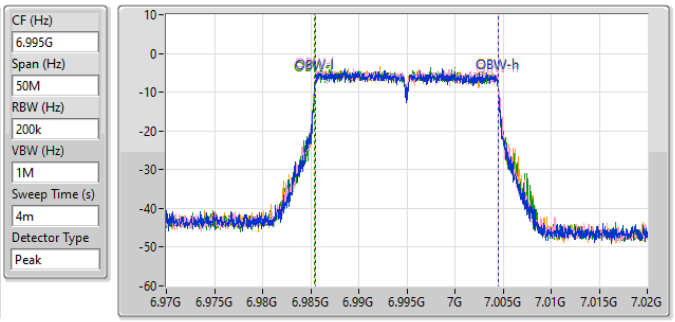


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.77M | 6.983835G | 7.006605G | 19.015M | 6.985455G | 7.00447G | Inf | 1 |
| 22.605M | 6.983615G | 7.00622G | 19.04M | 6.985455G | 7.004495G | Inf | 2 |
| 22.77M | 6.98334G | 7.00611G | 19.04M | 6.98543G | 7.00447G | Inf | 3 |
| 22.22M | 6.98367G | 7.00589G | 19.04M | 6.98543G | 7.00447G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**7095MHz**

01/05/2024

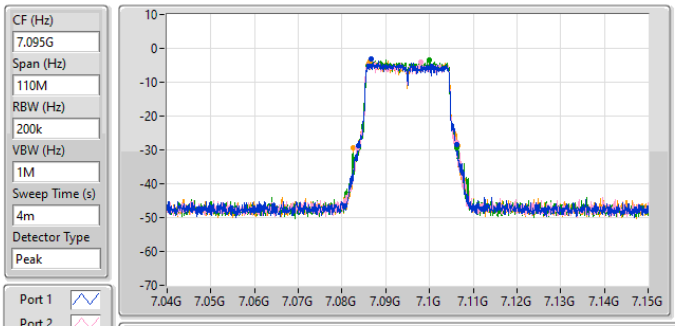


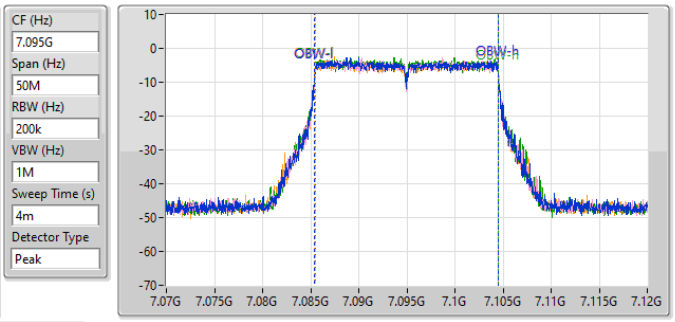


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.495M | 7.083725G | 7.10622G | 19.04M | 7.08543G | 7.10447G | Inf | 1 |
| 22.715M | 7.083505G | 7.10622G | 19.04M | 7.085455G | 7.104495G | Inf | 2 |
| 22.385M | 7.08378G | 7.106165G | 19.04M | 7.085455G | 7.104495G | Inf | 3 |
| 23.98M | 7.082515G | 7.106495G | 19.065M | 7.08543G | 7.104495G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX** **EBW**

**7115MHz**

01/05/2024

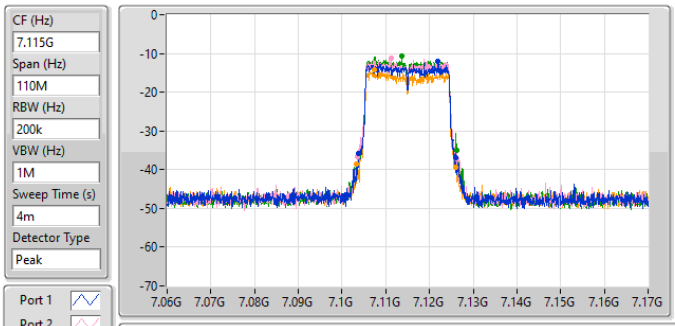


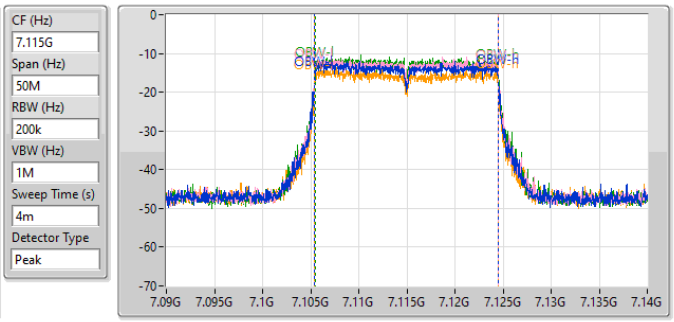


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 22.165M | 7.103835G | 7.126G | 19.065M | 7.10543G | 7.124495G | Inf | 1 |
| 22.605M | 7.103615G | 7.12622G | 19.065M | 7.10543G | 7.124495G | Inf | 2 |
| 22.55M | 7.10378G | 7.12633G | 19.04M | 7.105455G | 7.124495G | Inf | 3 |
| 22.88M | 7.10323G | 7.12611G | 19.065M | 7.10543G | 7.124495G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**5965MHz**

01/05/2024

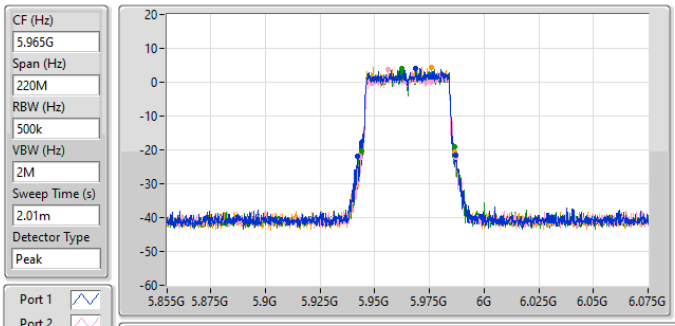


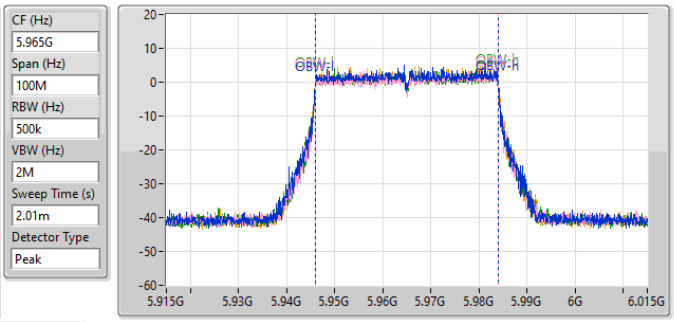


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 45.1M | 5.94212G | 5.98722G | 37.981M | 5.946009G | 5.983991G | Inf | 1 |
| 43.34M | 5.94344G | 5.98678G | 38.031M | 5.946009G | 5.98404G | Inf | 2 |
| 42.68M | 5.94399G | 5.98667G | 37.981M | 5.946059G | 5.98404G | Inf | 3 |
| 43.12M | 5.94322G | 5.98634G | 38.031M | 5.946009G | 5.98404G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6205MHz**

01/05/2024

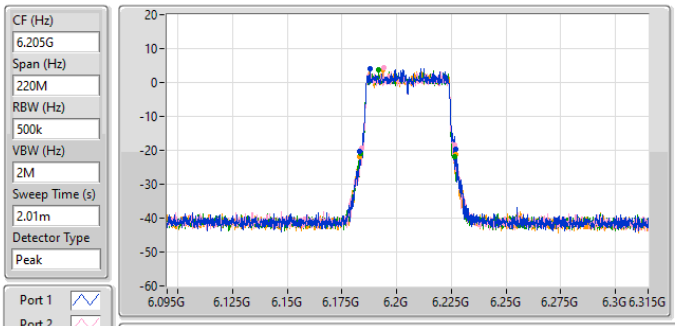


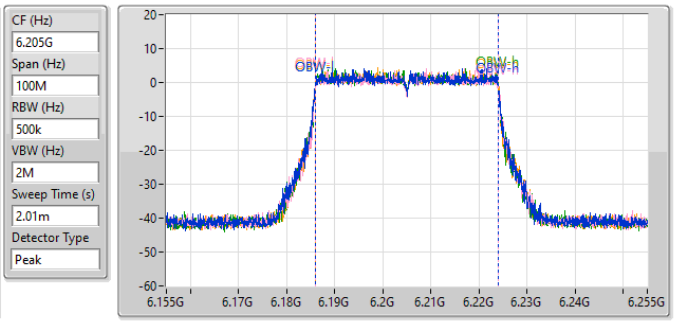


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44M | 6.18322G | 6.22722G | 38.081M | 6.18596G | 6.22404G | Inf | 1 |
| 42.35M | 6.1841G | 6.22645G | 37.981M | 6.186059G | 6.22404G | Inf | 2 |
| 43.34M | 6.18333G | 6.22667G | 38.081M | 6.18596G | 6.22404G | Inf | 3 |
| 44.22M | 6.18278G | 6.227G | 38.031M | 6.186009G | 6.22404G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6405MHz**

01/05/2024

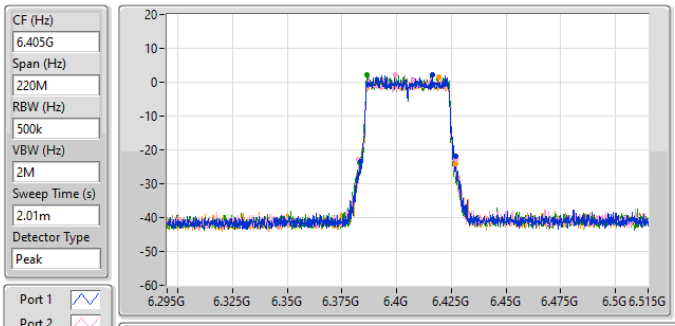


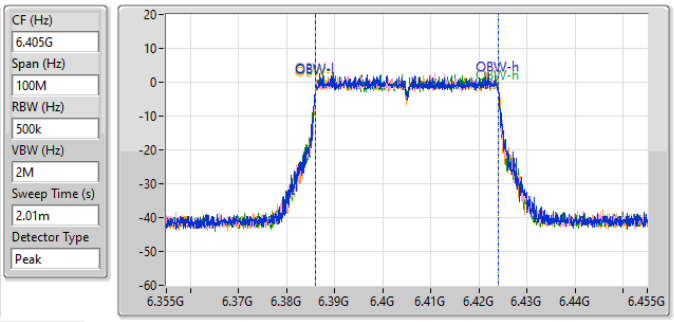


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.38355G | 6.427G | 38.081M | 6.38596G | 6.42404G | Inf | 1 |
| 44.44M | 6.38267G | 6.42711G | 38.031M | 6.386009G | 6.42404G | Inf | 2 |
| 44.11M | 6.38289G | 6.427G | 38.031M | 6.386009G | 6.42404G | Inf | 3 |
| 43.67M | 6.38311G | 6.42678G | 38.031M | 6.386009G | 6.42404G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6445MHz**

01/05/2024

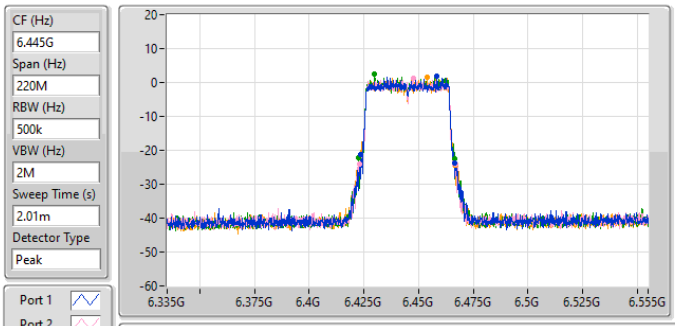


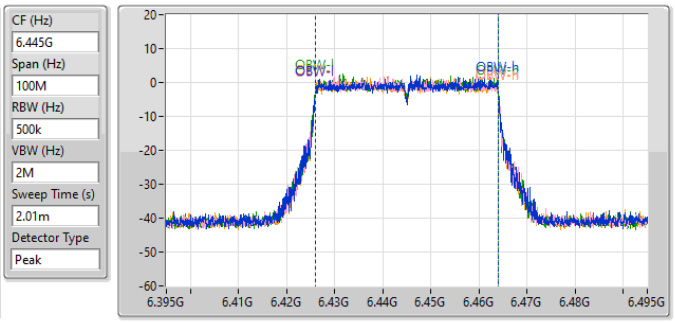


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.12M | 6.42355G | 6.46667G | 38.031M | 6.426009G | 6.46404G | Inf | 1 |
| 44M | 6.42289G | 6.46689G | 38.081M | 6.42596G | 6.46404G | Inf | 2 |
| 43.67M | 6.42267G | 6.46634G | 38.031M | 6.42596G | 6.463991G | Inf | 3 |
| 43.89M | 6.42311G | 6.467G | 38.031M | 6.42596G | 6.463991G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6485MHz**

01/05/2024

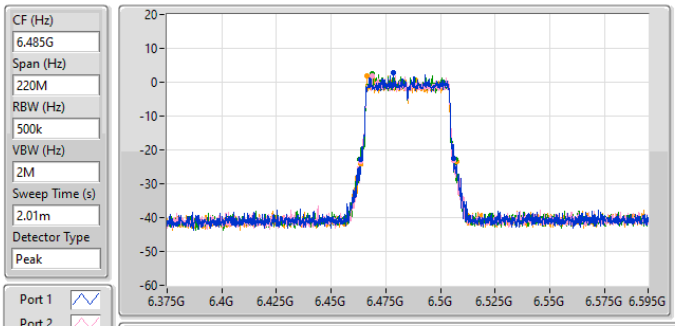


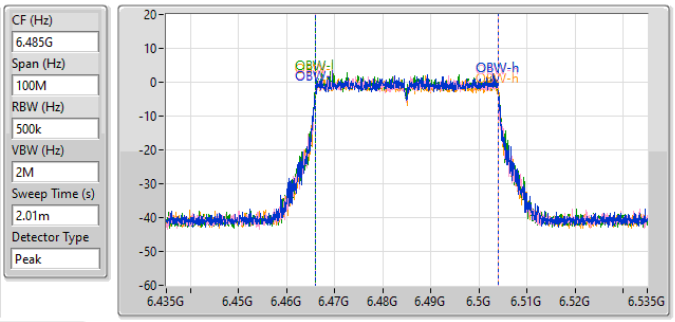


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.35M | 6.46366G | 6.50601G | 38.081M | 6.46596G | 6.50404G | Inf | 1 |
| 42.57M | 6.46366G | 6.50623G | 38.081M | 6.46596G | 6.50404G | Inf | 2 |
| 43.89M | 6.46311G | 6.507G | 38.081M | 6.46596G | 6.50404G | Inf | 3 |
| 44.11M | 6.46344G | 6.50755G | 38.081M | 6.46596G | 6.50404G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6525MHz**

01/05/2024

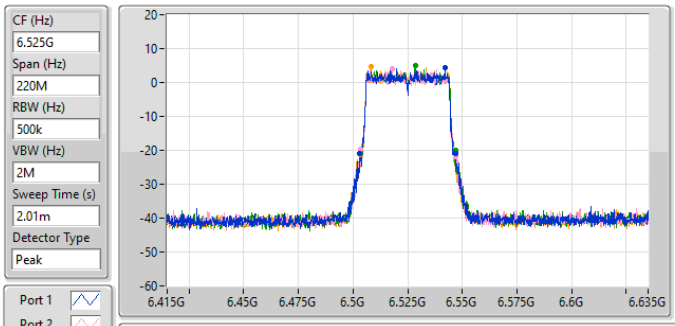


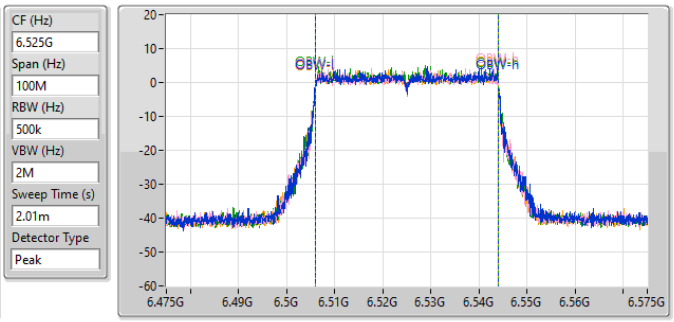


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.78M | 6.503G | 6.54678G | 38.081M | 6.50596G | 6.54404G | Inf | 1 |
| 43.23M | 6.50355G | 6.54678G | 37.981M | 6.50596G | 6.543941G | Inf | 2 |
| 43.23M | 6.50366G | 6.54689G | 38.081M | 6.50596G | 6.54404G | Inf | 3 |
| 43.45M | 6.50344G | 6.54689G | 38.031M | 6.50596G | 6.543991G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6565MHz**

01/05/2024

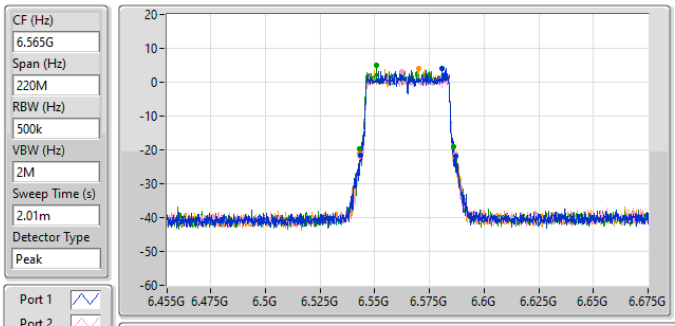


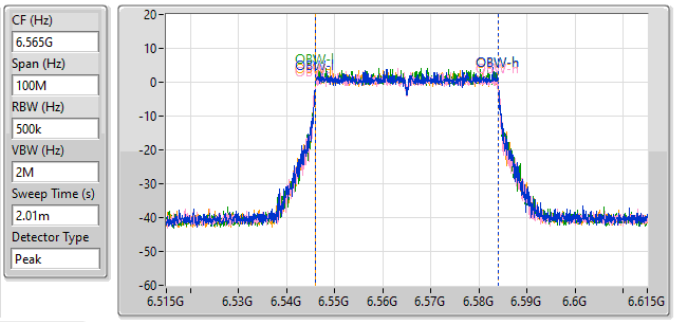


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.54333G | 6.58678G | 38.031M | 6.546009G | 6.58404G | Inf | 1 |
| 43.89M | 6.54311G | 6.587G | 37.981M | 6.54596G | 6.583941G | Inf | 2 |
| 42.79M | 6.54311G | 6.5859G | 37.981M | 6.546009G | 6.583991G | Inf | 3 |
| 43.23M | 6.54322G | 6.58645G | 38.031M | 6.54596G | 6.583991G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6685MHz**

01/05/2024

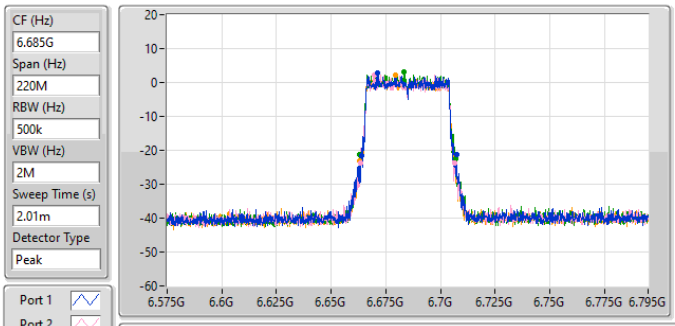


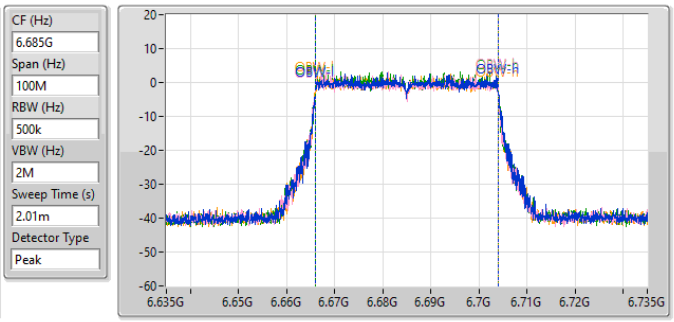


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.66388G | 6.70733G | 38.031M | 6.666009G | 6.70404G | Inf | 1 |
| 43.01M | 6.66355G | 6.70656G | 37.981M | 6.66596G | 6.703941G | Inf | 2 |
| 43.78M | 6.663G | 6.70678G | 37.981M | 6.666009G | 6.703991G | Inf | 3 |
| 43.67M | 6.66311G | 6.70678G | 38.031M | 6.66596G | 6.703991G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6885MHz**

01/05/2024

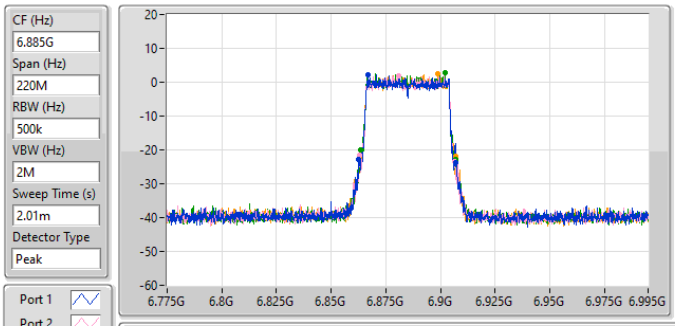


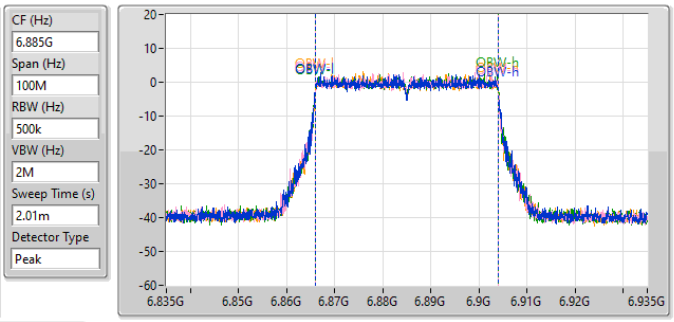


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.33M | 6.86267G | 6.907G | 38.031M | 6.86596G | 6.903991G | Inf | 1 |
| 43.78M | 6.86278G | 6.90656G | 37.981M | 6.866009G | 6.903991G | Inf | 2 |
| 43.56M | 6.86333G | 6.90689G | 37.981M | 6.866009G | 6.903991G | Inf | 3 |
| 43.89M | 6.863G | 6.90689G | 38.031M | 6.86596G | 6.903991G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**6925MHz**

01/05/2024

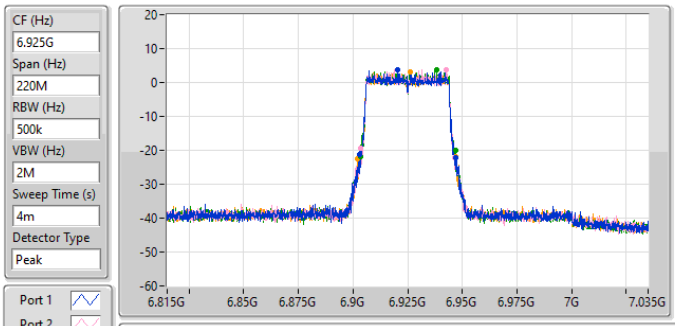


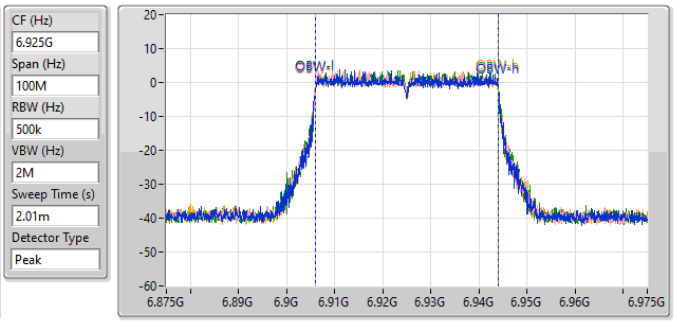


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.22M | 6.90289G | 6.94711G | 38.031M | 6.90596G | 6.943991G | Inf | 1 |
| 43.12M | 6.90355G | 6.94667G | 38.031M | 6.90596G | 6.943991G | Inf | 2 |
| 43.56M | 6.90333G | 6.94689G | 38.081M | 6.90596G | 6.94404G | Inf | 3 |
| 44.66M | 6.90223G | 6.94689G | 38.081M | 6.90596G | 6.94404G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**7005MHz**

01/05/2024

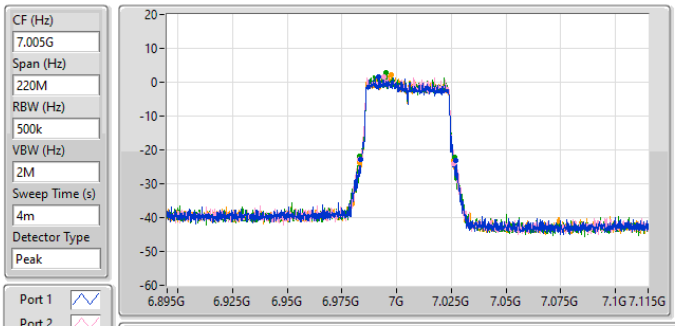


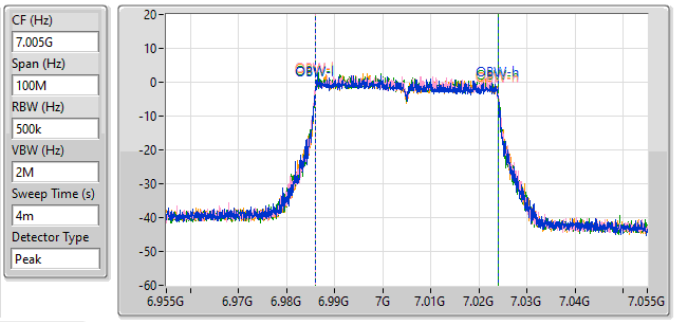


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.34M | 6.98344G | 7.02678G | 38.081M | 6.98591G | 7.023991G | Inf | 1 |
| 43.23M | 6.983G | 7.02623G | 38.031M | 6.98591G | 7.023941G | Inf | 2 |
| 43.45M | 6.98311G | 7.02656G | 38.031M | 6.98591G | 7.023941G | Inf | 3 |
| 43.12M | 6.98289G | 7.02601G | 38.031M | 6.98591G | 7.023941G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX** **EBW**

**7085MHz**

01/05/2024

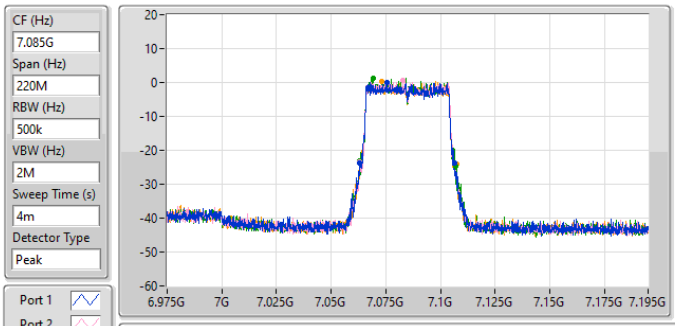


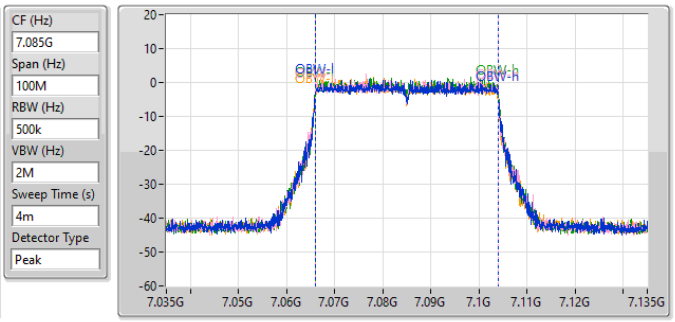


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.23M | 7.06311G | 7.10634G | 38.031M | 7.06596G | 7.103991G | Inf | 1 |
| 43.34M | 7.06311G | 7.10645G | 37.981M | 7.06596G | 7.103941G | Inf | 2 |
| 43.89M | 7.06311G | 7.107G | 38.081M | 7.06591G | 7.103991G | Inf | 3 |
| 44.44M | 7.06322G | 7.10766G | 37.981M | 7.06596G | 7.103941G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**5985MHz**

01/05/2024

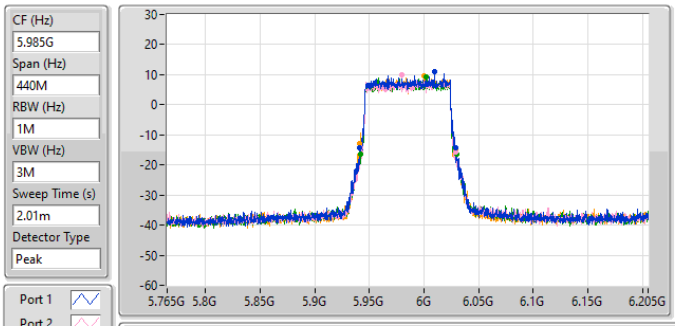


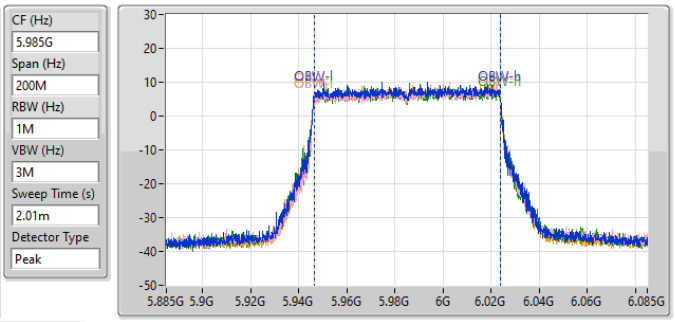


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.34M | 5.94122G | 6.02856G | 77.661M | 5.946319G | 6.023981G | Inf | 1 |
| 86.68M | 5.9421G | 6.02878G | 77.661M | 5.946319G | 6.023981G | Inf | 2 |
| 88M | 5.94166G | 6.02966G | 77.561M | 5.946319G | 6.023881G | Inf | 3 |
| 88.22M | 5.94122G | 6.02944G | 77.561M | 5.946319G | 6.023881G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6225MHz**

01/05/2024

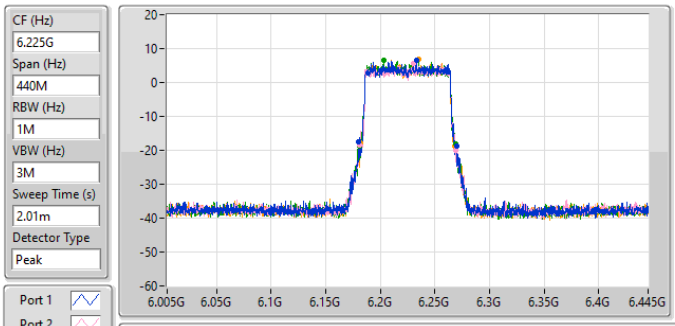


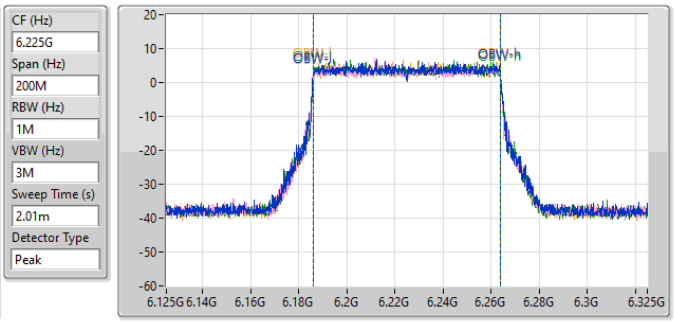


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 90.2M | 6.1799G | 6.2701G | 77.761M | 6.186119G | 6.263881G | Inf | 1 |
| 88.88M | 6.18056G | 6.26944G | 77.661M | 6.186219G | 6.263881G | Inf | 2 |
| 88M | 6.18122G | 6.26922G | 77.861M | 6.186119G | 6.263981G | Inf | 3 |
| 86.68M | 6.18166G | 6.26834G | 77.661M | 6.186219G | 6.263881G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6385MHz**

01/05/2024

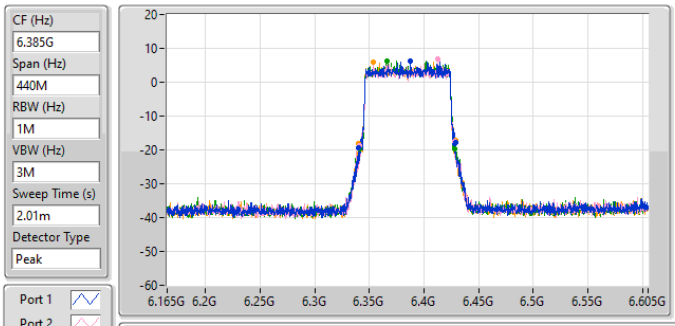


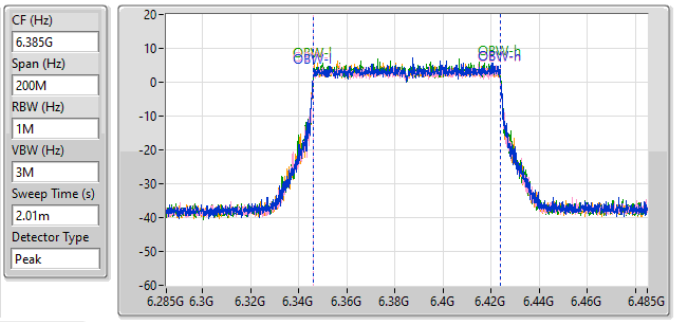


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.1M | 6.34012G | 6.42922G | 77.761M | 6.346119G | 6.423881G | Inf | 1 |
| 86.24M | 6.34144G | 6.42768G | 77.761M | 6.346119G | 6.423881G | Inf | 2 |
| 86.68M | 6.34122G | 6.4279G | 77.661M | 6.346119G | 6.423781G | Inf | 3 |
| 88.88M | 6.33968G | 6.42856G | 77.761M | 6.346119G | 6.423881G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6465MHz**

01/05/2024

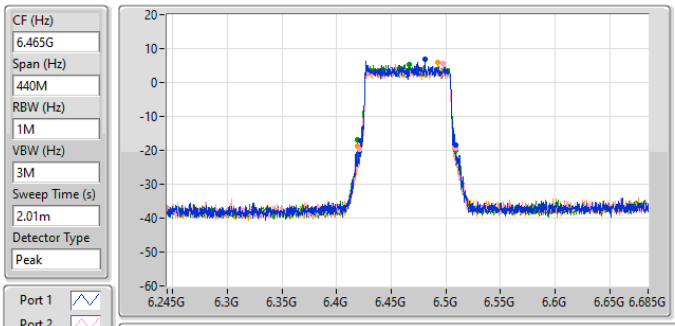


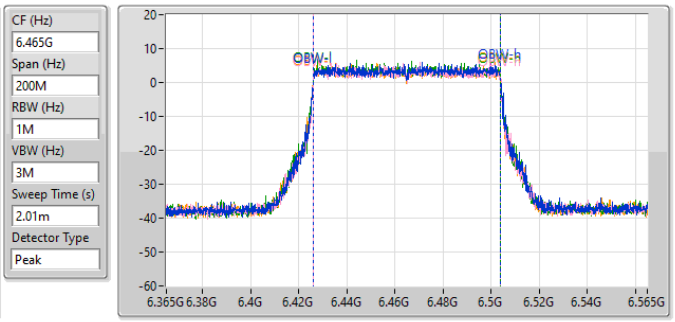


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.12M | 6.42188G | 6.509G | 77.661M | 6.426219G | 6.503881G | Inf | 1 |
| 88.88M | 6.42056G | 6.50944G | 77.661M | 6.426219G | 6.503881G | Inf | 2 |
| 89.98M | 6.41924G | 6.50922G | 77.661M | 6.426219G | 6.503881G | Inf | 3 |
| 89.54M | 6.41946G | 6.509G | 77.761M | 6.426119G | 6.503881G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6545MHz**

01/05/2024

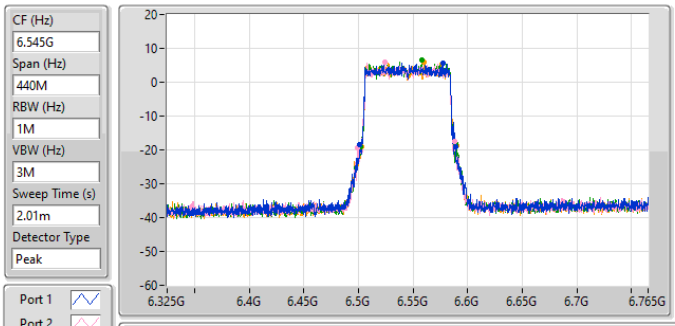


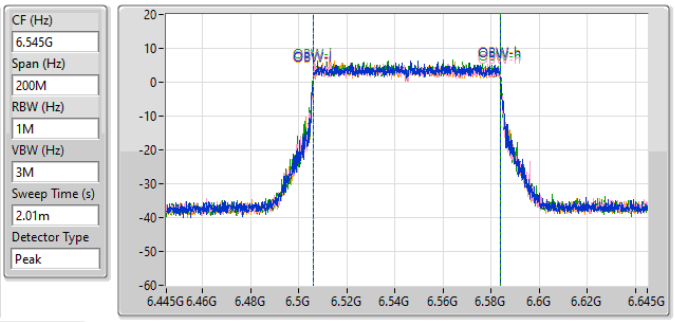


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.22M | 6.50078G | 6.589G | 77.561M | 6.506219G | 6.583781G | Inf | 1 |
| 89.32M | 6.49902G | 6.58834G | 77.661M | 6.506219G | 6.583881G | Inf | 2 |
| 86.68M | 6.5021G | 6.58878G | 77.861M | 6.506119G | 6.583981G | Inf | 3 |
| 87.56M | 6.50254G | 6.5901G | 77.561M | 6.506219G | 6.583781G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6625MHz**

01/05/2024

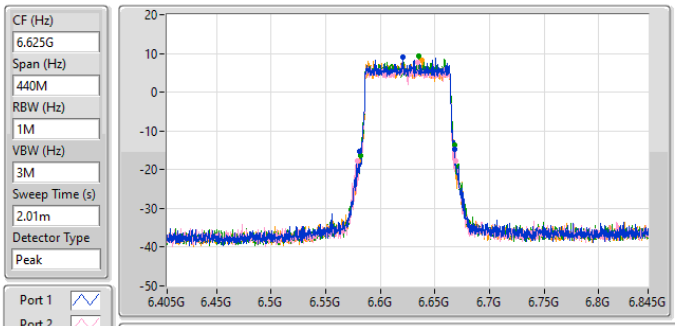


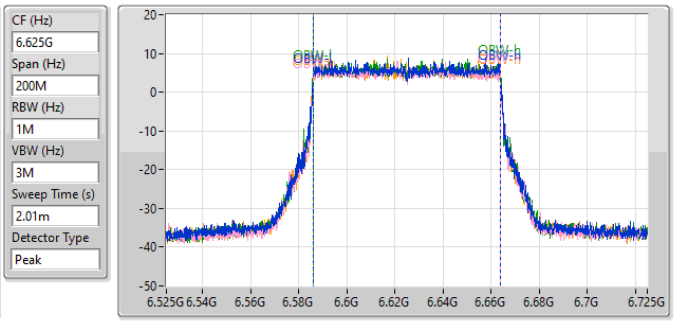


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 86.68M | 6.58122G | 6.6679G | 77.761M | 6.586119G | 6.663881G | Inf | 1 |
| 89.54M | 6.57924G | 6.66878G | 77.761M | 6.586119G | 6.663881G | Inf | 2 |
| 85.58M | 6.5821G | 6.66768G | 77.861M | 6.586119G | 6.663981G | Inf | 3 |
| 89.1M | 6.58012G | 6.66922G | 77.761M | 6.586119G | 6.663881G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6705MHz**

01/05/2024

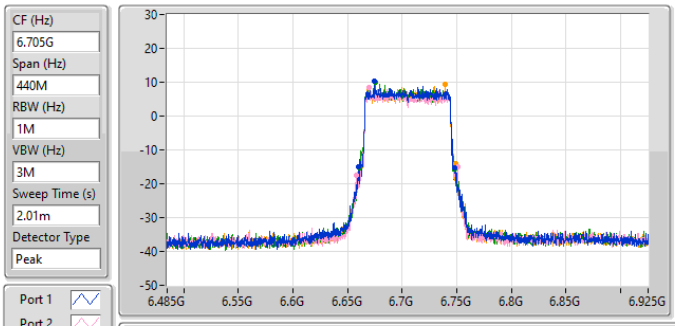


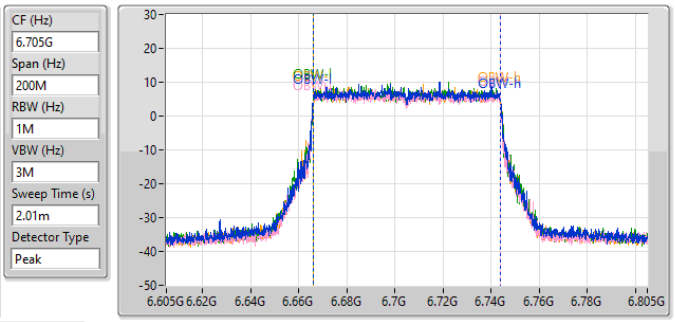


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.22M | 6.66012G | 6.74834G | 77.761M | 6.666119G | 6.743881G | Inf | 1 |
| 93.06M | 6.6577G | 6.75076G | 77.861M | 6.666119G | 6.743981G | Inf | 2 |
| 87.56M | 6.66078G | 6.74834G | 77.761M | 6.666119G | 6.743881G | Inf | 3 |
| 88.88M | 6.65968G | 6.74856G | 77.661M | 6.666219G | 6.743881G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6785MHz**

01/05/2024

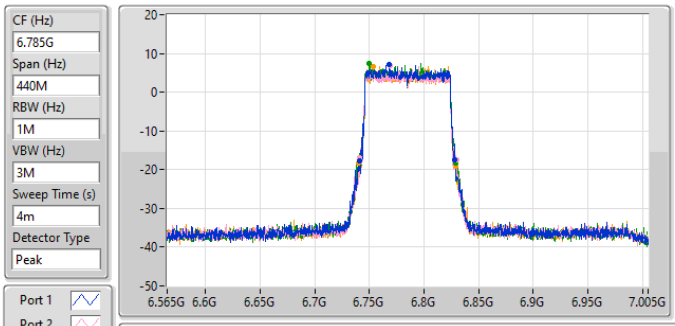


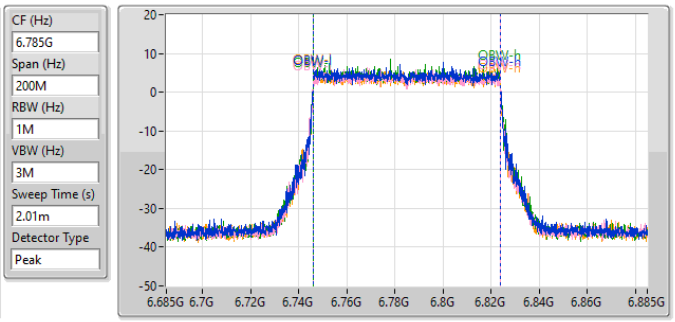


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.34M | 6.741G | 6.82834G | 77.661M | 6.746119G | 6.823781G | Inf | 1 |
| 89.32M | 6.74056G | 6.82988G | 77.661M | 6.746119G | 6.823781G | Inf | 2 |
| 88.22M | 6.74078G | 6.829G | 77.661M | 6.746219G | 6.823881G | Inf | 3 |
| 89.76M | 6.73968G | 6.82944G | 77.561M | 6.746219G | 6.823781G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6865MHz**

01/05/2024

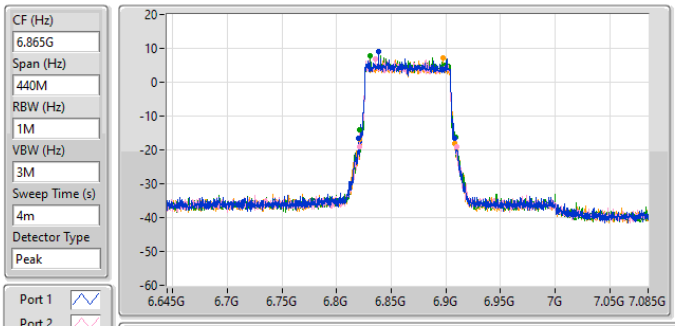


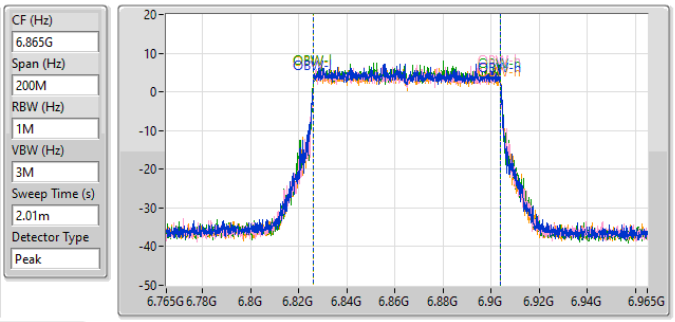


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.56M | 6.82034G | 6.9079G | 77.761M | 6.826119G | 6.903881G | Inf | 1 |
| 89.54M | 6.82056G | 6.9101G | 77.761M | 6.826119G | 6.903881G | Inf | 2 |
| 87.78M | 6.82122G | 6.909G | 77.761M | 6.826119G | 6.903881G | Inf | 3 |
| 87.34M | 6.821G | 6.90834G | 77.961M | 6.826019G | 6.903981G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**6945MHz**

01/05/2024

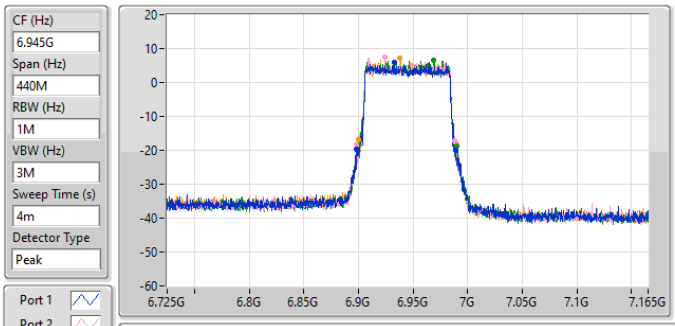


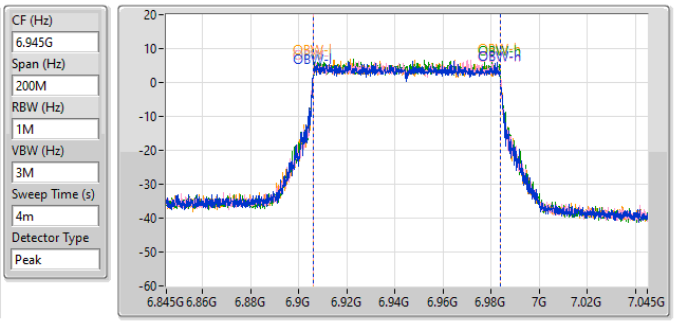


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 91.08M | 6.89814G | 6.98922G | 77.861M | 6.906019G | 6.983881G | Inf | 1 |
| 89.54M | 6.89858G | 6.98812G | 77.861M | 6.906019G | 6.983881G | Inf | 2 |
| 89.32M | 6.90034G | 6.98966G | 77.761M | 6.906119G | 6.983881G | Inf | 3 |
| 88.88M | 6.89968G | 6.98856G | 77.761M | 6.906119G | 6.983881G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX** **EBW**

**7025MHz**

03/05/2024

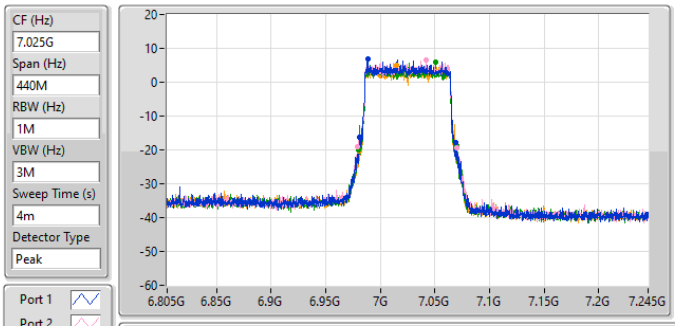


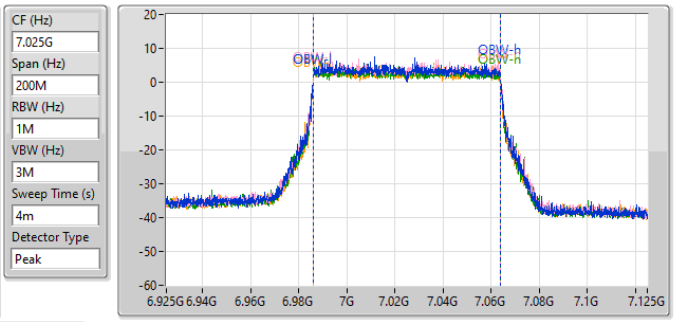


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.66M | 6.98056G | 7.06922G | 77.861M | 6.986119G | 7.063981G | Inf | 1 |
| 91.08M | 6.97924G | 7.07032G | 77.761M | 6.986119G | 7.063881G | Inf | 2 |
| 89.98M | 6.97968G | 7.06966G | 77.761M | 6.986119G | 7.063881G | Inf | 3 |
| 89.32M | 6.98056G | 7.06988G | 77.761M | 6.986119G | 7.063881G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6025MHz**

01/05/2024

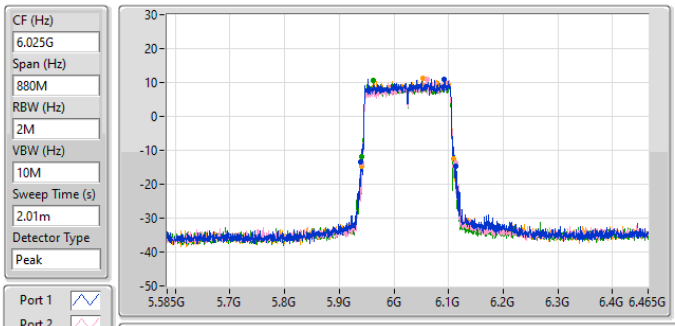


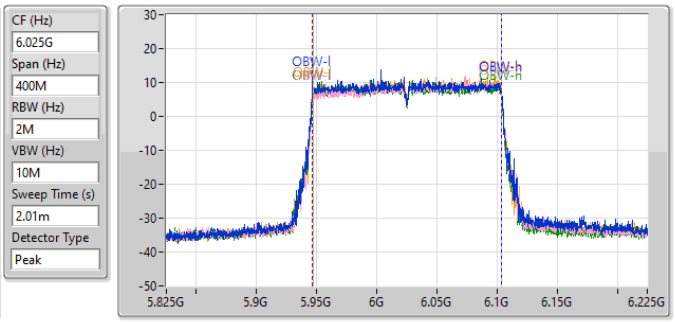


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 173.8M | 5.93876G | 6.11256G | 156.922M | 5.946639G | 6.103561G | Inf | 1 |
| 170.72M | 5.9414G | 6.11212G | 156.522M | 5.947239G | 6.103761G | Inf | 2 |
| 170.72M | 5.94052G | 6.11124G | 157.121M | 5.946639G | 6.103761G | Inf | 3 |
| 168.52M | 5.94052G | 6.10904G | 156.922M | 5.946839G | 6.103761G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6185MHz**

01/05/2024

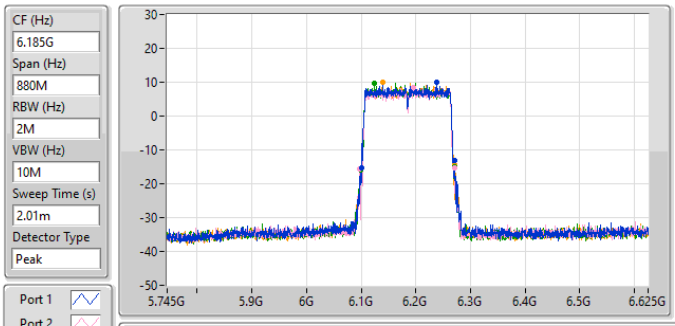


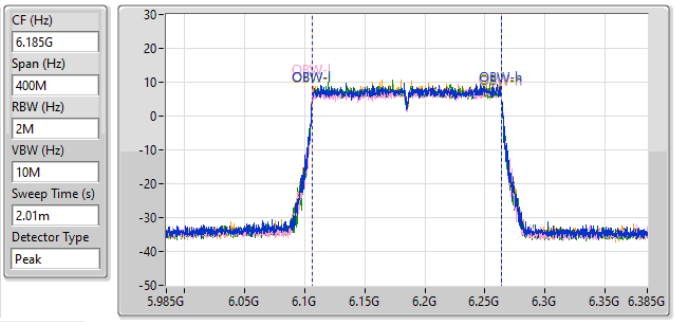


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 170.72M | 6.10052G | 6.27124G | 156.922M | 6.106639G | 6.263561G | Inf | 1 |
| 172.92M | 6.09788G | 6.2708G | 157.321M | 6.106439G | 6.263761G | Inf | 2 |
| 171.16M | 6.09964G | 6.2708G | 157.121M | 6.106439G | 6.263561G | Inf | 3 |
| 172.04M | 6.09964G | 6.27168G | 157.121M | 6.106439G | 6.263561G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6345MHz**

01/05/2024

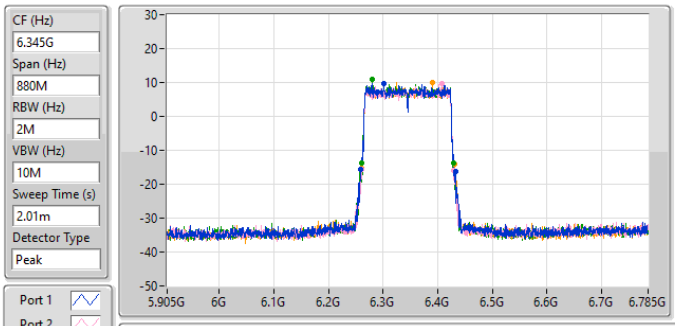


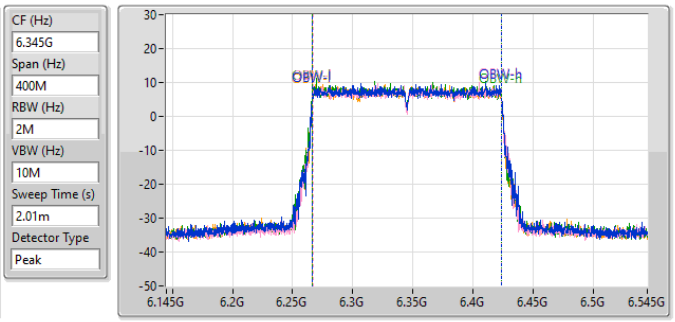


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 173.36M | 6.25964G | 6.433G | 157.121M | 6.266639G | 6.423761G | Inf | 1 |
| 168.96M | 6.26052G | 6.42948G | 156.922M | 6.266839G | 6.423761G | Inf | 2 |
| 168.96M | 6.26096G | 6.42992G | 157.121M | 6.266439G | 6.423561G | Inf | 3 |
| 169.84M | 6.26096G | 6.4308G | 157.121M | 6.266439G | 6.423561G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6505MHz**

01/05/2024

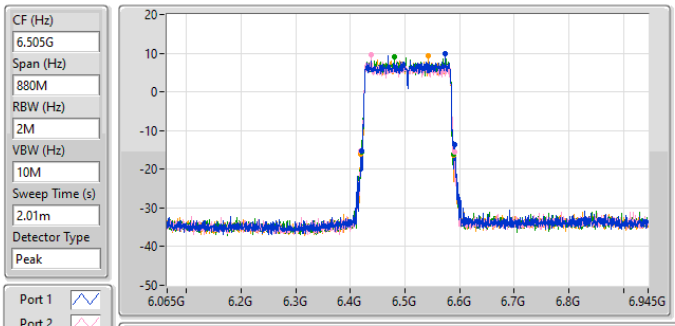


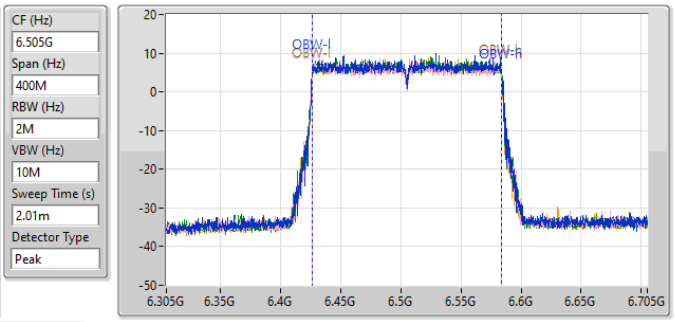


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 171.6M | 6.42008G | 6.59168G | 157.121M | 6.426439G | 6.583561G | Inf | 1 |
| 170.72M | 6.41964G | 6.59036G | 156.922M | 6.426639G | 6.583561G | Inf | 2 |
| 169.4M | 6.42008G | 6.58948G | 157.121M | 6.426639G | 6.583761G | Inf | 3 |
| 169.4M | 6.41964G | 6.58904G | 156.922M | 6.426639G | 6.583561G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6665MHz**

01/05/2024

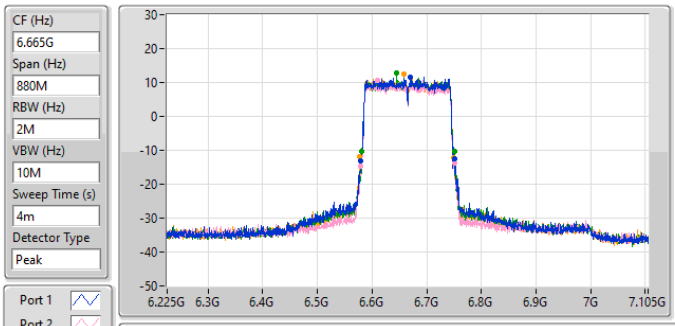


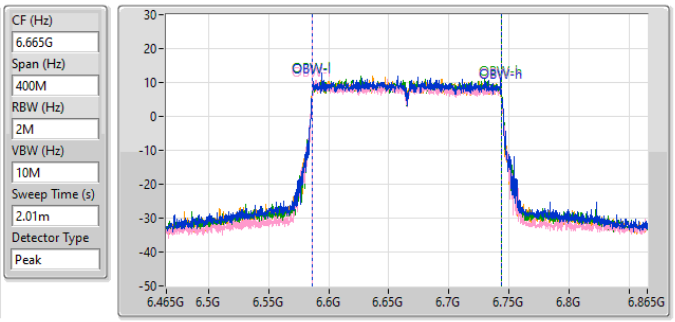


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 170.72M | 6.57964G | 6.75036G | 156.922M | 6.586639G | 6.743561G | Inf | 1 |
| 172.48M | 6.5792G | 6.75168G | 157.121M | 6.586439G | 6.743561G | Inf | 2 |
| 168.96M | 6.5814G | 6.75036G | 156.922M | 6.586639G | 6.743561G | Inf | 3 |
| 172.48M | 6.577G | 6.74948G | 156.922M | 6.586439G | 6.743361G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6825MHz**

01/05/2024

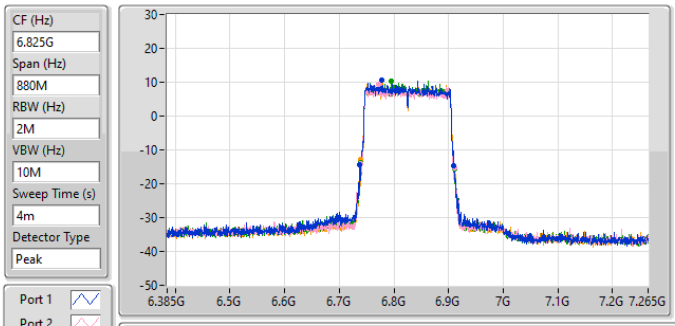


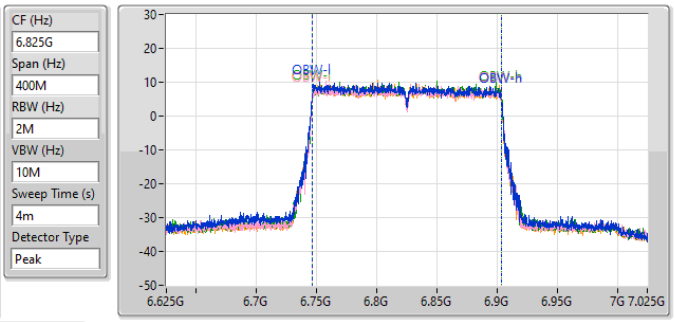


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 172.04M | 6.73744G | 6.90948G | 156.922M | 6.746439G | 6.903361G | Inf | 1 |
| 171.6M | 6.73964G | 6.91124G | 156.922M | 6.746439G | 6.903361G | Inf | 2 |
| 170.72M | 6.73964G | 6.91036G | 157.121M | 6.746439G | 6.903561G | Inf | 3 |
| 170.72M | 6.73964G | 6.91036G | 156.922M | 6.746439G | 6.903361G | Inf | 4 |

**6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX** **EBW**

**6985MHz**

01/05/2024

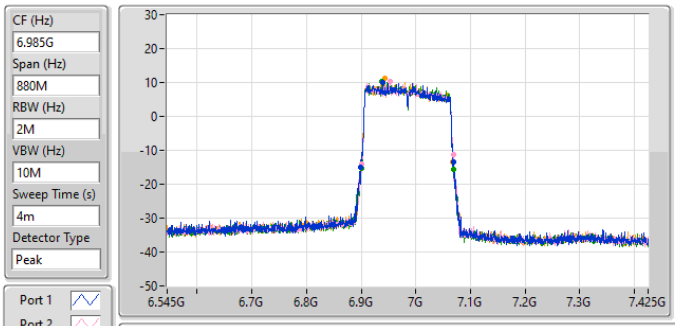


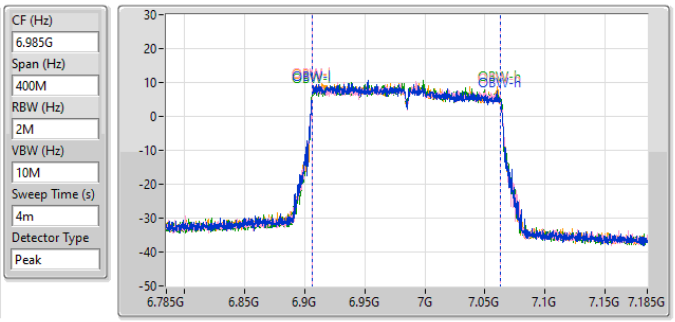


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 169.84M | 6.8992G | 7.06904G | 156.722M | 6.906239G | 7.062961G | Inf | 1 |
| 168.96M | 6.90052G | 7.06948G | 156.922M | 6.906239G | 7.063161G | Inf | 2 |
| 168.96M | 6.90008G | 7.06904G | 156.922M | 6.906239G | 7.063161G | Inf | 3 |
| 168.08M | 6.90008G | 7.06816G | 156.722M | 6.906239G | 7.062961G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6105MHz**

01/05/2024

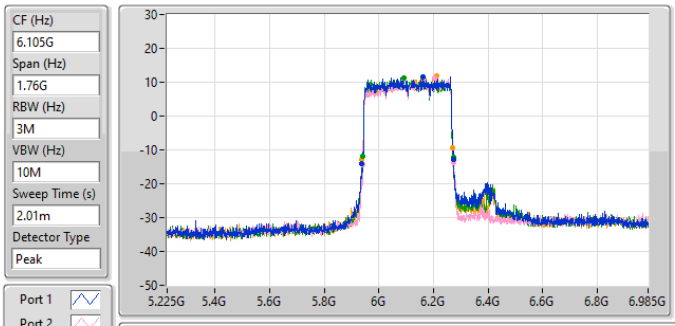


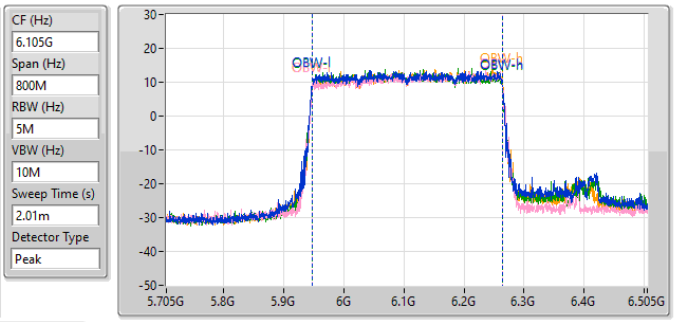


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 336.16M | 5.9378G | 6.27396G | 315.442M | 5.947879G | 6.263321G | Inf | 1 |
| 333.52M | 5.94132G | 6.27484G | 315.442M | 5.948278G | 6.263721G | Inf | 2 |
| 334.4M | 5.93956G | 6.27396G | 315.842M | 5.947479G | 6.263321G | Inf | 3 |
| 333.52M | 5.9378G | 6.27132G | 315.842M | 5.947879G | 6.263721G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6265MHz**

01/05/2024

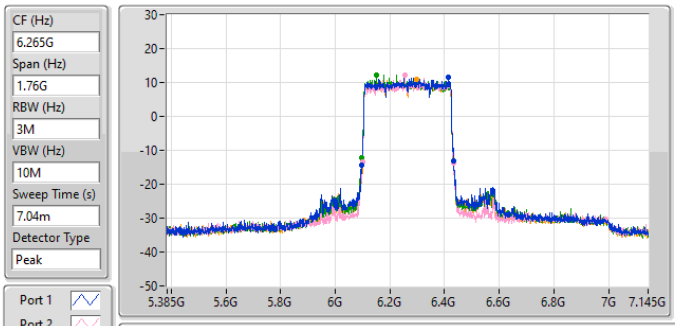


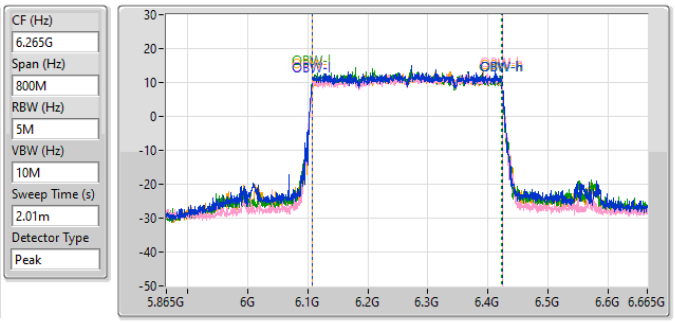


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 336.16M | 6.09692G | 6.43308G | 316.242M | 6.107079G | 6.423321G | Inf | 1 |
| 335.28M | 6.09868G | 6.43396G | 315.442M | 6.107879G | 6.423321G | Inf | 2 |
| 336.16M | 6.09692G | 6.43308G | 315.842M | 6.107079G | 6.422921G | Inf | 3 |
| 336.16M | 6.09692G | 6.43308G | 316.242M | 6.107079G | 6.423321G | Inf | 4 |

**5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6425MHz**

01/05/2024

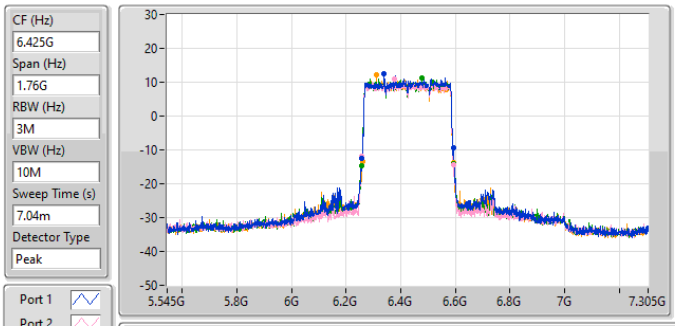


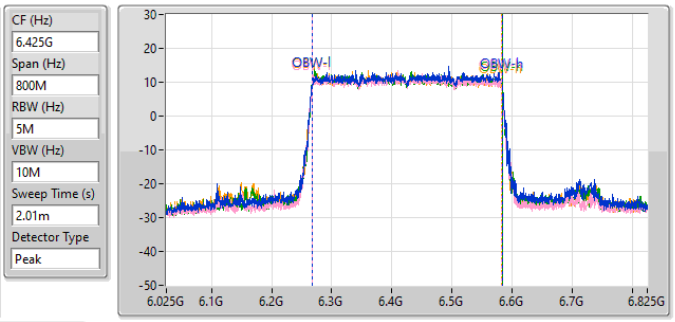


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 336.16M | 6.2578G | 6.59396G | 316.242M | 6.267079G | 6.583321G | Inf | 1 |
| 337.04M | 6.25604G | 6.59308G | 315.842M | 6.267079G | 6.582921G | Inf | 2 |
| 335.28M | 6.25692G | 6.5922G | 316.242M | 6.267079G | 6.583321G | Inf | 3 |
| 332.64M | 6.25956G | 6.5922G | 315.842M | 6.267079G | 6.582921G | Inf | 4 |

**6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6585MHz**

01/05/2024

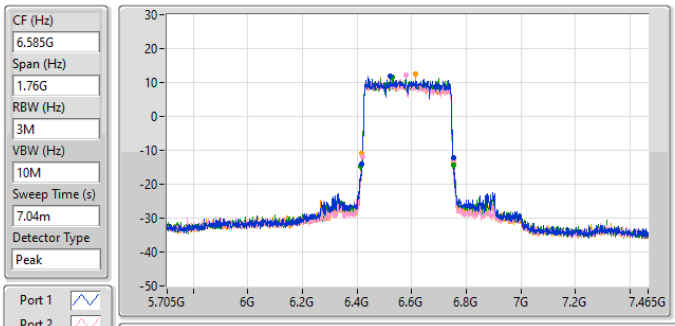


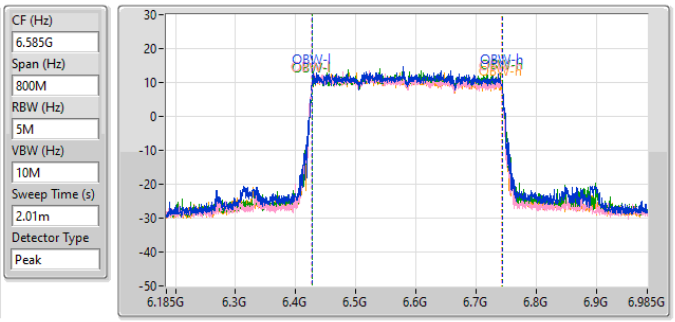


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 336.16M | 6.41604G | 6.7522G | 316.642M | 6.427079G | 6.743721G | Inf | 1 |
| 333.52M | 6.41868G | 6.7522G | 315.842M | 6.426679G | 6.742521G | Inf | 2 |
| 340.56M | 6.4134G | 6.75396G | 315.842M | 6.427479G | 6.743321G | Inf | 3 |
| 335.28M | 6.4178G | 6.75308G | 315.842M | 6.427079G | 6.742921G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6745MHz**

01/05/2024

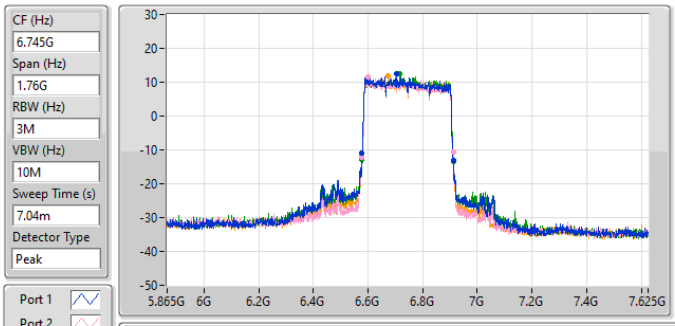


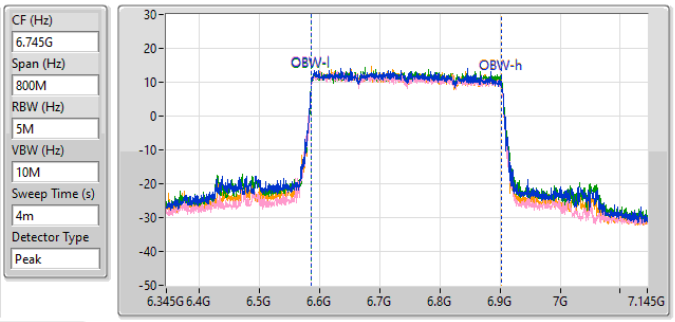


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 337.92M | 6.57604G | 6.91396G | 315.842M | 6.586679G | 6.902521G | Inf | 1 |
| 334.4M | 6.5778G | 6.9122G | 315.842M | 6.586679G | 6.902521G | Inf | 2 |
| 337.04M | 6.57692G | 6.91396G | 316.242M | 6.586679G | 6.902921G | Inf | 3 |
| 336.16M | 6.57604G | 6.9122G | 315.442M | 6.586679G | 6.902121G | Inf | 4 |

**6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX** **EBW**

**6905MHz**

01/05/2024

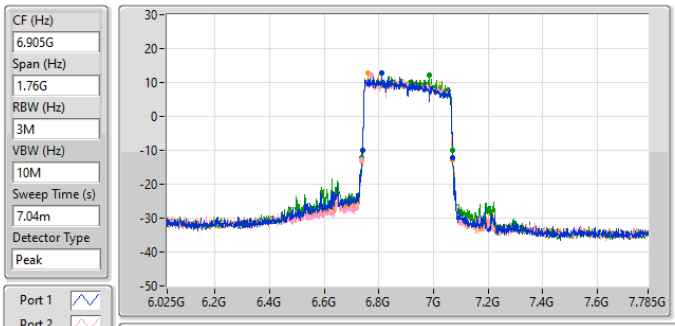


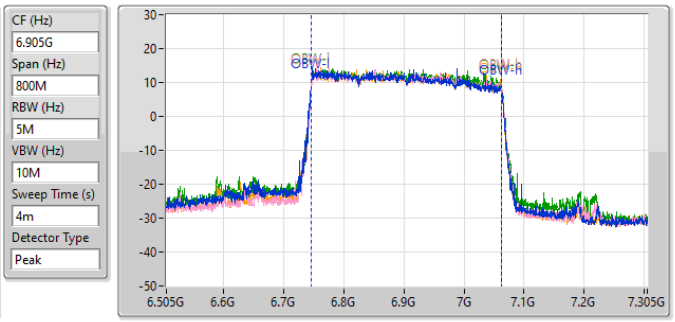


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 331.76M | 6.73868G | 7.07044G | 315.842M | 6.74588G | 7.061722G | Inf | 1 |
| 334.4M | 6.73604G | 7.07044G | 315.442M | 6.746679G | 7.062121G | Inf | 2 |
| 334.4M | 6.73604G | 7.07044G | 315.442M | 6.746679G | 7.062121G | Inf | 3 |
| 333.52M | 6.7378G | 7.07132G | 315.042M | 6.746679G | 7.061722G | Inf | 4 |

Test Mode: Mode 2
Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---|---|---|---|---|---|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX | 21.945M | 19.065M | 19M1D1D | 20.955M | 19.015M |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX | 22.33M | 19.09M | 19M1D1D | 21.01M | 18.891M |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX | 44.99M | 38.081M | 38M1D1D | 42.24M | 37.981M |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX | 43.67M | 38.031M | 38M0D1D | 41.25M | 37.781M |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX | 89.76M | 78.061M | 78M1D1D | 85.36M | 77.561M |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX | 90.86M | 78.161M | 78M2D1D | 80.74M | 77.361M |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX | 276.32M | 157.921M | 158MD1D | 171.16M | 157.121M |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX | 218.68M | 157.321M | 157MD1D | 165.44M | 155.522M |
| 802.11be EHT320-BF_Nss1,(MCS0)_2TX | 588.72M | 319.44M | 319MD1D | 361.68M | 315.842M |
| 802.11be EHT320-BF_Nss1,(MCS0)_4TX | 649.44M | 317.441M | 317MD1D | 329.12M | 312.644M |
| 6.425-6.525GHz | - | - | - | - | - |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX | 21.945M | 19.115M | 19M1D1D | 21.23M | 18.991M |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX | 22.165M | 19.115M | 19M1D1D | 21.01M | 18.941M |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX | 44.44M | 38.081M | 38M1D1D | 42.79M | 37.931M |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX | 44.88M | 38.031M | 38M0D1D | 41.47M | 37.881M |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX | 91.3M | 77.861M | 77M9D1D | 86.46M | 77.761M |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX | 89.76M | 77.961M | 78M0D1D | 81.62M | 77.161M |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX | 271.04M | 158.121M | 158MD1D | 263.12M | 157.521M |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX | 173.8M | 157.721M | 158MD1D | 164.12M | 156.722M |
| 802.11be EHT320-BF_Nss1,(MCS0)_2TX | 574.64M | 317.841M | 318MD1D | 443.52M | 317.041M |
| 802.11be EHT320-BF_Nss1,(MCS0)_4TX | 372.24M | 316.242M | 316MD1D | 331.76M | 315.442M |
| 6.525-6.875GHz | - | - | - | - | - |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX | 21.945M | 19.065M | 19M1D1D | 21.065M | 18.991M |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX | 21.89M | 19.09M | 19M1D1D | 20.13M | 18.941M |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX | 44.77M | 38.131M | 38M1D1D | 43.12M | 37.981M |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX | 43.56M | 38.081M | 38M1D1D | 41.47M | 37.881M |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX | 90.2M | 77.861M | 77M9D1D | 85.58M | 77.461M |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX | 93.72M | 77.861M | 77M9D1D | 80.74M | 76.962M |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX | 312.4M | 160.32M | 160MD1D | 203.28M | 157.321M |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX | 232.32M | 157.921M | 158MD1D | 163.68M | 155.922M |
| 802.11be EHT320-BF_Nss1,(MCS0)_2TX | 605.44M | 318.641M | 319MD1D | 363.44M | 313.843M |
| 802.11be EHT320-BF_Nss1,(MCS0)_4TX | 372.24M | 316.242M | 316MD1D | 322.08M | 312.644M |
| 6.875-7.125GHz | - | - | - | - | - |
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX | 22.22M | 19.09M | 19M1D1D | 21.01M | 18.991M |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX | 22.22M | 19.09M | 19M1D1D | 20.24M | 19.015M |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX | 44.66M | 38.131M | 38M1D1D | 42.79M | 37.931M |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX | 44.88M | 38.031M | 38M0D1D | 42.02M | 37.881M |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX | 96.36M | 77.761M | 77M8D1D | 83.38M | 77.661M |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX | 91.3M | 77.861M | 77M9D1D | 85.58M | 77.461M |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX | 195.8M | 157.321M | 157MD1D | 166.32M | 156.922M |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX | 246.84M | 157.121M | 157MD1D | 162.8M | 156.122M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---|---|---|---|---|---|---|---|---|---|---|
| 802.11be EHT20-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | Inf | 21.945M | 19.065M | 21.78M | 19.04M | | | | |
| 6195MHz | Pass | Inf | 21.78M | 19.04M | 21.89M | 19.015M | | | | |
| 6415MHz | Pass | Inf | 21.615M | 19.04M | 20.955M | 19.04M | | | | |
| 6435MHz | Pass | Inf | 21.615M | 19.015M | 21.23M | 19.115M | | | | |
| 6475MHz | Pass | Inf | 21.45M | 18.991M | 21.56M | 19.04M | | | | |
| 6515MHz | Pass | Inf | 21.505M | 19.065M | 21.945M | 19.09M | | | | |
| 6535MHz | Pass | Inf | 21.56M | 18.991M | 21.725M | 19.065M | | | | |
| 6695MHz | Pass | Inf | 21.065M | 19.065M | 21.945M | 19.04M | | | | |
| 6875MHz | Pass | Inf | 21.78M | 19.015M | 21.945M | 19.065M | | | | |
| 6895MHz | Pass | Inf | 21.01M | 19.09M | 21.67M | 19.04M | | | | |
| 6995MHz | Pass | Inf | 21.45M | 19.04M | 21.725M | 19.04M | | | | |
| 7095MHz | Pass | Inf | 21.505M | 18.991M | 22.165M | 19.09M | | | | |
| 7115MHz | Pass | Inf | 21.56M | 19.04M | 22.22M | 19.09M | | | | |
| 802.11be EHT40-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 42.24M | 37.981M | 42.68M | 38.031M | | | | |
| 6205MHz | Pass | Inf | 44.99M | 37.981M | 43.34M | 37.981M | | | | |
| 6405MHz | Pass | Inf | 43.78M | 38.031M | 43.23M | 38.081M | | | | |
| 6445MHz | Pass | Inf | 44.11M | 37.931M | 42.9M | 38.031M | | | | |
| 6485MHz | Pass | Inf | 44.44M | 37.981M | 42.79M | 37.981M | | | | |
| 6525MHz | Pass | Inf | 43.45M | 37.981M | 43.23M | 38.081M | | | | |
| 6565MHz | Pass | Inf | 43.45M | 37.981M | 43.56M | 38.131M | | | | |
| 6685MHz | Pass | Inf | 43.78M | 38.031M | 43.23M | 38.031M | | | | |
| 6885MHz | Pass | Inf | 44.77M | 38.081M | 43.12M | 37.981M | | | | |
| 6925MHz | Pass | Inf | 44.66M | 38.081M | 43.67M | 37.981M | | | | |
| 7005MHz | Pass | Inf | 42.79M | 38.031M | 43.89M | 37.981M | | | | |
| 7085MHz | Pass | Inf | 42.9M | 37.931M | 43.01M | 38.131M | | | | |
| 802.11be EHT80-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 89.76M | 77.561M | 87.34M | 77.661M | | | | |
| 6225MHz | Pass | Inf | 89.32M | 77.761M | 86.46M | 78.061M | | | | |
| 6385MHz | Pass | Inf | 88.66M | 77.861M | 85.36M | 77.661M | | | | |
| 6465MHz | Pass | Inf | 87.78M | 77.761M | 86.46M | 77.761M | | | | |
| 6545MHz | Pass | Inf | 91.3M | 77.861M | 89.32M | 77.861M | | | | |
| 6625MHz | Pass | Inf | 89.1M | 77.761M | 89.54M | 77.661M | | | | |
| 6705MHz | Pass | Inf | 90.2M | 77.761M | 87.34M | 77.661M | | | | |
| 6785MHz | Pass | Inf | 88.88M | 77.461M | 89.54M | 77.861M | | | | |
| 6865MHz | Pass | Inf | 85.58M | 77.661M | 87.56M | 77.661M | | | | |
| 6945MHz | Pass | Inf | 88.88M | 77.761M | 89.54M | 77.761M | | | | |
| 7025MHz | Pass | Inf | 96.36M | 77.761M | 83.38M | 77.661M | | | | |
| 802.11be EHT160-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 183.04M | 157.921M | 257.84M | 157.521M | | | | |
| 6185MHz | Pass | Inf | 183.04M | 157.521M | 171.16M | 157.121M | | | | |
| 6345MHz | Pass | Inf | 276.32M | 157.921M | 201.96M | 157.321M | | | | |
| 6505MHz | Pass | Inf | 271.04M | 158.121M | 263.12M | 157.521M | | | | |
| 6665MHz | Pass | Inf | 288.2M | 157.521M | 203.28M | 157.321M | | | | |
| 6825MHz | Pass | Inf | 312.4M | 160.32M | 260.48M | 157.521M | | | | |
| 6985MHz | Pass | Inf | 166.32M | 157.321M | 195.8M | 156.922M | | | | |
| 802.11be EHT320-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - | - | - |
| 6105MHz | Pass | Inf | 504.24M | 317.841M | 466.4M | 315.842M | | | | |
| 6265MHz | Pass | Inf | 361.68M | 318.241M | 392.48M | 316.242M | | | | |
| 6425MHz | Pass | Inf | 579.92M | 319.44M | 588.72M | 318.241M | | | | |
| 6585MHz | Pass | Inf | 443.52M | 317.041M | 574.64M | 317.841M | | | | |
| 6745MHz | Pass | Inf | 560.56M | 313.843M | 593.12M | 318.641M | | | | |
| 6905MHz | Pass | Inf | 363.44M | 315.842M | 605.44M | 318.241M | | | | |
| 802.11be EHT20-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---|---|---|---|---|---|---|---|---|---|---|
| 5955MHz | Pass | Inf | 21.175M | 18.891M | 22.33M | 19.04M | 21.12M | 19.015M | 21.285M | 19.015M |
| 6195MHz | Pass | Inf | 21.67M | 18.991M | 21.67M | 18.991M | 21.01M | 19.04M | 21.505M | 19.04M |
| 6415MHz | Pass | Inf | 21.23M | 18.966M | 21.23M | 19.015M | 21.56M | 19.015M | 21.45M | 19.09M |
| 6435MHz | Pass | Inf | 21.725M | 18.941M | 21.065M | 19.09M | 21.45M | 19.065M | 22.165M | 18.991M |
| 6475MHz | Pass | Inf | 21.395M | 18.991M | 21.01M | 19.015M | 21.67M | 19.09M | 21.67M | 19.04M |
| 6515MHz | Pass | Inf | 21.615M | 18.966M | 21.56M | 19.065M | 22.165M | 19.04M | 21.78M | 19.115M |
| 6535MHz | Pass | Inf | 20.13M | 18.941M | 20.9M | 19.065M | 21.175M | 18.991M | 21.34M | 19.015M |
| 6695MHz | Pass | Inf | 21.89M | 19.015M | 21.285M | 19.065M | 21.395M | 19.015M | 20.955M | 19.04M |
| 6875MHz | Pass | Inf | 21.23M | 19.04M | 21.78M | 19.04M | 21.615M | 19.09M | 21.505M | 19.065M |
| 6895MHz | Pass | Inf | 20.9M | 19.015M | 20.845M | 19.065M | 21.23M | 19.065M | 21.505M | 19.04M |
| 6995MHz | Pass | Inf | 21.23M | 19.04M | 21.78M | 19.09M | 21.45M | 19.065M | 22.22M | 19.04M |
| 7095MHz | Pass | Inf | 21.065M | 19.015M | 21.615M | 19.015M | 21.725M | 19.065M | 21.065M | 19.015M |
| 7115MHz | Pass | Inf | 20.24M | 19.065M | 22M | 19.04M | 22.11M | 19.065M | 21.175M | 19.09M |
| 802.11be EHT40-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 41.25M | 37.981M | 41.91M | 37.981M | 42.13M | 37.881M | 42.9M | 37.931M |
| 6205MHz | Pass | Inf | 41.58M | 37.781M | 42.02M | 37.881M | 41.8M | 37.931M | 43.23M | 38.031M |
| 6405MHz | Pass | Inf | 43.67M | 37.881M | 41.8M | 37.931M | 41.91M | 37.931M | 43.12M | 38.031M |
| 6445MHz | Pass | Inf | 44.88M | 37.931M | 42.68M | 37.881M | 43.34M | 37.981M | 44.22M | 38.031M |
| 6485MHz | Pass | Inf | 43.34M | 37.981M | 42.24M | 37.931M | 42.57M | 37.931M | 42.46M | 37.981M |
| 6525MHz | Pass | Inf | 44.33M | 37.931M | 41.47M | 37.981M | 44.11M | 37.981M | 42.24M | 37.981M |
| 6565MHz | Pass | Inf | 43.12M | 37.981M | 42.57M | 38.031M | 42.9M | 37.881M | 42.24M | 37.931M |
| 6685MHz | Pass | Inf | 41.47M | 37.881M | 42.68M | 37.931M | 43.12M | 37.931M | 42.46M | 37.981M |
| 6885MHz | Pass | Inf | 43.56M | 37.931M | 43.45M | 38.031M | 42.35M | 38.031M | 43.12M | 38.081M |
| 6925MHz | Pass | Inf | 42.57M | 37.981M | 44.88M | 37.881M | 42.46M | 37.931M | 42.46M | 37.981M |
| 7005MHz | Pass | Inf | 44.33M | 37.931M | 42.24M | 37.931M | 43.34M | 37.981M | 42.13M | 37.931M |
| 7085MHz | Pass | Inf | 43.45M | 37.931M | 42.02M | 37.981M | 42.68M | 38.031M | 43.23M | 37.981M |
| 802.11be EHT80-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 90.86M | 77.461M | 85.36M | 77.461M | 86.02M | 77.661M | 84.48M | 77.461M |
| 6225MHz | Pass | Inf | 80.74M | 78.161M | 80.74M | 78.061M | 90.2M | 77.661M | 83.6M | 77.861M |
| 6385MHz | Pass | Inf | 82.94M | 77.461M | 85.14M | 77.361M | 86.46M | 77.761M | 87.12M | 77.761M |
| 6465MHz | Pass | Inf | 82.94M | 77.461M | 81.62M | 77.361M | 87.34M | 77.961M | 84.7M | 77.761M |
| 6545MHz | Pass | Inf | 89.76M | 77.161M | 83.6M | 77.261M | 86.24M | 77.661M | 87.12M | 77.661M |
| 6625MHz | Pass | Inf | 93.72M | 77.561M | 86.02M | 77.261M | 88.44M | 77.761M | 84.48M | 77.761M |
| 6705MHz | Pass | Inf | 80.74M | 76.962M | 82.06M | 77.461M | 87.12M | 77.761M | 82.28M | 77.761M |
| 6785MHz | Pass | Inf | 87.78M | 77.561M | 86.9M | 77.761M | 86.9M | 77.661M | 87.12M | 77.761M |
| 6865MHz | Pass | Inf | 86.9M | 77.361M | 86.9M | 77.861M | 88.66M | 77.761M | 87.78M | 77.761M |
| 6945MHz | Pass | Inf | 85.8M | 77.661M | 91.3M | 77.861M | 85.8M | 77.561M | 87.12M | 77.661M |
| 7025MHz | Pass | Inf | 88.88M | 77.461M | 89.32M | 77.761M | 88.66M | 77.661M | 85.58M | 77.561M |
| 802.11be EHT160-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 165.44M | 155.522M | 166.32M | 156.322M | 170.28M | 156.722M | 167.64M | 156.722M |
| 6185MHz | Pass | Inf | 171.16M | 157.121M | 169.84M | 157.121M | 170.28M | 156.922M | 166.32M | 156.722M |
| 6345MHz | Pass | Inf | 170.28M | 157.121M | 165.88M | 156.522M | 218.68M | 157.321M | 168.96M | 156.522M |
| 6505MHz | Pass | Inf | 166.76M | 157.721M | 164.12M | 157.121M | 173.8M | 156.922M | 170.72M | 156.722M |
| 6665MHz | Pass | Inf | 166.76M | 157.921M | 166.76M | 157.321M | 170.28M | 157.121M | 170.72M | 157.321M |
| 6825MHz | Pass | Inf | 168.08M | 156.922M | 169.4M | 157.121M | 232.32M | 157.321M | 163.68M | 155.922M |
| 6985MHz | Pass | Inf | 162.8M | 156.122M | 165.44M | 156.522M | 246.84M | 157.121M | 165.88M | 156.722M |
| 802.11be EHT320-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 6105MHz | Pass | Inf | 329.12M | 316.642M | 336.16M | 315.842M | 330.88M | 315.442M | 332.64M | 315.442M |
| 6265MHz | Pass | Inf | 649.44M | 313.443M | 338.8M | 313.843M | 362.56M | 317.041M | 359.04M | 316.242M |
| 6425MHz | Pass | Inf | 506.88M | 312.644M | 509.52M | 317.441M | 481.36M | 317.441M | 333.52M | 315.842M |
| 6585MHz | Pass | Inf | 372.24M | 315.442M | 331.76M | 315.842M | 354.64M | 316.242M | 334.4M | 316.242M |
| 6745MHz | Pass | Inf | 372.24M | 312.644M | 335.28M | 315.842M | 337.04M | 315.842M | 330.88M | 315.842M |
| 6905MHz | Pass | Inf | 322.08M | 316.242M | 329.12M | 316.242M | 336.16M | 315.842M | 330.88M | 314.643M |

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

**5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**5955MHz**

24/05/2024

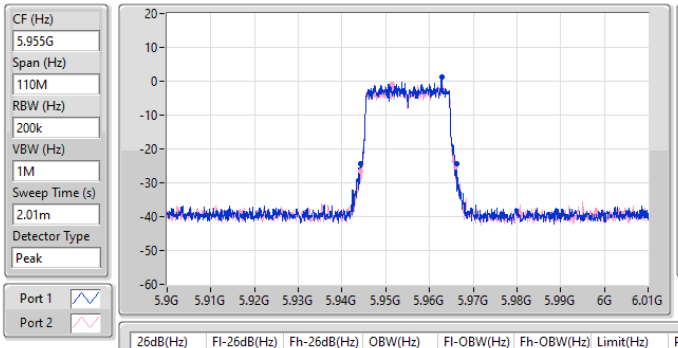


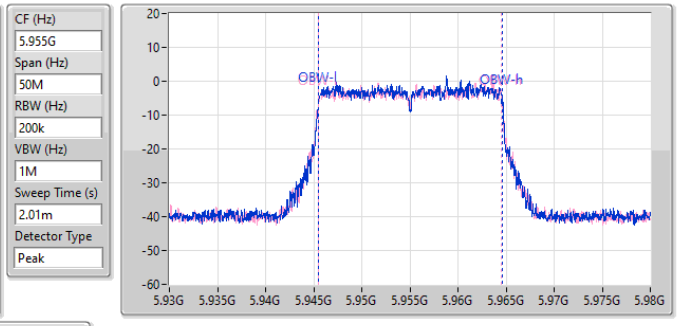


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.945M | 5.94422G | 5.966165G | 19.065M | 5.94553G | 5.964595G | Inf | 1 |
| 21.78M | 5.944275G | 5.966055G | 19.04M | 5.945505G | 5.964545G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6195MHz**

24/05/2024

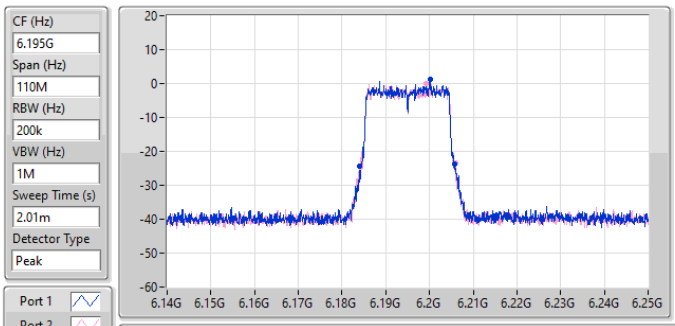


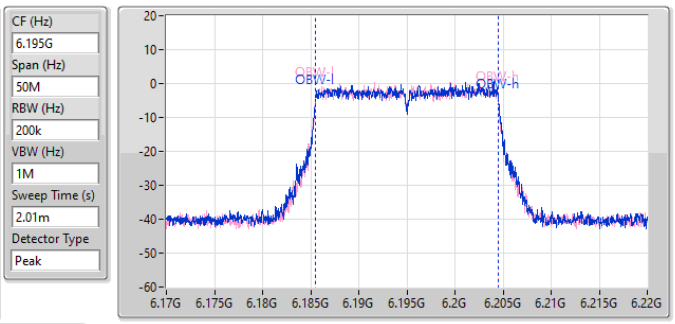


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.78M | 6.184G | 6.20578G | 19.04M | 6.185505G | 6.204545G | Inf | 1 |
| 21.89M | 6.184165G | 6.206055G | 19.015M | 6.185505G | 6.20452G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6415MHz**

24/05/2024

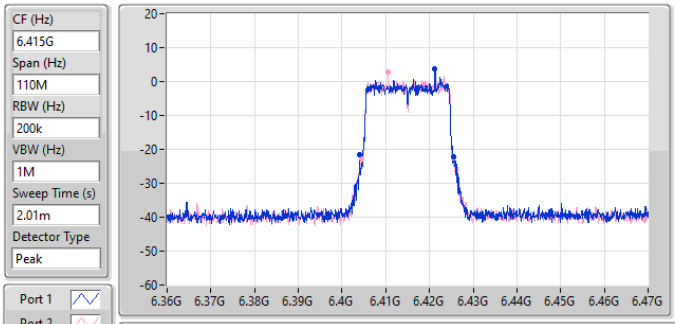


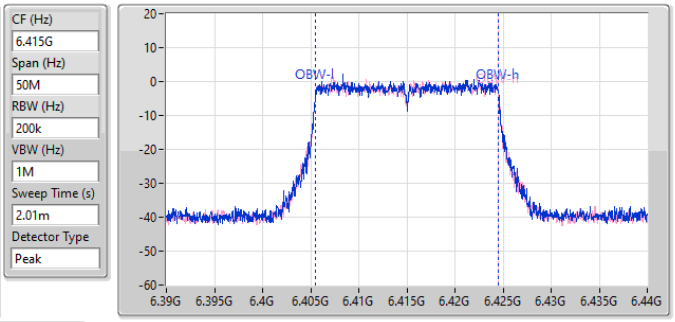


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.615M | 6.403945G | 6.42556G | 19.04M | 6.405505G | 6.424545G | Inf | 1 |
| 20.955M | 6.40455G | 6.425505G | 19.04M | 6.405505G | 6.424545G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6435MHz**

24/05/2024

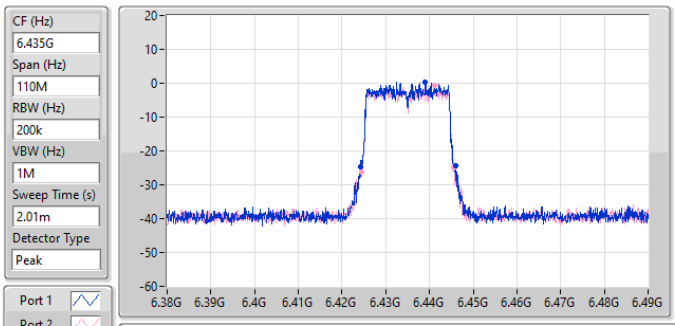


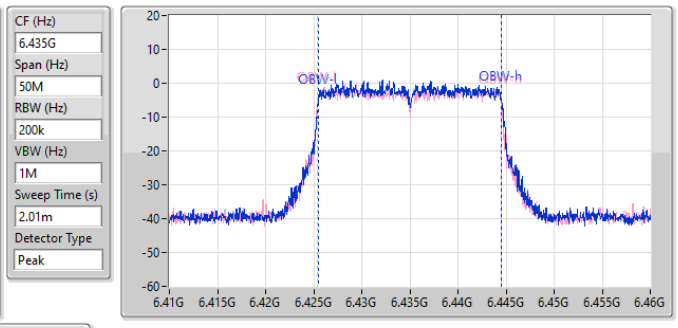


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.615M | 6.424275G | 6.44589G | 19.015M | 6.425505G | 6.44452G | Inf | 1 |
| 21.23M | 6.424385G | 6.445615G | 19.115M | 6.425405G | 6.44452G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6475MHz**

24/05/2024

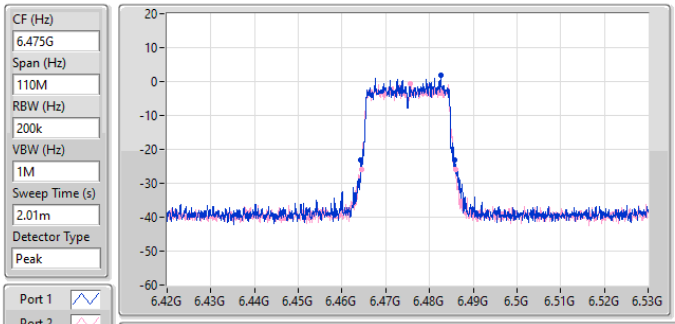


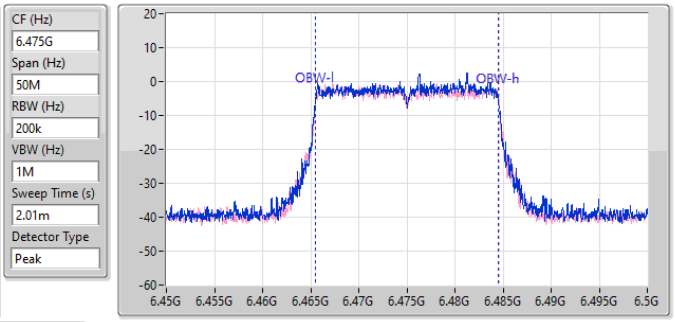


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.45M | 6.46433G | 6.48578G | 18.991M | 6.46553G | 6.48452G | Inf | 1 |
| 21.56M | 6.464385G | 6.485945G | 19.04M | 6.46553G | 6.48457G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6515MHz**

24/05/2024

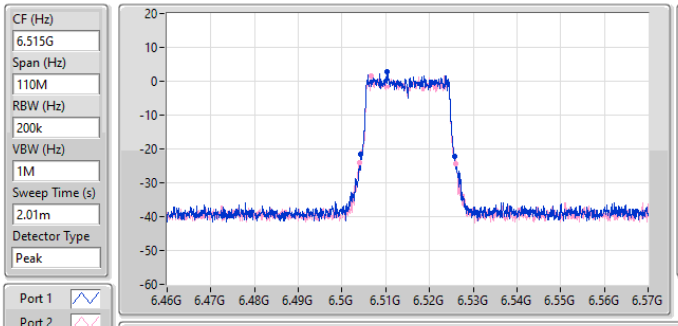


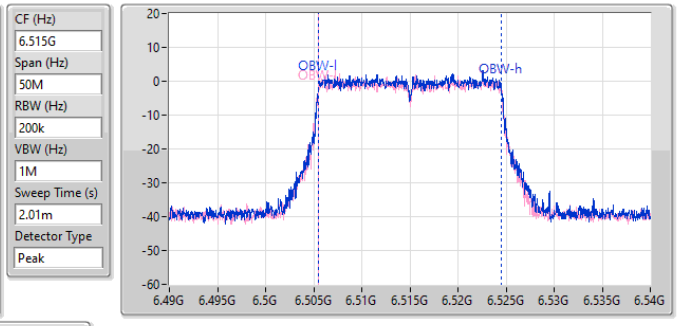


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.505M | 6.504275G | 6.52578G | 19.065M | 6.50548G | 6.524545G | Inf | 1 |
| 21.945M | 6.50411G | 6.526055G | 19.09M | 6.505455G | 6.524545G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6535MHz**

24/05/2024

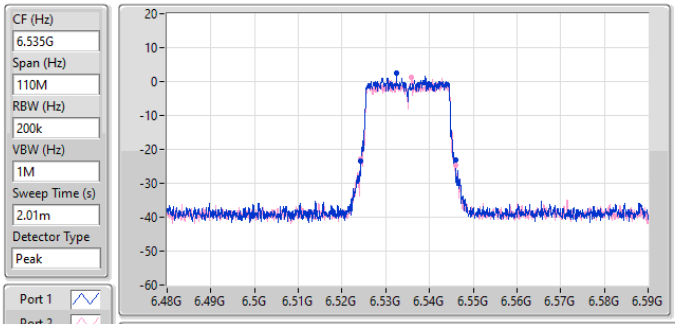


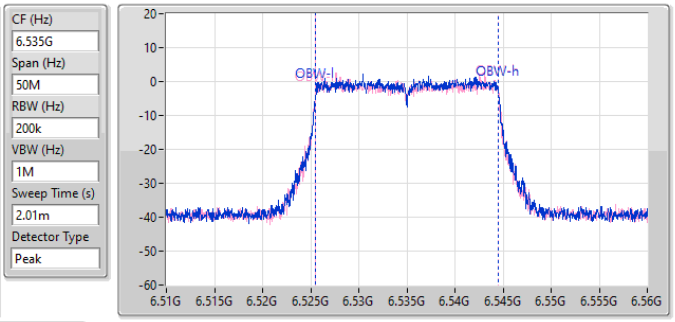


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.56M | 6.52433G | 6.54589G | 18.991M | 6.52553G | 6.54452G | Inf | 1 |
| 21.725M | 6.52433G | 6.546055G | 19.065M | 6.52548G | 6.544545G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6695MHz**

24/05/2024

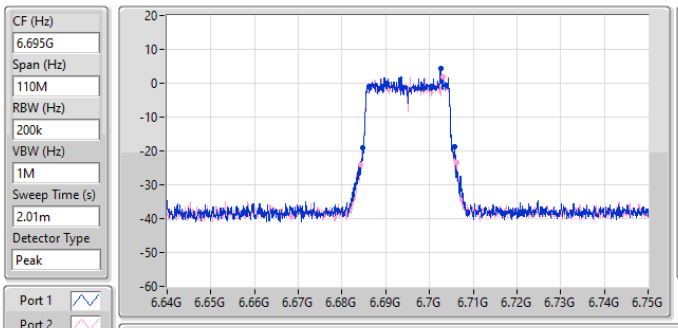


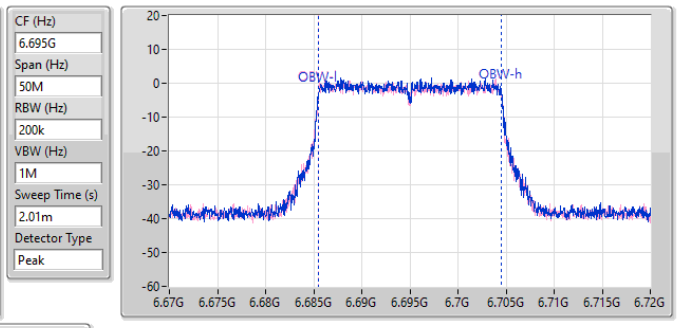


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.065M | 6.68477G | 6.705835G | 19.065M | 6.68548G | 6.704545G | Inf | 1 |
| 21.945M | 6.68433G | 6.706275G | 19.04M | 6.68548G | 6.70452G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6875MHz**

24/05/2024

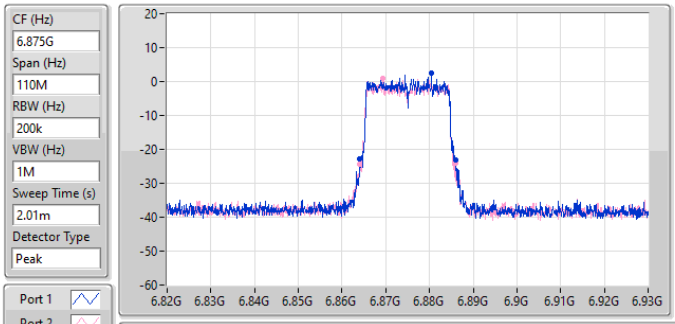


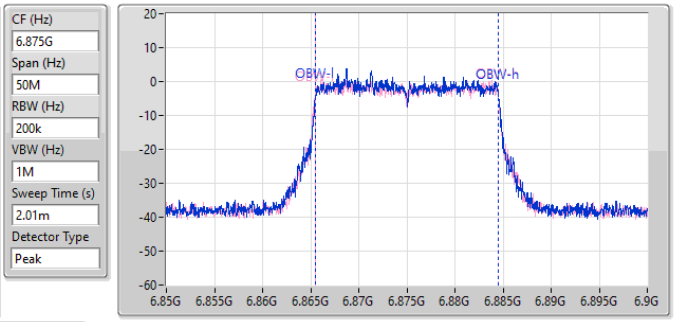


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.78M | 6.86411G | 6.88589G | 19.015M | 6.865505G | 6.88452G | Inf | 1 |
| 21.945M | 6.864G | 6.885945G | 19.065M | 6.865455G | 6.88452G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6895MHz**

24/05/2024

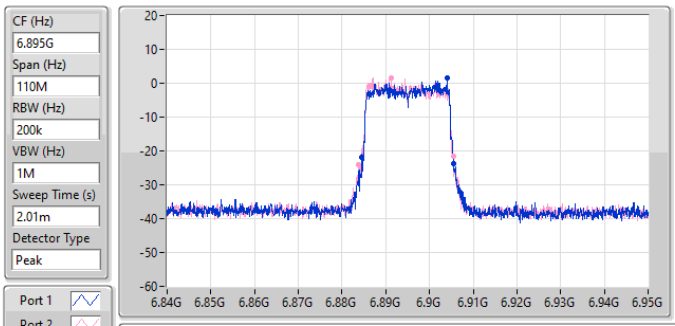


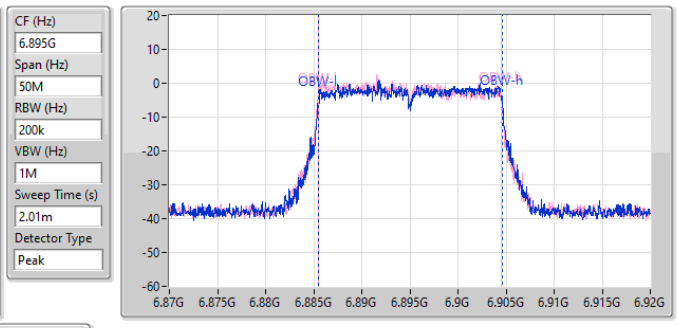


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.01M | 6.884495G | 6.905505G | 19.09M | 6.885505G | 6.904595G | Inf | 1 |
| 21.67M | 6.88378G | 6.90545G | 19.04M | 6.885455G | 6.904495G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**6995MHz**

24/05/2024

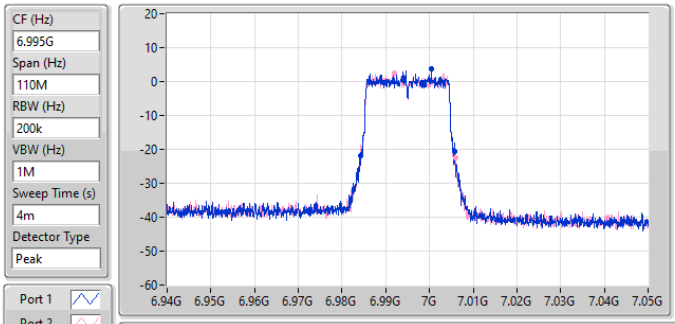


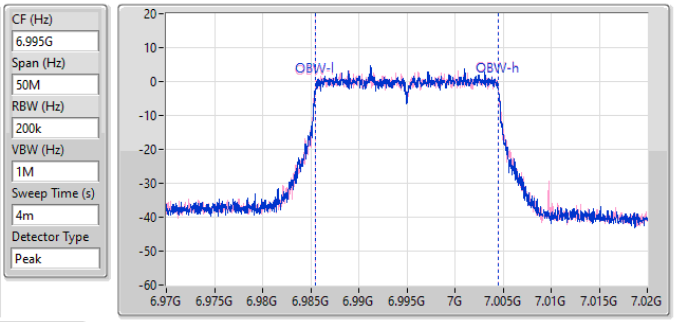


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.45M | 6.98433G | 7.00578G | 19.04M | 6.98548G | 7.00452G | Inf | 1 |
| 21.725M | 6.984165G | 7.00589G | 19.04M | 6.98548G | 7.00452G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**7095MHz**

24/05/2024

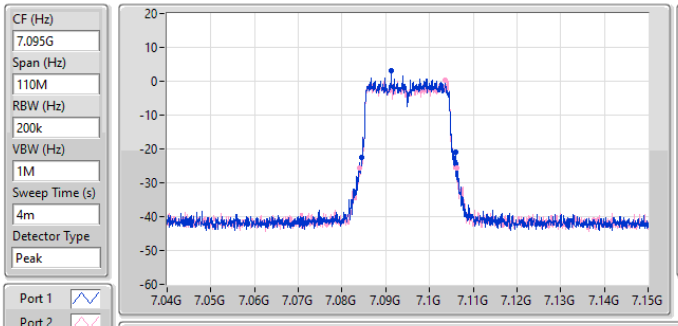


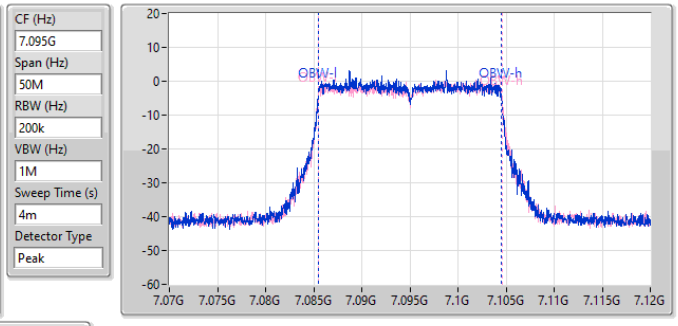


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.505M | 7.08444G | 7.105945G | 18.991M | 7.085505G | 7.104495G | Inf | 1 |
| 22.165M | 7.084G | 7.106165G | 19.09M | 7.08548G | 7.10457G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX** **EBW**

**7115MHz**

24/05/2024

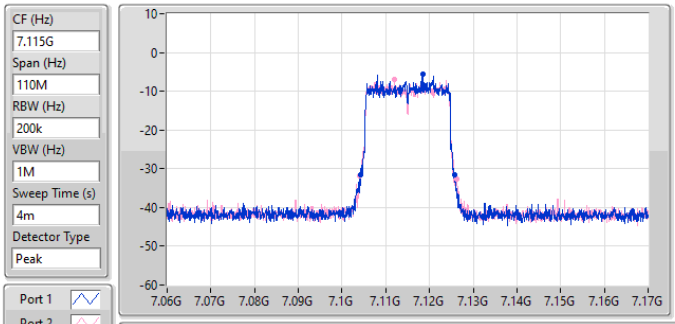


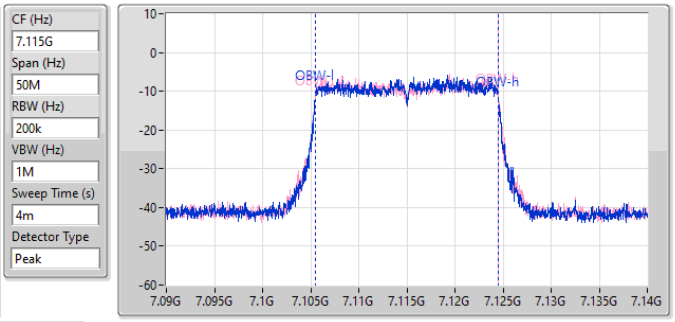


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 21.56M | 7.10422G | 7.12578G | 19.04M | 7.10548G | 7.12452G | Inf | 1 |
| 22.22M | 7.10411G | 7.12633G | 19.09M | 7.105455G | 7.124545G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**5965MHz**

24/05/2024

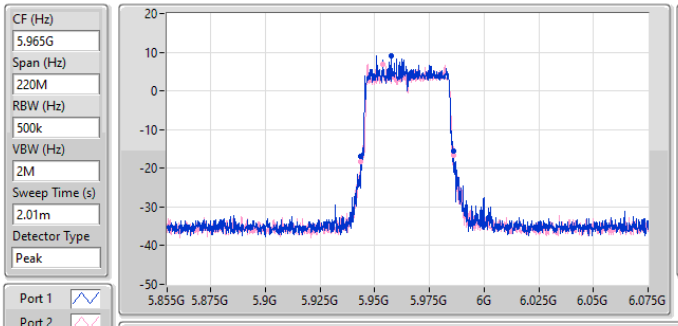


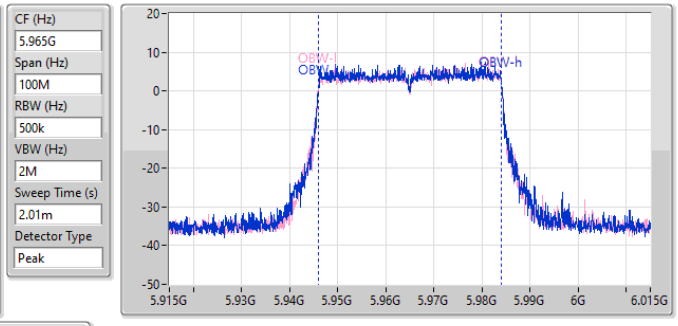


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.24M | 5.94366G | 5.9859G | 37.981M | 5.946059G | 5.98404G | Inf | 1 |
| 42.68M | 5.94355G | 5.98623G | 38.031M | 5.946009G | 5.98404G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6205MHz**

24/05/2024

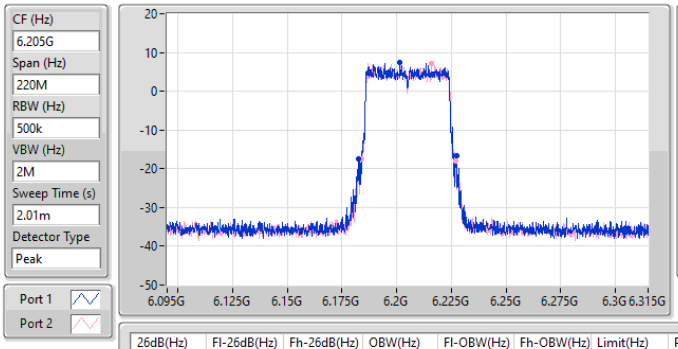


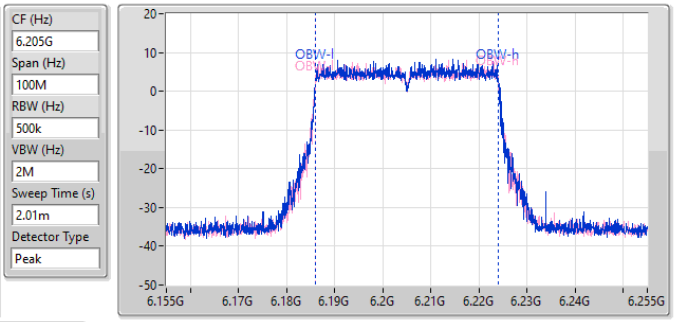


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.99M | 6.18234G | 6.22733G | 37.981M | 6.186059G | 6.22404G | Inf | 1 |
| 43.34M | 6.18377G | 6.22711G | 37.981M | 6.186009G | 6.223991G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6405MHz**

24/05/2024

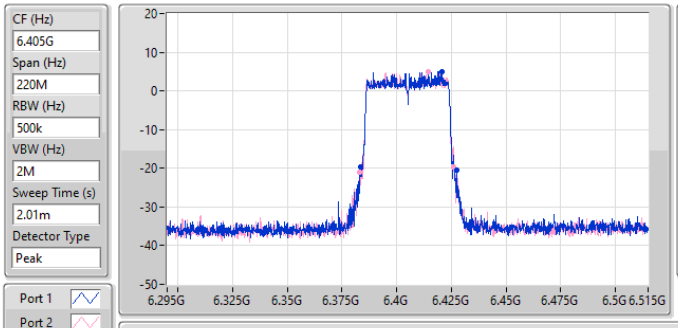


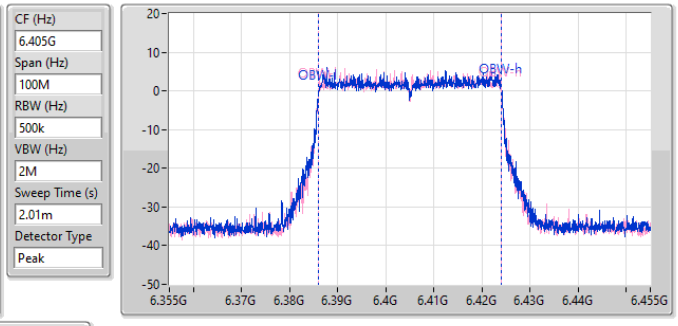


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.78M | 6.38366G | 6.42744G | 38.031M | 6.386009G | 6.42404G | Inf | 1 |
| 43.23M | 6.383G | 6.42623G | 38.081M | 6.386009G | 6.42409G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6445MHz**

24/05/2024

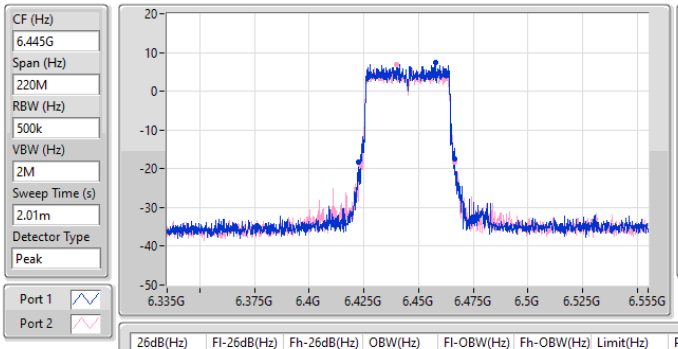


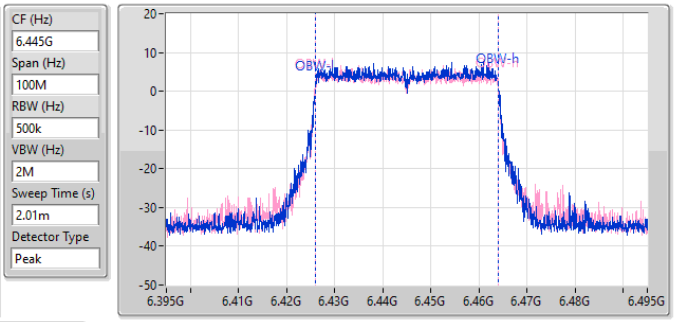


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.11M | 6.42245G | 6.46656G | 37.931M | 6.426059G | 6.463991G | Inf | 1 |
| 42.9M | 6.42344G | 6.46634G | 38.031M | 6.42596G | 6.463991G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6485MHz**

24/05/2024

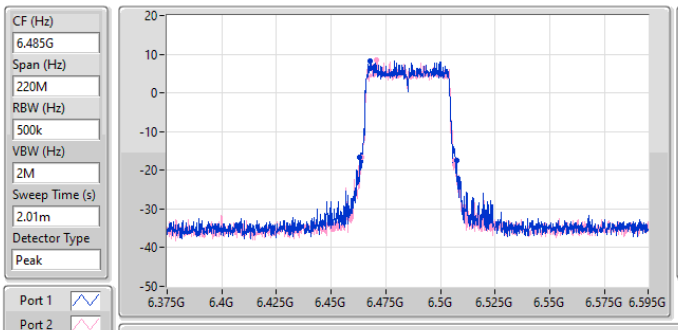


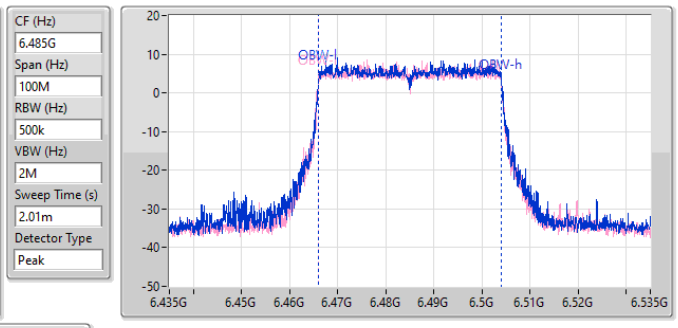


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.44M | 6.46289G | 6.50733G | 37.981M | 6.466059G | 6.50404G | Inf | 1 |
| 42.79M | 6.46377G | 6.50656G | 37.981M | 6.466009G | 6.503991G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6525MHz**

24/05/2024

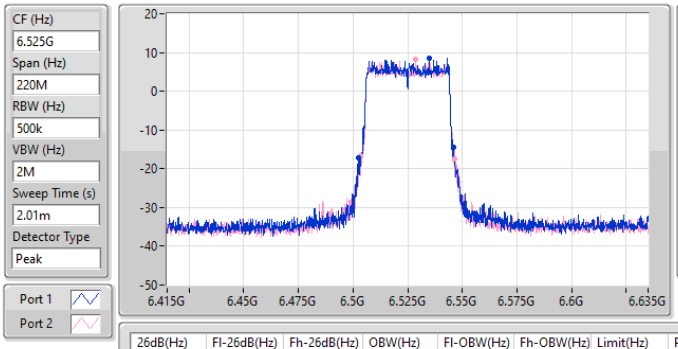


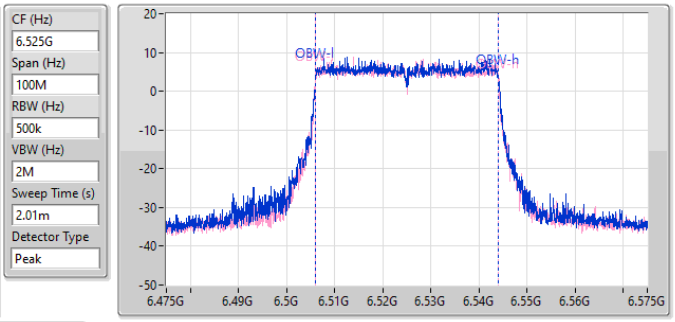


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.50267G | 6.54612G | 37.981M | 6.506059G | 6.54404G | Inf | 1 |
| 43.23M | 6.50333G | 6.54656G | 38.081M | 6.50596G | 6.54404G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6565MHz**

24/05/2024

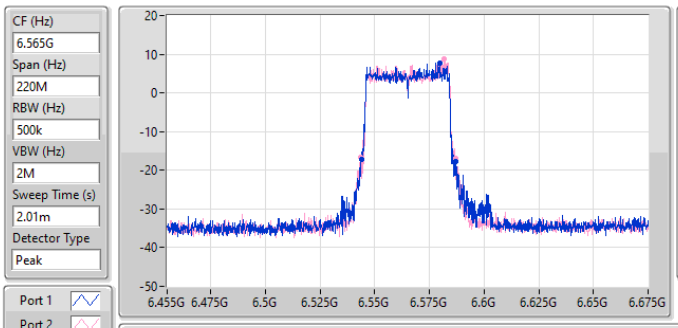


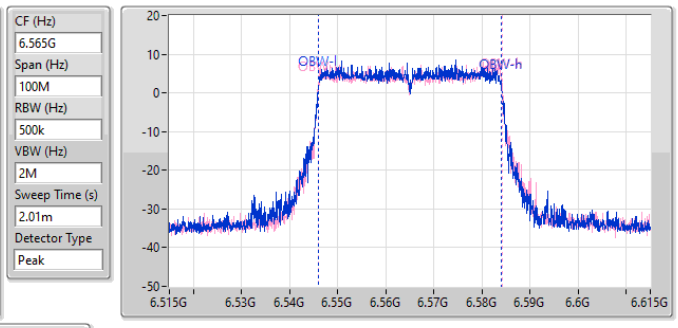


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.45M | 6.54377G | 6.58722G | 37.981M | 6.546009G | 6.583991G | Inf | 1 |
| 43.56M | 6.54344G | 6.587G | 38.131M | 6.546009G | 6.58414G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6685MHz**

24/05/2024

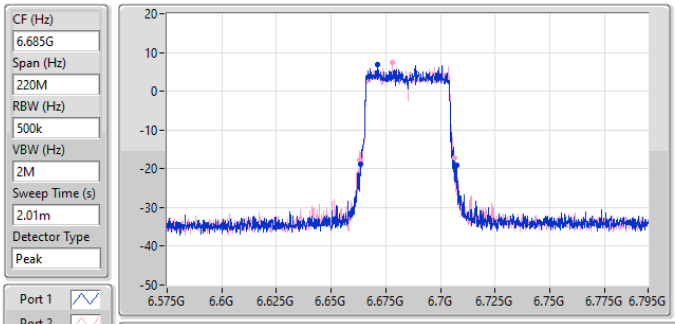


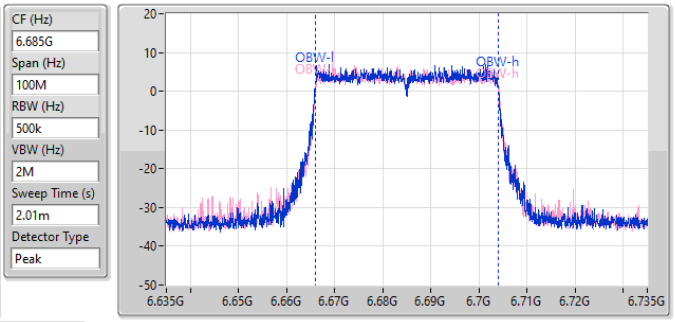


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 43.78M | 6.66355G | 6.70733G | 38.031M | 6.66596G | 6.703991G | Inf | 1 |
| 43.23M | 6.66311G | 6.70634G | 38.031M | 6.666059G | 6.70409G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6885MHz**

24/05/2024

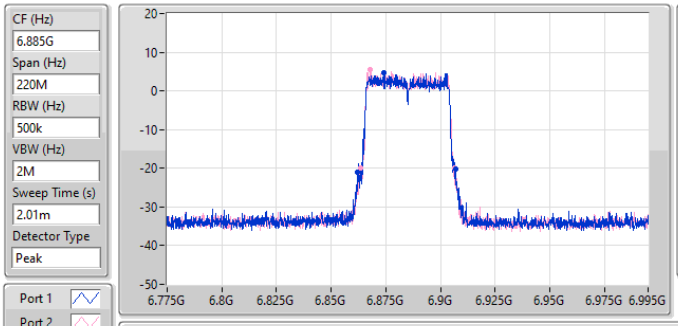


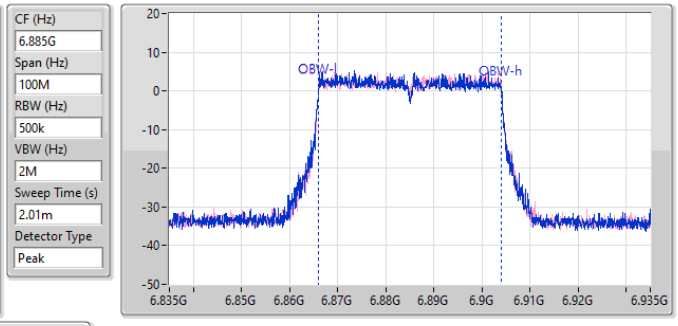


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.77M | 6.86212G | 6.90689G | 38.081M | 6.86596G | 6.90404G | Inf | 1 |
| 43.12M | 6.86344G | 6.90656G | 37.981M | 6.866009G | 6.903991G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**6925MHz**

24/05/2024

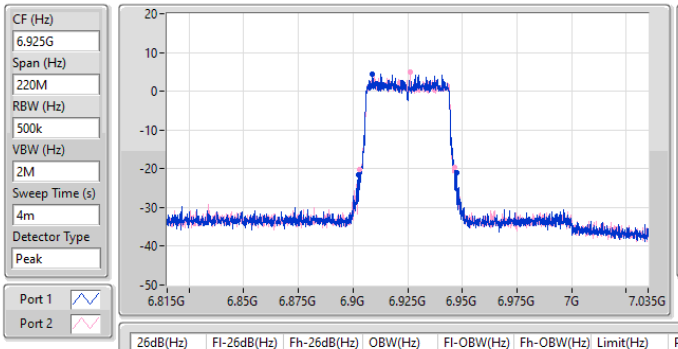


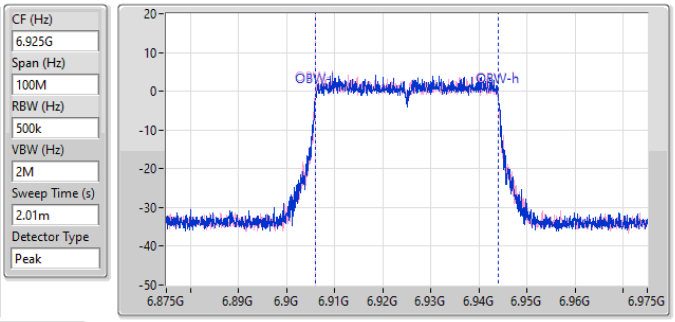


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 44.66M | 6.90267G | 6.94733G | 38.081M | 6.90596G | 6.94404G | Inf | 1 |
| 43.67M | 6.903G | 6.94667G | 37.981M | 6.906009G | 6.943991G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**7005MHz**

24/05/2024

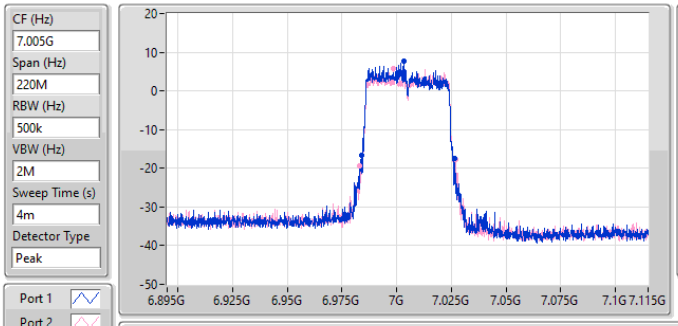


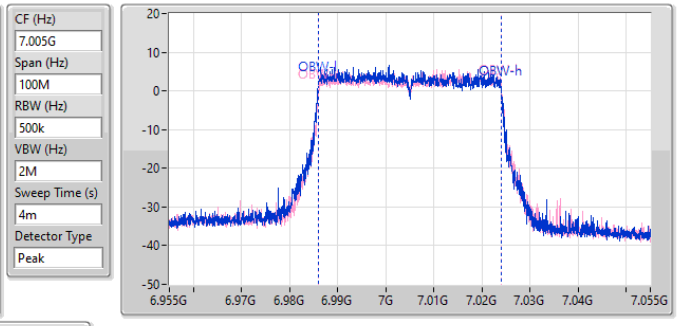


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.79M | 6.98377G | 7.02656G | 38.031M | 6.98591G | 7.023941G | Inf | 1 |
| 43.89M | 6.98289G | 7.02678G | 37.981M | 6.986059G | 7.02404G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX** **EBW**

**7085MHz**

24/05/2024

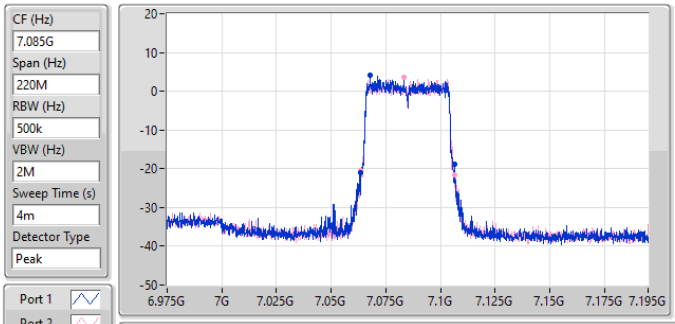


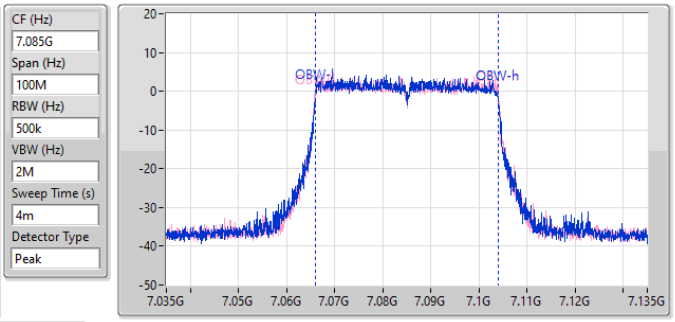


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 42.9M | 7.06366G | 7.10656G | 37.931M | 7.066009G | 7.103941G | Inf | 1 |
| 43.01M | 7.06344G | 7.10645G | 38.131M | 7.06591G | 7.10404G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**5985MHz**

24/05/2024

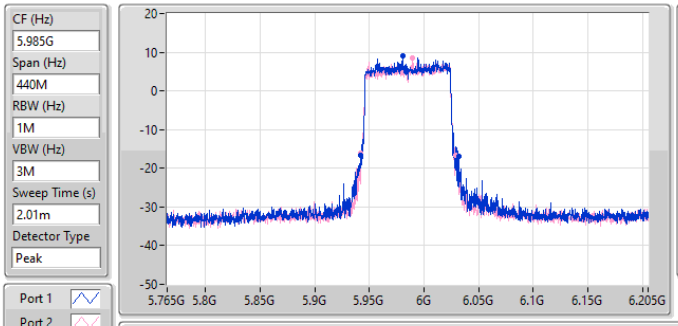


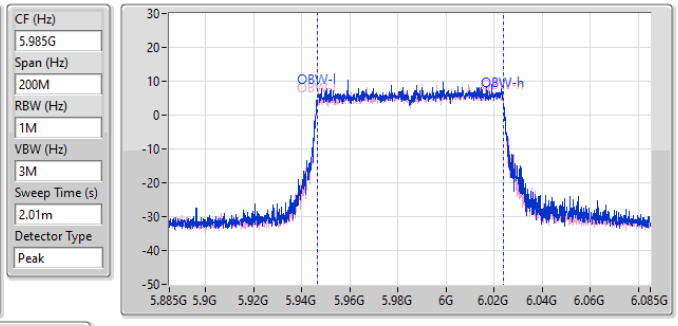


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.76M | 5.94232G | 6.03208G | 77.561M | 5.946319G | 6.023881G | Inf | 1 |
| 87.34M | 5.9421G | 6.02944G | 77.661M | 5.946319G | 6.023981G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6225MHz**

24/05/2024

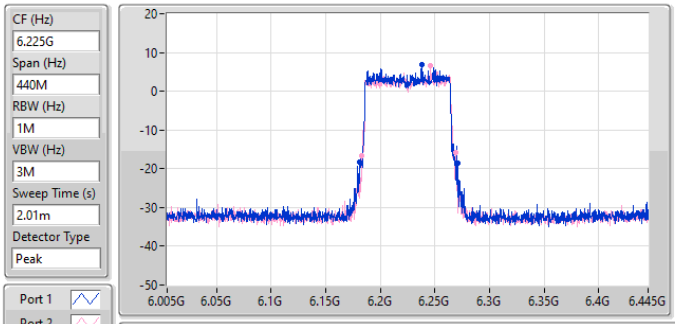


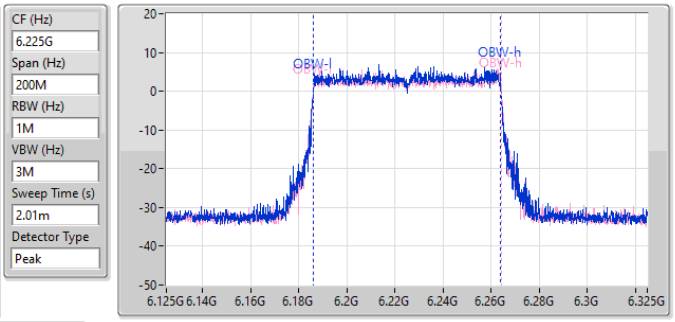


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.32M | 6.18122G | 6.27054G | 77.761M | 6.186219G | 6.263981G | Inf | 1 |
| 86.46M | 6.18298G | 6.26944G | 78.061M | 6.186219G | 6.26428G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6385MHz**

24/05/2024

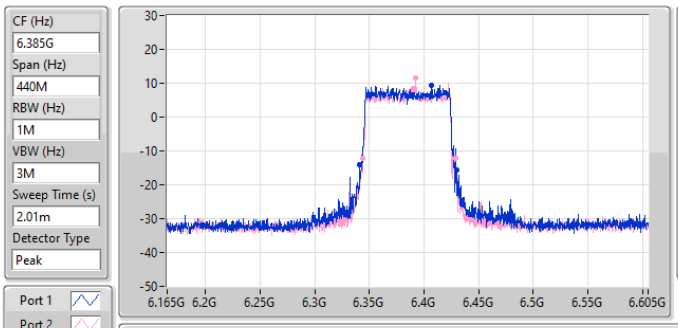


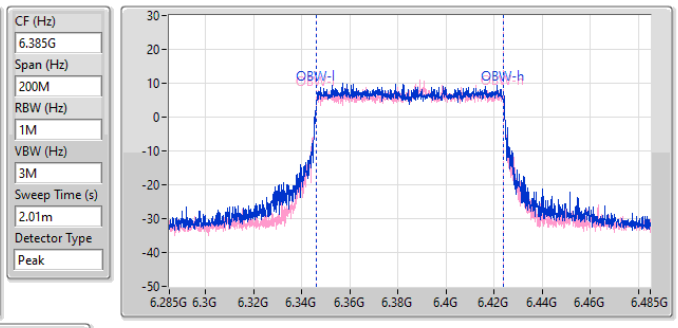


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.66M | 6.34122G | 6.42988G | 77.861M | 6.346219G | 6.42408G | Inf | 1 |
| 85.36M | 6.34342G | 6.42878G | 77.661M | 6.346219G | 6.423881G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6465MHz**

24/05/2024

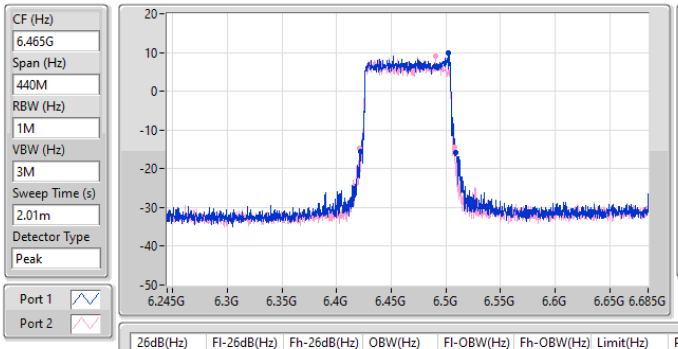


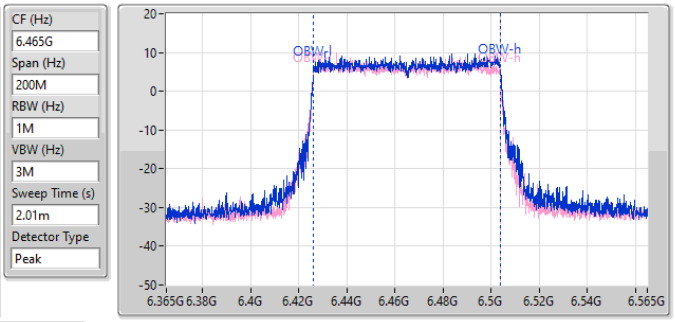


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 87.78M | 6.42166G | 6.50944G | 77.761M | 6.426219G | 6.503981G | Inf | 1 |
| 86.46M | 6.42122G | 6.50768G | 77.761M | 6.426119G | 6.503881G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6545MHz**

24/05/2024

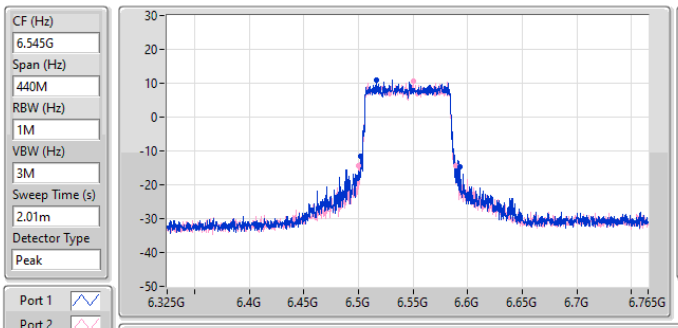


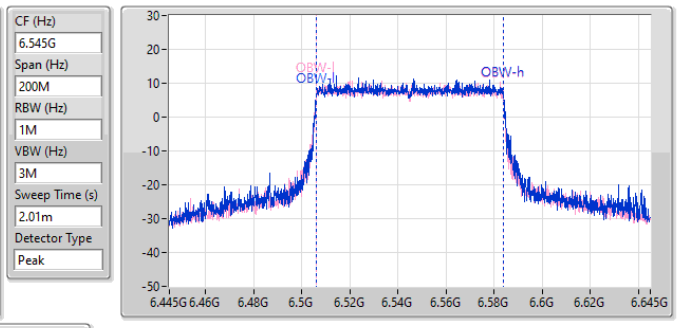


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 91.3M | 6.50188G | 6.59318G | 77.861M | 6.506119G | 6.583981G | Inf | 1 |
| 89.32M | 6.4999G | 6.58922G | 77.861M | 6.506119G | 6.583981G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6625MHz**

24/05/2024

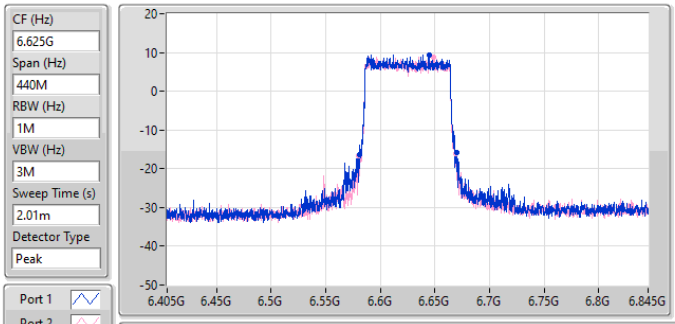


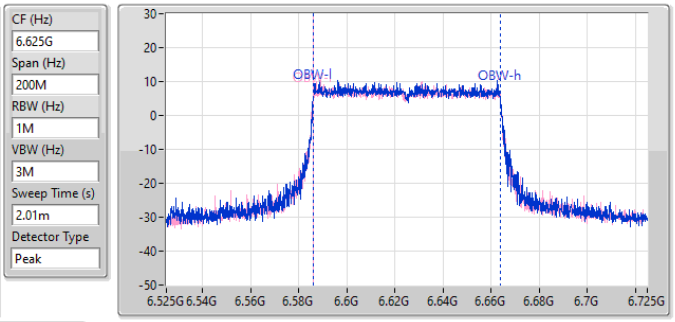


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 89.1M | 6.58056G | 6.66966G | 77.761M | 6.586119G | 6.663881G | Inf | 1 |
| 89.54M | 6.57968G | 6.66922G | 77.661M | 6.586219G | 6.663881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6705MHz**

24/05/2024

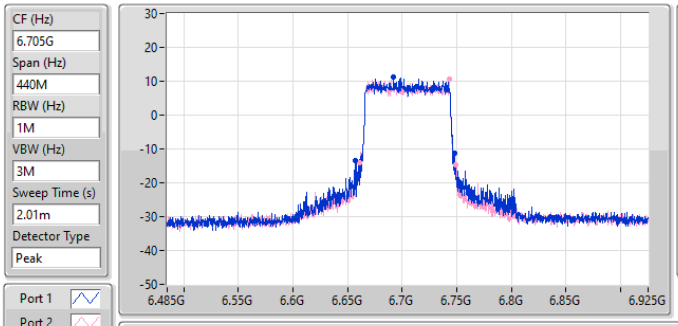


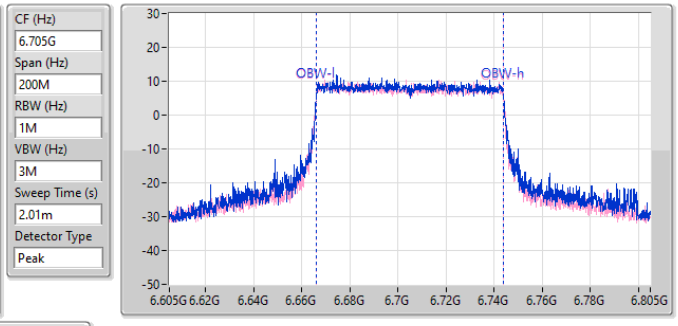


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 90.2M | 6.65748G | 6.74768G | 77.761M | 6.666119G | 6.743881G | Inf | 1 |
| 87.34M | 6.66122G | 6.74856G | 77.661M | 6.666219G | 6.743881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6785MHz**

24/05/2024

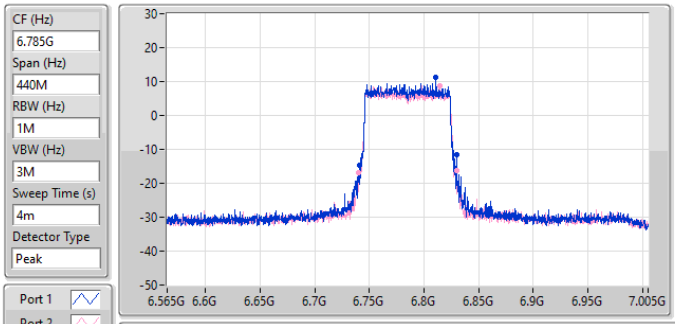


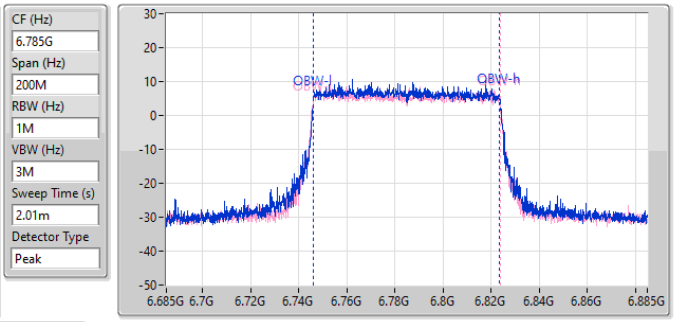


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.88M | 6.74122G | 6.8301G | 77.461M | 6.746219G | 6.823681G | Inf | 1 |
| 89.54M | 6.74012G | 6.82966G | 77.861M | 6.746019G | 6.823881G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6865MHz**

24/05/2024

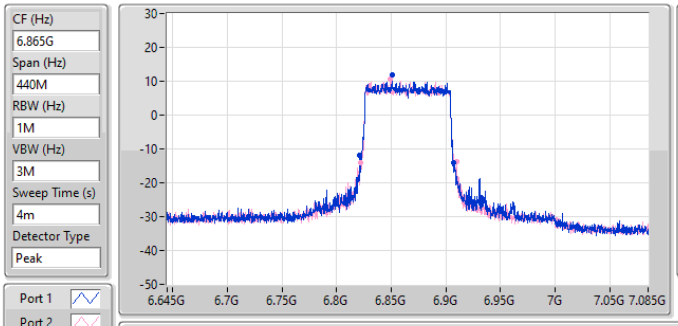


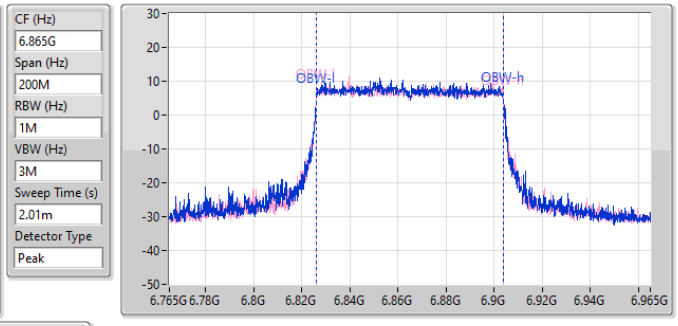


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 85.58M | 6.82144G | 6.90702G | 77.661M | 6.826219G | 6.903881G | Inf | 1 |
| 87.56M | 6.82232G | 6.90988G | 77.661M | 6.826219G | 6.903881G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**6945MHz**

24/05/2024

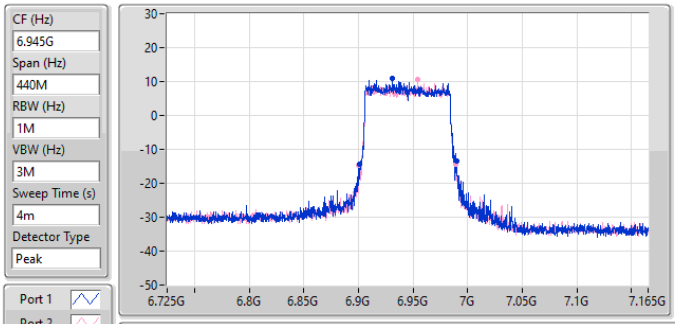


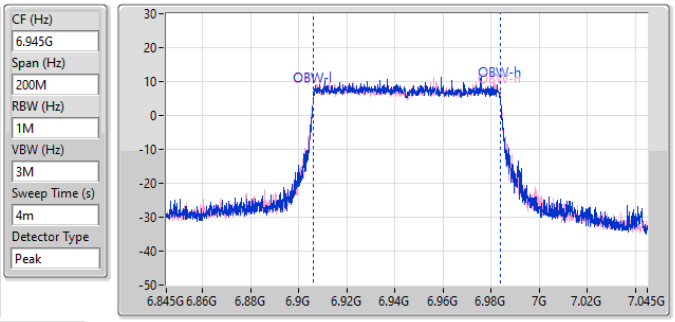


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 88.88M | 6.901G | 6.98988G | 77.761M | 6.906119G | 6.983881G | Inf | 1 |
| 89.54M | 6.8999G | 6.98944G | 77.761M | 6.906119G | 6.983881G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX** **EBW**

**7025MHz**

24/05/2024

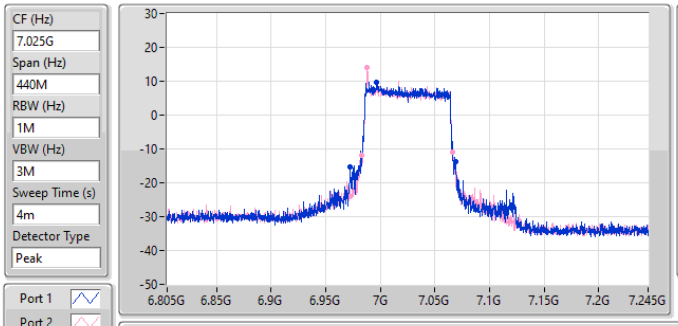


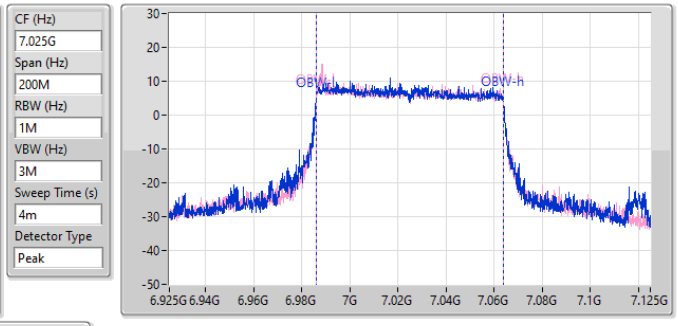


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 96.36M | 6.97242G | 7.06878G | 77.761M | 6.986019G | 7.063781G | Inf | 1 |
| 83.38M | 6.9832G | 7.06658G | 77.661M | 6.986119G | 7.063781G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6025MHz**

24/05/2024

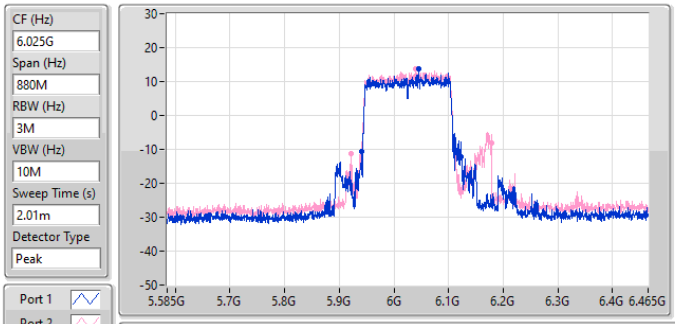


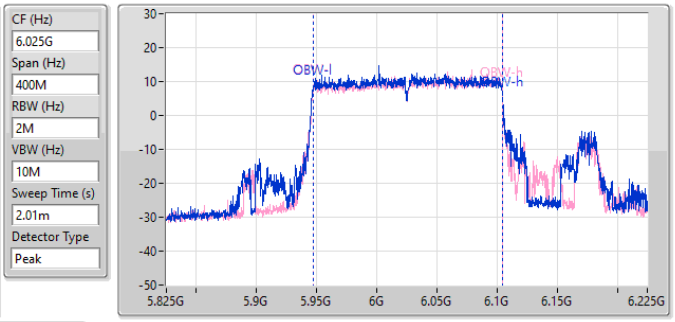


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 183.04M | 5.94052G | 6.12356G | 157.921M | 5.946839G | 6.10476G | Inf | 1 |
| 257.84M | 5.92116G | 6.179G | 157.521M | 5.946839G | 6.10436G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6185MHz**

24/05/2024

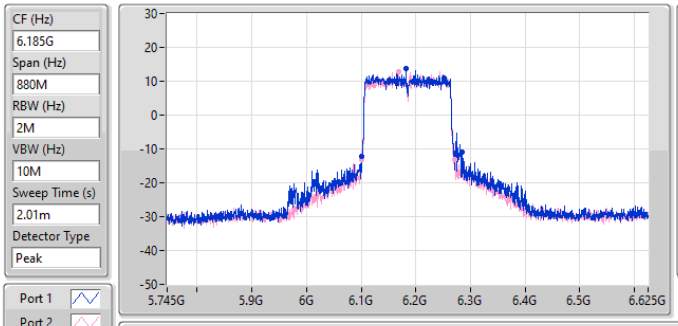


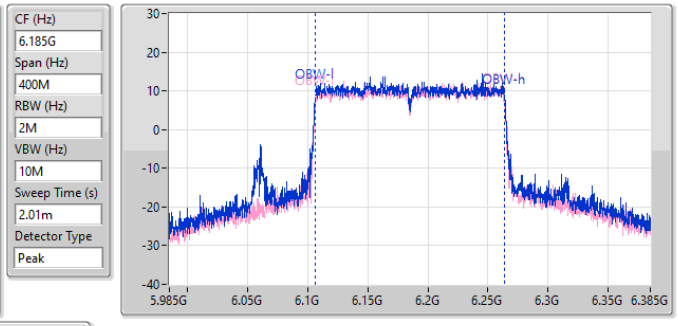


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 183.04M | 6.10096G | 6.284G | 157.521M | 6.106239G | 6.263761G | Inf | 1 |
| 171.16M | 6.10052G | 6.27168G | 157.121M | 6.106639G | 6.263761G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6345MHz**

24/05/2024

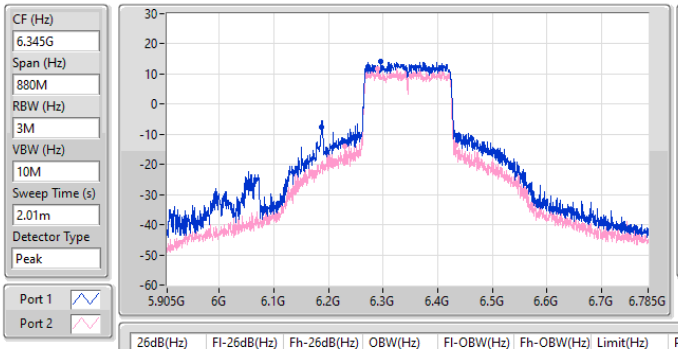


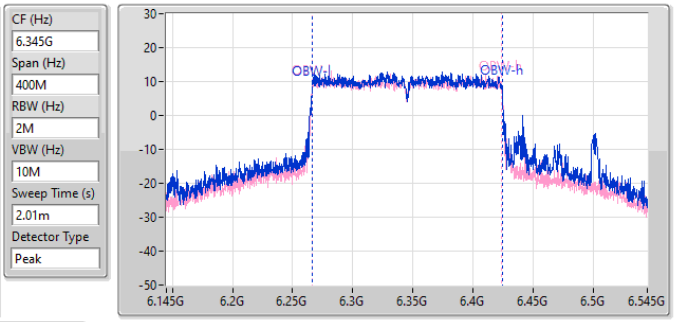


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 276.32M | 6.1866G | 6.46292G | 157.921M | 6.266439G | 6.42436G | Inf | 1 |
| 201.96M | 6.2306G | 6.43256G | 157.321M | 6.266439G | 6.423761G | Inf | 2 |

**6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6505MHz**

24/05/2024

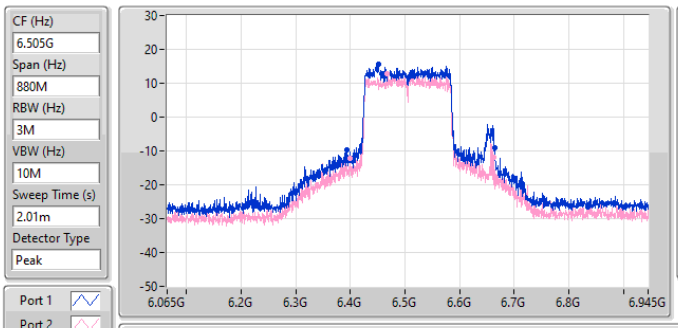


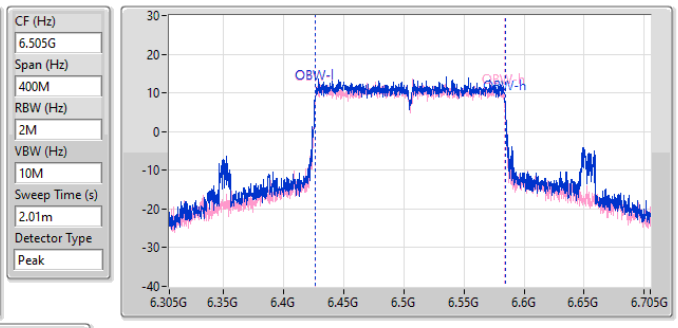


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 271.04M | 6.39368G | 6.66472G | 158.121M | 6.426239G | 6.58436G | Inf | 1 |
| 263.12M | 6.3994G | 6.66252G | 157.521M | 6.426239G | 6.583761G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6665MHz**

24/05/2024

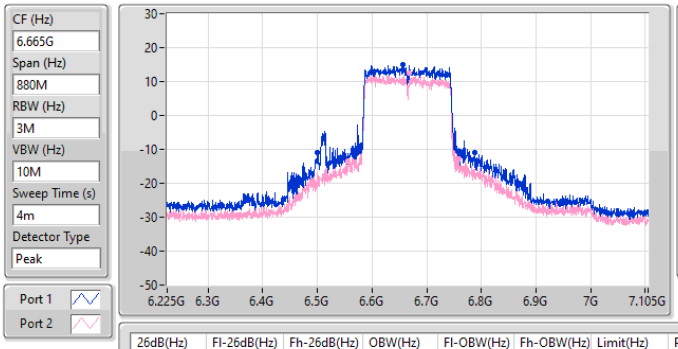


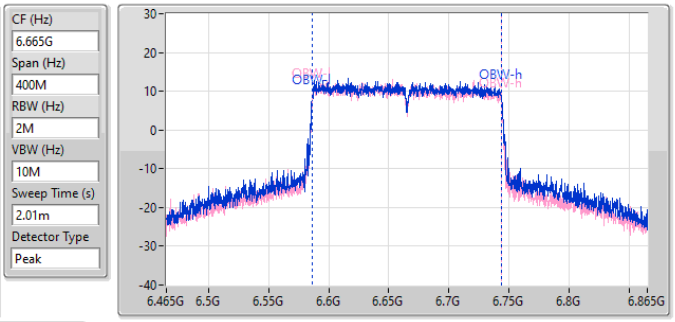


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 288.2M | 6.5G | 6.7882G | 157.521M | 6.586239G | 6.743761G | Inf | 1 |
| 203.28M | 6.55544G | 6.75872G | 157.321M | 6.586239G | 6.743561G | Inf | 2 |

**6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6825MHz**

24/05/2024

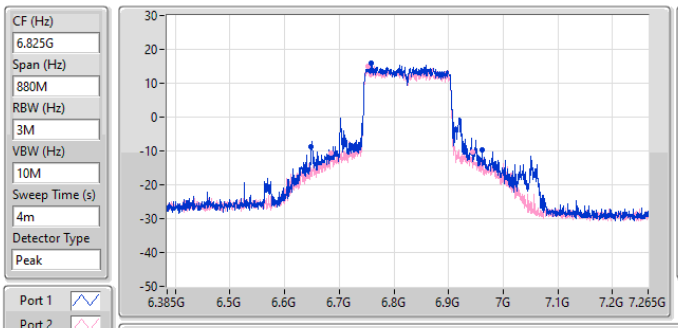


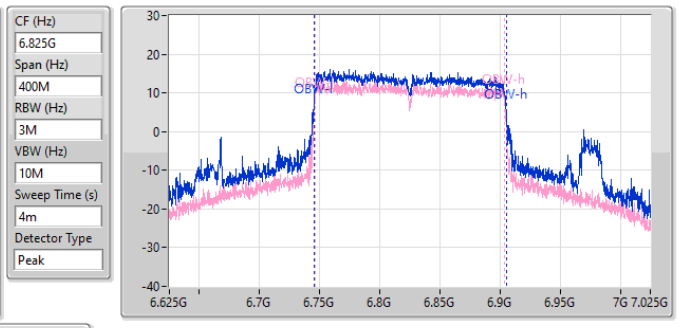


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 312.4M | 6.64856G | 6.96096G | 160.32M | 6.74504G | 6.90536G | Inf | 1 |
| 260.48M | 6.6842G | 6.94468G | 157.521M | 6.746039G | 6.903561G | Inf | 2 |

**6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX** **EBW**

**6985MHz**

24/05/2024

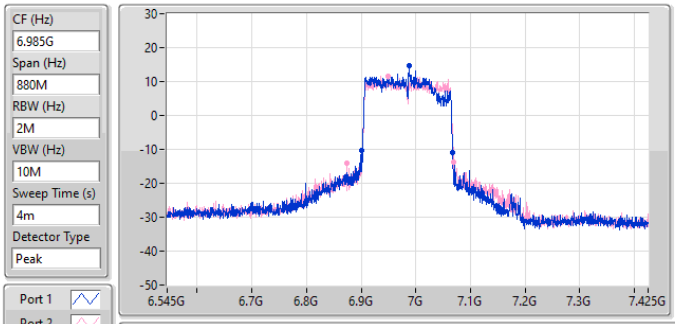


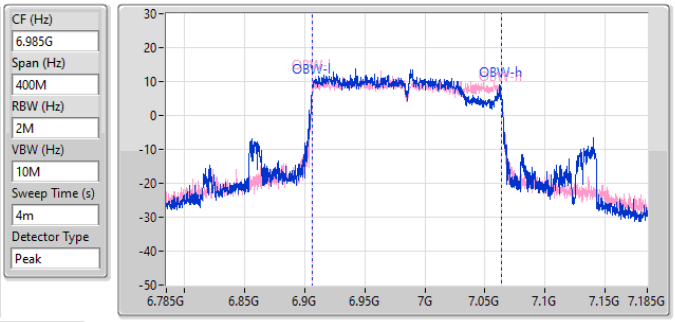


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 166.32M | 6.9014G | 7.06772G | 157.321M | 6.906039G | 7.063361G | Inf | 1 |
| 195.8M | 6.87412G | 7.06992G | 156.922M | 6.906439G | 7.063361G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX** **EBW**

**6105MHz**

24/05/2024

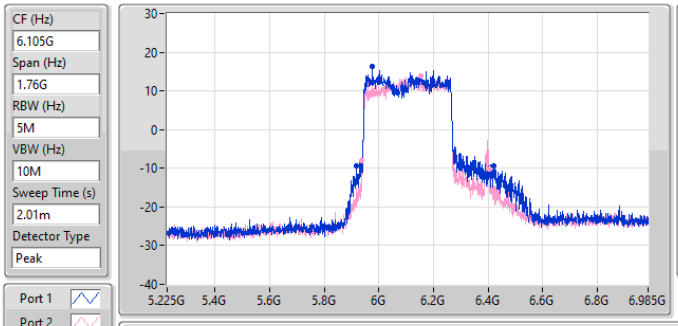


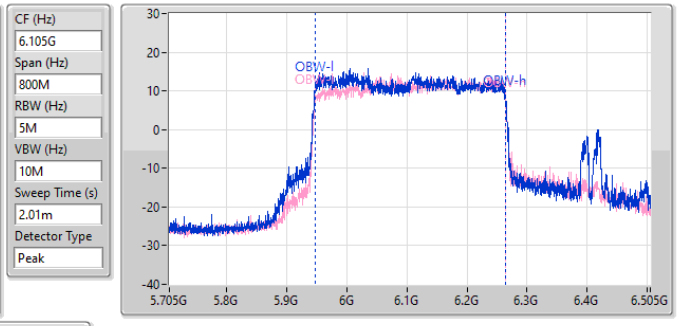


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 504.24M | 5.91668G | 6.42092G | 317.841M | 5.947079G | 6.26492G | Inf | 1 |
| 466.4M | 5.9378G | 6.4042G | 315.842M | 5.948278G | 6.26412G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX** **EBW**

**6265MHz**

24/05/2024

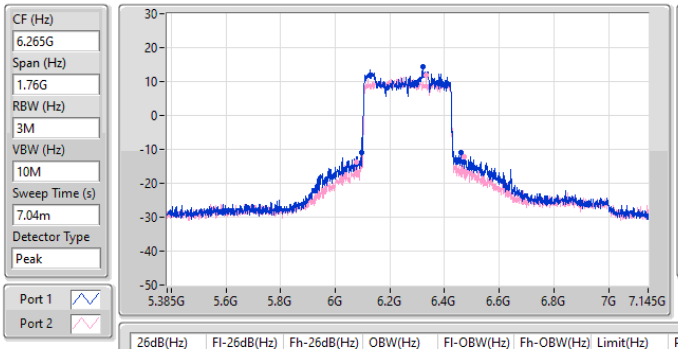


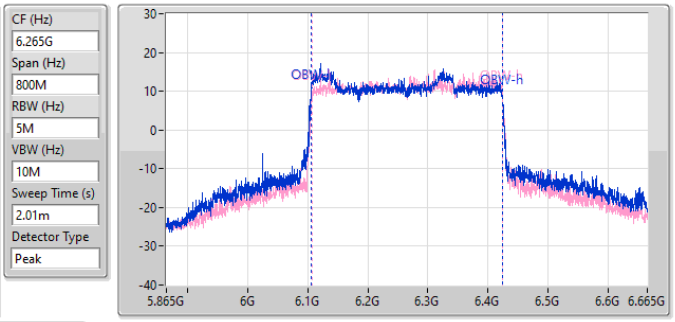


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 361.68M | 6.09692G | 6.4586G | 318.241M | 6.10548G | 6.423721G | Inf | 1 |
| 392.48M | 6.07844G | 6.47092G | 316.242M | 6.107479G | 6.423721G | Inf | 2 |

**5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX** **EBW**

**6425MHz**

24/05/2024

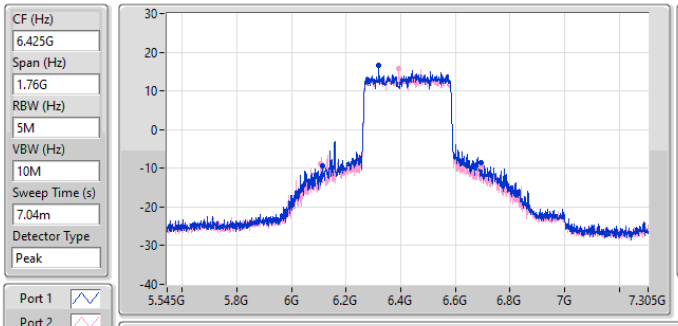


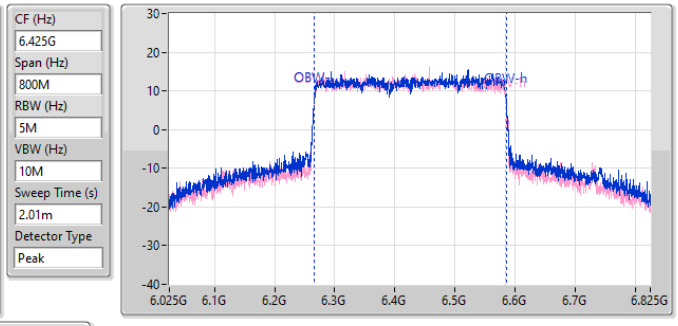


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|---|---|---|---|---|---|---|---|
| 579.92M | 6.11348G | 6.6934G | 319.44M | 6.26588G | 6.58532G | Inf | 1 |
| 588.72M | 6.10644G | 6.69516G | 318.241M | 6.26588G | 6.58412G | Inf | 2 |