

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (DTS), subpart B, Class B,
RSS-247 Issue 3:2023, RSS-Gen Issue 5, ICES-003 Issue 7:2020

FOR:

ARAD TECHNOLOGIES

Digital water meter

Models:

AT98-7-23-17-S-5-N, AT98-7-2-11-S-5-N,

AT98-7-2-25-S-5-N, AT98-7-22-5-P-5-N

AT98-7-21-5-P-5-N, AT98-7-1-13-P-5-N

AT98-7-22-5-OM-5-N, AT98-7-21-5-OM-5-N

AT98-7-1-13-OM-5-N

FCC ID: 2A7AA-SON2ENCODR

IC: 28664- SON2ENCODR

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	EUT Test configuration.....	5
6.3	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements.....	7
7.1	Minimum 6 dB and 99% bandwidth	7
7.2	Peak output power at AT98-7-23-17-S-5-N, AT98-7-2-11-S-5-N, AT98-7-2-25-S-5-N.....	11
7.3	Peak output power at AT98-7-22-5-P-5-N, AT98-7-21-5-P-5-N, AT98-7-1-13-P-5-N, AT98-7-22-5-OM-5-N, AT98-7-21-5-OM-5-N, AT98-7-1-13-OM-5-N	20
7.4	Field strength of spurious emissions	36
7.5	Field strength of spurious emissions AT98-7-22-5-OM-5-N	55
7.6	Band edge radiated emissions	74
7.7	Band edge radiated emissions AT98-7-22-5-OM-5-N	77
7.8	Peak spectral power density	80
7.9	Antenna requirements.....	85
8	Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements.....	86
8.1	Radiated emission measurements	86
8.2	Radiated emission measurements AT98-7-22-5-OM-5-N	90
9	APPENDIX A Test equipment and ancillaries used for tests.....	94
10	APPENDIX B Test equipment correction factors.....	95
11	APPENDIX C Measurement uncertainties	97
12	APPENDIX D Test laboratory description	98
13	APPENDIX E Specification references.....	99
14	APPENDIX F Abbreviations and acronyms.....	100
15	APPENDIX G Manufacturer's declaration	101

1 Applicant information

Client name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222, Ext: 271
Fax: 04-9935227
E-mail: viorel.negreanu@aradtec.com
Contact name: Mr. Vily Negreanu

2 Equipment under test attributes

Product name: Digital water meter
Product type: Transceiver
AT98-7-23-17-S-5-N
AT98-7-2-11-S-5-N
AT98-7-2-25-S-5-N
AT98-7-22-5-P-5-N
Model(s): AT98-7-21-5-P-5-N
AT98-7-1-13-P-5-N
AT98-7-22-5-OM-5-N
AT98-7-21-5-OM-5-N
AT98-7-1-13-OM-5-N
Serial number: 80E12687F48C
Hardware version: 00E
Software release: 98.1.7.5
Receipt date 18-Sep-25

3 Manufacturer information

Manufacturer name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222, Ext: 271
Fax: 04-9935227
E-Mail: viorel.negreanu@aradtec.com
Contact name: Mr. Vily Negreanu

4 Test details


Project ID: 57006
Location: Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel
Test started: 11-Jun-25
Test completed: 22-Dec-25
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS), subpart B, Class B, RSS-247 Issue 3:2023, RSS-Gen Issue 5, ICES-003 Issue 7:2020

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass*
FCC Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass*
FCC Section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC Section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 6.8, Antenna requirement	Pass
Unintentional emissions	
FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Section 6.2 class B, Radiated emission	Pass*

* According to manufacturer's declaration provided in Appendix G the possible variants of the AT98-7-23-17-S-5-N , AT98-7-2-11-S-5-N, AT98-7-2-25-S-5-N, AT98-7-22-5-P-5-N, AT98-7-21-5-P-5-N, AT98-7-1-13-P-5-N, AT98-7-22-5-OM-5-N, AT98-7-21-5-OM-5-N and AT98-7-1-13-OM-5-N fully identical and the only difference is a material that the pipe is made of and diameter and length of the pipe. Therefore, only the relevant tests were performed for models AT98-7-2-11-S-5-N (in the original report) and AT98-7-22-5-OM-5-N (in the present report). All other tests were performed only for model delivering the worst ERP. The re-issue of the Test Report is to support Application for Class II permissive changes certification. The change under this application is to add additional model variants AT98-7-22-5-P-5-N, AT98-7-21-5-P-5-N, AT98-7-1-13-P-5-N, AT98-7-22-5-OM-5-N, AT98-7-21-5-OM-5-N and AT98-7-1-13-OM-5-N.

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer, EMC & Radio	11-Jun-25 – 22-Dec-25	
Reviewed by:	Mrs. S. Peysahov Sheynin, certification specialist, EMC & Radio	27-Dec-25	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	15-Jan-26	

6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The AT98-7 Encoder water meter is a battery-operated meter designed for automated water meter reading. The AT98-7 Encoder provides optional online data of all kinds (water consumption, temperature, Alerts, Tampering, back flow ...) It uses 3W Sensus protocol Via data output cable ready for AMI Transceiver for sending water consumption data to the utility.

The AT98-7 Encoder Integrate Bluetooth Low energy for field maintenance.

6.2 EUT Test configuration

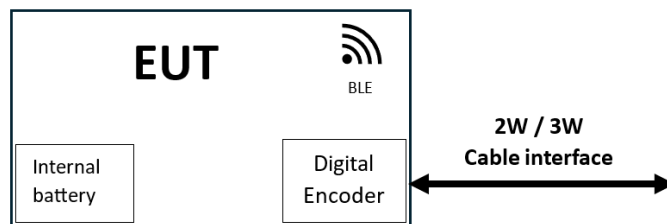

6.3 Transmitter characteristics

Type of equipment					
V	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Assigned frequency range		2400 -2483.5 MHz			
Operating frequencies		2402-2480 MHz			
Maximum rated output power		Peak output power 3.82 dBm			
Is transmitter output power variable?		V	No		
			Yes	continuous variable	
				stepped variable with stepsize	dB
				minimum RF power	dBm
				maximum RF power	dBm
Antenna connection					
unique coupling		standard connector		V	Integral
				V	with temporary RF connector without temporary RF connector
Antenna/s technical characteristics					
Type		Manufacturer		Model number	
Internal		Inhouse design		N/A	
				Gain	
				2.5 dBi	
Transmitter aggregate data rate/s				1 Mbps	
Type of modulation				GFSK	
Modulating test signal (baseband)					
Transmitter power source					
V	Battery	Nominal rated voltage	3.7 VDC	Battery type	Lithium Inorganic battery
	DC	Nominal rated voltage			
	AC mains	Nominal rated voltage		Frequency	Hz



Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 27 °C	Relative Humidity: 51 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 Minimum 6 dB and 99% bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup

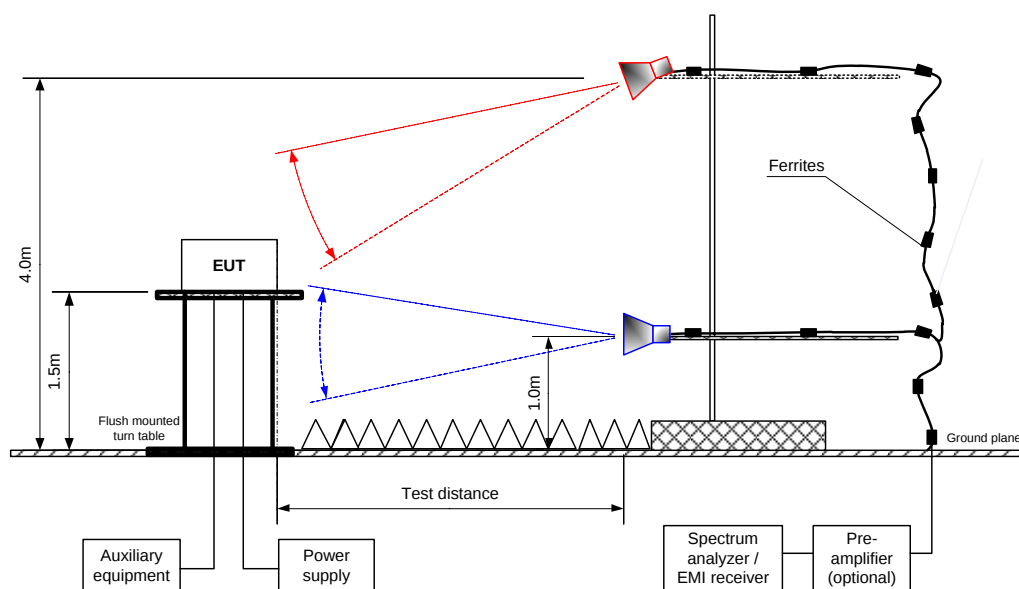



Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 27 °C	Relative Humidity: 51 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.1.2 6 and 99% dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: GFSK
 BIT RATE: 1 Mbps

Carrier frequency, MHz	99% bandwidth, kHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2402	1164.4	617.4	500	117.4	Pass
2440	1164.4	611.4	500	111.4	Pass
2480	1084.4	611.4	500	111.4	Pass

Reference numbers of test equipment used

HL 7585	HL 4114	HL 3903	HL 5902					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 27 °C	Relative Humidity: 51 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.1.1 6 dB bandwidth test result at low frequency



Plot 7.1.2 6 dB bandwidth test result at mid frequency

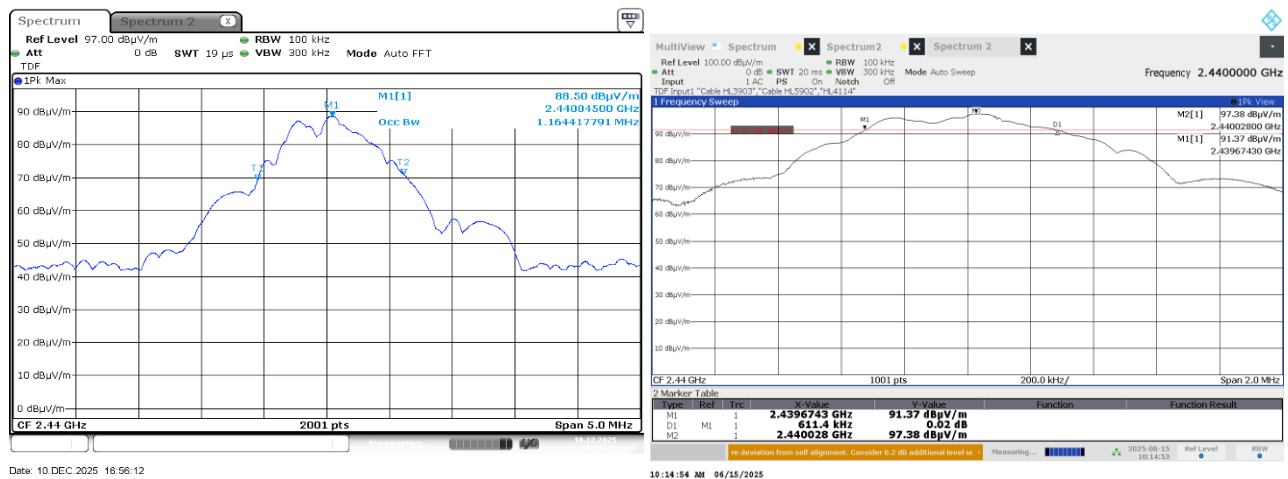



HERMON LABORATORIES

Report ID: ARARAD_FCC.57006_159332_CL2C.docx

Date of Issue: 15-Jan-26

Test specification:		Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Verdict: PASS	
Date(s):			
15-Jun-25			
Temperature: 27 °C	Relative Humidity: 51 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.1.3 6 dB bandwidth test result at high frequency



Date: 10 DEC 2025 17:06:39





Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

7.2 Peak output power at AT98-7-23-17-S-5-N, AT98-7-2-11-S-5-N, AT98-7-2-25-S-5-N

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

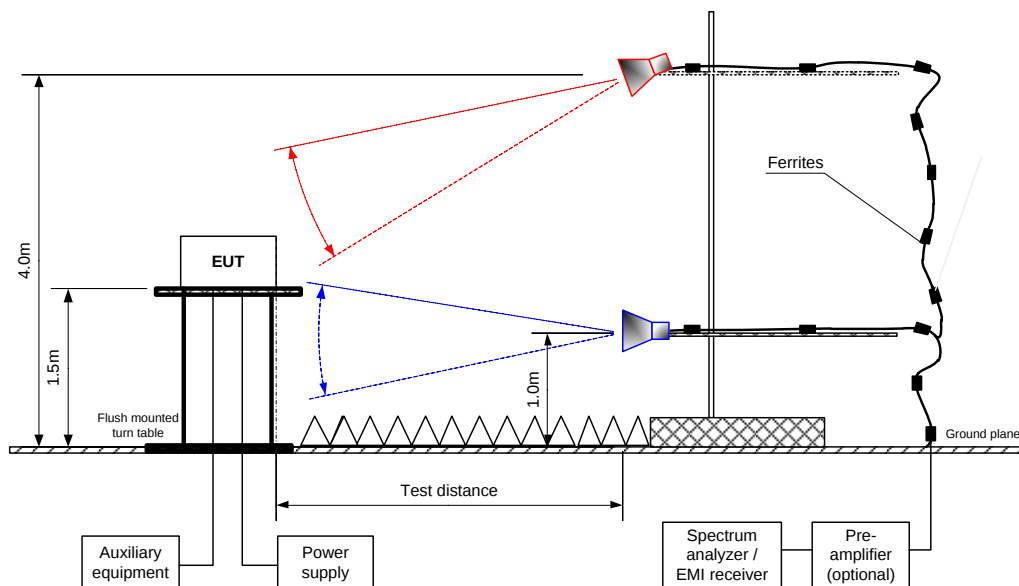



Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 MHz
 VIDEO BANDWIDTH: 10 MHz

MODEL AT98-7-23-17-S-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	100.15	H	1.95	25	2.5	2.45	30	-27.55	Pass
2440	100.60	H	1.95	25	2.5	2.90	30	-27.10	Pass
2480	100.70	H	1.90	25	2.5	3.00	30	-27.00	Pass

MODEL AT98-7-2-11-S-5-N (WC)

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	100.98	H	2.5	30	2.5	3.28	30	-26.72	Pass
2440	101.50	H	1.9	30	2.5	3.80	30	-26.20	Pass
2480	101.52	H	2.7	27	2.5	3.82	30	-26.18	Pass

MODEL AT98-7-2-25-S-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.77	H	2.70	10	2.5	2.07	30	-27.93	Pass
2440	98.96	H	2.68	10	2.5	1.26	30	-28.74	Pass
2480	100.33	H	2.70	20	2.5	2.63	30	-27.37	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3903	HL 4474	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency at AT98-7-23-17-S-5-N

Vertical polarization

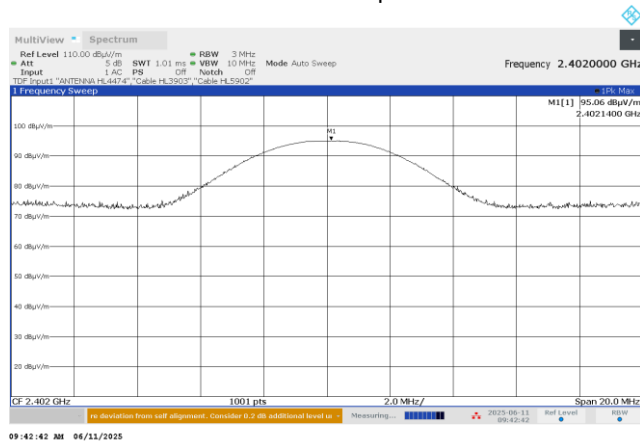


Horizontal polarization

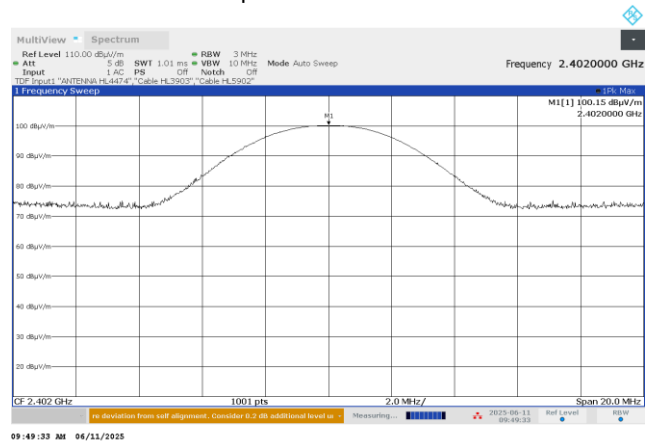


Plot 7.2.2 Field strength of carrier at mid frequency at AT98-7-23-17-S-5-N

Vertical polarization

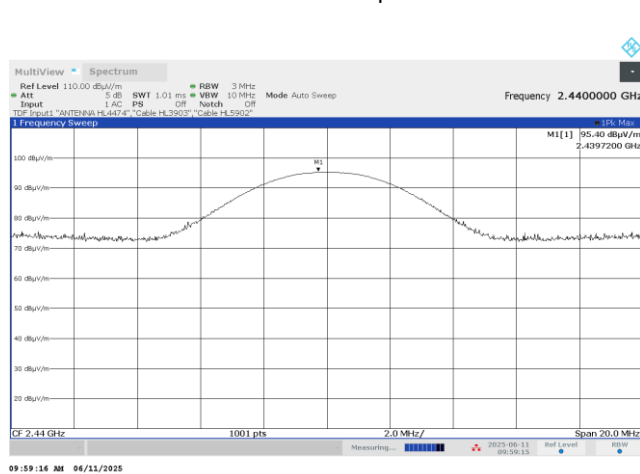

Horizontal polarization

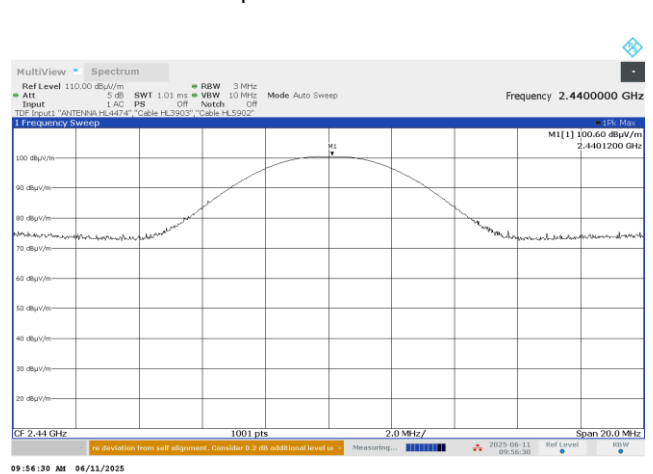




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.3 Field strength of carrier at high frequency at AT98-7-23-17-S-5-N

Vertical polarization

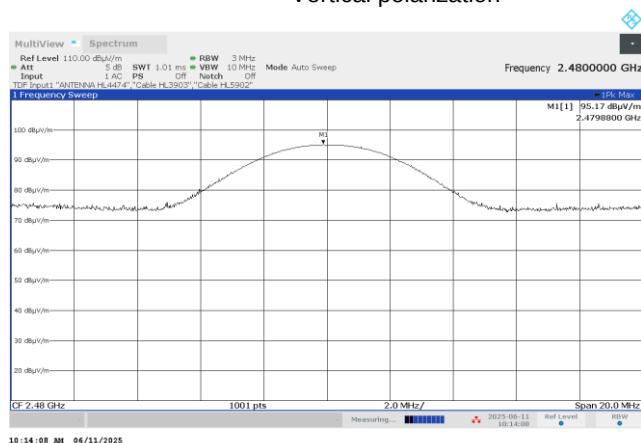

Horizontal polarization

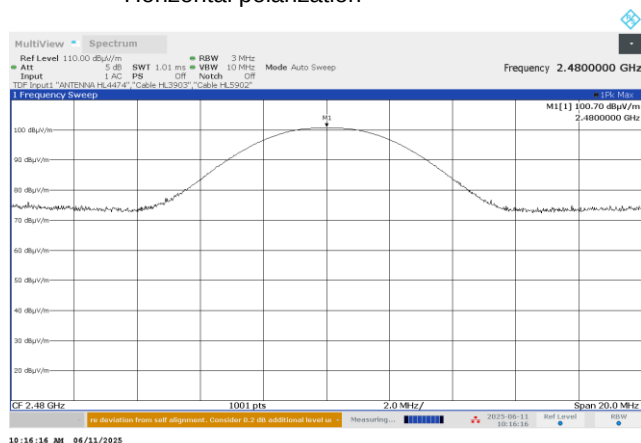



HERMON LABORATORIES


Report ID: ARARAD_FCC.57006_159332_CL2C.docx

Date of Issue: 15-Jan-26


Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.4 Field strength of carrier at low frequency at AT98-7-2-11-S-5-N

Vertical polarization

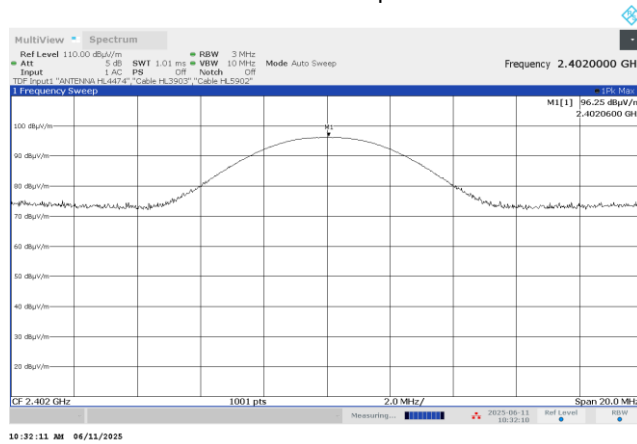


Horizontal polarization

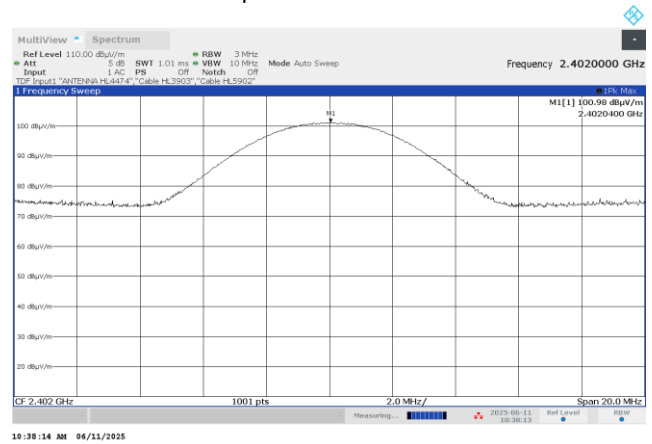


Plot 7.2.5 Field strength of carrier at mid frequency at AT98-7-2-11-S-5-N

Vertical polarization

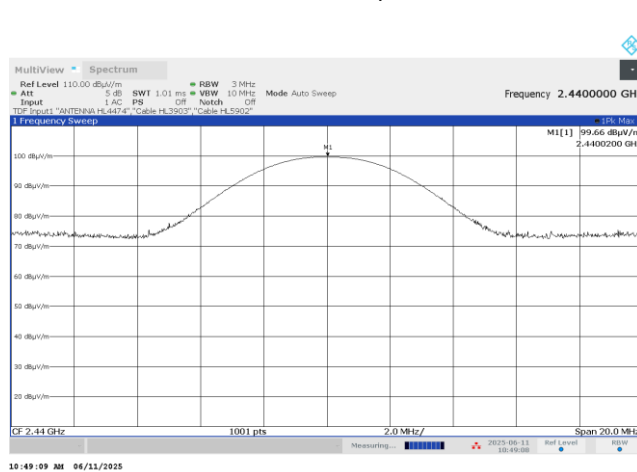

Horizontal polarization

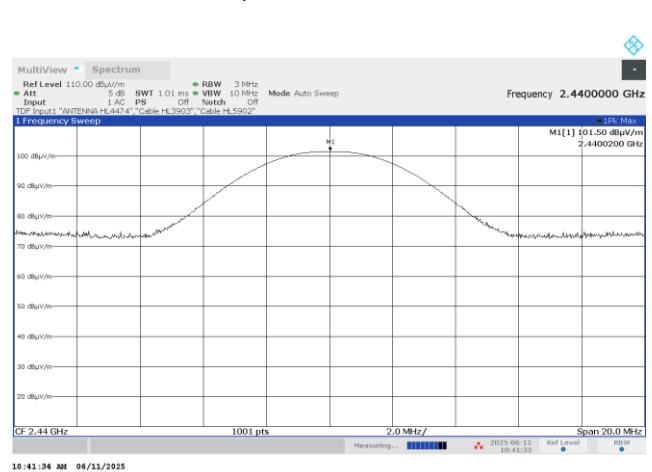




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.6 Field strength of carrier at high frequency at AT98-7-2-11-S-5-N

Vertical polarization

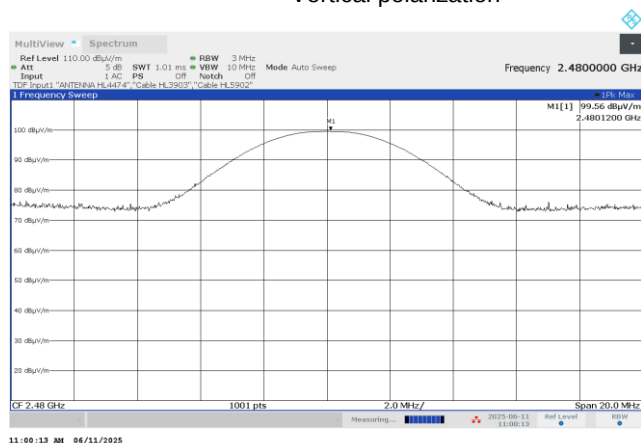

Horizontal polarization

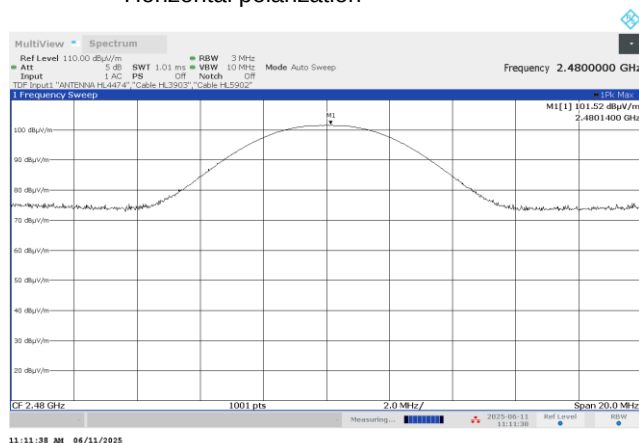




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.7 Field strength of carrier at low frequency at AT98-7-2-25-S-5-N

Vertical polarization

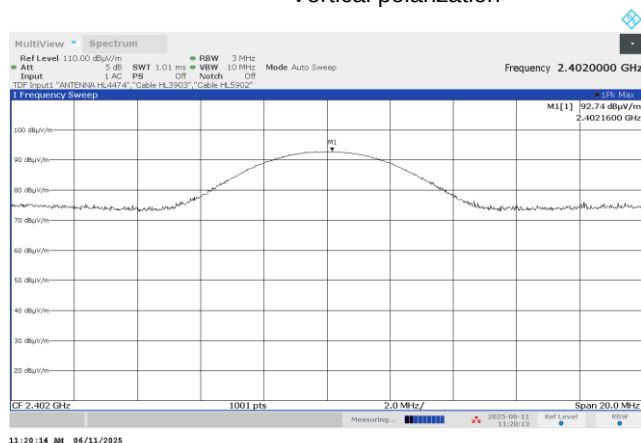


Horizontal polarization

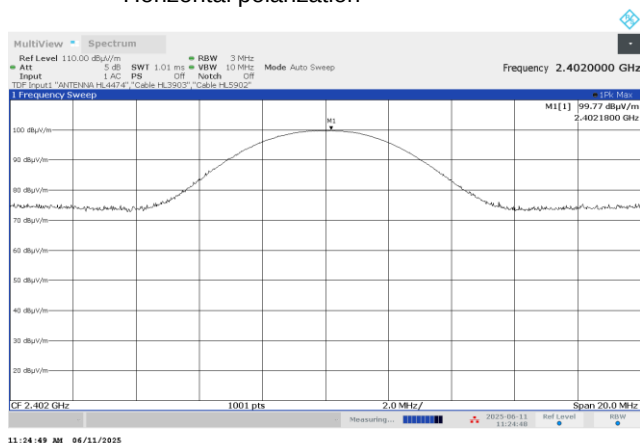


Plot 7.2.8 Field strength of carrier at mid frequency at AT98-7-2-25-S-5-N

Vertical polarization

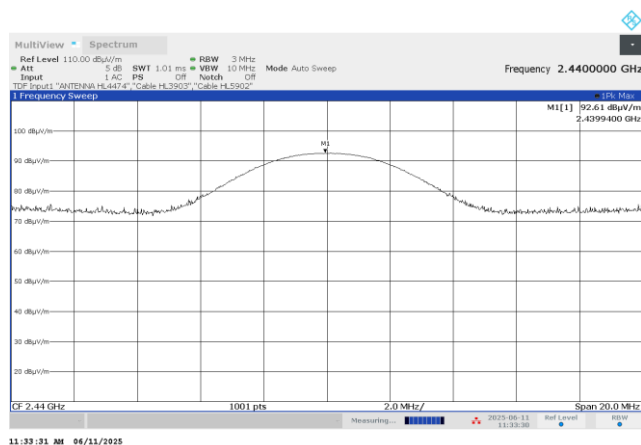

Horizontal polarization

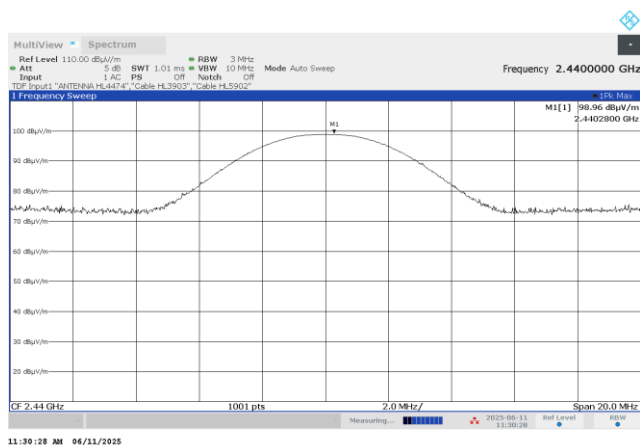





HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.9 Field strength of carrier at high frequency at AT98-7-2-25-S-5-N

Vertical polarization

Horizontal polarization

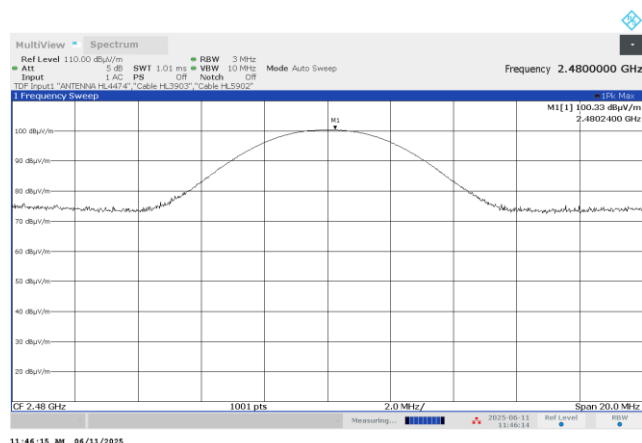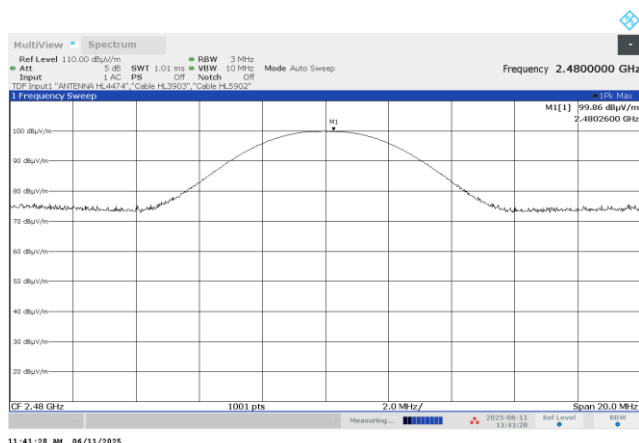



Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

7.3 Peak output power at AT98-7-22-5-P-5-N, AT98-7-21-5-P-5-N, AT98-7-1-13-P-5-N, AT98-7-22-5-OM-5-N, AT98-7-21-5-OM-5-N, AT98-7-1-13-OM-5-N

7.3.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.3.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{(30 \times P \times G)/r}$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.3.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.3.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.3.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.3.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.3.1 Setup for carrier field strength measurements

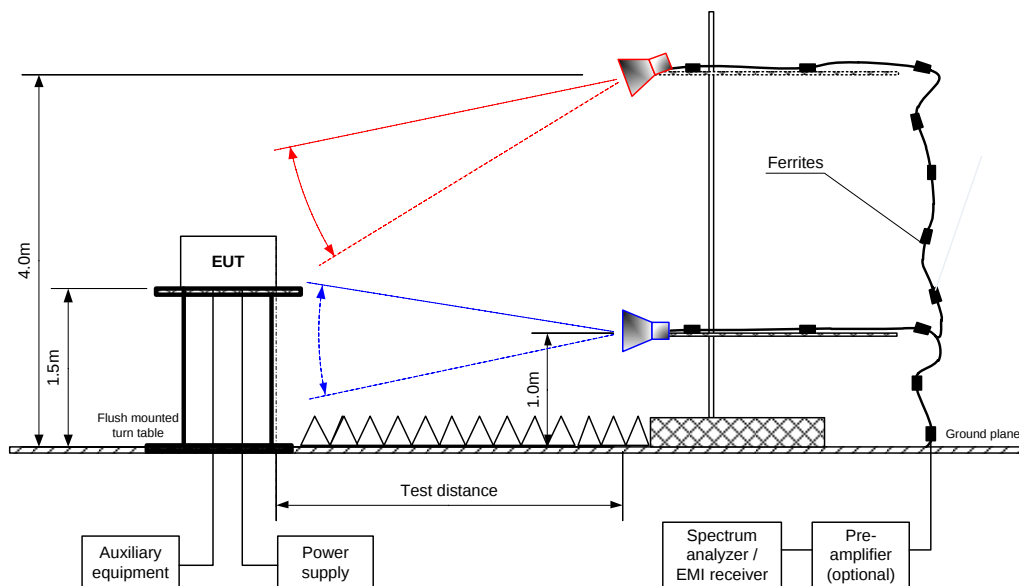



HERMON LABORATORIES

Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Table 7.3.2 Peak output power test results

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 RESOLUTION BANDWIDTH: 3 MHz
 VIDEO BANDWIDTH: 10 MHz

MODEL

AT98-7-1-13-P-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.32	H	1.6	0	2.5	1.62	30	-28.38	Pass
2440	99.45	H	1.6	17	2.5	1.75	30	-28.25	Pass
2480	99.05	H	1.6	13	2.5	1.35	30	-28.65	Pass

MODEL

AT98-7-1-13-OM-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.87	H	2.0	30	2.5	2.17	30	-27.83	Pass
2440	99.93	H	1.9	30	2.5	2.23	30	-27.77	Pass
2480	98.61	H	2.2	27	2.5	0.91	30	-29.09	Pass

MODEL

AT98-7-21-5-P-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.16	H	2.1	68	2.5	1.46	30	-28.54	Pass
2440	98.82	H	1.9	-59	2.5	1.12	30	-28.88	Pass
2480	98.22	H	2.0	113	2.5	0.52	30	-29.48	Pass

MODEL

AT98-7-21-5-OM-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.51	H	2.1	-60	2.5	1.81	30	-28.19	Pass
2440	99.68	H	2.0	-59	2.5	1.98	30	-28.02	Pass
2480	99.61	H	2.0	-90	2.5	1.91	30	-28.09	Pass



HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Table 7.3.3 Peak output power test results (continuation)

MODEL

AT98-7-22-5-P-5-N

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	99.25	H	2.3	70	2.5	1.55	30	-28.45	Pass
2440	99.04	H	2.2	21	2.5	1.34	30	-28.76	Pass
2480	98.86	H	2.2	-70	2.5	1.16	30	-28.84	Pass

MODEL

AT98-7-22-5-OM-5-N (WC)

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	100.20	H	2.1	-80	2.5	2.50	30	-27.50	Pass
2440	100.12	H	2.2	-42	2.5	1.81	30	-28.19	Pass
2480	99.81	H	2.0	-90	2.5	2.11	30	-27.89	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3903	HL 4933	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.1 Field strength of carrier at low frequency at AT98-1-13-P-5-N

Vertical polarization

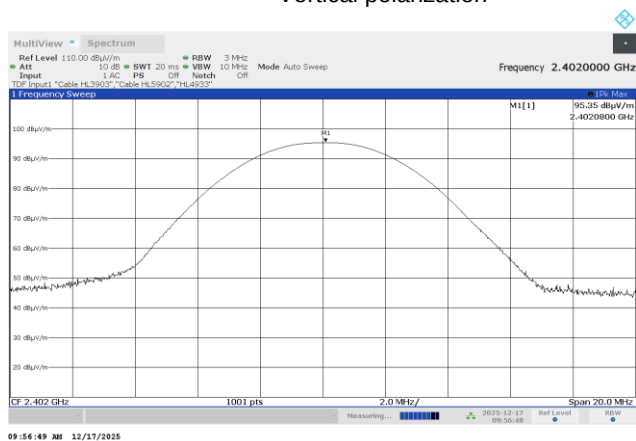


Horizontal polarization

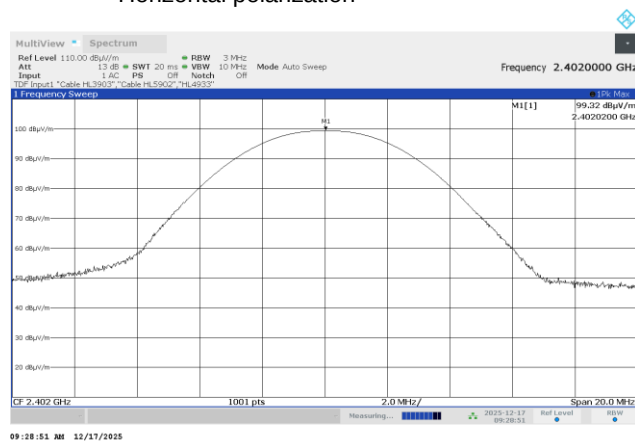


Plot 7.3.2 Field strength of carrier at mid frequency at AT98-1-13-P-5-N

Vertical polarization

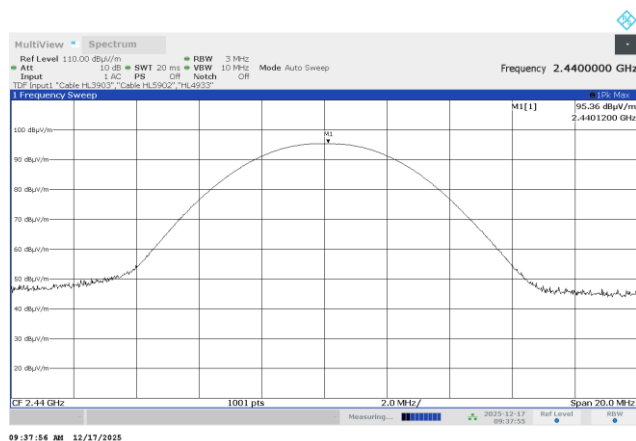

Horizontal polarization

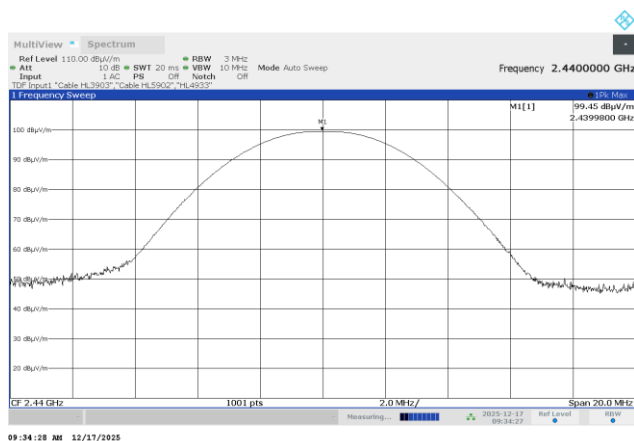




HERMON LABORATORIES


Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.3 Field strength of carrier at high frequency at AT98-1-13-P-5-N

Vertical polarization

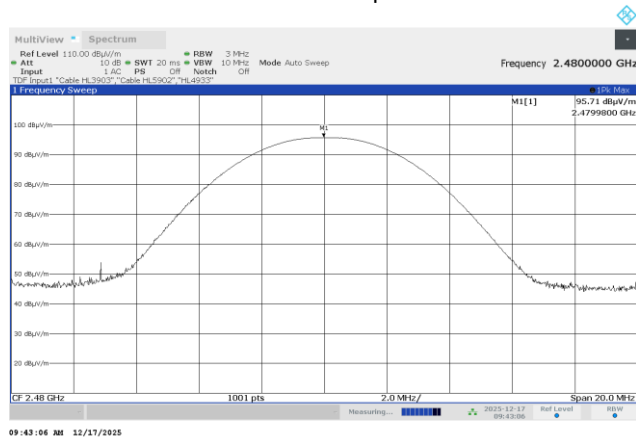

Horizontal polarization

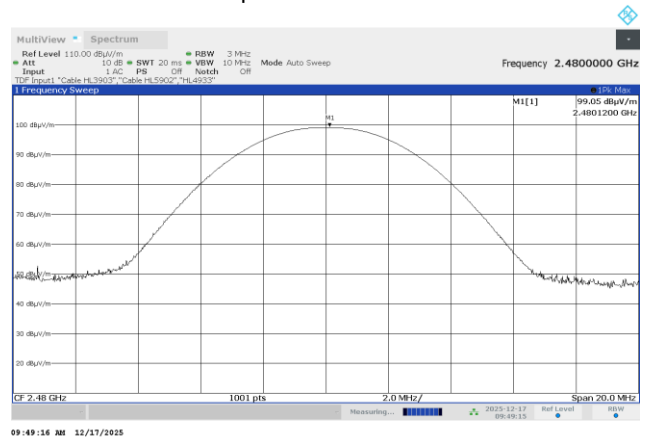




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.4 Field strength of carrier at low frequency AT98-1-13-OM-5-N

Vertical polarization

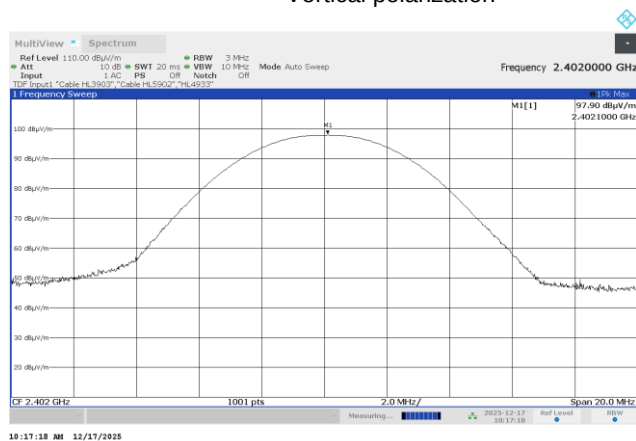


Horizontal polarization

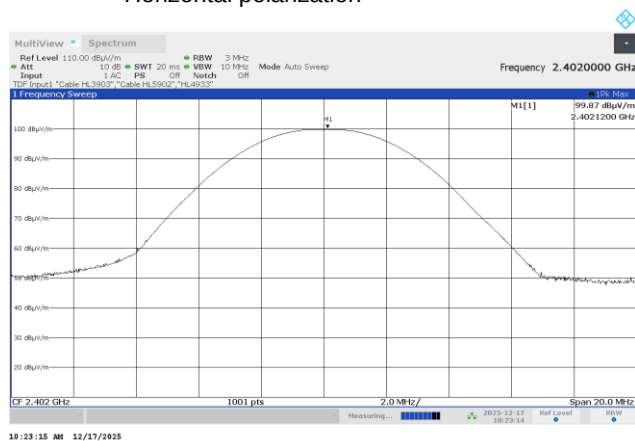


Plot 7.3.5 Field strength of carrier at mid frequency at AT98-1-13-OM-5-N

Vertical polarization

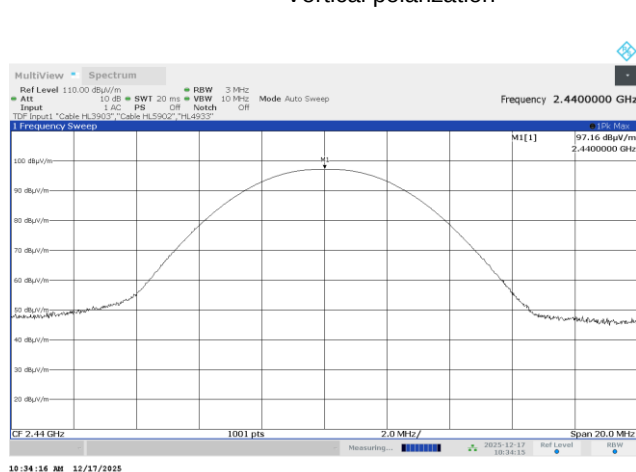

Horizontal polarization

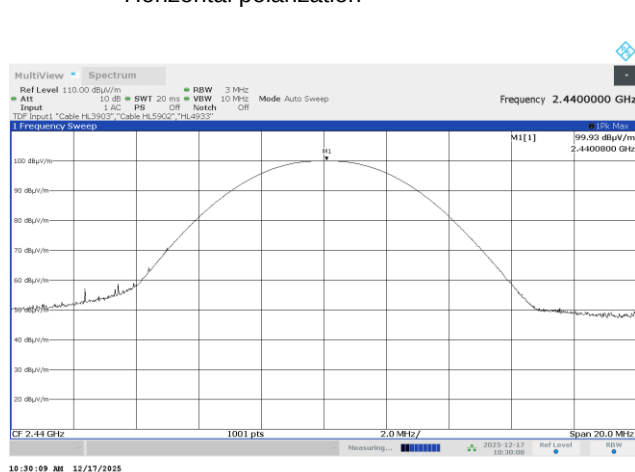




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.6 Field strength of carrier at high frequency at AT98-1-13-OM-5-N

Vertical polarization

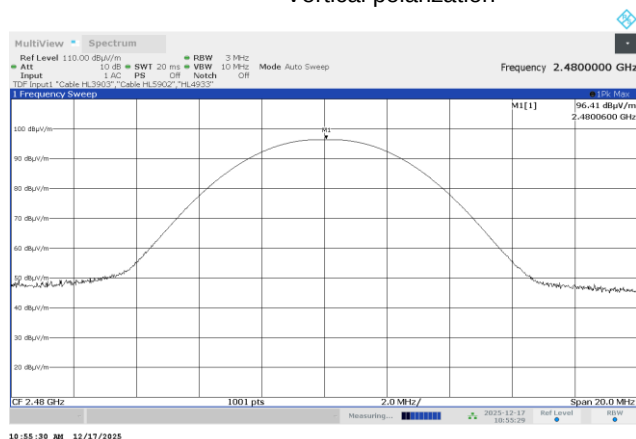

Horizontal polarization

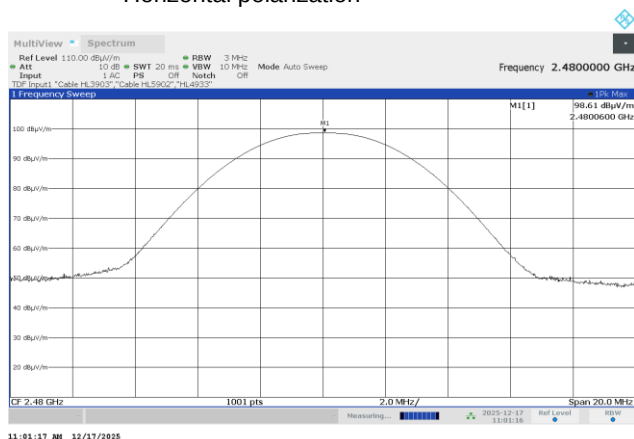



HERMON LABORATORIES


Report ID: ARARAD_FCC.57006_159332_CL2C.docx

Date of Issue: 15-Jan-26


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.7 Field strength of carrier at low frequency at AT98-7-21-5-P-5-N

Vertical polarization

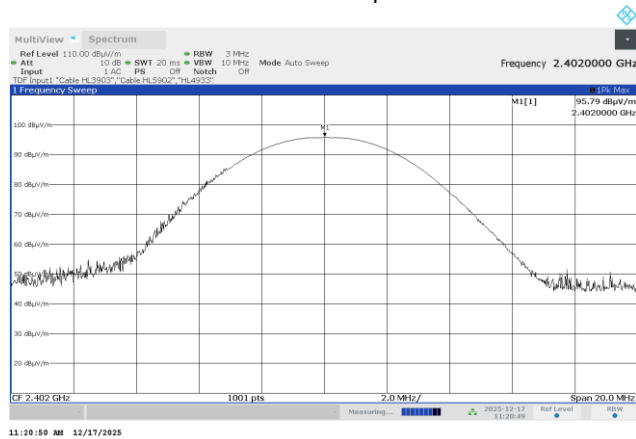


Horizontal polarization

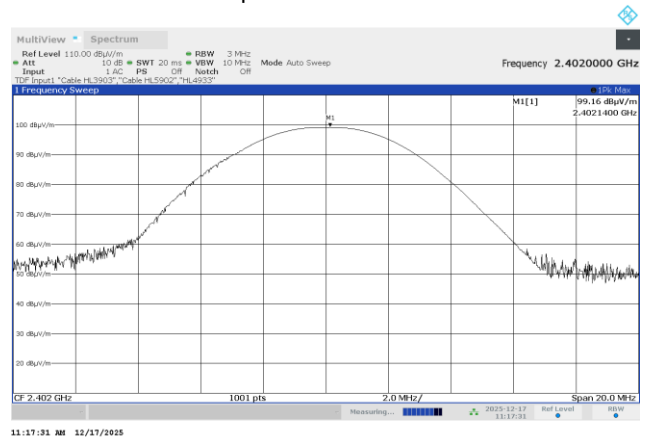


Plot 7.3.8 Field strength of carrier at mid frequency at AT98-7-21-5-P-5-N

Vertical polarization

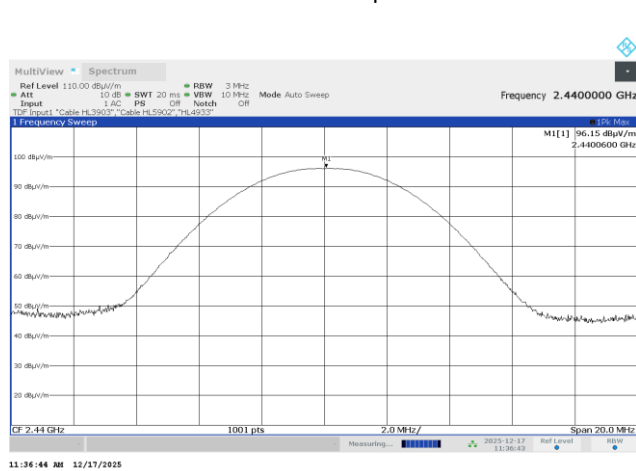

Horizontal polarization

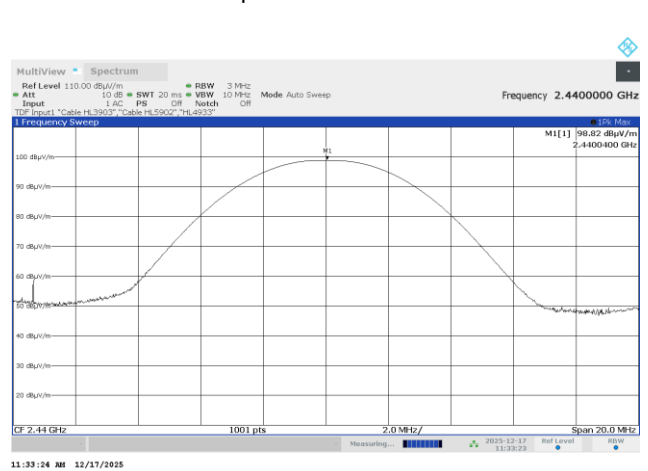





HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.9 Field strength of carrier at high frequency at AT98-7-21-5-P-5-N

Vertical polarization

Horizontal polarization

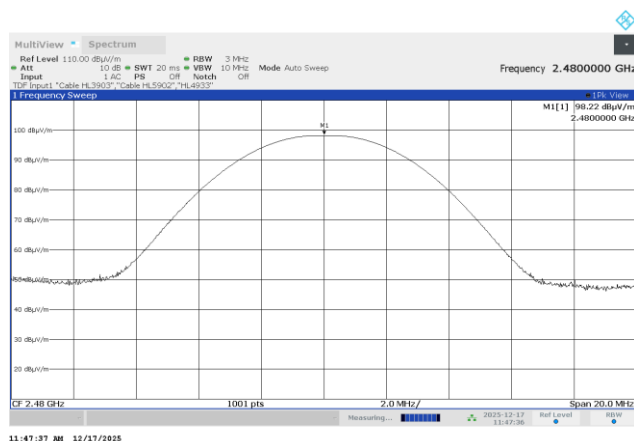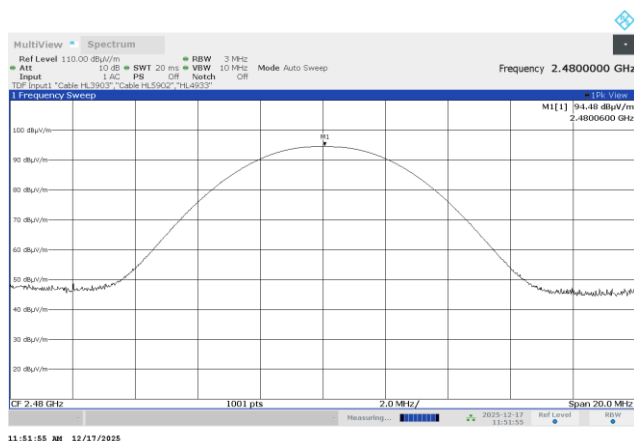




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.10 Field strength of carrier at low frequency at AT98-7-21-5-OM-5-N

Vertical polarization

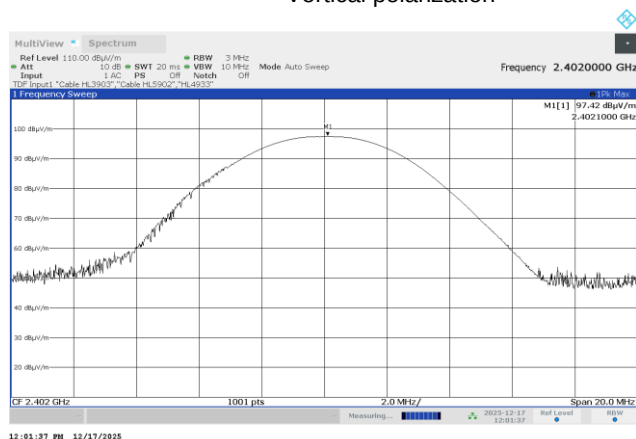


Horizontal polarization

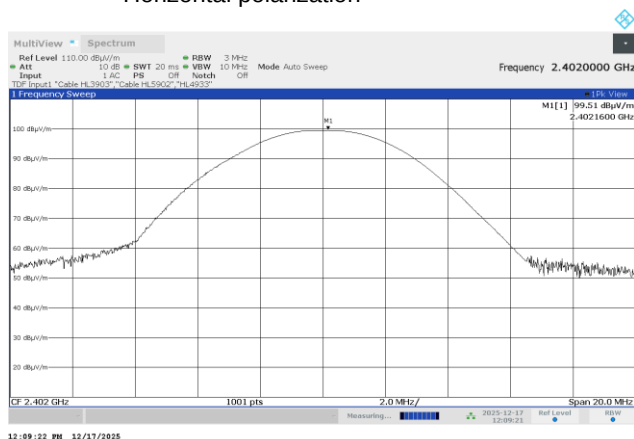


Plot 7.3.11 Field strength of carrier at mid frequency at AT98-7-21-5-OM-5-N

Vertical polarization

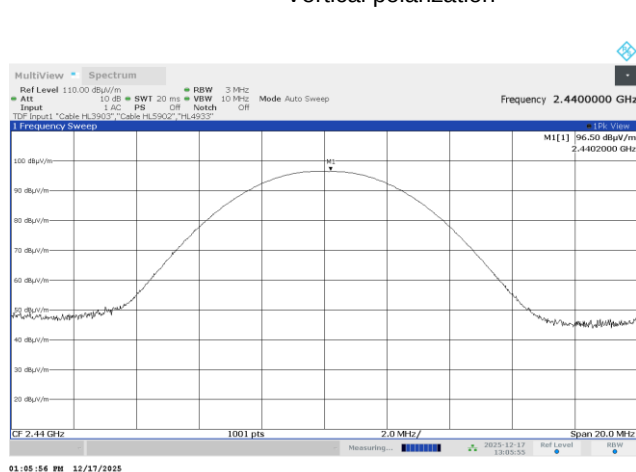

Horizontal polarization

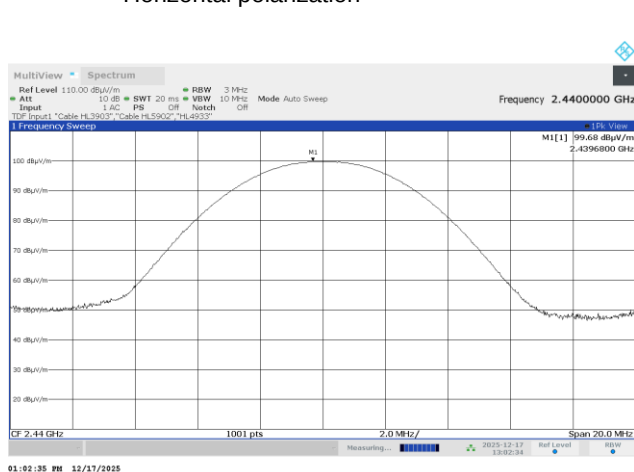





HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.12 Field strength of carrier at high frequency at AT98-7-21-5-OM-5-N

Vertical polarization

Horizontal polarization

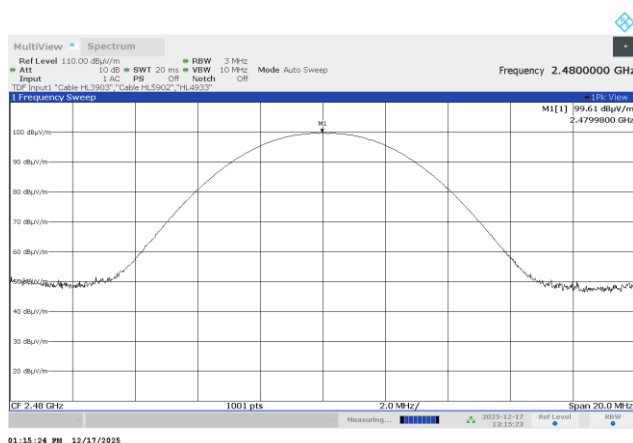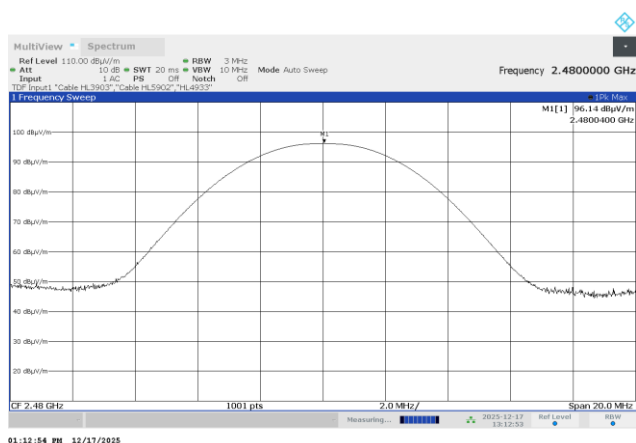




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.13 Field strength of carrier at low frequency at AT98-7-22-5-P-5-N

Vertical polarization

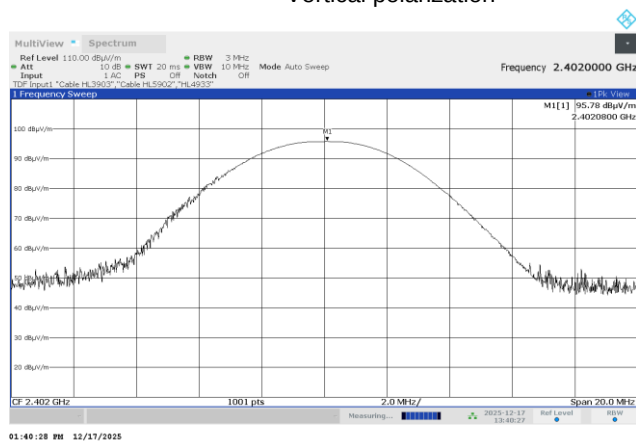


Horizontal polarization

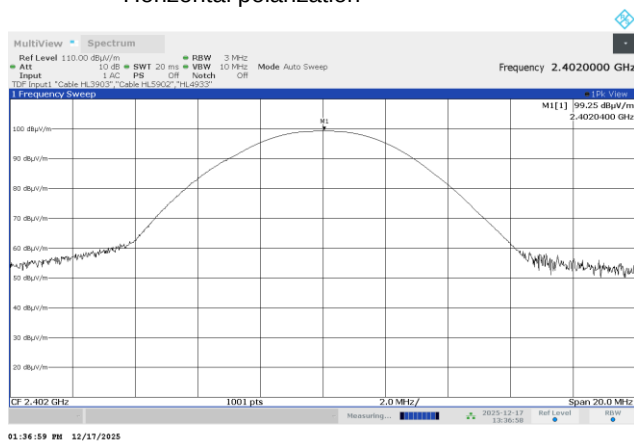


Plot 7.3.14 Field strength of carrier at mid frequency at AT98-7-22-5-P-5-N

Vertical polarization

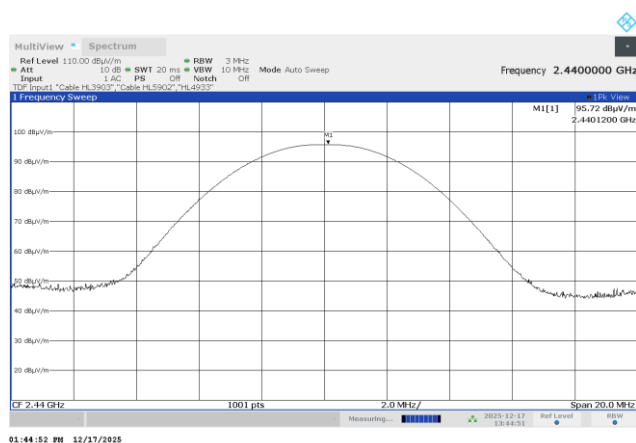

Horizontal polarization

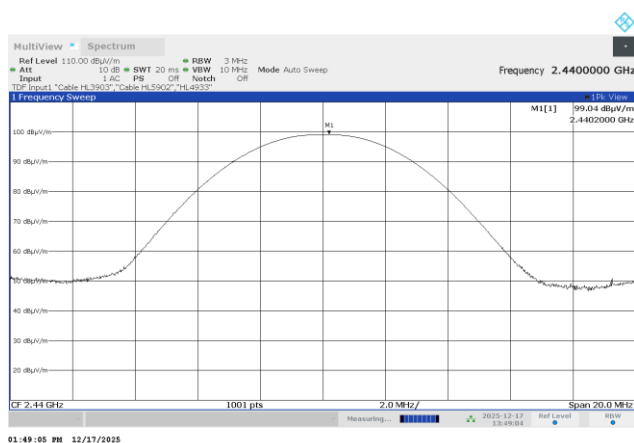




HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.15 Field strength of carrier at high frequency at AT98-7-22-5-P-5-N

Vertical polarization

Horizontal polarization

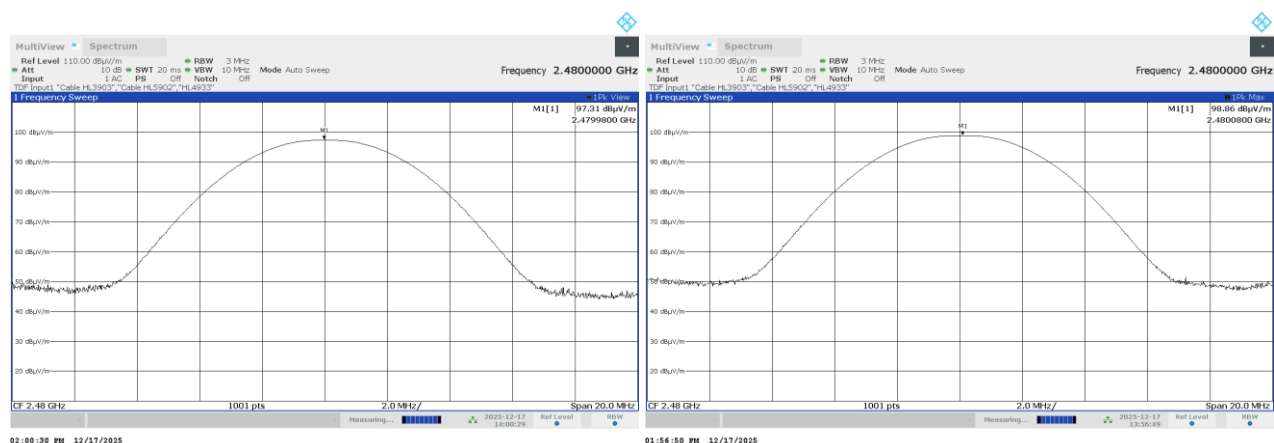




HERMON LABORATORIES


Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.16 Field strength of carrier at low frequency at AT98-7-22-5-OM-5-N

Vertical polarization

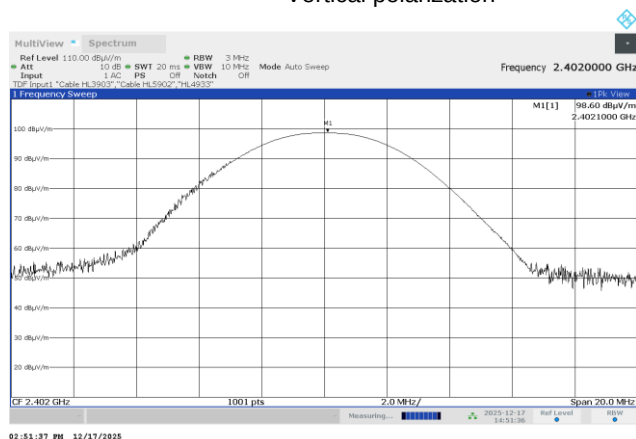


Horizontal polarization

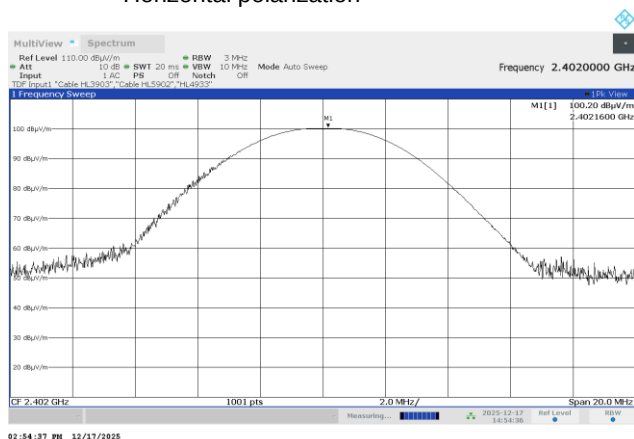


Plot 7.3.17 Field strength of carrier at mid frequency at AT98-7-22-5-OM-5-N

Vertical polarization

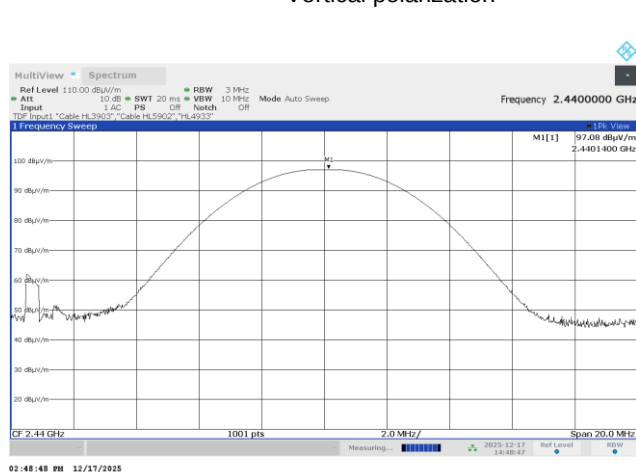

Horizontal polarization

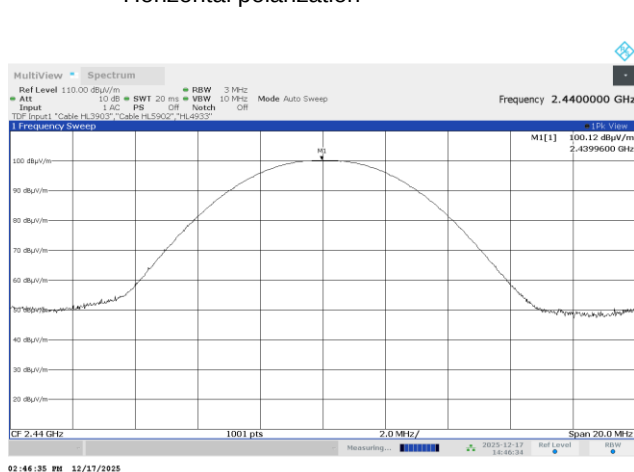





HERMON LABORATORIES

Test specification:		Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:		ANSI C63.10, section 7.8.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.18 Field strength of carrier at high frequency at AT98-7-22-5-OM-5-N

Vertical polarization

Horizontal polarization

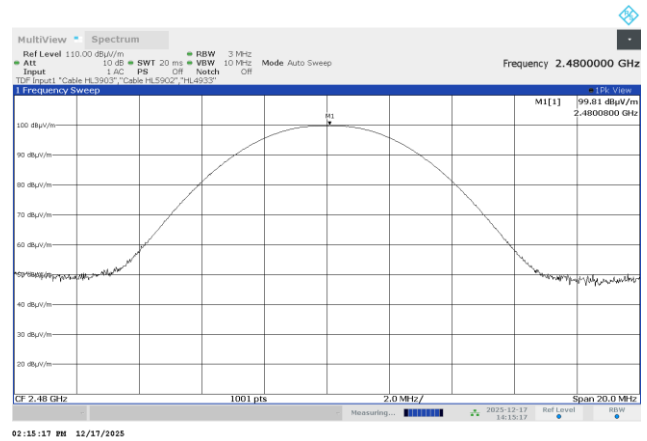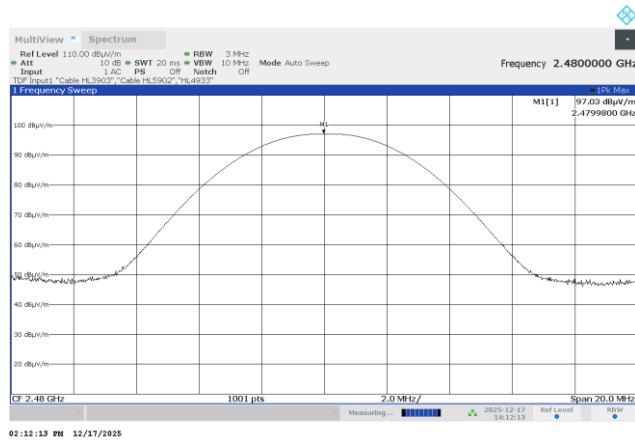



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

7.4 Field strength of spurious emissions

7.4.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, Figure 7.4.3, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.4.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.4.1 Setup for spurious emission field strength measurements below 30 MHz


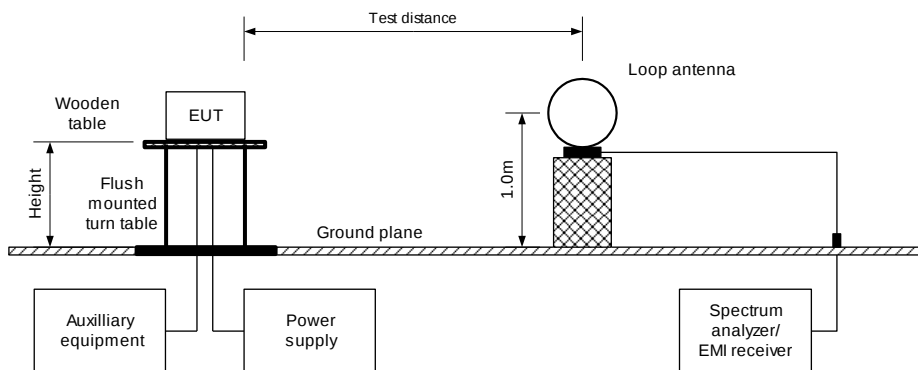



Figure 7.4.2 Setup for spurious emission field strength measurements in 30 -1000 MHz



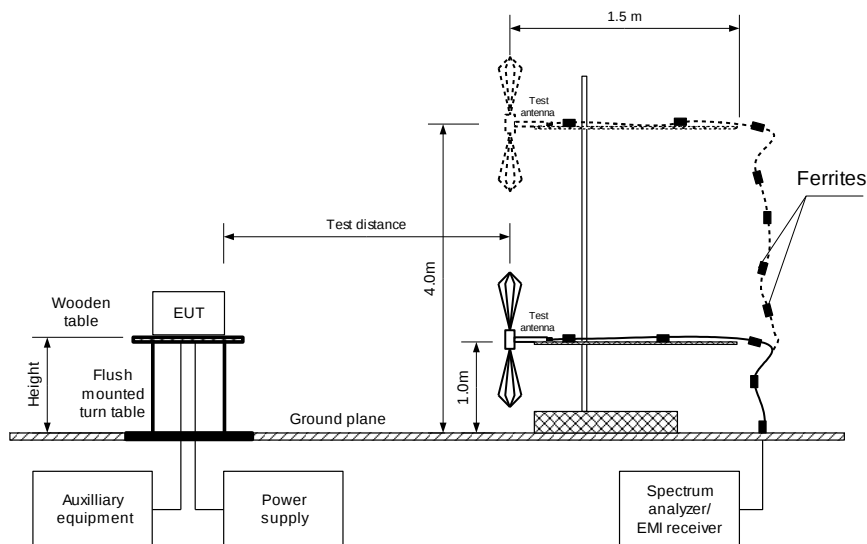

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.4.3 Setup for spurious emission field strength measurements above 1000 MHz

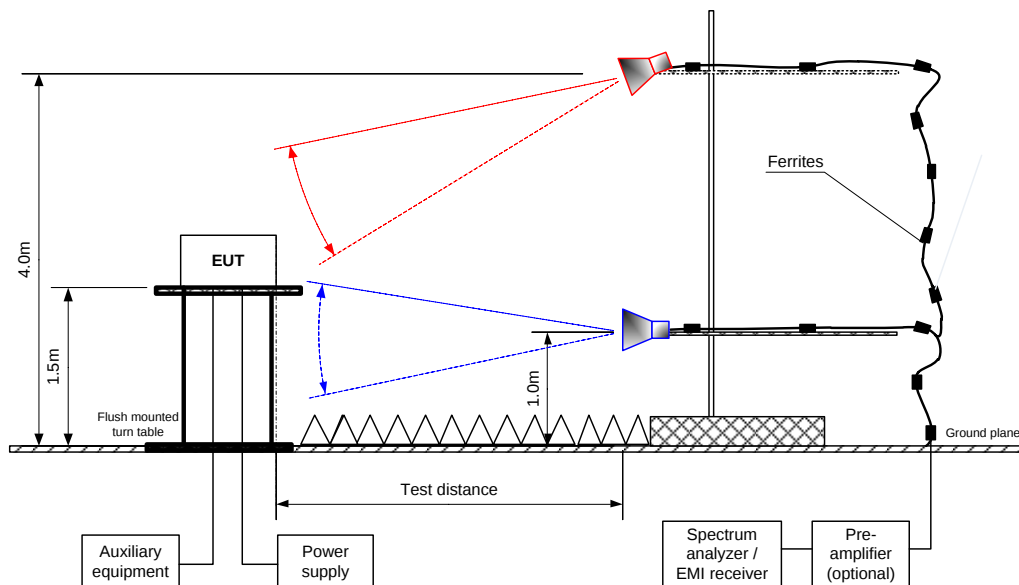



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.4.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 3.00 dBm at low carrier frequency
 3.82 dBm at mid carrier frequency
 2.63 dBm at high carrier frequency
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Double sided guide (above 1000 MHz)									
Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 2402 MHz									
70.28	44.5	Vertical	1.0	18	100.71	56.21	20.0	36.21	Pass
150.6	46.8	Vertical	1.0	-150		53.91		33.91	
178.8	48.2	Vertical	1.0	180		52.51		32.51	
202.76	48.2	Vertical	1.0	180		52.51		32.51	
7206.0	55.4	Vertical	2.1	-80		45.31		25.31	
Mid carrier frequency 2440 MHz									
142.59	42.3	Vertical	1.0	-150	100.55	58.25	20.0	38.25	Pass
170.63	46.4	Vertical	1.0	180		54.15		34.15	
178.81	47.9	Vertical	1.0	180		52.65		32.65	
194.80	48.3	Vertical	1.0	180		52.25		32.25	
202.82	44.9	Vertical	1.0	180		55.65		35.65	
High carrier frequency 2480 MHz									
70.3	44.9	Vertical	1.0	18	100.66	55.76	20.0	35.76	Pass
142.61	45.7	Vertical	1.0	-150		54.96		34.96	
170.68	50.1	Vertical	1.0	180		50.56		30.56	
182.70	49.4	Vertical	1.0	180		51.26		31.26	
194.80	47.3	Vertical	1.0	180		53.36		33.36	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.4.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 3.00 dBm at low carrier frequency
 3.82 dBm at mid carrier frequency
 2.63 dBm at high carrier frequency

DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency 2402 MHz											
4804	V	2.89	-30	51.66	74	-22.34	51.66	37.56	54	-16.44	Pass
12008	V	2.29	-18	60.93	74	-13.07	60.93	46.83	54	-7.17	
Mid carrier frequency 2440 MHz											
4880	V	2.8	-35	50.37	74	-23.63	50.37	36.27	54	-17.73	Pass
7320	V	2.1	-80	55.81	74	-18.19	55.81	41.71	54	-12.29	
12200	V	3.0	-35	59.16	74	-14.84	59.16	45.06	54	-8.94	
High carrier frequency 2480 MHz											
4960	V	1.9	19	48.26	74	-25.74	48.26	34.16	54	-19.84	Pass
7440	V	2.1	-76	55.82	74	-18.18	55.82	41.72	54	-12.28	
12400	V	3.4	-116	53.40	74	-20.60	53.40	39.30	54	-14.70	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.4.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.124	0.628	NA	NA	NA	-14.1

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.4.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 3.00 dBm at low carrier frequency
 3.82 dBm at mid carrier frequency
 2.63 dBm at high carrier frequency
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low carrier frequency 2402 MHz								
162.66	48.7	34.2	43.5	-9.3	Vertical	1.0	30	Pass
166.61	52.3	37.5	43.5	-6.0	Vertical	1.0	35	
170.58	49.4	35.8	43.5	-7.7	Vertical	1.0	-110	
Mid carrier frequency 2440 MHz								
162.60	50.7	33.9	43.5	-9.6	Vertical	1.0	30	Pass
166.73	51.3	38.2	43.5	-5.3	Vertical	1.0	35	
170.62	50.5	37.1	43.5	-6.4	Vertical	1.0	-110	
High carrier frequency 2480 MHz								
166.54	44.7	31.8	43.5	-11.7	Vertical	1.0	35	Pass
170.68	50.3	36.9	43.5	-6.6	Vertical	1.0	-110	

*- Margin = Measured emission - specification limit.

**-. EUT front panel refer to 0 degrees position of turntable.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.4.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.4.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL5288	HL 0446	HL 4933	HL 4956	HL 3903	HL 5902	HL 5112	HL 4339
HL 7585							

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.4.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

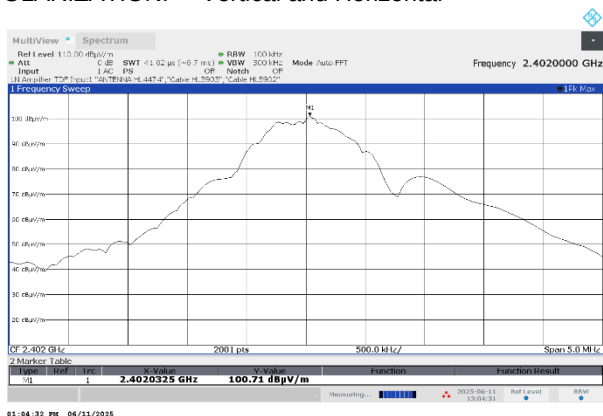

Plot 7.4.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

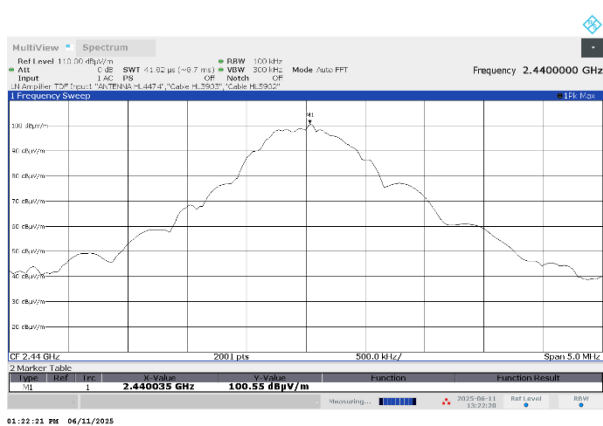




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

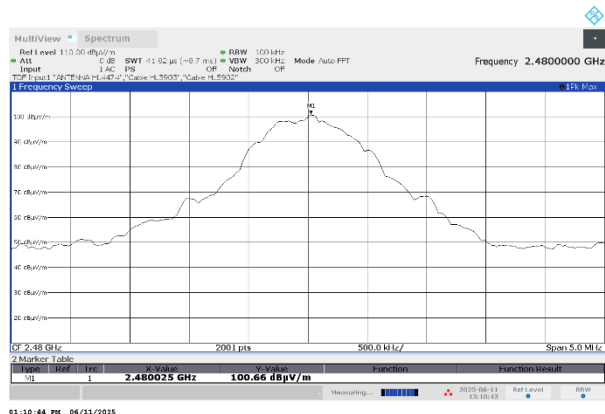




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.4.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

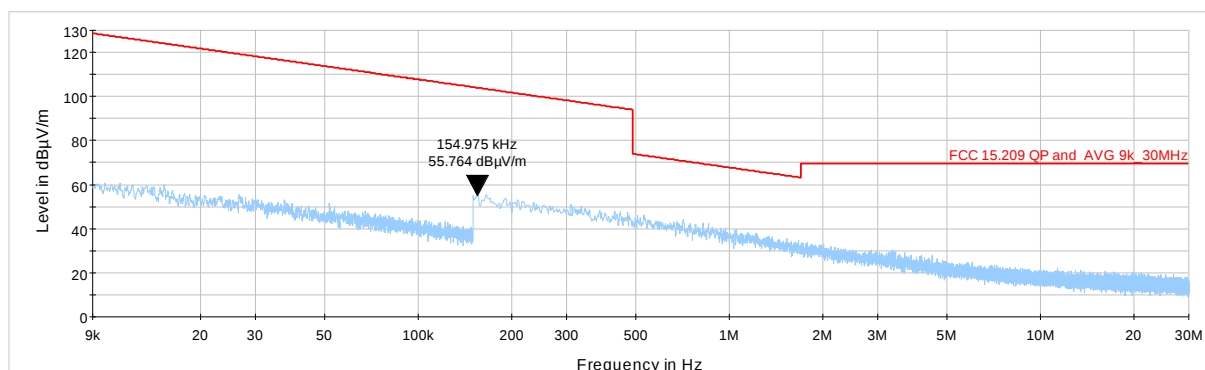

Plot 7.4.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

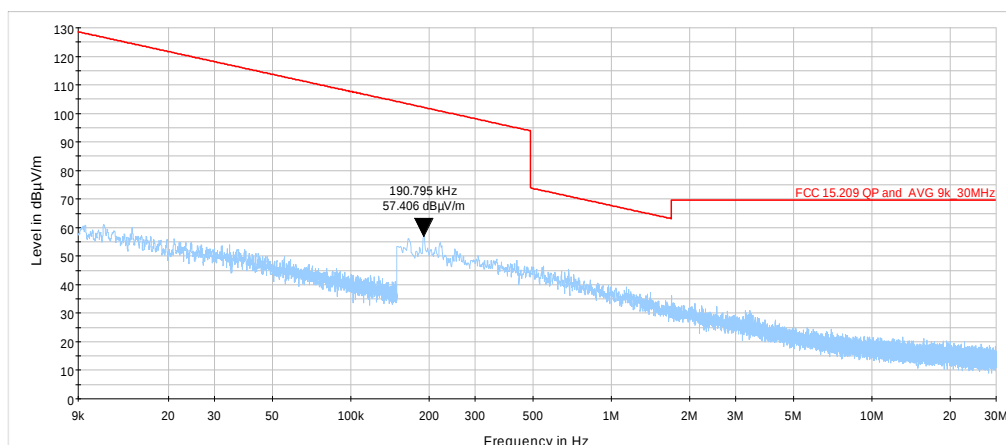




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

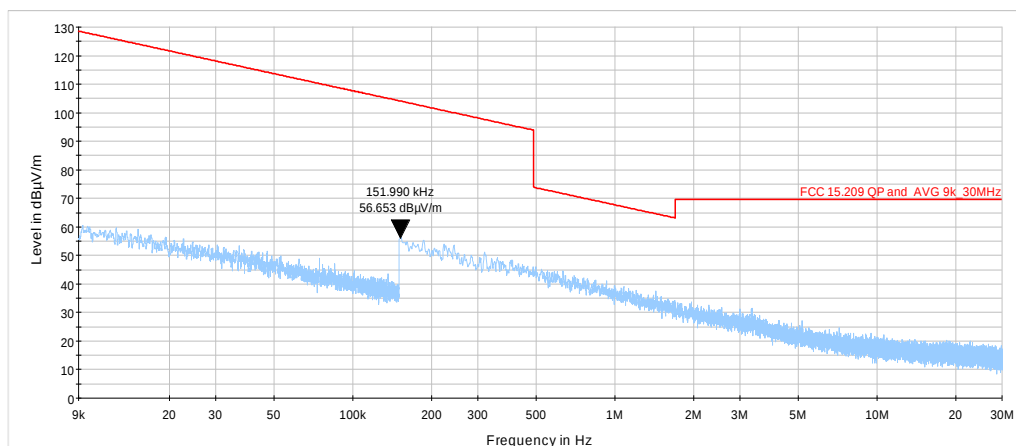




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.4.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

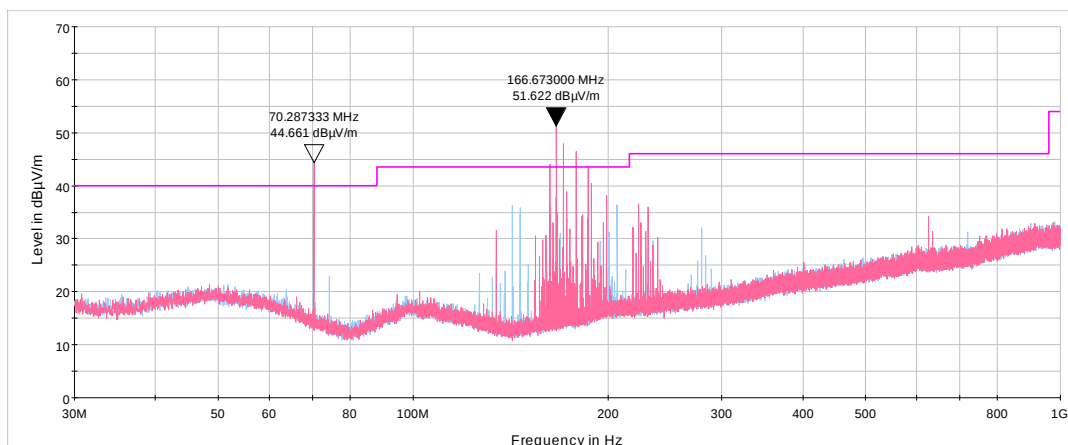

Plot 7.4.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

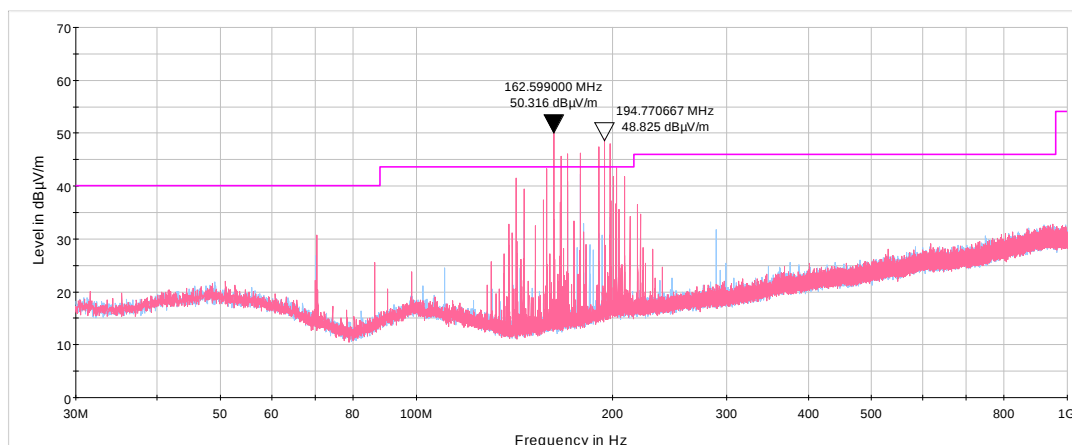




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

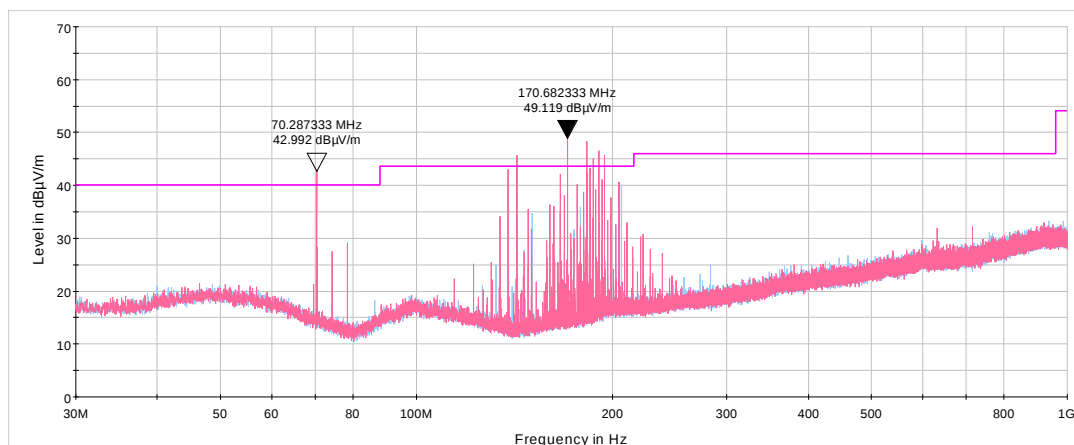




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.10 Radiated emission measurements from 1000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

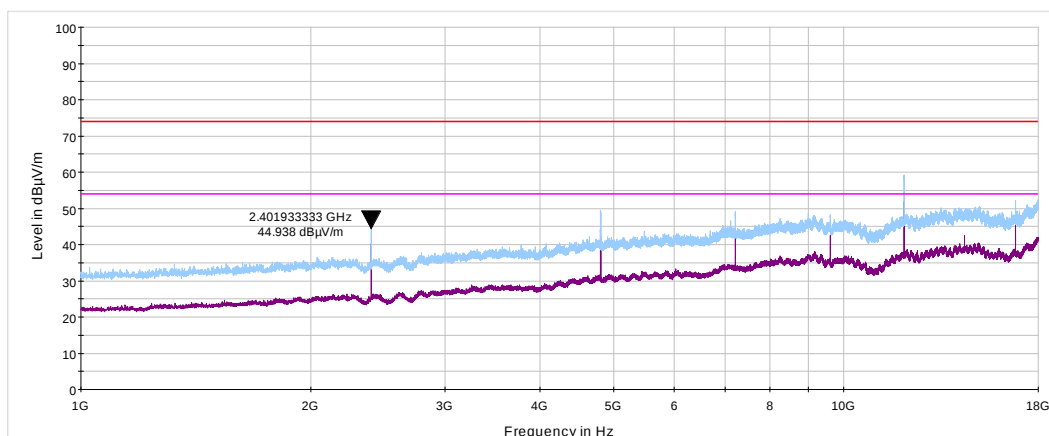

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.

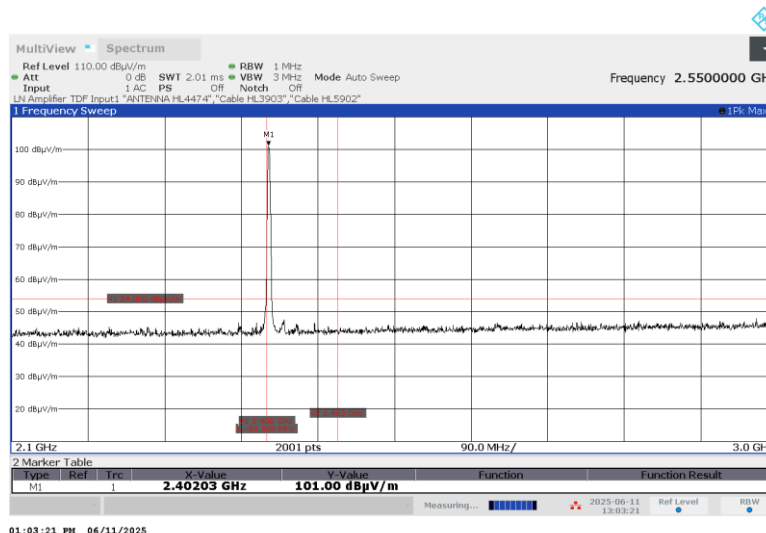




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.11 Radiated emission measurements from 1000 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

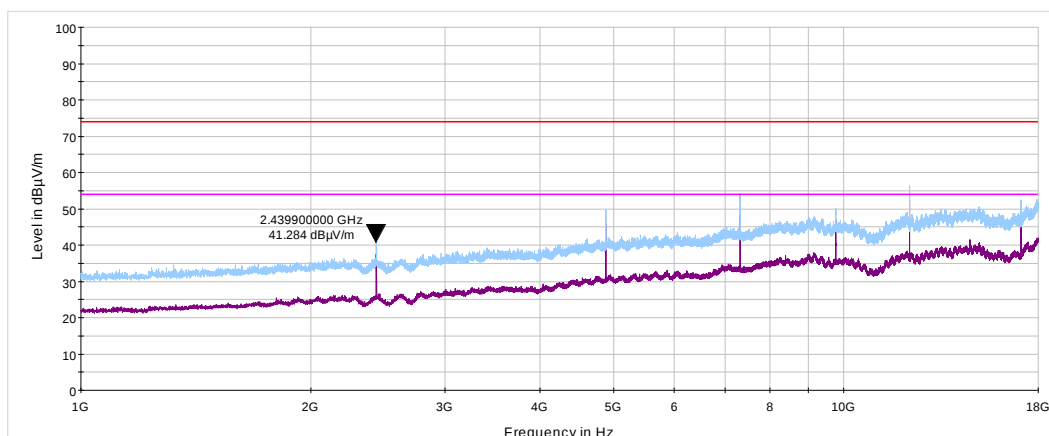

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.

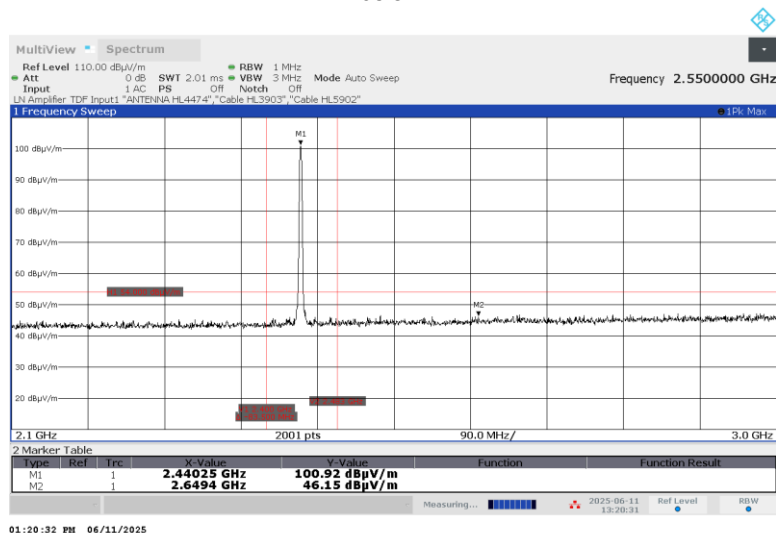




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.12 Radiated emission measurements from 1000 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

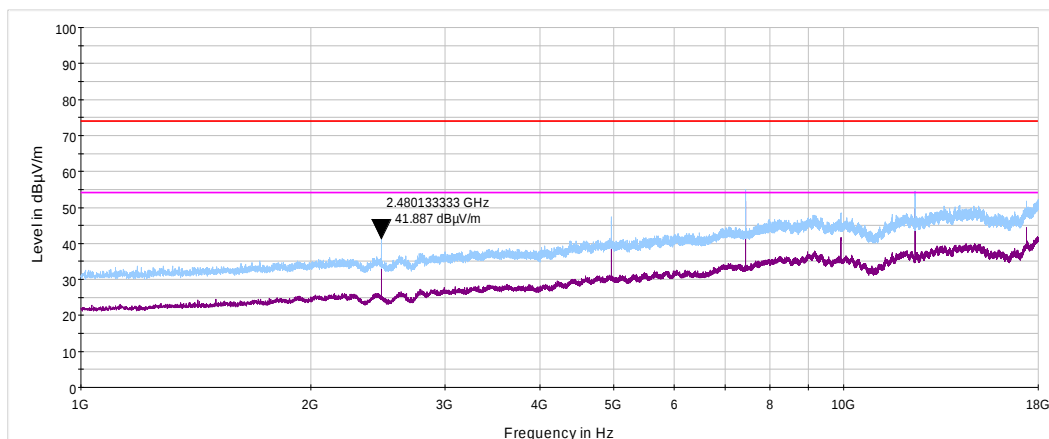

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.

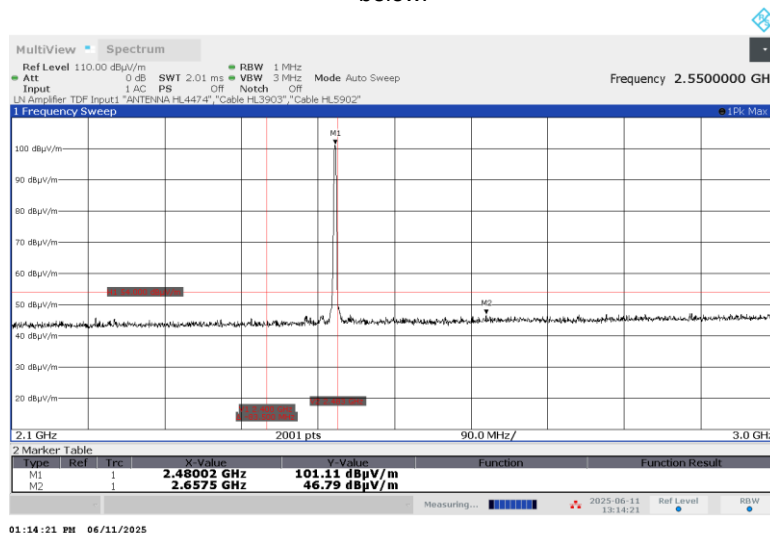





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			



Plot 7.4.13 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

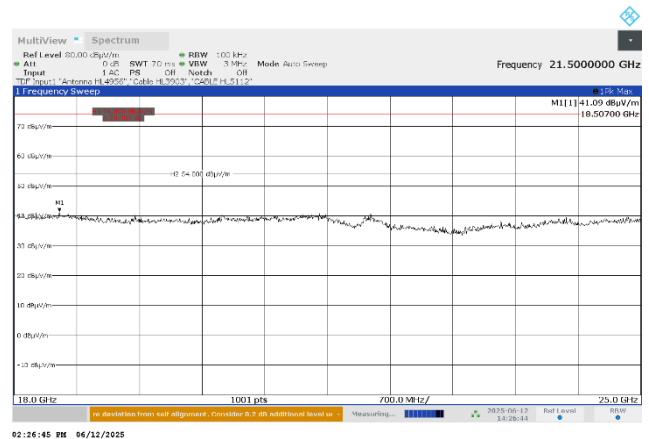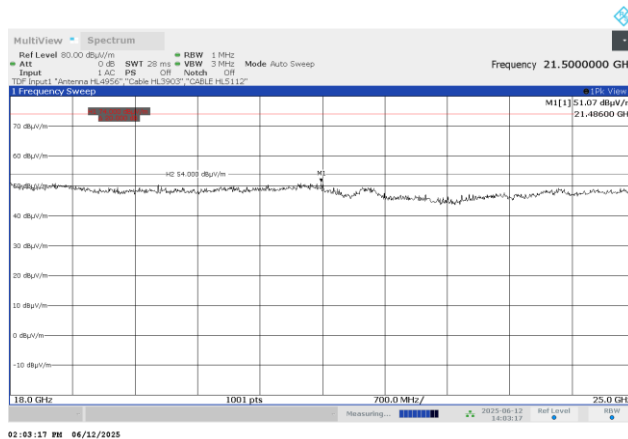

Plot 7.4.14 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

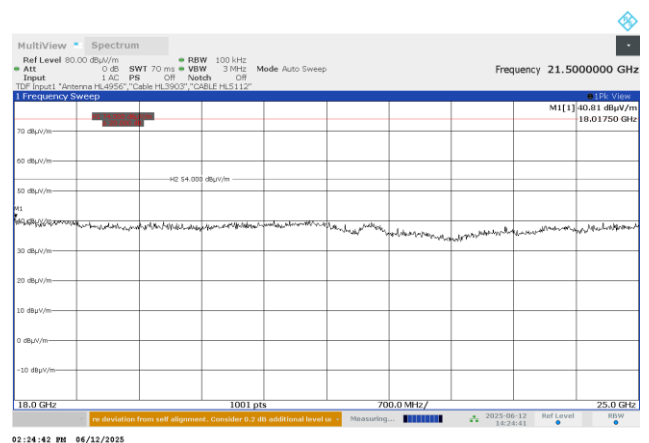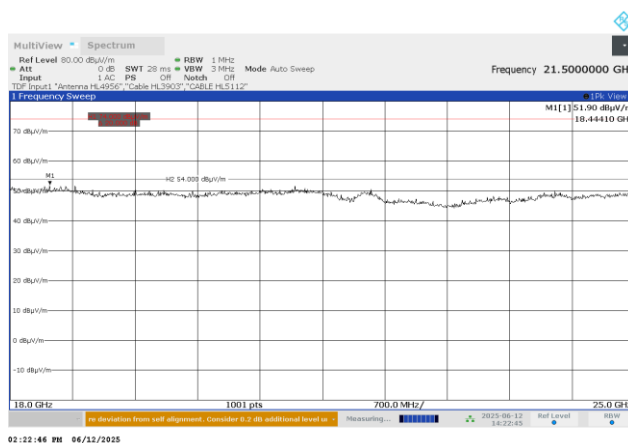





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.15 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

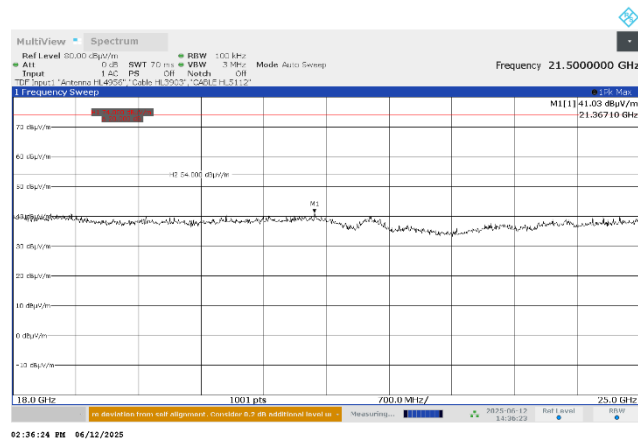
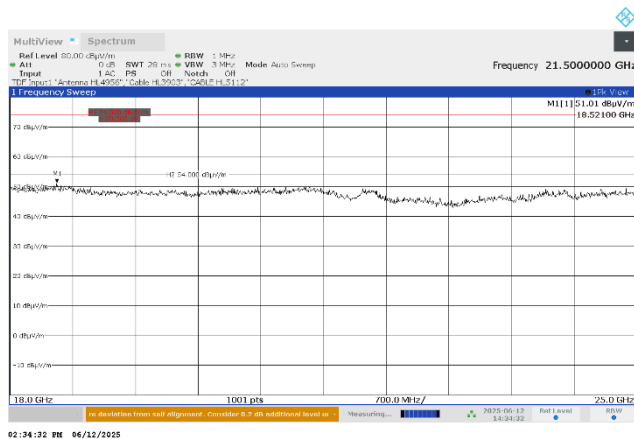




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25 - 12-Jun-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.16 Transmission pulse duration and period

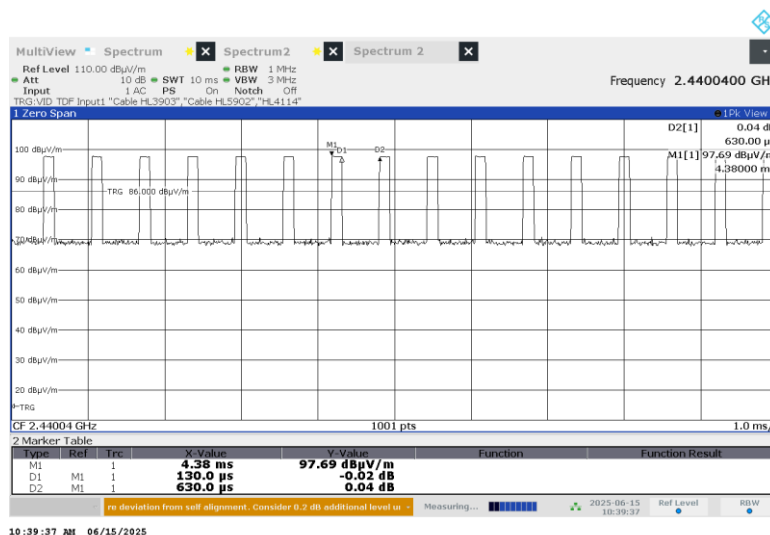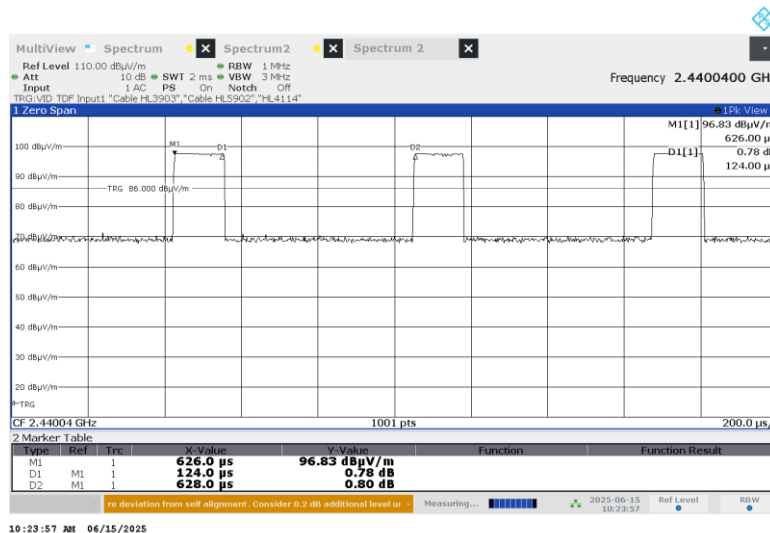



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

7.5 Field strength of spurious emissions AT98-7-22-5-OM-5-N

7.5.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.5.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.5.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.5.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.5.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.5.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.5.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.5.3.1 The EUT was set up as shown in Figure 7.4.2, Figure 7.5.3, energized and the performance check was conducted.

7.5.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.5.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.5.1 Setup for spurious emission field strength measurements below 30 MHz


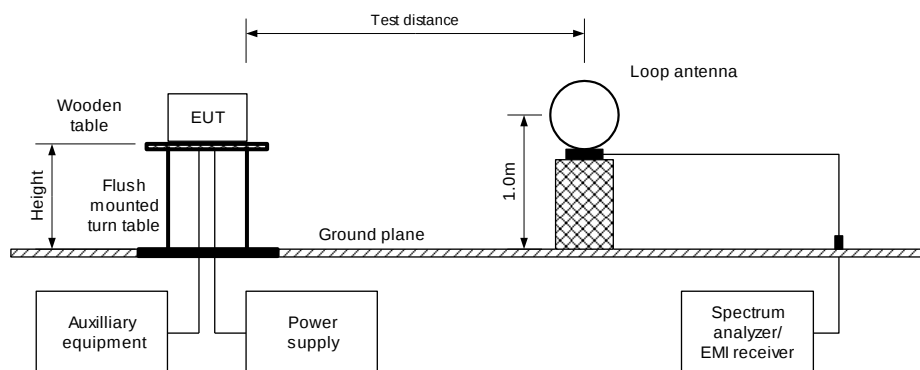


Figure 7.5.2 Setup for spurious emission field strength measurements in 30 -1000 MHz



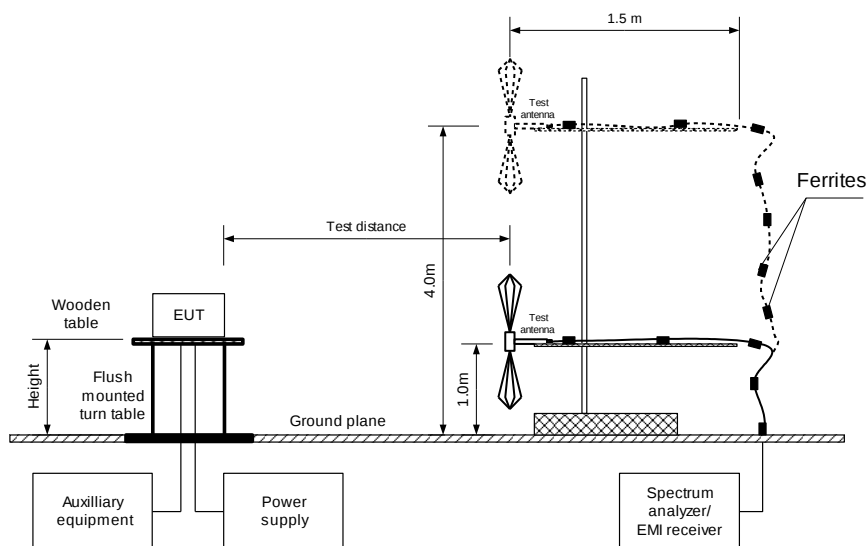

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.5.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 2.50 dBm at low carrier frequency
 1.81 dBm at mid carrier frequency
 2.11 dBm at high carrier frequency

DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low, mid, high carrier frequency									
No emissions were detected									Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.5.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 2.50 dBm at low carrier frequency
 1.81 dBm at mid carrier frequency
 2.11 dBm at high carrier frequency

DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency 2402 MHz											
4804	Vertical	1.6	159	49.7	74	-24.3	49.7	35.7	54	-18.3	Pass
12010	Horizontal	2.3	-73	56.3	74	-17.7	56.3	42.3	54	-11.7	
Mid carrier frequency 2440 MHz											
4880	Vertical	1.6	162	47.8	74	-26.2	47.8	33.8	54	-20.2	Pass
7320	Vertical	1.8	132	52.3	74	-21.7	52.3	38.3	54	-15.7	
12200	Horizontal	2.5	-80	57.1	74	-16.9	57.1	43.1	54	-10.9	
High carrier frequency 2480 MHz											
4960	Vertical	1.6	162	48.8	74	-25.2	48.8	34.8	54	-19.2	Pass
7440	Vertical	2.1	106	53.7	74	-20.3	53.7	39.7	54	-14.3	
12400	Horizontal	1.9	-155	55.2	74	-18.8	55.2	41.2	54	-12.8	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.

Table 7.5.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.124	0.628	NA	NA	NA	-14.1

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.5.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 2.50 dBm at low carrier frequency
 1.81 dBm at mid carrier frequency
 2.11 dBm at high carrier frequency
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low carrier frequency 2402 MHz								
118.33	33.8	19.3	43.5	-24.2	Vertical	1.0	4	Pass
170.45	46.7	32.3	43.5	-11.2	Horizontal	1.4	-2	
Mid carrier frequency 2440 MHz								
134.34	32.3	18.4	43.5	-25.1	Vertical	1.4	14	Pass
170.42	37.4	27.5	43.5	-16.0	Vertical	1.2	-90	
High carrier frequency 2480 MHz								
166.51	34.2	20.1	43.5	-23.4	Horizontal	1.5	12	Pass
170.48	40.6	28.4	43.5	-15.1	Horizontal	1.4	-1	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 7.5.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.5.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL5288	HL 0446	HL 4933	HL 4956	HL 3903	HL 5902	HL 5112	HL 4339
HL 7585							

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.5.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

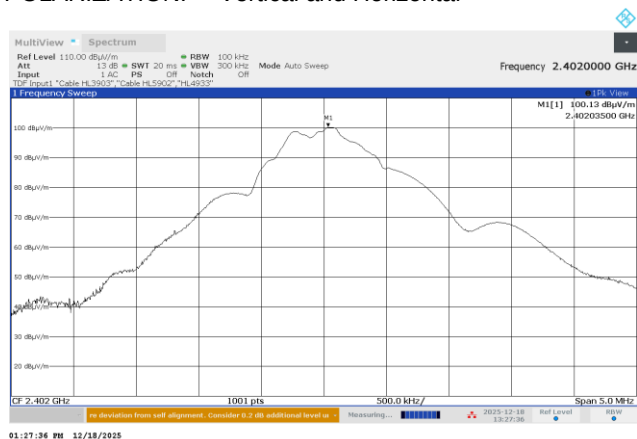

Plot 7.5.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

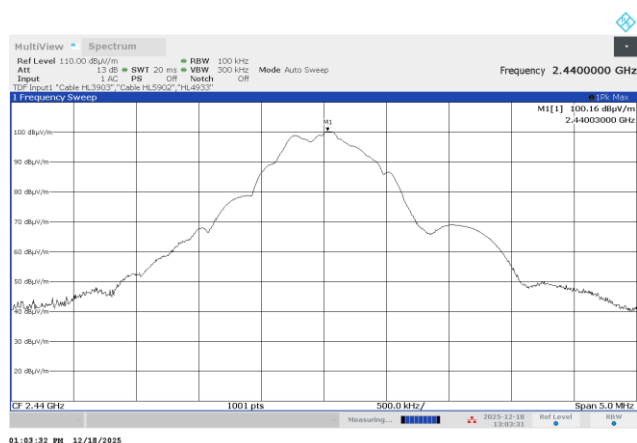




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.5.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

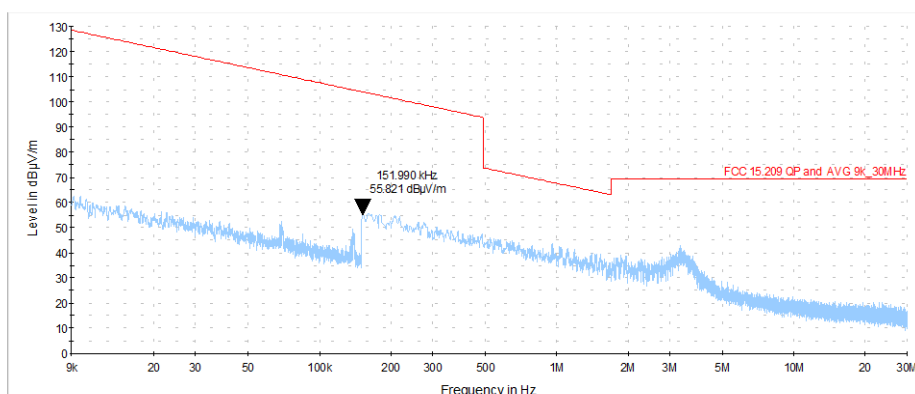

Plot 7.5.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

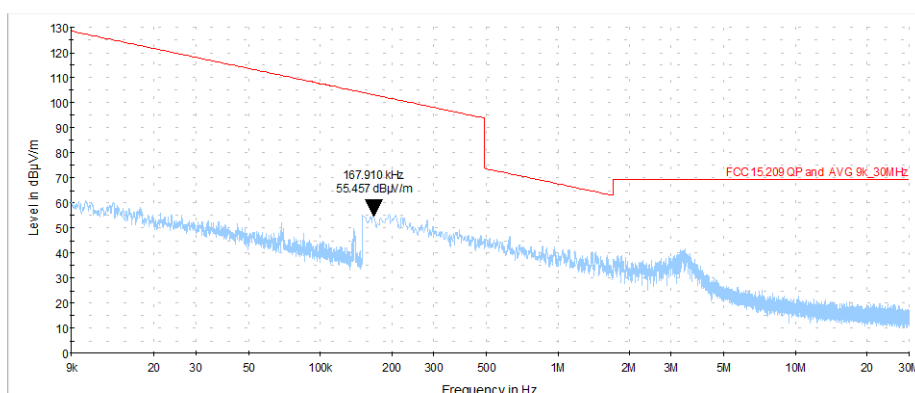




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

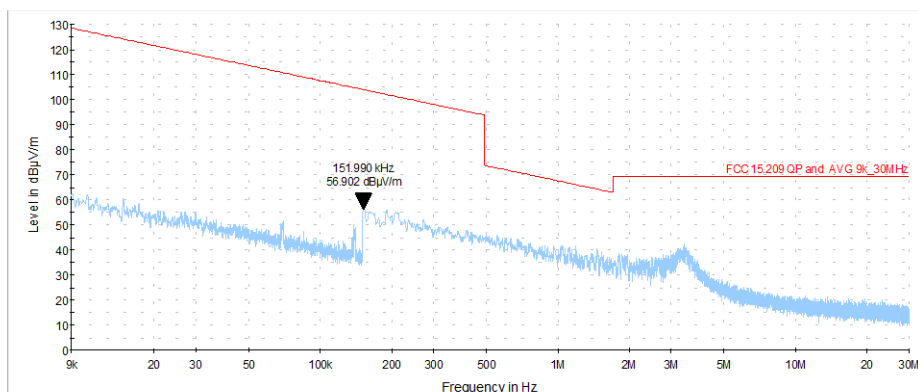




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.5.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

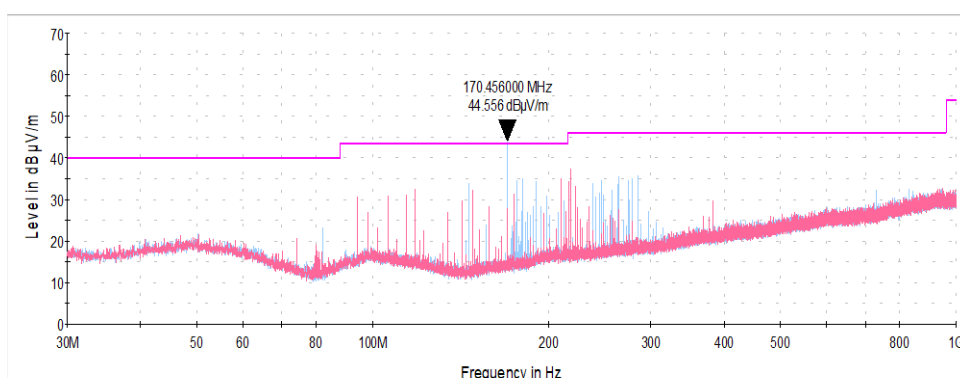

Plot 7.5.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

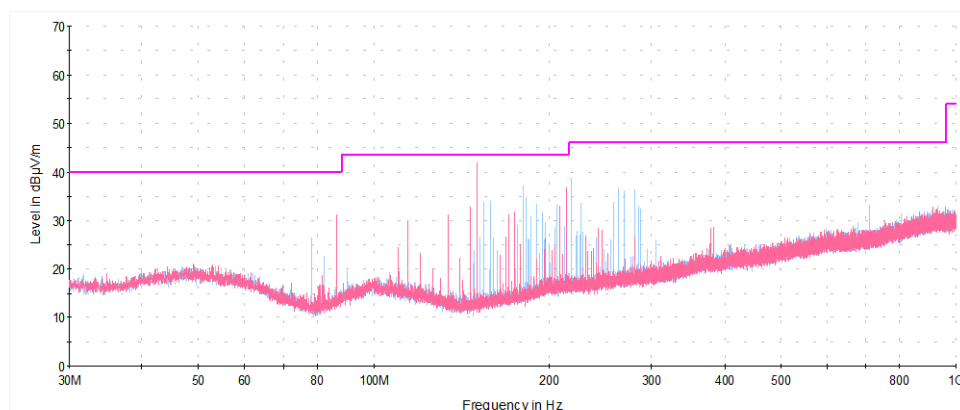




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

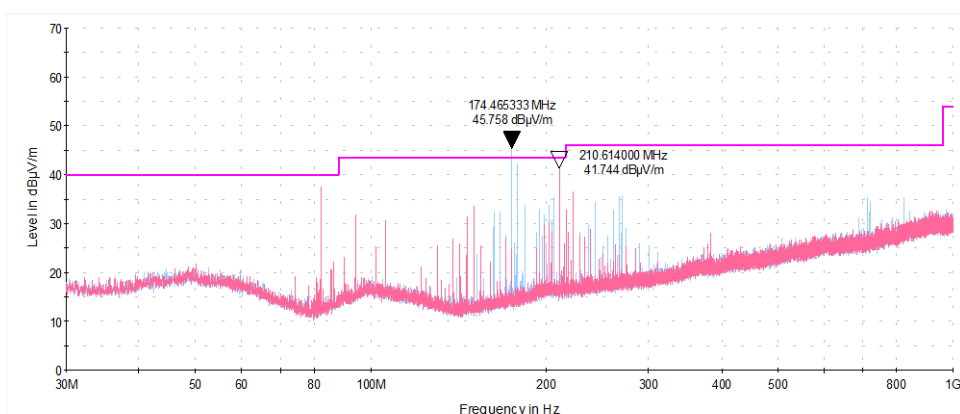




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.10 Radiated emission measurements from 1000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

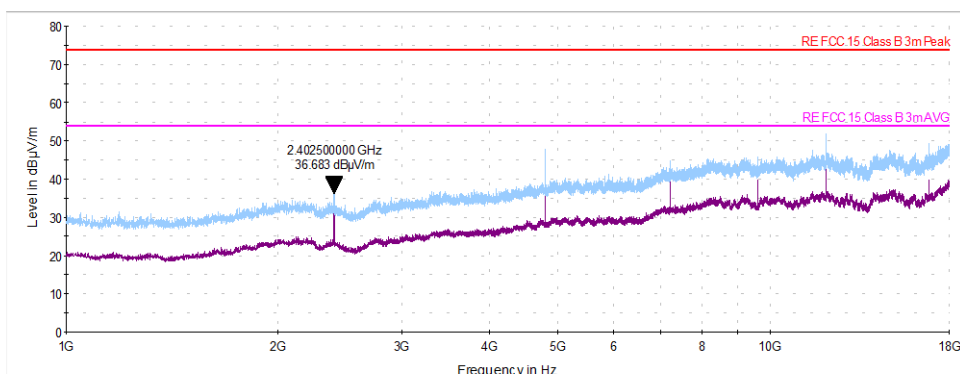

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.

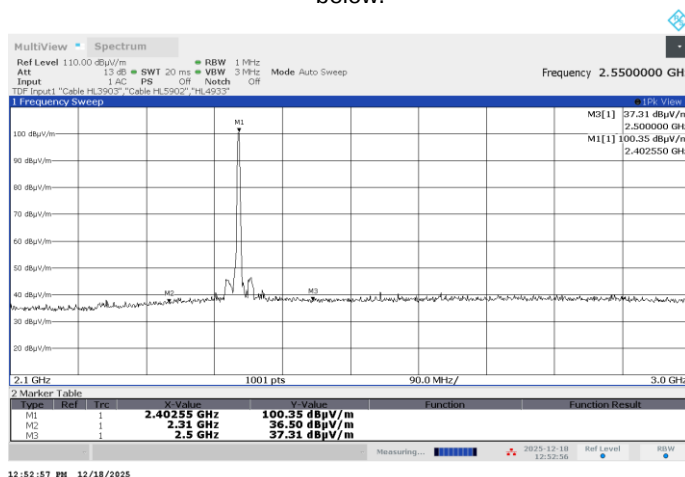




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.11 Radiated emission measurements from 1000 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

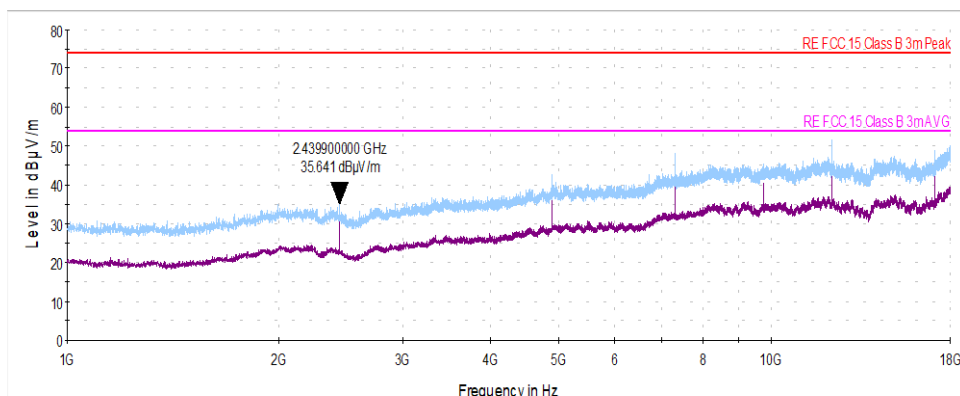

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.

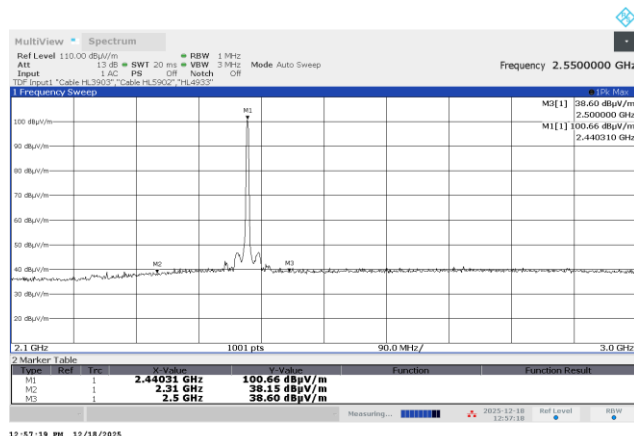




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.12 Radiated emission measurements from 1000 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

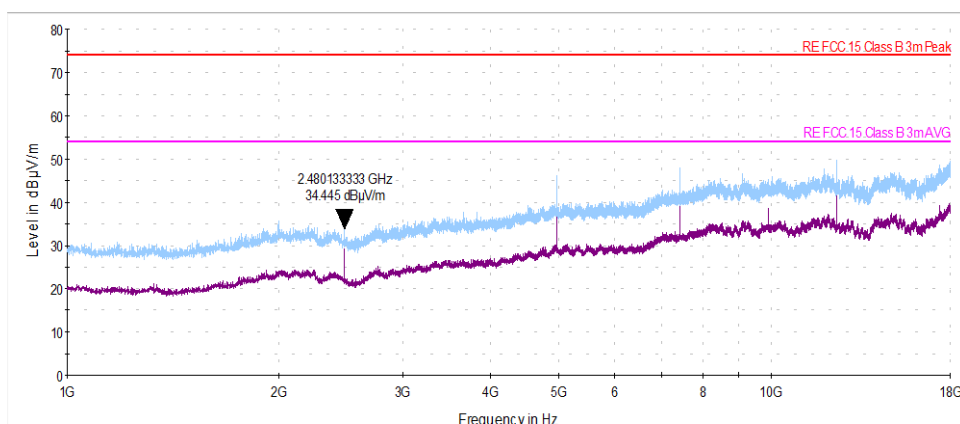

NOTE: The frequency range 2.1 – 3.0 GHz was suppressed by the filter HL4339. This part of the spectrum is on the plot below.





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.13 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal



Plot 7.5.14 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal






HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.15 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

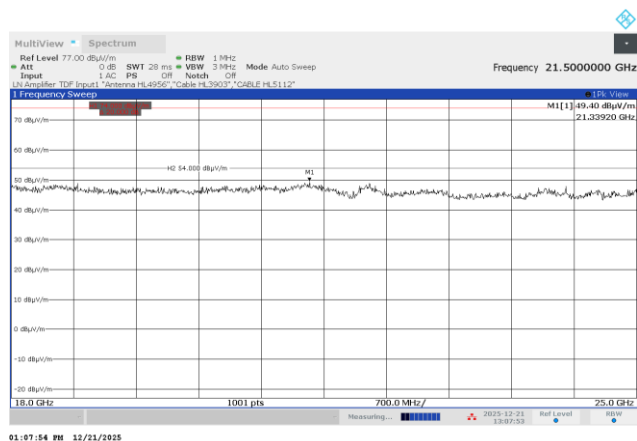



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25 - 21-Dec-25			
Temperature: 27 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.49 Transmission pulse duration and period





Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits


Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μ V/m)	
			Peak	Average
Peak	2400.0 – 2483.5	20.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Figure 7.6.1 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup

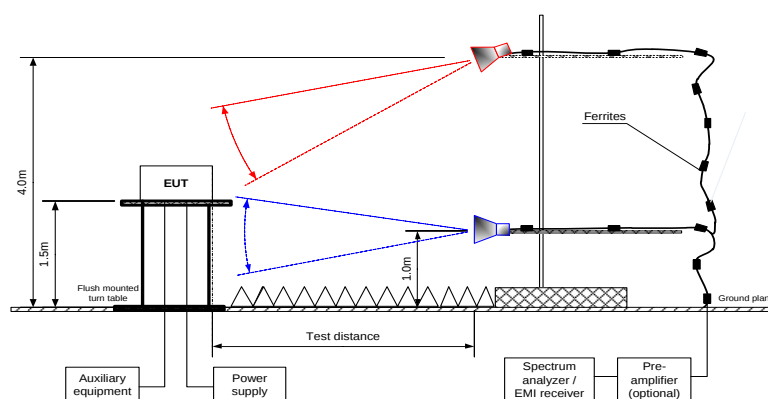



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Table 7.6.2 Band edge emission outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 RESOLUTION BANDWIDTH: 100 kHz

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.0	54.94	101.08	46.14	20	26.14	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.6.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 2 Mbps
 RESOLUTION BANDWIDTH: 1 MHz

Frequency, MHz	Peak field strength			Average field strength			Verdict
	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured Peak, dB(μV/m)	Limit AVR, dB(μV/m)	Margin, dB*	
2390.0	43.74	74.0	-30.26	43.74	54.0	-10.26	Pass
2483.5	49.18	74.0	-24.82	49.18	54.0	-4.82	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3903	HL 4474	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jun-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.6.1 The highest band edge emission at low carrier frequency

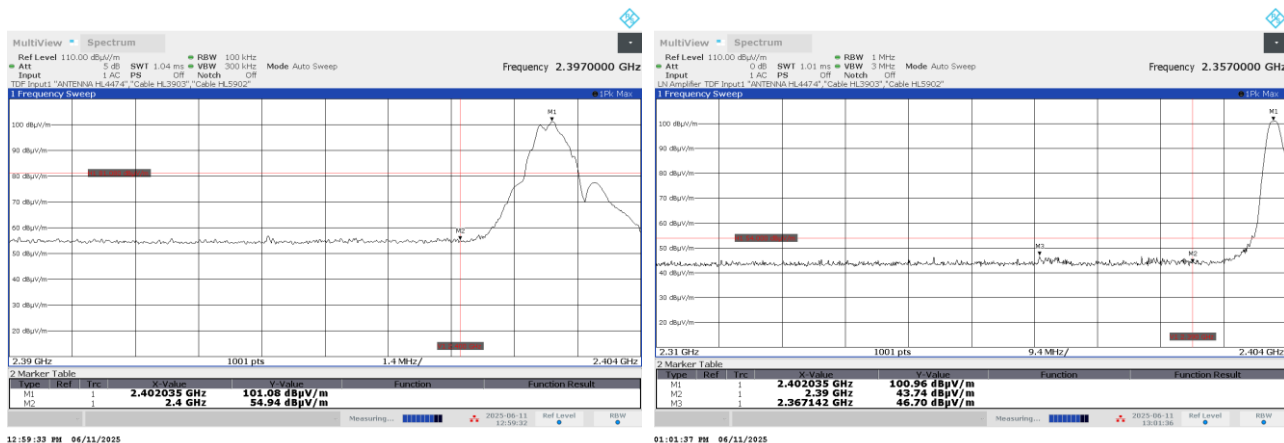

Plot 7.6.2 The highest band edge emission at high carrier frequency

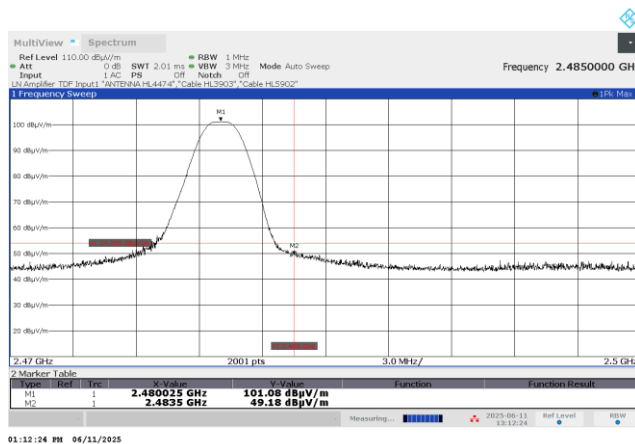



Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

7.7 Band edge radiated emissions AT98-7-22-5-OM-5-N

7.7.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.7.1 Band edge emission limits


Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μ V/m)	
			Peak	Average
Peak	2400.0 – 2483.5	20.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.7.2 Test procedure

- 7.7.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.7.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.7.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.7.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.7.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Figure 7.6.1 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.7.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.7.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.7.1 Band edge emission test setup

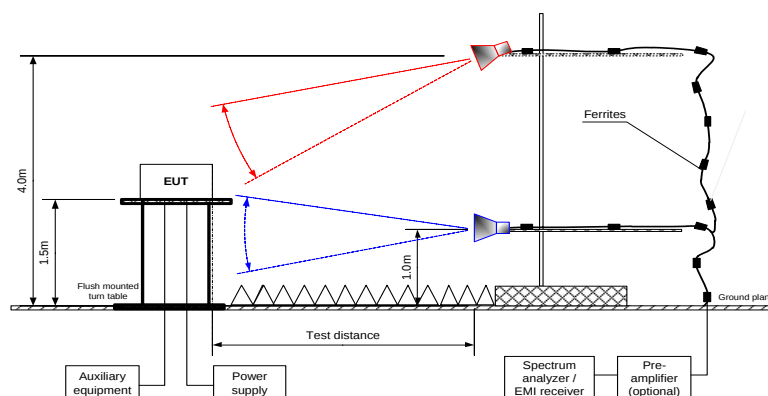



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Table 7.7.2 Band edge emission outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 RESOLUTION BANDWIDTH: 100 kHz

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.0	69.91	100.17	30.26	20	10.26	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.7.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 2 Mbps
 RESOLUTION BANDWIDTH: 1 MHz

Frequency, MHz	Peak field strength			Average field strength			Verdict
	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured Peak, dB(μV/m)	Limit AVR, dB(μV/m)	Margin, dB*	
2390.0	44.66	74.0	-29.34	44.66	54.0	-9.34	Pass
2483.5	48.04	74.0	-25.96	48.04	54.0	-5.96	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3903	HL 4474	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.7.1 The highest band edge emission at low carrier frequency

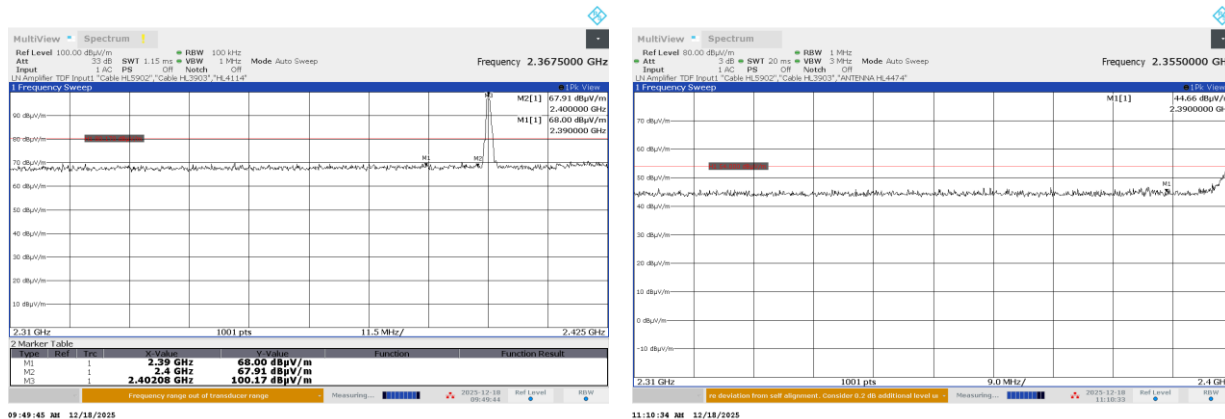

Plot 7.7.2 The highest band edge emission at high carrier frequency

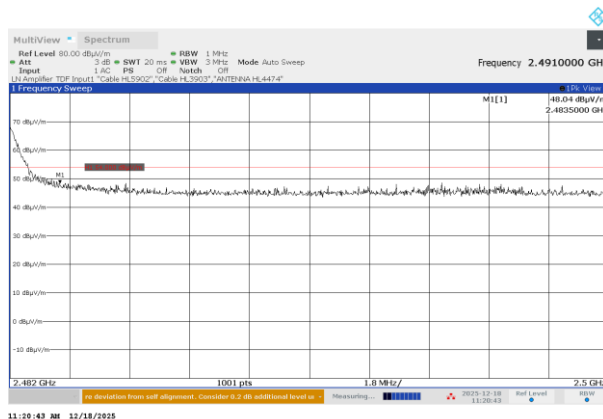



Test specification: FCC section 15.247(e), RSS-210 A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

7.8 Peak spectral power density

7.8.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test are given in Table 7.8.1.

Table 7.8.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.8.2 Test procedure for field strength measurements

7.8.2.1 The EUT was set up as shown in Figure 7.8.1, energized and its proper operation was checked.

7.8.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.8.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.


7.8.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.8.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.8.2 and associated plots.



Test specification: FCC section 15.247(e), RSS-210 A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.8.1 Setup for carrier field strength measurements

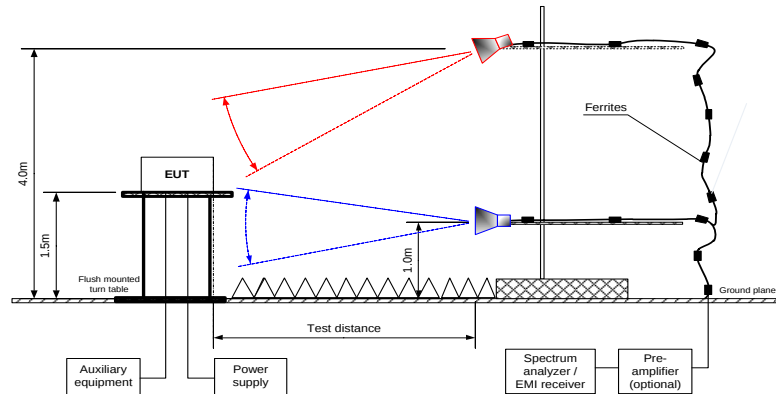



Test specification: FCC section 15.247(e), RSS-210 A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Table 7.8.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER: 3.28 dBm at low carrier frequency
 3.80 dBm at mid carrier frequency
 3.82 dBm at high carrier frequency

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2402	100.71	2.5	103.2	-4.99	H	2.5	30
2440	100.55	2.5	103.2	-5.15	H	1.9	30
2480	100.66	2.5	103.2	-5.04	H	2.7	27

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4474	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC section 15.247(e), RSS-210 A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.8.1 Peak spectral power density at low frequency

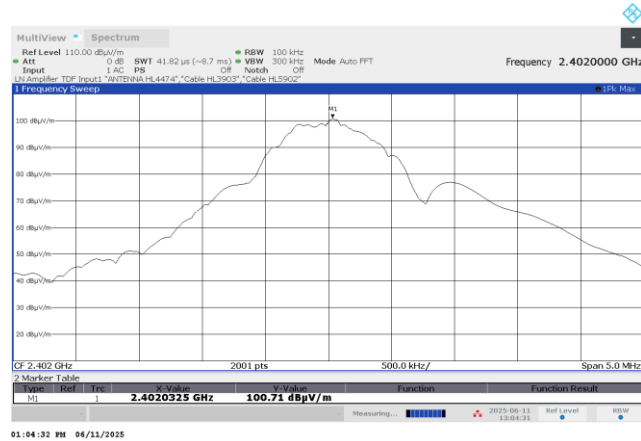

Plot 7.8.2 Peak spectral power density at mid frequency






HERMON LABORATORIES

Test specification: FCC section 15.247(e), RSS-210 A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.8.3 Peak spectral power density at high frequency

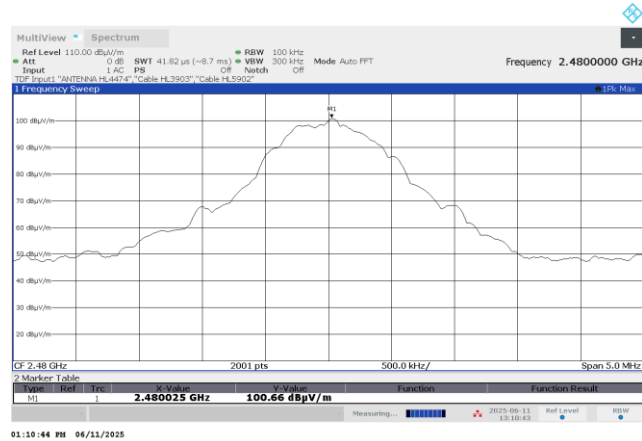



Test specification: FCC Section 15.203/ RSS-Gen, Section 7.1.4, Antenna requirement			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict:	
Date(s): 08-Jul-24 - 11-Jul-24			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1003 hPa	Power: 3.6 VDC
Remarks:			

7.9 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.9.1.

Table 7.9.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

8 Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
FCC 47 CFR, Section 15.109				
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*
ICES-003, Section 3.2.2				
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
1000 - 40000	---	74 (Peak) 54 (AVR)	---	80 (Peak) 60 (AVR)

* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – the standard defined and the test distance respectively in meters.

8.1.2 Test procedure for measurements in semi-anechoic chamber

8.1.2.1 30 – 1000 MHz range. The EUT was set up as shown in Figure 8.1.1 and the associated photograph/s, energized and the EUT performance was checked.

8.1.2.2 The measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.

8.1.2.3 1000 – 40000 MHz range. The EUT was set up as shown in Figure 8.1.2 and the associated photograph/s, energized and the EUT performance was checked.

8.1.2.4 The measurements were performed in the semi anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. In order to stay within the 3 dB beamwidth while keeping the antenna height scanned from 1 to 4 m, a few sweeps with different antenna angles over the entire height were performed.

8.1.2.5 The worst test results with respect to the limits were recorded in Table 8.1.2 and shown in the associated plots.



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber in 30 – 1000 MHz range, table-top EUT


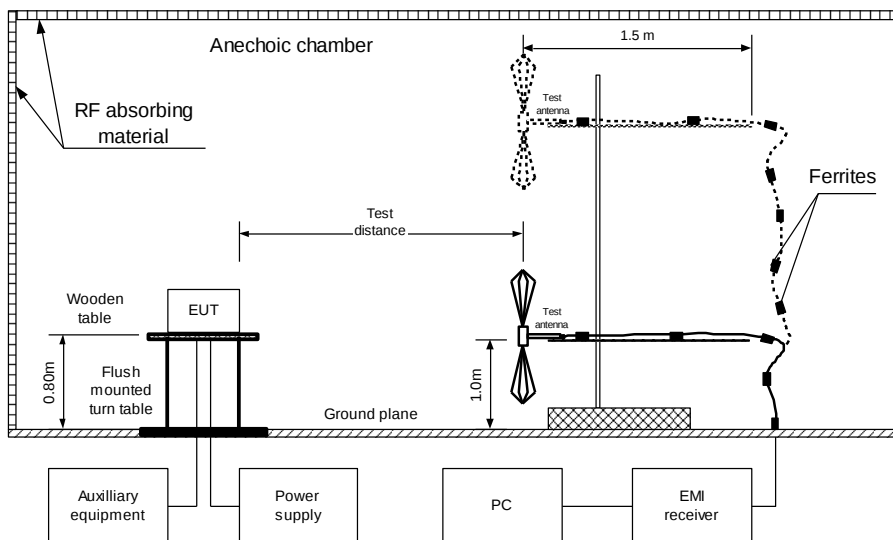


Figure 8.1.2 Setup for radiated emission measurements in 1000 – 40000 MHz range, table-top EUT



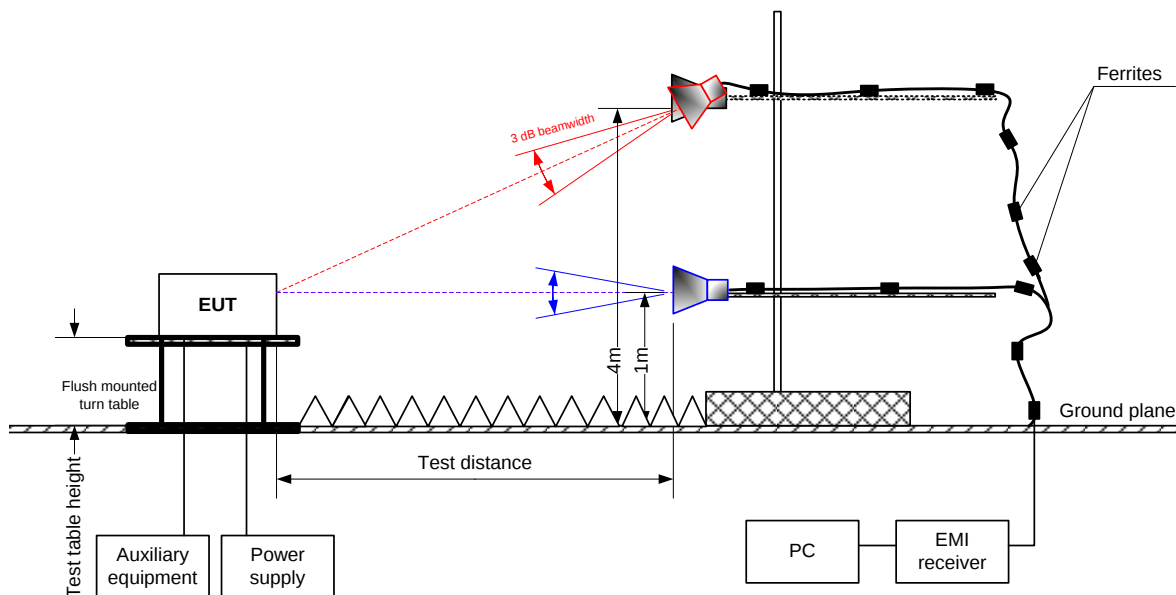

HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
70.3	44.5	31.2	40.0	-8.8	Vertical	1.0	33	Pass
138.5	48.0	36.3	43.5	-7.2	Vertical	1.0	-110	
182.7	47.0	35.8	43.5	-7.7	Vertical	1.0	-110	
186.7	50.8	37.6	43.5	-5.9	Vertical	1.0	-110	
202.9	43.8	30.9	43.5	-12.6	Vertical	1.0	-180	
206.8	50.4	35.9	43.5	-7.6	Vertical	1.0	-180	

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 13000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

RESOLUTION BANDWIDTH:							1000 KHz					
Frequency, MHz	Peak			Average			Antenna polarization	Antenna tilt, degrees	Antenna height, m	Turn-table position**, degrees	Verdict	
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*						
No emissions found												Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 5288	HL 4933	HL 7585	HL 5902	HL 3903			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-Jun-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal

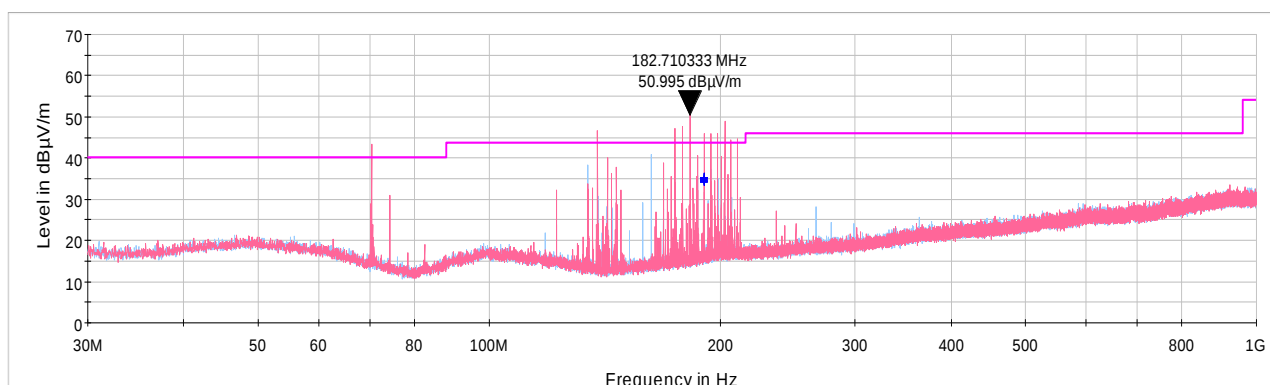

Plot 8.1.2 Radiated emission measurements above 1000 MHz

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal

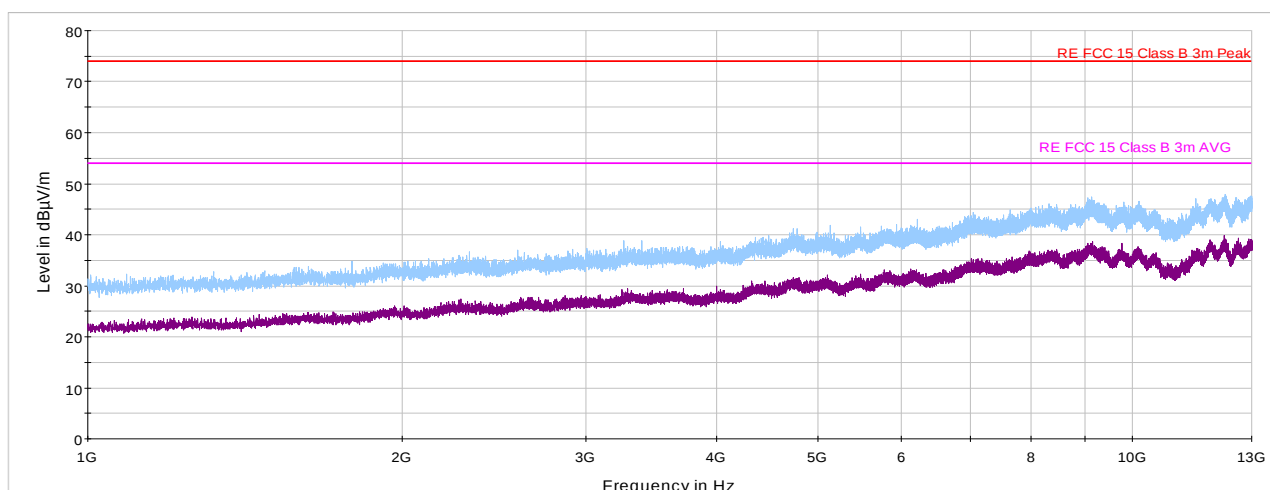



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

8.2 Radiated emission measurements AT98-7-22-5-OM-5-N

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.1.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
FCC 47 CFR, Section 15.109				
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*
ICES-003, Section 3.2.2				
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
1000 - 40000	---	74 (Peak) 54 (AVR)	---	80 (Peak) 60 (AVR)

* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – the standard defined and the test distance respectively in meters.

8.2.2 Test procedure for measurements in semi-anechoic chamber

8.2.2.1 30 – 1000 MHz range. The EUT was set up as shown in Figure 8.1.1 and the associated photograph/s, energized and the EUT performance was checked.

8.2.2.2 The measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.

8.2.2.3 1000 – 40000 MHz range. The EUT was set up as shown in Figure 8.1.2 and the associated photograph/s, energized and the EUT performance was checked.

8.2.2.4 The measurements were performed in the semi anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. In order to stay within the 3 dB beamwidth while keeping the antenna height scanned from 1 to 4 m, a few sweeps with different antenna angles over the entire height were performed.

8.2.2.5 The worst test results with respect to the limits were recorded in Table 8.1.2 and shown in the associated plots.



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber in 30 – 1000 MHz range, table-top EUT


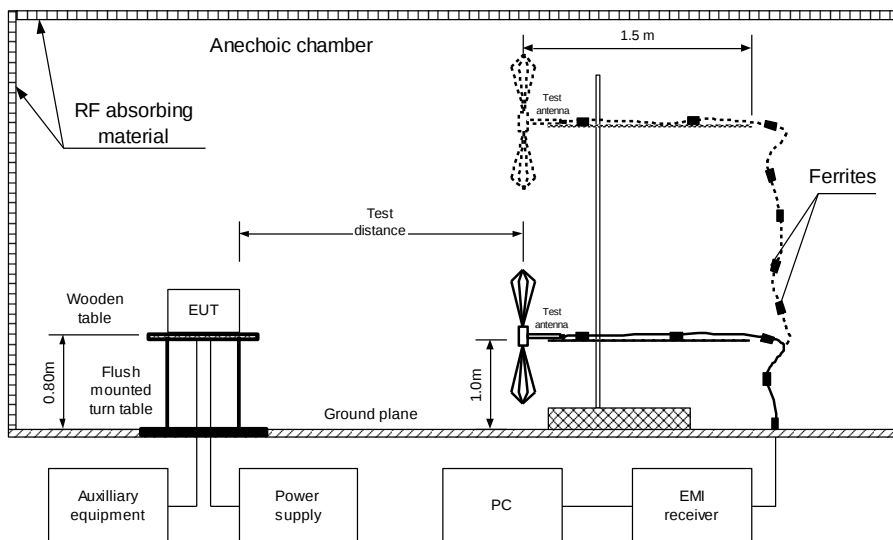


Figure 8.2.2 Setup for radiated emission measurements in 1000 – 40000 MHz range, table-top EUT



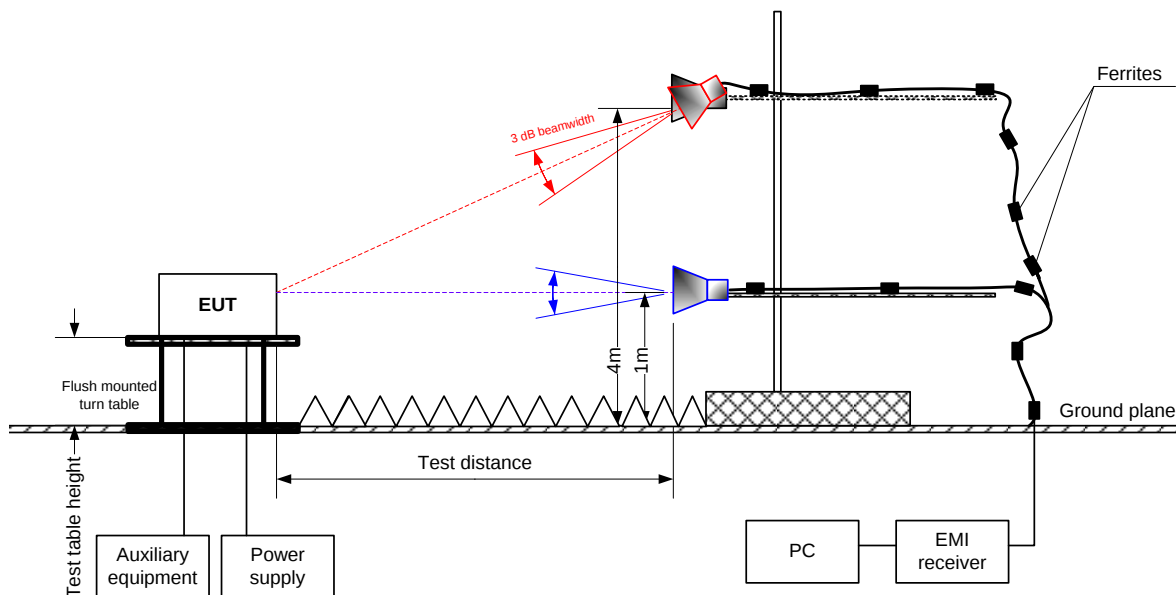

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
170.5	50.1	34.7	43.5	-8.8	Horizontal	1.8	163	Pass
174.5	50.3	34.9	43.5	-8.6	Horizontal	1.8	163	
178.5	46.7	32.3	43.5	-11.2	Horizontal	1.2	-2	
218.6	39.7	26.2	43.5	-17.3	Horizontal	1.0	104	
234.7	37.6	23.9	43.5	-19.6	Horizontal	1.2	180	
270.8	39.0	24.5	43.5	-19.0	Horizontal	1.0	-180	

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 13000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Resolution Bandwidth: 1000 Hz							Antenna polarization	Antenna tilt, degrees	Antenna height, m	Turn-table position**, degrees	Verdict	
Frequency, MHz	Peak			Average								
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*						
No emissions found												Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 5288	HL 4933	HL 7585	HL 5902	HL 3903			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Dec-25			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3.7 VDC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal

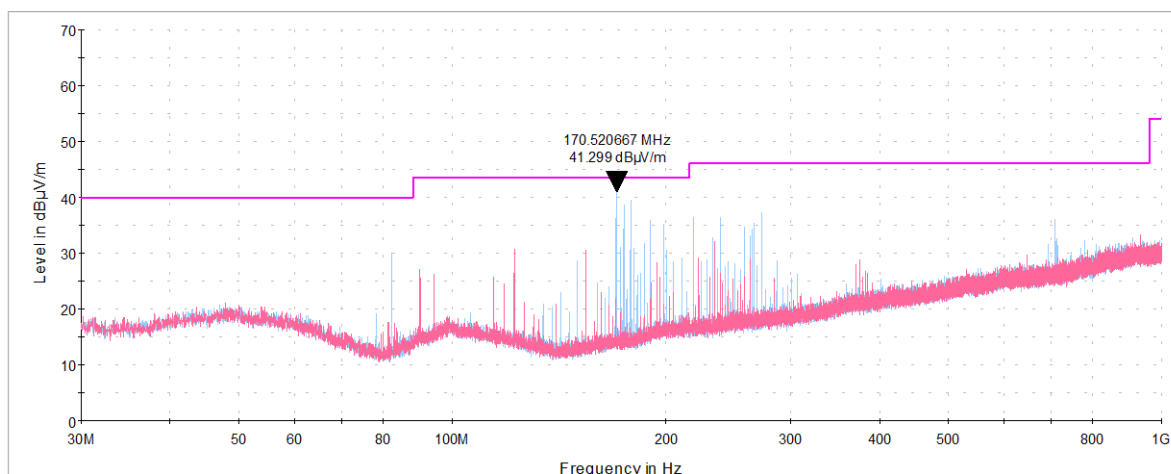

Plot 8.2.2 Radiated emission measurements above 1000 MHz

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal

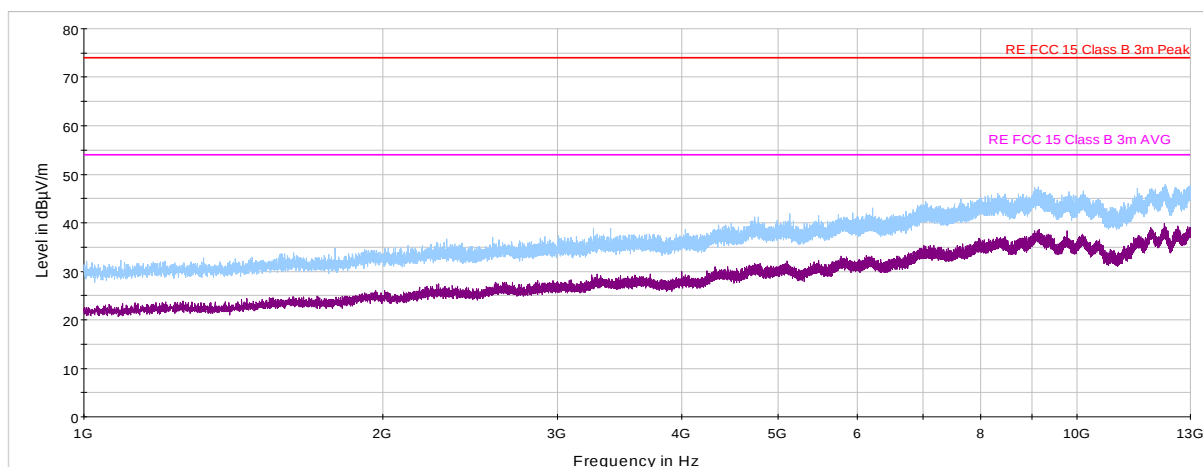

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	18-Feb-25	18-Feb-26
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	10-Jun-25	10-Jun-26
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	27-Oct-24	27-Oct-25
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	24-Nov-25	24-Nov-26
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM5011 5-02	001	05-Jun-25	05-Jun-27
4474	Double Ridged Waveguide Antenna, 0.8 to 18 GHz	FT-RT Antenna, Inc.	HA-08M18G-NF	20120609 01	27-Oct-24	27-Oct-25
4474	Double Ridged Waveguide Antenna, 0.8 to 18 GHz	FT-RT Antenna, Inc.	HA-08M18G-NF	20120609 01	04-Nov-25	04-Nov-26
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	19-Feb-25	19-Feb-26
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	25-Mar-25	25-Mar-26
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500MM	502494/2EA	09-Jun-25	09-Jun-26
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Apr-25	08-Apr-27
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	24-Apr-25	24-Apr-26
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	24-Sep-24	24-Sep-25
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	30-Sep-25	30-Sep-26

10 APPENDIX B Test equipment correction factors

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

13 APPENDIX E

Specification references

FCC 47CFR part 15: 2023	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247 Issue 3: 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 with_amendment_1_2: 2021	General Requirements and Information for the Certification of Radiocommunication Equipment
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ICES-003: 2020, Issue 7	Information Technology Equipment (Including Digital Apparatus)

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

15 APPENDIX G Manufacturer's declaration



AT98-7 Declaration

We, the undersigned,

Company Name: Arad Technologies LTD
Address: Hamada 4, Yokneam Ellit
Country: Israel
Telephone number: 972-4-9935222
Fax number: 972-4-9935227

Declare under our sole responsibility that the only change is with mechanical pipeline diameter and material type (see below), no change at all in **AT98-7** electronics.

AT98-7-22-5-P-5-N	AT98-7-21-5-P-5-N	AT98-7-1-13-P-5-N	Short description
			Accurate water meter, using the ultrasonic principle.
5/8" Polymer	3/4" Polymer	1" Polymer	Pipeline diameter / material
7.5" inch	7.5" inch	10.75" inch	Pipeline length

AT98-7-22-5-OM-5-N	AT98-7-21-5-OM-5-N	AT98-7-1-13-OM-5-N	Short description
			Accurate water meter, using the ultrasonic principle.
5/8" Brass	3/4" Brass	1" Brass	Pipeline diameter / material
7.5" inch	7.5" inch	10.75" inch	Pipeline length

AT98-7-23-17-5-S-N	AT98-7-2-11-5-S-N	AT98-7-2-25-5-S-N	Short description
			Accurate water meter, using the ultrasonic principle.
1.5" Stainless steel	2" Stainless steel	2" Stainless steel	Pipeline diameter / material
13" inch	10" inch	17" inch	Pipeline length

July 29, 2025

Glad Eliel
Project Manager

Company Stamp

Arad Technologies Ltd

END OF DOCUMENT