



FCC Part 15C Test Report

FCC ID: 2A7AFF-3020D

Applicant: Shenzhen Jiuyang Video Electronic Technology Co., Ltd

Address: E1, No. 41, Shasan Road, Shasan Community, Shajing Street, Baoan District, Shenzhen, China

Manufacturer: Shenzhen Jiuyang Video Electronic Technology Co., Ltd

Address: E1, No. 41, Shasan Road, Shasan Community, Shajing Street, Baoan District, Shenzhen, China

EUT: Portable car DVD player

Trade Mark: N/A

Model Number: F-3020D
F-3018D, W-1018D, R-3020, R-3018, R-1018, GT-1018

Date of Receipt: May. 25, 2022

Test Date: May. 25, 2022 – May. 31, 2022

Date of Report: May. 31, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.239
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20220531037E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	13
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS FOR FIELD STRENGTH OF FUNDAMENTAL	23
3.2.9 TEST RESULTS FOR FIELD STRENGTH OF BAND EDGE EMISSION	23
3.2.10 TEST RESULTS FOR FIELD STRENGTH ABOVE 1GHZ	23
4 . BANDWIDTH TEST	24
4.1 APPLIED PROCEDURES / LIMIT	24
4.1.1 TEST PROCEDURE	24
4.1.2 DEVIATION FROM STANDARD	24
4.1.3 TEST SETUP	24
4.1.4 EUT OPERATION CONDITIONS	24
4.1.5 TEST RESULTS	25
5 . ANTENNA REQUIREMENT	27
5.1 STANDARD REQUIREMENT	27



Table of Contents	Page
5.2 EUT ANTENNA	27
6 . TEST SEUUP PHOTO	28
7 . EUT PHOTO	30



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.239) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.239(c), 15.209(a) 15.239(b), 15.205(a)	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205, 15.239(c)	Band Edge Emission	PASS	
15.215(c)	20dB Bandwidth	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.42\text{dB}$
3	Spurious emissions, conducted	$\pm 2.76\text{dB}$
4	All emissions, radiated (<1G)	$\pm 3.65\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Portable car DVD player
Trademark	N/A
Model No.:	F-3020D F-3018D, W-1018D, R-3020, R-3018, R-1018, GT-1018
Model Difference	All samples are the same except the model number and appearance color, so we prepare "F-3020D" for test only.
Operation Frequency:	88.5-107.5MHz
Channel numbers:	4 Channels
Modulation technology:	FM
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	DC 12V from car charger DC 5V from adapter
Adapter:	Model: KYL-01201500 I/P: AC 100-240V 50-60Hz O/P: DC 12V 1.5A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. The EUT's all information provided by client.



3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	88.5	02	95.5	03	106.3
04	107.5				

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH01	FM
Mode 2	CH02	
Mode 3	CH04	
Mode 4	Link Mode	


For Conducted & Radiated Emission		
Final Test Mode	Description	
Mode 1	CH01	FM
Mode 2	CH02	
Mode 3	CH04	
Mode 4	Link Mode	

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated and Conducted Spurious Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Portable car DVD player	F-3020D	N/A	EUT
E-2	Adapter	KYL-01201500	N/A	Provide by client.

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

None.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 06, 2021	Nov. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 06, 2021	Nov. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 06, 2021	Nov. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 06, 2021	Nov. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 06, 2021	Nov. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 06, 2021	Nov. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 06, 2021	Nov. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 06, 2021	Nov. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 06, 2021	Nov. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 06, 2021	Nov. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 06, 2021	Nov. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 06, 2021	Nov. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 06, 2021	Nov. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 06, 2021	Nov. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 06, 2021	Nov. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 06, 2021	Nov. 05, 2022

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Nov. 06, 2021	Nov. 05, 2022
3	LISN	R&S	ENV216	102417	Nov. 06, 2021	Nov. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 06, 2021	Nov. 05, 2022

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

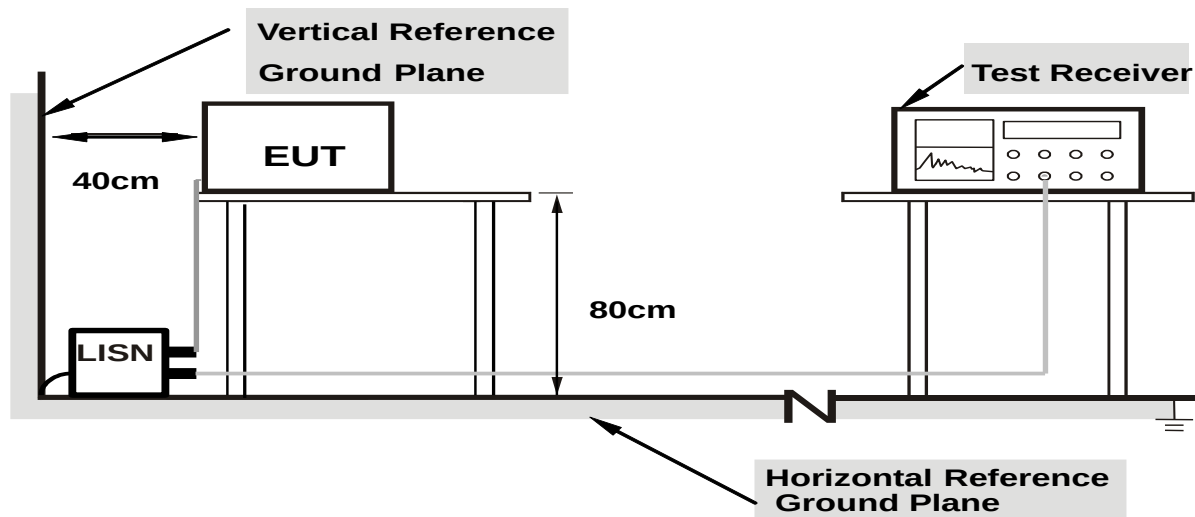

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

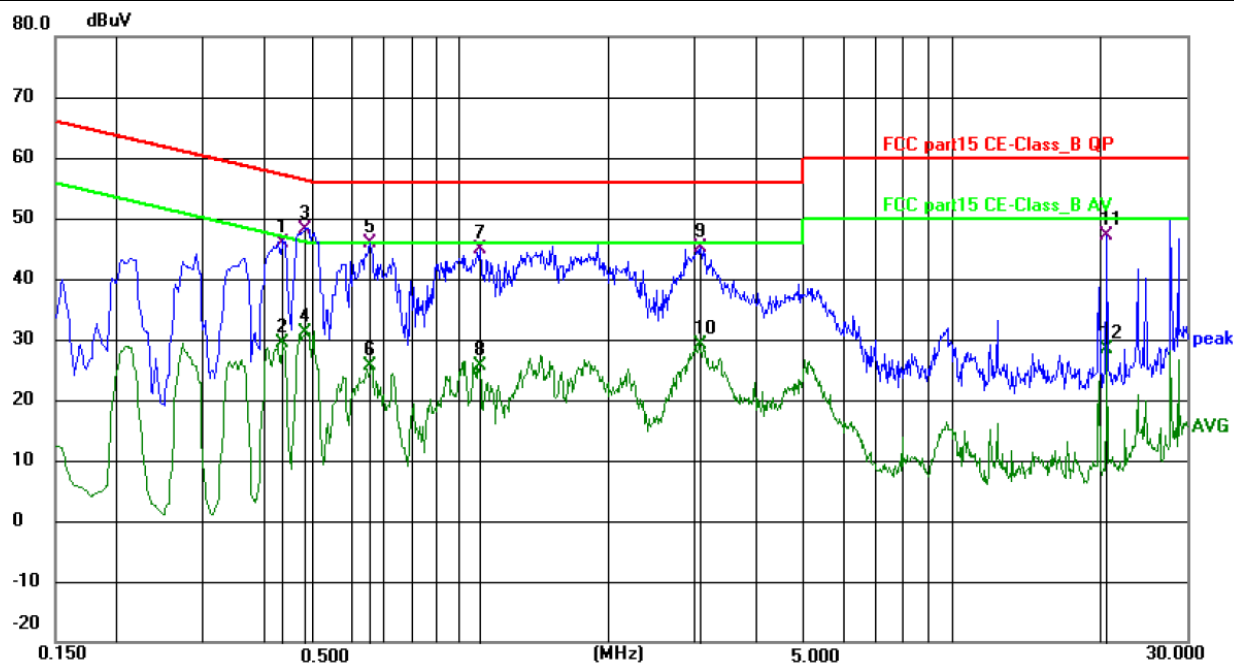


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.432800	36.78	9.15	45.93	57.20	-11.27	QP	P	
2	0.432800	20.21	9.15	29.36	47.20	-17.84	AVG	P	
3 *	0.481100	38.91	9.17	48.08	56.32	-8.24	QP	P	
4	0.481100	21.90	9.17	31.07	46.32	-15.25	AVG	P	
5	0.654000	36.42	9.36	45.78	56.00	-10.22	QP	P	
6	0.654000	16.31	9.36	25.67	46.00	-20.33	AVG	P	
7	1.094900	35.57	9.33	44.90	56.00	-11.10	QP	P	
8	1.094900	16.39	9.33	25.72	46.00	-20.28	AVG	P	
9	3.079400	36.53	8.65	45.18	56.00	-10.82	QP	P	
10	3.079400	20.41	8.65	29.06	46.00	-16.94	AVG	P	
11	20.611400	36.52	10.51	47.03	60.00	-12.97	QP	P	
12	20.611400	17.83	10.51	28.34	50.00	-21.66	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

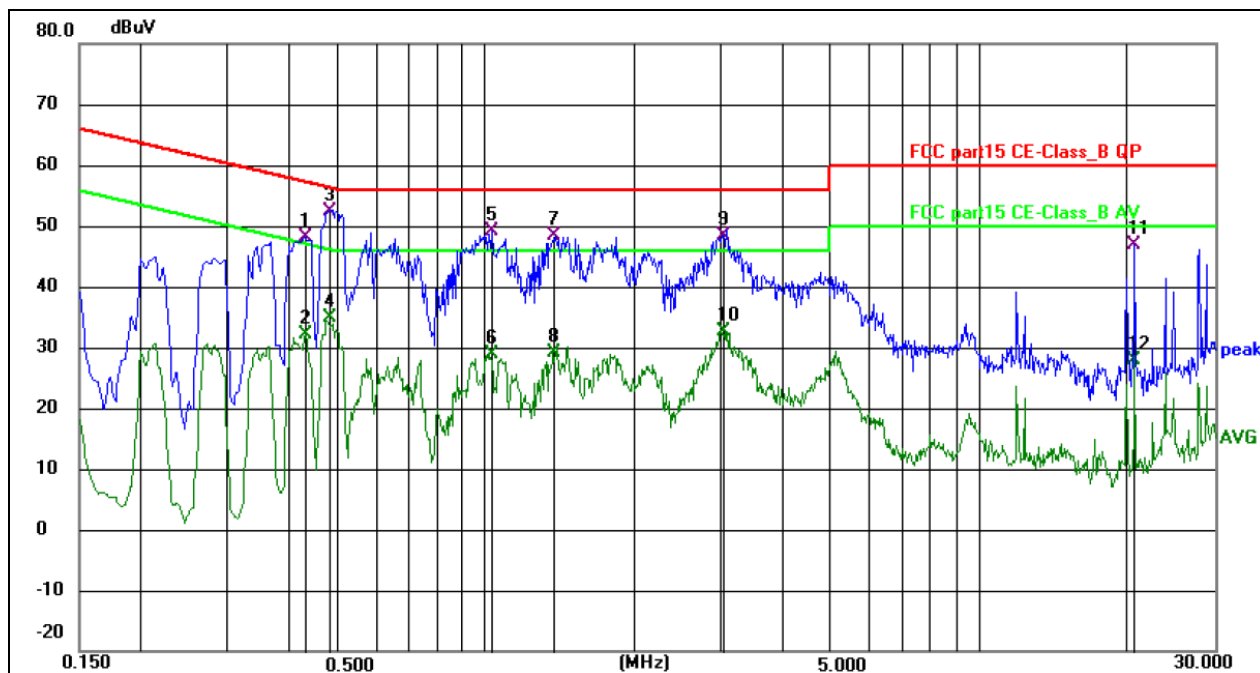

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.429000	38.82	9.28	48.10	57.27	-9.17	QP	P	
2	0.429000	22.88	9.28	32.16	47.27	-15.11	AVG	P	
3 *	0.483000	43.10	9.36	52.46	56.29	-3.83	QP	P	
4	0.483000	25.41	9.36	34.77	46.29	-11.52	AVG	P	
5	1.027500	39.78	9.42	49.20	56.00	-6.80	QP	P	
6	1.027500	19.53	9.42	28.95	46.00	-17.05	AVG	P	
7	1.382900	38.77	9.57	48.34	56.00	-7.66	QP	P	
8	1.382900	19.59	9.57	29.16	46.00	-16.84	AVG	P	
9	3.039000	38.57	9.83	48.40	56.00	-7.60	QP	P	
10	3.039000	22.89	9.83	32.72	46.00	-13.28	AVG	P	
11	20.629500	36.29	10.53	46.82	60.00	-13.18	QP	P	
12	20.629500	17.26	10.53	27.79	50.00	-22.21	AVG	P	

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
88-108 MHz	250	2500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.



- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. (Above 18GHz the distance is 3 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

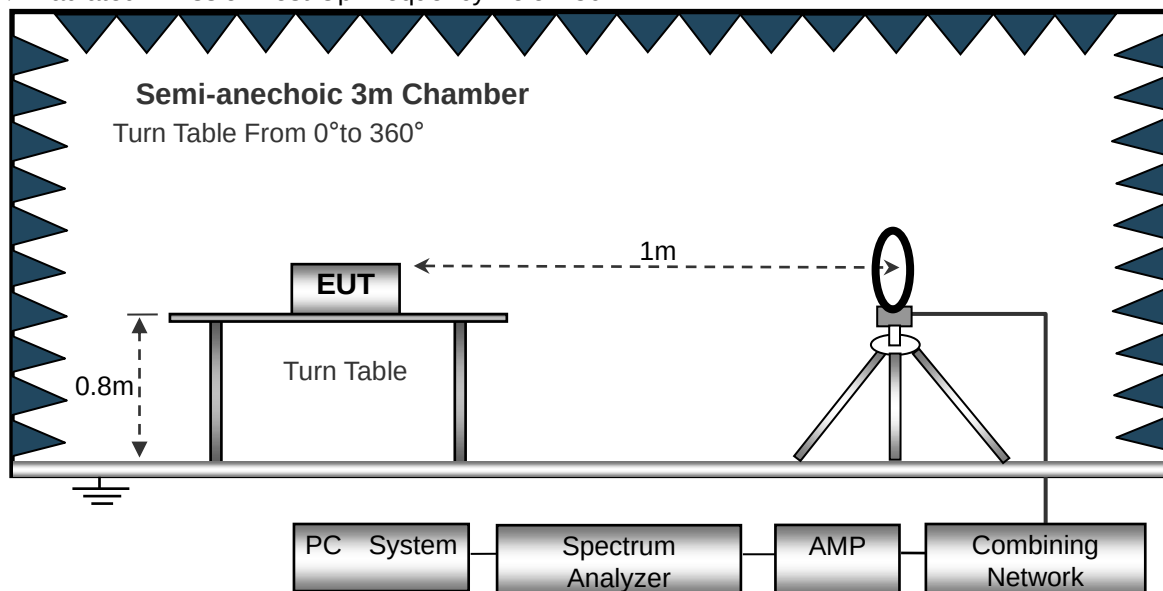

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

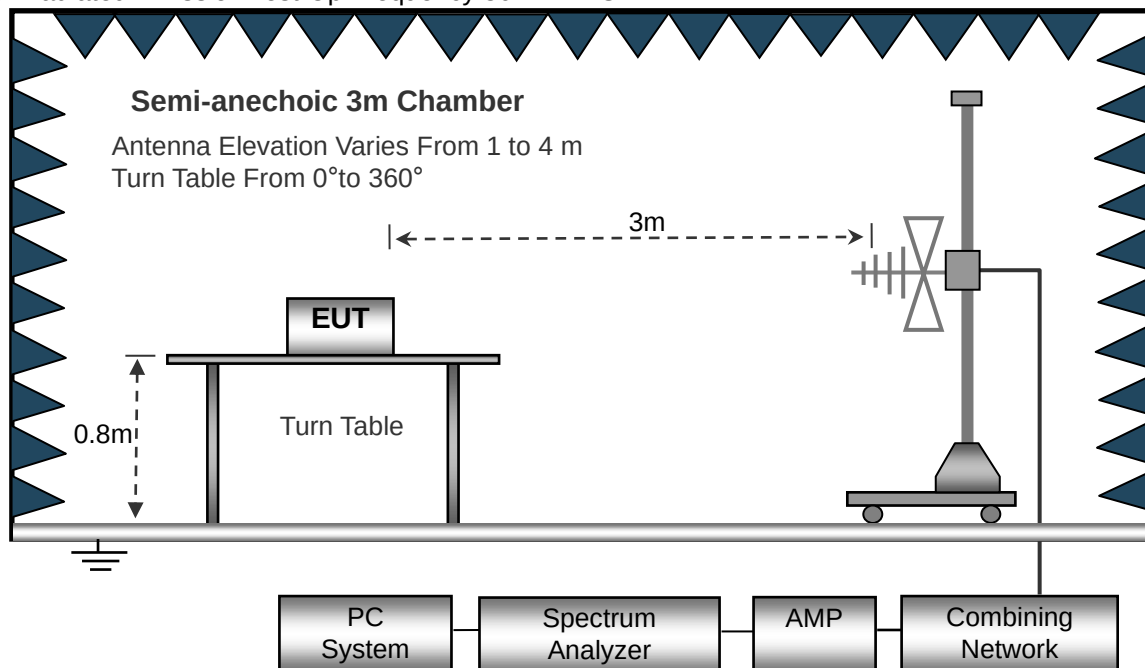

(C) Radiated Emission Test-Up Frequency Above 1GHz

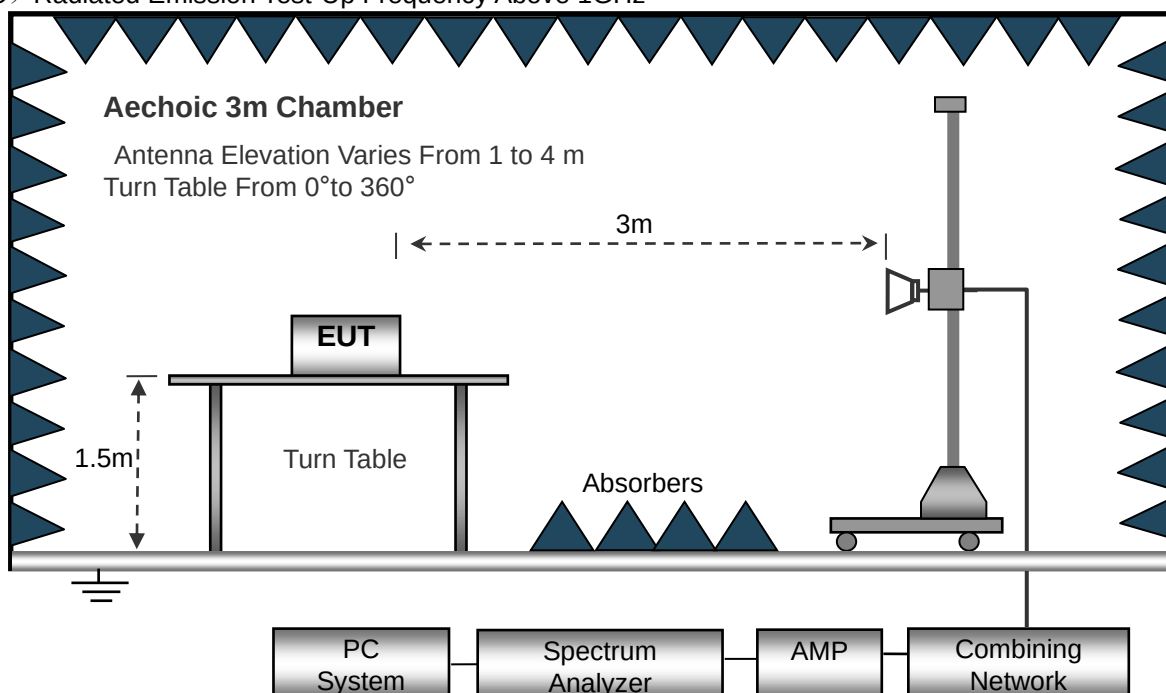

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12.0V		
Test Mode :	Mode 1		

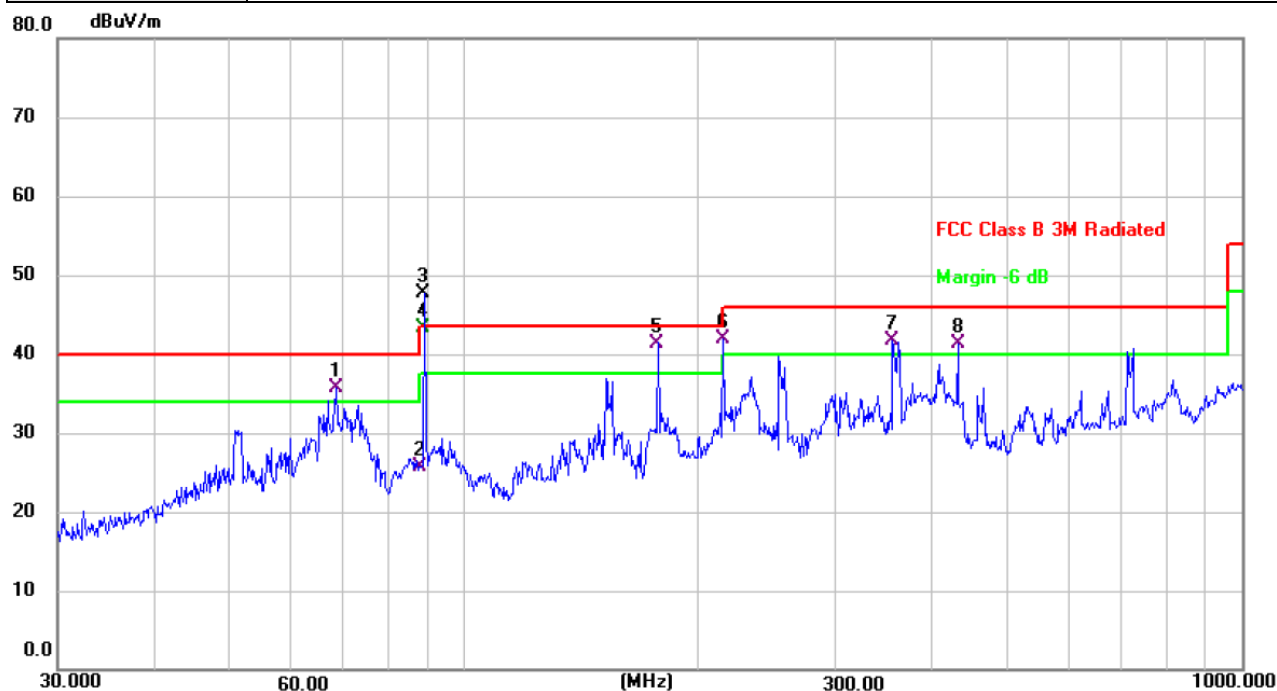

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	68.3907	50.99	-15.22	35.77	40.00	-4.23	QP
2	88.0000	41.46	-15.79	25.67	40.00	-14.33	QP
3 *	88.5000	63.32	-15.68	47.64	43.50	4.14	peak
4	88.5000	59.02	-15.68	43.34	43.50	-0.16	AVG
5 !	177.0000	56.10	-14.74	41.36	43.50	-2.14	QP
6 !	215.2677	54.24	-12.36	41.88	43.50	-1.62	QP
7 !	355.4272	50.79	-9.10	41.69	46.00	-4.31	QP
8 !	431.0314	49.05	-7.78	41.27	46.00	-4.73	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12.0V		
Test Mode :	Mode 1		

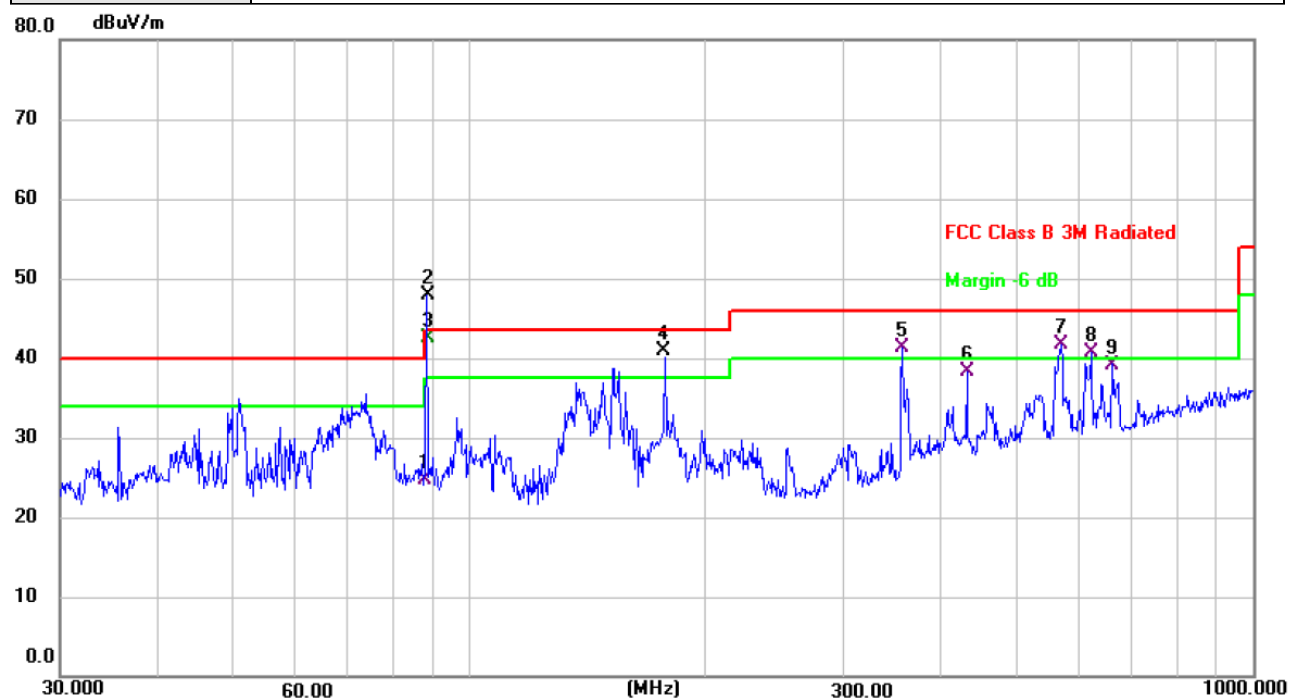

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	88.0000	40.44	-15.79	24.65	40.00	-15.35	QP
2 *	88.5000	63.59	-15.68	47.91	43.50	4.41	peak
3	88.5000	58.26	-15.68	42.58	43.50	-0.92	AVG
4 !	177.0000	55.61	-14.74	40.87	43.50	-2.63	peak
5 !	356.6758	50.44	-9.08	41.36	46.00	-4.64	QP
6	431.0315	46.06	-7.78	38.28	46.00	-7.72	QP
7 !	568.6126	46.98	-5.31	41.67	46.00	-4.33	QP
8 !	620.7096	45.13	-4.35	40.78	46.00	-5.22	QP
9	661.1504	42.86	-3.66	39.20	46.00	-6.80	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12.0V		
Test Mode :	Mode 2		

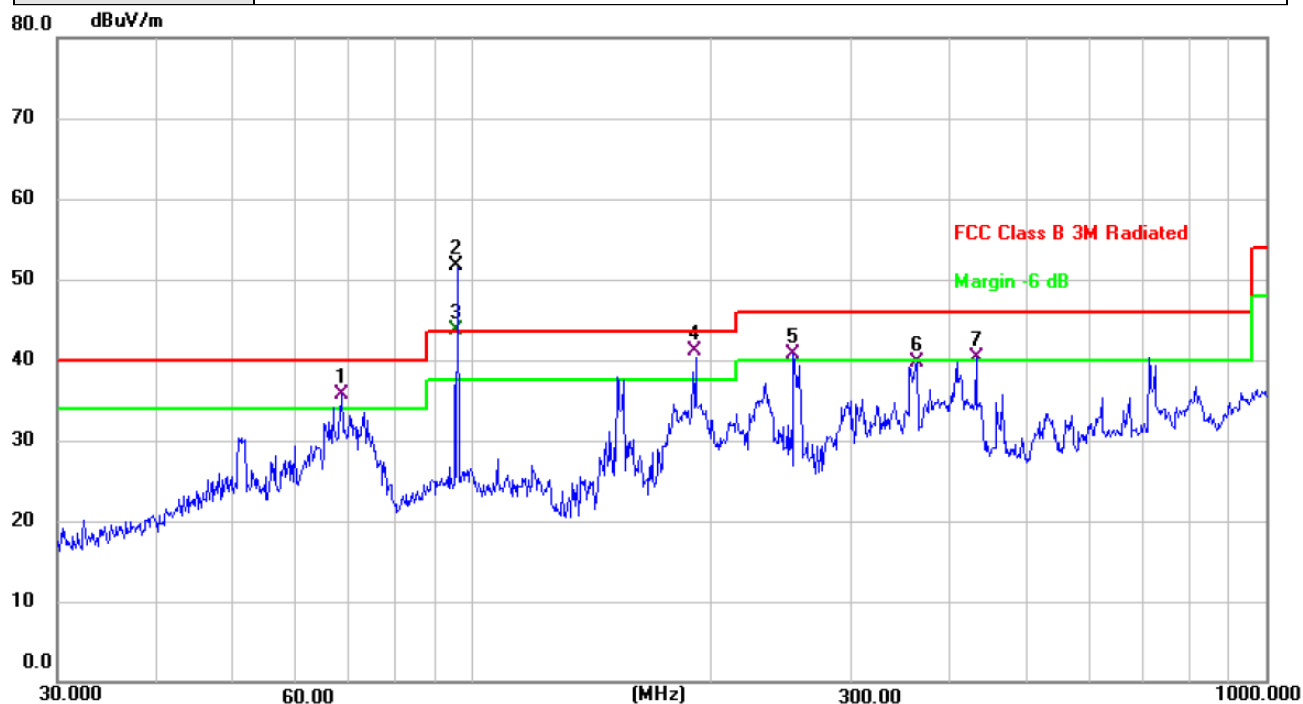

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	68.3906	50.99	-15.22	35.77	40.00	-4.23	QP
2 *	95.5000	65.95	-14.33	51.62	43.50	8.12	peak
3 X	95.5000	58.13	-14.33	43.80	43.50	0.30	AVG
4 !	191.0000	54.76	-13.64	41.12	43.50	-2.38	QP
5 !	253.8366	51.73	-11.07	40.66	46.00	-5.34	QP
6	362.9843	48.60	-8.96	39.64	46.00	-6.36	QP
7 !	431.0314	48.05	-7.78	40.27	46.00	-5.73	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12.0V		
Test Mode :	Mode 2		

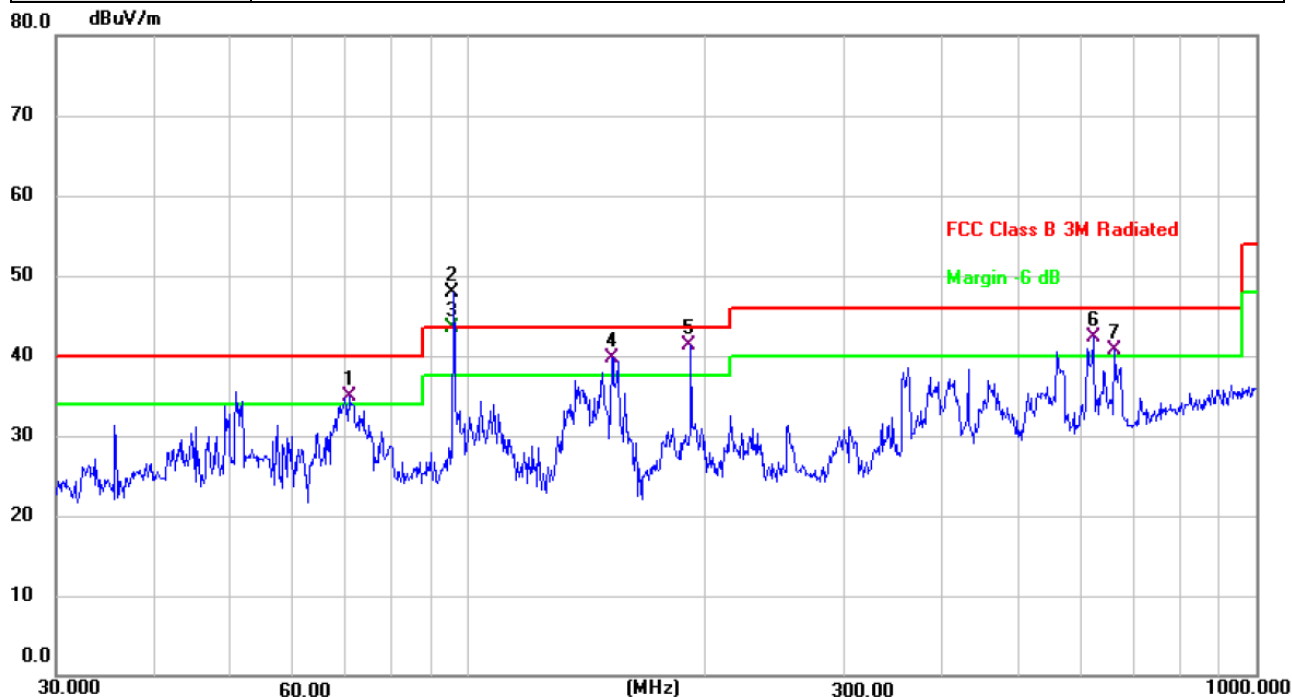

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	70.5835	50.68	-15.83	34.85	40.00	-5.15	QP
2 *	95.5000	62.15	-14.33	47.82	43.50	4.32	peak
3 X	95.5000	57.91	-14.33	43.58	43.50	0.08	AVG
4 !	152.1297	55.90	-16.27	39.63	43.50	-3.87	QP
5 !	191.0000	54.96	-13.64	41.32	43.50	-2.18	QP
6 !	620.7096	46.63	-4.35	42.28	46.00	-3.72	QP
7 !	661.1503	44.36	-3.66	40.70	46.00	-5.30	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12.0V		
Test Mode :	Mode 3		

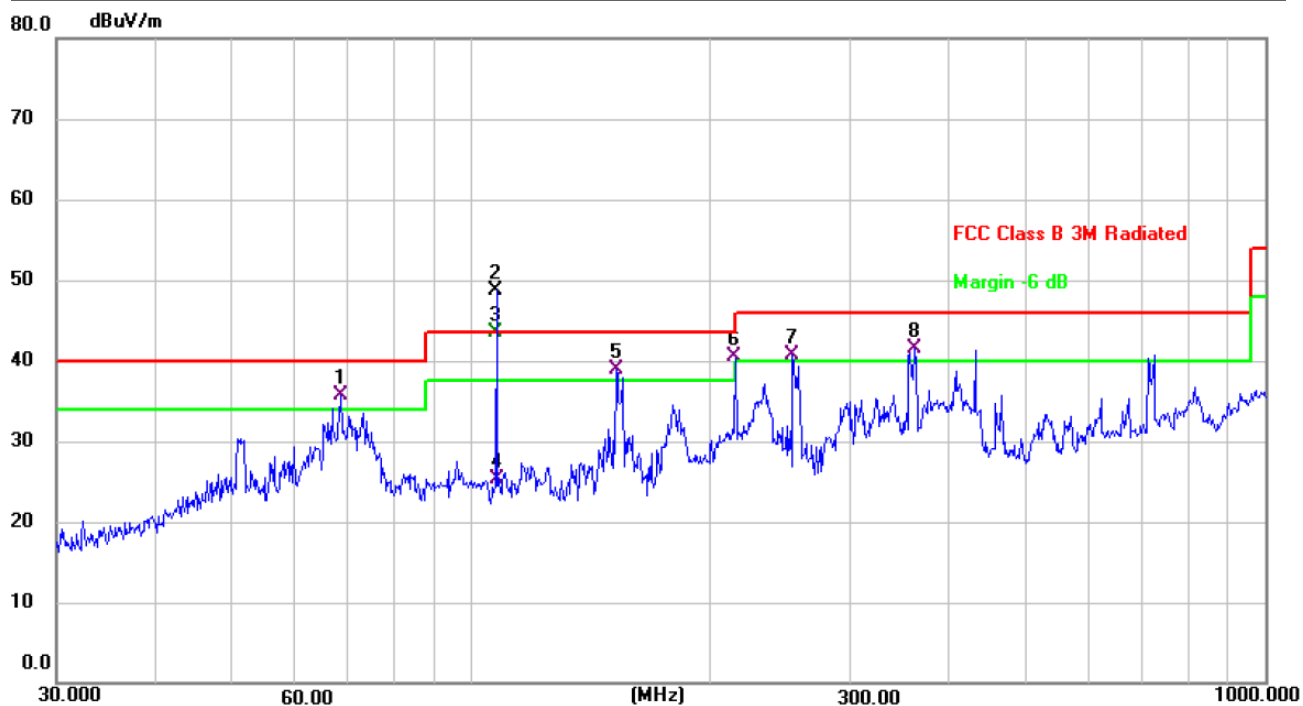

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	68.3906	50.99	-15.22	35.77	40.00	-4.23	QP
2 *	107.5000	62.85	-14.23	48.62	43.50	5.12	peak
3 X	107.5000	57.81	-14.23	43.58	43.50	0.08	AVG
4	108.0000	39.67	-14.28	25.39	43.50	-18.11	QP
5 !	152.1297	55.20	-16.27	38.93	43.50	-4.57	QP
6 !	215.0000	52.94	-12.37	40.57	43.50	-2.93	QP
7 !	253.8366	51.73	-11.07	40.66	46.00	-5.34	QP
8 !	361.7137	50.45	-8.99	41.46	46.00	-4.54	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12.0V		
Test Mode :	Mode 3		

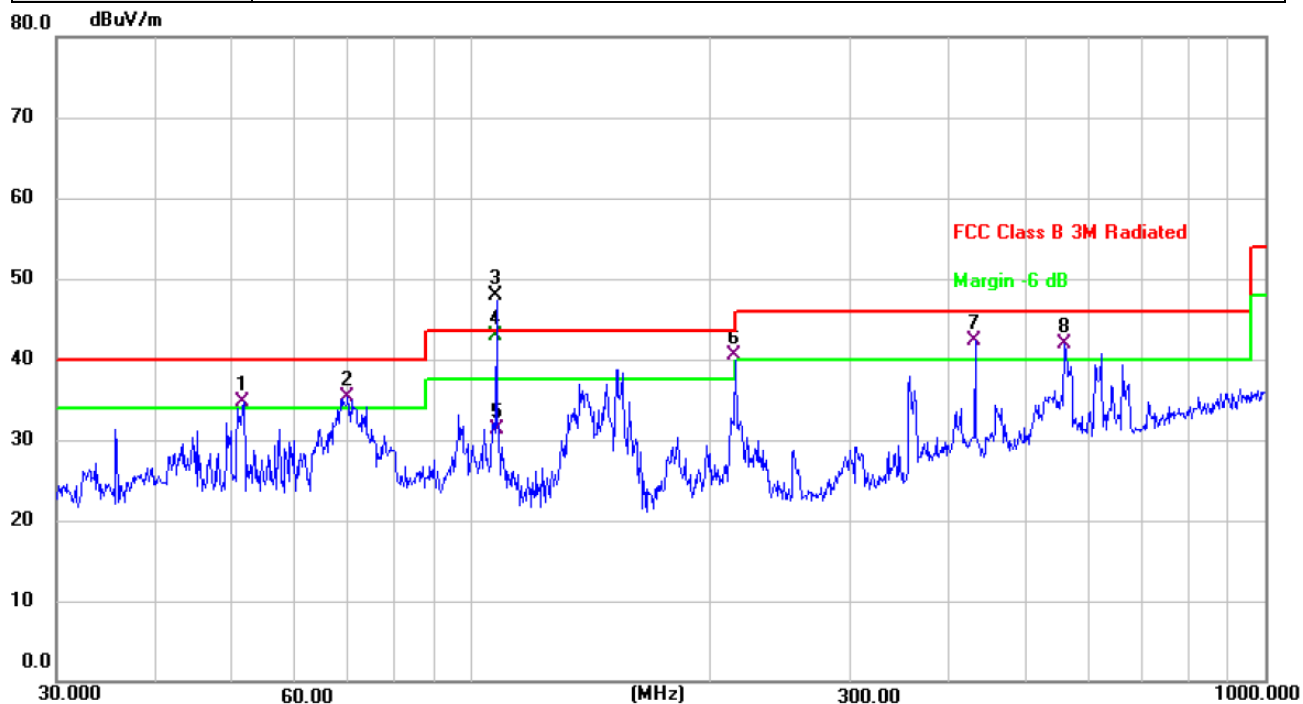

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	51.6534	46.34	-11.59	34.75	40.00	-5.25	QP
2 !	69.8394	50.91	-15.67	35.24	40.00	-4.76	QP
3 *	107.5000	62.19	-14.23	47.96	43.50	4.46	peak
4	107.5000	57.21	-14.23	42.98	43.50	-0.52	AVG
5	108.0000	45.49	-14.28	31.21	43.50	-12.29	QP
6 !	215.0000	52.86	-12.37	40.49	43.50	-3.01	QP
7 !	431.0247	50.06	-7.78	42.28	46.00	-3.72	QP
8 !	558.7345	47.45	-5.50	41.95	46.00	-4.05	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS FOR FIELD STRENGTH OF FUNDAMENTAL**

Polar (H/V)	Frequency	Emission Level	Limits	Margin	Detector Type	Result
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)		
H	88.50	47.64	68.00	-20.36	PK	Pass
H	88.50	43.34	48.00	-4.66	AV	Pass
V	88.50	47.91	68.00	-20.09	PK	Pass
V	88.50	42.58	48.00	-5.42	AV	Pass
H	95.50	51.62	68.00	-16.38	PK	Pass
H	95.50	43.80	48.00	-4.2	AV	Pass
V	95.50	47.82	68.00	-20.18	PK	Pass
V	95.50	43.58	48.00	-4.42	AV	Pass
H	107.50	48.62	68.00	-19.38	PK	Pass
H	107.50	43.58	48.00	-4.42	AV	Pass
V	107.50	47.96	68.00	-20.04	PK	Pass
V	107.50	42.98	48.00	-5.02	AV	Pass

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.2.9 TEST RESULTS FOR FIELD STRENGTH OF BAND EDGE EMISSION

Polar (H/V)	Frequency	Emission Level	Limits	Margin	Detector Type	Result
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)		
V	88.00	25.67	40.00	-14.33	QP	Pass
H	88.00	24.65	40.00	-15.35	QP	Pass
V	108.00	25.39	43.50	-18.11	QP	Pass
H	108.00	31.21	43.50	-12.29	QP	Pass

3.2.10 TEST RESULTS FOR FIELD STRENGTH ABOVE 1GHZ

The emission above 1GHz was background, so no data show it.



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.215) , Subpart C	
Section	Test Item
15.215	Bandwidth

4.1.1 TEST PROCEDURE

1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
88.5	51.94	200	Pass
95.5	51.97	200	Pass
107.5	52.95	200	Pass

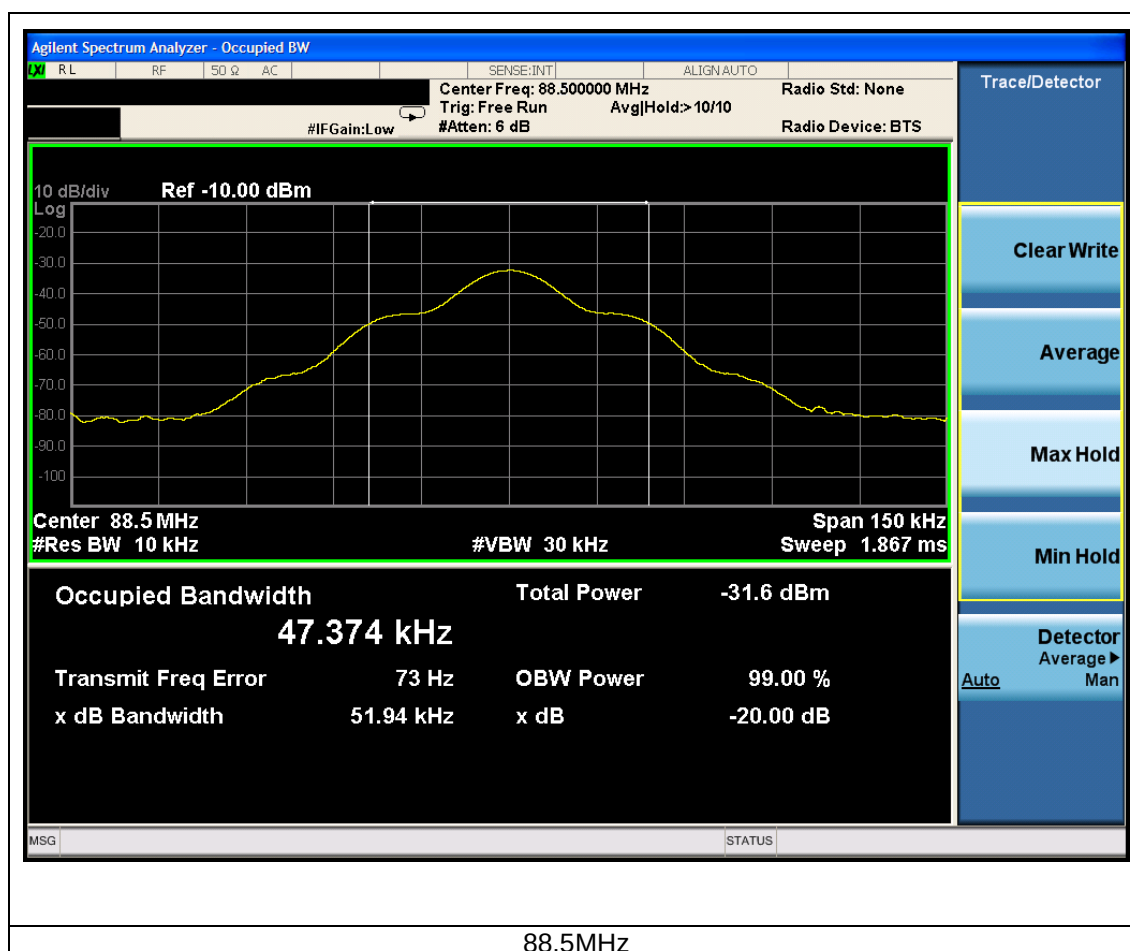

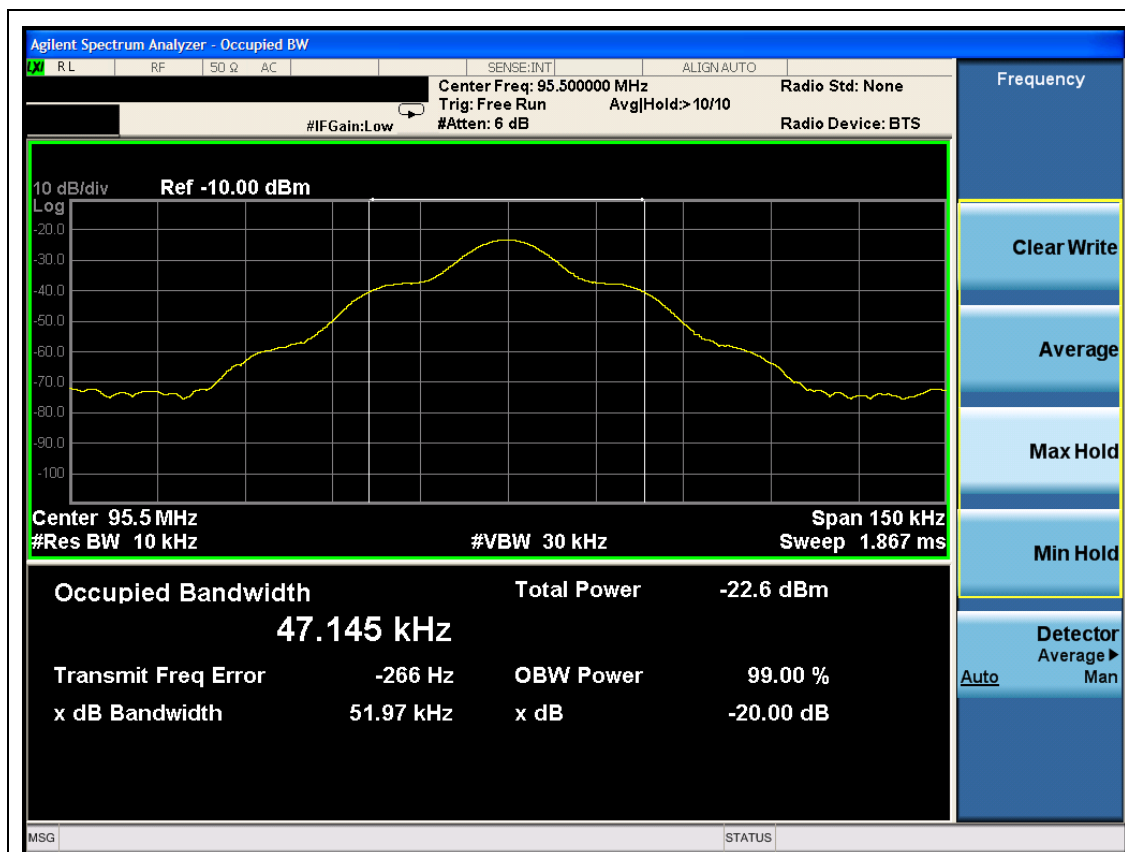

95.5MHz

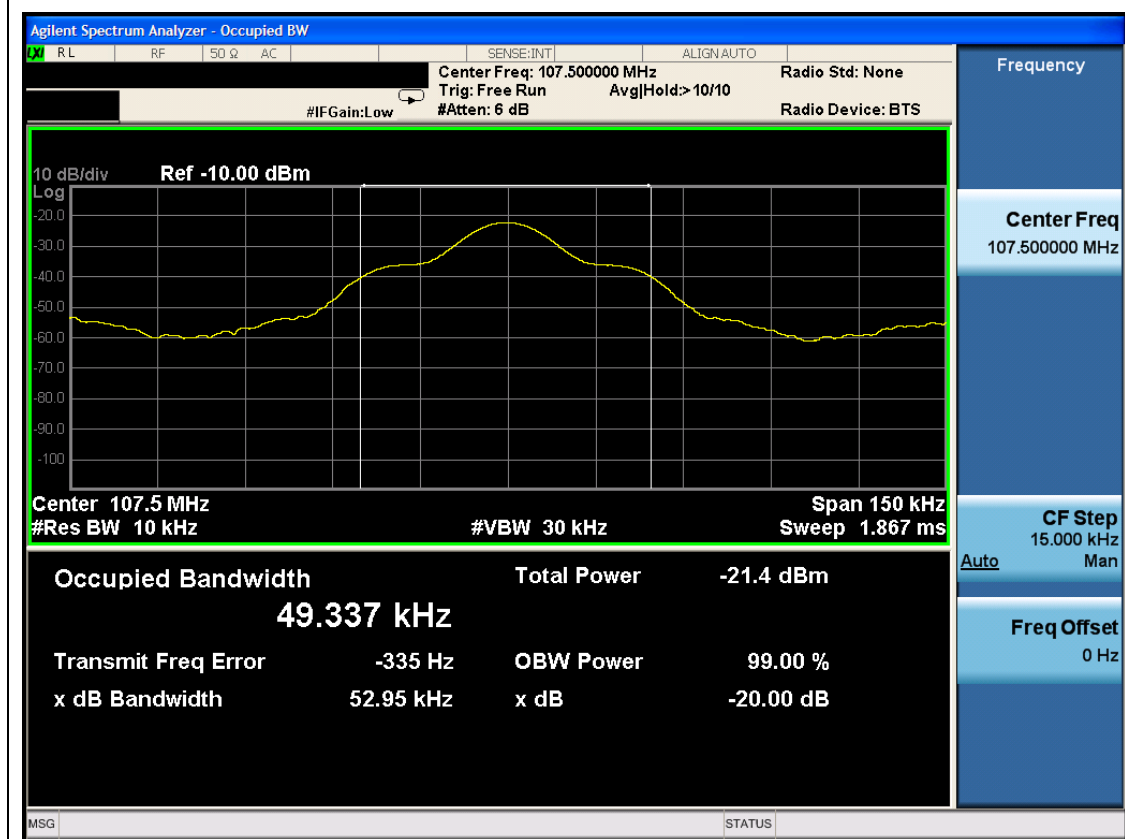

107.5MHz



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



5.2 EUT ANTENNA

The EUT antenna is Internal antenna, It comply with the standard requirement.



6. TEST SEUUP PHOTO

Radiated Measurement Photos

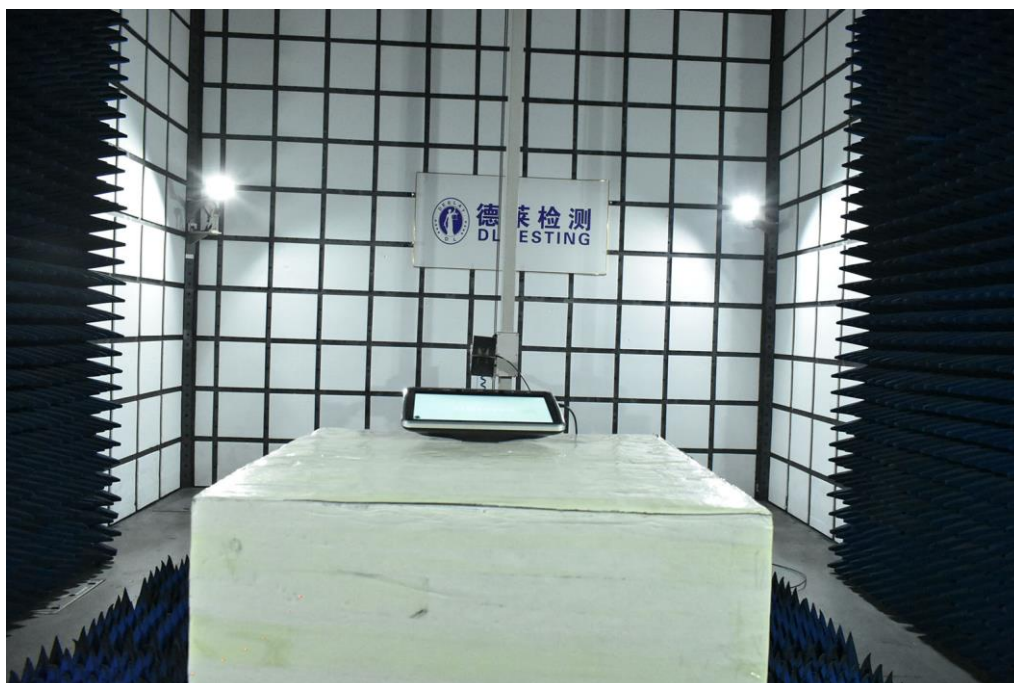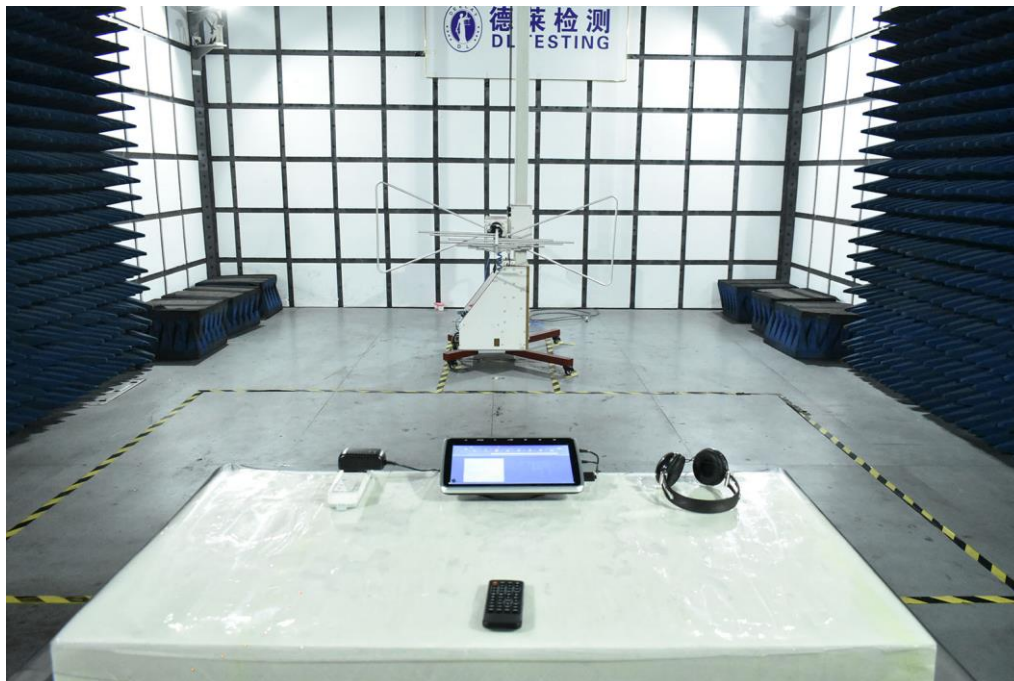





Conducted Measurement Photos





7. EUT PHOTO

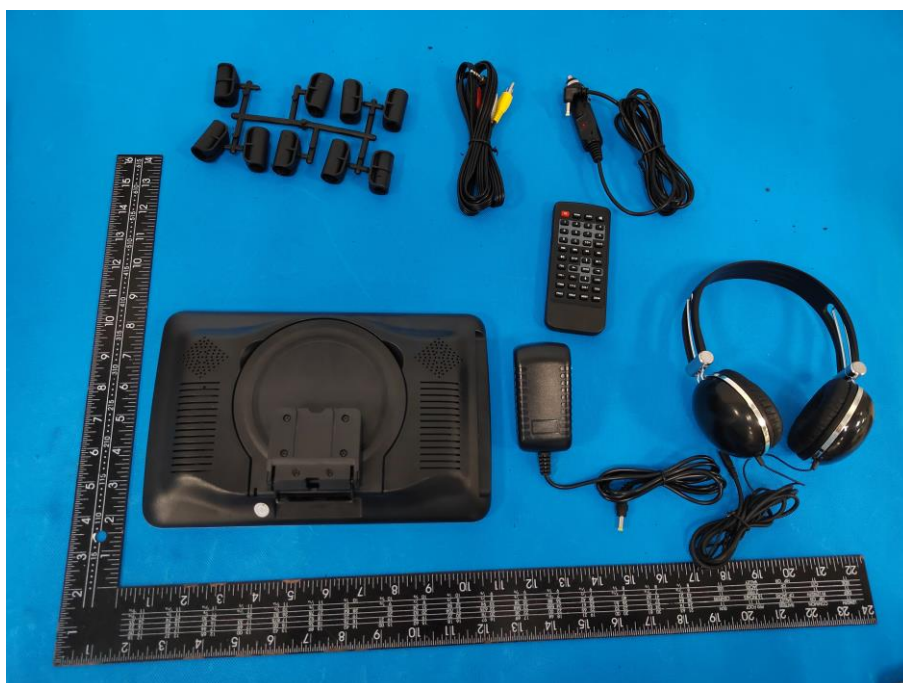

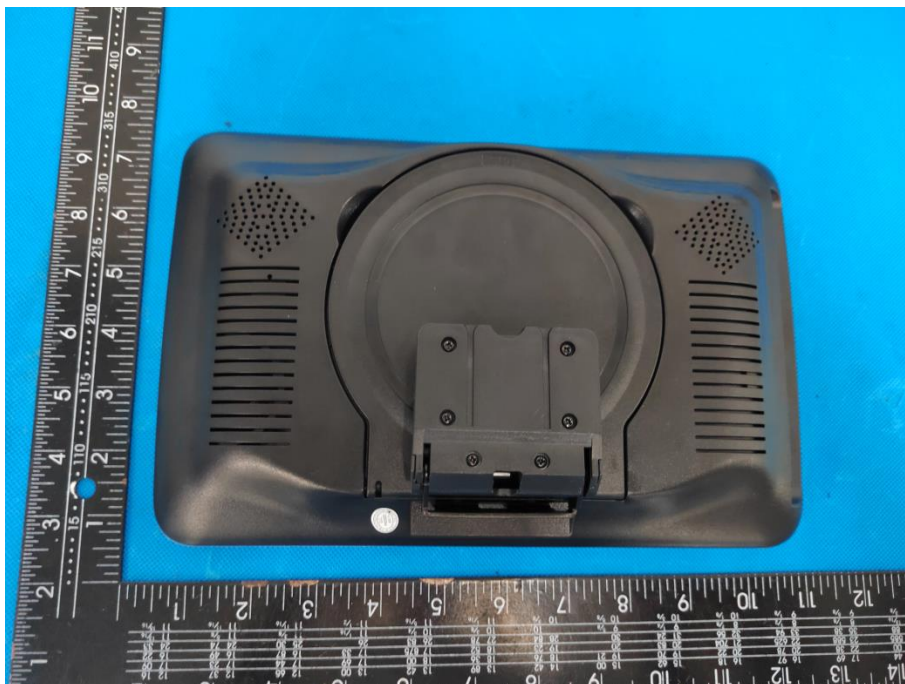



***** END OF REPORT *****