




Radiated EIRP_Non-Beamforming_Radio 3_2T1S_ Channel Puncturing

Appendix C.6

16/07/2025

EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 CP 5;Nant:2;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.57ms
Detector Type
RMS
CP BW
320MHz

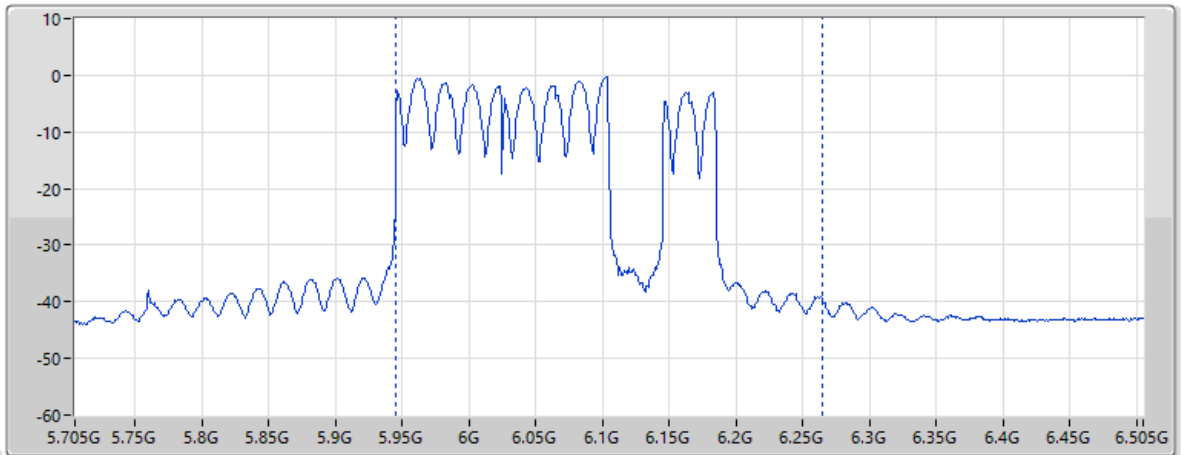

Page 7

EIRP (dBm)
19.52


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.44	11.99	8.42	35.11	57.76

16/07/2025

EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 CP 1;Nant:2;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

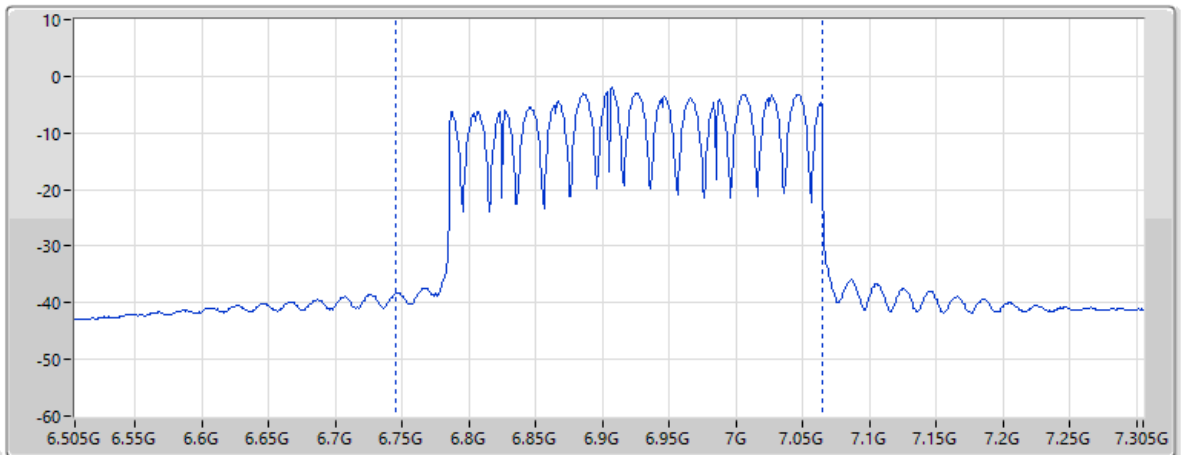

Page 7


EIRP (dBm)
18.59

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-2.86	11.22	8.81	34.97	58.83


16/07/2025

EIRP;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 3;Nant:2;Ch:7025MHz;TX

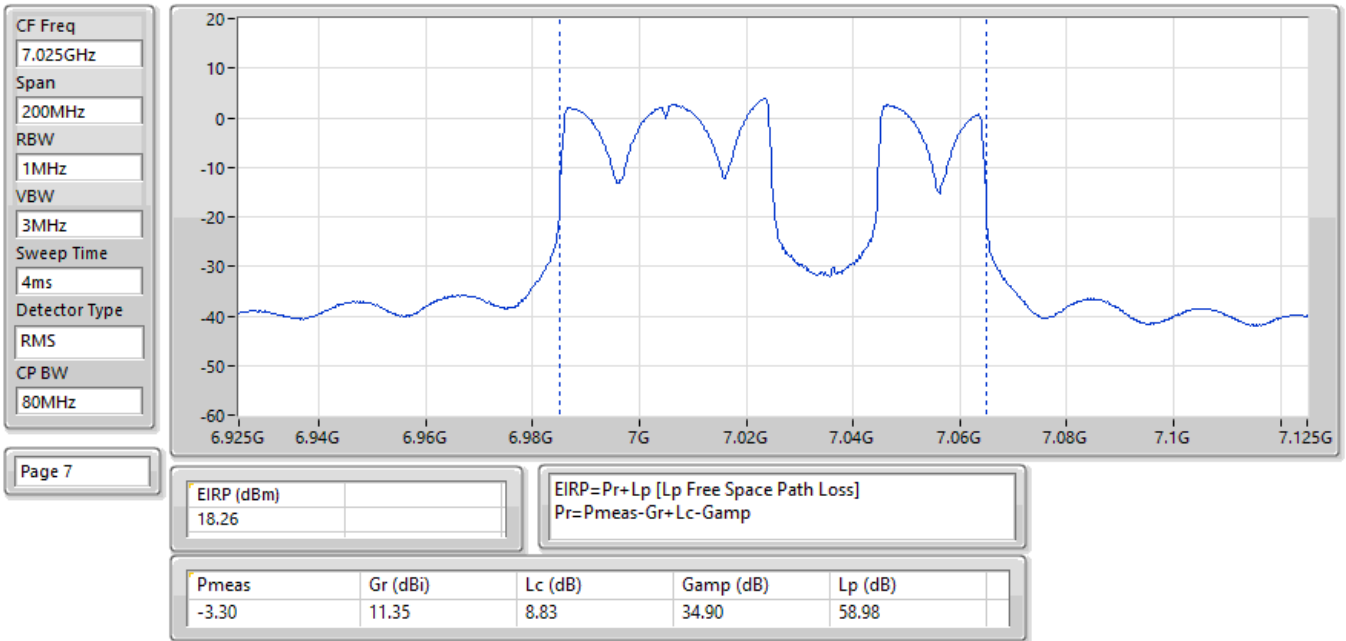

16/07/2025

EIRP;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 CP 4;Nant:2;Ch:6985MHz;TX

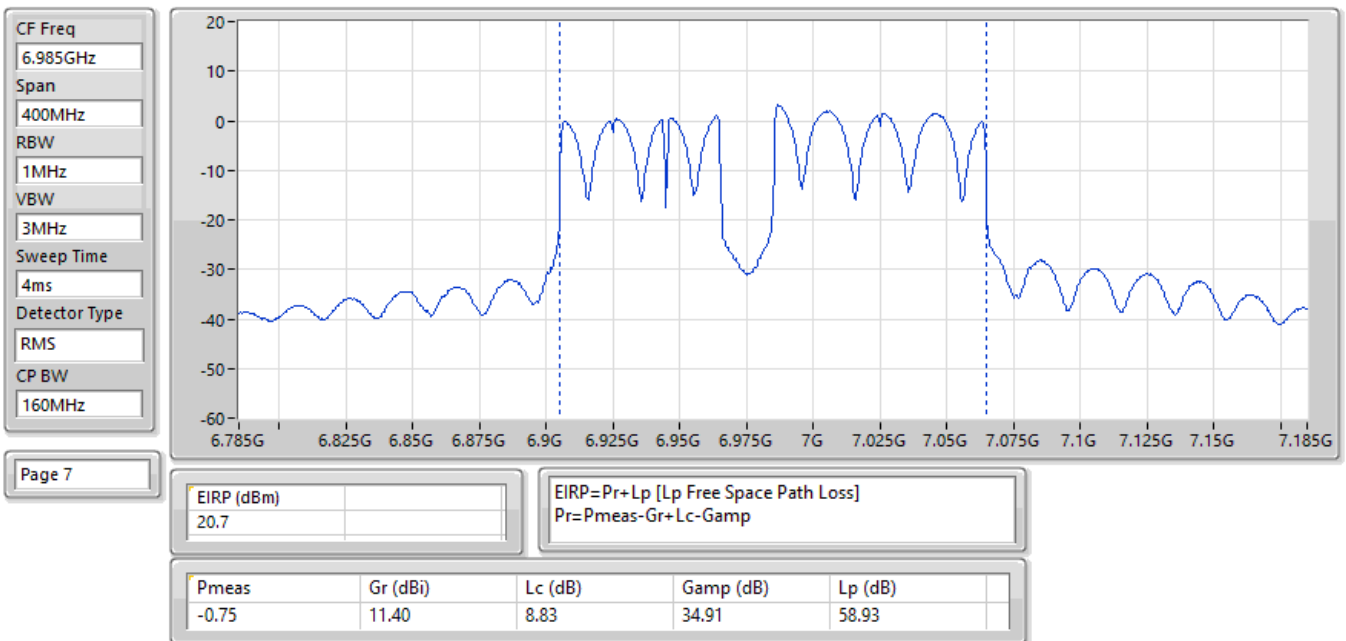

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.83	0.04819
802.11ax HEW40_Nss1,(MCS0)_1TX	19.22	0.08356
802.11ax HEW80_Nss1,(MCS0)_1TX	19.20	0.08318
802.11ax HEW160_Nss1,(MCS0)_1TX	19.31	0.08531
6.425-6.525GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.58	0.04550
802.11ax HEW40_Nss1,(MCS0)_1TX	19.10	0.08128
802.11ax HEW80_Nss1,(MCS0)_1TX	21.03	0.12677
802.11ax HEW160_Nss1,(MCS0)_1TX	19.09	0.08110
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	15.19	0.03304
802.11ax HEW40_Nss1,(MCS0)_1TX	19.26	0.08433
802.11ax HEW80_Nss1,(MCS0)_1TX	21.56	0.14322
802.11ax HEW160_Nss1,(MCS0)_1TX	21.29	0.13459
6.875-7.125GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.75	0.04732
802.11ax HEW40_Nss1,(MCS0)_1TX	19.25	0.08414
802.11ax HEW80_Nss1,(MCS0)_1TX	20.36	0.10864
802.11ax HEW160_Nss1,(MCS0)_1TX	19.67	0.09268



Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-
5955MHz	Pass	14.42	30.00
6195MHz	Pass	15.69	30.00
6415MHz	Pass	16.83	30.00
6435MHz	Pass	16.58	30.00
6475MHz	Pass	16.51	30.00
6515MHz	Pass	15.08	30.00
6535MHz	Pass	14.04	30.00
6695MHz	Pass	15.17	30.00
6875MHz	Pass	15.19	30.00
6895MHz	Pass	16.52	30.00
6995MHz	Pass	16.11	30.00
7095MHz	Pass	16.75	30.00
7115MHz	Pass	12.92	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-
5965MHz	Pass	19.13	30.00
6205MHz	Pass	19.22	30.00
6405MHz	Pass	18.53	30.00
6445MHz	Pass	19.10	30.00
6485MHz	Pass	18.94	30.00
6525MHz	Pass	18.98	30.00
6565MHz	Pass	19.06	30.00
6685MHz	Pass	19.26	30.00
6885MHz	Pass	19.21	30.00
6925MHz	Pass	19.25	30.00
7005MHz	Pass	19.04	30.00
7085MHz	Pass	18.64	30.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-
5985MHz	Pass	19.20	30.00
6225MHz	Pass	19.03	30.00
6385MHz	Pass	18.54	30.00
6465MHz	Pass	19.09	30.00
6545MHz	Pass	21.03	30.00
6625MHz	Pass	21.56	30.00
6705MHz	Pass	21.08	30.00
6785MHz	Pass	20.47	30.00
6865MHz	Pass	20.05	30.00
6945MHz	Pass	20.36	30.00
7025MHz	Pass	19.62	30.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-
6025MHz	Pass	19.31	30.00
6185MHz	Pass	19.28	30.00
6345MHz	Pass	18.86	30.00
6505MHz	Pass	19.09	30.00
6665MHz	Pass	21.29	30.00
6825MHz	Pass	20.25	30.00
6985MHz	Pass	19.67	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

13/05/2025

EIRP;Band:6.2G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6415MHz;TX

CF Freq
6.415GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

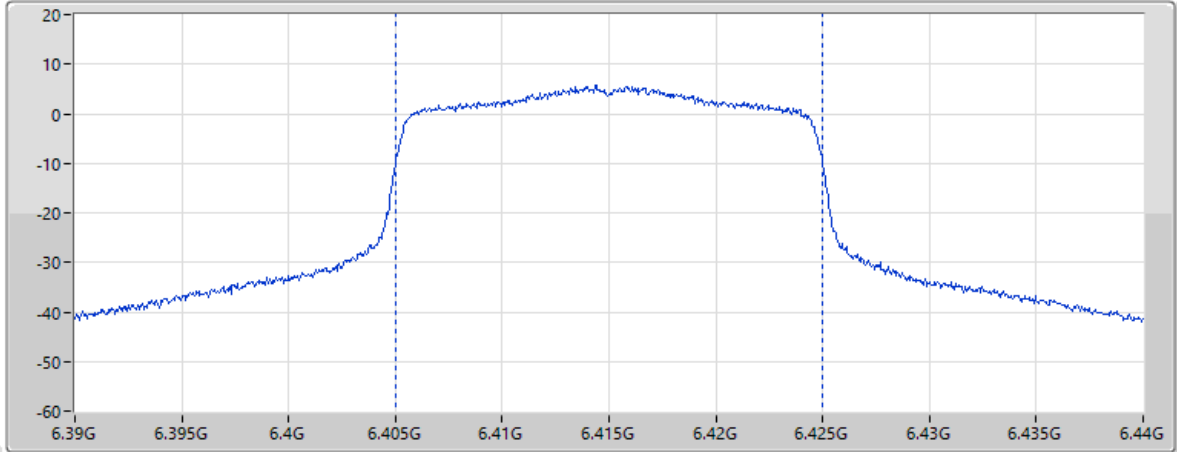

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
16.83		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-3.23	11.67	8.78	35.24	58.19

13/05/2025

EIRP;Band:6.2G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6205MHz;TX

CF Freq
6.205GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

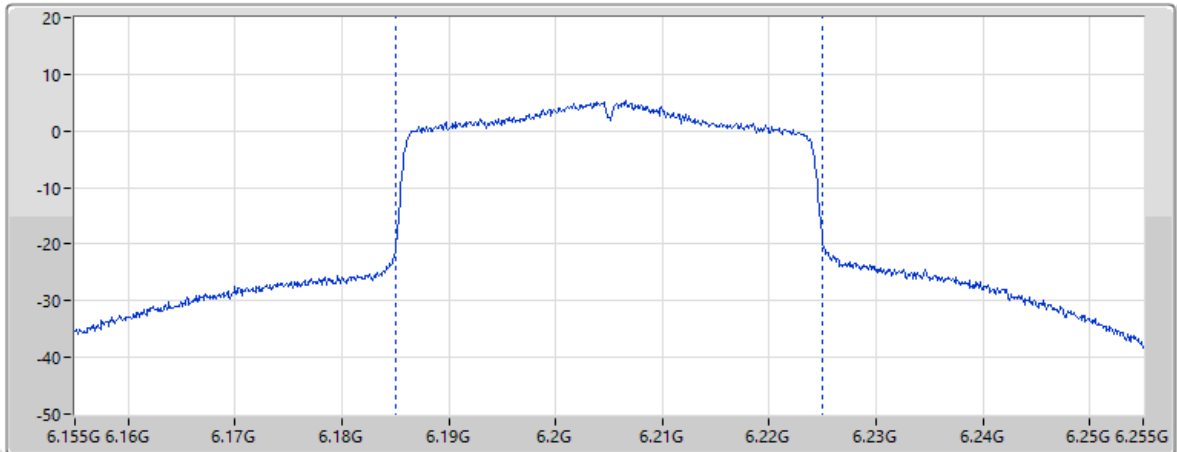


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
19.22		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.12	11.88	8.47	35.15	57.90

13/05/2025

EIRP;Band:6.2G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

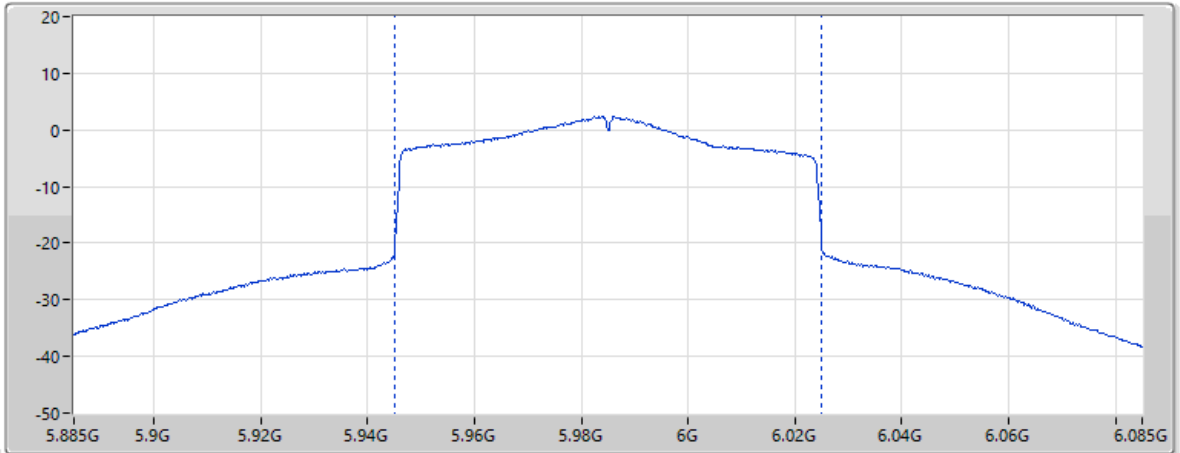


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.2				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.10	11.77	8.37	35.08	57.58

13/05/2025

EIRP;Band:6.2G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6025MHz;TX

CF Freq
6.025GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

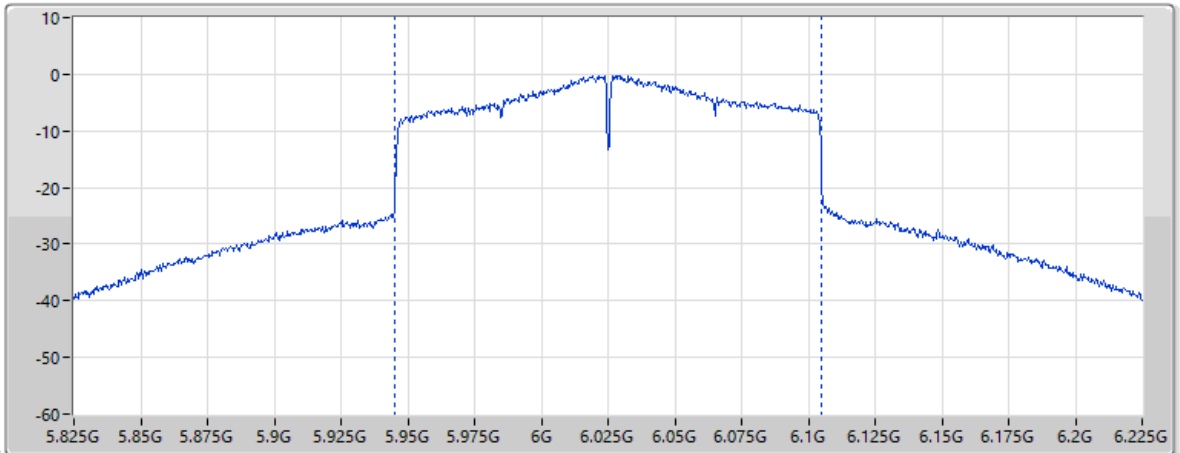

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.31				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.21	11.85	8.39	35.08	57.64

13/05/2025

EIRP:Band:6.4G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6435MHz;TX

CF Freq
6.435GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

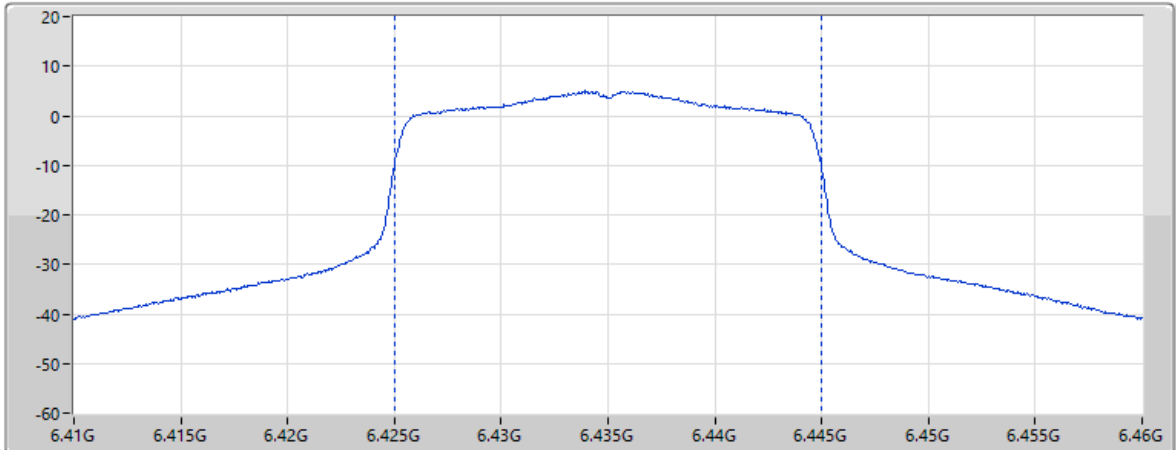

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
16.58				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-3.54	11.63	8.78	35.24	58.21

13/05/2025

EIRP:Band:6.4G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6445MHz;TX

CF Freq
6.445GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

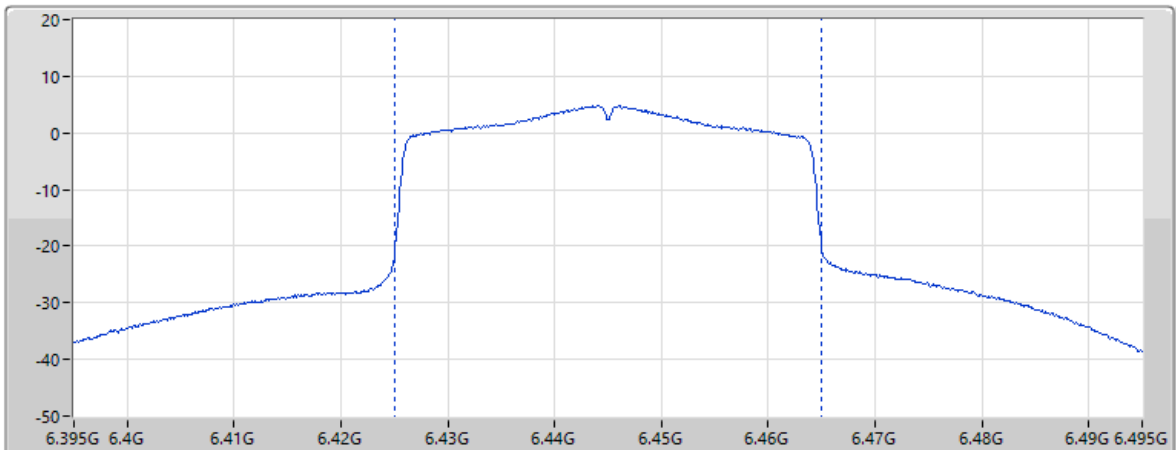


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.1				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.05	11.61	8.78	35.25	58.23

13/05/2025

EIRP;Band:6.4G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6545MHz;TX

CF Freq
6.545GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

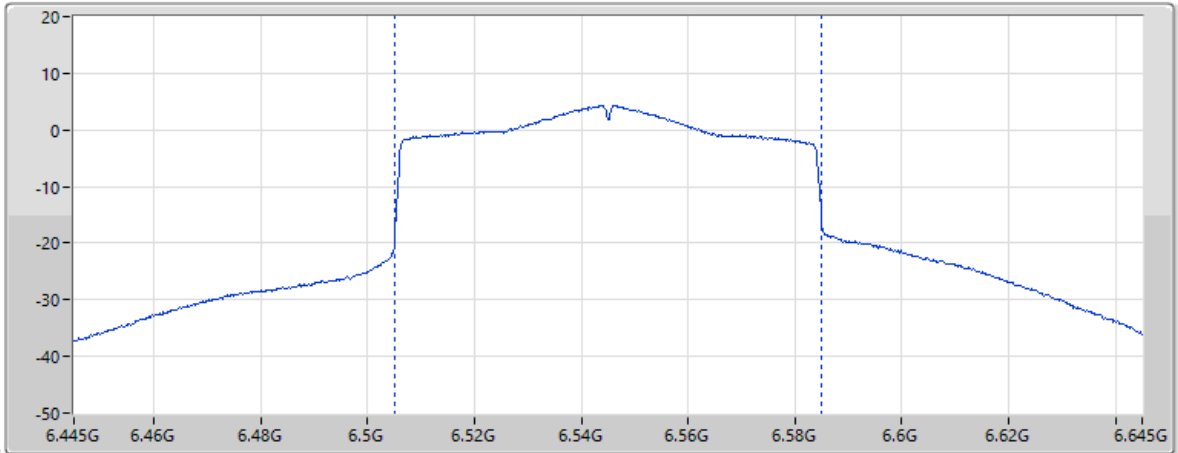


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
21.03				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.37	11.23	8.77	35.24	58.36

13/05/2025

EIRP;Band:6.4G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6505MHz;TX

CF Freq
6.505GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

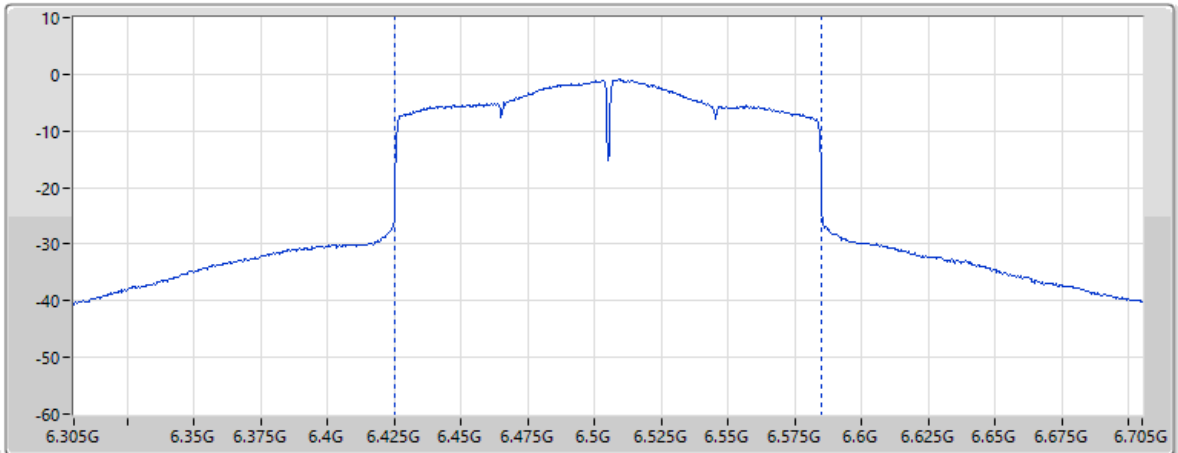

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.09				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.25	11.47	8.77	35.27	58.31

12/05/2025

EIRP:Band:6.7G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6875MHz;TX

CF Freq
6.875GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

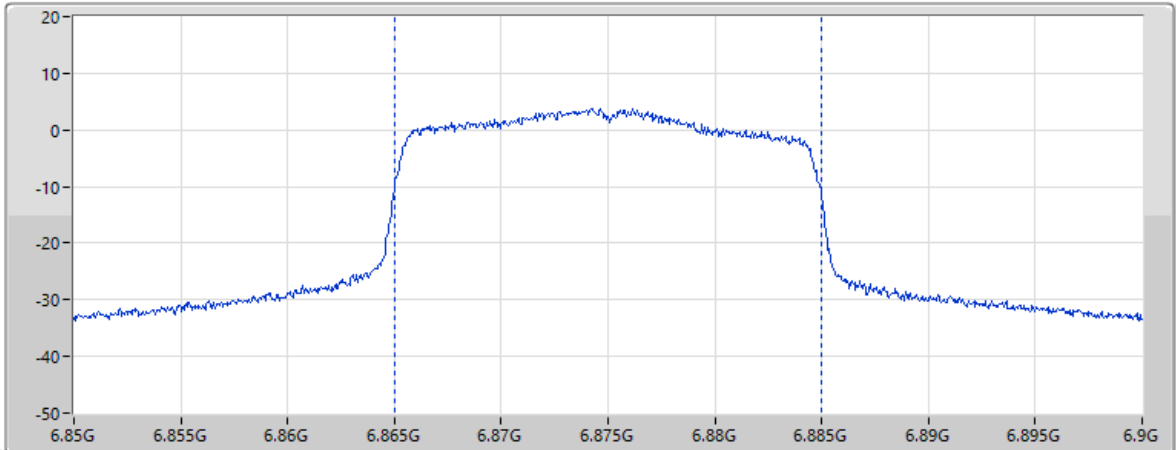

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
15.19				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-6.21	11.20	8.80	34.99	58.79

13/05/2025

EIRP:Band:6.7G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6685MHz;TX

CF Freq
6.685GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

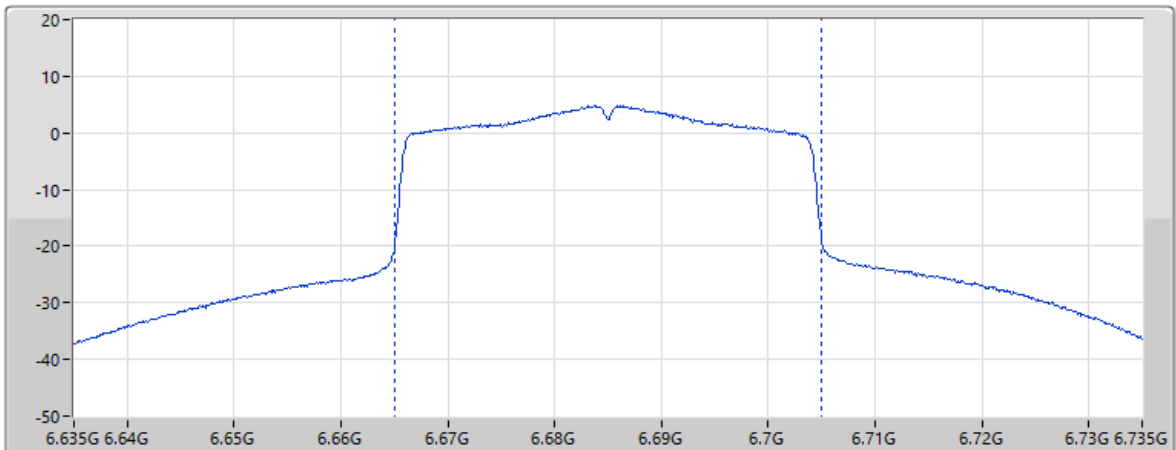


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.26				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-2.02	10.90	8.77	35.13	58.54

13/05/2025

EIRP;Band:6.7G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6625MHz;TX

CF Freq
6.625GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

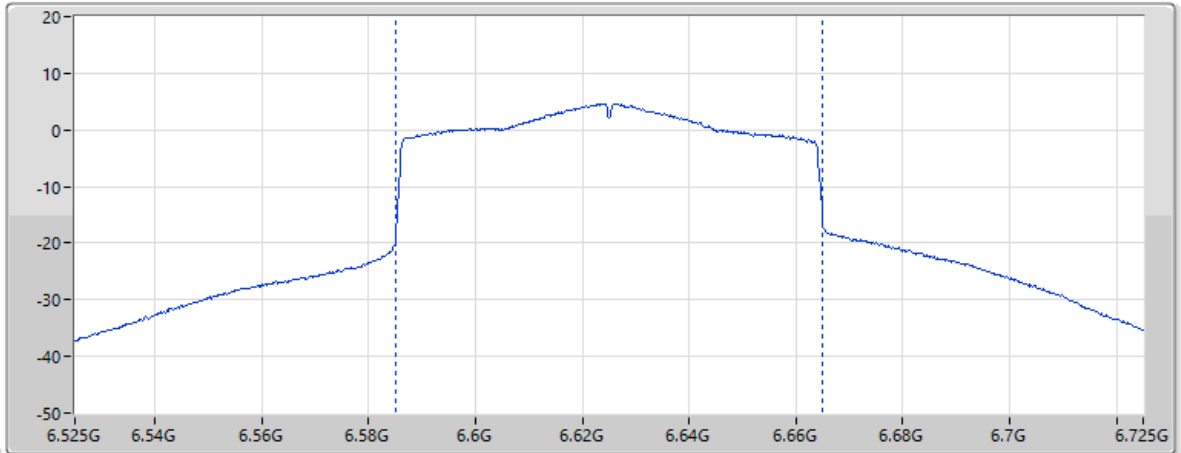


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
21.56				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.45	10.95	8.77	35.18	58.47

13/05/2025

EIRP;Band:6.7G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

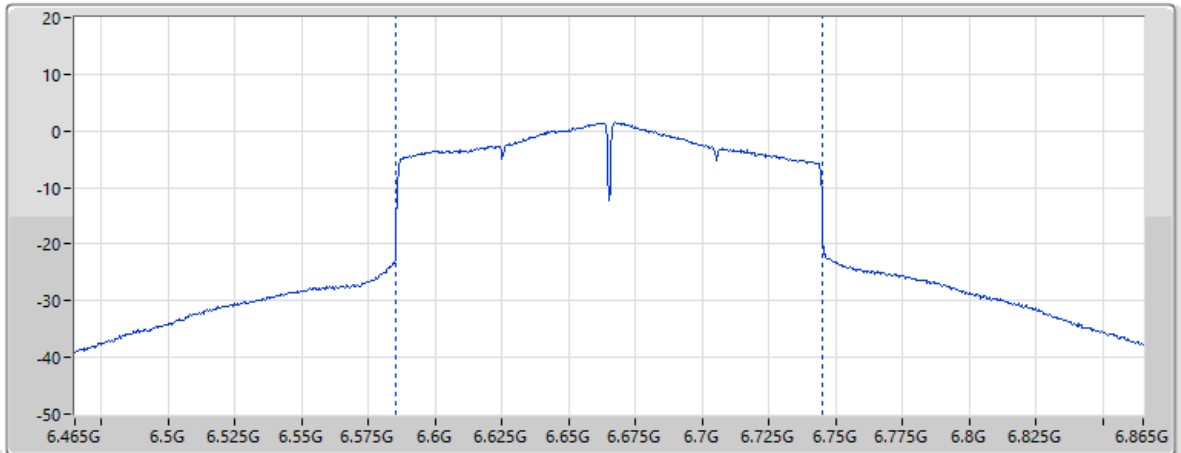

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
21.29				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.05	10.90	8.77	35.15	58.52

13/05/2025

EIRP:Band:7.0G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:7095MHz;TX

CF Freq
7.095GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
20MHz

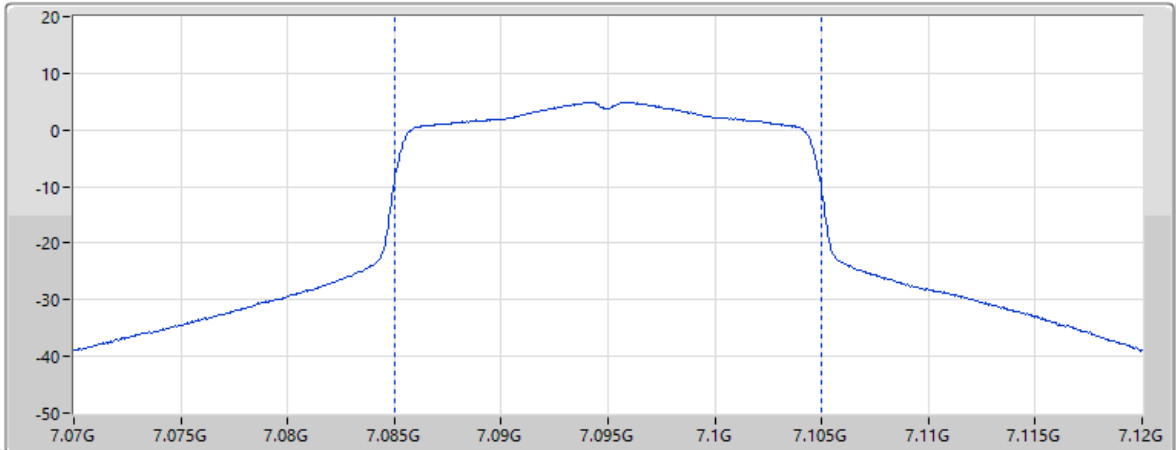

Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
16.75				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-5.09	11.12	8.80	34.90	59.06

13/05/2025

EIRP:Band:7.0G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6925MHz;TX

CF Freq
6.925GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

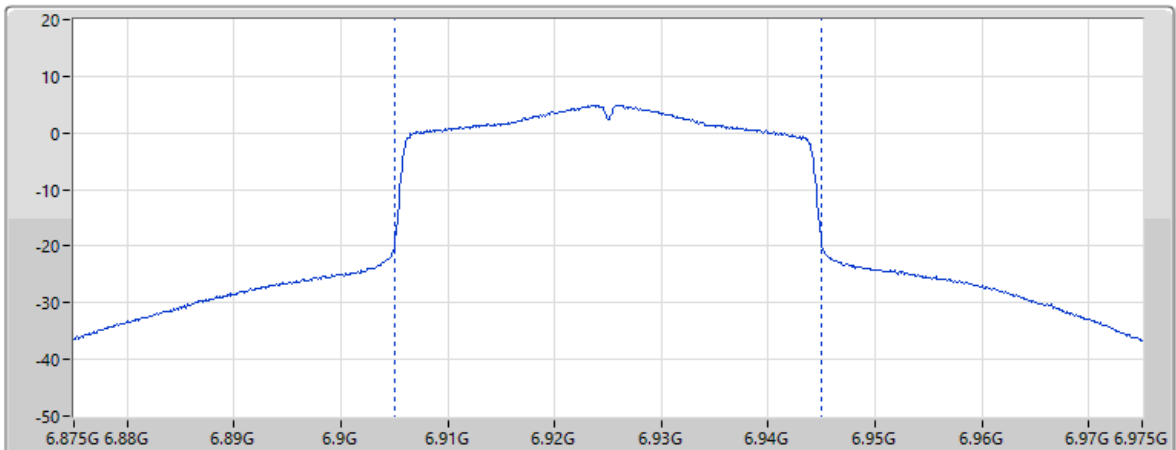


Page 8

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.25				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-2.15	11.30	8.81	34.96	58.85

13/05/2025

EIRP;Band:7.0G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6945MHz;TX

CF Freq
6.945GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
80MHz

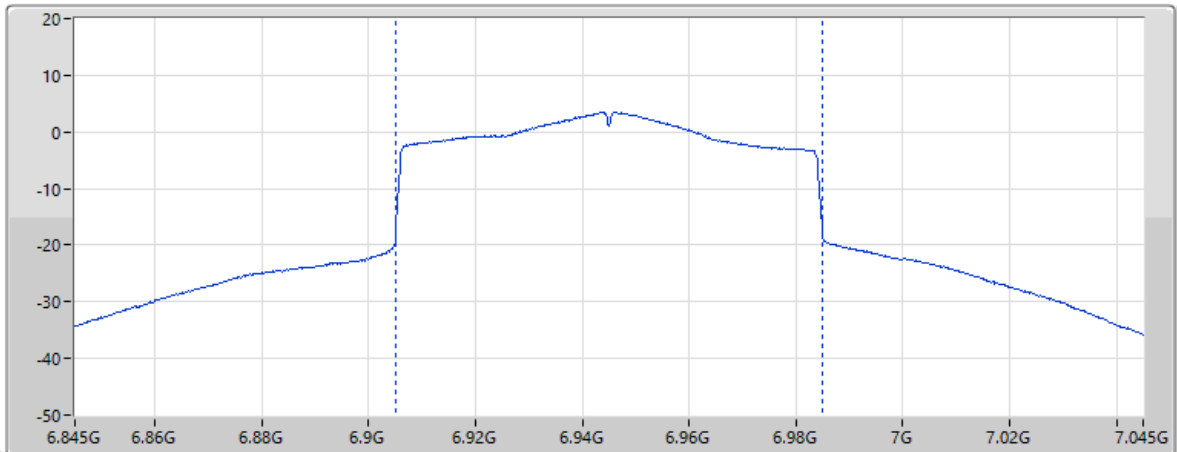

Page 8

EIRP (dBm)
20.36


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.02	11.38	8.82	34.94	58.88

13/05/2025

EIRP;Band:7.0G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6985MHz;TX

CF Freq
6.985GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
160MHz

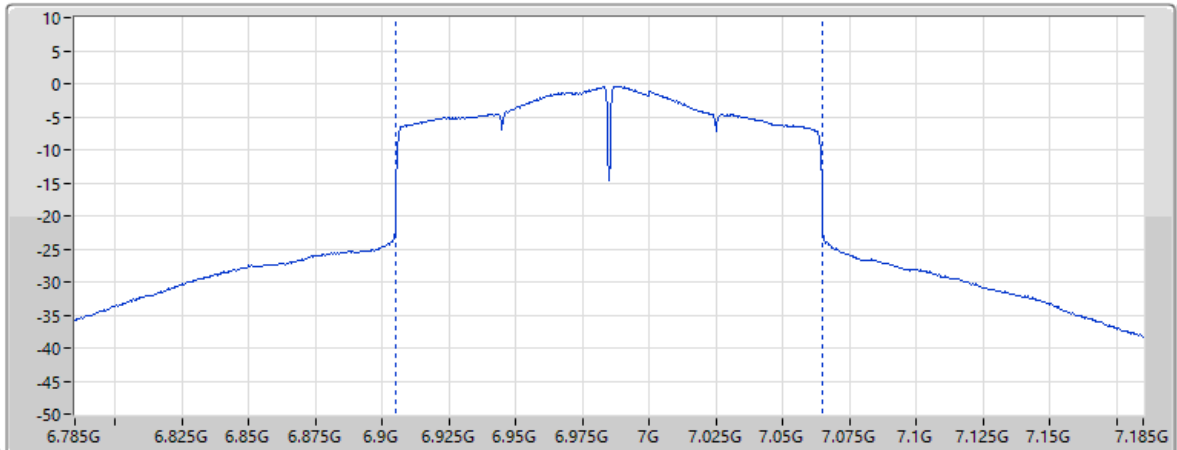

Page 8

EIRP (dBm)
19.67

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.78	11.40	8.83	34.91	58.93

**Summary**

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.52	0.05649
802.11be EHT40-BF_Nss1,(MCS0)_2TX	18.66	0.07345
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.50	0.17783
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.54	0.17947
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.40	0.13804
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	14.62	0.02897
802.11be EHT40-BF_Nss1,(MCS0)_2TX	18.69	0.07396
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.08	0.12823
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.11	0.08147
802.11be EHT320-BF_Nss1,(MCS0)_2TX	20.52	0.11272
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.73	0.05929
802.11be EHT40-BF_Nss1,(MCS0)_2TX	20.39	0.10940
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.48	0.17701
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.72	0.18707
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.01	0.12618
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.68	0.03698
802.11be EHT40-BF_Nss1,(MCS0)_2TX	20.12	0.10280
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.57	0.18072
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.55	0.17989

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	14.03	30.00
6195MHz	Pass	15.69	30.00
6415MHz	Pass	17.52	30.00
6435MHz	Pass	13.18	30.00
6475MHz	Pass	14.62	30.00
6515MHz	Pass	14.22	30.00
6535MHz	Pass	14.03	30.00
6695MHz	Pass	17.73	30.00
6875MHz	Pass	15.80	30.00
6895MHz	Pass	15.34	30.00
6995MHz	Pass	14.99	30.00
7095MHz	Pass	15.68	30.00
7115MHz	Pass	10.33	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	17.07	30.00
6205MHz	Pass	17.95	30.00
6405MHz	Pass	18.66	30.00
6445MHz	Pass	17.69	30.00
6485MHz	Pass	18.11	30.00
6525MHz	Pass	18.69	30.00
6565MHz	Pass	18.86	30.00
6685MHz	Pass	20.39	30.00
6885MHz	Pass	19.59	30.00
6925MHz	Pass	18.64	30.00
7005MHz	Pass	18.67	30.00
7085MHz	Pass	20.12	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	21.66	30.00
6225MHz	Pass	20.03	30.00
6385MHz	Pass	22.50	30.00
6465MHz	Pass	21.08	30.00
6545MHz	Pass	19.94	30.00
6625MHz	Pass	22.39	30.00
6705MHz	Pass	21.74	30.00
6785MHz	Pass	22.48	30.00
6865MHz	Pass	21.35	30.00
6945MHz	Pass	22.57	30.00
7025MHz	Pass	21.50	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	22.52	30.00
6185MHz	Pass	22.54	30.00
6345MHz	Pass	19.84	30.00
6505MHz	Pass	19.11	30.00
6665MHz	Pass	21.87	30.00
6825MHz	Pass	22.72	30.00



Radiated EIRP_Beamforming_Radio 3_2T1S

Appendix C.8

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
6985MHz	Pass	22.55	30.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-
6105MHz	Pass	19.15	30.00
6265MHz	Pass	21.40	30.00
6425MHz	Pass	20.90	30.00
6585MHz	Pass	20.52	30.00
6745MHz	Pass	21.01	30.00
6905MHz	Pass	15.74	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	4.86
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	4.77
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	3.66
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	-0.63
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	-3.28
6.425-6.525GHz	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	4.88
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	4.80
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	4.54
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	0.06
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	-3.10
6.525-6.875GHz	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	4.98
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	4.91
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	4.85
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	0.39
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	-3.66
6.875-7.125GHz	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	4.77
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	4.93
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	3.75
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	-2.15

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-
5955MHz	Pass	4.58	5.00
6195MHz	Pass	4.79	5.00
6415MHz	Pass	4.86	5.00
6435MHz	Pass	4.56	5.00
6475MHz	Pass	4.88	5.00
6515MHz	Pass	4.88	5.00
6535MHz	Pass	4.78	5.00
6695MHz	Pass	4.98	5.00
6875MHz	Pass	4.56	5.00
6895MHz	Pass	4.66	5.00
6995MHz	Pass	4.60	5.00
7095MHz	Pass	4.77	5.00
7115MHz	Pass	-4.50	5.00
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-
5965MHz	Pass	4.64	5.00
6205MHz	Pass	4.64	5.00
6405MHz	Pass	4.77	5.00
6445MHz	Pass	4.80	5.00
6485MHz	Pass	4.57	5.00
6525MHz	Pass	4.72	5.00
6565MHz	Pass	4.91	5.00
6685MHz	Pass	4.82	5.00
6885MHz	Pass	4.49	5.00
6925MHz	Pass	4.84	5.00
7005MHz	Pass	4.93	5.00
7085MHz	Pass	3.71	5.00
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	-	-	-
5985MHz	Pass	3.05	5.00
6225MHz	Pass	3.42	5.00
6385MHz	Pass	3.66	5.00
6465MHz	Pass	4.54	5.00
6545MHz	Pass	4.26	5.00
6625MHz	Pass	4.79	5.00
6705MHz	Pass	4.85	5.00
6785MHz	Pass	4.22	5.00
6865MHz	Pass	4.19	5.00
6945MHz	Pass	3.75	5.00
7025MHz	Pass	2.34	5.00
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	-	-	-
6025MHz	Pass	-0.91	5.00
6185MHz	Pass	-0.67	5.00
6345MHz	Pass	-0.63	5.00



Radiated PSD_Non-Beamforming_Radio 3_1T1S_Full RU

Appendix D.1

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6505MHz	Pass	0.06	5.00
6665MHz	Pass	0.39	5.00
6825MHz	Pass	-1.09	5.00
6985MHz	Pass	-2.15	5.00
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	-	-	-
6105MHz	Pass	-3.28	5.00
6265MHz	Pass	-4.54	5.00
6425MHz	Pass	-3.49	5.00
6585MHz	Pass	-3.10	5.00
6745MHz	Pass	-3.66	5.00
6905MHz	Pass	-3.80	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

10/05/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:1(2);Ch:6415MHz;TX

CF Freq
6.415GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

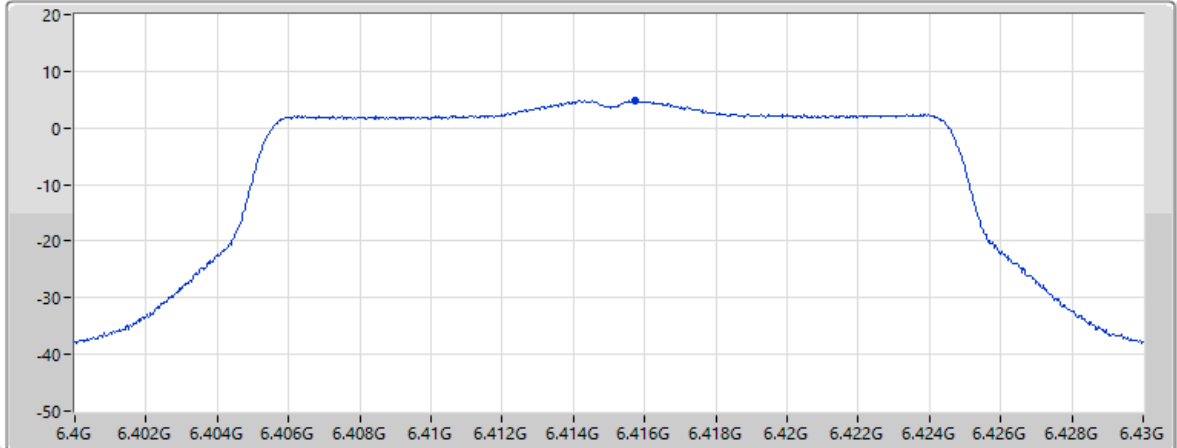

Page 6

EIRP PSD (dBm)	4.86	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.20	11.67	8.78	35.24	58.19

10/05/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:1(2);Ch:6405MHz;TX

CF Freq
6.405GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

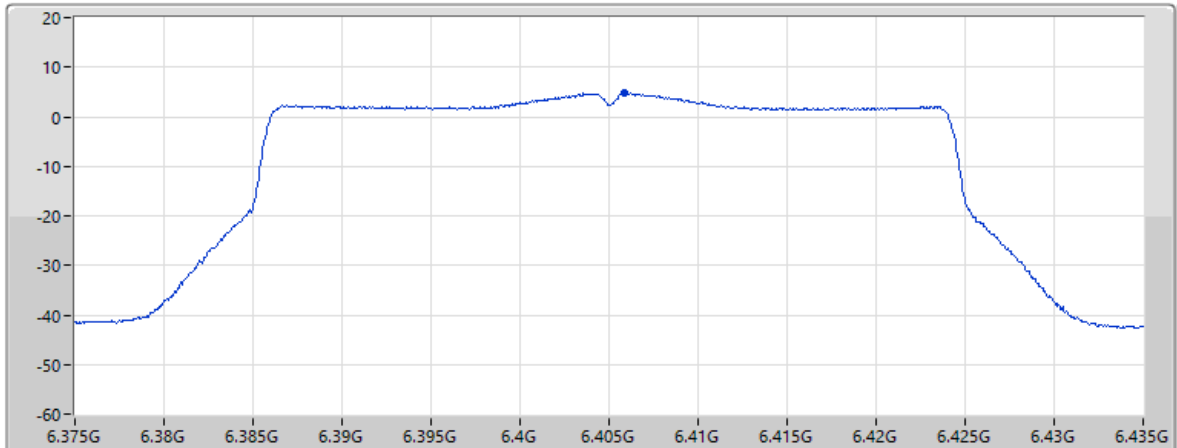


Page 6

EIRP PSD (dBm)	4.77	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.26	11.69	8.78	35.23	58.17

10/05/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:1(2);Ch:6385MHz;TX

CF Freq
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

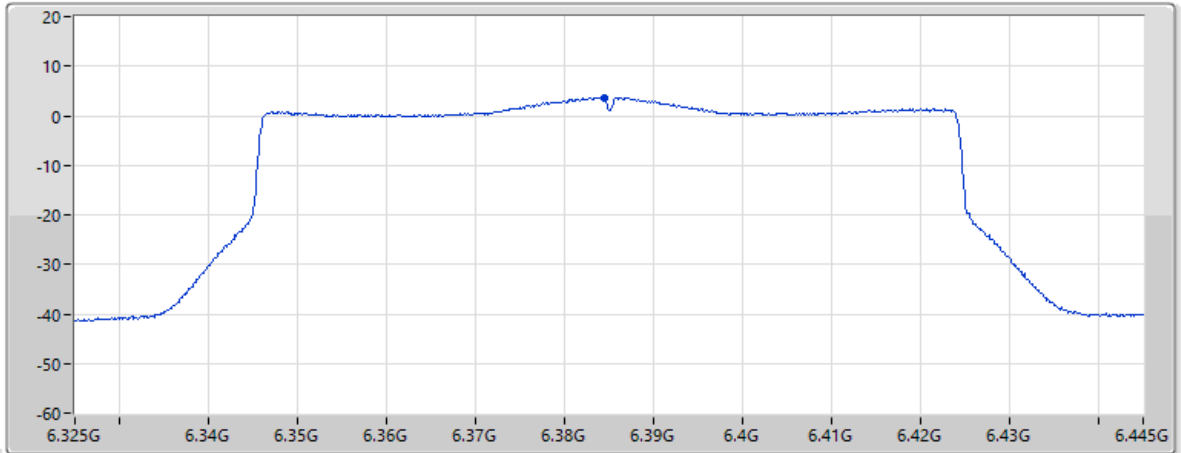


Page 6

EIRP PSD (dBm)	3.66	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.29	11.73	8.76	35.22	58.14

10/05/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:1(2);Ch:6345MHz;TX

CF Freq
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

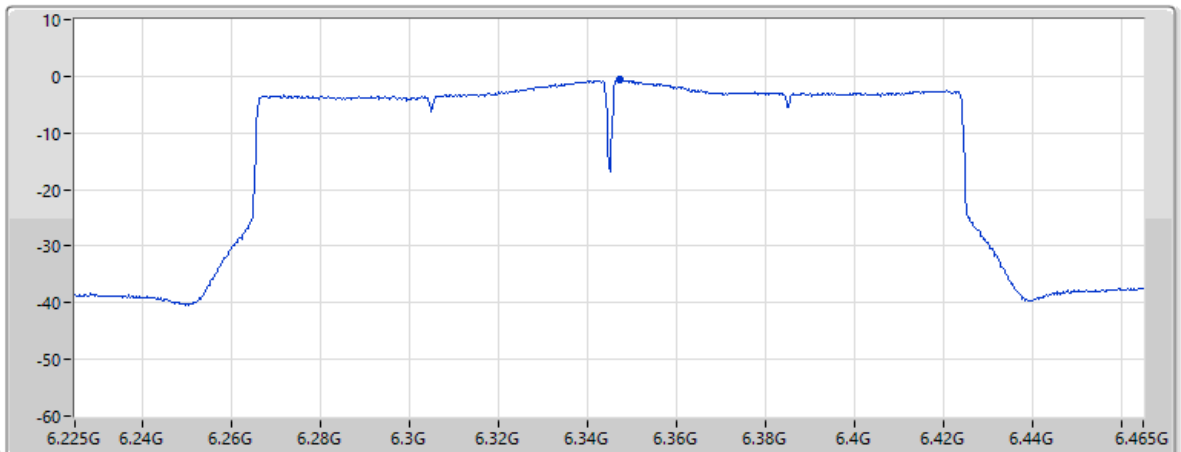

Page 6


EIRP PSD (dBm)	-0.63	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.40	11.81	8.70	35.21	58.09



10/05/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:1(2);Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

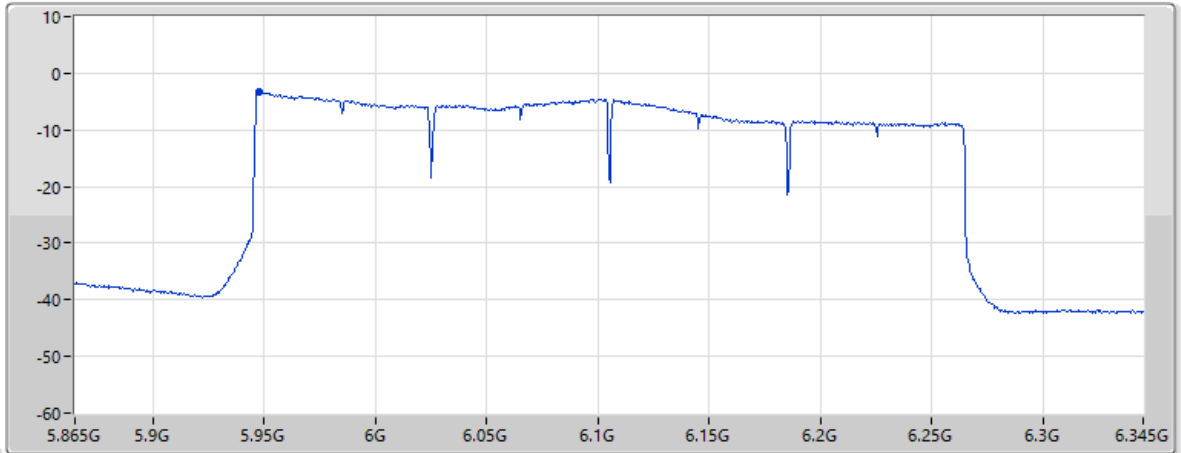


Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
-3.28				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-22.36	11.70	8.35	35.10	57.53

10/05/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:1(2);Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

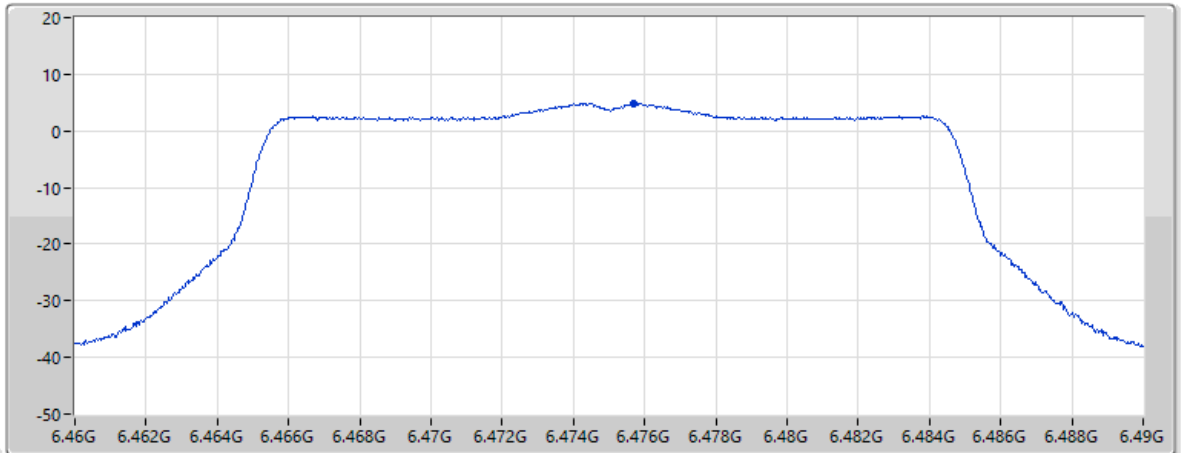

Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.88				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.36	11.55	8.78	35.26	58.27

10/05/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:1(2);Ch:6445MHz;TX

CF Freq
6.445GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

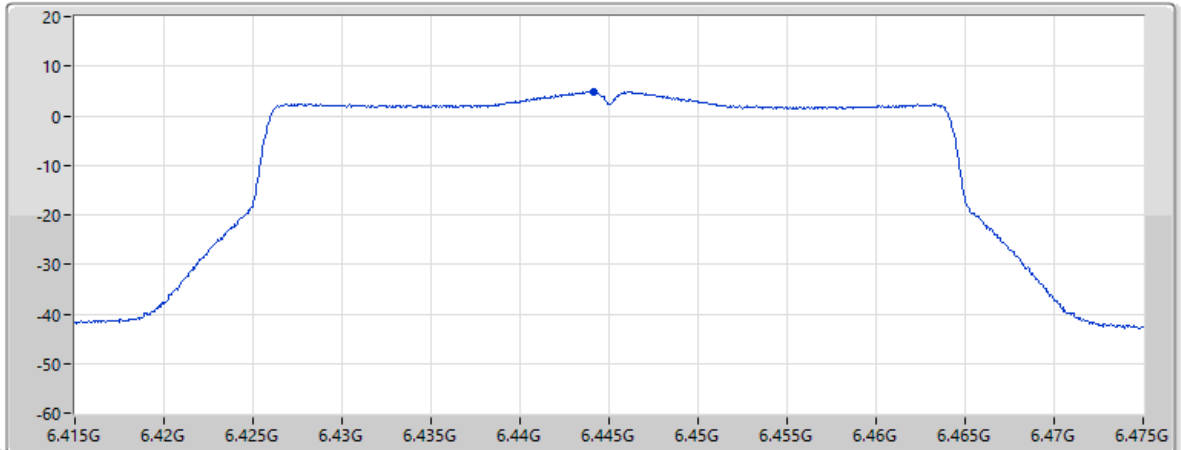

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.8				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.35	11.61	8.78	35.25	58.23

10/05/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:1(2);Ch:6465MHz;TX

CF Freq
6.465GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
80MHz

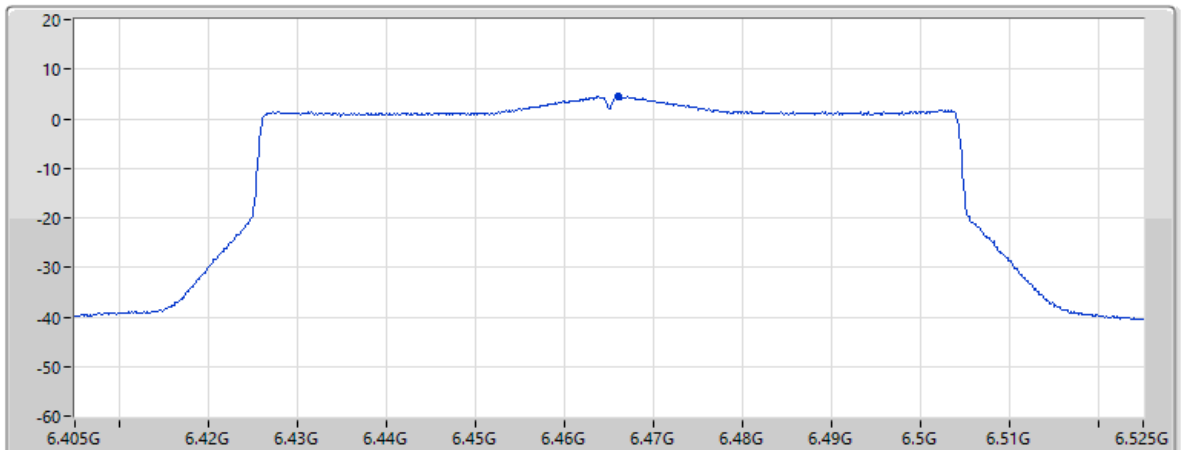


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.54				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.67	11.57	8.78	35.26	58.26

10/05/2025

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:1(2);Ch:6505MHz;TX

CF Freq
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

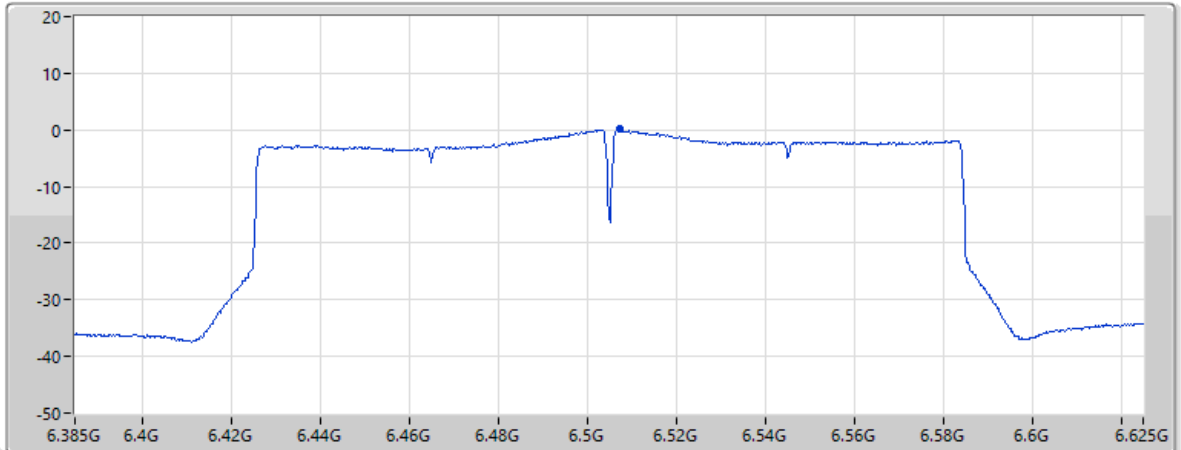


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
0.06				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.30	11.46	8.77	35.26	58.31

10/05/2025

EIRP PSD;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:1(2);Ch:6585MHz;TX

CF Freq
6.585GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

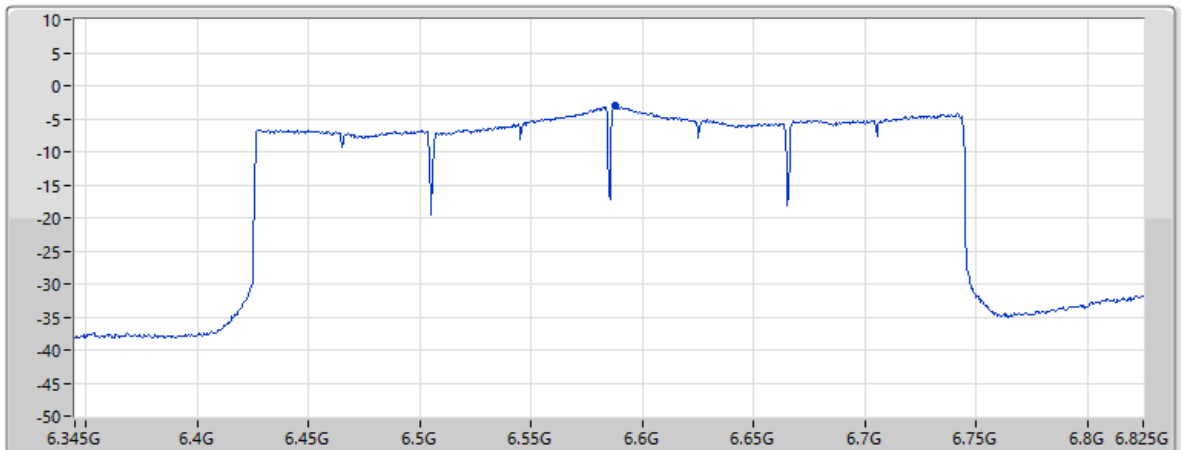


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
-3.1				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.04	11.05	8.77	35.20	58.42

10/05/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:1(2);Ch:6695MHz;TX

CF Freq
6.695GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

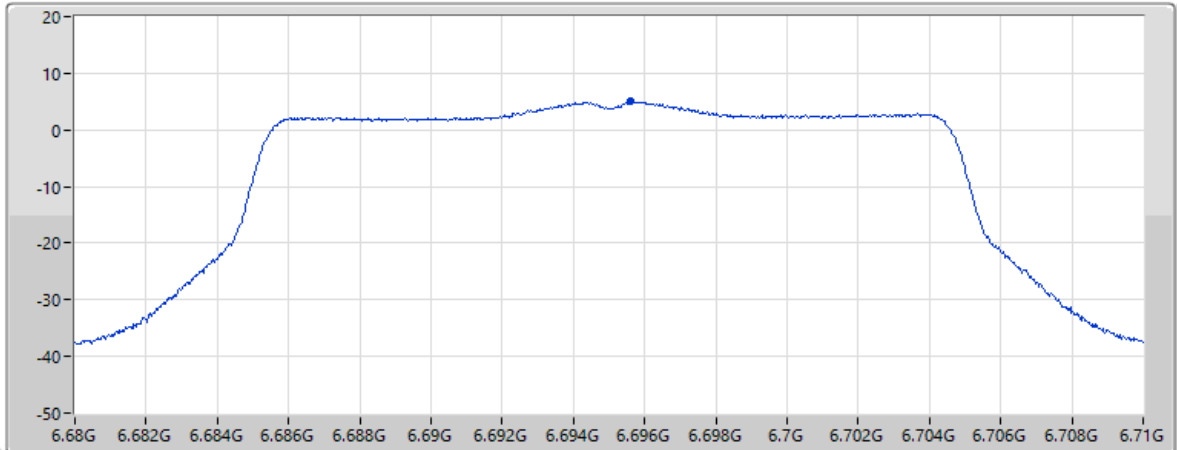


Page 6

EIRP PSD (dBm)	4.98	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.32	10.90	8.77	35.13	58.56

10/05/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:1(2);Ch:6565MHz;TX

CF Freq
6.565GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

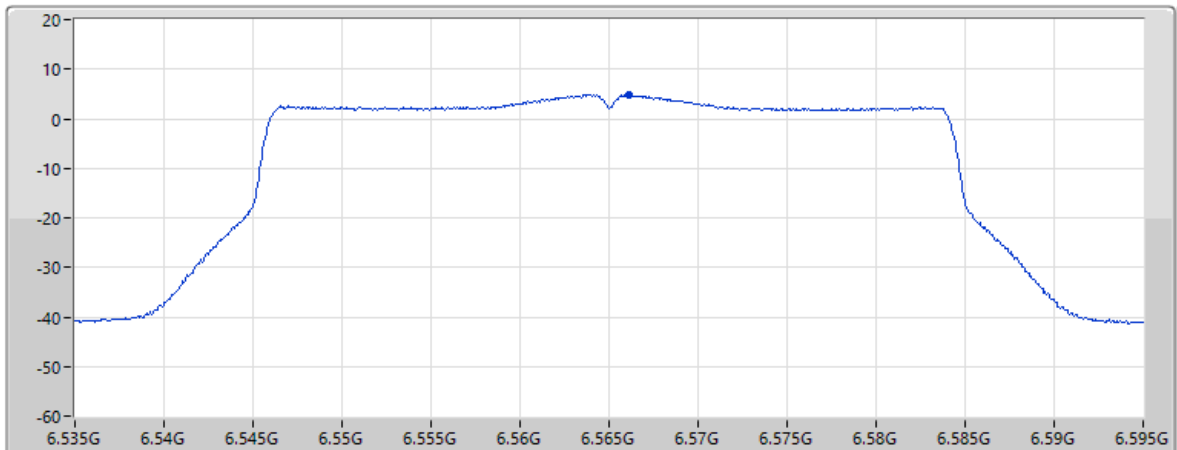


Page 6

EIRP PSD (dBm)	4.91	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.89	11.14	8.77	35.22	58.39

10/05/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:1(2);Ch:6705MHz;TX

CF Freq
6.705GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

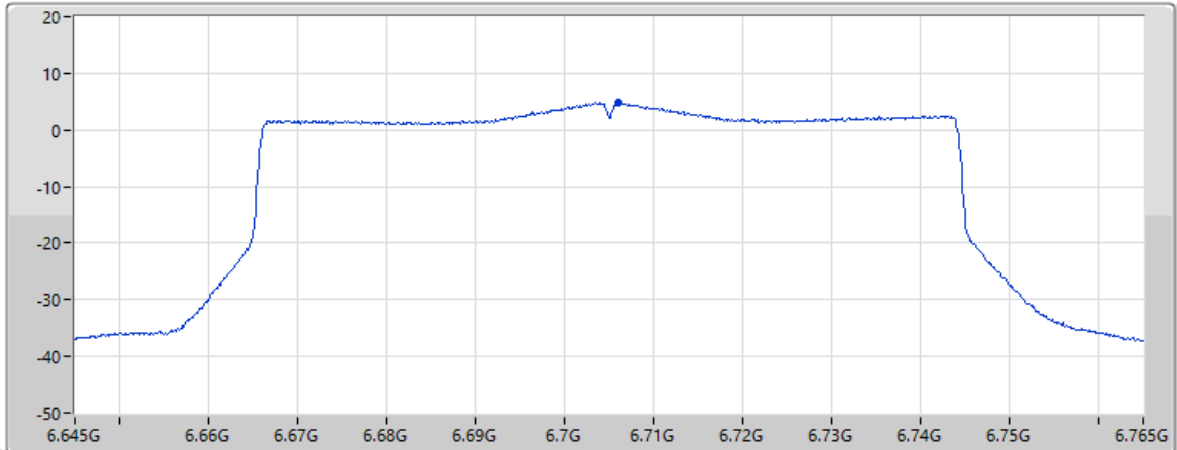


Page 6

EIRP PSD (dBm)	4.85	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.46	10.91	8.77	35.12	58.57

10/05/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:1(2);Ch:6665MHz;TX

CF Freq
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

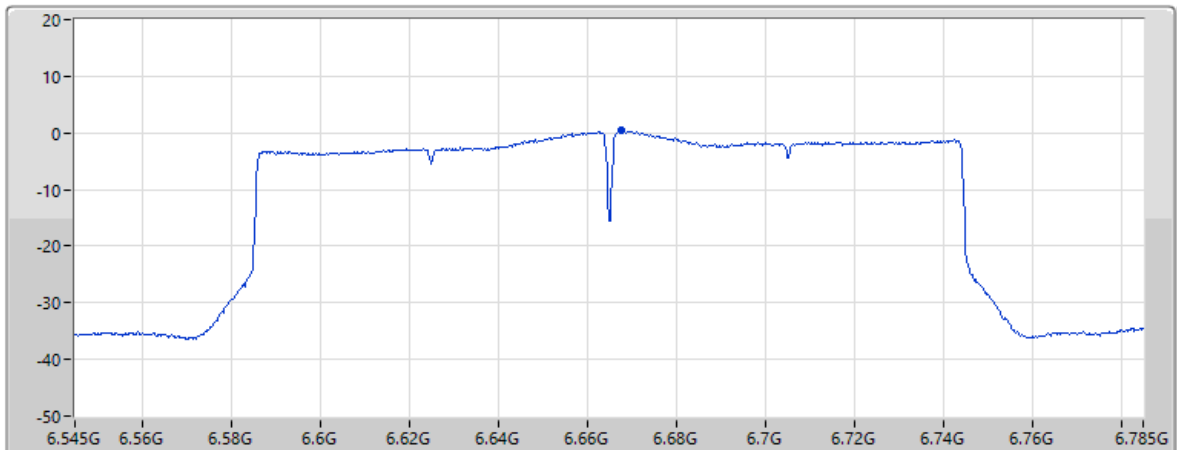

Page 6

EIRP PSD (dBm)	0.39	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.85	10.90	8.77	35.15	58.52

10/05/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:1(2);Ch:6745MHz;TX

CF Freq
6.745GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
320MHz

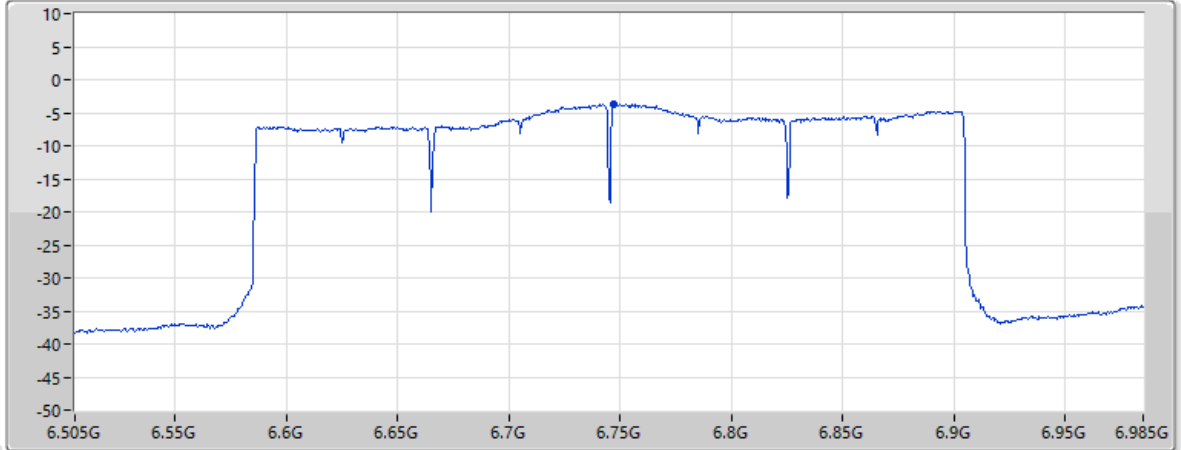

Page 6

EIRP PSD (dBm)	-3.66	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.98	10.99	8.77	35.09	58.63

10/05/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:1(2);Ch:7095MHz;TX

CF Freq
7.095GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
20MHz

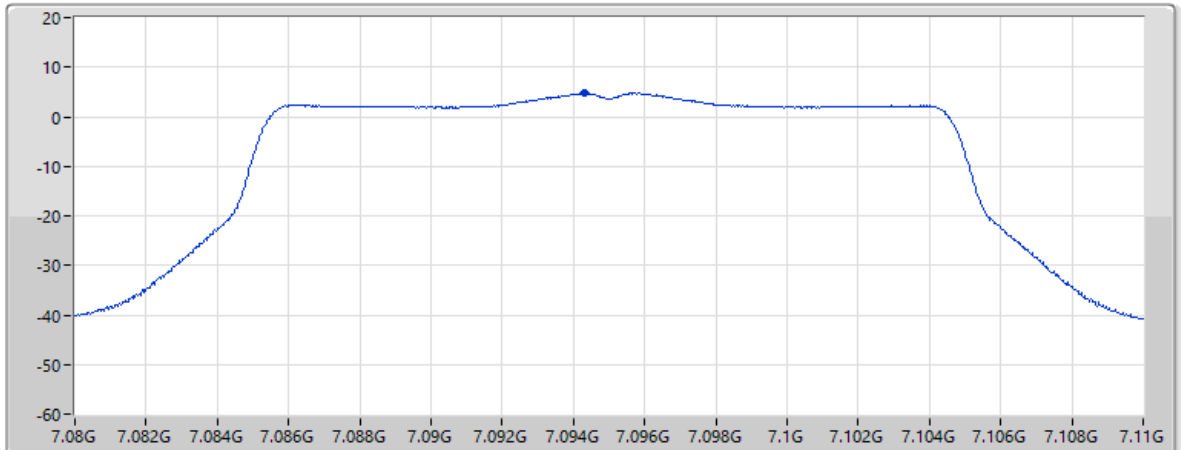

Page 6

EIRP PSD (dBm)	4.77	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.07	11.12	8.80	34.90	59.06

10/05/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:1(2);Ch:7005MHz;TX

CF Freq
7.005GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
40MHz

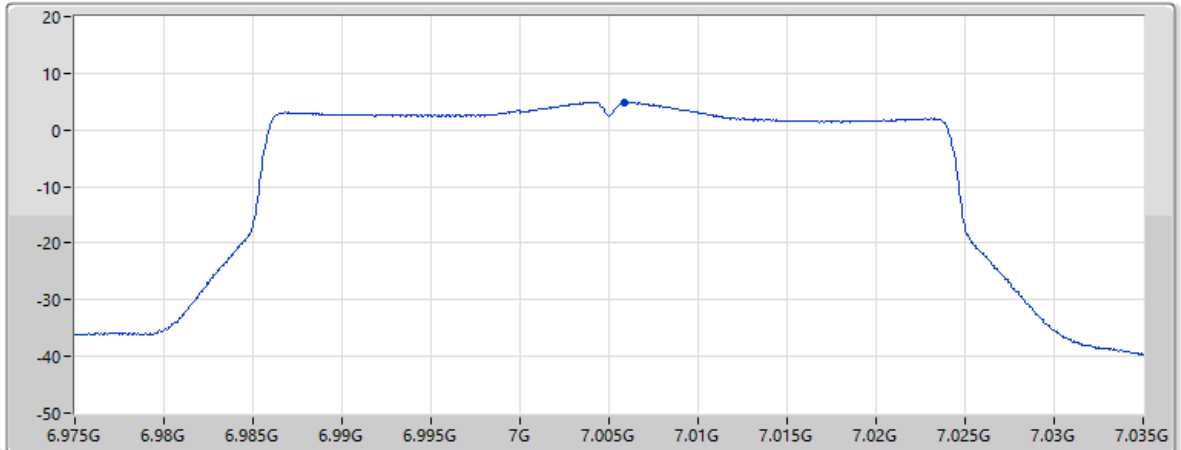

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.57	11.39	8.84	34.90	58.95

10/05/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:1(2);Ch:6945MHz;TX

CF Freq
6.945GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
80MHz

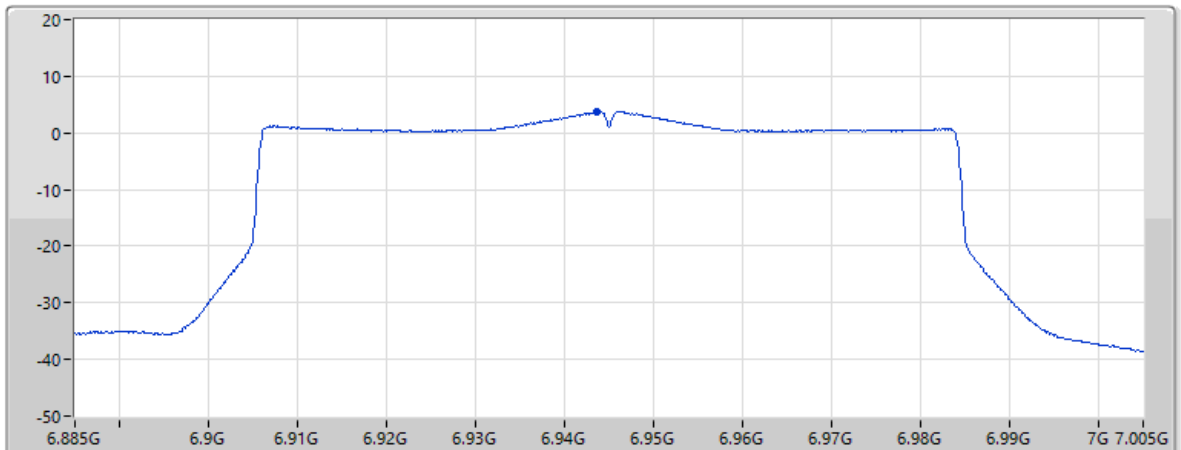


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
3.75				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.63	11.37	8.82	34.94	58.87

10/05/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:1(2);Ch:6985MHz;TX

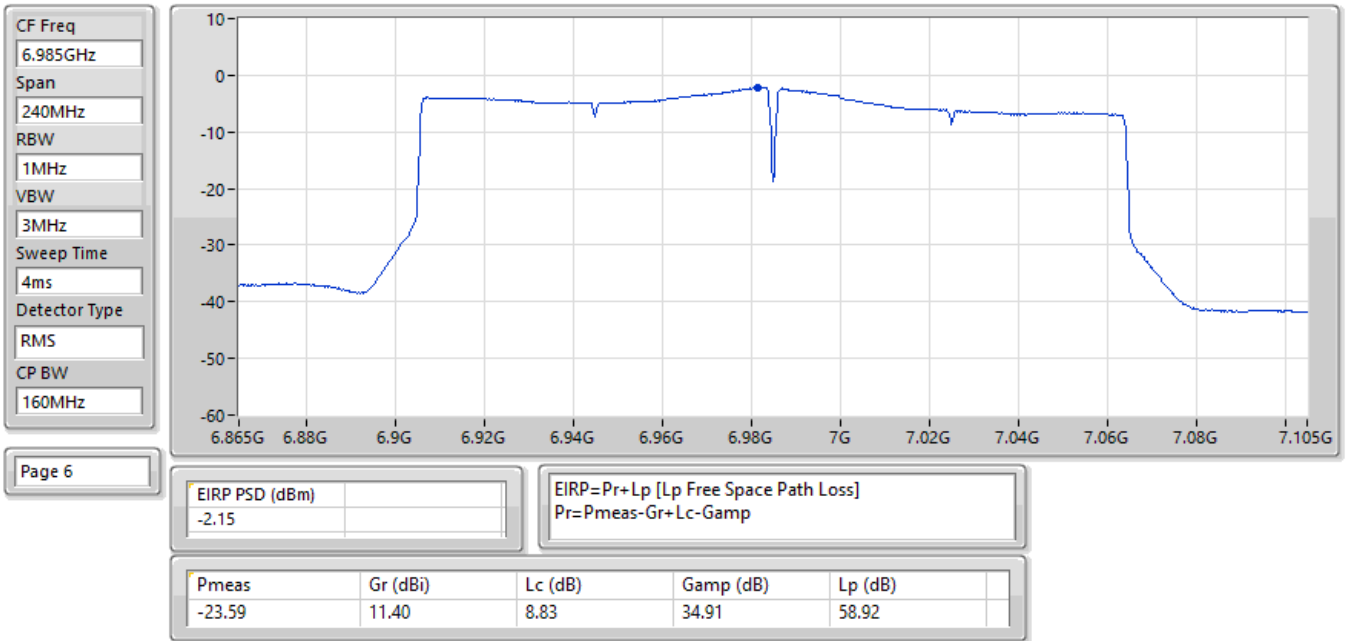

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20_Nss1,(MCS0)_2TX	4.77
802.11be EHT40_Nss1,(MCS0)_2TX	4.92
802.11be EHT80_Nss1,(MCS0)_2TX	4.84
802.11be EHT160_Nss1,(MCS0)_2TX	4.74
802.11be EHT320_Nss1,(MCS0)_2TX	1.65
6.425-6.525GHz	-
802.11be EHT20_Nss1,(MCS0)_2TX	4.70
802.11be EHT40_Nss1,(MCS0)_2TX	4.90
802.11be EHT80_Nss1,(MCS0)_2TX	4.72
802.11be EHT160_Nss1,(MCS0)_2TX	2.95
802.11be EHT320_Nss1,(MCS0)_2TX	0.99
6.525-6.875GHz	-
802.11be EHT20_Nss1,(MCS0)_2TX	4.90
802.11be EHT40_Nss1,(MCS0)_2TX	4.86
802.11be EHT80_Nss1,(MCS0)_2TX	4.79
802.11be EHT160_Nss1,(MCS0)_2TX	4.59
802.11be EHT320_Nss1,(MCS0)_2TX	1.36
6.875-7.125GHz	-
802.11be EHT20_Nss1,(MCS0)_2TX	4.64
802.11be EHT40_Nss1,(MCS0)_2TX	4.82
802.11be EHT80_Nss1,(MCS0)_2TX	4.77
802.11be EHT160_Nss1,(MCS0)_2TX	4.94

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-
5955MHz_TX	Pass	4.54	5.00
6195MHz_TX	Pass	4.72	5.00
6415MHz_TX	Pass	4.77	5.00
6435MHz_TX	Pass	4.37	5.00
6475MHz_TX	Pass	4.26	5.00
6515MHz_TX	Pass	4.70	5.00
6535MHz_TX	Pass	4.90	5.00
6695MHz_TX	Pass	4.72	5.00
6875MHz_TX	Pass	4.50	5.00
6895MHz_TX	Pass	4.57	5.00
6995MHz_TX	Pass	4.43	5.00
7095MHz_TX	Pass	4.64	5.00
7115MHz_TX	Pass	4.47	5.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-
5965MHz_TX	Pass	4.62	5.00
6205MHz_TX	Pass	4.51	5.00
6405MHz_TX	Pass	4.92	5.00
6445MHz_TX	Pass	4.83	5.00
6485MHz_TX	Pass	4.90	5.00
6525MHz_TX	Pass	4.90	5.00
6565MHz_TX	Pass	4.48	5.00
6685MHz_TX	Pass	4.86	5.00
6885MHz_TX	Pass	4.48	5.00
6925MHz_TX	Pass	4.82	5.00
7005MHz_TX	Pass	4.67	5.00
7085MHz_TX	Pass	4.71	5.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-
5985MHz_TX	Pass	4.50	5.00
6225MHz_TX	Pass	4.70	5.00
6385MHz_TX	Pass	4.84	5.00
6465MHz_TX	Pass	4.51	5.00
6545MHz_TX	Pass	4.72	5.00
6625MHz_TX	Pass	4.64	5.00
6705MHz_TX	Pass	4.64	5.00
6785MHz_TX	Pass	4.79	5.00
6865MHz_TX	Pass	4.59	5.00
6945MHz_TX	Pass	4.66	5.00
7025MHz_TX	Pass	4.77	5.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-
6025MHz_TX	Pass	4.20	5.00
6185MHz_TX	Pass	4.74	5.00
6345MHz_TX	Pass	2.28	5.00



Radiated PSD_Non-Beamforming_Radio 3_2T1S_Full RU

Appendix D.2

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6505MHz_TX	Pass	2.95	5.00
6665MHz_TX	Pass	3.95	5.00
6825MHz_TX	Pass	4.59	5.00
6985MHz_TX	Pass	4.94	5.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-
6105MHz_TX	Pass	1.47	5.00
6265MHz_TX	Pass	1.65	5.00
6425MHz_TX	Pass	-0.33	5.00
6585MHz_TX	Pass	0.99	5.00
6745MHz_TX	Pass	1.36	5.00
6905MHz_TX	Pass	0.67	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

10/05/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6415MHz;TX

CF Freq
6.415GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

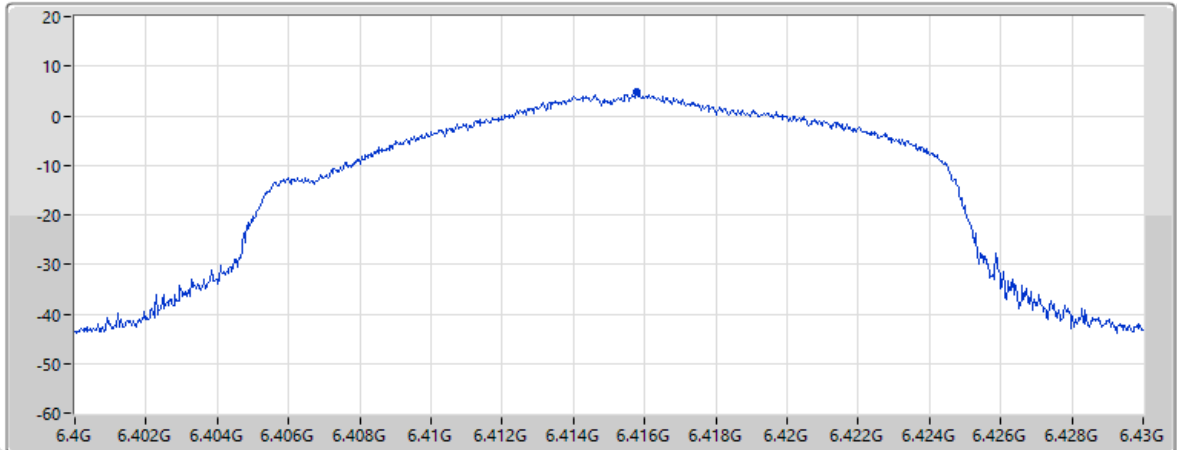

Page 5

EIRP PSD (dBm)	4.77	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.29	11.67	8.78	35.24	58.19

10/05/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

CF Freq
6.405GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

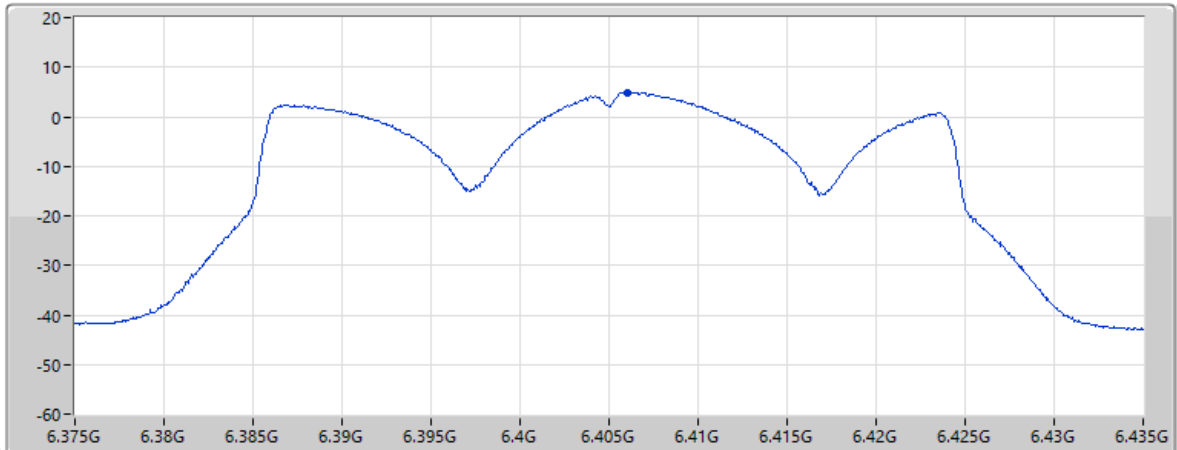


Page 5

EIRP PSD (dBm)	4.92	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.11	11.69	8.78	35.23	58.17

10/05/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

CF Freq
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

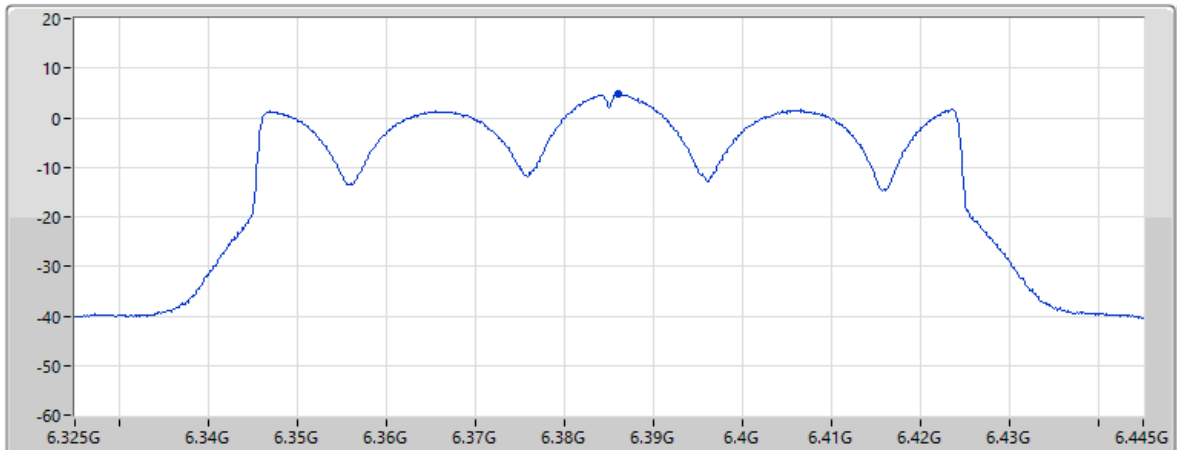


Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.84				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.12	11.73	8.76	35.22	58.15

10/05/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

CF Freq
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

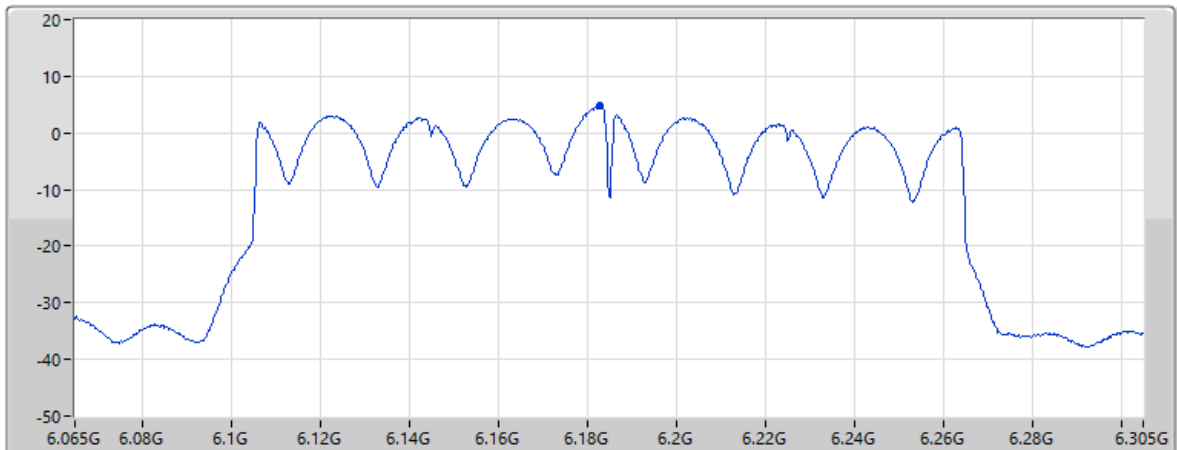


Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.74				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.54	11.90	8.45	35.14	57.87

10/05/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6265MHz;TX

CF Freq
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

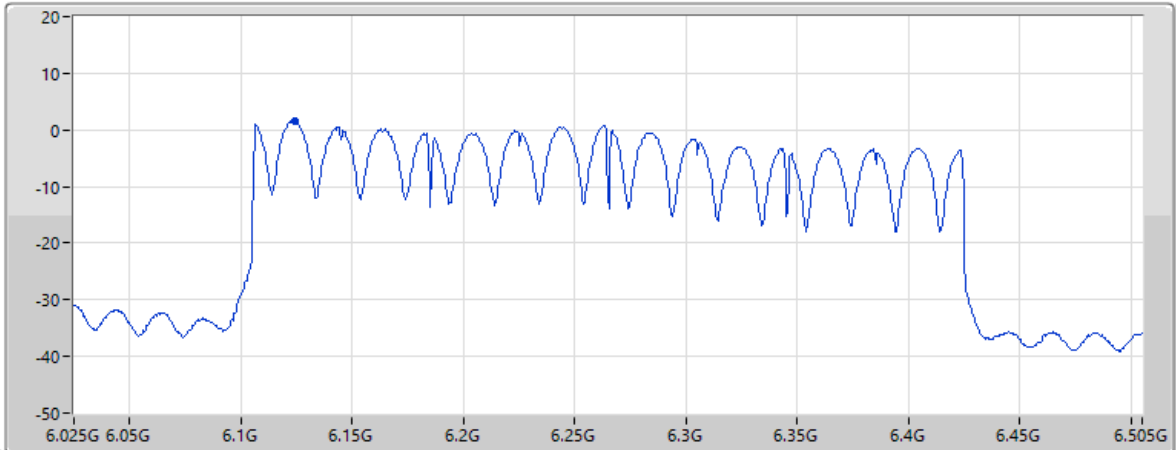


Page 5

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
1.65				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.49	11.95	8.43	35.12	57.78

10/05/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

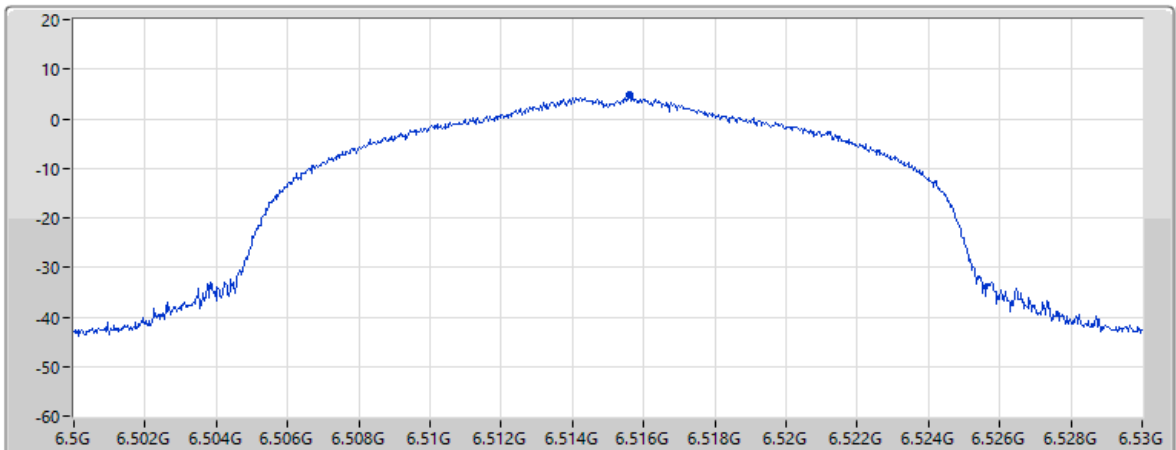


Page 5

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.7				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.72	11.41	8.77	35.26	58.32

10/05/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

CF Freq
6.485GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

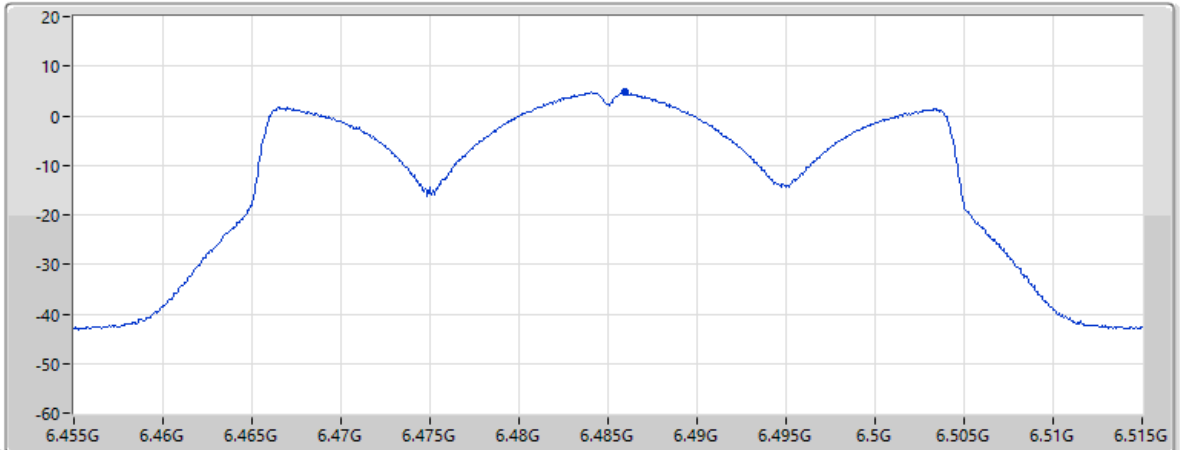


Page 5

EIRP PSD (dBm)	4.9	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.37	11.53	8.78	35.26	58.28

13/05/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

CF Freq
6.545GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

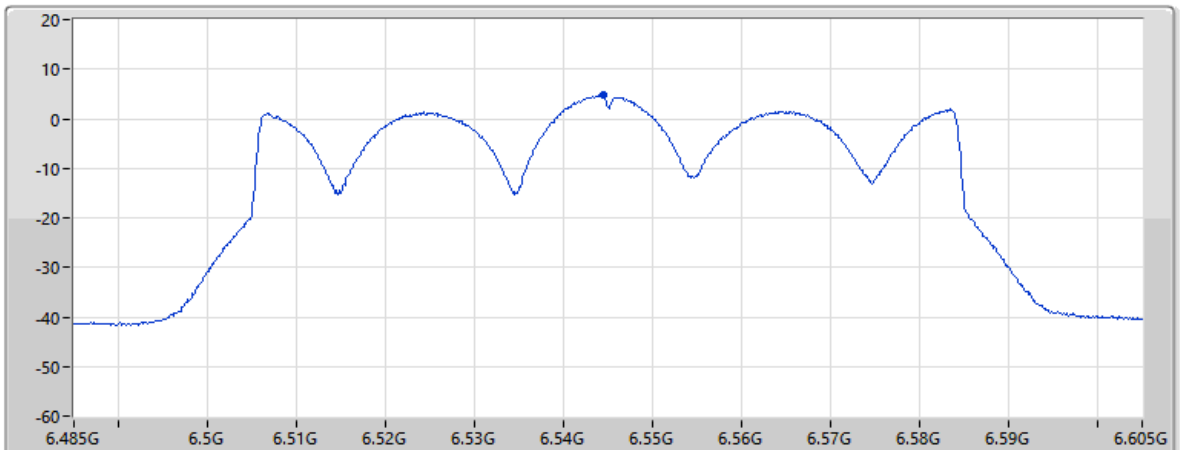


Page 5

EIRP PSD (dBm)	4.83	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.83	11.23	8.77	35.24	58.36

10/05/2025

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

CF Freq
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

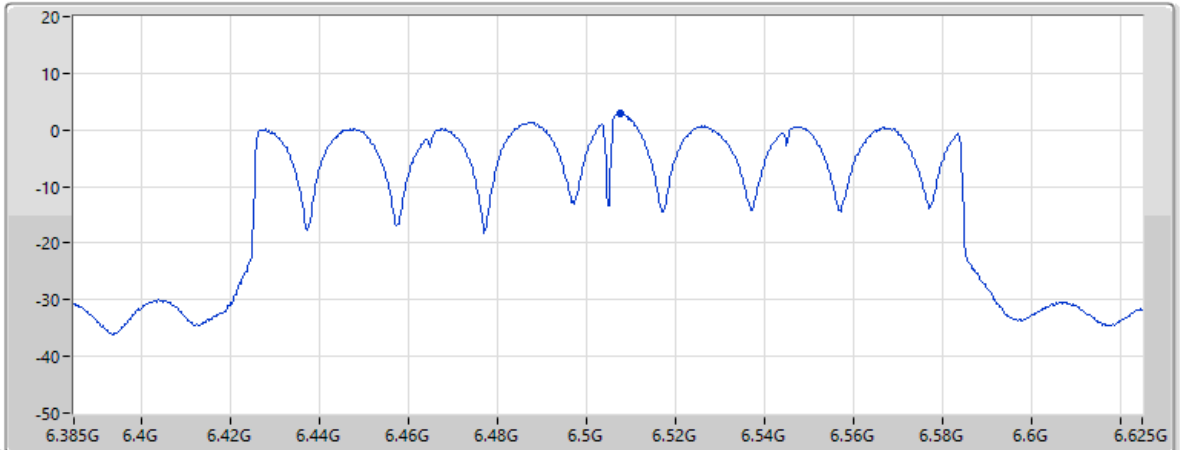


Page 5

EIRP PSD (dBm)	2.95	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.42	11.45	8.77	35.26	58.31

10/05/2025

EIRP PSD;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6585MHz;TX

CF Freq
6.585GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

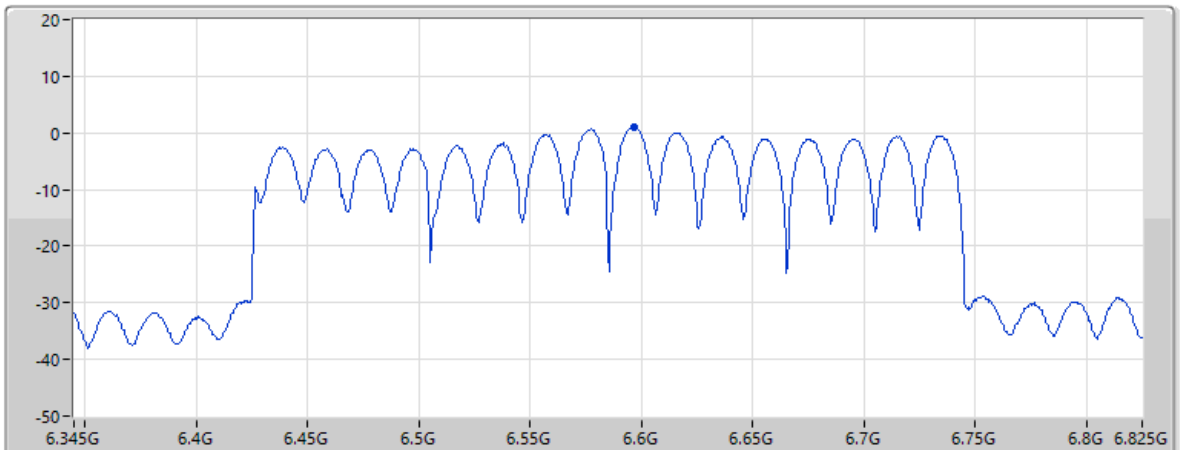


Page 5

EIRP PSD (dBm)	0.99	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.00	11.01	8.77	35.20	58.43

10/05/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

CF Freq
6.535GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

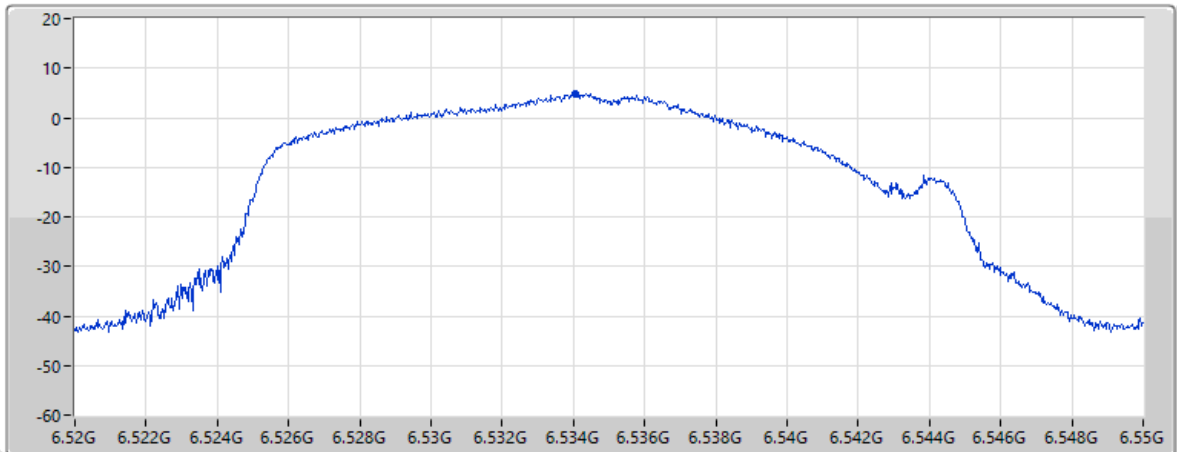

Page 5

EIRP PSD (dBm)
4.9


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.68	11.30	8.77	35.24	58.35

13/05/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6685MHz;TX

CF Freq
6.685GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

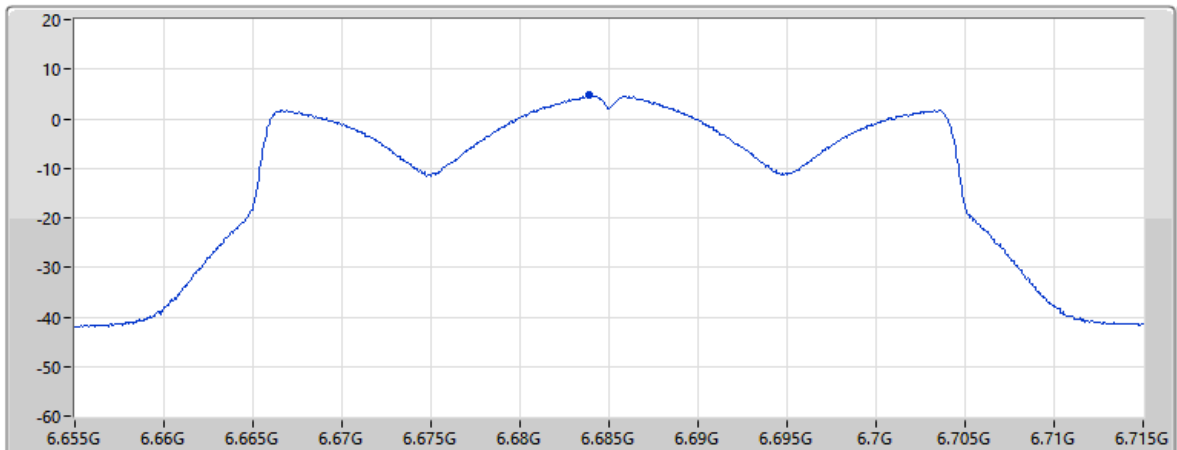

Page 5


EIRP PSD (dBm)
4.69

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.59	10.90	8.77	35.13	58.54


10/05/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

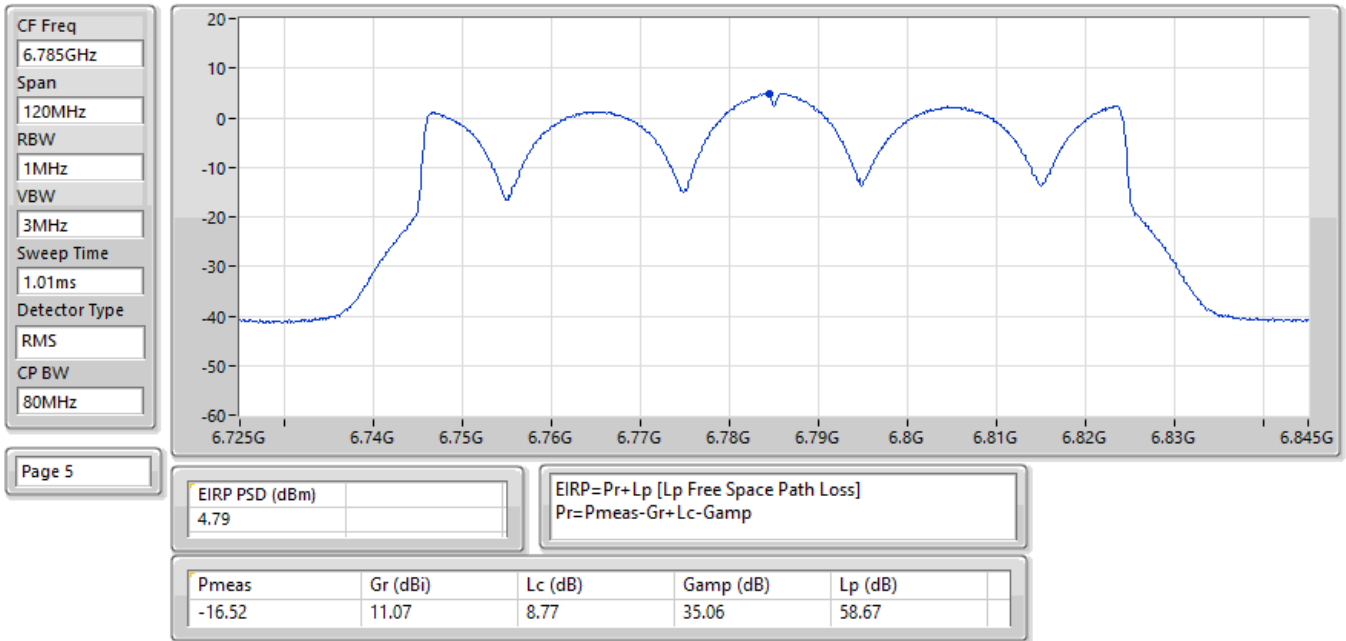


10/05/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

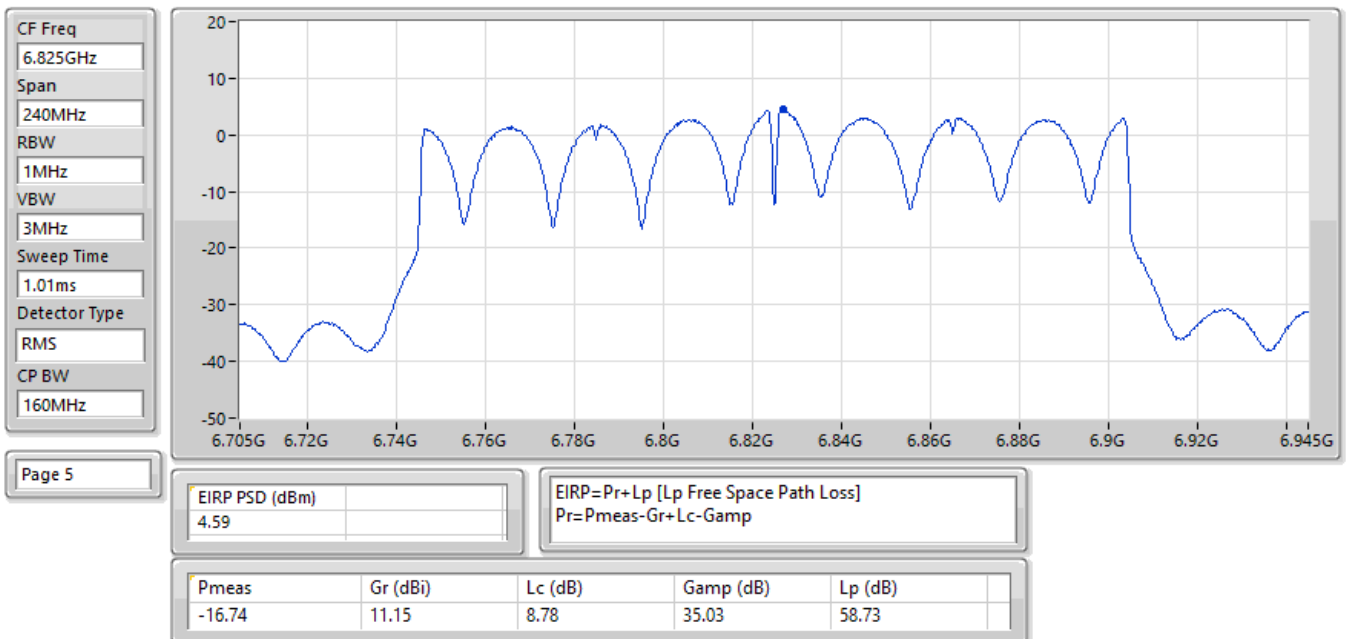


10/05/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6745MHz;TX

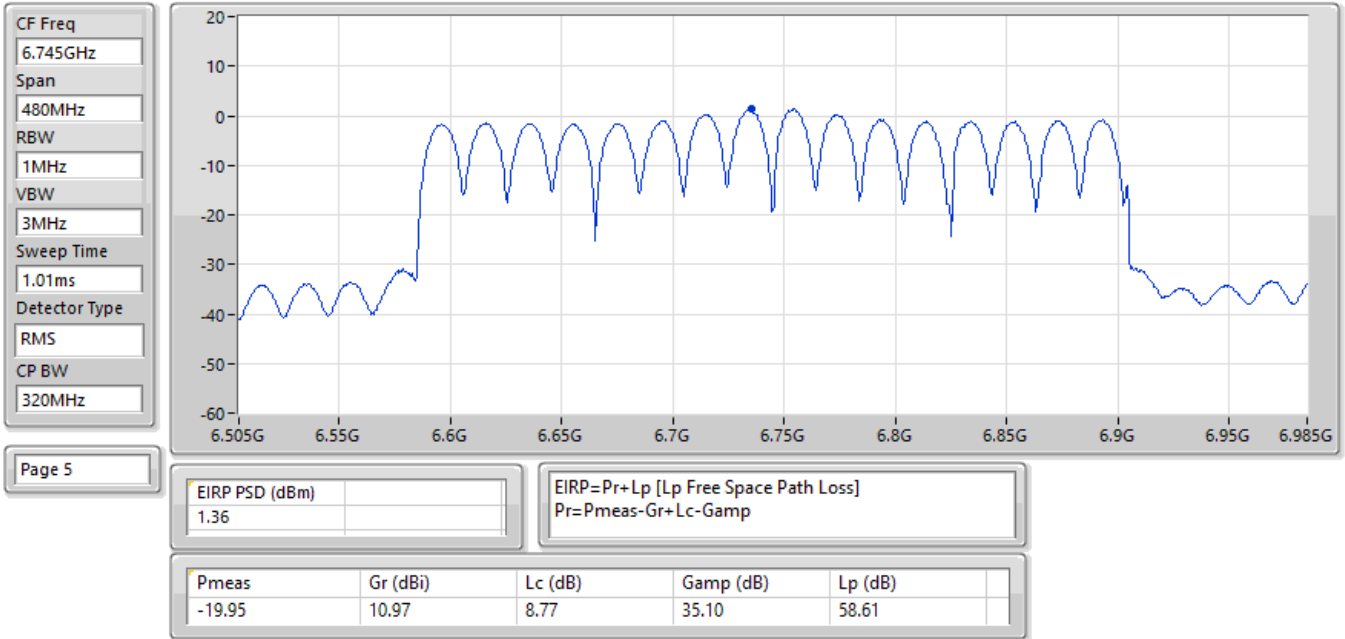

10/05/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:7095MHz;TX

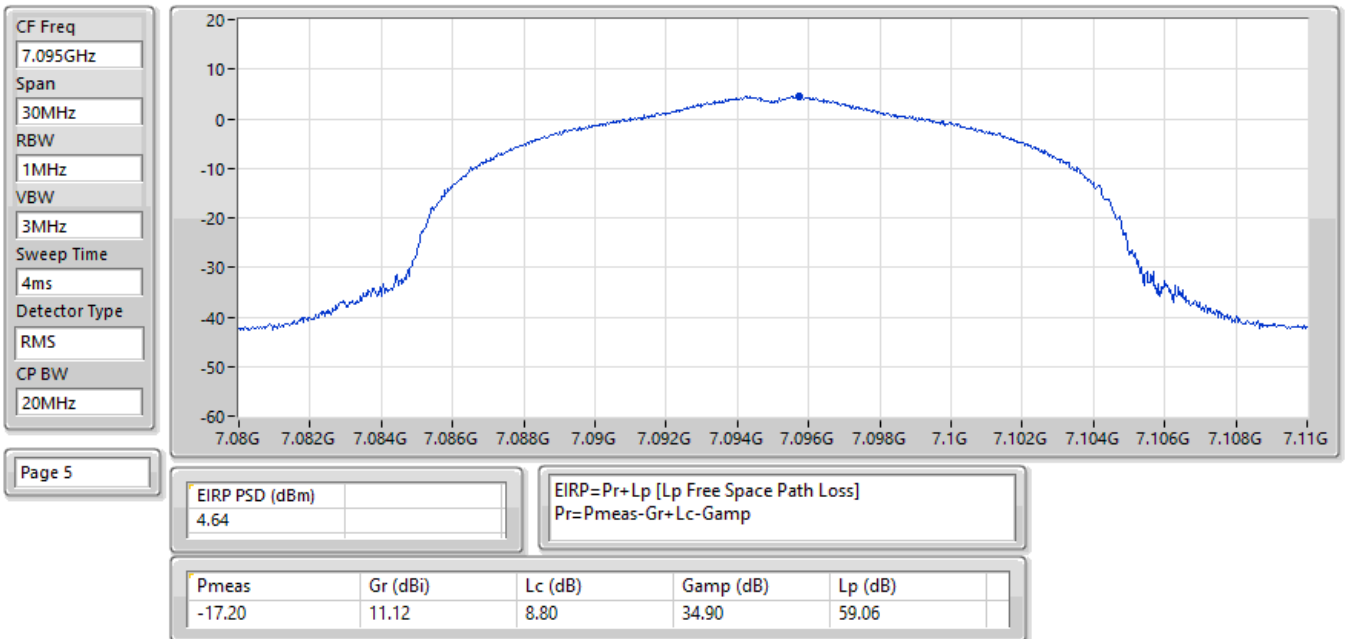

10/05/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

CF Freq
6.925GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

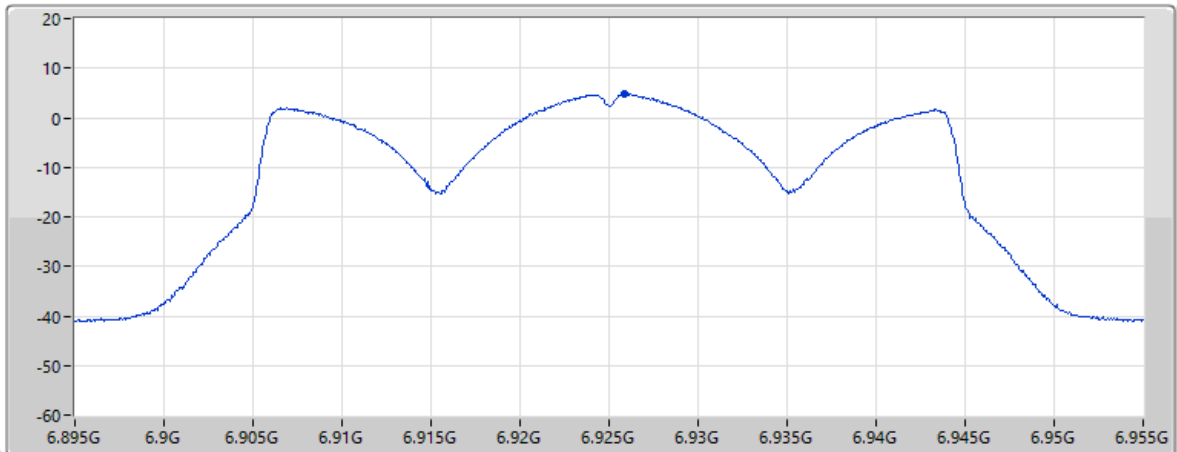

Page 5

EIRP PSD (dBm)	4.82	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.59	11.30	8.81	34.95	58.85

10/05/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
80MHz

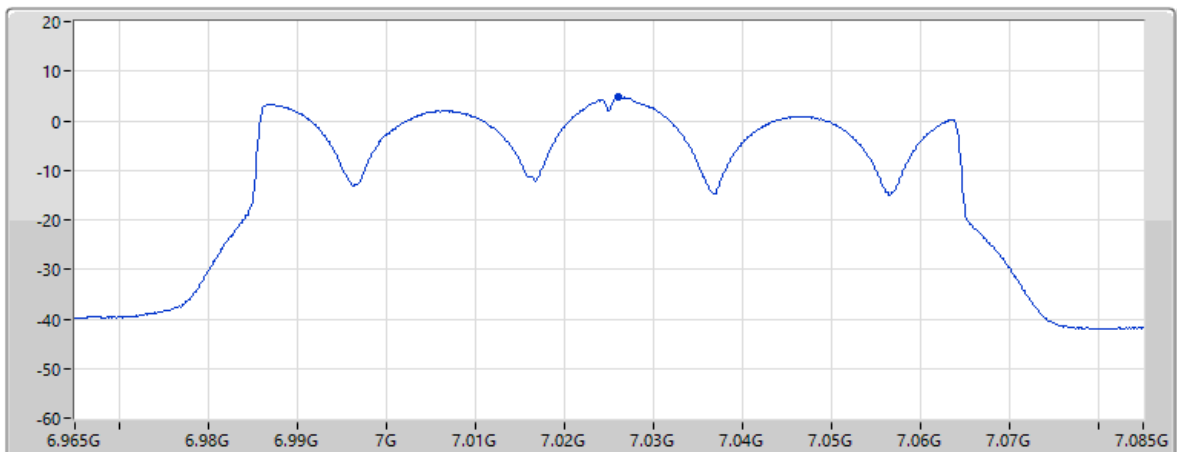


Page 5

EIRP PSD (dBm)	4.77	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.79	11.35	8.83	34.90	58.98

10/05/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

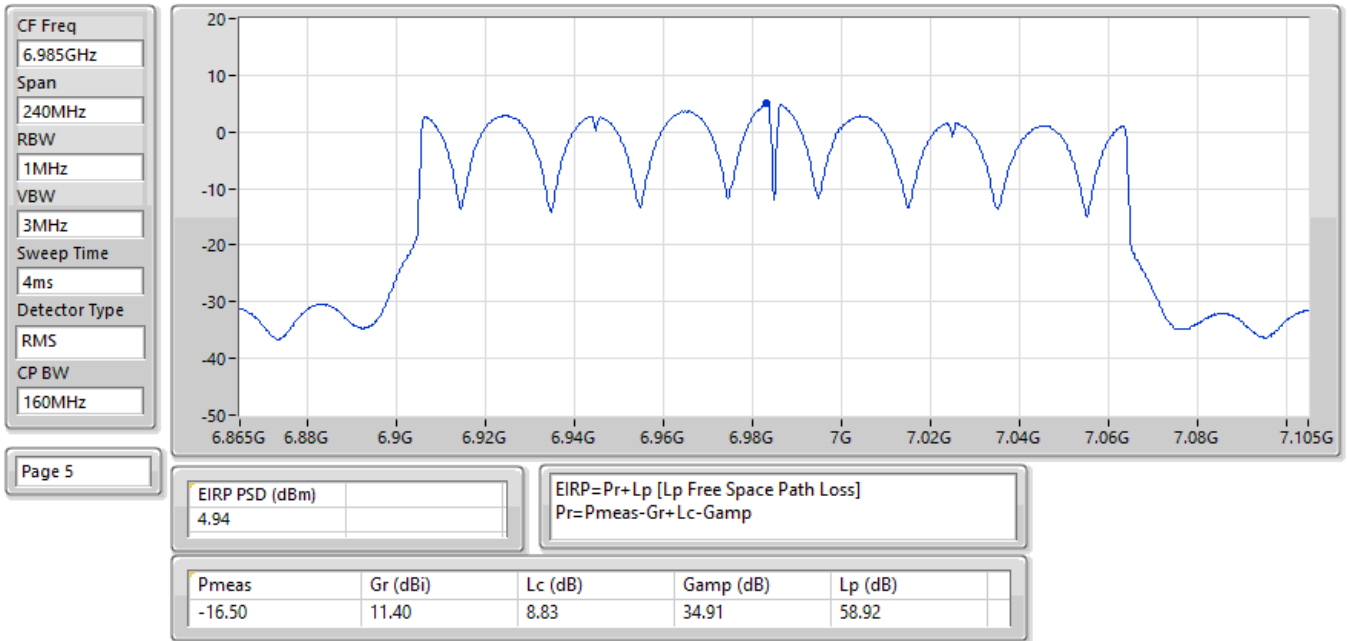

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	2.18
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	-1.98
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	-4.56
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	-5.38
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	0.37
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	-3.91

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	-	-	-
5985MHz	Pass	2.18	5.00
7025MHz	Pass	0.37	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	-	-	-
6025MHz	Pass	-1.98	5.00
6985MHz	Pass	-3.91	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	-	-	-
6105MHz	Pass	-4.56	5.00
6905MHz	Pass	-5.38	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

10/05/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:1(2);Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
80MHz

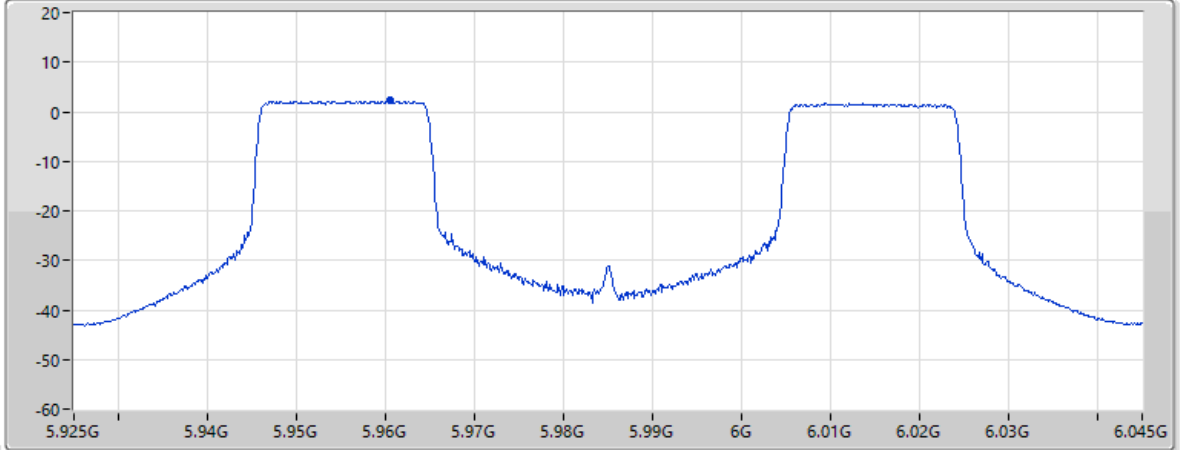

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
2.18				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.90	11.72	8.35	35.10	57.55

03/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU484+3xRU242 MRU 1;Nant:1(2);Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
160MHz

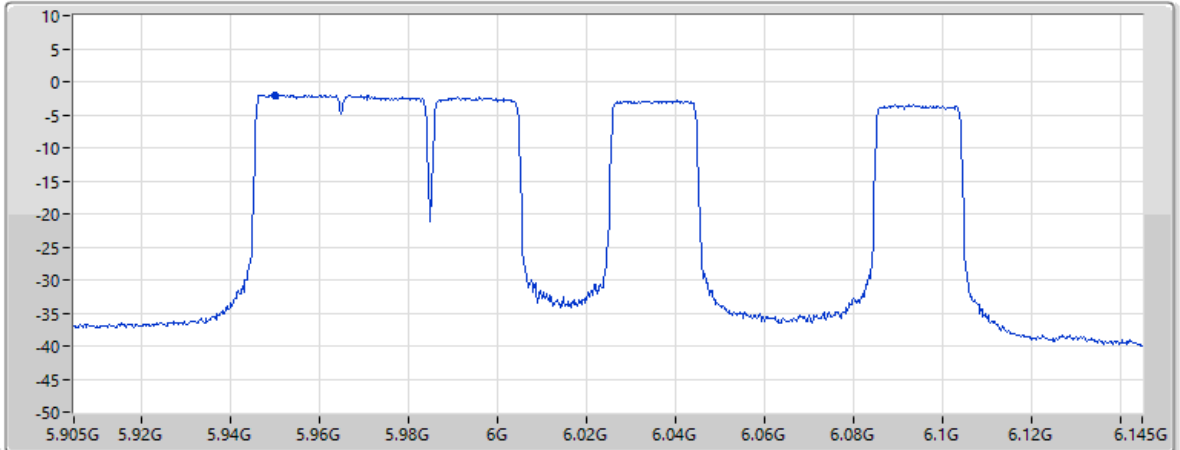


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
-1.98				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.06	11.70	8.35	35.10	57.53

03/07/2025

EIRP PSD:Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:1(2);Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

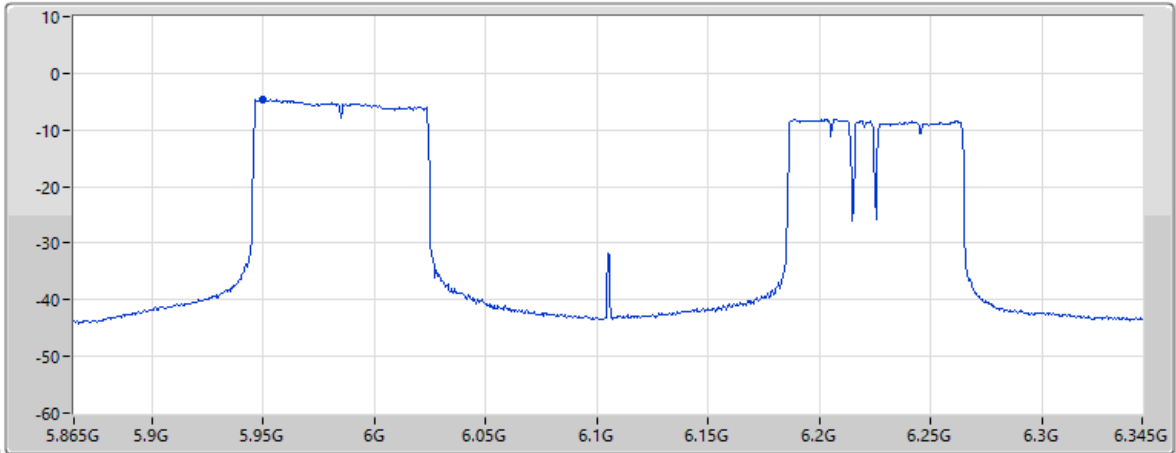


Page 6

EIRP PSD (dBm)	-4.56	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-23.64	11.70	8.35	35.10	57.53

03/07/2025

EIRP PSD:Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:1(2);Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

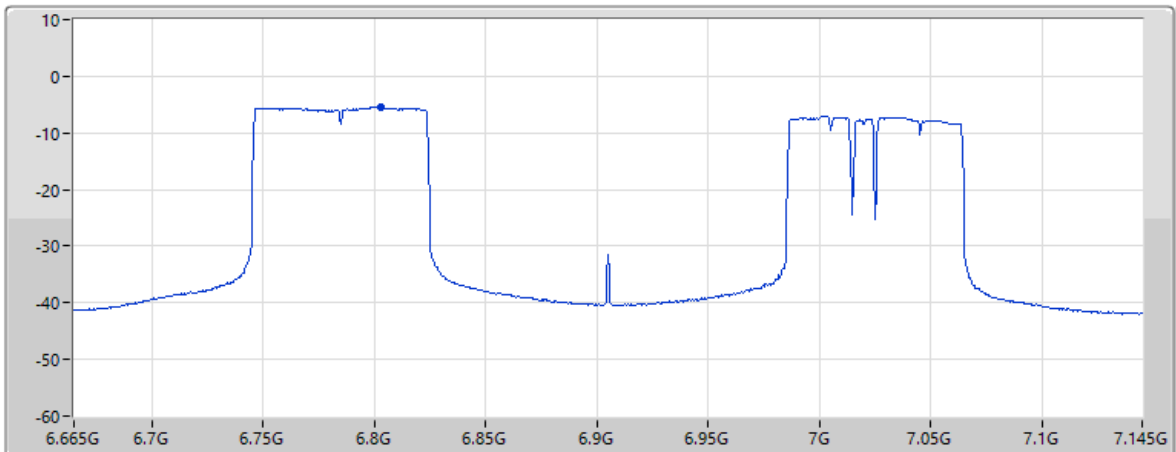

Page 6

EIRP PSD (dBm)	-5.38	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-26.69	11.11	8.77	35.05	58.70

10/05/2025

EIRP PSD:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:1(2);Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz

RBW
1MHz


VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
80MHz

Page 6

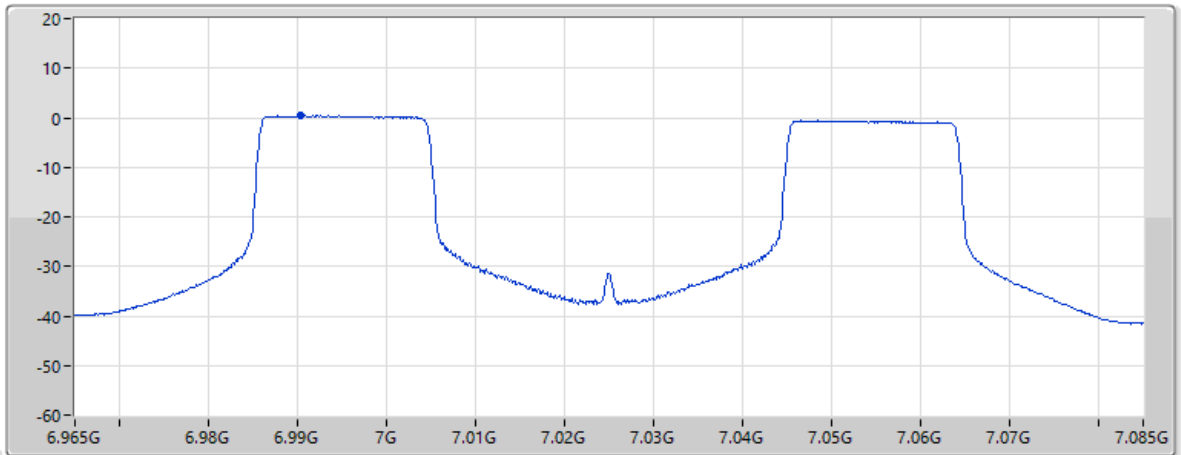

EIRP PSD (dBm)
0.37

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.09	11.40	8.84	34.91	58.93

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	2.66
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	4.23
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-0.16
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-2.52
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	3.53
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	2.67

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-
5985MHz	Pass	2.66	5.00
7025MHz	Pass	3.53	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-
6025MHz	Pass	4.23	5.00
6985MHz	Pass	2.67	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-
6105MHz	Pass	-0.16	5.00
6905MHz	Pass	-2.52	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

03/07/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:2;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
80MHz

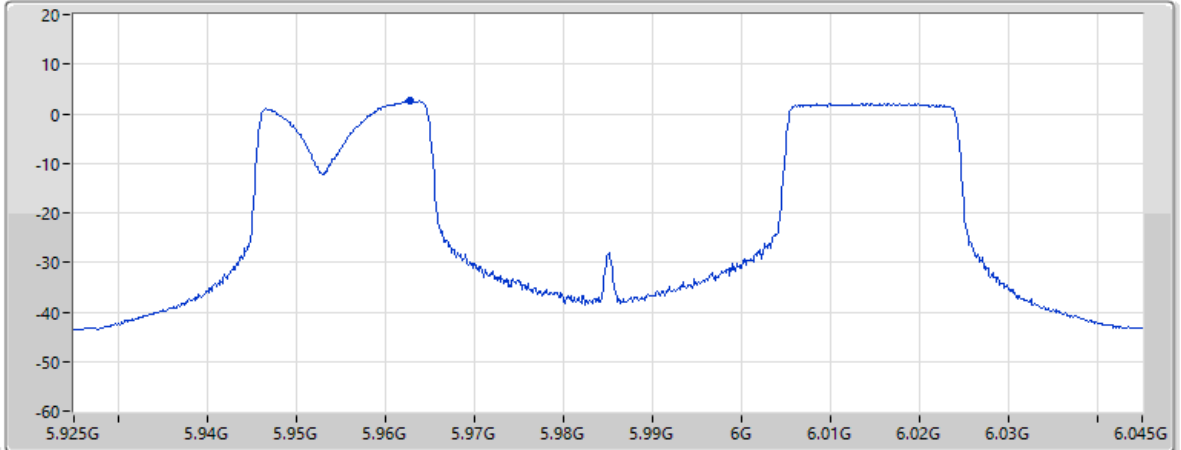

Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
2.66				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.43	11.73	8.36	35.09	57.55

04/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:2;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
160MHz

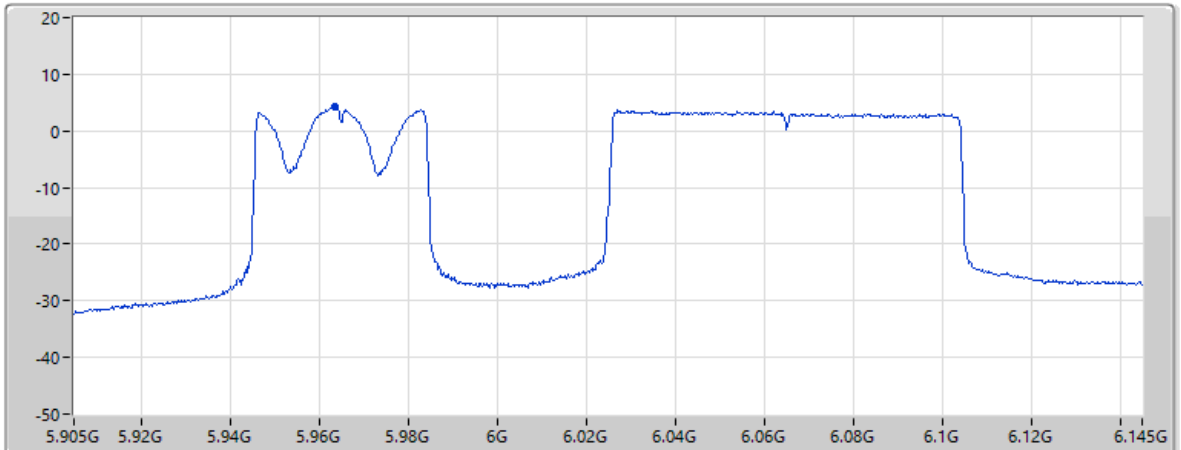


Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.23				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.86	11.73	8.36	35.09	57.55

04/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:2;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

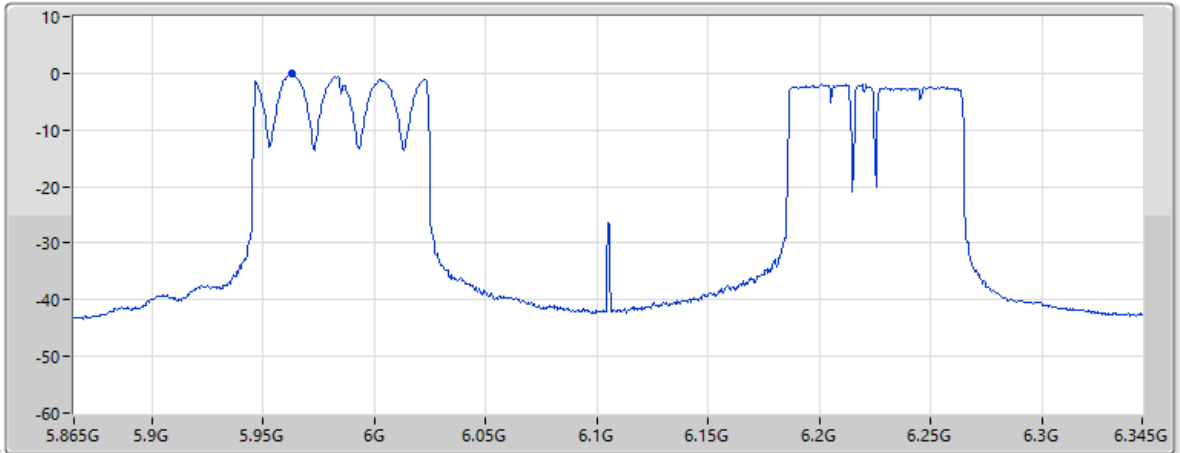


Page 5

EIRP PSD (dBm)	-0.16	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.25	11.73	8.36	35.09	57.55

04/07/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:2;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

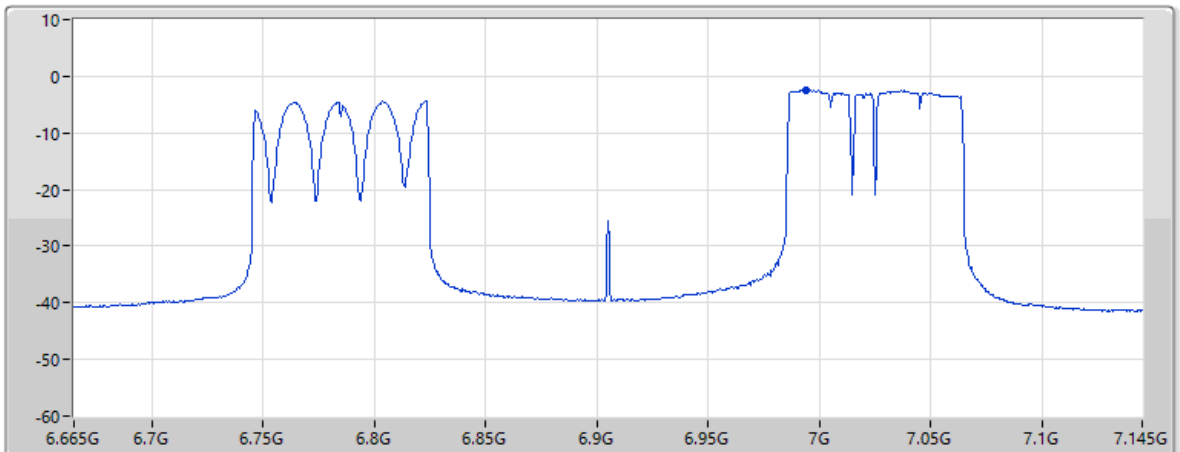


Page 5

EIRP PSD (dBm)	-2.52	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.00	11.40	8.84	34.90	58.94


04/07/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:2;Ch:7025MHz;TX

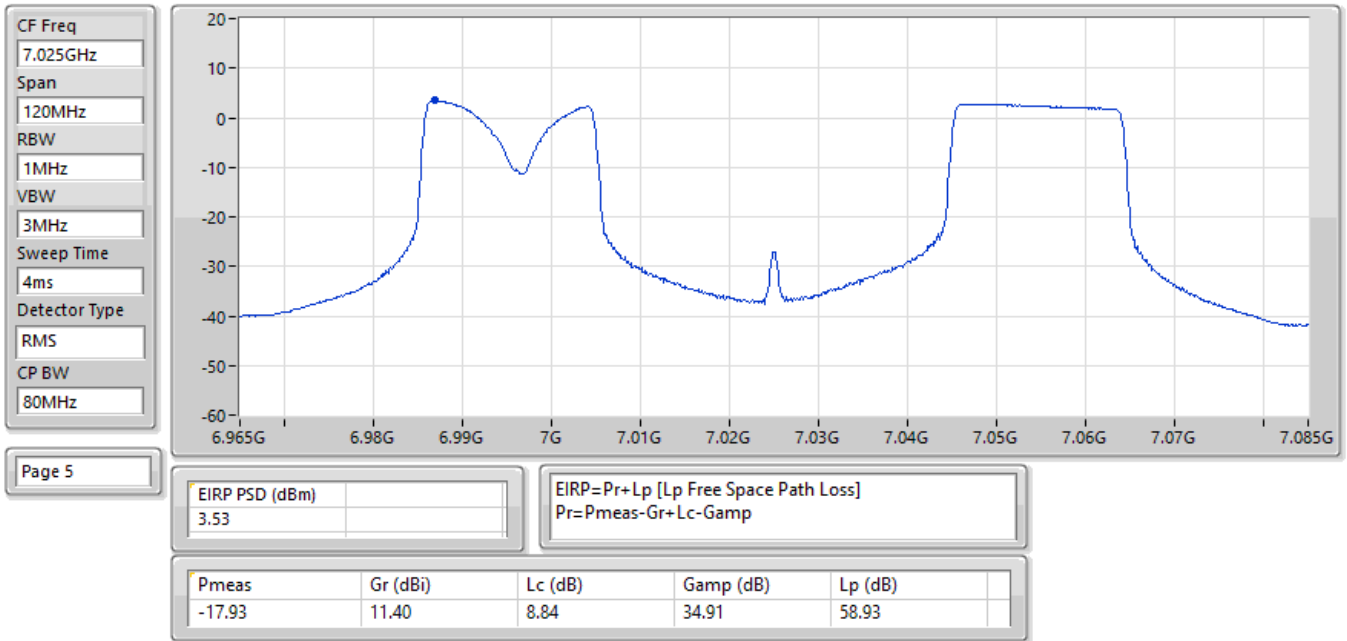

04/07/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:2;Ch:6985MHz;TX

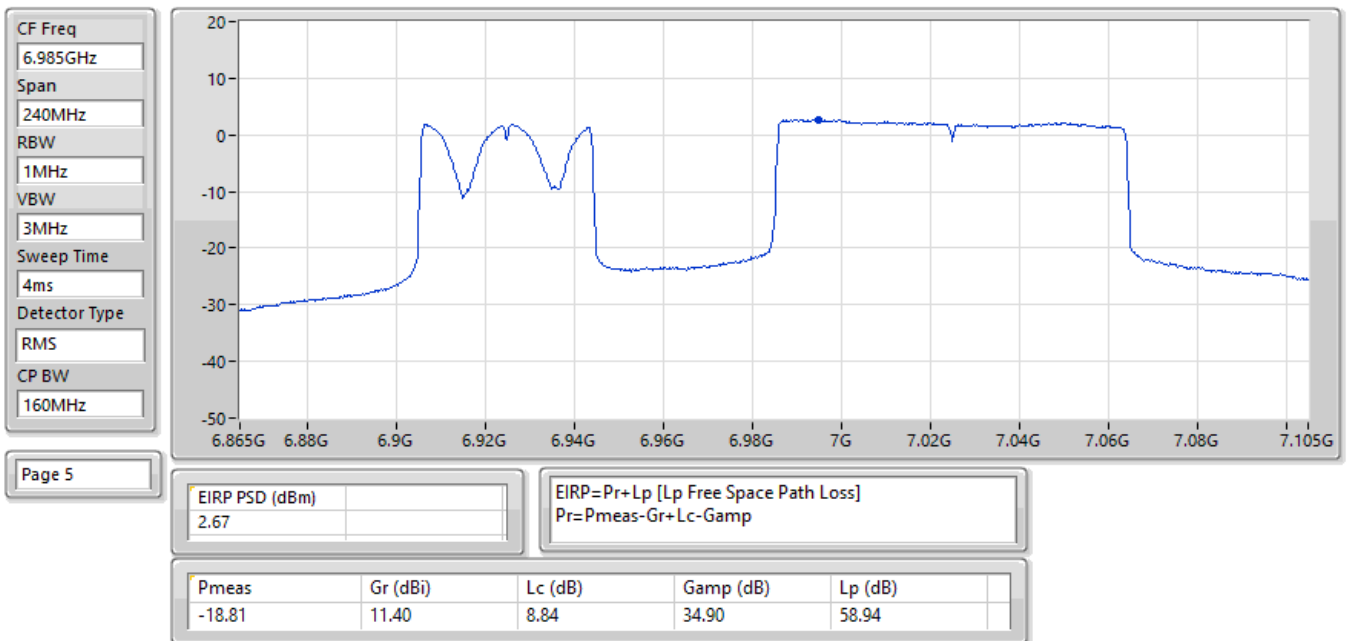



Radiated PSD_Non-Beamforming_Radio 3_1T1S_ Channel Puncturing

Appendix D.5

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX(Port2)	1.41
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX(Port2)	-1.14
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX(Port2)	-2.44
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_1TX(Port2)	-6.27
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX(Port2)	1.34
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX(Port2)	-5.45

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Radiated PSD_Non-Beamforming_Radio 3_1T1S_ Channel Puncturing

Appendix D.5

Result


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX(Port2)	-	-	-
5985MHz	Pass	1.41	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX(Port2)	-	-	-
7025MHz	Pass	1.34	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX(Port2)	-	-	-
6025MHz	Pass	-1.49	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX(Port2)	-	-	-
6025MHz	Pass	-1.14	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_1TX(Port2)	-	-	-
6985MHz	Pass	-5.47	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX(Port2)	-	-	-
6985MHz	Pass	-5.45	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX(Port2)	-	-	-
6105MHz	Pass	-2.44	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_1TX(Port2)	-	-	-
6105MHz	Pass	-2.83	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_1TX(Port2)	-	-	-
6105MHz	Pass	-3.87	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_1TX(Port2)	-	-	-
6905MHz	Pass	-6.27	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_1TX(Port2)	-	-	-
6905MHz	Pass	-6.54	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_1TX(Port2)	-	-	-
6905MHz	Pass	-6.30	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

05/07/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 4;Nant:1(2);Ch:5985MHz;TX

CF Freq
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

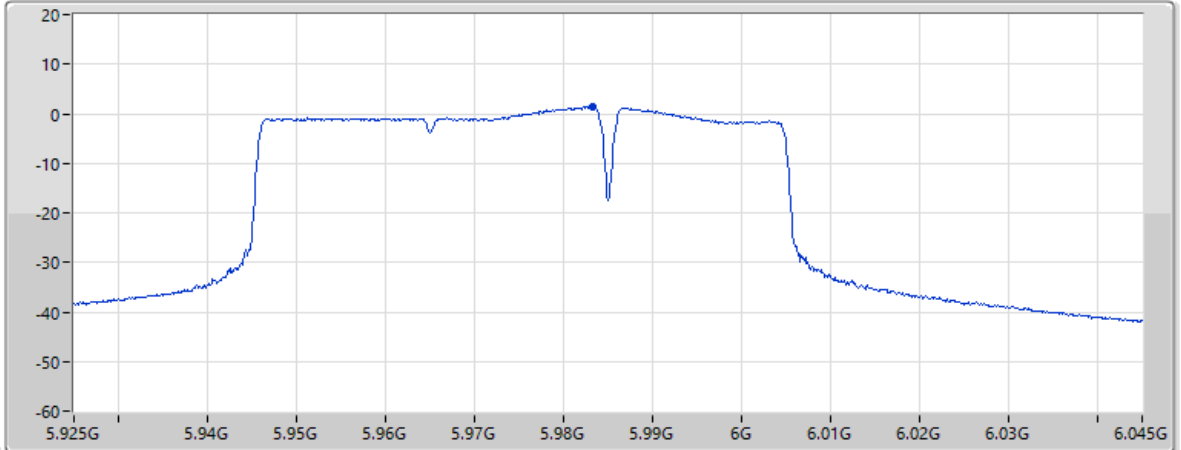

Page 6
Horizontal

EIRP PSD (dBm)

1.41

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas

Gr (dBi)

Lc (dB)

Gamp (dB)

Lp (dB)

-17.69

11.77

8.37


35.08

57.58

05/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 4;Nant:1(2);Ch:6025MHz;TX

CF Freq
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

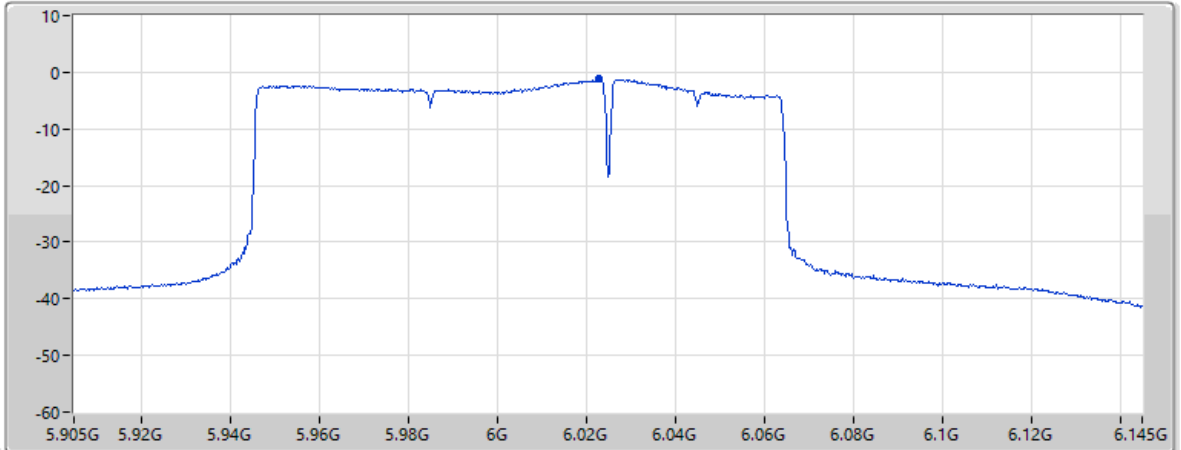

Page 6
Horizontal

EIRP PSD (dBm)

-1.14

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas

-20.24

Gr (dBi)

11.85

Lc (dB)

8.39

Gamp (dB)

35.08


Lp (dB)

57.64

15/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 CP 8;Nant:1(2);Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

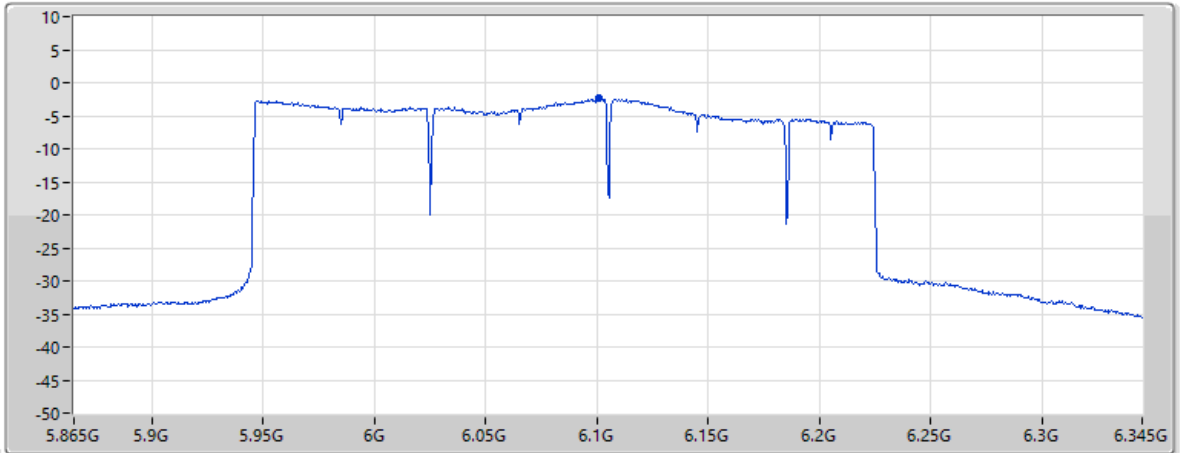


Page 6
Horizontal

EIRP PSD (dBm)	-2.44	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.50	12.00	8.42	35.11	57.75

05/07/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 CP 2;Nant:1(2);Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

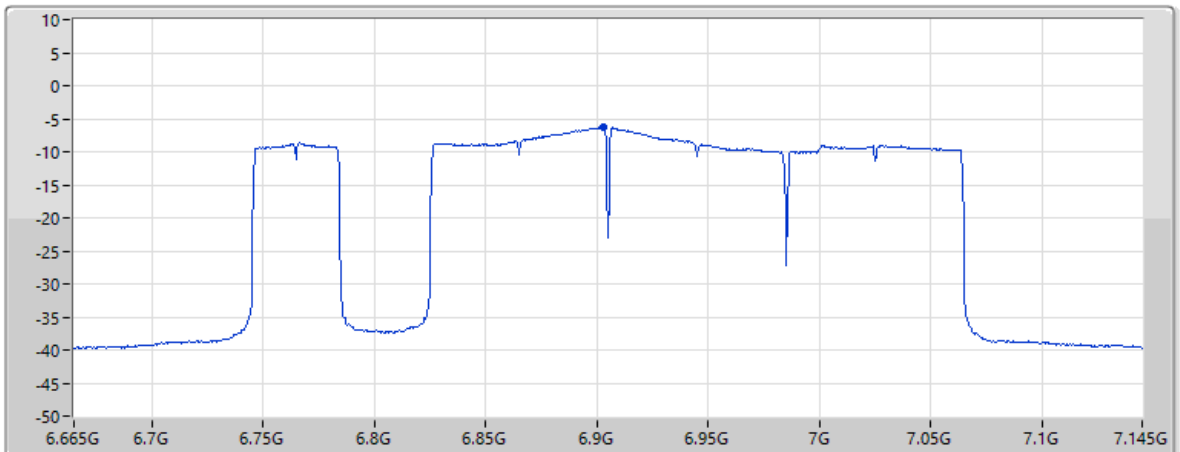


Page 6
Horizontal

EIRP PSD (dBm)	-6.27	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-27.72	11.21	8.81	34.97	58.82

05/07/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 1;Nant:1(2);Ch:7025MHz;TX

CF Freq
7.025GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
80MHz

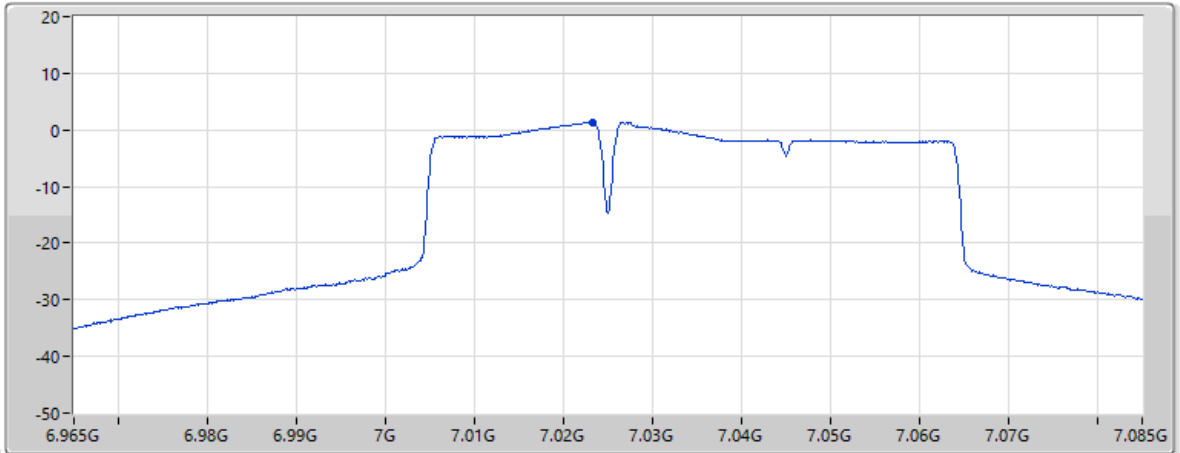


Page 6
Horizontal

EIRP PSD (dBm)	1.34	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.21	11.35	8.83	34.90	58.97

05/07/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 3;Nant:1(2);Ch:6985MHz;TX

CF Freq
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
160MHz

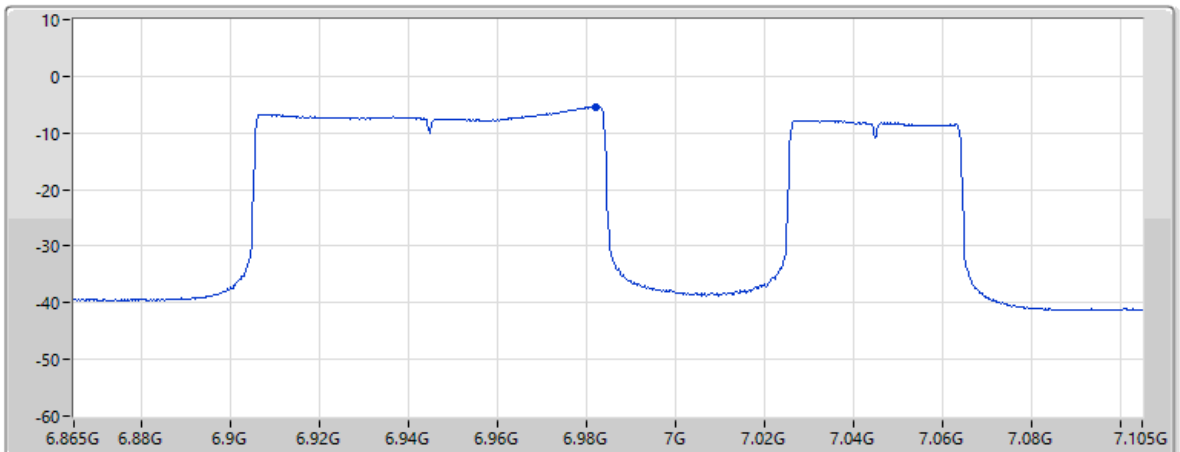

Page 6
Horizontal

EIRP PSD (dBm)	-5.45	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-26.89	11.40	8.83	34.91	58.92



Radiated PSD_Non-Beamforming_Radio 3_2T1S_ Channel Puncturing

Appendix D.6

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	2.79
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	4.02
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_2TX	-0.18
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX	-0.83
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	4.36
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	3.84

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Radiated PSD_Non-Beamforming_Radio 3_2T1S_ Channel Puncturing

Appendix D.6

Result


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-
5985MHz	Pass	2.79	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-
7025MHz	Pass	4.36	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-
6025MHz	Pass	3.50	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-
6025MHz	Pass	4.02	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-	-	-
6985MHz	Pass	3.02	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-
6985MHz	Pass	3.84	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-	-	-
6105MHz	Pass	-1.40	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-
6105MHz	Pass	-1.22	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_2TX	-	-	-
6105MHz	Pass	-0.18	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_2TX	-	-	-
6905MHz	Pass	-1.64	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-
6905MHz	Pass	-1.67	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX	-	-	-
6905MHz	Pass	-0.83	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

16/07/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 2;Nant:2;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
80MHz

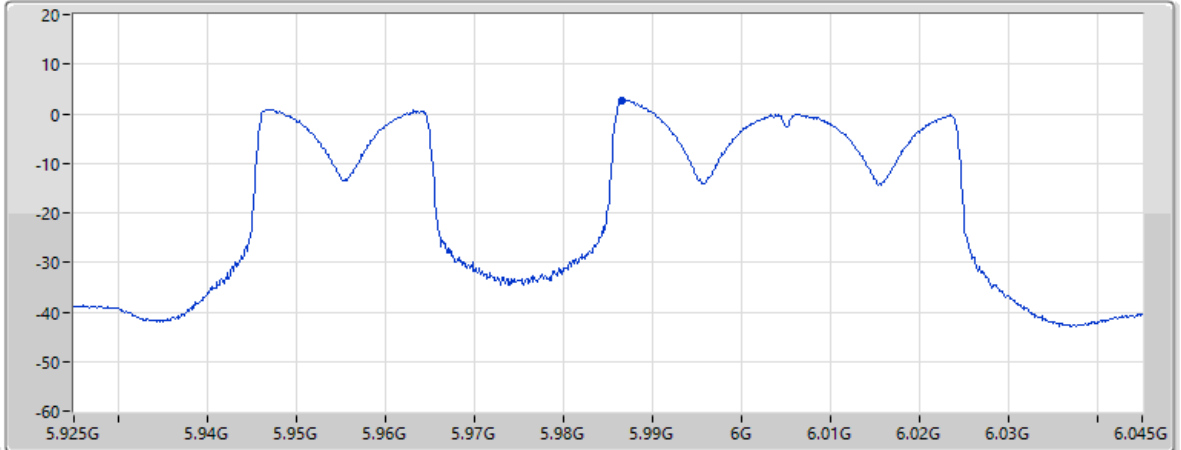


Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
2.79				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.32	11.77	8.37	35.08	57.59

16/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 3;Nant:2;Ch:6025MHz;TX

CF Freq
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
160MHz

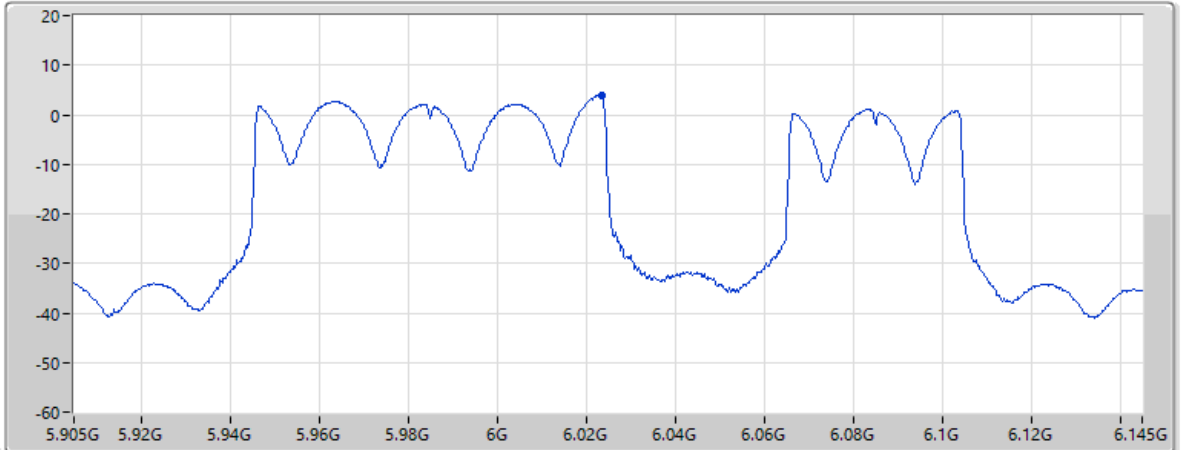


Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.02				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.08	11.85	8.39	35.08	57.64

16/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 CP 5;Nant:2;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
320MHz

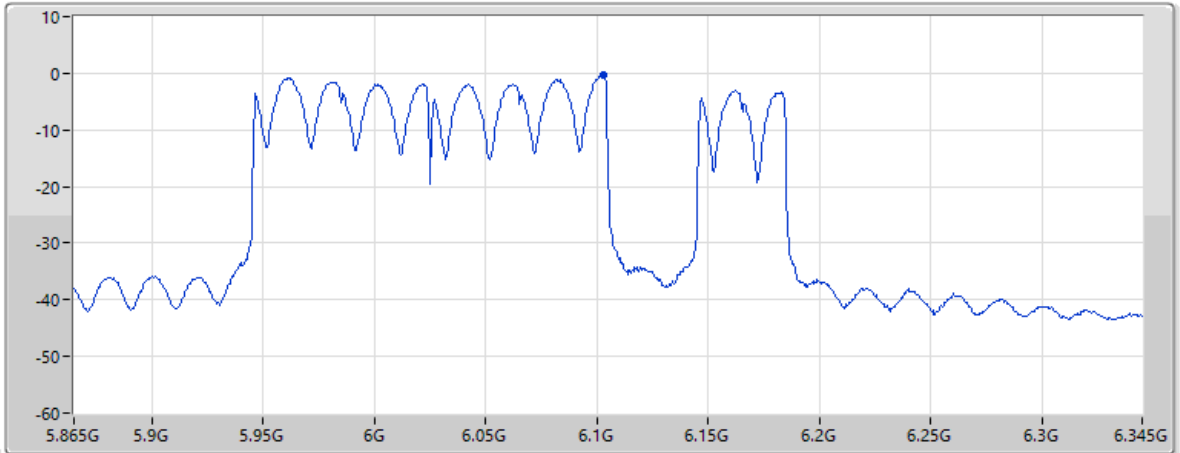


Page 5

EIRP PSD (dBm)	-0.18	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.25	11.99	8.42	35.11	57.75

16/07/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 CP 10;Nant:2;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

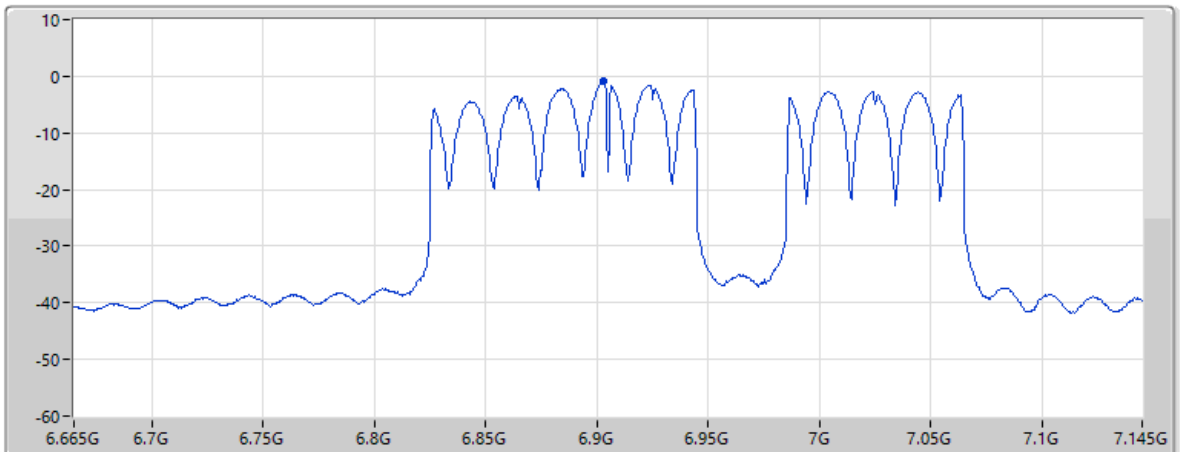

Page 5

EIRP PSD (dBm)	-0.83	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-22.28	11.21	8.81	34.97	58.82

16/07/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 3;Nant:2;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
80MHz

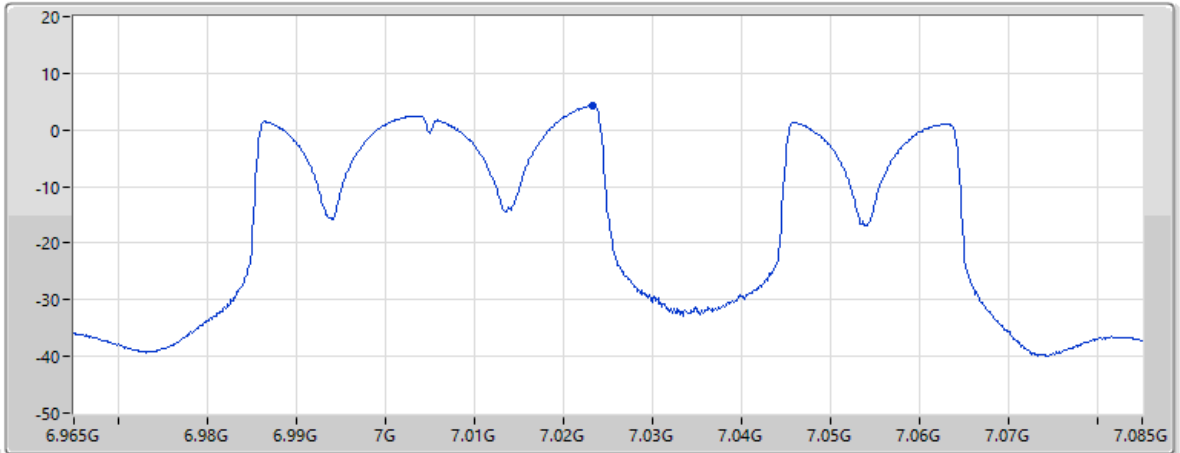

Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.36				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.19	11.35	8.83	34.90	58.97

16/07/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 3;Nant:2;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
160MHz

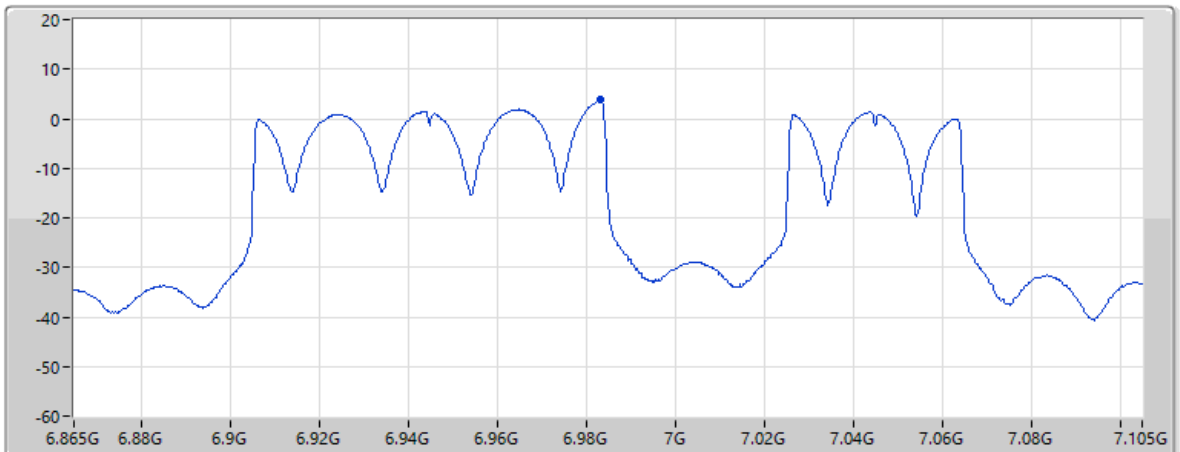

Page 5

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
3.84				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.60	11.40	8.83	34.91	58.92

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	4.89
802.11ax HEW40_Nss1,(MCS0)_1TX	4.98
802.11ax HEW80_Nss1,(MCS0)_1TX	2.43
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.67
6.425-6.525GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	4.93
802.11ax HEW40_Nss1,(MCS0)_1TX	4.94
802.11ax HEW80_Nss1,(MCS0)_1TX	4.40
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.14
6.525-6.875GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	4.66
802.11ax HEW40_Nss1,(MCS0)_1TX	4.99
802.11ax HEW80_Nss1,(MCS0)_1TX	4.75
802.11ax HEW160_Nss1,(MCS0)_1TX	1.78
6.875-7.125GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	4.99
802.11ax HEW40_Nss1,(MCS0)_1TX	4.98
802.11ax HEW80_Nss1,(MCS0)_1TX	3.84
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.09

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-
5955MHz	Pass	4.49	5.00
6195MHz	Pass	4.89	5.00
6415MHz	Pass	4.79	5.00
6435MHz	Pass	4.83	5.00
6475MHz	Pass	4.93	5.00
6515MHz	Pass	4.46	5.00
6535MHz	Pass	4.58	5.00
6695MHz	Pass	4.66	5.00
6875MHz	Pass	4.61	5.00
6895MHz	Pass	4.88	5.00
6995MHz	Pass	4.70	5.00
7095MHz	Pass	4.99	5.00
7115MHz	Pass	1.68	5.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-
5965MHz	Pass	4.97	5.00
6205MHz	Pass	4.98	5.00
6405MHz	Pass	4.17	5.00
6445MHz	Pass	4.70	5.00
6485MHz	Pass	4.62	5.00
6525MHz	Pass	4.94	5.00
6565MHz	Pass	4.75	5.00
6685MHz	Pass	4.99	5.00
6885MHz	Pass	4.85	5.00
6925MHz	Pass	4.78	5.00
7005MHz	Pass	4.98	5.00
7085MHz	Pass	4.46	5.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-
5985MHz	Pass	2.43	5.00
6225MHz	Pass	2.10	5.00
6385MHz	Pass	2.20	5.00
6465MHz	Pass	2.39	5.00
6545MHz	Pass	4.40	5.00
6625MHz	Pass	4.75	5.00
6705MHz	Pass	4.37	5.00
6785MHz	Pass	4.25	5.00
6865MHz	Pass	2.69	5.00
6945MHz	Pass	3.84	5.00
7025MHz	Pass	2.98	5.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-
6025MHz	Pass	-0.67	5.00
6185MHz	Pass	-0.79	5.00
6345MHz	Pass	-0.99	5.00
6505MHz	Pass	-0.14	5.00
6665MHz	Pass	1.78	5.00
6825MHz	Pass	0.75	5.00
6985MHz	Pass	-0.09	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

12/05/2025

EIRP PSD;Band:6.2G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

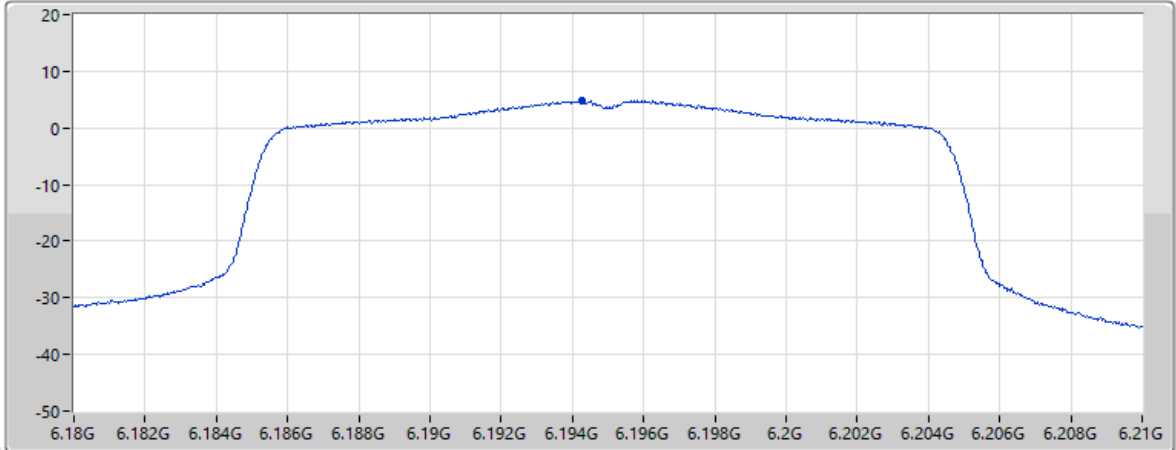

Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.89				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.40	11.90	8.46	35.15	57.88

13/05/2025

EIRP PSD;Band:6.2G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6205MHz;TX

CF Freq
6.205GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

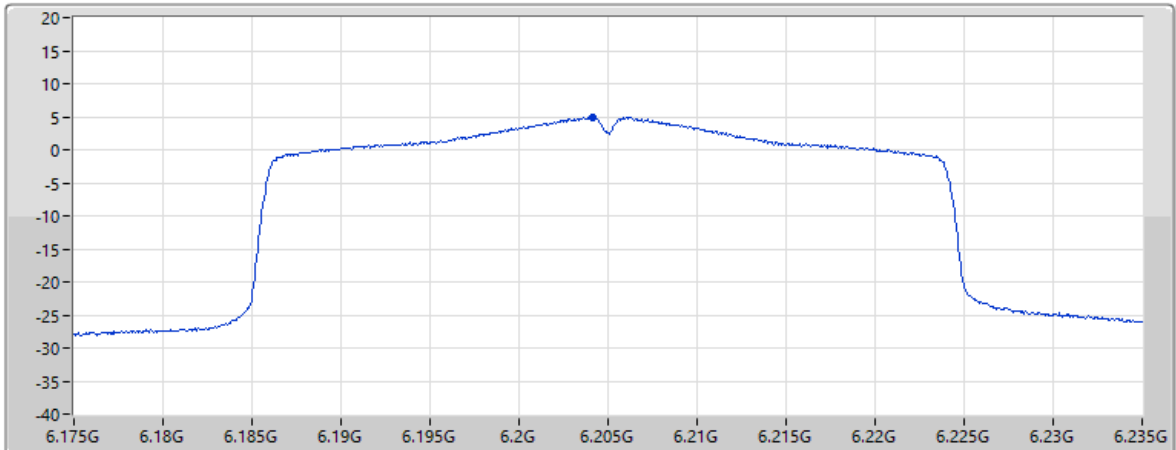

Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.98				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.36	11.88	8.47	35.15	57.90

09/06/2025

EIRP PSD;Band:6.2G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
80MHz

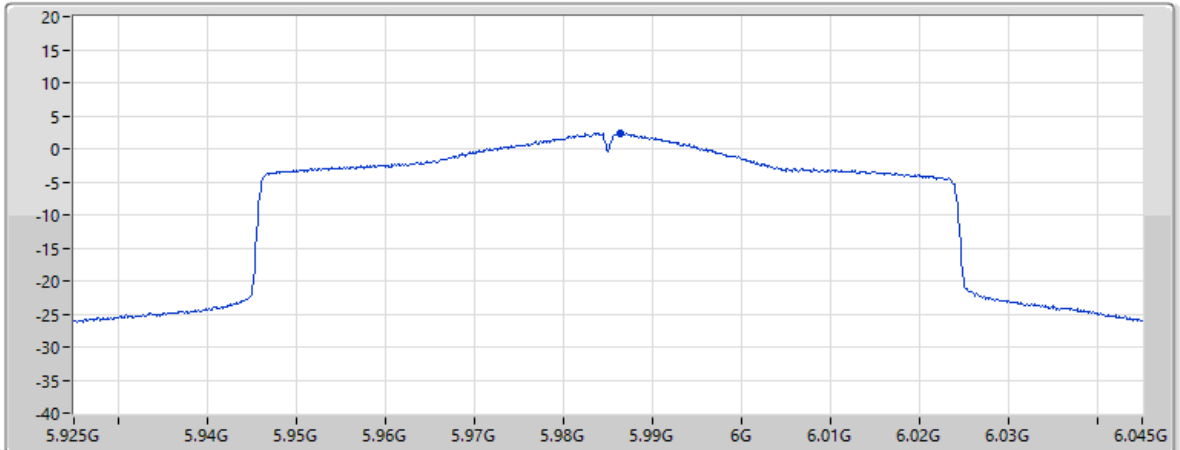

Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
2.43				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.68	11.77	8.37	35.08	57.59

13/05/2025

EIRP PSD;Band:6.2G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
160MHz

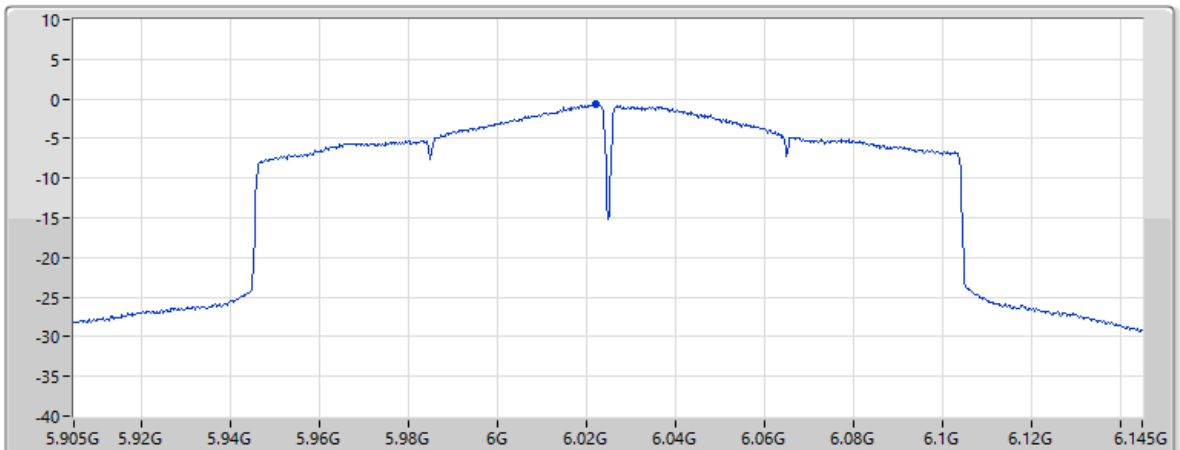

Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
-0.67				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.78	11.84	8.39	35.08	57.64

09/06/2025

EIRP PSD;Band:6.4G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6475MHz;TX

CF Freq
6.475GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

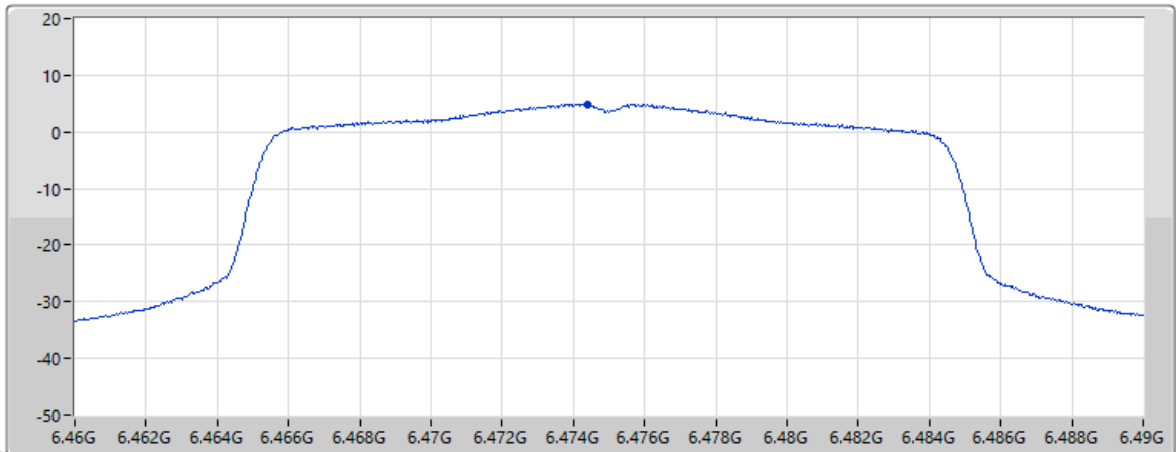

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.31	11.55	8.78	35.26	58.27

13/05/2025

EIRP PSD;Band:6.4G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6525MHz;TX

CF Freq
6.525GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

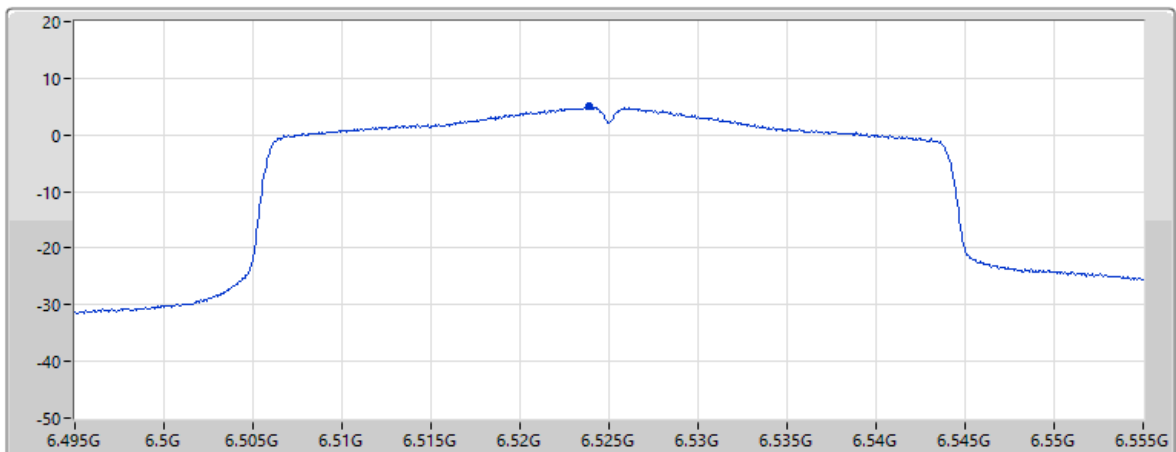

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.94				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.55	11.36	8.77	35.25	58.33

13/05/2025

EIRP PSD;Band:6.4G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6545MHz;TX

CF Freq
6.545GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
80MHz

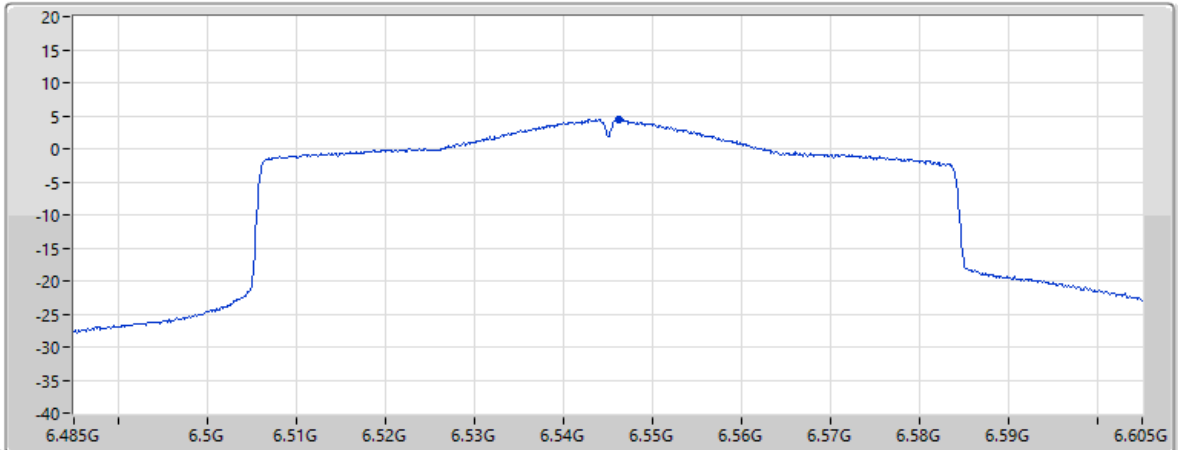

Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.4				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.27	11.22	8.77	35.24	58.36

13/05/2025

EIRP PSD;Band:6.4G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6505MHz;TX

CF Freq
6.505GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
160MHz

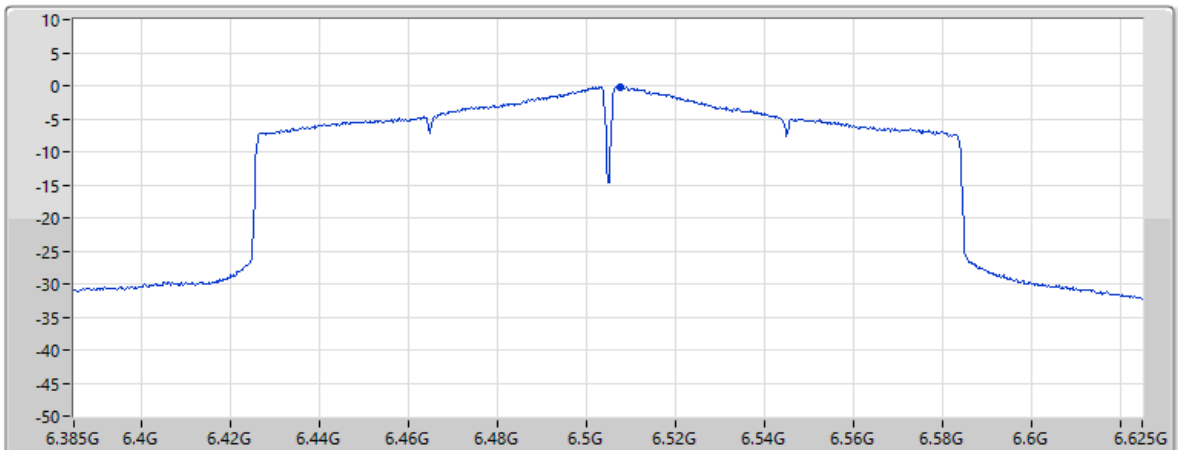


Page 6

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
-0.14				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.51	11.45	8.77	35.26	58.31

13/05/2025

EIRP PSD;Band:6.7G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:6695MHz;TX

CF Freq
6.695GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

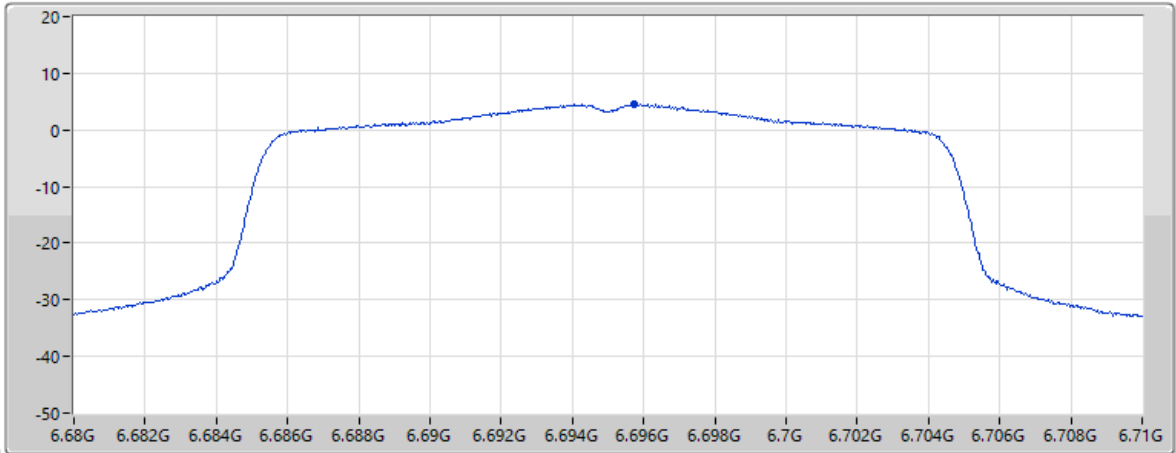


Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.66				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.64	10.90	8.77	35.13	58.56

09/06/2025

EIRP PSD;Band:6.7G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:6685MHz;TX

CF Freq
6.685GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

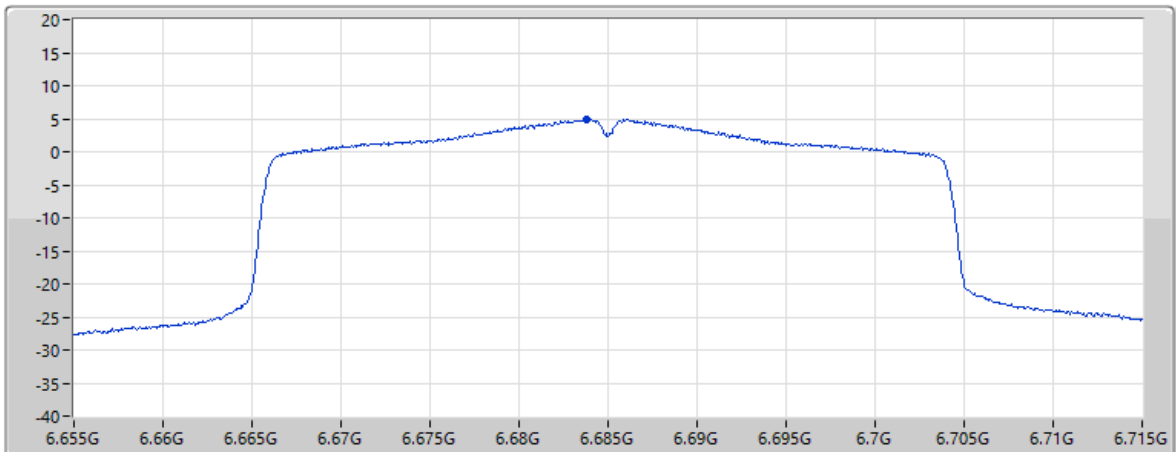


Page 6

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.99				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.29	10.90	8.77	35.13	58.54


09/06/2025

EIRP PSD;Band:6.7G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6625MHz;TX

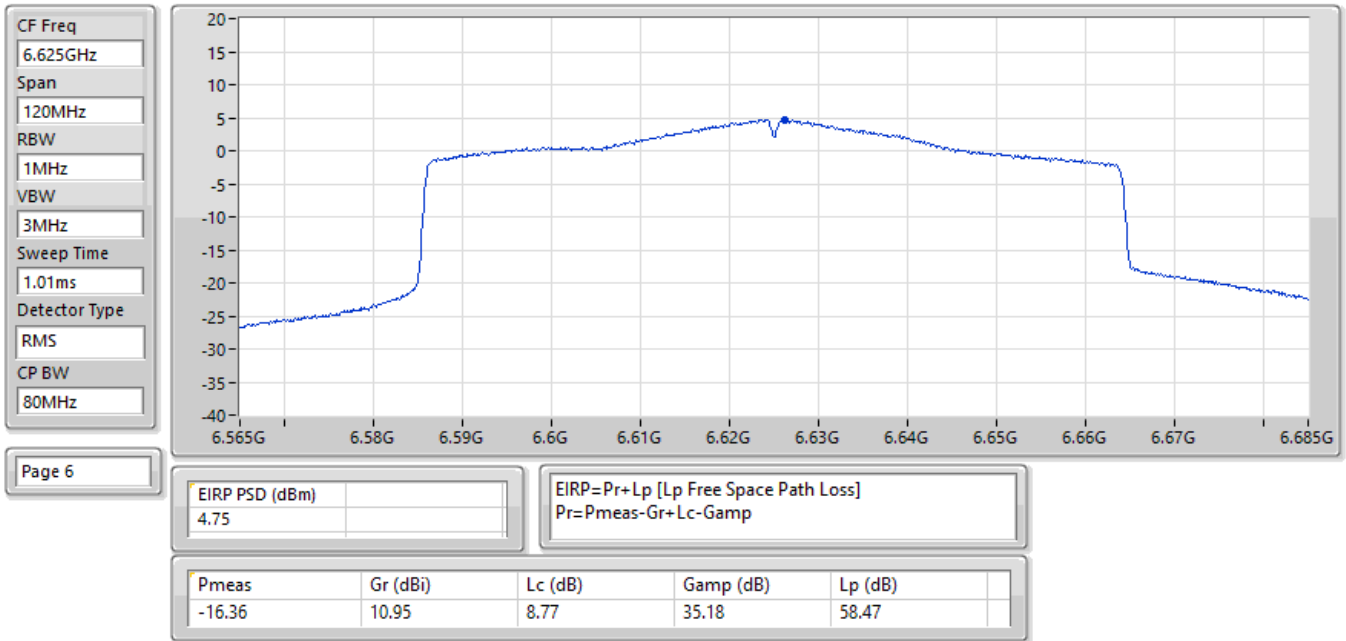


13/05/2025

EIRP PSD;Band:6.7G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6665MHz;TX

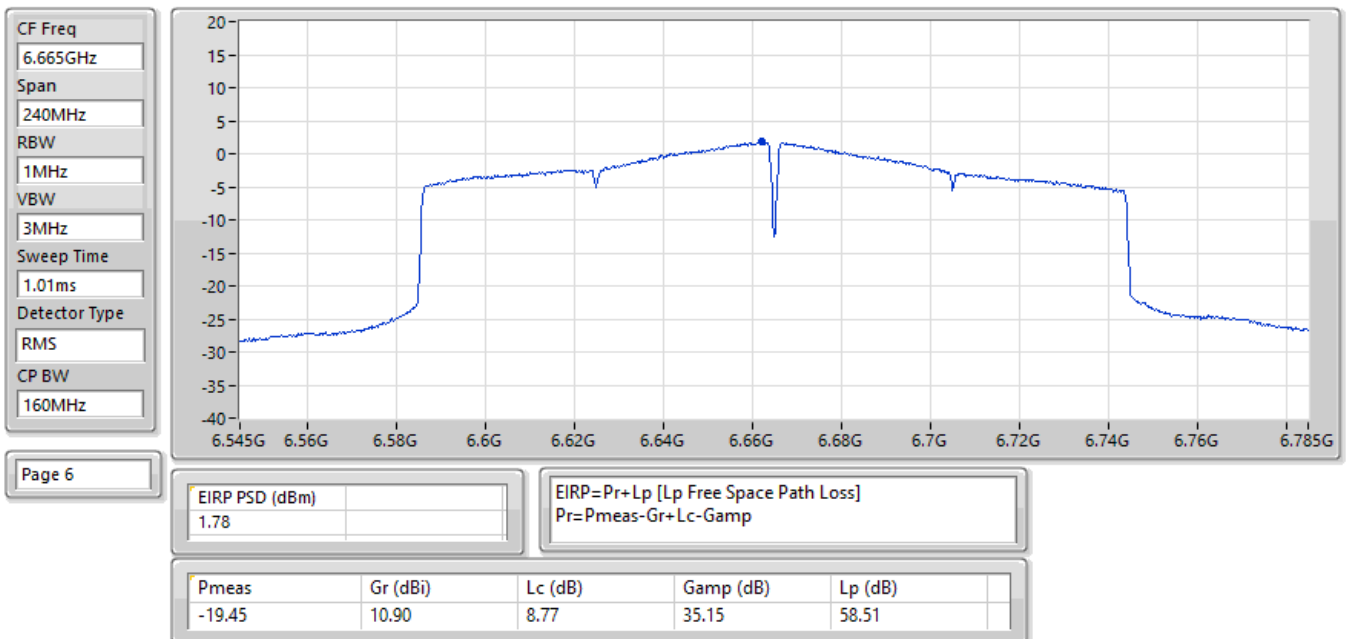


09/06/2025

EIRP PSD;Band:7.0G;ax20;BWch:20MHz;Nss:1,(M0);Nant:1;Ch:7095MHz;TX

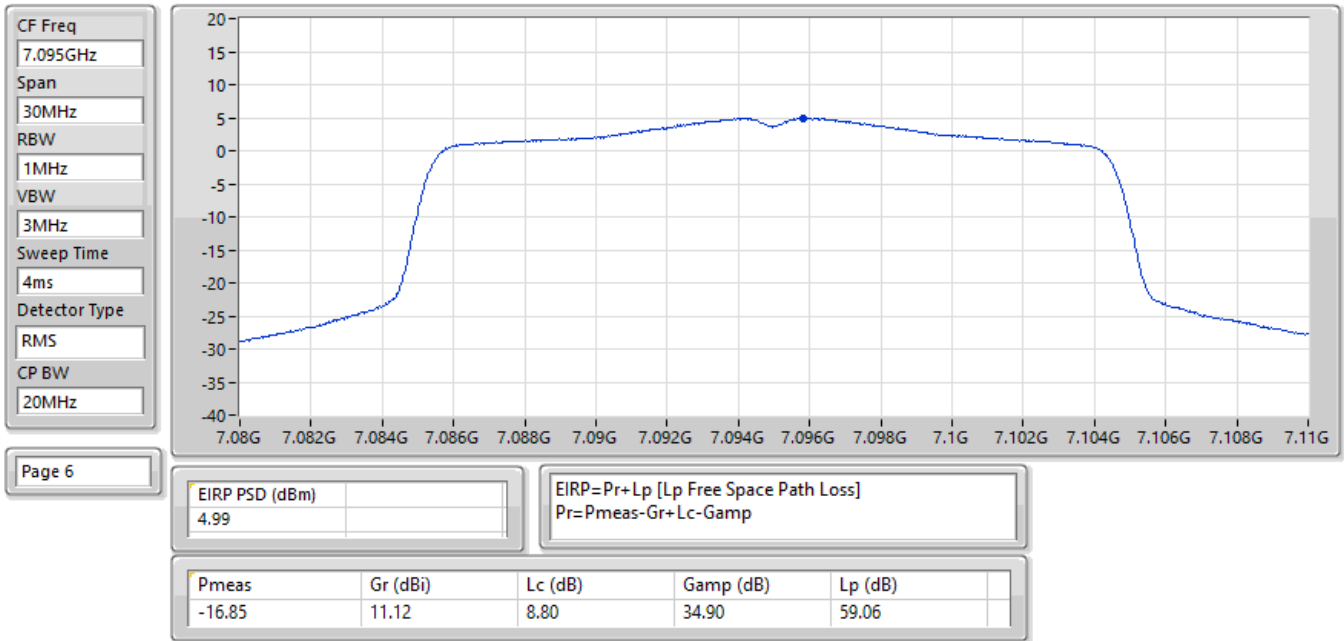

09/06/2025

EIRP PSD;Band:7.0G;ax40;BWch:40MHz;Nss:1,(M0);Nant:1;Ch:7005MHz;TX

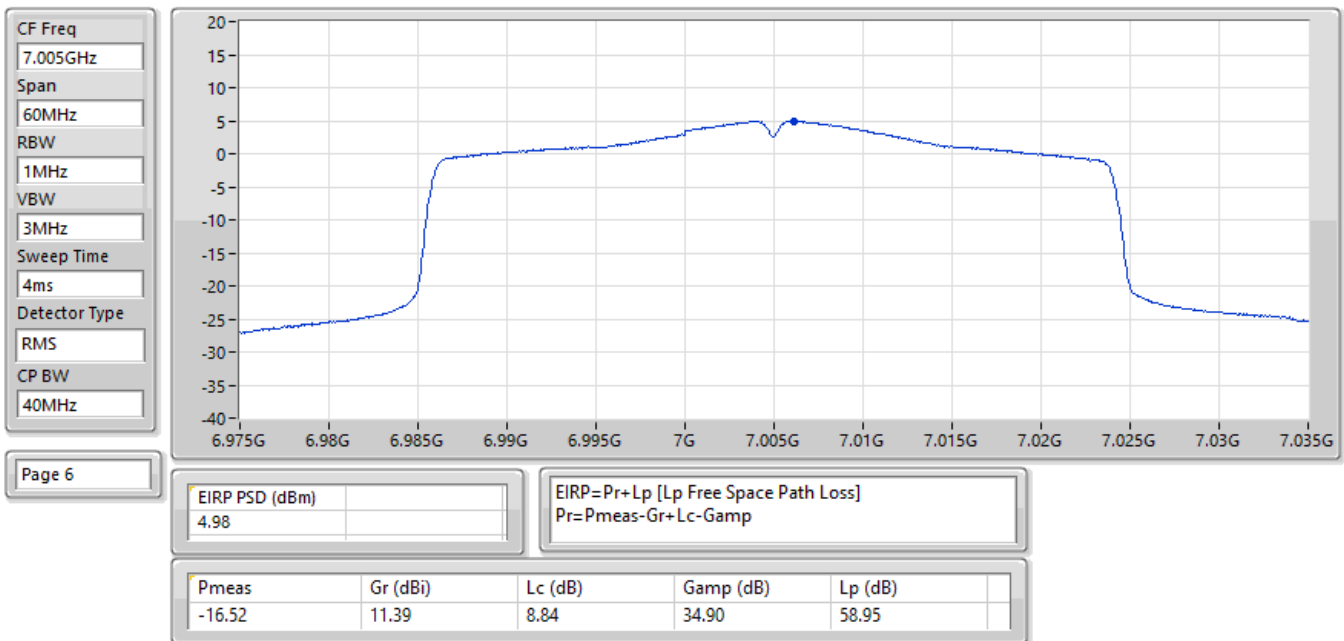

13/05/2025

EIRP PSD;Band:7.0G;ax80;BWch:80MHz;Nss:1,(M0);Nant:1;Ch:6945MHz;TX

CF Freq
6.945GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
80MHz

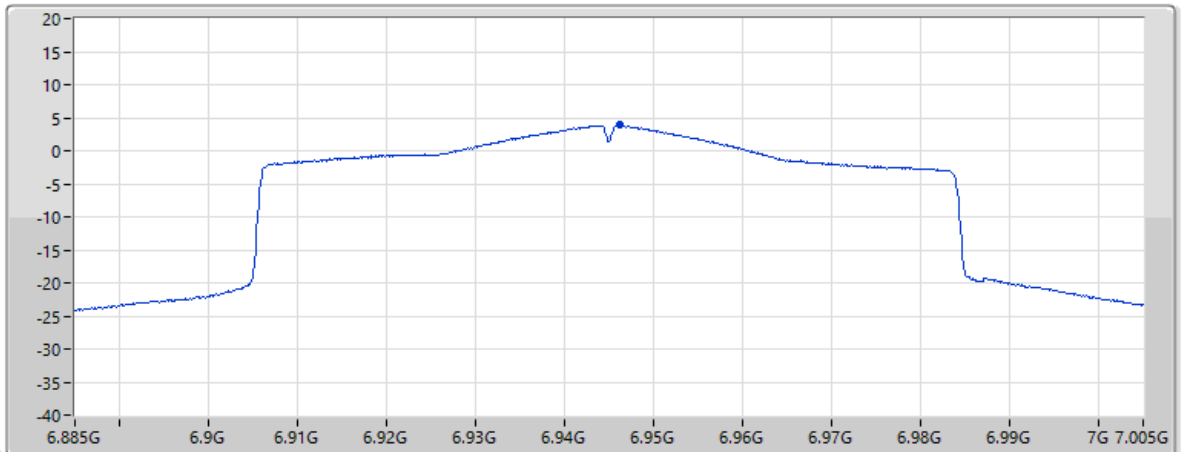

Page 6

EIRP PSD (dBm)	3.84	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.54	11.38	8.82	34.94	58.88

13/05/2025

EIRP PSD;Band:7.0G;ax160;BWch:160MHz;Nss:1,(M0);Nant:1;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
4ms

Detector Type
RMS

CP BW
160MHz

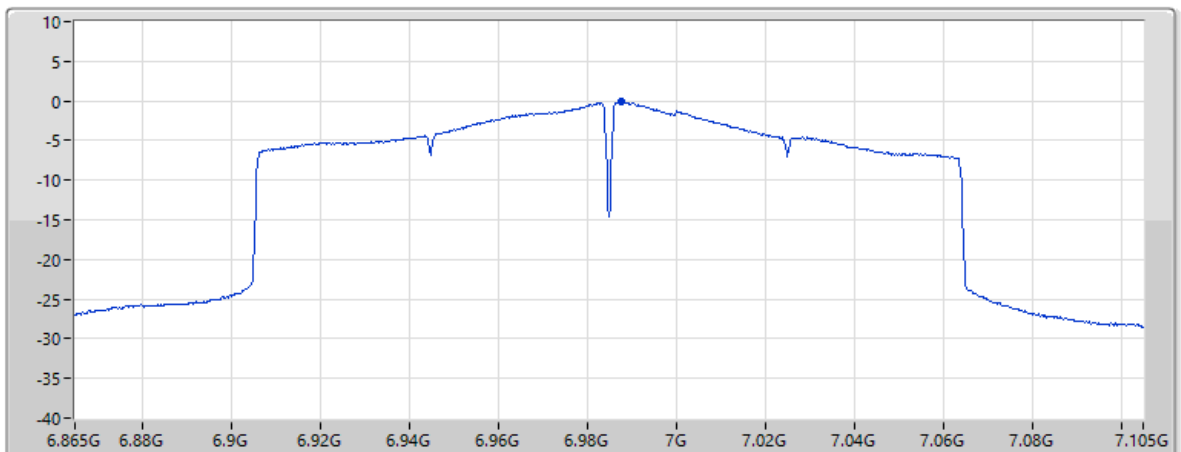

Page 6

EIRP PSD (dBm)	-0.09	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.55	11.40	8.84	34.91	58.93

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.67
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.93
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	2.59
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-0.34
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.91
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.95
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.95
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-3.01
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-0.97
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.57
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.82
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.65
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.91
802.11be EHT320-BF_Nss1,(MCS0)_2TX	0.94
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.70
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.81
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.94

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	4.53	5.00
6195MHz	Pass	4.67	5.00
6415MHz	Pass	4.34	5.00
6435MHz	Pass	4.52	5.00
6475MHz	Pass	4.91	5.00
6515MHz	Pass	4.36	5.00
6535MHz	Pass	4.27	5.00
6695MHz	Pass	4.39	5.00
6875MHz	Pass	4.57	5.00
6895MHz	Pass	4.37	5.00
6995MHz	Pass	4.68	5.00
7095MHz	Pass	4.70	5.00
7115MHz	Pass	-1.11	5.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	4.89	5.00
6205MHz	Pass	4.44	5.00
6405MHz	Pass	4.93	5.00
6445MHz	Pass	4.51	5.00
6485MHz	Pass	4.95	5.00
6525MHz	Pass	4.53	5.00
6565MHz	Pass	4.24	5.00
6685MHz	Pass	4.82	5.00
6885MHz	Pass	4.70	5.00
6925MHz	Pass	4.77	5.00
7005MHz	Pass	4.81	5.00
7085MHz	Pass	4.76	5.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	4.53	5.00
6225MHz	Pass	4.19	5.00
6385MHz	Pass	4.59	5.00
6465MHz	Pass	4.95	5.00
6545MHz	Pass	4.62	5.00
6625MHz	Pass	4.65	5.00
6705MHz	Pass	4.40	5.00
6785MHz	Pass	4.40	5.00
6865MHz	Pass	4.31	5.00
6945MHz	Pass	4.62	5.00
7025MHz	Pass	4.79	5.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	1.17	5.00
6185MHz	Pass	2.59	5.00
6345MHz	Pass	-0.02	5.00
6505MHz	Pass	-3.01	5.00
6665MHz	Pass	-0.48	5.00
6825MHz	Pass	0.91	5.00



Radiated PSD_Beamforming_Radio 3_2T1S

Appendix D.8

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6985MHz	Pass	0.94	5.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-
6105MHz	Pass	-8.01	5.00
6265MHz	Pass	-0.34	5.00
6425MHz	Pass	-1.37	5.00
6585MHz	Pass	-0.97	5.00
6745MHz	Pass	0.94	5.00
6905MHz	Pass	-5.05	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	Pass	6.4144G	-5.02	6.426725G	-35.40	-25.02	-10.38	2
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	Pass	6.4063G	-1.51	6.42655G	-30.23	-21.11	-9.12	2
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	Pass	6.3833G	1.20	6.2502G	-43.88	-38.80	-5.08	2
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	Pass	6.0226G	0.35	5.7604G	-42.80	-39.65	-3.15	2
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	Pass	5.95344G	-0.62	5.7142G	-32.44	-32.38	-0.06	2
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	Pass	6.435625G	-4.91	6.446975G	-36.96	-24.91	-12.05	2
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	Pass	6.4435G	-2.10	6.467G	-32.09	-22.16	-9.93	2
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	Pass	6.4673G	0.20	6.5925G	-42.33	-39.80	-2.53	2
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	Pass	6.5096G	0.83	6.7622G	-39.58	-39.17	-0.41	2
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	Pass	6.419G	0.93	6.8178G	-28.40	-24.41	-3.99	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	Pass	6.8754G	-4.94	6.86325G	-36.20	-24.96	-11.24	2
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	Pass	6.5657G	-1.97	6.5871G	-32.45	-22.01	-10.44	2
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	Pass	6.6267G	1.92	6.7489G	-39.16	-37.93	-1.23	2
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	Pass	6.6692G	0.98	6.9204G	-39.43	-39.02	-0.41	2
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	Pass	6.9086G	-1.29	7.2962G	-38.43	-32.93	-5.50	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	Pass	7.11415G	-13.75	7.152075G	-63.30	-53.75	-9.55	2
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	Pass	7.08395G	-1.23	7.01645G	-51.78	-41.23	-10.55	2
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	Pass	7.024G	0.28	6.8966G	-42.37	-39.45	-2.92	2
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	Pass	6.9892G	-0.51	6.729G	-47.63	-40.51	-7.12	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-
5955MHz	Pass	5.954625G	-4.86	5.94285G	-39.40	-24.92	-14.48	2
6195MHz	Pass	6.194525G	-4.00	6.20755G	-39.05	-24.30	-14.75	2
6415MHz	Pass	6.4144G	-5.02	6.426725G	-35.40	-25.02	-10.38	2
6435MHz	Pass	6.435625G	-4.91	6.446975G	-36.96	-24.91	-12.05	2
6475MHz	Pass	6.475975G	-5.04	6.48765G	-40.83	-25.09	-15.74	2
6515MHz	Pass	6.5155G	-4.75	6.52715G	-37.62	-24.78	-12.84	2
6535MHz	Pass	6.53565G	-4.04	6.5231G	-37.81	-24.07	-13.74	2
6695MHz	Pass	6.695275G	-5.52	6.706925G	-37.53	-25.52	-12.01	2
6875MHz	Pass	6.8754G	-4.94	6.86325G	-36.20	-24.96	-11.24	2
6895MHz	Pass	6.89465G	-4.45	6.906975G	-38.00	-24.45	-13.55	2
6995MHz	Pass	6.99475G	-2.94	6.960075G	-59.15	-42.94	-16.21	2
7095MHz	Pass	7.095325G	-4.40	7.107325G	-40.35	-24.30	-16.05	2
7115MHz	Pass	7.11415G	-13.75	7.152075G	-63.30	-53.75	-9.55	2
802.11be EHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9641G	-1.46	5.942G	-35.18	-21.46	-13.72	2
6205MHz	Pass	6.2037G	-1.29	6.18225G	-33.65	-21.30	-12.35	2
6405MHz	Pass	6.4063G	-1.51	6.42655G	-30.23	-21.11	-9.12	2
6445MHz	Pass	6.4435G	-2.10	6.467G	-32.09	-22.16	-9.93	2
6485MHz	Pass	6.486G	-2.52	6.5074G	-33.70	-22.59	-11.11	2
6525MHz	Pass	6.5258G	-1.80	6.5025G	-34.36	-21.70	-12.66	2
6565MHz	Pass	6.5657G	-1.97	6.5871G	-32.45	-22.01	-10.44	2
6685MHz	Pass	6.68415G	-2.30	6.70765G	-35.13	-22.31	-12.82	2
6885MHz	Pass	6.8835G	-1.40	6.8626G	-33.07	-21.40	-11.67	2
6925MHz	Pass	6.92435G	-0.95	6.9474G	-32.07	-21.06	-11.01	2
7005MHz	Pass	7.0039G	-0.50	6.98235G	-31.97	-20.58	-11.39	2
7085MHz	Pass	7.08395G	-1.23	7.01645G	-51.78	-41.23	-10.55	2
802.11be EHT80_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9875G	0.84	5.941G	-29.64	-18.96	-10.68	2
6225MHz	Pass	6.2226G	0.92	6.0893G	-46.79	-39.08	-7.71	2
6385MHz	Pass	6.3833G	1.20	6.2502G	-43.88	-38.80	-5.08	2
6465MHz	Pass	6.4673G	0.20	6.5925G	-42.33	-39.80	-2.53	2
6545MHz	Pass	6.5433G	2.08	6.6736G	-40.50	-37.89	-2.61	2
6625MHz	Pass	6.6267G	1.92	6.7489G	-39.16	-37.93	-1.23	2
6705MHz	Pass	6.708G	1.54	6.8367G	-43.23	-38.46	-4.77	2
6785MHz	Pass	6.7843G	1.50	6.9119G	-46.25	-38.46	-7.79	2
6865MHz	Pass	6.8631G	0.87	6.9944G	-46.84	-39.13	-7.71	2
6945MHz	Pass	6.9461G	0.44	6.8078G	-47.76	-39.56	-8.20	2
7025MHz	Pass	7.024G	0.28	6.8966G	-42.37	-39.45	-2.92	2
802.11be EHT160_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0226G	0.35	5.7604G	-42.80	-39.65	-3.15	2
6185MHz	Pass	6.182G	0.56	5.9212G	-43.52	-39.44	-4.08	2
6345MHz	Pass	6.3428G	0.34	6.0892G	-46.48	-39.53	-6.95	2
6505MHz	Pass	6.5096G	0.83	6.7622G	-39.58	-39.17	-0.41	2
6665MHz	Pass	6.6692G	0.98	6.9204G	-39.43	-39.02	-0.41	2
6825MHz	Pass	6.8274G	-0.49	7.0238G	-40.34	-32.22	-8.12	2
6985MHz	Pass	6.9892G	-0.51	6.729G	-47.63	-40.51	-7.12	2
802.11be EHT320_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-
6105MHz	Pass	5.95344G	-0.62	5.7142G	-32.44	-32.38	-0.06	2
6265MHz	Pass	6.11144G	1.87	5.8722G	-28.76	-20.79	-7.97	2
6425MHz	Pass	6.419G	0.93	6.8178G	-28.40	-24.41	-3.99	2
6585MHz	Pass	6.5938G	1.76	6.955G	-25.74	-21.32	-4.42	2
6745MHz	Pass	6.7514G	0.36	7.0598G	-29.65	-21.84	-7.81	2
6905MHz	Pass	6.9086G	-1.29	7.2962G	-38.43	-32.93	-5.50	2

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port2)

MASK

6415MHz_TX

16/05/2025

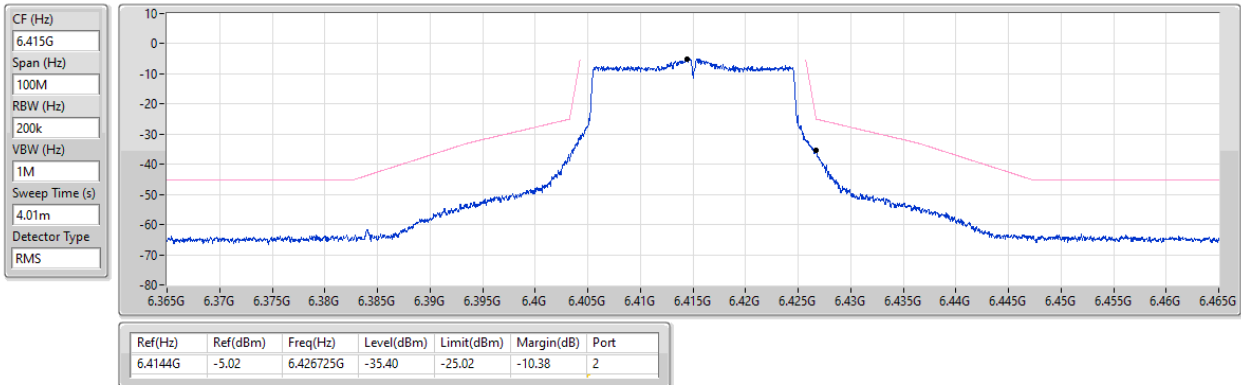


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port2)

MASK

6405MHz_TX

16/05/2025

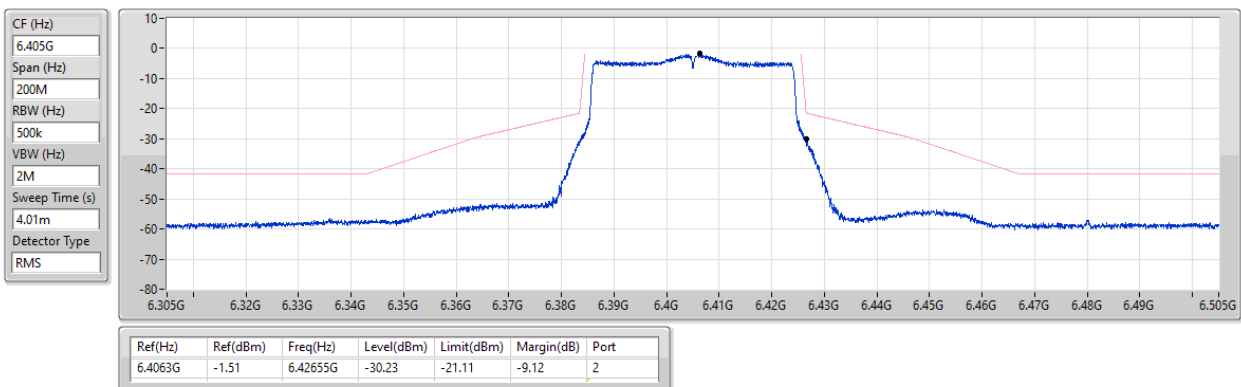


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port2)

MASK

6385MHz_TX

16/05/2025

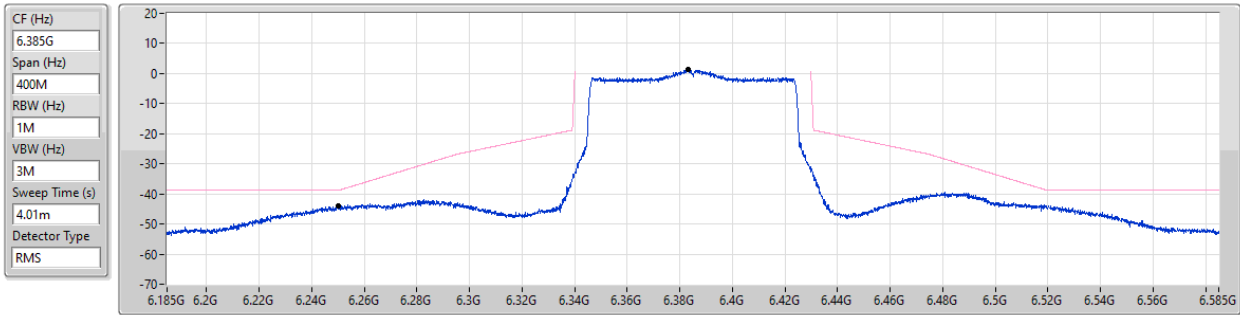


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX(Port2)

MASK

6025MHz_TX

16/05/2025

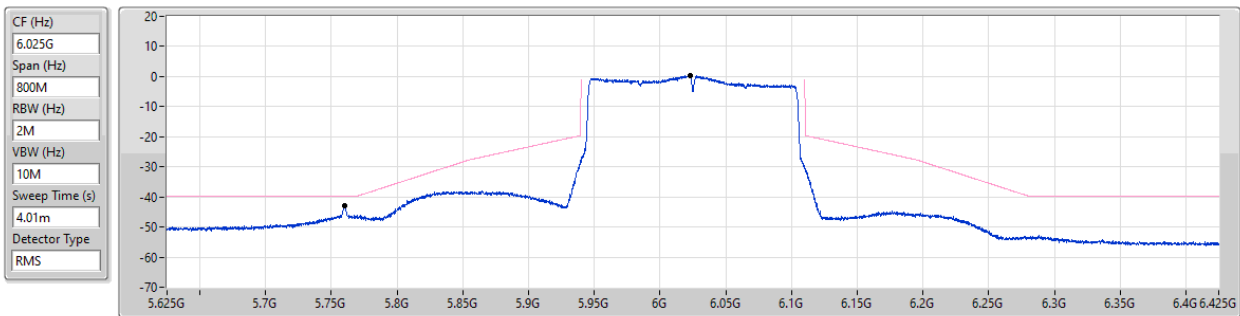


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX(Port2)

MASK

6105MHz_TX

16/05/2025

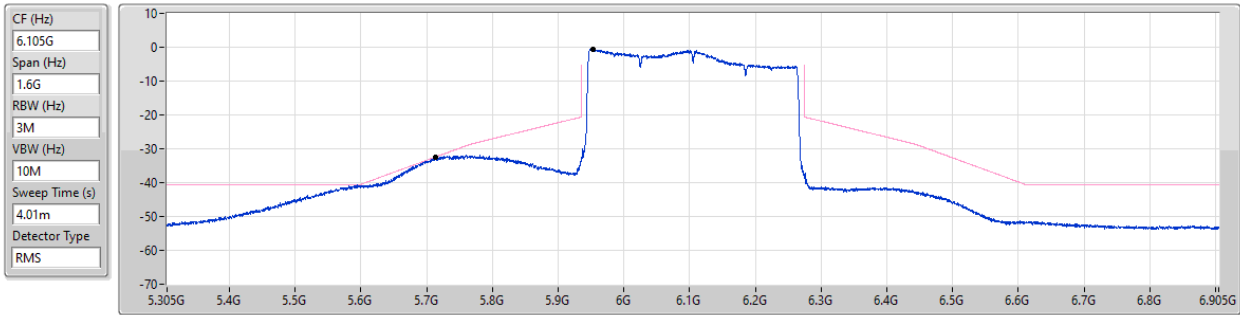


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port2)

MASK

6435MHz_TX

16/05/2025

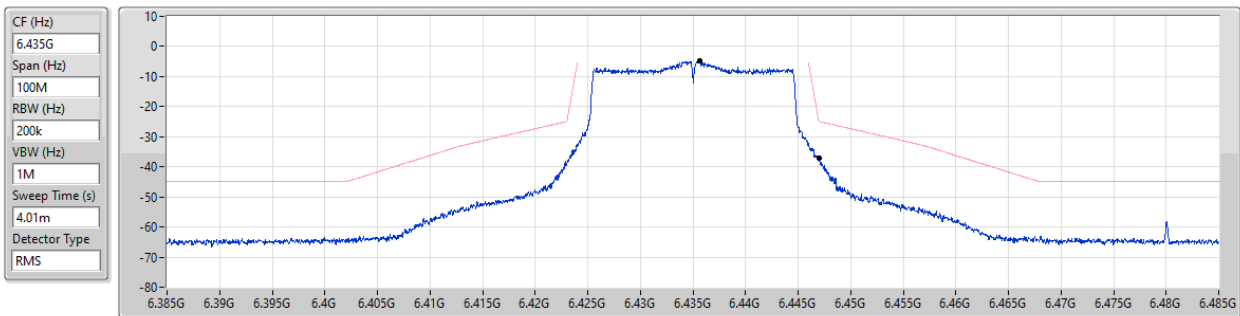


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port2)

MASK

6445MHz_TX

16/05/2025

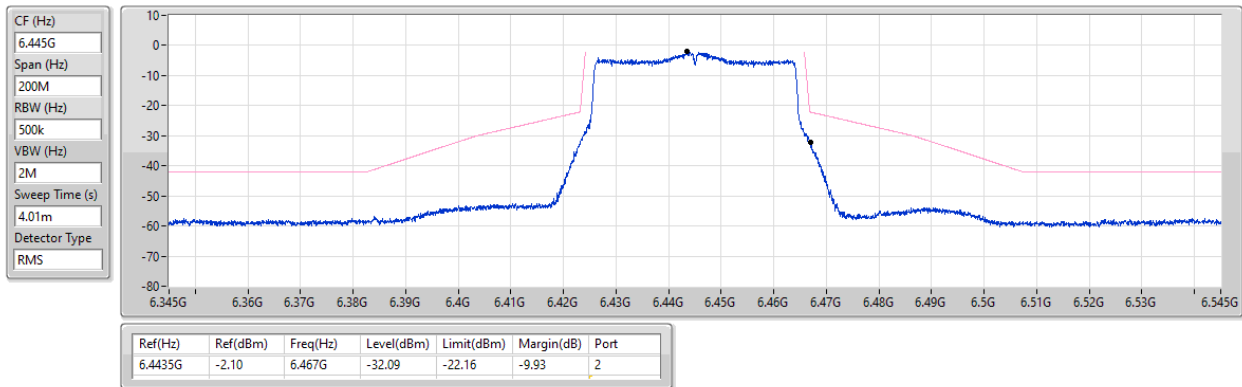


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port2)

MASK

6465MHz_TX

17/05/2025

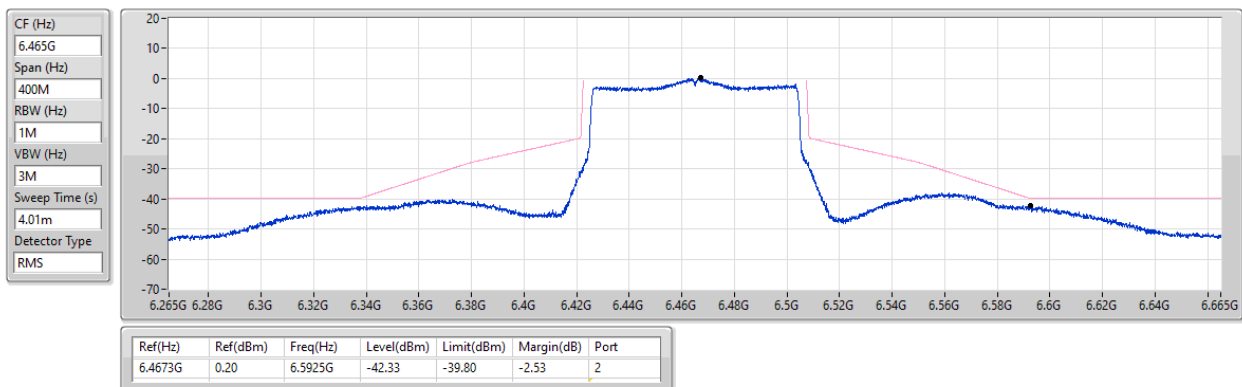


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_1TX(Port2)

MASK

6505MHz_TX

16/05/2025

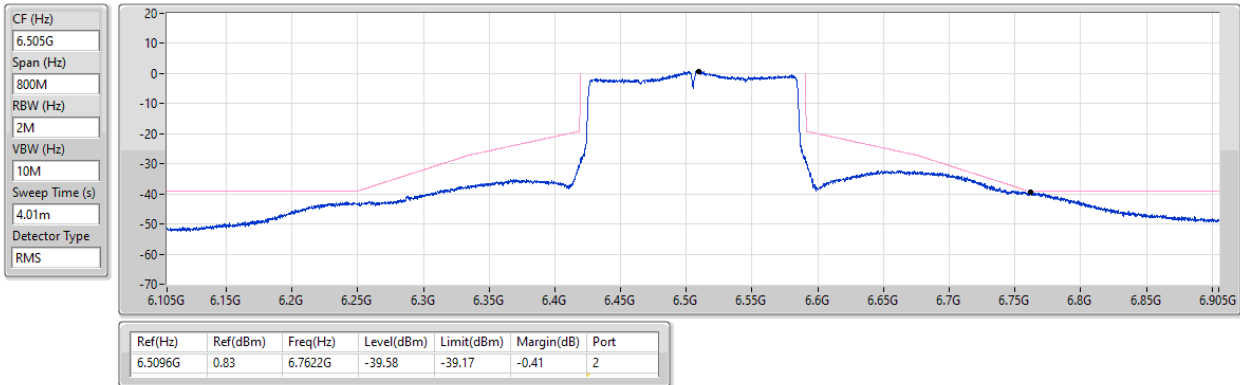


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_1TX(Port2)

MASK

6425MHz_TX

16/05/2025

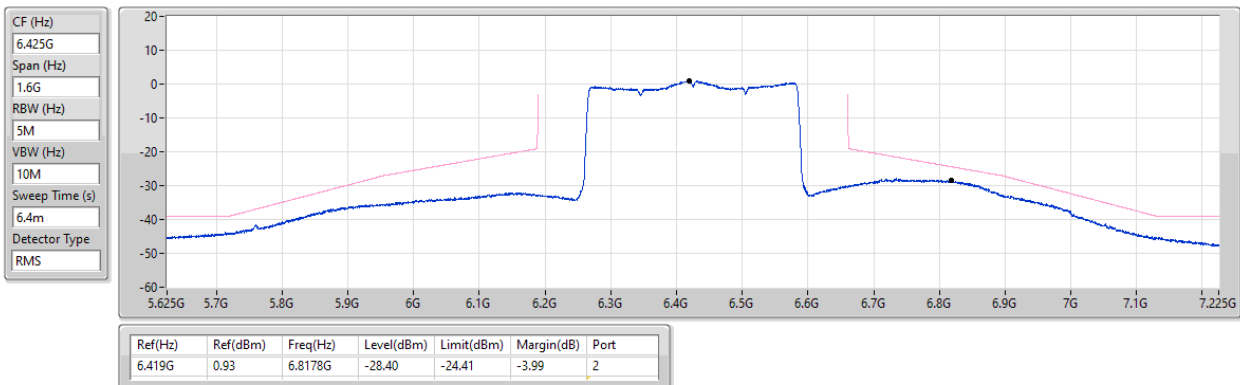


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port2)

MASK

6875MHz_TX

16/05/2025

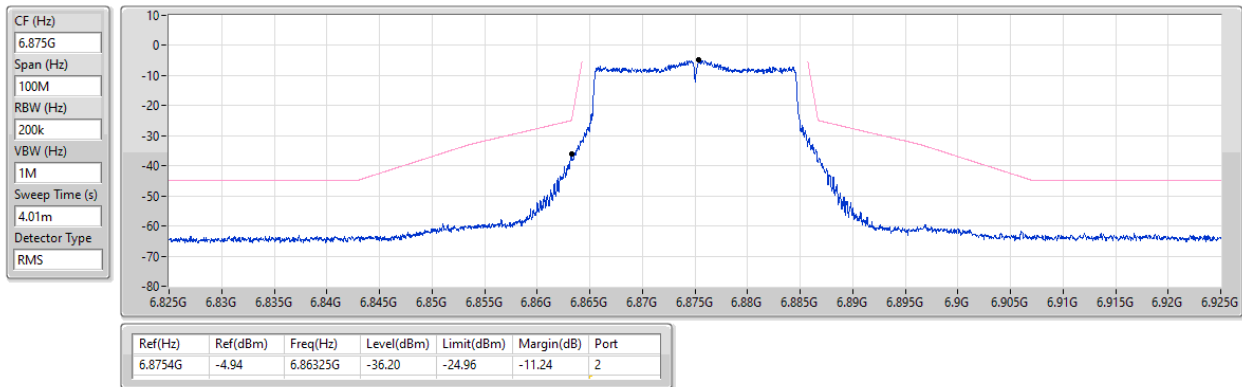


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port2)

MASK

6565MHz_TX

17/05/2025

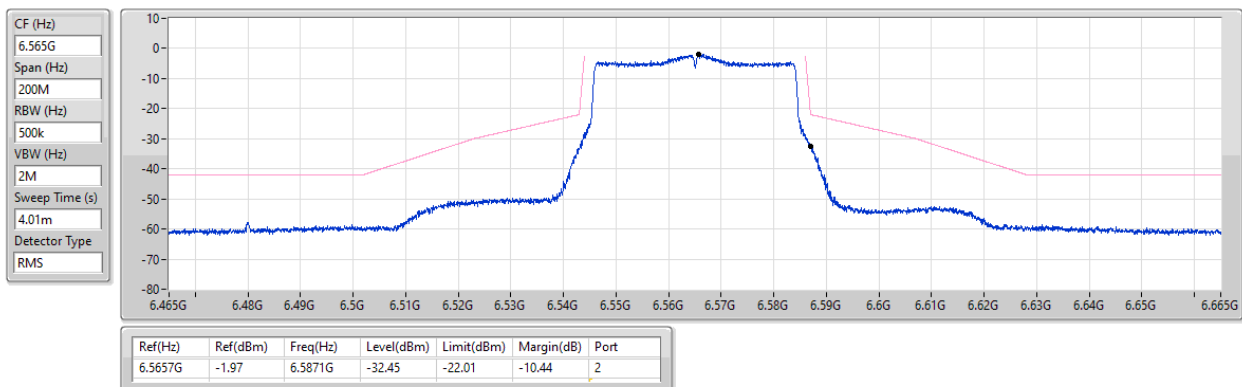


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port2)

MASK

6625MHz_TX

16/05/2025

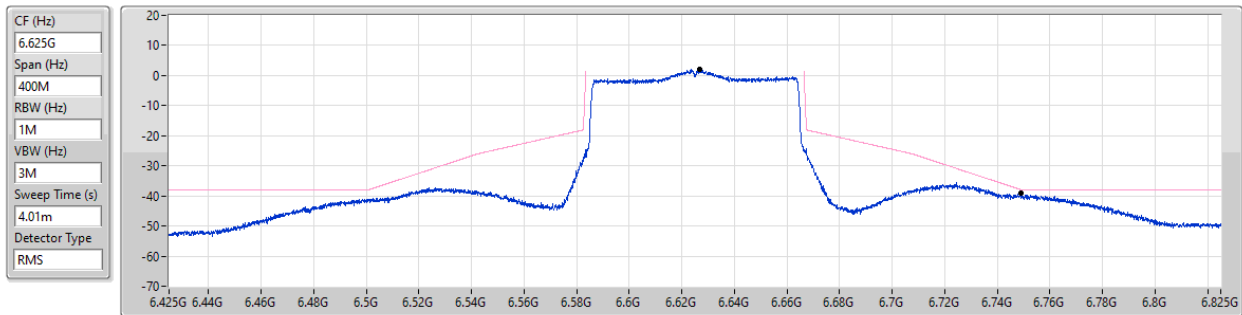


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_1TX(Port2)

MASK

6665MHz_TX

16/05/2025

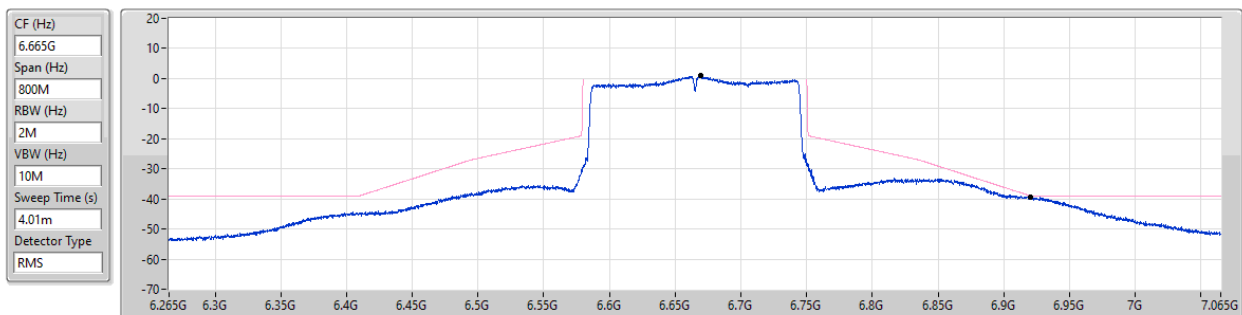


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_1TX(Port2)

MASK

6905MHz_TX

16/05/2025

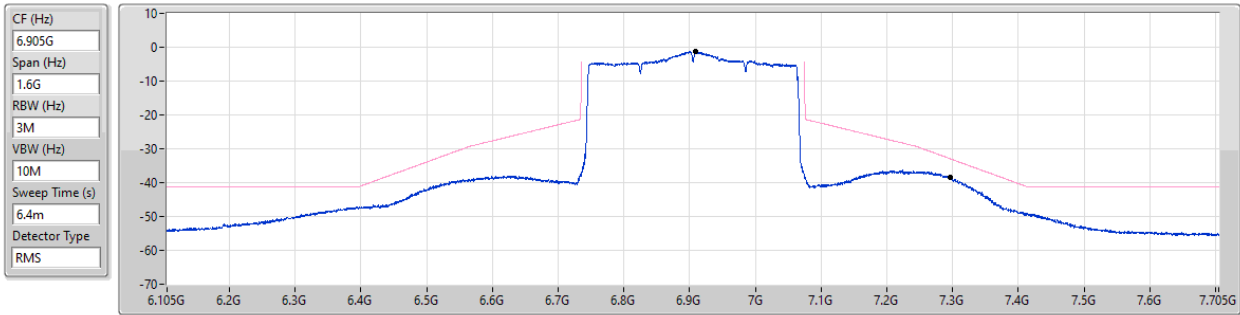


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port2)

MASK

7115MHz_TX

16/05/2025

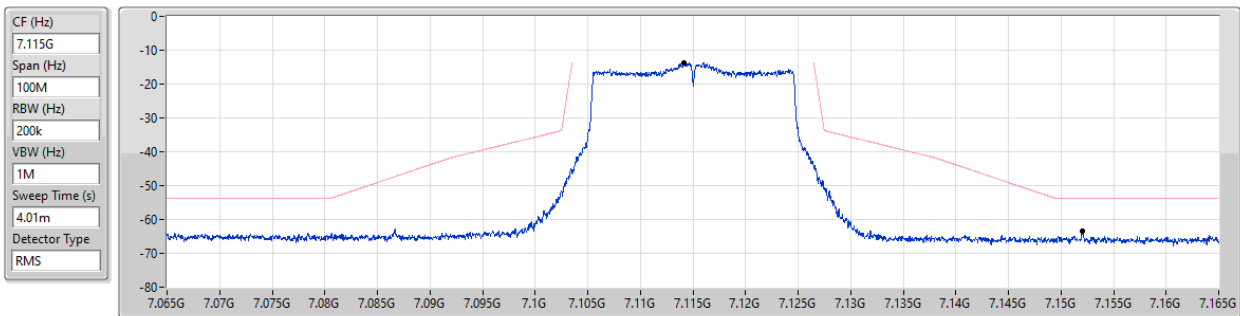


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port2)

MASK

7085MHz_TX

16/05/2025

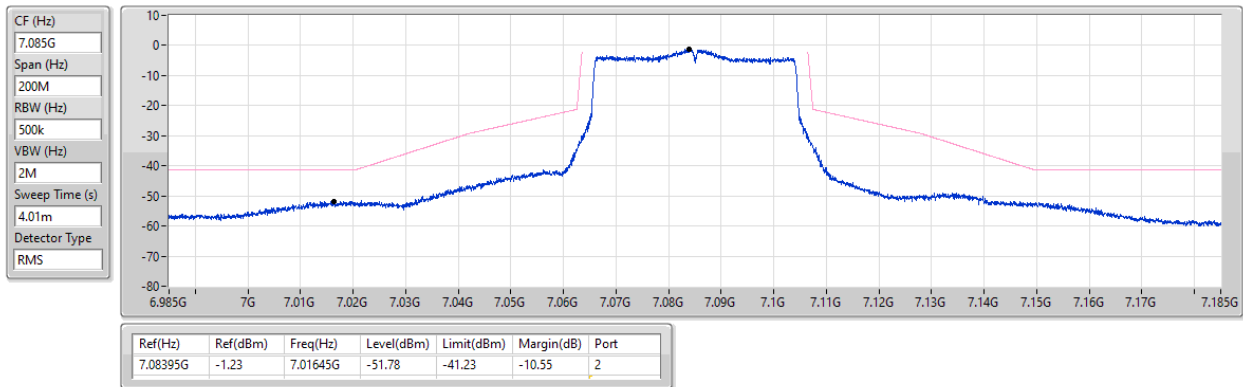


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port2)

MASK

7025MHz_TX

03/06/2025

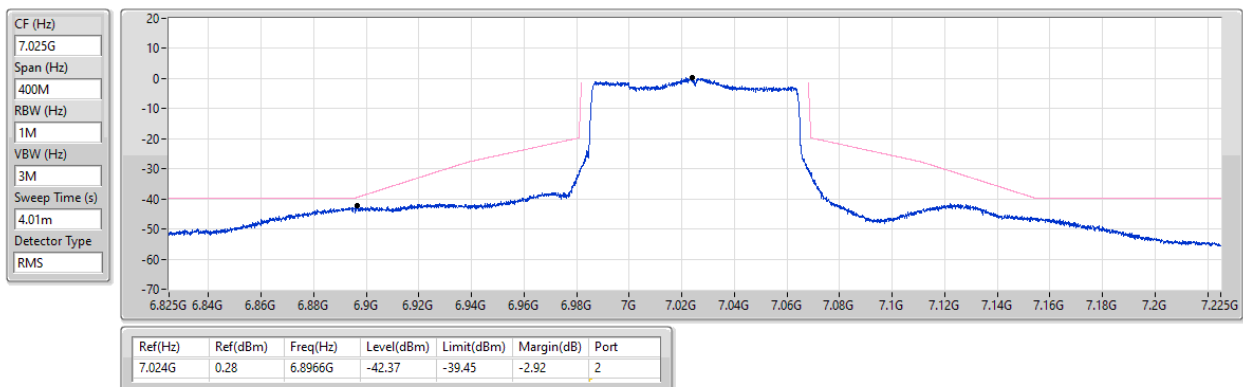


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_1TX(Port2)

MASK

6985MHz_TX

16/05/2025

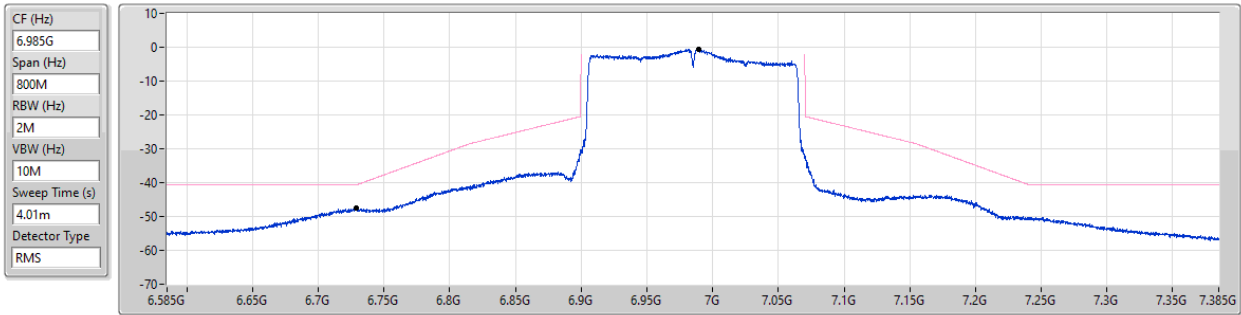

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.41545G	-6.68	6.383975G	-52.18	-45.57	-6.61	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.40665G	-2.14	6.48005G	-46.21	-42.14	-4.07	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.3864G	0.96	6.576G	-44.91	-39.04	-5.87	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.188G	0.99	5.9276G	-43.55	-39.01	-4.54	2
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	5.94904G	0.11	5.7078G	-32.72	-32.10	-0.62	2
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.475625G	-7.00	6.432025G	-53.58	-47.00	-6.58	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.4859G	-3.16	6.57605G	-45.03	-43.16	-1.87	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.5496G	-0.47	6.7201G	-47.47	-40.47	-7.00	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.5024G	1.31	6.758G	-41.20	-38.44	-2.76	2
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.5902G	2.21	6.0634G	-39.03	-37.79	-1.24	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.5347G	-7.06	6.576G	-48.27	-47.06	-1.21	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.566G	-3.87	6.48G	-46.32	-43.87	-2.45	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.7069G	-2.06	6.576G	-44.59	-42.05	-2.54	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.6608G	1.05	6.9266G	-41.00	-38.95	-2.05	2
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.739G	-1.57	6.2062G	-42.88	-41.57	-1.31	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.894525G	-9.00	6.864025G	-48.57	-47.58	-0.99	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.9263G	-5.13	6.864G	-48.72	-43.08	-5.64	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	7.0261G	-2.18	6.864G	-47.68	-42.18	-5.50	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.9878G	0.74	6.7198G	-42.46	-39.26	-3.20	1

**Result**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9544G	-8.48	6G	-57.74	-48.48	-9.26	1
5955MHz	Pass	5.955475G	-8.96	5.943325G	-43.20	-28.96	-14.24	2
6195MHz	Pass	6.1953G	-8.57	6.24G	-56.26	-48.57	-7.69	1
6195MHz	Pass	6.19455G	-7.70	6.1836G	-40.68	-27.70	-12.98	2
6415MHz	Pass	6.41545G	-6.68	6.383975G	-52.18	-45.57	-6.61	1
6415MHz	Pass	6.414625G	-5.86	6.403275G	-39.67	-25.91	-13.76	2
6435MHz	Pass	6.4345G	-7.05	6.447025G	-41.09	-27.13	-13.96	1
6435MHz	Pass	6.435475G	-7.45	6.446525G	-40.22	-27.25	-12.97	2
6475MHz	Pass	6.475625G	-7.00	6.432025G	-53.58	-47.00	-6.58	1
6475MHz	Pass	6.474675G	-7.09	6.486775G	-39.50	-27.20	-12.30	2
6515MHz	Pass	6.514675G	-7.61	6.468375G	-62.65	-47.61	-15.04	1
6515MHz	Pass	6.515525G	-7.77	6.5034G	-39.30	-27.47	-11.83	2
6535MHz	Pass	6.5347G	-7.06	6.576G	-48.27	-47.06	-1.21	1
6535MHz	Pass	6.534175G	-6.57	6.575975G	-58.90	-46.57	-12.33	2
6695MHz	Pass	6.694475G	-8.52	6.72G	-50.15	-38.49	-11.66	1
6695MHz	Pass	6.69455G	-8.62	6.682625G	-43.16	-28.72	-14.44	2
6875MHz	Pass	6.875425G	-9.16	6.906G	-52.01	-46.64	-5.37	1
6875MHz	Pass	6.875325G	-8.89	6.906025G	-60.00	-46.66	-13.34	2
6895MHz	Pass	6.894525G	-9.00	6.864025G	-48.57	-47.58	-0.99	1
6895MHz	Pass	6.895425G	-8.38	6.864025G	-54.76	-48.05	-6.71	2
6995MHz	Pass	6.994275G	-8.42	6.960025G	-51.71	-48.42	-3.29	1
6995MHz	Pass	6.9955G	-7.98	6.960025G	-60.23	-47.98	-12.25	2
7095MHz	Pass	7.095575G	-9.75	7.06005G	-55.27	-49.75	-5.52	1
7095MHz	Pass	7.095525G	-8.80	7.06G	-61.46	-48.80	-12.66	2
7115MHz	Pass	7.1155G	-10.41	7.0867G	-54.11	-46.74	-7.37	1
7115MHz	Pass	7.11435G	-9.38	7.152075G	-62.99	-49.38	-13.61	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9643G	-4.35	6.0335G	-57.31	-44.35	-12.96	1
5965MHz	Pass	5.96645G	-4.63	5.98805G	-39.46	-24.53	-14.93	2
6205MHz	Pass	6.20425G	-4.59	6.28805G	-53.65	-44.59	-9.06	1
6205MHz	Pass	6.2059G	-4.53	6.1831G	-33.87	-24.55	-9.32	2
6405MHz	Pass	6.40665G	-2.14	6.48005G	-46.21	-42.14	-4.07	1
6405MHz	Pass	6.4044G	-1.49	6.42775G	-35.77	-21.50	-14.27	2
6445MHz	Pass	6.44575G	-2.33	6.42305G	-32.67	-22.35	-10.32	1
6445MHz	Pass	6.4443G	-2.23	6.42245G	-34.65	-22.25	-12.40	2
6485MHz	Pass	6.4859G	-3.16	6.57605G	-45.03	-43.16	-1.87	1
6485MHz	Pass	6.48405G	-2.92	6.4627G	-34.06	-22.95	-11.11	2
6525MHz	Pass	6.5264G	-2.33	6.62405G	-49.22	-42.33	-6.89	1
6525MHz	Pass	6.522851G	-2.61	6.50245G	-35.08	-22.63	-12.45	2
6565MHz	Pass	6.566G	-3.87	6.48G	-46.32	-43.87	-2.45	1
6565MHz	Pass	6.5632G	-2.60	6.54275G	-34.29	-22.61	-11.68	2
6685MHz	Pass	6.6869G	-5.26	6.76805G	-50.34	-45.26	-5.08	1
6685MHz	Pass	6.6834G	-3.94	6.768G	-55.24	-43.94	-11.30	2
6885MHz	Pass	6.88435G	-5.78	6.9601G	-51.70	-45.78	-5.92	1
6885MHz	Pass	6.887499G	-5.41	6.96015G	-58.09	-45.41	-12.68	2
6925MHz	Pass	6.9263G	-5.13	6.864G	-48.72	-43.08	-5.64	1
6925MHz	Pass	6.92415G	-4.85	6.864G	-53.83	-42.98	-10.85	2
7005MHz	Pass	7.0044G	-5.53	6.98305G	-34.53	-25.43	-9.10	1
7005MHz	Pass	7.00605G	-4.60	6.9094G	-58.95	-44.60	-14.35	2
7085MHz	Pass	7.0841G	-5.62	6.9883G	-56.79	-45.62	-11.17	1
7085MHz	Pass	7.0844G	-4.52	7.10735G	-35.36	-24.52	-10.84	2
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9843G	-1.48	5.942G	-30.42	-21.50	-8.92	1
5985MHz	Pass	5.9863G	-1.60	5.9413G	-31.63	-21.63	-10.00	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6225MHz	Pass	6.2238G	-1.55	6.1815G	-31.61	-21.58	-10.03	1
6225MHz	Pass	6.2235G	-1.34	6.1811G	-31.57	-21.42	-10.15	2
6385MHz	Pass	6.3864G	0.96	6.576G	-44.91	-39.04	-5.87	1
6385MHz	Pass	6.3842G	1.04	6.251G	-50.35	-38.96	-11.39	2
6465MHz	Pass	6.4677G	0.06	6.6241G	-48.36	-39.94	-8.42	1
6465MHz	Pass	6.4632G	-0.04	6.3093G	-52.44	-40.04	-12.40	2
6545MHz	Pass	6.5496G	-0.47	6.7201G	-47.47	-40.47	-7.00	1
6545MHz	Pass	6.5422G	-0.09	6.5011G	-31.15	-20.13	-11.02	2
6625MHz	Pass	6.63G	-1.48	6.48G	-45.95	-41.48	-4.47	1
6625MHz	Pass	6.6219G	-0.56	6.5806G	-32.79	-20.59	-12.20	2
6705MHz	Pass	6.7069G	-2.06	6.576G	-44.59	-42.05	-2.54	1
6705MHz	Pass	6.6979G	-2.04	6.7474G	-28.68	-22.07	-6.61	2
6785MHz	Pass	6.7838G	-1.91	6.624G	-48.17	-41.91	-6.26	1
6785MHz	Pass	6.7888G	-2.19	6.8294G	-32.64	-22.20	-10.44	2
6865MHz	Pass	6.8664G	-2.88	6.72G	-46.98	-42.88	-4.10	1
6865MHz	Pass	6.8661G	-1.88	6.9098G	-32.74	-21.90	-10.84	2
6945MHz	Pass	6.9437G	-2.36	6.768G	-49.09	-42.36	-6.73	1
6945MHz	Pass	6.9465G	-1.48	6.9886G	-30.71	-21.51	-9.20	2
7025MHz	Pass	7.0261G	-2.18	6.864G	-47.68	-42.18	-5.50	1
7025MHz	Pass	7.0269G	-0.69	6.9816G	-31.40	-20.70	-10.70	2
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0214G	1.23	5.7604G	-45.29	-38.77	-6.52	1
6025MHz	Pass	6.0284G	1.22	5.7604G	-44.73	-38.78	-5.95	2
6185MHz	Pass	6.188G	0.60	6.5762G	-46.18	-39.40	-6.78	1
6185MHz	Pass	6.188G	0.99	5.9276G	-43.55	-39.01	-4.54	2
6345MHz	Pass	6.3472G	1.09	6.7202G	-47.24	-38.91	-8.33	1
6345MHz	Pass	6.3422G	1.20	6.6076G	-44.73	-38.80	-5.93	2
6505MHz	Pass	6.509G	2.14	6.712G	-40.59	-31.73	-8.86	1
6505MHz	Pass	6.5024G	1.31	6.758G	-41.20	-38.44	-2.76	2
6665MHz	Pass	6.67G	0.50	6.9212G	-46.77	-38.70	-8.07	1
6665MHz	Pass	6.6608G	1.05	6.9266G	-41.00	-38.95	-2.05	2
6825MHz	Pass	6.8226G	0.54	6.576G	-42.06	-37.59	-4.47	1
6825MHz	Pass	6.828G	0.84	7.0282G	-38.84	-31.87	-6.97	2
6985MHz	Pass	6.9878G	0.74	6.7198G	-42.46	-39.26	-3.20	1
6985MHz	Pass	6.9888G	1.64	6.7306G	-46.25	-38.31	-7.94	2
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	5.96384G	-0.33	5.597G	-43.00	-40.33	-2.67	1
6105MHz	Pass	5.94904G	0.11	5.7078G	-32.72	-32.10	-0.62	2
6265MHz	Pass	6.12304G	1.84	5.7598G	-39.85	-38.13	-1.72	1
6265MHz	Pass	6.12304G	2.21	5.867G	-28.98	-20.05	-8.93	2
6425MHz	Pass	6.4294G	1.60	5.9226G	-42.14	-38.17	-3.97	1
6425MHz	Pass	6.4218G	1.57	6.7962G	-26.67	-18.46	-8.21	2
6585MHz	Pass	6.5902G	2.21	6.0634G	-39.03	-37.79	-1.24	1
6585MHz	Pass	6.5806G	2.48	7.025G	-28.87	-17.54	-11.33	2
6745MHz	Pass	6.739G	-1.57	6.2062G	-42.88	-41.57	-1.31	1
6745MHz	Pass	6.88896G	-1.38	7.1434G	-36.39	-33.53	-2.86	2
6905MHz	Pass	6.9086G	-2.37	6.3866G	-46.21	-42.37	-3.84	1
6905MHz	Pass	6.9094G	-1.07	6.4002G	-49.76	-41.07	-8.69	2


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

16/05/2025

CF (Hz)
6.415G
Span (Hz)
100M
RBW (Hz)
200k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

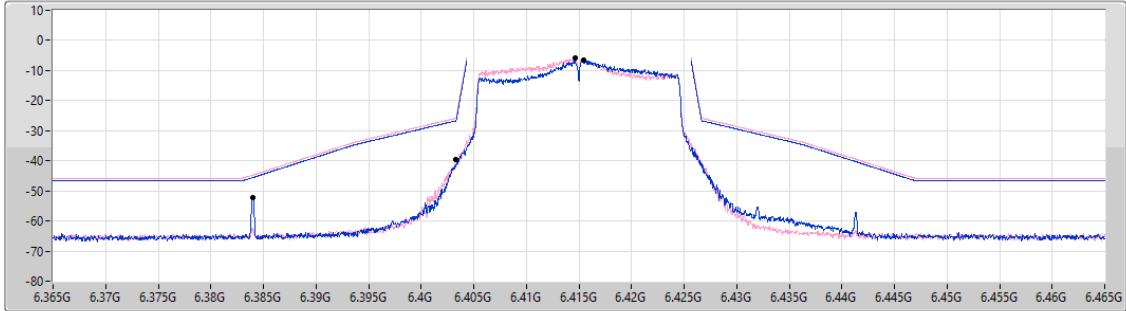

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.41545G	-6.68	6.383975G	-52.18	-45.57	-6.61	1
6.414625G	-5.86	6.403275G	-39.67	-25.91	-13.76	2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

16/05/2025

CF (Hz)
6.405G
Span (Hz)
200M
RBW (Hz)
500k
VBW (Hz)
2M
Sweep Time (s)
4.01m
Detector Type
RMS

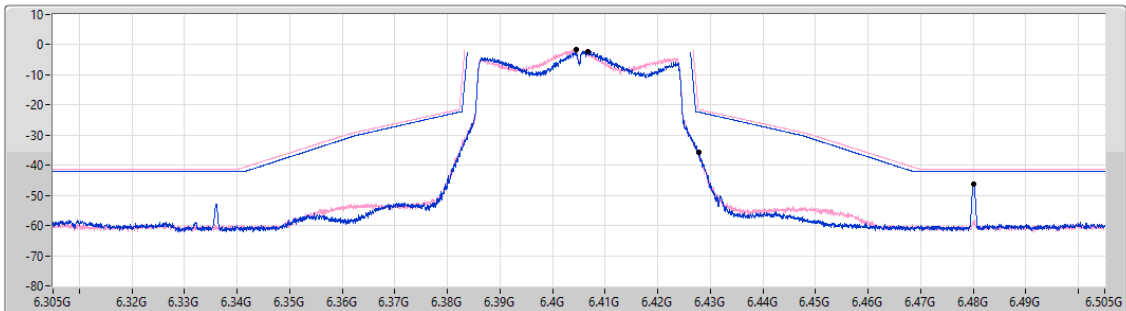


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.40665G	-2.14	6.48005G	-46.21	-42.14	-4.07	1
6.4044G	-1.49	6.42775G	-35.77	-21.50	-14.27	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

16/05/2025

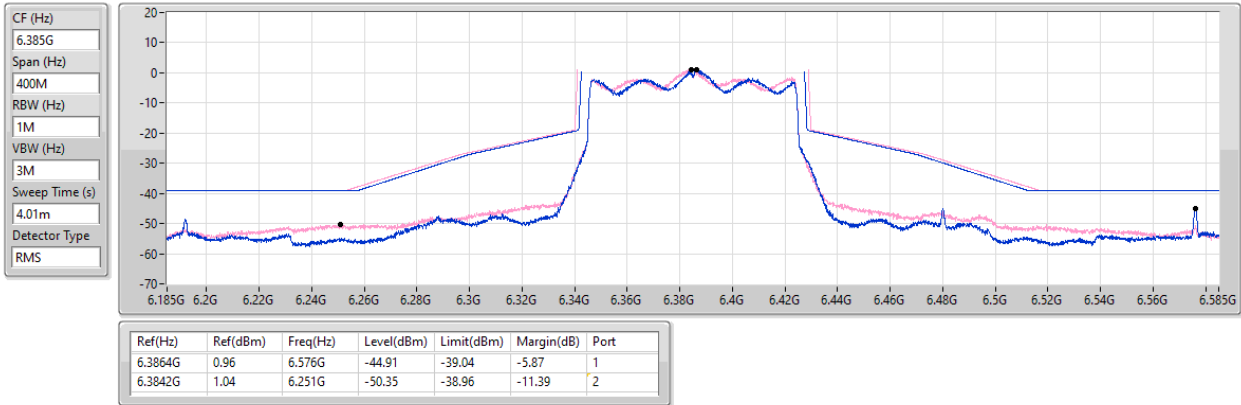


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6185MHz_TX

16/05/2025

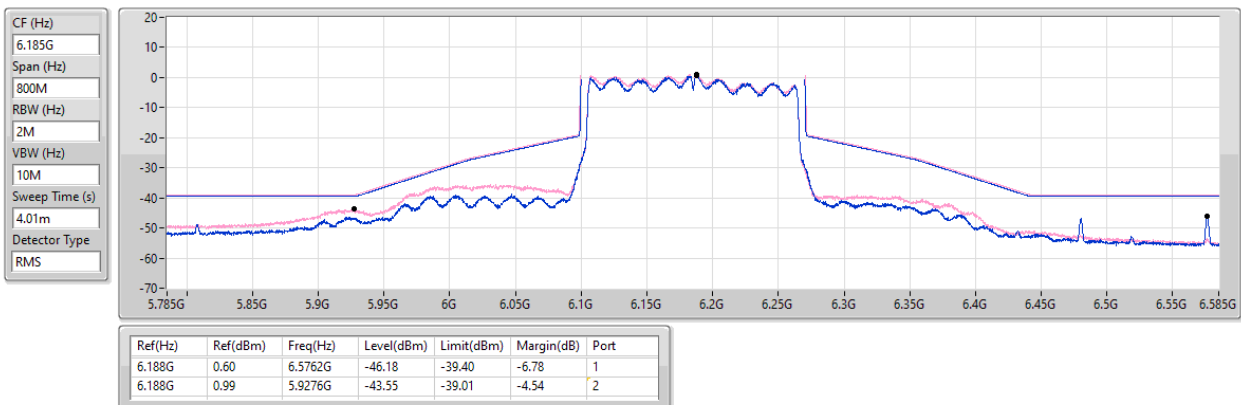


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6105MHz_TX

16/05/2025

CF (Hz)
6.105G
Span (Hz)
1.6G
RBW (Hz)
3M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

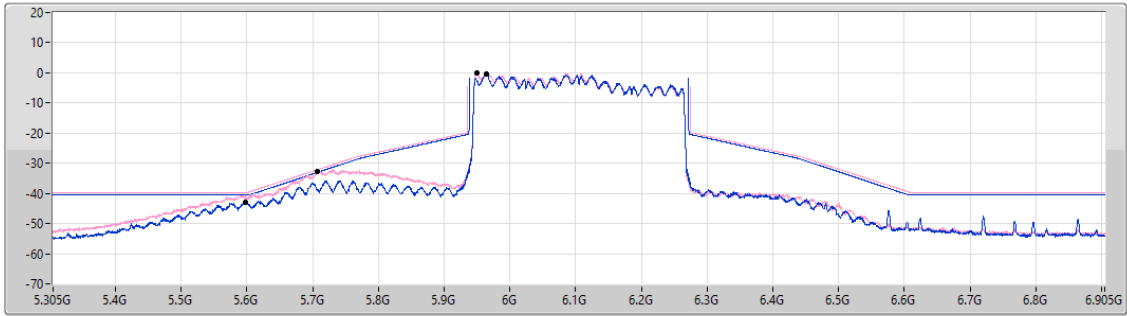

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.96384G	-0.33	5.597G	-43.00	-40.33	-2.67	1
5.94904G	0.11	5.7078G	-32.72	-32.10	-0.62	2


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6475MHz_TX

16/05/2025

CF (Hz)
6.475G
Span (Hz)
100M
RBW (Hz)
200k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

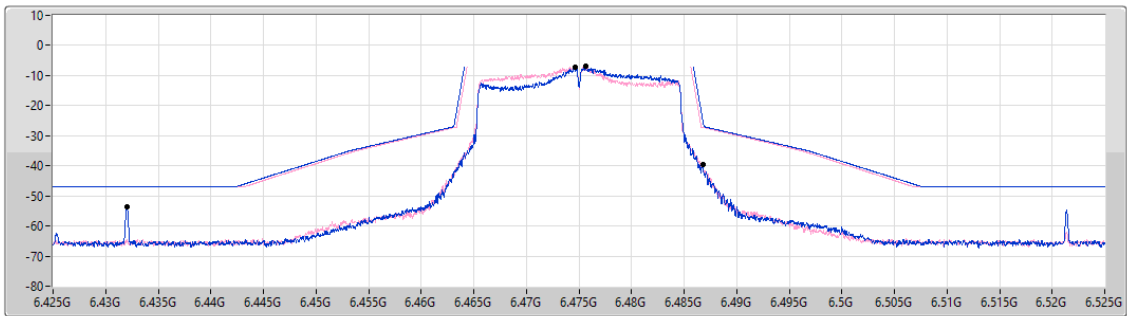


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.475625G	-7.00	6.432025G	-53.58	-47.00	-6.58	1
6.474675G	-7.09	6.486775G	-39.50	-27.20	-12.30	2

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6485MHz_TX

16/05/2025

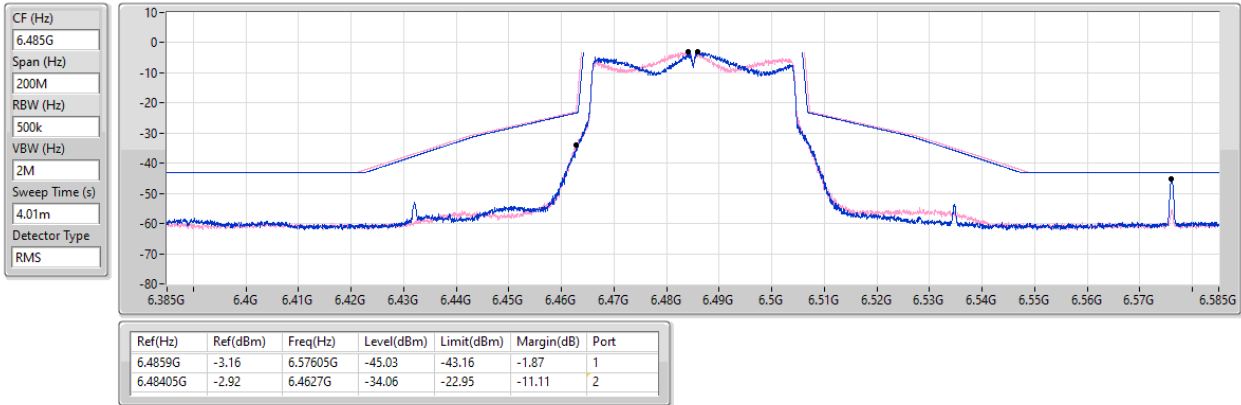


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6545MHz_TX

16/05/2025

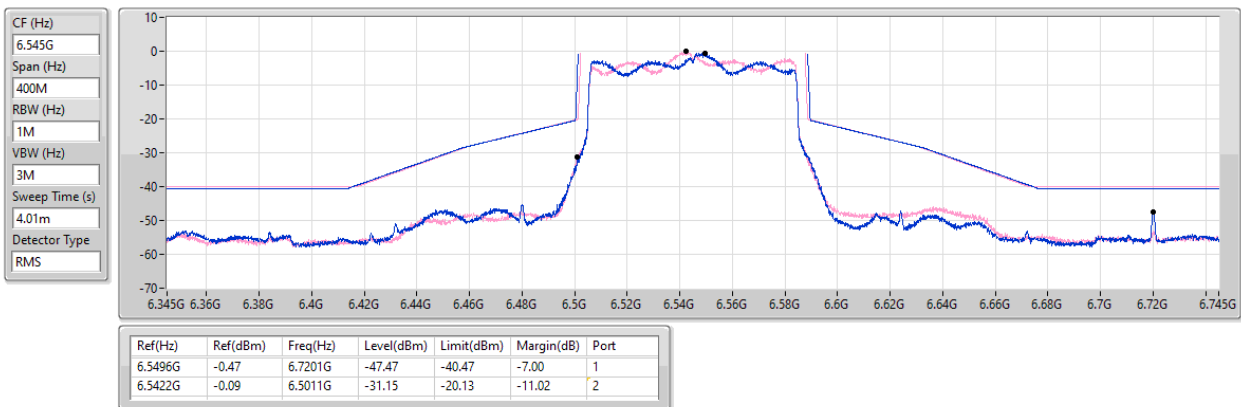


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6505MHz_TX

16/05/2025

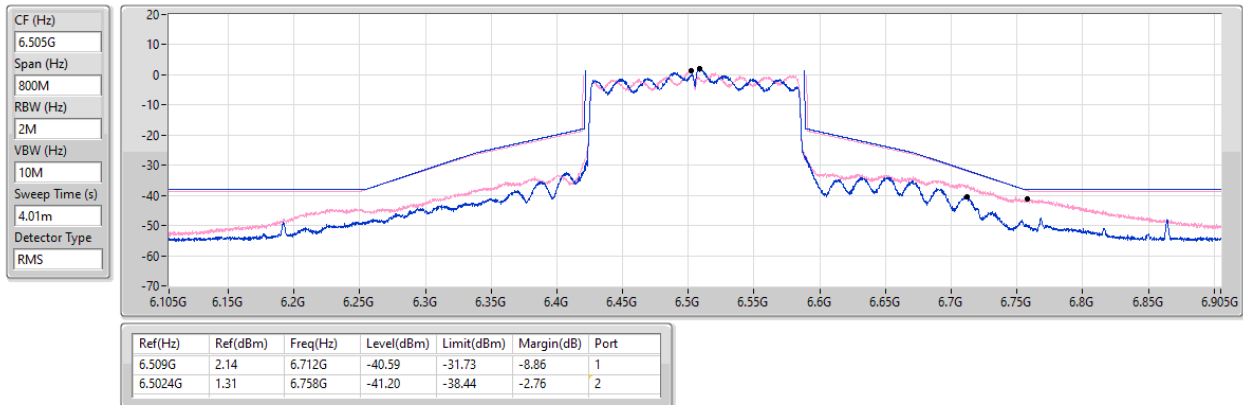


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6585MHz_TX

16/05/2025

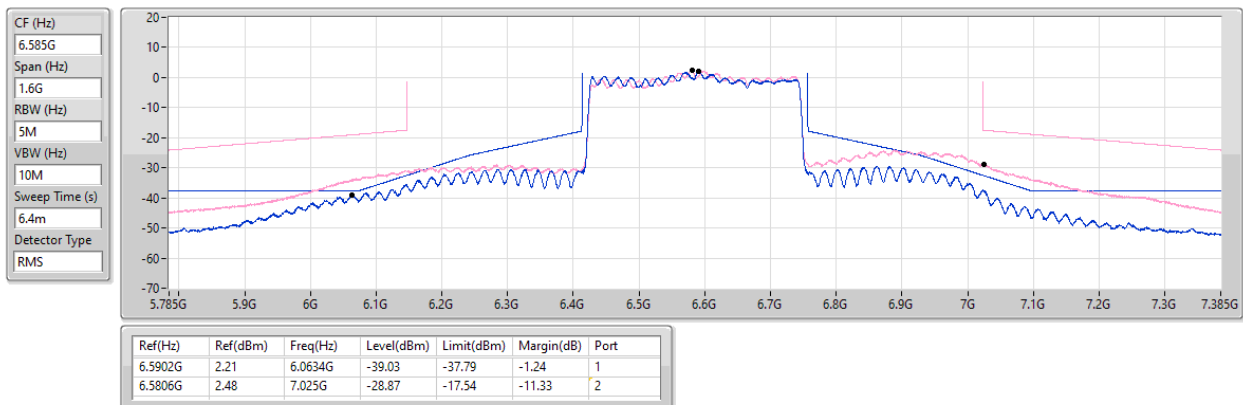


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

16/05/2025

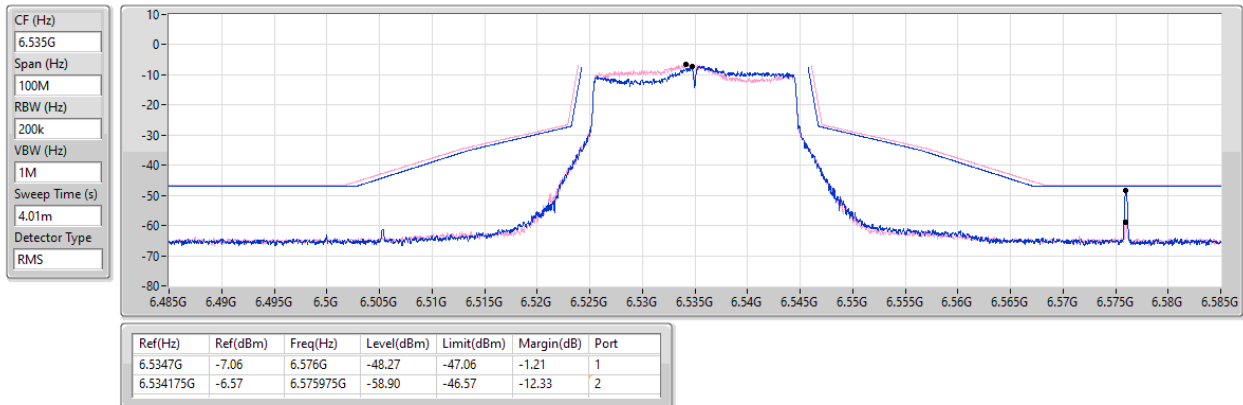


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6565MHz_TX

16/05/2025

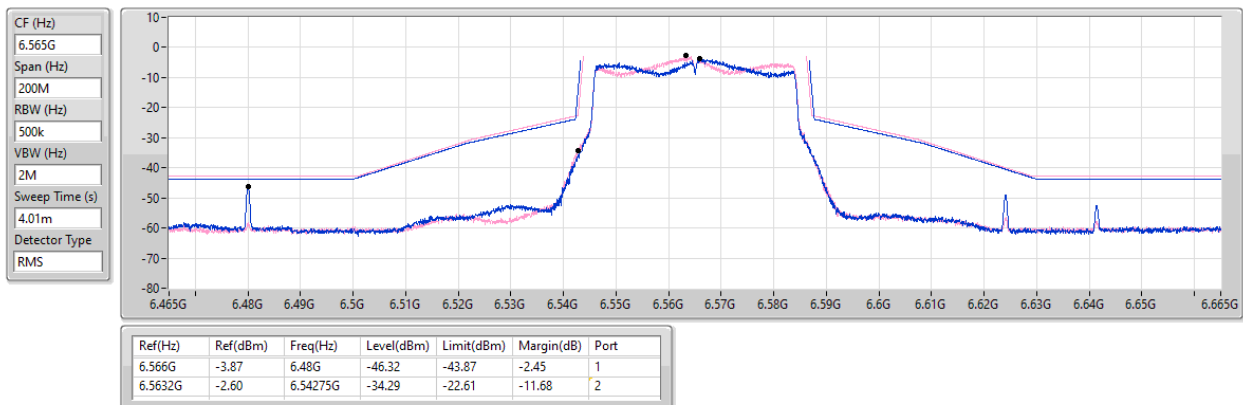


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6705MHz_TX

16/05/2025

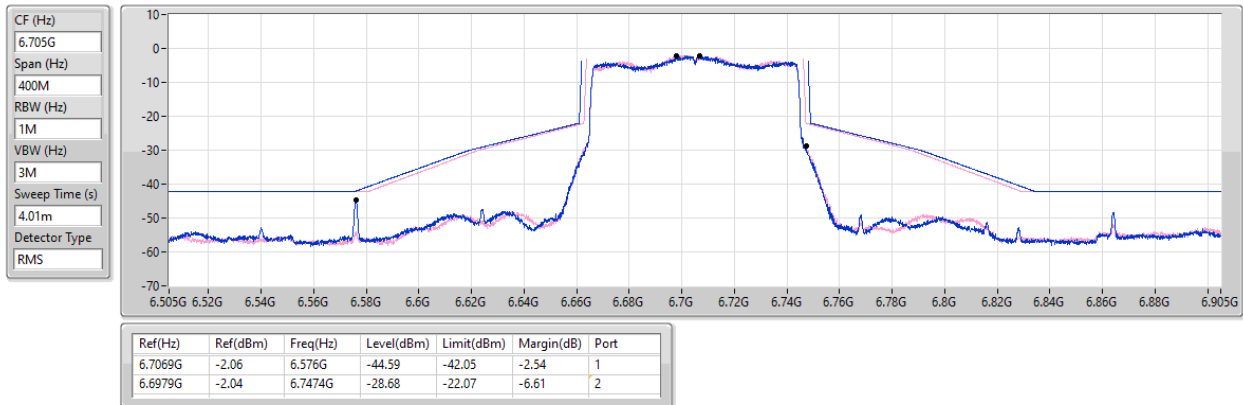


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

16/05/2025

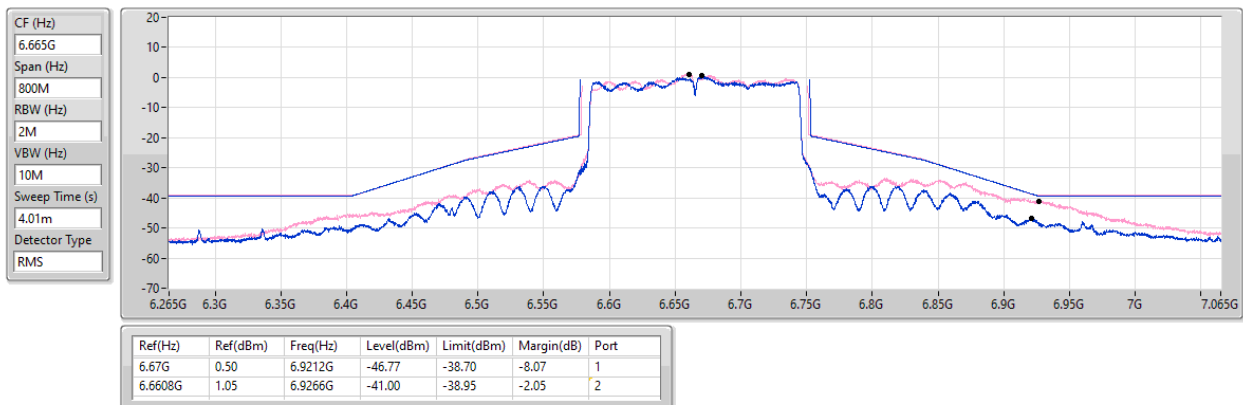


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6745MHz_TX

16/05/2025

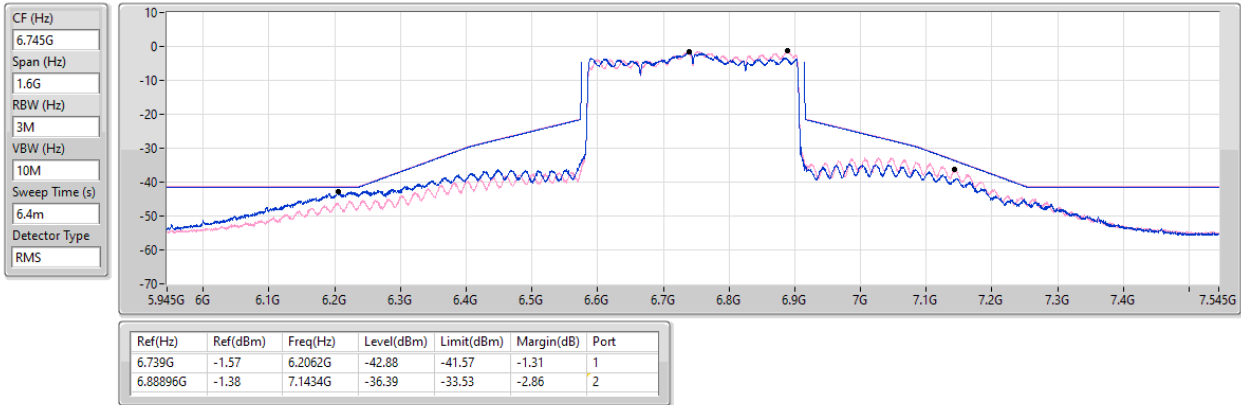


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6895MHz_TX

16/05/2025

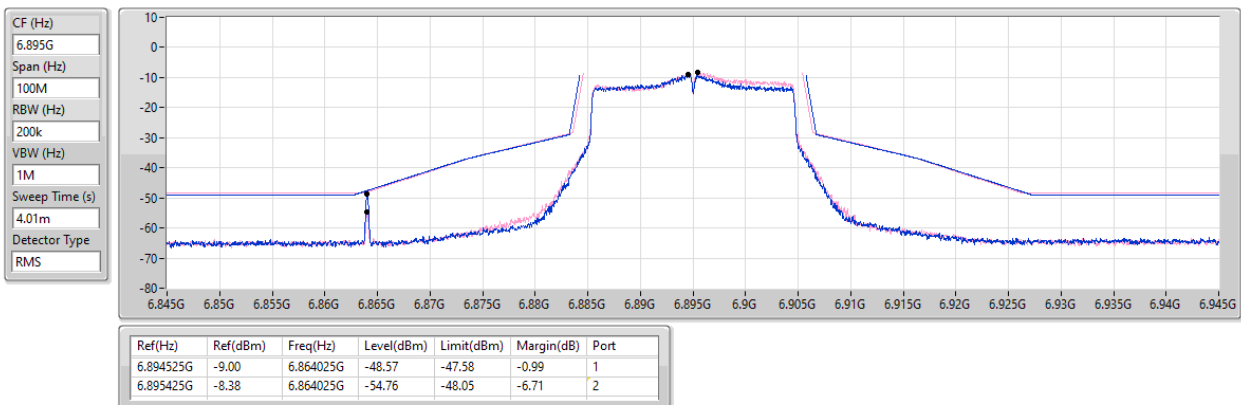


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6925MHz_TX

16/05/2025

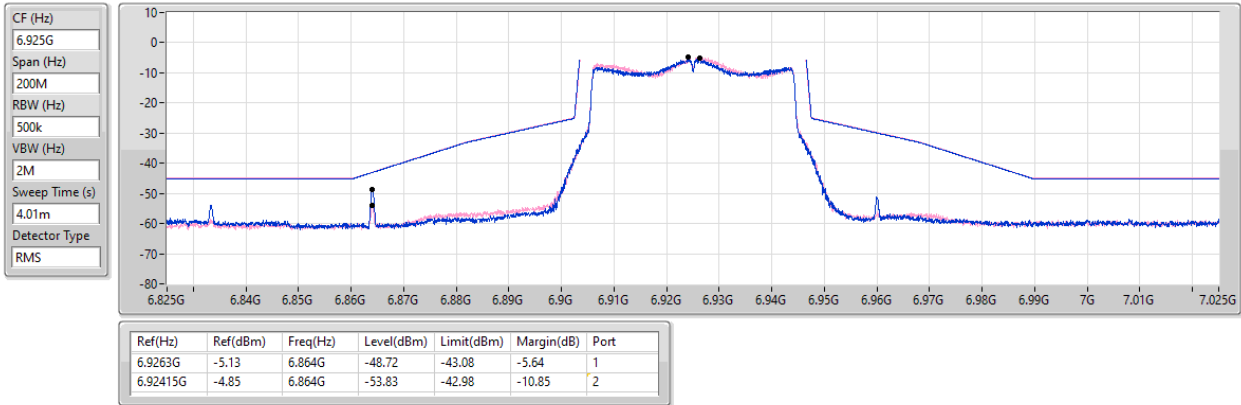


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

7025MHz_TX

16/05/2025

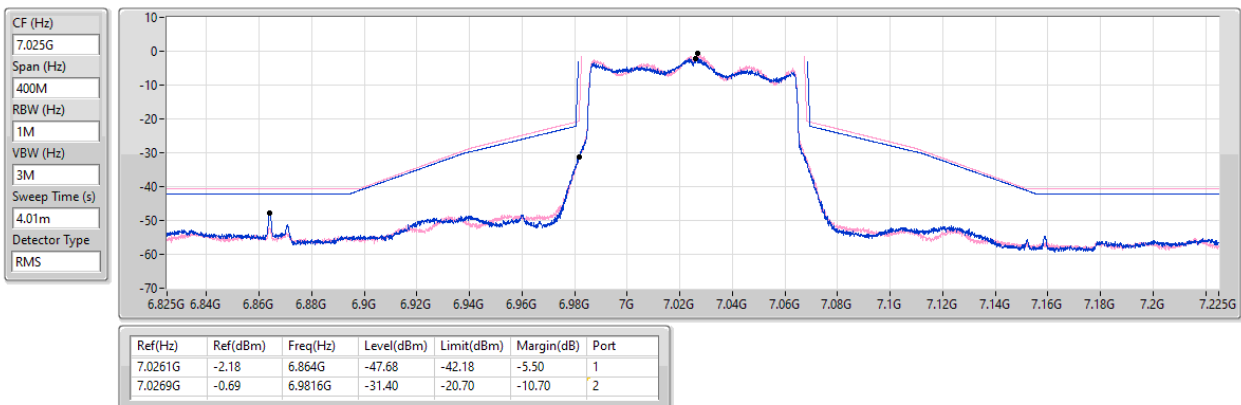


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6985MHz_TX

16/05/2025

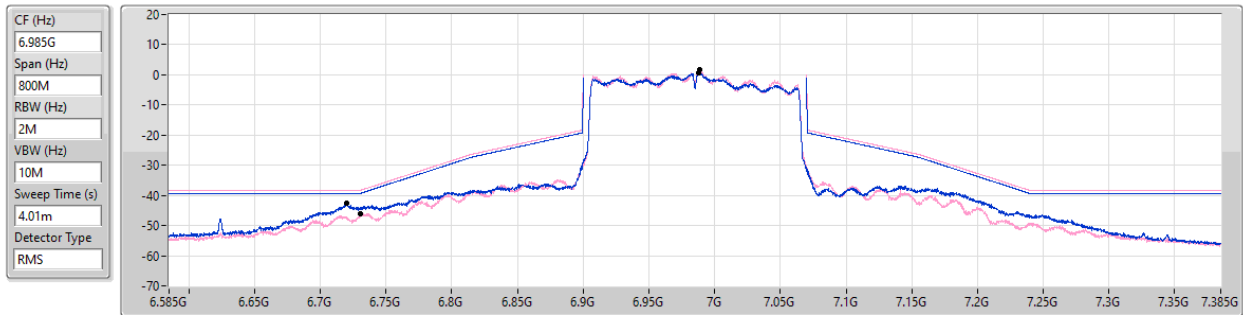

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.9878G	0.74	6.7198G	-42.46	-39.26	-3.20	1
6.9888G	1.64	6.7306G	-46.25	-38.31	-7.94	2

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	Pass	5.95861G	0.77	5.8355G	-43.01	-39.23	-3.78	2
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	Pass	5.95262G	0.30	5.8264G	-33.04	-31.76	-1.28	2
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	Pass	5.95144G	-2.89	5.7126G	-35.63	-34.76	-0.87	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	Pass	6.81622G	-2.89	6.511G	-37.75	-34.73	-3.02	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	Pass	6.99231G	0.04	6.928G	-36.22	-30.28	-5.94	2
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	Pass	6.95061G	-0.87	6.7842G	-39.08	-33.24	-5.84	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)	-	-	-	-	-	-	-	-
5985MHz	Pass	5.95861G	0.77	5.8355G	-43.01	-39.23	-3.78	2
7025MHz	Pass	6.99231G	0.04	6.928G	-36.22	-30.28	-5.94	2
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)	-	-	-	-	-	-	-	-
6025MHz	Pass	5.95262G	0.30	5.8264G	-33.04	-31.76	-1.28	2
6985MHz	Pass	6.95061G	-0.87	6.7842G	-39.08	-33.24	-5.84	2
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)	-	-	-	-	-	-	-	-
6105MHz	Pass	5.95144G	-2.89	5.7126G	-35.63	-34.76	-0.87	2
6905MHz	Pass	6.81622G	-2.89	6.511G	-37.75	-34.73	-3.02	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)

MASK

5985MHz_TX

19/05/2025

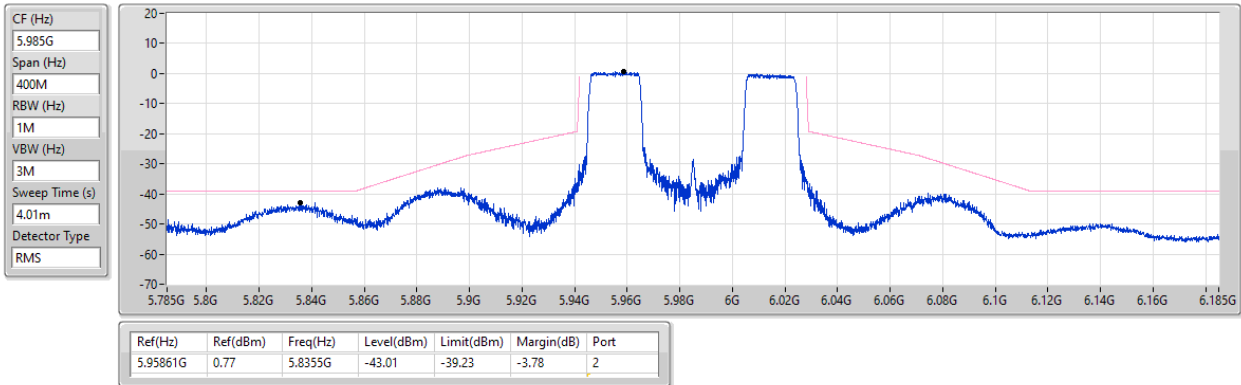


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)

MASK

6025MHz_TX

21/05/2025

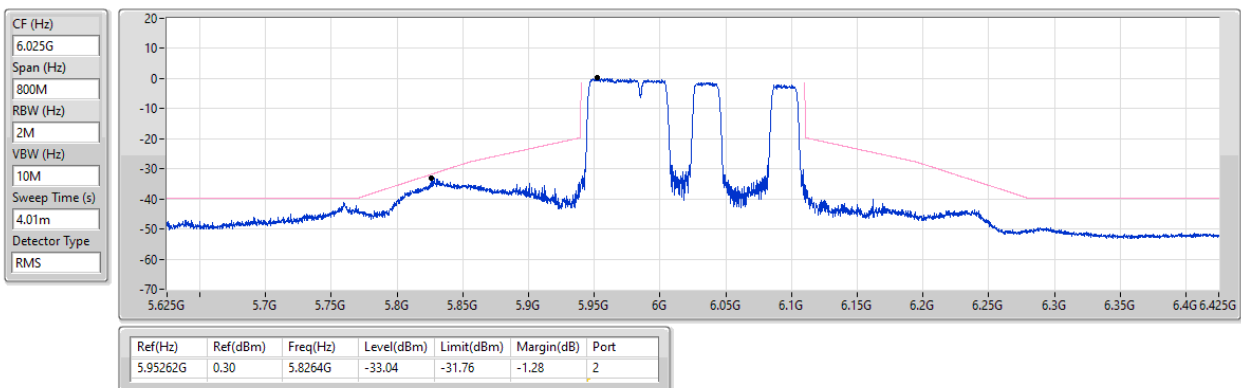


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)

MASK

6105MHz_TX

17/07/2025

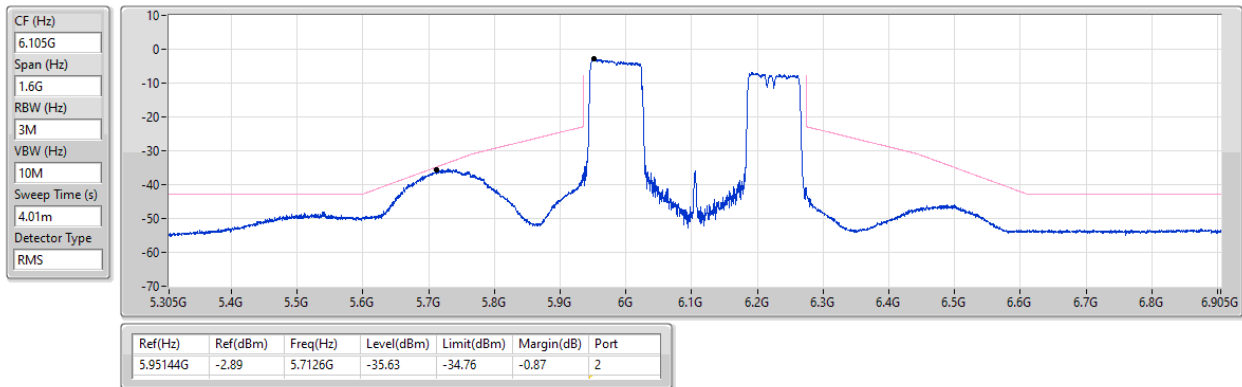


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_1TX(Port2)

MASK

6905MHz_TX

17/07/2025

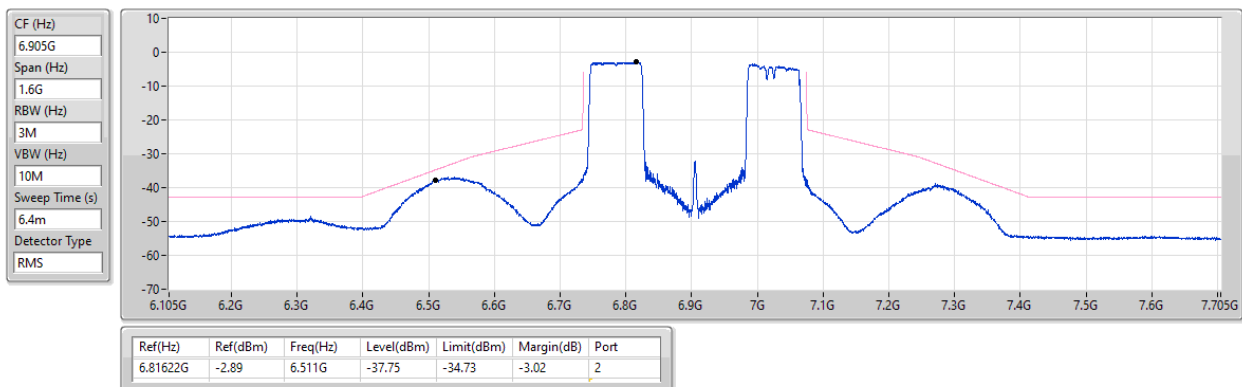


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX(Port2)

MASK

7025MHz_TX

01/07/2025

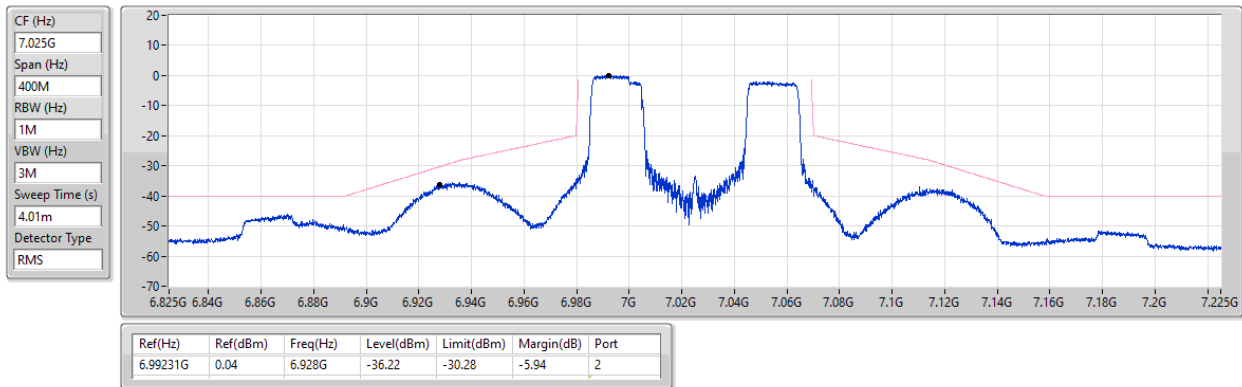


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX(Port2)

MASK

6985MHz_TX

21/05/2025

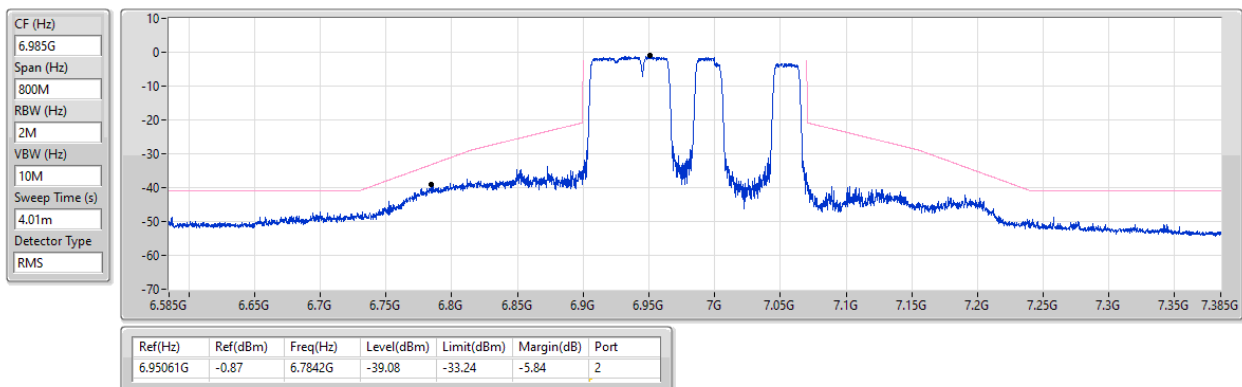

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	Pass	5.96371G	-2.09	5.8079G	-51.51	-42.09	-9.42	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	5.96322G	0.97	5.7648G	-42.50	-39.03	-3.47	1
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	Pass	5.96743G	-0.88	5.6974G	-34.22	-33.83	-0.39	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	Pass	6.99458G	-3.89	6.5154G	-41.52	-36.07	-5.45	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	Pass	6.98761G	-1.71	6.864G	-42.16	-41.71	-0.45	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	7.0026G	0.52	7.173G	-31.46	-30.05	-1.41	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.96371G	-2.09	5.8079G	-51.51	-42.09	-9.42	1
5985MHz	Pass	5.94811G	-2.19	5.8306G	-51.94	-42.19	-9.75	2
7025MHz	Pass	6.98761G	-1.71	6.864G	-42.16	-41.71	-0.45	1
7025MHz	Pass	6.98711G	-0.76	6.8641G	-46.23	-40.76	-5.47	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	5.96322G	0.97	5.7648G	-42.50	-39.03	-3.47	1
6025MHz	Pass	5.94822G	1.50	5.76G	-42.15	-38.50	-3.65	2
6985MHz	Pass	7.00519G	0.20	7.1698G	-31.75	-29.98	-1.77	1
6985MHz	Pass	7.0026G	0.52	7.173G	-31.46	-30.05	-1.41	2
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	5.96384G	-1.83	5.689G	-37.91	-35.84	-2.07	1
6105MHz	Pass	5.96743G	-0.88	5.6974G	-34.22	-33.83	-0.39	2
6905MHz	Pass	7.01897G	-3.71	6.5154G	-41.79	-35.31	-6.48	1
6905MHz	Pass	6.99458G	-3.89	6.5154G	-41.52	-36.07	-5.45	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

MASK

5985MHz_TX

23/05/2025

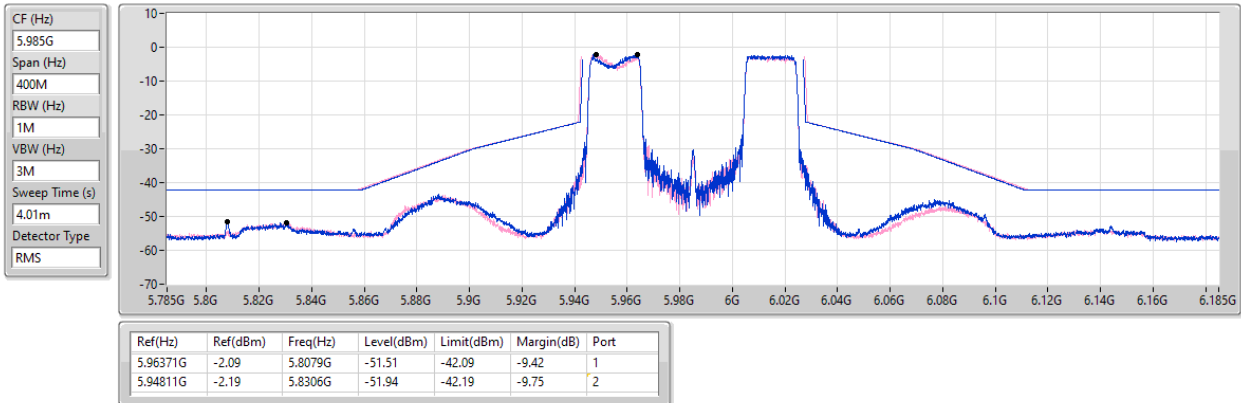


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

MASK

6025MHz_TX

30/06/2025

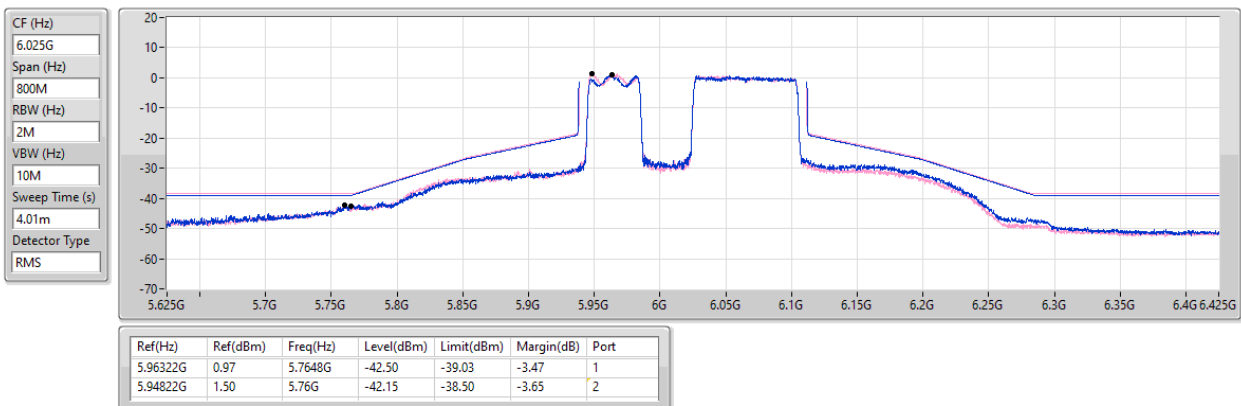


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

MASK

6105MHz_TX

01/07/2025

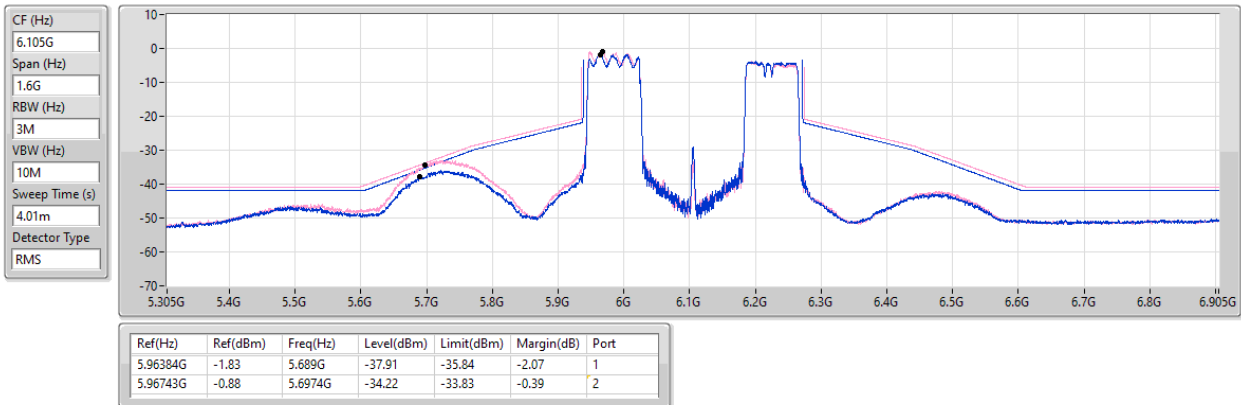


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

MASK

6905MHz_TX

18/07/2025

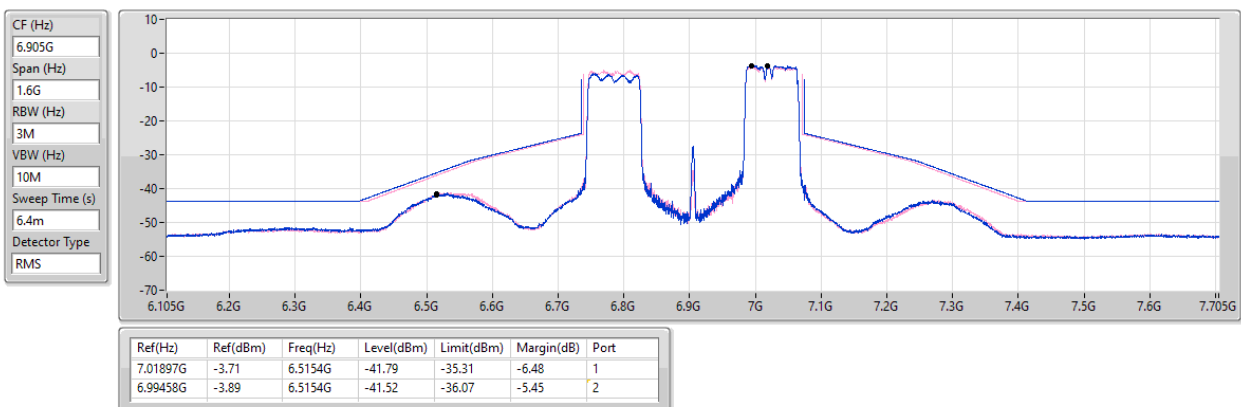


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

MASK

7025MHz_TX

25/05/2025

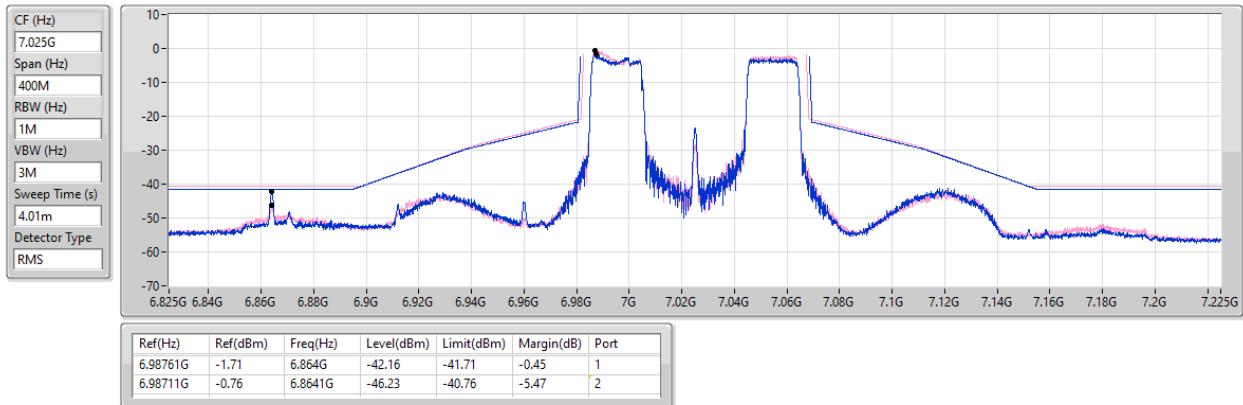


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

MASK

6985MHz_TX

18/07/2025

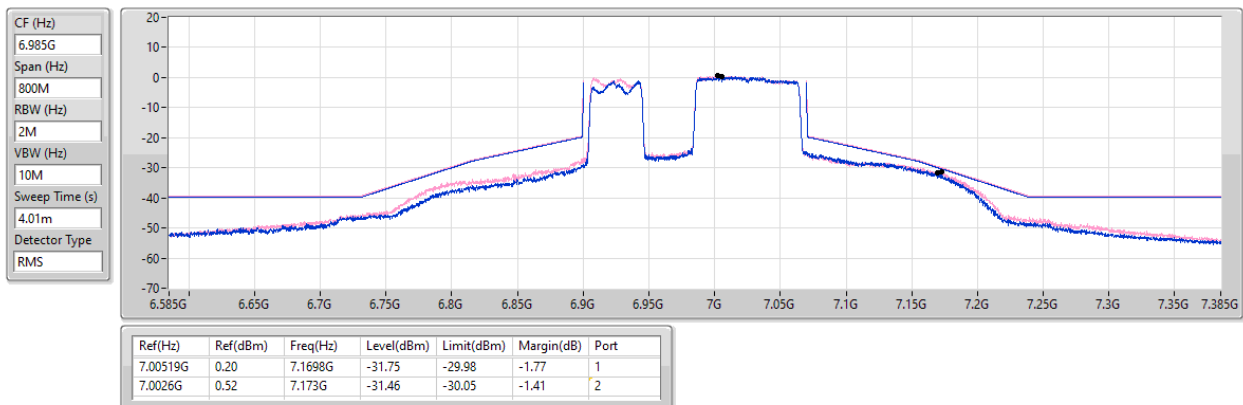



Mask_Non-Beamforming_Radio 3_1T1S_ Channel Puncturing

Appendix E.5

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX(Port2)	Pass	5.9873G	0.73	5.8561G	-48.14	-39.23	-8.91	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX(Port2)	Pass	6.0198G	-0.39	5.7706G	-40.54	-40.34	-0.20	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX(Port2)	Pass	5.95024G	-0.70	5.5982G	-41.60	-40.69	-0.91	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_1TX(Port2)	Pass	6.9094G	-1.94	6.3846G	-42.97	-41.94	-1.03	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX(Port2)	Pass	7.0214G	-0.91	6.8356G	-48.69	-40.91	-7.78	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_1TX(Port2)	Pass	6.9876G	-1.30	6.7262G	-45.97	-41.30	-4.67	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX(Port2)	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9873G	0.73	5.8561G	-48.14	-39.23	-8.91	2
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX(Port2)	-	-	-	-	-	-	-	-
7025MHz	Pass	7.0214G	-0.91	6.8356G	-48.69	-40.91	-7.78	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX(Port2)	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0198G	-0.39	5.7706G	-40.54	-40.34	-0.20	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX(Port2)	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0282G	-0.16	5.7606G	-43.83	-40.16	-3.67	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_1TX(Port2)	-	-	-	-	-	-	-	-
6985MHz	Pass	6.9876G	-1.30	6.7262G	-45.97	-41.30	-4.67	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX(Port2)	-	-	-	-	-	-	-	-
6985MHz	Pass	6.9802G	-1.44	6.7324G	-47.35	-41.13	-6.22	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX(Port2)	-	-	-	-	-	-	-	-
6105MHz	Pass	5.95024G	-0.70	5.5982G	-41.60	-40.69	-0.91	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_1TX(Port2)	-	-	-	-	-	-	-	-
6105MHz	Pass	5.95304G	-0.81	5.5978G	-45.50	-40.81	-4.69	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_1TX(Port2)	-	-	-	-	-	-	-	-
6105MHz	Pass	5.95704G	-0.99	5.5982G	-46.05	-40.98	-5.07	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_1TX(Port2)	-	-	-	-	-	-	-	-
6905MHz	Pass	6.9006G	-1.75	6.389G	-43.03	-41.75	-1.28	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_1TX(Port2)	-	-	-	-	-	-	-	-
6905MHz	Pass	6.9094G	-1.94	6.3846G	-42.97	-41.94	-1.03	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_1TX(Port2)	-	-	-	-	-	-	-	-
6905MHz	Pass	6.8914G	-1.74	6.3938G	-48.48	-41.74	-6.74	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX(Port2)

MASK

5985MHz_TX

18/05/2025

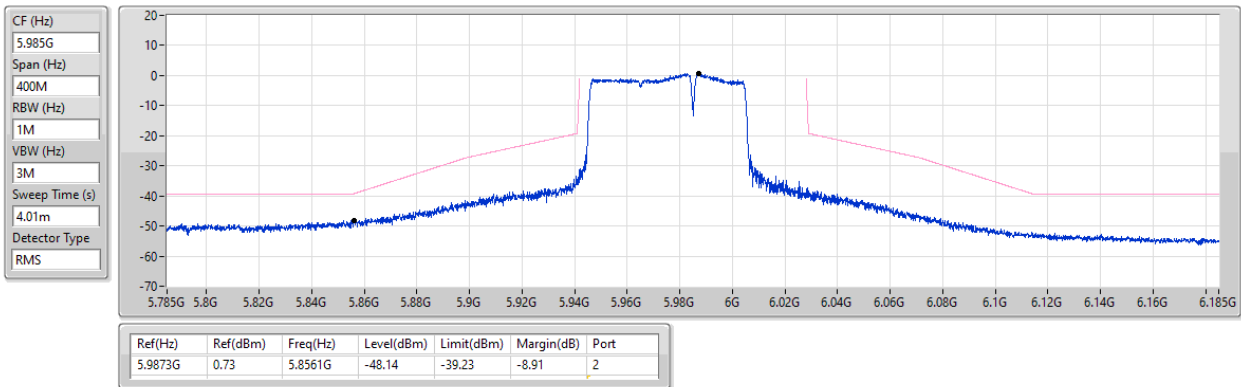


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX(Port2)

MASK

6025MHz_TX

19/05/2025

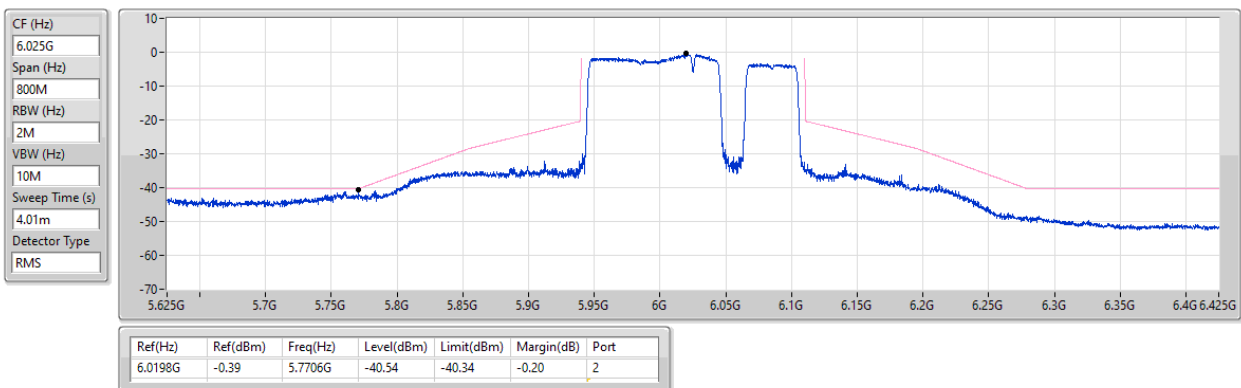


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_1TX(Port2)

MASK

6105MHz_TX

12/07/2025

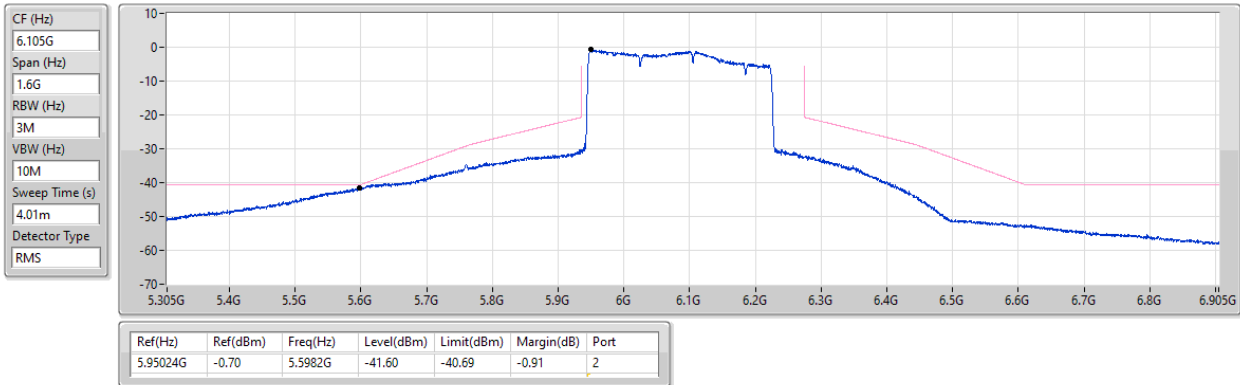


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_1TX(Port2)

MASK

6905MHz_TX

19/05/2025

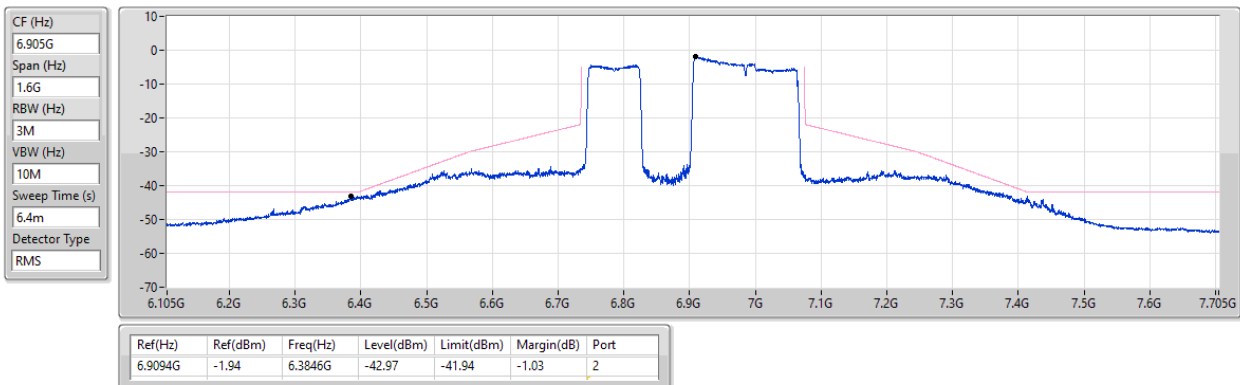


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX(Port2)

MASK

7025MHz_TX

01/07/2025

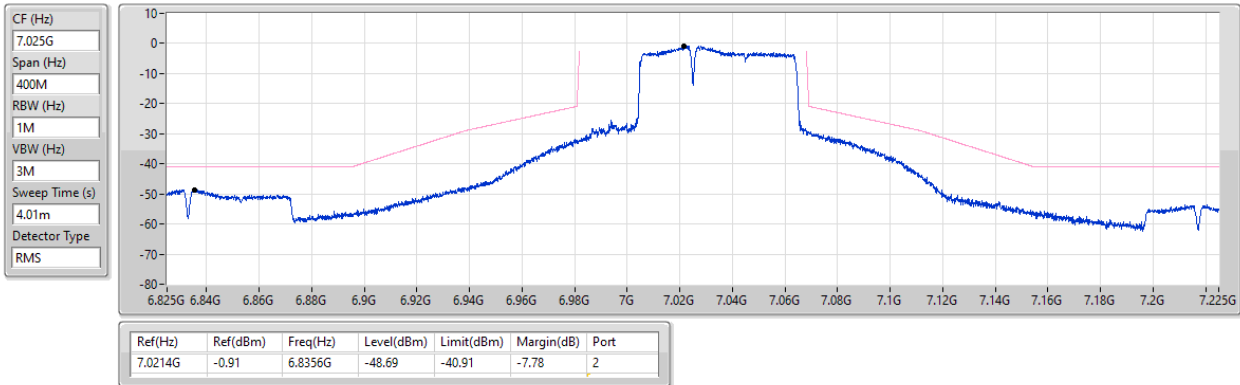


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_1TX(Port2)

MASK

6985MHz_TX

19/05/2025

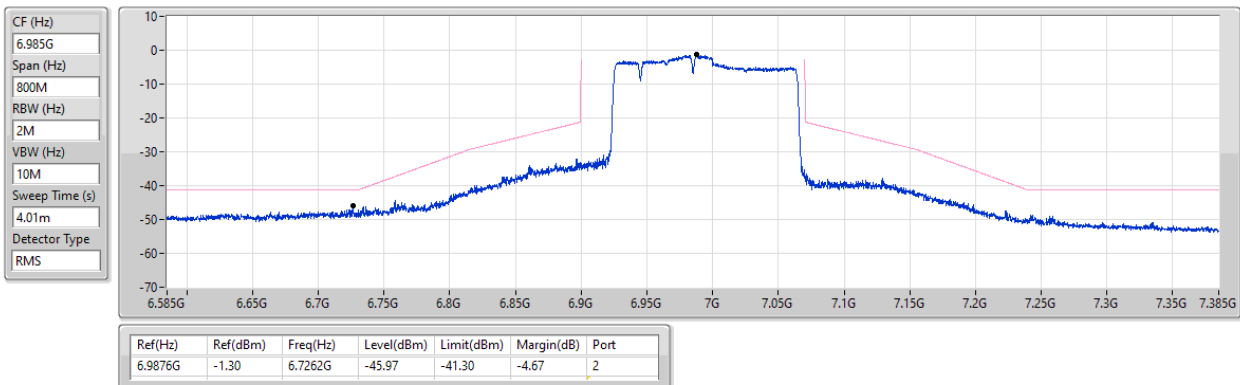

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	5.9871G	-2.49	5.8081G	-51.38	-42.49	-8.89	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	Pass	6.022G	1.04	5.7638G	-39.4	-38.96	-0.44	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	Pass	6.0226G	0.65	5.766G	-41.7	-39.35	-2.35	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	Pass	5.96663G	-1.14	5.6078G	-40.47	-40.45	-0.02	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	Pass	5.96623G	-0.44	5.6042G	-40.07	-40.01	-0.06	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_2TX	Pass	5.96464G	0.25	5.6034G	-42.63	-39.37	-3.26	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_2TX	Pass	6.9014G	-1.85	6.407G	-47.27	-41.85	-5.42	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	Pass	6.9226G	-2.22	6.4058G	-48.89	-42.22	-6.67	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX	Pass	6.9014G	-1.69	6.4098G	-42.35	-40.77	-1.58	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	Pass	7.0233G	-2.02	6.864G	-42.15	-42.02	-0.13	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	Pass	6.9874G	0.00	6.7304G	-40.28	-40.00	-0.28	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	Pass	6.9826G	0.53	6.7184G	-40.8	-39.47	-1.33	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9871G	-2.49	5.8081G	-51.38	-42.49	-8.89	1
5985MHz	Pass	5.9869G	-1.88	5.8302G	-53.83	-41.88	-11.95	2
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-	-
7025MHz	Pass	7.0233G	-2.02	6.864G	-42.15	-42.02	-0.13	1
7025MHz	Pass	7.0233G	-1.28	6.8641G	-47.32	-41.28	-6.04	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.022G	1.04	5.7638G	-39.4	-38.96	-0.44	1
6025MHz	Pass	6.0278G	0.78	5.7678G	-40.96	-39.1	-1.86	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0228G	1.06	5.7614G	-42.34	-38.94	-3.40	1
6025MHz	Pass	6.0226G	0.65	5.766G	-41.7	-39.35	-2.35	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-
6985MHz	Pass	6.9874G	0.00	6.7304G	-40.28	-40.00	-0.28	1
6985MHz	Pass	6.9884G	1.55	6.7342G	-39.69	-37.89	-1.80	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6985MHz	Pass	6.9826G	0.53	6.7184G	-40.8	-39.47	-1.33	1
6985MHz	Pass	6.9824G	0.75	6.7372G	-39.73	-38.27	-1.46	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	5.96344G	-1.97	5.6146G	-43.49	-41.35	-2.14	1
6105MHz	Pass	5.96663G	-1.14	5.6078G	-40.47	-40.45	-0.02	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	5.96304G	-1.24	5.6802G	-39.06	-35.89	-3.17	1
6105MHz	Pass	5.96623G	-0.44	5.6042G	-40.07	-40.01	-0.06	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.0854G	-0.14	5.5986G	-45.47	-40.14	-5.33	1
6105MHz	Pass	5.96464G	0.25	5.6034G	-42.63	-39.37	-3.26	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_2TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.8894G	-2.22	6.3954G	-48.58	-42.22	-6.36	1
6905MHz	Pass	6.9014G	-1.85	6.407G	-47.27	-41.85	-5.42	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.9094G	-1.94	6.3966G	-49.74	-41.94	-7.80	1
6905MHz	Pass	6.9226G	-2.22	6.4058G	-48.89	-42.22	-6.67	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.9014G	-1.69	6.4098G	-42.35	-40.77	-1.58	1
6905MHz	Pass	6.9098G	-0.88	6.407G	-46.28	-40.88	-5.40	2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

MASK

5985MHz_TX

25/05/2025

CF (Hz)
5.985G
Span (Hz)
400M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

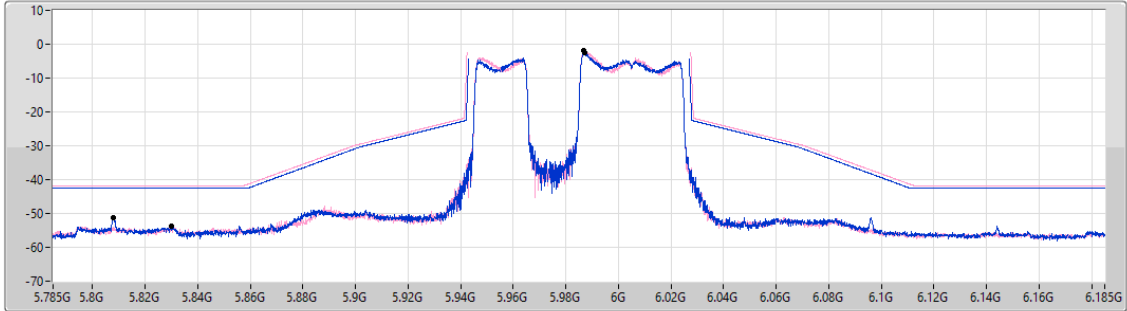

Port 1
Port 2

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.9871G	-2.49	5.8081G	-51.38	-42.49	-8.89	1
5.9869G	-1.88	5.8302G	-53.83	-41.88	-11.95	2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

MASK

6025MHz_TX

25/05/2025

CF (Hz)
6.025G
Span (Hz)
800M
RBW (Hz)
2M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

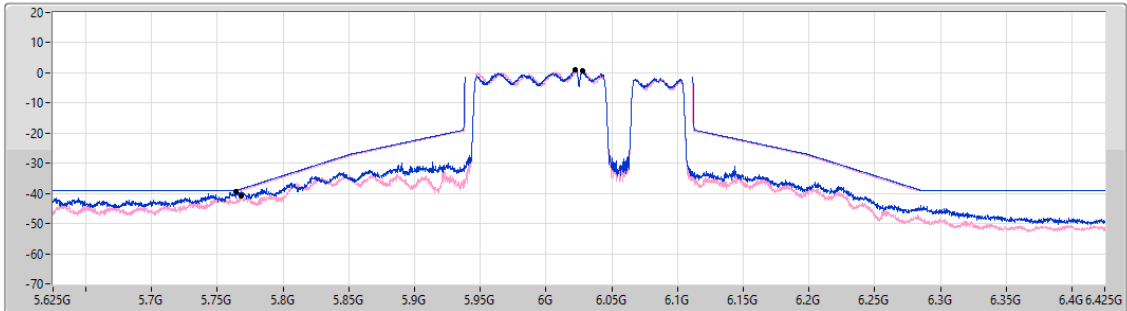

Port 1
Port 2


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.022G	1.04	5.7638G	-39.40	-38.96	-0.44	1
6.0278G	0.78	5.7678G	-40.96	-39.10	-1.86	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

MASK

6025MHz_TX

25/05/2025

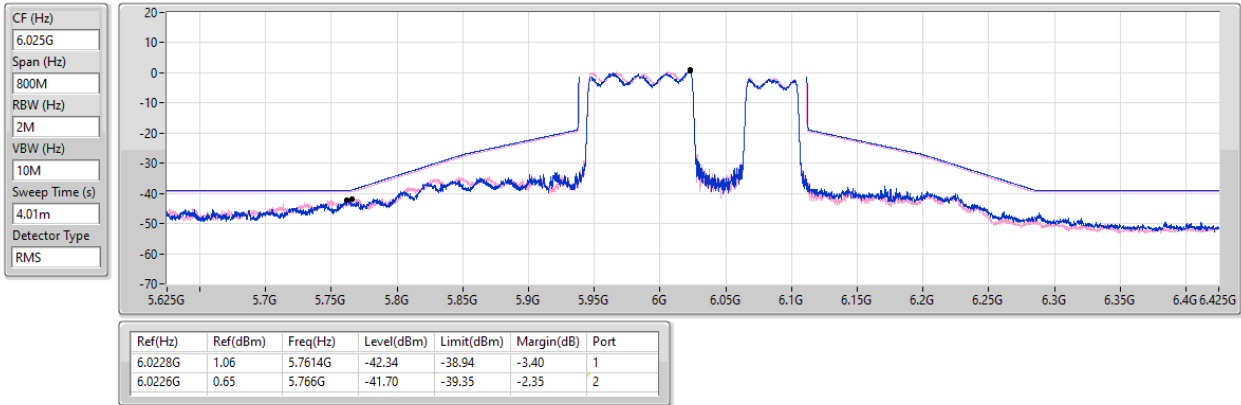


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX

MASK

6105MHz_TX

30/06/2025

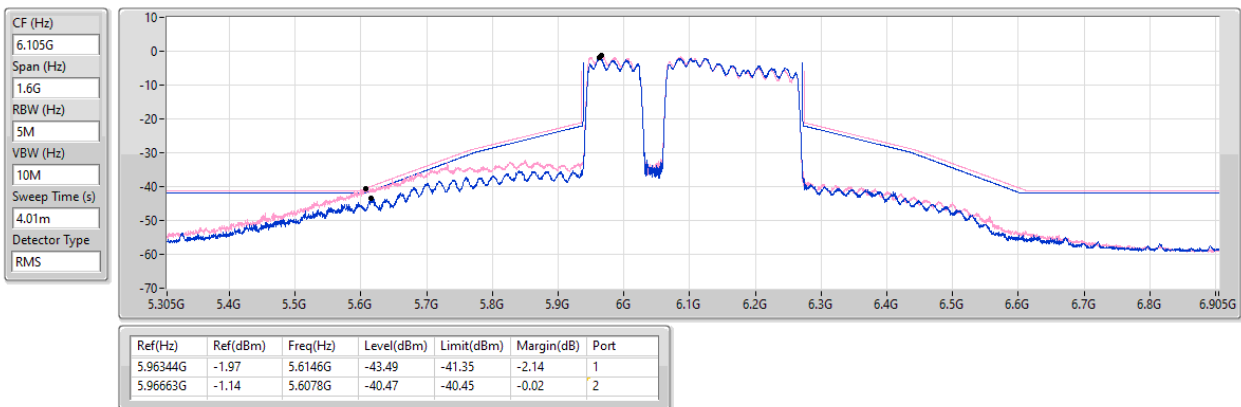

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX

MASK

6105MHz_TX

30/06/2025

CF (Hz)
6.105G


Span (Hz)
1.6G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

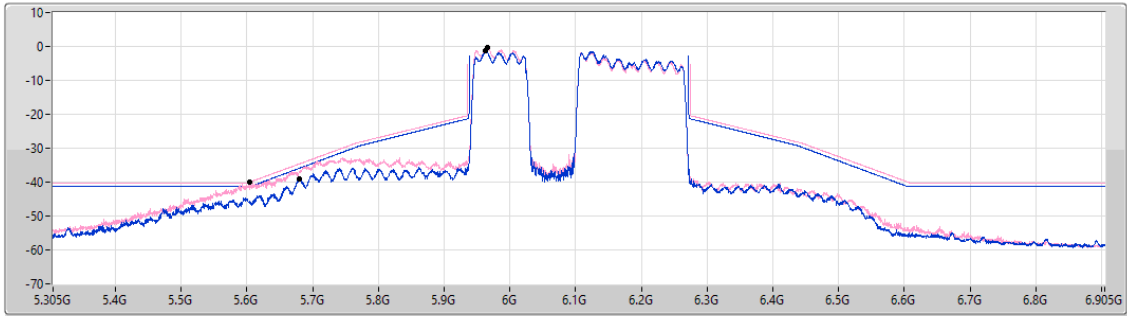

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.96304G	-1.24	5.6802G	-39.06	-35.89	-3.17	1
5.96623G	-0.44	5.6042G	-40.07	-40.01	-0.06	2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_2TX

MASK

6105MHz_TX

30/06/2025

CF (Hz)
6.105G


Span (Hz)
1.6G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

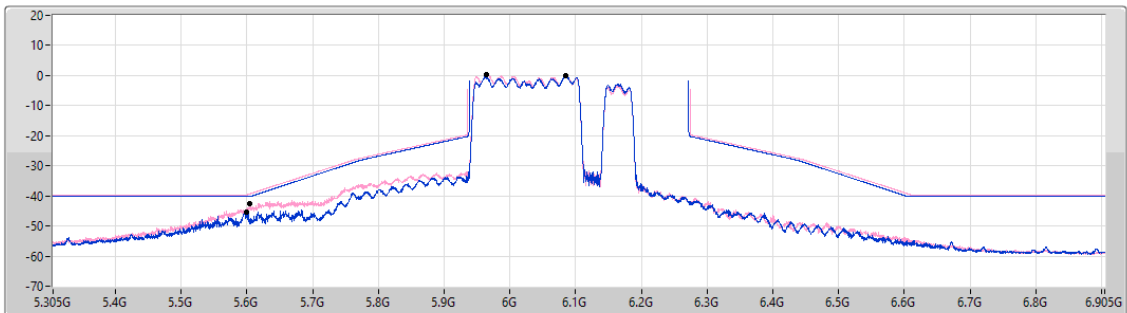


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.0854G	-0.14	5.5986G	-45.47	-40.14	-5.33	1
5.96464G	0.25	5.6034G	-42.63	-39.37	-3.26	2

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_2TX

MASK

6905MHz_TX

12/07/2025

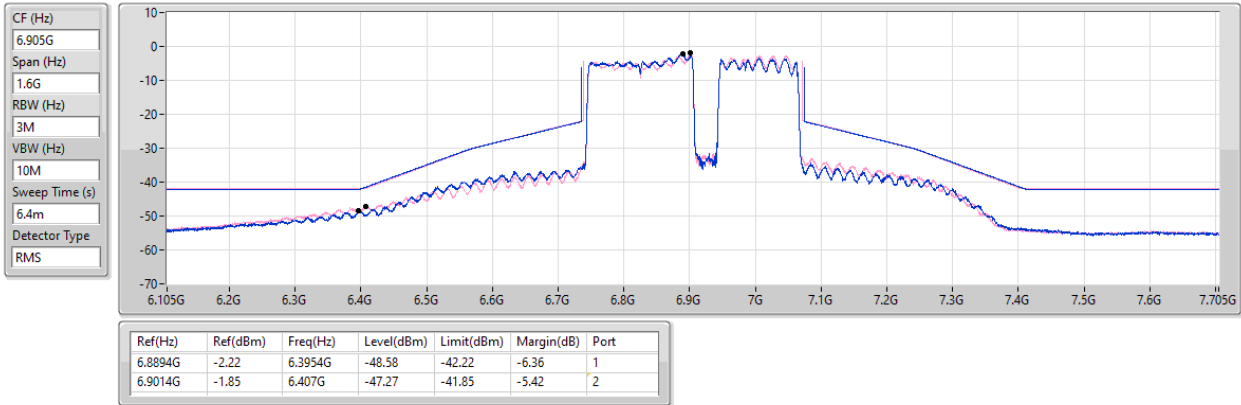


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX

MASK

6905MHz_TX

12/07/2025

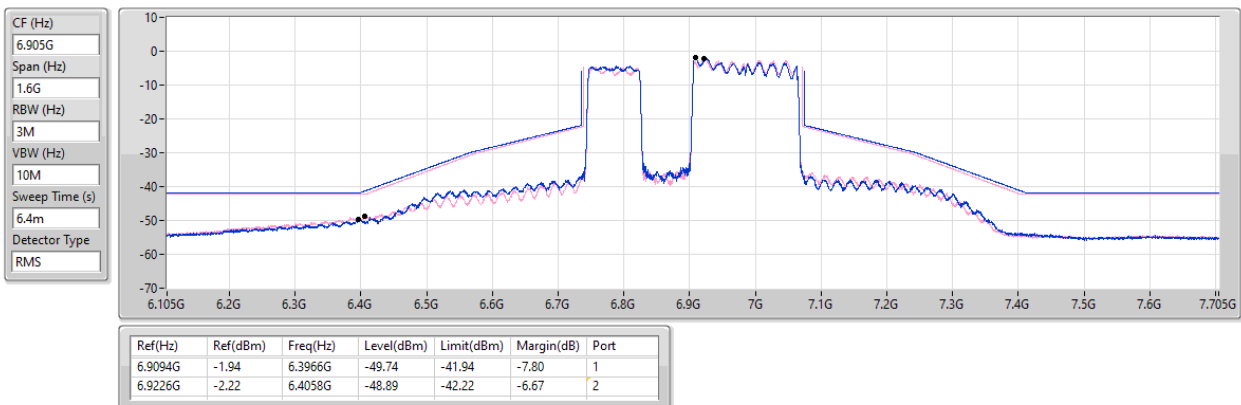


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX

MASK

6905MHz_TX

25/05/2025

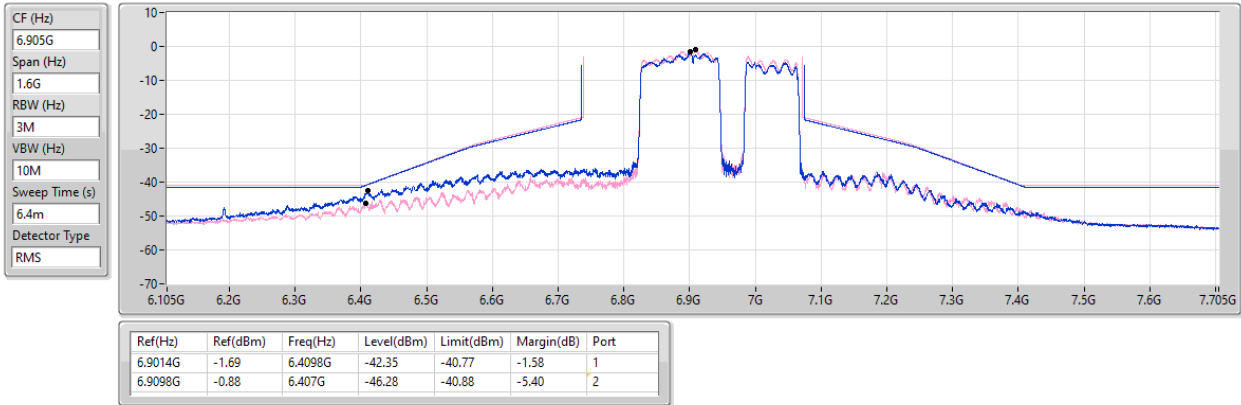


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

MASK

7025MHz_TX

25/05/2025

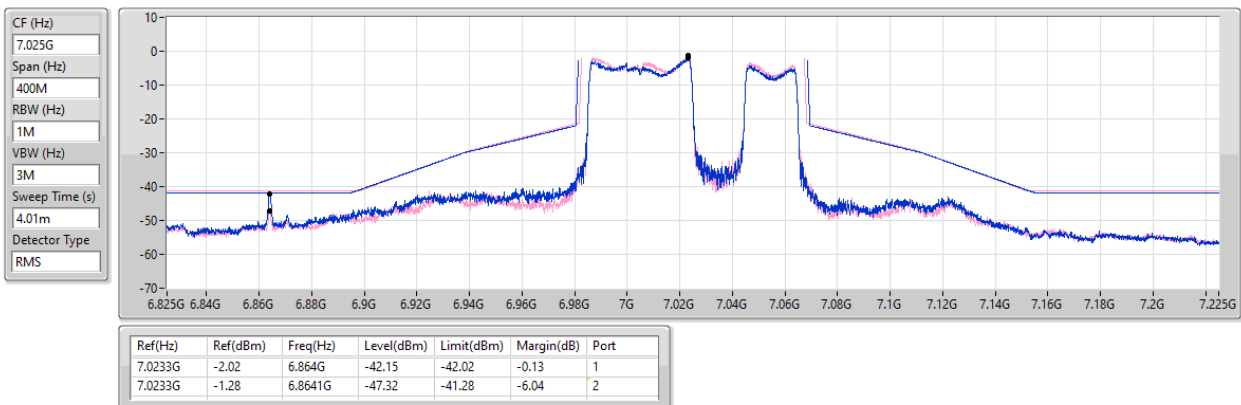


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX

MASK

6985MHz_TX

25/05/2025

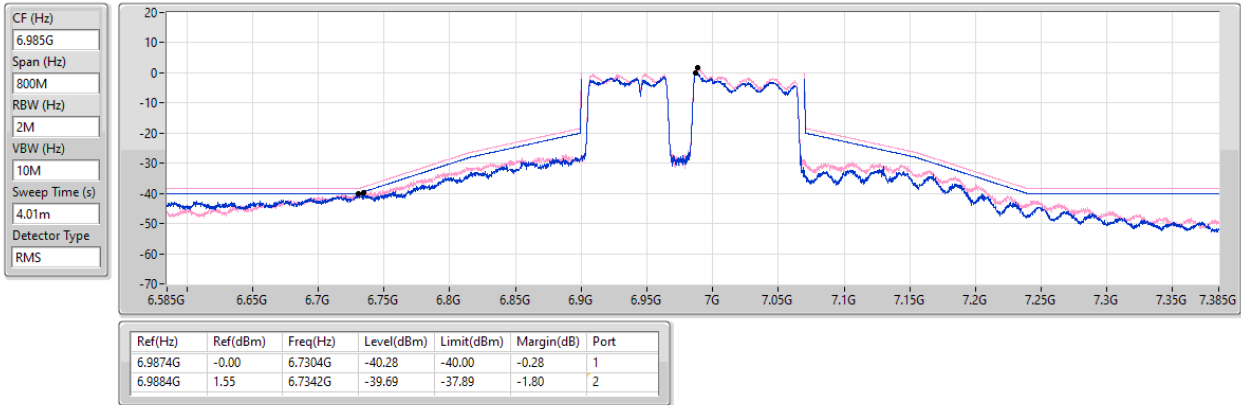


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

MASK

6985MHz_TX

25/05/2025

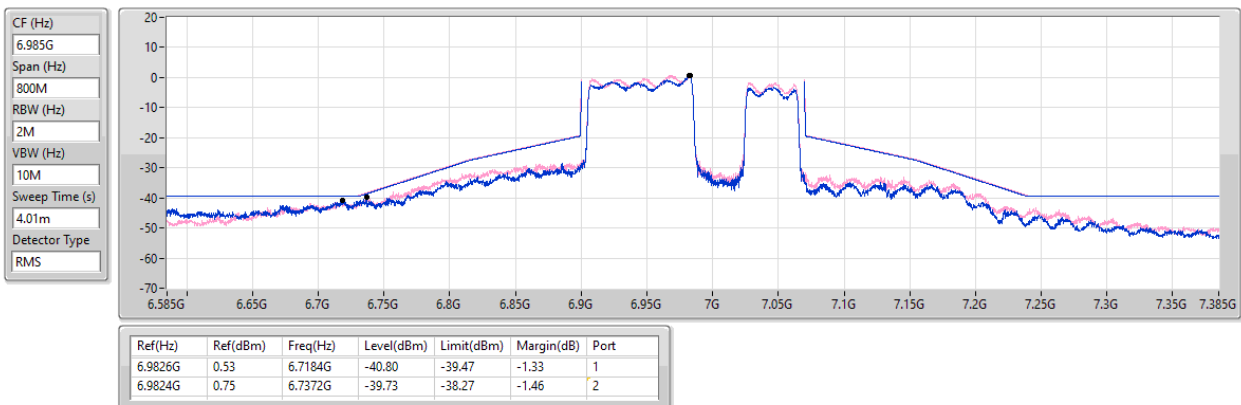

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	5.95585G	-5.69	5.93125G	-47.19	-37.94	-9.25	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	6.43465G	-4.44	6.44615G	-35.53	-24.44	-11.09	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	6.8755G	-4.77	6.890725G	-36.32	-28.60	-7.72	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	7.095625G	-4.53	7.1072G	-32.46	-25.04	-7.42	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.95585G	-5.69	5.93125G	-47.19	-37.94	-9.25	1
6195MHz	Pass	6.196175G	-4.85	6.183875G	-35.44	-24.85	-10.59	1
6415MHz	Pass	6.415525G	-3.55	6.42635G	-35.35	-23.93	-11.42	1
6435MHz	Pass	6.43465G	-4.44	6.44615G	-35.53	-24.44	-11.09	1
6475MHz	Pass	6.474675G	-4.41	6.486125G	-36.06	-24.44	-11.62	1
6515MHz	Pass	6.514325G	-4.71	6.49125G	-49.03	-36.79	-12.24	1
6535MHz	Pass	6.534625G	-5.71	6.52375G	-40.05	-25.73	-14.32	1
6695MHz	Pass	6.695675G	-5.85	6.683375G	-36.72	-26.22	-10.50	1
6875MHz	Pass	6.8755G	-4.77	6.890725G	-36.32	-28.60	-7.72	1
6895MHz	Pass	6.89545G	-4.92	6.91135G	-37.74	-29.21	-8.53	1
6995MHz	Pass	6.995525G	-4.21	7.007275G	-33.48	-24.23	-9.25	1
7095MHz	Pass	7.095625G	-4.53	7.1072G	-32.46	-25.04	-7.42	1
7115MHz	Pass	7.11455G	-7.52	7.12625G	-39.48	-27.68	-11.80	1

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

MASK

5955MHz_TX

17/05/2025

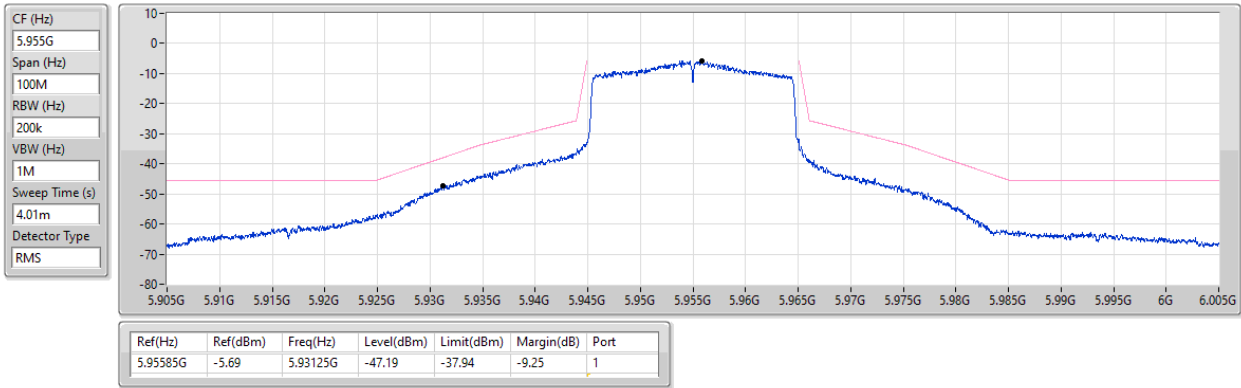


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

MASK

6435MHz_TX

17/05/2025

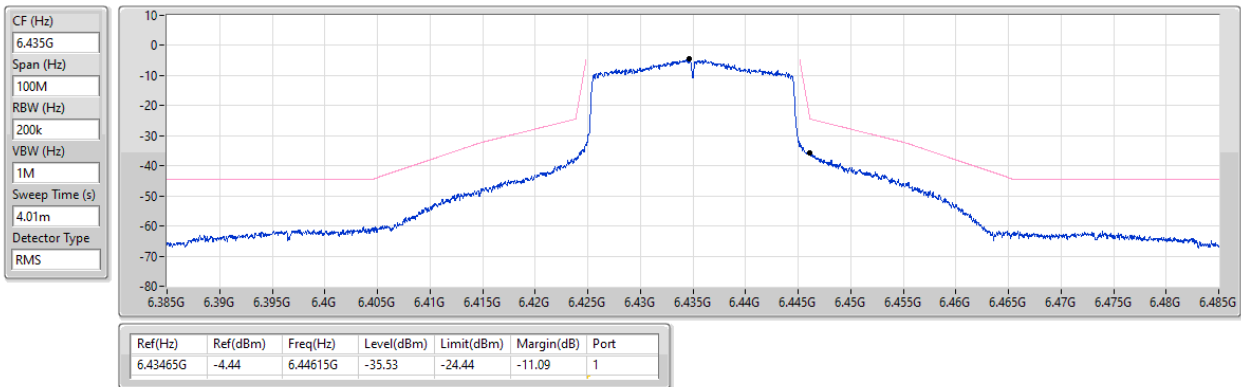


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

MASK

6875MHz_TX

17/05/2025

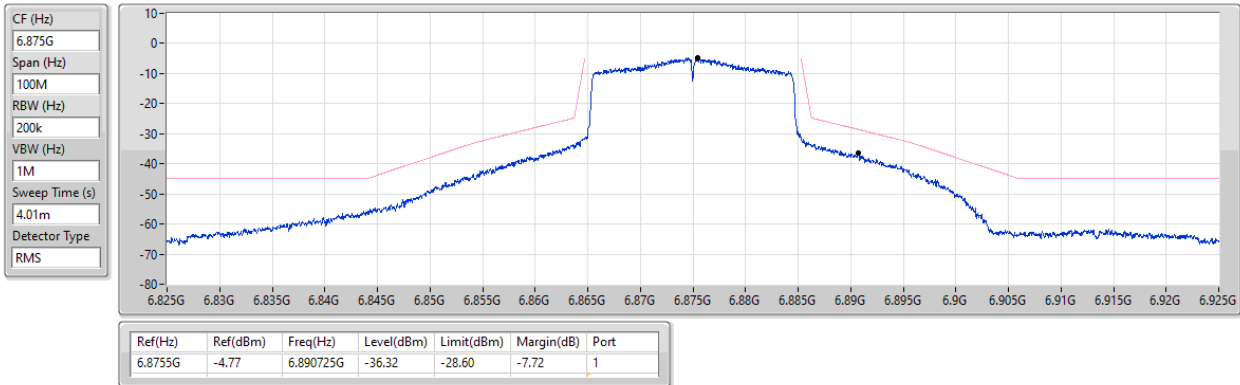

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

MASK

7095MHz_TX

14/06/2025

