



Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :g\_TX\_2437MHz  
Test by :Cyril

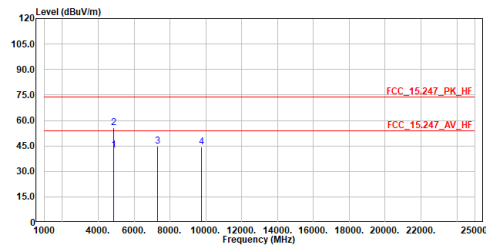

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |         |
| 1   | 4874.000  | 42.43  | 54.00  | -11.57 | 60.10 | -17.67 | Average |
| 2   | 4874.000  | 55.71  | 74.00  | -18.29 | 73.38 | -17.67 | Peak    |
| 3   | 7311.000  | 45.01  | 74.00  | -28.99 | 57.63 | -12.62 | Peak    |
| 4   | 9748.000  | 44.27  | 74.00  | -29.73 | 53.20 | -8.93  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :g\_TX\_2437MHz  
Test by :Cyril

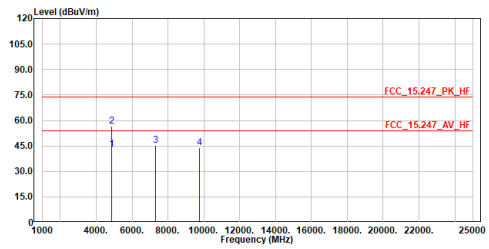

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |         |
| 1   | 4874.000  | 43.14  | 54.00  | -10.86 | 60.81 | -17.67 | Average |
| 2   | 4874.000  | 56.42  | 74.00  | -17.58 | 74.09 | -17.67 | Peak    |
| 3   | 7311.000  | 45.36  | 74.00  | -28.64 | 57.98 | -12.62 | Peak    |
| 4   | 9748.000  | 44.09  | 74.00  | -29.91 | 53.02 | -8.93  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :g\_TX\_2462MHz  
Test by :Cyril

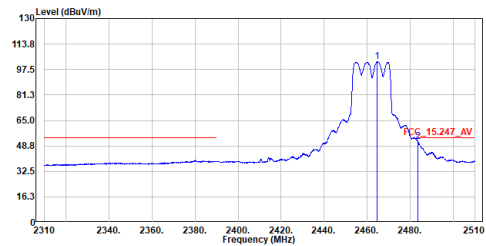

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2464.600  | 102.42 | -----  | ----- | 91.00 | 11.42  | Average |
| 2   | 2483.600  | 51.51  | 54.00  | -2.49 | 40.01 | 11.50  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :g\_TX\_2462MHz  
Test by :Cyril

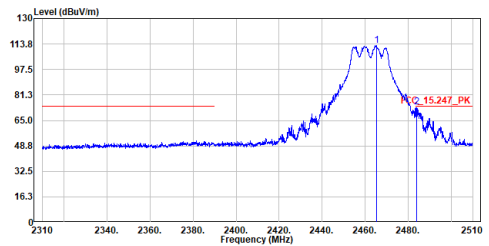

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2465.300  | 112.77 | -----  | ----- | 101.34 | 11.43  | Peak   |
| 2   | 2484.100  | 73.50  | 74.00  | -0.50 | 61.98  | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :g\_TX\_2462MHz  
Test by :Cyril

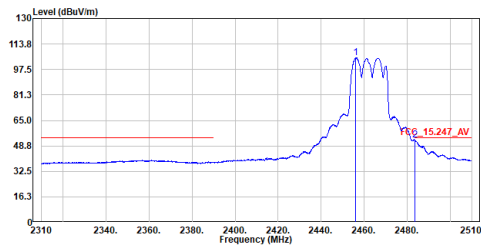

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2456.180  | 104.94 | -----  | ----- | 93.56 | 11.38  | Average |
| 2   | 2483.700  | 52.29  | 54.00  | -1.71 | 40.77 | 11.52  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :g\_TX\_2462MHz  
Test by :Cyril

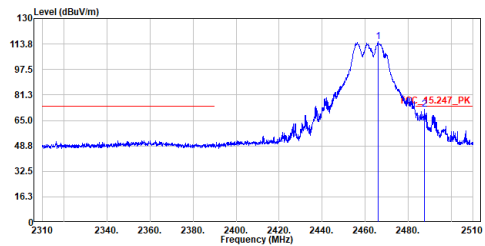

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2465.900  | 115.10 | -----  | ----- | 103.67 | 11.43  | Peak   |
| 2   | 2487.600  | 71.99  | 74.00  | -2.01 | 60.46  | 11.53  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :g\_TX\_2462MHz  
Test by :Cyril

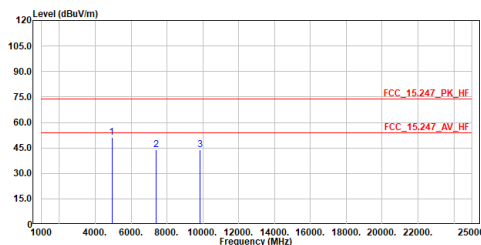

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4924.000  | 51.39  | 74.00  | -22.61 | 68.91 | -17.52 | Peak   |
| 2   | 7386.000  | 43.71  | 74.00  | -30.29 | 56.22 | -12.51 | Peak   |
| 3   | 9848.000  | 44.07  | 74.00  | -29.93 | 52.85 | -8.78  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :g\_TX\_2462MHz  
Test by :Cyril

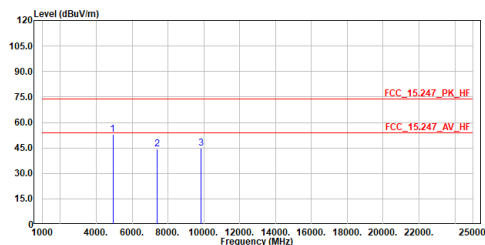

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4924.000  | 53.17  | 74.00  | -20.83 | 70.69 | -17.52 | Peak   |
| 2   | 7386.000  | 44.33  | 74.00  | -29.67 | 56.84 | -12.51 | Peak   |
| 3   | 9848.000  | 44.78  | 74.00  | -29.22 | 53.56 | -8.78  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

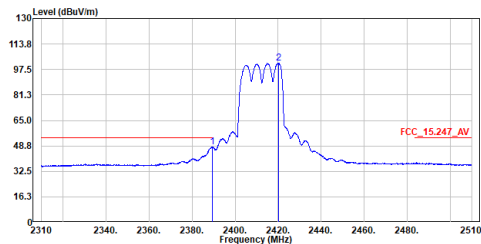

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2389.500  | 48.19  | 54.00  | -5.81 | 37.14 | 11.05  | Average |
| 2   | 2420.200  | 101.51 | -----  | ----- | 90.30 | 11.21  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

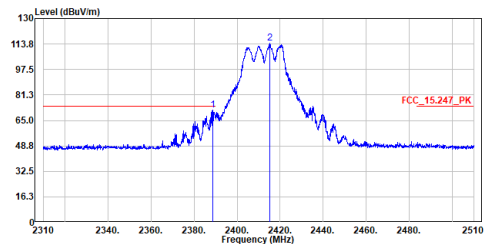

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2388.700  | 71.53  | 74.00  | -2.47 | 60.48  | 11.05  | Peak   |
| 2   | 2415.300  | 114.28 | -----  | ----- | 103.10 | 11.18  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

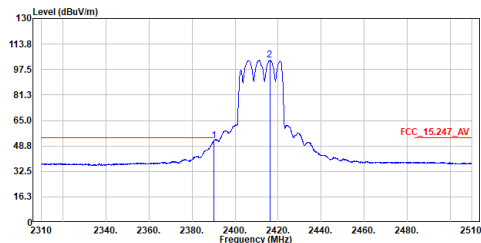

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2390.000  | 51.84  | 54.00  | -2.16 | 40.79 | 11.05  | Average |
| 2   | 2416.100  | 103.45 | -----  | ----- | 92.27 | 11.18  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

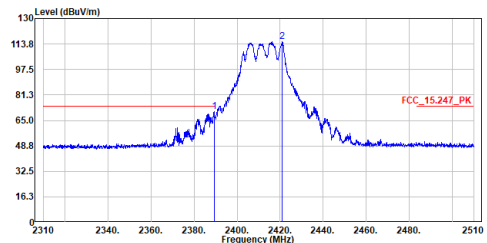

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2389.300  | 70.53  | 74.00  | -3.47 | 59.48  | 11.05  | Peak   |
| 2   | 2420.900  | 115.36 | -----  | ----- | 104.15 | 11.21  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

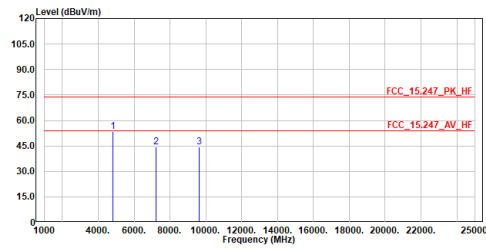

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4824.000  | 53.45  | 74.00  | -20.55 | 71.28 | -17.83 | Peak   |
| 2   | 7236.000  | 44.51  | 74.00  | -29.49 | 57.24 | -12.73 | Peak   |
| 3   | 9648.000  | 44.45  | 74.00  | -29.55 | 53.51 | -9.06  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2412MHz  
Test by :Cyril

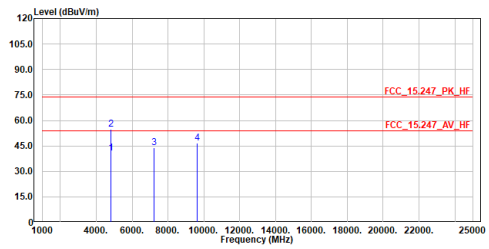

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |         |
| 1   | 4824.000  | 40.80  | 54.00  | -13.20 | 58.63 | -17.83 | Average |
| 2   | 4824.000  | 54.93  | 74.00  | -19.07 | 72.76 | -17.83 | Peak    |
| 3   | 7236.000  | 44.07  | 74.00  | -29.93 | 56.80 | -12.73 | Peak    |
| 4   | 9648.000  | 46.68  | 74.00  | -27.32 | 55.74 | -9.06  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2417MHz  
Test by :Cyril

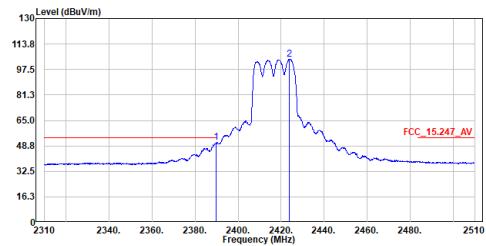

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2389.800  | 50.78  | 54.00  | -3.22 | 39.73 | 11.05  | Average |
| 2   | 2423.800  | 104.00 | -----  | ----- | 92.78 | 11.22  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2417MHz  
Test by :Cyril

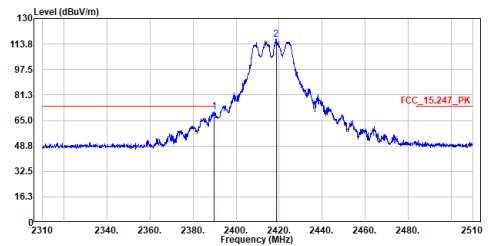


| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2389.700  | 70.52  | 74.00  | -3.48 | 59.47  | 11.05  | Peak   |
| 2   | 2418.600  | 116.88 | -----  | ----- | 105.68 | 11.20  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.




Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

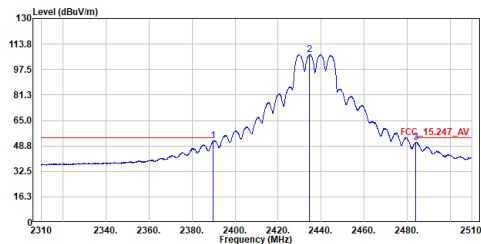

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2389.800  | 52.02  | 54.00  | -1.98 | 41.43 | 10.59  | Average |
| 2   | 2434.600  | 107.05 | -----  | ----- | 96.27 | 10.78  | Average |
| 3   | 2484.100  | 51.12  | 54.00  | -2.88 | 40.13 | 10.99  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

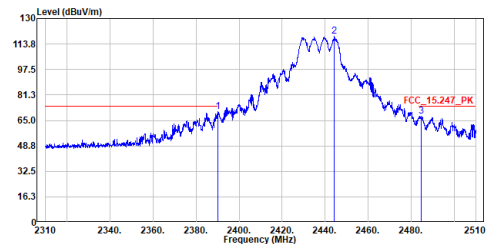

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2390.000  | 70.40  | 74.00  | -3.60 | 59.81  | 10.59  | Peak   |
| 2   | 2444.200  | 118.49 | -----  | ----- | 107.67 | 10.82  | Peak   |
| 3   | 2484.700  | 67.60  | 74.00  | -6.40 | 56.60  | 11.00  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

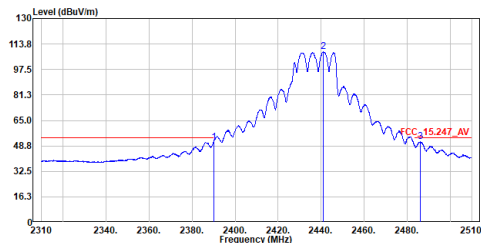

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2390.000  | 51.23  | 54.00  | -2.77 | 40.64 | 10.59  | Average |
| 2   | 2441.000  | 108.93 | -----  | ----- | 98.12 | 10.81  | Average |
| 3   | 2486.100  | 51.32  | 54.00  | -2.68 | 40.32 | 11.00  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

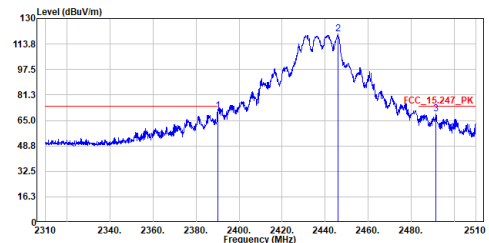

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2390.000  | 70.89  | 74.00  | -3.11 | 60.30  | 10.59  | Peak   |
| 2   | 2445.900  | 120.17 | -----  | ----- | 109.35 | 10.82  | Peak   |
| 3   | 2491.500  | 69.08  | 74.00  | -4.92 | 58.06  | 11.02  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

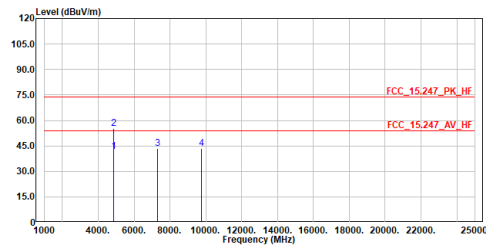

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |         |
| 1   | 4874.000  | 41.73  | 54.00  | -12.27 | 59.40 | -17.67 | Average |
| 2   | 4874.000  | 55.36  | 74.00  | -18.64 | 73.03 | -17.67 | Peak    |
| 3   | 7311.000  | 43.56  | 74.00  | -30.44 | 56.18 | -12.62 | Peak    |
| 4   | 9748.000  | 43.64  | 74.00  | -30.36 | 52.57 | -8.93  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2437MHz  
Test by :Cyril

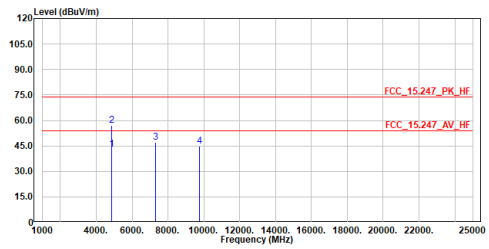

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |         |
| 1   | 4874.000  | 42.93  | 54.00  | -11.07 | 60.60 | -17.67 | Average |
| 2   | 4874.000  | 57.23  | 74.00  | -16.77 | 74.90 | -17.67 | Peak    |
| 3   | 7311.000  | 46.98  | 74.00  | -27.02 | 59.60 | -12.62 | Peak    |
| 4   | 9748.000  | 44.96  | 74.00  | -29.04 | 53.89 | -8.93  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

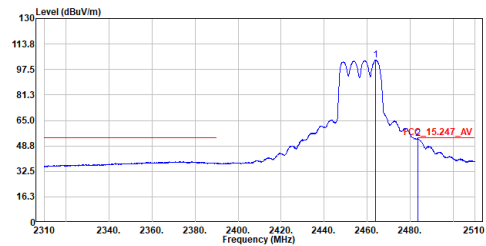

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2463.800  | 103.41 | -----  | ----- | 92.00 | 11.41  | Average |
| 2   | 2483.700  | 53.24  | 54.00  | -0.76 | 41.72 | 11.52  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

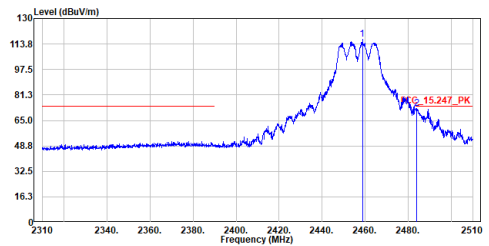

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2458.700  | 116.57 | -----  | ----- | 105.18 | 11.39  | Peak   |
| 2   | 2483.800  | 72.81  | 74.00  | -1.19 | 61.29  | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

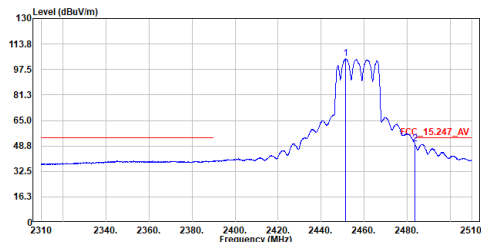

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2451.500  | 104.43 | -----  | ----- | 93.07 | 11.36  | Average |
| 2   | 2483.600  | 50.04  | 54.00  | -3.96 | 38.54 | 11.50  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

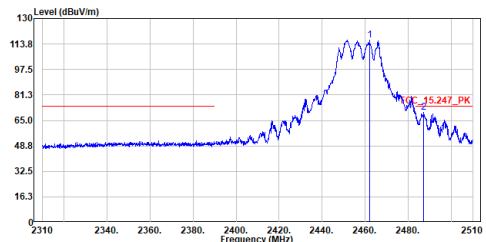

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2462.100  | 116.38 | -----  | ----- | 104.97 | 11.41  | Peak   |
| 2   | 2487.100  | 70.14  | 74.00  | -3.86 | 58.61  | 11.53  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

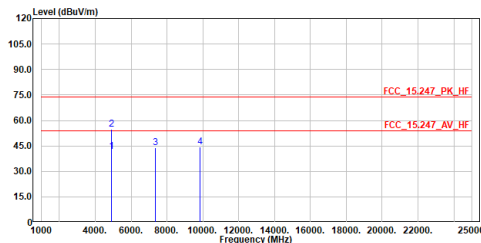

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |         |
| 1   | 4914.000  | 41.57  | 54.00  | -12.43 | 59.13 | -17.56 | Average |
| 2   | 4914.000  | 54.84  | 74.00  | -19.16 | 72.40 | -17.56 | Peak    |
| 3   | 7371.000  | 43.95  | 74.00  | -30.05 | 56.48 | -12.53 | Peak    |
| 4   | 9828.000  | 44.18  | 74.00  | -29.82 | 53.00 | -8.82  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2457MHz  
Test by :Cyril

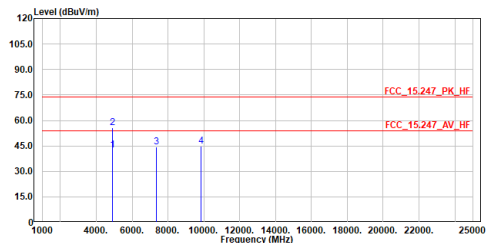

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |         |
| 1   | 4914.000  | 42.56  | 54.00  | -11.44 | 60.12 | -17.56 | Average |
| 2   | 4914.000  | 55.82  | 74.00  | -18.18 | 73.38 | -17.56 | Peak    |
| 3   | 7371.000  | 44.18  | 74.00  | -29.82 | 56.71 | -12.53 | Peak    |
| 4   | 9828.000  | 44.68  | 74.00  | -29.32 | 53.50 | -8.82  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

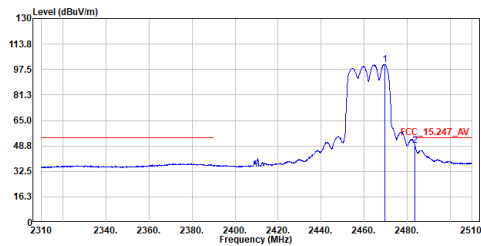

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2469.500  | 100.75 | -----  | ----- | 89.31 | 11.44  | Average |
| 2   | 2483.600  | 49.03  | 54.00  | -4.97 | 37.53 | 11.50  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

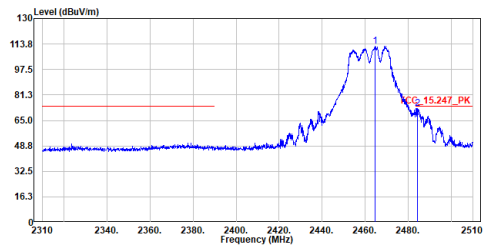

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2464.500  | 112.56 | -----  | ----- | 101.14 | 11.42  | Peak   |
| 2   | 2484.300  | 72.66  | 74.00  | -1.34 | 61.14  | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

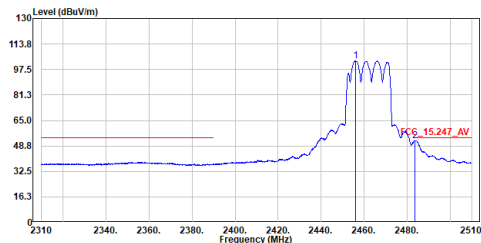

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2456.100  | 103.05 | -----  | ----- | 91.67 | 11.38  | Average |
| 2   | 2483.600  | 52.15  | 54.00  | -1.85 | 40.65 | 11.50  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

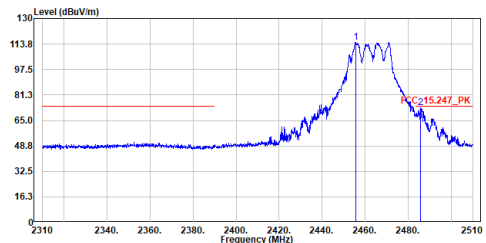

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2455.700  | 114.95 | -----  | ----- | 103.57 | 11.38  | Peak   |
| 2   | 2485.800  | 73.03  | 74.00  | -0.97 | 61.51  | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

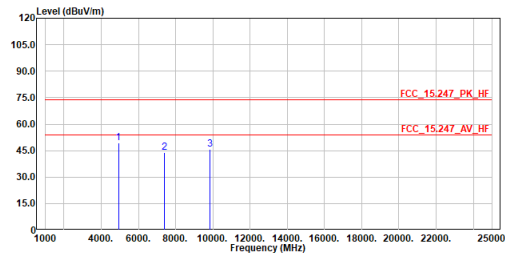


| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 4924.000         | 49.39           | 74.00                   | -24.61              | 66.91                 | -17.52       | Peak   |
| 2   | 7386.000         | 44.07           | 74.00                   | -29.93              | 56.58                 | -12.51       | Peak   |
| 3   | 9848.000         | 45.58           | 74.00                   | -28.42              | 54.36                 | -8.78        | Peak   |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax20\_TX\_2462MHz  
Test by :Cyril

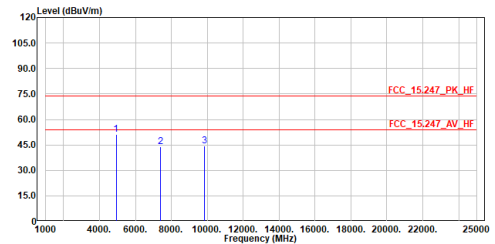


| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 4924.000         | 51.23           | 74.00                   | -22.77              | 68.75                 | -17.52       | Peak   |
| 2   | 7386.000         | 43.78           | 74.00                   | -30.22              | 56.29                 | -12.51       | Peak   |
| 3   | 9848.000         | 44.53           | 74.00                   | -29.47              | 53.31                 | -8.78        | Peak   |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

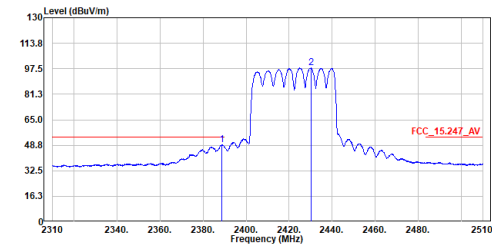


| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark  |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1   | 2388.700         | 48.90           | 54.00                   | -5.10               | 37.85                 | 11.05        | Average |
| 2   | 2430.200         | 97.91           | -----                   | -----               | 86.66                 | 11.25        | Average |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

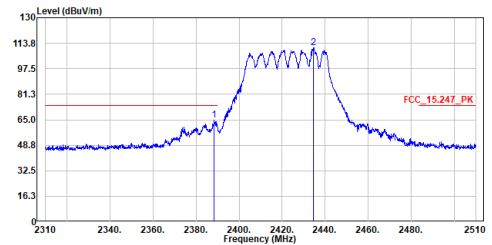


| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 2388.400         | 64.71           | 74.00                   | -9.29               | 53.66                 | 11.05        | Peak   |
| 2   | 2434.600         | 111.03          | -----                   | -----               | 99.76                 | 11.27        | Peak   |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

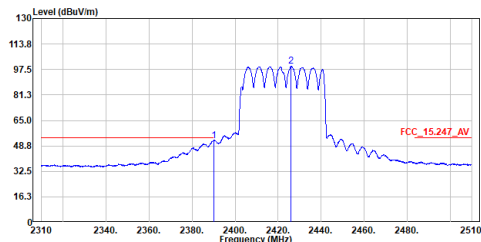

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2390.000  | 52.23  | 54.00  | -1.77 | 41.18 | 11.05  | Average |
| 2   | 2426.100  | 99.45  | -----  | ----- | 88.22 | 11.23  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

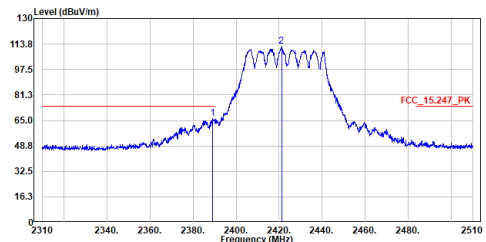

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2389.100  | 66.30  | 74.00  | -7.70 | 55.25  | 11.05  | Peak   |
| 2   | 2421.100  | 112.42 | -----  | ----- | 101.21 | 11.21  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

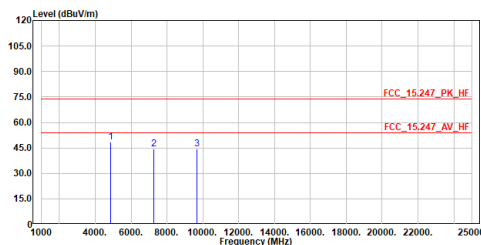

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4844.000  | 48.59  | 74.00  | -25.41 | 66.36 | -17.77 | Peak   |
| 2   | 7266.000  | 44.28  | 74.00  | -29.72 | 56.97 | -12.69 | Peak   |
| 3   | 9688.000  | 44.55  | 74.00  | -29.45 | 53.56 | -9.01  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2422MHz  
Test by :Cyril

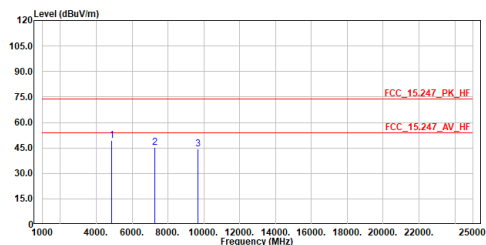

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4844.000  | 49.58  | 74.00  | -24.42 | 67.35 | -17.77 | Peak   |
| 2   | 7266.000  | 45.13  | 74.00  | -28.87 | 57.82 | -12.69 | Peak   |
| 3   | 9688.000  | 44.31  | 74.00  | -29.69 | 53.32 | -9.01  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

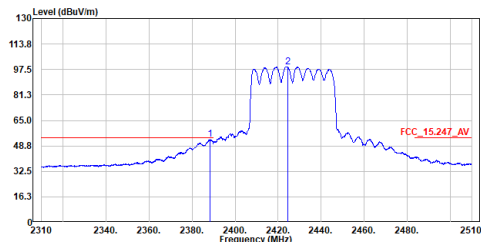

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2388.300  | 52.84  | 54.00  | -1.16 | 41.79 | 11.05  | Average |
| 2   | 2424.400  | 99.34  | -----  | ----- | 88.12 | 11.22  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

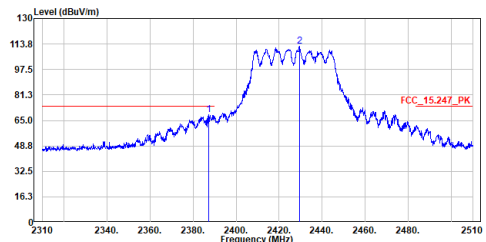

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2387.400  | 68.55  | 74.00  | -5.45 | 57.50  | 11.05  | Peak   |
| 2   | 2429.400  | 112.13 | -----  | ----- | 100.88 | 11.25  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

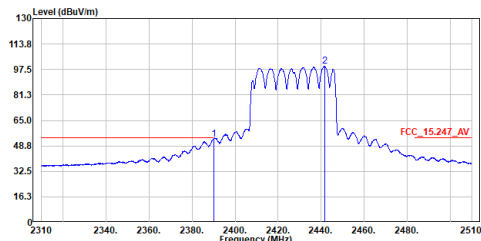

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2390.000  | 53.19  | 54.00  | -0.81 | 42.14 | 11.05  | Average |
| 2   | 2441.600  | 99.60  | -----  | ----- | 88.29 | 11.31  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

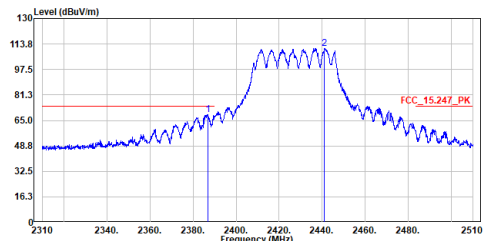

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |        |
| 1   | 2386.900  | 68.85  | 74.00  | -5.15 | 57.80 | 11.05  | Peak   |
| 2   | 2440.900  | 111.08 | -----  | ----- | 99.78 | 11.30  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

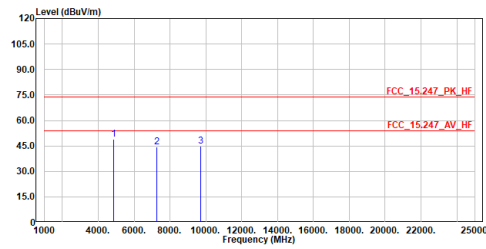

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4854.000  | 49.11  | 74.00  | -24.89 | 66.85 | -17.74 | Peak   |
| 2   | 7281.000  | 44.41  | 74.00  | -29.59 | 57.08 | -12.67 | Peak   |
| 3   | 9708.000  | 44.73  | 74.00  | -29.27 | 53.70 | -8.97  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2427MHz  
Test by :Cyril

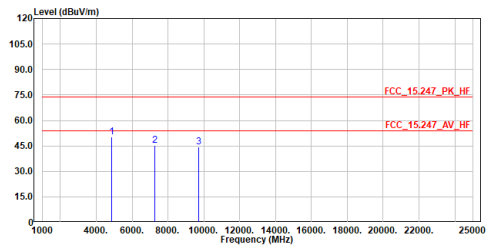

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4854.000  | 50.14  | 74.00  | -23.86 | 67.88 | -17.74 | Peak   |
| 2   | 7281.000  | 45.20  | 74.00  | -28.80 | 57.87 | -12.67 | Peak   |
| 3   | 9708.000  | 44.49  | 74.00  | -29.51 | 53.46 | -8.97  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

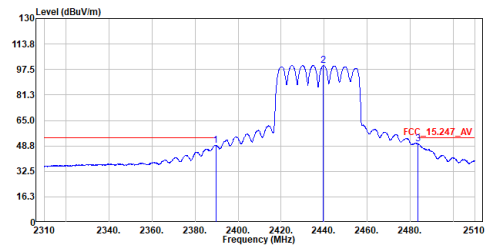

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2389.600  | 49.23  | 54.00  | -4.77 | 38.64 | 10.59  | Average |
| 2   | 2439.700  | 100.22 | -----  | ----- | 89.43 | 10.79  | Average |
| 3   | 2483.700  | 50.07  | 54.00  | -3.93 | 39.08 | 10.99  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

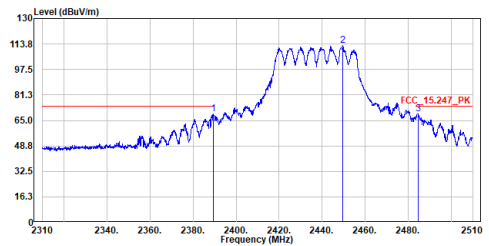

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2389.400  | 68.96  | 74.00  | -5.04 | 58.37  | 10.59  | Peak   |
| 2   | 2449.500  | 112.62 | -----  | ----- | 101.78 | 10.84  | Peak   |
| 3   | 2484.600  | 69.30  | 74.00  | -4.70 | 58.30  | 11.00  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

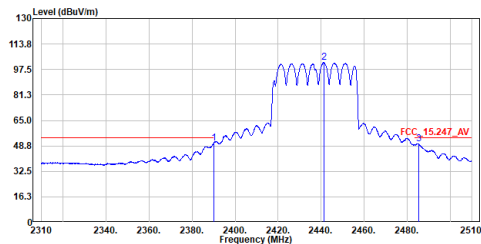

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2390.000  | 50.49  | 54.00  | -3.51 | 39.90 | 10.59  | Average |
| 2   | 2441.200  | 101.89 | -----  | ----- | 91.08 | 10.81  | Average |
| 3   | 2485.200  | 50.14  | 54.00  | -3.86 | 39.14 | 11.00  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

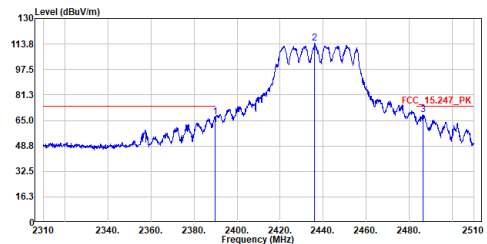

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2389.800  | 67.27  | 74.00  | -6.73 | 56.68  | 10.59  | Peak   |
| 2   | 2436.100  | 114.23 | -----  | ----- | 103.45 | 10.78  | Peak   |
| 3   | 2486.600  | 68.45  | 74.00  | -5.55 | 57.44  | 11.01  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

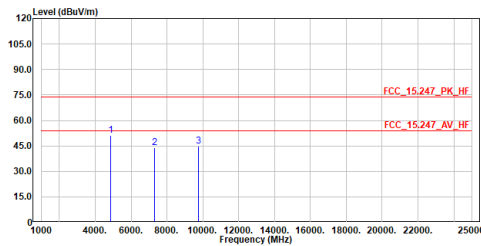

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4874.000  | 51.18  | 74.00  | -22.82 | 68.85 | -17.67 | Peak   |
| 2   | 7311.000  | 43.87  | 74.00  | -30.13 | 56.49 | -12.62 | Peak   |
| 3   | 9748.000  | 44.63  | 74.00  | -29.37 | 53.56 | -8.93  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2437MHz  
Test by :Cyril

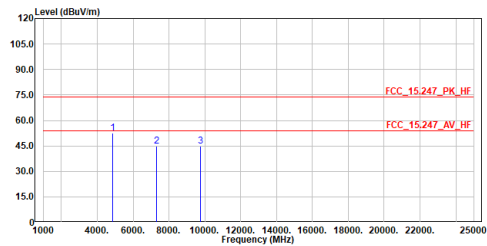

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4874.000  | 52.55  | 74.00  | -21.45 | 70.22 | -17.67 | Peak   |
| 2   | 7311.000  | 44.61  | 74.00  | -29.39 | 57.23 | -12.62 | Peak   |
| 3   | 9748.000  | 44.79  | 74.00  | -29.21 | 53.72 | -8.93  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

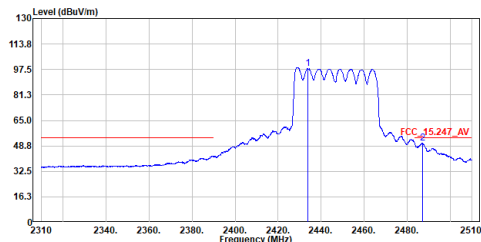

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2433.800  | 98.01  | -----  | ----- | 86.74 | 11.27  | Average |
| 2   | 2487.000  | 50.43  | 54.00  | -3.57 | 38.90 | 11.53  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

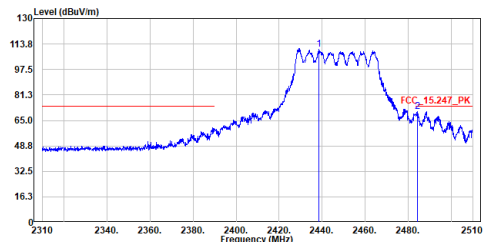

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |        |
| 1   | 2438.500  | 110.16 | -----  | ----- | 98.87 | 11.29  | Peak   |
| 2   | 2484.200  | 70.79  | 74.00  | -3.21 | 59.27 | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

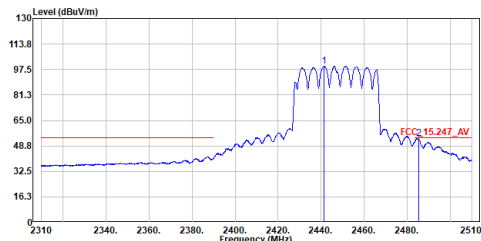

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB     |         |
| 1   | 2441.500  | 99.73  | -----  | ----- | 88.43 | 11.30  | Average |
| 2   | 2485.400  | 53.45  | 54.00  | -0.55 | 41.93 | 11.52  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

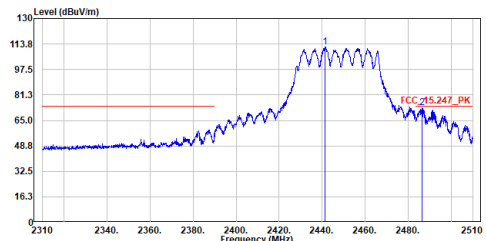

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB    | dBuV   | dB     |        |
| 1   | 2441.500  | 112.06 | -----  | ----- | 100.76 | 11.30  | Peak   |
| 2   | 2486.400  | 73.13  | 74.00  | -0.87 | 61.60  | 11.53  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

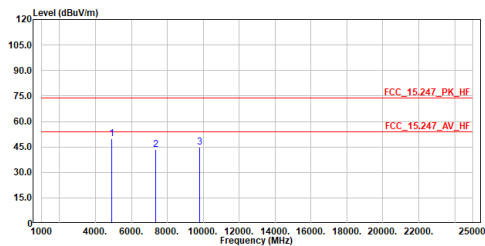

| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 4894.000         | 49.90           | 74.00                   | -24.10              | 67.52                 | -17.62       | Peak   |
| 2   | 7341.000         | 43.66           | 74.00                   | -30.34              | 56.24                 | -12.58       | Peak   |
| 3   | 9788.000         | 44.94           | 74.00                   | -29.06              | 53.81                 | -8.87        | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2447MHz  
Test by :Cyril

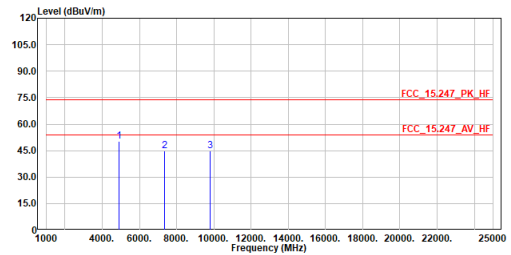

| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 4894.000         | 50.42           | 74.00                   | -23.58              | 68.04                 | -17.62       | Peak   |
| 2   | 7341.000         | 44.82           | 74.00                   | -29.18              | 57.40                 | -12.58       | Peak   |
| 3   | 9788.000         | 44.92           | 74.00                   | -29.08              | 53.79                 | -8.87        | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

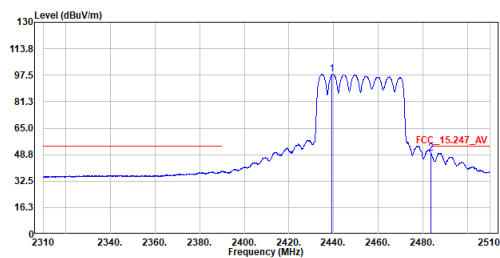

| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark  |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|---------|
| 1   | 2439.300         | 98.17           | -----                   | -----               | 86.88                 | 11.29        | Average |
| 2   | 2483.600         | 49.62           | 54.00                   | -4.38               | 38.12                 | 11.50        | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

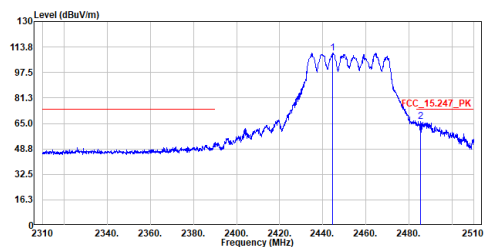

| No. | Frequency<br>MHz | Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Remark |
|-----|------------------|-----------------|-------------------------|---------------------|-----------------------|--------------|--------|
| 1   | 2444.600         | 109.87          | -----                   | -----               | 98.55                 | 11.32        | Peak   |
| 2   | 2485.400         | 66.15           | 74.00                   | -7.85               | 54.63                 | 11.52        | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

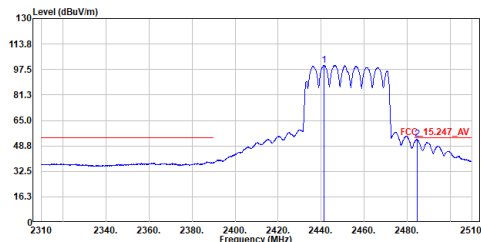

| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB     |         |
| 1   | 2441.400  | 100.17 | -----  | ----- | 88.87 | 11.30  | Average |
| 2   | 2484.600  | 53.07  | 54.00  | -0.93 | 41.55 | 11.52  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

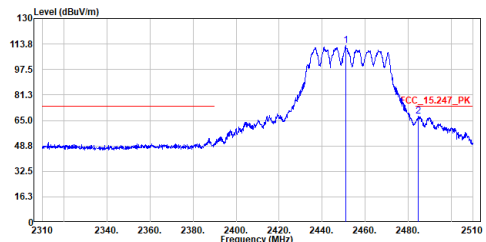

| No. | Frequency | Level  | Limit  | Over  | Read   | Factor | Remark |
|-----|-----------|--------|--------|-------|--------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level  | dB     |        |
| 1   | 2451.000  | 112.94 | -----  | ----- | 101.59 | 11.35  | Peak   |
| 2   | 2484.700  | 67.68  | 74.00  | -6.32 | 56.16  | 11.52  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.


Site :HC-CB04  
Condition :3m ,Horizontal  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

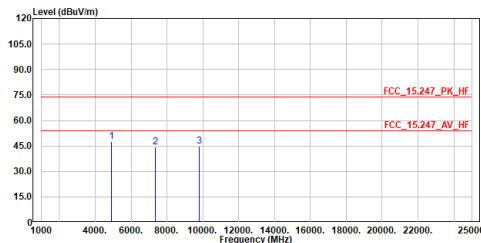

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4904.000  | 47.35  | 74.00  | -26.65 | 64.93 | -17.58 | Peak   |
| 2   | 7356.000  | 44.37  | 74.00  | -29.63 | 56.92 | -12.55 | Peak   |
| 3   | 9808.000  | 44.74  | 74.00  | -29.26 | 53.57 | -8.83  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m ,Vertical  
Mode :ax40\_TX\_2452MHz  
Test by :Cyril

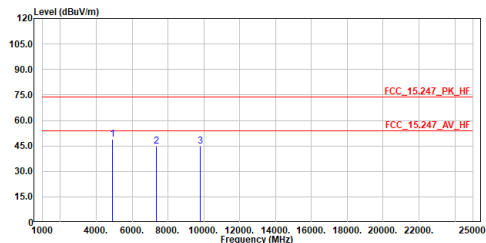

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB     |        |
| 1   | 4904.000  | 48.93  | 74.00  | -25.07 | 66.51 | -17.58 | Peak   |
| 2   | 7356.000  | 44.69  | 74.00  | -29.31 | 57.24 | -12.55 | Peak   |
| 3   | 9808.000  | 44.63  | 74.00  | -29.37 | 53.46 | -8.83  | Peak   |


Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.

## Appendix G. Test Result of Radiated Emissions Co-location

### WiFi 2.4 GHz + WiFi 5 GHz

#### 30 MHz ~ 1 GHz:


Site :HC-CB04  
Condition :3m Horizontal  
Mode :LF\_Co-location\_WIFI\_2.4G+WiFi\_5G  
Test by :Cyril

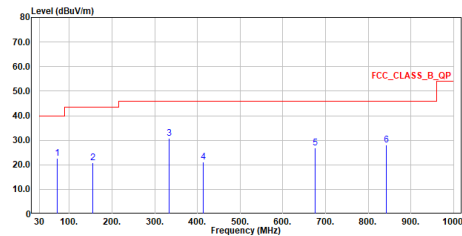

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 70.740    | 22.50  | 40.00  | -17.50 | 27.51 | -5.01  | QP     |
| 2   | 155.421   | 20.80  | 43.50  | -22.70 | 24.15 | -3.35  | QP     |
| 3   | 333.998   | 30.66  | 46.00  | -15.34 | 32.65 | -1.99  | QP     |
| 4   | 413.829   | 21.19  | 46.00  | -24.81 | 21.36 | -0.17  | QP     |
| 5   | 675.826   | 26.95  | 46.00  | -19.05 | 21.74 | 5.21   | QP     |
| 6   | 842.278   | 27.95  | 46.00  | -18.05 | 20.37 | 7.58   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.  
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m Vertical  
Mode :LF\_Co-location\_WIFI\_2.4G+WiFi\_5G  
Test by :Cyril

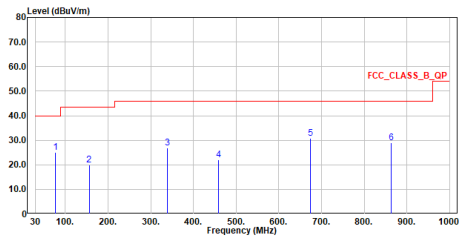


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 76.463    | 25.02  | 40.00  | -14.98 | 31.46 | -6.44  | QP     |
| 2   | 155.615   | 20.05  | 43.50  | -23.45 | 23.38 | -3.33  | QP     |
| 3   | 338.848   | 26.92  | 46.00  | -19.08 | 28.86 | -1.94  | QP     |
| 4   | 459.322   | 21.99  | 46.00  | -24.01 | 20.68 | 1.31   | QP     |
| 5   | 673.110   | 30.69  | 46.00  | -15.31 | 25.47 | 5.22   | QP     |
| 6   | 862.357   | 28.94  | 46.00  | -17.06 | 21.16 | 7.78   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.  
5. The other emission levels were very low against the limit.

#### Above 1 GHz:


Site :HC-CB04  
Condition :3m Horizontal  
Mode :Co-location\_WIFI\_2.4G+WiFi\_5G  
Test by :Cyril

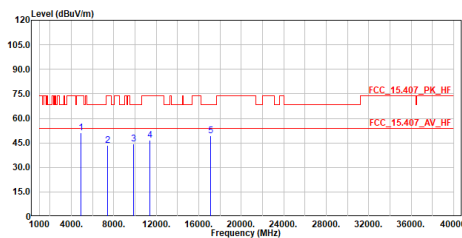

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4924.000  | 51.24  | 74.00  | -22.76 | 68.76 | -17.52 | Peak   |
| 2   | 7386.000  | 43.29  | 74.00  | -30.71 | 55.80 | -12.51 | Peak   |
| 3   | 9848.000  | 44.17  | 68.20  | -24.03 | 52.95 | -8.78  | Peak   |
| 4   | 11400.000 | 46.72  | 74.00  | -27.28 | 53.09 | -6.37  | Peak   |
| 5   | 17100.000 | 49.16  | 68.20  | -19.04 | 52.67 | -3.51  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.

Site :HC-CB04  
Condition :3m Vertical  
Mode :Co-location\_WIFI\_2.4G+WiFi\_5G  
Test by :Cyril

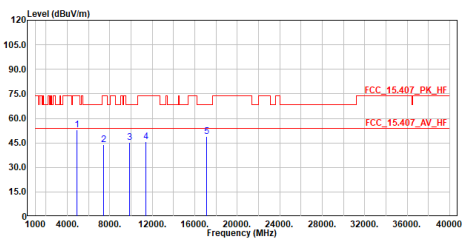

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB     |        |
| 1   | 4924.000  | 53.08  | 74.00  | -20.92 | 70.60 | -17.52 | Peak   |
| 2   | 7386.000  | 44.11  | 74.00  | -29.89 | 56.62 | -12.51 | Peak   |
| 3   | 9848.000  | 45.14  | 68.20  | -23.06 | 53.92 | -8.78  | Peak   |
| 4   | 11400.000 | 45.96  | 74.00  | -28.04 | 52.33 | -6.37  | Peak   |
| 5   | 17100.000 | 48.96  | 68.20  | -19.24 | 52.47 | -3.51  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
5. The other emission levels were very low against the limit.