

Onboard PCB antenna

Features

- 2 Onboard PCB antenna with small, low-profile and light-weight type.
- 2 Wide bandwidth


Applications

Bluetooth/Wireless LAN/Home RF
ISM band 2.4GHz applications

Specifications


Part Number	Frequency Range (MHz)	Peak Gain (XZ-total)	Average Gain (XZ-total)	VSWR	Impedance
PCB ANT	2400~2500	0dBi typ.	- 0.5dBi typ.	2.0 max.	50 Ω

2 Dimensions

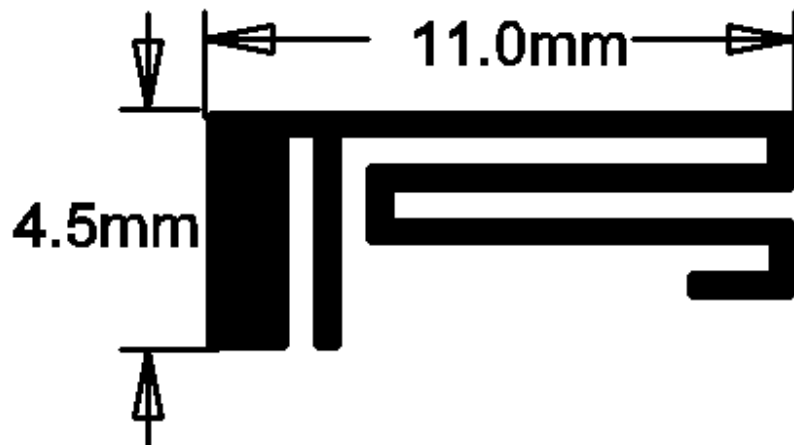

Mark	L	W
Dimensions	11 ± 0.2	4.5 ± 0.2

2 Return Loss-without matching circuits

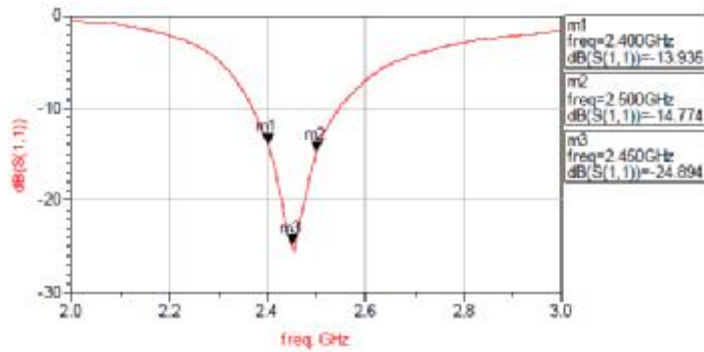

2 Radiation Patterns

