



FCC RF Test Report

FCC ID : UZ7ET4010A
EQUIPMENT : Enterprise Tablet
BRAND NAME : ZEBRA
MODEL NAME : ET4010A
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Dual Client (6CD)
(Standard Power UNII 5/7)
TEST DATE(S) : Jun. 28, 2025 ~ Sep. 14, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1	General Description	5
1.1	Product Feature of Equipment Under Test.....	5
1.2	Product Specification of Equipment Under Test.....	6
1.3	Modification of EUT	9
1.4	Testing Location	9
1.5	Test Software.....	10
1.6	Applicable Standards.....	10
2	Test Configuration of Equipment Under Test	11
2.1	Carrier Frequency and Channel	11
2.2	Test Mode.....	13
2.3	Connection Diagram of Test System.....	14
2.4	Support Unit used in test configuration and system	15
2.5	EUT Operation Test Setup	15
2.6	Measurement Results Explanation Example.....	15
3	Test Result	16
3.1	26dB & 99% Occupied Bandwidth Measurement	16
3.2	Maximum conducted Output Power and Fundamental Maximum EIRP Measurement.....	17
3.3	Fundamental Power Spectral Density Measurement	22
3.4	In-Band Emissions (Channel Mask)	24
3.5	Unwanted Emissions Measurement.....	26
3.6	AC Conducted Emission Measurement.....	30
3.7	Antenna Requirements.....	32
4	List of Measuring Equipment.....	35
5	Measurement Uncertainty	36
Appendix A. Conducted Test Results		
Appendix B. AC Conducted Emission Test Result		
Appendix C. Radiated Spurious Emission		
Appendix D. Duty Cycle Plots		
Appendix E. Setup Photographs		



History of this test report

Report No.	Version	Description	Issued Date
FR551202G	01	Initial issue of report	Sep. 10, 2025
FR551202G	02	Updated test data for 26dB Bandwidth and In-Band Emissions(Channel Mask) This report is an updated version, replacing the report issued on Sep. 10, 2025	Sep. 18, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(7)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(7)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(7)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	1
3.5	15.407(b)	Unwanted Emissions	Pass	Under limit 1.51 dB at 5923.410 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 10.64 dB at 0.153 MHz
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Remark 1: For CBP, receiver circuit is the same when connect to indoor AP and standard AP, the Contention Based Protocol have been demonstrated compliance in the Indoor low power test report which is issued separately (Report No. FR551202F).

Conformity Assessment Condition:	
1.	The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2.	The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:	
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.	



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Tablet
Brand Name	ZEBRA
Model Name	ET4010A
FCC ID	UZ7ET4010A
SN Code	Conducted: 251305247E0010 Conduction: 251505247E0046 Radiation: S251505247E0063 for Sample 1 S251505247E0029 for Sample 2
HW Version	EV1
SW Version	qssi_64-userdebug 15 15-07-16.00-VG-U00-PRD-ERS-04 210 release-keys
MFD	16JUL25
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT: Sample 1 without Scanner and Sample 2 with Scanner. According to the difference, we chose sample 1 to perform full test.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000527

Supported Unit used in test configuration and system				
AC Adapter 1 (TYPE C Wall Charger 1)	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT 1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-0TH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT 1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-0TH
Earphone 5 (USB-C Wired Earbuds)	Brand Name	Avantree	Part Number	C171
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB Cable 3 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-TN28-USBC2C-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-7: 6525 MHz ~ 6875 MHz
Maximum EIRP	<MIMO Ant.6+7> <U-NII-5> 802.11a : 22.64 dBm / 0.1837 W 802.11ax HE20 : 22.17 dBm / 0.1648 W 802.11ax HE40 : 22.18 dBm / 0.1652 W 802.11ax HE80 : 21.86 dBm / 0.1535 W 802.11ax HE160 : 20.52 dBm / 0.1127 W 802.11be EHT20 : 22.21 dBm / 0.1663 W 802.11be EHT40 : 22.22 dBm / 0.1667 W 802.11be EHT80 : 21.89 dBm / 0.1545 W 802.11be EHT160 : 20.56 dBm / 0.1138 W 802.11be EHT320 : 21.92 dBm / 0.1556 W <U-NII-7> 802.11a : 22.36 dBm / 0.1722 W 802.11ax HE20 : 22.42 dBm / 0.1746 W 802.11ax HE40 : 22.24 dBm / 0.1675 W 802.11ax HE80 : 21.67 dBm / 0.1469 W 802.11ax HE160 : 20.46 dBm / 0.1112 W 802.11be EHT20 : 22.26 dBm / 0.1683 W 802.11be EHT40 : 22.28 dBm / 0.1690 W 802.11be EHT80 : 21.70 dBm / 0.1479 W 802.11be EHT160 : 20.28 dBm / 0.1067 W
99% Occupied Bandwidth	<U-NII-5> 802.11a : 17.477 MHz 802.11be EHT20 : 19.229 MHz 802.11be EHT40 : 38.306 MHz 802.11be EHT80 : 77.906 MHz 802.11be EHT160 : 159.315 MHz 802.11be EHT320 : 318.020 MHz <U-NII-7> 802.11a : 17.496 MHz 802.11be EHT20 : 19.248 MHz 802.11be EHT40 : 38.344 MHz 802.11be EHT80 : 77.906 MHz 802.11be EHT160 : 159.010 MHz
Antenna Type / Gain	<5945 MHz ~ 6425 MHz > <Ant. 6>: IFA Antenna with gain 0.2 dBi <Ant. 7>: IFA Antenna with gain -0.3 dBi <6525 MHz ~ 6875 MHz > <Ant. 6>: IFA Antenna with gain 0 dBi <Ant. 7>: IFA Antenna with gain -0.4 dBi
Type of Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Antenna Function Description		Ant. 6	Ant. 7
	802.11 a/ax/be SISO	V	V
	802.11 a/ax/be CDD	V	
	802.11 ax/be SDM/TXBF	V	

Remark:

1. WIFI MIMO support CDD mode for 802.11a, and support CDD & SDM & TXBF mode for 802.11ax/be.
2. For WLAN SISO & MIMO(CDD) mode of 802.11a, the whole testing has assessed CDD mode by referring to the higher normal conducted power.
3. For WLAN SISO & MIMO(CDD) & MIMO(SDM) & MIMO(TXBF) mode of 802.11ax/be, CDD mode conducted power is set to 3dB higher than SDM/TXBF mode, since the maximum array gain for a two antennas system is 3dB, the whole testing has assessed CDD mode by referring to the higher output power.
4. For 802.11ax/be 20/40/80/160MHz mode, the whole testing has assessed only 802.11be EHT20/ EHT40/ EHT80/ EHT160MHz by referring to the higher output power.
5. 802.11ax/be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power/PSD/Channel Mask in appendix A, the full RU power/PSD > partial RU, therefore the full RU perform full test, and partial RU verify bandedge/spurious.
6. The device does not support UNII-5 CH 2.
7. The device supports 1S2T (CDD) and 2S2T (SDM) mode; 1S2T: Nss=1, MIMO 2Tx; 2S2T: Nss=2, MIMO 2Tx.
8. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/RSE.

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4



<160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8


<Large size RU 3*996 tone> & <320M BW Puncturing 80MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4

<Large size RU 3*996+484 tone> & <320M BW Puncturing 40MHz>:

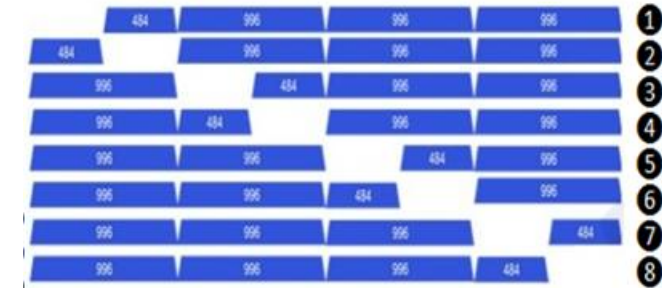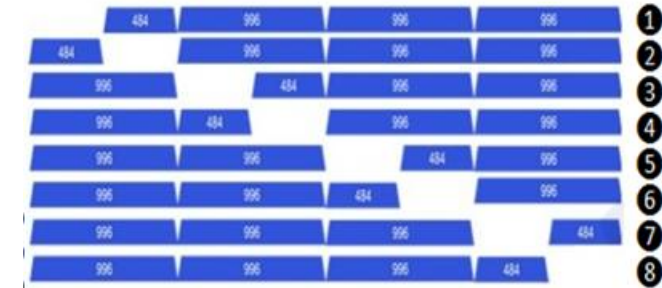Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8

<Large size RU 2*996+484 tone> & <320M BW Puncturing 80+40MHz>:

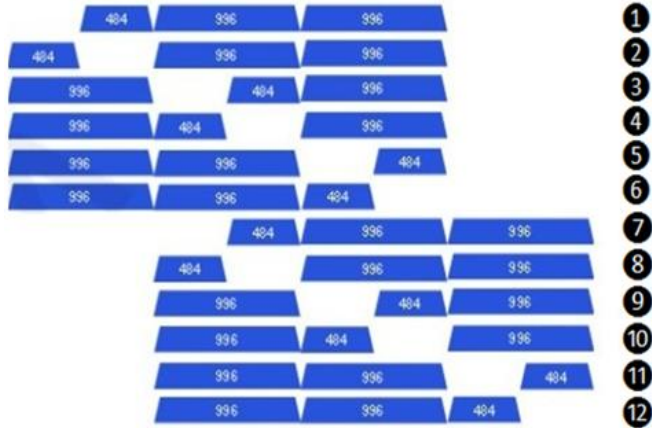Bandwidth	Tones	Index	For test modes configure
320MHz		1	1
		2	2
		3	3
		4	4
		5	5
		6	6
		7	7
		8	8
		9	9
		10	10
		11	11
		12	12

Only the worse cases are shown in this report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5>

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	31				63			
	Freq. (MHz)	6105				6265			



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

<U-NII- 7>

BW 20M	Channel	-	-	-	-	-	117	121	125
	Freq. (MHz)	-	-	-	-	-	6535	6555	6575
BW 40M	Channel	-		-		-		123	
	Freq. (MHz)	-		-		-		6565	

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G Link + Bluetooth Link + USB Cable 1 (CBL-EC5X-USBC3A-01) + AC Adapter 1 (PWR-WUA5V45W1US) + Battery (BT-000527)
Remark: For Radiated Test Cases, the tests were performed with Adapter1 and USB Cable1.	

Ch. #		5925-6425 MHz	6525-6875 MHz	5925-6425 MHz	6525-6875 MHz
		UNII-5	UNII-7	UNII-5	UNII-7
		20M BW	20M BW	40M BW	40M BW
L	Low	001	117	003	123
M	Middle	045	149	043	147
H	High	093	181	091	179


Ch. #		5925-6425 MHz	6525-6875 MHz	5925-6425 MHz	6525-6875 MHz
		UNII-5	UNII-7	UNII-5	UNII-7
		80M BW	80M BW	160M BW	160M BW
L	Low	007	135	015	143
M	Middle	039	151	047	-
H	High	087	167	079	-

Ch. #		UNII-5
		320M BW
L	Low	-
M	Middle	031
H	High	063


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

AC Conducted Emission:

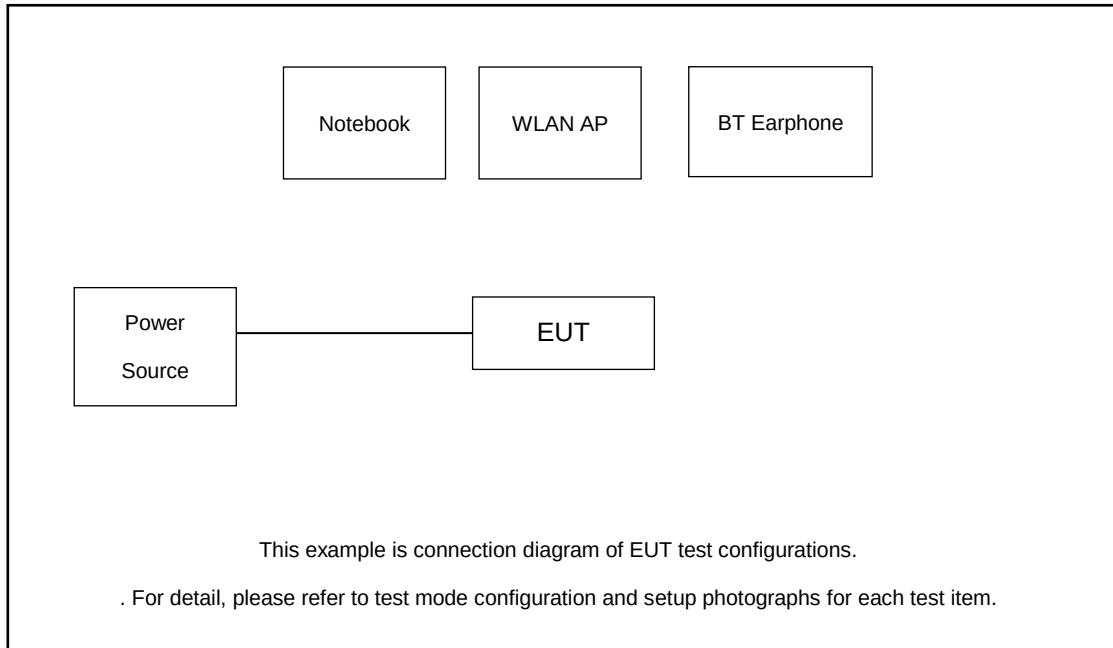

Radiated Emission:

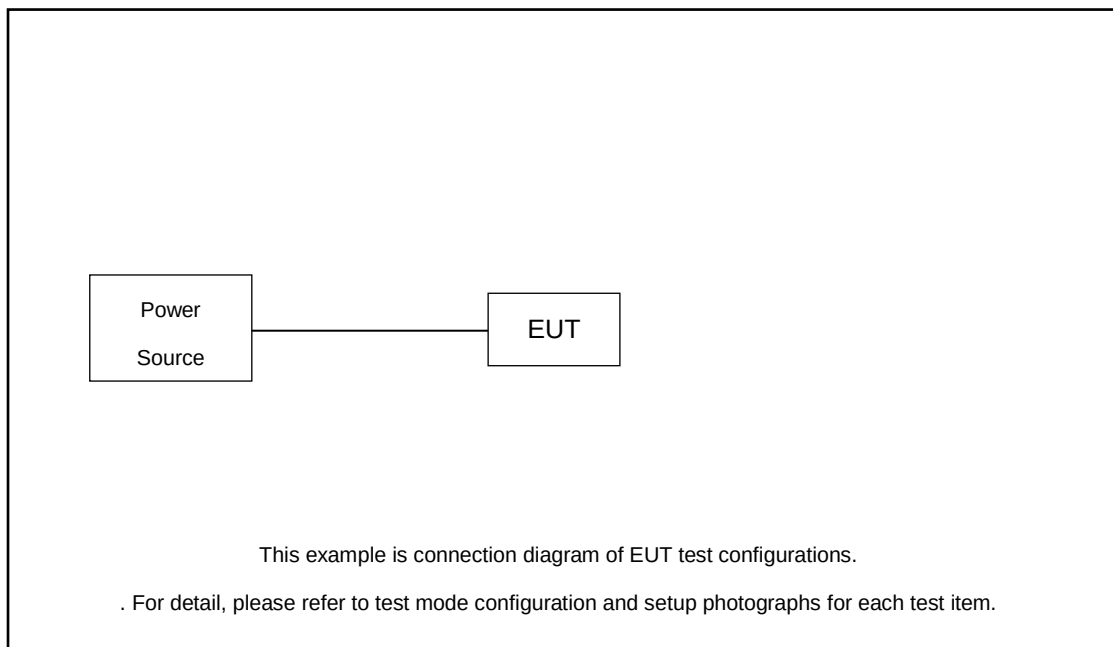

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.88 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.88 + 20 = 25.88 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

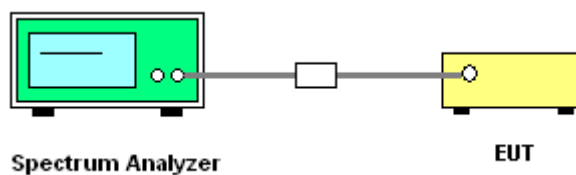

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

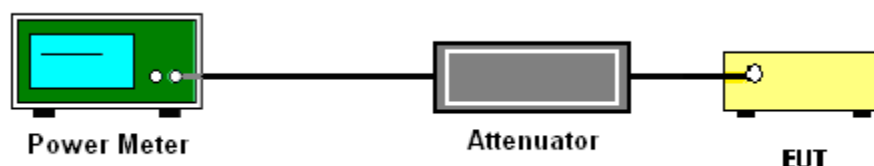



3.2.5 Test Result of Fundamental Maximum EIRP

U-NII-5 TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 7	Ant 6+7	Ant 6+7	Ant 6+7	Ant 6+7	
11a	CDD	2	1	5955	6Mbps	-	19.00	18.98	19.08	22.04	0.20	22.24	30	Pass
11a	CDD	2	49	6195	6Mbps	-	19.00	19.32	19.53	22.44	0.20	22.64	30	Pass
11a	CDD	2	93	6415	6Mbps	-	19.00	18.81	19.21	22.03	0.20	22.23	30	Pass
HE20	CDD	2	1	5955	MCS0	Full	19.00	18.88	18.97	21.94	0.20	22.14	30	Pass
HE20	CDD	2	1	5955	MCS0	RU 26/0	8.50	9.35	9.99	12.69	0.20	12.89	30	Pass
HE20	CDD	2	1	5955	MCS0	RU 52/37	11.50	12.51	12.73	15.63	0.20	15.83	30	Pass
HE20	CDD	2	1	5955	MCS0	RU 106/53	15.00	15.71	15.71	18.72	0.20	18.92	30	Pass
HE20	CDD	2	49	6195	MCS0	Full	19.00	18.83	19.06	21.96	0.20	22.16	30	Pass
HE20	CDD	2	49	6195	MCS0	RU 26/0	8.50	9.18	9.82	12.52	0.20	12.72	30	Pass
HE20	CDD	2	49	6195	MCS0	RU 52/37	11.50	12.33	12.57	15.46	0.20	15.66	30	Pass
HE20	CDD	2	49	6195	MCS0	RU 106/53	15.00	15.50	15.71	18.62	0.20	18.82	30	Pass
HE20	CDD	2	93	6415	MCS0	Full	19.00	18.78	19.14	21.97	0.20	22.17	30	Pass
HE20	CDD	2	93	6415	MCS0	RU 26/8	8.50	9.45	10.00	12.74	0.20	12.94	30	Pass
HE20	CDD	2	93	6415	MCS0	RU 52/40	11.50	12.67	12.66	15.68	0.20	15.88	30	Pass
HE20	CDD	2	93	6415	MCS0	RU 106/54	15.00	15.71	15.77	18.75	0.20	18.95	30	Pass
HE40	CDD	2	3	5965	MCS0	Full	19.00	18.88	18.91	21.91	0.20	22.11	30	Pass
HE40	CDD	2	3	5965	MCS0	RU 242/61	15.50	16.04	16.02	19.04	0.20	19.24	30	Pass
HE40	CDD	2	51	6205	MCS0	Full	19.00	18.82	19.11	21.98	0.20	22.18	30	Pass
HE40	CDD	2	51	6205	MCS0	RU 242/61	15.50	15.96	16.15	19.07	0.20	19.27	30	Pass
HE40	CDD	2	91	6405	MCS0	Full	19.00	18.73	19.08	21.92	0.20	22.12	30	Pass
HE40	CDD	2	91	6405	MCS0	RU 242/62	15.50	15.78	15.88	18.84	0.20	19.04	30	Pass
HE80	CDD	2	7	5985	MCS0	Full	18.50	18.61	18.44	21.54	0.20	21.74	30	Pass
HE80	CDD	2	7	5985	MCS0	RU 484/65	15.00	15.71	15.57	18.65	0.20	18.85	30	Pass
HE80	CDD	2	55	6225	MCS0	Full	18.50	18.59	18.71	21.66	0.20	21.86	30	Pass
HE80	CDD	2	55	6225	MCS0	RU 484/65	15.00	15.60	15.82	18.73	0.20	18.93	30	Pass
HE80	CDD	2	87	6385	MCS0	Full	18.50	18.58	18.53	21.57	0.20	21.77	30	Pass
HE80	CDD	2	87	6385	MCS0	RU 484/66	15.00	15.40	15.49	18.46	0.20	18.66	30	Pass
HE160	CDD	2	15	6025	MCS0	Full	17.50	17.61	16.98	20.32	0.20	20.52	30	Pass
HE160	CDD	2	15	6025	MCS0	RU 996/67	14.00	15.16	14.52	17.87	0.20	18.07	30	Pass
HE160	CDD	2	47	6185	MCS0	Full	17.50	17.19	17.20	20.21	0.20	20.41	30	Pass
HE160	CDD	2	47	6185	MCS0	RU 996/67	14.00	14.49	14.77	17.65	0.20	17.85	30	Pass
HE160	CDD	2	79	6345	MCS0	Full	17.50	17.02	16.96	20.00	0.20	20.20	30	Pass
HE160	CDD	2	79	6345	MCS0	RU 996/S67	14.00	14.21	14.42	17.33	0.20	17.53	30	Pass
EHT20	CDD	2	1	5955	MCS0	Full	19.00	18.93	19.03	21.99	0.20	22.19	30	Pass
EHT20	CDD	2	1	5955	MCS0	RU 26/0	8.50	9.42	10.04	12.75	0.20	12.95	30	Pass
EHT20	CDD	2	1	5955	MCS0	RU 52/37	11.50	12.54	12.77	15.67	0.20	15.87	30	Pass
EHT20	CDD	2	1	5955	MCS0	RU 106/53	15.00	15.77	15.74	18.77	0.20	18.97	30	Pass
EHT20	CDD	2	1	5955	MCS0	RU 52+26	11.50	12.42	12.37	15.41	0.20	15.61	30	Pass
EHT20	CDD	2	1	5955	MCS0	RU 106+26	15.00	15.73	15.75	18.75	0.20	18.95	30	Pass
EHT20	CDD	2	49	6195	MCS0	Full	19.00	18.87	19.10	22.00	0.20	22.20	30	Pass



EHT20	CDD	2	49	6195	MCS0	RU 26/0	8.50	9.24	9.90	12.59	0.20	12.79	30	Pass
EHT20	CDD	2	49	6195	MCS0	RU 52/37	11.50	12.39	12.61	15.51	0.20	15.71	30	Pass
EHT20	CDD	2	49	6195	MCS0	RU 106/53	15.00	15.53	15.77	18.66	0.20	18.86	30	Pass
EHT20	CDD	2	93	6415	MCS0	Full	19.00	18.82	19.18	22.01	0.20	22.21	30	Pass
EHT20	CDD	2	93	6415	MCS0	RU 26/8	8.50	9.52	10.03	12.79	0.20	12.99	30	Pass
EHT20	CDD	2	93	6415	MCS0	RU 52/40	11.50	12.75	12.73	15.75	0.20	15.95	30	Pass
EHT20	CDD	2	93	6415	MCS0	RU 106/54	15.00	15.76	15.81	18.80	0.20	19.00	30	Pass
EHT40	CDD	2	3	5965	MCS0	Full	19.00	18.91	18.94	21.94	0.20	22.14	30	Pass
EHT40	CDD	2	3	5965	MCS0	RU 242/61	15.50	16.07	16.09	19.09	0.20	19.29	30	Pass
EHT40	CDD	2	51	6205	MCS0	Full	19.00	18.85	19.16	22.02	0.20	22.22	30	Pass
EHT40	CDD	2	51	6205	MCS0	RU 242/61	15.50	16.03	16.18	19.12	0.20	19.32	30	Pass
EHT40	CDD	2	91	6405	MCS0	Full	19.00	18.77	19.12	21.96	0.20	22.16	30	Pass
EHT40	CDD	2	91	6405	MCS0	RU 242/62	15.50	15.84	15.93	18.90	0.20	19.10	30	Pass
EHT80	CDD	2	7	5985	MCS0	Full	18.50	18.65	18.47	21.57	0.20	21.77	30	Pass
EHT80	CDD	2	7	5985	MCS0	RU 484/65	15.00	15.76	15.63	18.71	0.20	18.91	30	Pass
EHT80	CDD	2	7	5985	MCS0	PC 20,Loc:4	17.00	17.58	17.34	20.47	0.20	20.67	30	Pass
EHT80	CDD	2	7	5985	MCS0	Large 484+242,Loc:4	16.50	17.15	17.01	20.09	0.20	20.29	30	Pass
EHT80	CDD	2	55	6225	MCS0	Full	18.50	18.62	18.74	21.69	0.20	21.89	30	Pass
EHT80	CDD	2	55	6225	MCS0	RU 484/65	15.00	15.63	15.90	18.78	0.20	18.98	30	Pass
EHT80	CDD	2	87	6385	MCS0	Full	18.50	18.63	18.57	21.61	0.20	21.81	30	Pass
EHT80	CDD	2	87	6385	MCS0	RU 484/66	15.00	15.43	15.54	18.50	0.20	18.70	30	Pass
EHT160	CDD	2	15	6025	MCS0	Full	17.50	17.65	17.02	20.36	0.20	20.56	30	Pass
EHT160	CDD	2	15	6025	MCS0	RU 996/67	14.00	15.20	14.58	17.92	0.20	18.12	30	Pass
EHT160	CDD	2	15	6025	MCS0	PC 20,Loc:8	16.00	16.89	16.46	19.69	0.20	19.89	30	Pass
EHT160	CDD	2	15	6025	MCS0	PC 40,Loc:4	15.50	16.58	16.21	19.41	0.20	19.61	30	Pass
EHT160	CDD	2	15	6025	MCS0	Large 996+484+242,Loc:8	15.50	16.56	16.18	19.38	0.20	19.58	30	Pass
EHT160	CDD	2	15	6025	MCS0	Large 996+484,Loc:4	15.00	15.99	15.61	18.81	0.20	19.01	30	Pass
EHT160	CDD	2	47	6185	MCS0	Full	17.50	17.24	17.23	20.25	0.20	20.45	30	Pass
EHT160	CDD	2	47	6185	MCS0	RU 996/67	14.00	14.55	14.83	17.71	0.20	17.91	30	Pass
EHT160	CDD	2	79	6345	MCS0	Full	17.50	17.07	17.03	20.06	0.20	20.26	30	Pass
EHT160	CDD	2	79	6345	MCS0	RU 996/S67	14.00	14.24	14.49	17.38	0.20	17.58	30	Pass
EHT320	CDD	2	31	6105	MCS0	Full	18.50	18.81	18.44	21.64	0.20	21.84	30	Pass
EHT320	CDD	2	31	6105	MCS0	RU966*2/69	15.00	15.69	15.65	18.68	0.20	18.88	30	Pass
EHT320	CDD	2	31	6105	MCS0	PC 40,Loc:8	17.50	17.83	17.77	20.81	0.20	21.01	30	Pass
EHT320	CDD	2	31	6105	MCS0	PC 80,Loc:4	17.00	17.37	17.31	20.35	0.20	20.55	30	Pass
EHT320	CDD	2	31	6105	MCS0	PC 80+40,Loc:6	16.00	16.64	16.62	19.64	0.20	19.84	30	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*3+484,Loc:8	17.00	17.60	17.40	20.51	0.20	20.71	30	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*3,Loc:4	16.50	16.90	16.94	19.93	0.20	20.13	30	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*2+484,Loc:6	15.50	16.28	16.11	19.21	0.20	19.41	30	Pass
EHT320	CDD	2	63	6265	MCS0	Full	18.50	18.72	18.69	21.72	0.20	21.92	30	Pass
EHT320	CDD	2	63	6265	MCS0	RU966*2/69	15.00	15.65	15.69	18.68	0.20	18.88	30	Pass



U-NII-7 TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 7	Ant 6+7	Ant 6+7	Ant 6+7	Ant 6+7	
11a	CDD	2	117	6535	6Mbps	-	19.00	19.36	19.19	22.29	0.00	22.29	30	Pass
11a	CDD	2	149	6695	6Mbps	-	19.00	19.01	19.66	22.36	0.00	22.36	30	Pass
11a	CDD	2	181	6855	6Mbps	-	19.00	18.69	19.28	22.01	0.00	22.01	30	Pass
HE20	CDD	2	117	6535	MCS0	Full	19.00	18.97	18.95	21.97	0.00	21.97	30	Pass
HE20	CDD	2	117	6535	MCS0	RU 26/0	8.50	10.18	9.67	12.94	0.00	12.94	30	Pass
HE20	CDD	2	117	6535	MCS0	RU 52/37	11.50	12.50	12.30	15.41	0.00	15.41	30	Pass
HE20	CDD	2	117	6535	MCS0	RU 106/53	15.00	15.45	15.53	18.50	0.00	18.50	30	Pass
HE20	CDD	2	149	6695	MCS0	Full	19.00	18.92	19.49	22.22	0.00	22.22	30	Pass
HE20	CDD	2	149	6695	MCS0	RU 26/0	8.50	10.01	10.22	13.13	0.00	13.13	30	Pass
HE20	CDD	2	149	6695	MCS0	RU 52/37	11.50	12.52	13.04	15.80	0.00	15.80	30	Pass
HE20	CDD	2	149	6695	MCS0	RU 106/53	15.00	15.56	16.11	18.85	0.00	18.85	30	Pass
HE20	CDD	2	181	6855	MCS0	Full	19.00	19.62	19.18	22.42	0.00	22.42	30	Pass
HE20	CDD	2	181	6855	MCS0	RU 26/8	8.50	9.91	9.96	12.95	0.00	12.95	30	Pass
HE20	CDD	2	181	6855	MCS0	RU 52/40	11.50	12.17	12.62	15.41	0.00	15.41	30	Pass
HE20	CDD	2	181	6855	MCS0	RU 106/54	15.00	15.09	15.61	18.37	0.00	18.37	30	Pass
HE40	CDD	2	123	6565	MCS0	Full	19.00	19.00	19.12	22.07	0.00	22.07	30	Pass
HE40	CDD	2	123	6565	MCS0	RU 242/61	15.50	15.85	15.98	18.93	0.00	18.93	30	Pass
HE40	CDD	2	147	6685	MCS0	Full	19.00	18.99	19.45	22.24	0.00	22.24	30	Pass
HE40	CDD	2	147	6685	MCS0	RU 242/61	15.50	15.85	16.40	19.14	0.00	19.14	30	Pass
HE40	CDD	2	179	6845	MCS0	Full	19.00	18.68	19.19	21.95	0.00	21.95	30	Pass
HE40	CDD	2	179	6845	MCS0	RU 242/62	15.50	15.40	16.18	18.82	0.00	18.82	30	Pass
HE80	CDD	2	135	6625	MCS0	Full	18.50	18.20	18.81	21.53	0.00	21.53	30	Pass
HE80	CDD	2	135	6625	MCS0	RU 484/65	15.00	15.31	15.86	18.61	0.00	18.61	30	Pass
HE80	CDD	2	151	6705	MCS0	Full	18.50	18.38	18.92	21.67	0.00	21.67	30	Pass
HE80	CDD	2	151	6705	MCS0	RU 484/65	15.00	15.22	15.89	18.58	0.00	18.58	30	Pass
HE80	CDD	2	167	6785	MCS0	Full	18.50	18.07	18.83	21.48	0.00	21.48	30	Pass
HE80	CDD	2	167	6785	MCS0	RU 484/66	15.00	15.06	15.77	18.44	0.00	18.44	30	Pass
HE160	CDD	2	143	6665	MCS0	Full	17.50	17.40	17.49	20.46	0.00	20.46	30	Pass
HE160	CDD	2	143	6665	MCS0	RU 996/67	14.00	14.13	14.99	17.60	0.00	17.60	30	Pass
EHT20	CDD	2	117	6535	MCS0	Full	19.00	19.02	18.99	22.02	0.00	22.02	30	Pass
EHT20	CDD	2	117	6535	MCS0	RU 26/0	8.50	10.22	9.71	12.98	0.00	12.98	30	Pass
EHT20	CDD	2	117	6535	MCS0	RU 52/37	11.50	12.53	12.38	15.47	0.00	15.47	30	Pass
EHT20	CDD	2	117	6535	MCS0	RU 106/53	15.00	15.54	15.57	18.57	0.00	18.57	30	Pass
EHT20	CDD	2	117	6535	MCS0	RU 52+26	11.50	12.06	12.31	15.20	0.00	15.20	30	Pass
EHT20	CDD	2	117	6535	MCS0	RU 106+26	15.00	15.48	15.55	18.53	0.00	18.53	30	Pass
EHT20	CDD	2	149	6695	MCS0	Full	19.00	18.96	19.53	22.26	0.00	22.26	30	Pass
EHT20	CDD	2	149	6695	MCS0	RU 26/0	8.50	10.09	10.25	13.18	0.00	13.18	30	Pass
EHT20	CDD	2	149	6695	MCS0	RU 52/37	11.50	12.60	13.08	15.86	0.00	15.86	30	Pass
EHT20	CDD	2	149	6695	MCS0	RU 106/53	15.00	15.59	16.17	18.90	0.00	18.90	30	Pass
EHT20	CDD	2	181	6855	MCS0	Full	19.00	18.66	19.21	21.95	0.00	21.95	30	Pass



EHT20	CDD	2	181	6855	MCS0	RU 26/8	8.50	9.96	9.99	12.99	0.00	12.99	30	Pass
EHT20	CDD	2	181	6855	MCS0	RU 52/40	11.50	12.21	12.65	15.45	0.00	15.45	30	Pass
EHT20	CDD	2	181	6855	MCS0	RU 106/54	15.00	15.15	15.69	18.44	0.00	18.44	30	Pass
EHT40	CDD	2	123	6565	MCS0	Full	19.00	19.04	19.16	22.11	0.00	22.11	30	Pass
EHT40	CDD	2	123	6565	MCS0	RU 242/61	15.50	15.94	16.02	18.99	0.00	18.99	30	Pass
EHT40	CDD	2	147	6685	MCS0	Full	19.00	19.02	19.51	22.28	0.00	22.28	30	Pass
EHT40	CDD	2	147	6685	MCS0	RU 242/61	15.50	15.91	16.48	19.21	0.00	19.21	30	Pass
EHT40	CDD	2	179	6845	MCS0	Full	19.00	18.72	19.21	21.98	0.00	21.98	30	Pass
EHT40	CDD	2	179	6845	MCS0	RU 242/62	15.50	15.48	16.23	18.88	0.00	18.88	30	Pass
EHT80	CDD	2	135	6625	MCS0	Full	18.50	18.24	18.85	21.57	0.00	21.57	30	Pass
EHT80	CDD	2	135	6625	MCS0	RU 484/65	15.00	15.40	15.94	18.69	0.00	18.69	30	Pass
EHT80	CDD	2	135	6625	MCS0	PC 20,Loc:4	17.00	17.18	17.67	20.44	0.00	20.44	30	Pass
EHT80	CDD	2	135	6625	MCS0	Large 484+242,Loc:4	16.50	16.80	17.27	20.05	0.00	20.05	30	Pass
EHT80	CDD	2	151	6705	MCS0	Full	18.50	18.41	18.95	21.70	0.00	21.70	30	Pass
EHT80	CDD	2	151	6705	MCS0	RU 484/65	15.00	15.29	15.93	18.64	0.00	18.64	30	Pass
EHT80	CDD	2	167	6785	MCS0	Full	18.50	18.10	18.88	21.52	0.00	21.52	30	Pass
EHT80	CDD	2	167	6785	MCS0	RU 484/66	15.00	15.14	15.82	18.51	0.00	18.51	30	Pass
EHT160	CDD	2	143	6665	MCS0	Full	17.50	16.99	17.54	20.28	0.00	20.28	30	Pass
EHT160	CDD	2	143	6665	MCS0	RU 996/S67	14.00	14.18	15.03	17.64	0.00	17.64	30	Pass
EHT160	CDD	2	143	6665	MCS0	PC 20,Loc:8	16.00	16.35	16.91	19.65	0.00	19.65	30	Pass
EHT160	CDD	2	143	6665	MCS0	PC 40,Loc:4	15.50	15.85	16.69	19.30	0.00	19.30	30	Pass
EHT160	CDD	2	143	6665	MCS0	Large 996+484+242,Loc:8	15.50	15.82	16.43	19.15	0.00	19.15	30	Pass
EHT160	CDD	2	143	6665	MCS0	Large 996+484,Loc:4	15.00	15.26	16.17	18.75	0.00	18.75	30	Pass



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

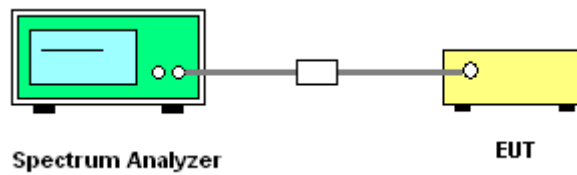

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

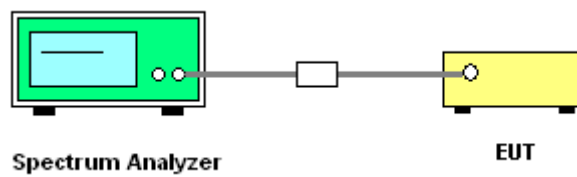

3.4.5 Test Result

Please refer to Appendix A.

3.5 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.5.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.5.4 Test Setup


For radiated emissions below 30MHz

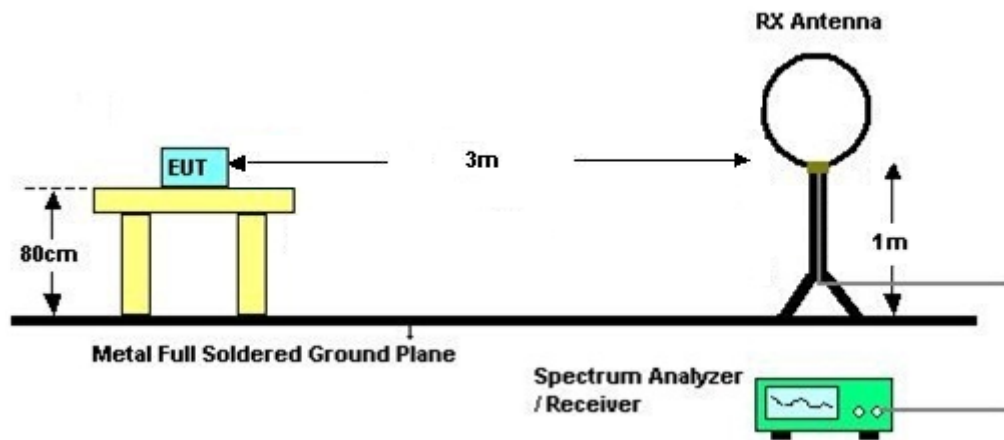

For radiated emissions from 30MHz to 1GHz

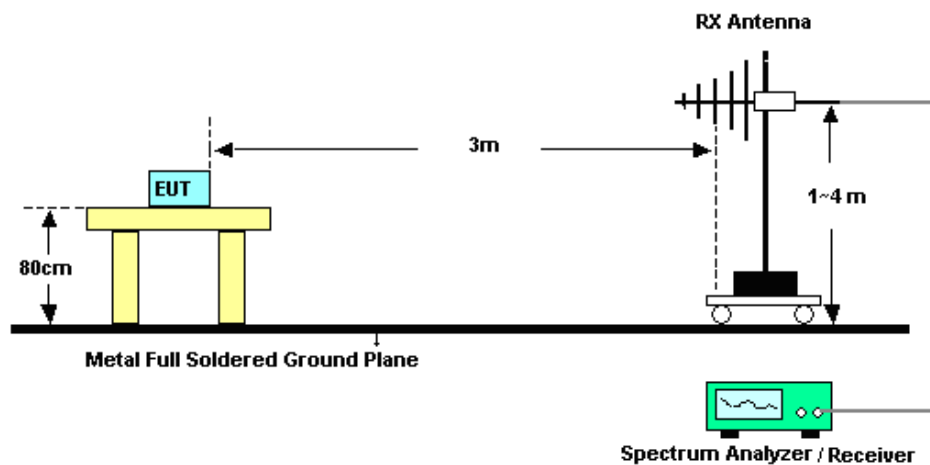

For radiated emissions above 1GHz

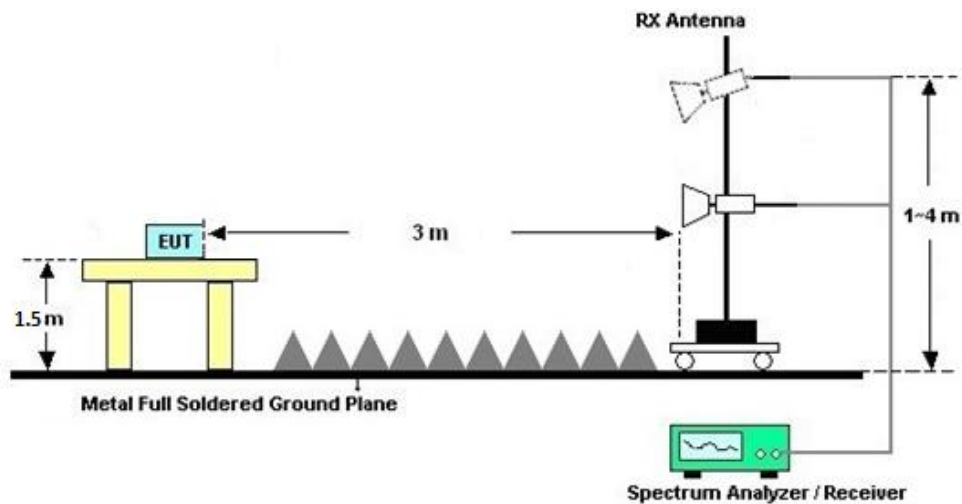



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

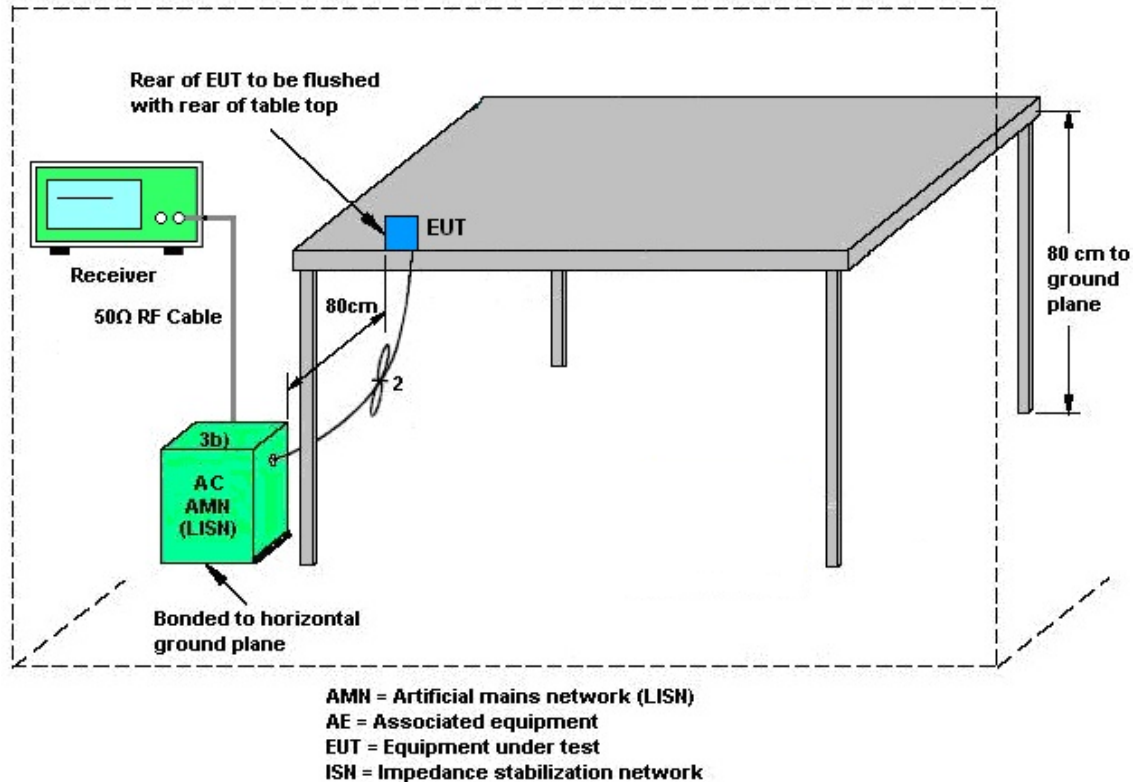

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11a/ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}]$ dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when $N_{SS} = 1$)

			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 6 (dBi)	Ant. 7 (dBi)		
UNII-5	0.20	-0.30	0.20	2.96
UNII-7	0.00	-0.40	0.00	2.81

<SDM Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_n/10})/N_{ANT}]$ dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 6 (dBi)	Ant. 7 (dBi)		
U-NII-5	0.20	-0.30	0.20	-0.04
U-NII-7	0.00	-0.40	0.00	-0.20

<TXBF modes>

The EUT supports TXBF mode for 11ax.

FCC KDB 662911 D01 Multiple Transmitter Output v02r01, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The directional gain "DG" is calculated as following table.

			DG	DG
			for	for
	Ant. 6	Ant. 7	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
UNII-5	0.20	-0.30	2.96	2.96
UNII-7	0.00	-0.40	2.81	2.81



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Jun. 28, 2025~ Sep. 14, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Jun. 28, 2025~ Sep. 14, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Jun. 28, 2025~ Sep. 14, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2024	Aug. 07, 2025	Oct. 10, 2025	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 18, 2025	Aug. 07, 2025	Apr. 17, 2026	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Aug. 07, 2025	Sep. 07, 2025	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	Aug. 07, 2025	Nov. 22, 2025	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251982	1GHz~18GHz	Aug. 16, 2024	Aug. 07, 2025	Aug. 15, 2025	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Aug. 07, 2025	Oct. 21, 2025	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 02, 2025	Aug. 07, 2025	Jul. 01, 2026	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Aug. 07, 2025	Jan. 01, 2026	Radiation (03CH03-KS)
high gain Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Dec. 02, 2024	Aug. 07, 2025	Dec. 01, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM01G18GA	EM	1GHz~26.5GHz	Oct. 09, 2024	Aug. 07, 2025	Oct. 08, 2025	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 07, 2025	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 07, 2025	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 07, 2025	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Aug. 23, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 19, 2025	Aug. 23, 2025	Aug. 18, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Aug. 23, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Aug. 23, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.44%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.32dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11BE320MIMO	Ant6	6105	349.71	5930.52	6280.24	---	---
	Ant7	6105	349.71	5929.00	6278.71	---	---
	Ant6	6265	344.38	6091.29	6435.67	---	---
	Ant7	6265	428.95	6009.76	6438.71	---	---
11A-CDD	Ant6	5955	23.81	5942.81	5966.62	320	PASS
	Ant7	5955	23.19	5943.57	5966.76	320	PASS
	Ant6	6195	23.91	6182.86	6206.76	320	PASS
	Ant7	6195	22.76	6183.81	6206.57	320	PASS
	Ant6	6415	23.67	6402.76	6426.43	320	PASS
	Ant7	6415	22.91	6403.76	6426.67	320	PASS
	Ant6	6535	23.81	6522.67	6546.48	320	PASS
	Ant7	6535	23.05	6523.62	6546.67	320	PASS
	Ant6	6695	23.71	6682.67	6706.38	320	PASS
	Ant7	6695	23.19	6683.57	6706.76	320	PASS
	Ant6	6855	24.00	6842.62	6866.62	320	PASS
	Ant7	6855	23.29	6843.52	6866.81	320	PASS
11BE20MIMO	Ant6	5955	23.38	5943.33	5966.71	320	PASS
	Ant7	5955	23.43	5943.38	5966.81	320	PASS
	Ant6	6195	23.38	6183.33	6206.71	320	PASS
	Ant7	6195	23.86	6183.00	6206.86	320	PASS
	Ant6	6415	24.00	6403.00	6427.00	320	PASS
	Ant7	6415	23.67	6403.00	6426.67	320	PASS
	Ant6	6535	23.76	6523.24	6547.00	320	PASS
	Ant7	6535	23.91	6523.00	6546.91	320	PASS
	Ant6	6695	23.81	6683.05	6706.86	320	PASS
	Ant7	6695	23.81	6683.00	6706.81	320	PASS
	Ant6	6855	23.62	6843.10	6866.71	320	PASS
	Ant7	6855	23.76	6842.95	6866.71	320	PASS
11BE40MIMO	Ant6	5965	43.14	5943.29	5986.43	320	PASS
	Ant7	5965	43.52	5943.48	5987.00	320	PASS
	Ant6	6205	43.52	6183.10	6226.62	320	PASS
	Ant7	6205	43.14	6183.57	6226.71	320	PASS
	Ant6	6405	43.91	6382.81	6426.71	320	PASS




	Ant7	6405	43.52	6383.10	6426.62	320	PASS
	Ant6	6565	44.10	6542.91	6587.00	320	PASS
	Ant7	6565	43.43	6543.19	6586.62	320	PASS
	Ant6	6685	42.86	6663.67	6706.52	320	PASS
	Ant7	6685	43.33	6663.29	6706.62	320	PASS
	Ant6	6845	43.14	6823.38	6866.52	320	PASS
	Ant7	6845	43.52	6823.19	6866.71	320	PASS
11BE80MIMO	Ant6	5985	86.86	5941.57	6028.43	320	PASS
	Ant7	5985	87.62	5941.19	6028.81	320	PASS
	Ant6	6225	86.48	6181.57	6268.05	320	PASS
	Ant7	6225	87.24	6181.19	6268.43	320	PASS
	Ant6	6385	88.57	6340.24	6428.81	320	PASS
	Ant7	6385	86.67	6341.38	6428.05	320	PASS
	Ant6	6625	86.29	6581.57	6667.86	320	PASS
	Ant7	6625	86.29	6581.38	6667.67	320	PASS
	Ant6	6705	87.05	6661.76	6748.81	320	PASS
	Ant7	6705	86.67	6661.57	6748.24	320	PASS
	Ant6	6785	86.67	6741.19	6827.86	320	PASS
	Ant7	6785	86.67	6741.38	6828.05	320	PASS
11BE160MIMO	Ant6	6025	174.48	5937.38	6111.86	320	PASS
	Ant7	6025	174.48	5937.76	6112.24	320	PASS
	Ant6	6185	175.62	6097.76	6273.38	320	PASS
	Ant7	6185	177.14	6095.48	6272.62	320	PASS
	Ant6	6345	173.71	6258.52	6432.24	320	PASS
	Ant7	6345	173.71	6258.14	6431.86	320	PASS
	Ant6	6665	176.76	6576.62	6753.38	320	PASS
	Ant7	6665	175.62	6576.62	6752.24	320	PASS

Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.

Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.




Test Graphs

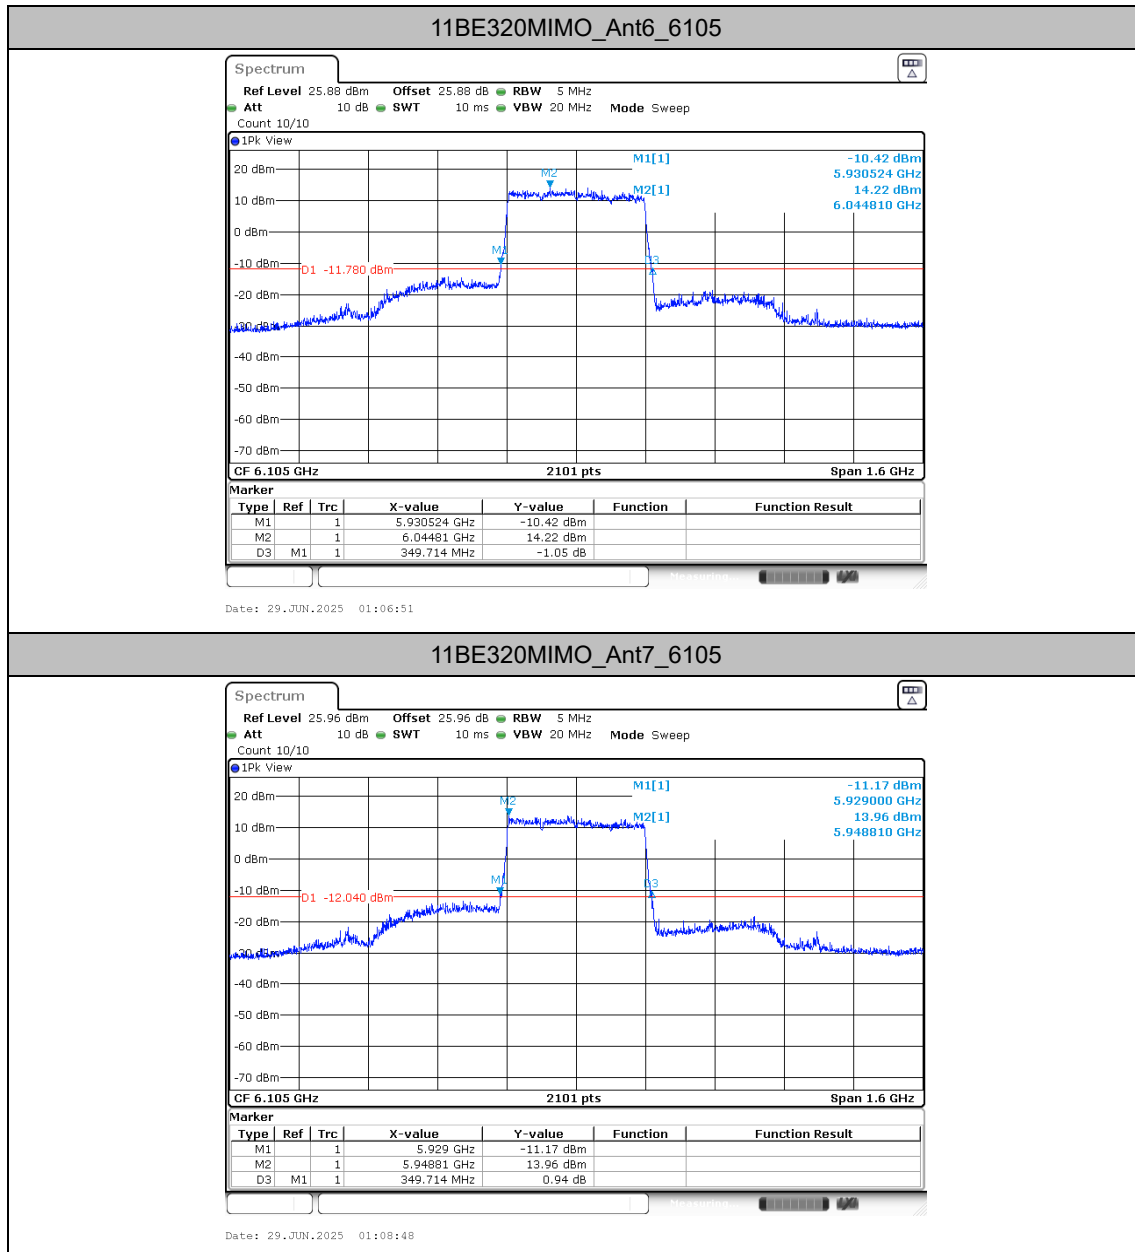




11BE320MIMO_Ant6_6265

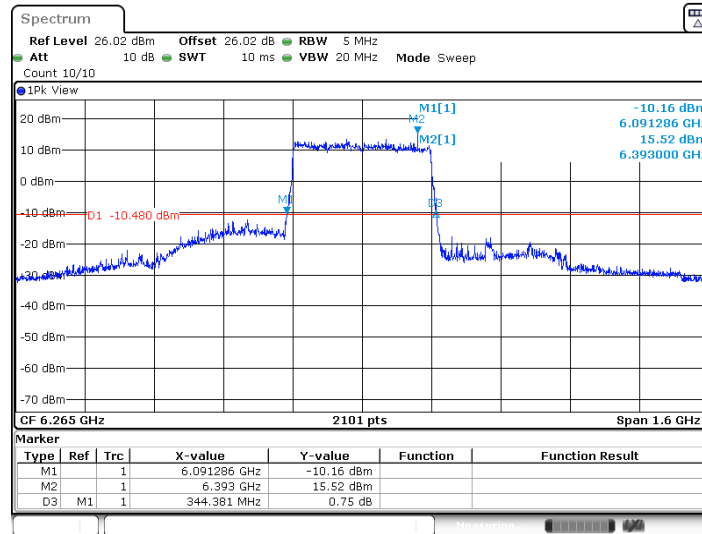

Date: 29.JUN.2025 01:11:17


11BE320MIMO_Ant7_6265

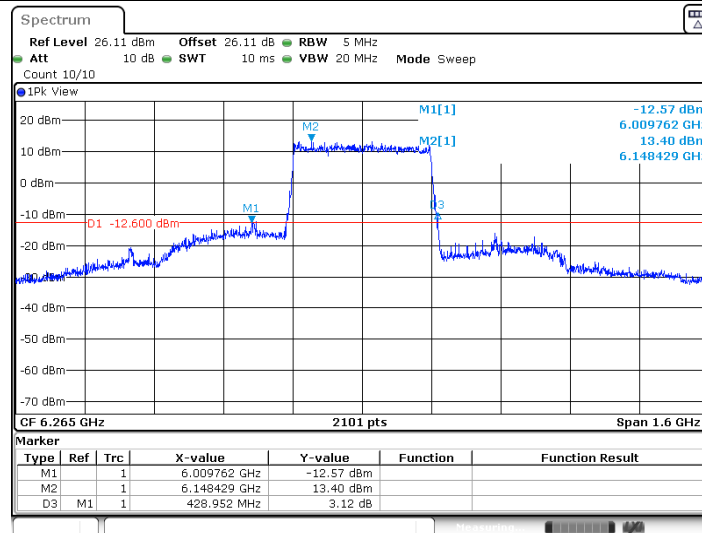

Date: 29.JUN.2025 01:12:27




11A-CDD_Ant6_5955

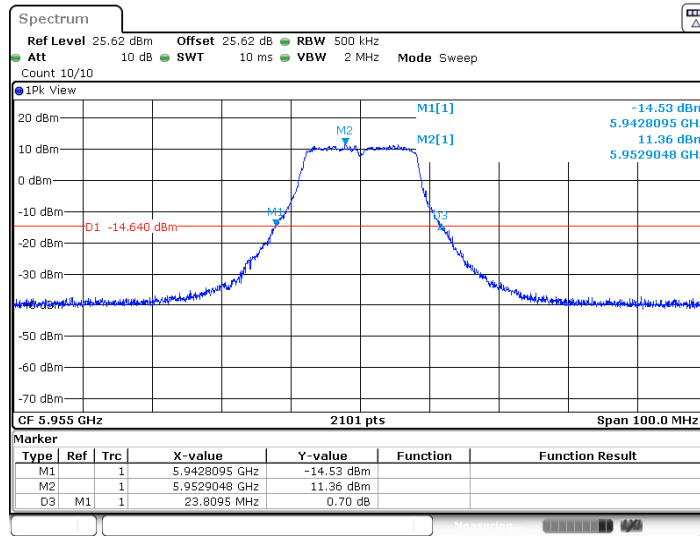

Date: 13.SEP.2025 11:03:32


11A-CDD_Ant7_5955

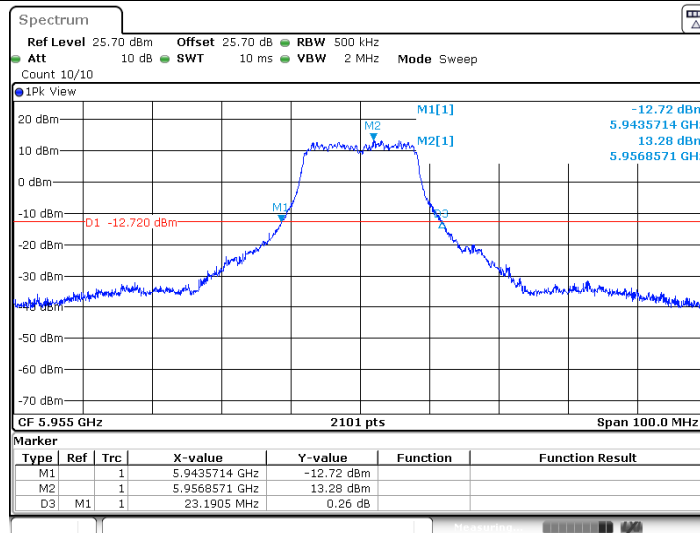

Date: 13.SEP.2025 11:04:11




11A-CDD_Ant6_6195

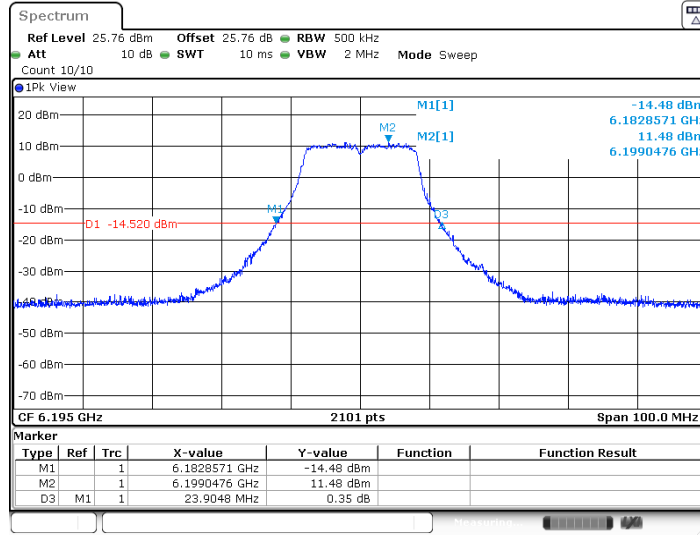

Date: 13.SEP.2025 11:05:10


11A-CDD_Ant7_6195

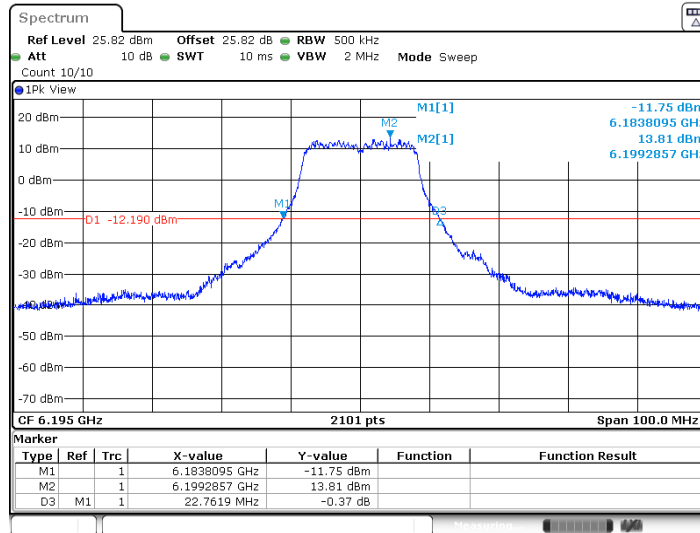

Date: 13.SEP.2025 11:05:51




11A-CDD_Ant6_6415

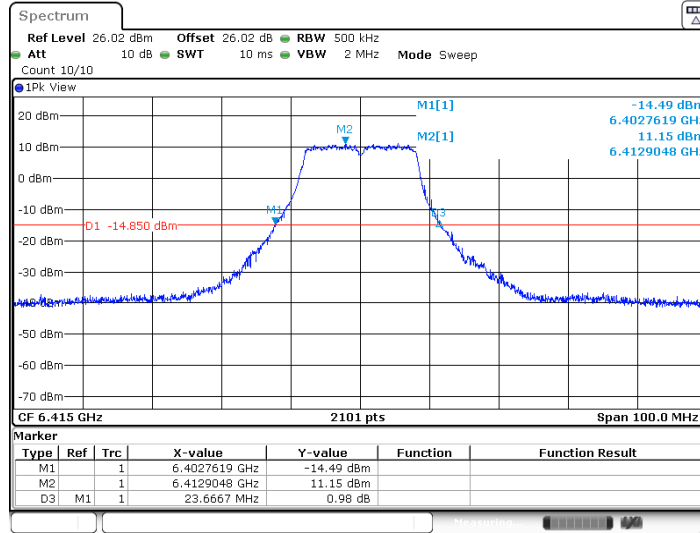


Date: 13.SEP.2025 11:06:52

11A-CDD_Ant7_6415

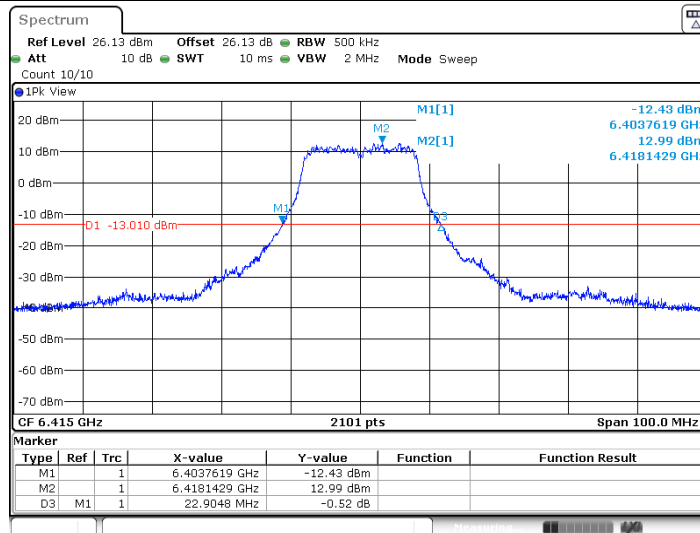


Date: 13.SEP.2025 11:07:34

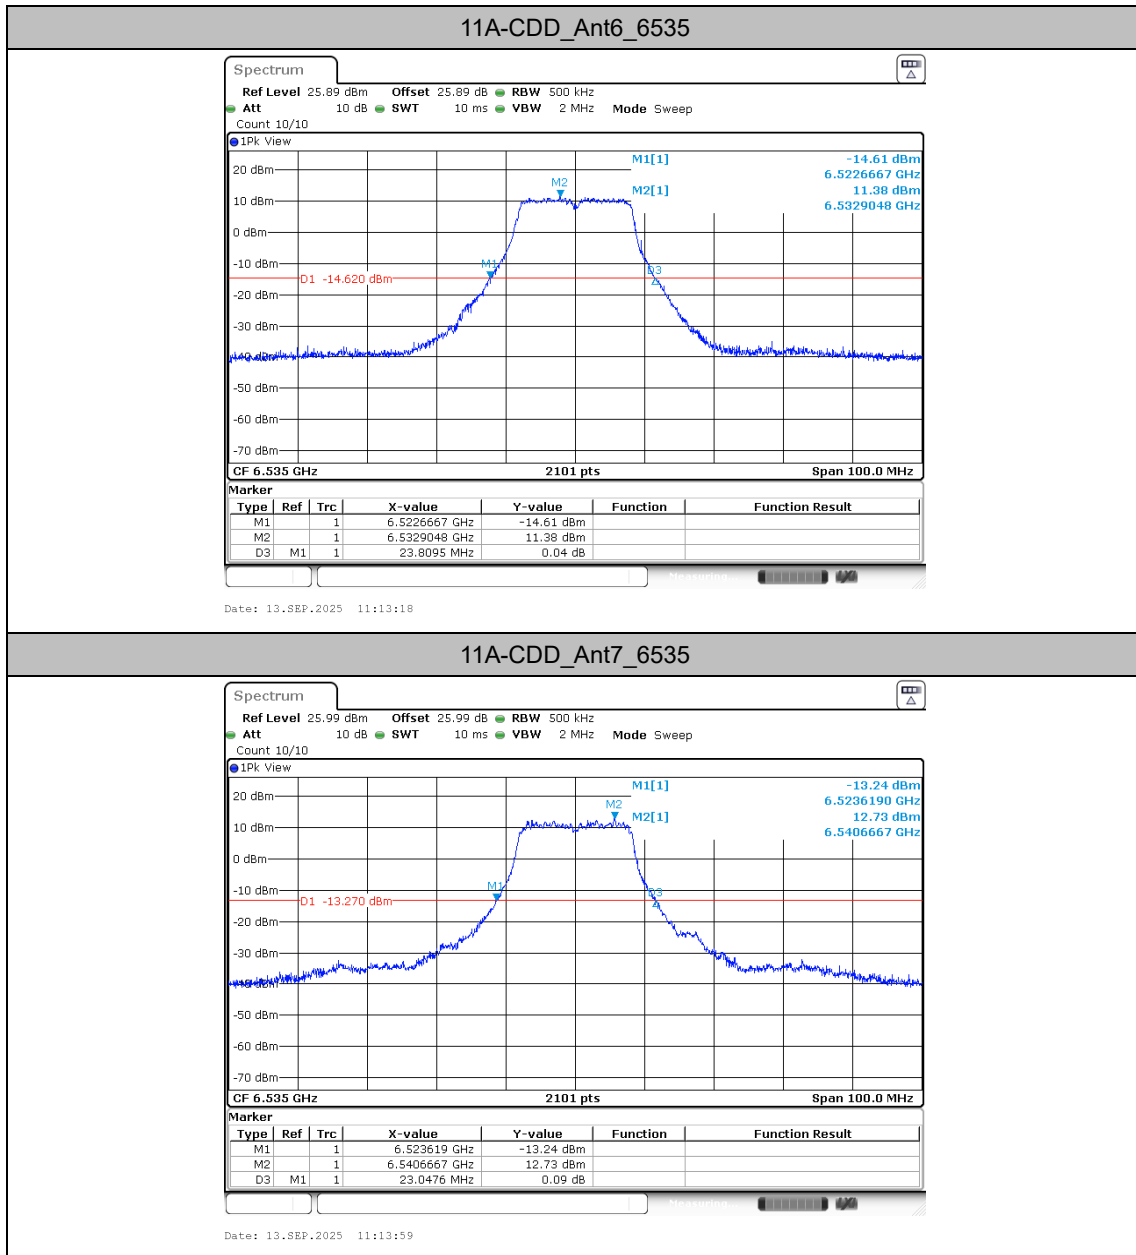




11A-CDD_Ant6_6695

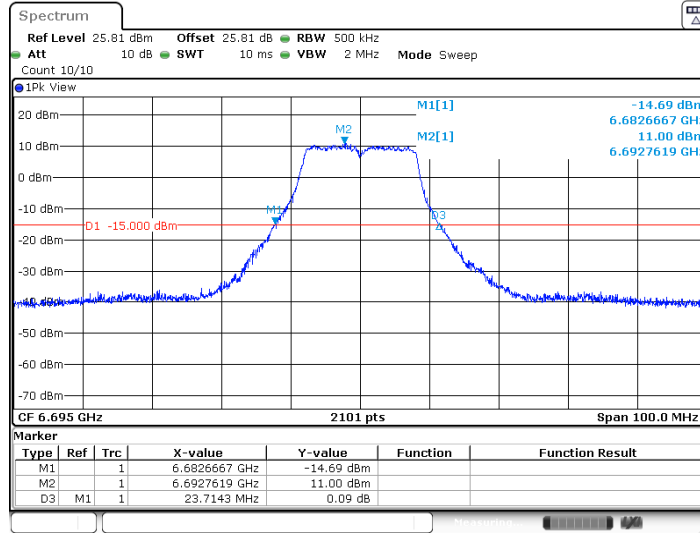

Date: 13.SEP.2025 11:14:53


11A-CDD_Ant7_6695

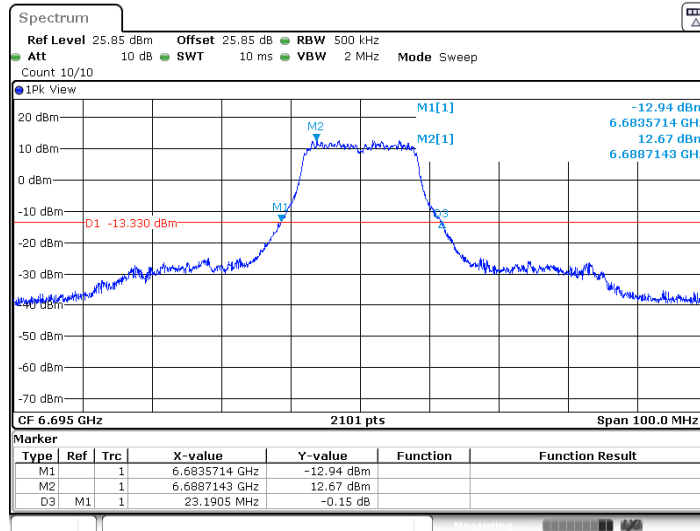

Date: 13.SEP.2025 11:15:34




11A-CDD_Ant6_6855

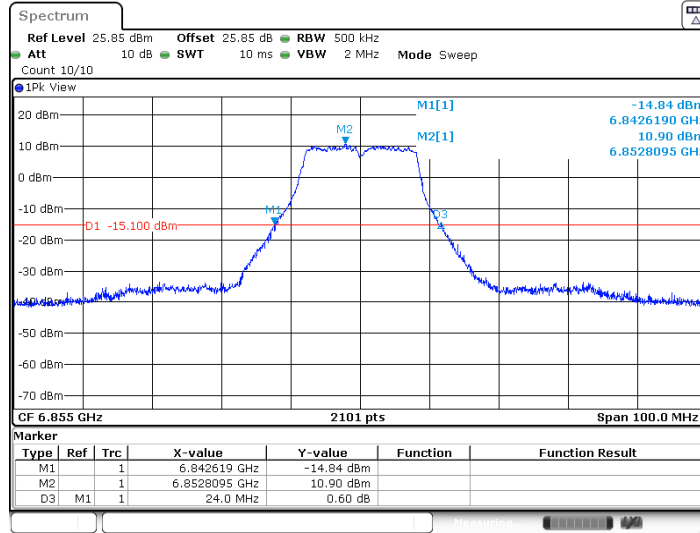

Date: 13.SEP.2025 11:18:16


11A-CDD_Ant7_6855

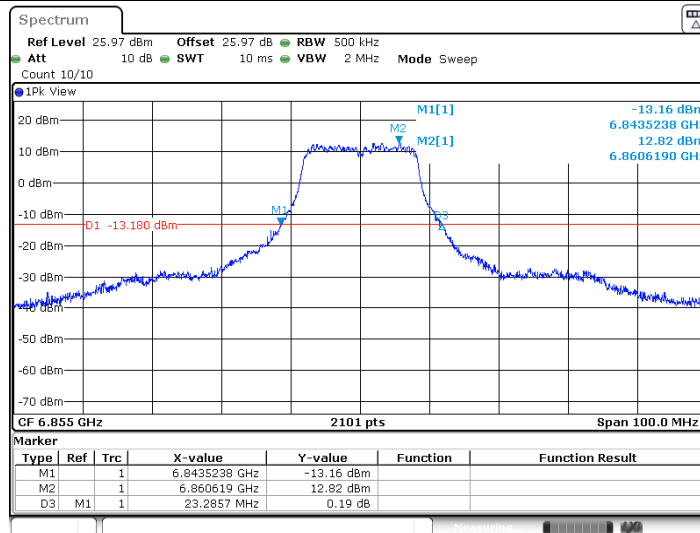

Date: 13.SEP.2025 11:18:57




11BE20MIMO_Ant6_5955

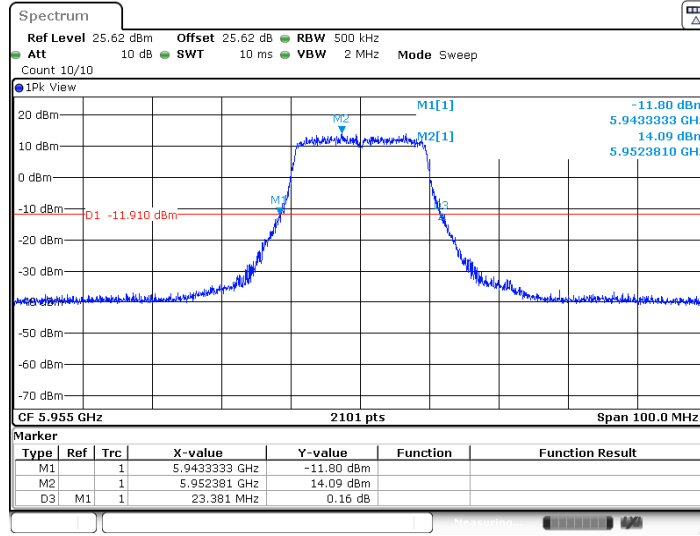

Date: 13.SEP.2025 11:21:20


11BE20MIMO_Ant7_5955

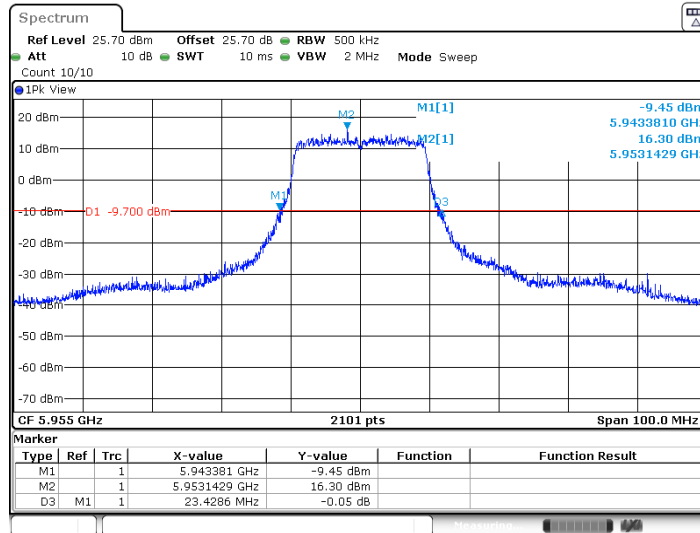


Date: 13.SEP.2025 11:22:01



11BE20MIMO_Ant6_6195

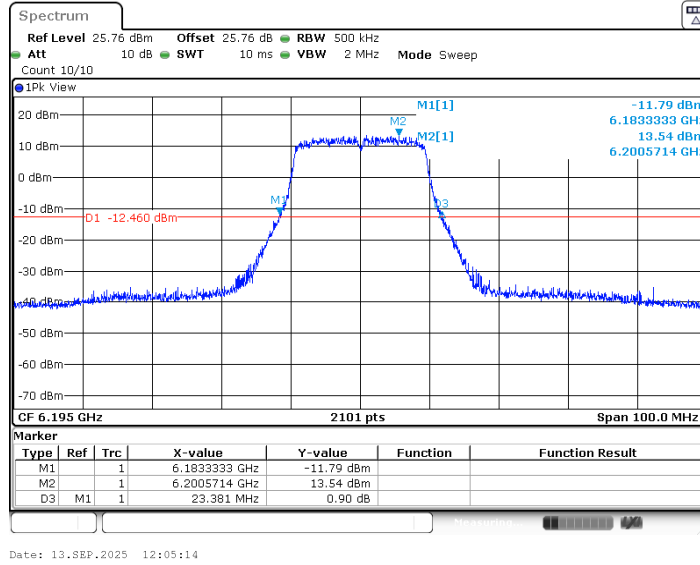


11BE20MIMO_Ant7_6195

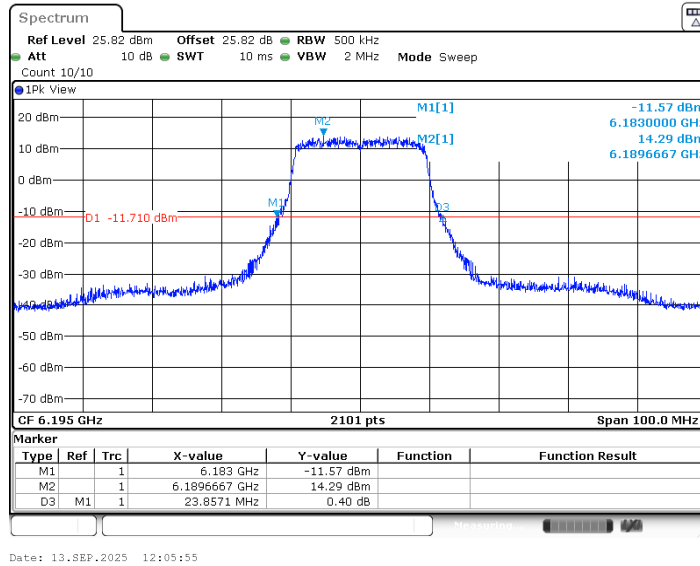




11BE20MIMO_Ant6_6415

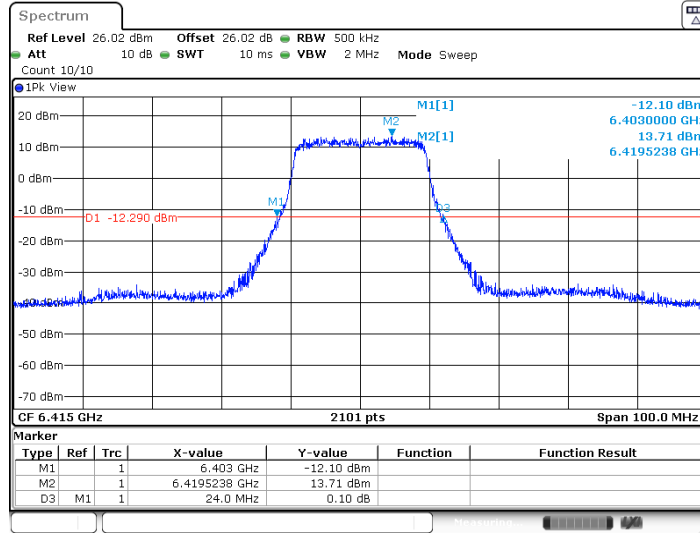

Date: 13.SEP.2025 12:06:45


11BE20MIMO_Ant7_6415

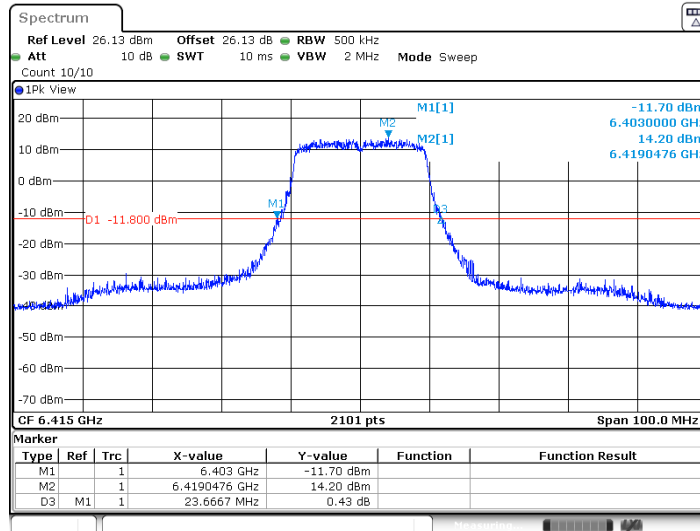

Date: 13.SEP.2025 12:07:26




11BE20MIMO_Ant6_6535

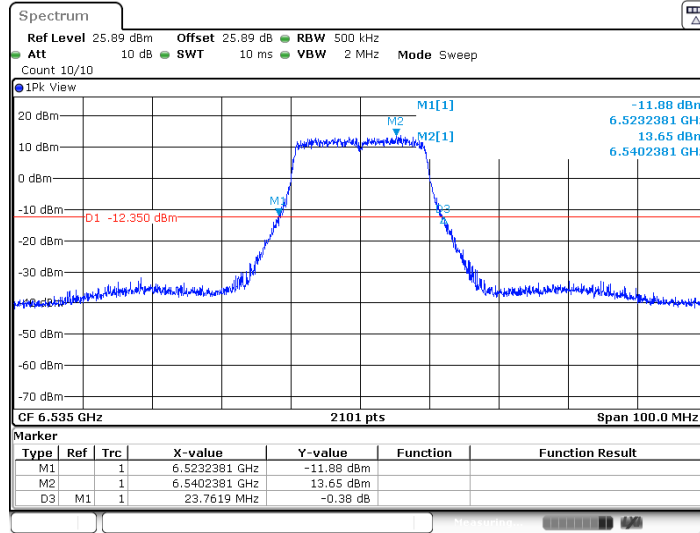

Date: 13.SEP.2025 12:13:27


11BE20MIMO_Ant7_6535

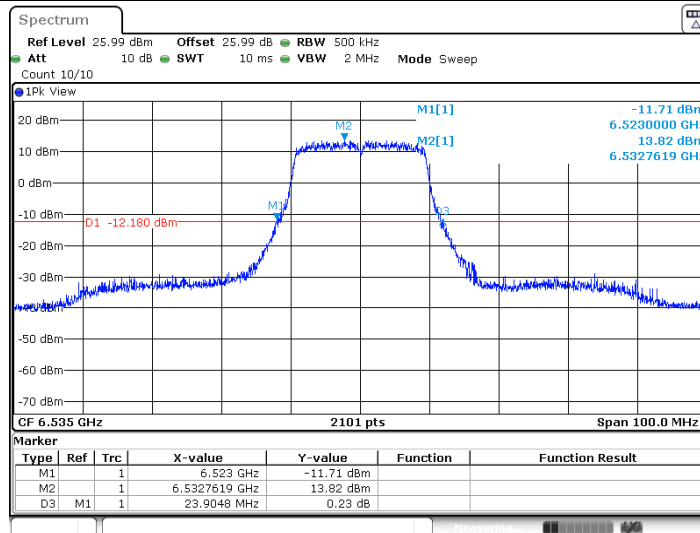

Date: 13.SEP.2025 12:14:08




11BE20MIMO_Ant6_6695

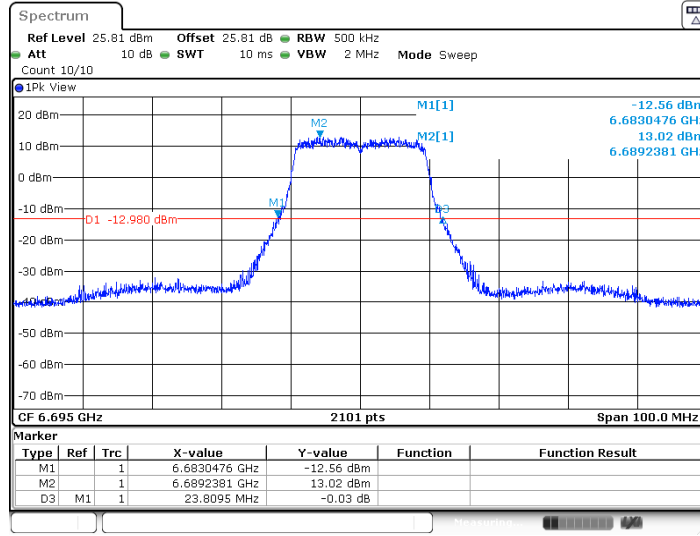

Date: 13.SEP.2025 12:15:06


11BE20MIMO_Ant7_6695

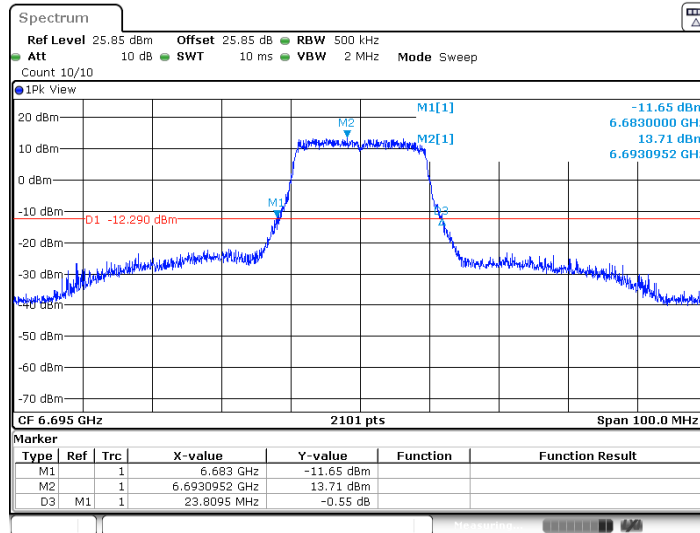


Date: 13.SEP.2025 12:15:48



11BE20MIMO_Ant6_6855

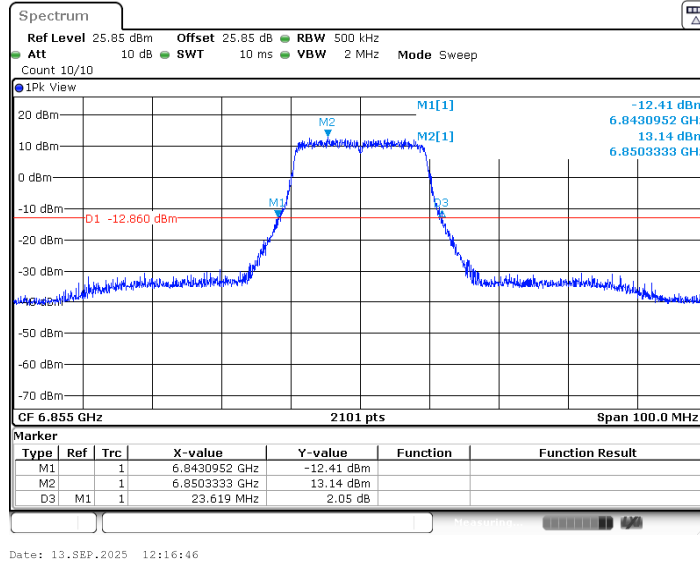


11BE20MIMO_Ant7_6855

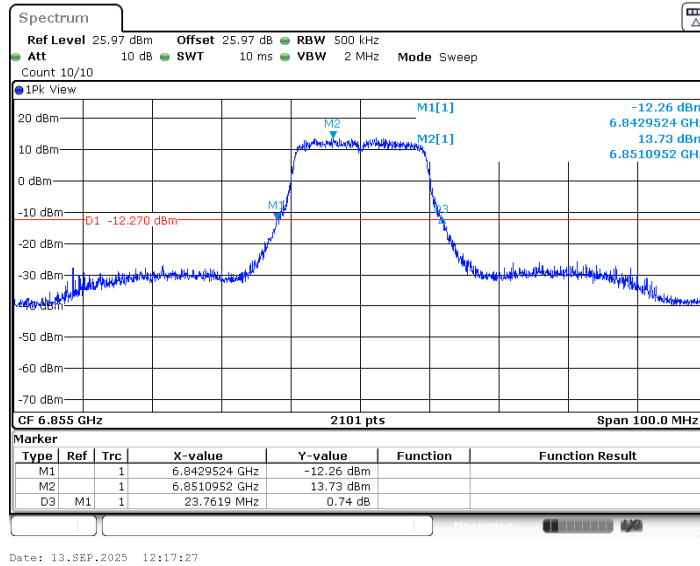




11BE40MIMO_Ant6_5965

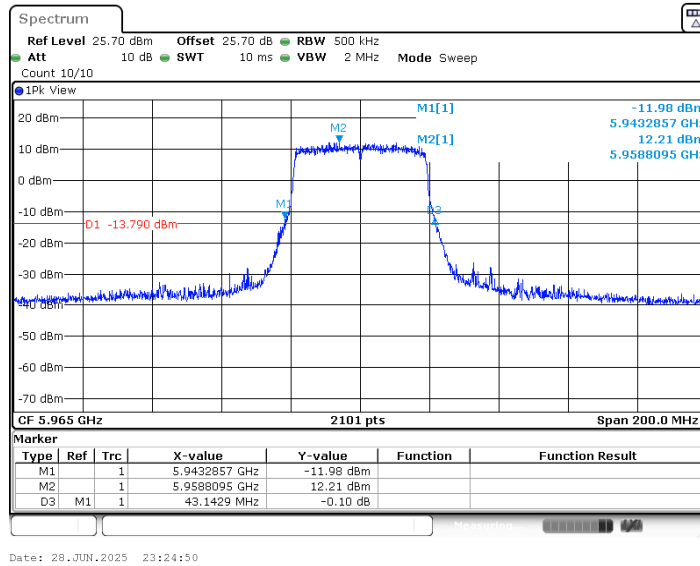


11BE40MIMO_Ant7_5965

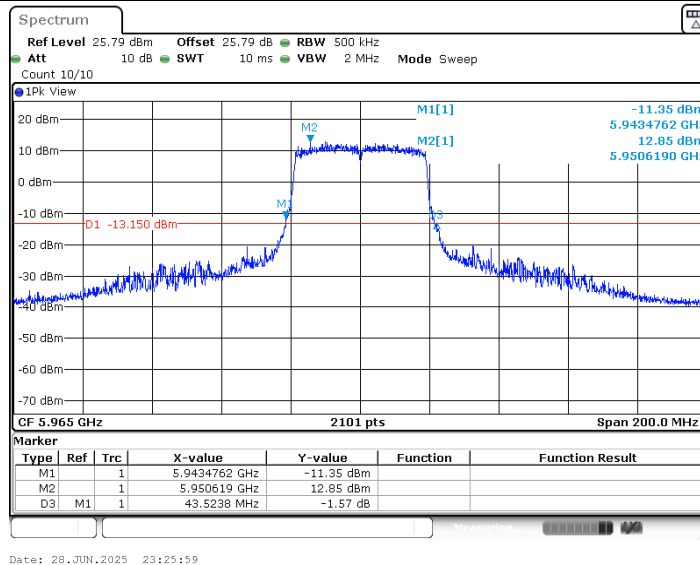




11BE40MIMO_Ant6_6205

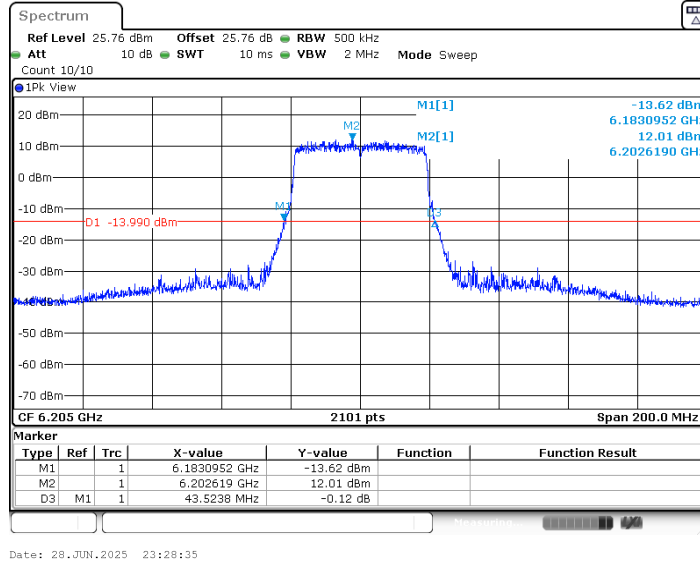


11BE40MIMO_Ant7_6205

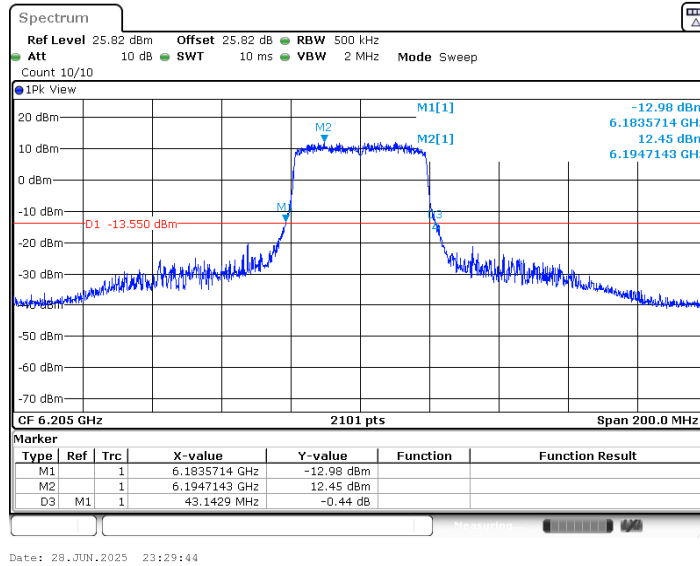




11BE40MIMO_Ant6_6405

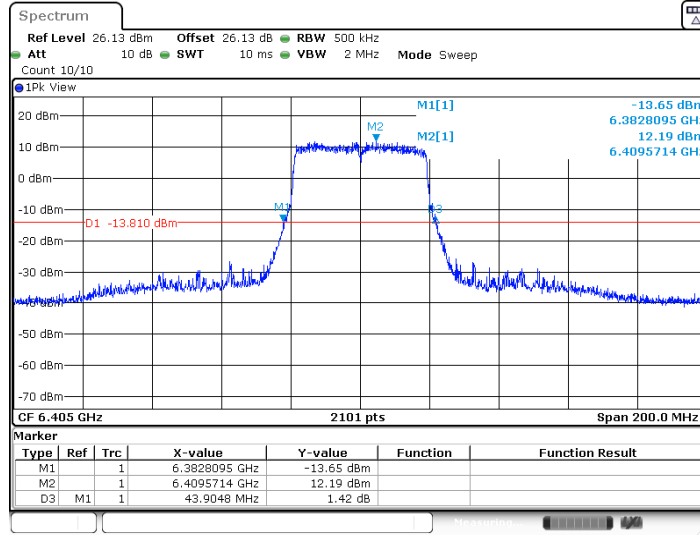

Date: 28.JUN.2025 23:31:25


11BE40MIMO_Ant7_6405

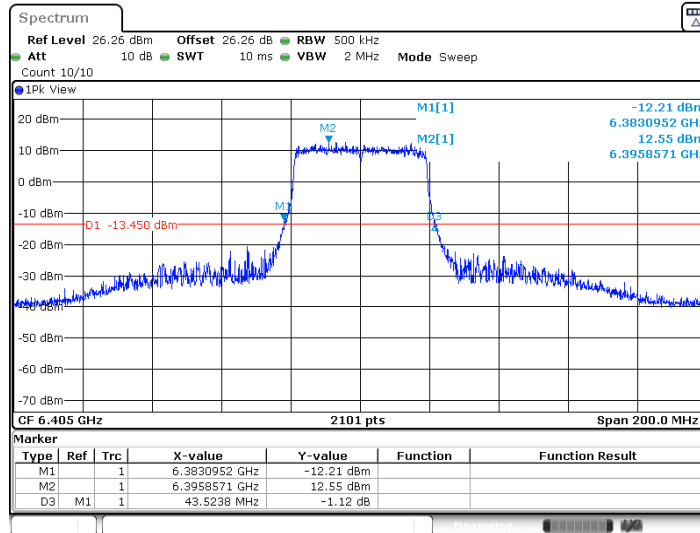

Date: 28.JUN.2025 23:32:35




11BE40MIMO_Ant6_6565

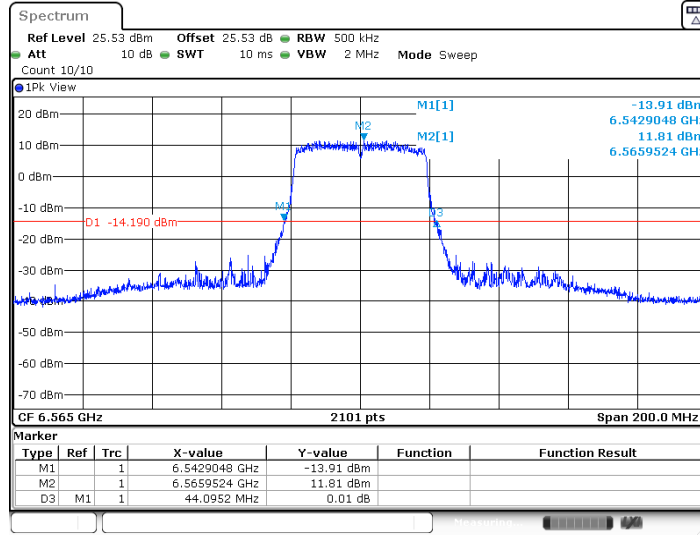

Date: 28.JUN.2025 23:48:06


11BE40MIMO_Ant7_6565

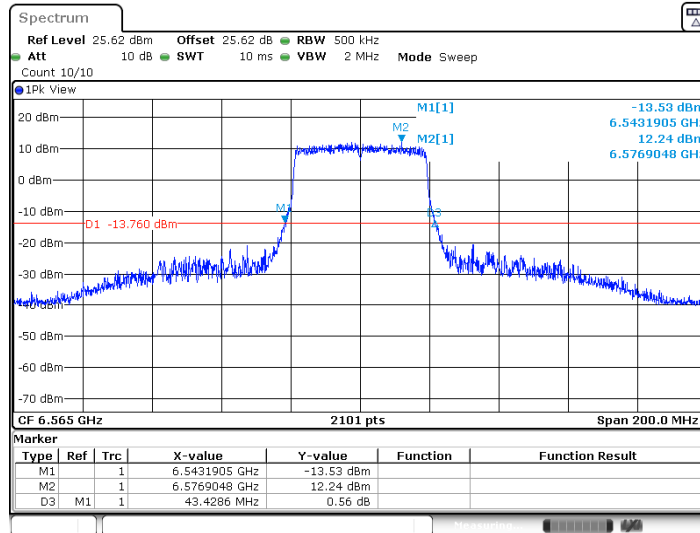


Date: 28.JUN.2025 23:49:15



11BE40MIMO_Ant6_6685

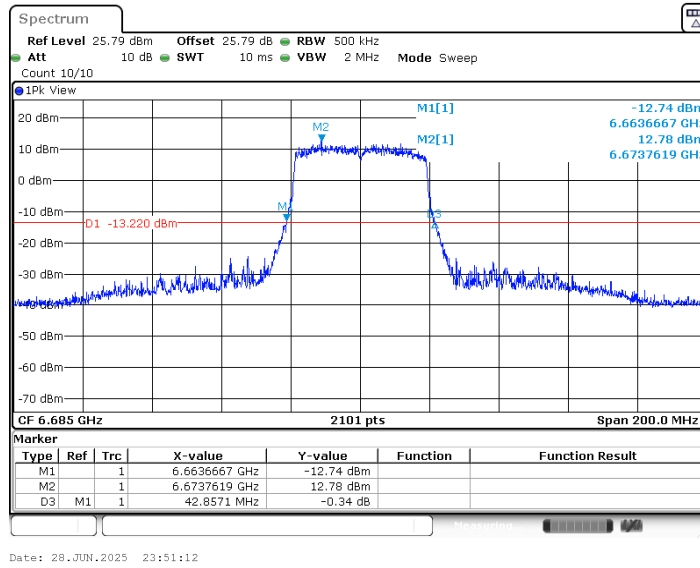


11BE40MIMO_Ant7_6685

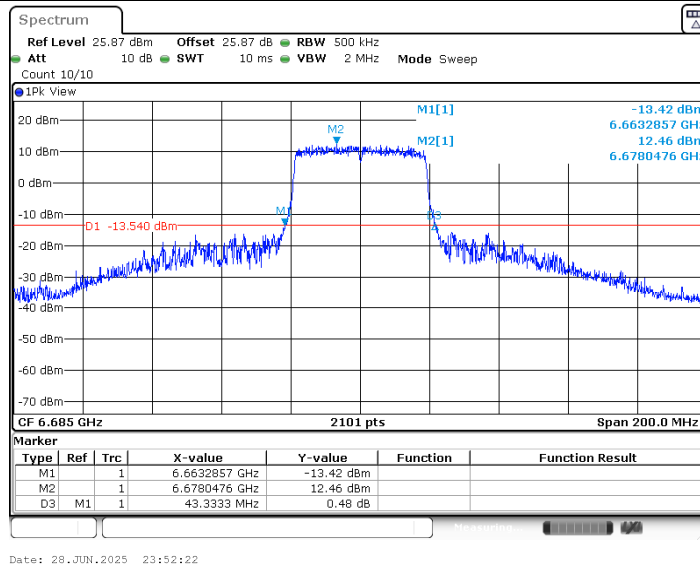




11BE40MIMO_Ant6_6845

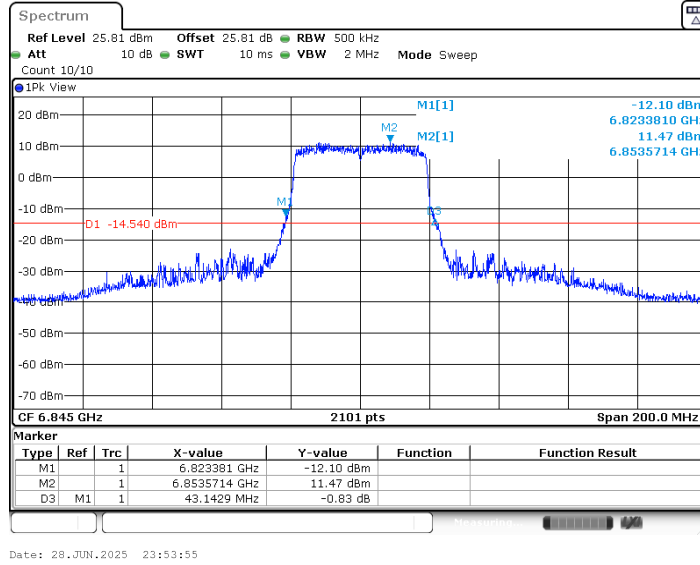


11BE40MIMO_Ant7_6845

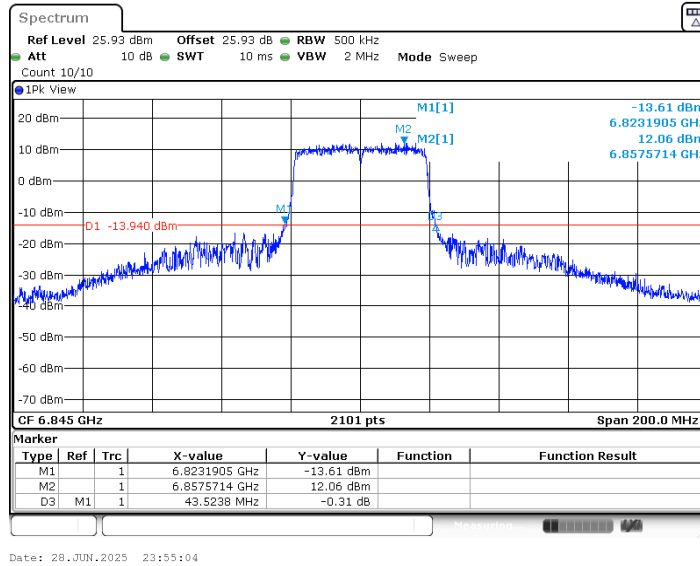




11BE80MIMO_Ant6_5985

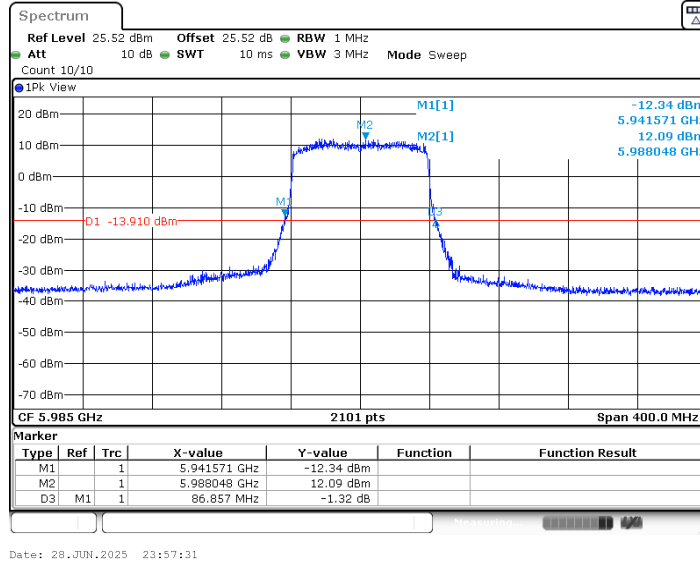


11BE80MIMO_Ant7_5985

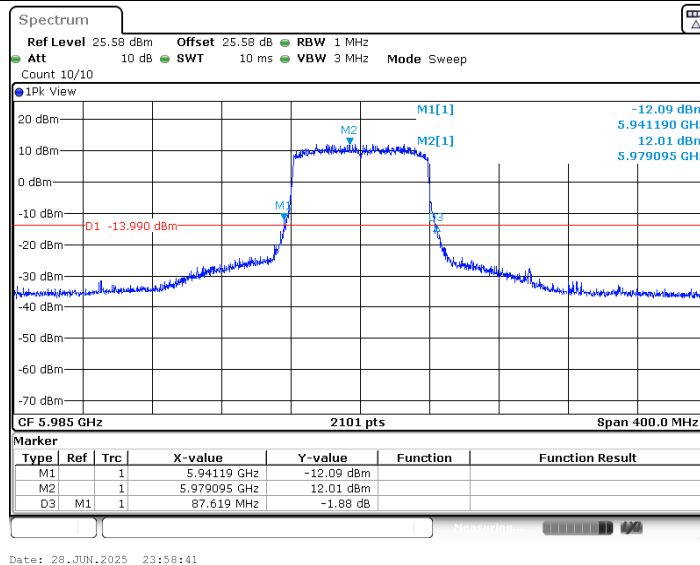




11BE80MIMO_Ant6_6225

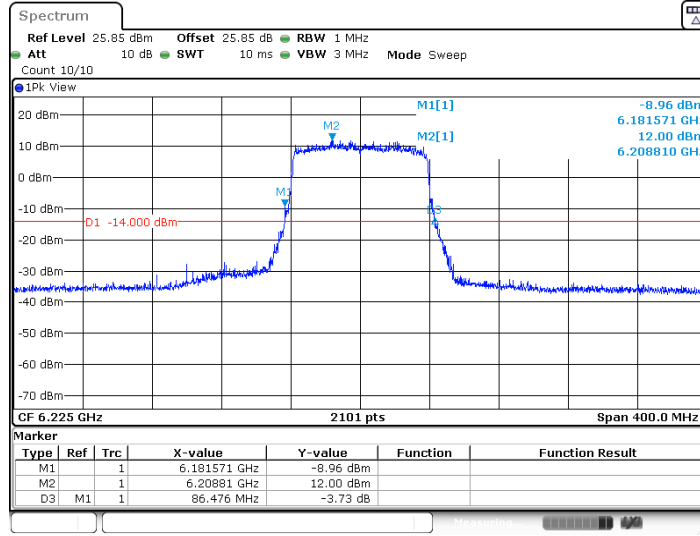

Date: 29.JUN.2025 00:00:39


11BE80MIMO_Ant7_6225

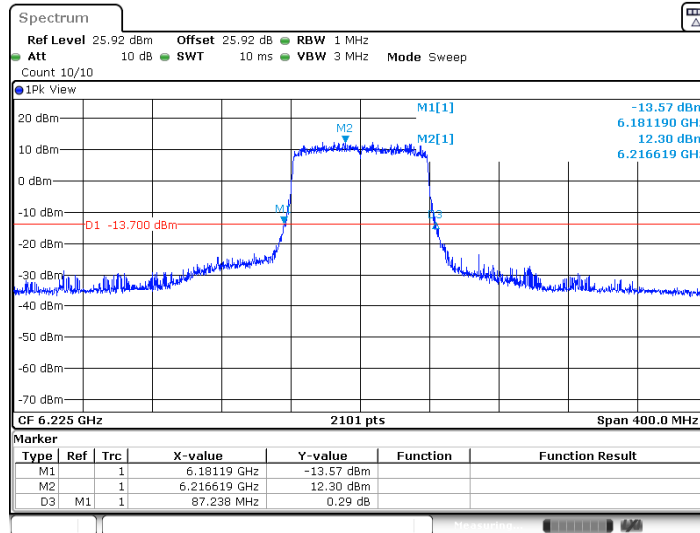


Date: 29.JUN.2025 00:01:49



11BE80MIMO_Ant6_6385

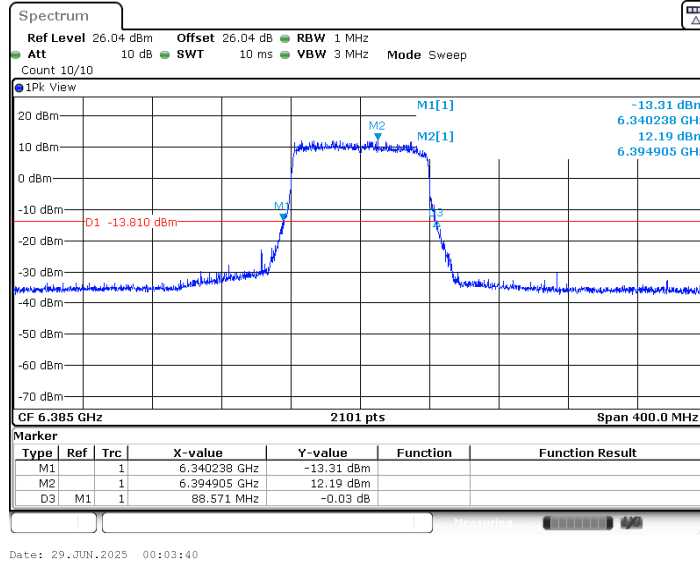


11BE80MIMO_Ant7_6385

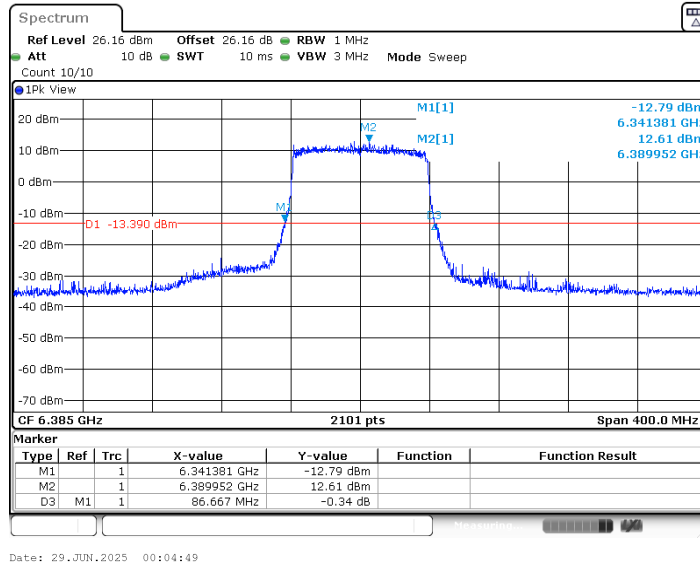




11BE80MIMO_Ant6_6625

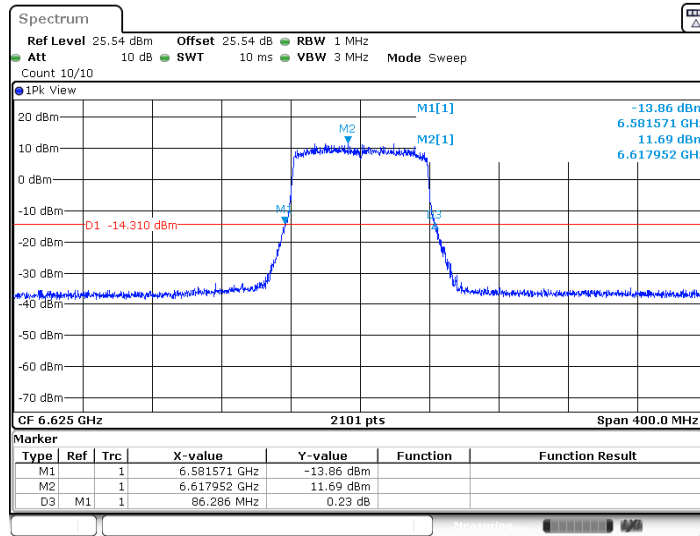

Date: 29.JUN.2025 00:13:18


11BE80MIMO_Ant7_6625

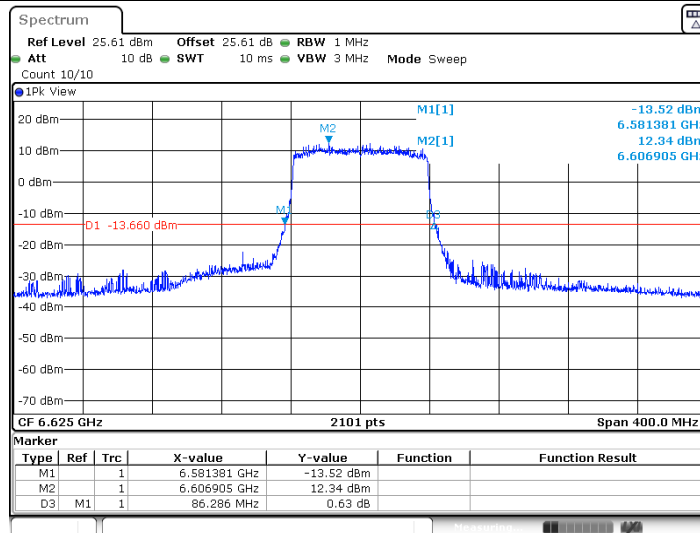

Date: 29.JUN.2025 00:14:28




11BE80MIMO_Ant6_6705

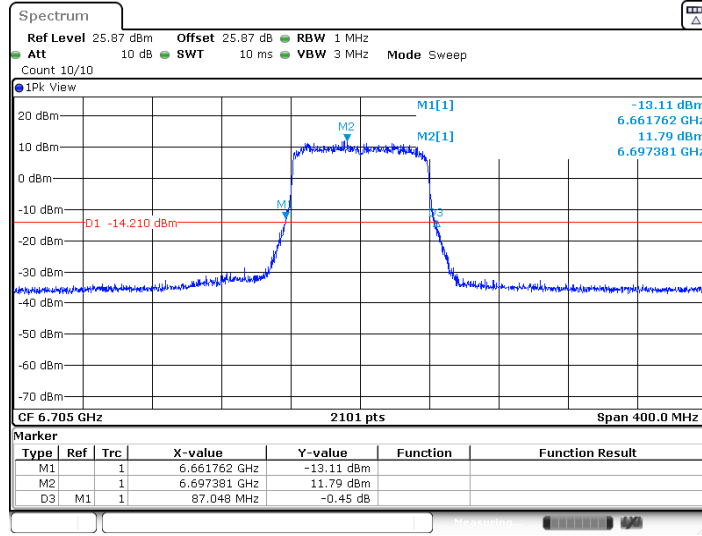

Date: 29.JUN.2025 00:16:22


11BE80MIMO_Ant7_6705

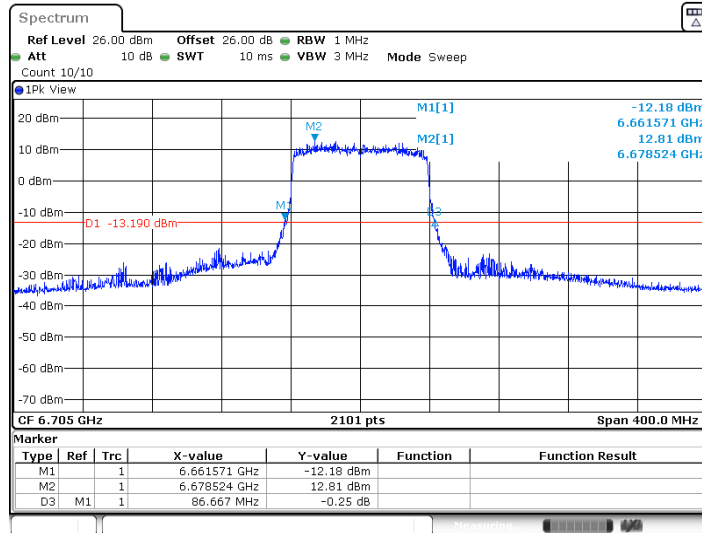


Date: 29.JUN.2025 00:17:31



11BE80MIMO_Ant6_6785

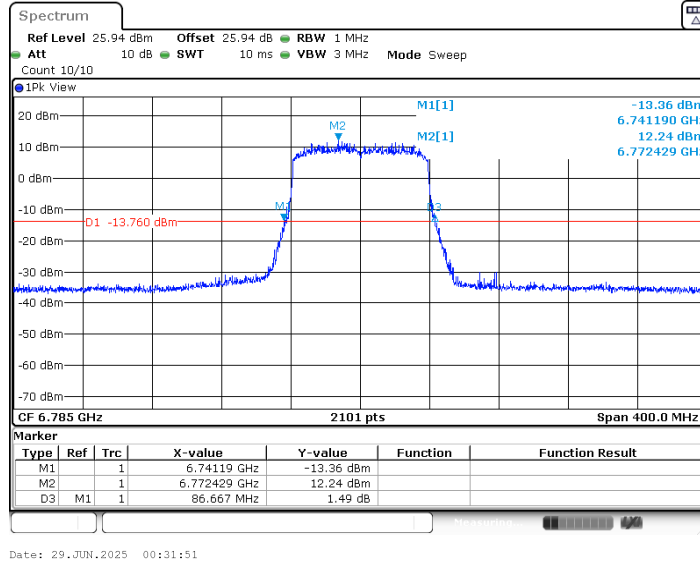


11BE80MIMO_Ant7_6785

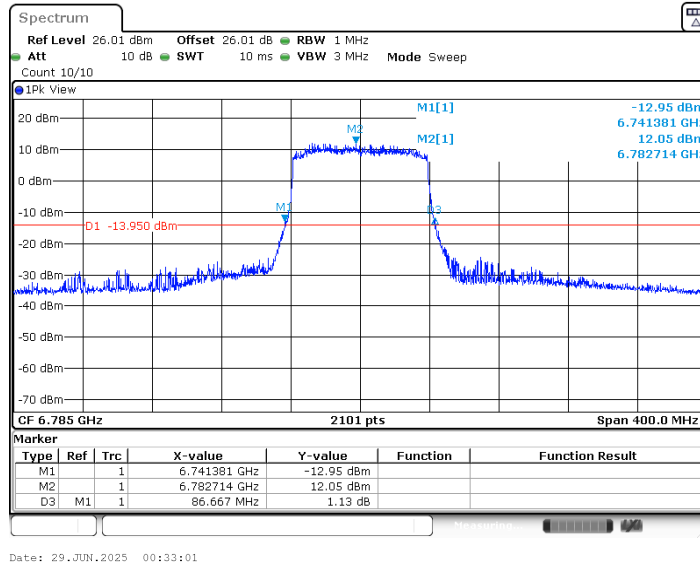






11BE160MIMO_Ant6_6025

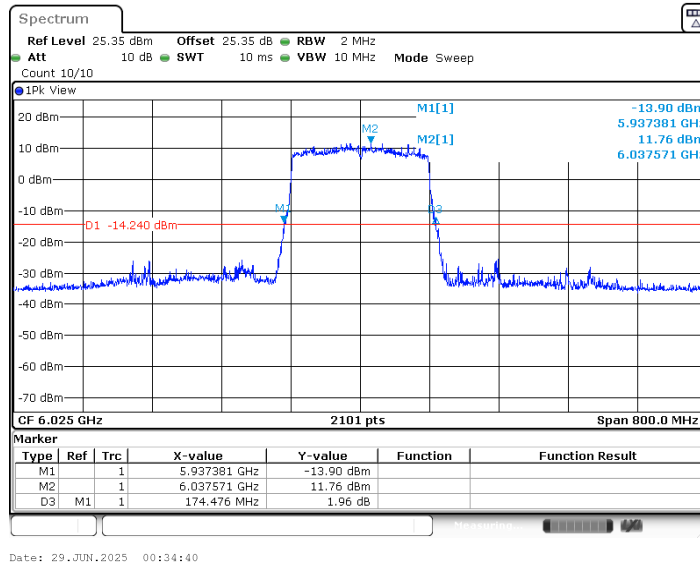


11BE160MIMO_Ant7_6025

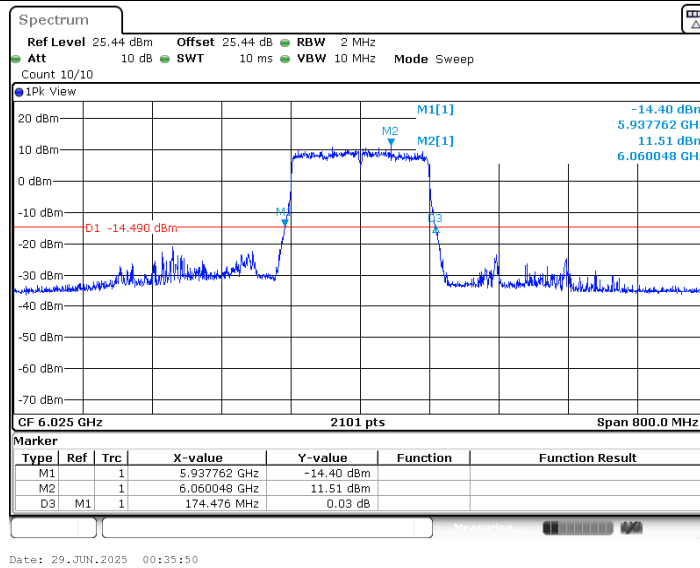

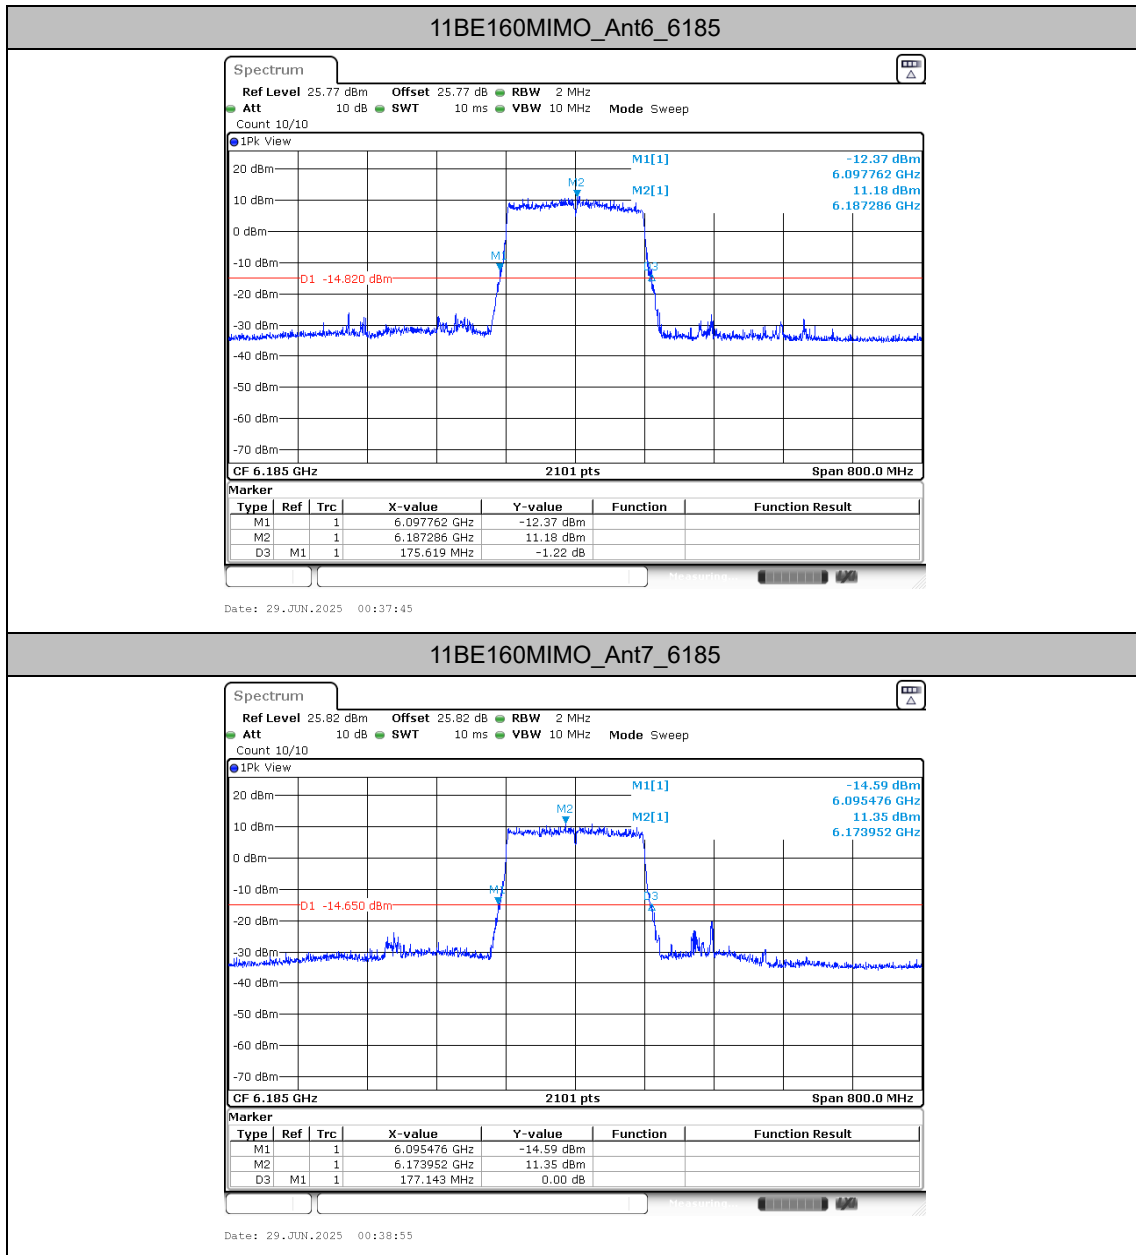

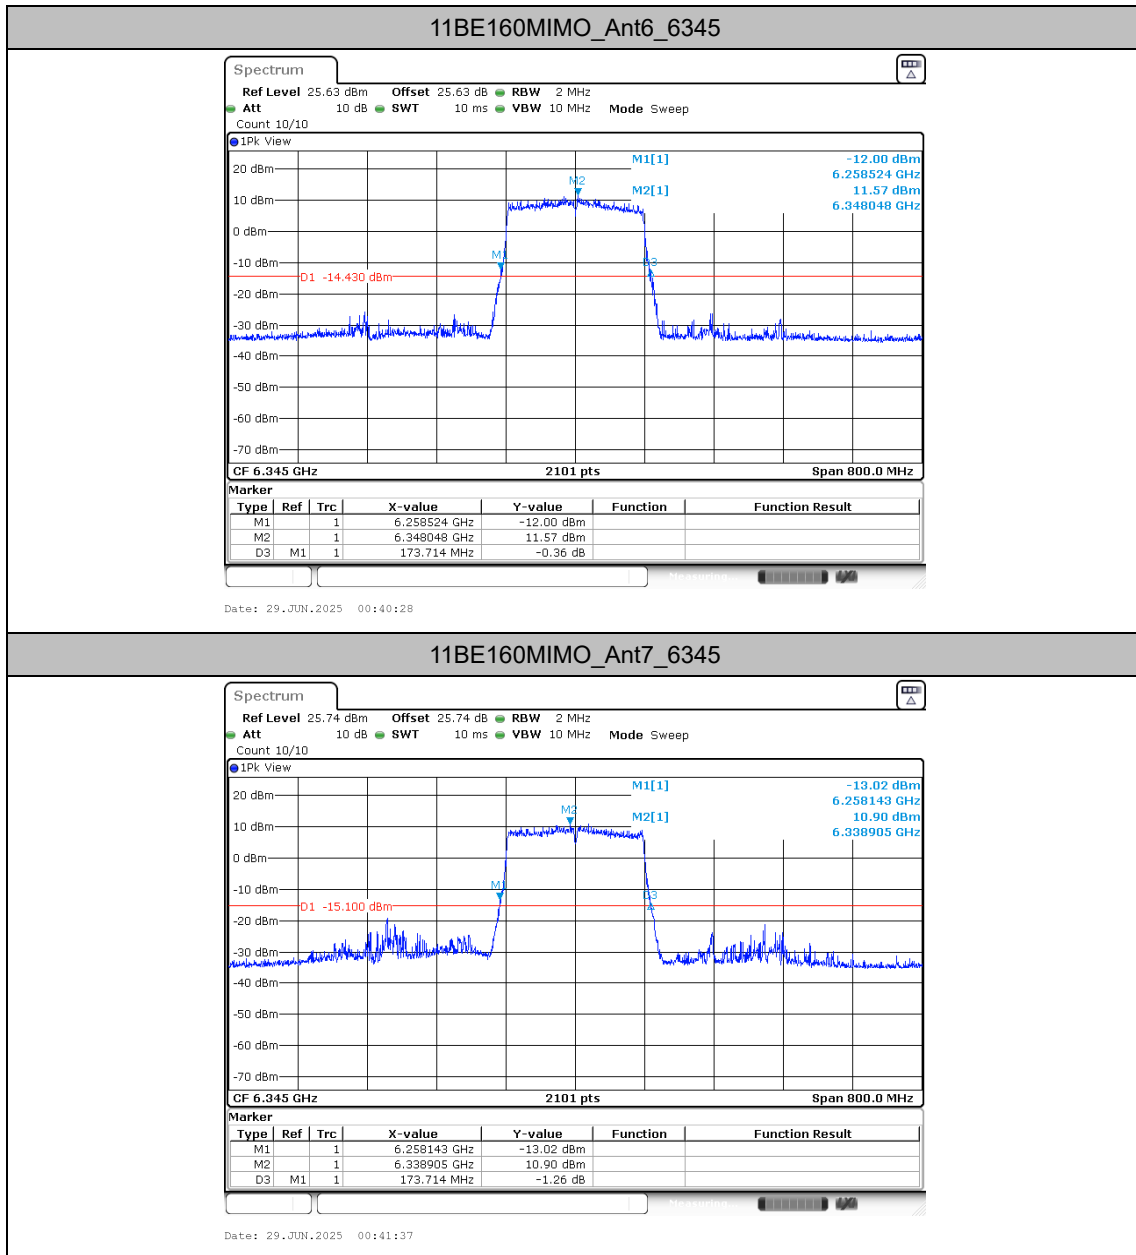

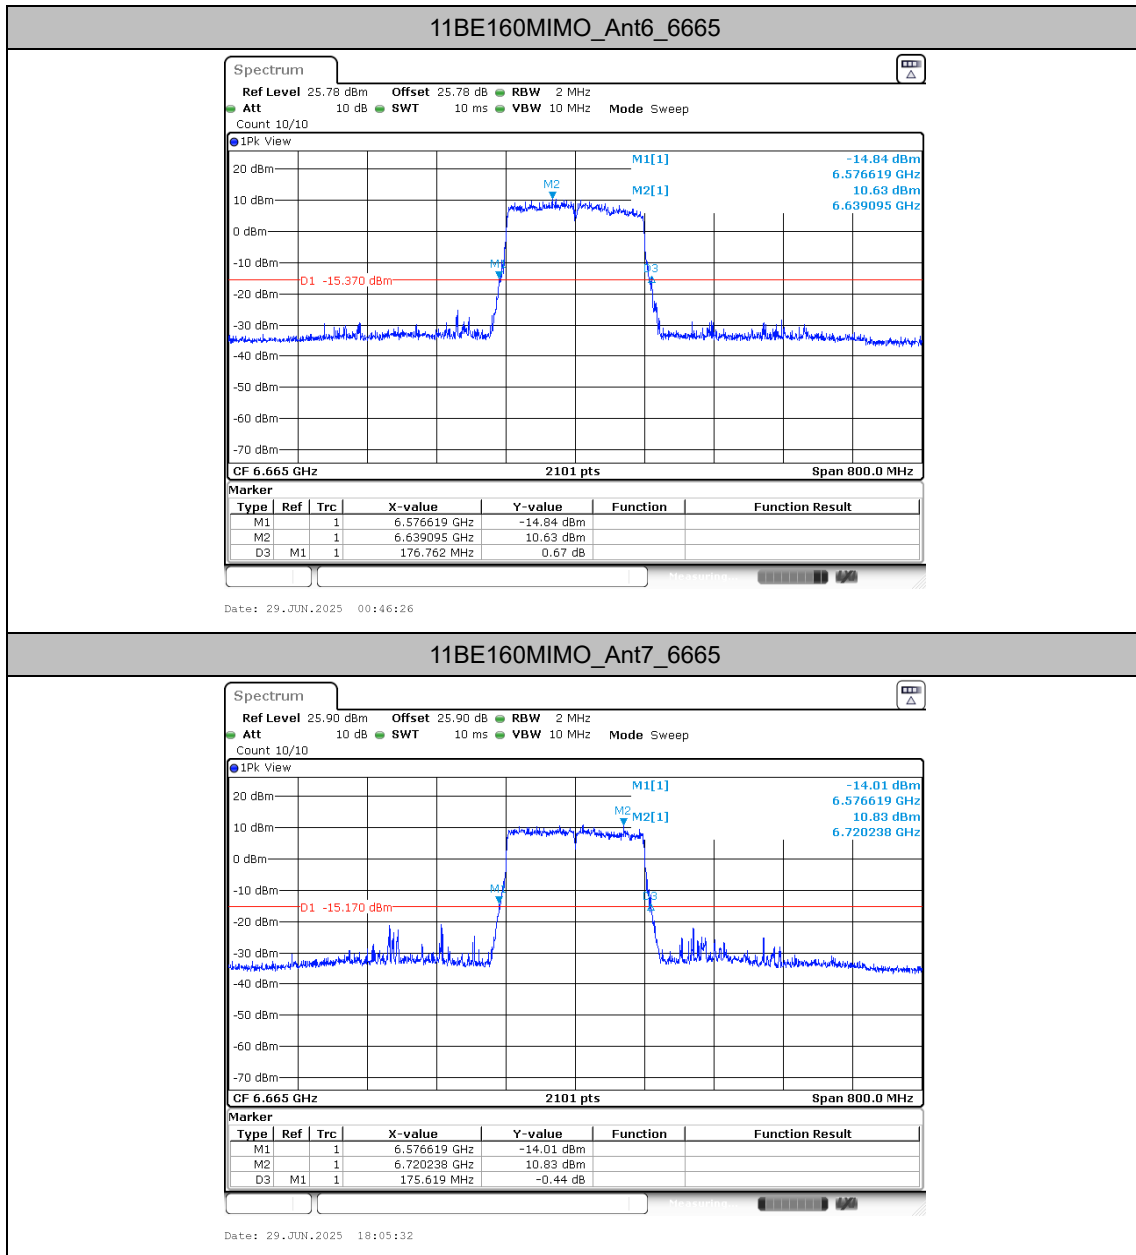



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11BE320MIMO	Ant6	6105	317.715	5945.6854	6263.4008	320	PASS
	Ant7	6105	317.106	5945.9900	6263.0961	320	PASS
	Ant6	6265	318.020	6105.3808	6423.4008	320	PASS
	Ant7	6265	317.715	6105.6854	6423.4008	320	PASS
11A-CDD	Ant6	5955	17.439	5946.1851	5963.6245	---	---
	Ant7	5955	17.173	5946.4327	5963.6054	---	---
	Ant6	6195	17.458	6186.1471	6203.6054	---	---
	Ant7	6195	17.116	6186.4327	6203.5483	---	---
	Ant6	6415	17.477	6406.1471	6423.6245	---	---
	Ant7	6415	17.116	6406.4517	6423.5673	---	---
	Ant6	6535	17.496	6526.1090	6543.6054	---	---
	Ant7	6535	17.097	6526.4517	6543.5483	---	---
	Ant6	6695	17.496	6686.0900	6703.5864	---	---
	Ant7	6695	17.078	6686.4327	6703.5102	---	---
	Ant6	6855	17.496	6846.1280	6863.6245	---	---
	Ant7	6855	17.097	6846.4517	6863.5483	---	---
11BE20MIMO	Ant6	5955	19.153	5945.4617	5964.6145	---	---
	Ant7	5955	19.229	5945.4046	5964.6335	---	---
	Ant6	6195	19.191	6185.4426	6204.6335	---	---
	Ant7	6195	19.210	6185.4236	6204.6335	---	---
	Ant6	6415	19.229	6405.4236	6424.6525	---	---
	Ant7	6415	19.210	6405.4236	6424.6335	---	---
	Ant6	6535	19.210	6525.4236	6544.6335	---	---
	Ant7	6535	19.153	6525.4426	6544.5954	---	---
	Ant6	6695	19.229	6685.3855	6704.6145	---	---
	Ant7	6695	19.153	6685.4236	6704.5764	---	---
	Ant6	6855	19.248	6845.3855	6864.6335	---	---
	Ant7	6855	19.172	6845.4236	6864.5954	---	---
11BE40MIMO	Ant6	5965	38.306	5945.8853	5984.1909	---	---
	Ant7	5965	38.153	5945.9234	5984.0766	---	---
	Ant6	6205	38.306	6185.8472	6224.1528	---	---
	Ant7	6205	38.267	6185.8472	6224.1147	---	---
	Ant6	6405	38.267	6385.8472	6424.1147	---	---
	Ant7	6405	38.306	6385.8091	6424.1147	---	---




	Ant6	6565	38.153	6545.9234	6584.0766	---	---
	Ant7	6565	38.267	6545.8853	6584.1528	---	---
	Ant6	6685	38.191	6665.8853	6704.0766	---	---
	Ant7	6685	38.344	6665.8472	6704.1909	---	---
	Ant6	6845	38.229	6825.9234	6864.1528	---	---
	Ant7	6845	38.344	6825.8472	6864.1909	---	---
11BE80MIMO	Ant6	5985	77.830	5946.0852	6023.9148	---	---
	Ant7	5985	77.753	5946.0852	6023.8386	---	---
	Ant6	6225	77.830	6186.0090	6263.8386	---	---
	Ant7	6225	77.906	6186.0090	6263.9148	---	---
	Ant6	6385	77.830	6345.9329	6423.7625	---	---
	Ant7	6385	77.906	6345.9329	6423.8386	---	---
	Ant6	6625	77.753	6586.0090	6663.7625	---	---
	Ant7	6625	77.753	6586.1614	6663.9148	---	---
	Ant6	6705	77.677	6666.0852	6743.7625	---	---
	Ant7	6705	77.830	6666.0090	6743.8386	---	---
	Ant6	6785	77.601	6746.2375	6823.8386	---	---
	Ant7	6785	77.753	6746.1614	6823.9148	---	---
11BE160MIMO	Ant6	6025	158.705	5945.4950	6104.2004	---	---
	Ant7	6025	159.162	5945.1904	6104.3527	---	---
	Ant6	6185	159.162	6105.0381	6264.2004	---	---
	Ant7	6185	159.315	6105.0381	6264.3527	---	---
	Ant6	6345	158.705	6265.6473	6424.3527	---	---
	Ant7	6345	159.010	6265.3427	6424.3527	---	---
	Ant6	6665	158.248	6585.4950	6743.7435	---	---
	Ant7	6665	159.010	6585.1904	6744.2004	---	---


Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.

Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.




Test Graphs

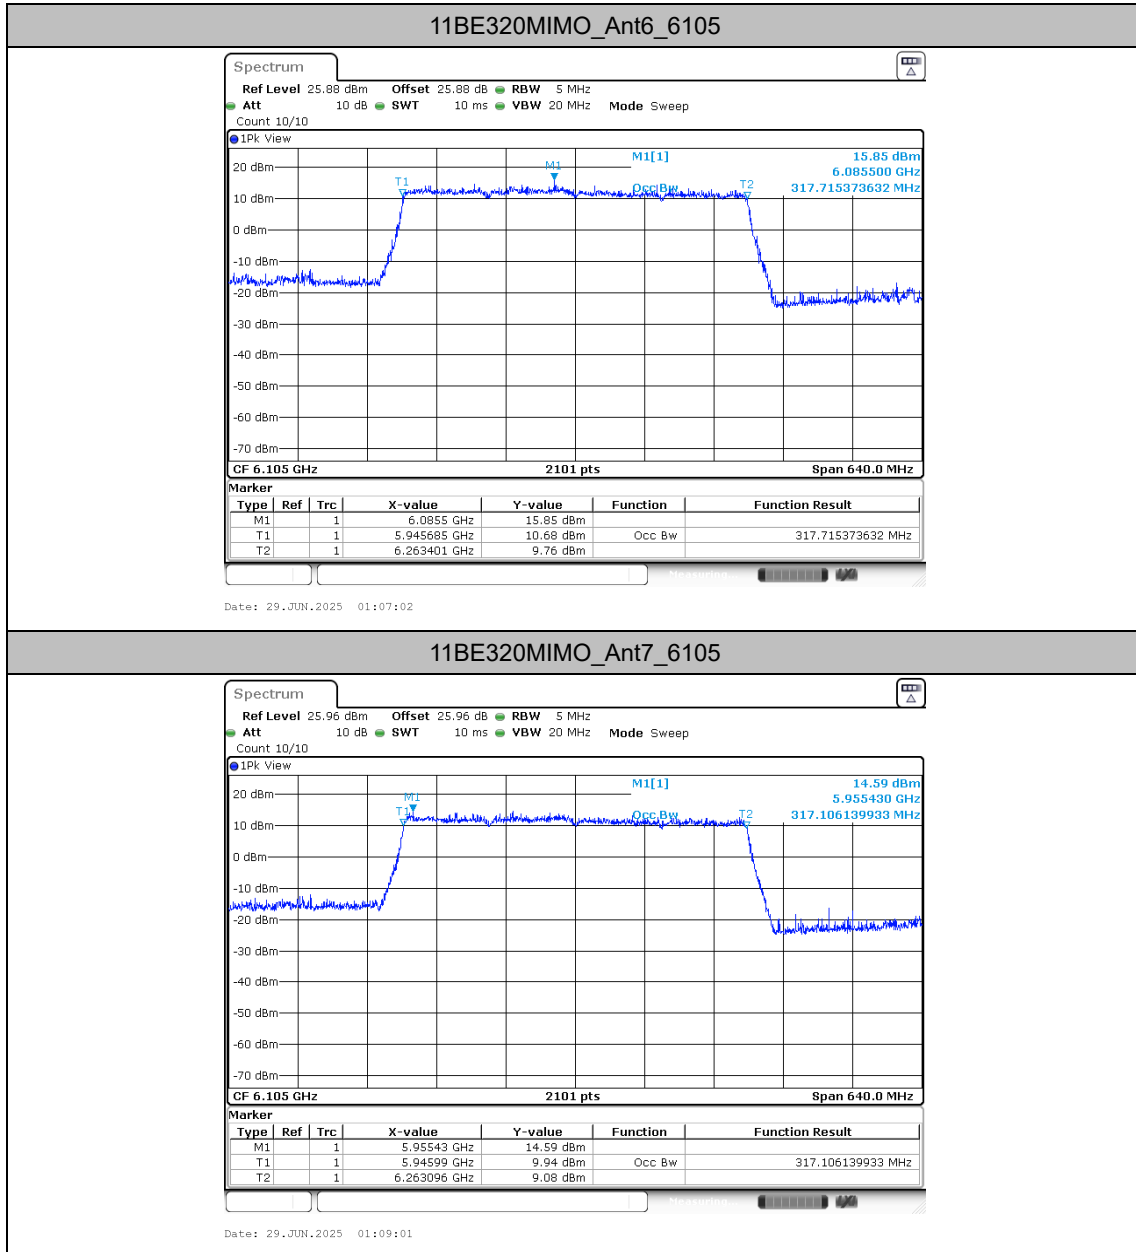

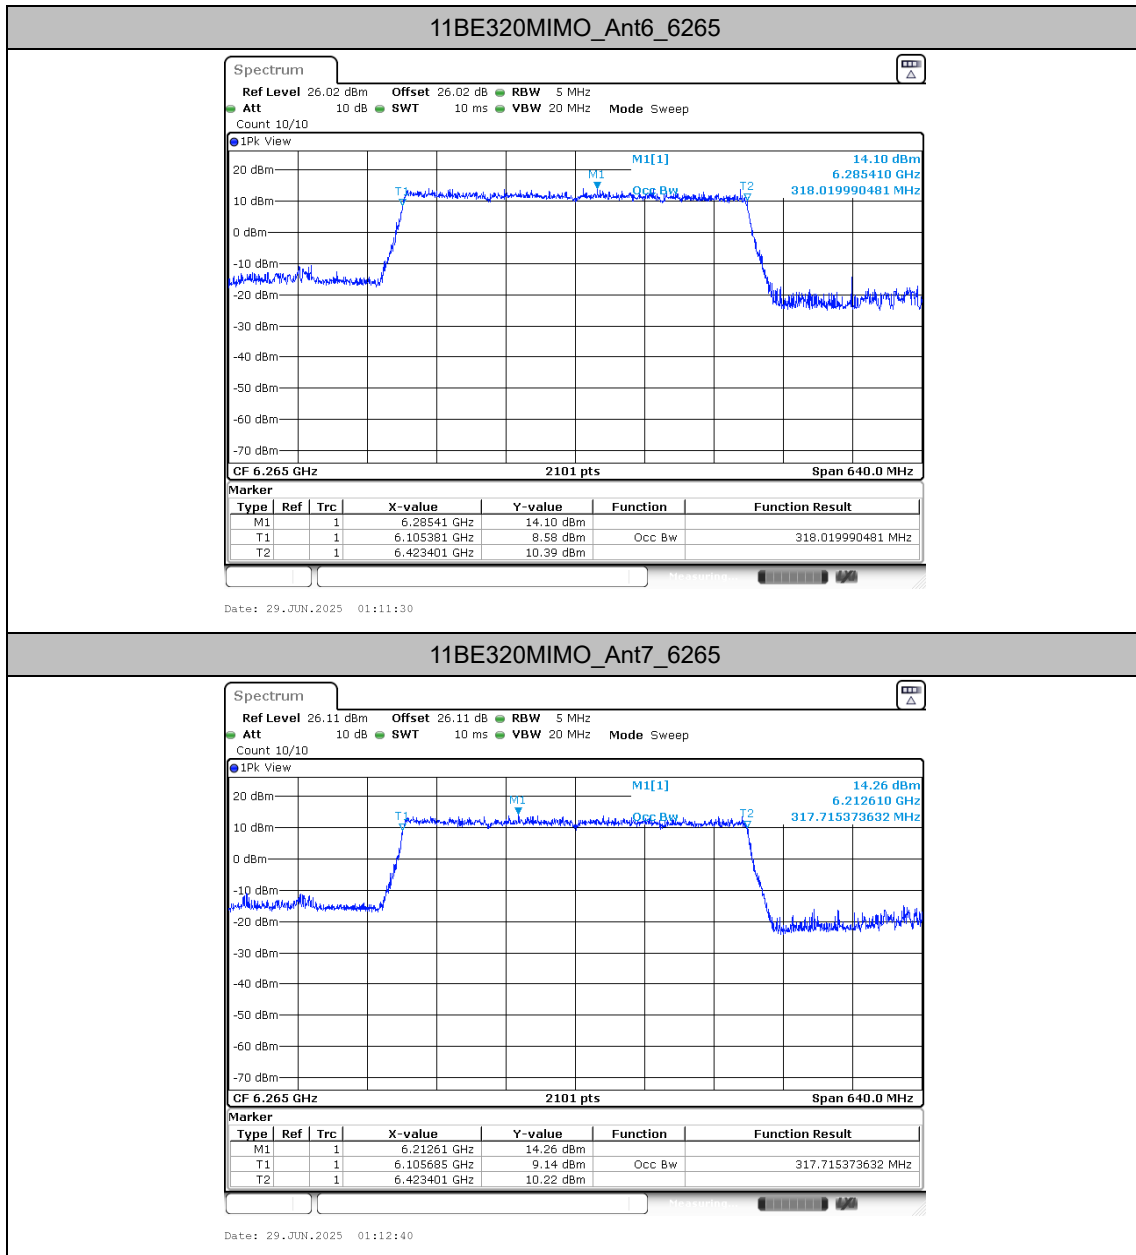




11A-CDD_Ant6_5955

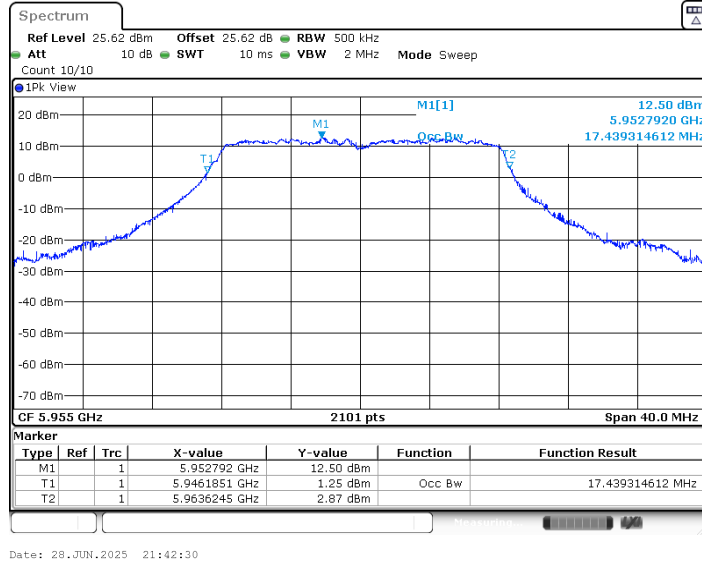


11A-CDD_Ant7_5955

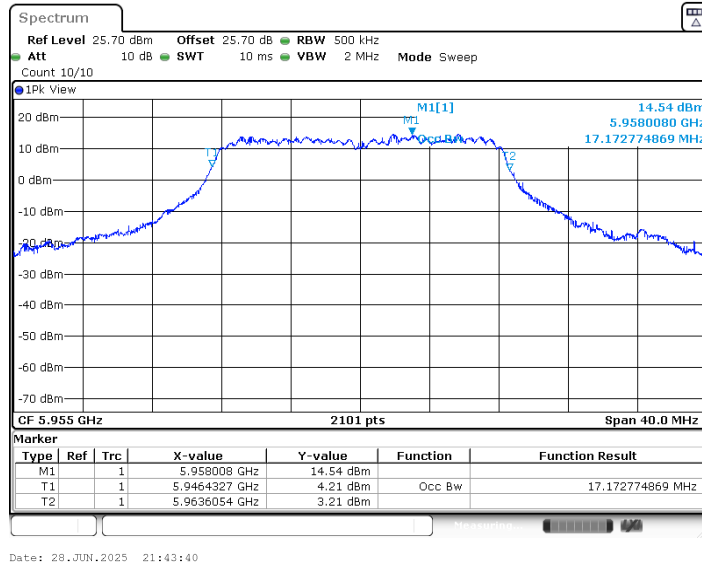




11A-CDD_Ant6_6195

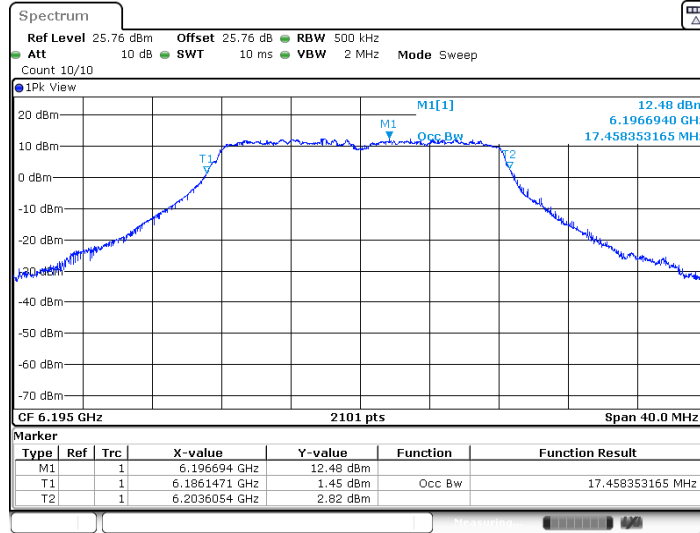

Date: 28.JUN.2025 21:46:54


11A-CDD_Ant7_6195

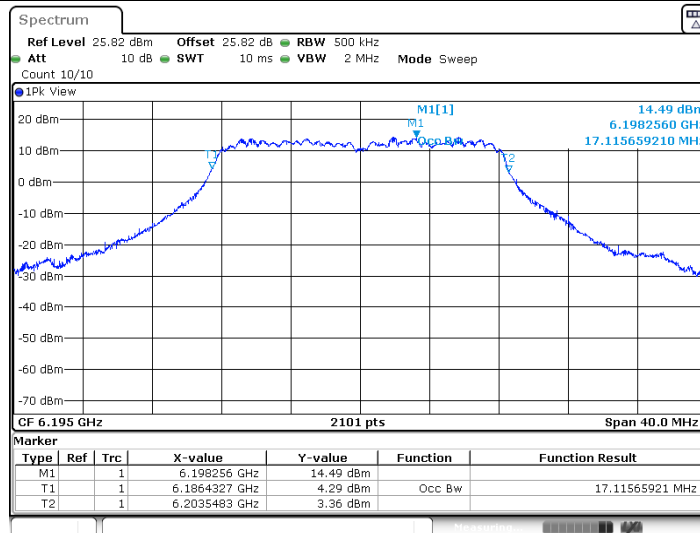


Date: 28.JUN.2025 21:48:03




11A-CDD_Ant6_6415

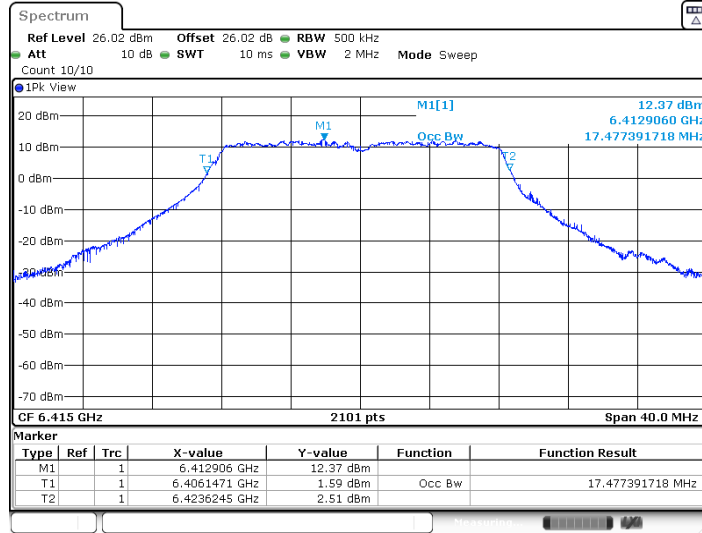


11A-CDD_Ant7_6415

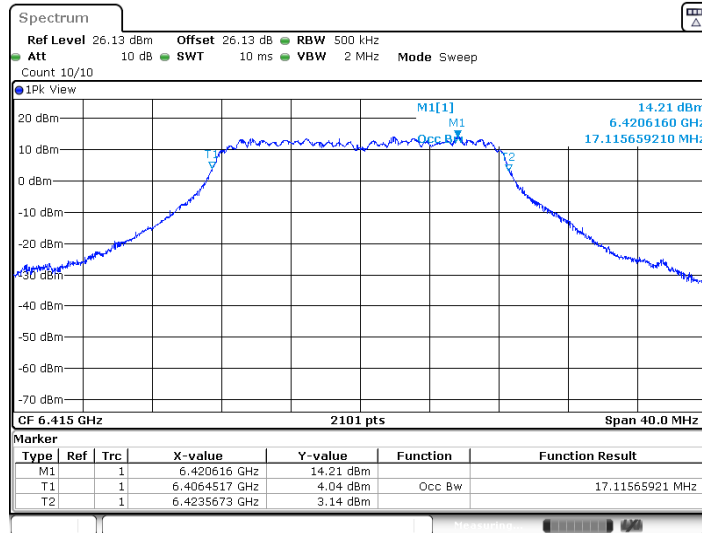

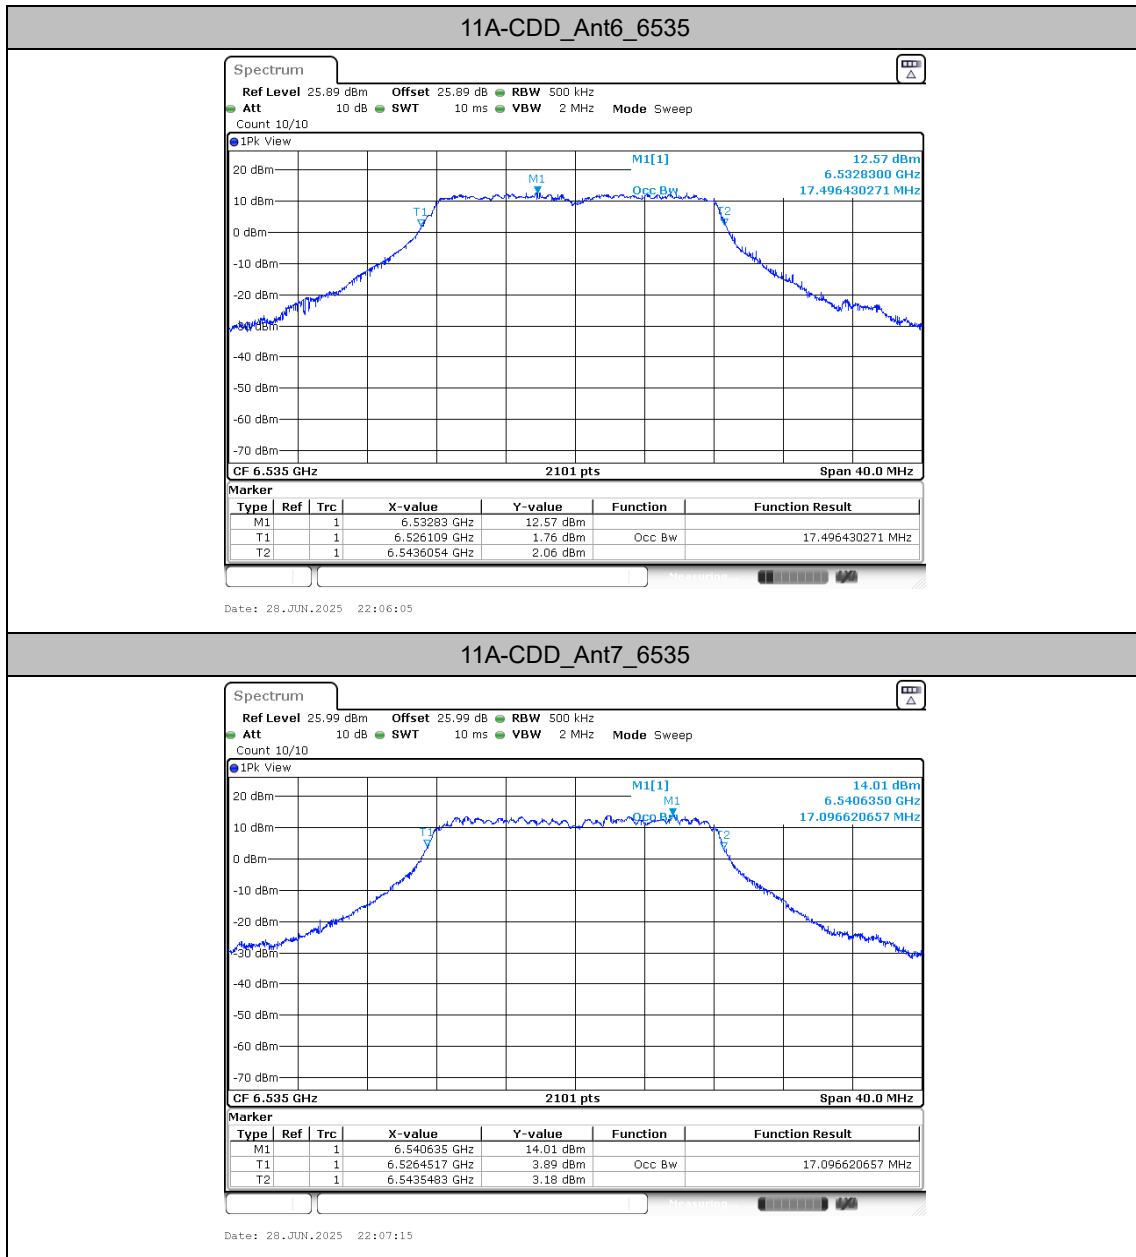




11A-CDD_Ant6_6695

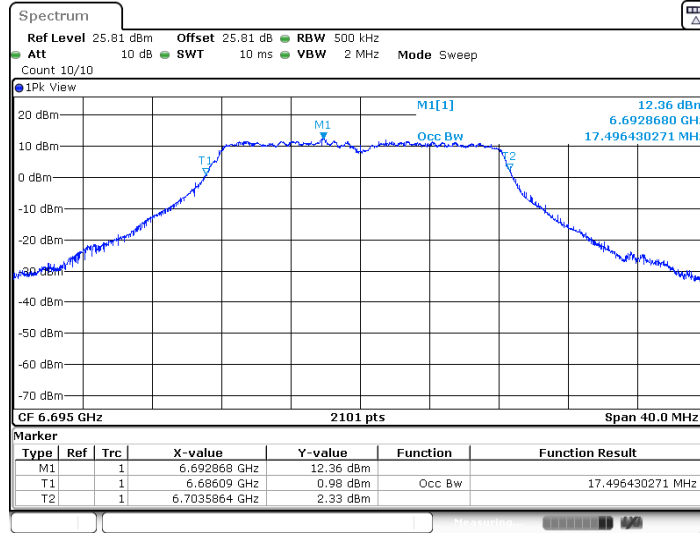


11A-CDD_Ant7_6695

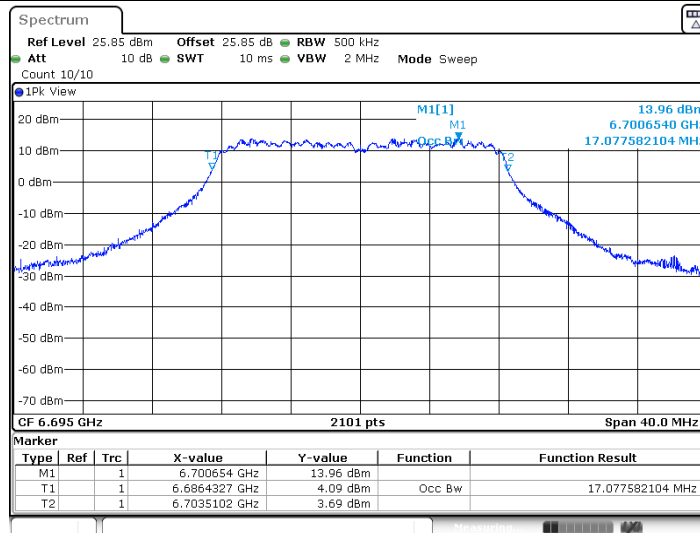





11A-CDD_Ant6_6855

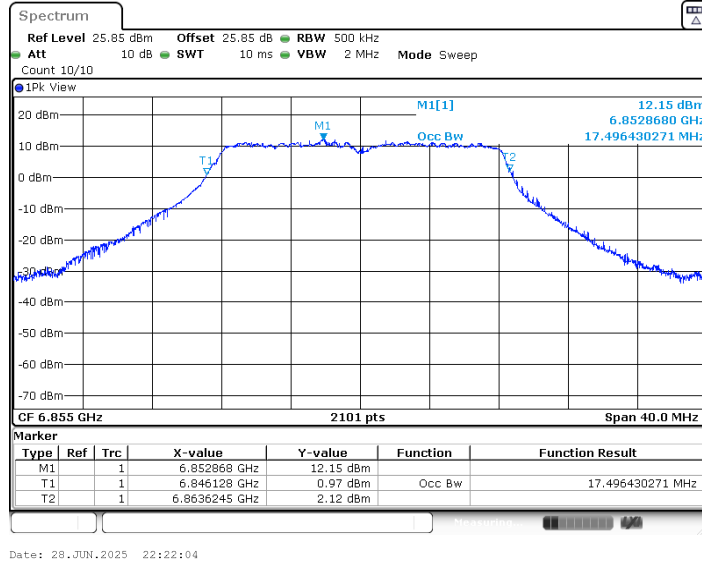


11A-CDD_Ant7_6855

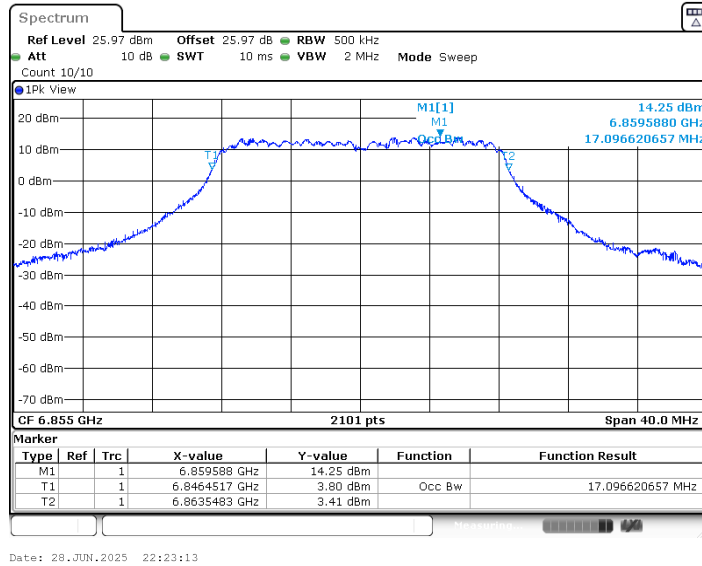

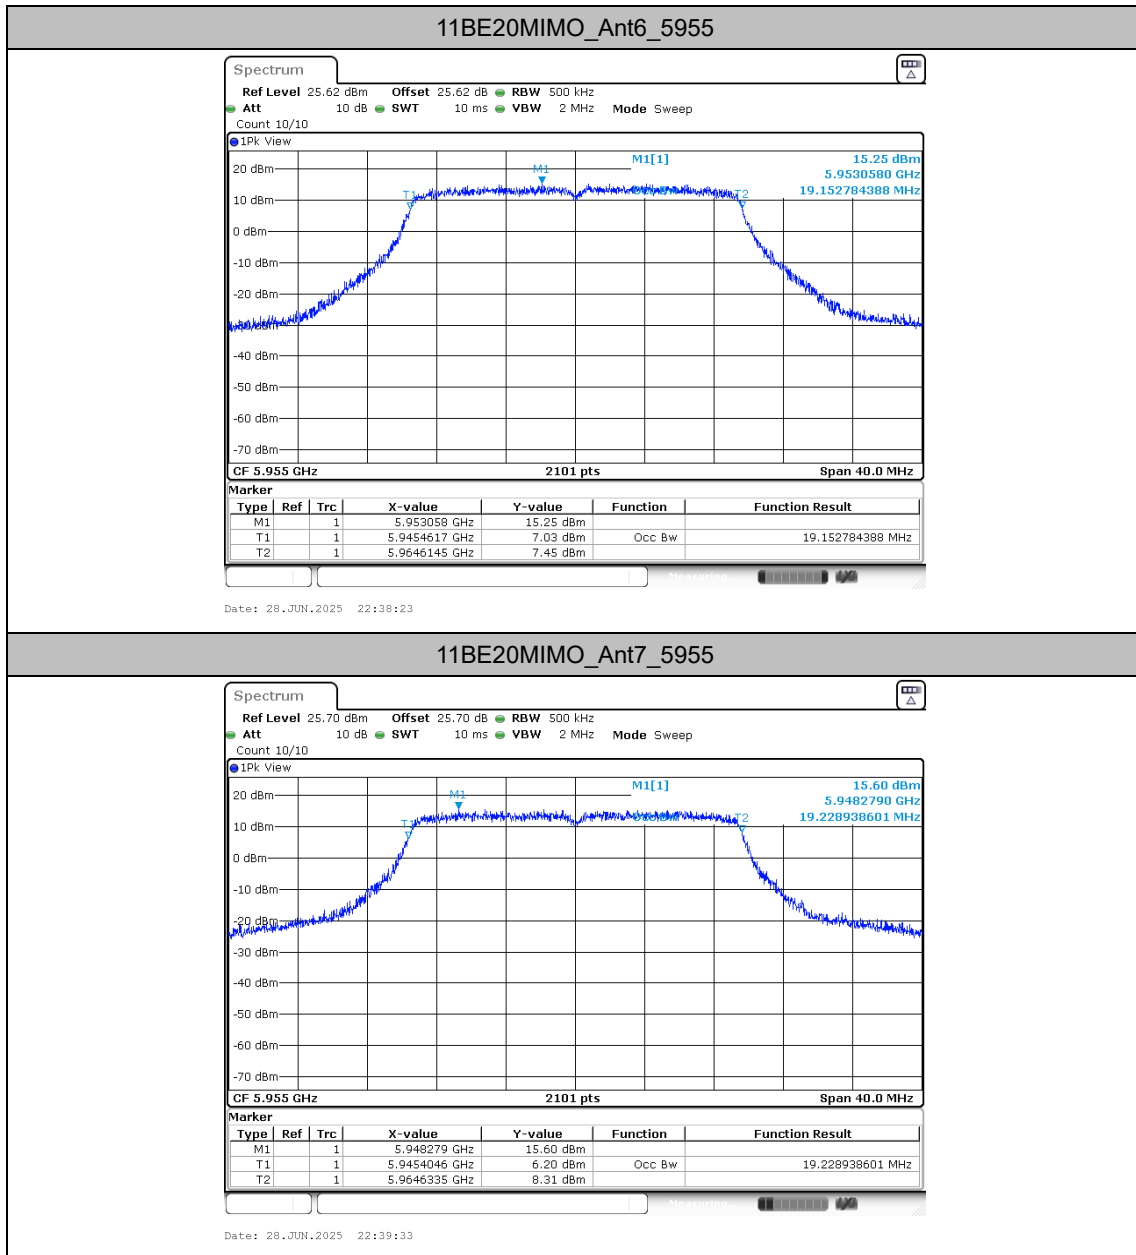




11BE20MIMO_Ant6_6195

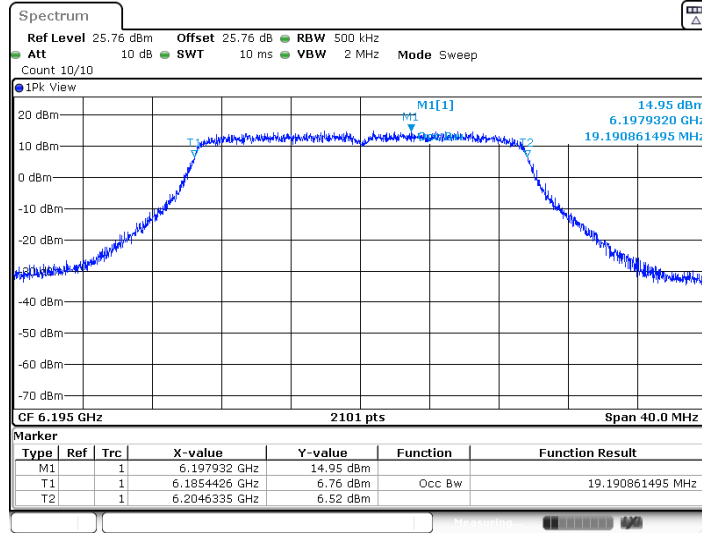

Date: 28.JUN.2025 22:41:29


11BE20MIMO_Ant7_6195

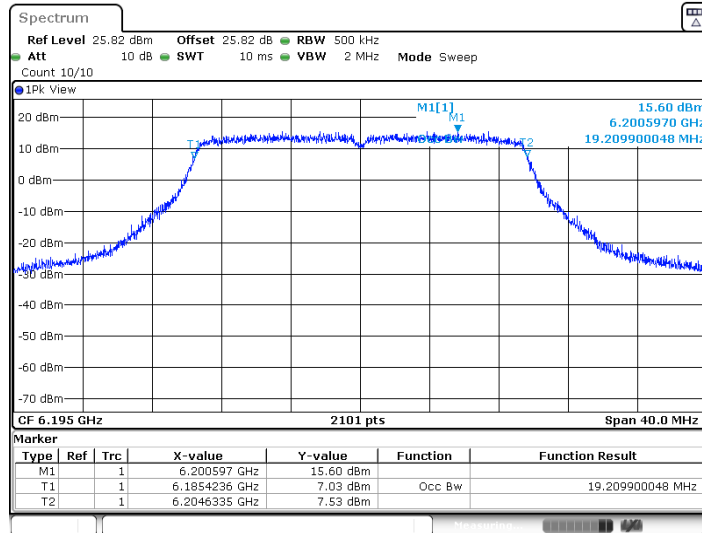

Date: 28.JUN.2025 22:42:38




11BE20MIMO_Ant6_6415

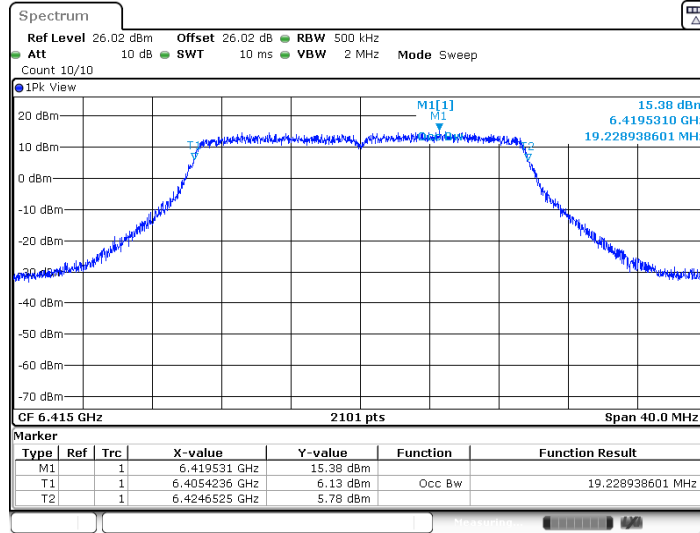

Date: 28.JUN.2025 22:44:49


11BE20MIMO_Ant7_6415

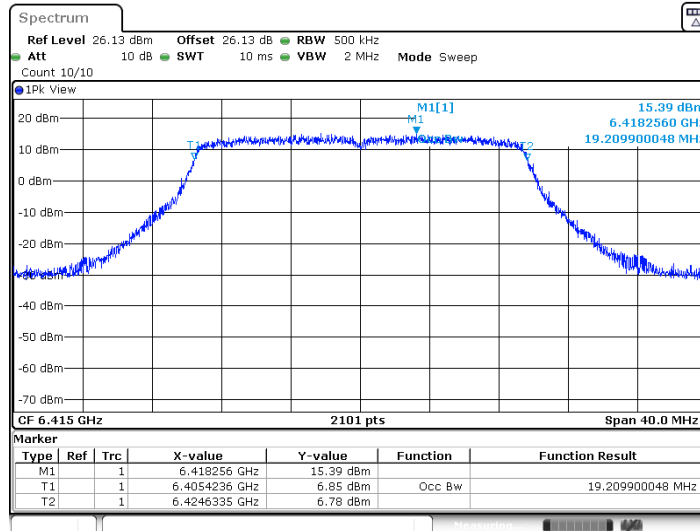

Date: 28.JUN.2025 22:45:58




11BE20MIMO_Ant6_6535

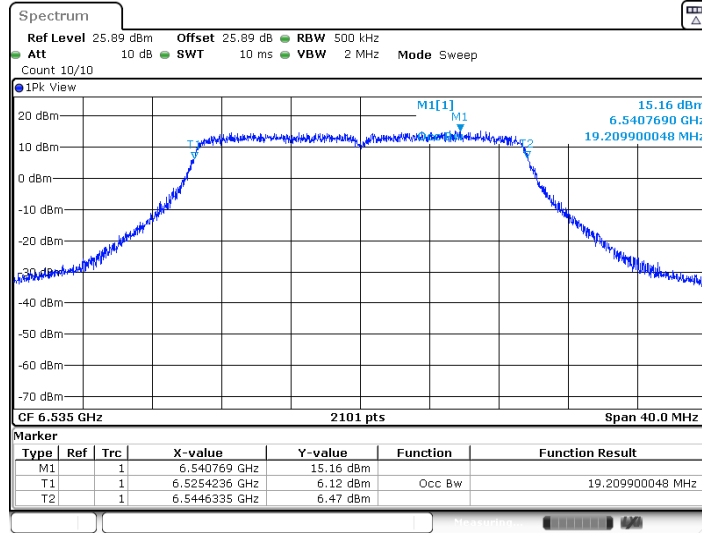

Date: 28.JUN.2025 22:59:28


11BE20MIMO_Ant7_6535

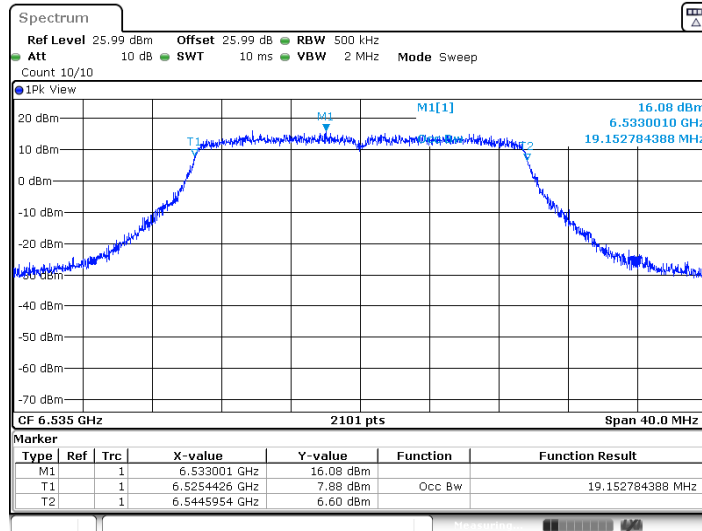

Date: 28.JUN.2025 23:00:38




11BE20MIMO_Ant6_6695

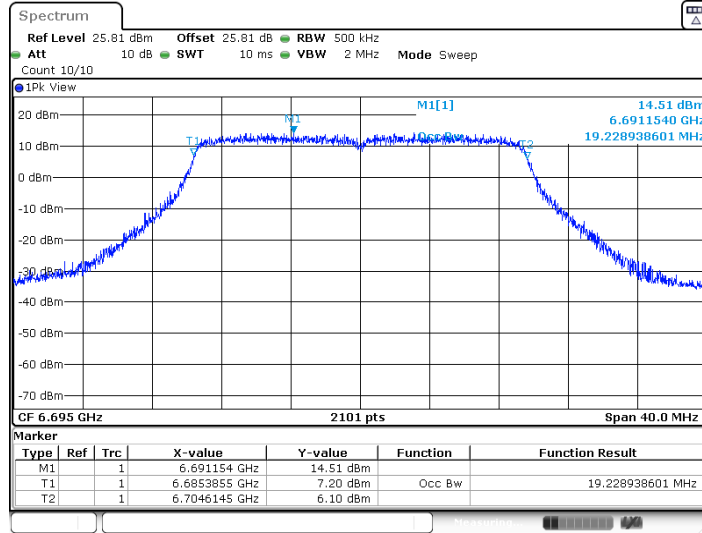

Date: 28.JUN.2025 23:02:29


11BE20MIMO_Ant7_6695

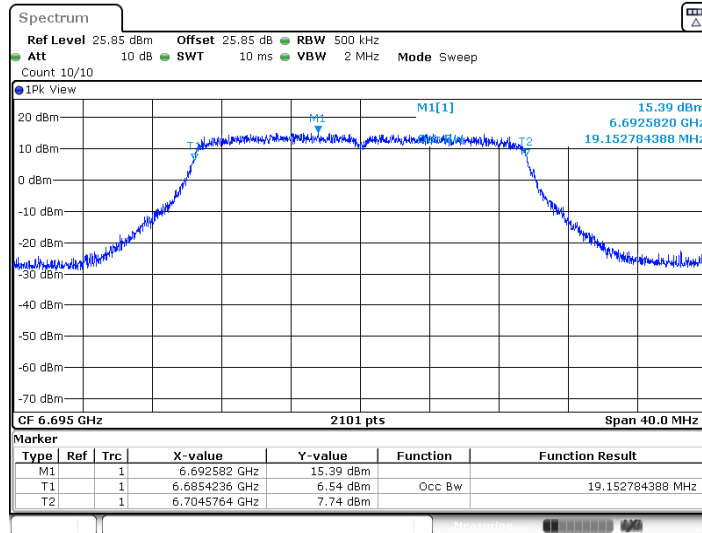


Date: 28.JUN.2025 23:03:39



11BE20MIMO_Ant6_6855

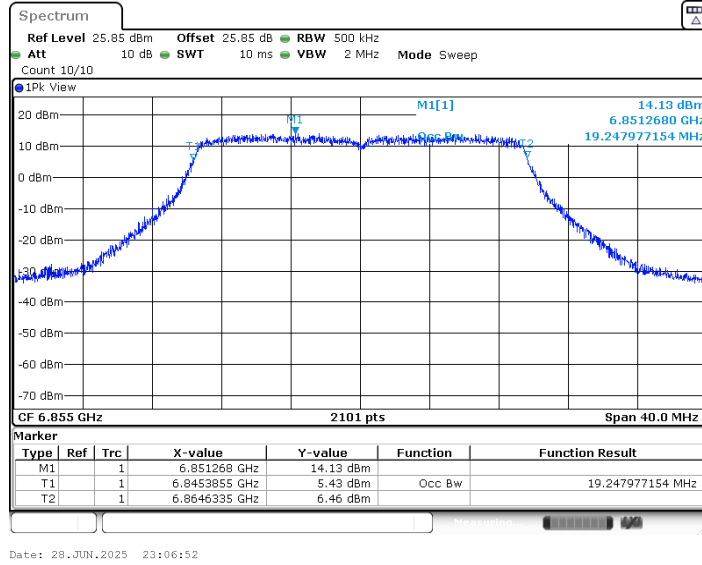


11BE20MIMO_Ant7_6855

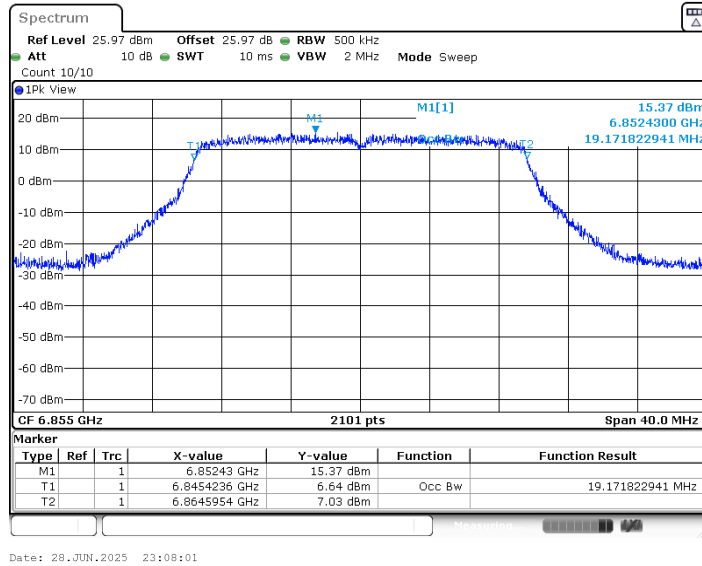




11BE40MIMO_Ant6_5965

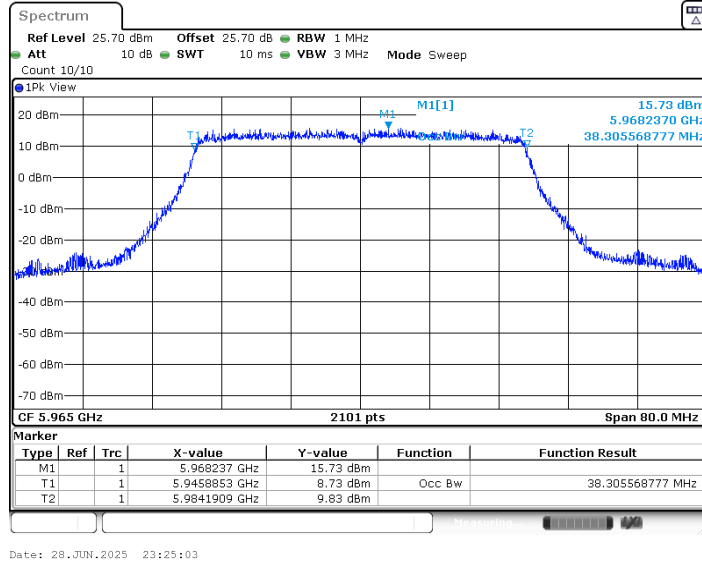


11BE40MIMO_Ant7_5965

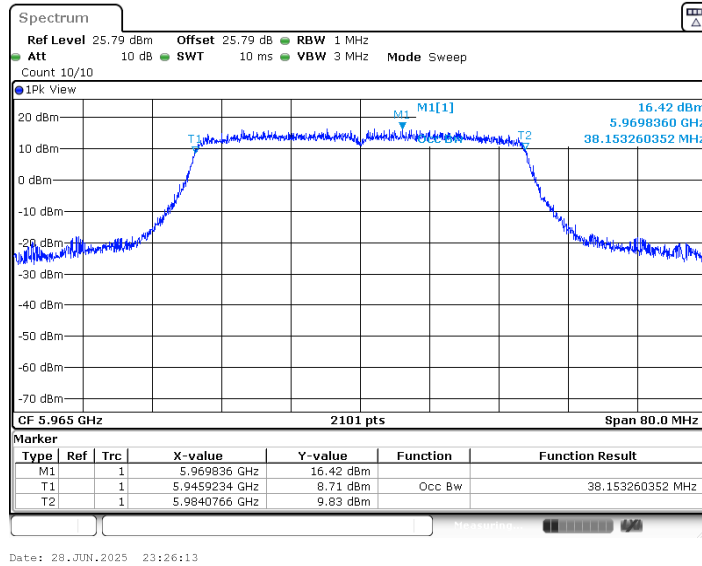




11BE40MIMO_Ant6_6205

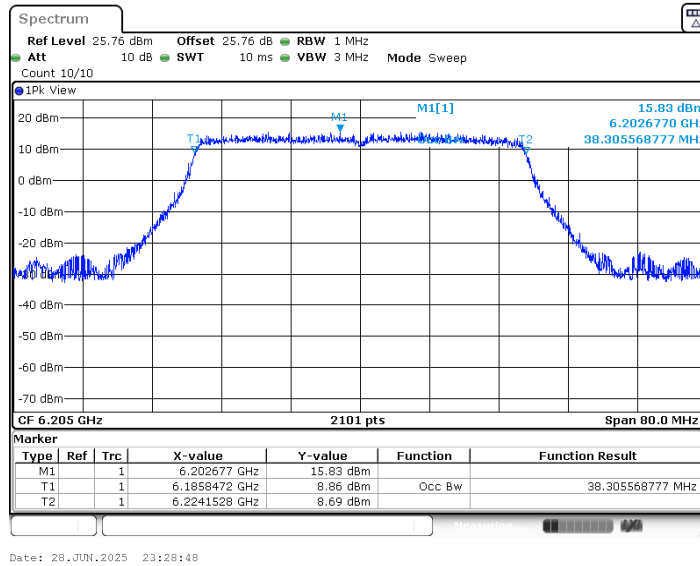


11BE40MIMO_Ant7_6205

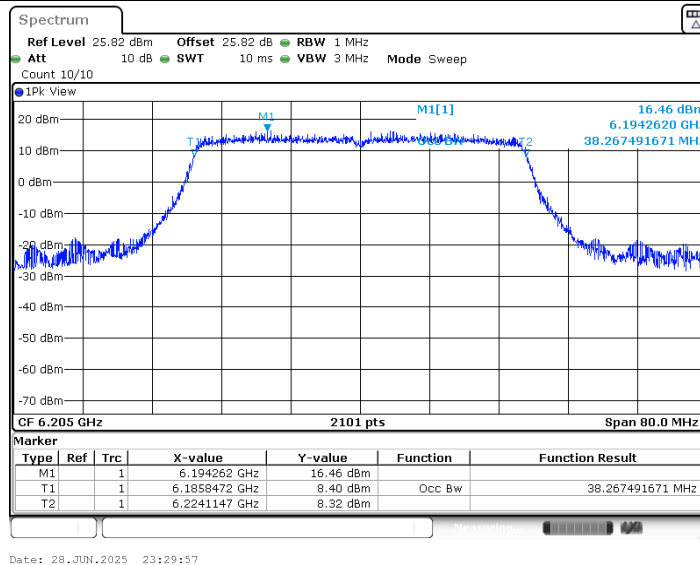




11BE40MIMO_Ant6_6405

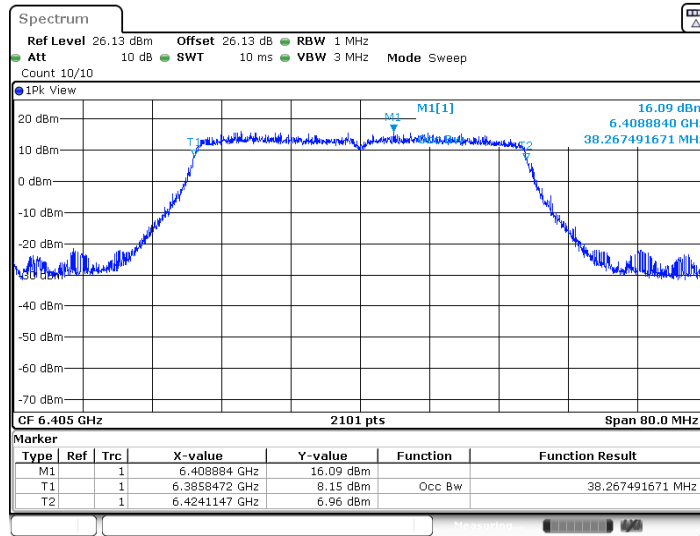

Date: 28.JUN.2025 23:31:38


11BE40MIMO_Ant7_6405

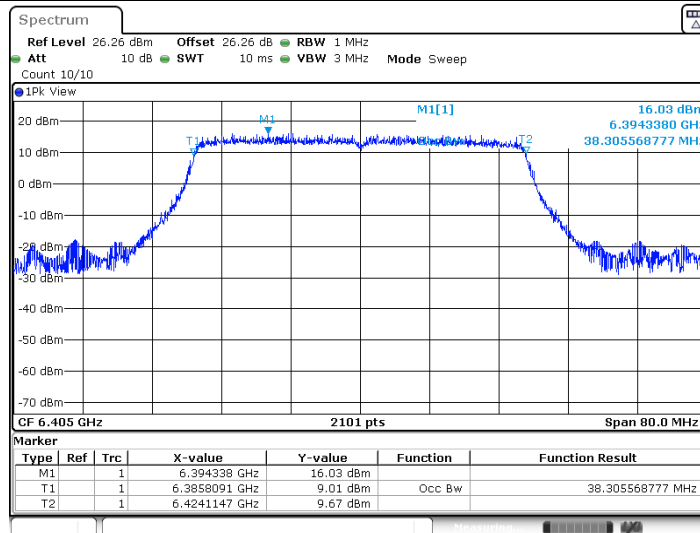


Date: 28.JUN.2025 23:32:48



11BE40MIMO_Ant6_6565

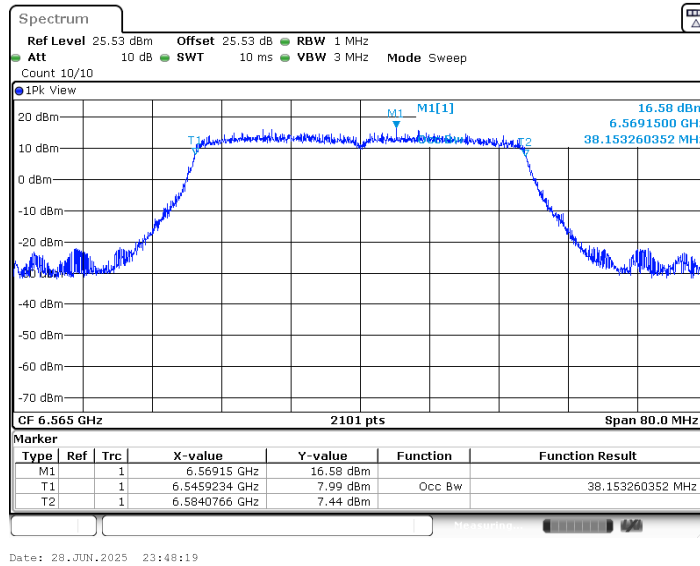


11BE40MIMO_Ant7_6565

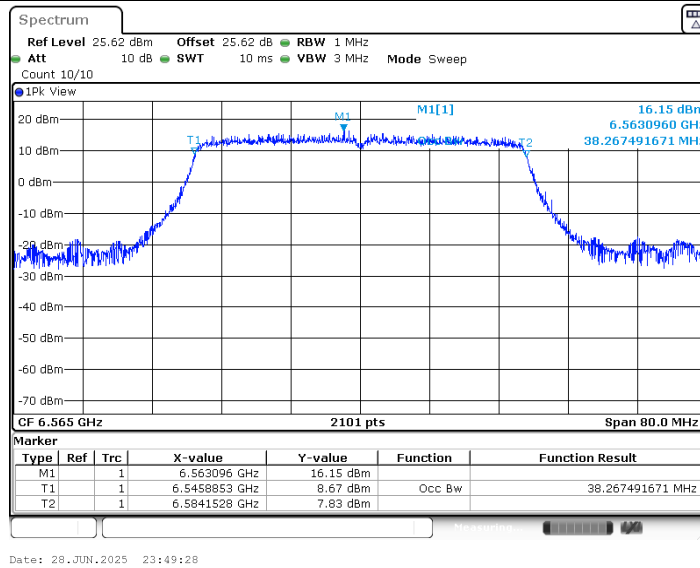




11BE40MIMO_Ant6_6685

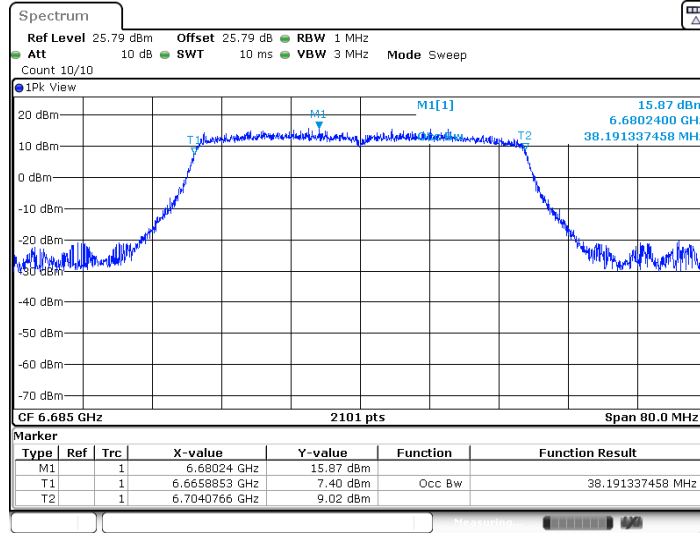

Date: 28.JUN.2025 23:51:25


11BE40MIMO_Ant7_6685

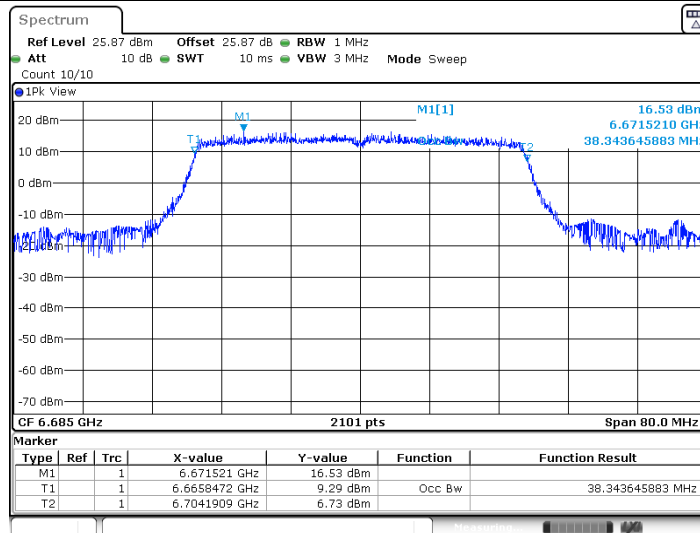

Date: 28.JUN.2025 23:52:35




11BE40MIMO_Ant6_6845

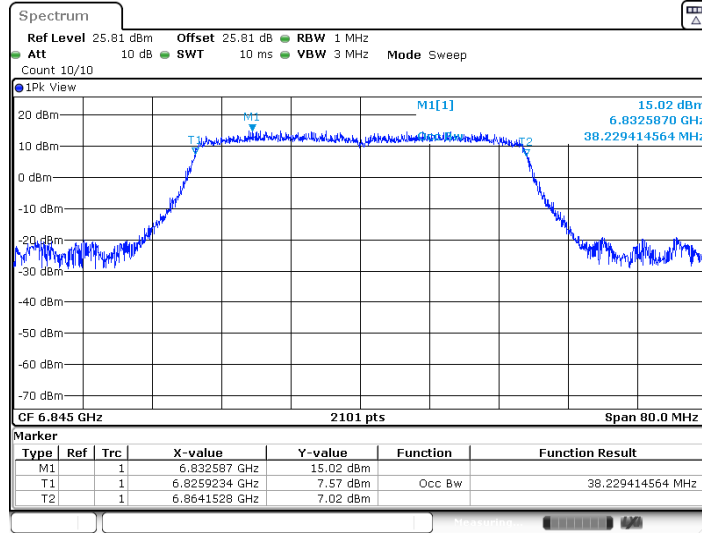

Date: 28.JUN.2025 23:54:08


11BE40MIMO_Ant7_6845

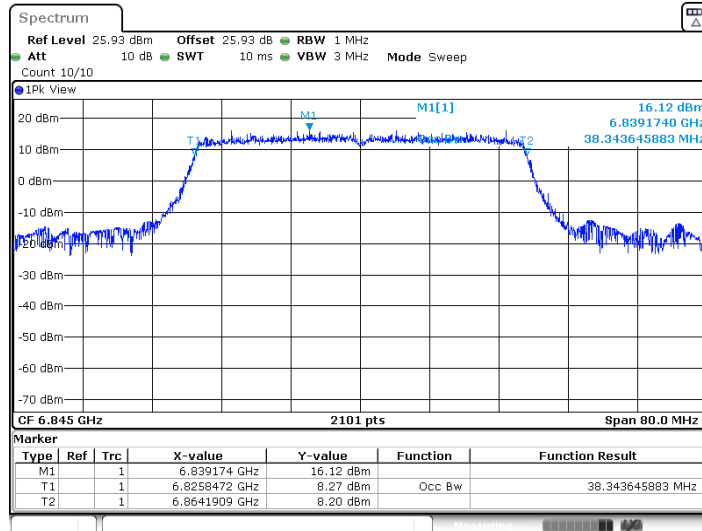

Date: 28.JUN.2025 23:55:17




11BE80MIMO_Ant6_5985

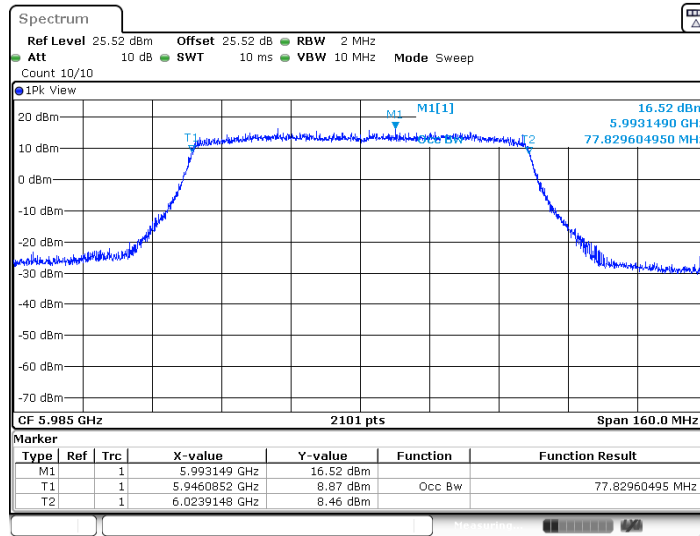

Date: 28.JUN.2025 23:57:44


11BE80MIMO_Ant7_5985

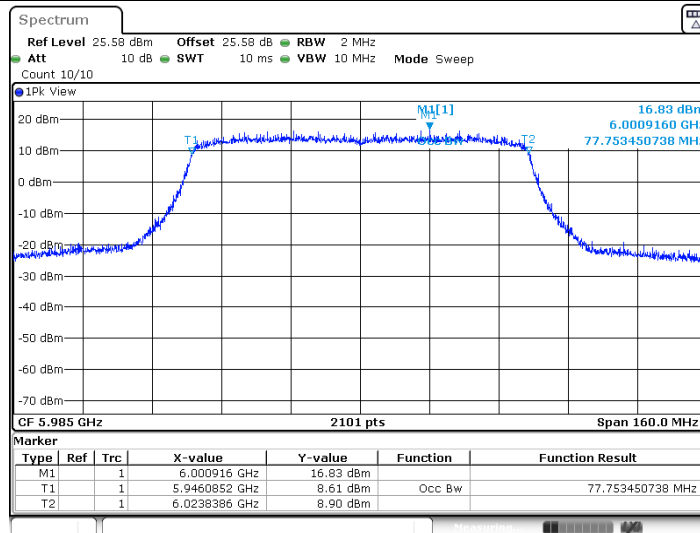


Date: 28.JUN.2025 23:58:54



11BE80MIMO_Ant6_6225

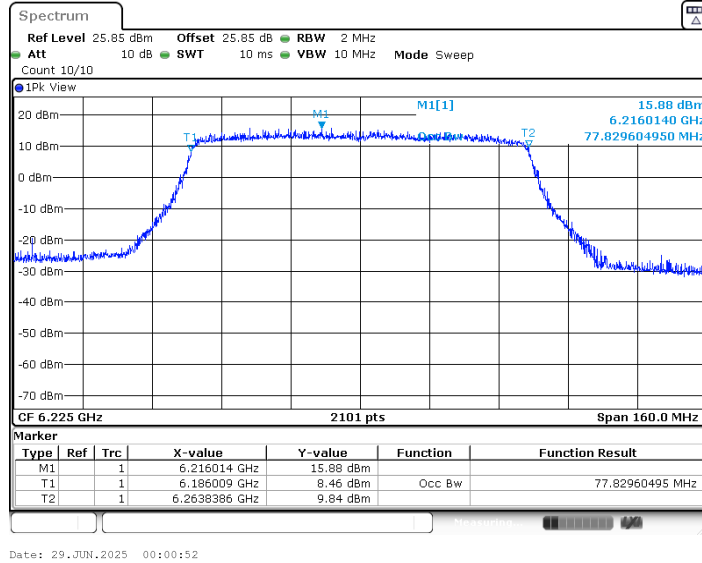


11BE80MIMO_Ant7_6225

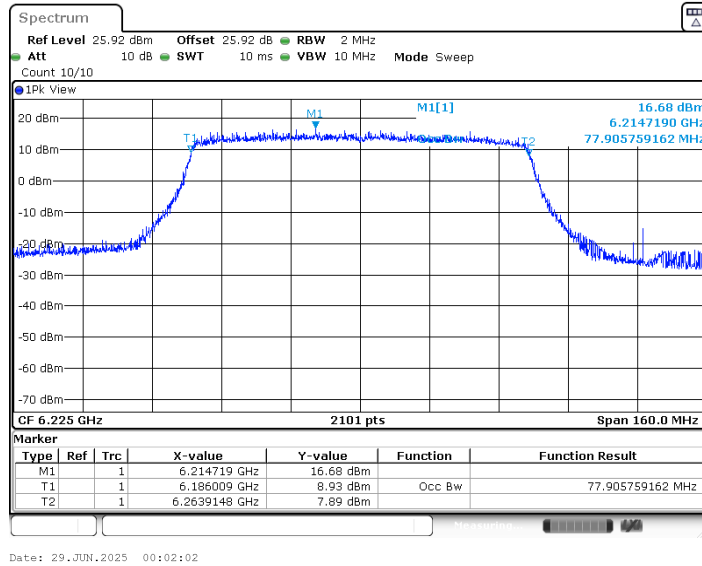




11BE80MIMO_Ant6_6385

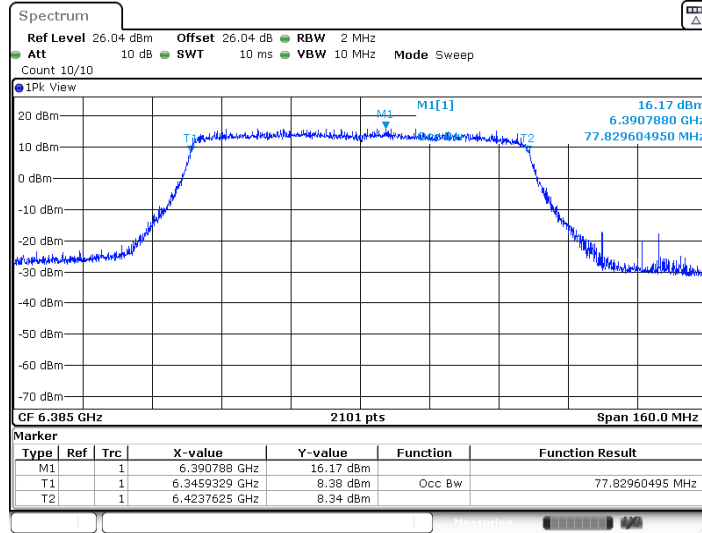

Date: 29.JUN.2025 00:03:53


11BE80MIMO_Ant7_6385

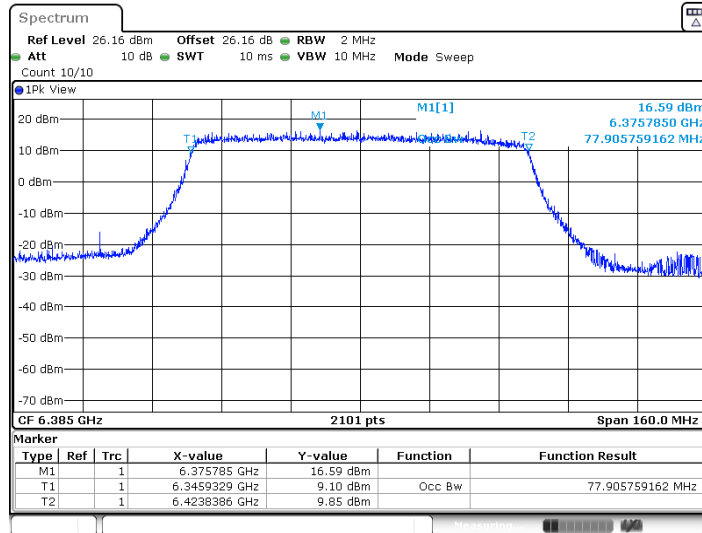


Date: 29.JUN.2025 00:05:02



11BE80MIMO_Ant6_6625

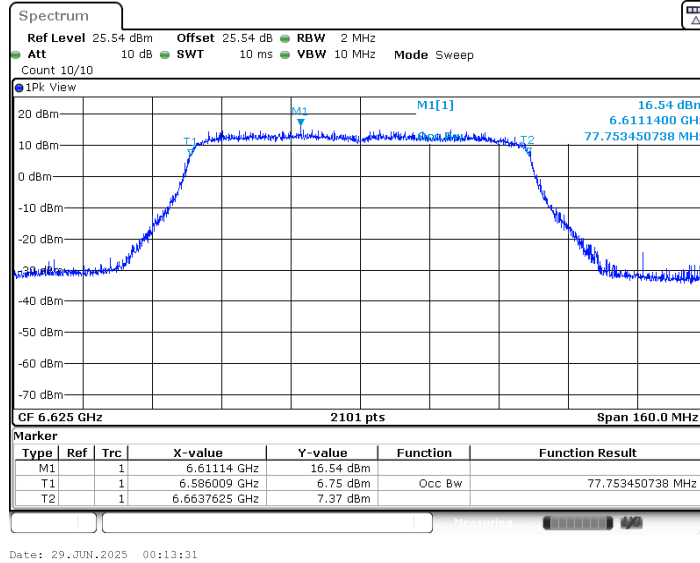


11BE80MIMO_Ant7_6625

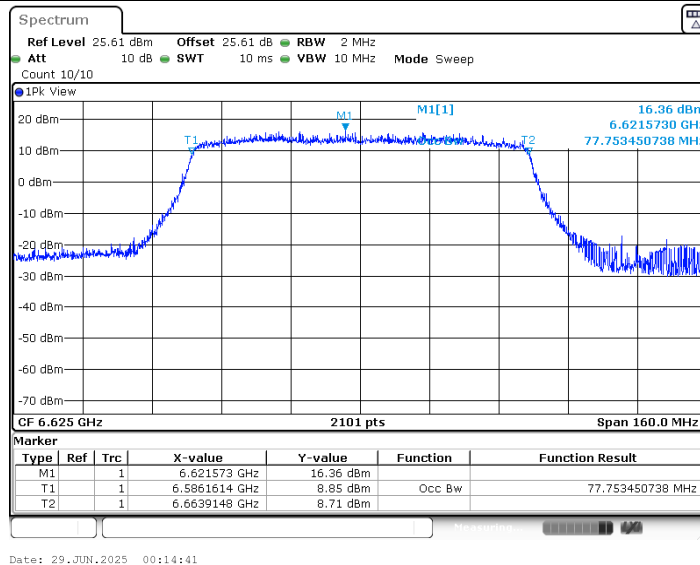




11BE80MIMO_Ant6_6705

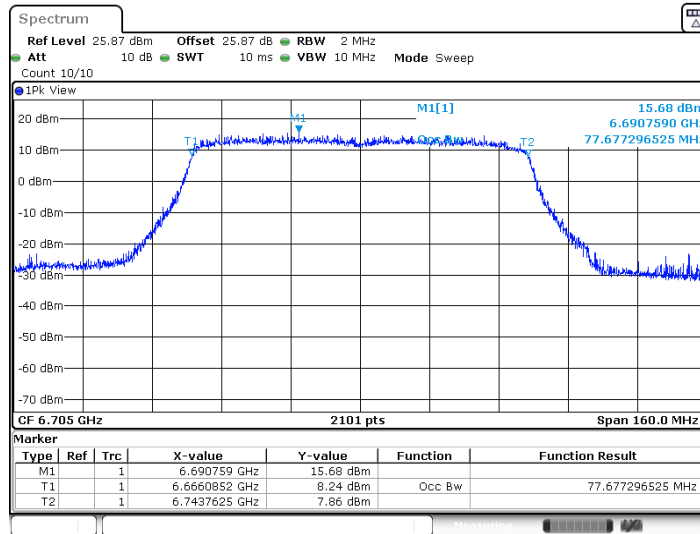


11BE80MIMO_Ant7_6705

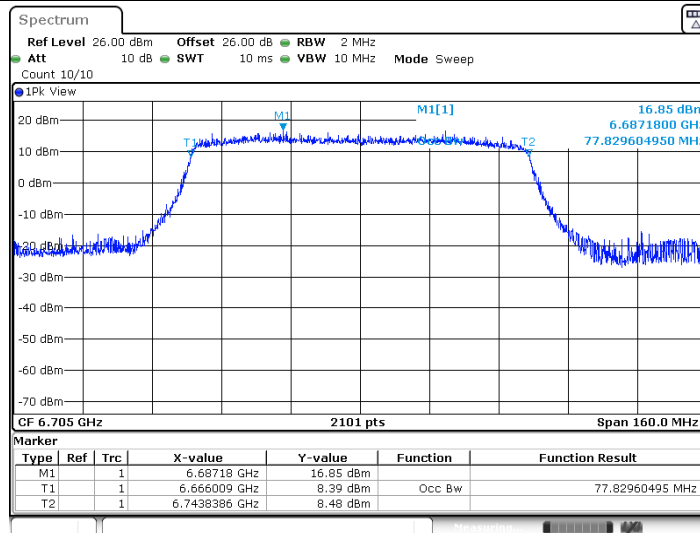




11BE80MIMO_Ant6_6785

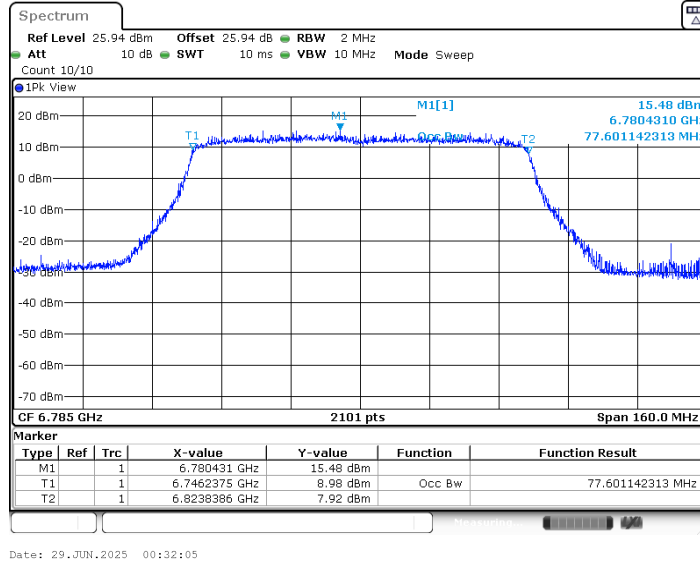


11BE80MIMO_Ant7_6785

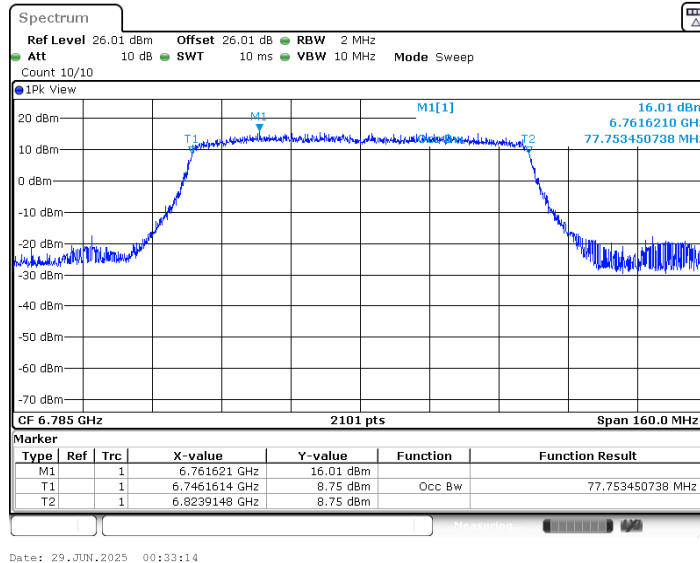





11BE160MIMO_Ant6_6025

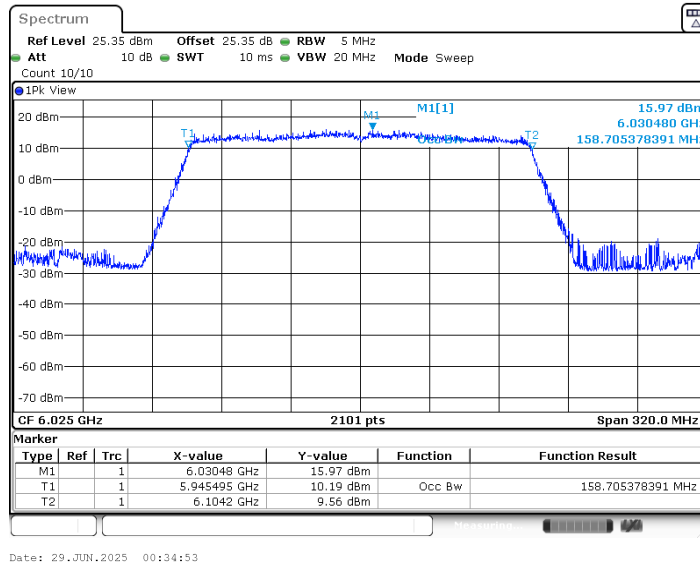


11BE160MIMO_Ant7_6025

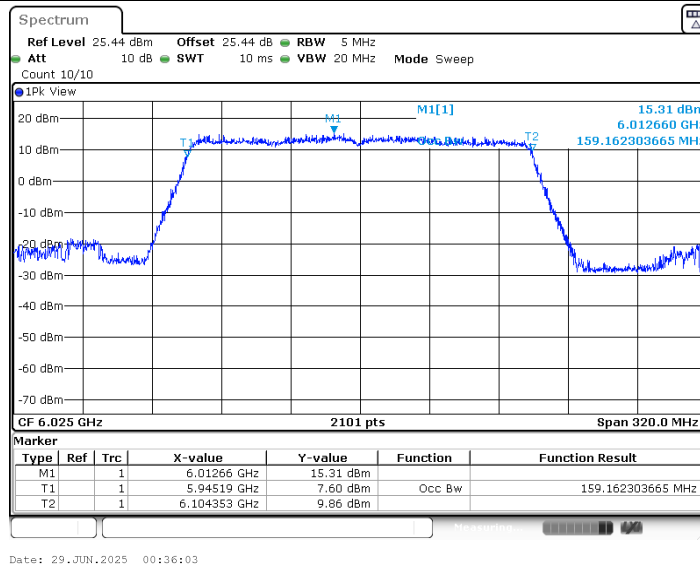

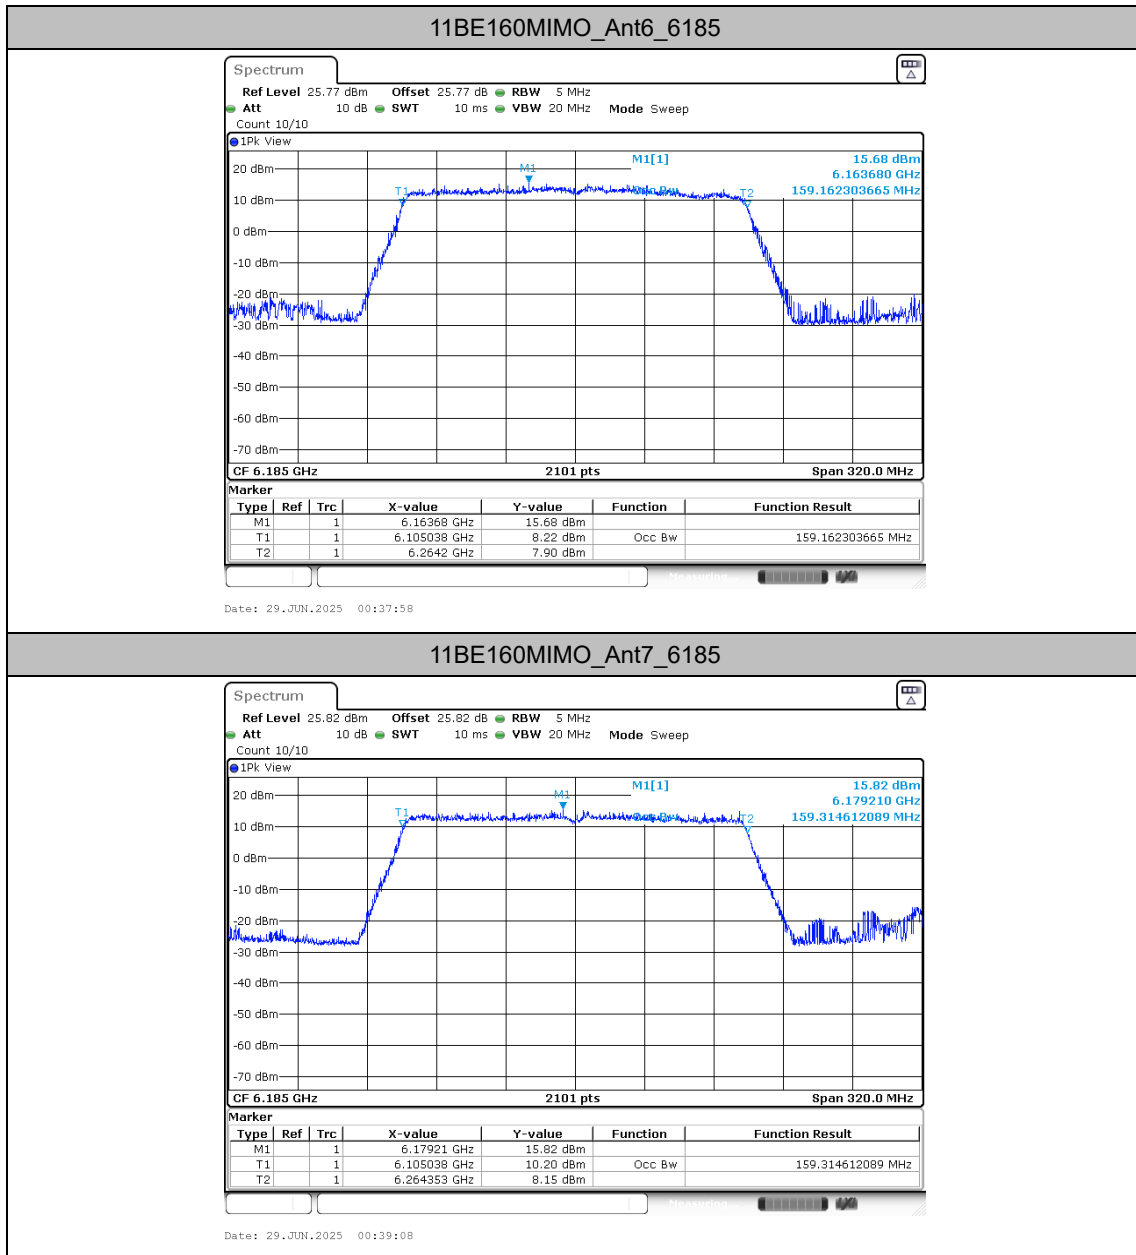





11BE160MIMO_Ant6_6345

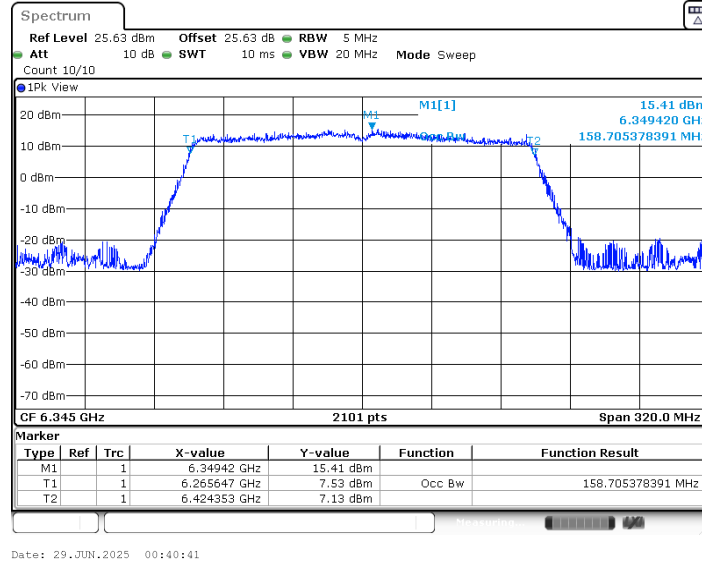

11BE160MIMO_Ant7_6345

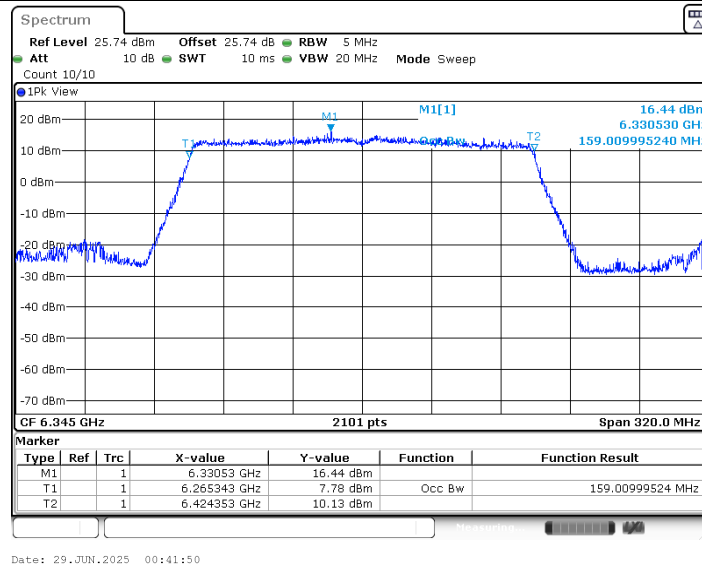

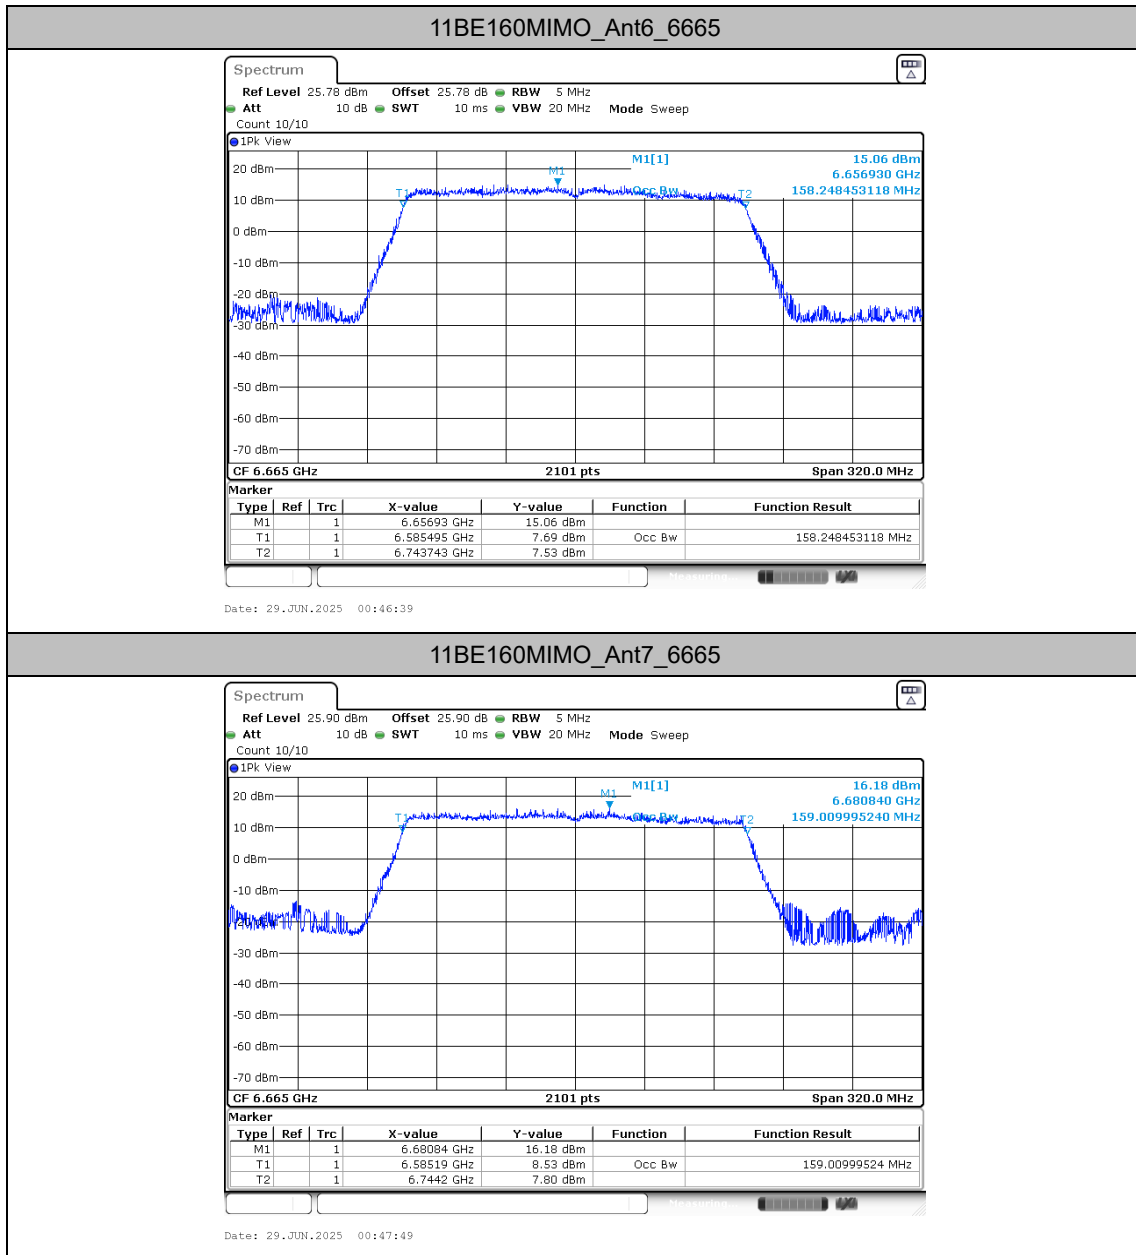



Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Gain [dBi]	EIRP [dBm/MHz]	Limit [dBm/MHz]	Verdict
11BE320MIMO	Ant6	6105	-4.57	0.20	-4.37	≤17.00	PASS
	Ant7	6105	-4.79	-0.30	-5.09	≤17.00	PASS
	total	6105	-1.67	2.96	1.29	≤17.00	PASS
	Ant6	6265	-4.24	0.20	-4.04	≤17.00	PASS
	Ant7	6265	-4.56	-0.30	-4.86	≤17.00	PASS
	total	6265	-1.39	2.96	1.57	≤17.00	PASS
11A-CDD	Ant6	5955	7.67	0.20	7.87	≤17.00	PASS
	Ant7	5955	7.87	-0.30	7.57	≤17.00	PASS
	total	5955	10.78	2.96	13.74	≤17.00	PASS
	Ant6	6195	7.37	0.20	7.57	≤17.00	PASS
	Ant7	6195	7.85	-0.30	7.55	≤17.00	PASS
	total	6195	10.63	2.96	13.59	≤17.00	PASS
	Ant6	6415	7.26	0.20	7.46	≤17.00	PASS
	Ant7	6415	7.66	-0.30	7.36	≤17.00	PASS
	total	6415	10.47	2.96	13.43	≤17.00	PASS
	Ant6	6535	7.35	0.00	7.35	≤17.00	PASS
	Ant7	6535	7.53	-0.40	7.13	≤17.00	PASS
	total	6535	10.45	2.81	13.26	≤17.00	PASS
	Ant6	6695	7.08	0.00	7.08	≤17.00	PASS
	Ant7	6695	7.79	-0.40	7.39	≤17.00	PASS
	total	6695	10.46	2.81	13.27	≤17.00	PASS
	Ant6	6855	6.87	0.00	6.87	≤17.00	PASS
	Ant7	6855	7.52	-0.40	7.12	≤17.00	PASS
	total	6855	10.22	2.81	13.03	≤17.00	PASS
11BE20MIMO	Ant6	5955	7.03	0.20	7.23	≤17.00	PASS
	Ant7	5955	7.30	-0.30	7.00	≤17.00	PASS
	total	5955	10.18	2.96	13.14	≤17.00	PASS
	Ant6	6195	6.82	0.20	7.02	≤17.00	PASS
	Ant7	6195	7.22	-0.30	6.92	≤17.00	PASS
	total	6195	10.03	2.96	12.99	≤17.00	PASS
	Ant6	6415	6.87	0.20	7.07	≤17.00	PASS
	Ant7	6415	7.06	-0.30	6.76	≤17.00	PASS
	total	6415	9.98	2.96	12.94	≤17.00	PASS



	Ant6	6535	6.87	0.00	6.87	≤17.00	PASS
	Ant7	6535	6.91	-0.40	6.51	≤17.00	PASS
	total	6535	9.90	2.81	12.71	≤17.00	PASS
	Ant6	6695	6.48	0.00	6.48	≤17.00	PASS
	Ant7	6695	7.32	-0.40	6.92	≤17.00	PASS
	total	6695	9.93	2.81	12.74	≤17.00	PASS
	Ant6	6855	6.23	0.00	6.23	≤17.00	PASS
	Ant7	6855	7.02	-0.40	6.62	≤17.00	PASS
	total	6855	9.65	2.81	12.46	≤17.00	PASS
11BE40MIMO	Ant6	5965	4.23	0.20	4.43	≤17.00	PASS
	Ant7	5965	4.34	-0.30	4.04	≤17.00	PASS
	total	5965	7.30	2.96	10.26	≤17.00	PASS
	Ant6	6205	3.95	0.20	4.15	≤17.00	PASS
	Ant7	6205	4.29	-0.30	3.99	≤17.00	PASS
	total	6205	7.13	2.96	10.09	≤17.00	PASS
	Ant6	6405	4.02	0.20	4.22	≤17.00	PASS
	Ant7	6405	4.20	-0.30	3.90	≤17.00	PASS
	total	6405	7.12	2.96	10.08	≤17.00	PASS
	Ant6	6565	3.76	0.00	3.76	≤17.00	PASS
	Ant7	6565	3.85	-0.40	3.45	≤17.00	PASS
	total	6565	6.82	2.81	9.63	≤17.00	PASS
	Ant6	6685	3.81	0.00	3.81	≤17.00	PASS
	Ant7	6685	4.39	-0.40	3.99	≤17.00	PASS
	total	6685	7.12	2.81	9.93	≤17.00	PASS
	Ant6	6845	3.38	0.00	3.38	≤17.00	PASS
	Ant7	6845	3.94	-0.40	3.54	≤17.00	PASS
	total	6845	6.68	2.81	9.49	≤17.00	PASS
11BE80MIMO	Ant6	5985	0.93	0.20	1.13	≤17.00	PASS
	Ant7	5985	0.65	-0.30	0.35	≤17.00	PASS
	total	5985	3.80	2.96	6.76	≤17.00	PASS
	Ant6	6225	0.73	0.20	0.93	≤17.00	PASS
	Ant7	6225	1.06	-0.30	0.76	≤17.00	PASS
	total	6225	3.91	2.96	6.87	≤17.00	PASS
	Ant6	6385	0.98	0.20	1.18	≤17.00	PASS
	Ant7	6385	0.99	-0.30	0.69	≤17.00	PASS
	total	6385	4.00	2.96	6.96	≤17.00	PASS
	Ant6	6625	0.26	0.00	0.26	≤17.00	PASS
	Ant7	6625	0.82	-0.40	0.42	≤17.00	PASS
	total	6625	3.56	2.81	6.37	≤17.00	PASS




	Ant6	6705	0.23	0.00	0.23	≤17.00	PASS
	Ant7	6705	1.16	-0.40	0.76	≤17.00	PASS
	total	6705	3.73	2.81	6.54	≤17.00	PASS
	Ant6	6785	0.11	0.00	0.11	≤17.00	PASS
	Ant7	6785	0.72	-0.40	0.32	≤17.00	PASS
	total	6785	3.44	2.81	6.25	≤17.00	PASS
11BE160MIMO	Ant6	6025	-2.75	0.20	-2.55	≤17.00	PASS
	Ant7	6025	-3.57	-0.30	-3.87	≤17.00	PASS
	total	6025	-0.13	2.96	2.83	≤17.00	PASS
	Ant6	6185	-3.25	0.20	-3.05	≤17.00	PASS
	Ant7	6185	-3.62	-0.30	-3.92	≤17.00	PASS
	total	6185	-0.42	2.96	2.54	≤17.00	PASS
	Ant6	6345	-3.14	0.20	-2.94	≤17.00	PASS
	Ant7	6345	-3.31	-0.30	-3.61	≤17.00	PASS
	total	6345	-0.21	2.96	2.75	≤17.00	PASS
	Ant6	6665	-3.70	0.00	-3.70	≤17.00	PASS
	Ant7	6665	-3.25	-0.40	-3.65	≤17.00	PASS
	total	6665	-0.46	2.81	2.35	≤17.00	PASS

Note: 1.The Duty Cycle Factor and is compensated in the graph.




Test Graphs

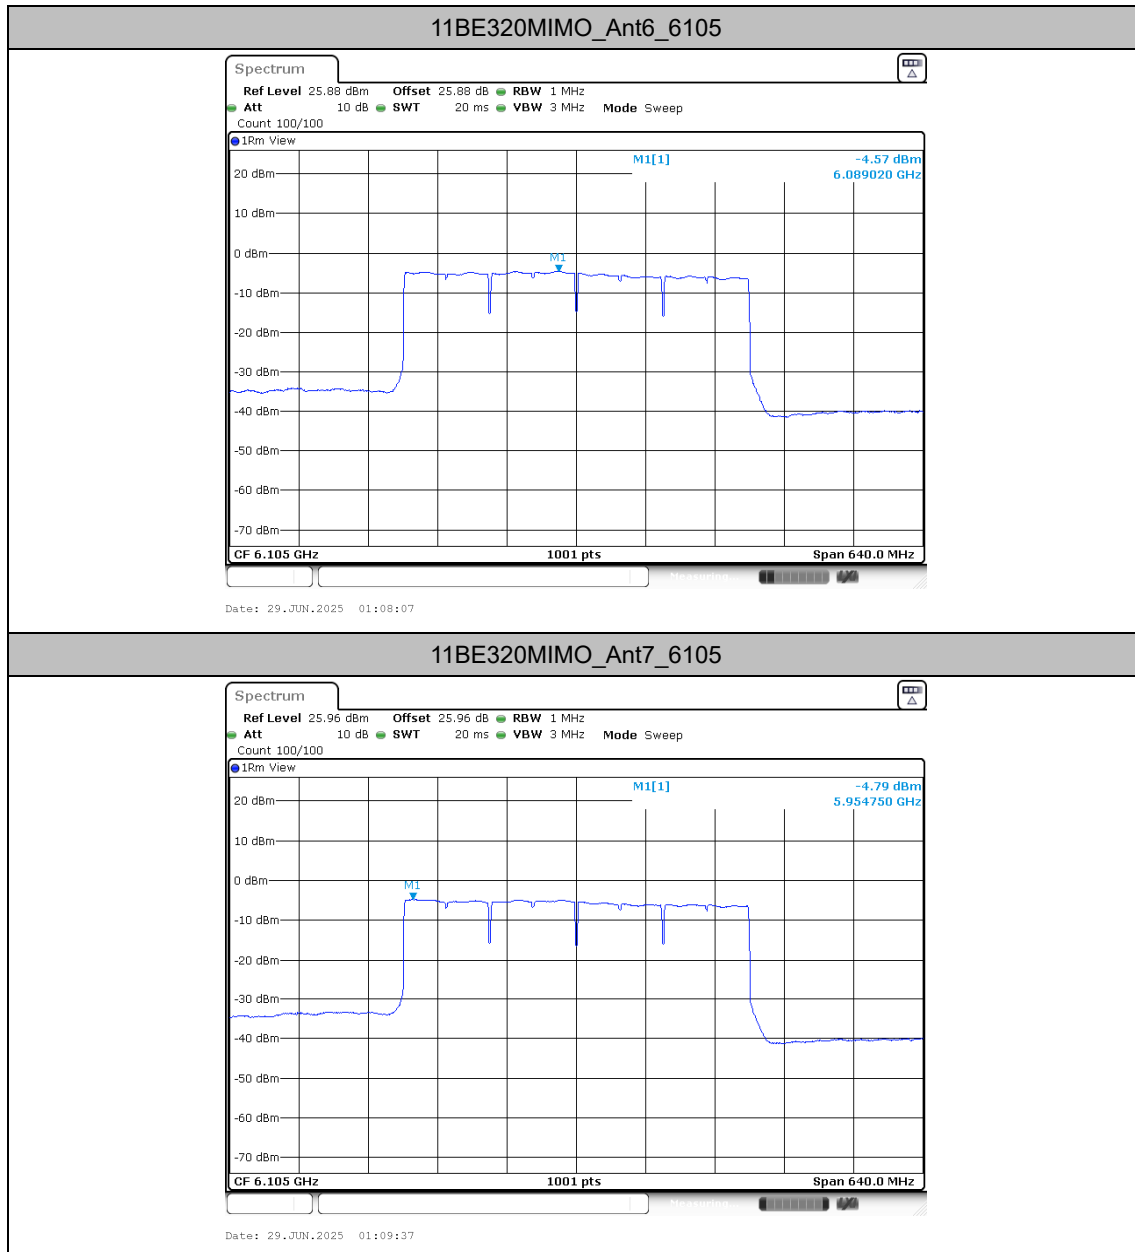




11BE320MIMO_Ant6_6265

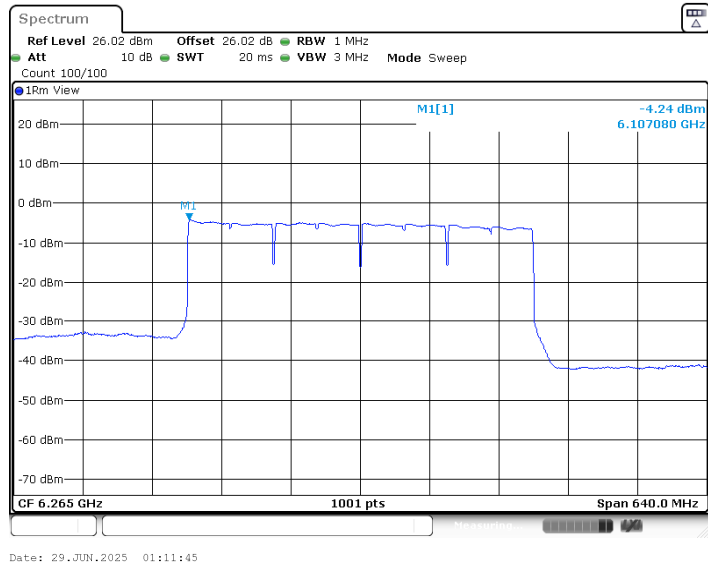


11BE320MIMO_Ant7_6265

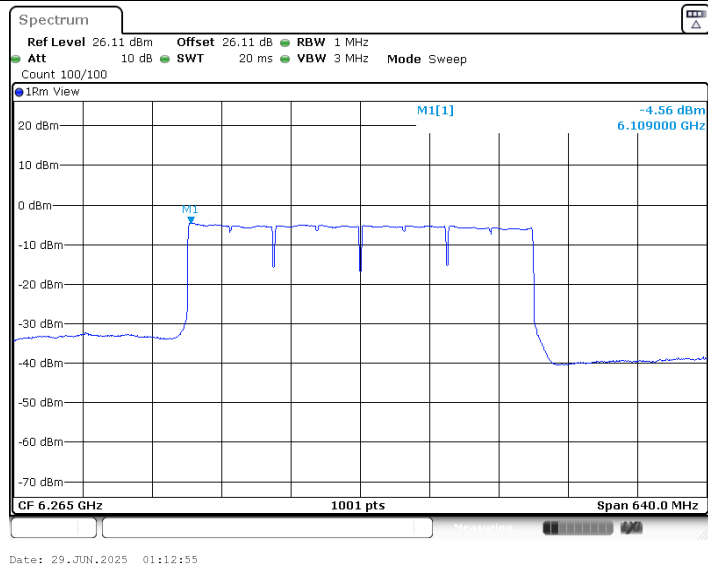




11A-CDD_Ant6_5955

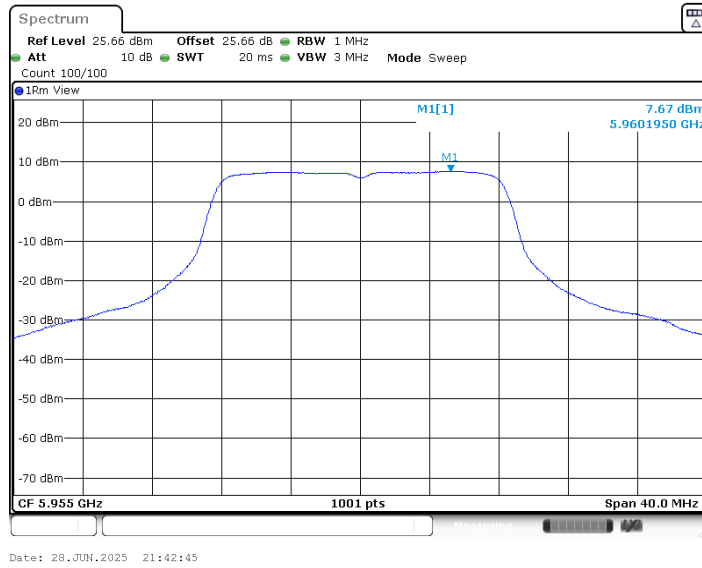


11A-CDD_Ant7_5955

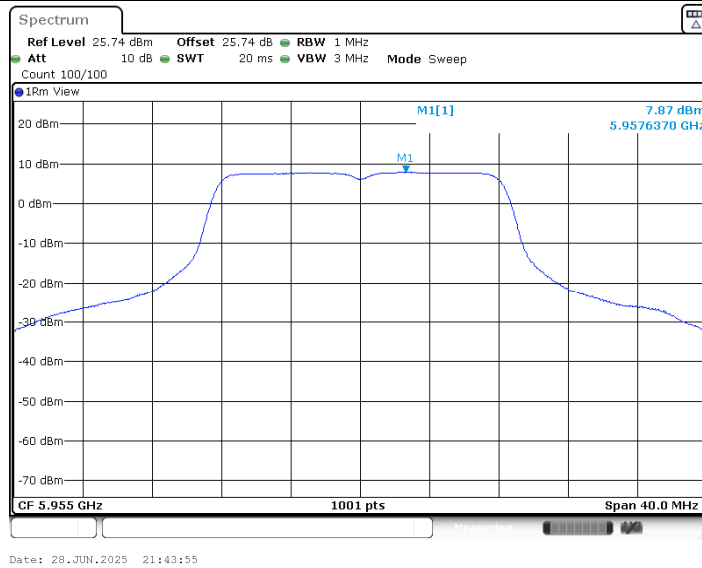



11A-CDD_Ant6_6195

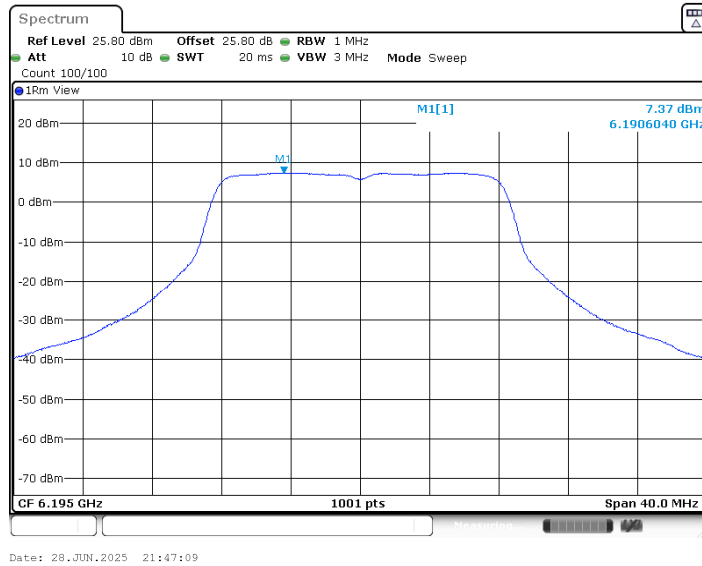

11A-CDD_Ant7_6195

