





11BE160MIMO_Ant7_5570_996Tone+484Tone_RU4

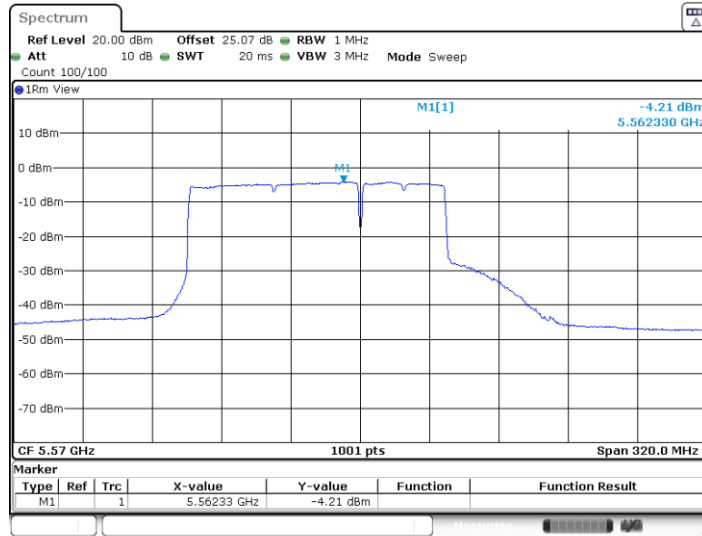

Date: 21.AUG.2025 19:49:09

11BE160MIMO_Ant7_5570_996Tone+484Tone+242Tone_RU8

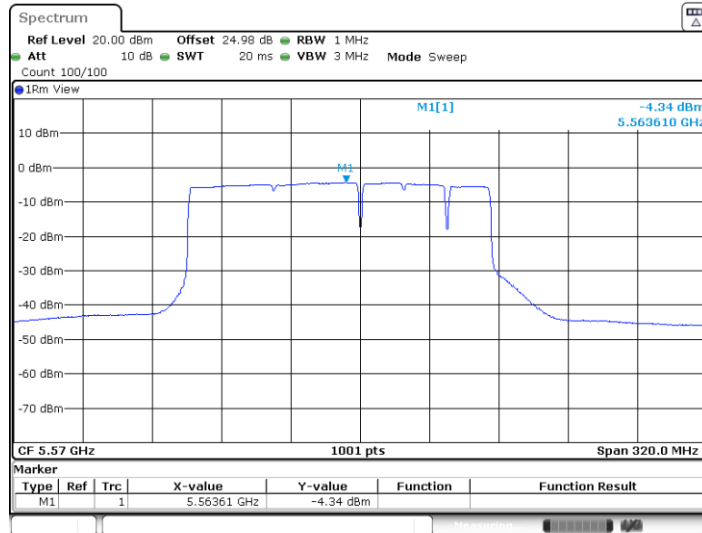

Date: 21.AUG.2025 19:59:45



<Puncturing>

Maximum power spectral density

Test Result

Test Mode	Antenna	Freq (MHz)	Ru Size	Ru Index	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11BE80 MIMO	Ant6	5210	Puncturing 20M	RU4	-1.29	≤11.00	PASS
	Ant7	5210	Puncturing 20M	RU4	-1.12	≤11.00	PASS
	total	5210	Puncturing 20M	RU4	1.81	≤11.00	PASS
	Ant6	5290	Puncturing 20M	RU1	-0.53	≤11.00	PASS
	Ant7	5290	Puncturing 20M	RU1	-1.02	≤11.00	PASS
	total	5290	Puncturing 20M	RU1	2.24	≤11.00	PASS
	Ant6	5530	Puncturing 20M	RU4	-1.07	≤11.00	PASS
	Ant7	5530	Puncturing 20M	RU4	-0.97	≤11.00	PASS
	total	5530	Puncturing 20M	RU4	1.99	≤11.00	PASS
	Ant6	5610	Puncturing 20M	RU1	-0.45	≤11.00	PASS
	Ant7	5610	Puncturing 20M	RU1	-1.05	≤11.00	PASS
	total	5610	Puncturing 20M	RU1	2.27	≤11.00	PASS
	Ant6	5775	Puncturing 20M	RU1	-3.59	≤30.00	PASS
				RU4	-3.66	≤30.00	PASS
	Ant7	5775	Puncturing 20M	RU1	-3.6	≤30.00	PASS
				RU4	-3.5	≤30.00	PASS
	total	5775	Puncturing 20M	RU1	-0.58	≤30.00	PASS
				RU4	-0.57	≤30.00	PASS
11BE160 MIMO	Ant6	5250	Puncturing 40M	RU1	-5.47	≤11.00	PASS
			Puncturing 20M	RU1	-5.47	≤11.00	PASS
			Puncturing 40M	RU4	-5.72	≤11.00	PASS
			Puncturing 20M	RU8	-5.78	≤11.00	PASS
	Ant7	5250	Puncturing 40M	RU1	-5.25	≤11.00	PASS
			Puncturing 20M	RU1	-5.19	≤11.00	PASS
			Puncturing 40M	RU4	-5.37	≤11.00	PASS
			Puncturing 20M	RU8	-5.34	≤11.00	PASS
	total	5250	Puncturing 20M	RU1	-2.32	≤11.00	PASS
			Puncturing 40M	RU1	-2.35	≤11.00	PASS
				RU4	-2.53	≤11.00	PASS
			Puncturing 20M	RU8	-2.54	≤11.00	PASS
	Ant6	5570	Puncturing 20M	RU1	-3.32	≤11.00	PASS
			Puncturing 40M	RU1	-3.45	≤11.00	PASS




				RU4	-3.58	≤11.00	PASS
			Puncturing 20M	RU8	-3.61	≤11.00	PASS
	Ant7	5570	Puncturing 40M	RU1	-3.59	≤11.00	PASS
			Puncturing 20M	RU1	-3.51	≤11.00	PASS
			Puncturing 40M	RU4	-3.75	≤11.00	PASS
			Puncturing 20M	RU8	-3.9	≤11.00	PASS
	total	5570	Puncturing 40M	RU1	-0.51	≤11.00	PASS
			Puncturing 20M	RU1	-0.40	≤11.00	PASS
			Puncturing 40M	RU4	-0.65	≤11.00	PASS
			Puncturing 20M	RU8	-0.74	≤11.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor and is compensated in the graph.




Test Graphs

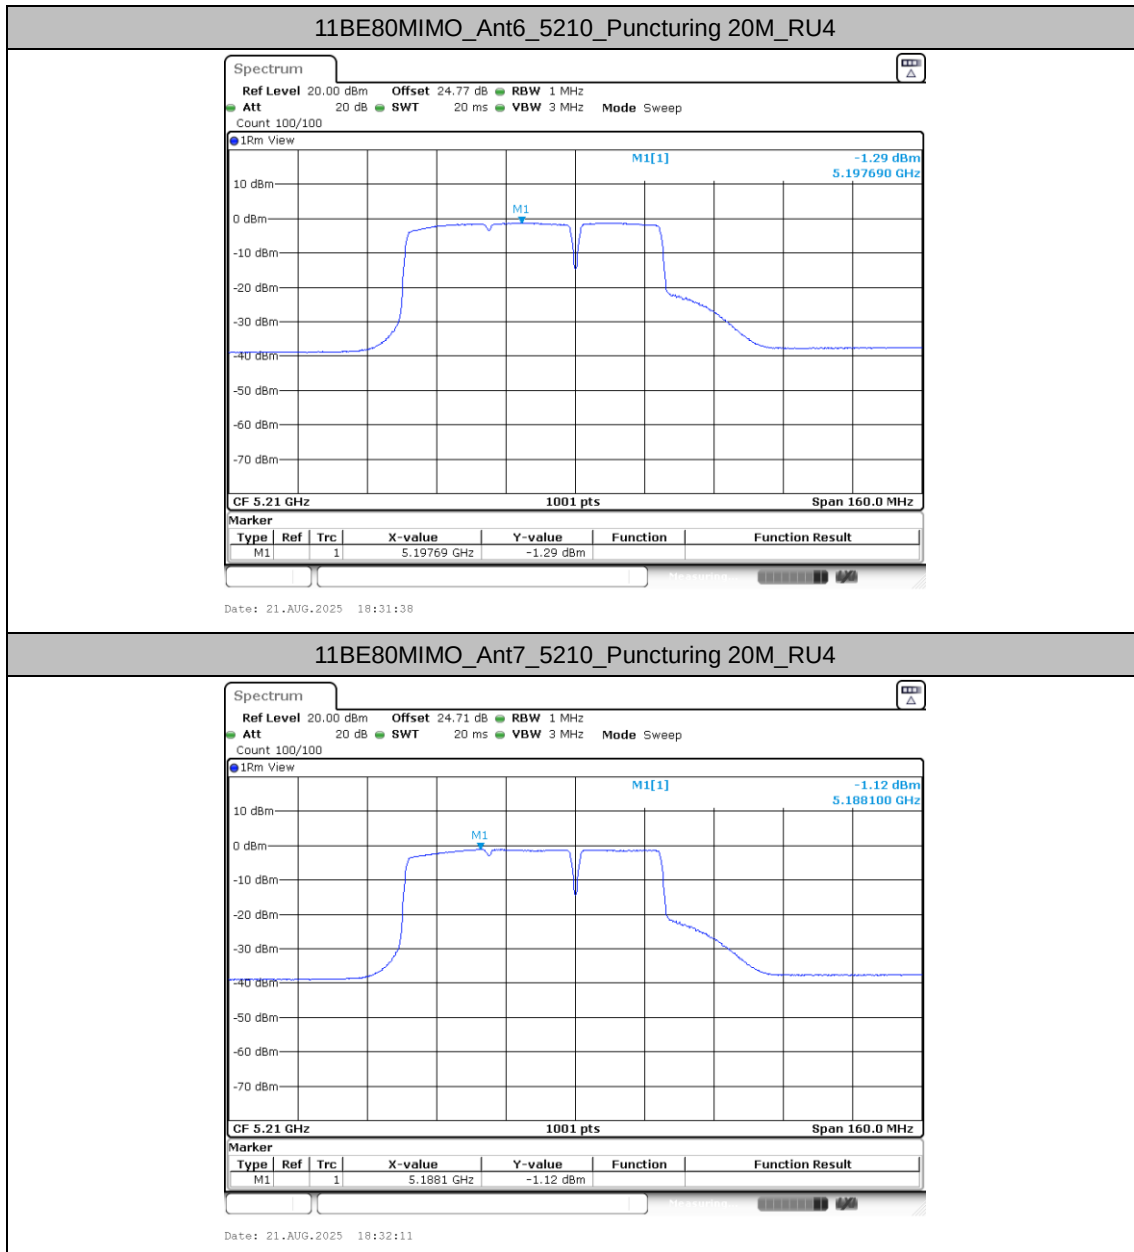




11BE80MIMO_Ant6_5290_Puncturing 20M_RU1

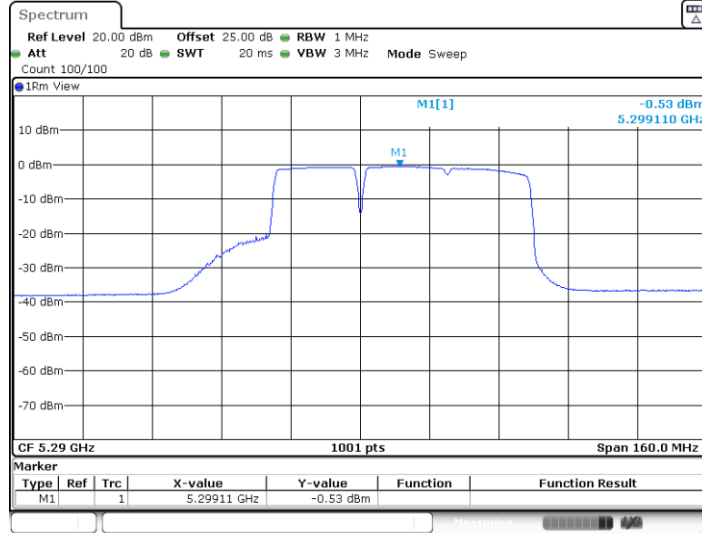


11BE80MIMO_Ant7_5290_Puncturing 20M_RU1

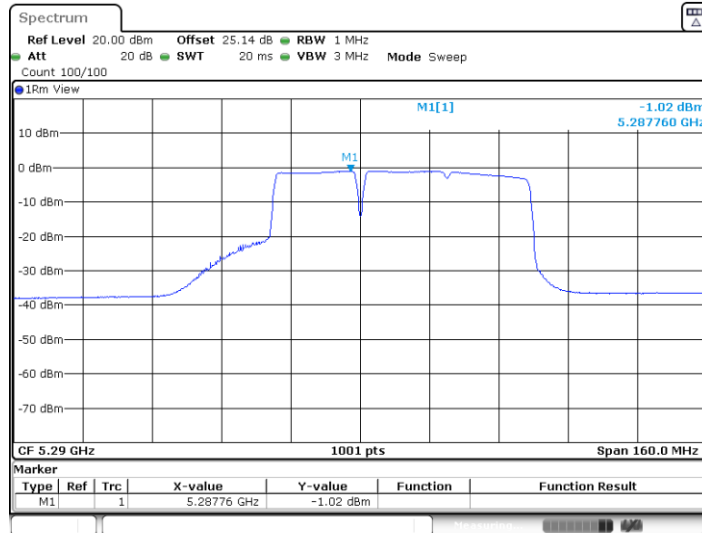




11BE80MIMO_Ant6_5530_Puncturing 20M_RU4

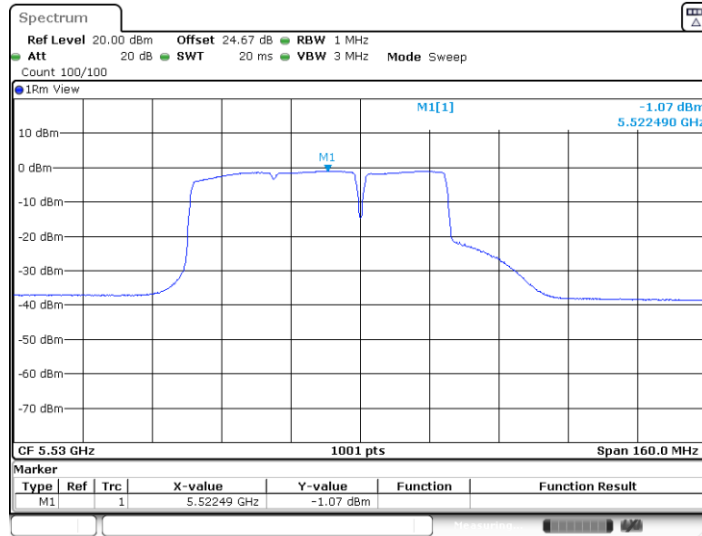


11BE80MIMO_Ant7_5530_Puncturing 20M_RU4

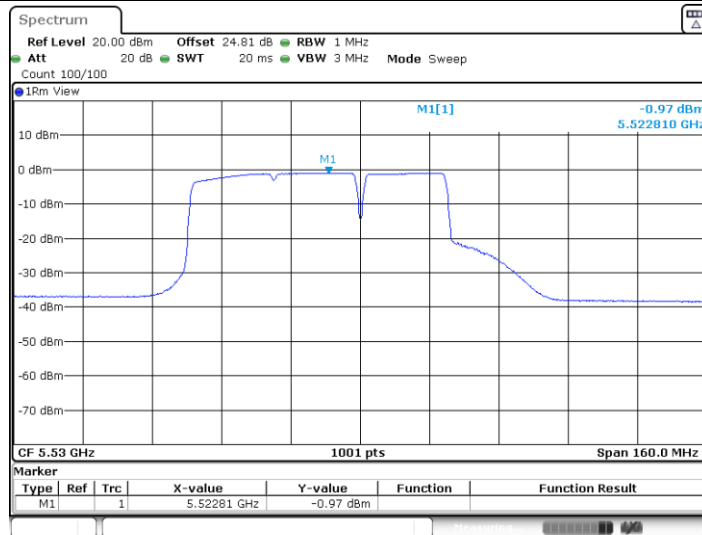




11BE80MIMO_Ant6_5610_Puncturing 20M_RU1

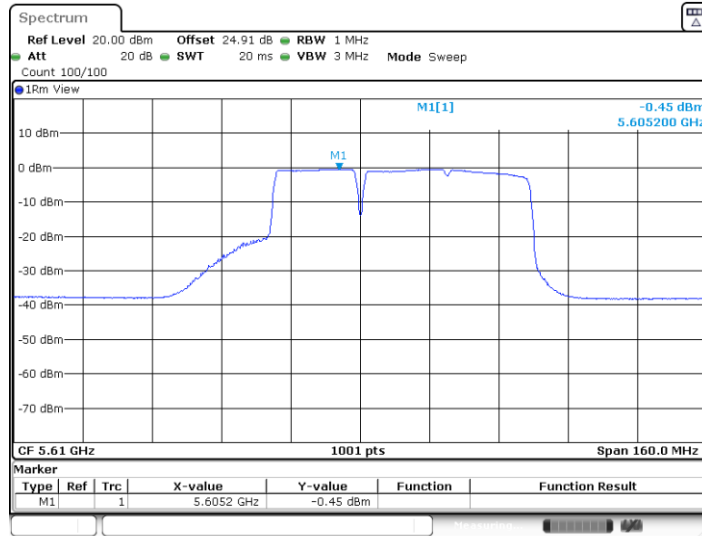

Date: 21.AUG.2025 18:37:31


11BE80MIMO_Ant7_5610_Puncturing 20M_RU1

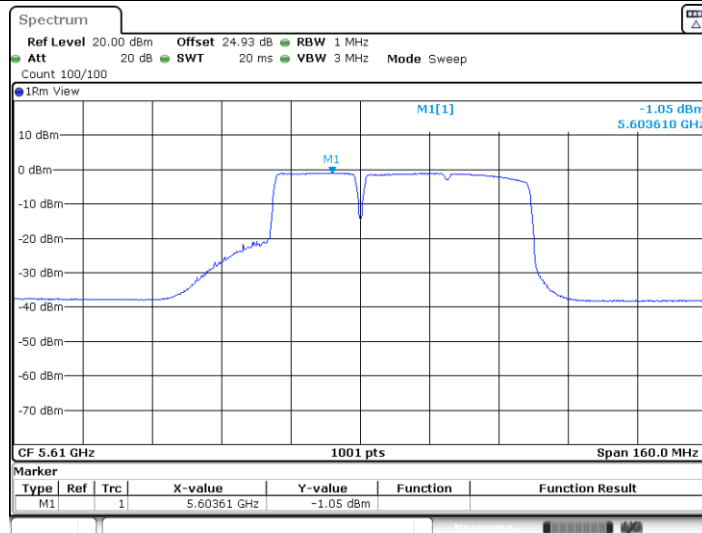


Date: 21.AUG.2025 18:40:18



11BE80MIMO_Ant6_5775_Puncturing 20M_RU1

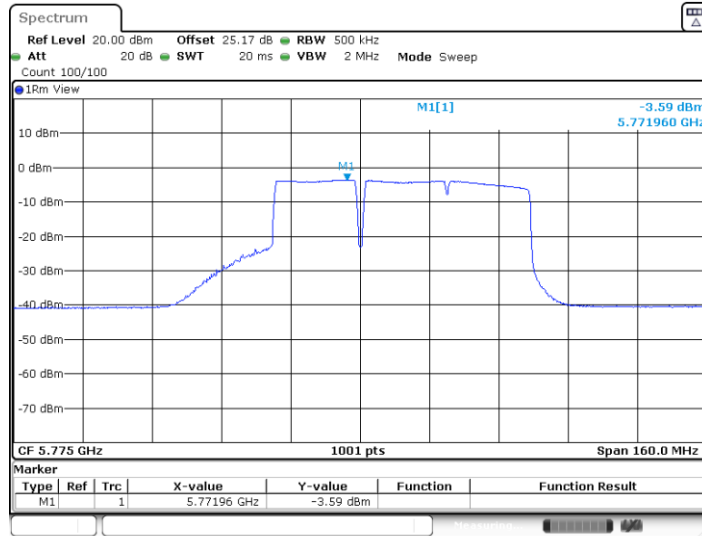


11BE80MIMO_Ant6_5775_Puncturing 20M_RU4

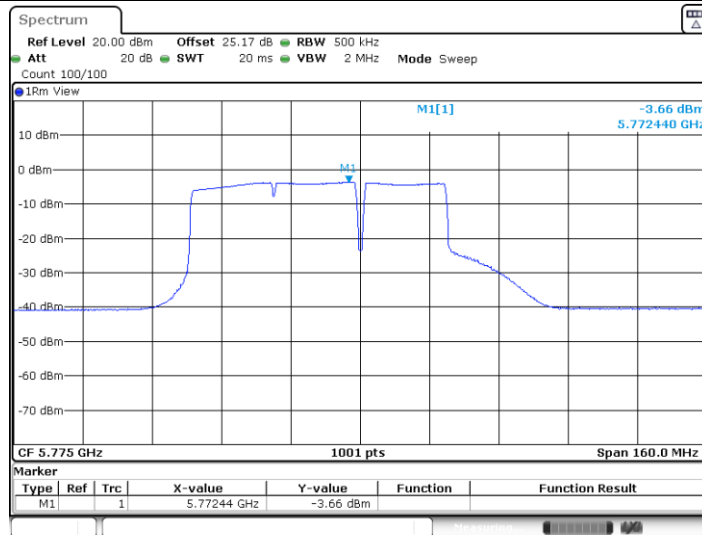




11BE80MIMO_Ant7_5775_Puncturing 20M_RU1

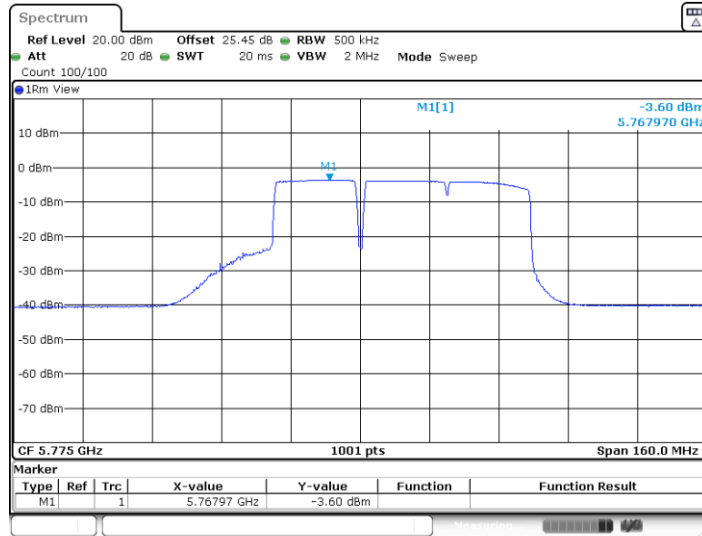


11BE80MIMO_Ant7_5775_Puncturing 20M_RU4

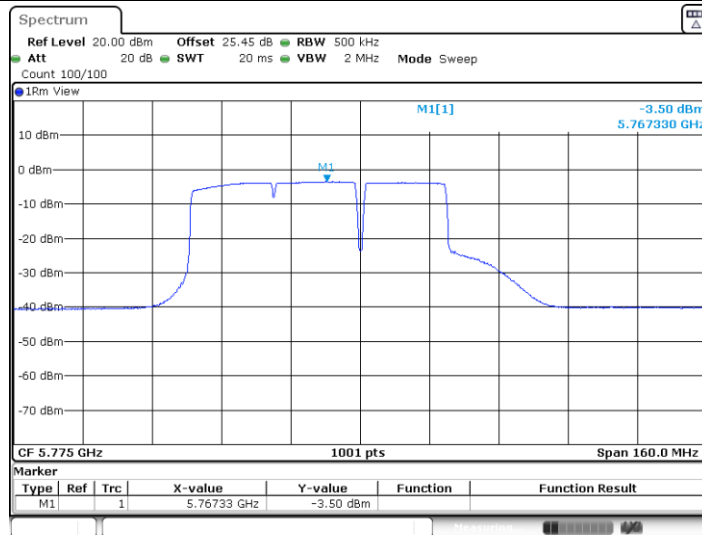




11BE160MIMO_Ant6_5250_Puncturing 40M_RU1

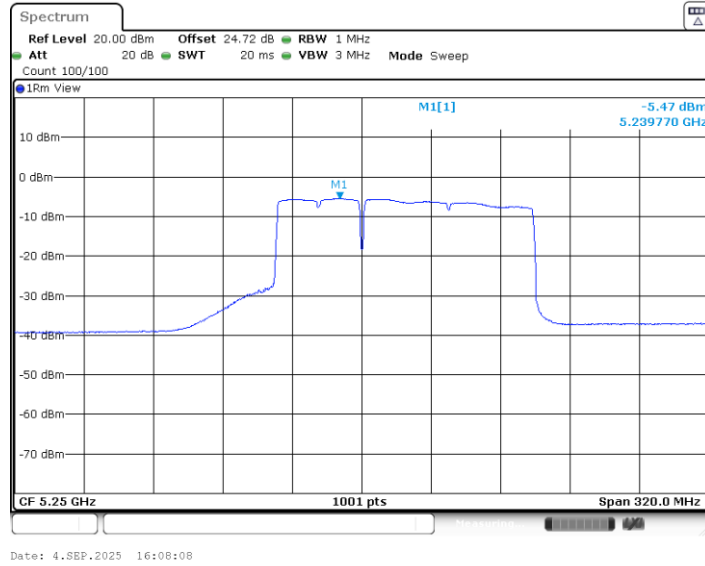


11BE160MIMO_Ant6_5250_Puncturing 20M_RU1

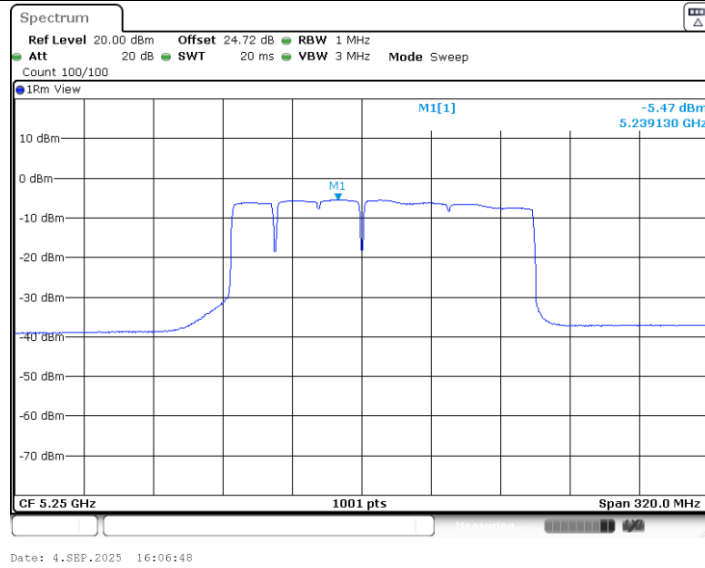




11BE160MIMO_Ant6_5250_Puncturing 40M_RU4

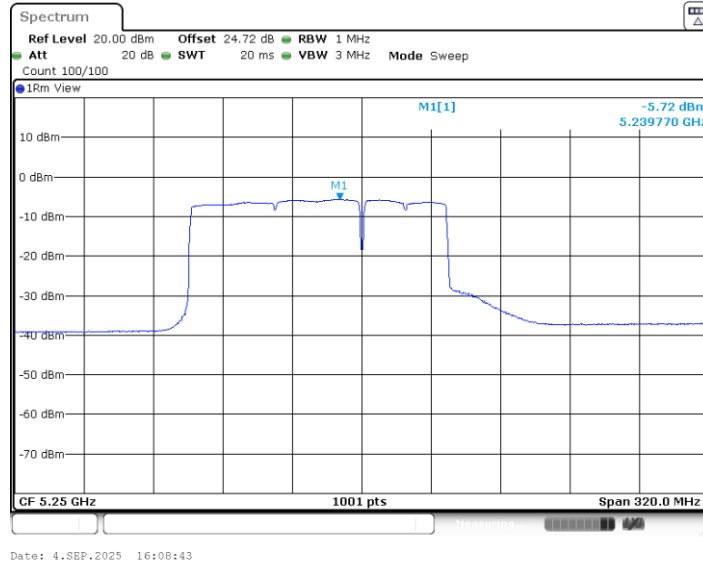

11BE160MIMO_Ant6_5250_Puncturing 20M_RU8

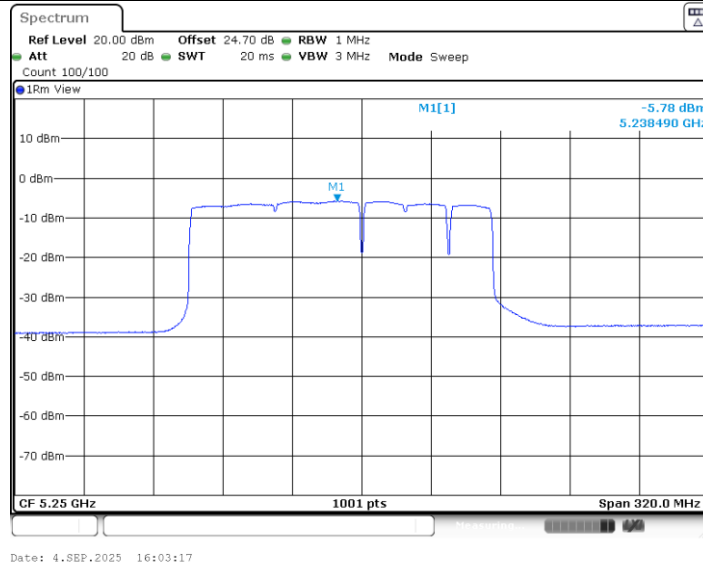



Spectrum

Ref Level 20.00 dBm Offset 25.03 dB RBW 1 MHz
 Att 20 dB SWT 20 ms VBW 3 MHz Mode Sweep
 Count 100/100

1Rm View

M1[1] ~5.19 dBm
 5.247440 GHz


10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm

CF 5.25 GHz 1001 pts Span 320.0 MHz


Date: 4.SEP.2025 16:07:20



11BE160MIMO_Ant7_5250_Puncturing 40M_RU4

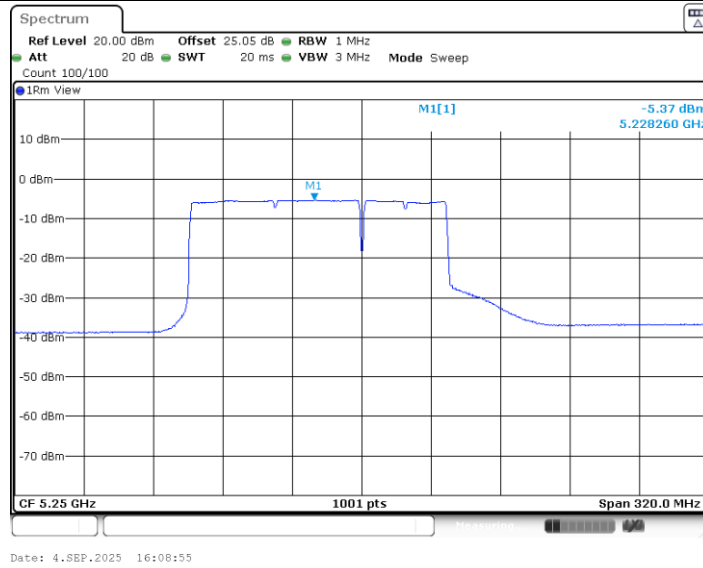


11BE160MIMO_Ant7_5250_Puncturing 20M_RU8

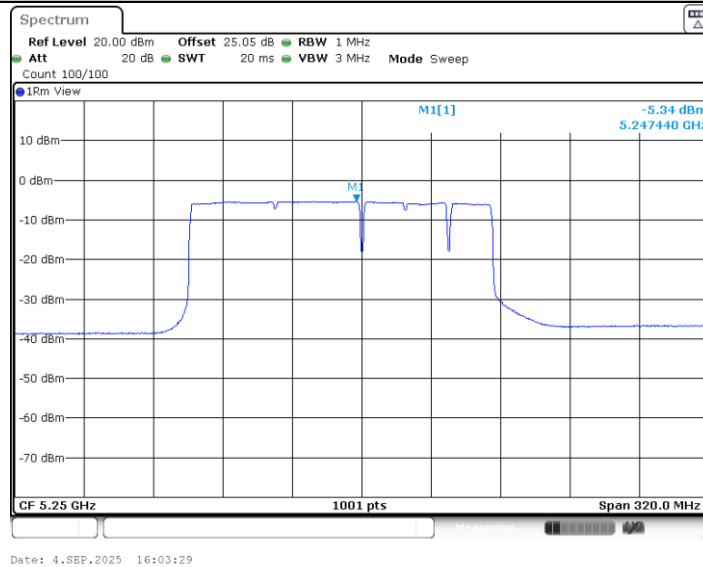




11BE160MIMO_Ant6_5570_Puncturing 20M_RU1

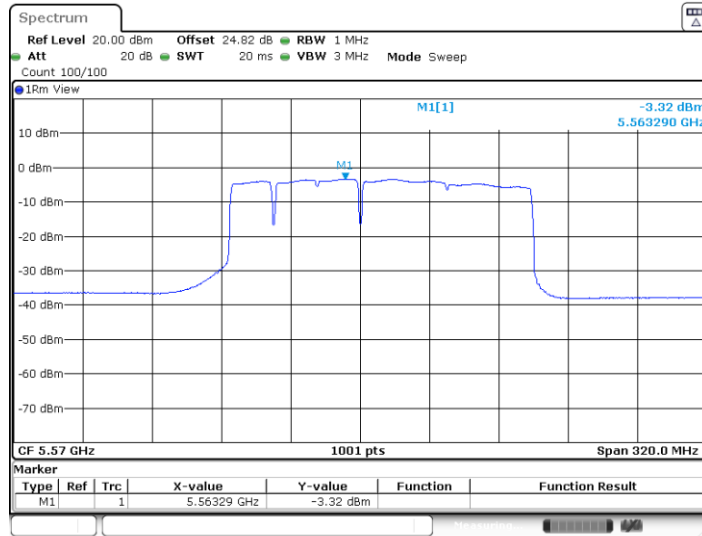


11BE160MIMO_Ant6_5570_Puncturing 40M_RU1

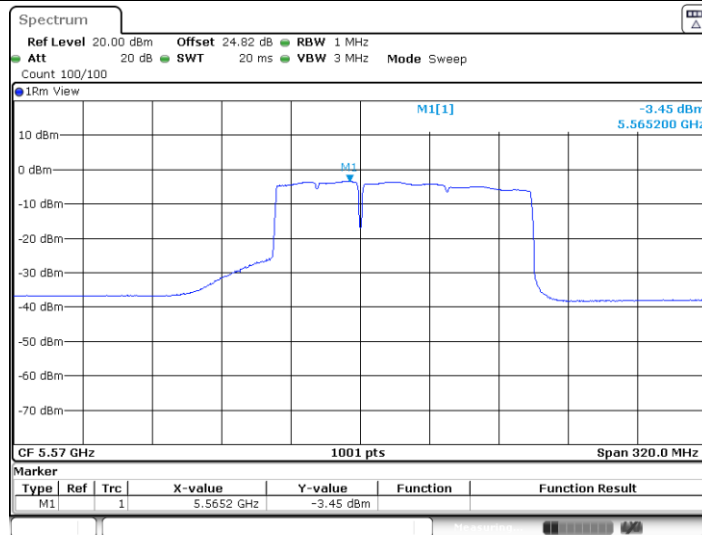




11BE160MIMO_Ant6_5570_Puncturing 40M_RU4

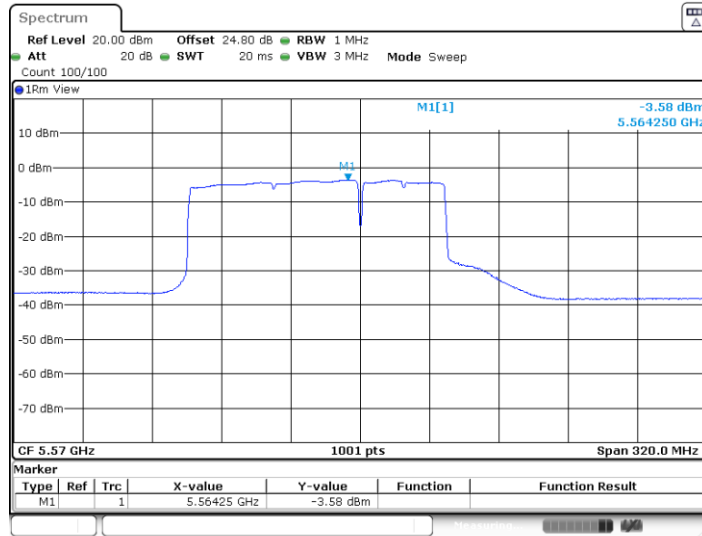


11BE160MIMO_Ant6_5570_Puncturing 20M_RU8

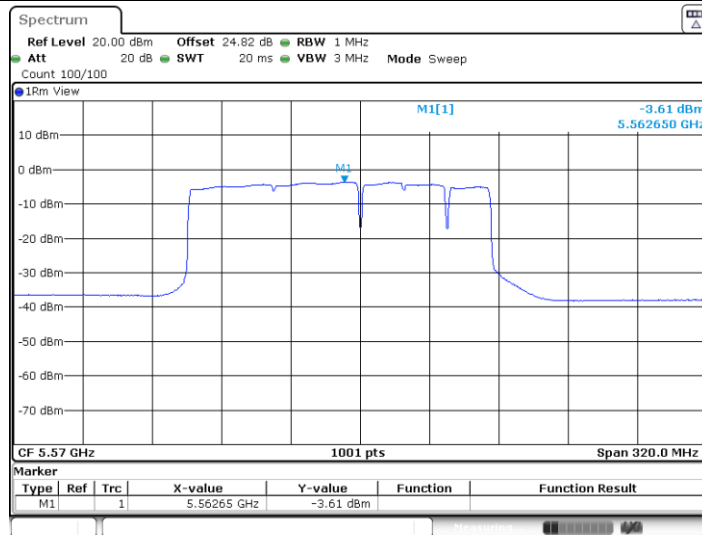




11BE160MIMO_Ant7_5570_Puncturing 40M_RU1

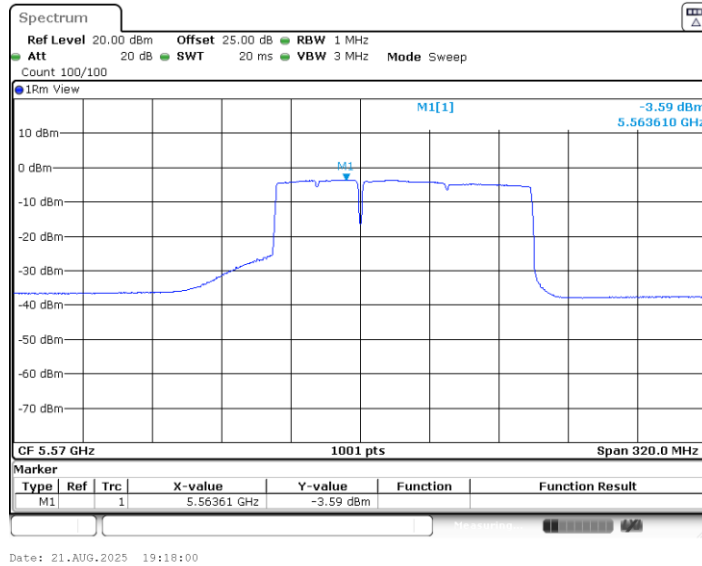


11BE160MIMO_Ant7_5570_Puncturing 20M_RU1

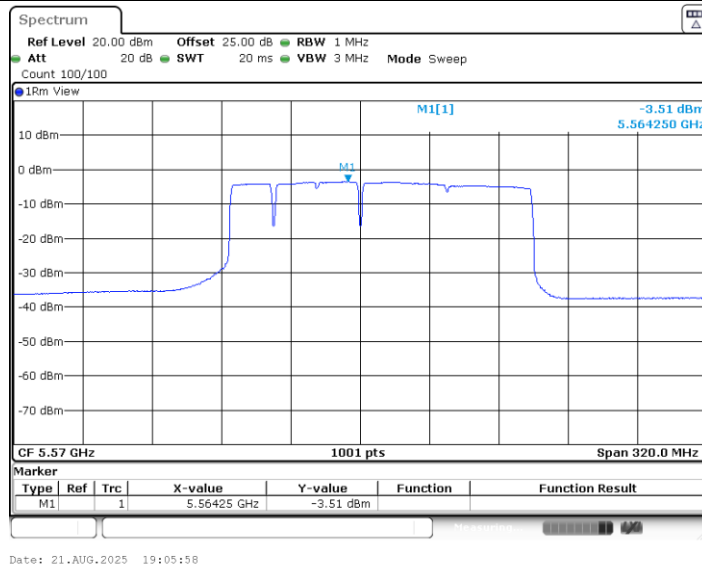




11BE160MIMO_Ant7_5570_Puncturing 40M_RU4

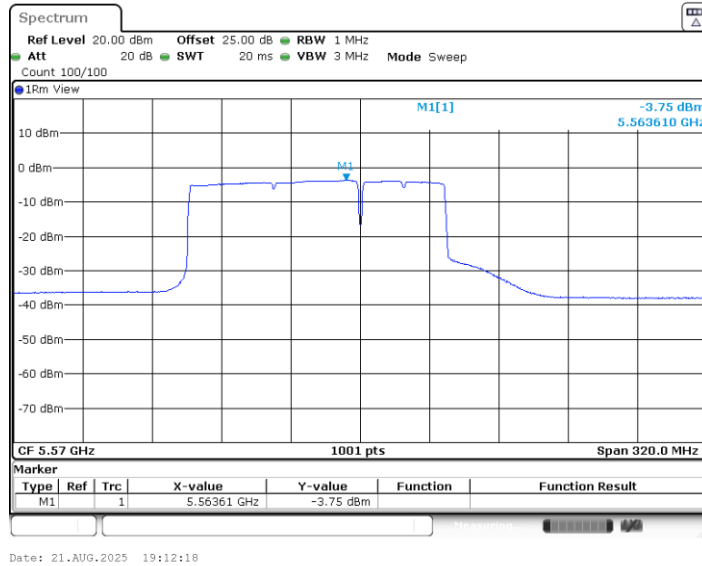


11BE160MIMO_Ant7_5570_Puncturing 20M_RU8

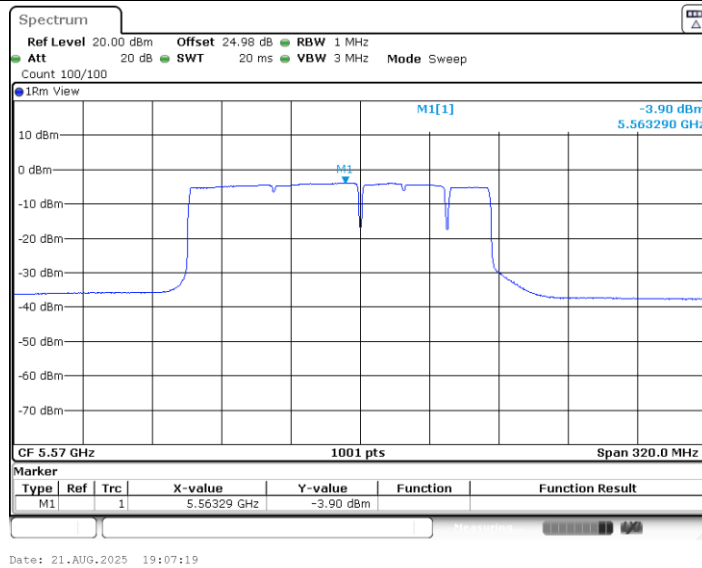




Appendix B. AC Conducted Emission Test Results

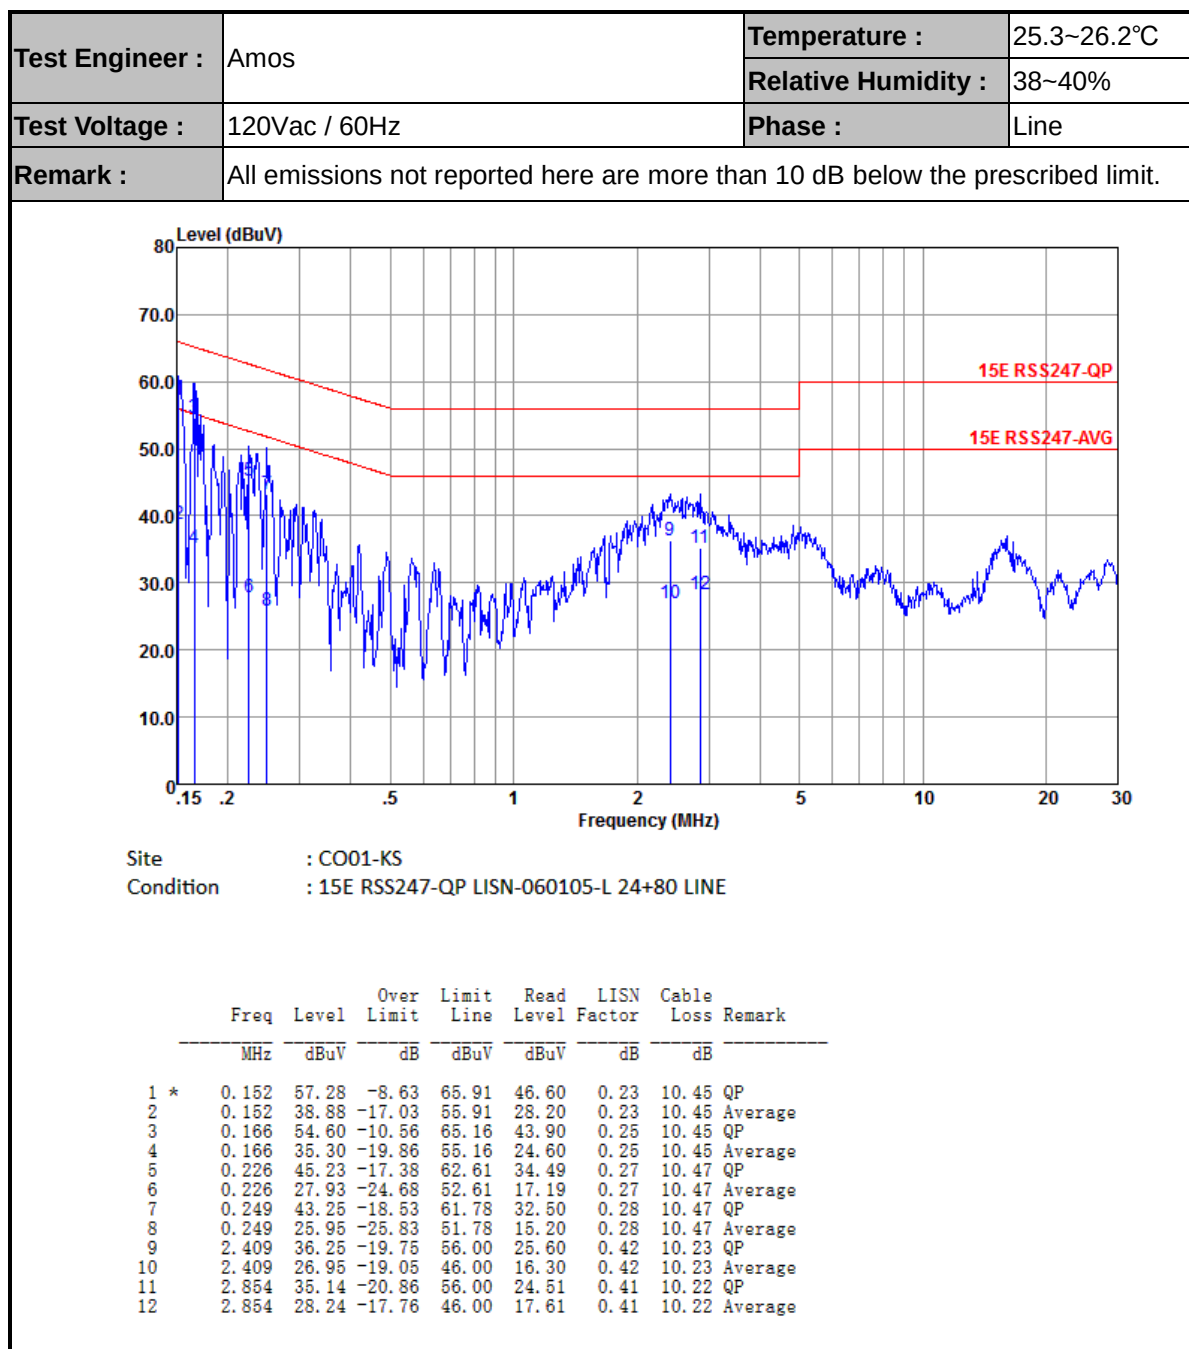



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

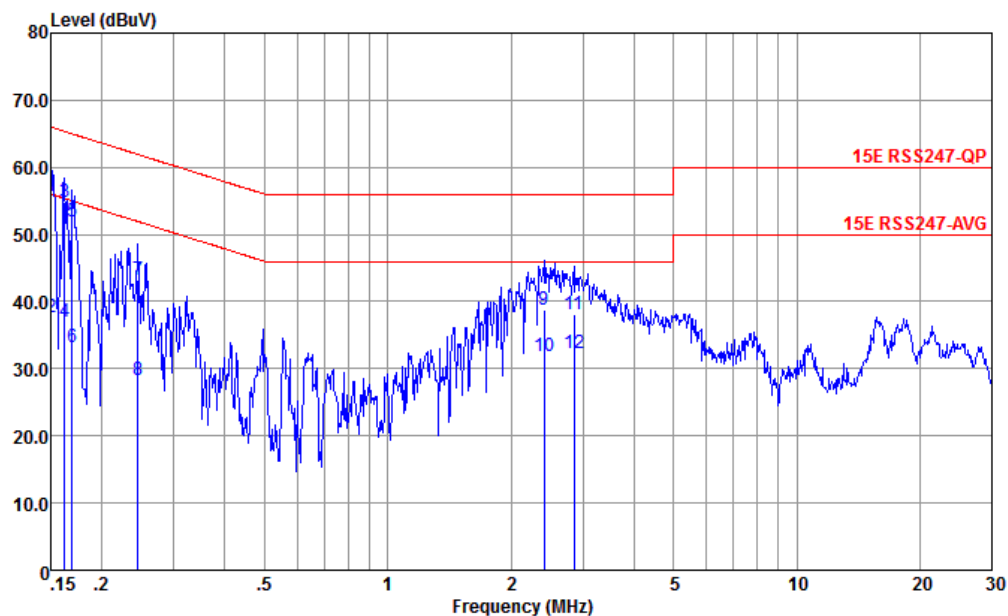

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	55.78	-10.22	66.00	45.10	0.23	10.45	QP
2	0.150	37.58	-18.42	56.00	26.90	0.23	10.45	Average
3	0.162	54.90	-10.44	65.34	44.21	0.24	10.45	QP
4	0.162	37.00	-18.34	55.34	26.31	0.24	10.45	Average
5	0.169	51.90	-13.09	64.99	41.20	0.25	10.45	QP
6	0.169	33.30	-21.69	54.99	22.60	0.25	10.45	Average
7	0.246	43.24	-18.67	61.91	32.50	0.27	10.47	QP
8	0.246	28.24	-23.67	51.91	17.50	0.27	10.47	Average
9	2.409	38.82	-17.18	56.00	28.20	0.39	10.23	QP
10	2.409	31.82	-14.18	46.00	21.20	0.39	10.23	Average
11	2.854	38.12	-17.88	56.00	27.50	0.40	10.22	QP
12	2.854	32.22	-13.78	46.00	21.60	0.40	10.22	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	46~48%
		Temperature :	26.2~27.5℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Sample
Mode 1	U-NII-1	5.15-5.25	CDD 6+7	802.11a	36	5180	6Mbps	-	1
Mode 2	U-NII-1	5.15-5.25	CDD 6+7	802.11a	44	5220	6Mbps	-	1
Mode 3	U-NII-1	5.15-5.25	CDD 6+7	802.11a	48	5240	6Mbps	-	1
Mode 4	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	36	5180	MCS0	Full	1
Mode 5	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	36	5180	MCS0	RU106/53	1
Mode 6	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	44	5220	MCS0	Full	1
Mode 7	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	48	5240	MCS0	Full	1
Mode 8	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT40	38	5190	MCS0	Full	1
Mode 9	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT40	38	5190	MCS0	RU242/61	1
Mode 10	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT40	46	5230	MCS0	Full	1
Mode 11	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT80	42	5210	MCS0	Full	1
Mode 12	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT80	42	5210	MCS0	RU484/65	1
Mode 13	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Full	1
Mode 14	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	RU996/67	1
Mode 15	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	RU996/68	1
Mode 16	U-NII-2A	5.25-5.35	CDD 6+7	802.11a	52	5260	6Mbps	-	1
Mode 17	U-NII-2A	5.25-5.35	CDD 6+7	802.11a	60	5300	6Mbps	-	1
Mode 18	U-NII-2A	5.25-5.35	CDD 6+7	802.11a	64	5320	6Mbps	-	1
Mode 19	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	52	5260	MCS0	Full	1
Mode 20	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	60	5300	MCS0	Full	1
Mode 21	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	64	5320	MCS0	Full	1
Mode 22	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	64	5320	MCS0	RU106/54	1
Mode 23	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT40	54	5270	MCS0	Full	1
Mode 24	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT40	62	5310	MCS0	Full	1
Mode 25	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT40	62	5310	MCS0	RU242/62	1
Mode 26	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT80	58	5290	MCS0	Full	1
Mode 27	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT80	58	5290	MCS0	RU484/66	1
Mode 28	U-NII-2C	5.47-5.725	CDD 6+7	802.11a	100	5500	6Mbps	-	1
Mode 29	U-NII-2C	5.47-5.725	CDD 6+7	802.11a	116	5580	6Mbps	-	1
Mode 30	U-NII-2C	5.47-5.725	CDD 6+7	802.11a	140	5700	6Mbps	-	1
Mode 31	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	100	5500	MCS0	-	1
Mode 32	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	100	5500	MCS0	RU106/53	1
Mode 33	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	116	5580	MCS0	-	1
Mode 34	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	140	5700	MCS0	-	1
Mode 35	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	140	5700	MCS0	RU106/54	1
Mode 36	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT40	102	5510	MCS0	Full	1
Mode 37	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT40	102	5510	MCS0	RU242/61	1
Mode 38	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT40	110	5550	MCS0	Full	1
Mode 39	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT40	134	5670	MCS0	Full	1



Mode 40	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT40	134	5670	MCS0	RU242/62	1
Mode 41	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	106	5530	MCS0	Full	1
Mode 42	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	106	5530	MCS0	RU484/65	1
Mode 43	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	122	5610	MCS0	Full	1
Mode 44	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	122	5610	MCS0	RU484/66	1
Mode 45	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Full	1
Mode 46	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	RU996/67	1
Mode 47	U-NII-2C	5.47-5.85	CDD 6+7	802.11a	144	5720	6Mbps	-	1
Mode 48	U-NII-2C	5.47-5.85	CDD 6+7	802.11be EHT20	144	5720	MCS0	-	1
Mode 49	U-NII-2C	5.47-5.85	CDD 6+7	802.11be EHT40	142	5710	MCS0	-	1
Mode 50	U-NII-2C	5.47-5.85	CDD 6+7	802.11be EHT80	138	5690	MCS0	-	1
Mode 51	U-NII-3	5.725-5.85	CDD 6+7	802.11a	149	5745	6Mbps	-	1
Mode 52	U-NII-3	5.725-5.85	CDD 6+7	802.11a	157	5785	6Mbps	-	1
Mode 53	U-NII-3	5.725-5.85	CDD 6+7	802.11a	165	5825	6Mbps	-	1
Mode 54	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	149	5745	MCS0	Full	1
Mode 55	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	149	5745	MCS0	RU106/53	1
Mode 56	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	157	5785	MCS0	Full	1
Mode 57	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	165	5825	MCS0	Full	1
Mode 58	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	165	5825	MCS0	RU106/54	1
Mode 59	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT40	151	5755	MCS0	RU242/61	1
Mode 60	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT40	151	5755	MCS0	Full	1
Mode 61	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT40	159	5795	MCS0	Full	1
Mode 62	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT40	159	5795	MCS0	RU242/62	1
Mode 63	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	Full	1
Mode 64	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	RU484/65	1
Mode 65	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	RU484/66	1
Mode 66	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	36	5180	MCS0	Index 38+1	1
Mode 67	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT20	36	5180	MCS0	Index 53+4	1
Mode 68	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	64	5320	MCS0	Index 39+7	1
Mode 69	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT20	64	5320	MCS0	Index 54+4	1
Mode 70	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	100	5500	MCS0	Index 38+1	1
Mode 71	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	100	5500	MCS0	Index 53+4	1
Mode 72	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	140	5700	MCS0	Index 39+7	1
Mode 73	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT20	140	5700	MCS0	Index 54+4	1
Mode 74	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	149	5745	MCS0	Index 38+1	1
Mode 75	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	149	5745	MCS0	Index 53+4	1
Mode 76	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	165	5825	MCS0	Index 39+7	1
Mode 77	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT20	165	5825	MCS0	Index 54+4	1
Mode 78	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT80	42	5210	MCS0	Puncturing 20M ④	1
Mode 79	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT80	58	5290	MCS0	Puncturing 20M ①	1
Mode 80	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	106	5530	MCS0	Puncturing 20M ④	1
Mode 81	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	122	5610	MCS0	Puncturing 20M ①	1
Mode 82	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Puncturing 40M ④	1
Mode 83	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Puncturing 40M ①	1
Mode 84	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Puncturing 40M ④	1
Mode 85	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Puncturing 40M ①	1
Mode 86	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Puncturing 20M ①	1
Mode 87	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Puncturing 20M ⑧	1
Mode 88	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Puncturing 20M ①	1
Mode 89	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Puncturing 20M ⑧	1
Mode 90	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	Puncturing 20M ①	1
Mode 91	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	Puncturing 20M ④	1



Mode 92	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT80	42	5210	MCS0	Large RU 484+242 ⁴	1
Mode 93	U-NII-2A	5.25-5.35	CDD 6+7	802.11be EHT80	58	5290	MCS0	Large RU 484+242 ¹	1
Mode 94	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	106	5530	MCS0	Large RU 484+242 ⁴	1
Mode 95	U-NII-2C	5.47-5.725	CDD 6+7	802.11be EHT80	122	5610	MCS0	Large RU 484+242 ¹	1
Mode 96	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Large RU 996+484 ⁴	1
Mode 97	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Large RU 996+484 ¹	1
Mode 98	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Large RU 996+484 ⁴	1
Mode 99	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Large RU 996+484 ¹	1
Mode 100	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Large RU 996+484+242 ⁸	1
Mode 101	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Large RU 996+484+242 ¹	1
Mode 102	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Large RU 996+484+242 ⁸	1
Mode 103	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	114	5570	MCS0	Large RU 996+484+242 ¹	1
Mode 104	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	Large RU 484+242 ⁴	1
Mode 105	U-NII-3	5.725-5.85	CDD 6+7	802.11be EHT80	155	5775	MCS0	Large RU 484+242 ¹	1
Mode 106	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSFK	39	2480	2Mbps	-	1
	2400-2483.5	2400-2483.5	7	802.11b	01	2412	1Mbps	-	1
	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	-	1
Mode 107	2400-2483.5	2400-2483.5	CDD 6+7	802.11b	01	2412	1Mbps	-	1
	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	-	1
Mode 108	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSFK	39	2480	2Mbps	-	1
	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	-	1
	U-NII-2C	5.47-5.85	CDD 6+7	802.11be EHT160	114	5570	MCS0	-	1
Mode 109	2400-2483.5	2400-2483.5	7	Bluetooth-LE_GSFK	39	2480	2Mbps	-	1
	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	-	1
	U-NII-2C	5.47-5.85	CDD 6+7	802.11be EHT160	114	5570	MCS0	-	1
Mode 110	U-NII-1	5.15-5.25	CDD 6+7	802.11be EHT160	50	5250	MCS0	Full	2



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5148.05	47.90	54.00	-6.10	H	AVERAGE	Pass	Band Edge
1	802.11a	36	6664.80	53.26	68.20	-14.94	V	PEAK	Pass	Harmonic
2	802.11a	44	5122.98	46.92	54.00	-7.08	H	AVERAGE	Pass	Band Edge
2	802.11a	44	11983.20	38.14	54.00	-15.86	V	AVERAGE	Pass	Harmonic
3	802.11a	48	5451.42	45.90	54.00	-8.10	H	AVERAGE	Pass	Band Edge
3	802.11a	48	11992.80	38.54	54.00	-15.46	V	AVERAGE	Pass	Harmonic
4	802.11be EHT20	36	5149.45	48.72	54.00	-5.28	H	AVERAGE	Pass	Band Edge
4	802.11be EHT20	36	11991.18	40.43	54.00	-13.57	V	AVERAGE	Pass	Harmonic
5	802.11be EHT20	36	5142.75	47.04	54.00	-6.96	H	AVERAGE	Pass	Band Edge
5	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
6	802.11be EHT20	44	5117.82	46.99	54.00	-7.01	V	AVERAGE	Pass	Band Edge
6	802.11be EHT20	44	11983.20	40.29	54.00	-13.71	V	AVERAGE	Pass	Harmonic
7	802.11be EHT20	48	5459.90	45.97	54.00	-8.03	H	AVERAGE	Pass	Band Edge
7	802.11be EHT20	48	11992.80	36.42	54.00	-17.58	V	AVERAGE	Pass	Harmonic
8	802.11be EHT40	38	5150.00	50.55	54.00	-3.45	H	AVERAGE	Pass	Band Edge
8	802.11be EHT40	38	6675.41	47.81	68.20	-20.39	V	PEAK	Pass	Harmonic
9	802.11be EHT40	38	5138.17	47.37	54.00	-6.63	H	AVERAGE	Pass	Band Edge
9	802.11be EHT40	38	-	-	-	-	-	-	-	Harmonic
10	802.11be EHT40	46	5150.00	49.02	54.00	-4.98	H	AVERAGE	Pass	Band Edge
10	802.11be EHT40	46	11977.20	40.69	54.00	-13.31	V	AVERAGE	Pass	Harmonic
11	802.11be EHT80	42	5136.25	51.31	54.00	-2.69	H	AVERAGE	Pass	Band Edge
11	802.11be EHT80	42	11983.20	37.40	54.00	-16.60	V	AVERAGE	Pass	Harmonic
12	802.11be EHT80	42	5132.25	47.22	54.00	-6.78	H	AVERAGE	Pass	Band Edge
12	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
13	802.11be EHT160	50	5393.33	52.61	54.00	-1.39	H	AVERAGE	Pass	Band Edge
13	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
14	802.11be EHT160	50	5143.38	50.10	54.00	-3.90	H	AVERAGE	Pass	Band Edge
14	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
15	802.11be EHT160	50	5350.91	50.66	54.00	-3.34	H	AVERAGE	Pass	Band Edge
15	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
16	802.11a	52	5139.45	46.89	54.00	-7.11	H	AVERAGE	Pass	Band Edge
16	802.11a	52	11985.60	40.20	54.00	-13.80	V	AVERAGE	Pass	Harmonic
17	802.11a	60	5074.22	47.09	54.00	-6.91	V	AVERAGE	Pass	Band Edge
17	802.11a	60	11988.00	40.77	54.00	-13.23	V	AVERAGE	Pass	Harmonic
18	802.11a	64	5351.55	46.99	54.00	-7.01	H	AVERAGE	Pass	Band Edge
18	802.11a	64	11977.20	40.80	54.00	-13.20	V	AVERAGE	Pass	Harmonic
19	802.11be EHT20	52	5106.65	46.82	54.00	-7.18	H	AVERAGE	Pass	Band Edge
19	802.11be EHT20	52	11985.60	40.44	54.00	-13.56	V	AVERAGE	Pass	Harmonic
20	802.11be EHT20	60	5093.16	46.92	54.00	-7.08	V	AVERAGE	Pass	Band Edge
20	802.11be EHT20	60	11988.00	39.52	54.00	-14.48	V	AVERAGE	Pass	Harmonic
21	802.11be EHT20	64	5350.75	46.78	54.00	-7.22	H	AVERAGE	Pass	Band Edge
21	802.11be EHT20	64	11977.20	39.17	54.00	-14.83	V	AVERAGE	Pass	Harmonic
22	802.11be EHT20	64	5391.65	45.56	54.00	-8.44	H	AVERAGE	Pass	Band Edge



22	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
23	802.11be EHT40	54	5355.03	48.07	54.00	-5.93	H	AVERAGE	Pass	Band Edge
23	802.11be EHT40	54	11988.80	36.20	54.00	-17.80	V	AVERAGE	Pass	Harmonic
24	802.11be EHT40	62	5355.15	51.16	54.00	-2.84	H	AVERAGE	Pass	Band Edge
24	802.11be EHT40	62	11989.20	38.99	54.00	-15.01	V	AVERAGE	Pass	Harmonic
25	802.11be EHT40	62	5350.03	47.13	54.00	-6.87	H	AVERAGE	Pass	Band Edge
25	802.11be EHT40	62	-	-	-	-	-	-	-	Harmonic
26	802.11be EHT80	58	5357.25	51.09	54.00	-2.91	H	AVERAGE	Pass	Band Edge
26	802.11be EHT80	58	11986.80	37.38	54.00	-16.62	V	AVERAGE	Pass	Harmonic
27	802.11be EHT80	58	5353.65	47.37	54.00	-6.63	H	AVERAGE	Pass	Band Edge
27	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
28	802.11a	100	5452.33	46.68	54.00	-7.32	H	AVERAGE	Pass	Band Edge
28	802.11a	100	11988.00	39.82	54.00	-14.18	V	AVERAGE	Pass	Harmonic
29	802.11a	116	5459.69	46.33	54.00	-7.67	H	AVERAGE	Pass	Band Edge
29	802.11a	116	11988.00	40.28	54.00	-13.72	V	AVERAGE	Pass	Harmonic
30	802.11a	140	5740.80	57.29	68.20	-10.91	H	PEAK	Pass	Band Edge
30	802.11a	140	11988.00	40.37	54.00	-13.63	V	AVERAGE	Pass	Harmonic
31	802.11be EHT20	100	5458.89	46.21	54.00	-7.79	H	AVERAGE	Pass	Band Edge
31	802.11be EHT20	100	11988.00	40.40	54.00	-13.60	V	AVERAGE	Pass	Harmonic
32	802.11be EHT20	100	5457.45	46.63	54.00	-7.37	H	AVERAGE	Pass	Band Edge
32	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
33	802.11be EHT20	116	5459.85	46.22	54.00	-7.78	H	AVERAGE	Pass	Band Edge
33	802.11be EHT20	116	11988.00	40.31	54.00	-13.69	V	AVERAGE	Pass	Harmonic
34	802.11be EHT20	140	5759.12	57.16	68.20	-11.04	H	PEAK	Pass	Band Edge
34	802.11be EHT20	140	11988.00	39.86	54.00	-14.14	V	AVERAGE	Pass	Harmonic
35	802.11be EHT20	140	5749.76	57.84	68.20	-10.36	H	PEAK	Pass	Band Edge
35	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
36	802.11be EHT40	102	5457.29	49.30	54.00	-4.70	H	AVERAGE	Pass	Band Edge
36	802.11be EHT40	102	11988.00	39.90	54.00	-14.10	V	AVERAGE	Pass	Harmonic
37	802.11be EHT40	102	5458.89	46.92	54.00	-7.08	H	AVERAGE	Pass	Band Edge
37	802.11be EHT40	102	-	-	-	-	-	-	-	Harmonic
38	802.11be EHT40	110	5459.91	48.50	54.00	-5.50	H	AVERAGE	Pass	Band Edge
38	802.11be EHT40	110	11988.00	41.73	54.00	-12.27	V	AVERAGE	Pass	Harmonic
39	802.11be EHT40	134	5454.09	45.83	54.00	-8.17	H	AVERAGE	Pass	Band Edge
39	802.11be EHT40	134	11988.00	39.93	54.00	-14.07	V	AVERAGE	Pass	Harmonic
40	802.11be EHT40	134	5451.69	45.86	54.00	-8.14	H	AVERAGE	Pass	Band Edge
40	802.11be EHT40	134	-	-	-	-	-	-	-	Harmonic
41	802.11be EHT80	106	5459.53	48.95	54.00	-5.05	H	AVERAGE	Pass	Band Edge
41	802.11be EHT80	106	11988.00	41.68	54.00	-12.32	V	AVERAGE	Pass	Harmonic
42	802.11be EHT80	106	5460.00	48.17	54.00	-5.83	H	AVERAGE	Pass	Band Edge
42	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
43	802.11be EHT80	122	5456.33	46.26	54.00	-7.74	H	AVERAGE	Pass	Band Edge
43	802.11be EHT80	122	11988.00	41.34	54.00	-12.66	V	AVERAGE	Pass	Harmonic
44	802.11be EHT80	122	5454.41	46.15	54.00	-7.85	H	AVERAGE	Pass	Band Edge
44	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
45	802.11be EHT160	114	5402.48	52.48	54.00	-1.52	H	AVERAGE	Pass	Band Edge
45	802.11be EHT160	114	11988.00	39.25	54.00	-14.75	V	AVERAGE	Pass	Harmonic



46	802.11be EHT160	114	5458.80	48.69	54.00	-5.31	H	AVERAGE	Pass	Band Edge
46	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
47	802.11a	144	-	-	-	-	-	-	-	Band Edge
47	802.11a	144	11988.00	39.58	54.00	-14.42	V	AVERAGE	Pass	Harmonic
48	802.11be EHT20	144	-	-	-	-	-	-	-	Band Edge
48	802.11be EHT20	144	11988.00	38.07	54.00	-15.93	V	AVERAGE	Pass	Harmonic
49	802.11be EHT40	142	-	-	-	-	-	-	-	Band Edge
49	802.11be EHT40	142	11988.00	39.61	54.00	-14.39	V	AVERAGE	Pass	Harmonic
50	802.11be EHT80	138	-	-	-	-	-	-	-	Band Edge
50	802.11be EHT80	138	11988.00	41.57	54.00	-12.43	V	AVERAGE	Pass	Harmonic
51	802.11a	149	5605.41	56.70	68.20	-11.50	H	PEAK	Pass	Band Edge
51	802.11a	149	11988.00	41.24	54.00	-12.76	V	AVERAGE	Pass	Harmonic
52	802.11a	157	5928.61	57.79	68.20	-10.41	V	PEAK	Pass	Band Edge
52	802.11a	157	11988.00	40.39	54.00	-13.61	V	AVERAGE	Pass	Harmonic
53	802.11a	165	5973.81	57.92	68.20	-10.28	H	PEAK	Pass	Band Edge
53	802.11a	165	11988.00	40.81	54.00	-13.19	V	AVERAGE	Pass	Harmonic
54	802.11be EHT20	149	5614.21	56.32	68.20	-11.88	V	PEAK	Pass	Band Edge
54	802.11be EHT20	149	11988.00	40.45	54.00	-13.55	V	AVERAGE	Pass	Harmonic
55	802.11be EHT20	149	5629.81	56.31	68.20	-11.89	H	PEAK	Pass	Band Edge
55	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT20	157	5947.01	57.42	68.20	-10.78	V	PEAK	Pass	Band Edge
56	802.11be EHT20	157	11988.00	40.65	54.00	-13.35	V	AVERAGE	Pass	Harmonic
57	802.11be EHT20	165	5997.41	57.48	68.20	-10.72	V	PEAK	Pass	Band Edge
57	802.11be EHT20	165	11988.00	40.35	54.00	-13.65	V	AVERAGE	Pass	Harmonic
58	802.11be EHT20	165	5969.01	57.84	68.20	-10.36	H	PEAK	Pass	Band Edge
58	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT40	151	5932.75	57.26	68.20	-10.94	V	PEAK	Pass	Band Edge
59	802.11be EHT40	151	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT40	151	5605.89	58.21	68.20	-9.99	H	PEAK	Pass	Band Edge
60	802.11be EHT40	151	11988.00	40.08	54.00	-13.92	V	AVERAGE	Pass	Harmonic
61	802.11be EHT40	159	5966.80	57.60	68.20	-10.60	H	PEAK	Pass	Band Edge
61	802.11be EHT40	159	11988.00	42.82	54.00	-11.18	V	AVERAGE	Pass	Harmonic
62	802.11be EHT40	159	5924.40	59.00	68.64	-9.64	H	PEAK	Pass	Band Edge
62	802.11be EHT40	159	-	-	-	-	-	-	-	Harmonic
63	802.11be EHT80	155	5611.20	58.25	68.20	-9.95	H	PEAK	Pass	Band Edge
63	802.11be EHT80	155	11988.00	41.22	54.00	-12.78	H	AVERAGE	Pass	Harmonic
64	802.11be EHT80	155	5929.20	59.36	68.20	-8.84	H	PEAK	Pass	Band Edge
64	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
65	802.11be EHT80	155	5950.00	56.88	68.20	-11.32	V	PEAK	Pass	Band Edge
65	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT20	36	5122.90	47.57	54.00	-6.43	H	AVERAGE	Pass	Band Edge
66	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT20	36	5144.05	47.09	54.00	-6.91	H	AVERAGE	Pass	Band Edge
67	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
68	802.11be EHT20	64	5350.00	48.52	54.00	-5.48	H	AVERAGE	Pass	Band Edge
68	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT20	64	5359.45	45.96	54.00	-8.04	H	AVERAGE	Pass	Band Edge



69	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT20	100	5450.25	46.82	54.00	-7.18	H	AVERAGE	Pass	Band Edge
70	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT20	100	5459.28	46.17	54.00	-7.83	H	AVERAGE	Pass	Band Edge
71	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT20	140	5746.16	59.42	68.20	-8.78	H	PEAK	Pass	Band Edge
72	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT20	140	5725.20	57.11	68.20	-11.09	H	PEAK	Pass	Band Edge
73	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT20	149	5631.60	57.12	68.20	-11.08	H	PEAK	Pass	Band Edge
74	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
75	802.11be EHT20	149	5612.00	56.89	68.20	-11.31	H	PEAK	Pass	Band Edge
75	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
76	802.11be EHT20	165	5955.60	57.59	68.20	-10.61	H	PEAK	Pass	Band Edge
76	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
77	802.11be EHT20	165	5952.80	58.97	68.20	-9.23	H	PEAK	Pass	Band Edge
77	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
78	802.11be EHT80	42	5149.98	49.95	54.00	-4.05	H	AVERAGE	Pass	Band Edge
78	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
79	802.11be EHT80	58	5350.23	50.68	54.00	-3.32	H	AVERAGE	Pass	Band Edge
79	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
80	802.11be EHT80	106	5452.26	49.89	54.00	-4.11	H	AVERAGE	Pass	Band Edge
80	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
81	802.11be EHT80	122	5459.89	46.28	54.00	-7.72	H	AVERAGE	Pass	Band Edge
81	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
82	802.11be EHT160	50	5134.60	52.70	54.00	-1.40	H	AVERAGE	Pass	Band Edge
82	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
83	802.11be EHT160	50	5370.12	52.44	54.00	-1.56	H	AVERAGE	Pass	Band Edge
83	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
84	802.11be EHT160	114	5412.16	52.26	54.00	-1.74	H	AVERAGE	Pass	Band Edge
84	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
85	802.11be EHT160	114	5458.58	50.41	54.00	-3.59	H	AVERAGE	Pass	Band Edge
85	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
86	802.11be EHT160	50	5134.88	51.64	54.00	-2.36	H	AVERAGE	Pass	Band Edge
86	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
87	802.11be EHT160	50	5135.85	52.41	54.00	-1.59	H	AVERAGE	Pass	Band Edge
87	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
88	802.11be EHT160	114	5437.24	52.70	54.00	-1.40	H	AVERAGE	Pass	Band Edge
88	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
89	802.11be EHT160	114	5411.94	51.72	54.00	-2.28	H	AVERAGE	Pass	Band Edge
89	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
90	802.11be EHT80	155	5945.60	58.39	68.20	-9.81	H	PEAK	Pass	Band Edge
90	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
91	802.11be EHT80	155	5939.20	58.21	68.20	-9.99	H	PEAK	Pass	Band Edge
91	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
92	802.11be EHT80	42	5149.96	49.85	54.00	-4.15	H	AVERAGE	Pass	Band Edge
92	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic







93	802.11be EHT80	58	5357.35	51.30	54.00	-2.70	H	AVERAGE	Pass	Band Edge
93	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
94	802.11be EHT80	106	5461.68	65.94	68.20	-2.26	H	PEAK	Pass	Band Edge
94	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
95	802.11be EHT80	122	5456.27	46.50	54.00	-7.50	H	AVERAGE	Pass	Band Edge
95	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
96	802.11be EHT160	50	5134.78	52.35	54.00	-1.65	H	AVERAGE	Pass	Band Edge
96	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
97	802.11be EHT160	50	5397.32	50.00	54.00	-4.00	H	AVERAGE	Pass	Band Edge
97	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
98	802.11be EHT160	114	5457.92	52.10	54.00	-1.90	H	AVERAGE	Pass	Band Edge
98	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
99	802.11be EHT160	114	5459.44	52.30	54.00	-1.70	H	AVERAGE	Pass	Band Edge
99	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
100	802.11be EHT160	50	5134.85	51.54	54.00	-2.46	H	AVERAGE	Pass	Band Edge
100	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
101	802.11be EHT160	50	5136.07	51.77	54.00	-2.23	H	AVERAGE	Pass	Band Edge
101	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
102	802.11be EHT160	114	5436.77	52.40	54.00	-1.60	H	AVERAGE	Pass	Band Edge
102	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
103	802.11be EHT160	114	5421.15	52.59	54.00	-1.41	H	AVERAGE	Pass	Band Edge
103	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
104	802.11be EHT80	155	5636.80	57.32	68.20	-10.88	H	PEAK	Pass	Band Edge
104	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
105	802.11be EHT80	155	5944.00	56.81	68.20	-11.39	H	PEAK	Pass	Band Edge
105	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
106	Bluetooth-LE_GSKF	39	2483.50	48.45	54.00	-5.55	H	AVERAGE	Pass	Band Edge
106	Bluetooth-LE_GSKF	39	7440.00	41.67	74.00	-32.33	H	PEAK	Pass	Harmonic
106	802.11b	01	2389.43	48.81	54.00	-5.19	H	AVERAGE	Pass	Band Edge
106	802.11b	01	4824.00	40.42	74.00	-33.58	H	PEAK	Pass	Harmonic
106	802.11be EHT160	50	5411.60	52.73	54.00	-1.27	H	AVERAGE	Pass	Band Edge
106	802.11be EHT160	50	10500.00	43.75	68.20	-24.45	H	PEAK	Pass	Harmonic
107	802.11b	01	2389.17	49.71	54.00	-4.29	H	AVERAGE	Pass	Band Edge
107	802.11b	01	4824.00	43.86	74.00	-30.14	V	PEAK	Pass	Harmonic
107	802.11be EHT160	50	5412.22	51.82	54.00	-2.18	H	AVERAGE	Pass	Band Edge
107	802.11be EHT160	50	10500.00	43.25	68.20	-24.95	H	PEAK	Pass	Harmonic
108	Bluetooth-LE_GSKF	39	2483.62	46.21	54.00	-7.79	V	AVERAGE	Pass	Band Edge
108	Bluetooth-LE_GSKF	39	7440.00	42.23	74.00	-31.77	H	PEAK	Pass	Harmonic
108	802.11be EHT160	50	5350.28	52.25	54.00	-1.75	H	AVERAGE	Pass	Band Edge
108	802.11be EHT160	50	10500.00	43.78	68.20	-24.42	V	PEAK	Pass	Harmonic
108	802.11be EHT160	114	5447.12	50.86	54.00	-3.14	H	AVERAGE	Pass	Band Edge
108	802.11be EHT160	114	11140.00	43.10	74.00	-30.90	V	PEAK	Pass	Harmonic
109	Bluetooth-LE_GSKF	39	2495.86	46.54	54.00	-7.46	H	AVERAGE	Pass	Band Edge
109	Bluetooth-LE_GSKF	39	7440.00	41.49	74.00	-32.51	V	PEAK	Pass	Harmonic
109	802.11be EHT160	50	5433.65	72.45	74.00	-1.55	H	PEAK	Pass	Band Edge
109	802.11be EHT160	50	10500.00	43.41	68.20	-24.79	V	PEAK	Pass	Harmonic
109	802.11be EHT160	114	5446.86	51.92	54.00	-2.08	H	AVERAGE	Pass	Band Edge







109	802.11be EHT160	114	11140.00	43.85	74.00	-30.15	V	PEAK	Pass	Harmonic
110	802.11be EHT160	50	5403.55	50.28	54.00	-3.72	H	AVERAGE	Pass	Band Edge
110	802.11be EHT160	50	10500.00	43.84	68.20	-24.36	V	PEAK	Pass	Harmonic

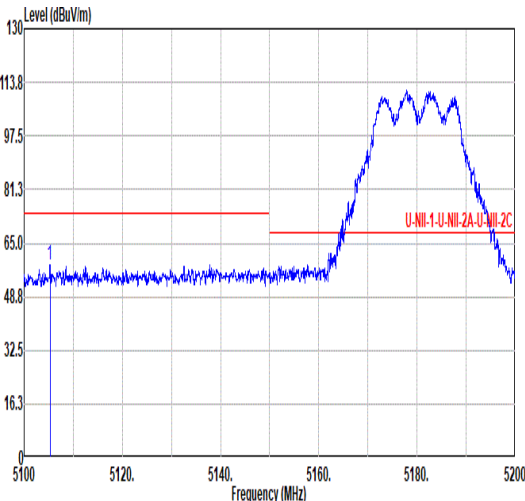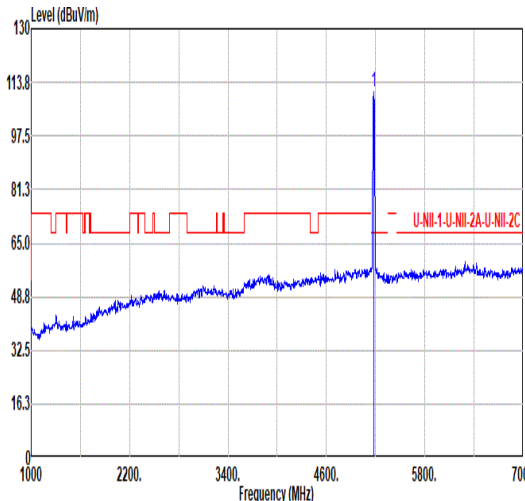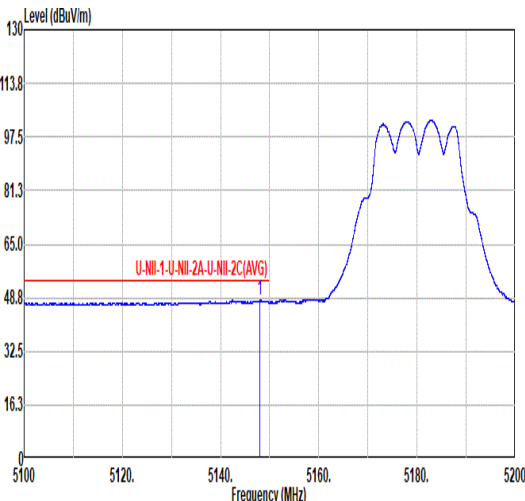
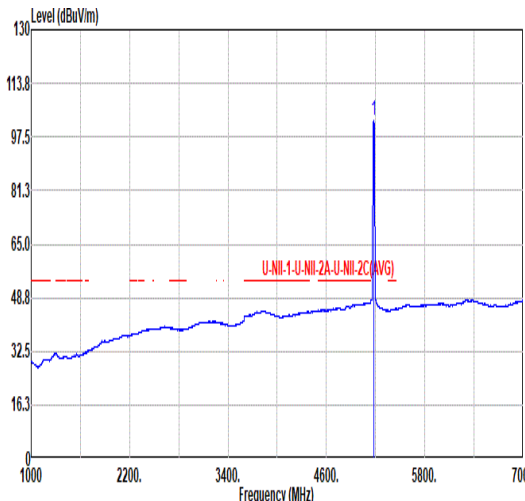


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5105.25</td><td>58.47</td><td>74.00</td><td>-15.53</td><td>42.04</td><td>34.40</td><td>11.88</td><td>29.85</td><td>0.00</td><td>224</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5105.25	58.47	74.00	-15.53	42.04	34.40	11.88	29.85	0.00	224	168	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>110.75</td><td>-----</td><td>-----</td><td>94.23</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>224</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.75	-----	-----	94.23	34.46	11.94	29.88	0.00	224	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5105.25	58.47	74.00	-15.53	42.04	34.40	11.88	29.85	0.00	224	168	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	110.75	-----	-----	94.23	34.46	11.94	29.88	0.00	224	168	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.05</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>31.46</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>224</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.05	47.90	54.00	-6.10	31.46	34.40	11.91	29.87	0.00	224	168	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.64</td><td>-----</td><td>-----</td><td>86.12</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>224</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.64	-----	-----	86.12	34.46	11.94	29.88	0.00	224	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.05	47.90	54.00	-6.10	31.46	34.40	11.91	29.87	0.00	224	168	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	102.64	-----	-----	86.12	34.46	11.94	29.88	0.00	224	168	AVERAGE																																																																																							

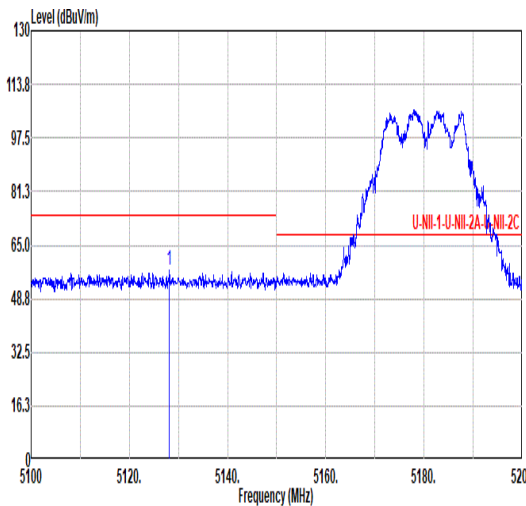
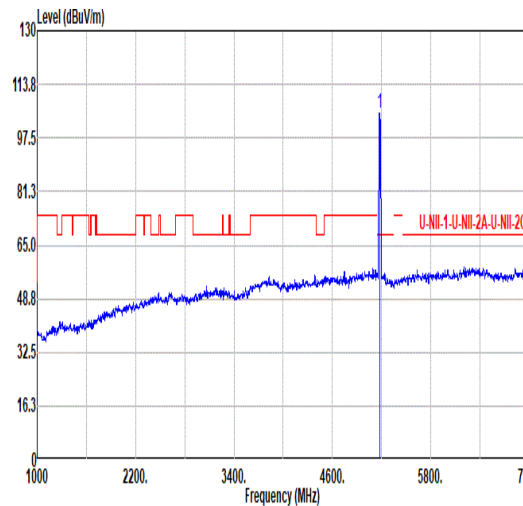
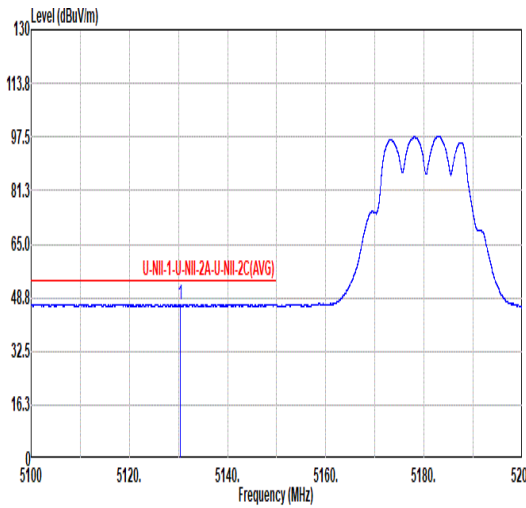
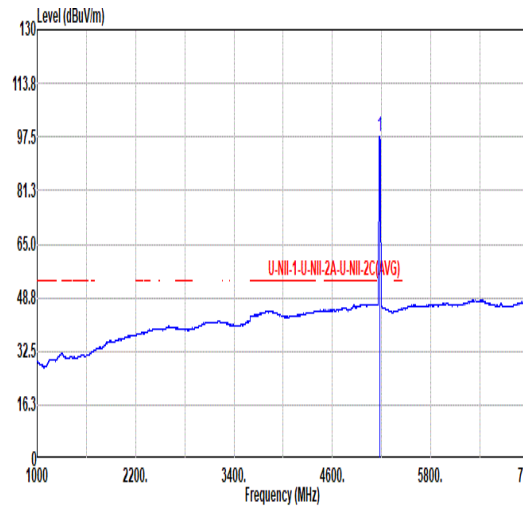


Mode	1																																																						
	Band Edge																																																						
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5128.15</td><td>57.45</td><td>74.00</td><td>-16.55</td><td>41.01</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>300</td><td>281</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5128.15	57.45	74.00	-16.55	41.01	34.40	11.90	29.86	0.00	300	281
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5128.15	57.45	74.00	-16.55	41.01	34.40	11.90	29.86	0.00	300	281	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.01</td><td>-----</td><td>-----</td><td>88.49</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>300</td><td>281</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.01	-----	-----	88.49	34.46	11.94	29.88	0.00	300	281
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5180.00	105.01	-----	-----	88.49	34.46	11.94	29.88	0.00	300	281	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5130.44</td><td>46.81</td><td>54.00</td><td>-7.19</td><td>30.37</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>300</td><td>281</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5130.44	46.81	54.00	-7.19	30.37	34.40	11.90	29.86	0.00	300	281
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5130.44	46.81	54.00	-7.19	30.37	34.40	11.90	29.86	0.00	300	281	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>97.80</td><td>-----</td><td>-----</td><td>81.28</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>300</td><td>281</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	97.80	-----	-----	81.28	34.46	11.94	29.88	0.00	300	281
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5180.00	97.80	-----	-----	81.28	34.46	11.94	29.88	0.00	300	281	AVERAGE																																											

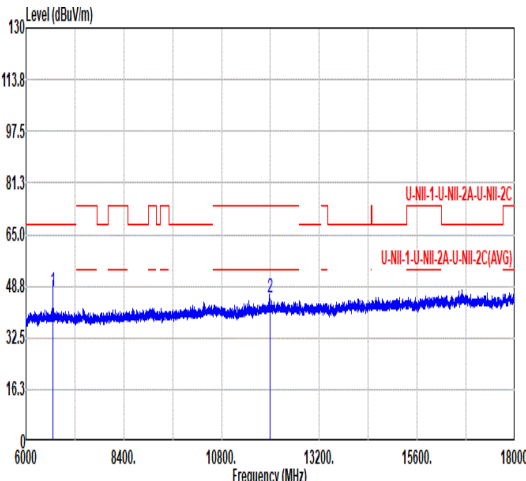
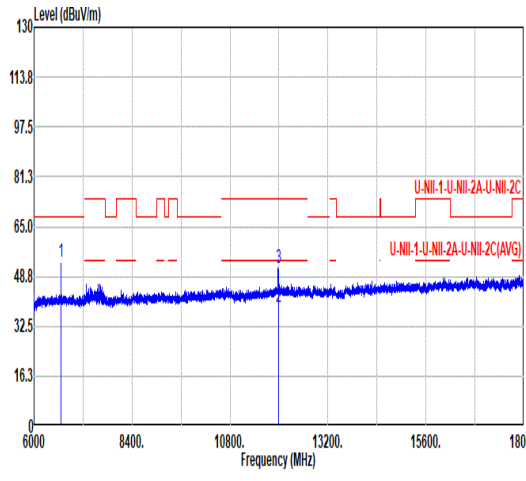


Mode	1																																																																																																																																									
	Harmonic																																																																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																									
ANT	CDD 6+7																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6664.00</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.24</td><td>35.67</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11991.18</td><td>44.90</td><td>74.00</td><td>-29.10</td><td>47.81</td><td>38.69</td><td>19.28</td><td>60.88</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6664.00	47.14	68.20	-21.06	61.24	35.67	14.30	64.07	0.00	--	--	PEAK	2	11991.18	44.90	74.00	-29.10	47.81	38.69	19.28	60.88	0.00	--	--	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6664.00</td><td>53.26</td><td>68.20</td><td>-14.94</td><td>67.36</td><td>35.67</td><td>14.30</td><td>64.07</td><td>0.00</td><td>297</td><td>205</td><td>PEAK</td></tr><tr><td>2</td><td>11991.18</td><td>38.94</td><td>54.00</td><td>-15.06</td><td>41.86</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>130</td><td>125</td><td>AVERAGE</td></tr><tr><td>3</td><td>11991.18</td><td>51.35</td><td>74.00</td><td>-22.65</td><td>54.26</td><td>38.69</td><td>19.28</td><td>60.88</td><td>0.00</td><td>130</td><td>125</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6664.00	53.26	68.20	-14.94	67.36	35.67	14.30	64.07	0.00	297	205	PEAK	2	11991.18	38.94	54.00	-15.06	41.86	38.69	19.28	60.89	0.00	130	125	AVERAGE	3	11991.18	51.35	74.00	-22.65	54.26	38.69	19.28	60.88	0.00	130	125
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	6664.00	47.14	68.20	-21.06	61.24	35.67	14.30	64.07	0.00	--	--	PEAK																																																																																																																														
2	11991.18	44.90	74.00	-29.10	47.81	38.69	19.28	60.88	0.00	--	--	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	6664.00	53.26	68.20	-14.94	67.36	35.67	14.30	64.07	0.00	297	205	PEAK																																																																																																																														
2	11991.18	38.94	54.00	-15.06	41.86	38.69	19.28	60.89	0.00	130	125	AVERAGE																																																																																																																														
3	11991.18	51.35	74.00	-22.65	54.26	38.69	19.28	60.88	0.00	130	125	PEAK																																																																																																																														

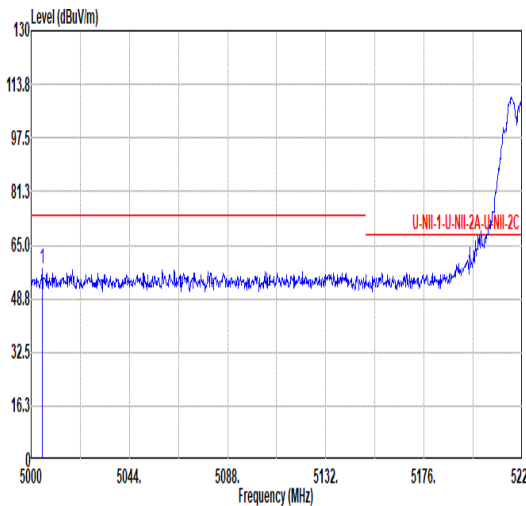
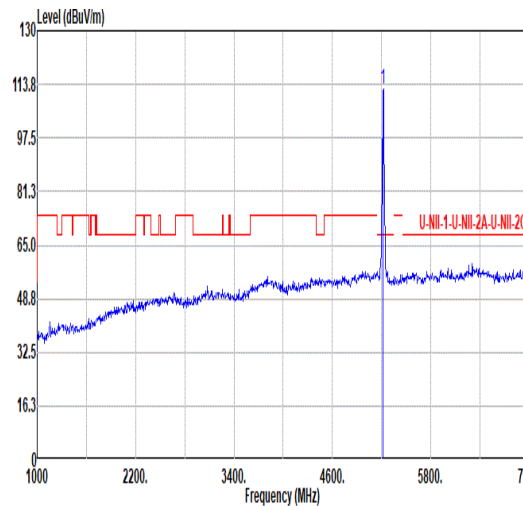
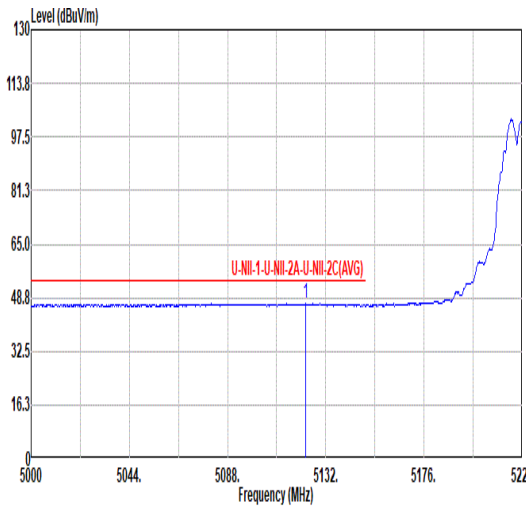
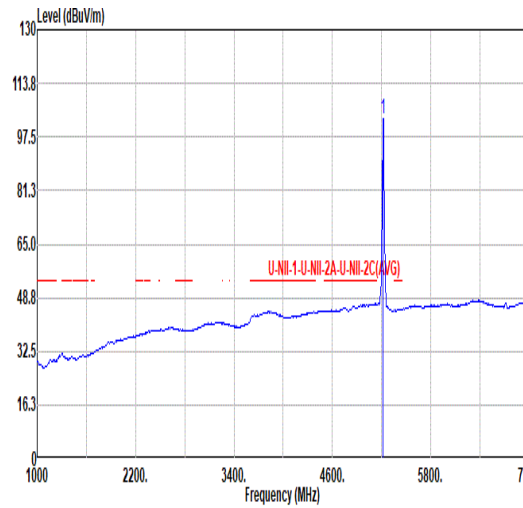


	2																																																																																																														
Mode	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5005.06</td><td>57.90</td><td>74.00</td><td>-16.10</td><td>41.60</td><td>34.30</td><td>11.81</td><td>29.81</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5005.06	57.90	74.00	-16.10	41.60	34.30	11.81	29.81	0.00	300	165	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>112.42</td><td>-----</td><td>-----</td><td>95.78</td><td>34.55</td><td>11.98</td><td>29.89</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	112.42	-----	-----	95.78	34.55	11.98	29.89	0.00	300	165
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5005.06	57.90	74.00	-16.10	41.60	34.30	11.81	29.81	0.00	300	165	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5220.00	112.42	-----	-----	95.78	34.55	11.98	29.89	0.00	300	165	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.98</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>30.48</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>300</td><td>165</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5122.98	46.92	54.00	-7.08	30.48	34.40	11.90	29.86	0.00	300	165	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>103.15</td><td>-----</td><td>-----</td><td>86.51</td><td>34.55</td><td>11.98</td><td>29.89</td><td>0.00</td><td>300</td><td>165</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	103.15	-----	-----	86.51	34.55	11.98	29.89	0.00	300	165
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5122.98	46.92	54.00	-7.08	30.48	34.40	11.90	29.86	0.00	300	165	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5220.00	103.15	-----	-----	86.51	34.55	11.98	29.89	0.00	300	165	AVERAGE																																																																																																			

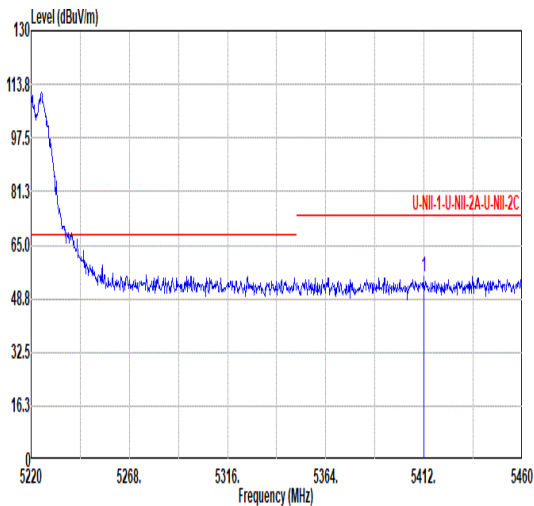
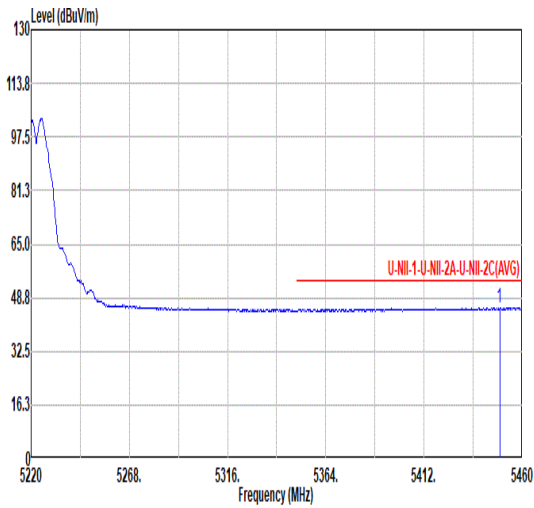


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5411.76</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>38.46</td><td>34.72</td><td>12.18</td><td>29.80</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5411.76	55.56	74.00	-18.44	38.46	34.72	12.18	29.80	0.00	300	165	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5411.76	55.56	74.00	-18.44	38.46	34.72	12.18	29.80	0.00	300	165	PEAK																																												
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5448.96</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>28.48</td><td>34.00</td><td>12.22</td><td>29.86</td><td>0.00</td><td>300</td><td>165</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.96	45.64	54.00	-8.36	28.48	34.00	12.22	29.86	0.00	300	165	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5448.96	45.64	54.00	-8.36	28.48	34.00	12.22	29.86	0.00	300	165	AVERAGE																																												

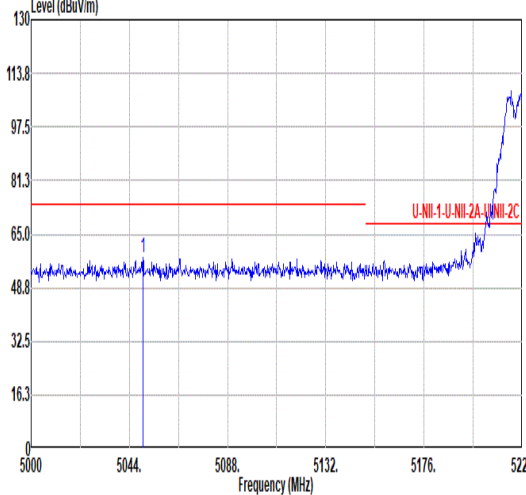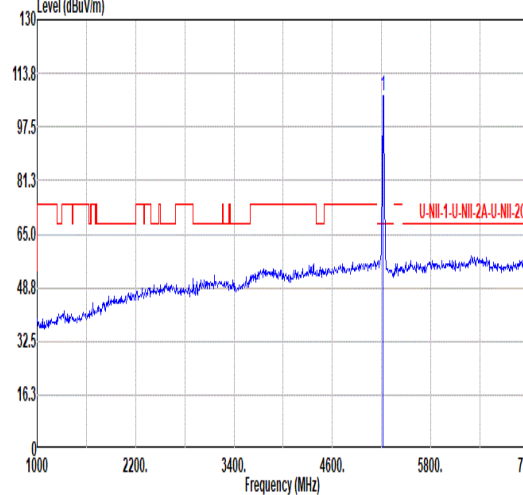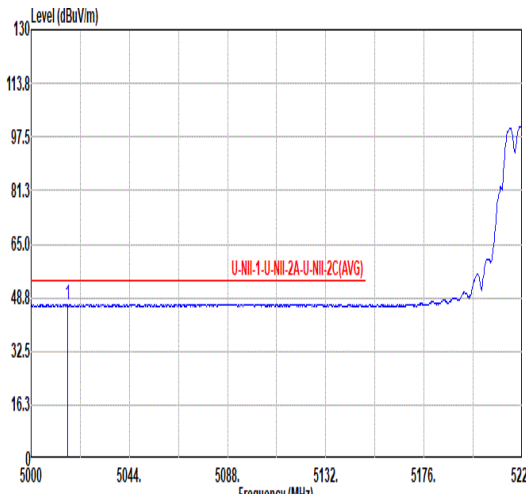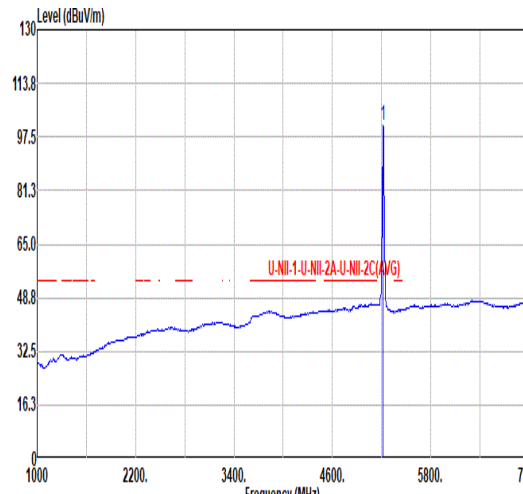

	2																																																					
Mode	Band Edge - L																																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																					
ANT	CDD 6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5050.16</td><td>57.74</td><td>74.00</td><td>-16.26</td><td>41.42</td><td>34.30</td><td>11.85</td><td>29.83</td><td>0.00</td><td>269 225 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5050.16	57.74	74.00	-16.26	41.42	34.30	11.85	29.83	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5050.16	57.74	74.00	-16.26	41.42	34.30	11.85	29.83	0.00	269 225 PEAK																																												
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>107.05</td><td>-----</td><td>-----</td><td>90.43</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>269 225 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	107.05	-----	-----	90.43	34.54	11.97	29.89	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5220.00	107.05	-----	-----	90.43	34.54	11.97	29.89	0.00	269 225 PEAK																																												
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5016.28</td><td>46.85</td><td>54.00</td><td>-7.15</td><td>30.55</td><td>34.30</td><td>11.82</td><td>29.82</td><td>0.00</td><td>269 225 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5016.28	46.85	54.00	-7.15	30.55	34.30	11.82	29.82	0.00	269 225 AVERAGE				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5016.28	46.85	54.00	-7.15	30.55	34.30	11.82	29.82	0.00	269 225 AVERAGE																																												
																																																						
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>100.91</td><td>-----</td><td>-----</td><td>84.29</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>269 225 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	100.91	-----	-----	84.29	34.54	11.97	29.89	0.00	269 225 AVERAGE					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5220.00	100.91	-----	-----	84.29	34.54	11.97	29.89	0.00	269 225 AVERAGE																																												

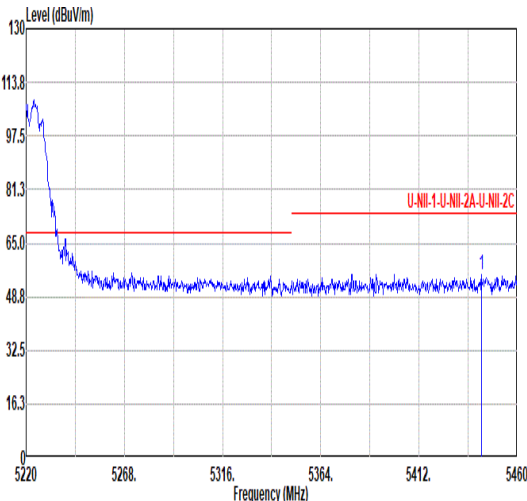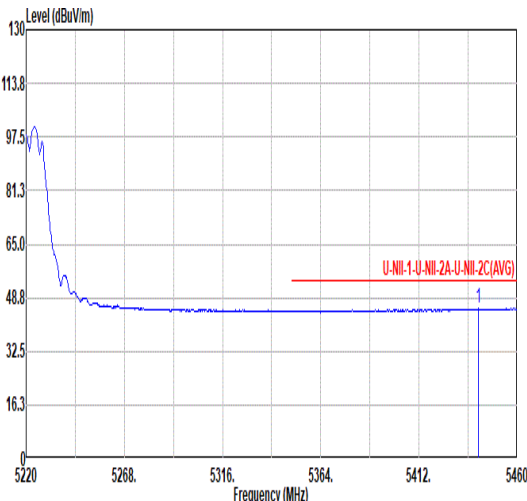

Mode	2																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Vertical										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5442.48</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>38.46</td><td>34.78</td><td>12.22</td><td>29.85</td><td>0.00</td><td>269</td><td>225</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5442.48	55.61	74.00	-18.39	38.46	34.78	12.22	29.85	0.00	269	225	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5442.48	55.61	74.00	-18.39	38.46	34.78	12.22	29.85	0.00	269	225	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.04</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>28.33</td><td>34.78</td><td>12.22</td><td>29.85</td><td>0.00</td><td>269</td><td>225</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.04	45.48	54.00	-8.52	28.33	34.78	12.22	29.85	0.00	269	225	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5441.04	45.48	54.00	-8.52	28.33	34.78	12.22	29.85	0.00	269	225	AVERAGE																																											

Mode

2

Harmonic

U-NII-1_5.15-5.25_802.11a_CH44_5220MHz

ANT

CDD 6+7

Pol.


Horizontal

Vertical

Peak

Avg


Level (dBuV/m)

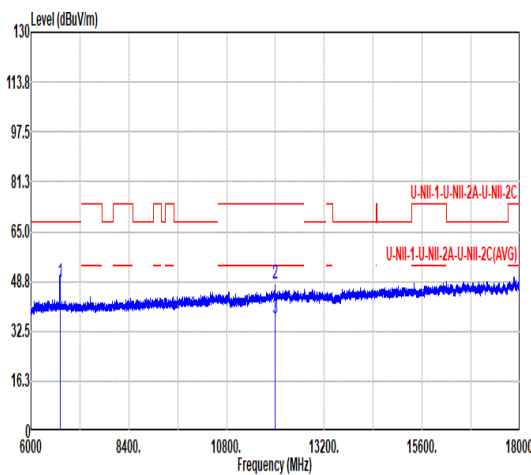

Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 6714.00	48.51	68.20	-19.69	62.59	35.63	14.34	64.05	0.00	--	--	PEAK
2 11983.20	47.93	74.00	-26.07	50.87	38.68	19.28	60.90	0.00	130	124	PEAK
3 11983.20	36.83	54.00	-17.17	39.74	38.69	19.28	60.88	0.00	130	124	AVERAGE





Level (dBuV/m)

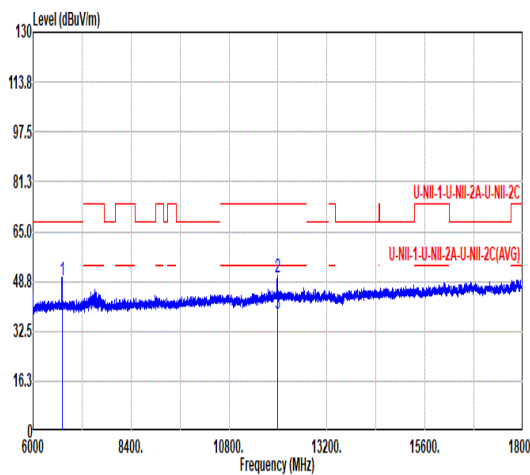





Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 6714.00	49.25	68.20	-18.95	63.33	35.63	14.34	64.05	0.00	--	--	PEAK
2 11983.20	49.95	74.00	-24.05	52.89	38.68	19.28	60.90	0.00	300	54	PEAK
3 11983.20	38.14	54.00	-15.86	41.08	38.68	19.28	60.90	0.00	300	54	AVERAGE

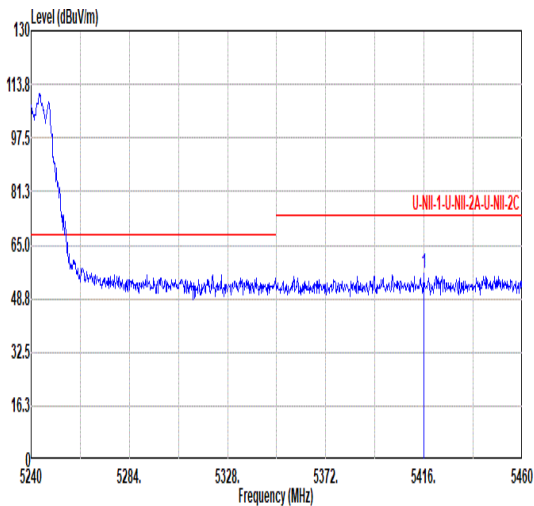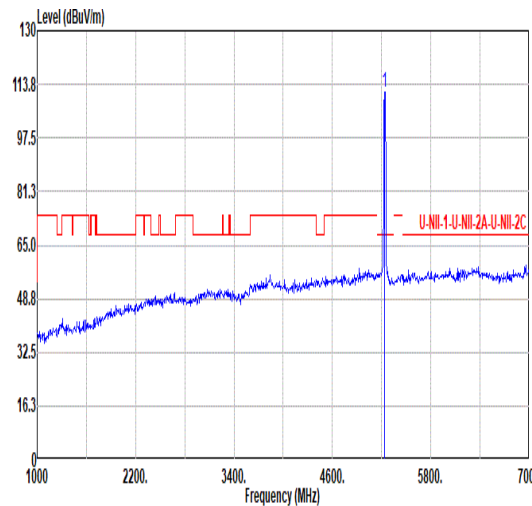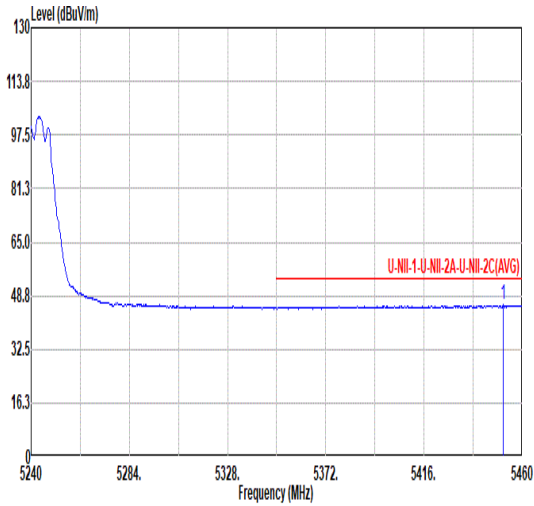
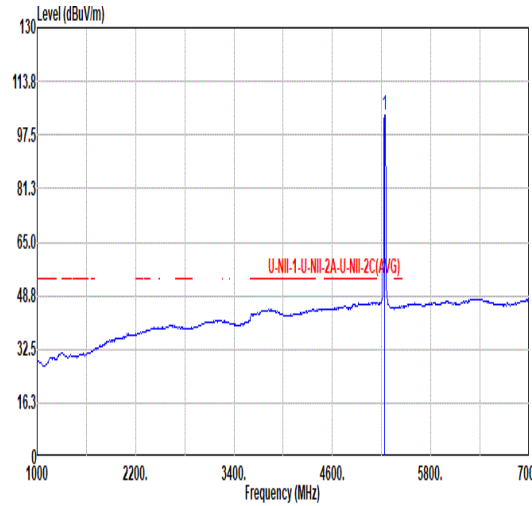


Mode	3																																																						
	Band Edge																																																						
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5415.78</td><td>56.61</td><td>74.00</td><td>-17.39</td><td>39.50</td><td>34.73</td><td>12.19</td><td>29.81</td><td>0.00</td><td>198</td><td>168</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5415.78	56.61	74.00	-17.39	39.50	34.73	12.19	29.81	0.00	198	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5415.78	56.61	74.00	-17.39	39.50	34.73	12.19	29.81	0.00	198	168	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>111.39</td><td>-----</td><td>-----</td><td>94.73</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>198</td><td>168</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	111.39	-----	-----	94.73	34.57	11.99	29.90	0.00	198	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	111.39	-----	-----	94.73	34.57	11.99	29.90	0.00	198	168	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5451.42</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>28.73</td><td>34.00</td><td>12.23</td><td>29.86</td><td>0.00</td><td>198</td><td>168</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.42	45.90	54.00	-8.10	28.73	34.00	12.23	29.86	0.00	198	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5451.42	45.90	54.00	-8.10	28.73	34.00	12.23	29.86	0.00	198	168	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.56</td><td>-----</td><td>-----</td><td>86.90</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>198</td><td>168</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	103.56	-----	-----	86.90	34.57	11.99	29.90	0.00	198	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	103.56	-----	-----	86.90	34.57	11.99	29.90	0.00	198	168	AVERAGE																																											

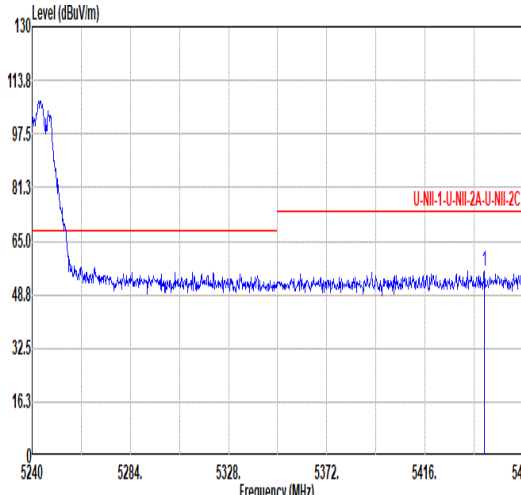
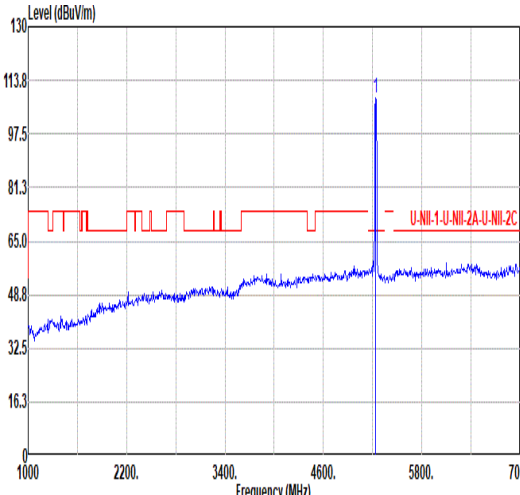
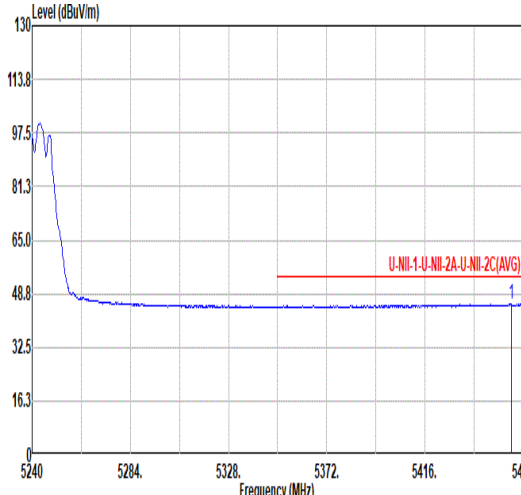
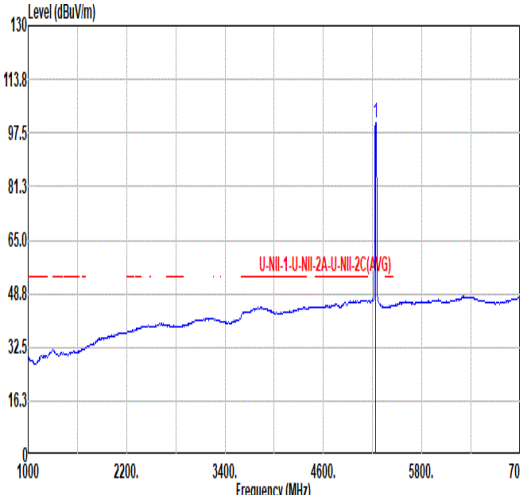


Mode	3																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																								
ANT	CDD 6+7																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5442.62	55.94	74.00	-18.06	38.78	34.79	12.22	29.85	0.00	270	216	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>108.25</td><td>-----</td><td>-----</td><td>91.59</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>270</td><td>216</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	108.25	-----	-----	91.59	34.57	11.99	29.90	0.00	270	216	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5442.62	55.94	74.00	-18.06	38.78	34.79	12.22	29.85	0.00	270	216	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5240.00	108.25	-----	-----	91.59	34.57	11.99	29.90	0.00	270	216	PEAK																																																																													
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.72</td><td>45.53</td><td>54.00</td><td>-8.47</td><td>28.38</td><td>34.79</td><td>12.23</td><td>29.87</td><td>0.00</td><td>270</td><td>216</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.72	45.53	54.00	-8.47	28.38	34.79	12.23	29.87	0.00	270	216	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>108.61</td><td>-----</td><td>-----</td><td>83.95</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>270</td><td>216</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	108.61	-----	-----	83.95	34.57	11.99	29.90	0.00	270	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5454.72	45.53	54.00	-8.47	28.38	34.79	12.23	29.87	0.00	270	216	AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5240.00	108.61	-----	-----	83.95	34.57	11.99	29.90	0.00	270	216	AVERAGE																																																																													



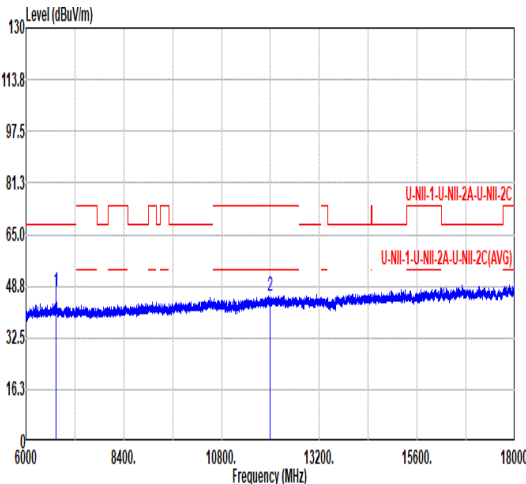
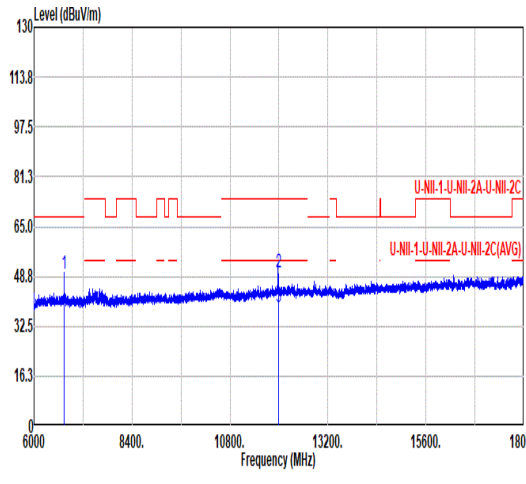


		3																																																																																																																																																			
Mode		Harmonic																																																																																																																																																			
		U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																																			
ANT		CDD 6+7																																																																																																																																																			
Pol.		Horizontal					Vertical																																																																																																																																														
Peak Avg																																																																																																																																																					
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6739.72</td><td>47.25</td><td>68.20</td><td>-20.95</td><td>61.25</td><td>35.68</td><td>14.36</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11992.80</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>48.53</td><td>38.69</td><td>19.29</td><td>68.88</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	6739.72	47.25	68.20	-20.95	61.25	35.68	14.36	64.04	0.00	--	--	PEAK	2	11992.80	45.63	74.00	-28.37	48.53	38.69	19.29	68.88	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6739.72</td><td>49.62</td><td>68.20</td><td>-18.58</td><td>63.62</td><td>35.68</td><td>14.36</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11992.80</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>52.81</td><td>38.69</td><td>19.29</td><td>68.88</td><td>0.00</td><td>300</td><td>60</td><td>PEAK</td></tr><tr><td>3</td><td>11992.80</td><td>38.54</td><td>54.00</td><td>-15.46</td><td>41.42</td><td>38.70</td><td>19.29</td><td>60.87</td><td>0.00</td><td>300</td><td>60</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	6739.72	49.62	68.20	-18.58	63.62	35.68	14.36	64.04	0.00	--	--	PEAK	2	11992.80	49.91	74.00	-24.09	52.81	38.69	19.29	68.88	0.00	300	60	PEAK	3	11992.80	38.54	54.00	-15.46	41.42	38.70	19.29	60.87	0.00	300	60
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																										
1	6739.72	47.25	68.20	-20.95	61.25	35.68	14.36	64.04	0.00	--	--	PEAK																																																																																																																																									
2	11992.80	45.63	74.00	-28.37	48.53	38.69	19.29	68.88	0.00	--	--	PEAK																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																										
1	6739.72	49.62	68.20	-18.58	63.62	35.68	14.36	64.04	0.00	--	--	PEAK																																																																																																																																									
2	11992.80	49.91	74.00	-24.09	52.81	38.69	19.29	68.88	0.00	300	60	PEAK																																																																																																																																									
3	11992.80	38.54	54.00	-15.46	41.42	38.70	19.29	60.87	0.00	300	60	AVERAGE																																																																																																																																									

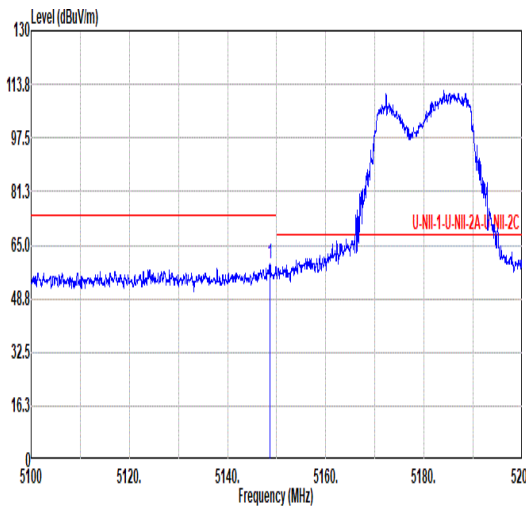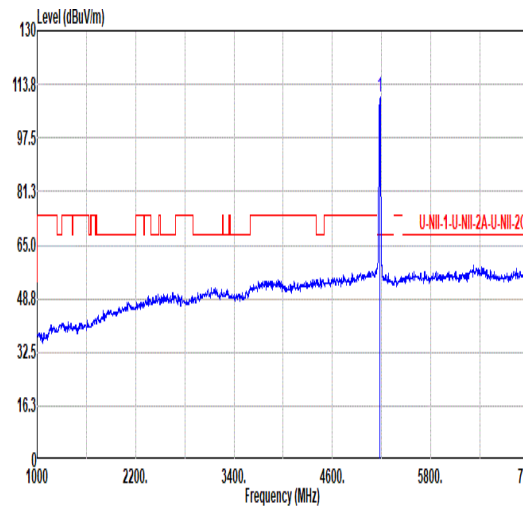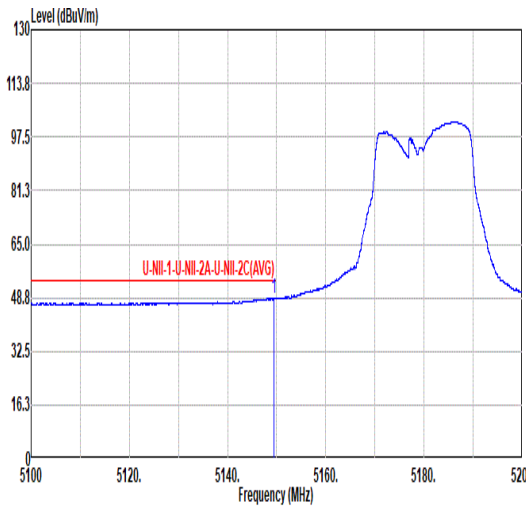
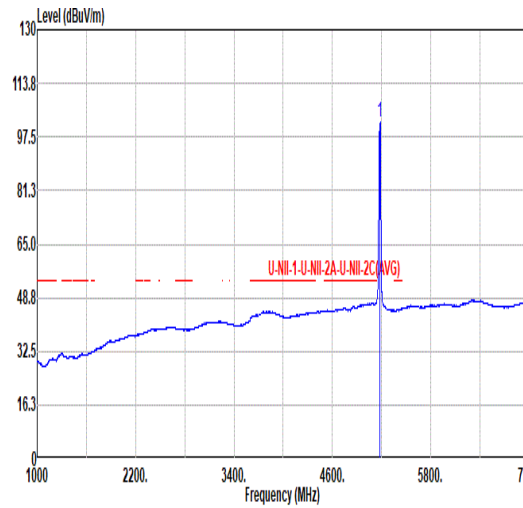


	4																																																																																								
Mode	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																								
ANT	CDD 6+7																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5148.55</td><td>59.22</td><td>74.00</td><td>-14.78</td><td>42.78</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00 266 165 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	5148.55	59.22	74.00	-14.78	42.78	34.40	11.91	29.87	0.00 266 165 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.07</td><td>-----</td><td>-----</td><td>93.54</td><td>34.47</td><td>11.94</td><td>29.88</td><td>0.00 266 165 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	5180.00	110.07	-----	-----	93.54	34.47	11.94	29.88
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																
1	5148.55	59.22	74.00	-14.78	42.78	34.40	11.91	29.87	0.00 266 165 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																
1	5180.00	110.07	-----	-----	93.54	34.47	11.94	29.88	0.00 266 165 PEAK																																																																																
Avg																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5149.45</td><td>48.72</td><td>54.00</td><td>-5.28</td><td>32.28</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00 266 165 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	5149.45	48.72	54.00	-5.28	32.28	34.40	11.91	29.87	0.00 266 165 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.82</td><td>-----</td><td>-----</td><td>85.29</td><td>34.47</td><td>11.94</td><td>29.88</td><td>0.00 266 165 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	5180.00	101.82	-----	-----	85.29	34.47	11.94	29.88
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																
1	5149.45	48.72	54.00	-5.28	32.28	34.40	11.91	29.87	0.00 266 165 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																
1	5180.00	101.82	-----	-----	85.29	34.47	11.94	29.88	0.00 266 165 AVERAGE																																																																																

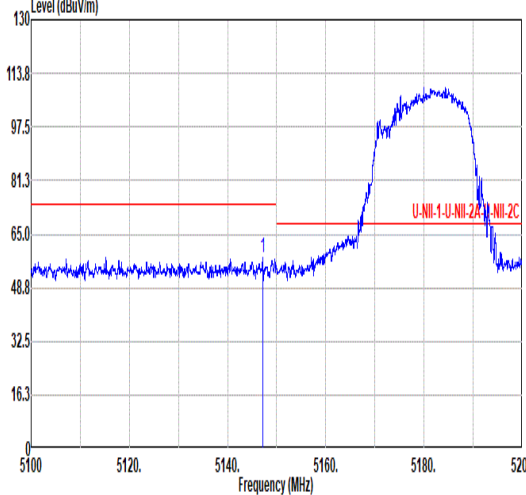
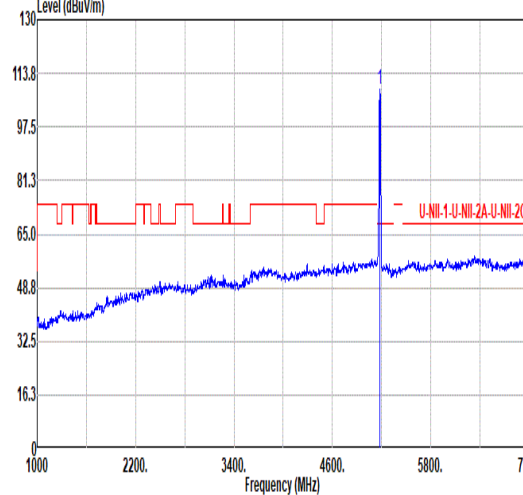
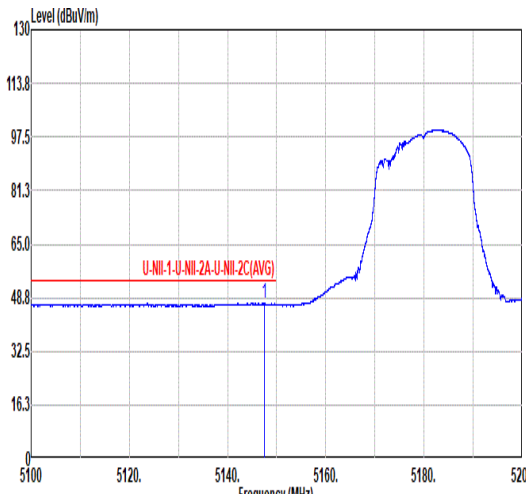
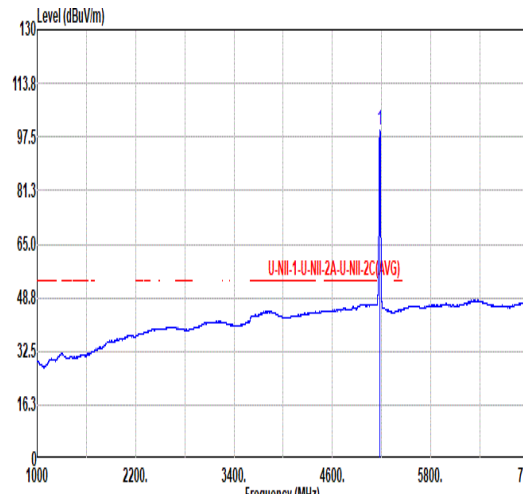


Mode	4																																																																																																														
	Band Edge																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.15</td><td>58.02</td><td>74.00</td><td>-15.98</td><td>41.58</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>260</td><td>246</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.15	58.02	74.00	-15.98	41.58	34.40	11.91	29.87	0.00	260	246	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.75</td><td>-----</td><td>-----</td><td>92.23</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>260</td><td>246</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	108.75	-----	-----	92.23	34.46	11.94	29.88	0.00	260	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5147.15	58.02	74.00	-15.98	41.58	34.40	11.91	29.87	0.00	260	246	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	108.75	-----	-----	92.23	34.46	11.94	29.88	0.00	260	246	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.45</td><td>47.20</td><td>54.00</td><td>-6.80</td><td>30.76</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>260</td><td>246</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.45	47.20	54.00	-6.80	30.76	34.40	11.91	29.87	0.00	260	246	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>99.40</td><td>-----</td><td>-----</td><td>82.88</td><td>34.46</td><td>11.94</td><td>29.88</td><td>0.00</td><td>260</td><td>246</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	99.40	-----	-----	82.88	34.46	11.94	29.88	0.00	260	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5147.45	47.20	54.00	-6.80	30.76	34.40	11.91	29.87	0.00	260	246	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	99.40	-----	-----	82.88	34.46	11.94	29.88	0.00	260	246	AVERAGE																																																																																																			



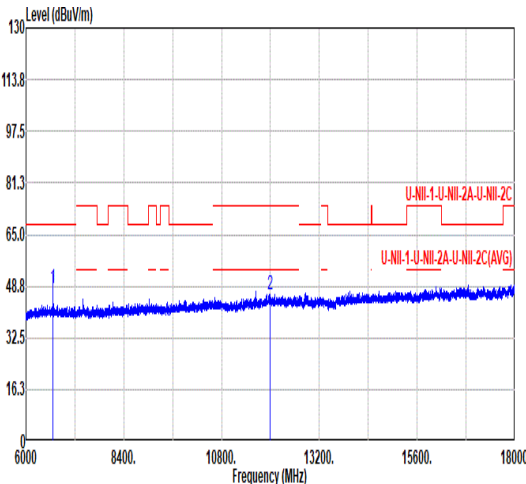
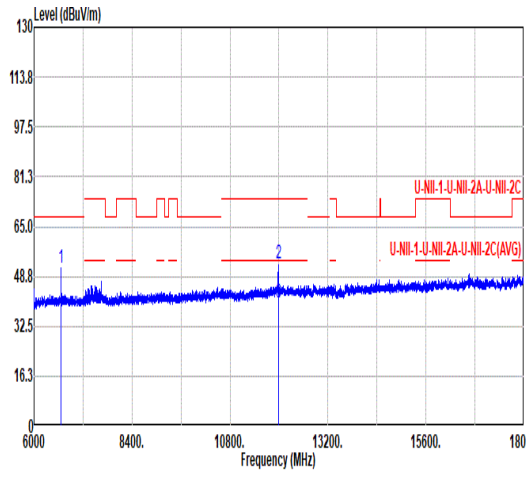


		4																																																																						
Mode		Harmonic																																																																						
		U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																						
ANT		CDD 6+7																																																																						
Pol.		Horizontal						Vertical																																																																
Peak Avg																																																																								
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>6664.00</td><td>48.31</td><td>68.20</td><td>-19.89</td><td>62.41</td><td>35.67</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11991.18</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>48.89</td><td>38.69</td><td>19.28</td><td>60.88</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	1	6664.00	48.31	68.20	-19.89	62.41	35.67	14.30	64.07	0.00	--	--	PEAK	2	11991.18	45.98	74.00	-28.02	48.89	38.69	19.28	60.88	0.00	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																															
1	6664.00	48.31	68.20	-19.89	62.41	35.67	14.30	64.07	0.00	--	--	PEAK																																																												
2	11991.18	45.98	74.00	-28.02	48.89	38.69	19.28	60.88	0.00	--	--	PEAK																																																												
																																																																								
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>6664.00</td><td>51.60</td><td>68.20</td><td>-16.60</td><td>65.70</td><td>35.67</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11991.18</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>55.68</td><td>38.69</td><td>19.28</td><td>60.88</td><td>0.00</td><td>309</td><td>58</td><td>PEAK</td></tr><tr><td>3</td><td>11991.18</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>43.37</td><td>38.68</td><td>19.28</td><td>60.90</td><td>0.00</td><td>309</td><td>58</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	1	6664.00	51.60	68.20	-16.60	65.70	35.67	14.30	64.07	0.00	--	--	PEAK	2	11991.18	52.77	74.00	-21.23	55.68	38.69	19.28	60.88	0.00	309	58	PEAK	3	11991.18	40.43	54.00	-13.57	43.37	38.68	19.28	60.90	0.00	309	58	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																															
1	6664.00	51.60	68.20	-16.60	65.70	35.67	14.30	64.07	0.00	--	--	PEAK																																																												
2	11991.18	52.77	74.00	-21.23	55.68	38.69	19.28	60.88	0.00	309	58	PEAK																																																												
3	11991.18	40.43	54.00	-13.57	43.37	38.68	19.28	60.90	0.00	309	58	AVERAGE																																																												

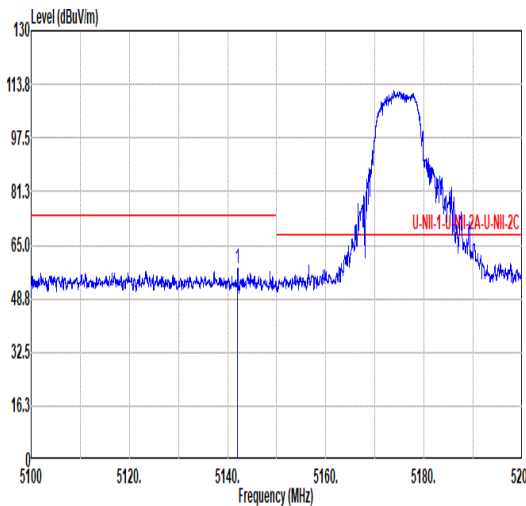
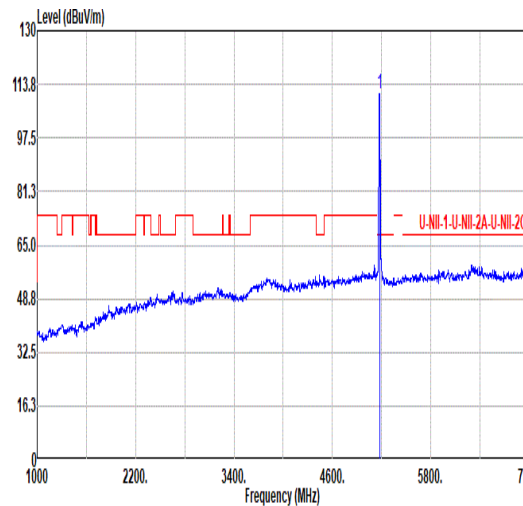
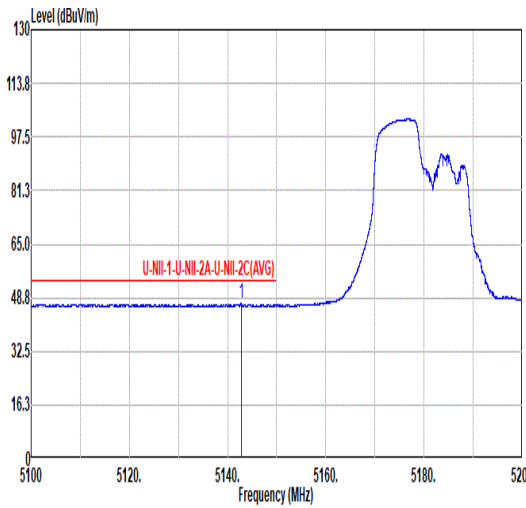
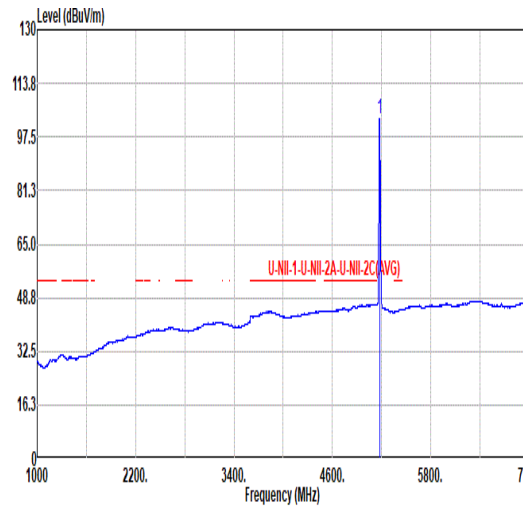


Mode	5																																																																																																														
	Band Edge																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU106/53_5180MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.05</td><td>58.01</td><td>74.00</td><td>-15.99</td><td>41.57</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>300</td><td>148</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.05	58.01	74.00	-15.99	41.57	34.40	11.91	29.87	0.00	300	148	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.76</td><td>-----</td><td>-----</td><td>94.26</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>300</td><td>148</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.76	-----	-----	94.26	34.45	11.93	29.88	0.00	300	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5142.05	58.01	74.00	-15.99	41.57	34.40	11.91	29.87	0.00	300	148	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	110.76	-----	-----	94.26	34.45	11.93	29.88	0.00	300	148	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.75</td><td>47.04</td><td>54.00</td><td>-6.96</td><td>30.60</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>300</td><td>148</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.75	47.04	54.00	-6.96	30.60	34.40	11.91	29.87	0.00	300	148	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.99</td><td>-----</td><td>-----</td><td>86.49</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>300</td><td>148</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.99	-----	-----	86.49	34.45	11.93	29.88	0.00	300	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5142.75	47.04	54.00	-6.96	30.60	34.40	11.91	29.87	0.00	300	148	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	102.99	-----	-----	86.49	34.45	11.93	29.88	0.00	300	148	AVERAGE																																																																																																			

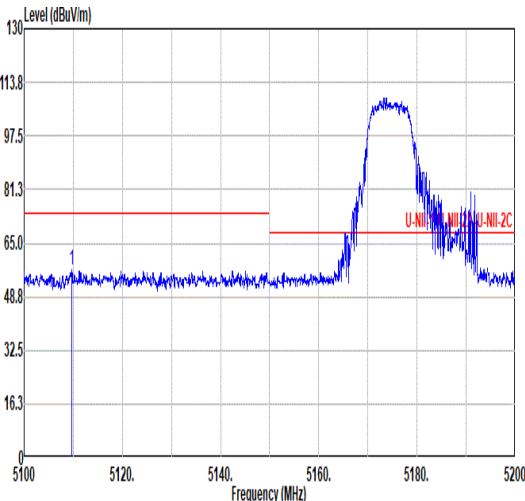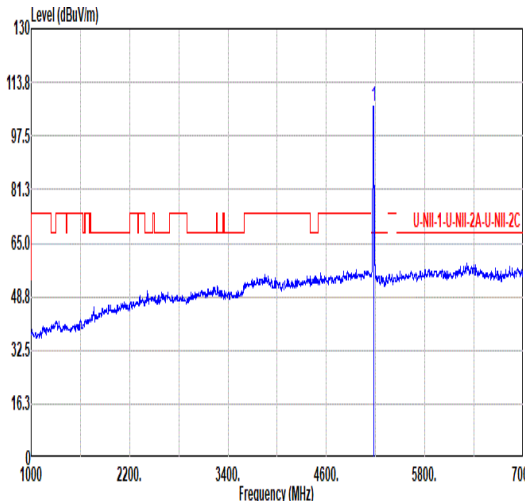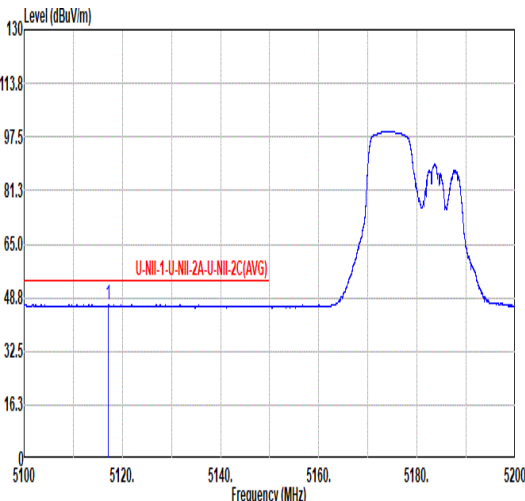
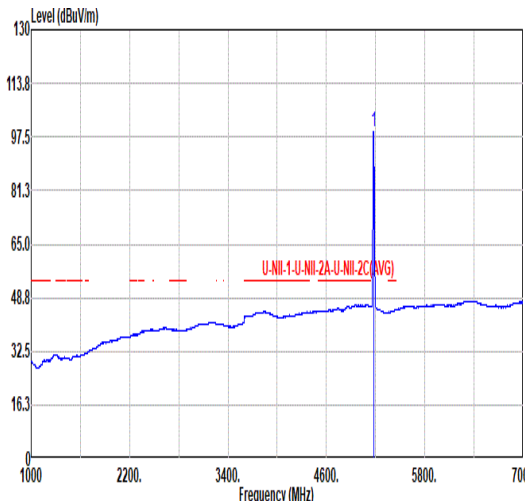


Mode	5																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU106/53_5180MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5109.75</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>40.29</td><td>34.40</td><td>11.89</td><td>29.85</td><td>0.00</td><td>300</td><td>272</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5109.75	56.73	74.00	-17.27	40.29	34.40	11.89	29.85	0.00	300	272	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>106.62</td><td>-----</td><td>-----</td><td>90.12</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>300</td><td>272</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	106.62	-----	-----	90.12	34.45	11.93	29.88	0.00	300	272
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5109.75	56.73	74.00	-17.27	40.29	34.40	11.89	29.85	0.00	300	272	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	106.62	-----	-----	90.12	34.45	11.93	29.88	0.00	300	272	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5117.15</td><td>46.59</td><td>54.00</td><td>-7.41</td><td>30.16</td><td>34.40</td><td>11.89</td><td>29.86</td><td>0.00</td><td>300</td><td>272</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5117.15	46.59	54.00	-7.41	30.16	34.40	11.89	29.86	0.00	300	272	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>99.23</td><td>-----</td><td>-----</td><td>82.73</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>300</td><td>272</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	99.23	-----	-----	82.73	34.45	11.93	29.88	0.00	300	272
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5117.15	46.59	54.00	-7.41	30.16	34.40	11.89	29.86	0.00	300	272	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	99.23	-----	-----	82.73	34.45	11.93	29.88	0.00	300	272	AVERAGE																																																																																							

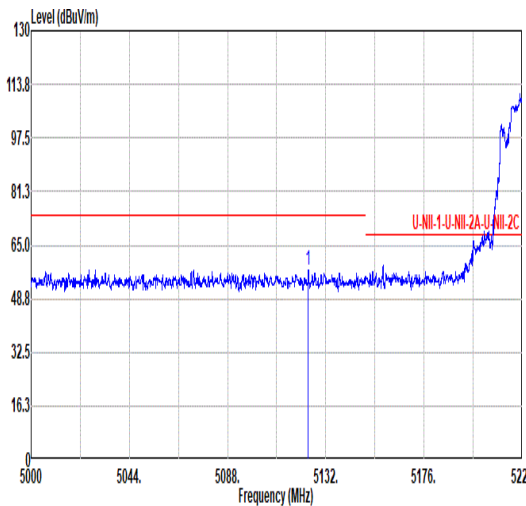
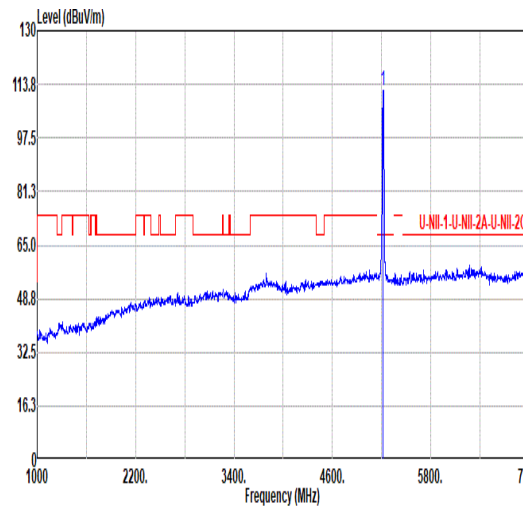
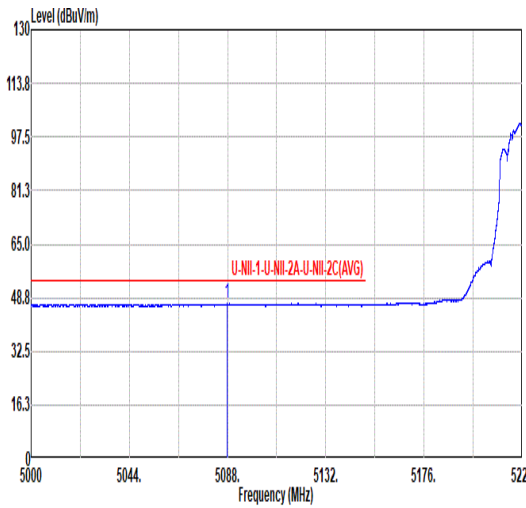
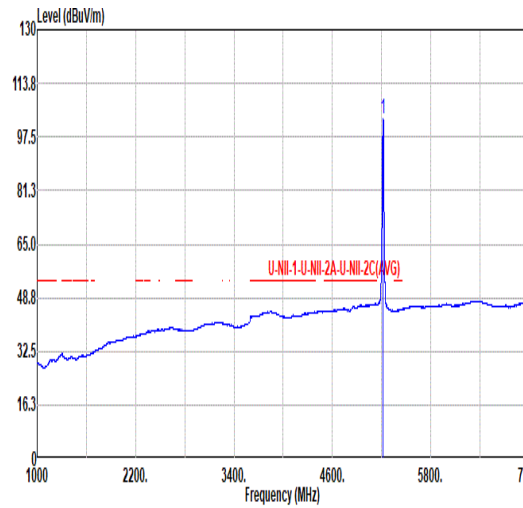


Mode	6																																																						
	Band Edge - L																																																						
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.20</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>41.13</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>101</td><td>163</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5124.20	57.57	74.00	-16.43	41.13	34.40	11.90	29.86	0.00	101	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5124.20	57.57	74.00	-16.43	41.13	34.40	11.90	29.86	0.00	101	163	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>112.07</td><td>-----</td><td>-----</td><td>95.45</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>101</td><td>163</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	112.07	-----	-----	95.45	34.54	11.97	29.89	0.00	101	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5220.00	112.07	-----	-----	95.45	34.54	11.97	29.89	0.00	101	163	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5087.90</td><td>46.95</td><td>54.00</td><td>-7.05</td><td>30.55</td><td>34.38</td><td>11.87</td><td>29.85</td><td>0.00</td><td>101</td><td>163</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5087.90	46.95	54.00	-7.05	30.55	34.38	11.87	29.85	0.00	101	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5087.90	46.95	54.00	-7.05	30.55	34.38	11.87	29.85	0.00	101	163	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.88</td><td>-----</td><td>-----</td><td>86.26</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>101</td><td>163</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.88	-----	-----	86.26	34.54	11.97	29.89	0.00	101	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5220.00	102.88	-----	-----	86.26	34.54	11.97	29.89	0.00	101	163	AVERAGE																																											

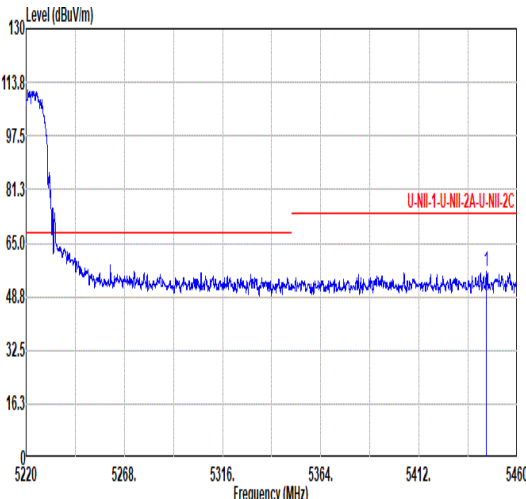
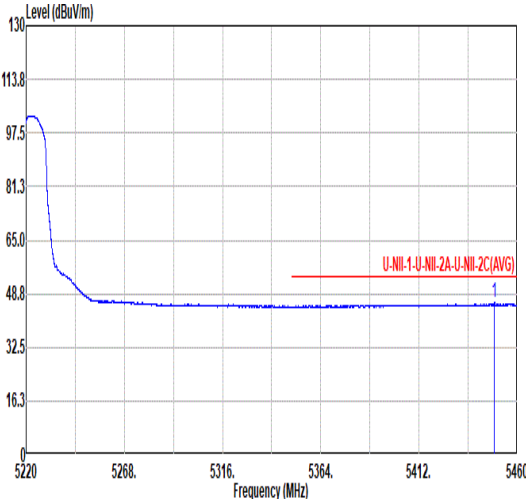


Mode	6																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.77</td><td>56.29</td><td>74.00</td><td>-17.71</td><td>39.13</td><td>34.79</td><td>12.22</td><td>29.85</td><td>0.00</td><td>101</td><td>163</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.77	56.29	74.00	-17.71	39.13	34.79	12.22	29.85	0.00	101	163	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5444.77	56.29	74.00	-17.71	39.13	34.79	12.22	29.85	0.00	101	163	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5448.85</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>28.87</td><td>34.00</td><td>12.22</td><td>29.86</td><td>0.00</td><td>101</td><td>163</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.85	46.03	54.00	-7.97	28.87	34.00	12.22	29.86	0.00	101	163	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5448.85	46.03	54.00	-7.97	28.87	34.00	12.22	29.86	0.00	101	163	AVERAGE																																											

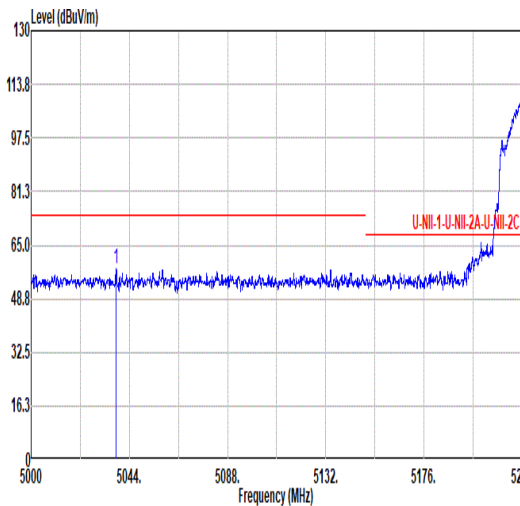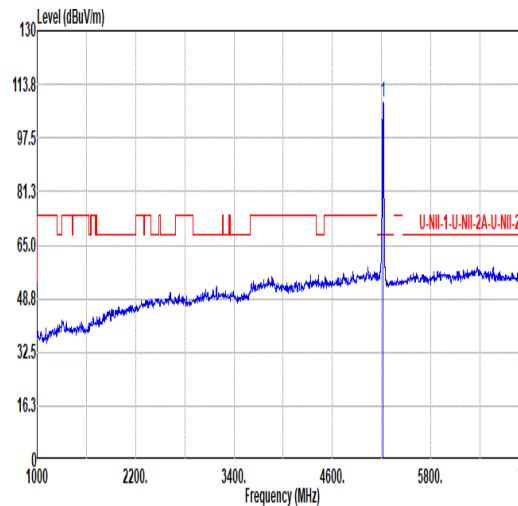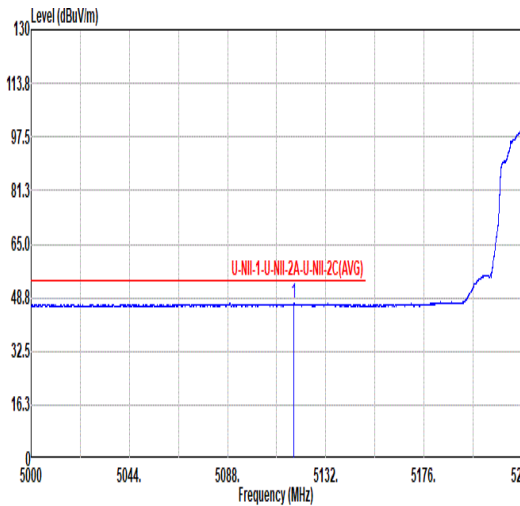
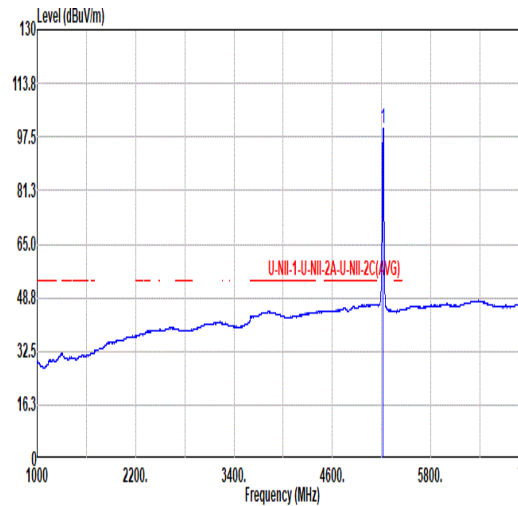


Mode	6																																																													
	Band Edge - L																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																													
ANT	CDD 6+7																																																													
Pol.	Vertical						Fundamental																																																							
Peak																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5038.18</td><td>57.94</td><td>74.00</td><td>-16.06</td><td>41.63</td><td>34.30</td><td>11.84</td><td>29.83</td><td>0.00</td><td>249</td><td>261</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5038.18	57.94	74.00	-16.06	41.63	34.30	11.84	29.83	0.00	249	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5038.18	57.94	74.00	-16.06	41.63	34.30	11.84	29.83	0.00	249	261	PEAK																																																		
Fundamental																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5220.00</td><td>108.28</td><td>-----</td><td>-----</td><td>91.66</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>249</td><td>261</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5220.00	108.28	-----	-----	91.66	34.54	11.97	29.89	0.00	249	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5220.00	108.28	-----	-----	91.66	34.54	11.97	29.89	0.00	249	261	PEAK																																																		
Avg																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5117.82</td><td>46.99</td><td>54.00</td><td>-7.01</td><td>30.56</td><td>34.40</td><td>11.89</td><td>29.86</td><td>0.00</td><td>249</td><td>261</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5117.82	46.99	54.00	-7.01	30.56	34.40	11.89	29.86	0.00	249	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5117.82	46.99	54.00	-7.01	30.56	34.40	11.89	29.86	0.00	249	261	AVERAGE																																																		
Fundamental																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>5220.00</td><td>100.04</td><td>-----</td><td>-----</td><td>83.42</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>249</td><td>261</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5220.00	100.04	-----	-----	83.42	34.54	11.97	29.89	0.00	249	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5220.00	100.04	-----	-----	83.42	34.54	11.97	29.89	0.00	249	261	AVERAGE																																																		



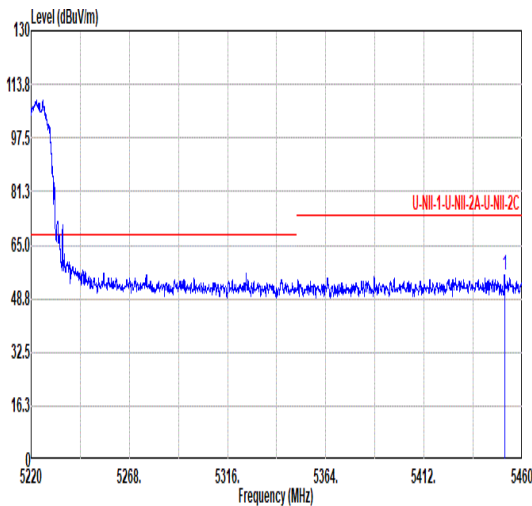
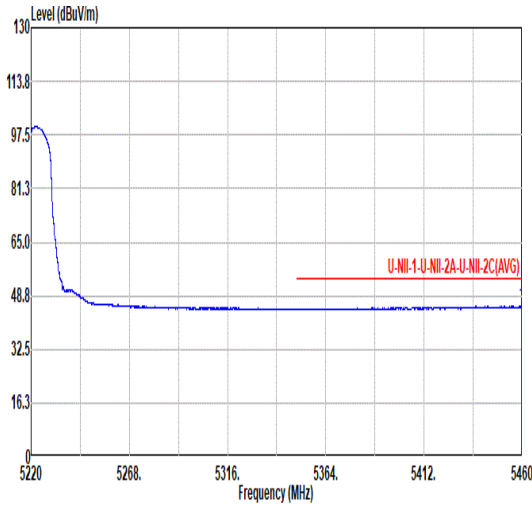


Mode	6																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Vertical						Fundamental																																																
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5451.49</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>38.95</td><td>34.80</td><td>12.23</td><td>29.86</td><td>0.00</td><td>249 261 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.49	56.12	74.00	-17.88	38.95	34.80	12.23	29.86	0.00	249 261 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5451.49	56.12	74.00	-17.88	38.95	34.80	12.23	29.86	0.00	249 261 PEAK																																													
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.65</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>28.40</td><td>34.78</td><td>12.24</td><td>29.88</td><td>0.00</td><td>249 261 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.65	45.54	54.00	-8.46	28.40	34.78	12.24	29.88	0.00	249 261 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5459.65	45.54	54.00	-8.46	28.40	34.78	12.24	29.88	0.00	249 261 AVERAGE																																													



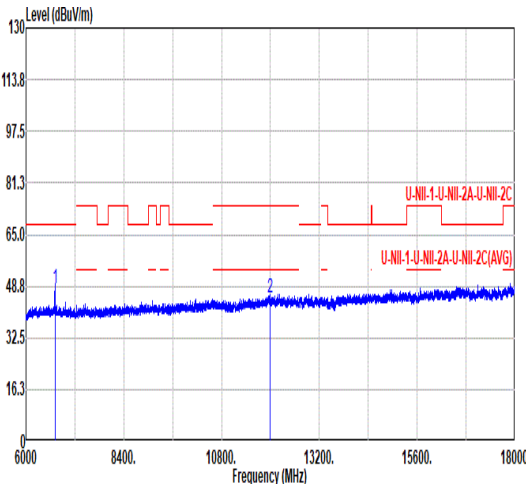
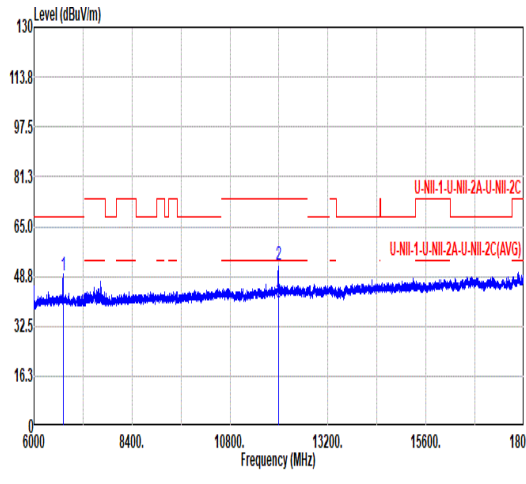


		6																																																																													
Mode		Harmonic																																																																													
		U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																																													
ANT		CDD 6+7																																																																													
Pol.		Horizontal					Vertical																																																																								
Peak Avg																																																																															
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6714.00</td><td>47.94</td><td>68.20</td><td>-20.26</td><td>62.02</td><td>35.63</td><td>14.34</td><td>64.05</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11983.20</td><td>45.15</td><td>74.00</td><td>-28.85</td><td>48.09</td><td>38.68</td><td>19.28</td><td>60.90</td><td>0.00</td><td>--</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6714.00	47.94	68.20	-20.26	62.02	35.63	14.34	64.05	0.00	--	PEAK	2	11983.20	45.15	74.00	-28.85	48.09	38.68	19.28	60.90	0.00	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	6714.00	47.94	68.20	-20.26	62.02	35.63	14.34	64.05	0.00	--	PEAK																																																																				
2	11983.20	45.15	74.00	-28.85	48.09	38.68	19.28	60.90	0.00	--	PEAK																																																																				
																																																																															
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6714.00</td><td>49.14</td><td>68.20</td><td>-19.06</td><td>63.22</td><td>35.63</td><td>14.34</td><td>64.05</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11983.20</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>55.27</td><td>38.68</td><td>19.28</td><td>60.90</td><td>0.00</td><td>300</td><td>56 PEAK</td></tr><tr><td>3</td><td>11983.20</td><td>40.29</td><td>54.00</td><td>-13.71</td><td>43.21</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>300</td><td>56 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	6714.00	49.14	68.20	-19.06	63.22	35.63	14.34	64.05	0.00	--	PEAK	2	11983.20	52.33	74.00	-21.67	55.27	38.68	19.28	60.90	0.00	300	56 PEAK	3	11983.20	40.29	54.00	-13.71	43.21	38.69	19.28	60.89	0.00	300	56 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																				
1	6714.00	49.14	68.20	-19.06	63.22	35.63	14.34	64.05	0.00	--	PEAK																																																																				
2	11983.20	52.33	74.00	-21.67	55.27	38.68	19.28	60.90	0.00	300	56 PEAK																																																																				
3	11983.20	40.29	54.00	-13.71	43.21	38.69	19.28	60.89	0.00	300	56 AVERAGE																																																																				

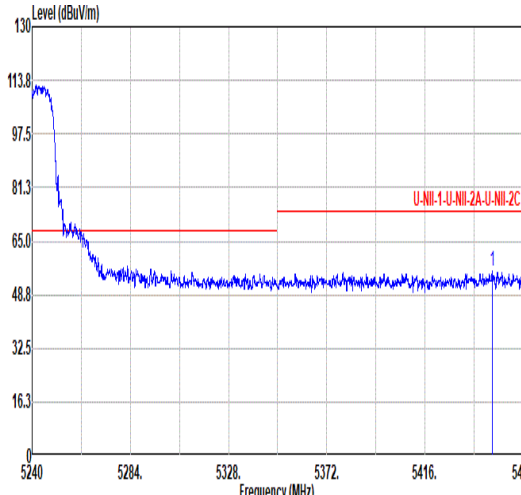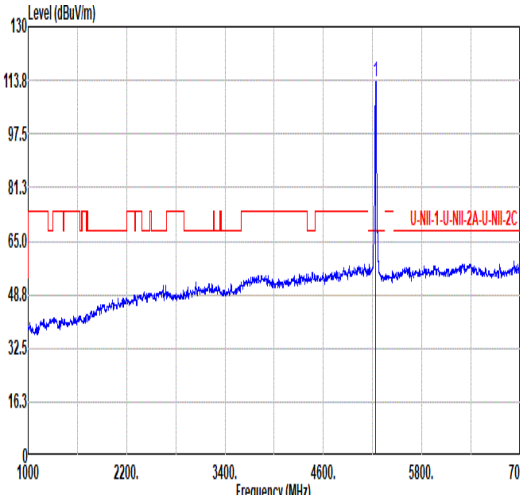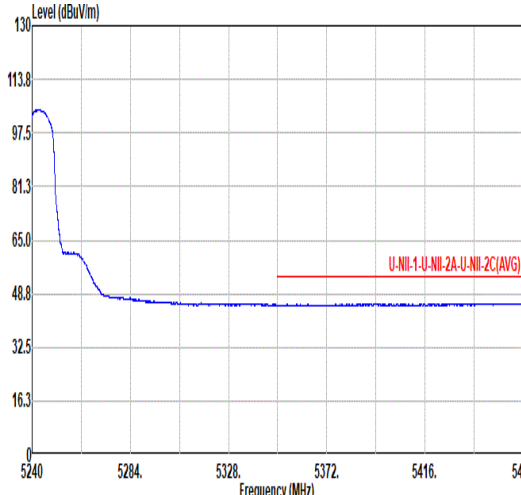
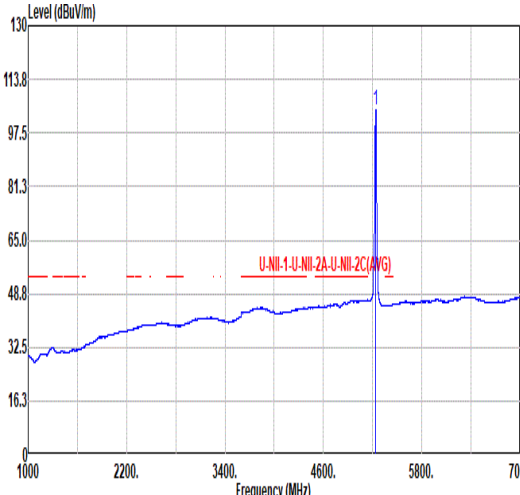


Mode	7																																																						
	Band Edge																																																						
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.04</td><td>55.90</td><td>74.00</td><td>-18.10</td><td>38.74</td><td>34.79</td><td>12.22</td><td>29.85</td><td>0.00</td><td>100</td><td>164</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.04	55.90	74.00	-18.10	38.74	34.79	12.22	29.85	0.00	100	164
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5446.04	55.90	74.00	-18.10	38.74	34.79	12.22	29.85	0.00	100	164	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>113.24</td><td>-----</td><td>-----</td><td>96.55</td><td>34.59</td><td>12.00</td><td>29.90</td><td>0.00</td><td>100</td><td>164</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	113.24	-----	-----	96.55	34.59	12.00	29.90	0.00	100	164
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	113.24	-----	-----	96.55	34.59	12.00	29.90	0.00	100	164	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.90</td><td>45.97</td><td>54.00</td><td>-8.03</td><td>28.83</td><td>34.78</td><td>12.24</td><td>29.88</td><td>0.00</td><td>100</td><td>164</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.90	45.97	54.00	-8.03	28.83	34.78	12.24	29.88	0.00	100	164
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5459.90	45.97	54.00	-8.03	28.83	34.78	12.24	29.88	0.00	100	164	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>104.62</td><td>-----</td><td>-----</td><td>87.95</td><td>34.58</td><td>11.99</td><td>29.90</td><td>0.00</td><td>100</td><td>164</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	104.62	-----	-----	87.95	34.58	11.99	29.90	0.00	100	164
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	104.62	-----	-----	87.95	34.58	11.99	29.90	0.00	100	164	AVERAGE																																											

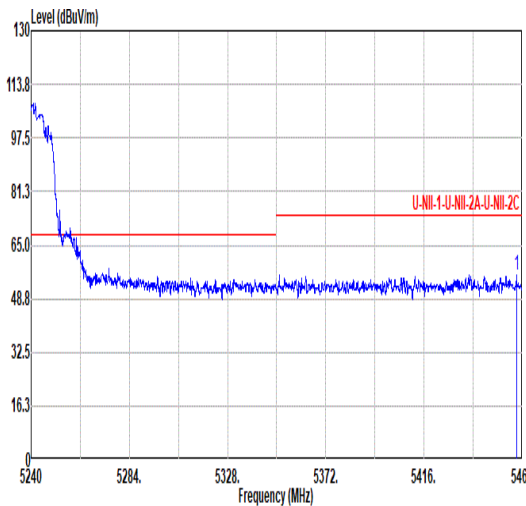
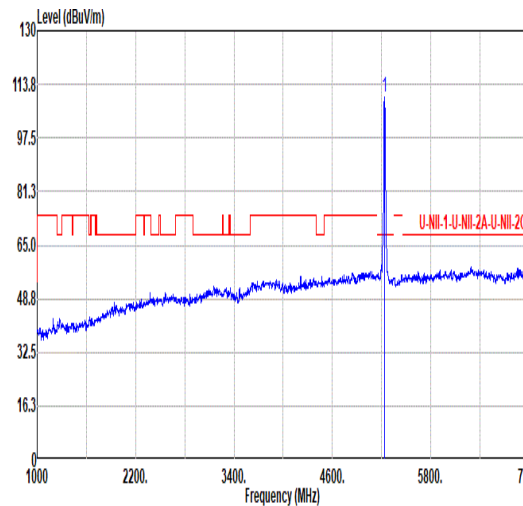
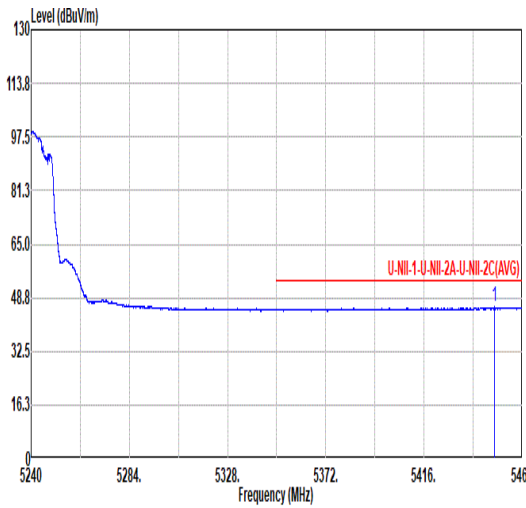
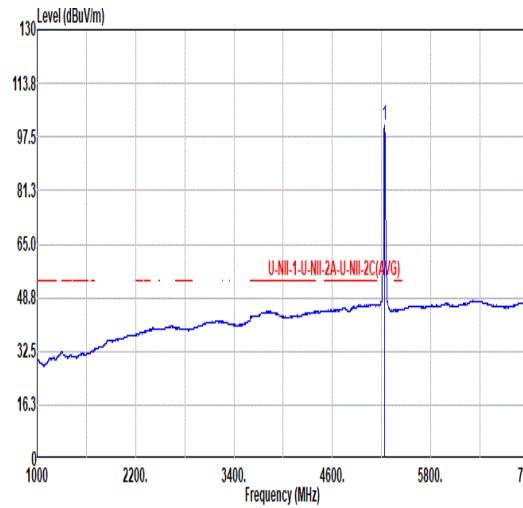


Mode	7																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.48</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>38.85</td><td>34.79</td><td>12.23</td><td>29.87</td><td>0.00</td><td>257</td><td>216</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.48	56.00	74.00	-18.00	38.85	34.79	12.23	29.87	0.00	257	216	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>109.91</td><td>-----</td><td>-----</td><td>93.25</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>257</td><td>216</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	109.91	-----	-----	93.25	34.57	11.99	29.90	0.00	257	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5457.48	56.00	74.00	-18.00	38.85	34.79	12.23	29.87	0.00	257	216	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	109.91	-----	-----	93.25	34.57	11.99	29.90	0.00	257	216	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5447.58</td><td>45.87</td><td>54.00</td><td>-8.13</td><td>28.71</td><td>34.00</td><td>12.22</td><td>29.86</td><td>0.00</td><td>257</td><td>216</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5447.58	45.87	54.00	-8.13	28.71	34.00	12.22	29.86	0.00	257	216	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>101.07</td><td>-----</td><td>-----</td><td>84.41</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>257</td><td>216</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.07	-----	-----	84.41	34.57	11.99	29.90	0.00	257	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5447.58	45.87	54.00	-8.13	28.71	34.00	12.22	29.86	0.00	257	216	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	101.07	-----	-----	84.41	34.57	11.99	29.90	0.00	257	216	AVERAGE																																																																																							

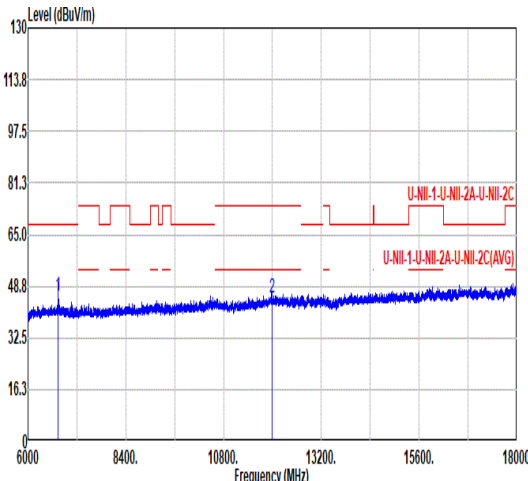
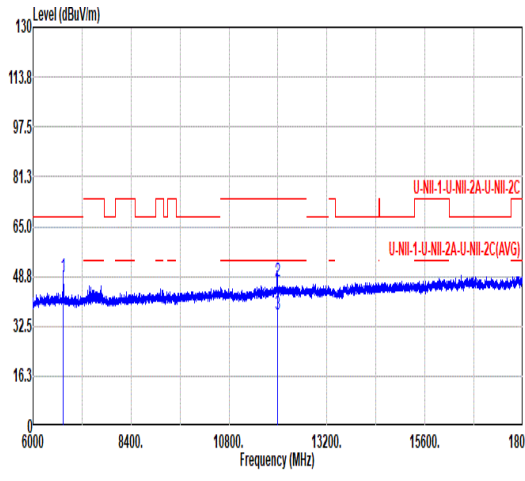


Mode	7																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																																																																																																																																																																													
ANT	CDD 6+7																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																												
Peak Avg																																																																																																																																																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="5">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th></tr><tr><th colspan="2">MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6739.72</td><td>45.46</td><td>68.20</td><td>-22.74</td><td>59.46</td><td>35.68</td><td>14.36</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td><td colspan="6"></td></tr><tr><td>2</td><td>11992.80</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>47.86</td><td>38.69</td><td>19.29</td><td>68.88</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td><td colspan="6"></td></tr></table>			Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq		Level	Line Margin	Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	MHz		dBuV/m	dB	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	1	6739.72	45.46	68.20	-22.74	59.46	35.68	14.36	64.04	0.00	--	--	PEAK							2	11992.80	44.96	74.00	-29.04	47.86	38.69	19.29	68.88	0.00	--	--	PEAK							<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th></tr><tr><th colspan="2">MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6739.72</td><td>48.40</td><td>68.20</td><td>-19.80</td><td>62.40</td><td>35.68</td><td>14.36</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td><td colspan="6"></td></tr><tr><td>2</td><td>11992.80</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>50.14</td><td>38.69</td><td>19.29</td><td>68.88</td><td>0.00</td><td>300</td><td>30</td><td>PEAK</td><td colspan="6"></td></tr><tr><td>3</td><td>11992.80</td><td>36.42</td><td>54.00</td><td>-17.58</td><td>39.32</td><td>38.69</td><td>19.29</td><td>68.88</td><td>0.00</td><td>300</td><td>30</td><td>AVERAGE</td><td colspan="6"></td></tr></table>			Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq		Level	Line Margin	Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	MHz		dBuV/m	dB	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	1	6739.72	48.40	68.20	-19.80	62.40	35.68	14.36	64.04	0.00	--	--	PEAK							2	11992.80	47.24	74.00	-26.76	50.14	38.69	19.29	68.88	0.00	300	30	PEAK							3	11992.80	36.42	54.00	-17.58	39.32	38.69	19.29	68.88	0.00	300	30	AVERAGE					
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																												
Freq		Level	Line Margin	Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor																																																																																																																																																																																													
MHz		dBuV/m	dB	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																													
1	6739.72	45.46	68.20	-22.74	59.46	35.68	14.36	64.04	0.00	--	--	PEAK																																																																																																																																																																																																		
2	11992.80	44.96	74.00	-29.04	47.86	38.69	19.29	68.88	0.00	--	--	PEAK																																																																																																																																																																																																		
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																												
Freq		Level	Line Margin	Level	Line Margin	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor	Level	Factor																																																																																																																																																																																													
MHz		dBuV/m	dB	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																													
1	6739.72	48.40	68.20	-19.80	62.40	35.68	14.36	64.04	0.00	--	--	PEAK																																																																																																																																																																																																		
2	11992.80	47.24	74.00	-26.76	50.14	38.69	19.29	68.88	0.00	300	30	PEAK																																																																																																																																																																																																		
3	11992.80	36.42	54.00	-17.58	39.32	38.69	19.29	68.88	0.00	300	30	AVERAGE																																																																																																																																																																																																		

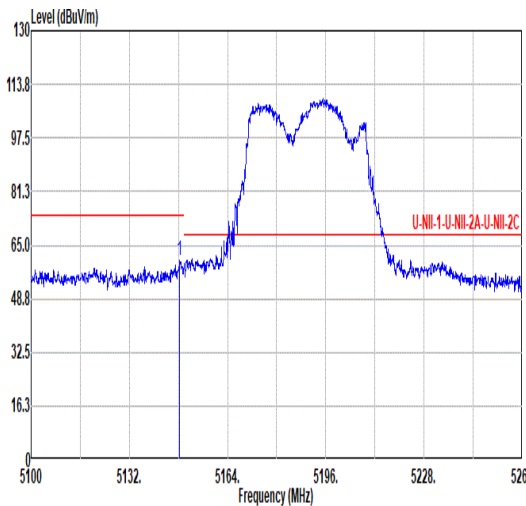
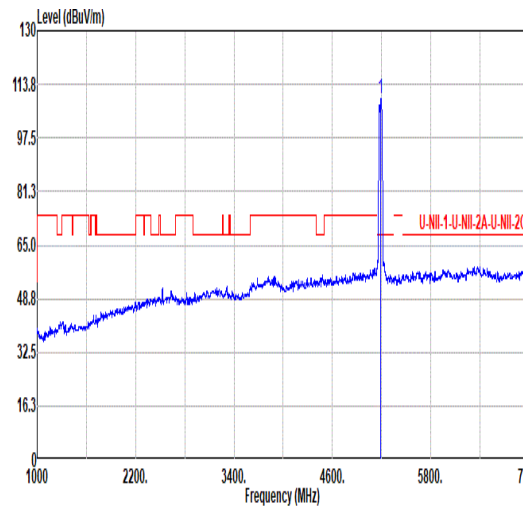
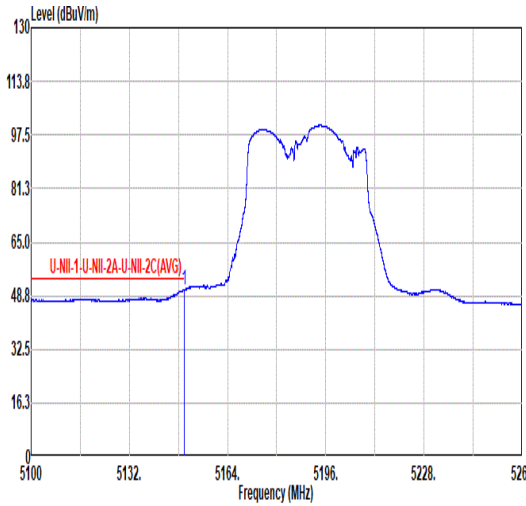
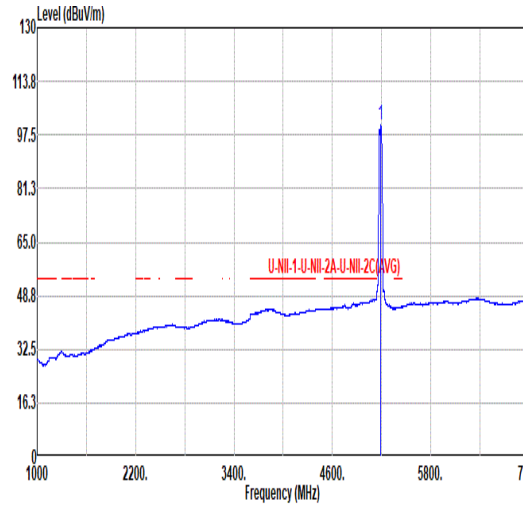


	8																																																																																																												
Mode	Band Edge - L																																																																																																												
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																																												
ANT	CDD 6+7																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																						
Peak																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.41</td><td>60.21</td><td>74.00</td><td>-13.79</td><td>43.77</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>265</td><td>169</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.41	60.21	74.00	-13.79	43.77	34.40	11.91	29.87	0.00	265	169	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>109.57</td><td>-----</td><td>-----</td><td>93.02</td><td>34.49</td><td>11.95</td><td>29.89</td><td>0.00</td><td>265</td><td>169</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	109.57	-----	-----	93.02	34.49	11.95	29.89	0.00	265	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5148.41	60.21	74.00	-13.79	43.77	34.40	11.91	29.87	0.00	265	169	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5190.00	109.57	-----	-----	93.02	34.49	11.95	29.89	0.00	265	169	PEAK																																																																																																	
Avg																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>50.55</td><td>54.00</td><td>-3.45</td><td>34.11</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>265</td><td>169</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	50.55	54.00	-3.45	34.11	34.40	11.91	29.87	0.00	265	169	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>100.42</td><td>-----</td><td>-----</td><td>83.09</td><td>34.48</td><td>11.94</td><td>29.89</td><td>0.00</td><td>265</td><td>169</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	100.42	-----	-----	83.09	34.48	11.94	29.89	0.00	265	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5150.00	50.55	54.00	-3.45	34.11	34.40	11.91	29.87	0.00	265	169	AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5190.00	100.42	-----	-----	83.09	34.48	11.94	29.89	0.00	265	169	AVERAGE																																																																																																	

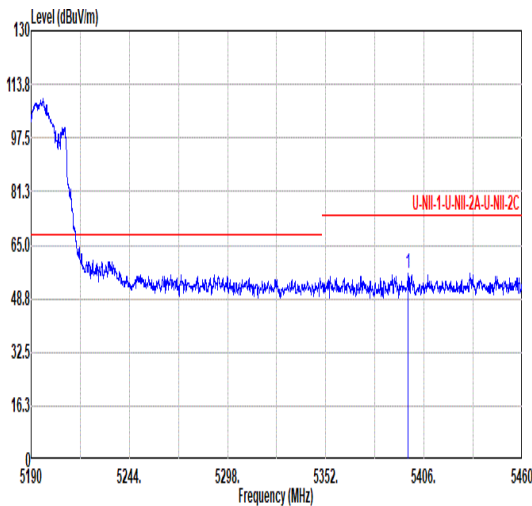
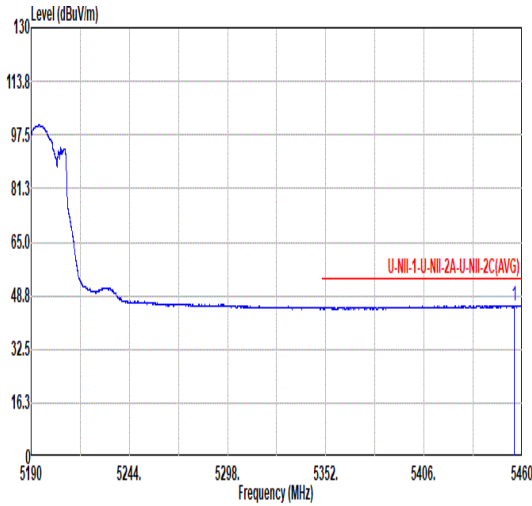


Mode	8																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																					
ANT	CDD 6+7																																																					
Pol.	Horizontal																																																					
Peak																																																						
	Blank																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5397.23</td><td>56.51</td><td>74.00</td><td>-17.49</td><td>39.43</td><td>34.69</td><td>12.17</td><td>29.78</td><td>0.00</td><td>265</td><td>169</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5397.23	56.51	74.00	-17.49	39.43	34.69	12.17	29.78	0.00	265	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5397.23	56.51	74.00	-17.49	39.43	34.69	12.17	29.78	0.00	265	169	PEAK																																										
Avg																																																						
	Blank																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.55</td><td>45.78</td><td>54.00</td><td>-8.22</td><td>28.63</td><td>34.79</td><td>12.23</td><td>29.87</td><td>0.00</td><td>265</td><td>169</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.55	45.78	54.00	-8.22	28.63	34.79	12.23	29.87	0.00	265	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5455.55	45.78	54.00	-8.22	28.63	34.79	12.23	29.87	0.00	265	169	AVERAGE																																										

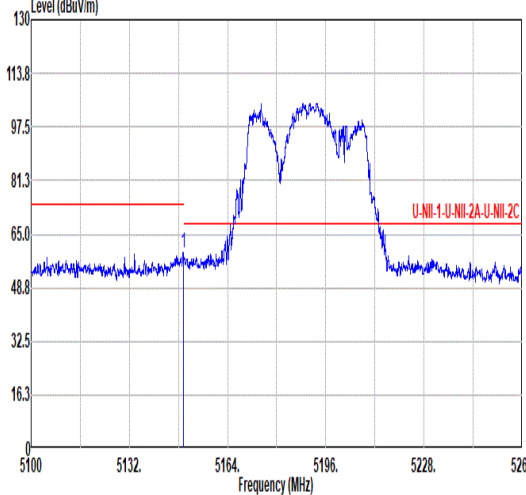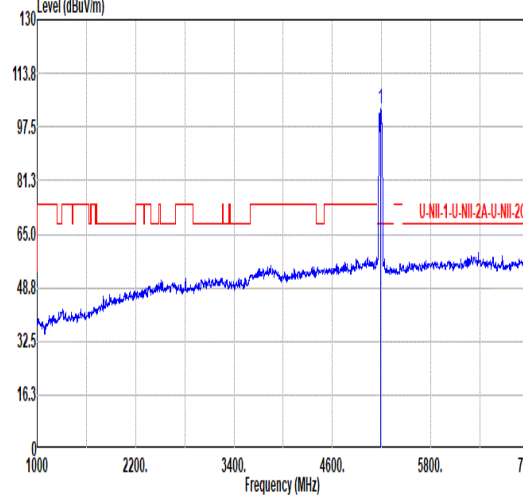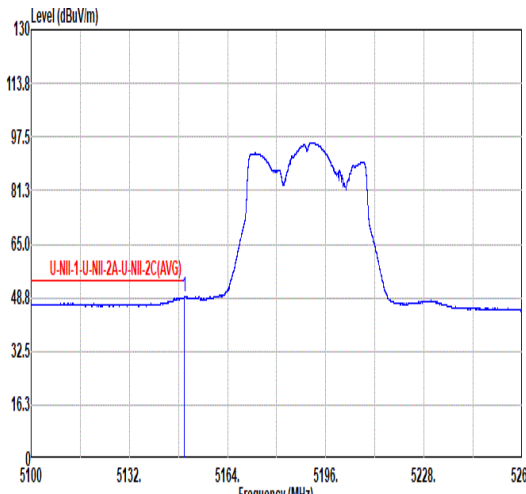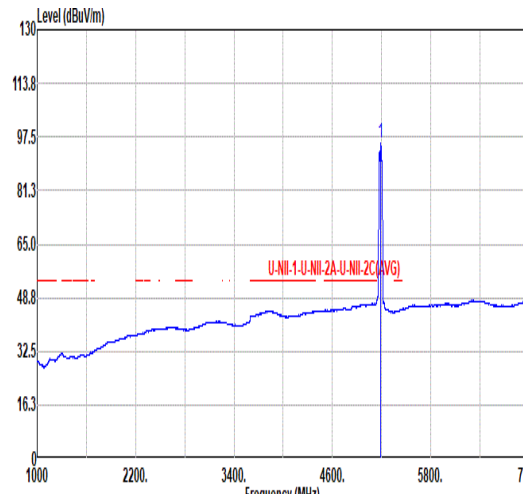

Mode	8																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.53</td><td>59.37</td><td>74.00</td><td>-14.63</td><td>42.93</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>267</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.53	59.37	74.00	-14.63	42.93	34.40	11.91	29.87	0.00	100	267	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>102.91</td><td>-----</td><td>-----</td><td>86.38</td><td>34.48</td><td>11.94</td><td>29.89</td><td>0.00</td><td>100</td><td>267</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	102.91	-----	-----	86.38	34.48	11.94	29.89	0.00	100	267
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.53	59.37	74.00	-14.63	42.93	34.40	11.91	29.87	0.00	100	267	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	102.91	-----	-----	86.38	34.48	11.94	29.89	0.00	100	267	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>48.84</td><td>54.00</td><td>-5.16</td><td>32.40</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>267</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	48.84	54.00	-5.16	32.40	34.40	11.91	29.87	0.00	100	267	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>95.78</td><td>-----</td><td>-----</td><td>79.25</td><td>34.48</td><td>11.94</td><td>29.89</td><td>0.00</td><td>100</td><td>267</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	95.78	-----	-----	79.25	34.48	11.94	29.89	0.00	100	267
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5150.00	48.84	54.00	-5.16	32.40	34.40	11.91	29.87	0.00	100	267	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	95.78	-----	-----	79.25	34.48	11.94	29.89	0.00	100	267	AVERAGE																																																																																																			



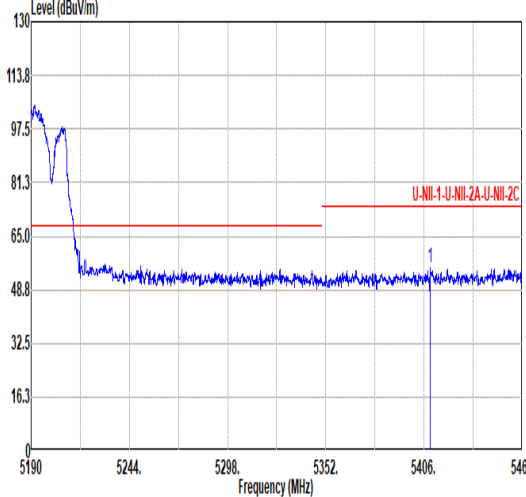
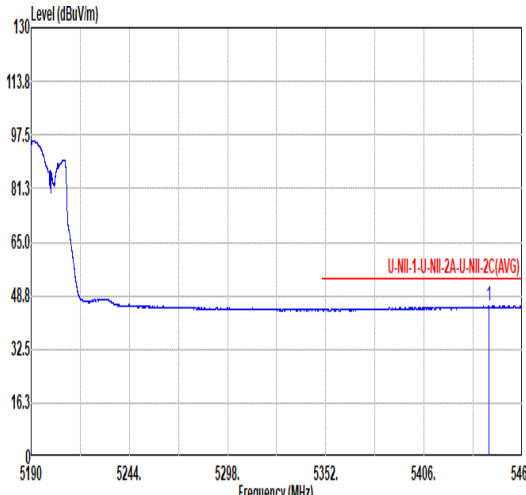


Mode	8																																																									
	Band Edge - R																																																									
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																									
ANT	CDD 6+7																																																									
Pol.	Vertical																																																									
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.38</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>38.32</td><td>34.72</td><td>12.18</td><td>29.80</td><td>0.00</td><td>100</td><td>267</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5409.38	55.42	74.00	-18.58	38.32	34.72	12.18	29.80	0.00	100	267	PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	5409.38	55.42	74.00	-18.58	38.32	34.72	12.18	29.80	0.00	100	267	PEAK																																														
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.51</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>28.49</td><td>34.78</td><td>12.22</td><td>29.85</td><td>0.00</td><td>100</td><td>267</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.51	45.64	54.00	-8.36	28.49	34.78	12.22	29.85	0.00	100	267	AVERAGE	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	5441.51	45.64	54.00	-8.36	28.49	34.78	12.22	29.85	0.00	100	267	AVERAGE																																														





Mode	8																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																	
ANT	CDD 6+7																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6675.41</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>61.26</td><td>35.65</td><td>14.30</td><td>64.07</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11988.80</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>49.13</td><td>38.69</td><td>19.28</td><td>60.89</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK	2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	6675.41	47.14	68.20	-21.06	61.26	35.65	14.30	64.07	0.00	--	PEAK																																																							
2	11988.80	46.21	74.00	-27.79	49.13	38.69	19.28	60.89	0.00	--	PEAK																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</</th></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level</																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level</																																																															

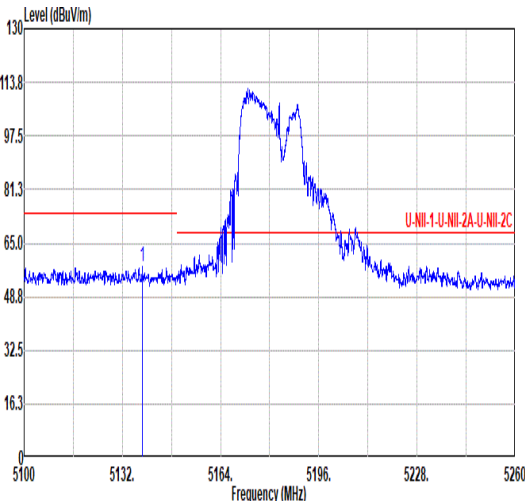
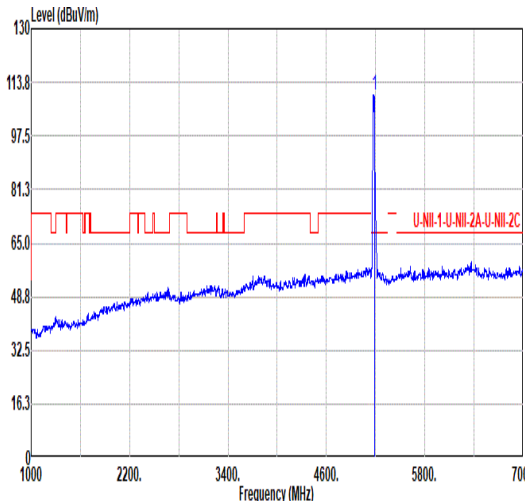
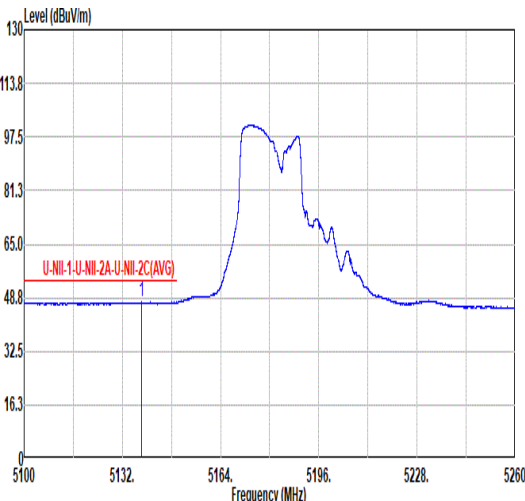
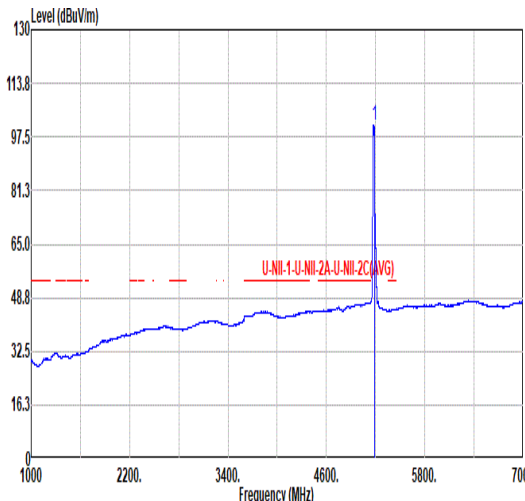


		9																																																					
Mode		Band Edge - L																																																					
		U-NII-1_5.15-5.25_802.11be EHT40_CH38_RU242/61_5190MHz																																																					
ANT		CDD 6+7																																																					
Pol.		Horizontal																																																					
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.49</td><td>57.75</td><td>74.00</td><td>-16.25</td><td>41.31</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>169</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5138.49	57.75	74.00	-16.25	41.31	34.40	11.91	29.87	0.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5138.49	57.75	74.00	-16.25	41.31	34.40	11.91	29.87	0.00	100	169	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>109.76</td><td>-----</td><td>-----</td><td>93.26</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>100</td><td>169</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	109.76	-----	-----	93.26	34.45	11.93	29.88	0.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5190.00	109.76	-----	-----	93.26	34.45	11.93	29.88	0.00	100	169	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.17</td><td>47.37</td><td>54.00</td><td>-6.63</td><td>30.93</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>169</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5138.17	47.37	54.00	-6.63	30.93	34.40	11.91	29.87	0.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5138.17	47.37	54.00	-6.63	30.93	34.40	11.91	29.87	0.00	100	169	AVERAGE																																											
AVERAGE																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>101.12</td><td>-----</td><td>-----</td><td>84.62</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>100</td><td>169</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	101.12	-----	-----	84.62	34.45	11.93	29.88	0.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5190.00	101.12	-----	-----	84.62	34.45	11.93	29.88	0.00	100	169	AVERAGE																																											

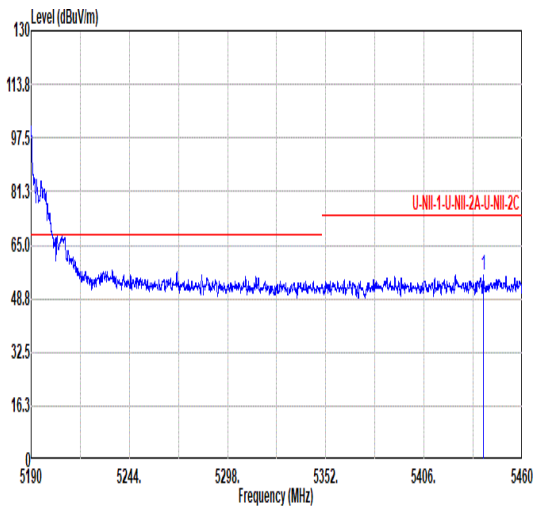
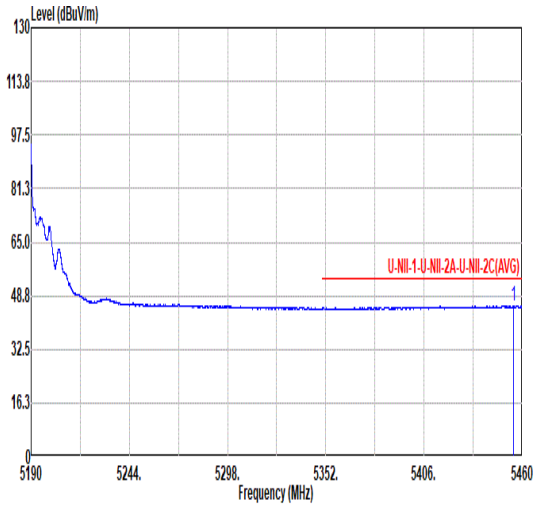


Mode	9																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_RU242/61_5190MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5438.54</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>38.93</td><td>34.78</td><td>12.21</td><td>29.84</td><td>0.00</td><td>100</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5438.54	56.08	74.00	-17.92	38.93	34.78	12.21	29.84	0.00	100	169	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5438.54	56.08	74.00	-17.92	38.93	34.78	12.21	29.84	0.00	100	169	PEAK																																											
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.01</td><td>45.66</td><td>54.00</td><td>-8.34</td><td>28.51</td><td>34.79</td><td>12.23</td><td>29.87</td><td>0.00</td><td>100</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.01	45.66	54.00	-8.34	28.51	34.79	12.23	29.87	0.00	100	169	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5455.01	45.66	54.00	-8.34	28.51	34.79	12.23	29.87	0.00	100	169	AVERAGE																																											

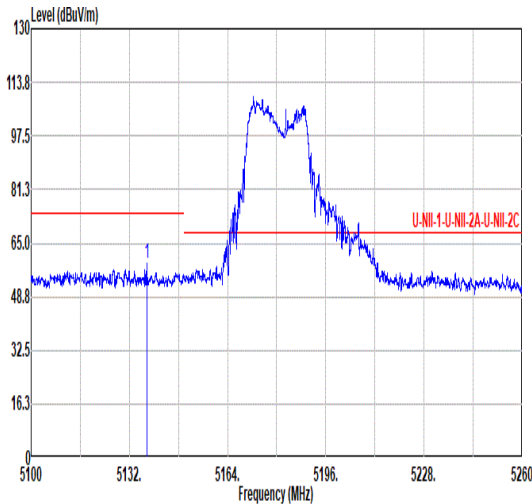
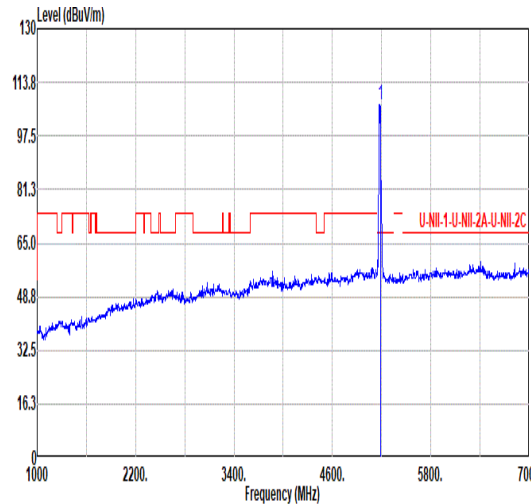
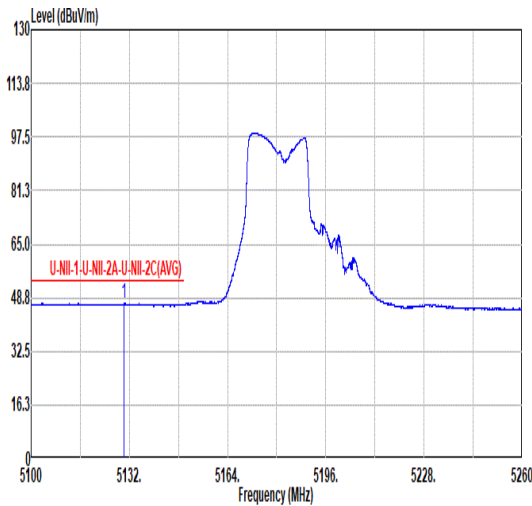
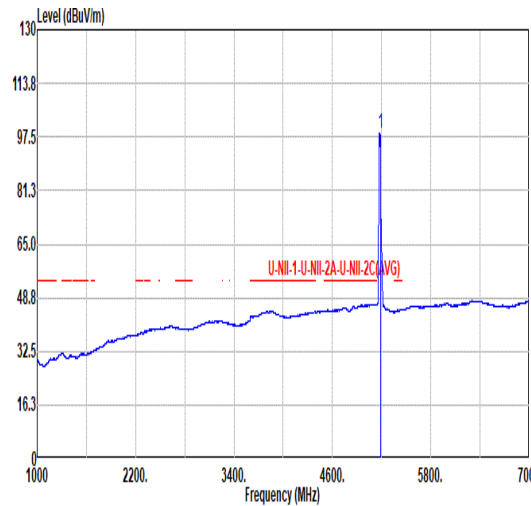


	9																																																																																												
Mode	Band Edge - L																																																																																												
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_RU242/61_5190MHz																																																																																												
ANT	CDD 6+7																																																																																												
Pol.	Vertical					Fundamental																																																																																							
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5137.69</td><td>58.91</td><td>74.00</td><td>-15.09</td><td>42.47</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>247</td><td>270 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5137.69	58.91	74.00	-15.09	42.47	34.40	11.91	29.87	0.00	247	270 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5190.00</td><td>107.00</td><td>-----</td><td>-----</td><td>90.58</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>247</td><td>270 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5190.00	107.00	-----	-----	90.58	34.45	11.93	29.88	0.00	247
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5137.69	58.91	74.00	-15.09	42.47	34.40	11.91	29.87	0.00	247	270 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5190.00	107.00	-----	-----	90.58	34.45	11.93	29.88	0.00	247	270 PEAK																																																																																			
Avg																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5130.33</td><td>47.00</td><td>54.00</td><td>-6.92</td><td>30.64</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>247</td><td>270 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5130.33	47.00	54.00	-6.92	30.64	34.40	11.90	29.86	0.00	247	270 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5190.00</td><td>98.82</td><td>-----</td><td>-----</td><td>82.32</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>247</td><td>270 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5190.00	98.82	-----	-----	82.32	34.45	11.93	29.88	0.00	247
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5130.33	47.00	54.00	-6.92	30.64	34.40	11.90	29.86	0.00	247	270 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5190.00	98.82	-----	-----	82.32	34.45	11.93	29.88	0.00	247	270 AVERAGE																																																																																			

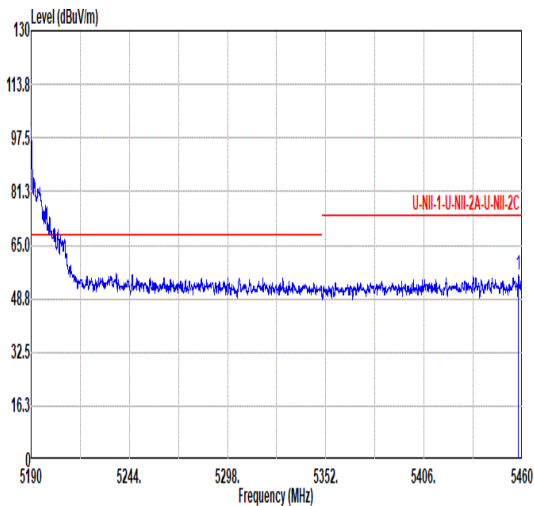
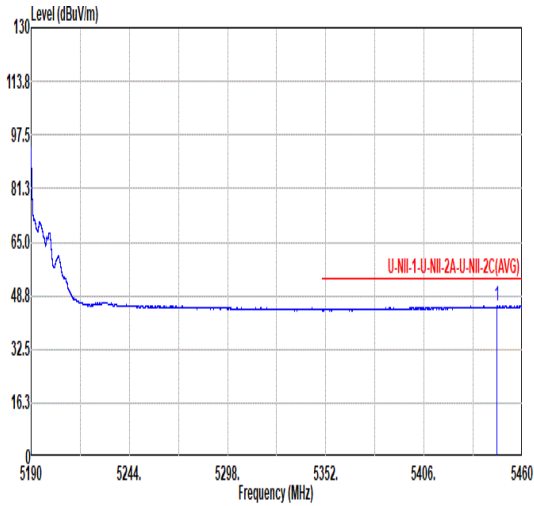


Mode	9																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_RU242/61_5190MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.98</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>38.86</td><td>34.78</td><td>12.23</td><td>29.87</td><td>0.00</td><td>247</td><td>270</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.98	56.00	74.00	-18.00	38.86	34.78	12.23	29.87	0.00	247	270	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5457.98	56.00	74.00	-18.00	38.86	34.78	12.23	29.87	0.00	247	270	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.10</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>28.43</td><td>34.79</td><td>12.22</td><td>29.85</td><td>0.00</td><td>247</td><td>270</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.10	45.59	54.00	-8.41	28.43	34.79	12.22	29.85	0.00	247	270	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5446.10	45.59	54.00	-8.41	28.43	34.79	12.22	29.85	0.00	247	270	AVERAGE																																												

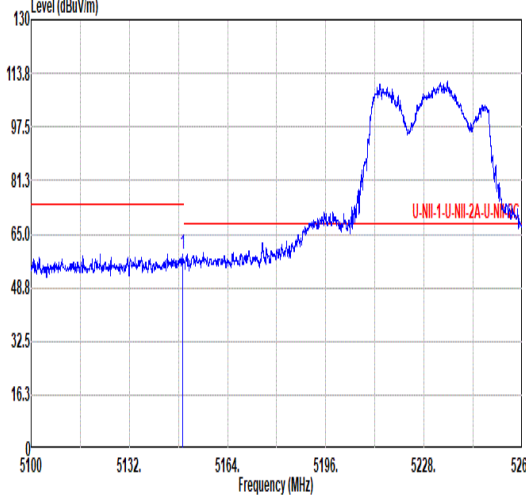
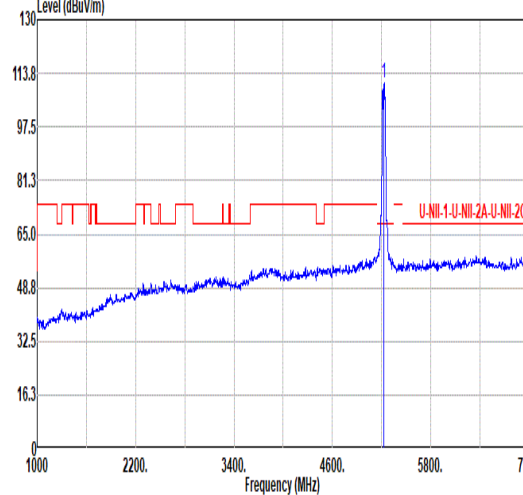
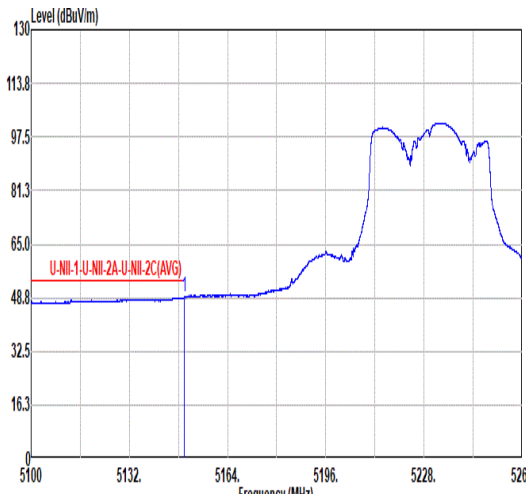
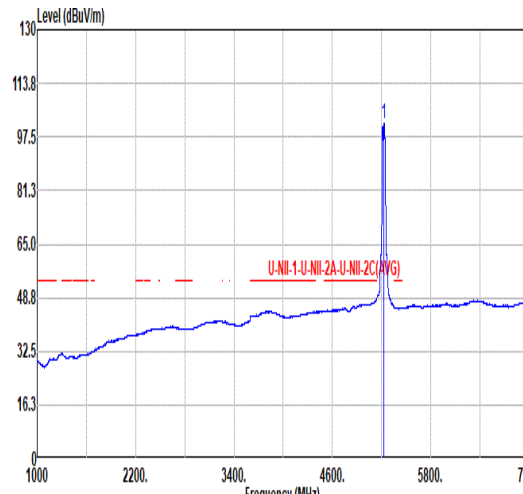


Mode	10																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.37</td><td>58.91</td><td>74.00</td><td>-15.09</td><td>42.47</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>163</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.37	58.91	74.00	-15.09	42.47	34.40	11.91	29.87	0.00	100	163	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>110.78</td><td>-----</td><td>-----</td><td>94.12</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>100</td><td>163</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	110.78	-----	-----	94.12	34.57	11.99	29.90	0.00	100	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.37	58.91	74.00	-15.09	42.47	34.40	11.91	29.87	0.00	100	163	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5230.00	110.78	-----	-----	94.12	34.57	11.99	29.90	0.00	100	163	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>49.02</td><td>54.00</td><td>-4.98</td><td>32.58</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>163</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	49.02	54.00	-4.98	32.58	34.40	11.91	29.87	0.00	100	163	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>101.62</td><td>-----</td><td>-----</td><td>84.96</td><td>34.57</td><td>11.99</td><td>29.90</td><td>0.00</td><td>100</td><td>163</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	101.62	-----	-----	84.96	34.57	11.99	29.90	0.00	100	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5150.00	49.02	54.00	-4.98	32.58	34.40	11.91	29.87	0.00	100	163	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5230.00	101.62	-----	-----	84.96	34.57	11.99	29.90	0.00	100	163	AVERAGE																																																																																																			

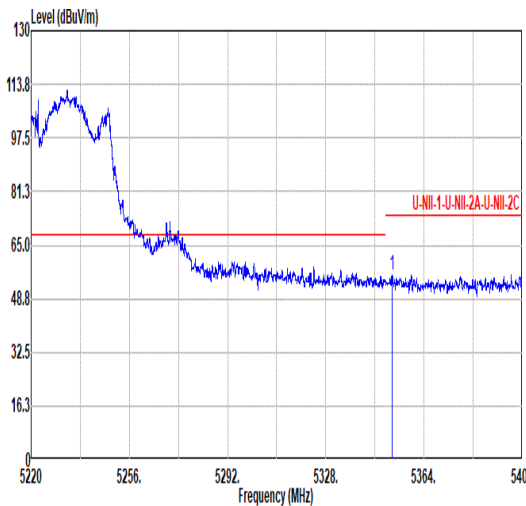
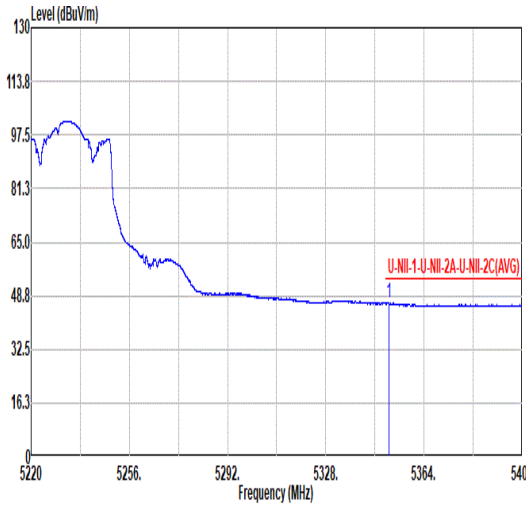


Mode	10																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5352.22</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>39.34</td><td>34.51</td><td>12.12</td><td>29.84</td><td>0.00</td><td>100</td><td>163</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.22	56.13	74.00	-17.87	39.34	34.51	12.12	29.84	0.00	100	163	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5352.22	56.13	74.00	-17.87	39.34	34.51	12.12	29.84	0.00	100	163	PEAK																																												
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.14</td><td>46.49</td><td>54.00</td><td>-7.51</td><td>29.71</td><td>34.50</td><td>12.12</td><td>29.84</td><td>0.00</td><td>100</td><td>163</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.14	46.49	54.00	-7.51	29.71	34.50	12.12	29.84	0.00	100	163	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.14	46.49	54.00	-7.51	29.71	34.50	12.12	29.84	0.00	100	163	AVERAGE																																												

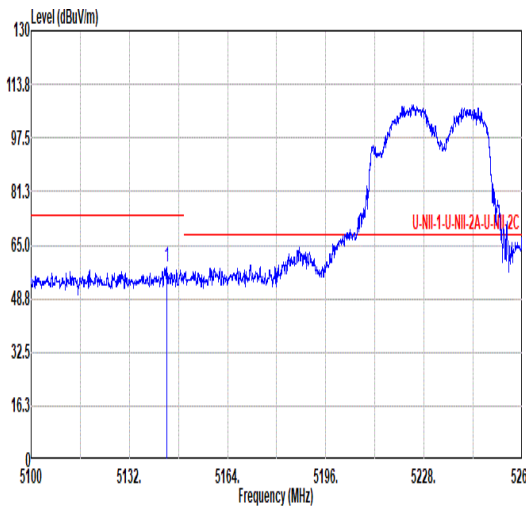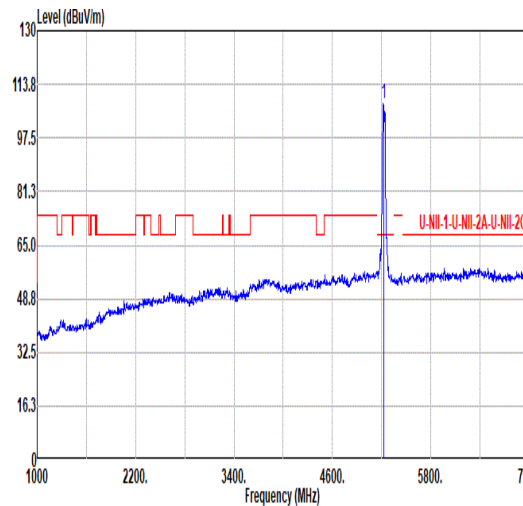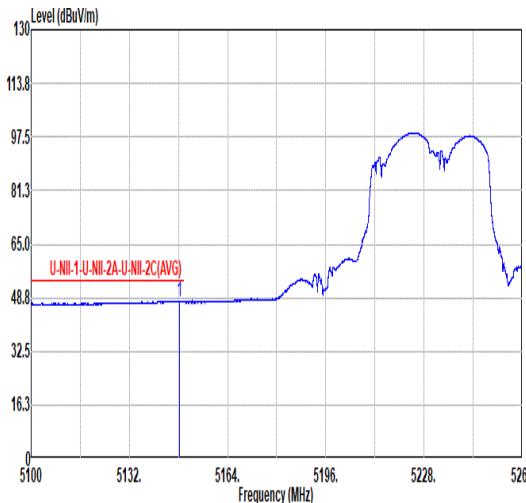
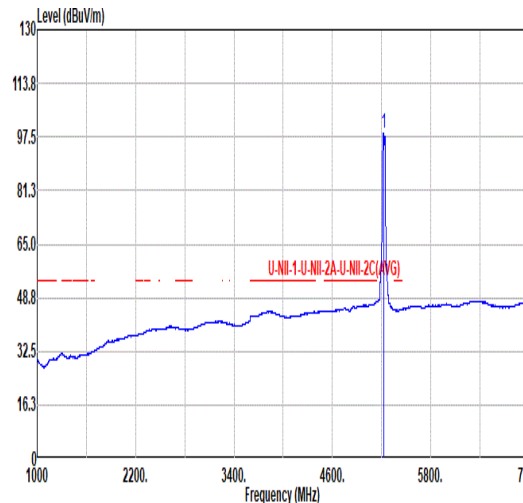


Mode	10																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.09</td><td>58.41</td><td>74.00</td><td>-15.59</td><td>41.97</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>276</td><td>214</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.09	58.41	74.00	-15.59	41.97	34.40	11.91	29.87	0.00	276	214	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>107.81</td><td>-----</td><td>-----</td><td>91.19</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>276</td><td>214</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	107.81	-----	-----	91.19	34.54	11.97	29.89	0.00	276	214
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5144.09	58.41	74.00	-15.59	41.97	34.40	11.91	29.87	0.00	276	214	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5230.00	107.81	-----	-----	91.19	34.54	11.97	29.89	0.00	276	214	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.41</td><td>47.72</td><td>54.00</td><td>-6.28</td><td>31.28</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>276</td><td>214</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.41	47.72	54.00	-6.28	31.28	34.40	11.91	29.87	0.00	276	214	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>98.68</td><td>-----</td><td>-----</td><td>82.06</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>276</td><td>214</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	98.68	-----	-----	82.06	34.54	11.97	29.89	0.00	276	214
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5148.41	47.72	54.00	-6.28	31.28	34.40	11.91	29.87	0.00	276	214	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5230.00	98.68	-----	-----	82.06	34.54	11.97	29.89	0.00	276	214	AVERAGE																																																																																																			



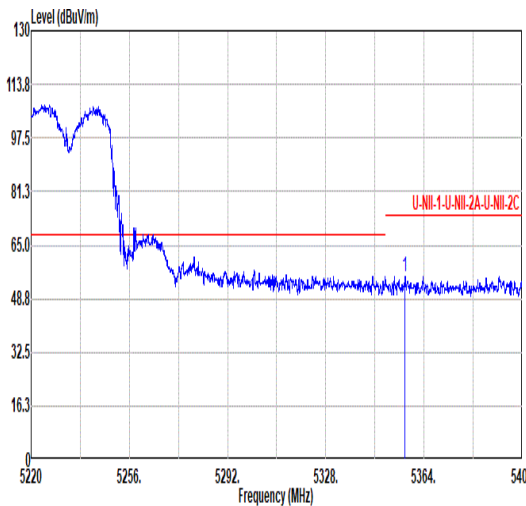
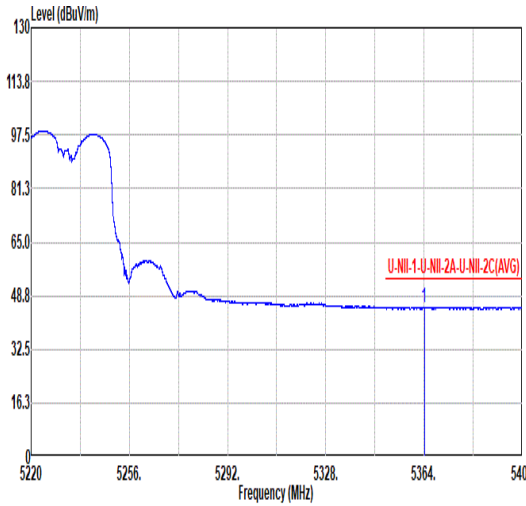


Mode	10																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5357.08</td><td>55.40</td><td>74.00</td><td>-18.60</td><td>38.59</td><td>34.53</td><td>12.12</td><td>29.84</td><td>0.00</td><td>276</td><td>214</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5357.08	55.40	74.00	-18.60	38.59	34.53	12.12	29.84	0.00	276	214	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5357.08	55.40	74.00	-18.60	38.59	34.53	12.12	29.84	0.00	276	214	PEAK																																												
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5364.10</td><td>45.36</td><td>54.00</td><td>-8.64</td><td>28.50</td><td>34.56</td><td>12.13</td><td>29.83</td><td>0.00</td><td>276</td><td>214</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5364.10	45.36	54.00	-8.64	28.50	34.56	12.13	29.83	0.00	276	214	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5364.10	45.36	54.00	-8.64	28.50	34.56	12.13	29.83	0.00	276	214	AVERAGE																																												

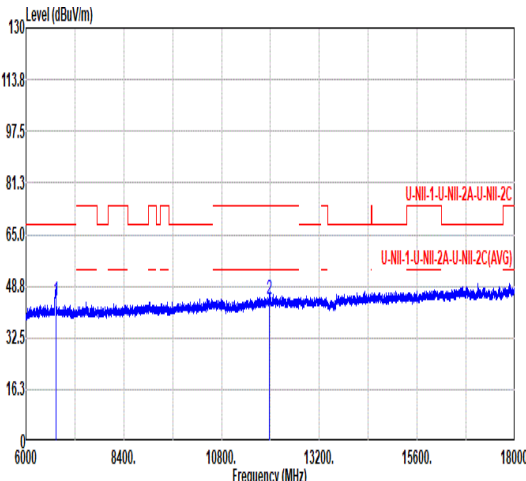
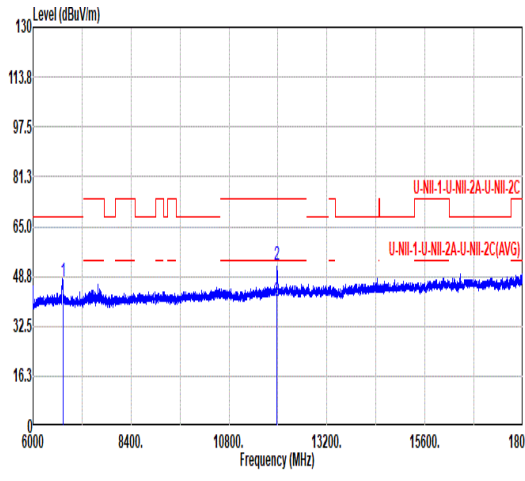


Mode	10																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																																																																																																					
ANT	CDD 6+7																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																															
Peak Avg																																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6729.60</td><td>44.33</td><td>68.20</td><td>-23.87</td><td>58.36</td><td>35.66</td><td>14.35</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11977.20</td><td>44.40</td><td>74.00</td><td>-29.60</td><td>47.36</td><td>38.68</td><td>19.27</td><td>68.91</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6729.60	44.33	68.20	-23.87	58.36	35.66	14.35	64.04	0.00	--	PEAK	2	11977.20	44.40	74.00	-29.60	47.36	38.68	19.27	68.91	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6729.60</td><td>47.31</td><td>68.20</td><td>-20.89</td><td>61.34</td><td>35.66</td><td>14.35</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11977.20</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>55.58</td><td>38.68</td><td>19.27</td><td>68.91</td><td>0.00</td><td>100</td><td>63 PEAK</td></tr><tr><td>3</td><td>11977.20</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>43.63</td><td>38.68</td><td>19.28</td><td>68.90</td><td>0.00</td><td>100</td><td>63 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6729.60	47.31	68.20	-20.89	61.34	35.66	14.35	64.04	0.00	--	PEAK	2	11977.20	52.62	74.00	-21.38	55.58	38.68	19.27	68.91	0.00	100	63 PEAK	3	11977.20	40.69	54.00	-13.31	43.63	38.68	19.28	68.90	0.00	100	63 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	6729.60	44.33	68.20	-23.87	58.36	35.66	14.35	64.04	0.00	--	PEAK																																																																																																																											
2	11977.20	44.40	74.00	-29.60	47.36	38.68	19.27	68.91	0.00	--	PEAK																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	6729.60	47.31	68.20	-20.89	61.34	35.66	14.35	64.04	0.00	--	PEAK																																																																																																																											
2	11977.20	52.62	74.00	-21.38	55.58	38.68	19.27	68.91	0.00	100	63 PEAK																																																																																																																											
3	11977.20	40.69	54.00	-13.31	43.63	38.68	19.28	68.90	0.00	100	63 AVERAGE																																																																																																																											

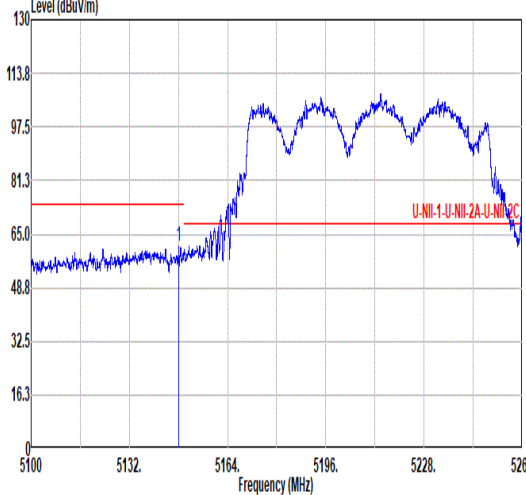
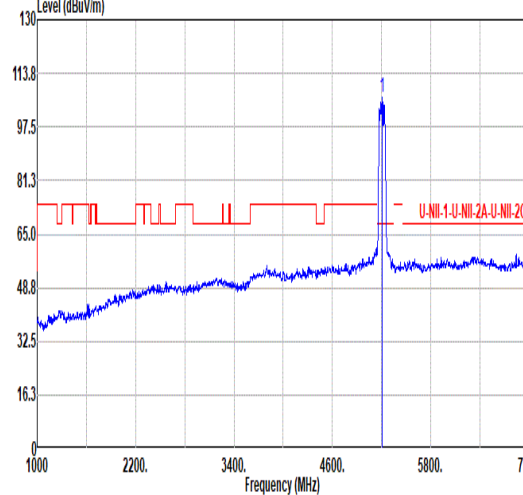
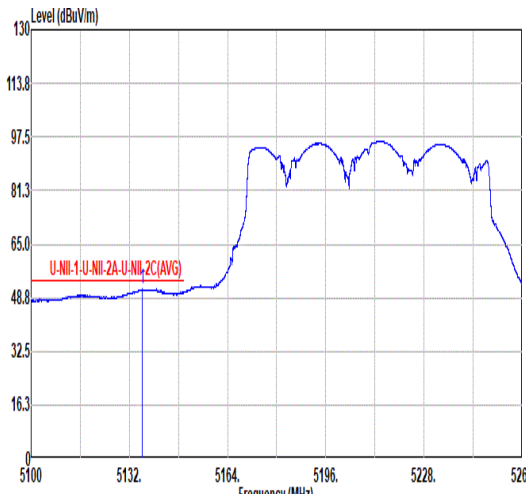
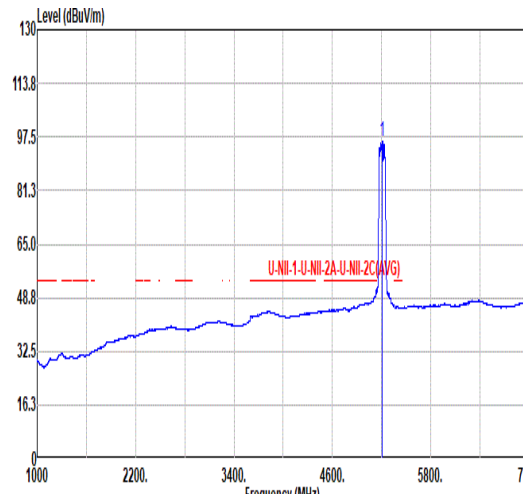


	11																																																																																																																
Mode	Band Edge - L																																																																																																																
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz																																																																																																																
ANT	CDD 6+7																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.09</td><td>61.41</td><td>74.00</td><td>-12.59</td><td>44.97</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>161</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.09	61.41	74.00	-12.59	44.97	34.40	11.91	29.87	0.00	100	161	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>106.54</td><td>-----</td><td>-----</td><td>89.95</td><td>34.52</td><td>11.96</td><td>29.89</td><td>0.00</td><td>100</td><td>161</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	106.54	-----	-----	89.95	34.52	11.96	29.89	0.00	100	161	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5148.09	61.41	74.00	-12.59	44.97	34.40	11.91	29.87	0.00	100	161	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5210.00	106.54	-----	-----	89.95	34.52	11.96	29.89	0.00	100	161	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5136.25</td><td>51.31</td><td>54.00</td><td>-2.69</td><td>34.86</td><td>34.40</td><td>11.91</td><td>29.86</td><td>0.00</td><td>100</td><td>161</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5136.25	51.31	54.00	-2.69	34.86	34.40	11.91	29.86	0.00	100	161	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>96.14</td><td>-----</td><td>-----</td><td>79.55</td><td>34.52</td><td>11.96</td><td>29.89</td><td>0.00</td><td>100</td><td>161</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	96.14	-----	-----	79.55	34.52	11.96	29.89	0.00	100	161
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5136.25	51.31	54.00	-2.69	34.86	34.40	11.91	29.86	0.00	100	161	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5210.00	96.14	-----	-----	79.55	34.52	11.96	29.89	0.00	100	161	AVERAGE																																																																																																					

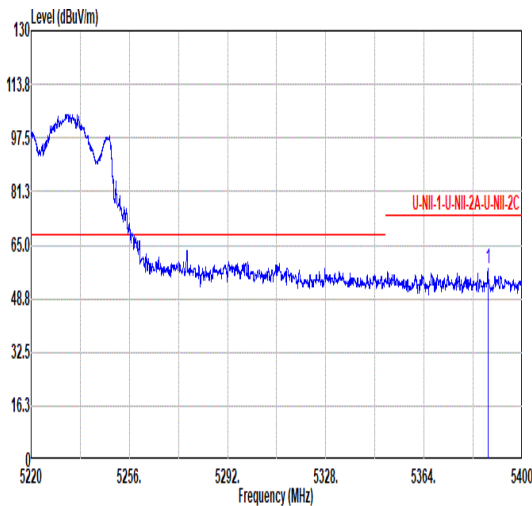
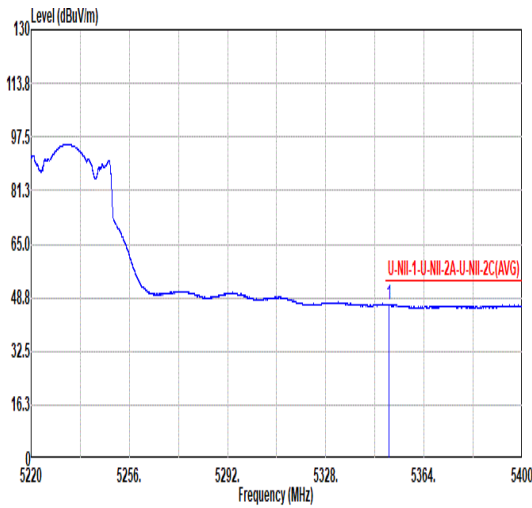


Mode	11																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5387.50</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>40.66</td><td>34.65</td><td>12.16</td><td>29.80</td><td>0.00</td><td>100</td><td>161</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5387.50	57.67	74.00	-16.33	40.66	34.65	12.16	29.80	0.00	100	161	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5387.50	57.67	74.00	-16.33	40.66	34.65	12.16	29.80	0.00	100	161	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.14</td><td>46.66</td><td>54.00</td><td>-7.34</td><td>29.88</td><td>34.50</td><td>12.12</td><td>29.84</td><td>0.00</td><td>100</td><td>161</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.14	46.66	54.00	-7.34	29.88	34.50	12.12	29.84	0.00	100	161	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5351.14	46.66	54.00	-7.34	29.88	34.50	12.12	29.84	0.00	100	161	AVERAGE																																											

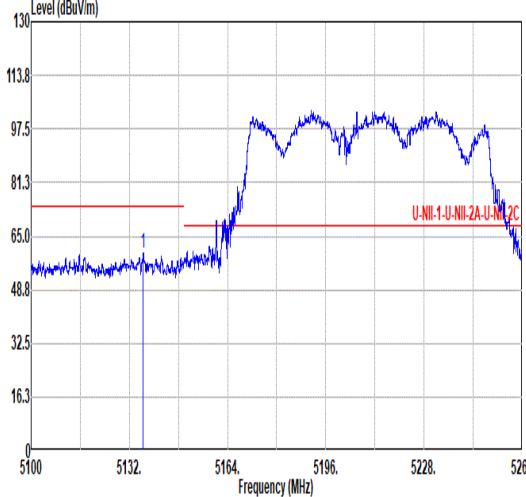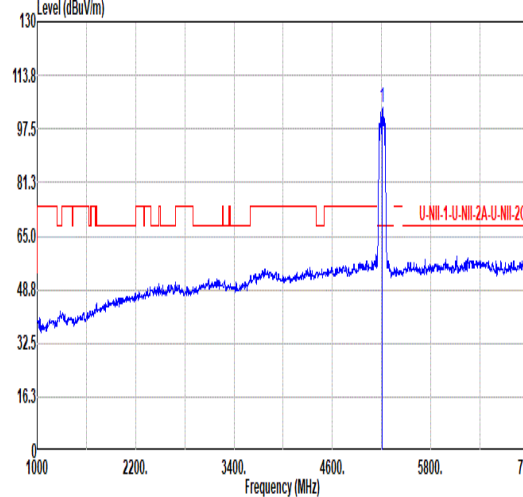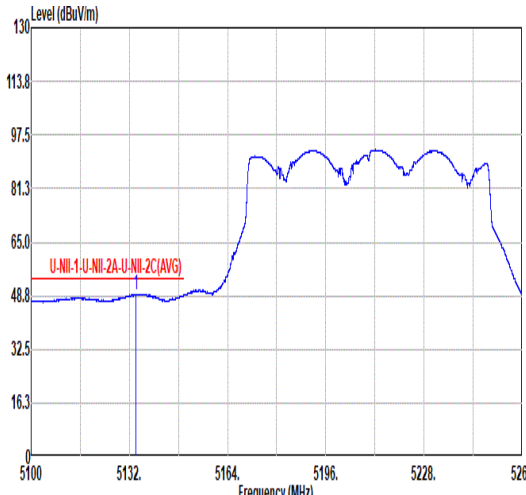
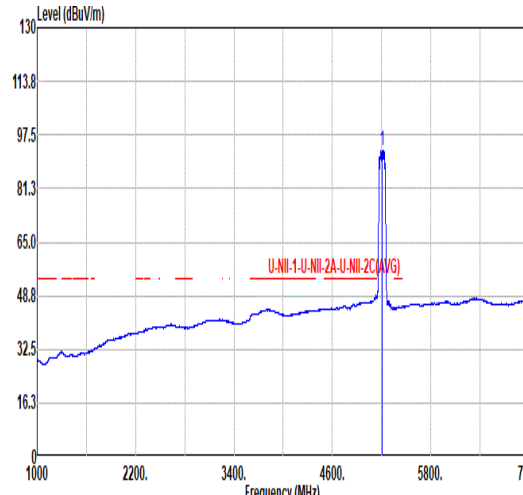


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5136.57</td><td>59.86</td><td>74.00</td><td>-14.14</td><td>43.41</td><td>34.40</td><td>11.91</td><td>29.86</td><td>0.00</td><td>254</td><td>278</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.57	59.86	74.00	-14.14	43.41	34.40	11.91	29.86	0.00	254	278	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>103.96</td><td>-----</td><td>-----</td><td>87.35</td><td>34.53</td><td>11.97</td><td>29.89</td><td>0.00</td><td>254</td><td>278</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	103.96	-----	-----	87.35	34.53	11.97	29.89	0.00	254	278
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5136.57	59.86	74.00	-14.14	43.41	34.40	11.91	29.86	0.00	254	278	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	103.96	-----	-----	87.35	34.53	11.97	29.89	0.00	254	278	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5134.17</td><td>49.27</td><td>54.00</td><td>-4.73</td><td>32.83</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>254</td><td>278</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5134.17	49.27	54.00	-4.73	32.83	34.40	11.90	29.86	0.00	254	278	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>92.86</td><td>-----</td><td>-----</td><td>76.27</td><td>34.52</td><td>11.96</td><td>29.89</td><td>0.00</td><td>254</td><td>278</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	92.86	-----	-----	76.27	34.52	11.96	29.89	0.00	254	278
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5134.17	49.27	54.00	-4.73	32.83	34.40	11.90	29.86	0.00	254	278	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	92.86	-----	-----	76.27	34.52	11.96	29.89	0.00	254	278	AVERAGE																																																																																							



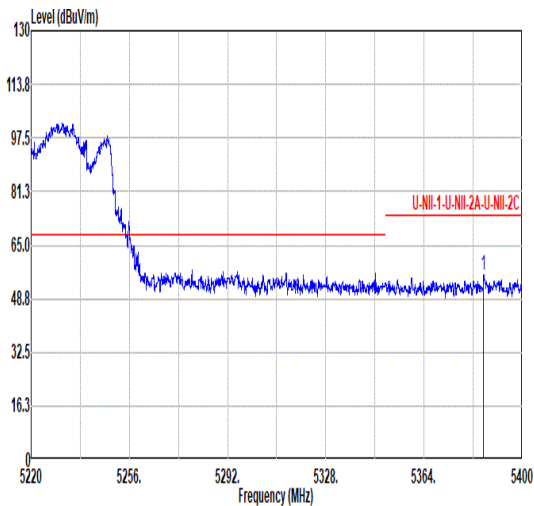
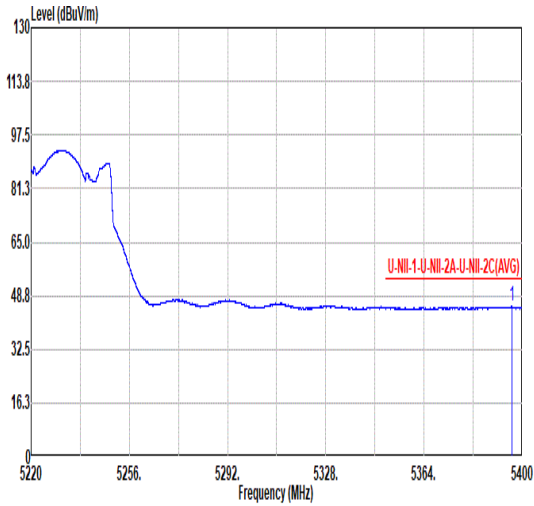


Mode	11																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5385.88</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>39.15</td><td>34.64</td><td>12.15</td><td>29.80</td><td>0.00</td><td>254</td><td>278 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5385.88	56.14	74.00	-17.86	39.15	34.64	12.15	29.80	0.00	254	278 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5385.88	56.14	74.00	-17.86	39.15	34.64	12.15	29.80	0.00	254	278 PEAK																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5396.14</td><td>45.46</td><td>54.00</td><td>-8.54</td><td>28.40</td><td>34.68</td><td>12.17</td><td>29.79</td><td>0.00</td><td>254</td><td>278 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5396.14	45.46	54.00	-8.54	28.40	34.68	12.17	29.79	0.00	254	278 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5396.14	45.46	54.00	-8.54	28.40	34.68	12.17	29.79	0.00	254	278 AVERAGE																																													

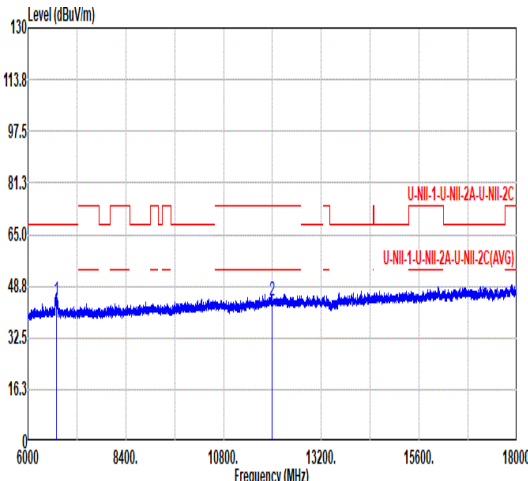
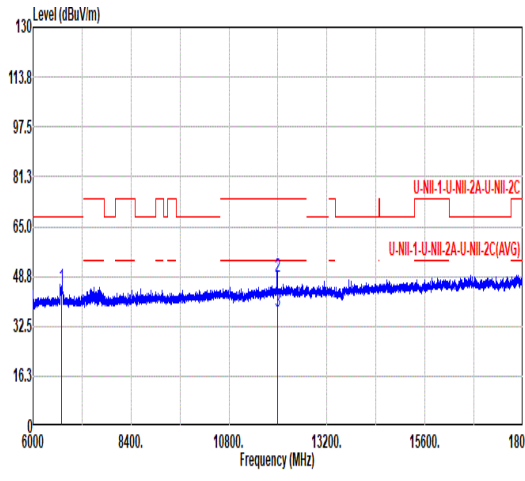


		11																																																																																		
Mode		Harmonic																																																																																		
		U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz																																																																																		
ANT		CDD 6+7																																																																																		
Pol.		Horizontal																																																																																		
Peak Avg																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6703.87</td><td>44.11</td><td>68.20</td><td>-24.09</td><td>58.22</td><td>35.61</td><td>14.33</td><td>64.05</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11983.20</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>47.27</td><td>38.68</td><td>19.28</td><td>60.90</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	6703.87	44.11	68.20	-24.09	58.22	35.61	14.33	64.05	0.00	--	--	PEAK	2	11983.20	44.33	74.00	-29.67	47.27	38.68	19.28	60.90	0.00	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	6703.87	44.11	68.20	-24.09	58.22	35.61	14.33	64.05	0.00	--	--	PEAK																																																																								
2	11983.20	44.33	74.00	-29.67	47.27	38.68	19.28	60.90	0.00	--	--	PEAK																																																																								
		Vertical																																																																																		
																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6703.87</td><td>45.21</td><td>68.20</td><td>-22.99</td><td>59.32</td><td>35.61</td><td>14.33</td><td>64.05</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11983.20</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>51.44</td><td>38.68</td><td>19.28</td><td>60.90</td><td>0.00</td><td>300</td><td>53</td><td>PEAK</td></tr><tr><td>3</td><td>11983.20</td><td>37.40</td><td>54.00</td><td>-16.60</td><td>40.36</td><td>38.68</td><td>19.27</td><td>60.91</td><td>0.00</td><td>300</td><td>53</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	6703.87	45.21	68.20	-22.99	59.32	35.61	14.33	64.05	0.00	--	--	PEAK	2	11983.20	48.50	74.00	-25.50	51.44	38.68	19.28	60.90	0.00	300	53	PEAK	3	11983.20	37.40	54.00	-16.60	40.36	38.68	19.27	60.91	0.00	300	53	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	6703.87	45.21	68.20	-22.99	59.32	35.61	14.33	64.05	0.00	--	--	PEAK																																																																								
2	11983.20	48.50	74.00	-25.50	51.44	38.68	19.28	60.90	0.00	300	53	PEAK																																																																								
3	11983.20	37.40	54.00	-16.60	40.36	38.68	19.27	60.91	0.00	300	53	AVERAGE																																																																								

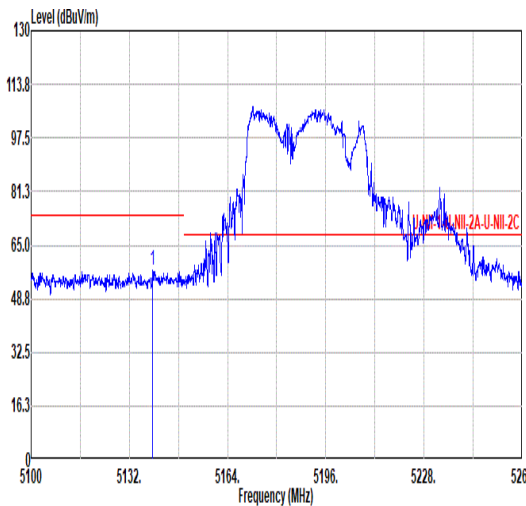
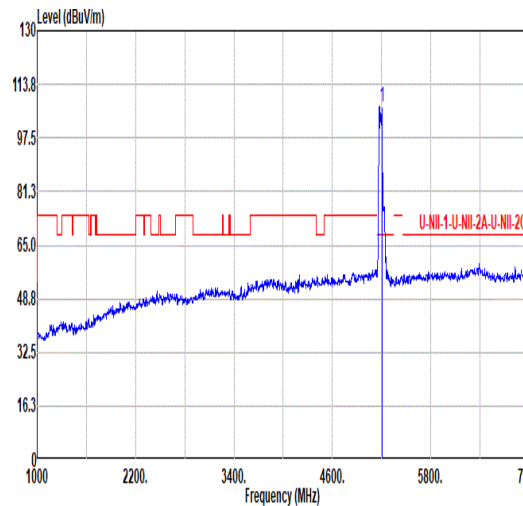
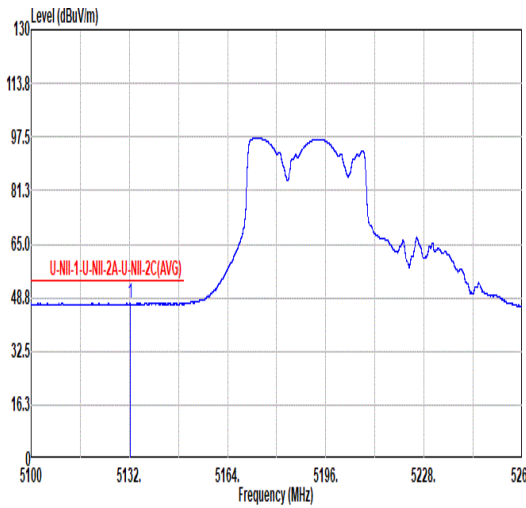
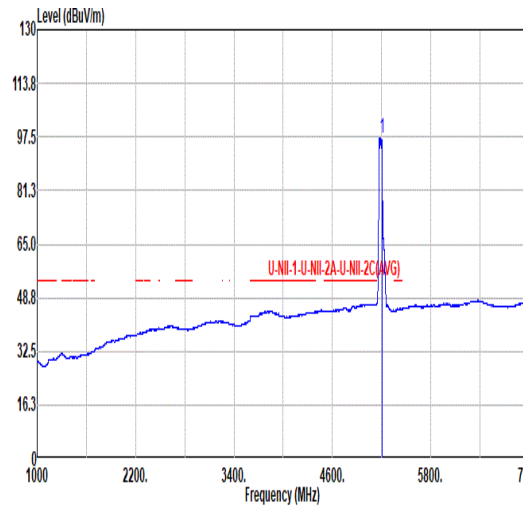


	12																																																																																																														
Mode	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_RU484/65_5210MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5139.61</td><td>57.53</td><td>74.00</td><td>-16.47</td><td>41.09</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5139.61	57.53	74.00	-16.47	41.09	34.40	11.91	29.87	0.00	100	167	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>107.00</td><td>-----</td><td>-----</td><td>90.50</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	107.00	-----	-----	90.50	34.45	11.93	29.88	0.00	100	167
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5139.61	57.53	74.00	-16.47	41.09	34.40	11.91	29.87	0.00	100	167	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5210.00	107.00	-----	-----	90.50	34.45	11.93	29.88	0.00	100	167	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5132.25</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>30.78</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5132.25	47.22	54.00	-6.78	30.78	34.40	11.90	29.86	0.00	100	167	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>97.33</td><td>-----</td><td>-----</td><td>80.83</td><td>34.45</td><td>11.93</td><td>29.88</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	97.33	-----	-----	80.83	34.45	11.93	29.88	0.00	100	167
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5132.25	47.22	54.00	-6.78	30.78	34.40	11.90	29.86	0.00	100	167	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5210.00	97.33	-----	-----	80.83	34.45	11.93	29.88	0.00	100	167	AVERAGE																																																																																																			

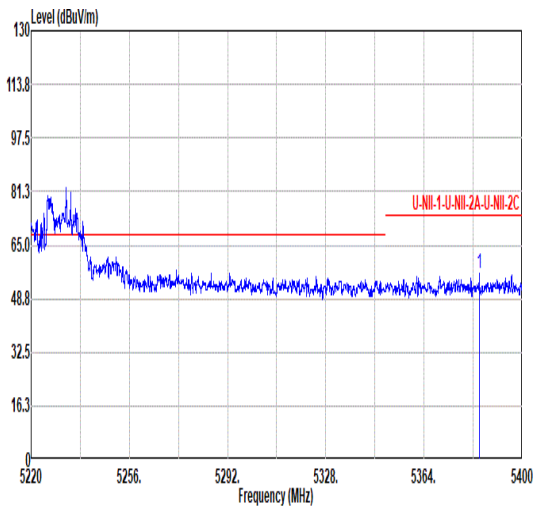
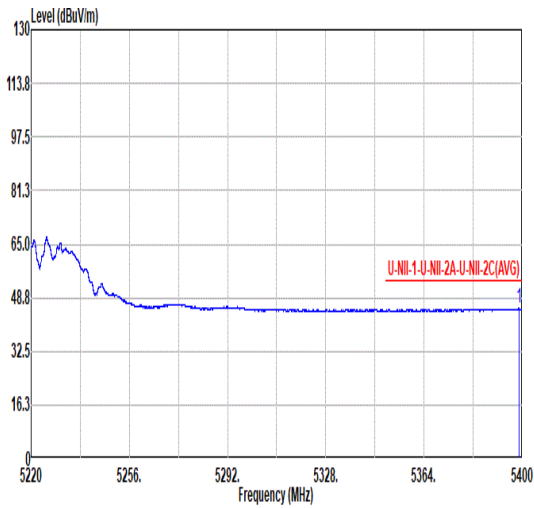


Mode	12																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_RU484/65_5210MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5384.26</td><td>56.24</td><td>74.00</td><td>-17.76</td><td>39.25</td><td>34.64</td><td>12.15</td><td>29.80</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5384.26	56.24	74.00	-17.76	39.25	34.64	12.15	29.80	0.00	100	167	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5384.26	56.24	74.00	-17.76	39.25	34.64	12.15	29.80	0.00	100	167	PEAK																																											
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5398.81</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>28.33</td><td>34.70</td><td>12.17</td><td>29.78</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5398.81	45.42	54.00	-8.58	28.33	34.70	12.17	29.78	0.00	100	167	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5398.81	45.42	54.00	-8.58	28.33	34.70	12.17	29.78	0.00	100	167	AVERAGE																																											

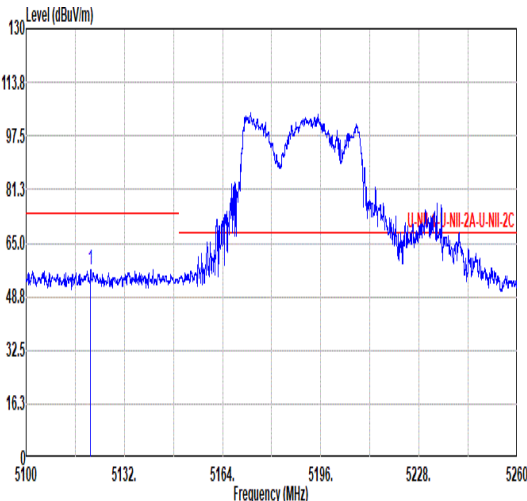
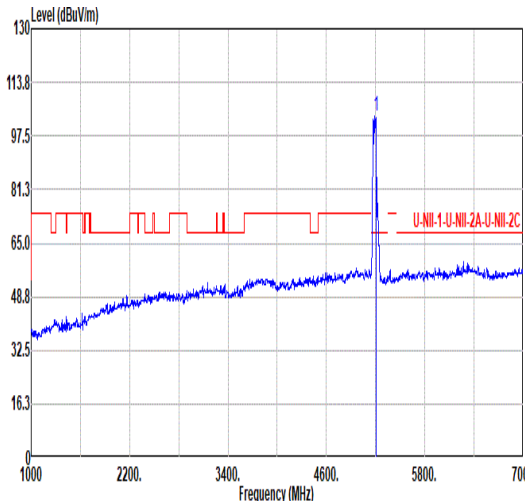
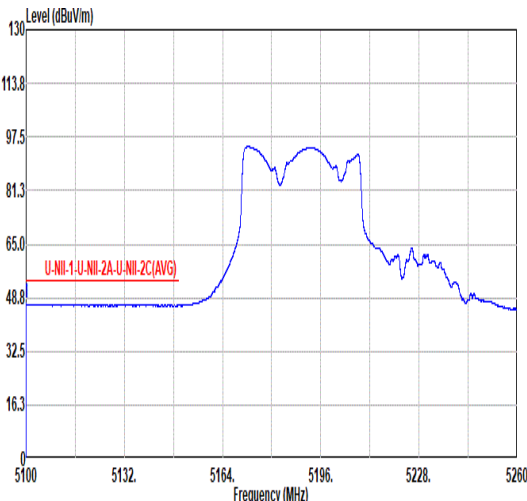
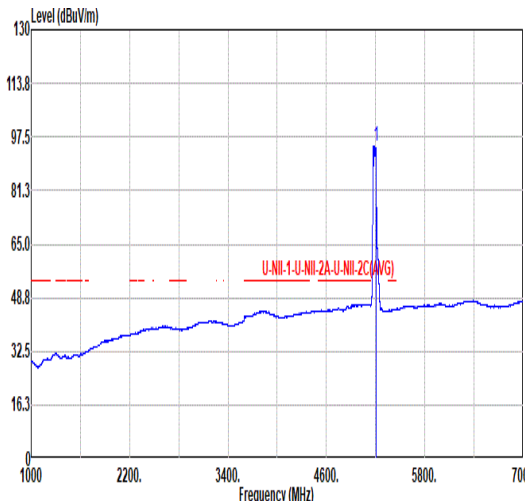


		12																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-1_5.15-5.25_802.11be EHT80_CH42_RU484/65_5210MHz																																																																																											
ANT		CDD 6+7																																																																																											
Pol.		Vertical						Fundamental																																																																																					
Peak																																																																																													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5121.05	57.03	74.00	-16.97	40.60	34.40	11.89	29.86	0.00	240	242	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>103.32</td><td>-----</td><td>-----</td><td>86.79</td><td>34.48</td><td>11.94</td><td>29.89</td><td>0.00</td><td>240</td><td>242</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	103.32	-----	-----	86.79	34.48	11.94	29.89	0.00	240	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5121.05	57.03	74.00	-16.97	40.60	34.40	11.89	29.86	0.00	240	242	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5210.00	103.32	-----	-----	86.79	34.48	11.94	29.89	0.00	240	242	PEAK																																																																																	
Avg																																																																																													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5100.00	46.95	54.00	-7.05	30.52	34.40	11.88	29.85	0.00	240	242	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>94.80</td><td>-----</td><td>-----</td><td>78.32</td><td>34.43</td><td>11.93</td><td>29.88</td><td>0.00</td><td>240</td><td>242</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	94.80	-----	-----	78.32	34.43	11.93	29.88	0.00	240	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5100.00	46.95	54.00	-7.05	30.52	34.40	11.88	29.85	0.00	240	242	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5210.00	94.80	-----	-----	78.32	34.43	11.93	29.88	0.00	240	242	AVERAGE																																																																																	

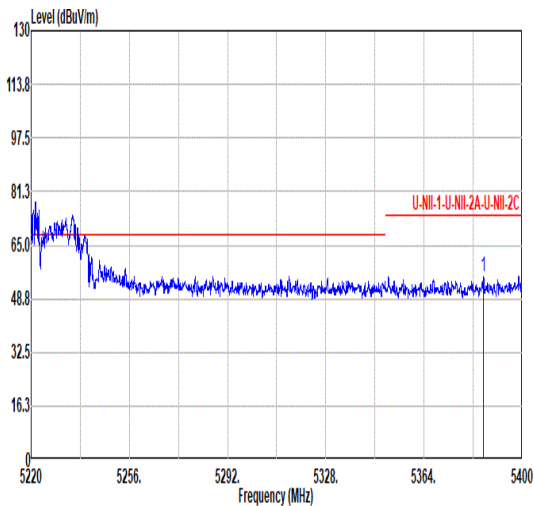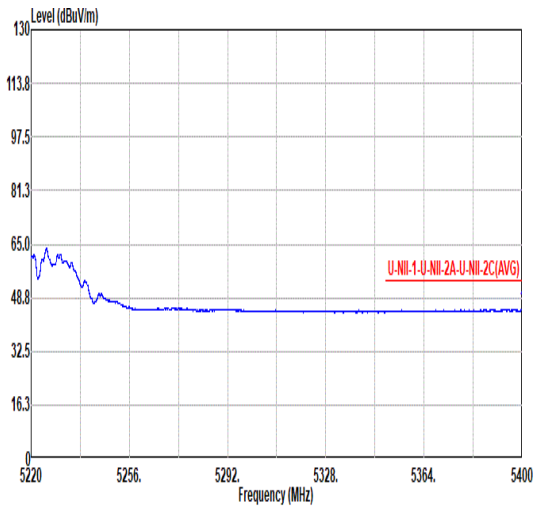

Mode	12																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_RU484/65_5210MHz																																																	
ANT	CDD 6+7																																																	
Pol.	Vertical					Fundamental																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5385.88</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>38.59</td><td>34.64</td><td>12.15</td><td>29.80</td><td>0.00</td><td>240 242 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5385.88	55.58	74.00	-18.42	38.59	34.64	12.15	29.80	0.00	240 242 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																									
1 5385.88	55.58	74.00	-18.42	38.59	34.64	12.15	29.80	0.00	240 242 PEAK																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5399.92</td><td>45.30</td><td>54.00</td><td>-8.70</td><td>28.21</td><td>34.70</td><td>12.17</td><td>29.78</td><td>0.00</td><td>240 242 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5399.92	45.30	54.00	-8.70	28.21	34.70	12.17	29.78	0.00	240 242 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																									
1 5399.92	45.30	54.00	-8.70	28.21	34.70	12.17	29.78	0.00	240 242 AVERAGE																																									

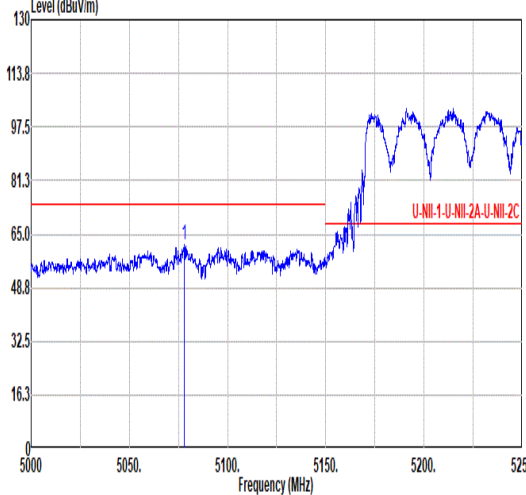
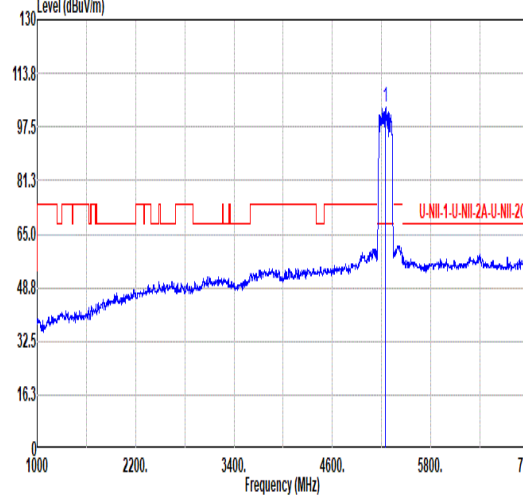
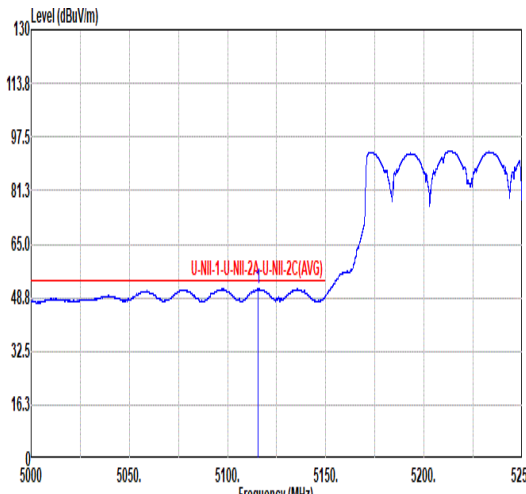
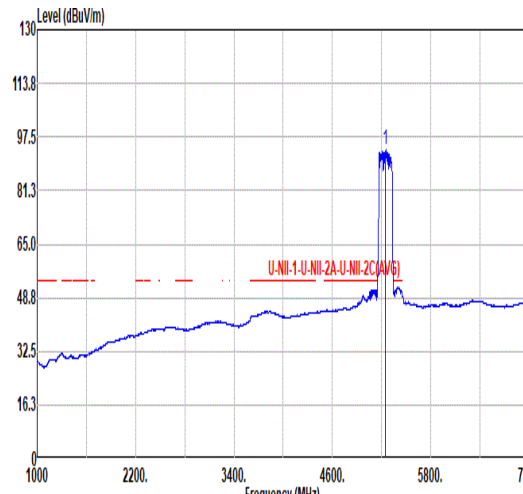


Mode	13																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_Full_5250MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5077.88</td><td>61.75</td><td>74.00</td><td>-12.25</td><td>45.37</td><td>34.36</td><td>11.86</td><td>29.84</td><td>0.00</td><td>100</td><td>163</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5077.88	61.75	74.00	-12.25	45.37	34.36	11.86	29.84	0.00	100	163	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>103.62</td><td>-----</td><td>-----</td><td>86.91</td><td>34.60</td><td>12.01</td><td>29.90</td><td>0.00</td><td>100</td><td>163</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	103.62	-----	-----	86.91	34.60	12.01	29.90	0.00	100	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5077.88	61.75	74.00	-12.25	45.37	34.36	11.86	29.84	0.00	100	163	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	103.62	-----	-----	86.91	34.60	12.01	29.90	0.00	100	163	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5115.38</td><td>51.56</td><td>54.00</td><td>-2.44</td><td>35.13</td><td>34.40</td><td>11.89</td><td>29.86</td><td>0.00</td><td>100</td><td>163</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5115.38	51.56	54.00	-2.44	35.13	34.40	11.89	29.86	0.00	100	163	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>93.52</td><td>-----</td><td>-----</td><td>76.81</td><td>34.60</td><td>12.01</td><td>29.90</td><td>0.00</td><td>100</td><td>163</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	93.52	-----	-----	76.81	34.60	12.01	29.90	0.00	100	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5115.38	51.56	54.00	-2.44	35.13	34.40	11.89	29.86	0.00	100	163	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	93.52	-----	-----	76.81	34.60	12.01	29.90	0.00	100	163	AVERAGE																																																																																							



Mode	13										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_Full_5250MHz										
ANT	CDD 6+7										
Pol.	Horizontal										
Peak	Level (dBuV/m)										

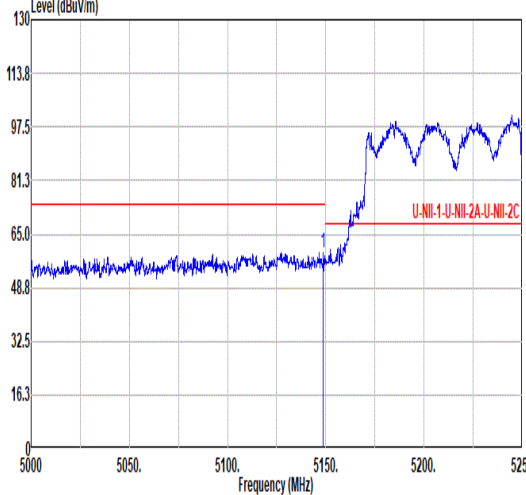
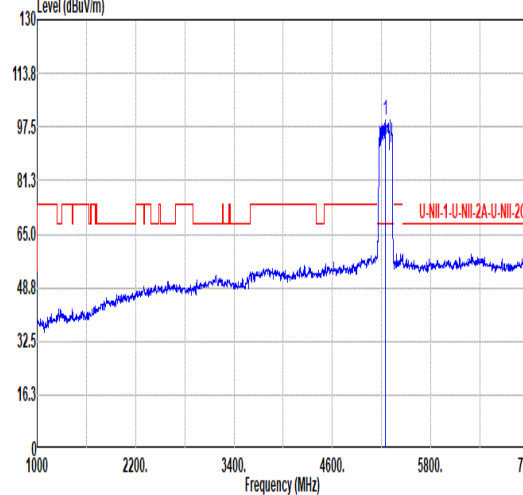
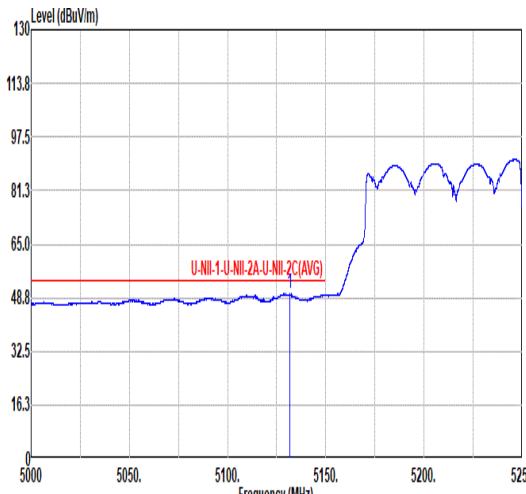
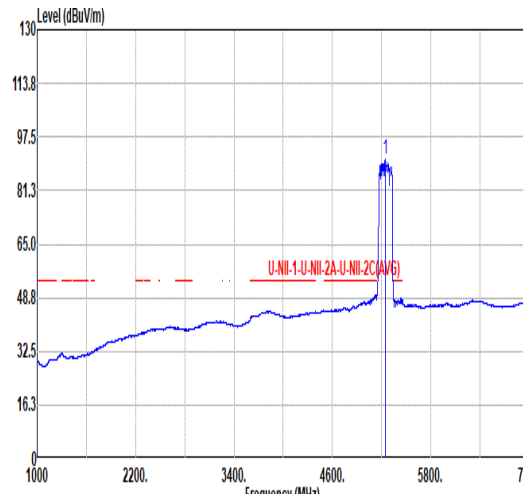


Mode	13																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_Full_5250MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.63</td><td>59.51</td><td>74.00</td><td>-14.49</td><td>43.07</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>275</td><td>212</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.63	59.51	74.00	-14.49	43.07	34.40	11.91	29.87	0.00	275	212	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>99.62</td><td>-----</td><td>-----</td><td>82.95</td><td>34.50</td><td>12.07</td><td>29.90</td><td>0.00</td><td>275</td><td>212</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	99.62	-----	-----	82.95	34.50	12.07	29.90	0.00	275	212
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.63	59.51	74.00	-14.49	43.07	34.40	11.91	29.87	0.00	275	212	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	99.62	-----	-----	82.95	34.50	12.07	29.90	0.00	275	212	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5131.63</td><td>49.86</td><td>54.00</td><td>-4.14</td><td>33.42</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>275</td><td>212</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5131.63	49.86	54.00	-4.14	33.42	34.40	11.90	29.86	0.00	275	212	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>90.61</td><td>-----</td><td>-----</td><td>73.92</td><td>34.59</td><td>12.00</td><td>29.90</td><td>0.00</td><td>275</td><td>212</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	90.61	-----	-----	73.92	34.59	12.00	29.90	0.00	275	212
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5131.63	49.86	54.00	-4.14	33.42	34.40	11.90	29.86	0.00	275	212	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	90.61	-----	-----	73.92	34.59	12.00	29.90	0.00	275	212	AVERAGE																																																																																							





Mode	13										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_Full_5250MHz										
ANT	CDD 6+7										
Pol.	Vertical										
Peak	Level (dBuV/m)										

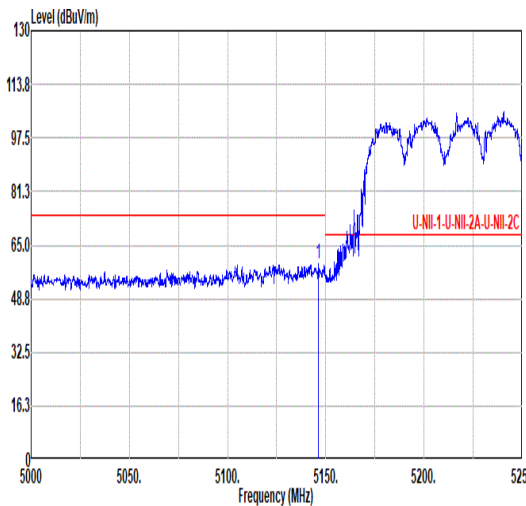
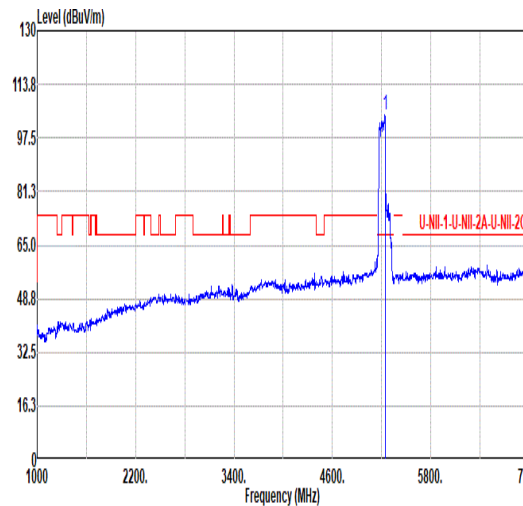
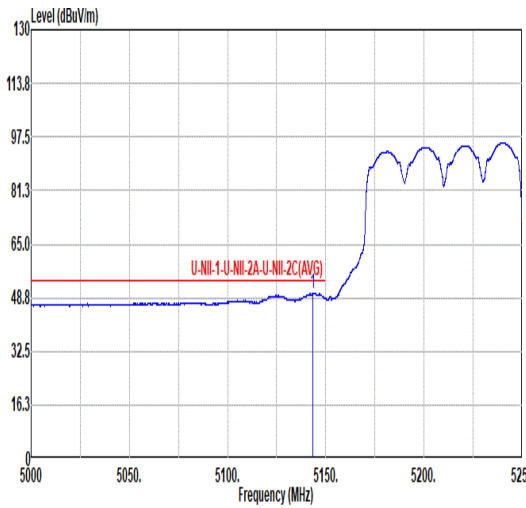
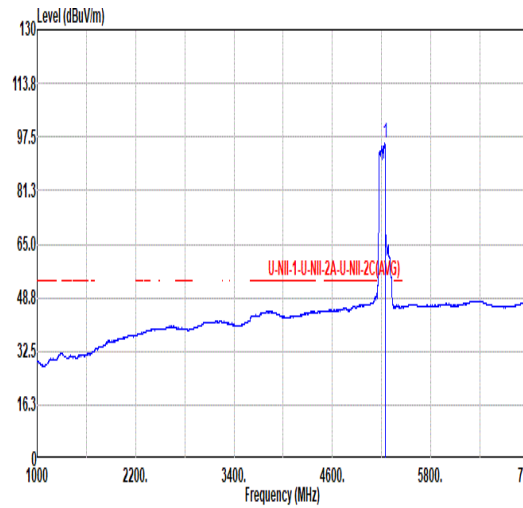


		14																																																					
Mode		Band Edge - L																																																					
		U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/67_5250MHz																																																					
ANT		CDD 6+7																																																					
Pol.		Horizontal						Fundamental																																															
Peak																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.13</td><td>59.51</td><td>74.00</td><td>-14.49</td><td>43.07</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>235</td><td>165</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.13	59.51	74.00	-14.49	43.07	34.40	11.91	29.87	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5146.13	59.51	74.00	-14.49	43.07	34.40	11.91	29.87	0.00	235	165	PEAK																																											
																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>104.25</td><td>-----</td><td>-----</td><td>87.58</td><td>34.58</td><td>11.99</td><td>29.90</td><td>0.00</td><td>235</td><td>165</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	104.25	-----	-----	87.58	34.58	11.99	29.90	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5250.00	104.25	-----	-----	87.58	34.58	11.99	29.90	0.00	235	165	PEAK																																											
Avg																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.38</td><td>50.10</td><td>54.00</td><td>-3.90</td><td>33.66</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>235</td><td>165</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5143.38	50.10	54.00	-3.90	33.66	34.40	11.91	29.87	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5143.38	50.10	54.00	-3.90	33.66	34.40	11.91	29.87	0.00	235	165	AVERAGE																																											
																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>95.67</td><td>-----</td><td>-----</td><td>79.00</td><td>34.58</td><td>11.99</td><td>29.90</td><td>0.00</td><td>235</td><td>165</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	95.67	-----	-----	79.00	34.58	11.99	29.90	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5250.00	95.67	-----	-----	79.00	34.58	11.99	29.90	0.00	235	165	AVERAGE																																											

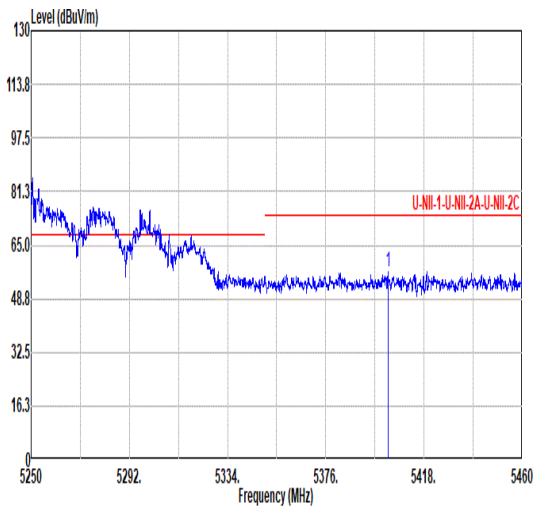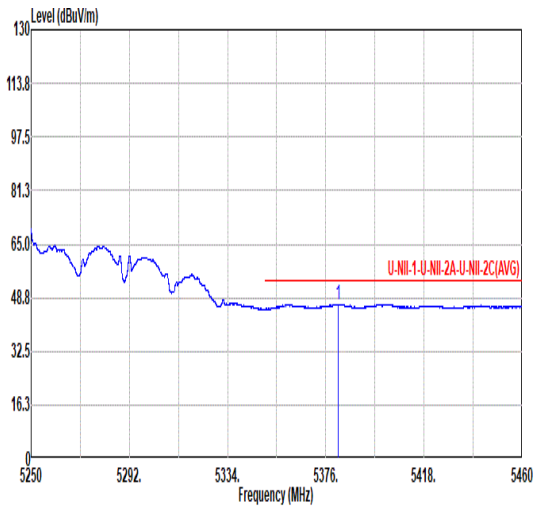

Mode	14																																																				
	Band Edge - R																																																				
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/67_5250MHz																																																				
ANT	CDD 6+7																																																				
Pol.	Horizontal							Fundamental																																													
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5402.57</td><td>57.08</td><td>74.00</td><td>-16.92</td><td>39.98</td><td>34.71</td><td>12.17</td><td>29.78</td><td>0.00</td><td>235</td><td>165 PEAK</td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5402.57	57.08	74.00	-16.92	39.98	34.71	12.17	29.78	0.00	235	165 PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 5402.57	57.08	74.00	-16.92	39.98	34.71	12.17	29.78	0.00	235	165 PEAK																																											
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5381.46</td><td>46.83</td><td>54.00</td><td>-7.17</td><td>29.85</td><td>34.63</td><td>12.15</td><td>29.80</td><td>0.00</td><td>235</td><td>165 AVERAGE</td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5381.46	46.83	54.00	-7.17	29.85	34.63	12.15	29.80	0.00	235	165 AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 5381.46	46.83	54.00	-7.17	29.85	34.63	12.15	29.80	0.00	235	165 AVERAGE																																											

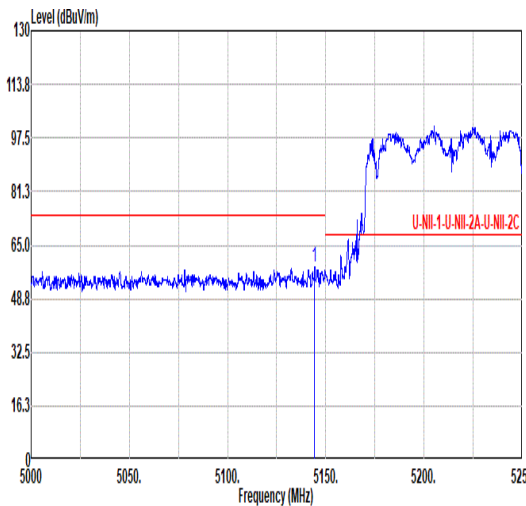
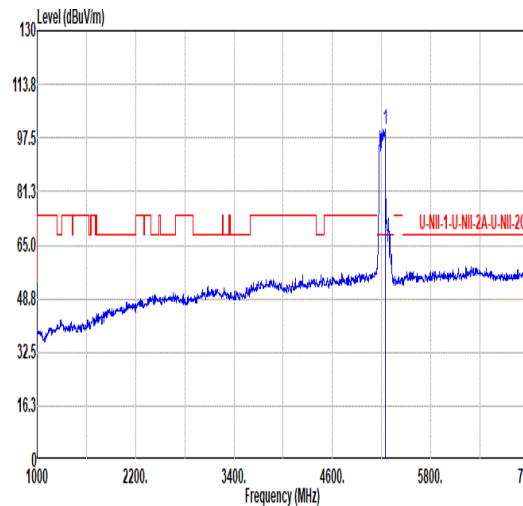
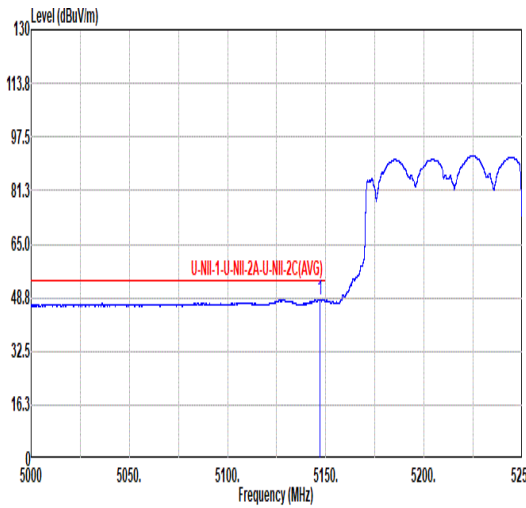
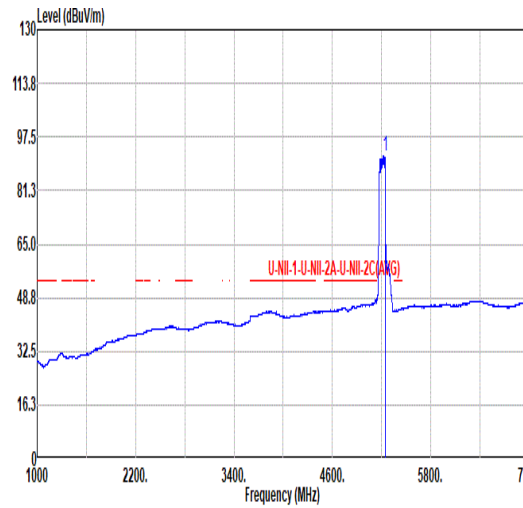


	14																																																																																																			
Mode	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/67_5250MHz																																																																																																			
ANT	CDD 6+7																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.38</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>42.11</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>273</td><td>219</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.38	58.55	74.00	-15.45	42.11	34.40	11.91	29.87	0.00	273	219	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>100.16</td><td>-----</td><td>-----</td><td>83.47</td><td>34.59</td><td>12.00</td><td>29.90</td><td>0.00</td><td>273</td><td>219</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5250.00	100.16	-----	-----	83.47	34.59	12.00	29.90	0.00	273	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5144.38	58.55	74.00	-15.45	42.11	34.40	11.91	29.87	0.00	273	219	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5250.00	100.16	-----	-----	83.47	34.59	12.00	29.90	0.00	273	219	PEAK																																																																																								
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5146.88</td><td>48.24</td><td>54.00</td><td>-5.76</td><td>31.80</td><td>34.40</td><td>11.91</td><td>29.87</td><td>0.00</td><td>273</td><td>219</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.88	48.24	54.00	-5.76	31.80	34.40	11.91	29.87	0.00	273	219	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>91.75</td><td>-----</td><td>-----</td><td>75.13</td><td>34.54</td><td>11.97</td><td>29.89</td><td>0.00</td><td>273</td><td>219</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5250.00	91.75	-----	-----	75.13	34.54	11.97	29.89	0.00	273	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5146.88	48.24	54.00	-5.76	31.80	34.40	11.91	29.87	0.00	273	219	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5250.00	91.75	-----	-----	75.13	34.54	11.97	29.89	0.00	273	219	AVERAGE																																																																																								





Mode	14																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/67_5250MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.59</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>38.79</td><td>34.78</td><td>12.23</td><td>29.87</td><td>0.00</td><td>273</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.59	55.93	74.00	-18.07	38.79	34.78	12.23	29.87	0.00	273	219	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5457.59	55.93	74.00	-18.07	38.79	34.78	12.23	29.87	0.00	273	219	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5442.05</td><td>45.69</td><td>54.00</td><td>-8.31</td><td>28.54</td><td>34.78</td><td>12.22</td><td>29.85</td><td>0.00</td><td>273</td><td>219</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5442.05	45.69	54.00	-8.31	28.54	34.78	12.22	29.85	0.00	273	219	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5442.05	45.69	54.00	-8.31	28.54	34.78	12.22	29.85	0.00	273	219	AVERAGE																																											

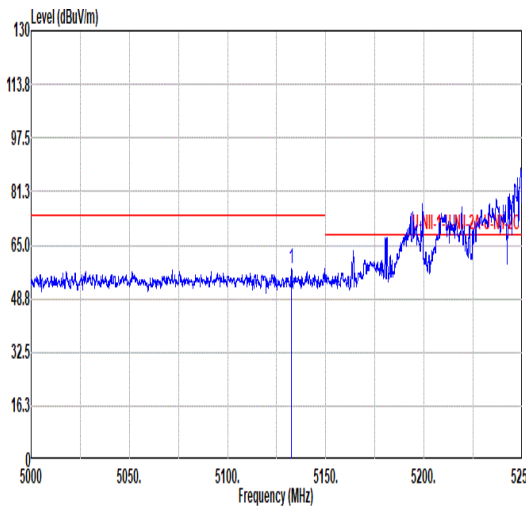
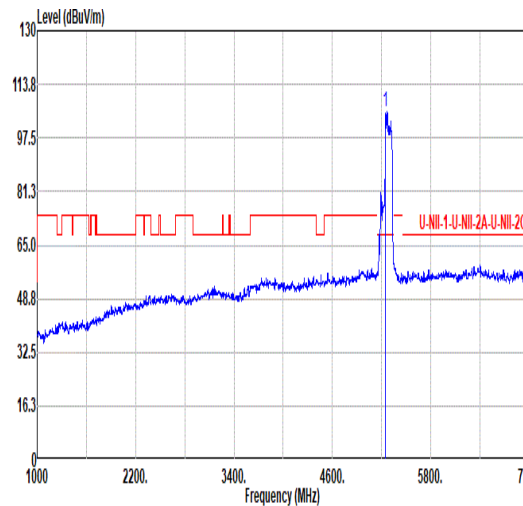
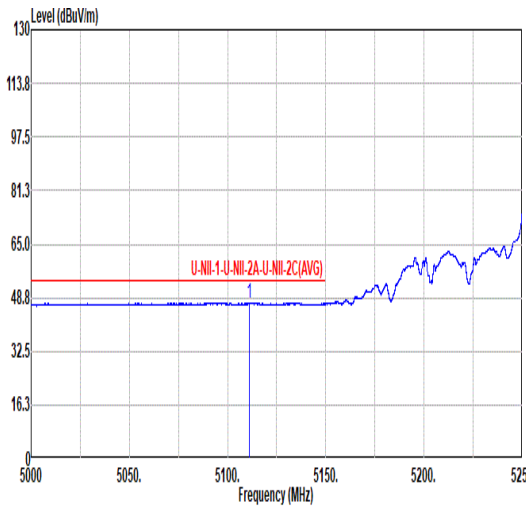
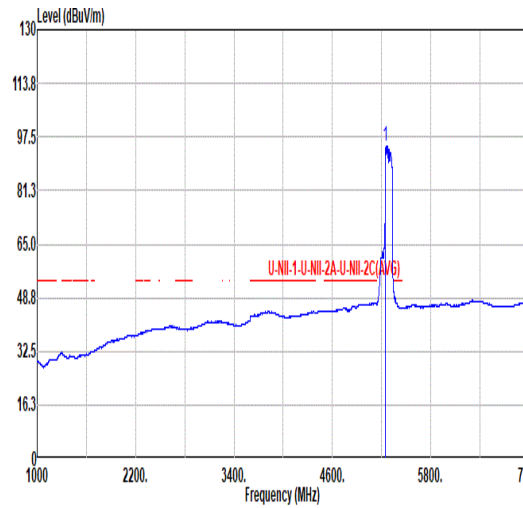


Mode	15																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/68_5250MHz																																																																																																														
ANT	CDD 6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5132.63</td><td>57.81</td><td>74.00</td><td>-16.19</td><td>41.37</td><td>34.40</td><td>11.90</td><td>29.86</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5132.63	57.81	74.00	-16.19	41.37	34.40	11.90	29.86	0.00	100	167	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>105.36</td><td>-----</td><td>-----</td><td>88.67</td><td>34.56</td><td>12.03</td><td>29.90</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	105.36	-----	-----	88.67	34.56	12.03	29.90	0.00	100	167
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5132.63	57.81	74.00	-16.19	41.37	34.40	11.90	29.86	0.00	100	167	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5250.00	105.36	-----	-----	88.67	34.56	12.03	29.90	0.00	100	167	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5110.88</td><td>47.27</td><td>54.00</td><td>-6.73</td><td>30.83</td><td>34.40</td><td>11.89</td><td>29.85</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5110.88	47.27	54.00	-6.73	30.83	34.40	11.89	29.85	0.00	100	167	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>94.77</td><td>-----</td><td>-----</td><td>78.00</td><td>34.56</td><td>12.03</td><td>29.90</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	94.77	-----	-----	78.00	34.56	12.03	29.90	0.00	100	167
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5110.88	47.27	54.00	-6.73	30.83	34.40	11.89	29.85	0.00	100	167	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5250.00	94.77	-----	-----	78.00	34.56	12.03	29.90	0.00	100	167	AVERAGE																																																																																																			

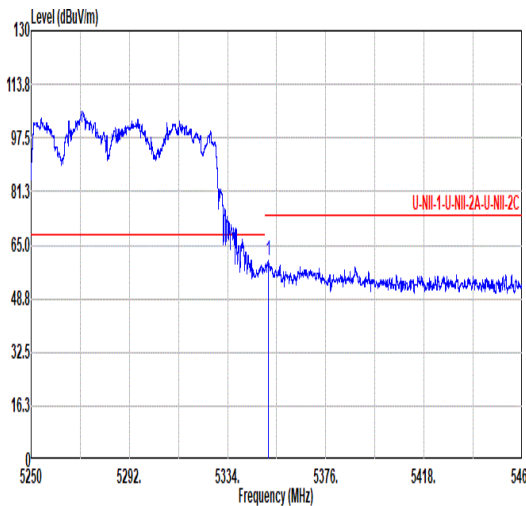
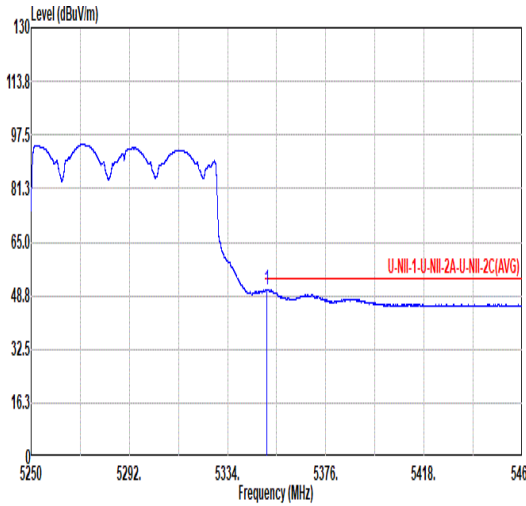


Mode	15																																																																	
	Band Edge - R																																																																	
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/68_5250MHz																																																																	
ANT	CDD 6+7																																																																	
Pol.	Horizontal																																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.33</td><td>60.17</td><td>74.00</td><td>-13.83</td><td>43.38</td><td>34.51</td><td>12.12</td><td>29.84</td><td>0.00</td><td>100</td><td>167</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.33	60.17	74.00	-13.83	43.38	34.51	12.12	29.84	0.00	100	167	PEAK	Blank										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5351.33	60.17	74.00	-13.83	43.38	34.51	12.12	29.84	0.00	100	167	PEAK																																																						
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.91</td><td>50.66</td><td>54.00</td><td>-3.34</td><td>33.88</td><td>34.50</td><td>12.12</td><td>29.84</td><td>0.00</td><td>100</td><td>167</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.91	50.66	54.00	-3.34	33.88	34.50	12.12	29.84	0.00	100	167	AVERAGE	Blank										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5350.91	50.66	54.00	-3.34	33.88	34.50	12.12	29.84	0.00	100	167	AVERAGE																																																						

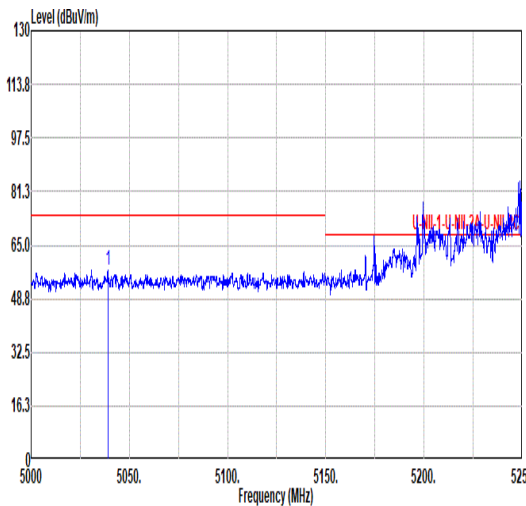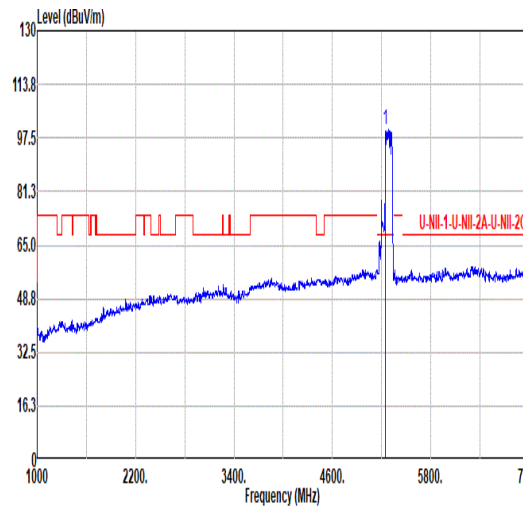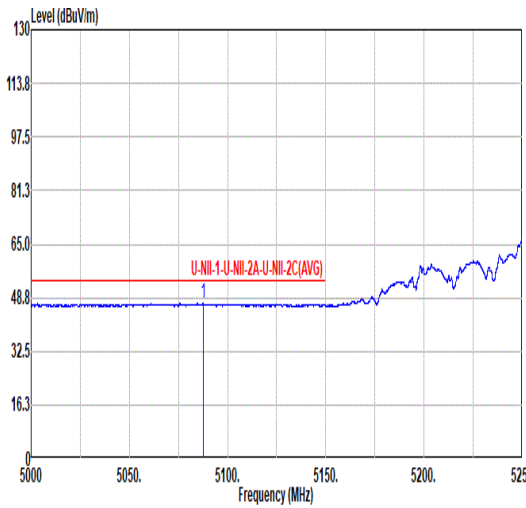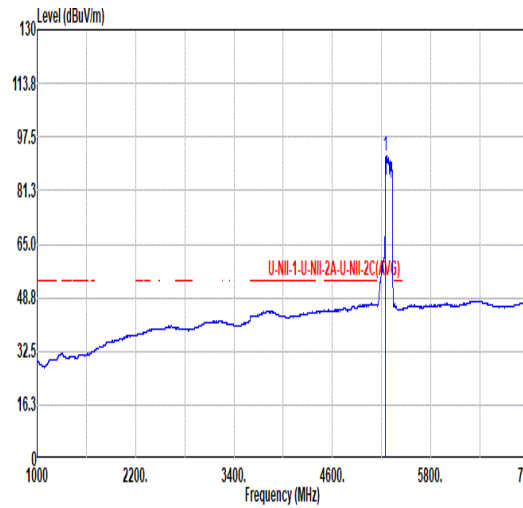

Mode	15																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/68_5250MHz																																																																																																		
ANT	CDD 6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5039.13</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>41.10</td><td>34.30</td><td>11.84</td><td>29.83</td><td>0.00</td><td>272</td><td>216</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5039.13	57.41	74.00	-16.59	41.10	34.30	11.84	29.83	0.00	272	216	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>100.20</td><td>-----</td><td>-----</td><td>83.53</td><td>34.54</td><td>12.04</td><td>29.91</td><td>0.00</td><td>272</td><td>216</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	100.20	-----	-----	83.53	34.54	12.04	29.91	0.00	272	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5039.13	57.41	74.00	-16.59	41.10	34.30	11.84	29.83	0.00	272	216	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	100.20	-----	-----	83.53	34.54	12.04	29.91	0.00	272	216	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5087.62</td><td>46.93</td><td>54.00</td><td>-7.07</td><td>30.53</td><td>34.38</td><td>11.87</td><td>29.85</td><td>0.00</td><td>272</td><td>216</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5087.62	46.93	54.00	-7.07	30.53	34.38	11.87	29.85	0.00	272	216	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>91.93</td><td>-----</td><td>-----</td><td>75.24</td><td>34.57</td><td>12.02</td><td>29.90</td><td>0.00</td><td>272</td><td>216</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	91.93	-----	-----	75.24	34.57	12.02	29.90	0.00	272	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5087.62	46.93	54.00	-7.07	30.53	34.38	11.87	29.85	0.00	272	216	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5250.00	91.93	-----	-----	75.24	34.57	12.02	29.90	0.00	272	216	AVERAGE																																																																																							

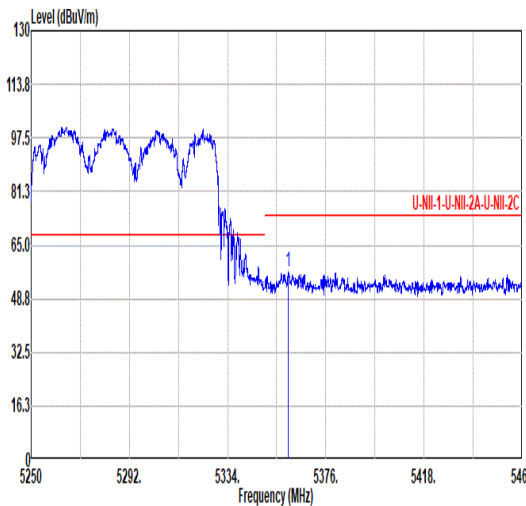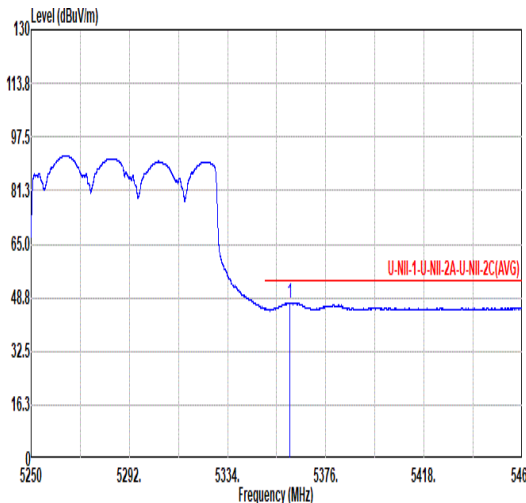

Mode	15																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_RU996/68_5250MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5359.94</td><td>56.89</td><td>74.00</td><td>-17.11</td><td>40.05</td><td>34.54</td><td>12.13</td><td>29.83</td><td>0.00</td><td>272</td><td>216</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5359.94	56.89	74.00	-17.11	40.05	34.54	12.13	29.83	0.00	272	216	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5359.94	56.89	74.00	-17.11	40.05	34.54	12.13	29.83	0.00	272	216	PEAK																																												
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5360.57</td><td>47.28</td><td>54.00</td><td>-6.72</td><td>30.44</td><td>34.54</td><td>12.13</td><td>29.83</td><td>0.00</td><td>272</td><td>216</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5360.57	47.28	54.00	-6.72	30.44	34.54	12.13	29.83	0.00	272	216	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5360.57	47.28	54.00	-6.72	30.44	34.54	12.13	29.83	0.00	272	216	AVERAGE																																												